



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR202008EG95NAXD
Product LTE Module
Brand Quectel
Model EG95-NAXD
Report No. R2006A0378-R1
Issue Date August 25, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Testing Location	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information.....	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. RF Power Output and Effective Radiated Power	8
5.2. Occupied Bandwidth	16
5.3. Band Edge Compliance.....	23
5.4. Peak-to-Average Power Ratio (PAPR)	31
5.5. Frequency Stability.....	33
5.6. Spurious Emissions at Antenna Terminals	38
5.7. Radiates Spurious Emission	43
6. Main Test Instruments	48



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output and Effective Radiated Power	2.1046 22.913(a)(5)	Refer to the original
2	Occupied Bandwidth	2.1049	Refer to the original
3	Band Edge Compliance	2.1051 / 22.917(a)	Refer to the original
4	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	Refer to the original
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	Refer to the original

Date of Testing: October 22, 2019 ~ November 9, 2019 and June 29, 2020 and August 21, 2020

Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

EG95-NAXD (Report No.: R2006A0378-R1) is a variant of the EG95-NAX (Report No.: R1907A0407-R1). Test values duplicated from Original for variant. There is only tested Frequency Stability and Spurious Emissions at Antenna Terminals for variant in this report. The detailed product change description please refers to the Statement letter_EG95-NAX & EG95-NAXD.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

2.2. General Information

EUT Description			
Model	EG95-NAXD		
IMEI	863071010199125		
Hardware Version	R1.0		
Software Version	EG95NAXDGAR07A01M1G		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	Frequency(MHz)	Gain(dBi)	
	820	2.53	
	840	1.89	
	850	2.29	
Test Mode(s)	LTE Band 26;		
Test Modulation	(LTE)QPSK 16QAM;		
LTE Category	4		
Maximum E.R.P.	LTE Band 26:	24.65dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	824 ~ 849	869 ~ 894
Note: The information of the EUT is declared by the manufacturer.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

Test modes are chosen as the worst case configuration below for LTE Band 26

Test items	Bandwidth (MHz)					Modulation		RB			Test Channel		
	1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	O	O	-	O	-	-	-	O	-

Note

- The mark "O" means that this configuration is chosen for testing.
- The mark "-" means that this configuration is not testing.

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement


During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).


- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test Setup

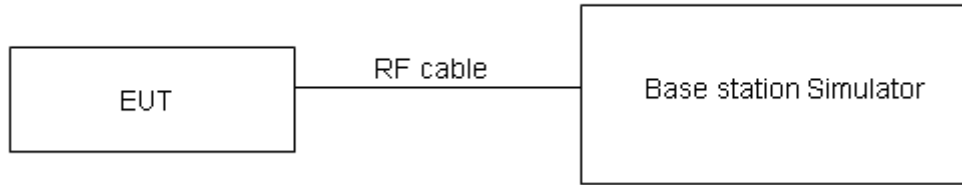

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

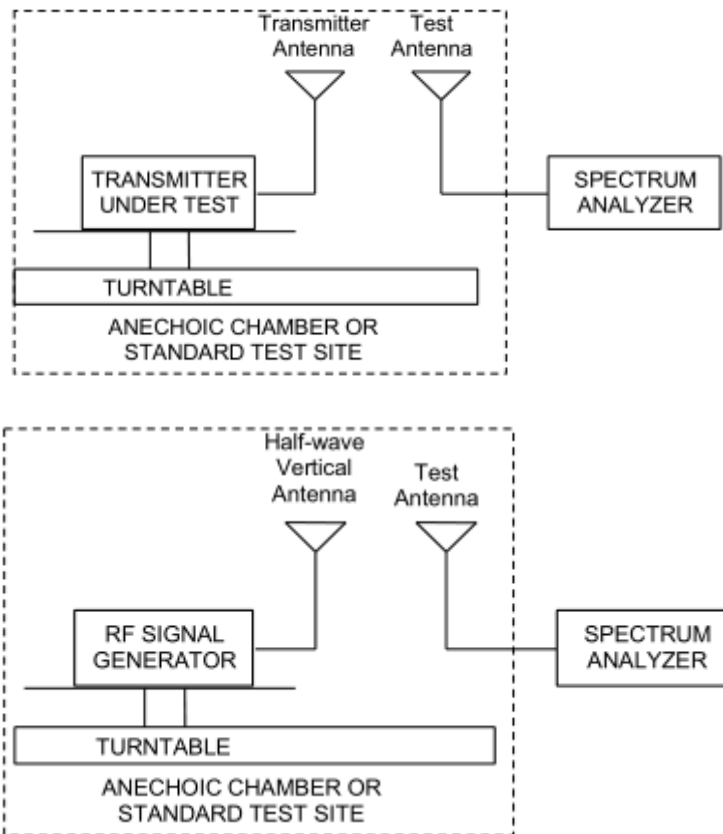

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP .



Test Results

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	ERP (dBm)
LTE Band26	1.4	26797	1	#0	QPSK	24.14	24.52
LTE Band26	1.4	26797	1	#Mid	QPSK	24.27	24.65
LTE Band26	1.4	26797	1	#Max	QPSK	24.08	24.46
LTE Band26	1.4	26797	3	#0	QPSK	23.87	24.25
LTE Band26	1.4	26797	3	#Mid	QPSK	23.86	24.24
LTE Band26	1.4	26797	3	#Max	QPSK	23.82	24.20
LTE Band26	1.4	26797	6	#0	QPSK	22.92	23.30
LTE Band26	1.4	26797	1	#0	16QAM	22.99	23.37
LTE Band26	1.4	26797	1	#Mid	16QAM	23.30	23.68
LTE Band26	1.4	26797	1	#Max	16QAM	22.93	23.31
LTE Band26	1.4	26797	3	#0	16QAM	23.08	23.46
LTE Band26	1.4	26797	3	#Mid	16QAM	23.08	23.46
LTE Band26	1.4	26797	3	#Max	16QAM	23.07	23.45
LTE Band26	1.4	26797	6	#0	16QAM	21.93	22.31
LTE Band26	1.4	26915	1	#0	QPSK	23.88	23.62
LTE Band26	1.4	26915	1	#Mid	QPSK	24.02	23.76
LTE Band26	1.4	26915	1	#Max	QPSK	23.78	23.52
LTE Band26	1.4	26915	3	#0	QPSK	24.05	23.79
LTE Band26	1.4	26915	3	#Mid	QPSK	24.05	23.79
LTE Band26	1.4	26915	3	#Max	QPSK	23.99	23.73
LTE Band26	1.4	26915	6	#0	QPSK	23.05	22.79
LTE Band26	1.4	26915	1	#0	16QAM	23.47	23.21
LTE Band26	1.4	26915	1	#Mid	16QAM	23.70	23.44
LTE Band26	1.4	26915	1	#Max	16QAM	23.49	23.23
LTE Band26	1.4	26915	3	#0	16QAM	23.32	23.06
LTE Band26	1.4	26915	3	#Mid	16QAM	23.32	23.06
LTE Band26	1.4	26915	3	#Max	16QAM	23.29	23.03
LTE Band26	1.4	26915	6	#0	16QAM	22.13	22.27
LTE Band26	1.4	27033	1	#0	QPSK	23.68	23.82
LTE Band26	1.4	27033	1	#Mid	QPSK	23.84	23.98
LTE Band26	1.4	27033	1	#Max	QPSK	23.63	23.77
LTE Band26	1.4	27033	3	#0	QPSK	23.72	23.86
LTE Band26	1.4	27033	3	#Mid	QPSK	23.63	23.77
LTE Band26	1.4	27033	3	#Max	QPSK	23.63	23.77
LTE Band26	1.4	27033	6	#0	QPSK	22.74	22.88
LTE Band26	1.4	27033	1	#0	16QAM	22.74	22.88
LTE Band26	1.4	27033	1	#Mid	16QAM	22.77	22.91
LTE Band26	1.4	27033	1	#Max	16QAM	22.62	22.76



LTE Band26	1.4	27033	3	#0	16QAM	22.68	22.82
LTE Band26	1.4	27033	3	#Mid	16QAM	22.70	22.84
LTE Band26	1.4	27033	3	#Max	16QAM	22.60	22.74
LTE Band26	1.4	27033	6	#0	16QAM	21.84	21.98
LTE Band26	3	26805	1	#0	QPSK	23.89	23.87
LTE Band26	3	26805	1	#Mid	QPSK	23.78	23.76
LTE Band26	3	26805	1	#Max	QPSK	23.78	23.76
LTE Band26	3	26805	8	#0	QPSK	22.96	22.94
LTE Band26	3	26805	8	#Mid	QPSK	22.96	22.94
LTE Band26	3	26805	8	#Max	QPSK	22.86	22.84
LTE Band26	3	26805	15	#0	QPSK	22.89	22.87
LTE Band26	3	26805	1	#0	16QAM	22.95	22.93
LTE Band26	3	26805	1	#Mid	16QAM	22.81	22.79
LTE Band26	3	26805	1	#Max	16QAM	22.83	22.81
LTE Band26	3	26805	8	#0	16QAM	21.93	21.91
LTE Band26	3	26805	8	#Mid	16QAM	21.93	21.91
LTE Band26	3	26805	8	#Max	16QAM	21.83	21.81
LTE Band26	3	26805	15	#0	16QAM	21.79	21.77
LTE Band26	3	26915	1	#0	QPSK	24.04	23.78
LTE Band26	3	26915	1	#Mid	QPSK	23.89	23.63
LTE Band26	3	26915	1	#Max	QPSK	23.95	23.69
LTE Band26	3	26915	8	#0	QPSK	23.09	22.83
LTE Band26	3	26915	8	#Mid	QPSK	23.09	22.83
LTE Band26	3	26915	8	#Max	QPSK	22.99	22.73
LTE Band26	3	26915	15	#0	QPSK	23.04	22.78
LTE Band26	3	26915	1	#0	16QAM	23.68	23.42
LTE Band26	3	26915	1	#Mid	16QAM	23.51	23.25
LTE Band26	3	26915	1	#Max	16QAM	23.56	23.30
LTE Band26	3	26915	8	#0	16QAM	22.22	21.96
LTE Band26	3	26915	8	#Mid	16QAM	22.23	21.97
LTE Band26	3	26915	8	#Max	16QAM	22.13	21.87
LTE Band26	3	26915	15	#0	16QAM	22.08	21.82
LTE Band26	3	27025	1	#0	QPSK	23.86	24.00
LTE Band26	3	27025	1	#Mid	QPSK	23.99	24.13
LTE Band26	3	27025	1	#Max	QPSK	23.83	23.97
LTE Band26	3	27025	8	#0	QPSK	22.86	23.00
LTE Band26	3	27025	8	#Mid	QPSK	22.88	23.02
LTE Band26	3	27025	8	#Max	QPSK	22.75	22.89
LTE Band26	3	27025	15	#0	QPSK	22.77	22.91
LTE Band26	3	27025	1	#0	16QAM	22.90	23.04
LTE Band26	3	27025	1	#Mid	16QAM	22.82	22.96
LTE Band26	3	27025	1	#Max	16QAM	22.87	23.01



LTE Band26	3	27025	8	#0	16QAM	22.06	22.20
LTE Band26	3	27025	8	#Mid	16QAM	21.96	22.10
LTE Band26	3	27025	8	#Max	16QAM	21.91	22.05
LTE Band26	3	27025	15	#0	16QAM	21.76	21.90
LTE Band26	5	26815	1	#0	QPSK	23.66	24.04
LTE Band26	5	26815	1	#Mid	QPSK	23.67	24.05
LTE Band26	5	26815	1	#Max	QPSK	23.60	23.98
LTE Band26	5	26815	12	#0	QPSK	22.77	23.15
LTE Band26	5	26815	12	#Mid	QPSK	22.78	23.16
LTE Band26	5	26815	12	#Max	QPSK	22.74	23.12
LTE Band26	5	26815	25	#0	QPSK	22.82	23.20
LTE Band26	5	26815	1	#0	16QAM	23.23	23.61
LTE Band26	5	26815	1	#Mid	16QAM	23.04	23.42
LTE Band26	5	26815	1	#Max	16QAM	23.00	23.38
LTE Band26	5	26815	12	#0	16QAM	21.69	22.07
LTE Band26	5	26815	12	#Mid	16QAM	21.70	22.08
LTE Band26	5	26815	12	#Max	16QAM	21.65	22.03
LTE Band26	5	26815	25	#0	16QAM	21.86	22.24
LTE Band26	5	26915	1	#0	QPSK	23.86	23.60
LTE Band26	5	26915	1	#Mid	QPSK	23.76	23.50
LTE Band26	5	26915	1	#Max	QPSK	23.55	23.29
LTE Band26	5	26915	12	#0	QPSK	23.04	22.78
LTE Band26	5	26915	12	#Mid	QPSK	23.04	22.78
LTE Band26	5	26915	12	#Max	QPSK	22.94	22.68
LTE Band26	5	26915	25	#0	QPSK	22.94	22.68
LTE Band26	5	26915	1	#0	16QAM	22.99	22.73
LTE Band26	5	26915	1	#Mid	16QAM	23.05	22.79
LTE Band26	5	26915	1	#Max	16QAM	22.88	22.62
LTE Band26	5	26915	12	#0	16QAM	21.89	21.63
LTE Band26	5	26915	12	#Mid	16QAM	21.75	21.49
LTE Band26	5	26915	12	#Max	16QAM	21.56	21.30
LTE Band26	5	26915	25	#0	16QAM	21.77	21.51
LTE Band26	5	27015	1	#0	QPSK	23.83	23.97
LTE Band26	5	27015	1	#Mid	QPSK	23.74	23.88
LTE Band26	5	27015	1	#Max	QPSK	23.63	23.77
LTE Band26	5	27015	12	#0	QPSK	22.88	23.02
LTE Band26	5	27015	12	#Mid	QPSK	22.89	23.03
LTE Band26	5	27015	12	#Max	QPSK	22.63	22.77
LTE Band26	5	27015	25	#0	QPSK	22.78	22.92
LTE Band26	5	27015	1	#0	16QAM	22.84	22.98
LTE Band26	5	27015	1	#Mid	16QAM	22.58	22.72
LTE Band26	5	27015	1	#Max	16QAM	22.72	22.86



LTE Band26	5	27015	12	#0	16QAM	21.98	22.12
LTE Band26	5	27015	12	#Mid	16QAM	21.89	22.03
LTE Band26	5	27015	12	#Max	16QAM	21.76	21.90
LTE Band26	5	27015	25	#0	16QAM	21.70	21.84
LTE Band26	10	26840	1	#0	QPSK	23.72	23.70
LTE Band26	10	26840	1	#Mid	QPSK	23.70	23.68
LTE Band26	10	26840	1	#Max	QPSK	23.75	23.73
LTE Band26	10	26840	25	#0	QPSK	22.87	22.85
LTE Band26	10	26840	25	#Mid	QPSK	22.85	22.83
LTE Band26	10	26840	25	#Max	QPSK	22.91	22.89
LTE Band26	10	26840	50	#0	QPSK	22.89	22.87
LTE Band26	10	26840	1	#0	16QAM	22.92	22.90
LTE Band26	10	26840	1	#Mid	16QAM	23.18	23.16
LTE Band26	10	26840	1	#Max	16QAM	22.98	22.96
LTE Band26	10	26840	25	#0	16QAM	21.76	21.74
LTE Band26	10	26840	25	#Mid	16QAM	21.76	21.74
LTE Band26	10	26840	25	#Max	16QAM	21.90	21.88
LTE Band26	10	26840	50	#0	16QAM	21.73	21.71
LTE Band26	10	26915	1	#0	QPSK	23.93	23.67
LTE Band26	10	26915	1	#Mid	QPSK	24.19	23.93
LTE Band26	10	26915	1	#Max	QPSK	23.57	23.31
LTE Band26	10	26915	25	#0	QPSK	22.96	22.70
LTE Band26	10	26915	25	#Mid	QPSK	22.96	22.70
LTE Band26	10	26915	25	#Max	QPSK	22.79	22.53
LTE Band26	10	26915	50	#0	QPSK	22.94	22.68
LTE Band26	10	26915	1	#0	16QAM	23.24	22.98
LTE Band26	10	26915	1	#Mid	16QAM	23.41	23.15
LTE Band26	10	26915	1	#Max	16QAM	23.35	23.09
LTE Band26	10	26915	25	#0	16QAM	22.02	21.76
LTE Band26	10	26915	25	#Mid	16QAM	22.03	21.77
LTE Band26	10	26915	25	#Max	16QAM	21.85	21.59
LTE Band26	10	26915	50	#0	16QAM	21.78	21.52
LTE Band26	10	26990	1	#0	QPSK	23.66	23.40
LTE Band26	10	26990	1	#Mid	QPSK	23.92	23.66
LTE Band26	10	26990	1	#Max	QPSK	23.61	23.35
LTE Band26	10	26990	25	#0	QPSK	22.79	22.53
LTE Band26	10	26990	25	#Mid	QPSK	22.80	22.54
LTE Band26	10	26990	25	#Max	QPSK	22.79	22.53
LTE Band26	10	26990	50	#0	QPSK	22.83	22.57
LTE Band26	10	26990	1	#0	16QAM	22.41	22.15
LTE Band26	10	26990	1	#Mid	16QAM	22.61	22.35
LTE Band26	10	26990	1	#Max	16QAM	22.16	21.90



LTE Band26	10	26990	25	#0	16QAM	21.89	21.63
LTE Band26	10	26990	25	#Mid	16QAM	21.64	21.38
LTE Band26	10	26990	25	#Max	16QAM	21.78	21.52
LTE Band26	10	26990	50	#0	16QAM	21.77	21.51
LTE Band26	15	26865	1	#0	QPSK	23.74	23.72
LTE Band26	15	26865	1	#Mid	QPSK	23.92	23.90
LTE Band26	15	26865	1	#Max	QPSK	23.70	23.68
LTE Band26	15	26865	36	#0	QPSK	22.84	22.82
LTE Band26	15	26865	36	#Mid	QPSK	22.84	22.82
LTE Band26	15	26865	36	#Max	QPSK	22.97	22.95
LTE Band26	15	26865	75	#0	QPSK	22.84	22.82
LTE Band26	15	26865	1	#0	16QAM	23.02	23.00
LTE Band26	15	26865	1	#Mid	16QAM	23.51	23.49
LTE Band26	15	26865	1	#Max	16QAM	22.91	22.89
LTE Band26	15	26865	36	#0	16QAM	21.91	21.89
LTE Band26	15	26865	36	#Mid	16QAM	21.86	21.84
LTE Band26	15	26865	36	#Max	16QAM	21.86	21.84
LTE Band26	15	26865	75	#0	16QAM	21.73	21.71
LTE Band26	15	26915	1	#0	QPSK	23.87	23.61
LTE Band26	15	26915	1	#Mid	QPSK	24.08	23.82
LTE Band26	15	26915	1	#Max	QPSK	23.68	23.42
LTE Band26	15	26915	36	#0	QPSK	22.88	22.62
LTE Band26	15	26915	36	#Mid	QPSK	22.92	22.66
LTE Band26	15	26915	36	#Max	QPSK	22.81	22.55
LTE Band26	15	26915	75	#0	QPSK	22.85	22.59
LTE Band26	15	26915	1	#0	16QAM	23.30	23.04
LTE Band26	15	26915	1	#Mid	16QAM	23.39	23.13
LTE Band26	15	26915	1	#Max	16QAM	23.29	23.03
LTE Band26	15	26915	36	#0	16QAM	22.05	21.79
LTE Band26	15	26915	36	#Mid	16QAM	22.06	21.80
LTE Band26	15	26915	36	#Max	16QAM	21.58	21.32
LTE Band26	15	26915	75	#0	16QAM	21.76	21.50
LTE Band26	15	26965	1	#0	QPSK	23.87	23.61
LTE Band26	15	26965	1	#Mid	QPSK	23.65	23.39
LTE Band26	15	26965	1	#Max	QPSK	23.62	23.36
LTE Band26	15	26965	36	#0	QPSK	22.87	22.61
LTE Band26	15	26965	36	#Mid	QPSK	22.87	22.61
LTE Band26	15	26965	36	#Max	QPSK	22.76	22.50
LTE Band26	15	26965	75	#0	QPSK	22.79	22.53
LTE Band26	15	26965	1	#0	16QAM	22.76	22.50
LTE Band26	15	26965	1	#Mid	16QAM	22.30	22.04
LTE Band26	15	26965	1	#Max	16QAM	22.27	22.01



LTE Band26	15	26965	36	#0	16QAM	21.91	21.65
LTE Band26	15	26965	36	#Mid	16QAM	21.86	21.60
LTE Band26	15	26965	36	#Max	16QAM	21.74	21.48
LTE Band26	15	26965	75	#0	16QAM	21.87	21.61

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 30kHz, VBW is set to 91 kHz for LTE Band 26 (1.4MHz),

RBW is set to 62 kHz, VBW is set to 180kHz for LTE Band 26 (3MHz),


RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 26 (5MHz),

RBW is set to 200 kHz, VBW is set to 620kHz for LTE Band 26 (10MHz).

RBW is set to 300 kHz, VBW is set to 910kHz for LTE Band 26 (15MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

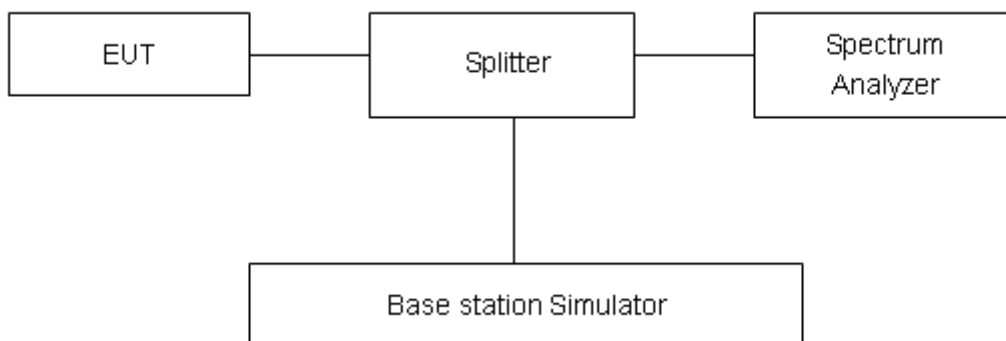

Limits

No specific occupied bandwidth requirements in part 2.1049.


Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.





Test Result


LTE Band 26						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	26797	824.7	1.0942	1.289
			26915	836.5	1.0947	1.278
			27033	848.3	1.0945	1.282
		3	26805	825.5	2.7046	2.992
			26915	836.5	2.7035	3.008
			27025	847.5	2.6885	2.942
		5	26815	826.5	4.4894	4.948
			26915	836.5	4.5199	5.000
			27015	846.5	4.5147	4.989
		10	26840	829	8.9827	9.923
			26915	836.5	8.9517	9.884
			26990	844	8.9541	9.718
		15	26865	831.5	13.4420	14.490
			26915	836.5	13.4070	14.630
			26965	841.5	13.4130	14.580
	16QAM	1.4	26797	824.7	1.0986	1.286
			26915	836.5	1.0922	1.271
			27033	848.3	1.0951	1.280
		3	26805	825.5	2.7009	2.997
			26915	836.5	2.7031	2.965
			27025	847.5	2.6977	2.984
		5	26815	826.5	4.5095	4.994
			26915	836.5	4.4889	4.979
			27015	846.5	4.5059	4.963
		10	26840	829	8.9680	9.797
			26915	836.5	8.9635	9.781
			26990	844	8.9475	9.702
15		26865	831.5	13.4350	14.520	
		26915	836.5	13.4290	14.500	
		26965	841.5	13.4040	14.550	

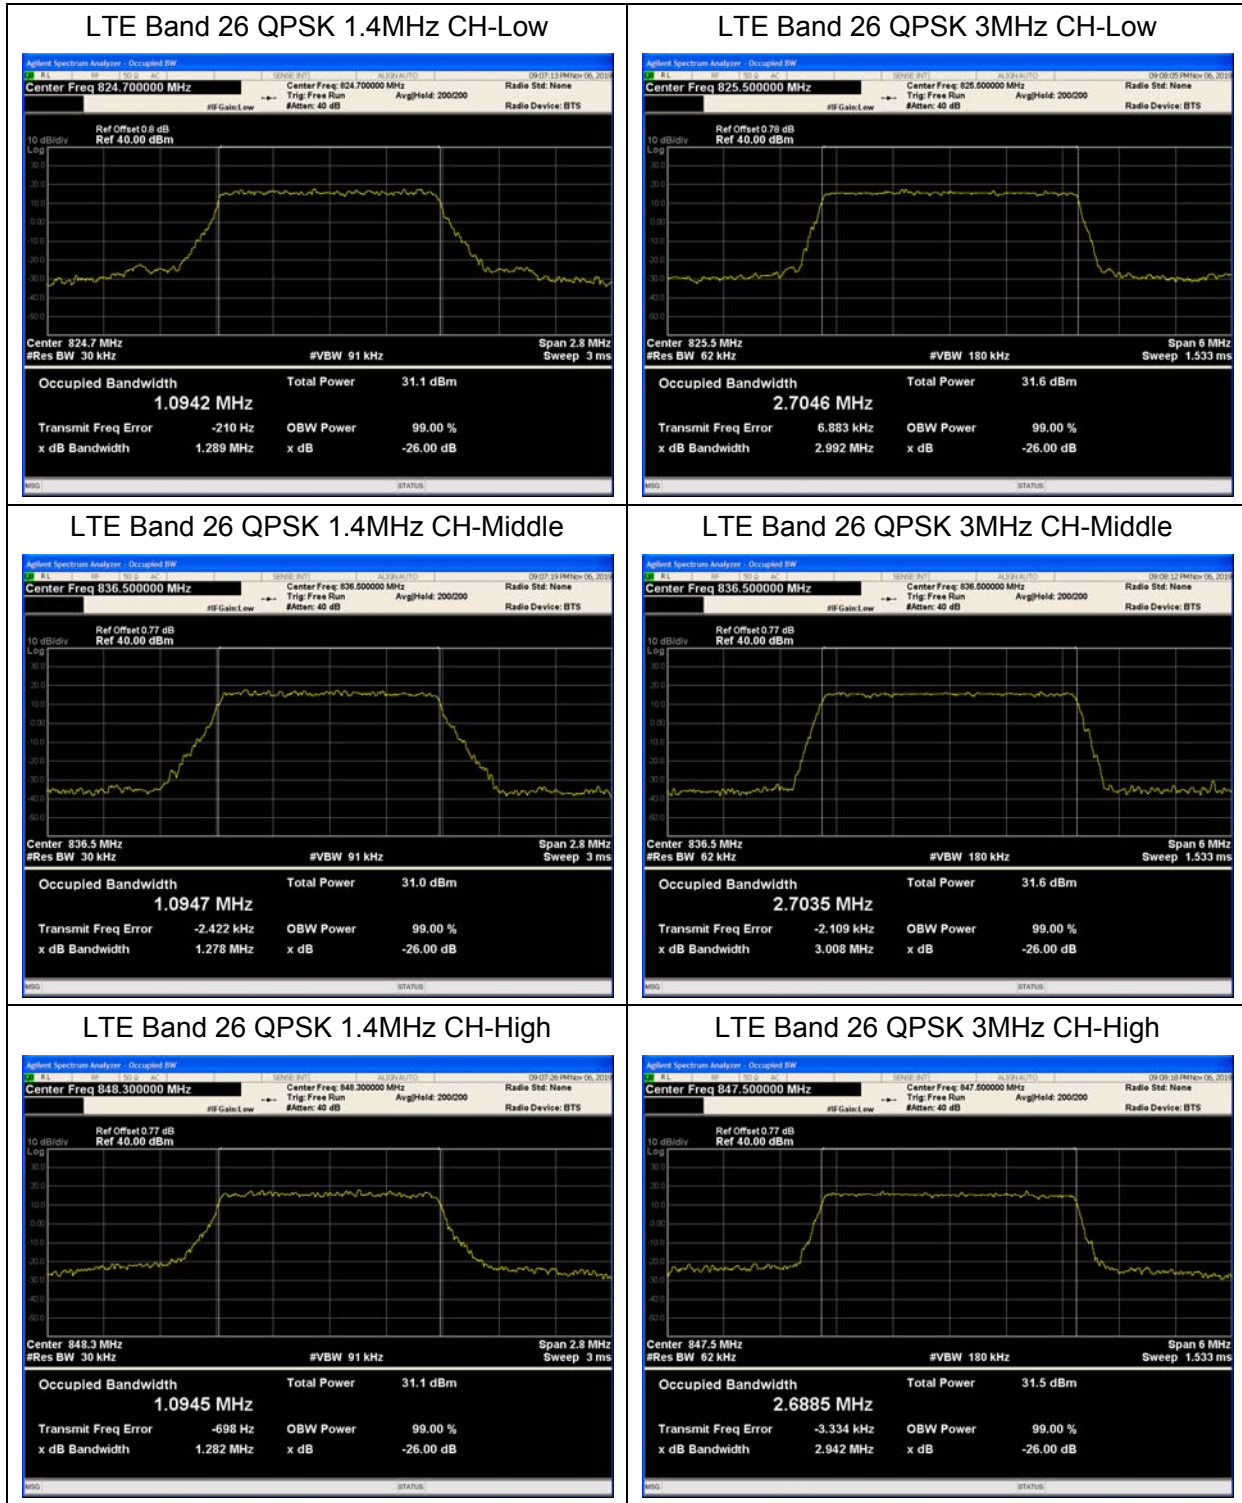

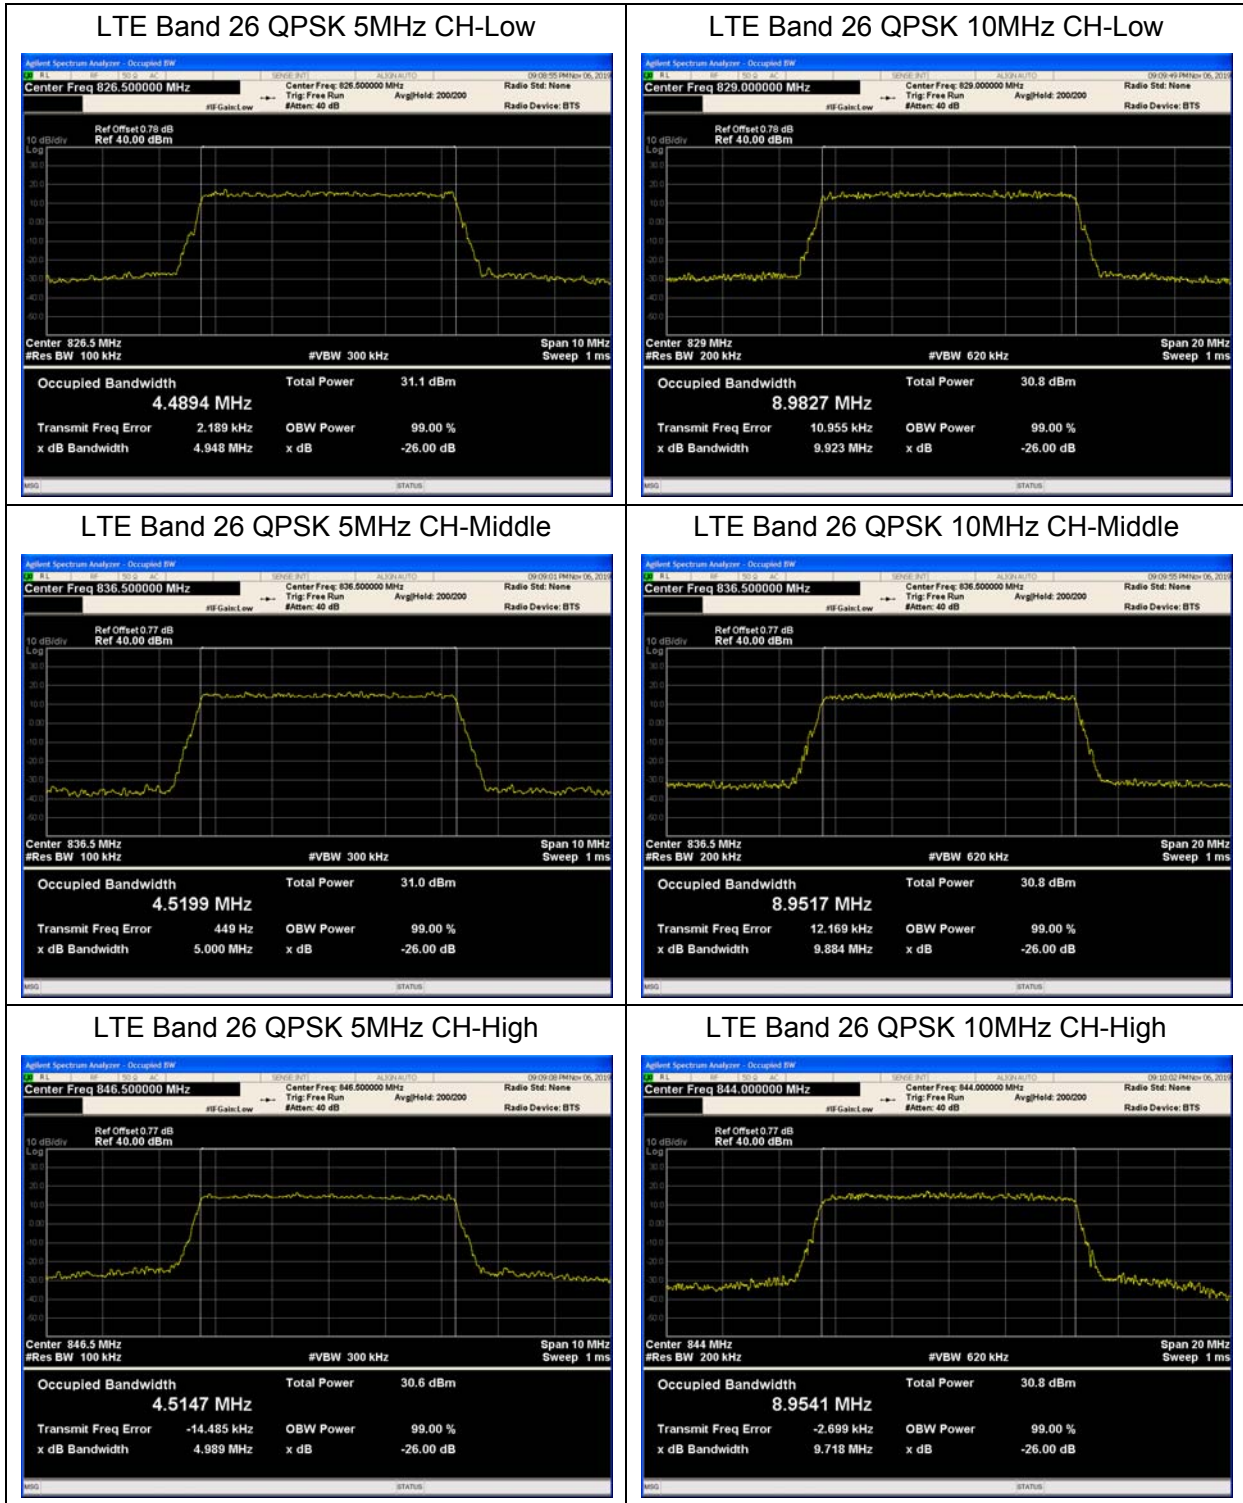

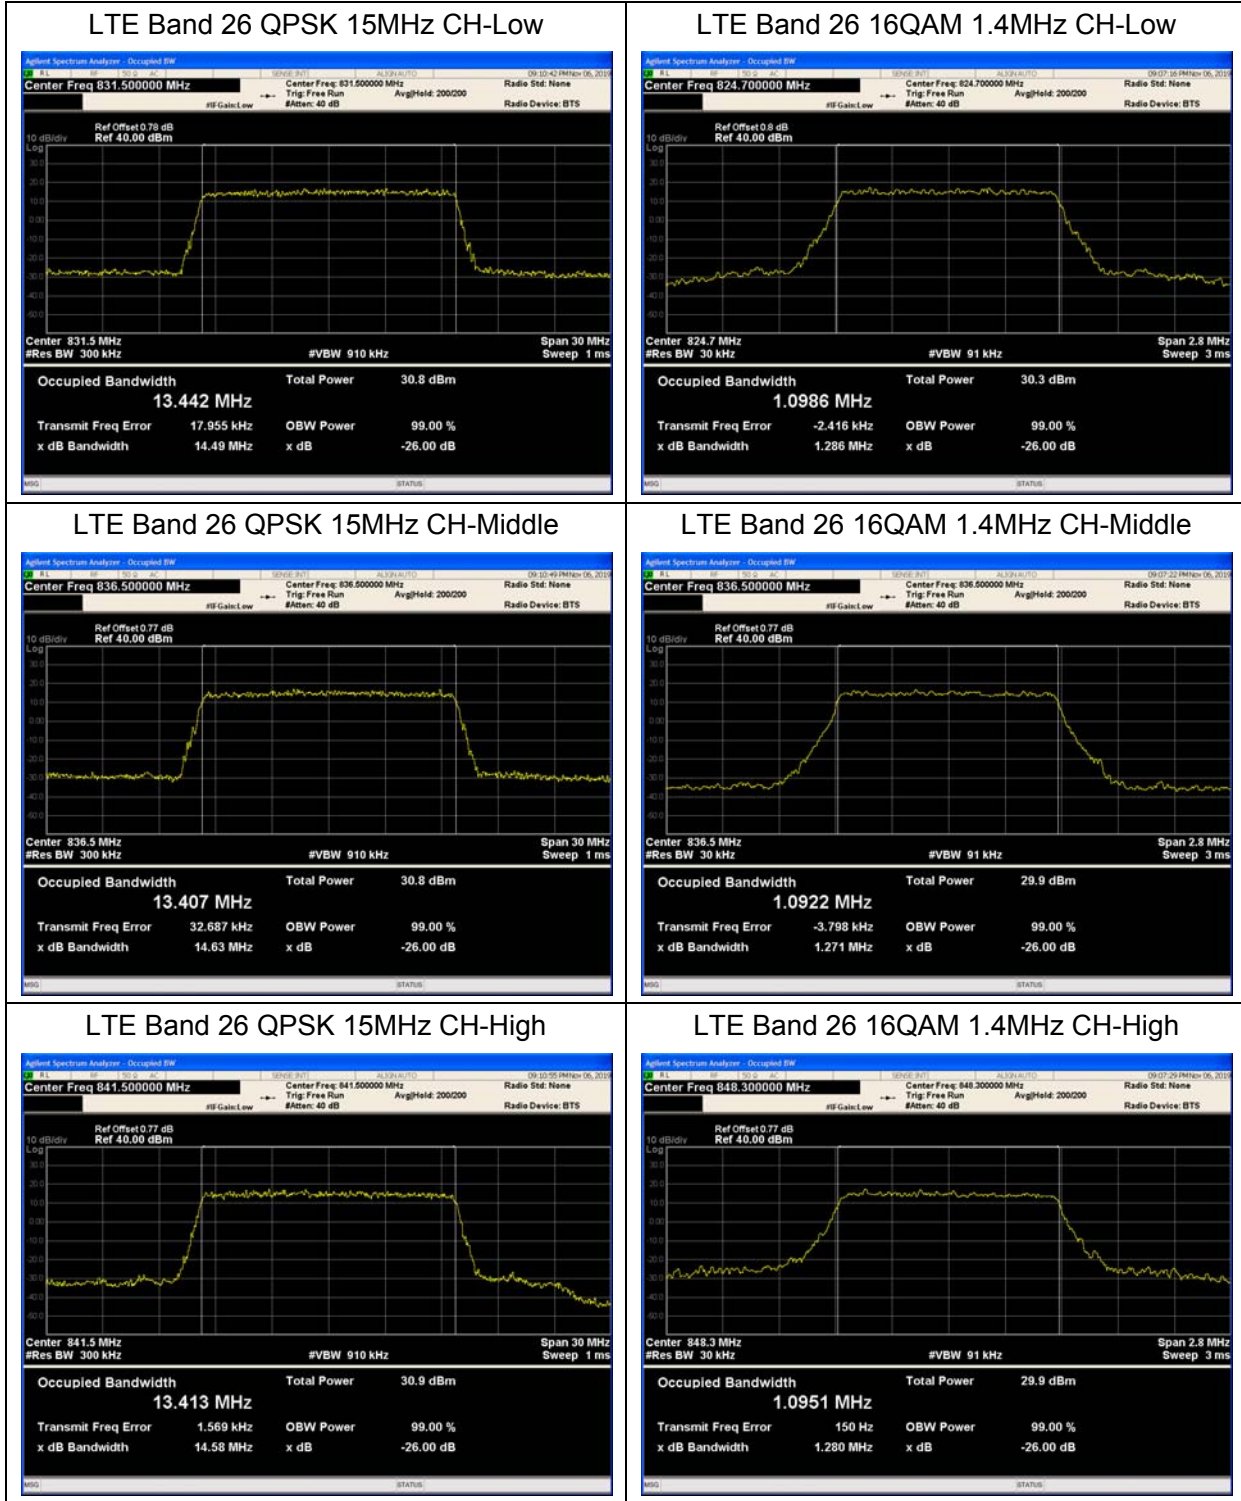

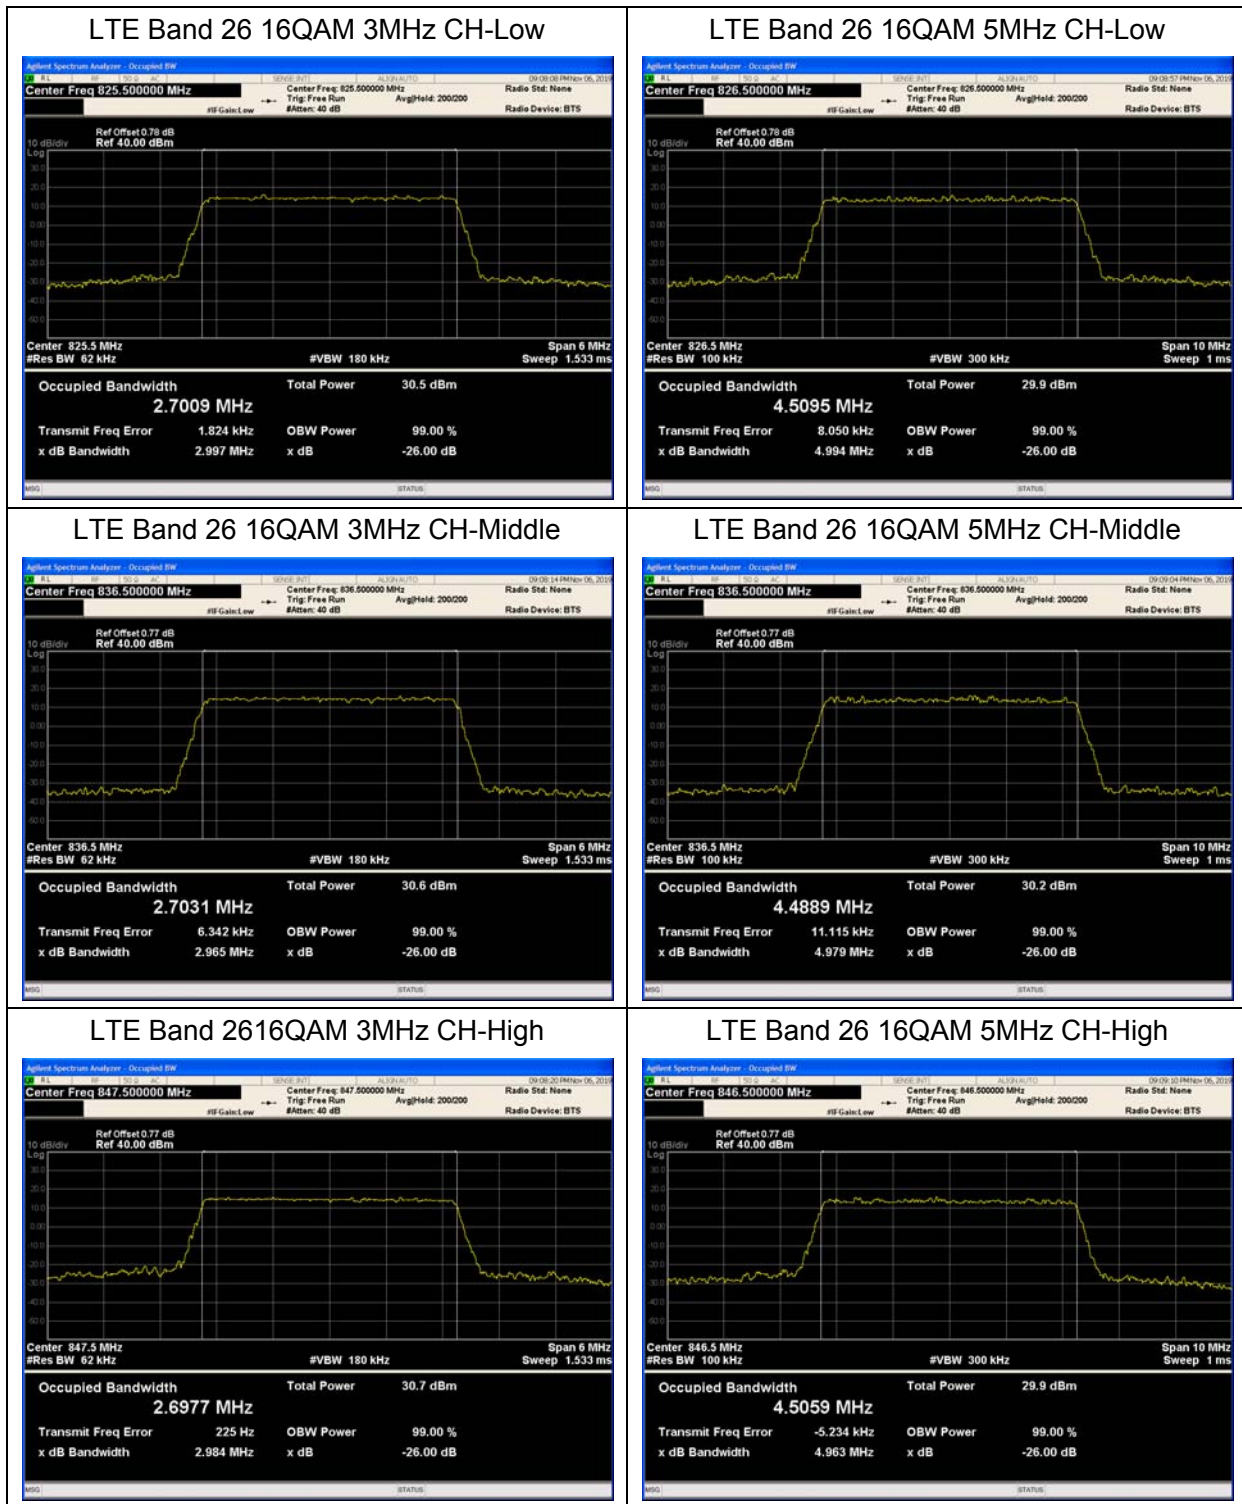

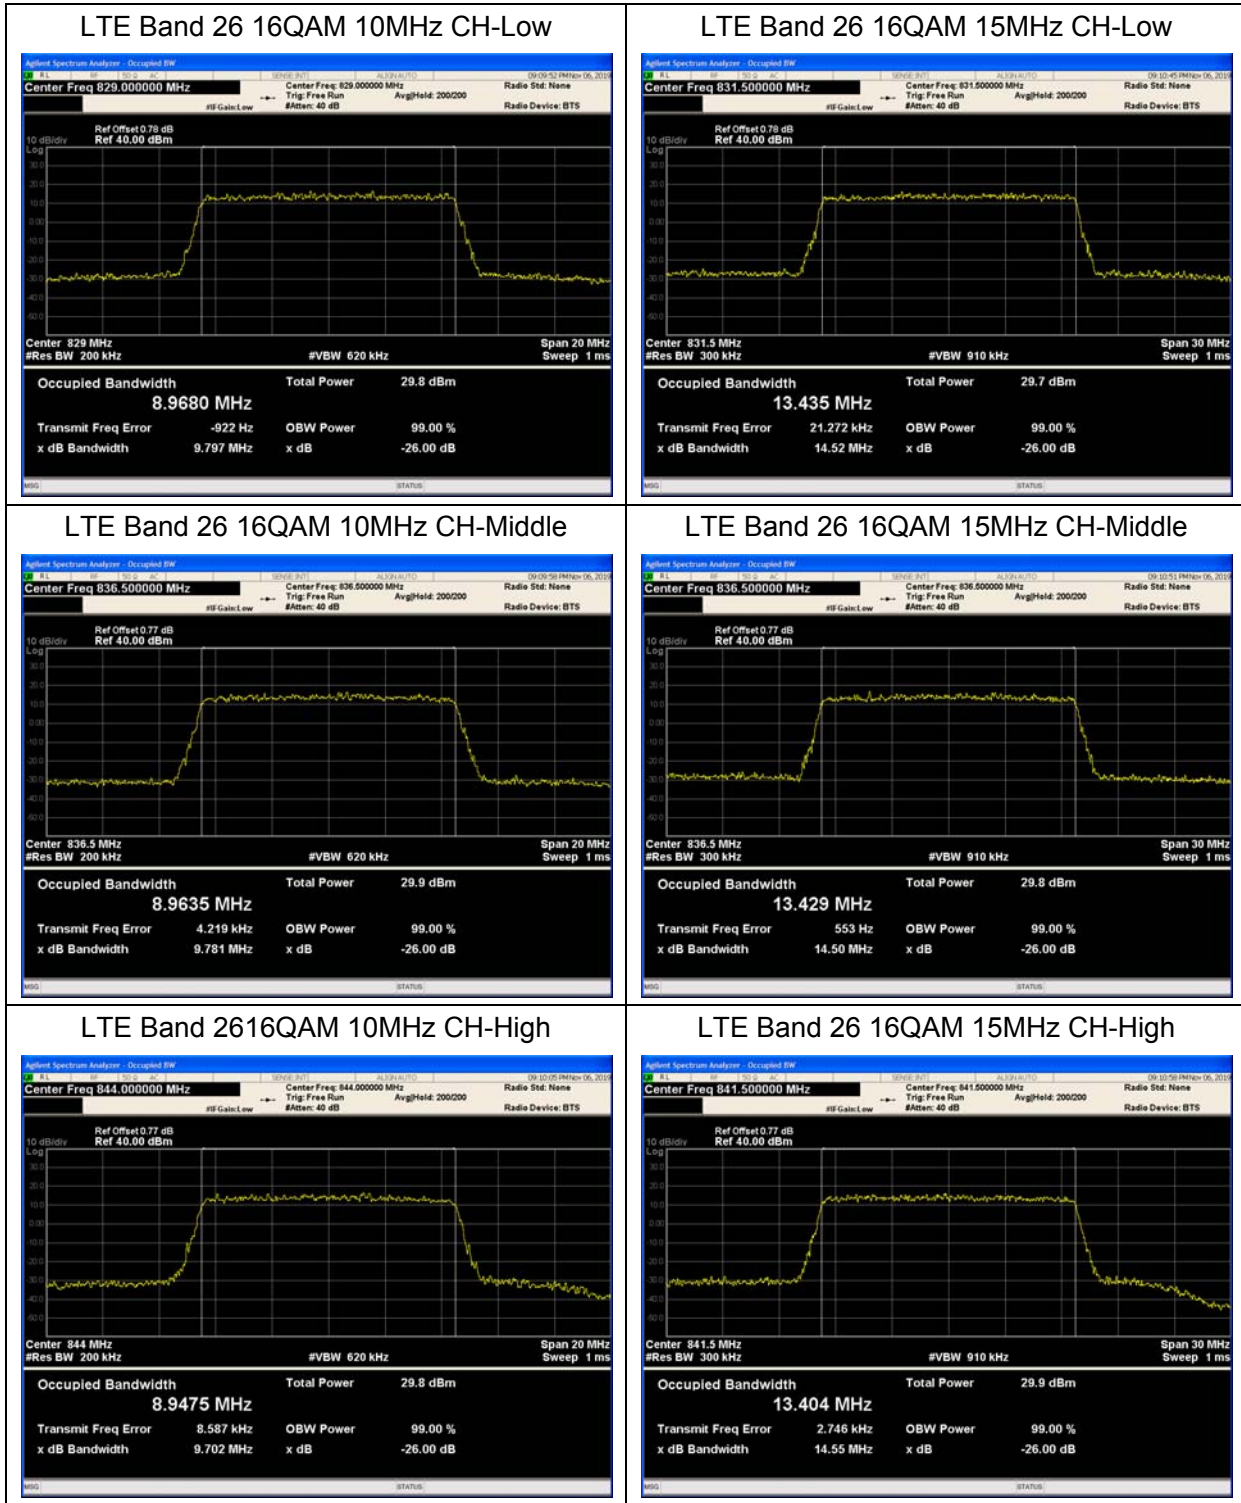

5.3. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 15kHz, VBW is set to 43kHz for LTE Band 26 (1.4MHz),

RBW is set to 30kHz, VBW is set to 91kHz for LTE Band 26 (3MHz),


RBW is set to 51kHz, VBW is set to 150kHz for LTE Band 26 (5MHz),

RBW is set to 100kHz, VBW is set to 300kHz for LTE Band 26 (10MHz).

RBW is set to 150kHz, VBW is set to 470kHz for LTE Band 26 (15MHz).

Spectrum analyzer plots are included on the following pages.

Test Setup

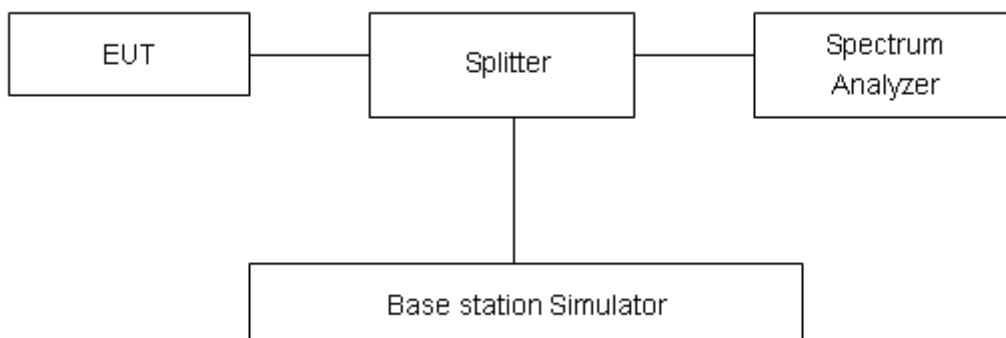

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

LTE Band 26 QPSK 1.4MHz CH-Low 1RB

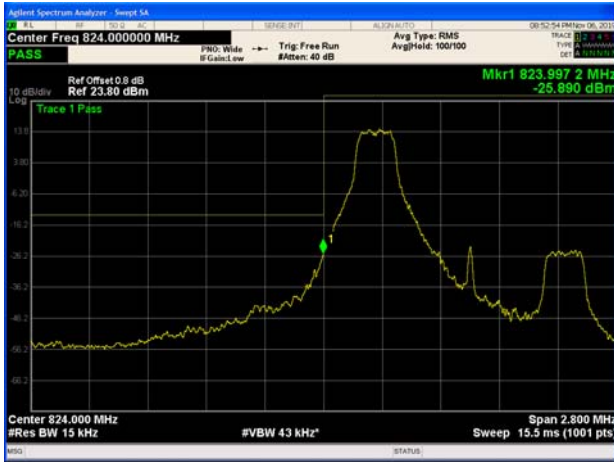

LTE Band 26 QPSK 1.4MHz CH-High 1RB




LTE Band 26 QPSK 1.4MHz CH-Low 100%RB




LTE Band 26 QPSK 1.4MHz CH-High 100%RB



LTE Band 26 QPSK 3MHz CH-Low 1RB

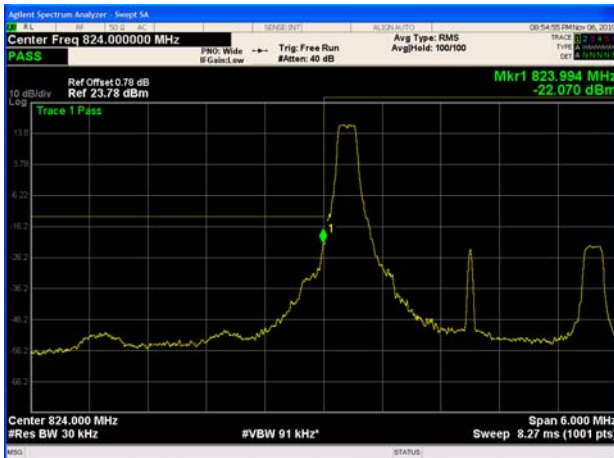

LTE Band 26 QPSK 3MHz CH-High 1RB

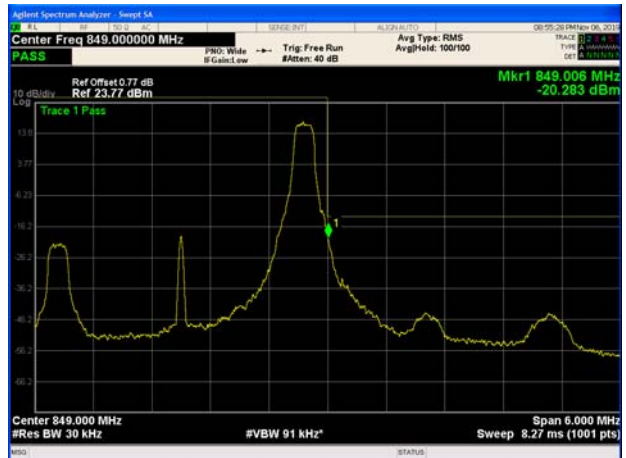




LTE Band 26 QPSK 3MHz CH-Low 100%RB




LTE Band 26 QPSK 3MHz CH-High 100%RB



LTE Band 26 QPSK 5MHz CH-Low 1RB

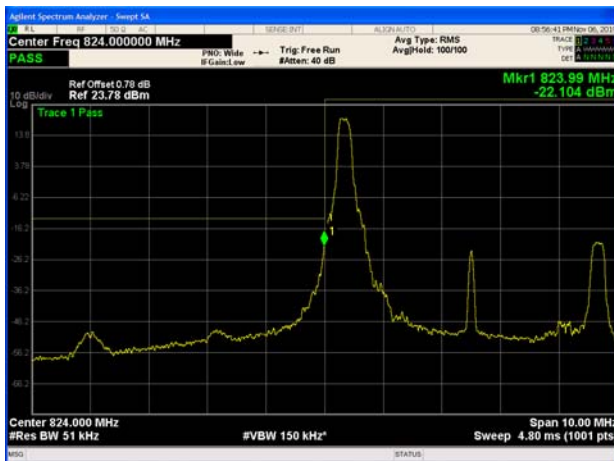

LTE Band 26 QPSK 5MHz CH-High 1RB

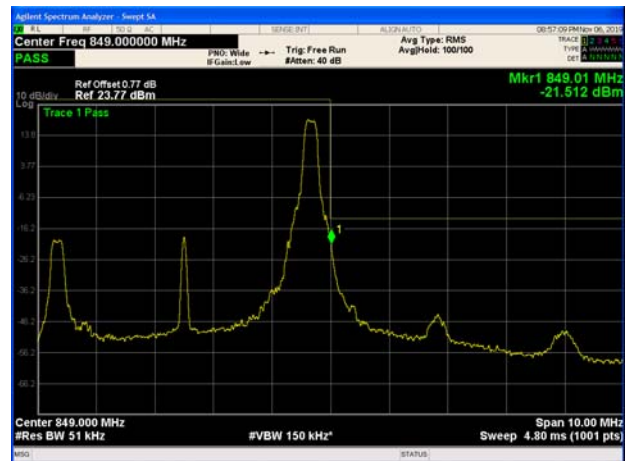

LTE Band 26 QPSK 5MHz CH-Low 100%RB



LTE Band 26 QPSK 5MHz CH-High 100%RB






LTE Band 26 QPSK 10MHz CH-Low 1RB



LTE Band 26 QPSK 10MHz CH-High 1RB

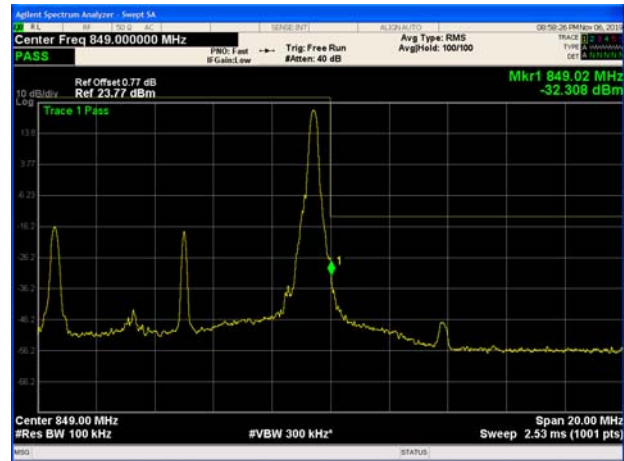


LTE Band 26 QPSK 10MHz CH-Low 100%RB




LTE Band 26 QPSK 10MHz CH-High 100%RB




LTE Band 26 QPSK 15MHz CH-Low 1RB

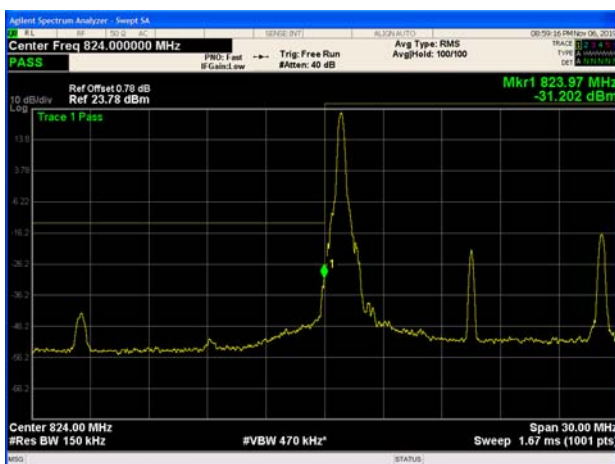

LTE Band 26 QPSK 15MHz CH-High 1RB

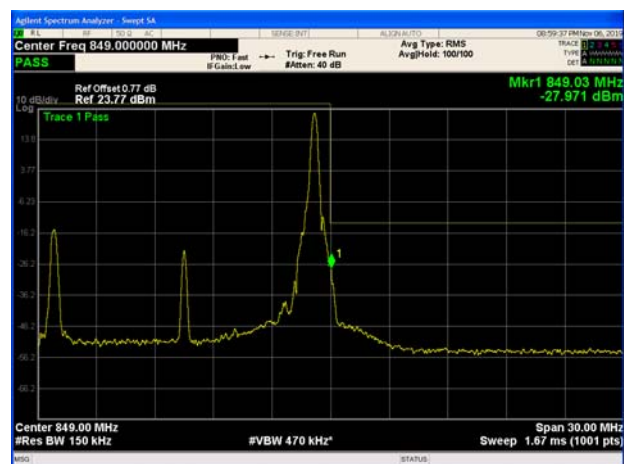

LTE Band 26 QPSK 15MHz CH-Low 100%RB

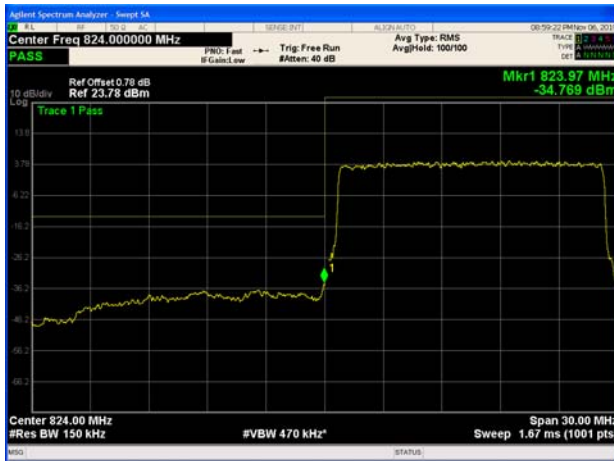

LTE Band 26 QPSK 15MHz CH-High 100%RB



LTE Band 26 16QAM 1.4MHz CH-Low 1RB



LTE Band 26 16QAM 1.4MHz CH-High 1RB



LTE Band 26 16QAM 1.4MHz CH-Low 100%RB




LTE Band 26 16QAM 1.4MHz CH-High 100%RB







LTE Band 26 16QAM 3MHz CH-Low 1RB

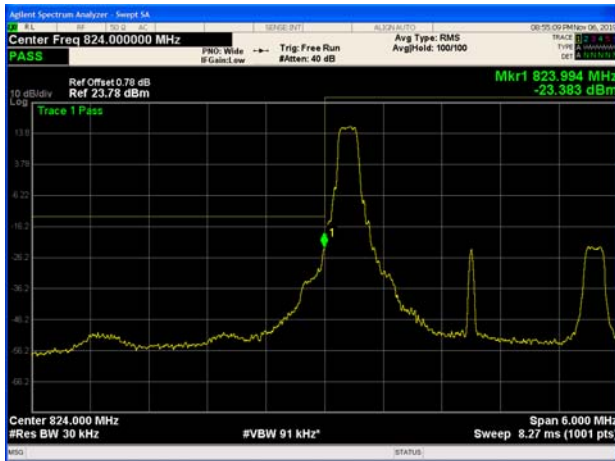

LTE Band 26 16QAM 3MHz CH-High 1RB

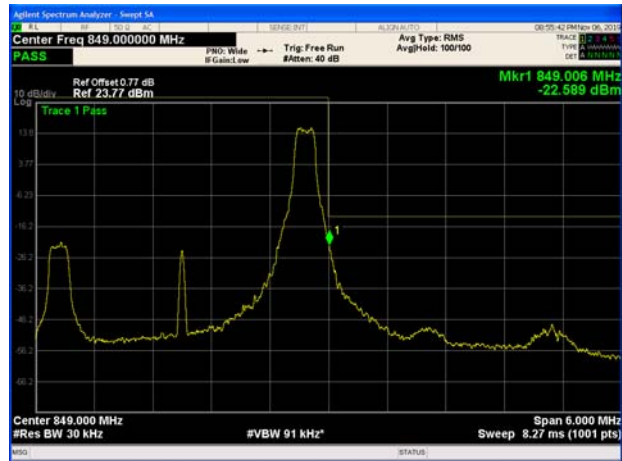


LTE Band 26 16QAM 3MHz CH-Low 100%RB

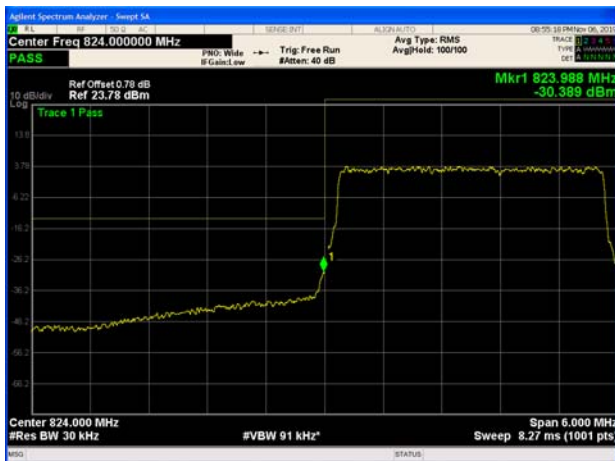


LTE Band 26 16QAM 3MHz CH-High 100%RB



LTE Band 26 16QAM 5MHz CH-Low 1RB

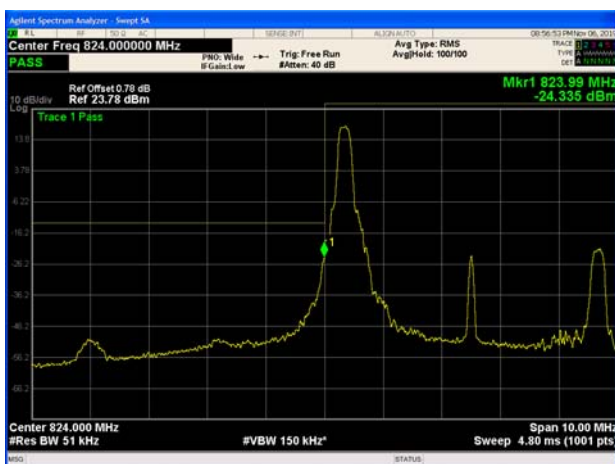

LTE Band 26 16QAM 5MHz CH-High 1RB

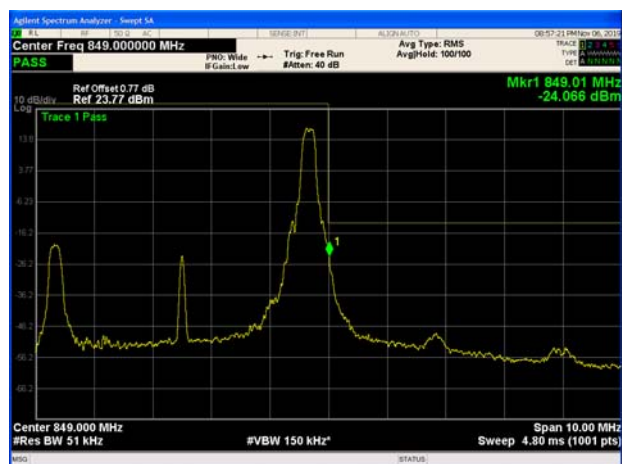




LTE Band 26 16QAM 5MHz CH-Low 100%RB




LTE Band 26 16QAM 5MHz CH-High 100%RB



LTE Band 26 16QAM 10MHz CH-Low 1RB

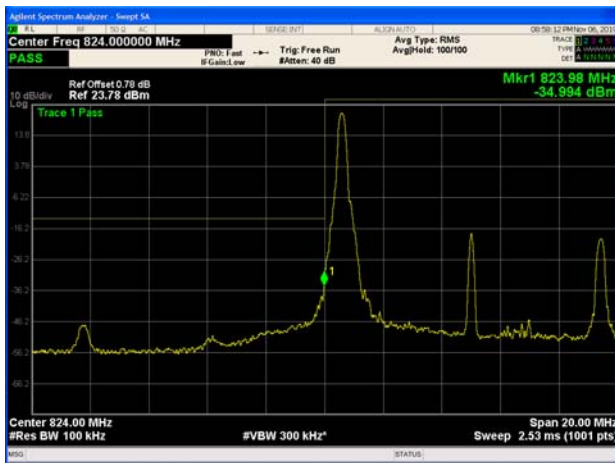

LTE Band 26 16QAM 10MHz CH-High 1RB

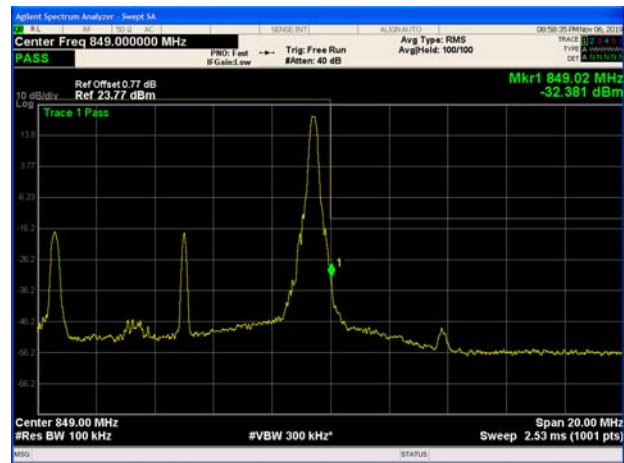

LTE Band 26 16QAM 10MHz CH-Low 100%RB




LTE Band 26 16QAM 10MHz CH-High 100%RB






LTE Band 26 16QAM 15MHz CH-Low 1RB

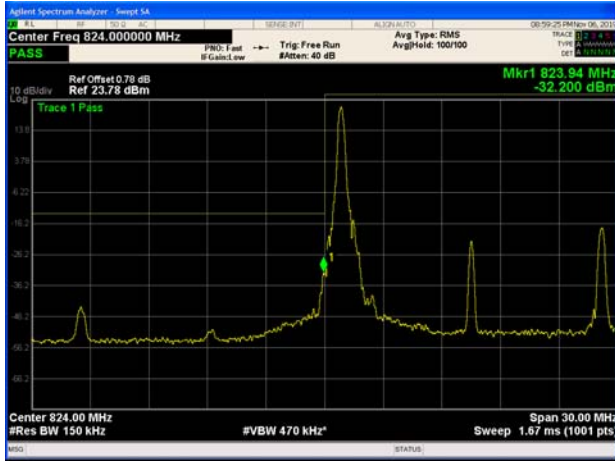

LTE Band 26 16QAM 15MHz CH-High 1RB

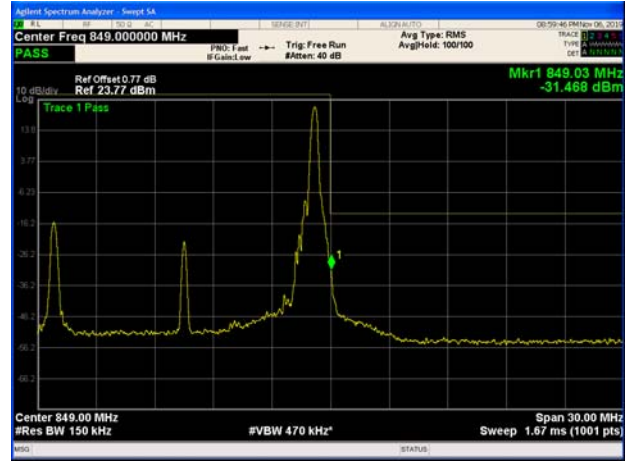

LTE Band 26 16QAM 15MHz CH-Low 100%RB



LTE Band 26 16QAM 15MHz CH-High 100%RB



5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

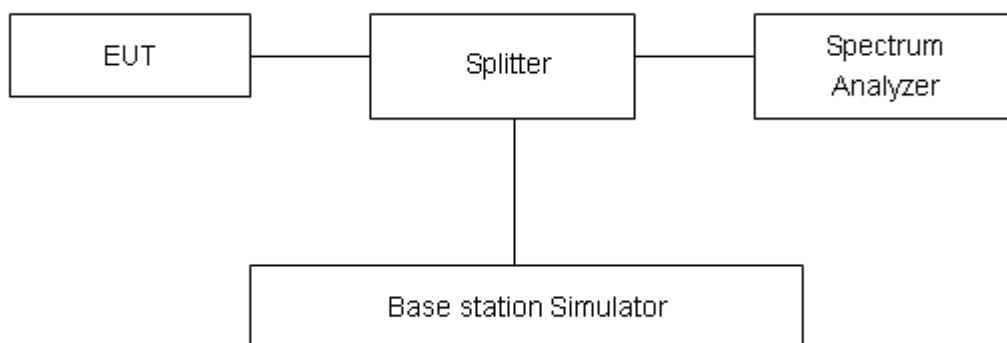

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

LTE Band 26								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	26797	824.7	28.38	23.10	5.28	≤13	PASS
		26915	836.5	28.05	23.00	5.05	≤13	PASS
		27033	848.3	27.46	22.91	4.55	≤13	PASS
	3	26805	825.5	28.45	23.07	5.38	≤13	PASS
		26915	836.5	28.22	23.10	5.12	≤13	PASS
		27025	847.5	27.49	22.92	4.57	≤13	PASS
	5	26815	826.5	28.41	23.07	5.34	≤13	PASS
		26915	836.5	28.22	23.11	5.11	≤13	PASS
		27015	846.5	27.62	22.91	4.71	≤13	PASS
	10	26840	829	28.28	22.96	5.32	≤13	PASS
		26915	836.5	28.17	22.99	5.18	≤13	PASS
		26990	844	27.87	22.95	4.92	≤13	PASS
	15	26865	831.5	28.48	23.07	5.41	≤13	PASS
		26915	836.5	28.33	22.98	5.35	≤13	PASS
		26965	841.5	28.19	22.97	5.22	≤13	PASS
16QAM	1.4	26797	824.7	28.28	22.17	6.11	≤13	PASS
		26915	836.5	28.24	22.33	5.91	≤13	PASS
		27033	848.3	27.44	22.05	5.39	≤13	PASS
	3	26805	825.5	28.32	22.14	6.18	≤13	PASS
		26915	836.5	27.94	21.96	5.98	≤13	PASS
		27025	847.5	27.36	21.88	5.48	≤13	PASS
	5	26815	826.5	28.15	22.02	6.13	≤13	PASS
		26915	836.5	27.97	22.05	5.92	≤13	PASS
		27015	846.5	27.42	21.86	5.56	≤13	PASS
	10	26840	829	28.04	21.89	6.15	≤13	PASS
		26915	836.5	27.99	22.02	5.97	≤13	PASS
		26990	844	27.82	22.01	5.81	≤13	PASS
	15	26865	831.5	28.19	22.03	6.16	≤13	PASS
		26915	836.5	28.22	22.12	6.10	≤13	PASS
		26965	841.5	28.00	22.04	5.96	≤13	PASS

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

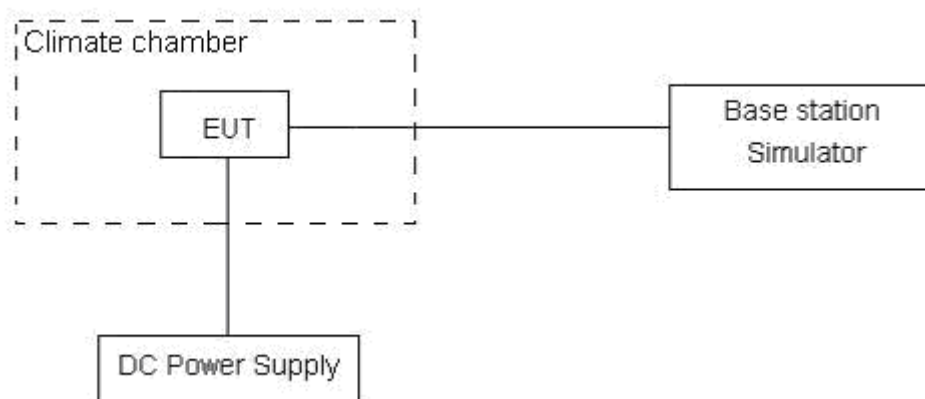



Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.



Test Result

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	15.28	16.76	0.00813	0.00891	PASS
Extreme (85°C)		15.60	4.76	0.00830	0.00253	PASS
Extreme (80°C)		9.58	11.00	0.00510	0.00585	PASS
Extreme (70°C)		11.33	8.03	0.00602	0.00427	PASS
Extreme (60°C)		14.05	13.71	0.00747	0.00729	PASS
Extreme (50°C)		14.25	12.38	0.00758	0.00658	PASS
Extreme (40°C)		1.51	17.81	0.00080	0.00947	PASS
Extreme (30°C)		5.37	1.80	0.00286	0.00095	PASS
Extreme (20°C)		4.75	8.28	0.00253	0.00440	PASS
Extreme (10°C)		9.32	13.01	0.00496	0.00692	PASS
Extreme (0°C)		4.63	6.32	0.00246	0.00336	PASS
Extreme (-10°C)		17.70	15.68	0.00942	0.00834	PASS
Extreme (-20°C)		1.05	6.07	0.00056	0.00323	PASS
Extreme (-30°C)		3.08	6.46	0.00164	0.00343	PASS
Extreme (-40°C)		5.26	3.16	0.00280	0.00168	PASS
25°C	LV	12.52	2.63	0.00666	0.00140	PASS
	HV	5.34	14.53	0.00284	0.00773	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	16.18	3.47	0.00861	0.00184	PASS
Extreme (85°C)		3.70	2.35	0.00197	0.00125	PASS
Extreme (80°C)		10.98	9.00	0.00584	0.00479	PASS
Extreme (70°C)		3.52	12.78	0.00187	0.00680	PASS
Extreme (60°C)		14.48	9.46	0.00770	0.00503	PASS
Extreme (50°C)		12.14	12.32	0.00646	0.00655	PASS
Extreme (40°C)		5.90	9.13	0.00314	0.00486	PASS
Extreme (30°C)		1.79	15.02	0.00095	0.00799	PASS
Extreme (20°C)		14.27	14.00	0.00759	0.00745	PASS
Extreme (10°C)		12.56	8.87	0.00668	0.00472	PASS
Extreme (0°C)		6.12	3.58	0.00326	0.00190	PASS
Extreme (-10°C)		16.81	11.90	0.00894	0.00633	PASS
Extreme (-20°C)		11.22	13.43	0.00597	0.00714	PASS
Extreme (-30°C)		1.39	16.74	0.00074	0.00890	PASS



Extreme (-40°C)		10.83	10.77	0.00576	0.00573	PASS
25°C	LV	4.68	13.02	0.00249	0.00693	PASS
	HV	9.08	15.75	0.00483	0.00838	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	12.43	16.62	0.00661	0.00884	PASS
Extreme (85°C)		17.52	1.76	0.00932	0.00094	PASS
Extreme (80°C)		17.02	16.38	0.00905	0.00871	PASS
Extreme (70°C)		14.53	7.16	0.00773	0.00381	PASS
Extreme (60°C)		9.98	11.34	0.00531	0.00603	PASS
Extreme (50°C)		6.57	14.79	0.00350	0.00786	PASS
Extreme (40°C)		10.30	16.79	0.00548	0.00893	PASS
Extreme (30°C)		1.15	15.26	0.00061	0.00812	PASS
Extreme (20°C)		1.42	13.31	0.00076	0.00708	PASS
Extreme (10°C)		13.15	5.44	0.00699	0.00289	PASS
Extreme (0°C)		9.82	10.94	0.00522	0.00582	PASS
Extreme (-10°C)		4.09	11.81	0.00218	0.00628	PASS
Extreme (-20°C)		13.09	7.63	0.00696	0.00406	PASS
Extreme (-30°C)		14.90	6.76	0.00793	0.00359	PASS
Extreme (-40°C)		1.72	5.56	0.00092	0.00296	PASS
25°C	LV	11.53	14.02	0.00613	0.00746	PASS
	HV	3.28	13.17	0.00174	0.00701	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	3.98	1.65	0.00212	0.00088	PASS
Extreme (85°C)		6.12	11.01	0.00326	0.00585	PASS
Extreme (80°C)		16.26	7.73	0.00865	0.00411	PASS
Extreme (70°C)		6.77	8.28	0.00360	0.00440	PASS
Extreme (60°C)		15.02	6.87	0.00799	0.00366	PASS
Extreme (50°C)		12.21	16.51	0.00649	0.00878	PASS
Extreme (40°C)		7.80	7.70	0.00415	0.00410	PASS
Extreme (30°C)		1.94	8.85	0.00103	0.00471	PASS
Extreme (20°C)		1.14	9.78	0.00061	0.00520	PASS
Extreme (10°C)		1.98	10.57	0.00105	0.00562	PASS
Extreme (0°C)		3.83	15.69	0.00204	0.00835	PASS
Extreme (-10°C)		10.06	15.05	0.00535	0.00801	PASS
Extreme (-20°C)		1.79	3.76	0.00095	0.00200	PASS



Extreme (-30°C)		13.85	6.97	0.00737	0.00371	PASS
Extreme (-40°C)		16.08	9.47	0.00856	0.00504	PASS
25°C	LV	16.52	3.81	0.00879	0.00203	PASS
	HV	9.56	13.42	0.00508	0.00714	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	9.96	9.70	0.00530	0.00516	PASS
Extreme (85°C)		15.09	4.86	0.00803	0.00259	PASS
Extreme (80°C)		12.83	12.13	0.00683	0.00645	PASS
Extreme (70°C)		9.17	17.28	0.00488	0.00919	PASS
Extreme (60°C)		11.29	11.43	0.00600	0.00608	PASS
Extreme (50°C)		3.98	11.64	0.00212	0.00619	PASS
Extreme (40°C)		1.50	3.69	0.00080	0.00196	PASS
Extreme (30°C)		15.16	16.51	0.00807	0.00878	PASS
Extreme (20°C)		13.41	7.83	0.00713	0.00417	PASS
Extreme (10°C)		11.74	12.25	0.00624	0.00652	PASS
Extreme (0°C)		14.73	2.32	0.00784	0.00123	PASS
Extreme (-10°C)		15.00	3.77	0.00798	0.00201	PASS
Extreme (-20°C)		6.68	15.98	0.00355	0.00850	PASS
Extreme (-30°C)		4.48	11.96	0.00238	0.00636	PASS
Extreme (-40°C)		6.71	2.10	0.00357	0.00112	PASS
25°C	LV	16.05	13.05	0.00854	0.00694	PASS
	HV	9.44	10.55	0.00502	0.00561	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

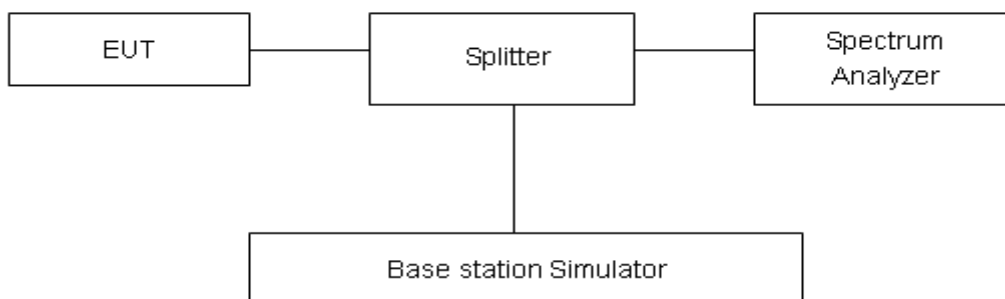

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.




Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


LTE Band 26 1.4MHz CH-Low 9kHz~10GHz

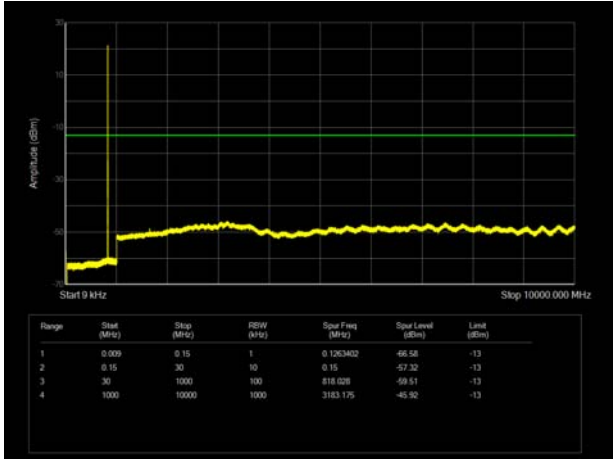


LTE Band 26 3MHz CH-Low 9kHz ~10GHz

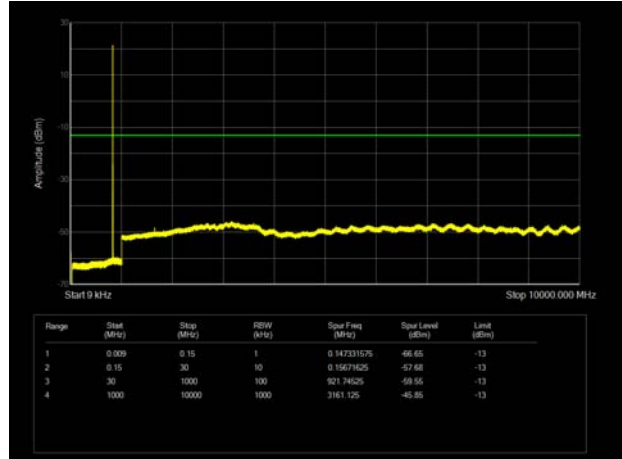


LTE Band 26 1.4MHz CH-Middle 9kHz~10GHz

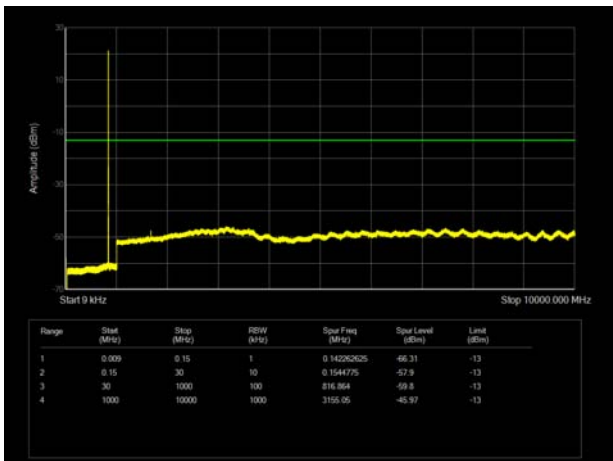


LTE Band 26 3MHz CH-Middle 9kHz ~10GHz

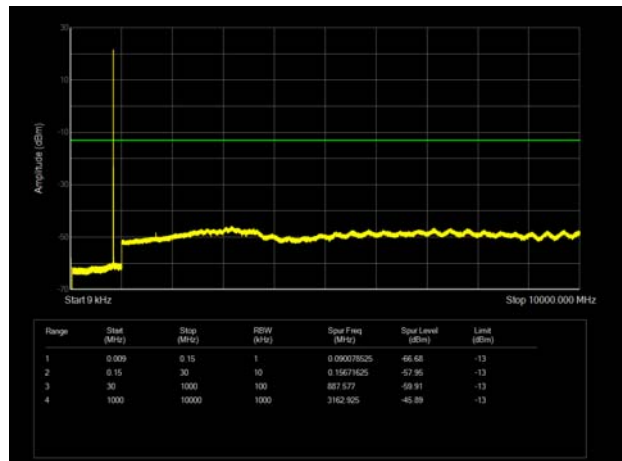


LTE Band 26 1.4MHz CH-High 9kHz~10GHz

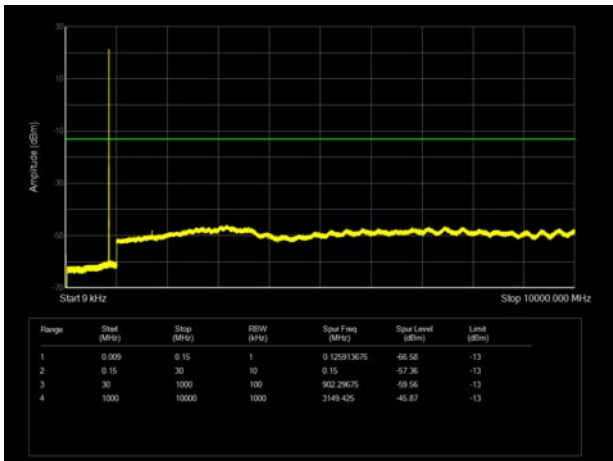


LTE Band 26 3MHz CH-High 9kHz ~10GHz

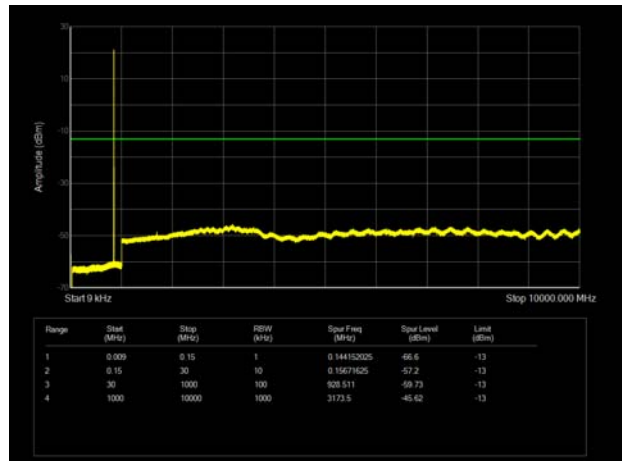


LTE Band 26 5MHz CH-Low 9kHz ~10GHz

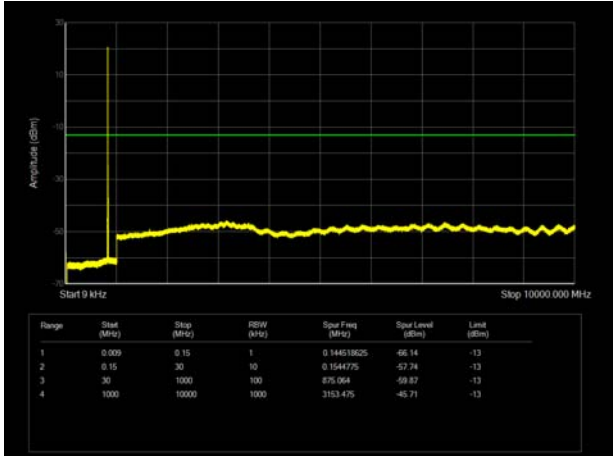


LTE Band 26 10MHz CH-Low 9kHz ~10GHz

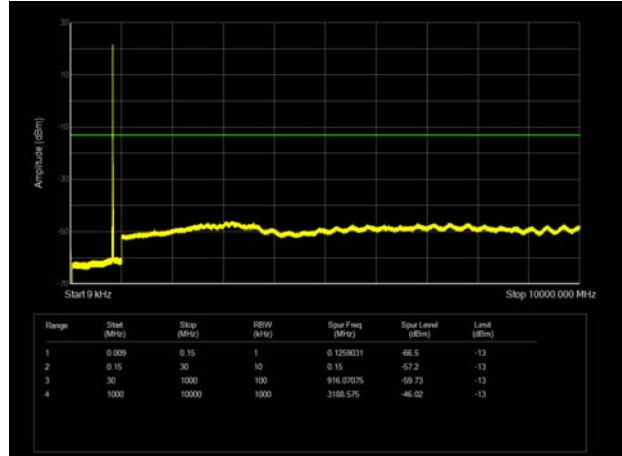


LTE Band 26 5MHz CH-Middle 9kHz ~10GHz

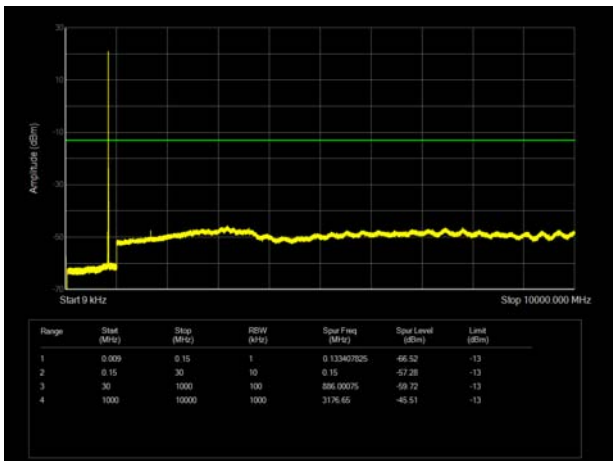


LTE Band 26 10MHz CH-Middle 9kHz ~10GHz

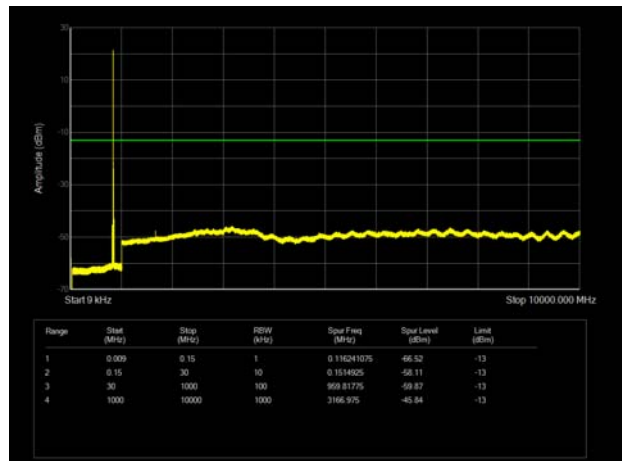


LTE Band 26 5MHz CH-High 9kHz ~10GHz

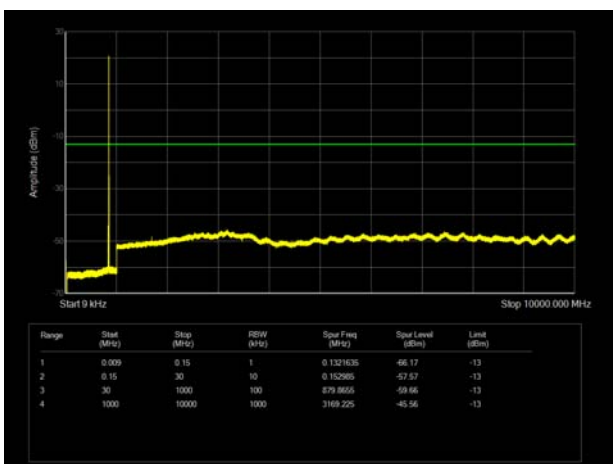


LTE Band 26 10MHz CH-High 9kHz ~10GHz

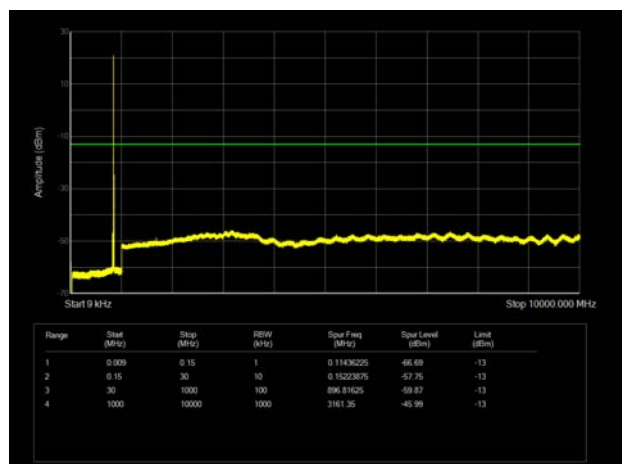


LTE Band 26 15MHz CH-Low 9kHz ~10GHz

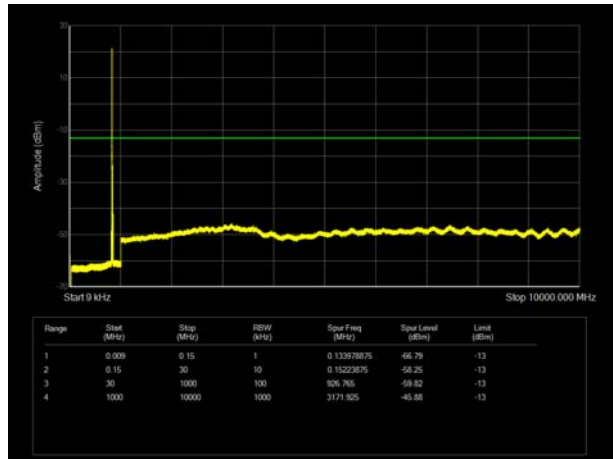

LTE Band 26 15MHz CH-Middle 9kHz ~10GHz

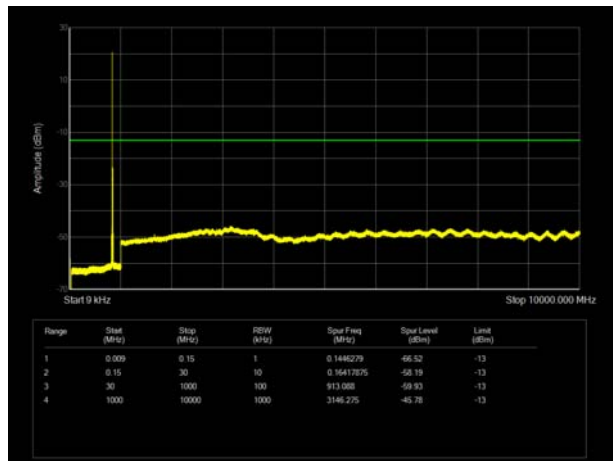

LTE Band 26 15MHz CH-High 9kHz ~10GHz

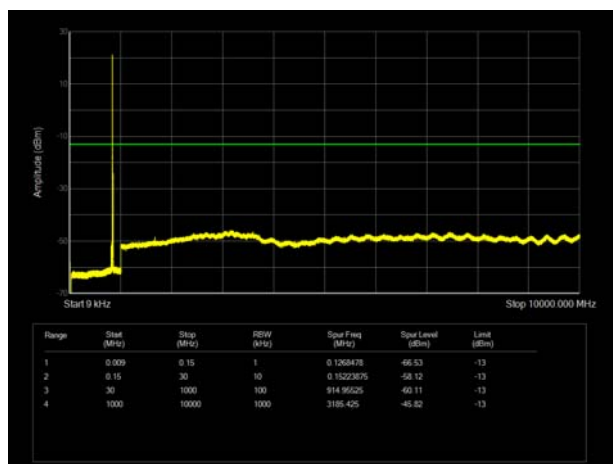

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

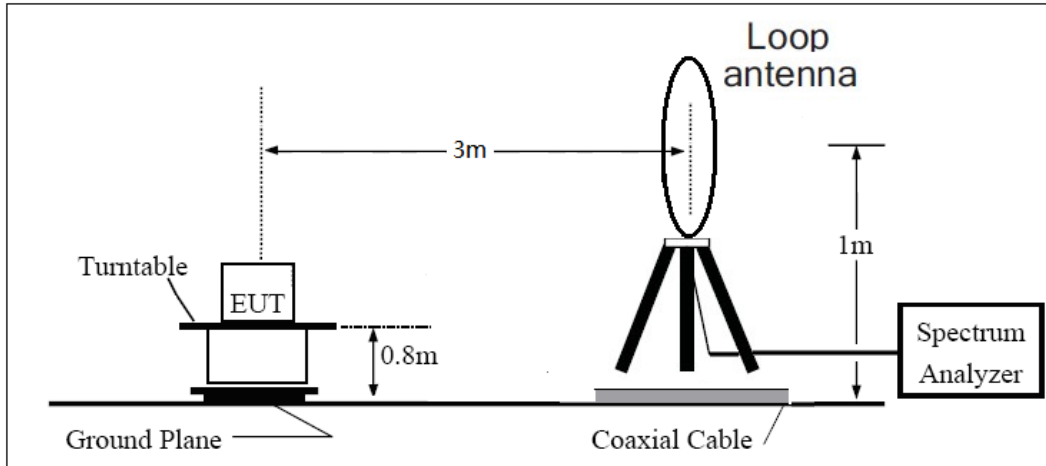

30MHz ~ 1GHz

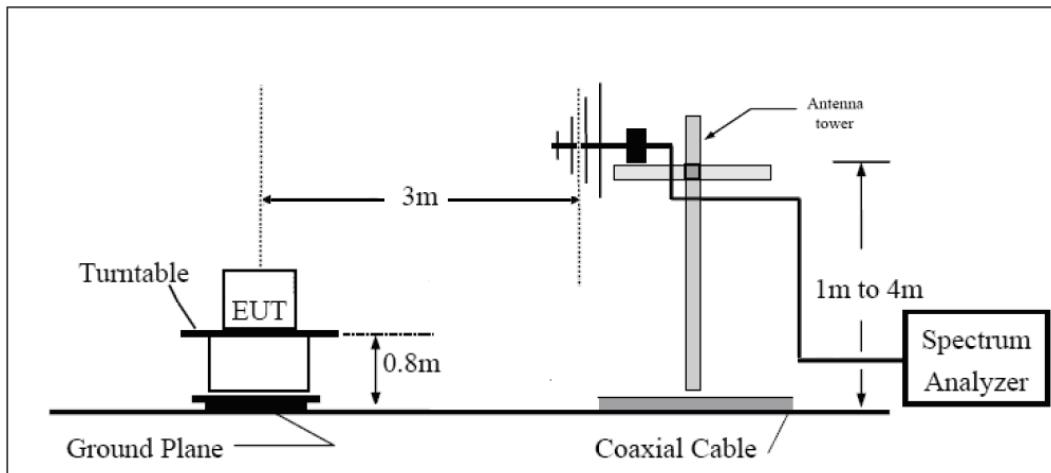

Above 1GHz

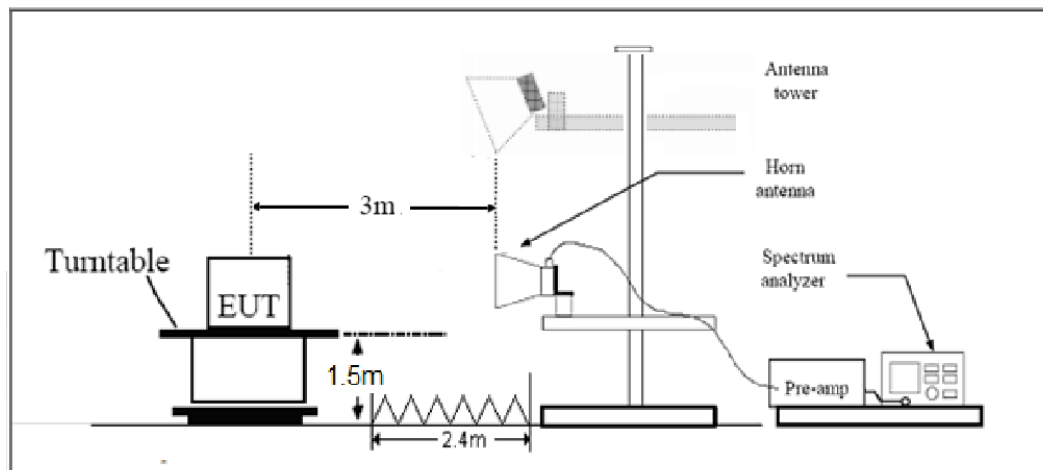



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1663.00	-60.53	2.00	10.75	Horizontal	-53.93	-13.00	40.93	0
3	2494.50	-53.04	2.51	11.05	Horizontal	-46.65	-13.00	33.65	90
4	3326.00	-63.55	4.20	11.15	Horizontal	-58.75	-13.00	45.75	90
5	4157.50	-59.70	5.20	11.15	Horizontal	-55.90	-13.00	42.90	45
6	4989.00	-59.29	5.50	11.95	Horizontal	-54.99	-13.00	41.99	135
7	5820.50	-60.19	5.70	13.55	Horizontal	-54.49	-13.00	41.49	0
8	6652.00	-58.96	6.30	13.75	Horizontal	-53.66	-13.00	40.66	45
9	7483.50	-56.43	6.80	13.85	Horizontal	-51.53	-13.00	38.53	90
10	8315.00	-56.21	6.90	14.25	Horizontal	-51.01	-13.00	38.01	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1663.00	-63.10	2.00	10.75	Horizontal	-56.50	-13.00	43.50	45
3	2494.50	-54.71	2.51	11.05	Horizontal	-48.32	-13.00	35.32	135
4	3326.00	-62.81	4.20	11.15	Horizontal	-58.01	-13.00	45.01	135
5	4157.50	-60.59	5.20	11.15	Horizontal	-56.79	-13.00	43.79	315
6	4989.00	-58.96	5.50	11.95	Horizontal	-54.66	-13.00	41.66	90
7	5820.50	-60.54	5.70	13.55	Horizontal	-54.84	-13.00	41.84	45
8	6652.00	-57.41	6.30	13.75	Horizontal	-52.11	-13.00	39.11	90
9	7483.50	-55.47	6.80	13.85	Horizontal	-50.57	-13.00	37.57	180
10	8315.00	-55.40	6.90	14.25	Horizontal	-50.20	-13.00	37.20	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 26 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1663.00	-60.56	2.00	10.75	Horizontal	-53.96	-13.00	40.96	315
3	2494.50	-57.64	2.51	11.05	Horizontal	-51.25	-13.00	38.25	270
4	3326.00	-62.53	4.20	11.15	Horizontal	-57.73	-13.00	44.73	180
5	4157.50	-60.72	5.20	11.15	Horizontal	-56.92	-13.00	43.92	135
6	4989.00	-59.69	5.50	11.95	Horizontal	-55.39	-13.00	42.39	45
7	5820.50	-61.07	5.70	13.55	Horizontal	-55.37	-13.00	42.37	90
8	6652.00	-58.09	6.30	13.75	Horizontal	-52.79	-13.00	39.79	180
9	7483.50	-55.99	6.80	13.85	Horizontal	-51.09	-13.00	38.09	0
10	8315.00	-55.05	6.90	14.25	Horizontal	-49.85	-13.00	36.85	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Date of Testing: October 22, 2019 ~ November 9, 2019

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-12-13
Software	R&S	EMC32	9.26.0	/	/



Date of Testing: June 29, 2020 and August 21, 2020

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****