



# RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd  
**FCC ID**          XMR202008EG95NAXD  
**Product**        LTE Module  
**Brand**            Quectel  
**Model**            EG95-NAXD  
**Report No.**      R2006A0378-R2  
**Issue Date**      July 8, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

---

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Testing Location .....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information .....	5
2.2. General information .....	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. RF Power Output and Effective Radiated Power .....	8
5.2. Occupied Bandwidth .....	16
5.3. Band Edge Compliance.....	25
5.4. Peak-to-Average Power Ratio (PAPR) .....	34
5.5. Frequency Stability .....	36
5.6. Spurious Emissions at Antenna Terminals .....	42
5.7. Radiates Spurious Emission .....	49
6. Main Test Instruments .....	54

## Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output and Effective Radiated Power	2.1046 24.232(c)	Refer to the original
2	Occupied Bandwidth	2.1049	Refer to the original
3	Band Edge Compliance	2.1051 /24.238(a)	Refer to the original
4	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	Refer to the original
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	Refer to the original
7	Radiates Spurious Emission	2.1053 / 24.238(a)	Refer to the original

Date of Testing: October 22, 2019 ~ November 9, 2019 and June 29, 2020

Note: PASS: The EUT complies with the essential requirements in the standard.  
FAIL: The EUT does not comply with the essential requirements in the standard.  
All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

**EG95-NAXD (Report No.: R2006A0378-R2) is a variant of the EG95-NAX (Report No.: R1907A0407-R2). Test values duplicated from Original for variant. There is only tested Frequency Stability for variant in this report. The detailed product change description please refers to the Statement letter\_EG95-NAX&EG95-NAXD.**



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

### 2.2. General information

EUT Description			
Model	EG95-NAXD		
IMEI	863071010199125		
Hardware Version	R1.0		
Software Version	EG95NAXDGAR07A01M1G		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	Frequency(MHz)	Gain(dBi)	
	1860	1.25	
Test Mode(s)	LTE Band 25;		
Test Modulation	(LTE)QPSK,16QAM		
LTE Category	4		
Maximum E.I.R.P	LTE Band 25:	25.24dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 25	1850 ~ 1915	1930 ~ 1995
Note: 1. The information of the EUT is declared by the manufacturer.			

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 24E (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

### 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below for LTE Band 25:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Conducted Spurious Emissions	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

## 5. Test Case Results

### 5.1.RF Power Output and Effective Radiated Power

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.


The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g.transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
 where:dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm )} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$



The RB allocation refers to section 5.1, using the maximum output power configuration.



**Test Setup**

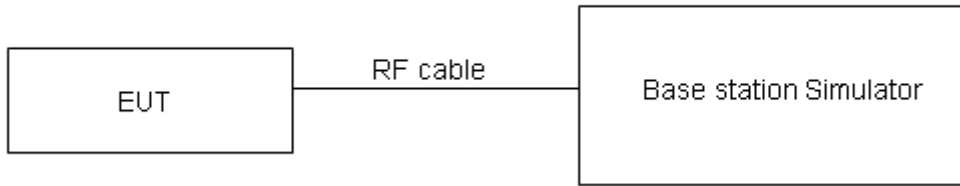

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

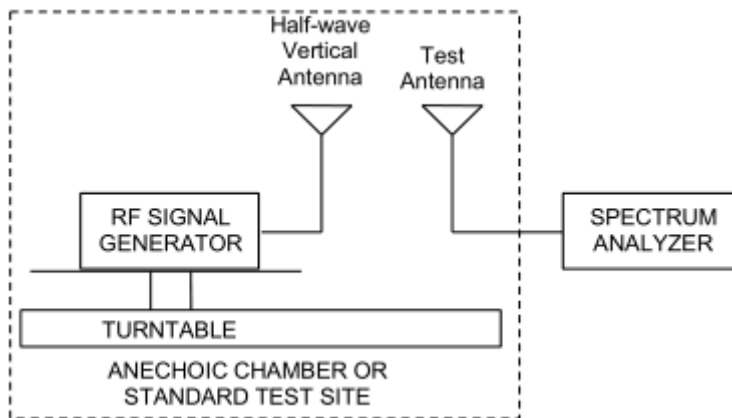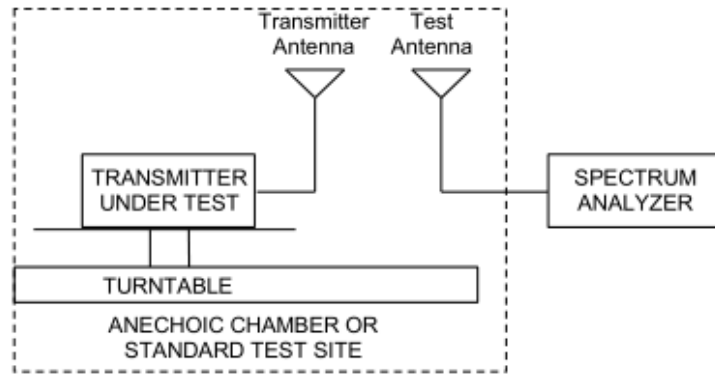

**Limits**

No specific RF power output requirements in part 2.1046.

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2\text{ W}$ (33 dBm)
-------	----------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB for RF power output,  $k = 2$ ,  $U = 1.19$  dB for EIRP.



## Test Results

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	EIRP (dBm)
LTE Band25	1.4	26047	1	#0	QPSK	23.78	25.03
LTE Band25	1.4	26047	1	#Mid	QPSK	23.87	25.12
LTE Band25	1.4	26047	1	#Max	QPSK	23.72	24.97
LTE Band25	1.4	26047	3	#0	QPSK	23.60	24.85
LTE Band25	1.4	26047	3	#Mid	QPSK	23.60	24.85
LTE Band25	1.4	26047	3	#Max	QPSK	23.60	24.85
LTE Band25	1.4	26047	6	#0	QPSK	22.61	23.86
LTE Band25	1.4	26047	1	#0	16QAM	22.53	23.78
LTE Band25	1.4	26047	1	#Mid	16QAM	22.75	24.00
LTE Band25	1.4	26047	1	#Max	16QAM	22.67	23.92
LTE Band25	1.4	26047	3	#0	16QAM	22.74	23.99
LTE Band25	1.4	26047	3	#Mid	16QAM	22.74	23.99
LTE Band25	1.4	26047	3	#Max	16QAM	22.78	24.03
LTE Band25	1.4	26047	6	#0	16QAM	21.40	22.65
LTE Band25	1.4	26365	1	#0	QPSK	23.47	24.72
LTE Band25	1.4	26365	1	#Mid	QPSK	23.71	24.96
LTE Band25	1.4	26365	1	#Max	QPSK	23.57	24.82
LTE Band25	1.4	26365	3	#0	QPSK	23.44	24.69
LTE Band25	1.4	26365	3	#Mid	QPSK	23.43	24.68
LTE Band25	1.4	26365	3	#Max	QPSK	23.54	24.79
LTE Band25	1.4	26365	6	#0	QPSK	22.72	23.97
LTE Band25	1.4	26365	1	#0	16QAM	22.71	23.96
LTE Band25	1.4	26365	1	#Mid	16QAM	22.97	24.22
LTE Band25	1.4	26365	1	#Max	16QAM	23.00	24.25
LTE Band25	1.4	26365	3	#0	16QAM	22.93	24.18
LTE Band25	1.4	26365	3	#Mid	16QAM	22.73	23.98
LTE Band25	1.4	26365	3	#Max	16QAM	22.70	23.95
LTE Band25	1.4	26365	6	#0	16QAM	21.67	22.92
LTE Band25	1.4	26683	1	#0	QPSK	23.47	24.72
LTE Band25	1.4	26683	1	#Mid	QPSK	23.46	24.71
LTE Band25	1.4	26683	1	#Max	QPSK	23.45	24.70
LTE Band25	1.4	26683	3	#0	QPSK	23.49	24.74
LTE Band25	1.4	26683	3	#Mid	QPSK	23.48	24.73
LTE Band25	1.4	26683	3	#Max	QPSK	23.48	24.73
LTE Band25	1.4	26683	6	#0	QPSK	22.62	23.87
LTE Band25	1.4	26683	1	#0	16QAM	22.12	23.37
LTE Band25	1.4	26683	1	#Mid	16QAM	22.30	23.55
LTE Band25	1.4	26683	1	#Max	16QAM	22.00	23.25
LTE Band25	1.4	26683	3	#0	16QAM	22.73	23.98



LTE Band25	1.4	26683	3	#Mid	16QAM	22.72	23.97
LTE Band25	1.4	26683	3	#Max	16QAM	22.69	23.94
LTE Band25	1.4	26683	6	#0	16QAM	21.75	23.00
LTE Band25	3	26055	1	#0	QPSK	23.55	24.80
LTE Band25	3	26055	1	#Mid	QPSK	23.58	24.83
LTE Band25	3	26055	1	#Max	QPSK	23.55	24.80
LTE Band25	3	26055	8	#0	QPSK	22.74	23.99
LTE Band25	3	26055	8	#Mid	QPSK	22.74	23.99
LTE Band25	3	26055	8	#Max	QPSK	22.69	23.94
LTE Band25	3	26055	15	#0	QPSK	22.66	23.91
LTE Band25	3	26055	1	#0	16QAM	22.72	23.97
LTE Band25	3	26055	1	#Mid	16QAM	22.59	23.84
LTE Band25	3	26055	1	#Max	16QAM	22.57	23.82
LTE Band25	3	26055	8	#0	16QAM	21.45	22.70
LTE Band25	3	26055	8	#Mid	16QAM	21.46	22.71
LTE Band25	3	26055	8	#Max	16QAM	21.53	22.78
LTE Band25	3	26055	15	#0	16QAM	21.44	22.69
LTE Band25	3	26365	1	#0	QPSK	23.62	24.87
LTE Band25	3	26365	1	#Mid	QPSK	23.64	24.89
LTE Band25	3	26365	1	#Max	QPSK	23.56	24.81
LTE Band25	3	26365	8	#0	QPSK	22.77	24.02
LTE Band25	3	26365	8	#Mid	QPSK	22.77	24.02
LTE Band25	3	26365	8	#Max	QPSK	22.68	23.93
LTE Band25	3	26365	15	#0	QPSK	22.63	23.88
LTE Band25	3	26365	1	#0	16QAM	23.17	24.42
LTE Band25	3	26365	1	#Mid	16QAM	23.34	24.59
LTE Band25	3	26365	1	#Max	16QAM	23.36	24.61
LTE Band25	3	26365	8	#0	16QAM	22.01	23.26
LTE Band25	3	26365	8	#Mid	16QAM	22.01	23.26
LTE Band25	3	26365	8	#Max	16QAM	21.92	23.17
LTE Band25	3	26365	15	#0	16QAM	21.56	22.81
LTE Band25	3	26675	1	#0	QPSK	23.51	24.76
LTE Band25	3	26675	1	#Mid	QPSK	23.85	25.10
LTE Band25	3	26675	1	#Max	QPSK	23.57	24.82
LTE Band25	3	26675	8	#0	QPSK	22.67	23.92
LTE Band25	3	26675	8	#Mid	QPSK	22.68	23.93
LTE Band25	3	26675	8	#Max	QPSK	22.86	24.11
LTE Band25	3	26675	15	#0	QPSK	22.77	24.02
LTE Band25	3	26675	1	#0	16QAM	22.28	23.53
LTE Band25	3	26675	1	#Mid	16QAM	22.44	23.69
LTE Band25	3	26675	1	#Max	16QAM	22.50	23.75
LTE Band25	3	26675	8	#0	16QAM	21.80	23.05
LTE Band25	3	26675	8	#Mid	16QAM	21.81	23.06



LTE Band25	3	26675	8	#Max	16QAM	21.94	23.19
LTE Band25	3	26675	15	#0	16QAM	21.57	22.82
LTE Band25	5	26065	1	#0	QPSK	23.50	24.75
LTE Band25	5	26065	1	#Mid	QPSK	23.61	24.86
LTE Band25	5	26065	1	#Max	QPSK	23.54	24.79
LTE Band25	5	26065	12	#0	QPSK	22.64	23.89
LTE Band25	5	26065	12	#Mid	QPSK	22.64	23.89
LTE Band25	5	26065	12	#Max	QPSK	22.68	23.93
LTE Band25	5	26065	25	#0	QPSK	22.75	24.00
LTE Band25	5	26065	1	#0	16QAM	22.65	23.90
LTE Band25	5	26065	1	#Mid	16QAM	22.60	23.85
LTE Band25	5	26065	1	#Max	16QAM	22.50	23.75
LTE Band25	5	26065	12	#0	16QAM	21.53	22.78
LTE Band25	5	26065	12	#Mid	16QAM	21.53	22.78
LTE Band25	5	26065	12	#Max	16QAM	21.50	22.75
LTE Band25	5	26065	25	#0	16QAM	21.56	22.81
LTE Band25	5	26365	1	#0	QPSK	23.60	24.85
LTE Band25	5	26365	1	#Mid	QPSK	23.65	24.90
LTE Band25	5	26365	1	#Max	QPSK	23.68	24.93
LTE Band25	5	26365	12	#0	QPSK	22.76	24.01
LTE Band25	5	26365	12	#Mid	QPSK	22.76	24.01
LTE Band25	5	26365	12	#Max	QPSK	22.75	24.00
LTE Band25	5	26365	25	#0	QPSK	22.70	23.95
LTE Band25	5	26365	1	#0	16QAM	22.78	24.03
LTE Band25	5	26365	1	#Mid	16QAM	22.85	24.10
LTE Band25	5	26365	1	#Max	16QAM	22.88	24.13
LTE Band25	5	26365	12	#0	16QAM	21.45	22.70
LTE Band25	5	26365	12	#Mid	16QAM	21.45	22.70
LTE Band25	5	26365	12	#Max	16QAM	21.24	22.49
LTE Band25	5	26365	25	#0	16QAM	21.40	22.65
LTE Band25	5	26665	1	#0	QPSK	23.57	24.82
LTE Band25	5	26665	1	#Mid	QPSK	23.82	25.07
LTE Band25	5	26665	1	#Max	QPSK	23.51	24.76
LTE Band25	5	26665	12	#0	QPSK	22.70	23.95
LTE Band25	5	26665	12	#Mid	QPSK	22.66	23.91
LTE Band25	5	26665	12	#Max	QPSK	22.72	23.97
LTE Band25	5	26665	25	#0	QPSK	22.65	23.90
LTE Band25	5	26665	1	#0	16QAM	22.85	24.10
LTE Band25	5	26665	1	#Mid	16QAM	22.75	24.00
LTE Band25	5	26665	1	#Max	16QAM	22.51	23.76
LTE Band25	5	26665	12	#0	16QAM	21.57	22.82
LTE Band25	5	26665	12	#Mid	16QAM	21.56	22.81
LTE Band25	5	26665	12	#Max	16QAM	21.70	22.95



LTE Band25	5	26665	25	#0	16QAM	21.62	22.87
LTE Band25	10	26090	1	#0	QPSK	23.65	24.90
LTE Band25	10	26090	1	#Mid	QPSK	23.76	25.01
LTE Band25	10	26090	1	#Max	QPSK	23.63	24.88
LTE Band25	10	26090	25	#0	QPSK	22.81	24.06
LTE Band25	10	26090	25	#Mid	QPSK	22.71	23.96
LTE Band25	10	26090	25	#Max	QPSK	22.80	24.05
LTE Band25	10	26090	50	#0	QPSK	22.70	23.95
LTE Band25	10	26090	1	#0	16QAM	22.83	24.08
LTE Band25	10	26090	1	#Mid	16QAM	23.47	24.72
LTE Band25	10	26090	1	#Max	16QAM	22.72	23.97
LTE Band25	10	26090	25	#0	16QAM	21.79	23.04
LTE Band25	10	26090	25	#Mid	16QAM	21.79	23.04
LTE Band25	10	26090	25	#Max	16QAM	21.80	23.05
LTE Band25	10	26090	50	#0	16QAM	21.61	22.86
LTE Band25	10	26365	1	#0	QPSK	23.83	25.08
LTE Band25	10	26365	1	#Mid	QPSK	23.99	25.24
LTE Band25	10	26365	1	#Max	QPSK	23.80	25.05
LTE Band25	10	26365	25	#0	QPSK	22.74	23.99
LTE Band25	10	26365	25	#Mid	QPSK	22.74	23.99
LTE Band25	10	26365	25	#Max	QPSK	22.82	24.07
LTE Band25	10	26365	50	#0	QPSK	22.80	24.05
LTE Band25	10	26365	1	#0	16QAM	23.50	24.75
LTE Band25	10	26365	1	#Mid	16QAM	23.34	24.59
LTE Band25	10	26365	1	#Max	16QAM	23.27	24.52
LTE Band25	10	26365	25	#0	16QAM	21.90	23.15
LTE Band25	10	26365	25	#Mid	16QAM	21.80	23.05
LTE Band25	10	26365	25	#Max	16QAM	21.96	23.21
LTE Band25	10	26365	50	#0	16QAM	21.90	23.15
LTE Band25	10	26640	1	#0	QPSK	23.51	24.76
LTE Band25	10	26640	1	#Mid	QPSK	23.56	24.81
LTE Band25	10	26640	1	#Max	QPSK	23.55	24.80
LTE Band25	10	26640	25	#0	QPSK	22.79	24.04
LTE Band25	10	26640	25	#Mid	QPSK	22.75	24.00
LTE Band25	10	26640	25	#Max	QPSK	22.69	23.94
LTE Band25	10	26640	50	#0	QPSK	22.78	24.03
LTE Band25	10	26640	1	#0	16QAM	22.66	23.91
LTE Band25	10	26640	1	#Mid	16QAM	22.61	23.86
LTE Band25	10	26640	1	#Max	16QAM	22.41	23.66
LTE Band25	10	26640	25	#0	16QAM	21.81	23.06
LTE Band25	10	26640	25	#Mid	16QAM	21.82	23.07
LTE Band25	10	26640	25	#Max	16QAM	21.66	22.91
LTE Band25	10	26640	50	#0	16QAM	21.84	23.09



LTE Band25	15	26115	1	#0	QPSK	23.63	24.88
LTE Band25	15	26115	1	#Mid	QPSK	23.78	25.03
LTE Band25	15	26115	1	#Max	QPSK	23.64	24.89
LTE Band25	15	26115	36	#0	QPSK	22.75	24.00
LTE Band25	15	26115	36	#Mid	QPSK	22.73	23.98
LTE Band25	15	26115	36	#Max	QPSK	22.70	23.95
LTE Band25	15	26115	75	#0	QPSK	22.73	23.98
LTE Band25	15	26115	1	#0	16QAM	22.89	24.14
LTE Band25	15	26115	1	#Mid	16QAM	22.67	23.92
LTE Band25	15	26115	1	#Max	16QAM	22.73	23.98
LTE Band25	15	26115	36	#0	16QAM	21.66	22.91
LTE Band25	15	26115	36	#Mid	16QAM	21.66	22.91
LTE Band25	15	26115	36	#Max	16QAM	21.64	22.89
LTE Band25	15	26115	75	#0	16QAM	21.68	22.93
LTE Band25	15	26365	1	#0	QPSK	23.69	24.94
LTE Band25	15	26365	1	#Mid	QPSK	23.70	24.95
LTE Band25	15	26365	1	#Max	QPSK	23.68	24.93
LTE Band25	15	26365	36	#0	QPSK	22.73	23.98
LTE Band25	15	26365	36	#Mid	QPSK	22.70	23.95
LTE Band25	15	26365	36	#Max	QPSK	22.80	24.05
LTE Band25	15	26365	75	#0	QPSK	22.71	23.96
LTE Band25	15	26365	1	#0	16QAM	23.23	24.48
LTE Band25	15	26365	1	#Mid	16QAM	23.16	24.41
LTE Band25	15	26365	1	#Max	16QAM	23.20	24.45
LTE Band25	15	26365	36	#0	16QAM	21.85	23.10
LTE Band25	15	26365	36	#Mid	16QAM	21.86	23.11
LTE Band25	15	26365	36	#Max	16QAM	21.95	23.20
LTE Band25	15	26365	75	#0	16QAM	21.75	23.00
LTE Band25	15	26615	1	#0	QPSK	23.62	24.87
LTE Band25	15	26615	1	#Mid	QPSK	23.53	24.78
LTE Band25	15	26615	1	#Max	QPSK	23.32	24.57
LTE Band25	15	26615	36	#0	QPSK	22.74	23.99
LTE Band25	15	26615	36	#Mid	QPSK	22.70	23.95
LTE Band25	15	26615	36	#Max	QPSK	22.62	23.87
LTE Band25	15	26615	75	#0	QPSK	22.65	23.90
LTE Band25	15	26615	1	#0	16QAM	22.30	23.55
LTE Band25	15	26615	1	#Mid	16QAM	22.29	23.54
LTE Band25	15	26615	1	#Max	16QAM	21.78	23.03
LTE Band25	15	26615	36	#0	16QAM	21.73	22.98
LTE Band25	15	26615	36	#Mid	16QAM	21.72	22.97
LTE Band25	15	26615	36	#Max	16QAM	21.44	22.69
LTE Band25	15	26615	75	#0	16QAM	21.71	22.96
LTE Band25	20	26140	1	#0	QPSK	23.39	24.64



LTE Band25	20	26140	1	#Mid	QPSK	23.88	25.13
LTE Band25	20	26140	1	#Max	QPSK	23.63	24.88
LTE Band25	20	26140	50	#0	QPSK	22.68	23.93
LTE Band25	20	26140	50	#Mid	QPSK	22.66	23.91
LTE Band25	20	26140	50	#Max	QPSK	22.66	23.91
LTE Band25	20	26140	100	#0	QPSK	22.67	23.92
LTE Band25	20	26140	1	#0	16QAM	22.89	24.14
LTE Band25	20	26140	1	#Mid	16QAM	23.35	24.60
LTE Band25	20	26140	1	#Max	16QAM	22.41	23.66
LTE Band25	20	26140	50	#0	16QAM	21.71	22.96
LTE Band25	20	26140	50	#Mid	16QAM	21.71	22.96
LTE Band25	20	26140	50	#Max	16QAM	21.70	22.95
LTE Band25	20	26140	100	#0	16QAM	21.67	22.92
LTE Band25	20	26365	1	#0	QPSK	23.55	24.80
LTE Band25	20	26365	1	#Mid	QPSK	23.81	25.06
LTE Band25	20	26365	1	#Max	QPSK	23.84	25.09
LTE Band25	20	26365	50	#0	QPSK	22.71	23.96
LTE Band25	20	26365	50	#Mid	QPSK	22.71	23.96
LTE Band25	20	26365	50	#Max	QPSK	22.85	24.10
LTE Band25	20	26365	100	#0	QPSK	22.78	24.03
LTE Band25	20	26365	1	#0	16QAM	22.37	23.62
LTE Band25	20	26365	1	#Mid	16QAM	22.37	23.62
LTE Band25	20	26365	1	#Max	16QAM	21.86	23.11
LTE Band25	20	26365	50	#0	16QAM	21.72	22.97
LTE Band25	20	26365	50	#Mid	16QAM	21.72	22.97
LTE Band25	20	26365	50	#Max	16QAM	21.86	23.11
LTE Band25	20	26365	100	#0	16QAM	21.74	22.99
LTE Band25	20	26590	1	#0	QPSK	23.67	24.92
LTE Band25	20	26590	1	#Mid	QPSK	23.83	25.08
LTE Band25	20	26590	1	#Max	QPSK	23.46	24.71
LTE Band25	20	26590	50	#0	QPSK	22.80	24.05
LTE Band25	20	26590	50	#Mid	QPSK	22.71	23.96
LTE Band25	20	26590	50	#Max	QPSK	22.57	23.82
LTE Band25	20	26590	100	#0	QPSK	22.80	24.05
LTE Band25	20	26590	1	#0	16QAM	22.79	24.04
LTE Band25	20	26590	1	#Mid	16QAM	22.91	24.16
LTE Band25	20	26590	1	#Max	16QAM	22.37	23.62
LTE Band25	20	26590	50	#0	16QAM	21.82	23.07
LTE Band25	20	26590	50	#Mid	16QAM	21.75	23.00
LTE Band25	20	26590	50	#Max	16QAM	21.59	22.84
LTE Band25	20	26590	100	#0	16QAM	21.76	23.01

## 5.2.Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 30kHz, VBW is set to 91kHz for LTE Band 25(1.4MHz),

RBW is set to 62kHz,VBW is set to 180kHz for LTE Band 25 (3MHz),

RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 25 (5MHz),


RBW is set to 200kHz,VBW is set to 620kHz for LTE Band 25(10MHz),

RBW is set to 300kHz,VBW is set to 910kHz for LTE Band 25(15MHz),

RBW is set to 430kHz,VBW is set to 1.2MHz for LTE Band 25(20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

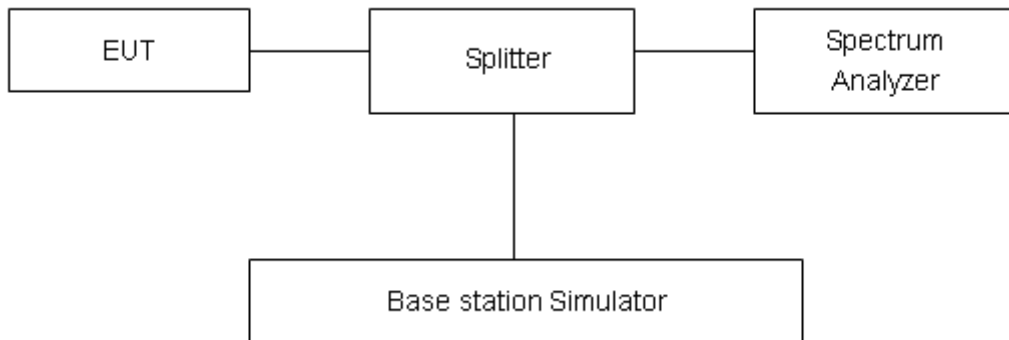

### Limits

No specific occupied bandwidth requirements in part 2.1049.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .














**Test Result**

LTE Band 25					
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
QPSK	1.4	26047	1850.7	1.0935	1.292
		26365	1882.5	1.0992	1.299
		26683	1914.3	1.1026	1.300
	3	26055	1851.5	2.7121	2.995
		26365	1882.5	2.6987	2.989
		26675	1913.5	2.7021	3.016
	5	26065	1852.5	4.5082	4.975
		26365	1882.5	4.5254	4.956
		26665	1912.5	4.5251	4.989
	10	26090	1855	8.9705	9.762
		26365	1882.5	8.9819	9.808
		26640	1910	8.9656	9.669
	15	26115	1857.5	13.4370	14.530
		26365	1882.5	13.4490	14.580
		26615	1907.5	13.3980	14.520
	20	26140	1860	17.8730	19.220
		26365	1882.5	17.8880	19.210
		26590	1905	17.8380	19.140
16QAM	1.4	26047	1850.7	1.1017	1.273
		26365	1882.5	1.0887	1.280
		26683	1914.3	1.0983	1.300
	3	26055	1851.5	2.7049	2.990
		26365	1882.5	2.6941	2.972
		26675	1913.5	2.6994	2.974
	5	26065	1852.5	4.5258	4.928
		26365	1882.5	4.5018	4.967
		26665	1912.5	4.5247	4.984
	10	26090	1855	8.9760	9.813
		26365	1882.5	8.9984	9.814
		26640	1910	8.9683	9.741




	15	26115	1857.5	13.4280	14.430
		26365	1882.5	13.4540	14.680
		26615	1907.5	13.3590	14.330
	20	26140	1860	17.9390	19.310
		26365	1882.5	17.9000	19.230
		26590	1905	17.8660	19.230

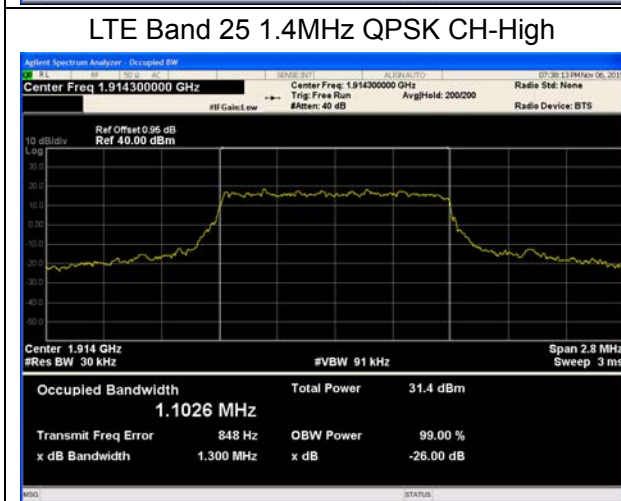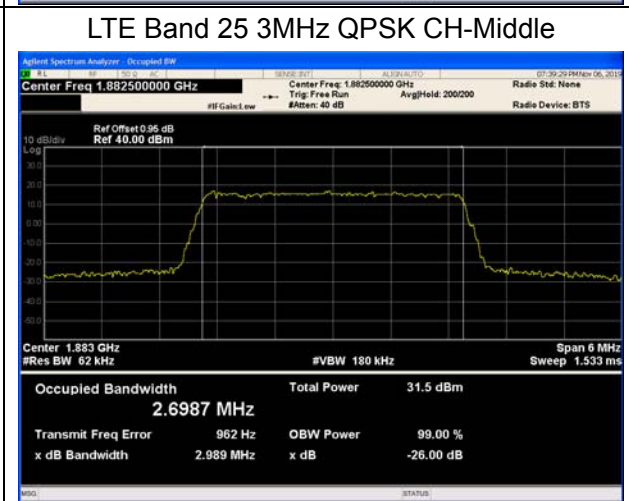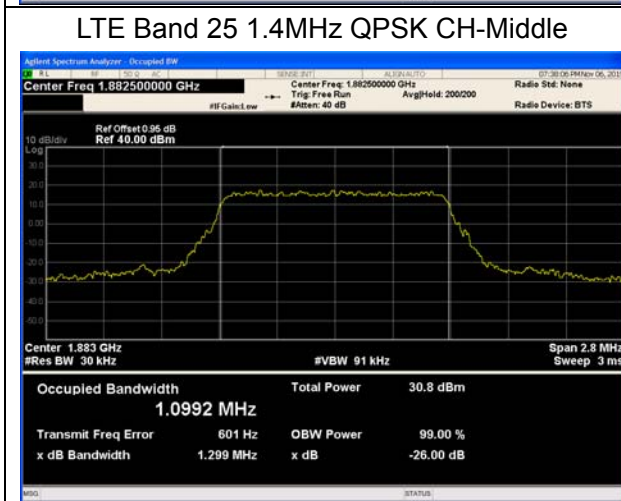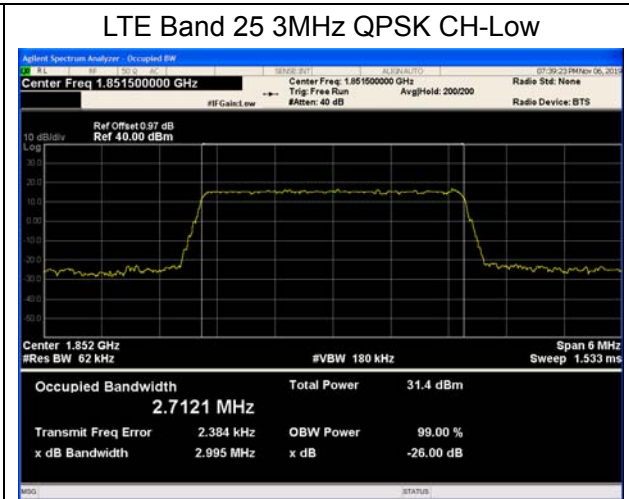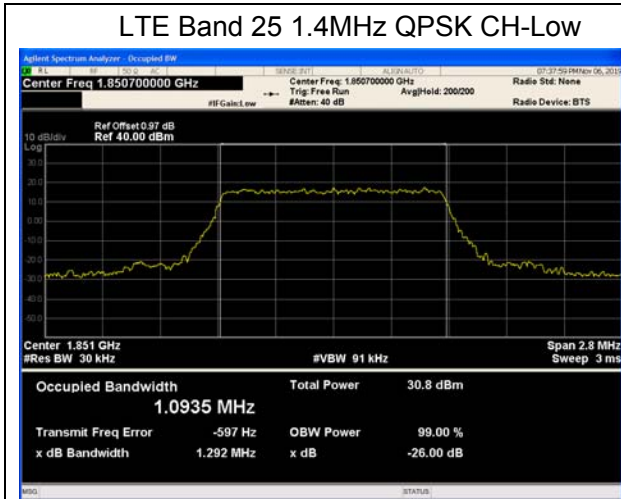

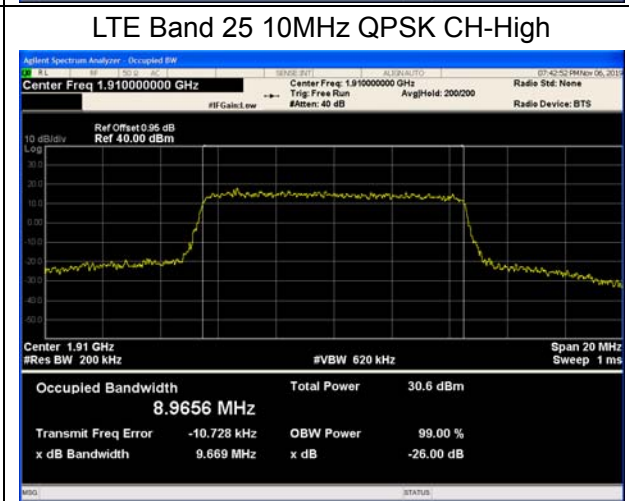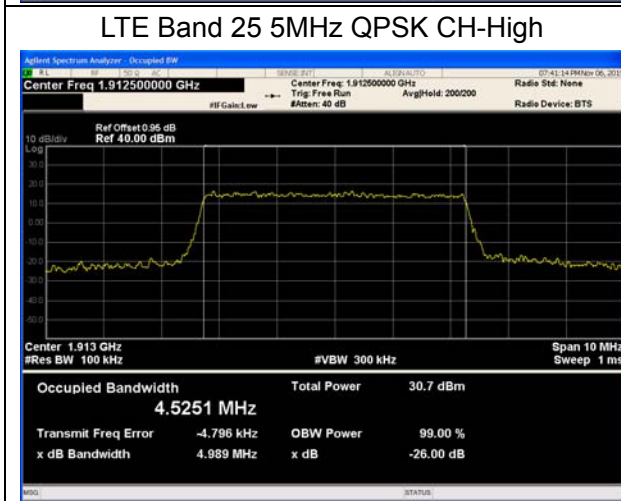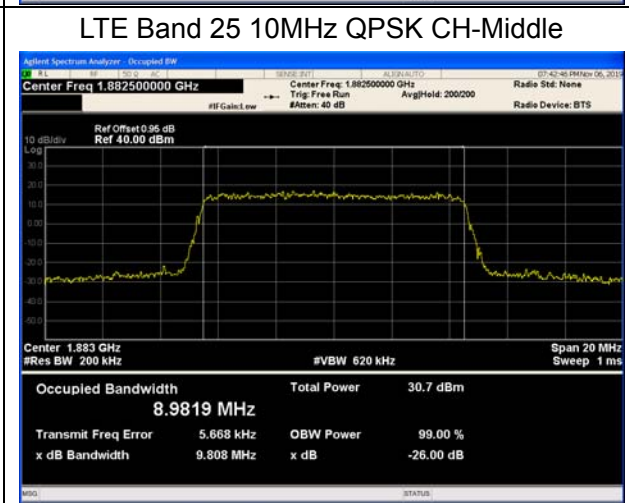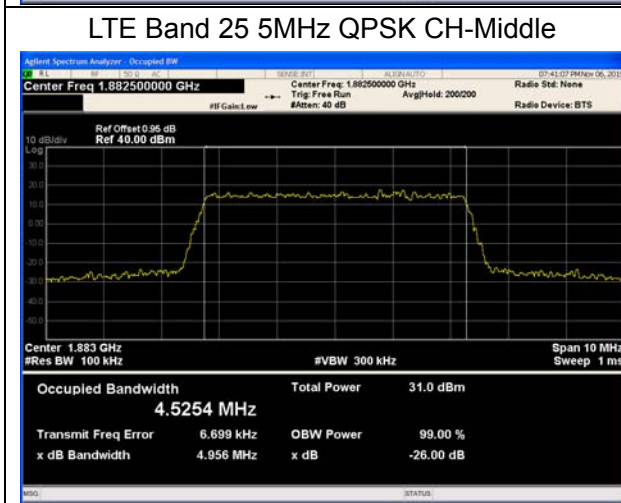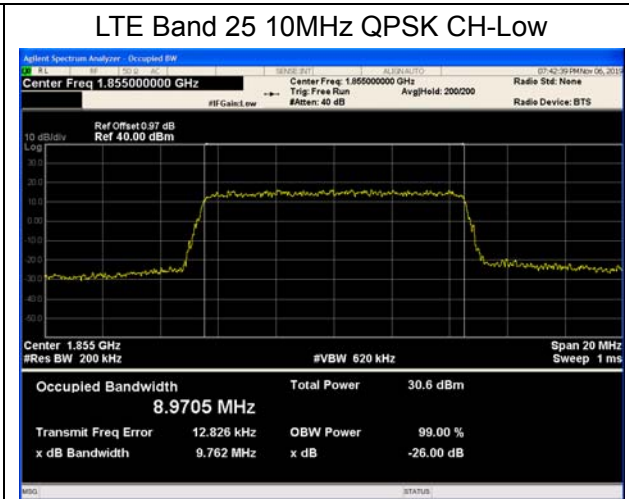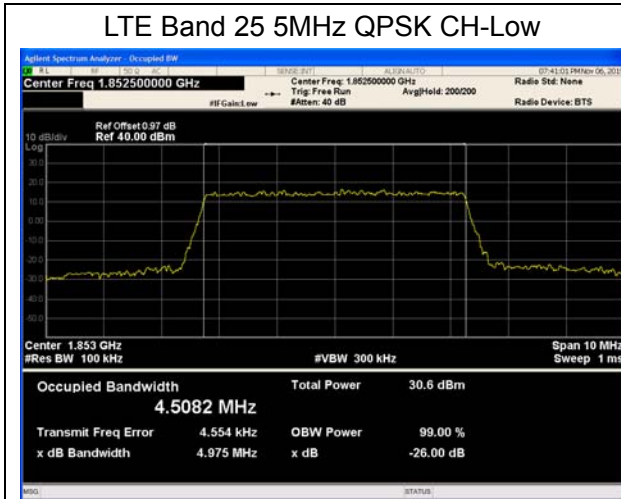





### LTE Band 25 15MHz QPSK CH-Low

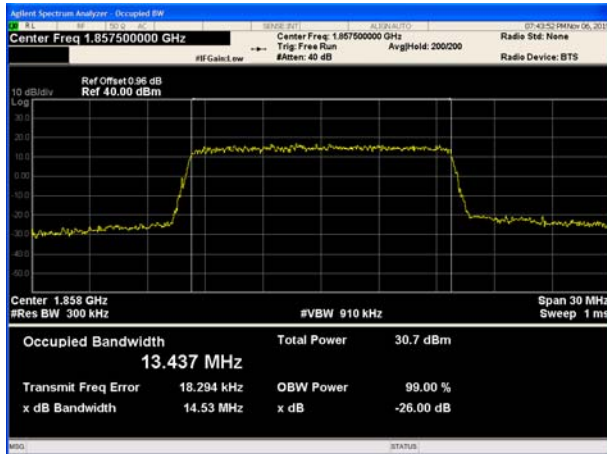


### LTE Band 25 20MHz QPSK CH-Low

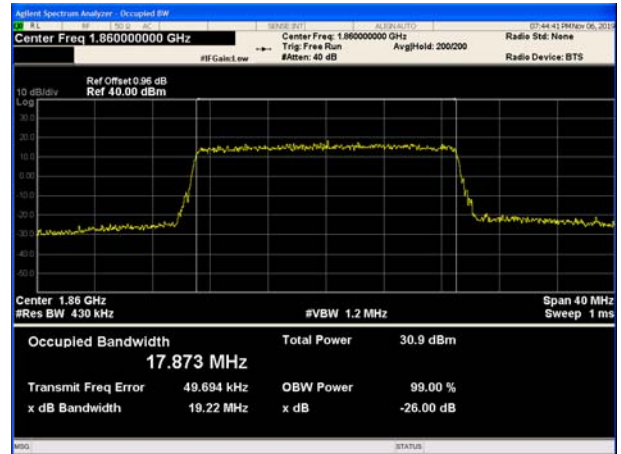

### LTE Band 25 15MHz QPSK CH-Middle

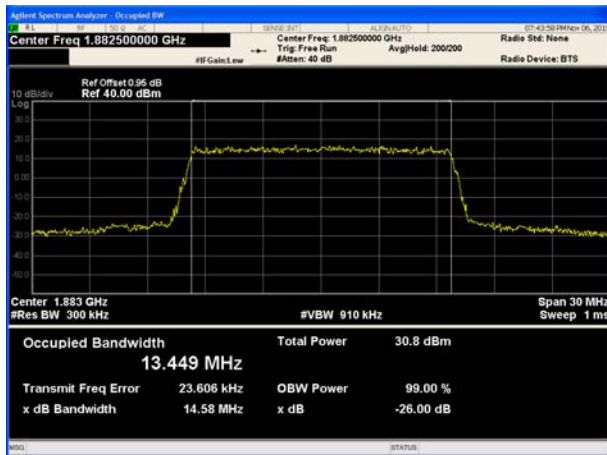


### LTE Band 25 20MHz QPSK CH-Middle

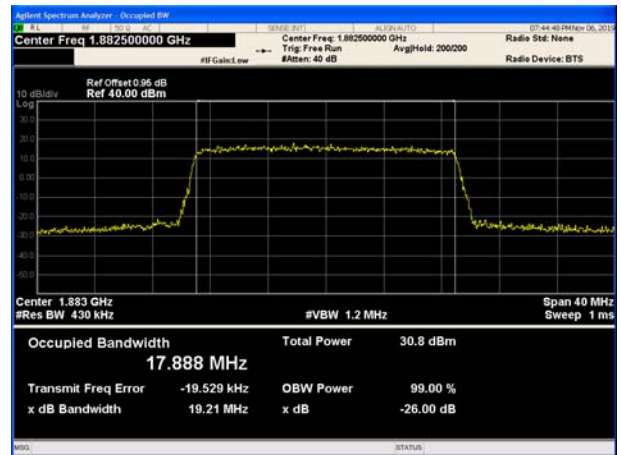

### LTE Band 25 15MHz QPSK CH-High




### LTE Band 25 20MHz QPSK CH-High

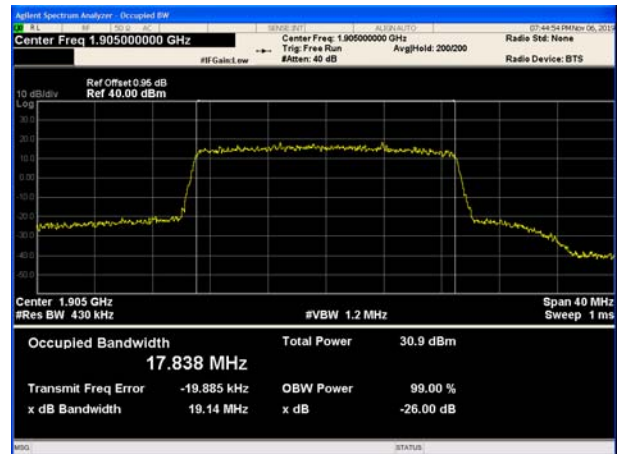





### LTE Band 25 1.4MHz 16QAM CH-Low

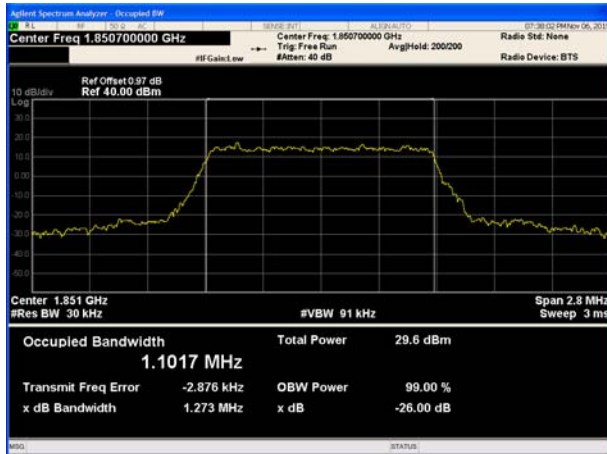


### LTE Band 25 3MHz 16QAM CH-Low

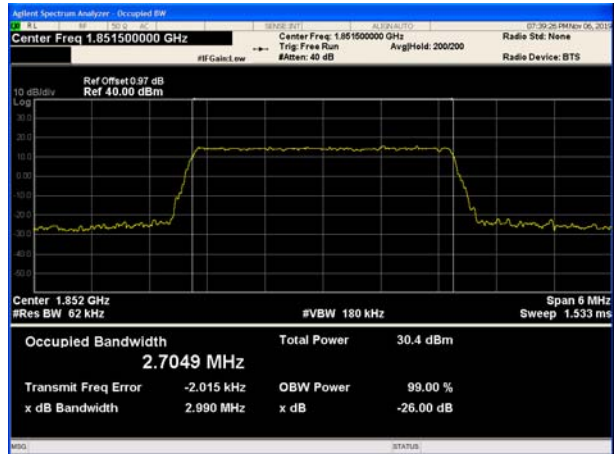

### LTE Band 25 1.4MHz 16QAM CH-Middle

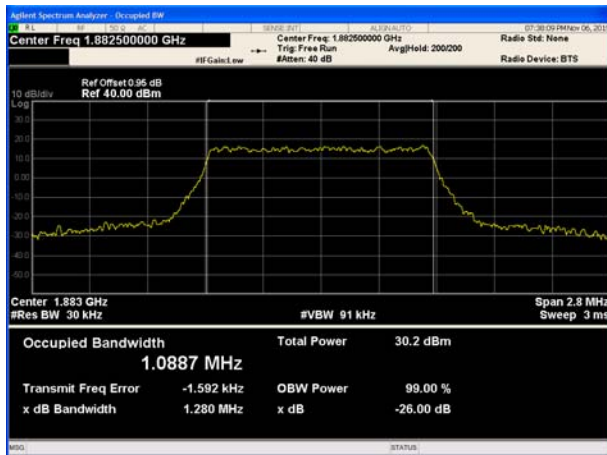


### LTE Band 25 3MHz 16QAM CH-Middle

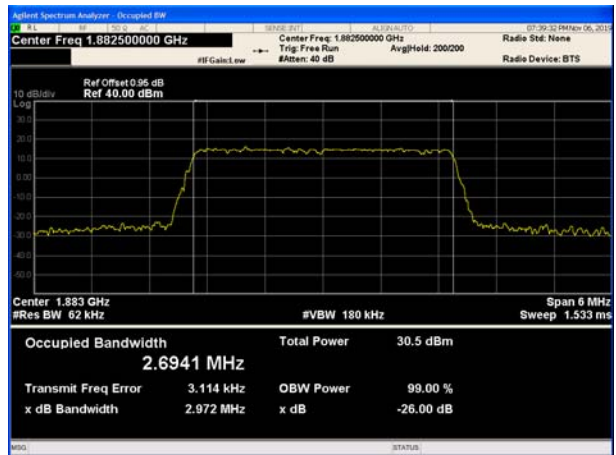

### LTE Band 25 1.4MHz 16QAM CH-High




### LTE Band 25 3MHz 16QAM CH-High

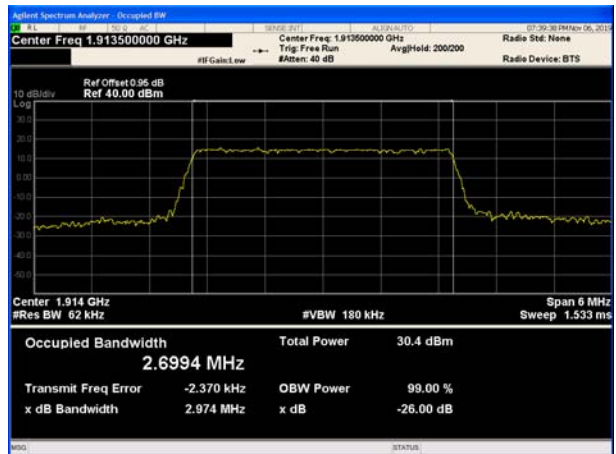





### LTE Band 25 5MHz 16QAM CH-Low

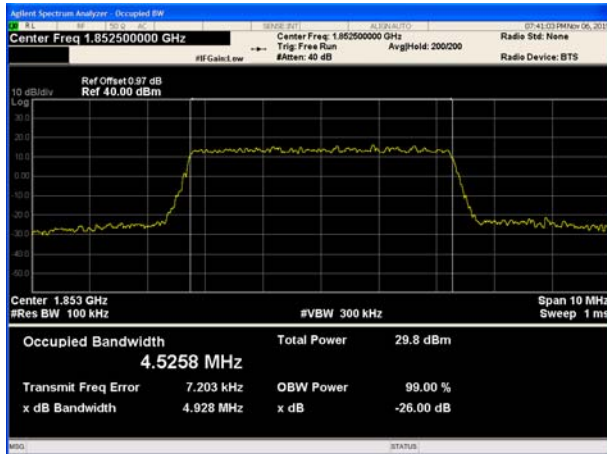


### LTE Band 25 10MHz 16QAM CH-Low

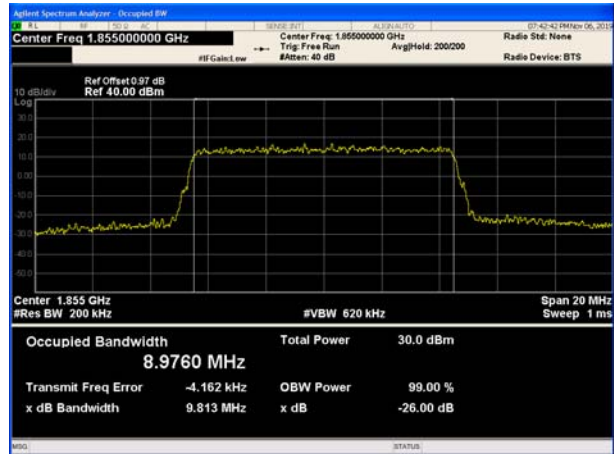

### LTE Band 25 5MHz 16QAM CH-Middle

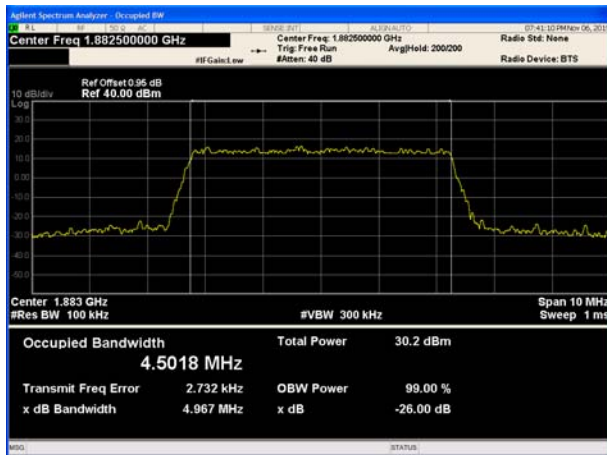


### LTE Band 25 10MHz 16QAM CH-Middle






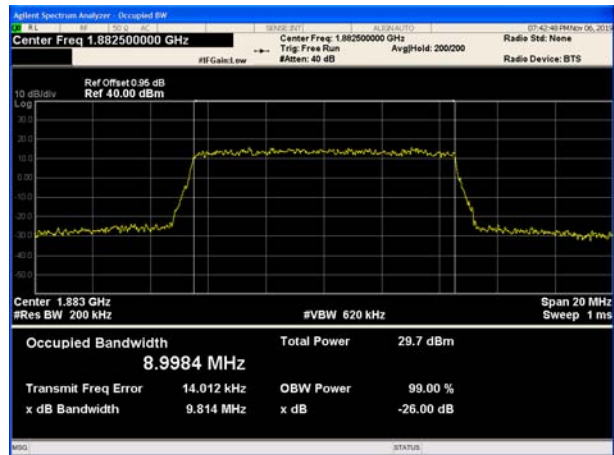


### LTE Band 25 5MHz 16QAM CH-High



### LTE Band 25 10MHz 16QAM CH-High

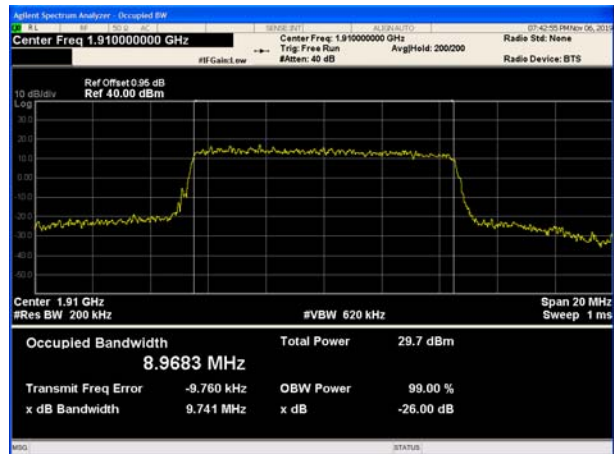

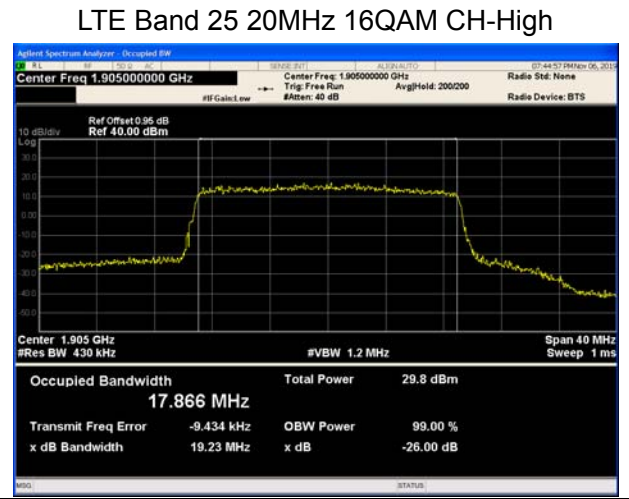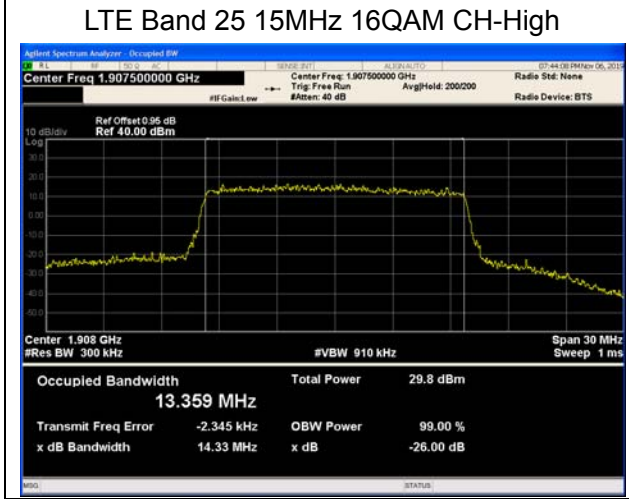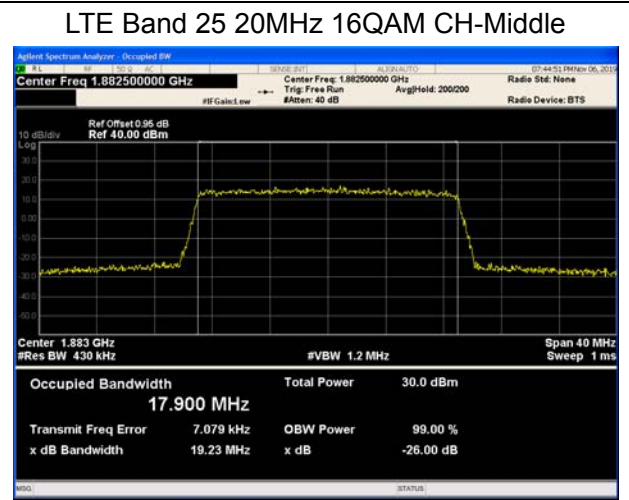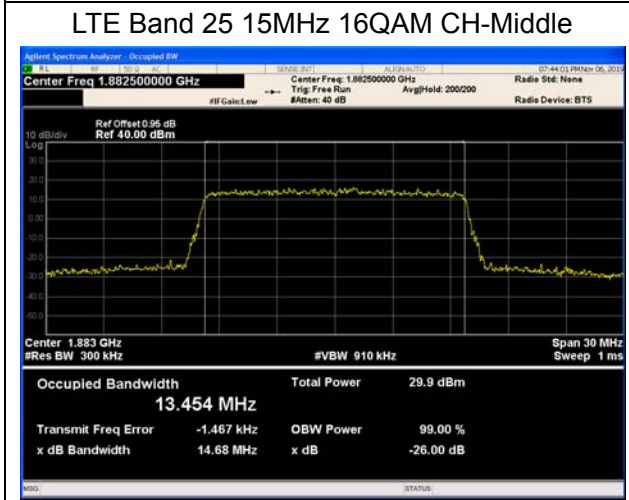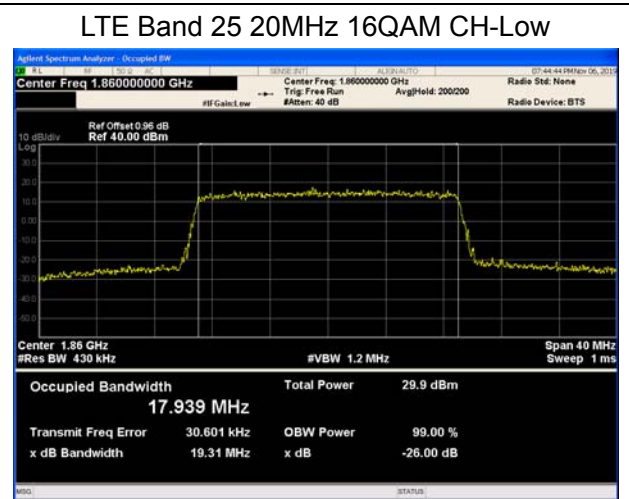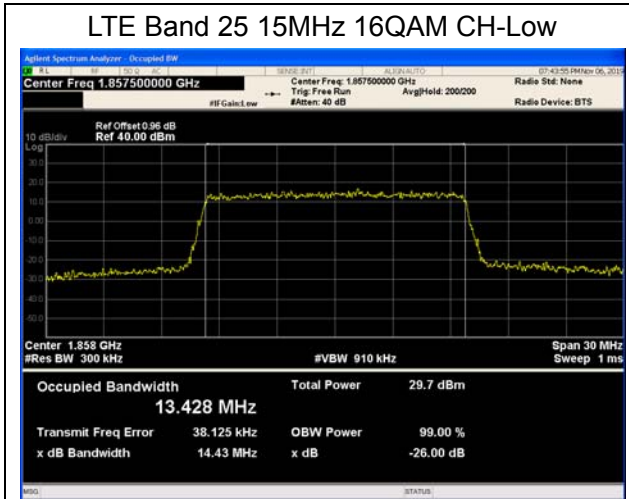



### 5.3. Band Edge Compliance


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 15kHz, VBW is set to 43kHz for LTE Band 25(1.4MHz), RBW is set to 30kHz,VBW is set to 91kHz for LTE Band 25 (3MHz), RBW is set to 51kHz,VBW is set to 150kHz for LTE Band 25 (5MHz), RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 25(10MHz), RBW is set to 150kHz,VBW is set to 470kHz for LTE Band 25(15MHz), RBW is set to 200kHz,VBW is set to 620kHz for LTE Band 25(20MHz). Spectrum analyzer plots are included on the following pages.

#### Test Setup

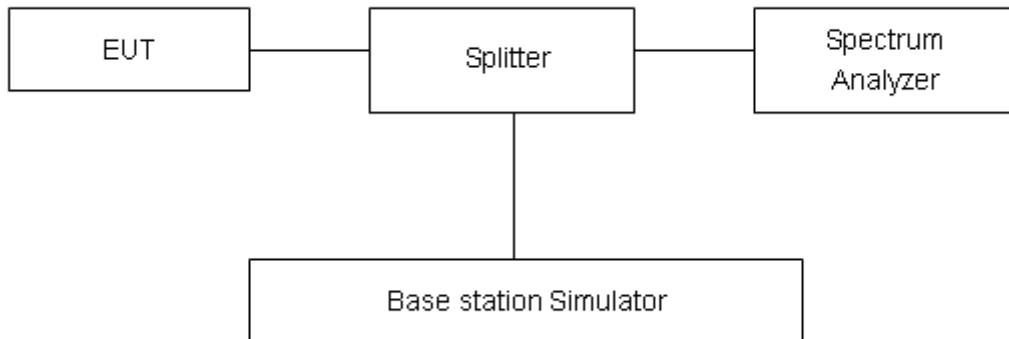

#### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.”

Limit	-13 dBm
-------	---------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.



Test Result:

LTE Band 25 1.4MHz QPSK 1RB CH-Low



LTE Band 25 1.4MHz QPSK 1RB CH-High




LTE Band 25 1.4MHz QPSK 100%RB CH-Low




LTE Band 25 1.4MHz QPSK 100%RB CH-High



LTE Band 25 3MHz QPSK 1RB CH-Low

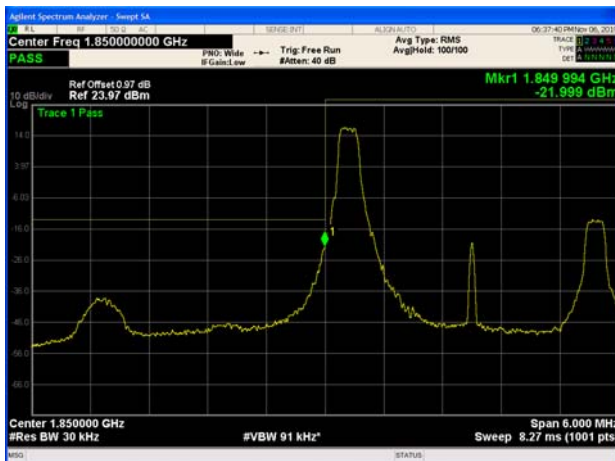

LTE Band 25 3MHz QPSK 1RB CH-High

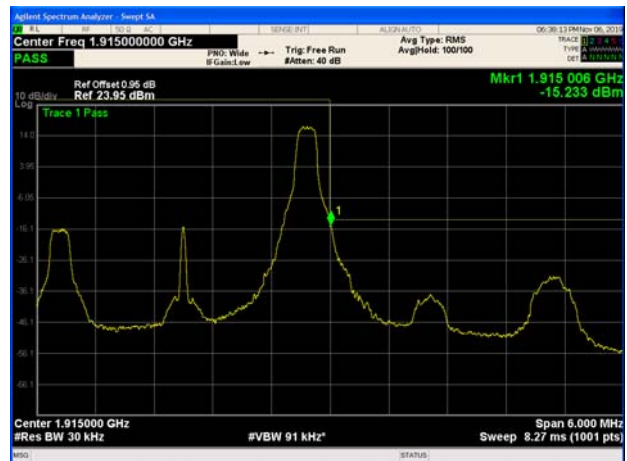





LTE Band 25 3MHz QPSK 100%RB CH-Low




LTE Band 25 3MHz QPSK 100%RB CH-High

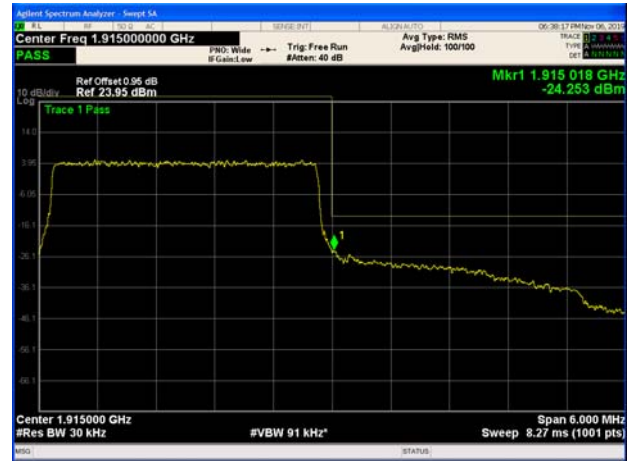

LTE Band 25 5MHz QPSK 1RB CH-Low

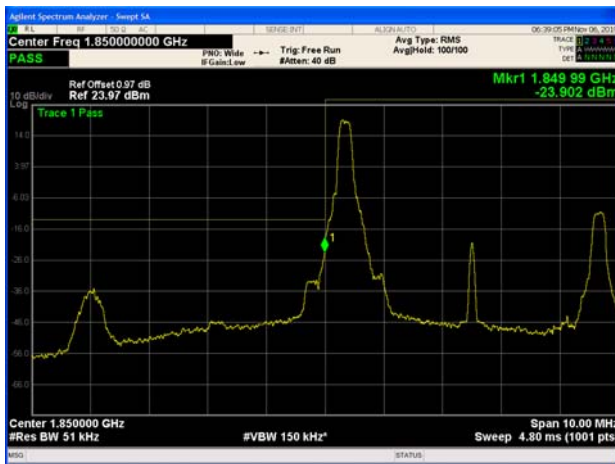


LTE Band 25 5MHz QPSK 1RB CH-High

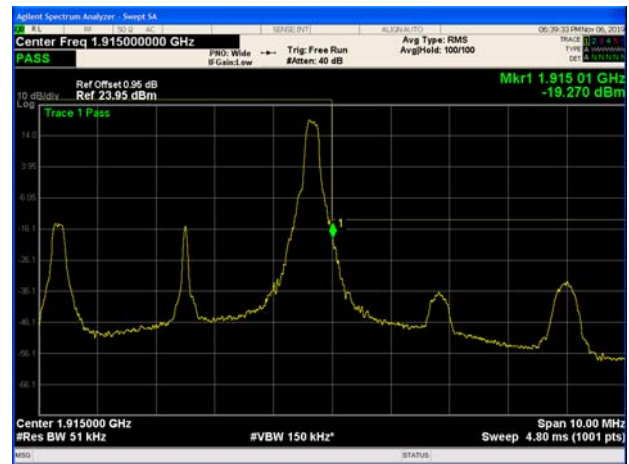

LTE Band 25 5MHz QPSK 100%RB CH-Low




LTE Band 25 5MHz QPSK 100%RB CH-High

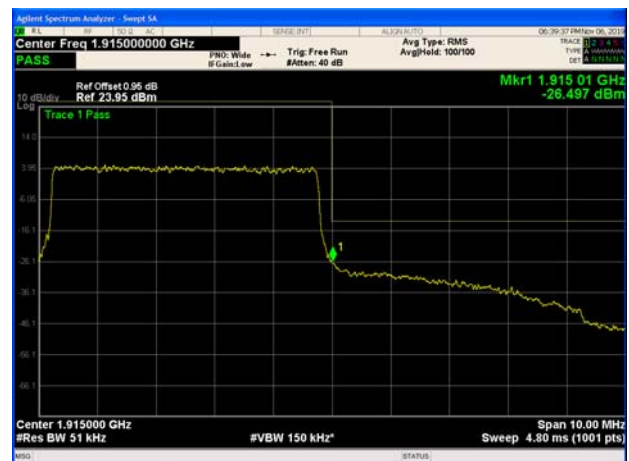





### LTE Band 25 10MHz QPSK 1RB CH-Low

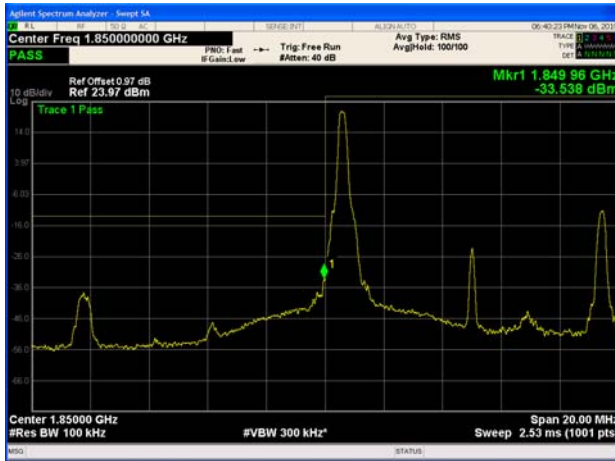

### LTE Band 25 10MHz QPSK 1RB CH-High

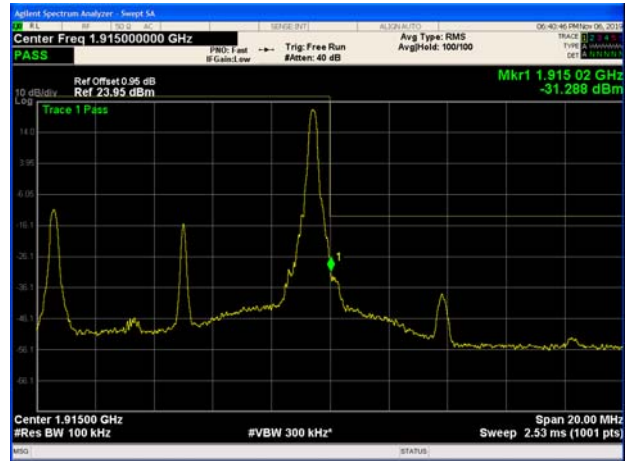


### LTE Band 25 10MHz QPSK 100%RB CH-Low

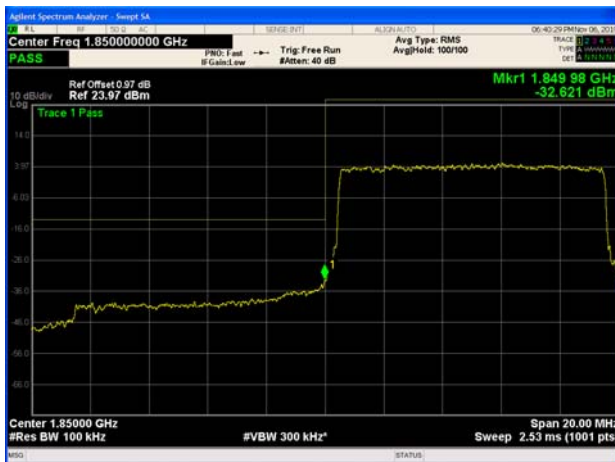


### LTE Band 25 10MHz QPSK 100%RB CH-High



### LTE Band 25 15MHz QPSK 1RB CH-Low

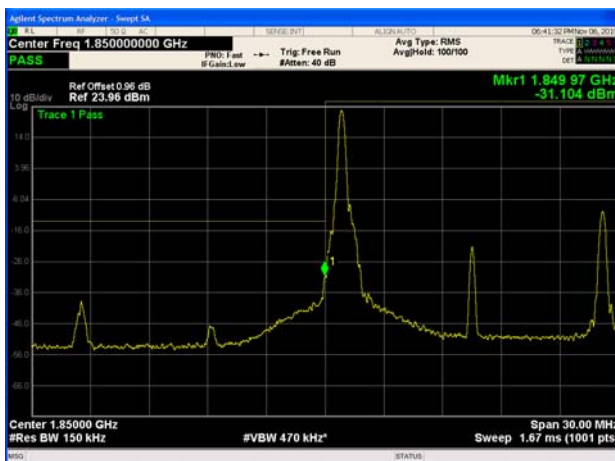

### LTE Band 25 15MHz QPSK 1RB CH-High

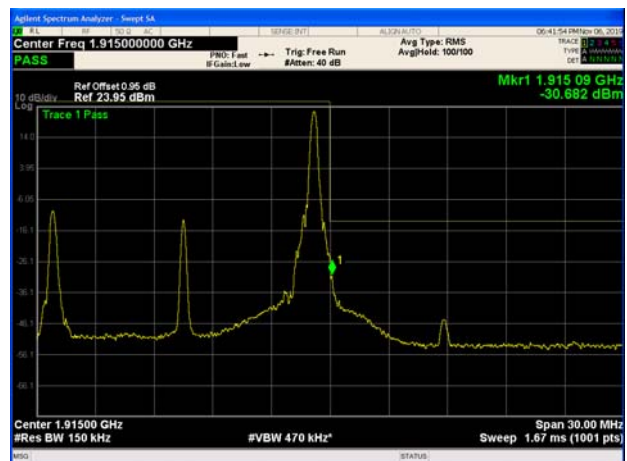




LTE Band 25 15MHz QPSK 100%RB CH-Low




LTE Band 25 15MHz QPSK 100%RB CH-High



LTE Band 25 20MHz QPSK 1RB CH-Low

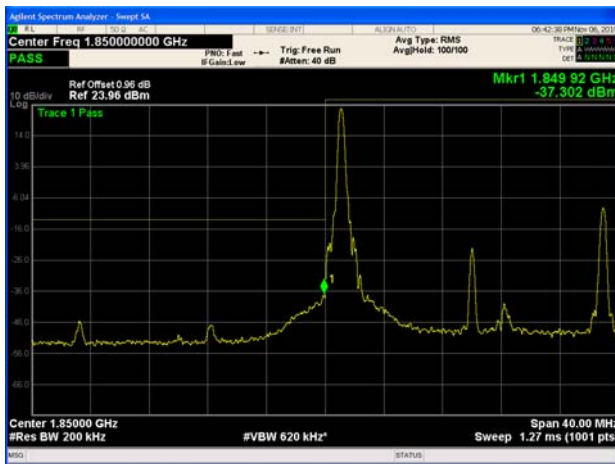

LTE Band 25 20MHz QPSK 1RB CH-High

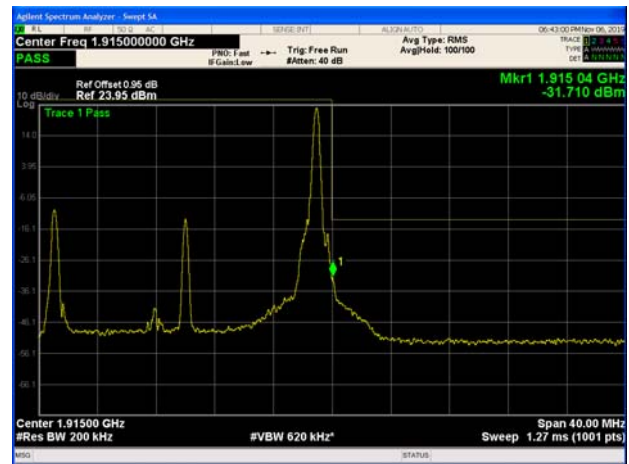

LTE Band 25 20MHz QPSK 100%RB CH-Low



LTE Band 25 20MHz QPSK 100%RB CH-High





### LTE Band 25 1.4MHz 16QAM 1RB CH-Low



### LTE Band 25 1.4MHz 16QAM 1RB CH-High




### LTE Band 25 1.4MHz 16QAM 100%RB CH-Low




### LTE Band 25 1.4MHz 16QAM 100%RB CH-High



### LTE Band 25 3MHz 16QAM 1RB CH-Low

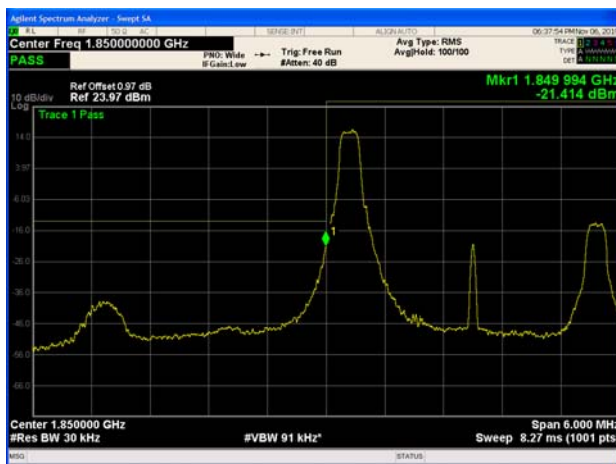

### LTE Band 25 3MHz 16QAM 1RB CH-High

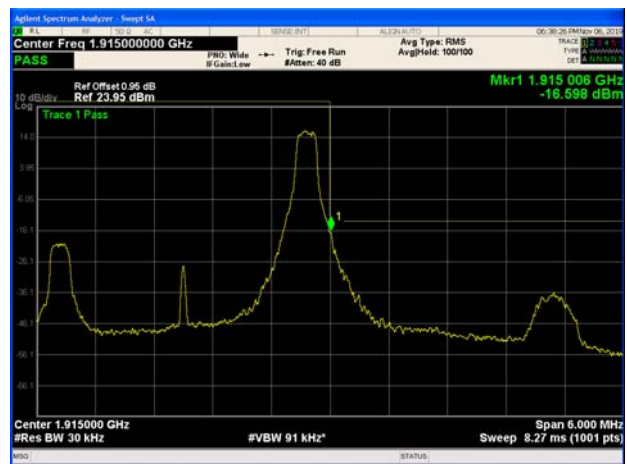




LTE Band 25 3MHz 16QAM 100%RB CH-Low




LTE Band 25 3MHz 16QAM 100%RB CH-High



LTE Band 25 5MHz 16QAM 1RB CH-Low

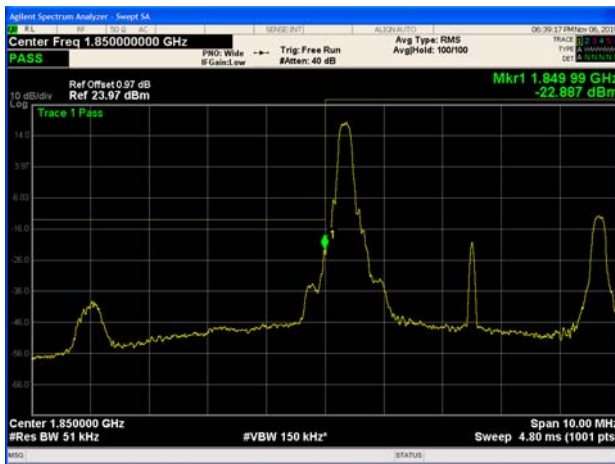

LTE Band 25 5MHz 16QAM 1RB CH-High

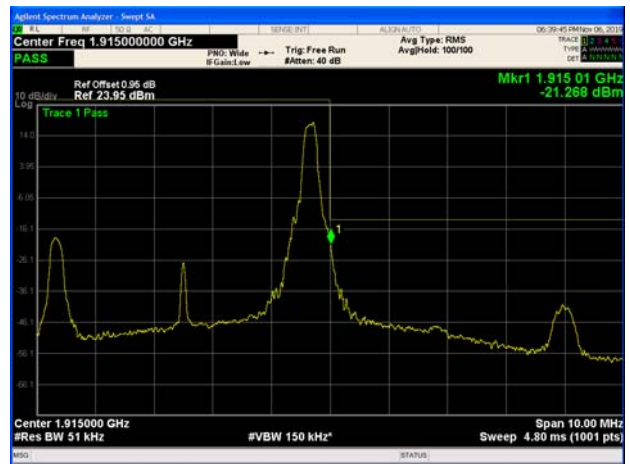

LTE Band 25 5MHz 16QAM 100%RB CH-Low




LTE Band 25 5MHz 16QAM 100%RB CH-High







LTE Band 25 10MHz 16QAM 1RB CH-Low

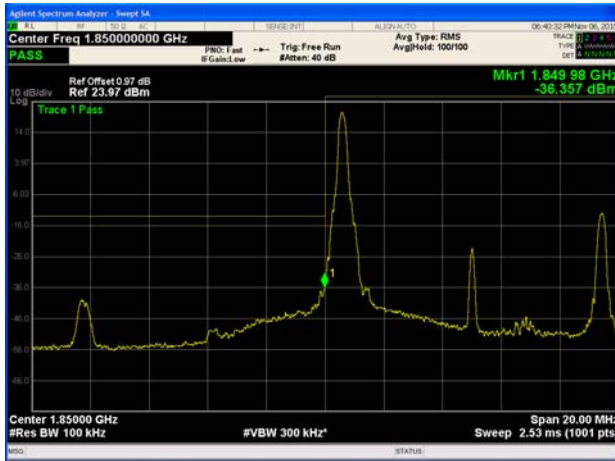

LTE Band 25 10MHz 16QAM 1RB CH-High

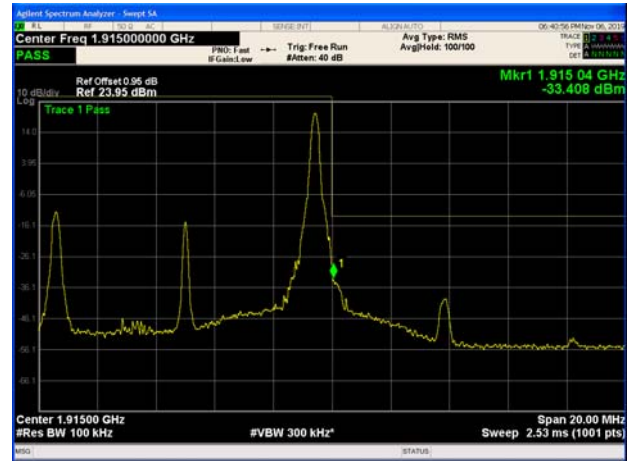


LTE Band 25 10MHz 16QAM 100%RB CH-Low

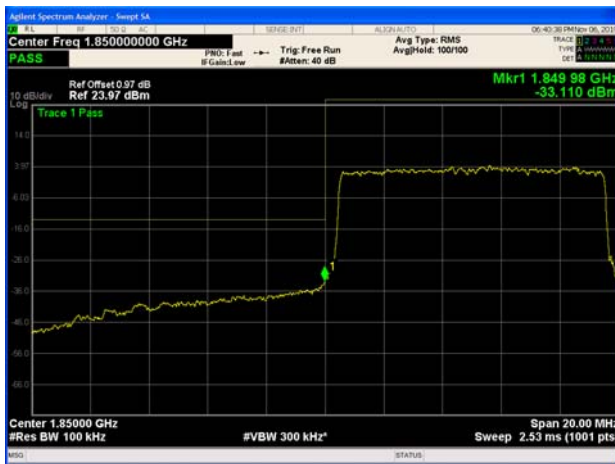


LTE Band 25 10MHz 16QAM 100%RB CH-High



LTE Band 25 15MHz 16QAM 1RB CH-Low

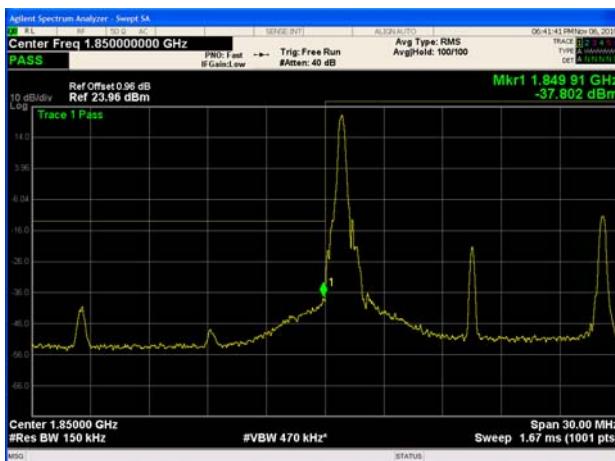

LTE Band 25 15MHz 16QAM 1RB CH-High

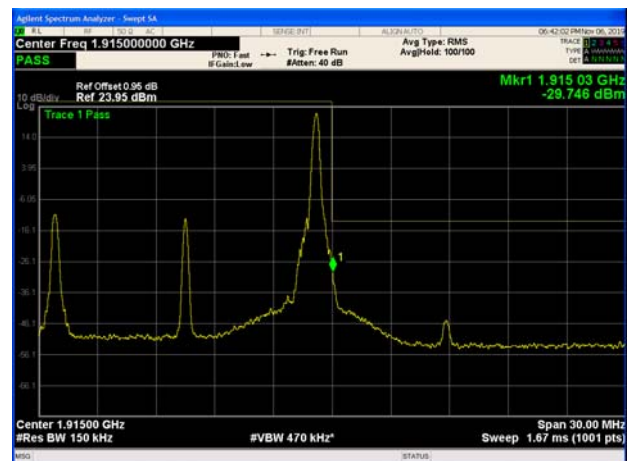






LTE Band 25 15MHz 16QAM 100%RB CH-Low




LTE Band 25 15MHz 16QAM 100%RB CH-High




LTE Band 25 20MHz 16QAM 1RB CH-Low

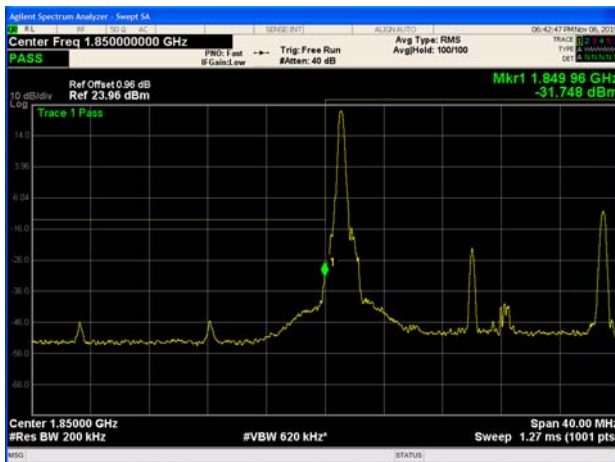

LTE Band 25 20MHz 16QAM 1RB CH-High

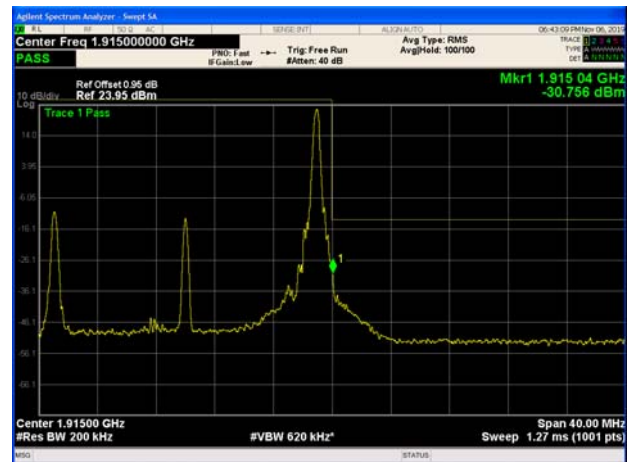

LTE Band 25 20MHz 16QAM 100%RB CH-Low

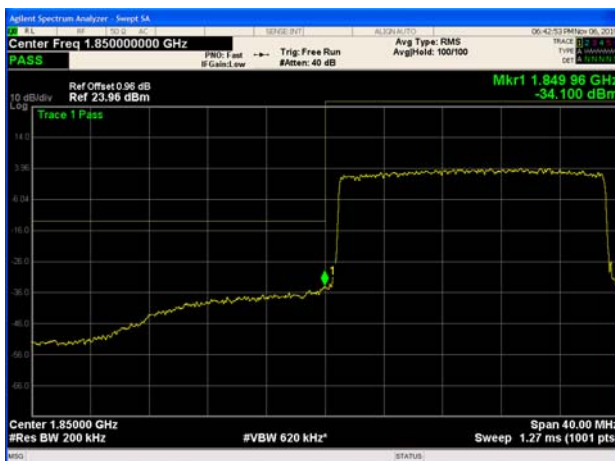

LTE Band 25 20MHz 16QAM 100%RB CH-High



### 5.4. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

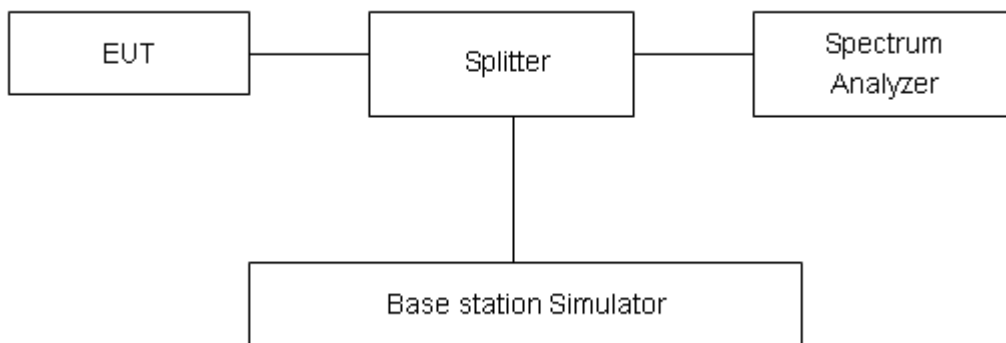

#### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



## Test Results

LTE Band 25								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	26047	1850.7	28.03	22.81	5.22	≤13	PASS
		26365	1882.5	28.12	22.91	5.21	≤13	PASS
		26683	1914.3	27.32	23.00	4.32	≤13	PASS
	3	26055	1851.5	28.13	22.83	5.30	≤13	PASS
		26365	1882.5	28.22	23.00	5.22	≤13	PASS
		26675	1913.5	27.46	23.04	4.42	≤13	PASS
	5	26065	1852.5	28.13	22.78	5.35	≤13	PASS
		26365	1882.5	28.17	22.94	5.23	≤13	PASS
		26665	1912.5	27.41	22.84	4.57	≤13	PASS
	10	26090	1855	28.24	22.91	5.33	≤13	PASS
		26365	1882.5	28.15	22.94	5.21	≤13	PASS
		26640	1910	27.55	22.78	4.77	≤13	PASS
	15	26115	1857.5	28.29	22.87	5.42	≤13	PASS
		26365	1882.5	28.29	22.90	5.39	≤13	PASS
		26615	1907.5	27.84	22.79	5.05	≤13	PASS
	20	26140	1860	28.08	22.85	5.23	≤13	PASS
		26365	1882.5	28.19	23.01	5.18	≤13	PASS
		26590	1905	27.86	22.87	4.99	≤13	PASS
16QAM	1.4	26047	1850.7	27.84	21.75	6.09	≤13	PASS
		26365	1882.5	28.28	22.27	6.01	≤13	PASS
		26683	1914.3	27.33	22.02	5.31	≤13	PASS
	3	26055	1851.5	28.00	21.81	6.19	≤13	PASS
		26365	1882.5	28.12	22.07	6.05	≤13	PASS
		26675	1913.5	27.41	21.98	5.43	≤13	PASS
	5	26065	1852.5	28.03	21.82	6.21	≤13	PASS
		26365	1882.5	27.95	21.86	6.09	≤13	PASS
		26665	1912.5	27.38	21.90	5.48	≤13	PASS
	10	26090	1855	28.12	21.94	6.18	≤13	PASS
		26365	1882.5	27.99	21.88	6.11	≤13	PASS
		26640	1910	27.44	21.85	5.59	≤13	PASS
	15	26115	1857.5	28.03	21.81	6.22	≤13	PASS
		26365	1882.5	28.16	22.03	6.13	≤13	PASS
		26615	1907.5	27.67	21.85	5.82	≤13	PASS
	20	26140	1860	28.07	21.97	6.10	≤13	PASS
		26365	1882.5	28.11	22.07	6.04	≤13	PASS
		26590	1905	27.71	21.79	5.92	≤13	PASS

## 5.5. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

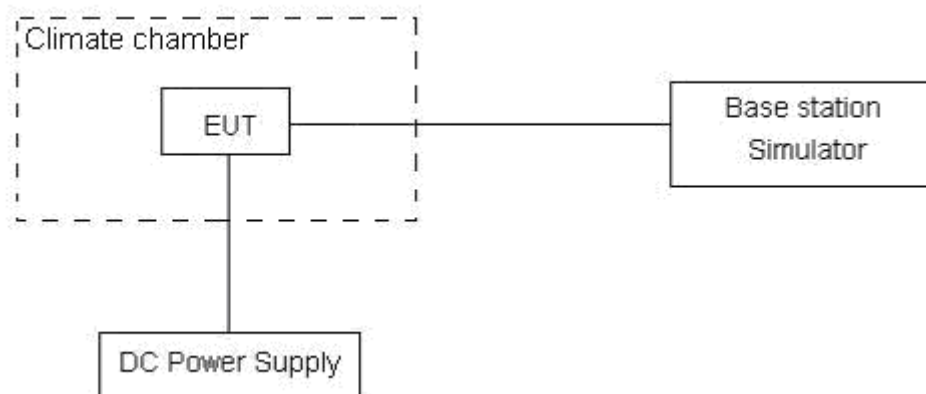

**Limits**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .



## Test Result

LTE Band 25						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	5.49	15.62	0.00292	0.00831	PASS
Extreme (85°C)		2.45	2.17	0.00130	0.00115	PASS
Extreme (80°C)		7.91	9.51	0.00421	0.00506	PASS
Extreme (70°C)		9.30	2.14	0.00495	0.00114	PASS
Extreme (60°C)		5.13	5.44	0.00273	0.00289	PASS
Extreme (50°C)		14.11	8.23	0.00751	0.00438	PASS
Extreme (40°C)		10.42	13.88	0.00554	0.00738	PASS
Extreme (30°C)		14.68	12.86	0.00781	0.00684	PASS
Extreme (20°C)		4.76	6.82	0.00253	0.00363	PASS
Extreme (10°C)		14.69	17.93	0.00782	0.00954	PASS
Extreme (0°C)		9.26	14.33	0.00492	0.00762	PASS
Extreme (-10°C)		17.47	16.54	0.00929	0.00880	PASS
Extreme (-20°C)		4.02	3.83	0.00214	0.00204	PASS
Extreme (-30°C)		15.28	10.18	0.00813	0.00541	PASS
Extreme (-40°C)		14.04	14.51	0.00747	0.00772	PASS
25°C		LV	13.58	12.94	0.00722	0.00688
	HV	1.78	13.32	0.00095	0.00709	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	15.53	9.81	0.00826	0.00522	PASS
Extreme (85°C)		16.66	16.16	0.00886	0.00860	PASS
Extreme (80°C)		9.47	2.53	0.00504	0.00134	PASS
Extreme (70°C)		9.02	4.73	0.00480	0.00252	PASS
Extreme (60°C)		9.52	6.90	0.00507	0.00367	PASS
Extreme (50°C)		15.89	2.60	0.00845	0.00138	PASS
Extreme (40°C)		1.37	1.92	0.00073	0.00102	PASS
Extreme (30°C)		16.70	17.03	0.00889	0.00906	PASS
Extreme (20°C)		4.95	8.76	0.00263	0.00466	PASS
Extreme (10°C)		9.56	7.26	0.00509	0.00386	PASS
Extreme (0°C)		11.74	10.64	0.00624	0.00566	PASS
Extreme (-10°C)		8.99	2.41	0.00478	0.00128	PASS
Extreme (-20°C)		10.39	17.69	0.00552	0.00941	PASS
Extreme (-30°C)		4.32	5.62	0.00230	0.00299	PASS



Extreme (-40°C)		13.32	9.15	0.00709	0.00487	PASS
25°C	LV	10.19	9.79	0.00542	0.00521	PASS
	HV	14.33	16.40	0.00762	0.00872	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	15.81	8.84	0.00841	0.00470	
Extreme (85°C)		11.74	6.84	0.00624	0.00364	PASS
Extreme (80°C)		1.31	9.49	0.00070	0.00505	PASS
Extreme (70°C)		5.37	6.38	0.00286	0.00339	PASS
Extreme (60°C)		17.67	8.31	0.00940	0.00442	PASS
Extreme (50°C)		13.34	2.65	0.00710	0.00141	PASS
Extreme (40°C)		5.52	12.21	0.00294	0.00649	PASS
Extreme (30°C)		12.10	3.59	0.00643	0.00191	PASS
Extreme (20°C)		2.26	12.72	0.00120	0.00677	PASS
Extreme (10°C)		4.39	9.71	0.00233	0.00517	PASS
Extreme (0°C)		7.31	6.62	0.00389	0.00352	PASS
Extreme (-10°C)		11.18	12.44	0.00595	0.00662	PASS
Extreme (-20°C)		14.64	5.31	0.00779	0.00282	PASS
Extreme (-30°C)		13.06	2.34	0.00695	0.00125	PASS
Extreme (-40°C)		17.98	16.94	0.00956	0.00901	PASS
25°C	LV	9.83	16.20	0.00523	0.00862	PASS
	HV	13.57	1.62	0.00722	0.00086	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	13.25	14.09	0.00705	0.00750	
Extreme (85°C)		15.68	1.01	0.00834	0.00054	PASS
Extreme (80°C)		7.16	8.19	0.00381	0.00436	PASS
Extreme (70°C)		4.42	14.83	0.00235	0.00789	PASS
Extreme (60°C)		7.13	8.89	0.00379	0.00473	PASS
Extreme (50°C)		2.16	8.39	0.00115	0.00446	PASS
Extreme (40°C)		15.54	12.24	0.00826	0.00651	PASS
Extreme (30°C)		16.19	5.36	0.00861	0.00285	PASS
Extreme (20°C)		14.61	12.76	0.00777	0.00679	PASS
Extreme (10°C)		5.94	9.04	0.00316	0.00481	PASS
Extreme (0°C)		14.15	7.19	0.00753	0.00383	PASS
Extreme (-10°C)		2.32	10.49	0.00124	0.00558	PASS
Extreme (-20°C)		15.55	17.55	0.00827	0.00934	PASS
Extreme (-30°C)		10.37	14.48	0.00552	0.00770	PASS



Extreme (-40°C)		14.67	15.36	0.00780	0.00817	PASS
25°C	LV	3.40	6.31	0.00181	0.00336	PASS
	HV	5.10	2.38	0.00271	0.00127	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	17.36	1.73	0.00923	0.00092	PASS
Extreme (85°C)		15.12	7.04	0.00804	0.00375	PASS
Extreme (80°C)		17.51	17.33	0.00932	0.00922	PASS
Extreme (70°C)		8.98	8.47	0.00478	0.00451	PASS
Extreme (60°C)		3.33	4.15	0.00177	0.00221	PASS
Extreme (50°C)		8.29	11.48	0.00441	0.00611	PASS
Extreme (40°C)		1.31	2.99	0.00070	0.00159	PASS
Extreme (30°C)		14.49	12.39	0.00771	0.00659	PASS
Extreme (20°C)		10.50	5.23	0.00558	0.00278	PASS
Extreme (10°C)		16.66	8.43	0.00886	0.00448	PASS
Extreme (0°C)		13.31	5.36	0.00708	0.00285	PASS
Extreme (-10°C)		10.14	16.04	0.00539	0.00853	PASS
Extreme (-20°C)		7.17	12.44	0.00382	0.00662	PASS
Extreme (-30°C)		7.65	15.81	0.00407	0.00841	PASS
Extreme (-40°C)		15.82	16.75	0.00842	0.00891	PASS
25°C	LV	10.10	5.16	0.00537	0.00275	PASS
	HV	8.13	1.56	0.00432	0.00083	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	16.14	4.27	0.00859	0.00227	PASS
Extreme (85°C)		2.19	3.35	0.00116	0.00178	PASS
Extreme (80°C)		4.46	3.79	0.00237	0.00202	PASS
Extreme (70°C)		6.61	17.76	0.00352	0.00945	PASS
Extreme (60°C)		4.35	9.23	0.00232	0.00491	PASS
Extreme (50°C)		17.46	15.98	0.00929	0.00850	PASS
Extreme (40°C)		7.92	3.06	0.00421	0.00163	PASS
Extreme (30°C)		3.39	11.68	0.00181	0.00621	PASS
Extreme (20°C)		1.95	7.40	0.00104	0.00393	PASS
Extreme (10°C)		4.56	3.03	0.00242	0.00161	PASS
Extreme (0°C)		8.17	15.43	0.00435	0.00821	PASS
Extreme (-10°C)		9.39	9.86	0.00499	0.00524	PASS
Extreme (-20°C)		5.81	1.03	0.00309	0.00055	PASS
Extreme (-30°C)		3.27	4.44	0.00174	0.00236	PASS





Extreme (-40°C)		15.38	5.68	0.00818	0.00302	PASS
25°C	LV	16.08	12.84	0.00855	0.00683	PASS
	HV	10.81	3.41	0.00575	0.00181	PASS

## 5.6. Spurious Emissions at Antenna Terminals

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

### Test setup

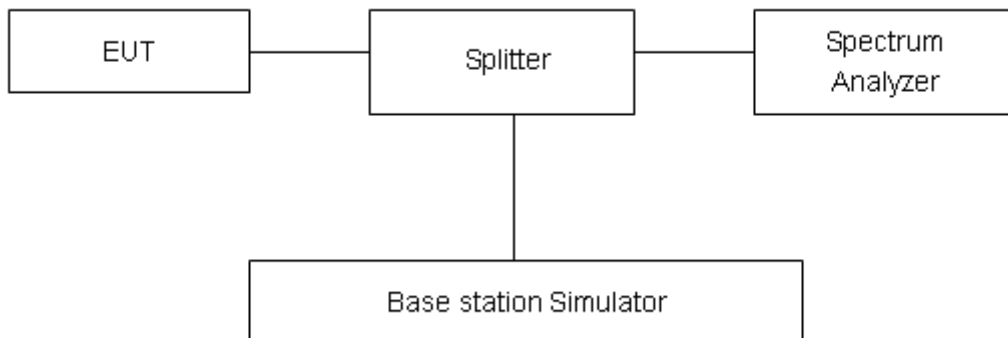

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log<sub>10</sub> (P) dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

### Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

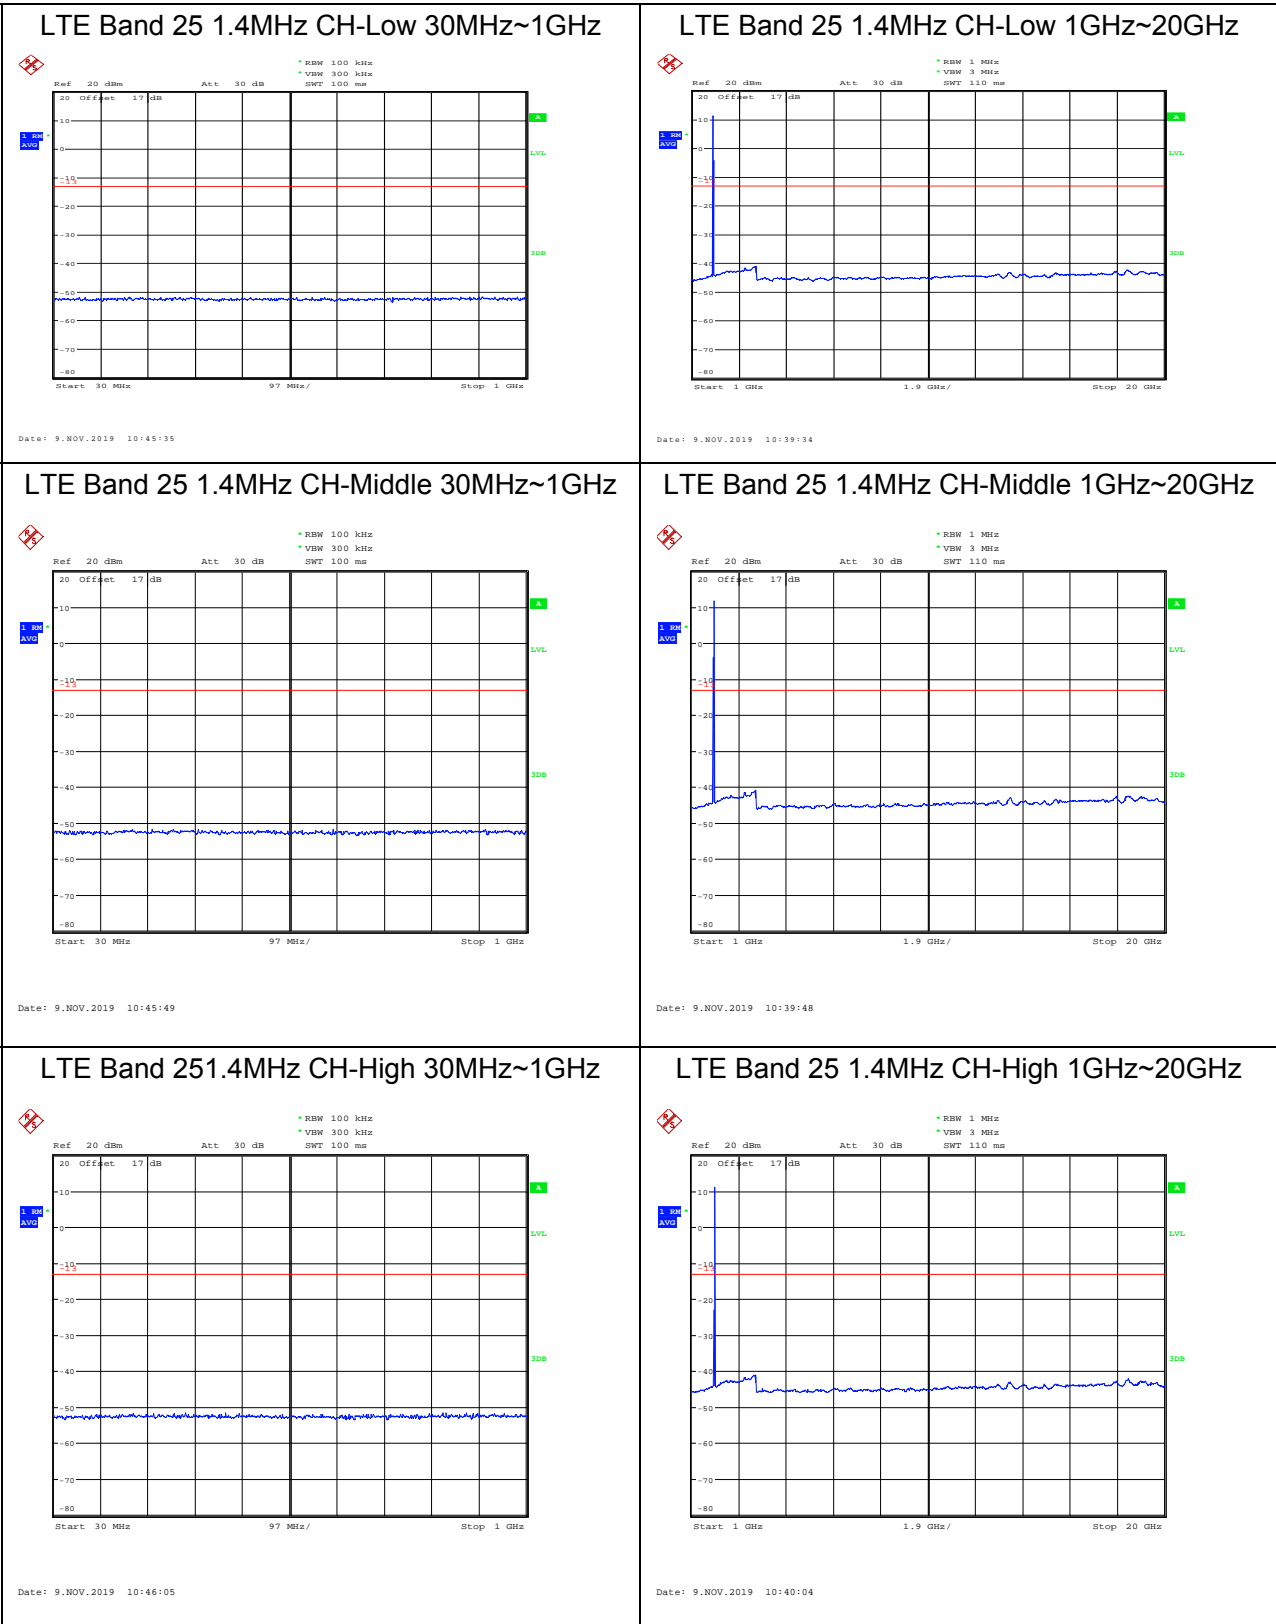




LTE Band 25 3MHz CH-Low 30MHz~1GHz

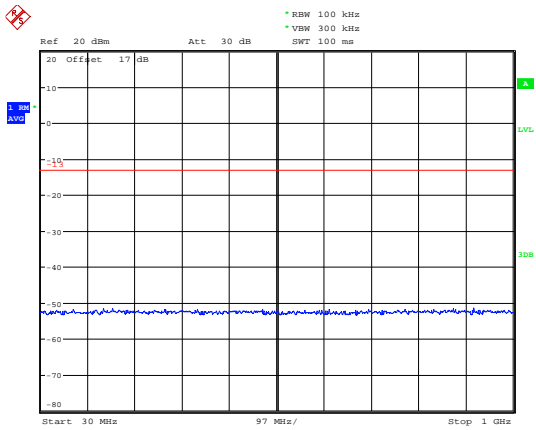


Date: 9.NOV.2019 10:46:28

LTE Band 25 3MHz CH-Low 1GHz~20GHz

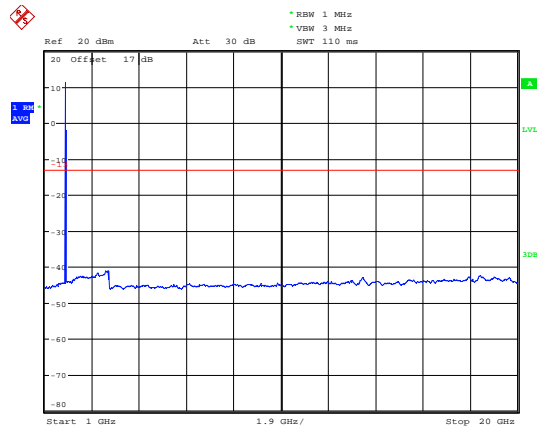


Date: 9.NOV.2019 10:40:28

LTE Band 25 3MHz CH-Middle 30MHz~1GHz

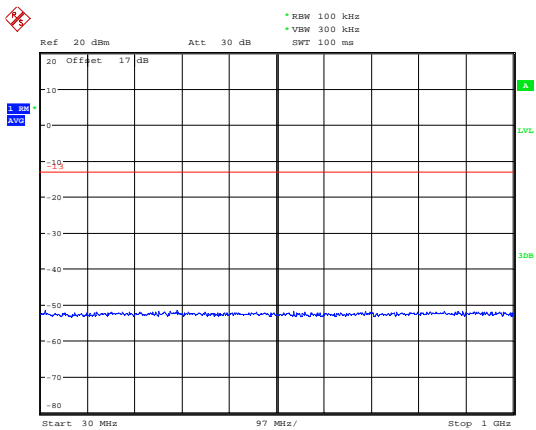


Date: 9.NOV.2019 10:46:43

LTE Band 25 3MHz CH-Middle 1GHz~20GHz

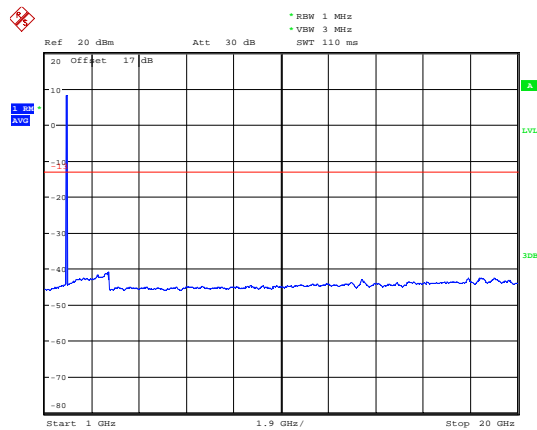


Date: 9.NOV.2019 10:40:44

LTE Band 25 3MHz CH-High 30MHz~1GHz

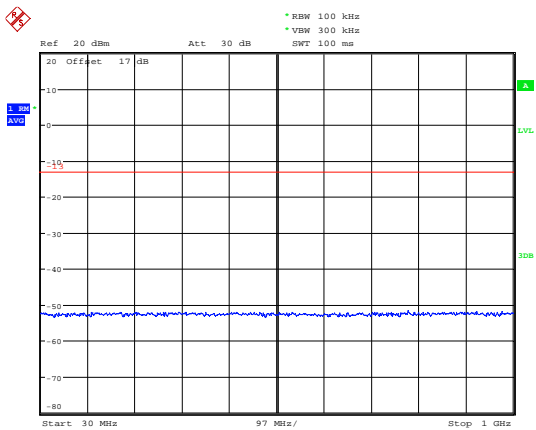

Date: 9.NOV.2019 10:47:11


LTE Band 25 3MHz CH-High 1GHz~20GHz

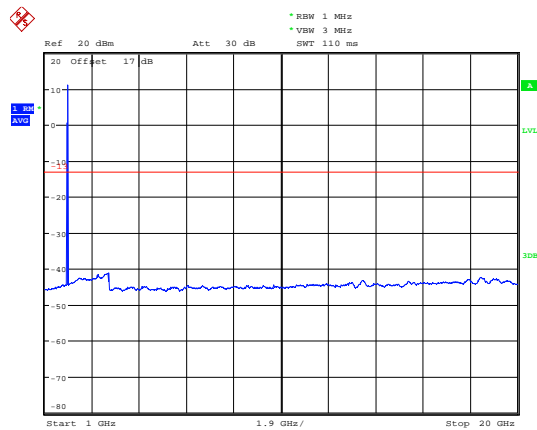

Date: 9.NOV.2019 10:40:59




### LTE Band 25 5MHz CH-Low 30MHz~1GHz

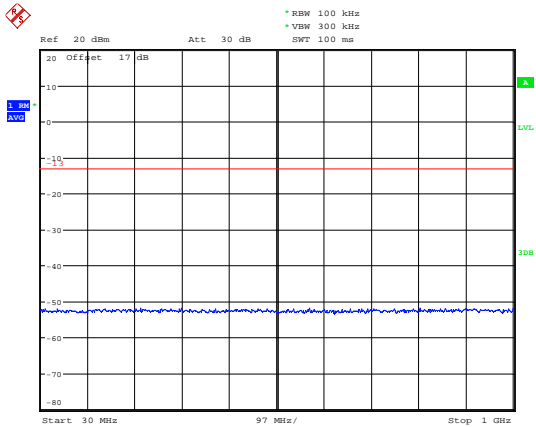


Date: 9.NOV.2019 10:47:36

### LTE Band 25 5MHz CH-Low 1GHz~20GHz

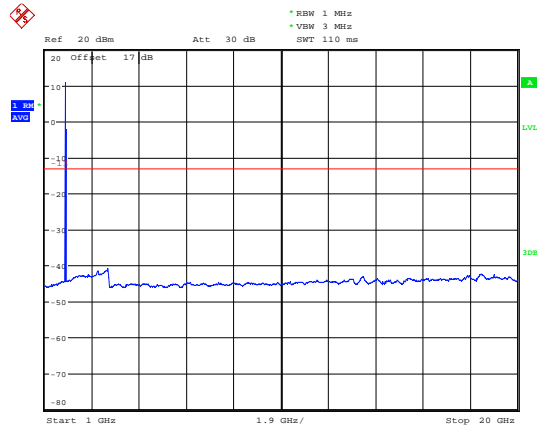


Date: 9.NOV.2019 10:41:22

### LTE Band 25 5MHz CH-Middle 30MHz~1GHz

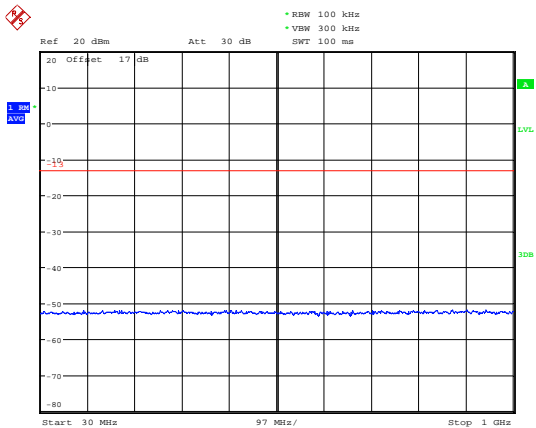


Date: 9.NOV.2019 10:47:50

### LTE Band 25 5MHz CH-Middle 1GHz~20GHz

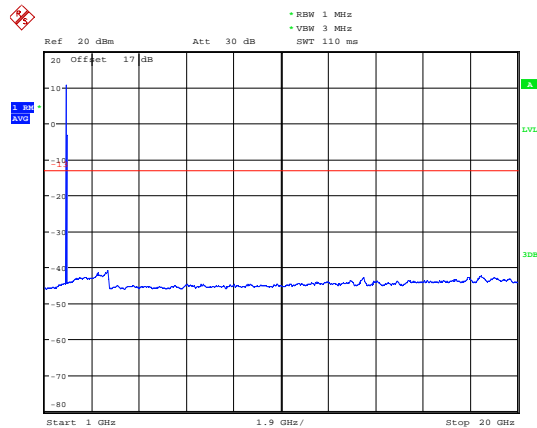


Date: 9.NOV.2019 10:41:34

### LTE Band 25 5MHz CH-High 30MHz~1GHz

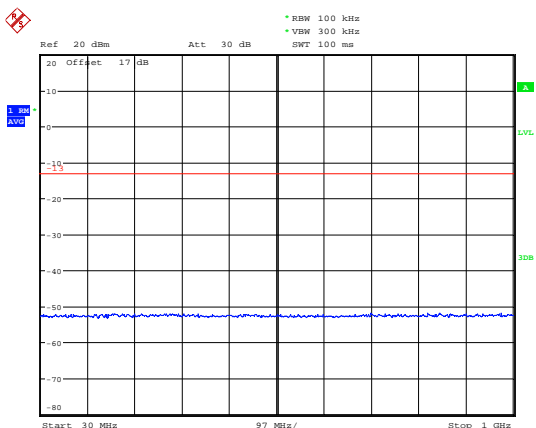

Date: 9.NOV.2019 10:48:12


### LTE Band 25 5MHz CH-High 1GHz~20GHz

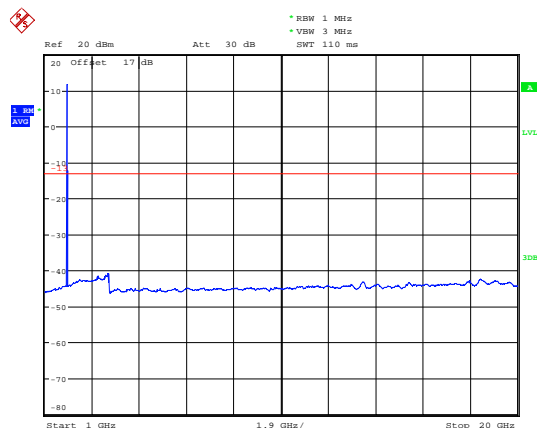

Date: 9.NOV.2019 10:41:52




LTE Band 25 10MHz CH-Low 30MHz~1GHz

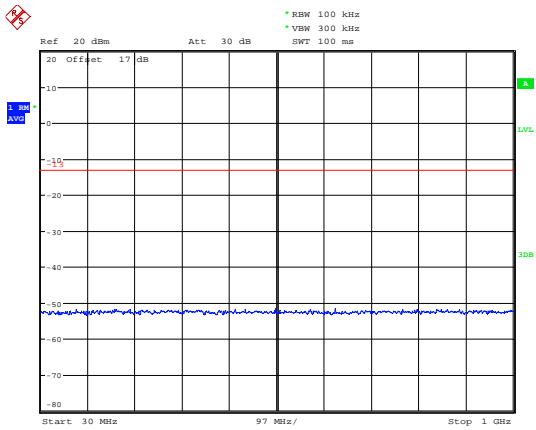


Date: 9.NOV.2019 10:48:41

LTE Band 25 10MHz CH-Low 1GHz~20GHz

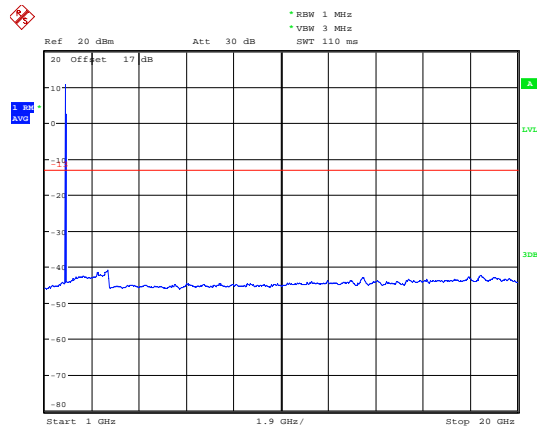


Date: 9.NOV.2019 10:42:14

LTE Band 25 10MHz CH-Middle 30MHz~1GHz

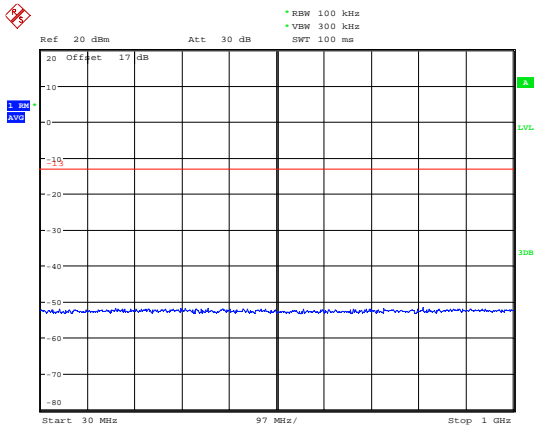


Date: 9.NOV.2019 10:48:56

LTE Band 25 10MHz CH-Middle 1GHz~20GHz

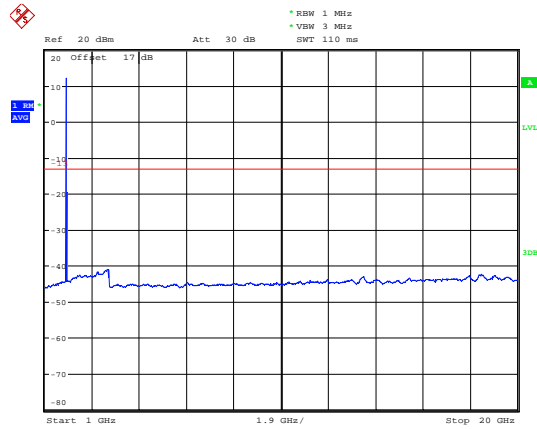


Date: 9.NOV.2019 10:42:28

LTE Band 25 10MHz CH-High 30MHz~1GHz

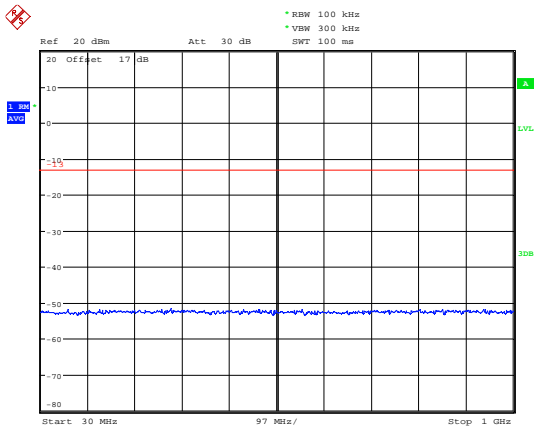

Date: 9.NOV.2019 10:49:16


LTE Band 25 10MHz CH-High 1GHz~20GHz

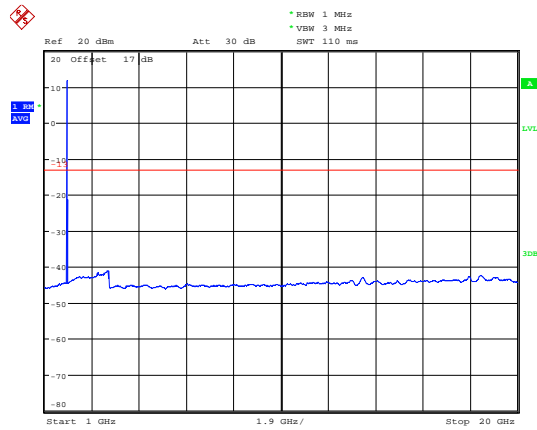

Date: 9.NOV.2019 10:42:44




### LTE Band 25 15MHz CH-Low 30MHz~1GHz

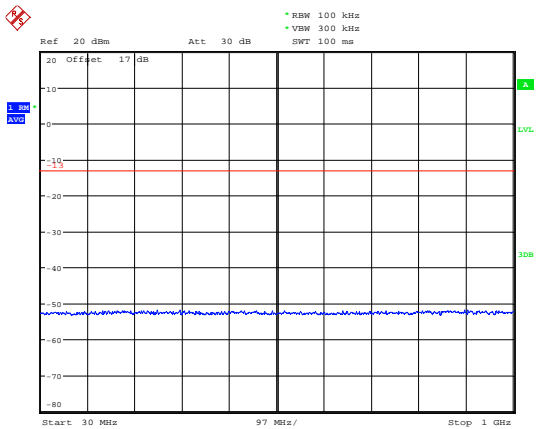


Date: 9.NOV.2019 10:49:39

### LTE Band 25 15MHz CH-Low 1GHz~20GHz

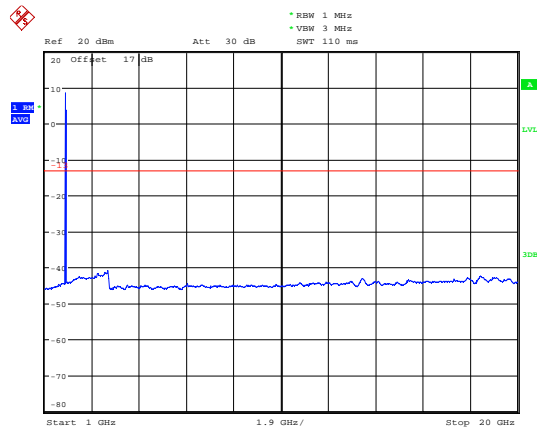


Date: 9.NOV.2019 10:43:09

### LTE Band 25 15MHz CH-Middle 30MHz~1GHz

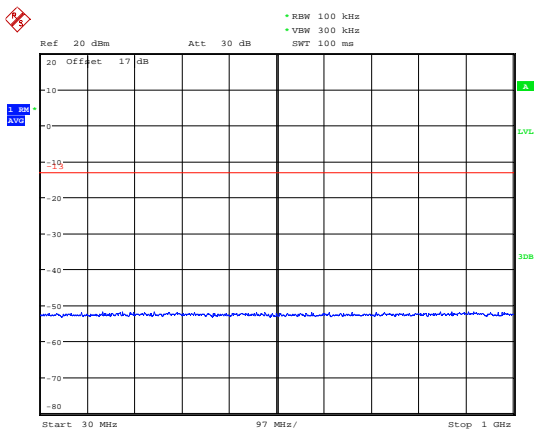


Date: 9.NOV.2019 10:49:53

### LTE Band 25 15MHz CH-Middle 1GHz~20GHz

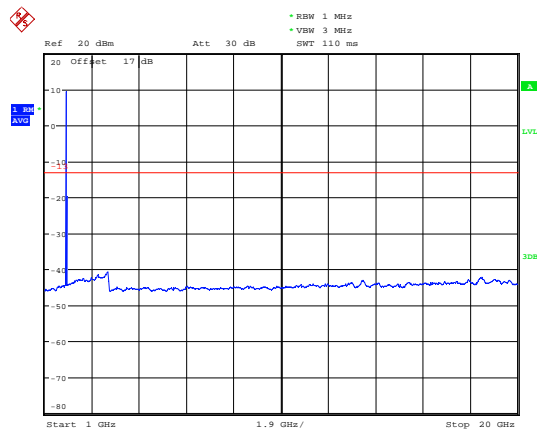


Date: 9.NOV.2019 10:43:22

### LTE Band 25 15MHz CH-High 30MHz~1GHz

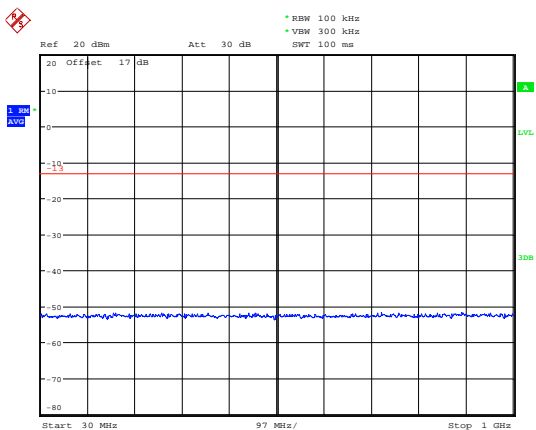

Date: 9.NOV.2019 10:50:11


### LTE Band 25 15MHz CH-High 1GHz~20GHz

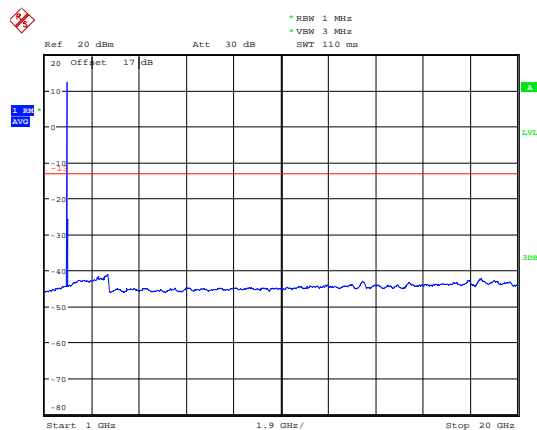

Date: 9.NOV.2019 10:43:39




### LTE Band 25 20MHz CH-Low 30MHz~1GHz

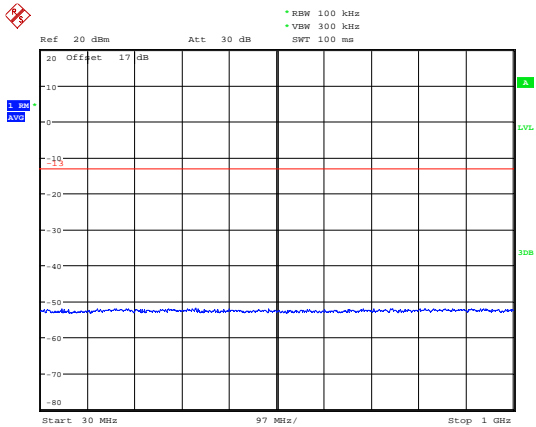


Date: 9.NOV.2019 10:51:46

### LTE Band 25 20MHz CH-Low 1GHz~20GHz

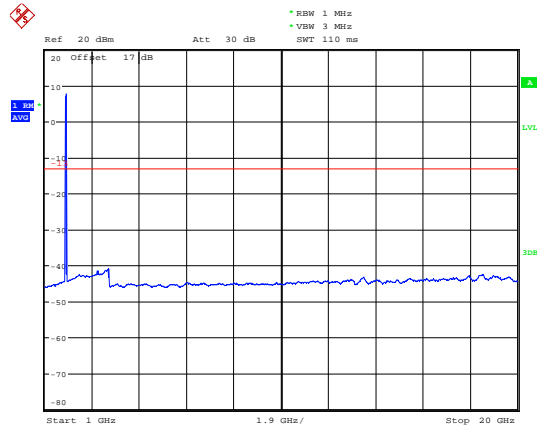


Date: 9.NOV.2019 10:44:01

### LTE Band 25 20MHz CH-Middle 30MHz~1GHz

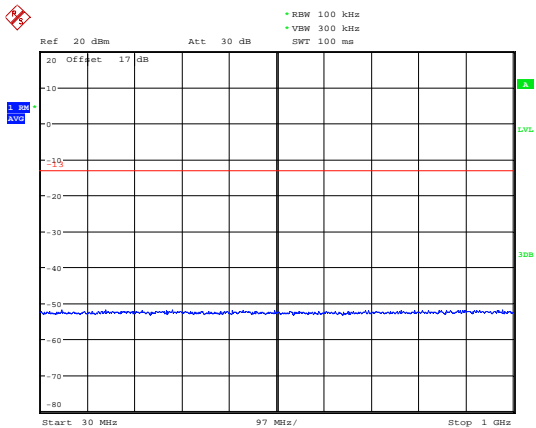


Date: 9.NOV.2019 10:52:02

### LTE Band 25 20MHz CH-Middle 1GHz~20GHz

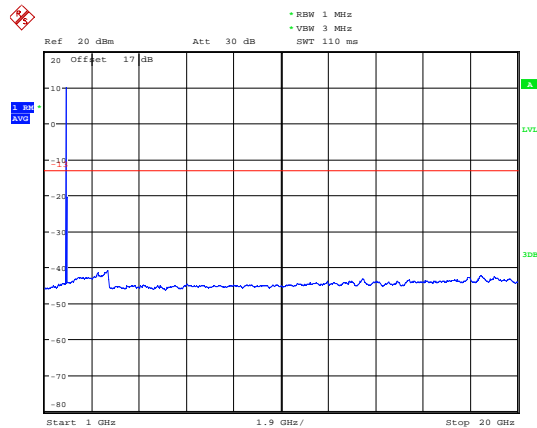


Date: 9.NOV.2019 10:44:23

### LTE Band 25 20MHz CH-High 30MHz~1GHz

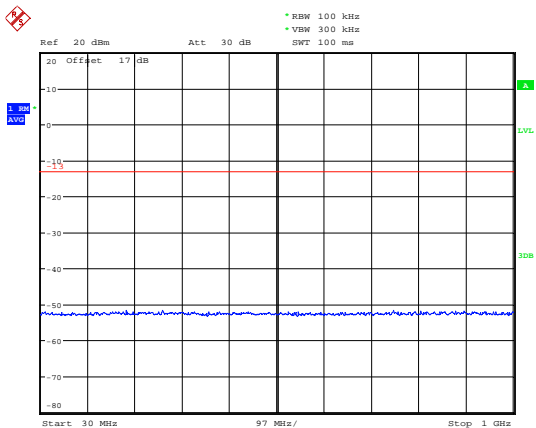

Date: 9.NOV.2019 10:52:17

### LTE Band 25 20MHz CH-High 1GHz~20GHz

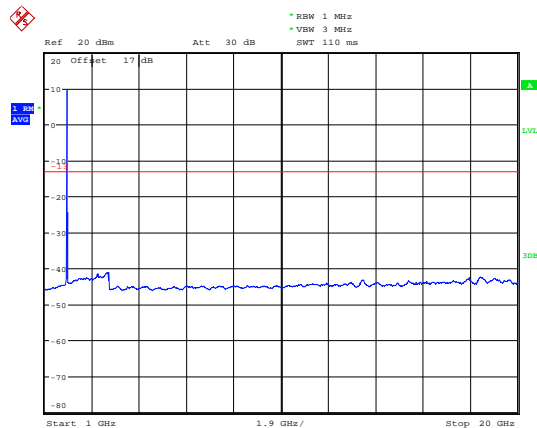

Date: 9.NOV.2019 10:44:39



## 5.7. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
  
The measurement results are amend as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

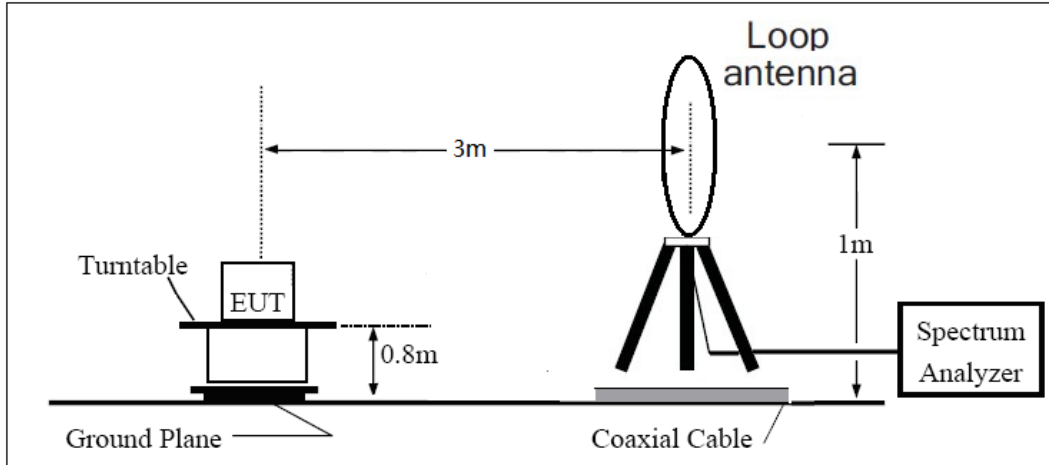

**30MHz ~ 1GHz**

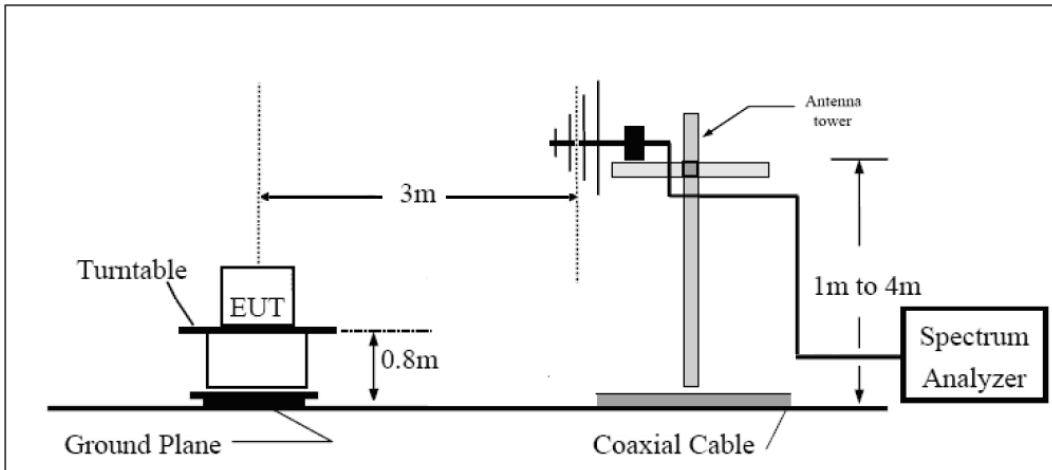

**Above 1GHz**

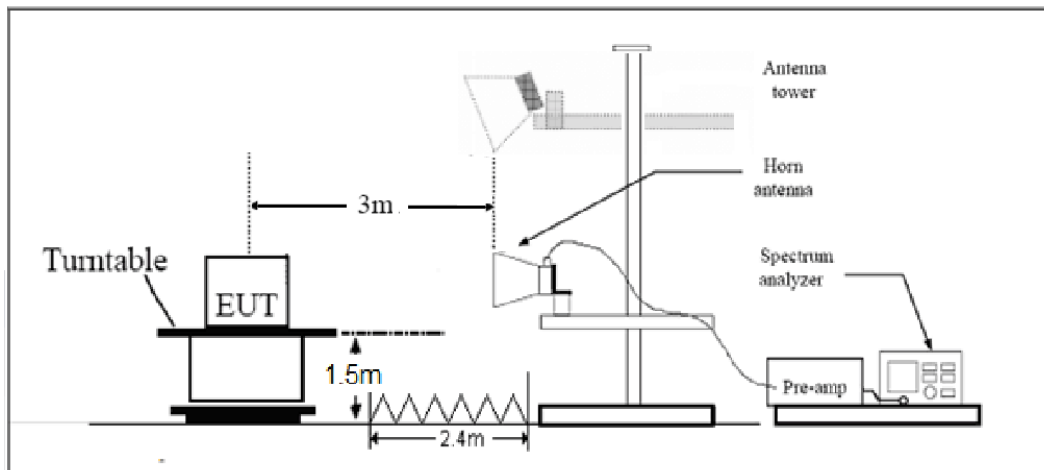



Note: Area side: 2.4mX3.6m

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

## LTE Band 25 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.0	-54.03	5.10	11.05	Horizontal	-48.08	-13.00	35.08	90
3	5647.5	-49.85	5.42	12.65	Horizontal	-42.62	-13.00	29.62	45
4	7530.0	-56.47	6.70	13.85	Horizontal	-49.32	-13.00	36.32	45
5	9412.5	-45.15	7.01	14.75	Horizontal	-37.41	-13.00	24.41	0
6	11295.0	-54.25	7.48	15.95	Horizontal	-45.78	-13.00	32.78	180
7	13177.5	-55.91	7.51	16.55	Horizontal	-46.87	-13.00	33.87	135
8	15060.0	-52.63	8.24	15.35	Horizontal	-45.52	-13.00	32.52	45
9	16942.5	-50.14	8.41	14.95	Horizontal	-43.60	-13.00	30.60	270
10	18825.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 25 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.0	-62.70	5.10	11.05	Horizontal	-56.75	-13.00	43.75	90
3	5647.5	-62.27	5.42	12.65	Horizontal	-55.04	-13.00	42.04	45
4	7530.0	-58.16	6.70	13.85	Horizontal	-51.01	-13.00	38.01	0
5	9412.5	-56.83	7.01	14.75	Horizontal	-49.09	-13.00	36.09	180
6	11295.0	-54.08	7.48	15.95	Horizontal	-45.61	-13.00	32.61	90
7	13177.5	-55.70	7.51	16.55	Horizontal	-46.66	-13.00	33.66	270
8	15060.0	-52.67	8.24	15.35	Horizontal	-45.56	-13.00	32.56	45
9	16942.5	-49.99	8.41	14.95	Horizontal	-43.45	-13.00	30.45	90
10	18825.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 25 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.0	-56.08	5.10	11.05	Horizontal	-50.13	-13.00	37.13	270
3	5647.5	-48.93	5.42	12.65	Horizontal	-41.70	-13.00	28.70	135
4	7530.0	-58.80	6.70	13.85	Horizontal	-51.65	-13.00	38.65	315
5	9412.5	-43.85	7.01	14.75	Horizontal	-36.11	-13.00	23.11	0
6	11295.0	-55.03	7.48	15.95	Horizontal	-46.56	-13.00	33.56	90
7	13177.5	-55.53	7.51	16.55	Horizontal	-46.49	-13.00	33.49	45
8	15060.0	-53.03	8.24	15.35	Horizontal	-45.92	-13.00	32.92	180
9	16942.5	-50.51	8.41	14.95	Horizontal	-43.97	-13.00	30.97	90
10	18825.0	--	--	--	--	--	--	--	--

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

Date of Testing: October 22, 2019 ~ November 9, 2019

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2019-05-19	2020-05-18
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-19	2020-05-18
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-12-13
Software	R&S	EMC32	9.26.0	/	/



Date of Testing: June 29, 2020

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*