

## #01\_GSM850\_GPRS (1 Tx slot)\_Bottom Side\_8mm\_Ch189


Communication System: GPRS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_850\_240227 Medium parameters used:  $f=836.400$  MHz;  $\sigma=0.923$  S/m;  $\epsilon_r=41.5$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.32, 10.32, 10.32); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.538 W/kg; SAR (10g) = 0.356 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.05 dB  
SAR (1g) = 0.559 W/kg; SAR (8g) = 0.387 W/kg; SAR (10g) = 0.366 W/kg  
Smallest distance from peaks to all points 3 dB below = 17.4 mm  
Ratio of SAR at M2 to SAR at M1 = 85.5 %

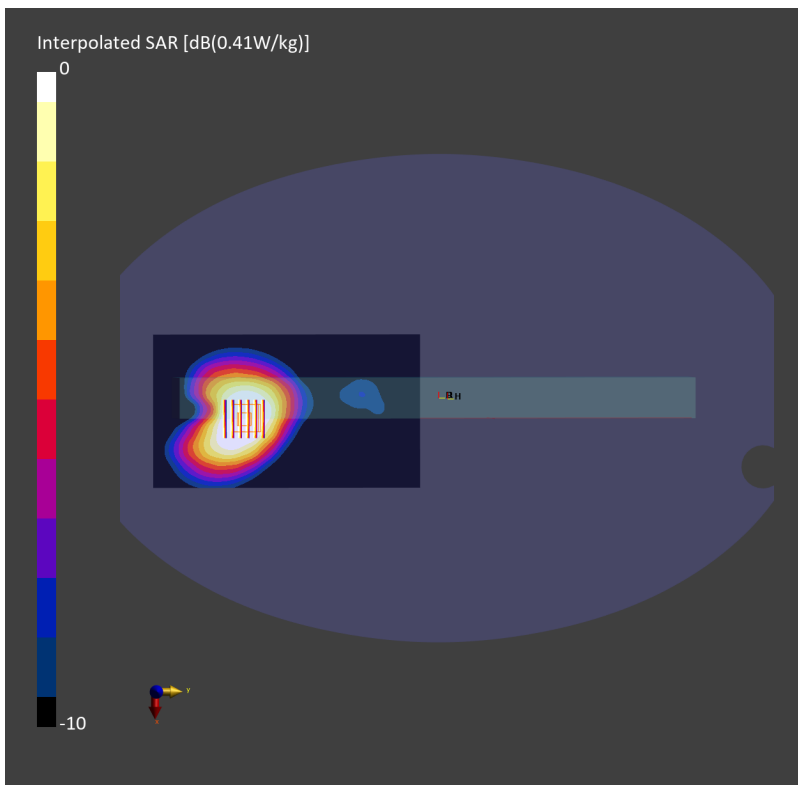

## #02\_GSM1900\_GPRS (1 Tx slot)\_Bottom Side\_8mm\_Ch810


Communication System: GPRS-FDD; Frequency: 1909.800 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_1900\_240228 Medium parameters used:  $f=1909.800$  MHz;  $\sigma=1.43$  S/m;  $\epsilon_r=39.3$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.42, 8.42, 8.42); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 240.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.266 W/kg; SAR (10g) = 0.159 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.277 W/kg; SAR (8g) = 0.180 W/kg; SAR (10g) = 0.169 W/kg  
Smallest distance from peaks to all points 3 dB below = 16.7 mm  
Ratio of SAR at M2 to SAR at M1 = 83.6 %

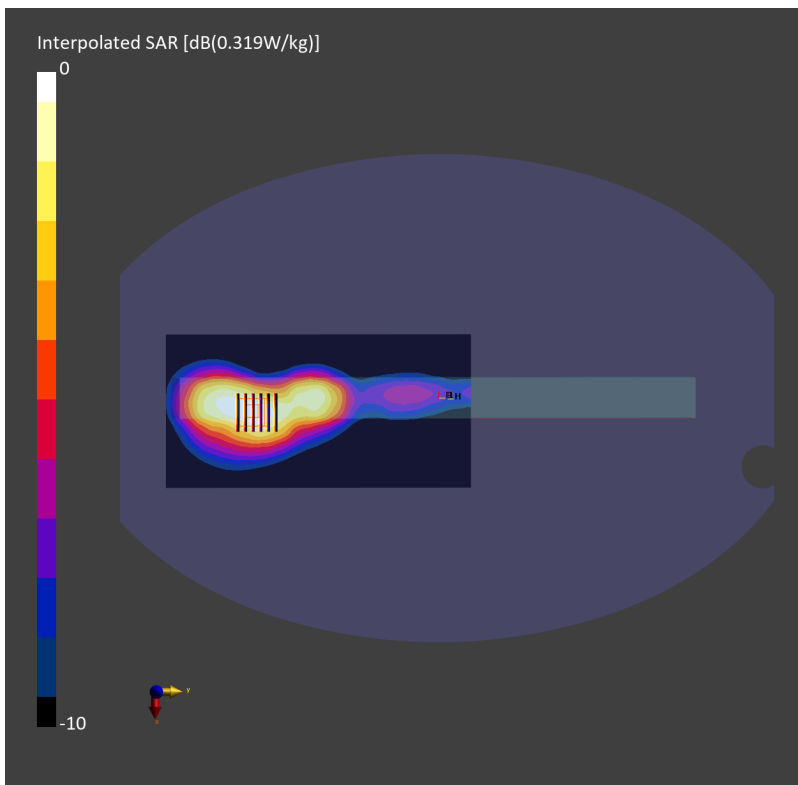

### #03\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_8mm\_Ch9400


Communication System: UMTS-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240228 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.42$  S/m;  $\epsilon_r=39.2$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.42, 8.42, 8.42); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.537 W/kg; SAR (10g) = 0.325 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.07 dB  
SAR (1g) = 0.561 W/kg; SAR (8g) = 0.369 W/kg; SAR (10g) = 0.347 W/kg  
Smallest distance from peaks to all points 3 dB below = 15.6 mm  
Ratio of SAR at M2 to SAR at M1 = 83.8 %

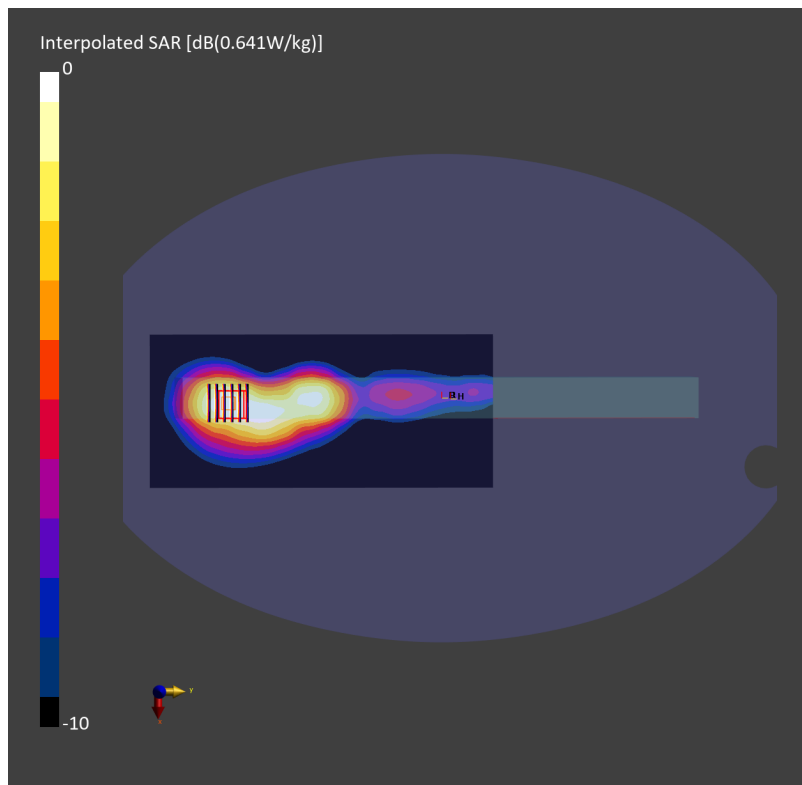

### #04\_WCDMA IV\_RMC 12.2Kbps\_Bottom Side\_8mm\_Ch1413


Communication System: UMTS-FDD; Frequency: 1732.600 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240228 Medium parameters used:  $f=1732.600$  MHz;  $\sigma=1.34$  S/m;  $\epsilon_r=41.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.9, 8.9, 8.9); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.443 W/kg; SAR (10g) = 0.272 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.470 W/kg; SAR (8g) = 0.312 W/kg; SAR (10g) = 0.294 W/kg  
Smallest distance from peaks to all points 3 dB below = 16.8 mm  
Ratio of SAR at M2 to SAR at M1 = 83.7 %

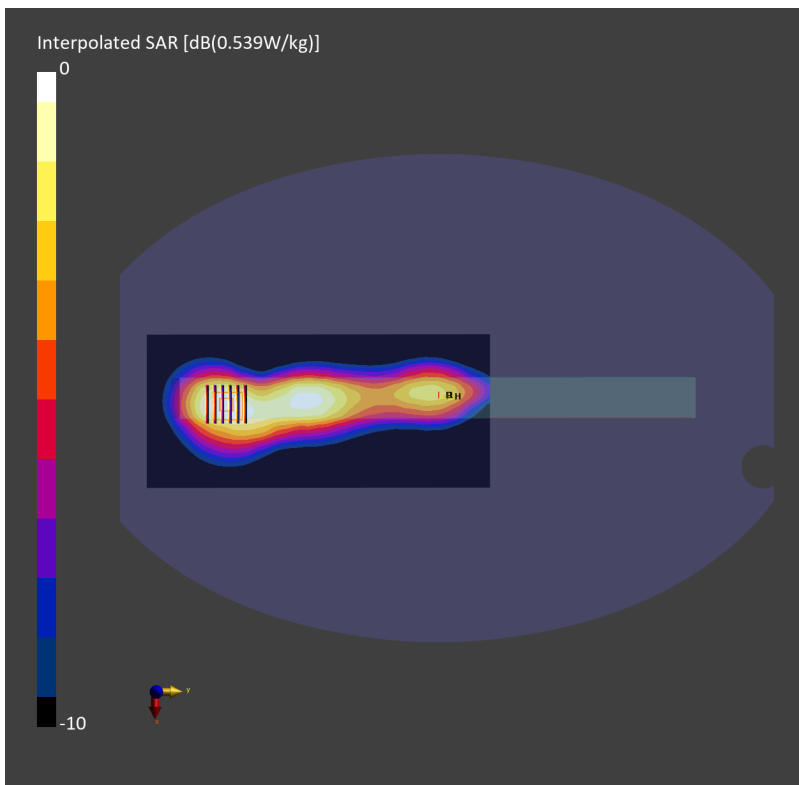

## #05\_WCDMA V\_RMC 12.2Kbps\_Bottom Side\_8mm\_Ch4132


Communication System: UMTS-FDD; Frequency: 826.400 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_240227 Medium parameters used:  $f=826.400$  MHz;  $\sigma=0.919$  S/m;  $\epsilon_r=41.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.32, 10.32, 10.32); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.357 W/kg; SAR (10g) = 0.236 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.366 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.240 W/kg  
Smallest distance from peaks to all points 3 dB below = 20.4 mm  
Ratio of SAR at M2 to SAR at M1 = 85.7 %

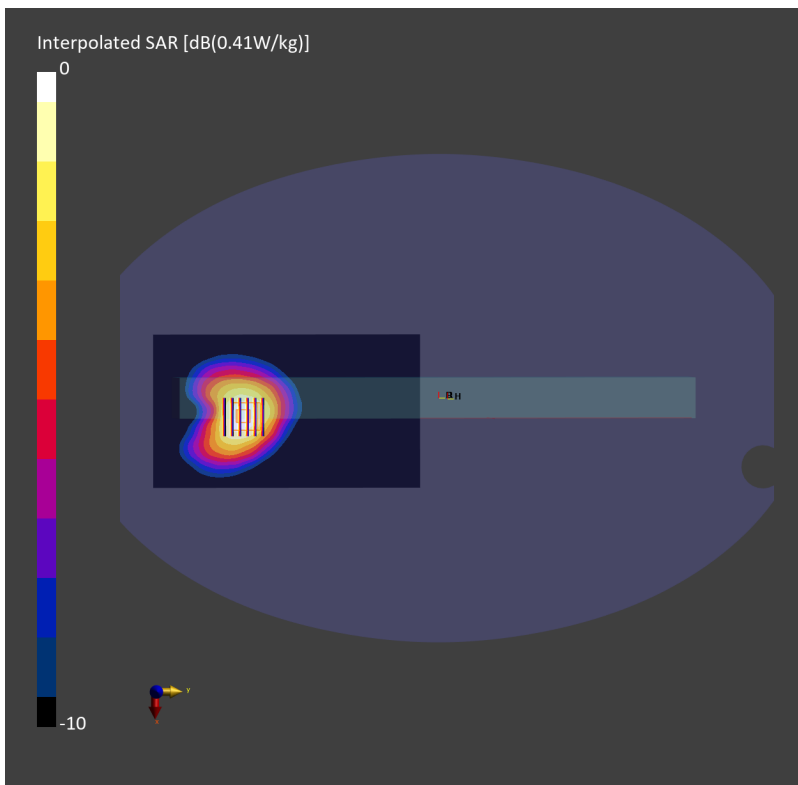

## #06\_LTE Band 7\_20M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch20850


Communication System: LTE-FDD ; Frequency: 2510.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240226 Medium parameters used:  $f=2510.000$  MHz;  $\sigma=1.90$  S/m;  $\epsilon_r=39.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.87, 7.87, 7.87); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (100.0 mm x 180.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.328 W/kg; SAR (10g) = 0.179 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.331 W/kg; SAR (8g) = 0.183 W/kg; SAR (10g) = 0.168 W/kg  
Smallest distance from peaks to all points 3 dB below = 10.8 mm  
Ratio of SAR at M2 to SAR at M1 = 80.9 %

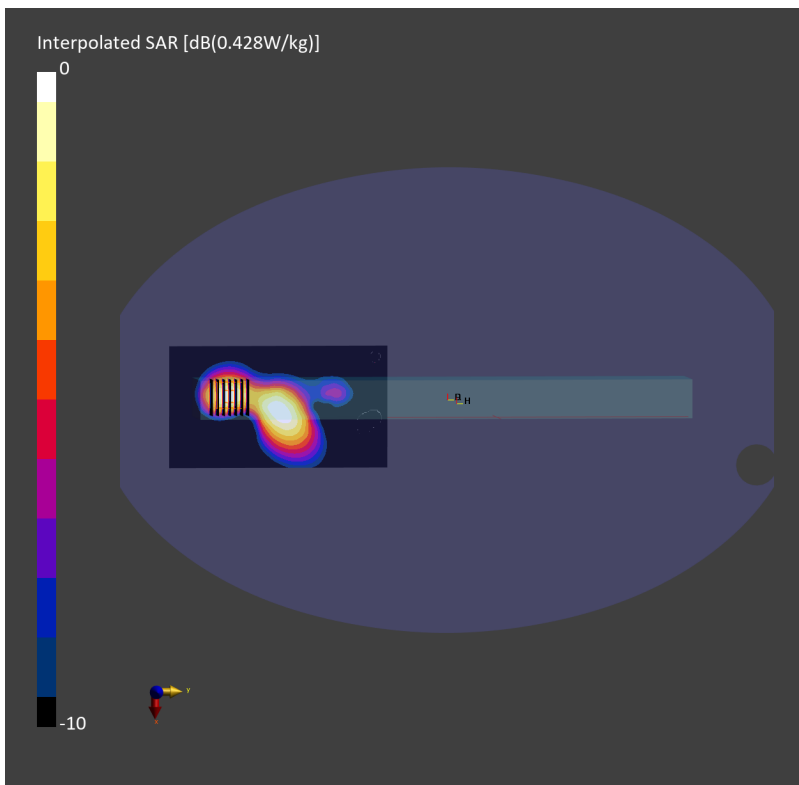

## #07\_LTE Band 12\_10M\_QPSK\_1\_0\_Top Side\_8mm\_Ch23095


Communication System: LTE-FDD; Frequency: 707.500 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240227 Medium parameters used:  $f=707.500$  MHz;  $\sigma=0.877$  S/m;  $\epsilon_r=42.1$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.67, 10.67, 10.67); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (90.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.411 W/kg; SAR (10g) = 0.273 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.418 W/kg; SAR (8g) = 0.301 W/kg; SAR (10g) = 0.287 W/kg  
Smallest distance from peaks to all points 3 dB below = 15.7 mm  
Ratio of SAR at M2 to SAR at M1 = 88.7 %

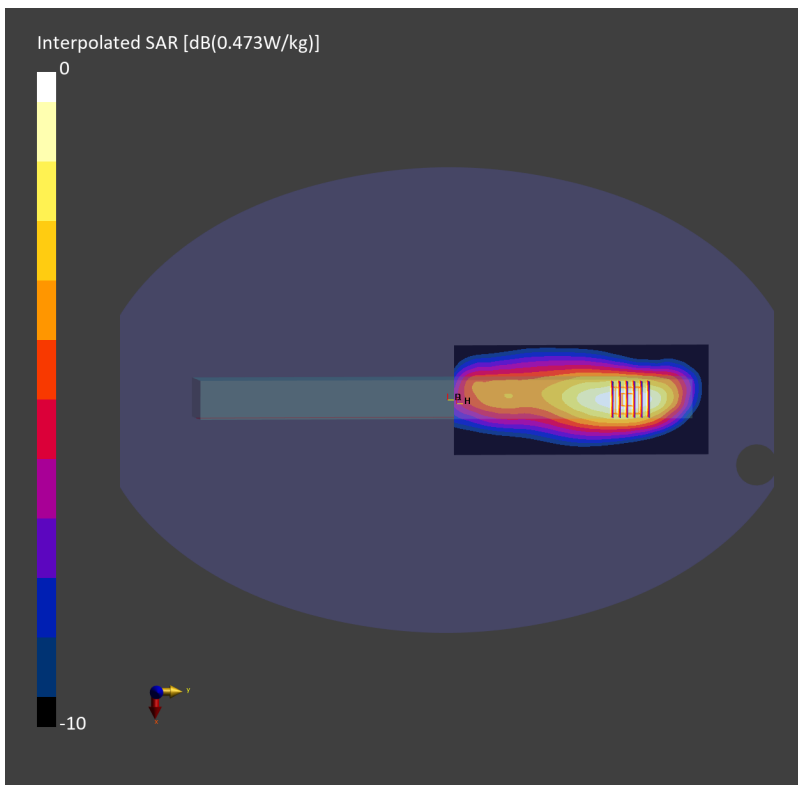

## #08\_LTE Band 13\_10M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch23230


Communication System: LTE-FDD; Frequency: 782.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240227 Medium parameters used:  $f=782.000$  MHz;  $\sigma=0.902$  S/m;  $\epsilon_r=41.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.67, 10.67, 10.67); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.269 W/kg; SAR (10g) = 0.181 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.275 W/kg; SAR (8g) = 0.193 W/kg; SAR (10g) = 0.183 W/kg  
Smallest distance from peaks to all points 3 dB below = > 15.0 mm  
Ratio of SAR at M2 to SAR at M1 = 85.4 %

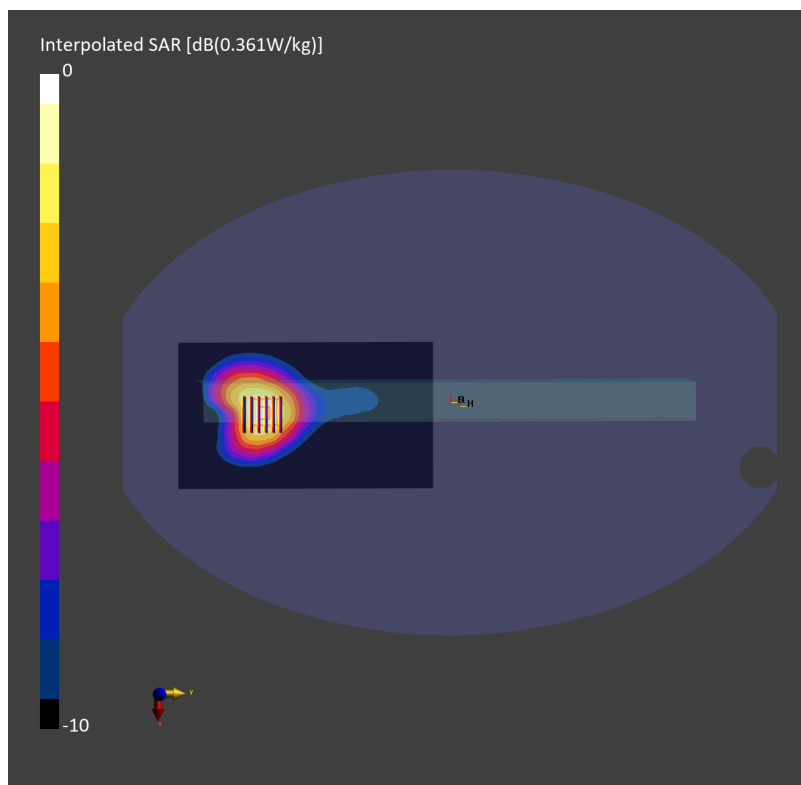



### #09\_LTE Band 25\_20M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch26340


Communication System: LTE-FDD ; Frequency: 1880.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240228 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.42$  S/m;  $\epsilon_r=39.2$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.42, 8.42, 8.42); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.303 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.524 W/kg; SAR (8g) = 0.346 W/kg; SAR (10g) = 0.324 W/kg  
Smallest distance from peaks to all points 3 dB below = 15.1 mm  
Ratio of SAR at M2 to SAR at M1 = 84.9 %

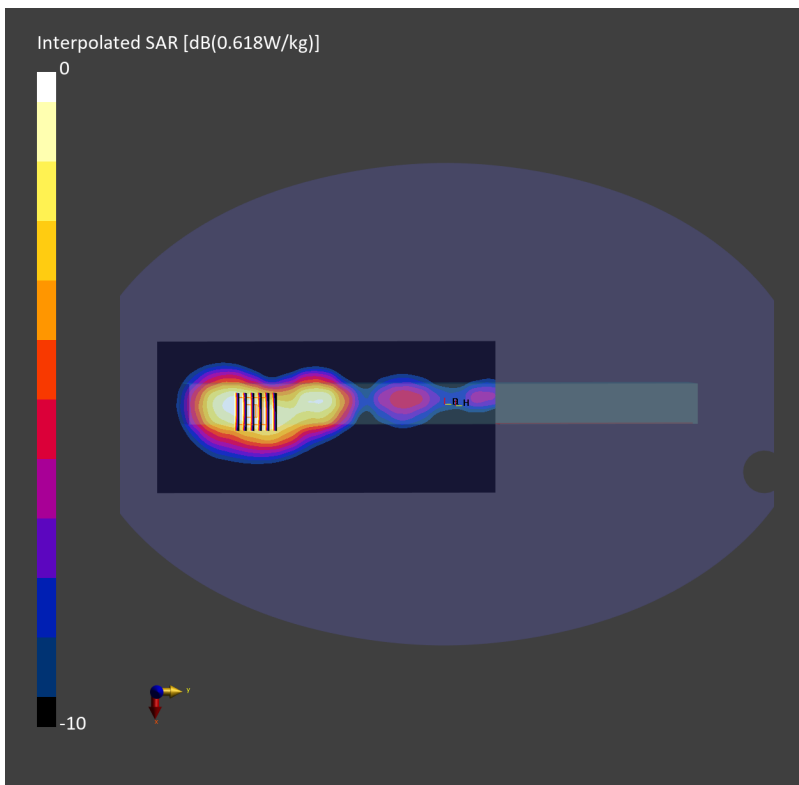

## #10\_LTE Band 26\_15M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch26865


Communication System: LTE-FDD; Frequency: 831.500 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_240227 Medium parameters used:  $f=831.500$  MHz;  $\sigma=0.921$  S/m;  $\epsilon_r=41.5$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.32, 10.32, 10.32); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.604 W/kg; SAR (10g) = 0.393 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.624 W/kg; SAR (8g) = 0.429 W/kg; SAR (10g) = 0.405 W/kg  
Smallest distance from peaks to all points 3 dB below = 14.5 mm  
Ratio of SAR at M2 to SAR at M1 = 86.6 %

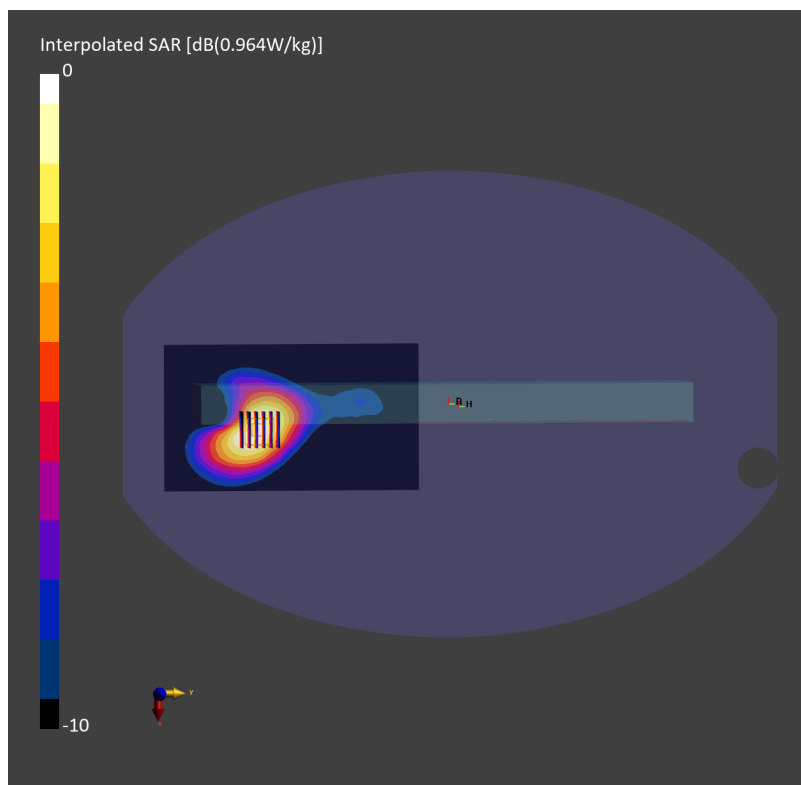

## #11\_LTE Band 66\_20M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch132572


Communication System: LTE-FDD ; Frequency: 1770.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240228 Medium parameters used:  $f=1770.000$  MHz;  $\sigma=1.39$  S/m;  $\epsilon_r=40.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.9, 8.9, 8.9); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.411 W/kg; SAR (10g) = 0.253 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.431 W/kg; SAR (8g) = 0.288 W/kg; SAR (10g) = 0.271 W/kg  
Smallest distance from peaks to all points 3 dB below = > 15.0 mm  
Ratio of SAR at M2 to SAR at M1 = 84.4 %

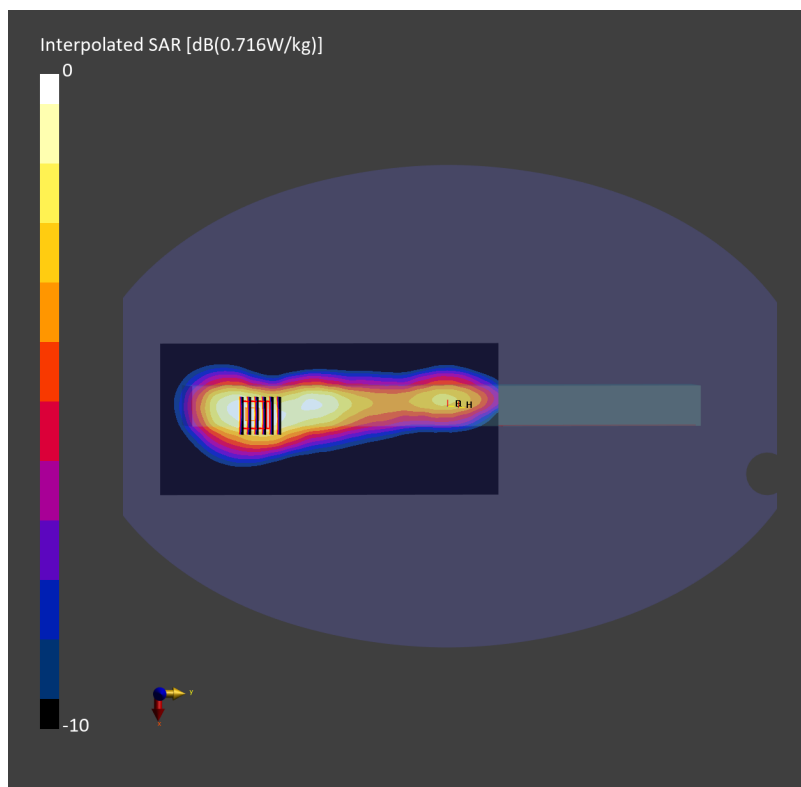

## #12\_LTE Band 71\_20M\_QPSK\_1\_0\_Top Side\_8mm\_Ch133297


Communication System: LTE-FDD ; Frequency: 680.500 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240227 Medium parameters used:  $f=680.500$  MHz;  $\sigma=0.867$  S/m;  $\epsilon_r=42.2$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.67, 10.67, 10.67); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (90.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.286 W/kg; SAR (10g) = 0.189 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.292 W/kg; SAR (8g) = 0.210 W/kg; SAR (10g) = 0.200 W/kg  
Smallest distance from peaks to all points 3 dB below = 14.4 mm  
Ratio of SAR at M2 to SAR at M1 = 87.9 %

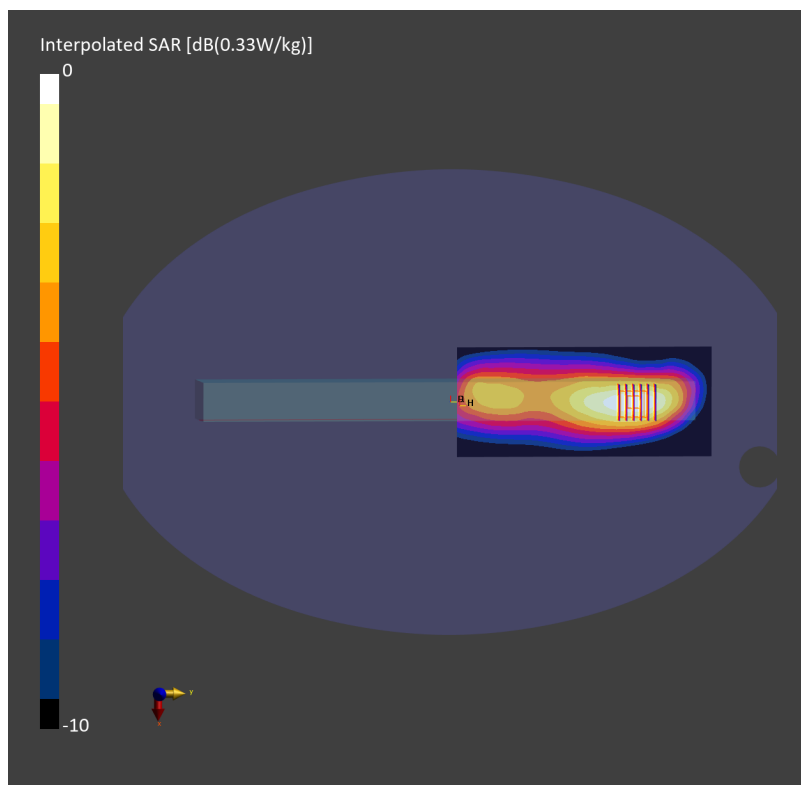

### #13\_LTE Band 41\_20M\_QPSK\_1\_0\_Bottom Side\_8mm\_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_240226 Medium parameters used:  $f=2680.000$  MHz;  $\sigma=2.09$  S/m;  $\epsilon_r=39.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.87, 7.87, 7.87); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2024-01-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

**Area Scan (100.0 mm x 180.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.441 W/kg; SAR (10g) = 0.229 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.03 dB  
SAR (1g) = 0.412 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.231 W/kg  
Smallest distance from peaks to all points 3 dB below = 13.0 mm  
Ratio of SAR at M2 to SAR at M1 = 80.1 %

