

FCC Radio Test Report

FCC ID: XMR2020EM160RGL2

Report No. : BTL-FCCP-6-2311T077
Equipment : LTE-A Cat 16 M.2 Module
Model Name : EM160R-GL
Brand Name : Quectel
Applicant : Quectel Wireless Solutions Company Limited
Address : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

Radio Function : LTE Band 48

FCC Rule Part(s) : FCC CFR Title 47, Part 96

Date of Receipt : 2023/12/5
Date of Test : 2023/12/25 ~ 2024/1/12
Issued Date : 2024/1/30

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Jerry Chuang, Supervisor

Approved by : 
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	REFERENCE TEST GUIDANCE	6
1.2	TEST FACILITY	6
1.3	MEASUREMENT UNCERTAINTY	6
1.4	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	8
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4	SUPPORT UNITS	9
3	EFFECTIVE ISOTROPIC RADIATED POWER MEASUREMENT	10
3.1	LIMIT	10
3.2	TEST PROCEDURE	10
3.3	DEVIATION FROM TEST STANDARD	10
3.4	TEST SETUP	10
3.5	EUT OPERATING CONDITIONS	10
3.6	TEST RESULT	10
4	RADIATED SPURIOUS EMISSIONS MEASUREMENT	11
4.1	LIMIT	11
4.2	TEST PROCEDURE	11
4.3	DEVIATION FROM TEST STANDARD	11
4.4	TEST SETUP	12
4.5	EUT OPERATING CONDITIONS	12
4.6	TEST RESULT	12
5	LIST OF MEASURING EQUIPMENTS	13
6	EUT TEST PHOTO	14
7	EUT PHOTOS	14
APPENDIX A	EQUIVALENT ISOTROPIC RADIATED POWER	15
APPENDIX B	RADIATED SPURIOUS EMISSIONS	20

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-6-2311T077	R00	Original Report.	2024/1/30	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
2.1046 96.41	Effective Isotropic Radiated Power	APPENDIX A	Pass	-----
2.1053 96.41	Radiated Spurious Emissions	APPENDIX B	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCCID: XMR2020EM160RGL2) to be incorporated to the host device (Model number: TP00157A), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 REFERENCE TEST GUIDANCE

ANSI C63.26-2015
 ANSI/TIA-603-E-2016
 FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.2 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
 (FCC DN: TW0659)

C05 SR10 SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
 (FCC DN: TW0659)

C06 CB21 CB22

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.4 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
Effective Isotropic Radiated Power	23.2 °C, 45 %	AC 120V	Jerry Chuang
Radiated Spurious Emissions	Refer to data	AC 120V	Kevin Zhen

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	LTE-A Cat 16 M.2 Module				
Model Name	EM160R-GL				
Brand Name	Quectel				
Model Difference	N/A				
Power Source	Supplied from host system.				
Power Rating	3.1 ~4.1Vdc, typical 3.7Vdc				
Host device information					
Equipment	Notebook Computer				
Model Name	TP00157A				
Brand Name	Lenovo				
Model Difference	N/A				
Power Source	DC voltage supplied from External Power Supply. (Lenovo/ ADL135YSDC3A)				
Power Rating	I/P: 100-240V~ 2.5A 50-60Hz O/P: 20.0VDC 6.75A 135.0W / 19.95VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W				
WIFI+BT Module	Intel® Wi-Fi 6E AX211 / AX211D2W				
WWAN Module	Quectel / EM160R-GL				
Operation Frequency	Band	UL Frequency (MHz)	DL Frequency (MHz)		
	LTE 48	3550 ~ 3700	-		
Maximum EIRP	Band	BW (MHz)	Mode	Power (W)	
			5	QPSK	0.172
				16QAM	0.147
				64QAM	0.145
			10	QPSK	0.174
				16QAM	0.149
				64QAM	0.147
			15	QPSK	0.176
				16QAM	0.151
				64QAM	0.150
			20	QPSK	0.179
				16QAM	0.153
64QAM	0.151				
Test Model	EM160R-GL				
Sample Status	Engineering Sample				
EUT Modification(s)	N/A				

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	Luxshare-ICT	DC330023020	PIFA	I-PEX	0.60	LTE Band 48
Aux	Luxshare-ICT	DC330023030	PIFA	I-PEX	-	RX only

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	SPEEDWIRE	DC330023120	PIFA	I-PEX	-3.11	LTE Band 48
Aux	SPEEDWIRE	DC330023130	PIFA	I-PEX	-	RX only

(3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES


Test Items	Band	Test Mode	Note
Effective Isotropic Radiated Power	LTE Band 48	Refer to APPENDIX A	-
Radiated Spurious Emissions (Below 1G)	LTE Band 48	TX Mode (CH 55990)	-
Radiated Spurious Emissions (Above 1G)	LTE Band 48	TX Mode (CH 55340/55990/56640)	-
Radiated Spurious Emissions (Above 18G)	LTE Band 48	TX Mode (CH 55990)	-

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (2) For Radiated Spurious Emissions both QPSK, 16QAM and 64QAM are evaluated, but only the worst case (QPSK) is recorded.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

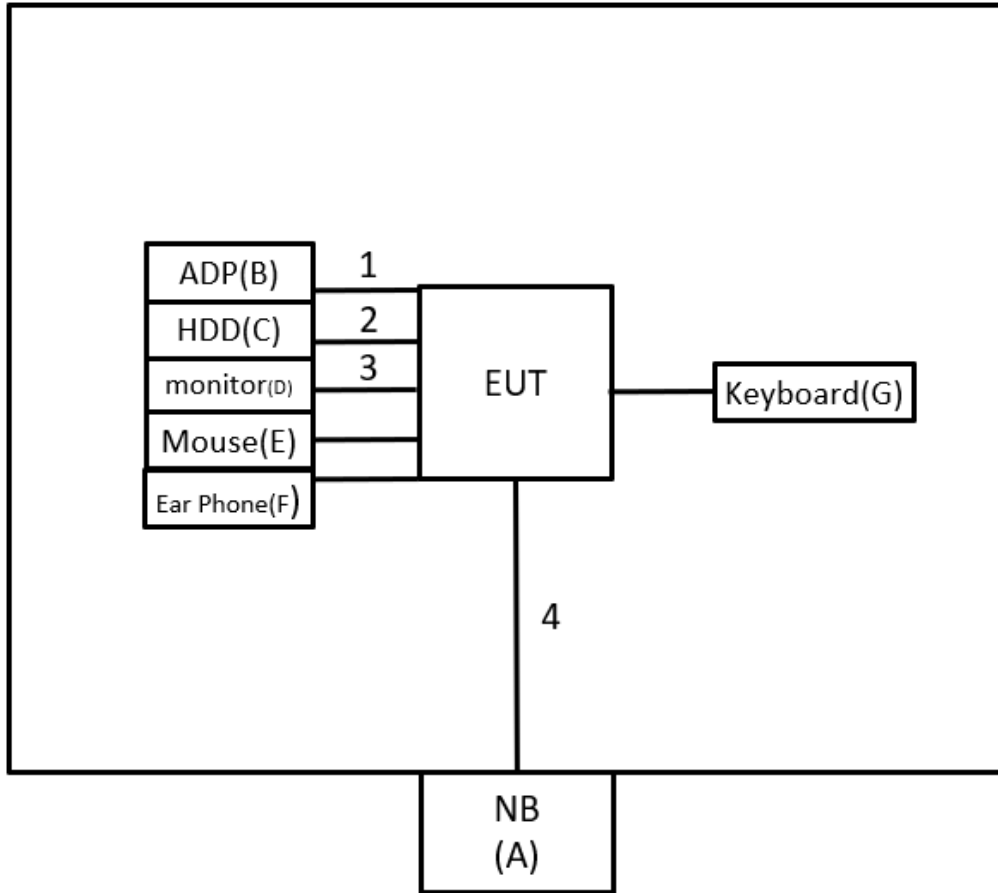

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	HP	TPN-1119	N/A	Furnished by test lab.
B	ADP	Lenovo	ADL135YSDC3 A	N/A	Supplied by test requester.
C	USB 2.5" HDD	TOSIBA	XS700	483B60M9KQSS	Furnished by test lab.
D	27" 4K Monitor	DELL	U2720Q	CN-083VF-WSL0 0-0B7-332L	Furnished by test lab.
E	Mouse	Lenovo	SM-8823	N/A	Furnished by test lab.
F	Ear Phone	HTC	N/A	N/A	Furnished by test lab.
G	Keyboard	Bloody	KB-8	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.9m	Power Cord	Supplied by test requester.
2	N/A	N/A	1m	Type C to USB Cable	Furnished by test lab.
3	N/A	N/A	1.8m	HDMI	Furnished by test lab.
4	N/A	N/A	10m	RJ45 Cable	Furnished by test lab.

3 EFFECTIVE ISOTROPIC RADIATED POWER MEASUREMENT

3.1 LIMIT

EIRP for CBRS equipment as below table:

Device	Maximum EIRP (dBm/10 MHz)
End User Device	23
Category A CBSD	30
Category B CBSD	47

3.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi.}$
- e. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

Conducted Measurement:



3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

- (1) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBm)		Correct Factor (dB/m)		Measurement Value (dBm)
-50.43	+	-2.11	=	-52.54

Measurement Value (dBm)		Limit Value (dBm)		Margin Level (dB)
-52.54	-	-13	=	-39.54

4.2 TEST PROCEDURE


The testing follows FCC KDB 971168 v03r01 Section 6.2.

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}$.
- e. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

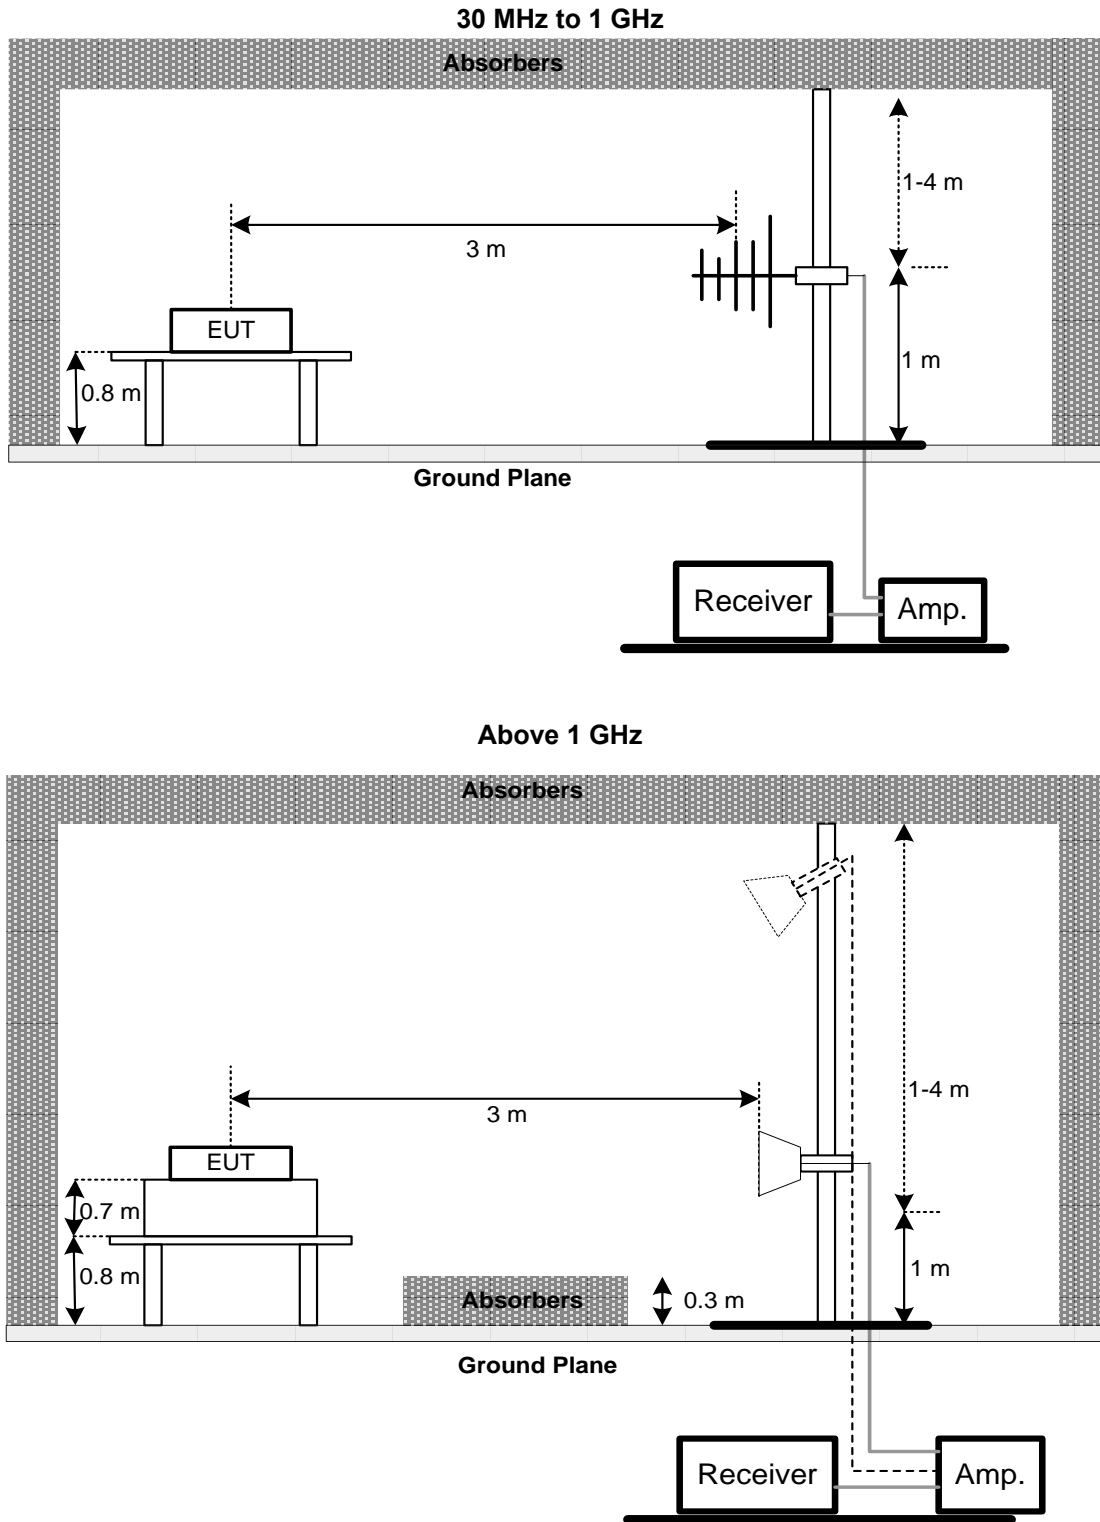

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B.

5 LIST OF MEASURING EQUIPMENTS

Effective Isotropic Radiated Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2023/7/4	2024/7/3
2	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2023/11/22	2024/11/21

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2023/9/6	2024/9/5
2	Preamplifier	EMCI	EMC118A45SE	980819	2023/3/7	2024/3/6
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2023/9/21	2024/9/20
4	Test Cable	EMCI	EMC104-SM-1000	180809	2023/7/10	2024/7/9
5	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2023/3/14	2024/3/13
6	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2023/3/14	2024/3/13
7	EXA Signal Analyzer	keysight	N9020B	MY57120120	2023/2/24	2024/2/23
8	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2023/5/12	2024/5/11
9	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2023/5/12	2024/5/11
10	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2023/5/9	2024/5/8
11	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2023/5/9	2024/5/8
12	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2023/3/14	2024/3/13
13	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2023/3/14	2024/3/13
14	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A
15	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2023/7/4	2024/7/3
16	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2023/11/22	2024/11/21

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2311T077-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2311T077-1 (APPENDIX-EUT PHOTOS).

APPENDIX A EQUIVALENT ISOTROPIC RADIATED POWER

LTE Band 48 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
48	5	55265	3552.5	QPSK	1	0	0	21.59	22.19	0.166
					1	12	0	21.73	22.33	0.171
					1	24	0	21.69	22.29	0.169
					25	0	1	20.70	21.30	0.135
				16QAM	1	0	1	20.94	21.54	0.143
					1	12	1	20.97	21.57	0.144
					1	24	1	21.08	21.68	0.147
					25	0	2	19.69	20.29	0.107
				64QAM	1	0	1	20.77	21.37	0.137
					1	12	1	20.93	21.53	0.142
					1	24	1	21.02	21.62	0.145
					25	0	2	19.63	20.23	0.105
		55990	3625.0	QPSK	1	0	0	21.75	22.35	0.172
					1	12	0	21.68	22.28	0.169
					1	24	0	21.51	22.11	0.163
					25	0	1	20.49	21.09	0.129
				16QAM	1	0	1	20.93	21.53	0.142
					1	12	1	20.88	21.48	0.141
					1	24	1	20.80	21.40	0.138
					25	0	2	19.57	20.17	0.104
				64QAM	1	0	1	20.95	21.55	0.143
					1	12	1	20.81	21.41	0.138
					1	24	1	20.64	21.24	0.133
					25	0	2	19.65	20.25	0.106
		56715	3697.5	QPSK	1	0	0	21.28	21.88	0.154
					1	12	0	21.42	22.02	0.159
					1	24	0	21.40	22.00	0.158
					25	0	1	20.35	20.95	0.124
				16QAM	1	0	1	20.57	21.17	0.131
					1	12	1	20.71	21.31	0.135
					1	24	1	20.81	21.41	0.138
					25	0	2	19.38	19.98	0.100
				64QAM	1	0	1	20.49	21.09	0.129
					1	12	1	20.55	21.15	0.130
					1	24	1	20.73	21.33	0.136
					25	0	2	19.37	19.97	0.099

NOTE:

- (1) EIRP = Average power + Antenna gain.
- (2) ERP = EIRP - 2.15.
- (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
48	10	55290	3555.0	QPSK	1	0	0	21.64	22.24	0.167
					1	24	0	21.80	22.40	0.174
					1	49	0	21.76	22.36	0.172
					50	0	1	20.76	21.36	0.137
				16QAM	1	0	1	21.00	21.60	0.145
					1	24	1	21.03	21.63	0.146
					1	49	1	21.13	21.73	0.149
					50	0	2	19.76	20.36	0.109
				64QAM	1	0	1	20.84	21.44	0.139
					1	24	1	20.99	21.59	0.144
					1	49	1	21.07	21.67	0.147
					50	0	2	19.71	20.31	0.107
		55990	3625.0	QPSK	1	0	0	21.80	22.40	0.174
					1	24	0	21.72	22.32	0.171
					1	49	0	21.58	22.18	0.165
					50	0	1	20.55	21.15	0.130
				16QAM	1	0	1	21.01	21.61	0.145
					1	24	1	20.92	21.52	0.142
					1	49	1	20.87	21.47	0.140
					50	0	2	19.64	20.24	0.106
				64QAM	1	0	1	21.00	21.60	0.145
					1	24	1	20.89	21.49	0.141
					1	49	1	20.71	21.31	0.135
					50	0	2	19.72	20.32	0.108
		56690	3695.0	QPSK	1	0	0	21.34	21.94	0.156
					1	24	0	21.47	22.07	0.161
					1	49	0	21.47	22.07	0.161
					50	0	1	20.42	21.02	0.126
				16QAM	1	0	1	20.63	21.23	0.133
					1	24	1	20.79	21.39	0.138
					1	49	1	20.86	21.46	0.140
					50	0	2	19.46	20.06	0.101
				64QAM	1	0	1	20.54	21.14	0.130
					1	24	1	20.62	21.22	0.132
					1	49	1	20.80	21.40	0.138
					50	0	2	19.42	20.02	0.100

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

 (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)			
48	15	55315	3557.5	QPSK	1	0	0	21.70	22.30	0.170			
					1	37	0	21.86	22.46	0.176			
					1	74	0	21.83	22.43	0.175			
				16QAM	75	0	1	20.82	21.42	0.139			
					1	0	1	21.05	21.65	0.146			
					1	37	1	21.11	21.71	0.148			
				64QAM	1	74	1	21.19	21.79	0.151			
					75	0	2	19.82	20.42	0.110			
					1	0	1	20.91	21.51	0.142			
				55990	3625.0	QPSK	3625.0	1	0	0	21.86	22.46	0.176
								1	37	0	21.79	22.39	0.173
								1	74	0	21.65	22.25	0.168
		16QAM	75			0	1	20.62	21.22	0.132			
			1			0	1	21.06	21.66	0.147			
			1			37	1	20.98	21.58	0.144			
		64QAM	1			74	1	20.93	21.53	0.142			
			75			0	2	19.71	20.31	0.107			
			1			0	1	21.05	21.65	0.146			
		56665	3692.5			QPSK	3692.5	1	37	1	20.94	21.54	0.143
								1	74	1	20.77	21.37	0.137
								75	0	2	19.77	20.37	0.109
				16QAM	1	0	0	21.40	22.00	0.158			
					1	37	0	21.55	22.15	0.164			
					1	74	0	21.53	22.13	0.163			
				64QAM	75	0	1	20.47	21.07	0.128			
					1	0	1	20.69	21.29	0.135			
					1	37	1	20.84	21.44	0.139			
				64QAM	1	74	1	20.91	21.51	0.142			
					75	0	2	19.54	20.14	0.103			
					1	0	1	20.62	21.22	0.132			
		1	37		1	20.69	21.29	0.135					
		1	74		1	20.84	21.44	0.139					
		75	0		2	19.49	20.09	0.102					

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

 (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)			
48	20	55340	3560.0	QPSK	1	0	0	21.74	22.34	0.171			
					1	49	0	21.92	22.52	0.179			
					1	99	0	21.91	22.51	0.178			
				16QAM	100	0	1	20.86	21.46	0.140			
					1	0	1	21.11	21.71	0.148			
					1	49	1	21.18	21.78	0.151			
				64QAM	1	99	1	21.26	21.86	0.153			
					100	0	2	19.89	20.49	0.112			
					1	0	1	20.97	21.57	0.144			
				55990	3625.0	QPSK	3625.0	1	0	0	21.92	22.52	0.179
								1	49	0	21.86	22.46	0.176
								1	99	0	21.71	22.31	0.170
		16QAM	100			0	1	20.69	21.29	0.135			
			1			0	1	21.10	21.70	0.148			
			1			49	1	21.03	21.63	0.146			
		64QAM	1			99	1	20.99	21.59	0.144			
			100			0	2	19.76	20.36	0.109			
			1			0	1	21.11	21.71	0.148			
		56640	3690.0			QPSK	3690.0	1	49	0	21.59	22.19	0.166
								1	99	0	21.58	22.18	0.165
								100	0	1	20.54	21.14	0.130
				16QAM	1	0	1	20.73	21.33	0.136			
					1	49	1	20.88	21.48	0.141			
					1	99	1	20.97	21.57	0.144			
				64QAM	100	0	2	19.61	20.21	0.105			
					1	0	1	20.69	21.29	0.135			
					1	49	1	20.76	21.36	0.137			
						1	99	1	20.90	21.50	0.141		
						100	0	2	19.57	20.17	0.104		

NOTE:


(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

 (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

APPENDIX B RADIATED SPURIOUS EMISSIONS

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Vertical
Temp	22°C	Hum.	58%

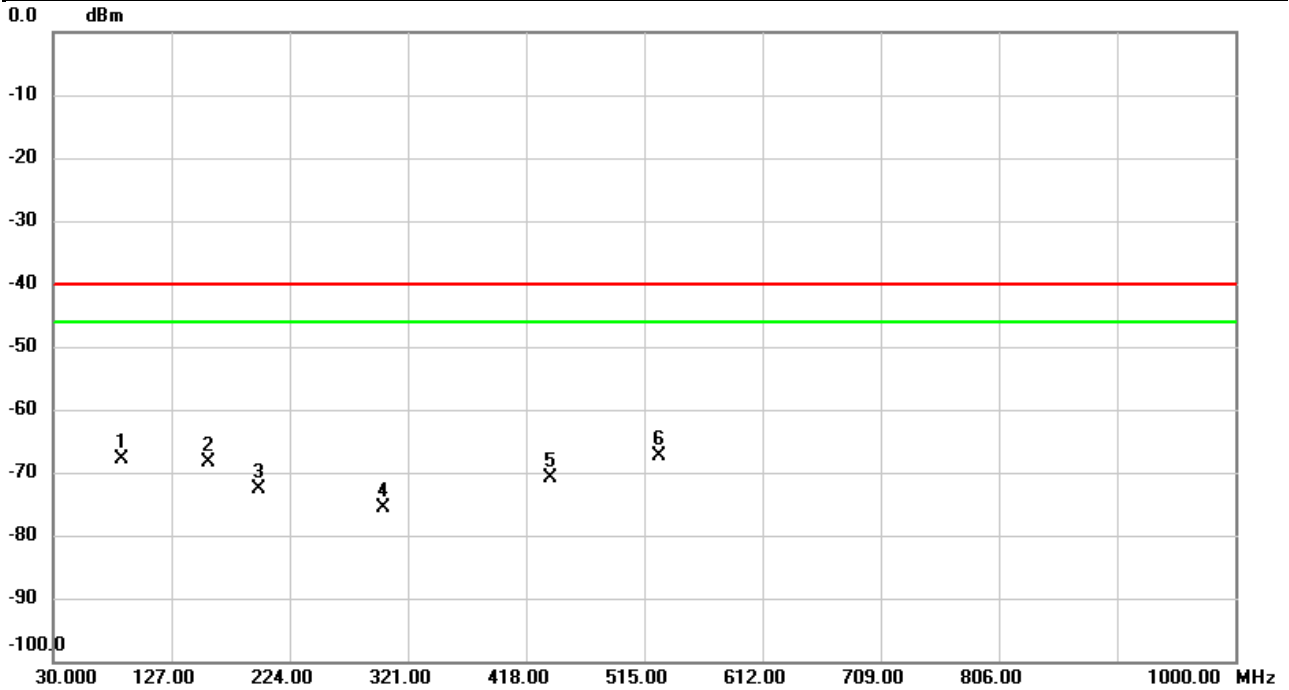


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		86.4540	-62.05	-5.75	-67.80	-40.00	-27.80	peak	
2		158.0077	-66.19	-2.26	-68.45	-40.00	-28.45	peak	
3		198.3920	-69.30	-3.20	-72.50	-40.00	-32.50	peak	
4		300.7916	-72.39	-3.29	-75.68	-40.00	-35.68	peak	
5		437.4323	-69.38	-1.60	-70.98	-40.00	-30.98	peak	
6	*	527.6100	-68.97	1.54	-67.43	-40.00	-27.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Horizontal
Temp	22°C	Hum.	58%

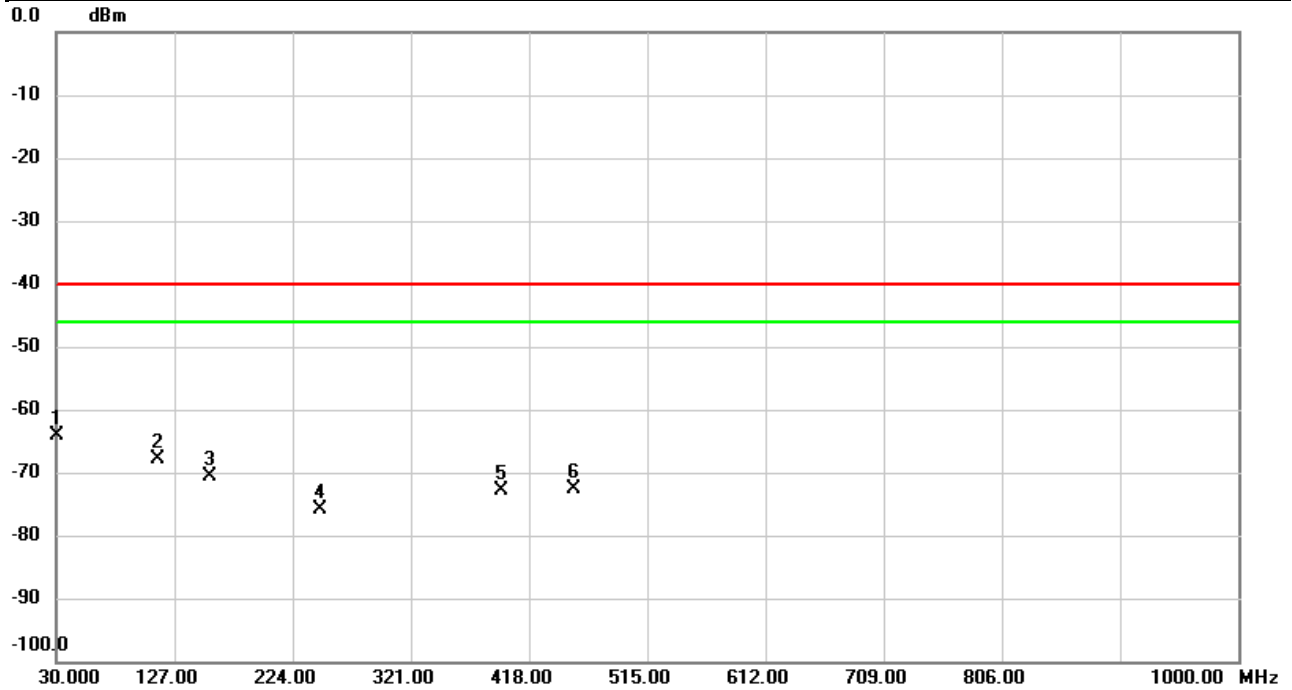


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	30.0000	-66.87	2.87	-64.00	-40.00	-24.00	peak	
2		113.0320	-59.97	-7.88	-67.85	-40.00	-27.85	peak	
3		155.7120	-64.78	-5.88	-70.66	-40.00	-30.66	peak	
4		246.7627	-67.94	-8.04	-75.98	-40.00	-35.98	peak	
5		394.8817	-70.39	-2.45	-72.84	-40.00	-32.84	peak	
6		454.9247	-70.58	-1.97	-72.55	-40.00	-32.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55340	Polarization	Vertical
Temp	22°C	Hum.	58%

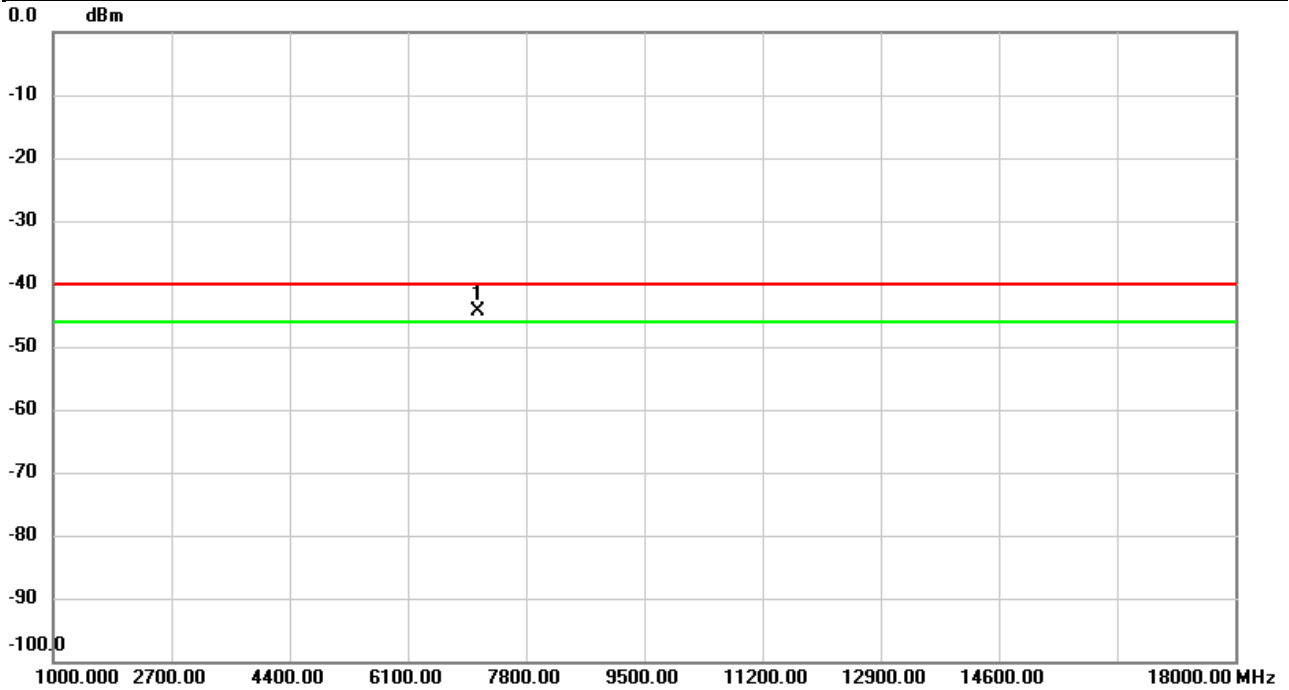


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7100.000	-63.02	18.54	-44.48	-40.00	-4.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55340	Polarization	Horizontal
Temp	22°C	Hum.	58%

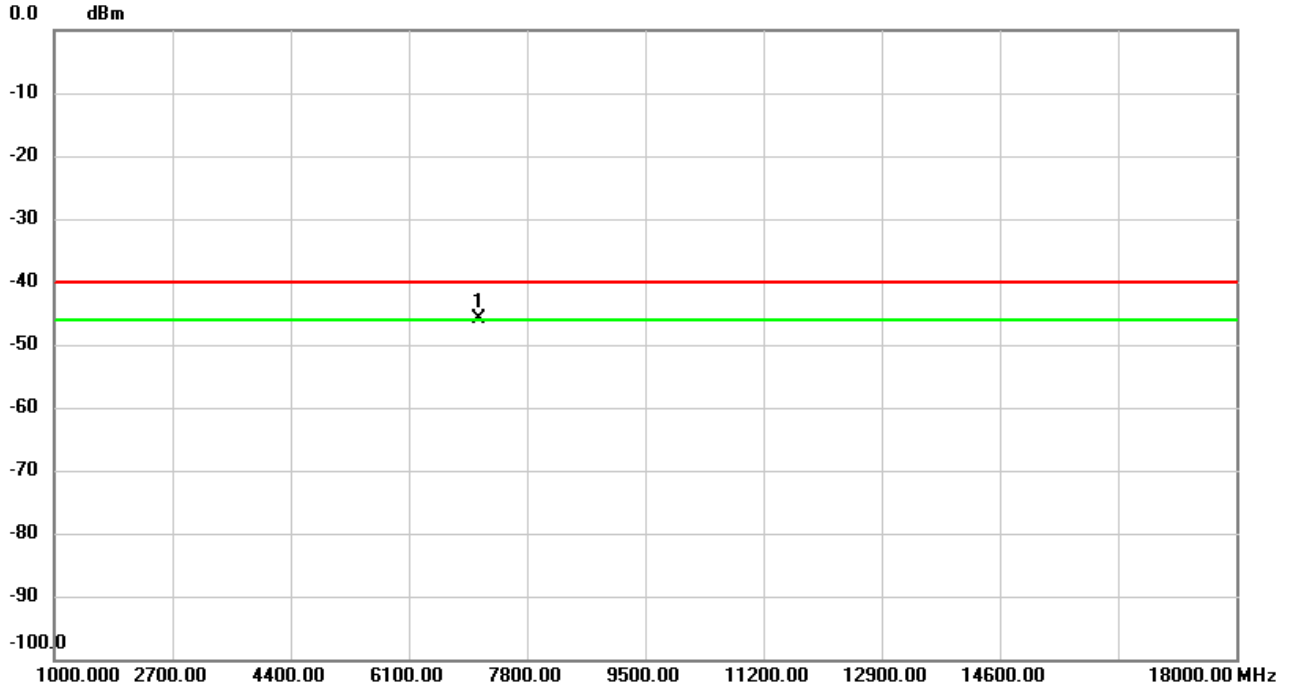


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7100.000	-64.34	18.40	-45.94	-40.00	-5.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Vertical
Temp	22°C	Hum.	58%

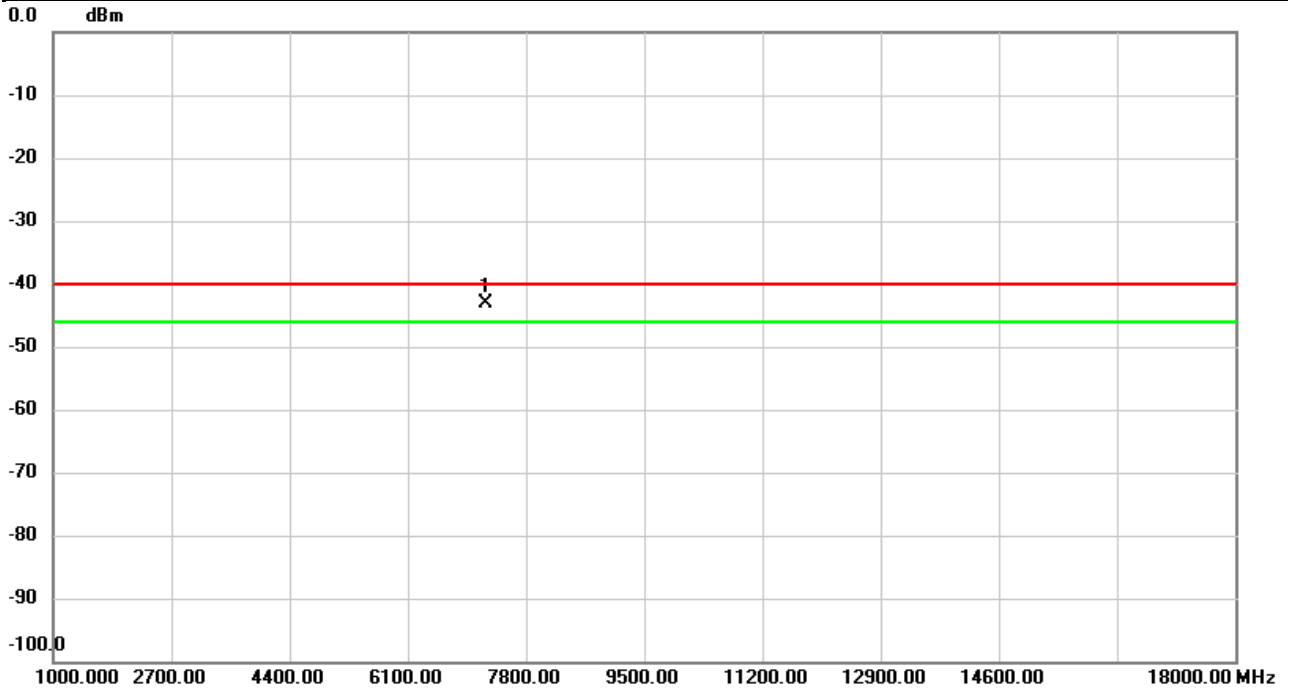


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7232.200	-61.12	17.90	-43.22	-40.00	-3.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Horizontal
Temp	22°C	Hum.	58%

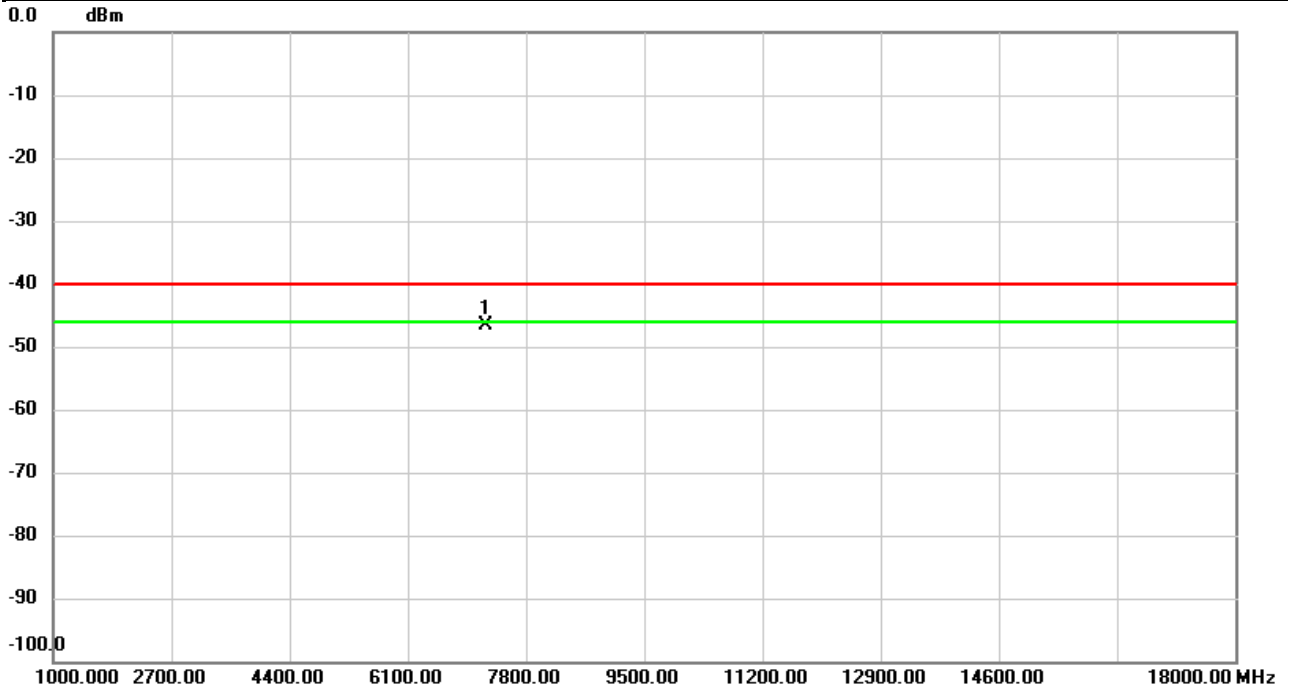


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7230.000	-64.15	17.50	-46.65	-40.00	-6.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH56640	Polarization	Vertical
Temp	22°C	Hum.	58%

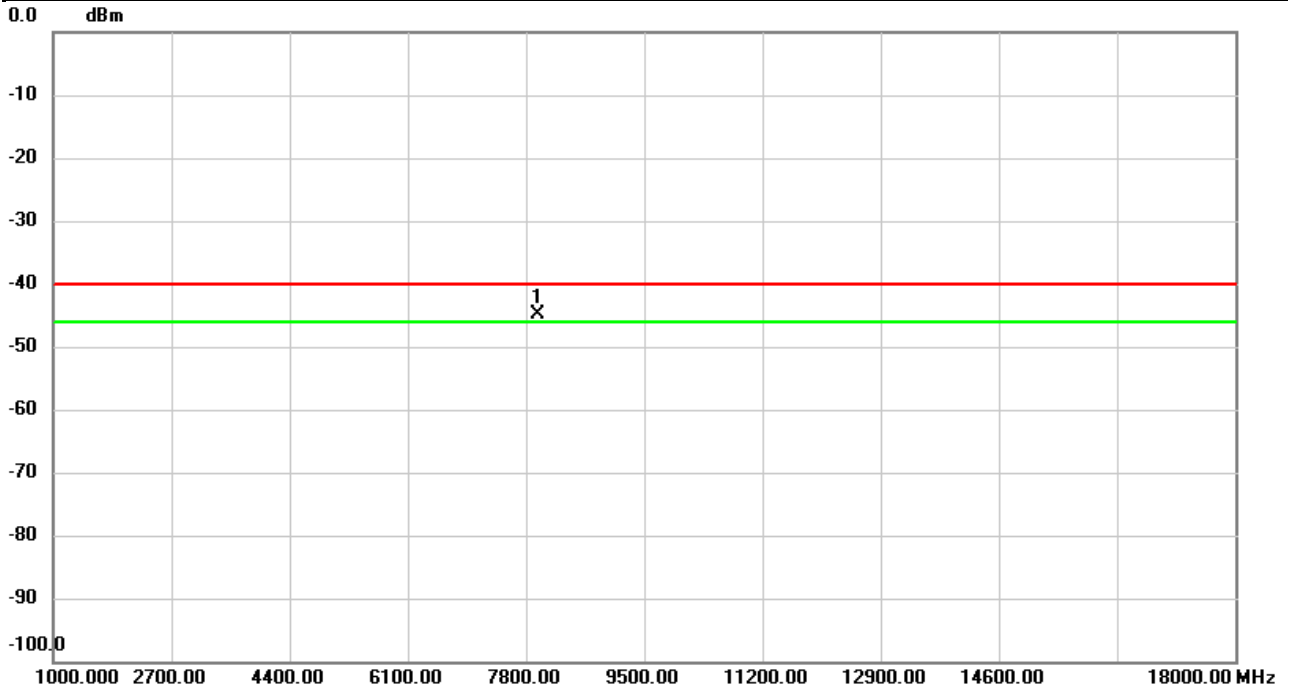


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7960.000	-62.52	17.72	-44.80	-40.00	-4.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH56640	Polarization	Horizontal
Temp	22°C	Hum.	58%

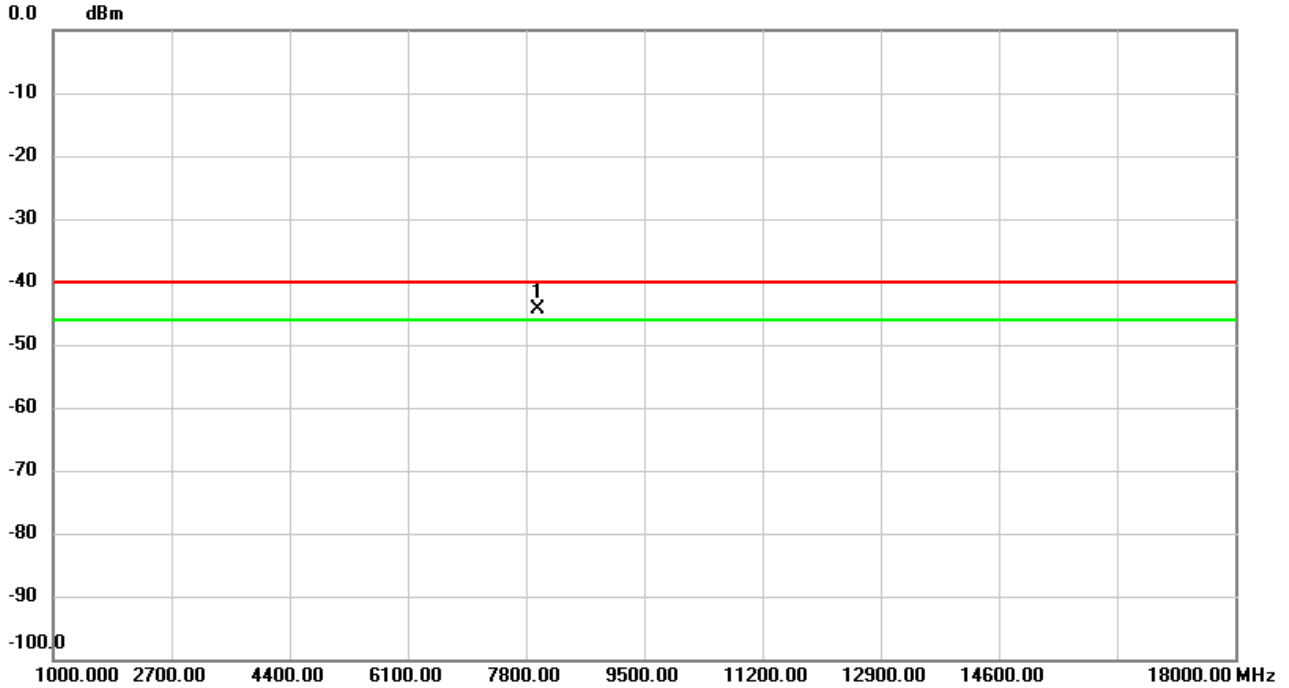


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7960.000	-62.79	18.40	-44.39	-40.00	-4.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Vertical
Temp	22°C	Hum.	58%

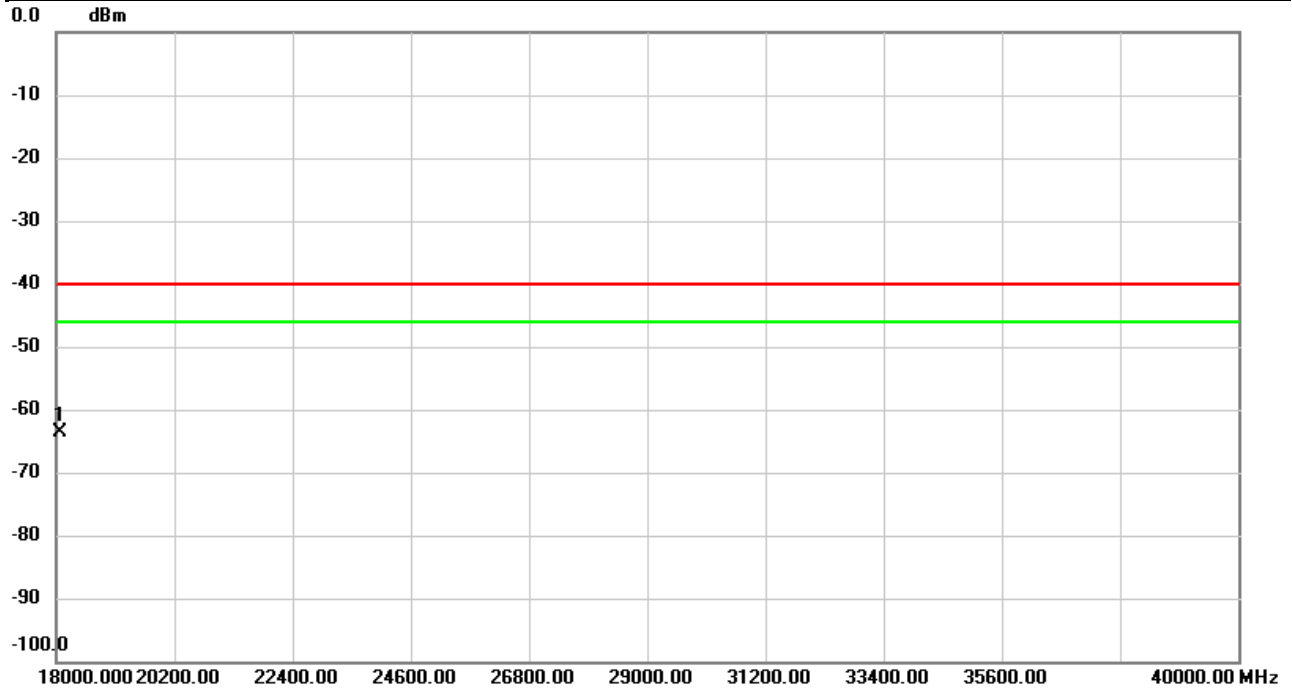

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18075.00	-56.76	-6.86	-63.62	-40.00	-23.62	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 48	Test Date	2024/1/8
Test Channel	CH55990	Polarization	Horizontal
Temp	22°C	Hum.	58%

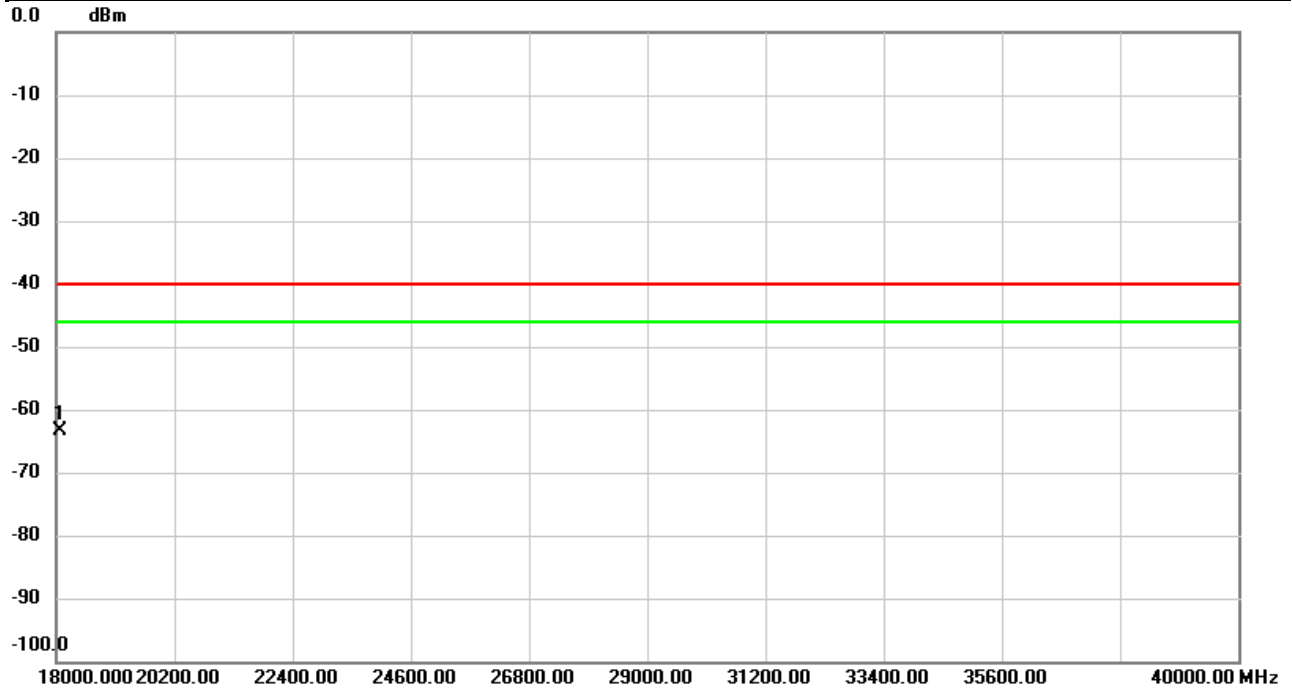

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18075.00	-56.39	-6.86	-63.25	-40.00	-23.25	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

End of Test Report