

MEASUREMENT REPORT

FCC PART 22 & 24 & 27

FCC ID: XMR2021BC660KGL

Application: Quectel Wireless Solutions Company Limited

Application Type: Certification

Product: NB-IoT Module

Model No.: BC660K-GL

Brand Name: Quectel

FCC Rule Part(s): Part 2, 22 (H), 24 (E), 27

Test Procedure(s): ANSI C63.26-2015

Test Date: December 08, 2020 ~ January 11, 2021

Reviewed By:

Sunny Sun

Sunny Sun

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

| Report No. | Version | Description | Issue Date | Note |
|---------------|---------|----------------|------------|-------|
| 2012RSU022-U5 | Rev. 01 | Initial Report | 04-06-2021 | Valid |
| | | | | |

Note: This report is prepared for FCC Class II permissive supplement to MRT Original report No. 2012RSU022-U1, to disable the Band 14 via software.

CONTENTS

| Description | Page |
|--|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1. Applicant | 5 |
| 1.2. Manufacturer | 5 |
| 1.3. Testing Facility..... | 5 |
| 2. PRODUCT INFORMATION | 6 |
| 2.1. Equipment Description | 6 |
| 2.2. Product Specification Subjective to this Report | 6 |
| 2.3. Description of Available Antennas..... | 7 |
| 2.4. Device Capabilities | 8 |
| 2.5. EMI Suppression Device(s)/Modifications..... | 8 |
| 2.6. Maximum Power, Frequency Tolerance, and Emission Designator | 9 |
| 2.7. Configuration of Tested System | 10 |
| 2.8. Test Environment Condition..... | 10 |
| 3. TEST EQUIPMENT CALIBRATION DATE..... | 11 |
| 4. MEASUREMENT UNCERTAINTY | 13 |
| 5. TEST RESULT | 14 |
| 5.1. Summary | 14 |
| 5.2. Occupied Bandwidth | 15 |
| 5.2.1. Test Limit | 15 |
| 5.2.2. Test Procedure | 15 |
| 5.2.3. Test Setting..... | 15 |
| 5.2.4. Test Setup | 15 |
| 5.2.5. Test Result..... | 16 |
| 5.3. Frequency Stability Measurement | 21 |
| 5.3.1. Test Limit | 21 |
| 5.3.2. Test Procedures Used | 21 |
| 5.3.3. Test Setting..... | 21 |
| 5.3.4. Test Setup | 22 |
| 5.3.5. Test Result..... | 23 |
| 5.4. Equivalent Isotropically Radiated Power Measurement | 28 |
| 5.4.1. Test Limit | 28 |
| 5.4.2. Test Procedures Used | 28 |
| 5.4.3. Test Setting..... | 28 |
| 5.4.4. Test Setup | 29 |

| | | |
|-----------|--|-----------|
| 5.4.5. | Test Result..... | 30 |
| 5.5. | Band Edge Measurement..... | 35 |
| 5.5.1. | Test Limit..... | 35 |
| 5.5.2. | Test Procedure Used..... | 35 |
| 5.5.3. | Test Setting..... | 35 |
| 5.5.4. | Test Setup..... | 36 |
| 5.5.5. | Test Result..... | 37 |
| 5.6. | Peak to Average Ratio..... | 51 |
| 5.6.1. | Test Limit..... | 51 |
| 5.6.2. | Test Procedure Used..... | 51 |
| 5.6.3. | Test Setting..... | 51 |
| 5.6.4. | Test Setup..... | 51 |
| 5.6.5. | Test Result..... | 52 |
| 5.7. | Conducted Spurious Emissions..... | 57 |
| 5.7.1. | Test Limit..... | 57 |
| 5.7.2. | Test Procedure Used..... | 57 |
| 5.7.3. | Test Setting..... | 57 |
| 5.7.4. | Test Setup..... | 58 |
| 5.7.5. | Test Result..... | 59 |
| 5.8. | Radiated Spurious Emissions Measurements..... | 79 |
| 5.8.1. | Test Limit..... | 79 |
| 5.8.2. | Test Procedure Used..... | 79 |
| 5.8.3. | Test Setting..... | 79 |
| 5.8.4. | Test Setup..... | 80 |
| 5.8.5. | Test Result..... | 81 |
| 6. | CONCLUSION..... | 86 |
| | Appendix A - Test Setup Photograph..... | 87 |
| | Appendix B - EUT Photograph..... | 88 |

2. PRODUCT INFORMATION

2.1. Equipment Description

| | |
|-----------------------------|---|
| Product Name: | NB-IoT Module |
| Model No.: | BC660K-GL |
| Brand Name: | Quectel |
| Hardware Version: | R1.0 |
| Software Version: | BC660KGLAAR01A03 |
| IMEI: | 866207050001894; 866207050001886 |
| Operating Temp.: | -35 ~ 75 °C |
| Supply Voltage: | 2.2 ~ 4.3Vdc, typical 3.3Vdc |
| NB-IoT Specification | |
| Single Band: | NB-IoT Band 2, 4, 5, 12, 13, 17, 25, 66, 85 |
| Modulation: | BPSK, QPSK |
| Category: | Release 14 (Cat NB2) |
| Deployment: | Stand-alone |
| Sub-carrier Spacing: | 3.75kHz, 15kHz |

2.2. Product Specification Subjective to this Report

| | |
|-------------------------------------|---|
| FDD T _x Frequency Range: | Band 2: 1850 ~ 1910 MHz; Band 4: 1710 ~ 1755 MHz Band 5: 824 ~ 849 MHz; Band 12: 699 ~ 716 MHz Band 13: 777 ~ 787 MHz; Band 17: 704 ~ 716 MHz Band 25: 1850 ~ 1915 MHz; Band 66: 1710 ~ 1780 MHz Band 85: 698 ~ 716 MHz |
| FDD R _x Frequency Range: | Band 2: 1930 ~ 1990 MHz; Band 4: 2110 ~ 2155 MHz Band 5: 869 ~ 894 MHz; Band 12: 729 ~ 746 MHz Band 13: 746 ~ 756 MHz; Band 17: 734 ~ 746 MHz Band 25: 1930 ~ 1995 MHz; Band 66: 2110 ~ 2180 MHz Band 85: 728 ~ 746 MHz |
| Type of Modulation: | BPSK, QPSK |

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: All product specification presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

2.3. Description of Available Antennas

| Technology | Frequency Range (MHz) | Antenna Type | Max Peak Gain (dBi) |
|----------------|-----------------------|--------------|---------------------|
| NB-IoT Band 2 | 1850 ~ 1910 | Dipole | 1.59 |
| NB-IoT Band 4 | 1710 ~ 1755 | | 2.00 |
| NB-IoT Band 5 | 824 ~ 849 | | 2.53 |
| NB-IoT Band 12 | 699 ~ 716 | | 3.95 |
| NB-IoT Band 13 | 777 ~ 787 | | 4.45 |
| NB-IoT Band 17 | 704 ~ 716 | | 3.95 |
| NB-IoT Band 25 | 1850 ~ 1915 | | 1.59 |
| NB-IoT Band 66 | 1710 ~ 1780 | | 2.00 |
| NB-IoT Band 85 | 698 ~ 716 | | 3.95 |

Note: All the information is provided by the manufacturer.

2.4. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2.5. Device Capabilities

This device contains the following capabilities:

NB-IoT (Band 2, 4, 5, 12, 13, 17, 25, 66, 85)

Band 25 (1850 ~ 1915 MHz) overlaps the entire frequency range of Band 2 (1850 ~ 1910 MHz). Therefore, test data provided in this report covers Band 2 as well as Band 25.

Band 66 (1710 ~ 1780 MHz) overlaps the entire frequency range of Band 4 (1710 ~ 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

Band 85 (698 ~ 716 MHz) overlaps the entire frequency range of Band 12 (699 ~ 716 MHz) and Band 17 (704 ~ 716 MHz). Therefore, test data provided in this report covers Band 12 and Band 17 as well as Band 85.


2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Maximum Power, Frequency Tolerance, and Emission Designator

| NB-IoT Band 2/25 | | BPSK | | | QPSK | | |
|----------------------|-------------|------------|-----------------|---------------|------------|-----------------|---------------|
| BW (kHz) | Feq. (MHz) | Designator | Tolerance (ppm) | Max Power (W) | Designator | Tolerance (ppm) | Max Power (W) |
| 200 | 1850 ~ 1915 | -- | -- | 0.2333 | 177KG7D | 0.0033 | 0.2350 |
| NB-IoT Band 4/66 | | BPSK | | | QPSK | | |
| BW (kHz) | Feq. (MHz) | Designator | Tolerance (ppm) | Max Power (W) | Designator | Tolerance (ppm) | Max Power (W) |
| 200 | 1710 ~ 1780 | -- | -- | 0.2333 | 178KG7D | 0.0036 | 0.2328 |
| NB-IoT Band 5 | | BPSK | | | QPSK | | |
| BW (kHz) | Feq. (MHz) | Designator | Tolerance (ppm) | Max Power (W) | Designator | Tolerance (ppm) | Max Power (W) |
| 200 | 824 ~ 849 | -- | -- | 0.2333 | 178KG7D | 0.0040 | 0.2317 |
| NB-IoT Band 12/17/85 | | BPSK | | | QPSK | | |
| BW (kHz) | Feq. (MHz) | Designator | Tolerance (ppm) | Max Power (W) | Designator | Tolerance (ppm) | Max Power (W) |
| 200 | 698 ~ 716 | -- | -- | 0.2360 | 177KG7D | 0.0049 | 0.2312 |
| NB-IoT Band 13 | | BPSK | | | QPSK | | |
| BW (kHz) | Feq. (MHz) | Designator | Tolerance (ppm) | Max Power (W) | Designator | Tolerance (ppm) | Max Power (W) |
| 200 | 777 ~ 787 | -- | -- | 0.2339 | 177KG7D | 0.0036 | 0.2333 |

2.8. Configuration of Tested System

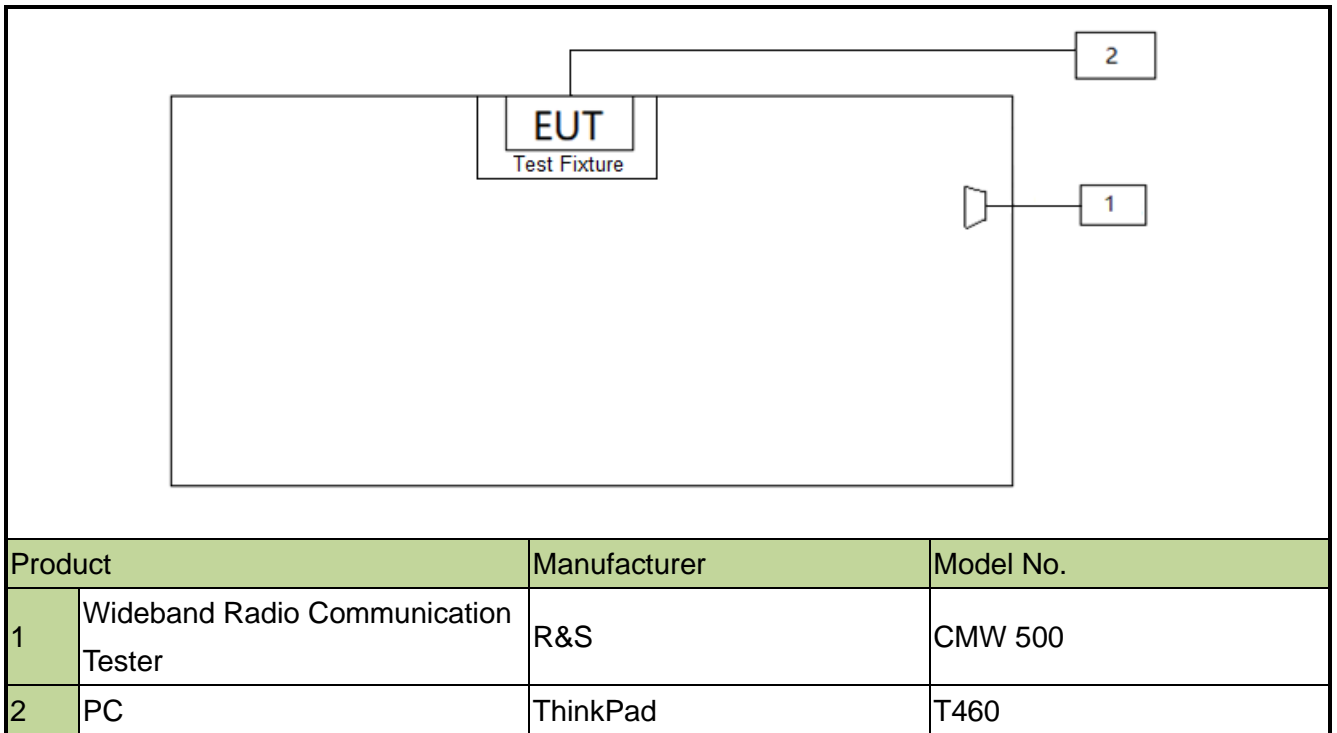

2.9. Test Environment Condition

| | |
|---------------------|------------|
| Ambient Temperature | 15 ~ 35°C |
| Relative Humidity | 20 ~ 75%RH |

3. TEST EQUIPMENT CALIBRATION DATE

Radiated Emission (WZ- AC1)

| Instrument | Manufacturer | Type No. | Asset No. | Cali. Interval | Cali. Due Date |
|--|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver | R&S | ESR7 | MRTSUE06001 | 1 year | 2021/08/01 |
| Wideband Radio Communication Tester | R&S | CMW 500 | MRTSUE06243 | 1 year | 2021/11/07 |
| PXA Signal Analyzer | Keysight | 9030B | MRTSUE06395 | 1 year | 2021/09/03 |
| Loop Antenna | Schwarzbeck | FMZB 1519 | MRTSUE06025 | 1 year | 2021/11/10 |
| Bilog Period Antenna | Schwarzbeck | VULB 9168 | MRTSUE06172 | 1 year | 2022/03/31 |
| Broad Band Horn Antenna | Schwarzbeck | BBHA 9120D | MRTSUE06023 | 1 year | 2021/10/13 |
| Broad Band Horn Antenna | Schwarzbeck | BBHA 9170 | MRTSUE06597 | 1 year | 2022/02/23 |
| Microwave System Amplifier | Agilent | 83017A | MRTSUE06076 | 1 year | 2021/11/15 |
| Preamplifier | Schwarzbeck | BBV 9721 | MRTSUE06121 | 1 year | 2021/06/11 |
| Thermohygrometer | Testo | 608-H1 | MRTSUE06403 | 1 year | 2021/08/08 |
| Anechoic Chamber | TDK | Chamber-AC1 | MRTSUE06212 | 1 year | 2021/04/30 |

Radiated Emission (WZ-AC2)

| Instrument | Manufacturer | Type No. | Asset No. | Cali. Interval | Cali. Due Date |
|--|--------------|-------------|-------------|----------------|----------------|
| Spectrum Analyzer | Keysight | N9038A | MRTSUE06125 | 1 year | 2021/08/01 |
| Wideband Radio Communication Tester | R&S | CMW 500 | MRTSUE06243 | 1 year | 2021/11/07 |
| Loop Antenna | Schwarzbeck | FMZB 1519 | MRTSUE06025 | 1 year | 2021/11/10 |
| Bilog Period Antenna | Schwarzbeck | VULB 9162 | MRTSUE06022 | 1 year | 2021/10/13 |
| Horn Antenna | Schwarzbeck | BBHA9120D | MRTSUE06171 | 1 year | 2021/10/27 |
| Broad Band Horn Antenna | Schwarzbeck | BBHA 9170 | MRTSUE06597 | 1 year | 2022/02/23 |
| Broad Band Coaxial Preamplifier | Schwarzbeck | BBV 9718 | MRTSUE06176 | 1 year | 2021/11/15 |
| Preamplifier | Schwarzbeck | BBV 9721 | MRTSUE06121 | 1 year | 2021/06/11 |
| Temperature/Humidity Meter | Minggao | ETH529 | MRTSUE06170 | 1 year | 2021/12/14 |
| Anechoic Chamber | RIKEN | Chamber-AC2 | MRTSUE06213 | 1 year | 2021/04/30 |

Conducted Test Equipment (WZ-SR6, WZ-TR3)

| Instrument | Manufacturer | Type No. | Asset No. | Cali. Interval | Cali. Due Date |
|--|--------------|-----------|-------------|----------------|----------------|
| EXA Signal Analyzer | Agilent | N9020A | MRTSUE06106 | 1 year | 2021/04/15 |
| EXA Signal Analyzer | Keysight | N9010B | MRTSUE06452 | 1 year | 2021/07/11 |
| Signal Analyzer | R&S | FSV40 | MRTSUE06218 | 1 year | 2021/04/15 |
| Wideband Radio Communication Tester | R&S | CMW 500 | MRTSUE06243 | 1 year | 2021/11/07 |
| Power Meter | Agilent | U2021XA | MRTSUE06030 | 1 year | 2021/11/18 |
| DC Power Supply | GWINSTEK | DPS-3303C | MRTSUE06064 | N/A | N/A |
| True RMS Clamp Meter | Fluke | 319 | MRTSUE06080 | 1 year | 2021/05/06 |
| Directional Coupler | Agilent | 87301D | MRTSUE06082 | 1 year | 2022/03/25 |
| Dual Directional Coupler | Agilent | 7778D | MRTSUE06083 | 1 year | 2022/03/25 |
| Attenuator | MVE | 6dB | MRTSUE06534 | 1 year | 2021/12/12 |
| Attenuator | MVE | 10dB | MRTSUE06543 | 1 year | 2021/12/12 |
| Temperature & Humidity Chamber | BAOYT | BYH-150CL | MRTSUE06051 | 1 year | 2021/11/07 |
| Thermohygrometer | testo | 608-H1 | MRTSUE06401 | 1 year | 2021/08/08 |

| Software | Version | Function |
|--------------|---------|-------------------|
| EMI Software | V3 | EMI Test Software |

4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

| |
|--|
| Radiated Emission Measurement |
| Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 9kHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB |
| Spurious Emissions, Conducted |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB |
| Output Power |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB |
| Power Spectrum Density |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB |
| Occupied Bandwidth |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28% |

5. TEST RESULT

5.1. Summary

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|---|---|--|----------------|-------------|------------------|
| 2.1049 | Occupied Bandwidth | N/A | Conducted | Pass | Section 5.2 |
| 2.1055, 22.355 24.235, 27.54 | Frequency Stability | < 2.5 ppm | | Pass | Section 5.3 |
| 22.913(a)(5) | Equivalent Radiated Power (Band 5) | < 7 Watts Max ERP | | Pass | Section 5.4 |
| 27.50(b)(9) 27.50(c)(9) | Equivalent Radiated Power (Band 13, 12/17/85) | < 30 Watts Max ERP | | | |
| 24.232(c) | Equivalent Isotropic Radiated Power (Band 2/25) | < 2 Watts Max EIRP | | | |
| 27.50(d)(4) | Equivalent Isotropic Radiated Power (Band 4/66) | < 1 Watts Max EIRP | | | |
| 24.232(d), 27.50(d)(5) | Peak to Average Ratio | < 13dB | | Pass | Section 5.6 |
| 2.1051, 22.917(a) 24.238(a), 27.53(c), 27.53(g), 27.53(h) | Band Edge (Band 2/25, 4/66, 5, 13, 12/17/85) | < 43 + 10log ₁₀ (P _[Watts]) | | Pass | Section 5.5, 5.7 |
| 2.1051, 22.917(a) 24.238(a), 27.53(c), 27.53(g), 27.53(h) | Spurious Emission (Band 2/25, 4/66, 5, 13, 12/17/85) | < 43 + 10log ₁₀ (P _[Watts]) | | | |
| 2.1053, 22.917(a) 24.238(a), 27.53(c) (f) (g) (h) | Spurious Emissions (Band 2/25, 4/66, 5, 13, 12/17/85) | < 43 + 10log ₁₀ (P _[Watts]) | Radiated | Pass | Section 5.8 |

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented in the test report.

5.2. Occupied Bandwidth

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.


5.2.4. Test Setup

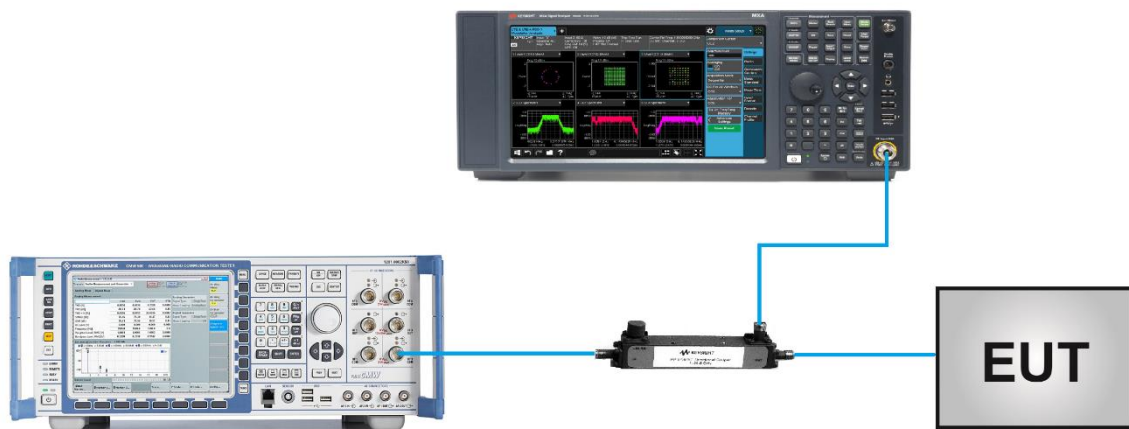

5.2.5. Test Result


| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/15 |
| Test Band | Band 2/25 | | |

| Channel | Frequency (MHz) | Modulation | Sub-carrier spacing (kHz) | N _{tones} | 99% Bandwidth (kHz) |
|---------|-----------------|------------|---------------------------|--------------------|---------------------|
| 26041 | 1850.1 | QPSK | 15 | 12@0 | 176.77 |
| 26365 | 1882.5 | | | | 176.21 |
| 26689 | 1914.9 | | | | 177.16 |

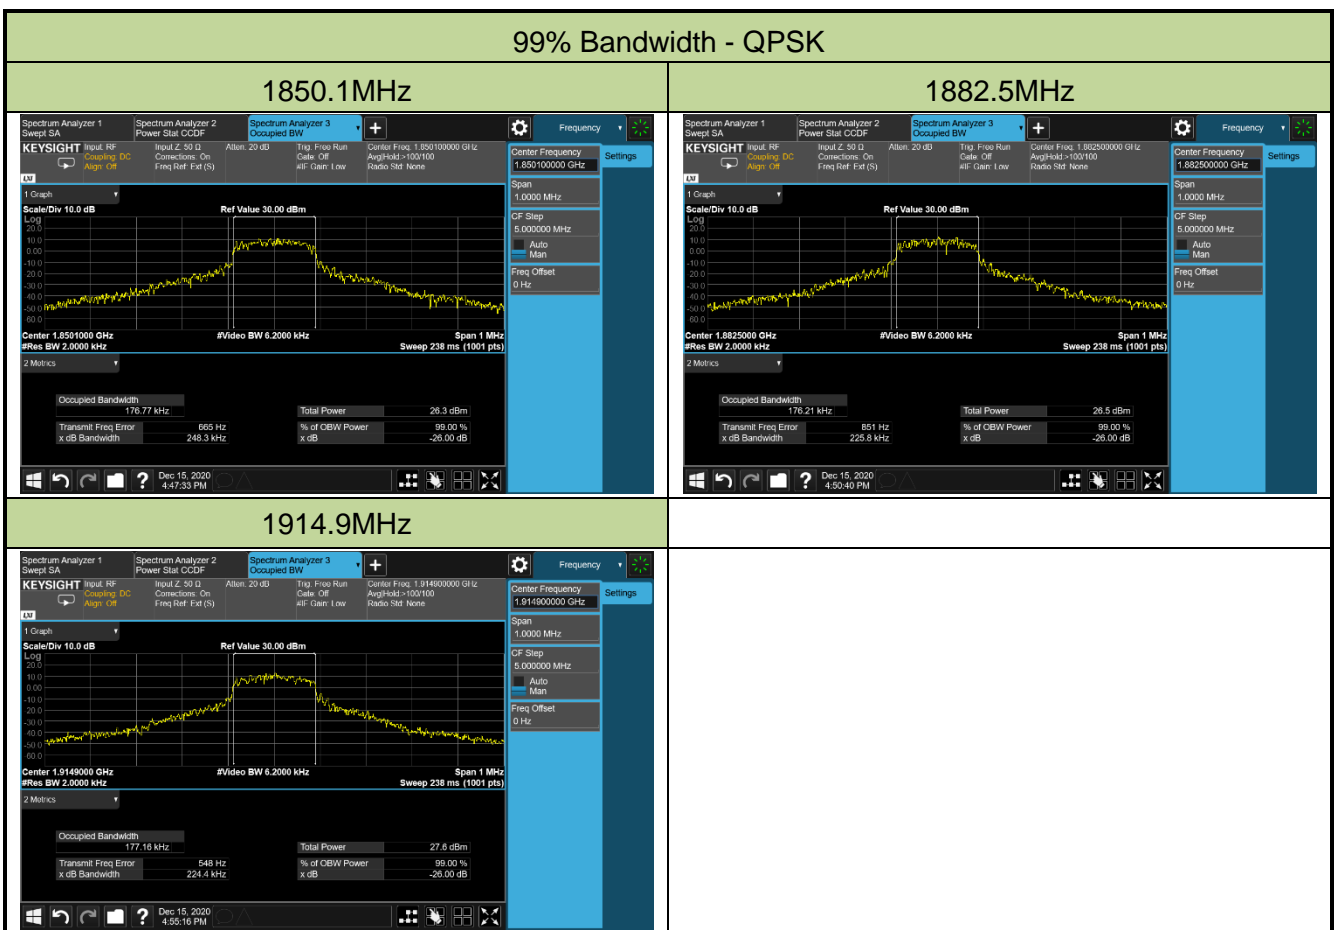


| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/15 |
| Test Band | Band 4/66 | | |

| Channel | Frequency (MHz) | Modulation | Sub-carrier spacing (kHz) | N _{tones} | 99% Bandwidth (kHz) |
|---------|-----------------|------------|---------------------------|--------------------|---------------------|
| 131973 | 1710.1 | QPSK | 15 | 12@0 | 177.03 |
| 132322 | 1745.0 | | | | 177.00 |
| 132671 | 1779.9 | | | | 178.02 |

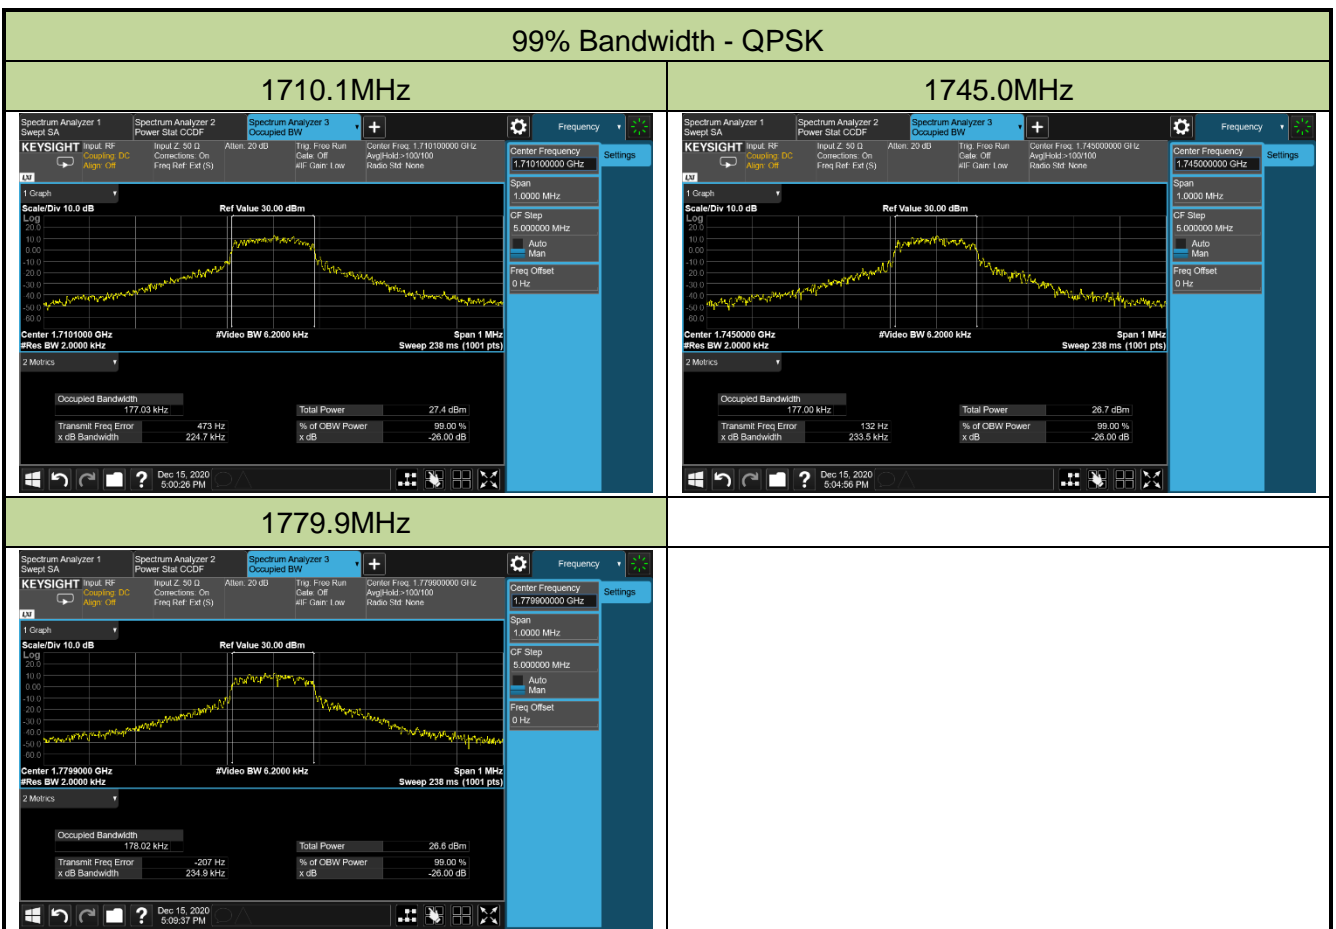


| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/15 |
| Test Band | Band 5 | | |

| Channel | Frequency (MHz) | Modulation | Sub-carrier spacing (kHz) | N _{tones} | 99% Bandwidth (kHz) |
|---------|-----------------|------------|---------------------------|--------------------|---------------------|
| 20401 | 824.1 | QPSK | 15 | 12@0 | 176.38 |
| 20525 | 836.5 | | | | 177.50 |
| 20649 | 848.9 | | | | 177.58 |

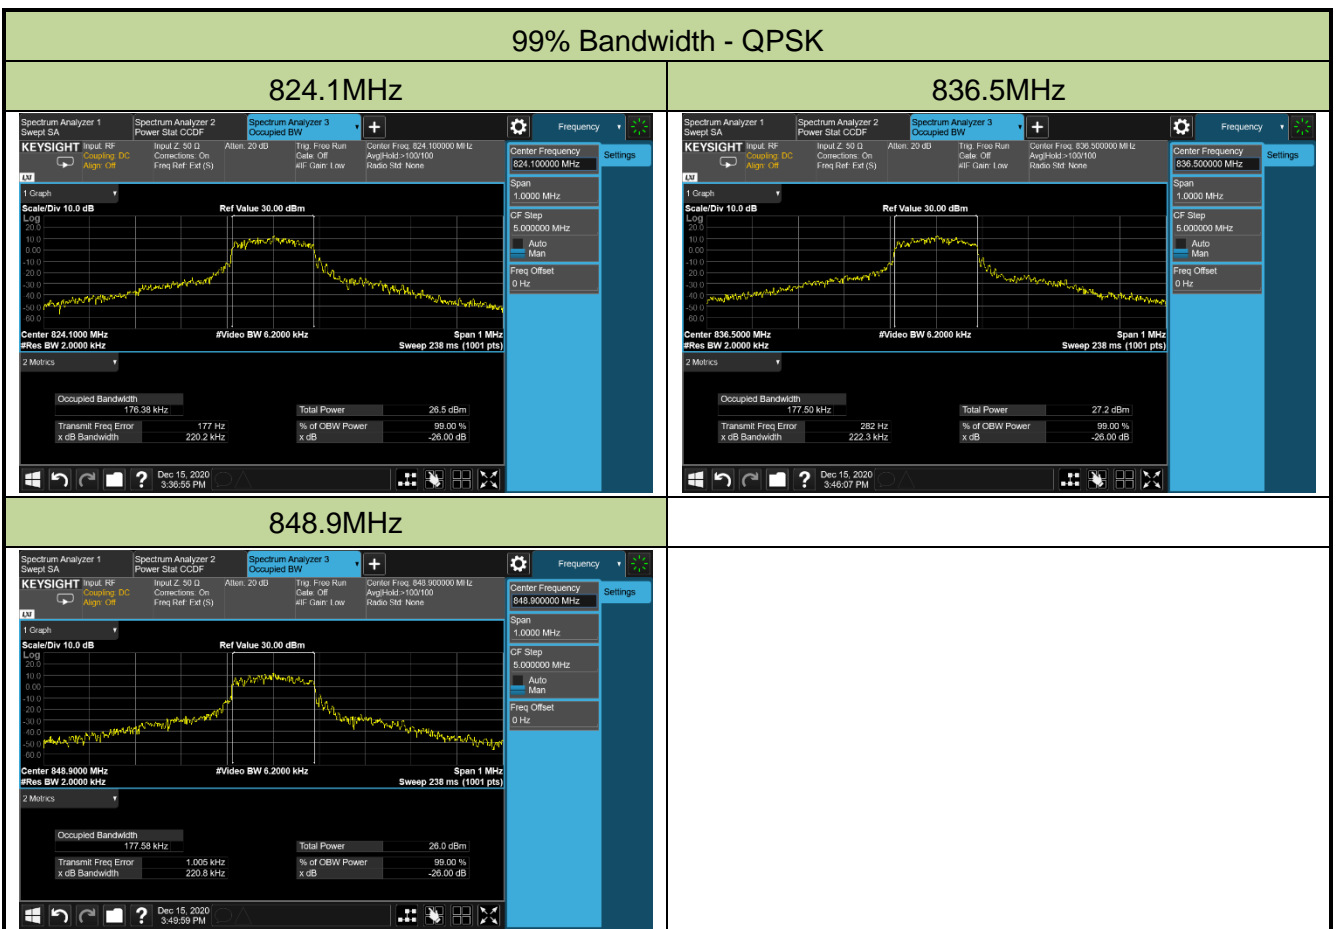


| | | | |
|---------------|---------------|-----------|-------------------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/15 ~ 2021/01/04 |
| Test Band | Band 12&17/85 | | |

| Channel | Frequency (MHz) | Modulation | Sub-carrier spacing (kHz) | N _{tones} | 99% Bandwidth (kHz) |
|---------|-----------------|------------|---------------------------|--------------------|---------------------|
| 134004 | 698.2 | QPSK | 15 | 12@0 | 177.49 |
| 134082 | 706.0 | | | | 177.07 |
| 134180 | 715.8 | | | | 176.62 |

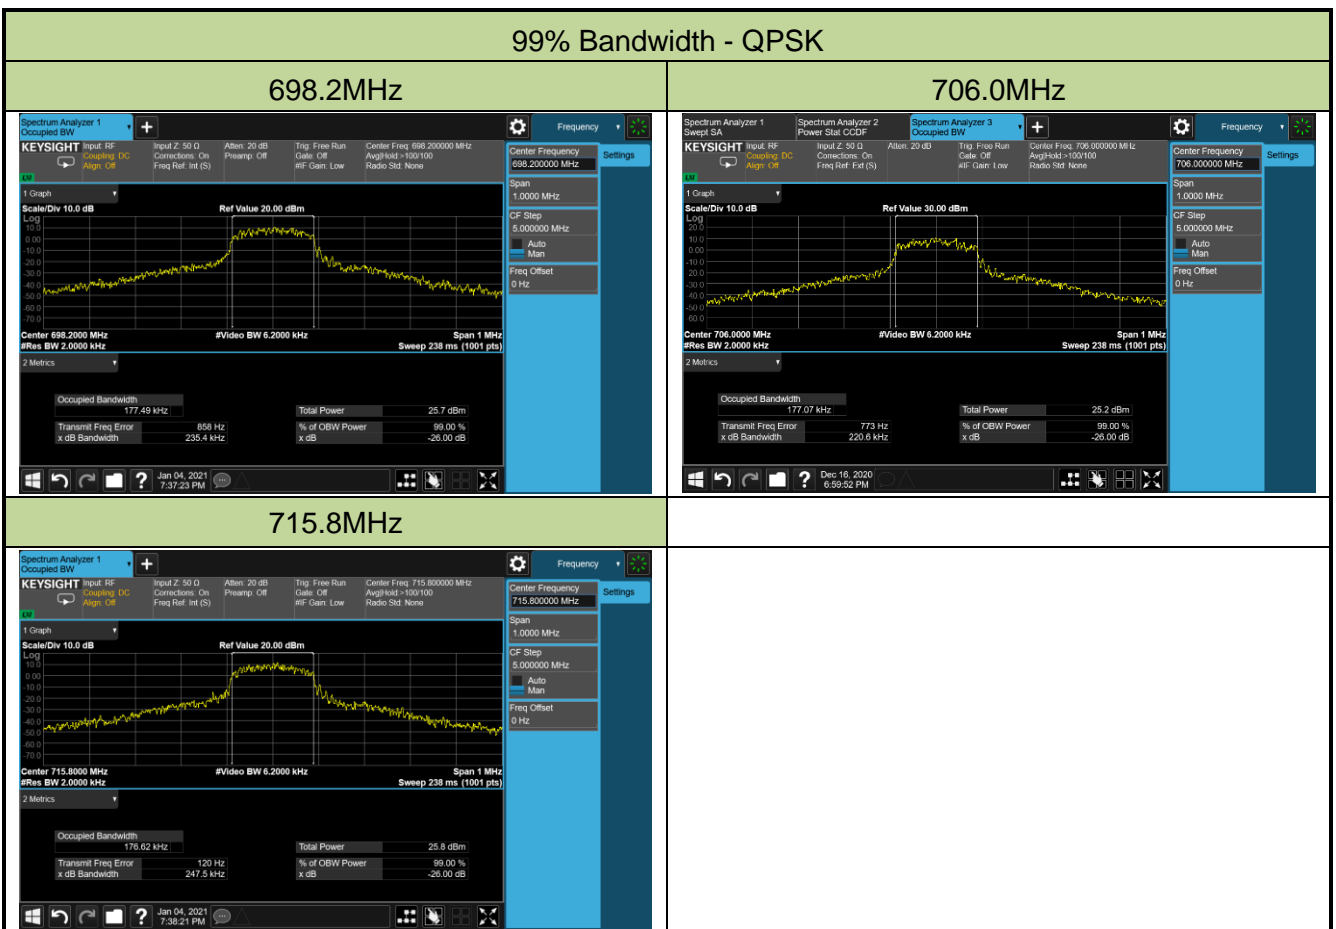

| | | | |
|---------------|---------------|-----------|-------------------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/15 ~ 2021/01/04 |
| Test Band | Band 13 | | |

| Channel | Frequency (MHz) | Modulation | Sub-carrier spacing (kHz) | N _{tones} | 99% Bandwidth (kHz) |
|---------|-----------------|------------|---------------------------|--------------------|---------------------|
| 23182 | 777.2 | QPSK | 15 | 12@0 | 176.70 |
| 23230 | 782.0 | | | | 176.69 |
| 23278 | 786.8 | | | | 176.68 |

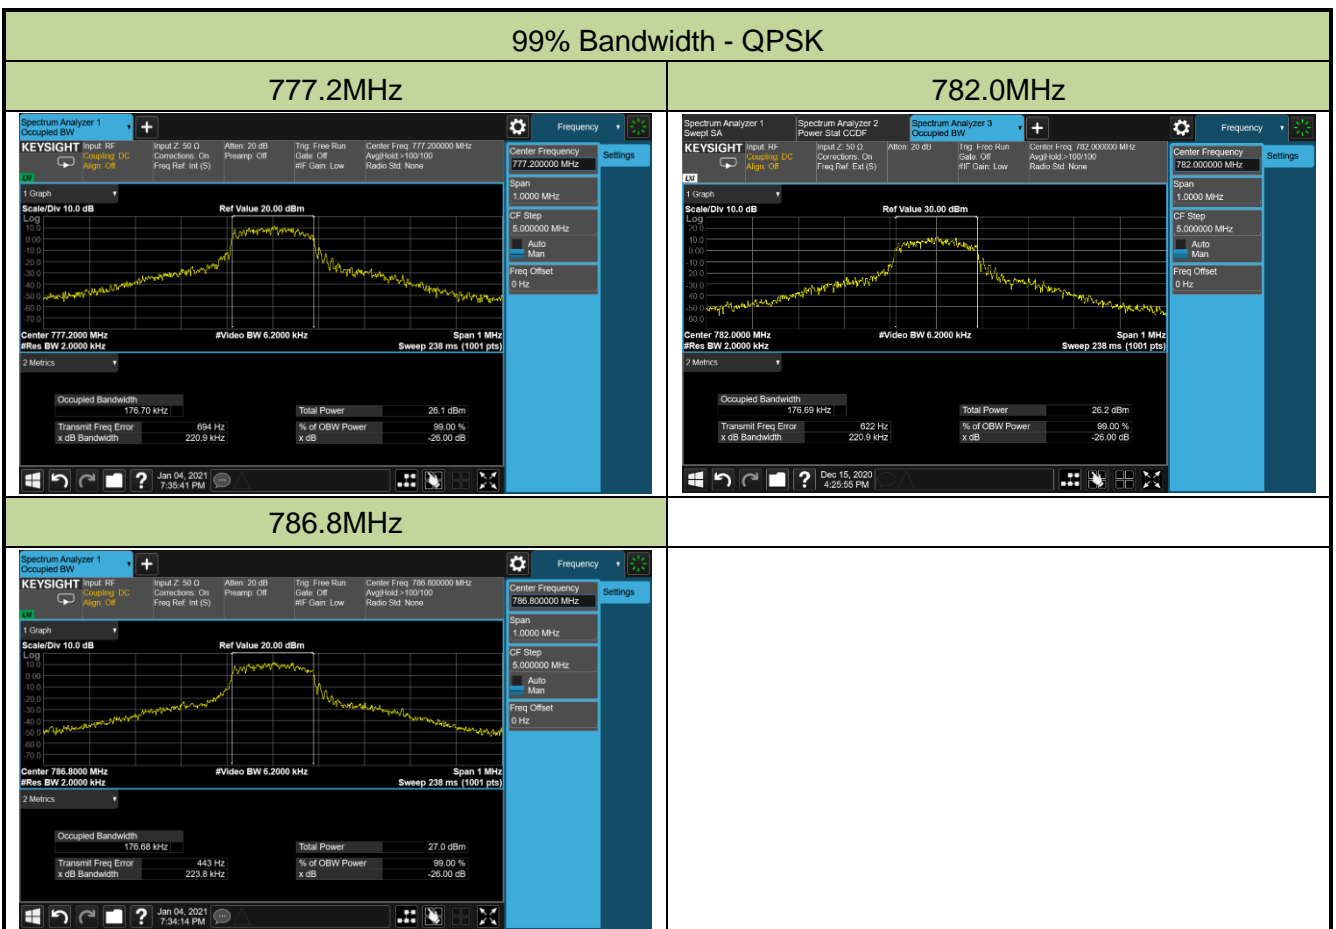

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

5.3.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

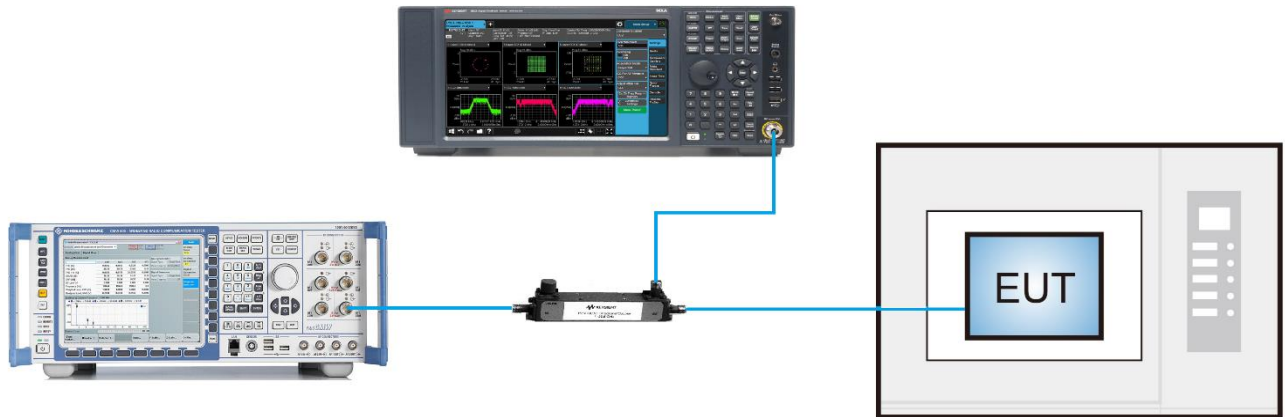

5.3.5. Test Result

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-TR3 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/17 |
| Test Band | Band 2/25 | | |

| Power (VDC) | Temp. (°C) | Freq. Error (Hz) | Frequency Tolerance (ppm) |
|-------------|------------|------------------|---------------------------|
| 3.3 | - 30 | 4.35 | 0.00231 |
| | - 20 | 4.33 | 0.00230 |
| | - 10 | 4.07 | 0.00216 |
| | 0 | 4.25 | 0.00226 |
| | + 10 | 4.98 | 0.00265 |
| | + 20 (Ref) | 4.30 | 0.00228 |
| | + 30 | 6.15 | 0.00327 |
| | + 40 | 3.79 | 0.00201 |
| | + 50 | 5.76 | 0.00306 |
| 4.3 | + 20 | 5.24 | 0.00278 |
| 2.2 | + 20 | 4.94 | 0.00262 |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-TR3 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/17 |
| Test Band | Band 4/66 | | |

| Power (VDC) | Temp. (°C) | Freq. Error (Hz) | Frequency Tolerance (ppm) |
|-------------|------------|------------------|---------------------------|
| 3.3 | - 30 | 5.14 | 0.00295 |
| | - 20 | 3.53 | 0.00202 |
| | - 10 | 4.08 | 0.00234 |
| | 0 | 4.40 | 0.00252 |
| | + 10 | 4.18 | 0.00240 |
| | + 20 (Ref) | 3.66 | 0.00210 |
| | + 30 | 3.79 | 0.00217 |
| | + 40 | 6.23 | 0.00357 |
| | + 50 | 4.58 | 0.00262 |
| 4.3 | + 20 | 3.68 | 0.00211 |
| 2.2 | + 20 | 4.43 | 0.00254 |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-TR3 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/17 |
| Test Band | Band 5 | | |

| Power (VDC) | Temp. (°C) | Freq. Error (Hz) | Frequency Tolerance (ppm) |
|-------------|------------|------------------|---------------------------|
| 3.3 | - 30 | 2.60 | 0.00311 |
| | - 20 | 1.69 | 0.00202 |
| | - 10 | 2.43 | 0.00290 |
| | 0 | 1.55 | 0.00185 |
| | + 10 | 2.08 | 0.00249 |
| | + 20 (Ref) | 1.64 | 0.00196 |
| | + 30 | 1.72 | 0.00206 |
| | + 40 | 1.97 | 0.00236 |
| | + 50 | 2.02 | 0.00241 |
| 4.3 | + 20 | 3.32 | 0.00397 |
| 2.2 | + 20 | 2.03 | 0.00243 |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-TR3 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/18 |
| Test Band | Band 12&17/85 | | |

| Power (VDC) | Temp. (°C) | Freq. Error (Hz) | Frequency Tolerance (ppm) |
|-------------|------------|------------------|---------------------------|
| 3.3 | - 30 | 3.45 | 0.00489 |
| | - 20 | 2.82 | 0.00399 |
| | - 10 | 3.29 | 0.00466 |
| | 0 | 2.69 | 0.00381 |
| | + 10 | 2.26 | 0.00320 |
| | + 20 (Ref) | 2.69 | 0.00381 |
| | + 30 | 2.99 | 0.00424 |
| | + 40 | 2.61 | 0.00370 |
| | + 50 | 2.54 | 0.00360 |
| 4.3 | + 20 | 2.73 | 0.00387 |
| 2.2 | + 20 | 2.18 | 0.00309 |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-TR3 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/18 |
| Test Band | Band 13 | | |

| Power (VDC) | Temp. (°C) | Freq. Error (Hz) | Frequency Tolerance (ppm) |
|-------------|------------|------------------|---------------------------|
| 3.3 | - 30 | 2.04 | 0.00261 |
| | - 20 | 1.78 | 0.00228 |
| | - 10 | 2.85 | 0.00364 |
| | 0 | 2.12 | 0.00271 |
| | + 10 | 2.03 | 0.00260 |
| | + 20 (Ref) | 1.90 | 0.00243 |
| | + 30 | 2.12 | 0.00271 |
| | + 40 | 1.99 | 0.00254 |
| | + 50 | 1.82 | 0.00233 |
| 4.3 | + 20 | 2.73 | 0.00349 |
| 2.2 | + 20 | 1.79 | 0.00229 |

5.4. Equivalent Isotropically Radiated Power Measurement

5.4.1. Test Limit

Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

Band 13, 12/17/85:

Control stations and mobile stations transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806MHz bands are limited to 30 watts ERP.

Band 2/25:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Band 4/66:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

5.4.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

5.4.4. Test Setup

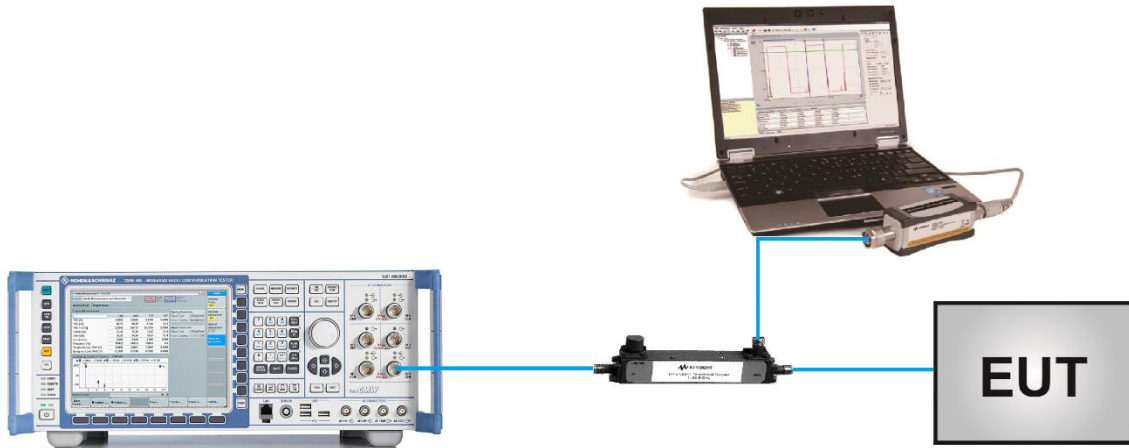

5.4.5. Test Result

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2021/01/10 |
| Test Band | Band 2/25 | | |

| Channel No. | Frequency (MHz) | Sub-carrier spacing (kHz) | N _{tones} | Output Power (dBm) | EIRP (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------------|--------------------|--------------------|------------|-------------|
| BPSK | | | | | | |
| 26041 | 1850.1 | 3.75 | 1@0 | 23.37 | 24.96 | < 33.01 |
| 26365 | 1882.5 | | | 23.41 | 25.00 | < 33.01 |
| 26689 | 1914.9 | | | 23.68 | 25.27 | < 33.01 |
| 26041 | 1850.1 | | 1@47 | 23.59 | 25.38 | < 33.01 |
| 26365 | 1882.5 | | | 23.43 | 25.32 | < 33.01 |
| 26689 | 1914.9 | | | 23.53 | 25.12 | < 33.01 |
| 26041 | 1850.1 | 15 | 1@0 | 23.67 | 25.26 | < 33.01 |
| 26365 | 1882.5 | | | 23.54 | 25.13 | < 33.01 |
| 26689 | 1914.9 | | | 23.66 | 25.25 | < 33.01 |
| 26041 | 1850.1 | | 1@11 | 23.53 | 25.12 | < 33.01 |
| 26365 | 1882.5 | | | 23.50 | 25.09 | < 33.01 |
| 26689 | 1914.9 | | | 23.68 | 25.27 | < 33.01 |
| QPSK | | | | | | |
| 26041 | 1850.1 | 3.75 | 1@0 | 23.35 | 24.94 | < 33.01 |
| 26365 | 1882.5 | | | 23.43 | 25.02 | < 33.01 |
| 26689 | 1914.9 | | | 23.69 | 25.28 | < 33.01 |
| 26041 | 1850.1 | | 1@47 | 23.38 | 24.97 | < 33.01 |
| 26365 | 1882.5 | | | 23.45 | 25.04 | < 33.01 |
| 26689 | 1914.9 | | | 23.56 | 25.15 | < 33.01 |
| 26041 | 1850.1 | 15 | 1@0 | 23.55 | 25.14 | < 33.01 |
| 26365 | 1882.5 | | | 23.62 | 25.21 | < 33.01 |
| 26689 | 1914.9 | | | 23.54 | 25.33 | < 33.01 |
| 26041 | 1850.1 | | 1@11 | 23.21 | 24.80 | < 33.01 |
| 26365 | 1882.5 | | | 23.56 | 25.15 | < 33.01 |
| 26689 | 1914.9 | | | 23.71 | 25.30 | < 33.01 |
| 26041 | 1850.1 | 12@0 | 22.14 | 23.73 | < 33.01 | |
| 26365 | 1882.5 | | 22.03 | 23.62 | < 33.01 | |
| 26689 | 1914.9 | | 21.90 | 23.49 | < 33.01 | |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2021/01/10 |
| Test Band | Band 4/66 | | |

| Channel No. | Frequency (MHz) | Sub-carrier spacing (kHz) | N _{tones} | Output Power (dBm) | EIRP (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------------|--------------------|--------------------|------------|-------------|
| BPSK | | | | | | |
| 131973 | 1710.1 | 3.75 | 1@0 | 23.49 | 25.49 | < 30.00 |
| 132322 | 1745.0 | | | 23.65 | 25.65 | < 30.00 |
| 132671 | 1779.9 | | | 23.65 | 25.65 | < 30.00 |
| 131973 | 1710.1 | | 1@47 | 23.47 | 25.47 | < 30.00 |
| 132322 | 1745.0 | | | 23.64 | 25.64 | < 30.00 |
| 132671 | 1779.9 | | | 23.38 | 25.38 | < 30.00 |
| 131973 | 1710.1 | 15 | 1@0 | 23.66 | 25.76 | < 30.00 |
| 132322 | 1745.0 | | | 23.44 | 25.44 | < 30.00 |
| 132671 | 1779.9 | | | 23.51 | 25.51 | < 30.00 |
| 131973 | 1710.1 | | 1@11 | 23.68 | 25.78 | < 30.00 |
| 132322 | 1745.0 | | | 23.40 | 25.40 | < 30.00 |
| 132671 | 1779.9 | | | 23.31 | 25.31 | < 30.00 |
| QPSK | | | | | | |
| 131973 | 1710.1 | 3.75 | 1@0 | 23.51 | 25.51 | < 30.00 |
| 132322 | 1745.0 | | | 23.58 | 25.58 | < 30.00 |
| 132671 | 1779.9 | | | 23.64 | 25.64 | < 30.00 |
| 131973 | 1710.1 | | 1@47 | 23.52 | 25.52 | < 30.00 |
| 132322 | 1745.0 | | | 23.56 | 25.56 | < 30.00 |
| 132671 | 1779.9 | | | 23.67 | 25.67 | < 30.00 |
| 131973 | 1710.1 | 15 | 1@0 | 23.24 | 25.04 | < 30.00 |
| 132322 | 1745.0 | | | 23.50 | 25.50 | < 30.00 |
| 132671 | 1779.9 | | | 23.45 | 25.45 | < 30.00 |
| 131973 | 1710.1 | | 1@11 | 23.51 | 25.51 | < 30.00 |
| 132322 | 1745.0 | | | 23.47 | 25.47 | < 30.00 |
| 132671 | 1779.9 | | | 23.43 | 25.43 | < 30.00 |
| 131973 | 1710.1 | 12@0 | 21.92 | 23.92 | < 30.00 | |
| 132322 | 1745.0 | | 21.71 | 23.71 | < 30.00 | |
| 132671 | 1779.9 | | 21.82 | 23.82 | < 30.00 | |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2021/01/10 |
| Test Band | Band 5 | | |

| Channel No. | Frequency (MHz) | Sub-carrier spacing (kHz) | N _{tones} | Output Power (dBm) | ERP (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------------|--------------------|--------------------|-----------|-------------|
| BPSK | | | | | | |
| 20401 | 824.1 | 3.75 | 1@0 | 23.26 | 23.64 | < 38.45 |
| 20525 | 836.5 | | | 23.68 | 24.06 | < 38.45 |
| 20649 | 848.9 | | | 23.15 | 23.53 | < 38.45 |
| 20401 | 824.1 | | 1@47 | 23.26 | 23.64 | < 38.45 |
| 20525 | 836.5 | | | 23.36 | 23.14 | < 38.45 |
| 20649 | 848.9 | | | 23.18 | 23.56 | < 38.45 |
| 20401 | 824.1 | 15 | 1@0 | 23.44 | 23.82 | < 38.45 |
| 20525 | 836.5 | | | 23.36 | 23.74 | < 38.45 |
| 20649 | 848.9 | | | 23.35 | 23.73 | < 38.45 |
| 20401 | 824.1 | | 1@11 | 23.35 | 23.73 | < 38.45 |
| 20525 | 836.5 | | | 23.37 | 23.75 | < 38.45 |
| 20649 | 848.9 | | | 23.40 | 23.78 | < 38.45 |
| QPSK | | | | | | |
| 20401 | 824.1 | 3.75 | 1@0 | 23.26 | 23.64 | < 38.45 |
| 20525 | 836.5 | | | 23.54 | 23.42 | < 38.45 |
| 20649 | 848.9 | | | 22.74 | 23.52 | < 38.45 |
| 20401 | 824.1 | | 1@47 | 23.44 | 23.32 | < 38.45 |
| 20525 | 836.5 | | | 22.75 | 23.13 | < 38.45 |
| 20649 | 848.9 | | | 23.58 | 23.46 | < 38.45 |
| 20401 | 824.1 | 15 | 1@0 | 23.41 | 23.59 | < 38.45 |
| 20525 | 836.5 | | | 23.45 | 23.43 | < 38.45 |
| 20649 | 848.9 | | | 23.41 | 23.29 | < 38.45 |
| 20401 | 824.1 | | 1@11 | 23.45 | 23.21 | < 38.45 |
| 20525 | 836.5 | | | 23.37 | 23.35 | < 38.45 |
| 20649 | 848.9 | | | 23.65 | 23.13 | < 38.45 |
| 20401 | 824.1 | 12@0 | 22.13 | 22.51 | < 38.45 | |
| 20525 | 836.5 | | 22.10 | 22.48 | < 38.45 | |
| 20649 | 848.9 | | 22.08 | 22.46 | < 38.45 | |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2021/01/10 |
| Test Band | Band 12/17/85 | | |

| Channel No. | Frequency (MHz) | Sub-carrier spacing (kHz) | N _{tones} | Output Power (dBm) | ERP (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------------|--------------------|--------------------|-----------|-------------|
| BPSK | | | | | | |
| 134004 | 698.2 | 3.75 | 1@0 | 23.47 | 25.57 | < 44.77 |
| 134082 | 706.0 | | | 23.45 | 25.55 | < 44.77 |
| 134180 | 715.8 | | | 23.43 | 25.53 | < 44.77 |
| 134004 | 698.2 | | 1@47 | 23.56 | 25.56 | < 44.77 |
| 134082 | 706.0 | | | 23.56 | 25.56 | < 44.77 |
| 134180 | 715.8 | | | 23.67 | 25.47 | < 44.77 |
| 134004 | 698.2 | 15 | 1@0 | 23.73 | 25.53 | < 44.77 |
| 134082 | 706.0 | | | 23.66 | 25.46 | < 44.77 |
| 134180 | 715.8 | | | 23.52 | 25.32 | < 44.77 |
| 134004 | 698.2 | | 1@11 | 23.64 | 25.44 | < 44.77 |
| 134082 | 706.0 | | | 23.58 | 25.58 | < 44.77 |
| 134180 | 715.8 | | | 23.57 | 25.57 | < 44.77 |
| QPSK | | | | | | |
| 134004 | 698.2 | 3.75 | 1@0 | 23.58 | 25.58 | < 44.77 |
| 134082 | 706.0 | | | 23.61 | 25.61 | < 44.77 |
| 134180 | 715.8 | | | 23.64 | 25.54 | < 44.77 |
| 134004 | 698.2 | | 1@47 | 23.59 | 25.59 | < 44.77 |
| 134082 | 706.0 | | | 23.51 | 25.51 | < 44.77 |
| 134180 | 715.8 | | | 23.21 | 25.01 | < 44.77 |
| 134004 | 698.2 | 15 | 1@0 | 23.31 | 25.11 | < 44.77 |
| 134082 | 706.0 | | | 23.20 | 25.00 | < 44.77 |
| 134180 | 715.8 | | | 23.12 | 24.92 | < 44.77 |
| 134004 | 698.2 | | 1@11 | 23.33 | 25.13 | < 44.77 |
| 134082 | 706.0 | | | 23.15 | 24.95 | < 44.77 |
| 134180 | 715.8 | | | 23.08 | 24.88 | < 44.77 |
| 134004 | 698.2 | 12@0 | 21.69 | 23.49 | < 44.77 | |
| 134082 | 706.0 | | 21.72 | 23.52 | < 44.77 | |
| 134180 | 715.8 | | 21.70 | 23.50 | < 44.77 | |

| | | | |
|---------------|---------------|-----------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2021/01/10 |
| Test Band | Band 13 | | |

| Channel No. | Frequency (MHz) | Sub-carrier spacing (kHz) | N _{tones} | Output Power (dBm) | ERP (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------------|--------------------|--------------------|-----------|-------------|
| BPSK | | | | | | |
| 23182 | 777.2 | 3.75 | 1@0 | 23.67 | 25.97 | < 44.77 |
| 23230 | 782.0 | | | 23.60 | 25.90 | < 44.77 |
| 23278 | 786.8 | | | 23.61 | 25.91 | < 44.77 |
| 23182 | 777.2 | | 1@47 | 23.69 | 25.99 | < 44.77 |
| 23230 | 782.0 | | | 23.59 | 25.89 | < 44.77 |
| 23278 | 786.8 | | | 23.67 | 25.97 | < 44.77 |
| 23182 | 777.2 | 15 | 1@0 | 23.08 | 25.38 | < 44.77 |
| 23230 | 782.0 | | | 23.35 | 25.65 | < 44.77 |
| 23278 | 786.8 | | | 23.36 | 25.66 | < 44.77 |
| 23182 | 777.2 | | 1@11 | 23.13 | 25.43 | < 44.77 |
| 23230 | 782.0 | | | 23.22 | 25.52 | < 44.77 |
| 23278 | 786.8 | | | 23.26 | 25.56 | < 44.77 |
| QPSK | | | | | | |
| 23182 | 777.2 | 3.75 | 1@0 | 23.09 | 25.39 | < 44.77 |
| 23230 | 782.0 | | | 23.54 | 25.84 | < 44.77 |
| 23278 | 786.8 | | | 23.68 | 25.98 | < 44.77 |
| 23182 | 777.2 | | 1@47 | 22.98 | 25.28 | < 44.77 |
| 23230 | 782.0 | | | 23.41 | 25.71 | < 44.77 |
| 23278 | 786.8 | | | 23.67 | 25.97 | < 44.77 |
| 23182 | 777.2 | 15 | 1@0 | 23.36 | 25.66 | < 44.77 |
| 23230 | 782.0 | | | 23.30 | 25.60 | < 44.77 |
| 23278 | 786.8 | | | 23.40 | 25.70 | < 44.77 |
| 23182 | 777.2 | | 1@11 | 23.26 | 25.56 | < 44.77 |
| 23230 | 782.0 | | | 23.25 | 25.55 | < 44.77 |
| 23278 | 786.8 | | | 23.37 | 25.67 | < 44.77 |
| 23182 | 777.2 | | 12@0 | 21.70 | 24.00 | < 44.77 |
| 23230 | 782.0 | | | 21.92 | 24.22 | < 44.77 |
| 23278 | 786.8 | | | 21.81 | 24.11 | < 44.77 |

5.5. Band Edge Measurement

5.5.1. Test Limit

22.917(a), 24.238 (a), 27.53 (g) (h)

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is $43 + 10\log_{10}(P_{\text{Watts}})$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

5.5.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.7

5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.


To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.5.4. Test Setup

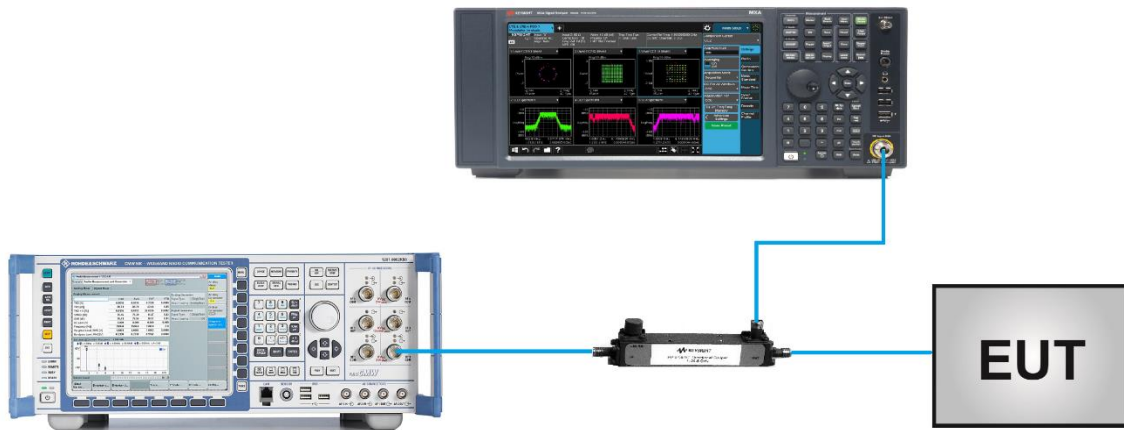


5.5.5. Test Result

| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/20 |
| Test Band | Band 2/25 | Test Result | Pass |

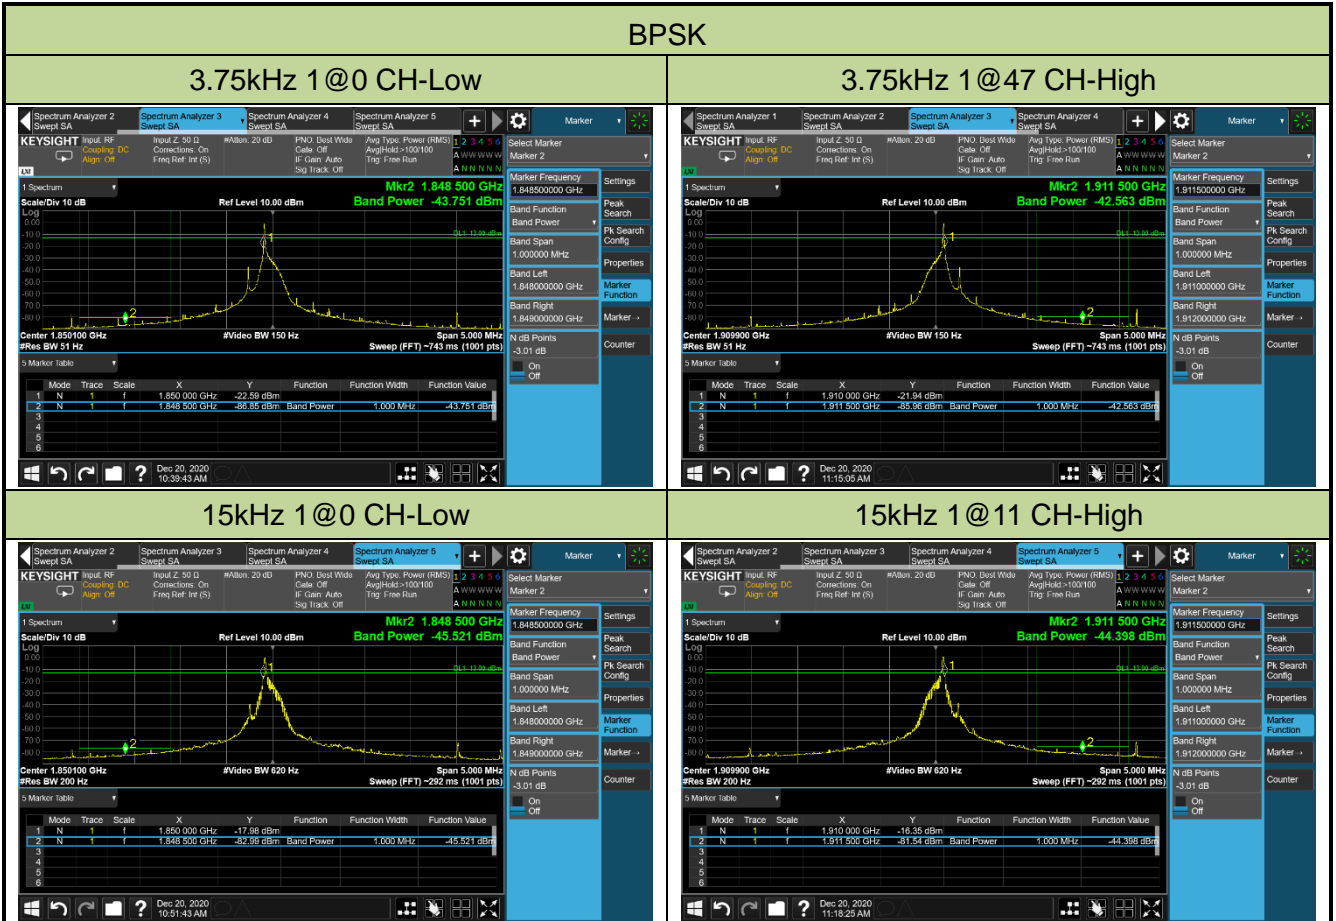


QPSK


3.75kHz 1@0 CH-Low

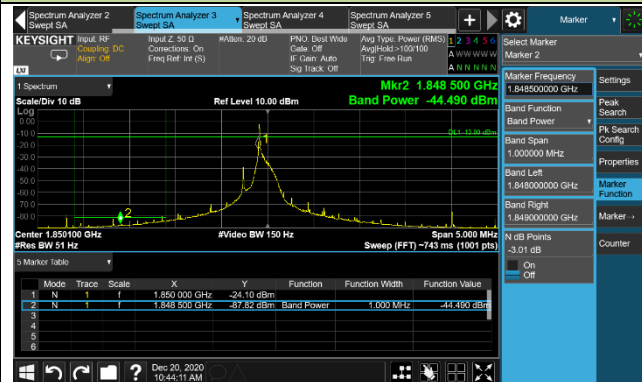


3.75kHz 1@47 CH-High

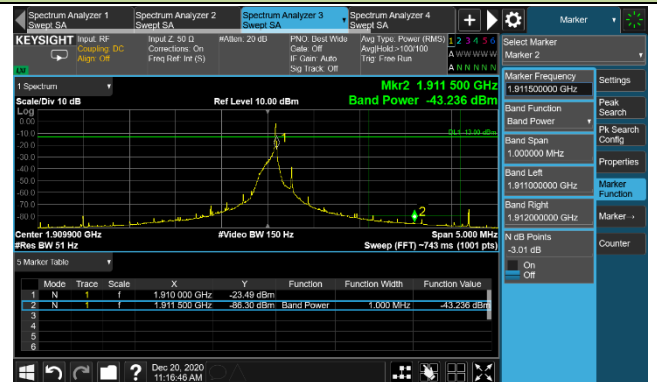


15kHz 1@0 CH-Low

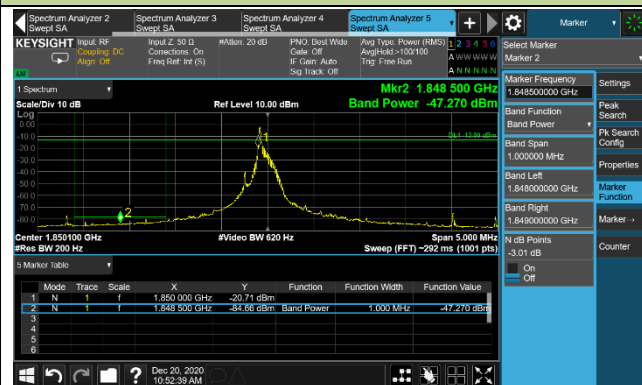


15kHz 1@11 CH-High

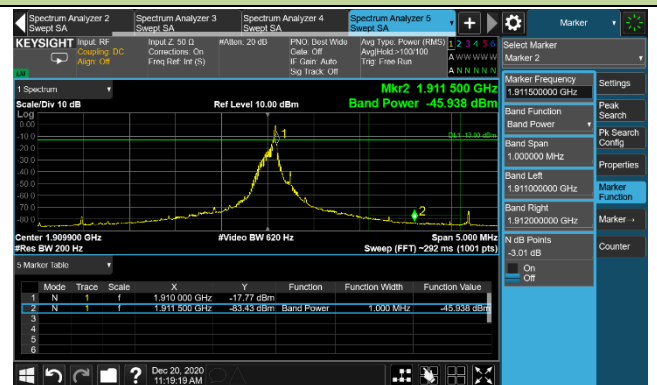

15 kHz 12@0 CH-Low

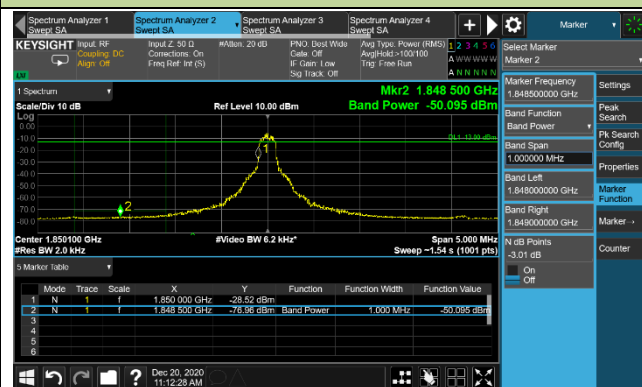

15kHz 12@0 CH-High

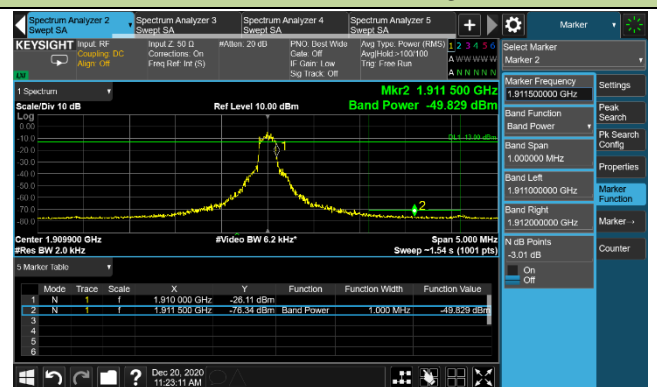

| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/20 |
| Test Band | Band 25 | Test Result | Pass |

BPSK




QPSK




| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/20 |
| Test Band | Band 4/66 | Test Result | Pass |

BPSK

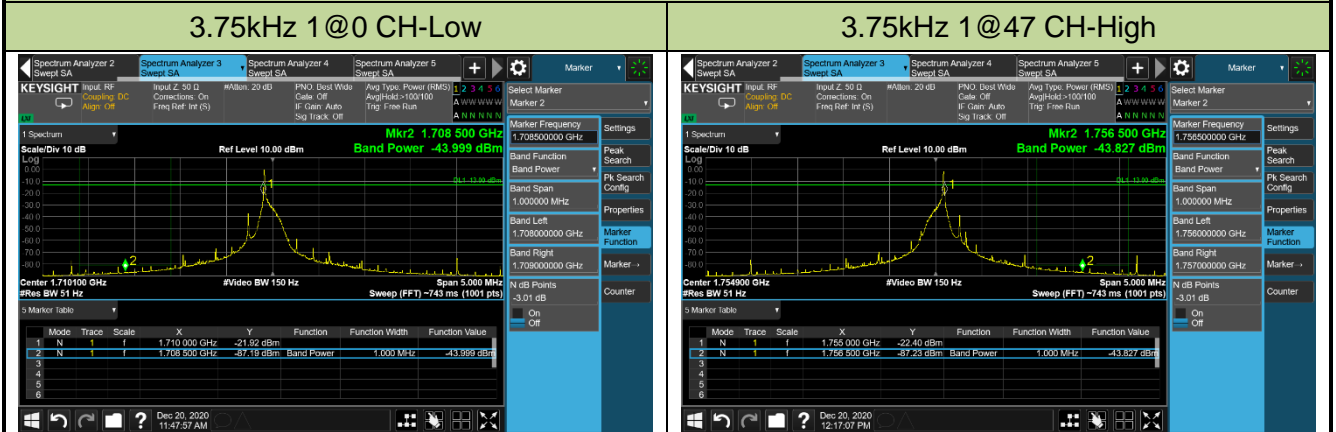


QPSK


3.75kHz 1@0 CH-Low

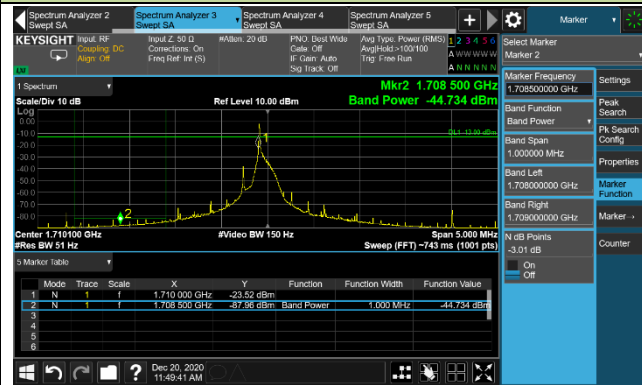


3.75kHz 1@47 CH-High

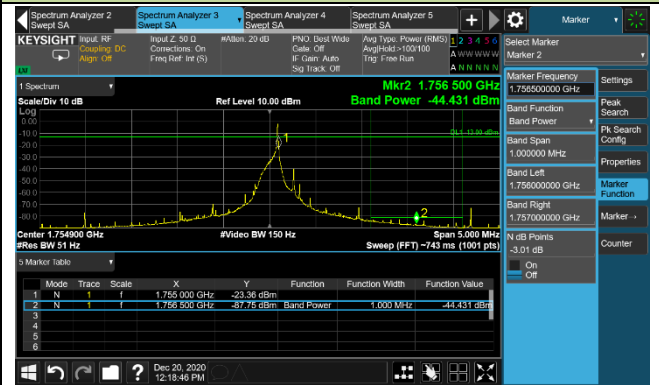


15kHz 1@0 CH-Low

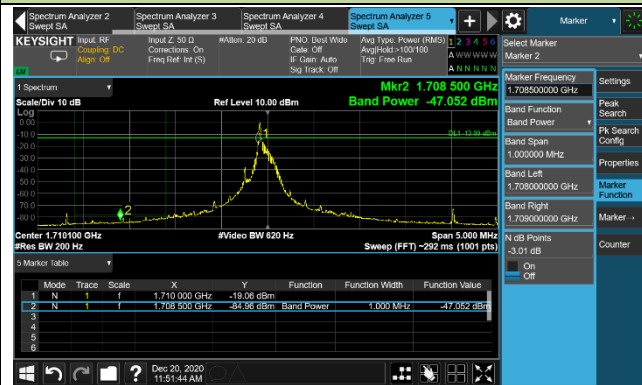


15kHz 1@11 CH-High

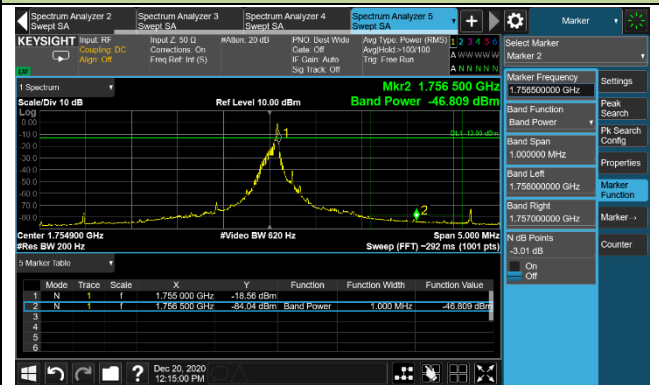

15 kHz 12@0 CH-Low

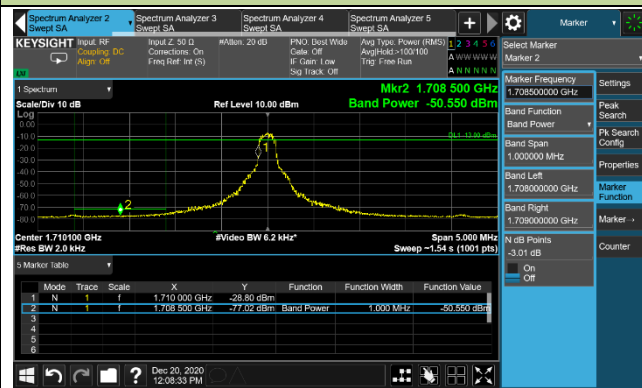

15kHz 12@0 CH-High

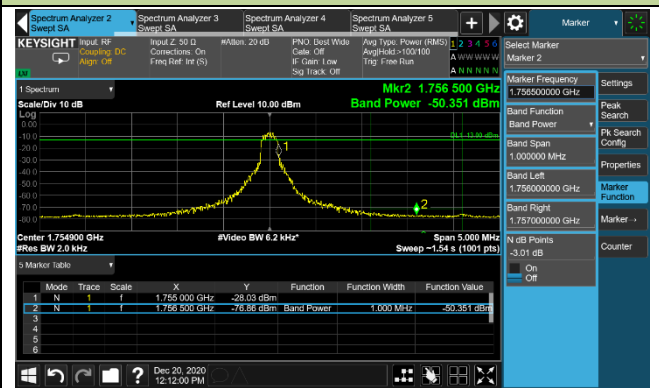

| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/20 |
| Test Band | Band 66 | Test Result | Pass |

BPSK




QPSK




| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/18 |
| Test Band | Band 5 | Test Result | Pass |

BPSK

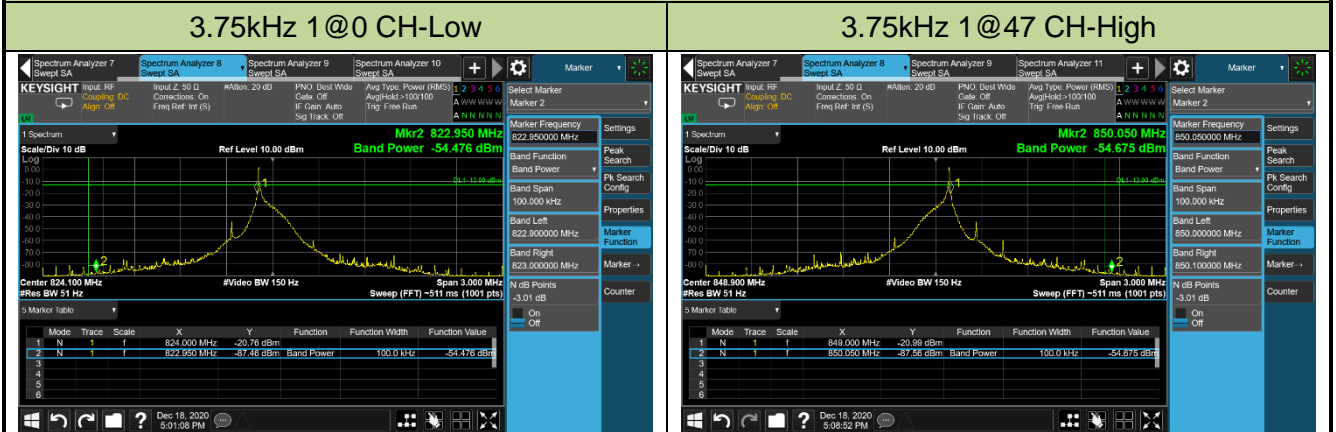


QPSK


3.75kHz 1@0 CH-Low

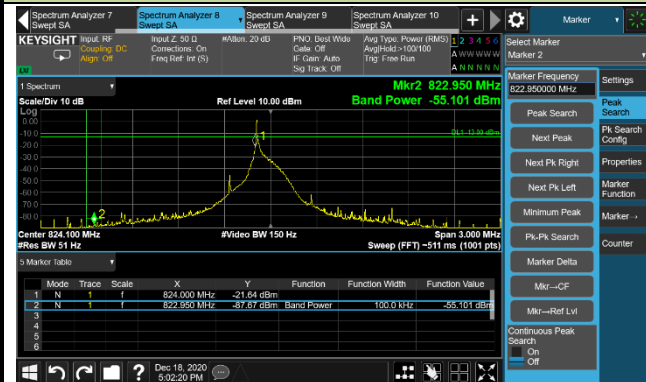


3.75kHz 1@47 CH-High

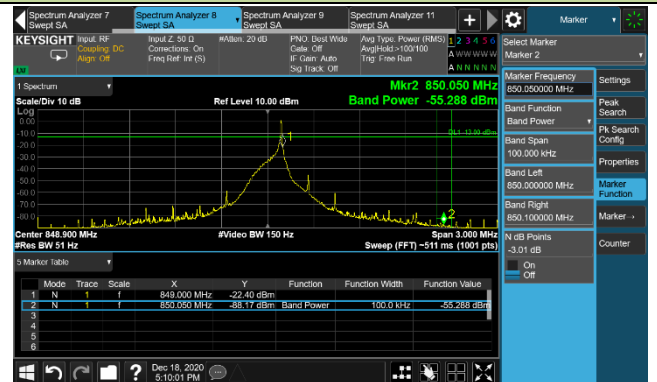


15kHz 1@0 CH-Low

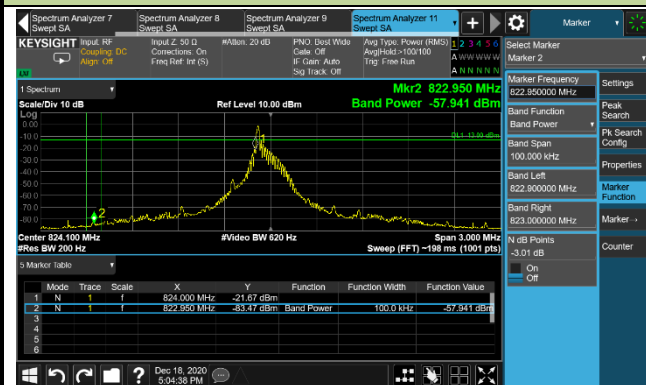


15kHz 1@11 CH-High

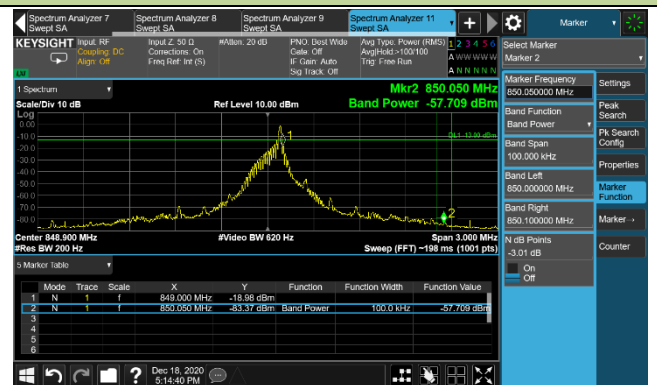

15 kHz 12@0 CH-Low

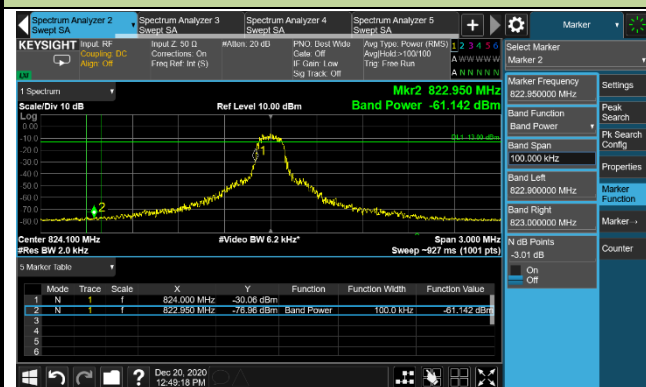

15kHz 12@0 CH-High

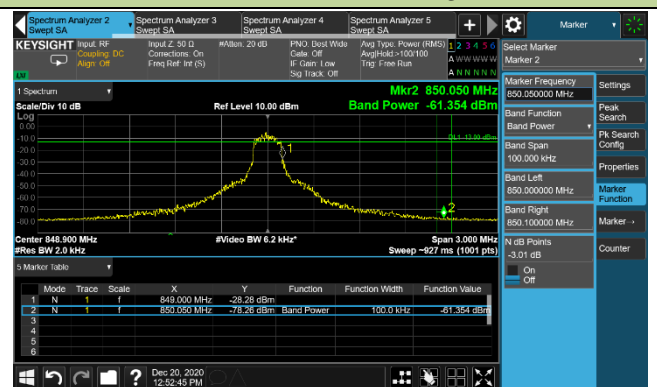


| | | | |
|---------------|---------------|-------------|------------|
| Product | NB-IoT Module | Test Site | WZ-SR6 |
| Test Engineer | Caitlin Chen | Test Date | 2020/12/18 |
| Test Band | Band 12&17/85 | Test Result | Pass |

BPSK




QPSK


3.75kHz 1@0 CH-Low

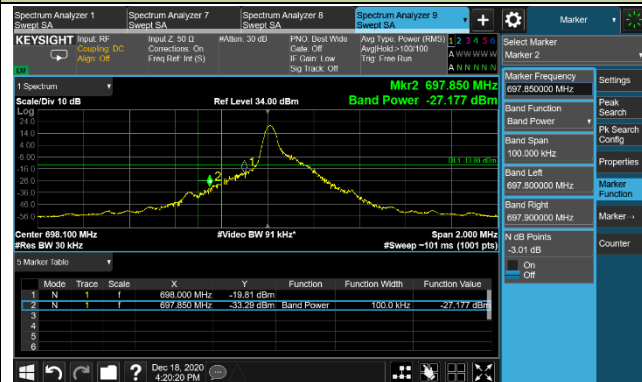


3.75kHz 1@47 CH-High

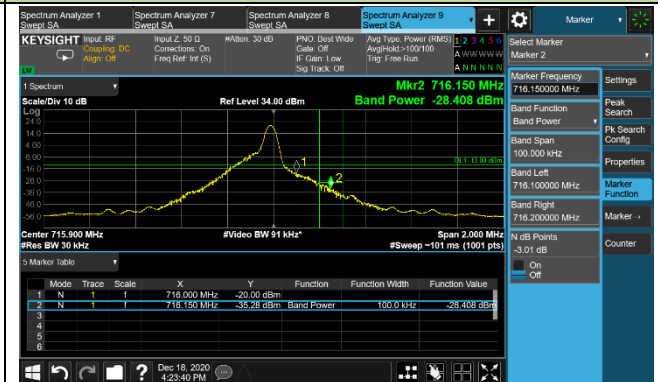


15kHz 1@0 CH-Low

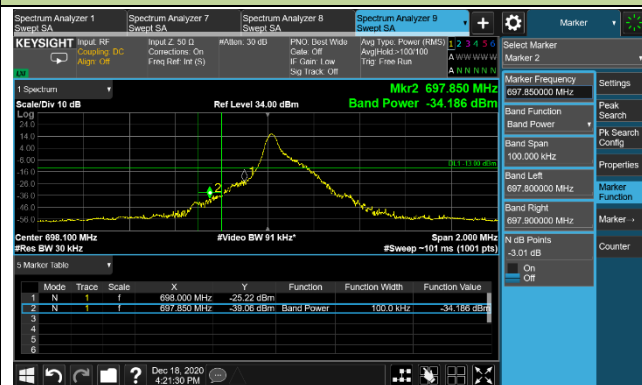

15kHz 1@11 CH-High

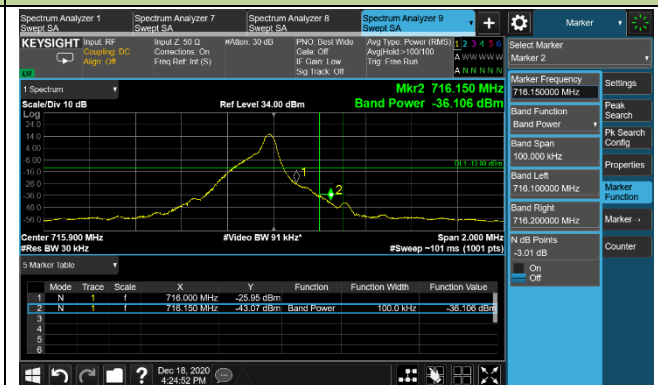

15 kHz 12@0 CH-Low

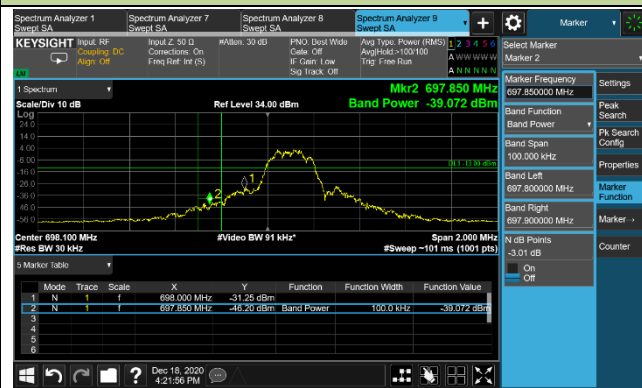

15kHz 12@0 CH-High

