



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR2021EG91NAXDL
Product LTE Module
Brand Quectel
Model EG91-NAXDL
Report No. R2110A0928-R5V1
Issue Date December 16, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR47 Part 27C (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	5
1.1	Notes of the Test Report	5
1.2.	Test facility	5
1.3	Testing Location	5
2	General Description of Equipment under Test	6
2.1	Applicant and Manufacturer Information.....	6
2.2	General information.....	6
3	Applied Standards	8
4	Test Configuration	9
5	Test Case Results	11
5.1	RF Power Output	11
5.2	Effective Isotropic Radiated Power	16
5.3	Occupied Bandwidth	21
5.4	Band Edge Compliance	35
5.5	Peak-to-Average Power Ratio (PAPR).....	54
5.6	Frequency Stability.....	57
5.7	Spurious Emissions at Antenna Terminals	61
5.8	Radiates Spurious Emission	69
6	Main Test Instruments	84
ANNEX A: The EUT Appearance		86
ANNEX B: Test Setup Photos		87
ANNEX C: Verify data		88
ANNEX D: Product Change Description		89



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	December 8, 2021
Rev.1	Add description in Page 10.	December 16, 2021

Note: This revised report (Report No. R2110A0928-R5V1) supersedes and replaces the previously issued report (Report No. R2110A0928-R5). Please discard or destroy the previously issued report and dispose of it accordingly.

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4)/27.50(b)(10)/27.50(c)(10)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h)/27.53(g)/27.53(f) /27.53(c)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051/27.53(h)/27.53(g)/27.53(f)	PASS
8	Radiates Spurious Emission	2.1051/27.53(h) /27.53(g) /27.53(f)	PASS
Date of Testing (Original): May 25, 2018 ~ June 27, 2018 and November 28, 2019 and June 29, 2020 and July 6, 2020 (Variant): October 22, 2021 and November 30, 2021~ December 1, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

EG91-NAXDL (Report No.: R2110A0928-R5V1) is a variant model of EG91-NAXD (Report No.: R2006A0379-R5). There is only changed the Software Version, FCC ID and Model of product. Tested cases refer to the following table. Please refer to Appendix C for Verify data:

Test Case	Original	Variant
Occupied Bandwidth	PASS	Updated 16QAM(1.4M/3M/5M) modulation data.
Band Edge Compliance	PASS	Added 16QAM (1.4M/3M/5M, 100%RB) modulation data.
Peak-to-Average Power Ratio	PASS	Updated 16QAM(1.4M/3M/5M) modulation data.
Radiates Spurious Emission	PASS	Verify the worst combination of each frequency band(LTE Band 13).

The detailed product change description please refers to the Difference Declaration Letter.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

2.2 General information

EUT Description			
Model	EG91-NAXDL		
IMEI	Original(EG91-NAXD)	863071010199125	
	Variant(EG91-NAXDL)	863495050001955	
Hardware Version	R1.0		
Software Version	EG91NAXDLGAR07A01M1G		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	Frequency(MHz)	Gain(dBi)	
	700	1.66	
	710	3.26	
	720	3.95	
	780	4.45	
	1720	1.94	
	1740	2.00	
	1760	1.57	
Test Mode(s)	LTE Band 4; LTE Band 12, LTE Band 13;		
Test Modulation	(LTE)QPSK 16QAM;		
LTE Category	1		
Maximum E.I.R.P./ E.R.P.	LTE Band 4:	25.23dBm	
	LTE Band 12:	19.44dBm	
	LTE Band 13:	22.55Bm	
Rated Power Supply Voltage:	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 4	1710 ~ 1755	2110 ~ 2155



	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2020)

FCC CFR47 Part 2 (2020)

Reference standard:

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal position) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/12/13:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	O	O	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 4	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 12	O	O	O	O	-	-	O	O	O	-	O	O	-	O
	LTE 13	-	-	O	O	-	-	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 12	O	O	O	O	-	-	O	O	-	-	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O
Frequency Stability	LTE 4	-	-	-	-	-	O	O	O	O	-	O	O	O	O
	LTE 12	-	-	-	O	-	-	O	O	O	-	O	O	O	O
	LTE 13	-	-	-	O	-	-	O	O	O	-	O	O	O	O
Spurious Emissions at Antenna Terminals	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 12	O	O	O	O	-	-	O	-	O	-	-	O	O	O
	LTE 13	-	-	O	O	-	-	O	-	O	-	-	O	O	O
Radiates Spurious	LTE 4	O	-	O	-	-	O	O	-	O	-	-	O	O	O
	LTE 12	O	-	O	O	-	-	O	-	O	-	-	O	O	O



Emission	LTE 13	-	-	O	O	-	-	O	-	O	-	-	-	O	-
----------	--------	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Note:

1. The mark "O" means that this configuration is chosen for testing.
2. The mark "-" means that this configuration is not testing.
3. The product prototype category level is 1, 16QAM10M/15M/20M can only support up to 24RB, and cannot support full RB, so Bandwidth and PAPA that require full RB testing have not been tested.

5 Test Case Results

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

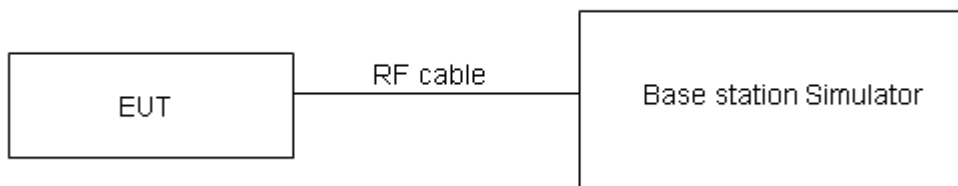

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE Band 4				AV Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19957/1710.7	20175/1732.5	20393/1754.3
1.4MHz	QPSK	1	0	23.94	24.08	23.88
		1	2	24.02	24.12	24.05
		1	5	24.13	24.25	23.87
		3	0	24.07	23.93	23.92
		3	2	23.93	23.86	23.96
		3	3	24.03	23.83	24.02
	6	0	23.06	22.95	22.98	
	16QAM	1	0	23.39	23.01	22.93
		1	2	23.48	23.49	23.12
1		5	23.51	22.67	23.05	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19965/1711.5	20175/1732.5	20385/1753.5
3MHz	QPSK	1	0	24.02	24.03	24.03
		1	7	24.05	24.30	24.21
		1	14	23.91	24.06	23.81
		8	0	22.88	22.94	23.03
		8	4	22.85	22.87	22.96
		8	7	22.70	22.98	22.89
	15	0	22.79	23.06	22.93	
	16QAM	1	0	22.89	22.67	23.60
		1	7	22.85	23.00	23.73
1		14	22.69	22.94	23.49	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19975/1712.5	20175/1732.5	20375/1752.5
5MHz	QPSK	1	0	23.99	24.01	23.99
		1	13	24.03	24.26	24.18
		1	24	23.88	24.01	23.77
		12	0	22.85	22.89	22.99
		12	6	22.83	22.83	22.91
		12	13	22.68	22.96	22.85
	25	0	22.77	23.05	22.91	
	16QAM	1	0	22.86	22.63	23.57
		1	13	22.82	22.98	23.70
1		24	22.66	22.92	23.45	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20000/1715	20175/1732.5	20350/1750
10MHz	QPSK	1	0	24.01	24.02	24.02
		1	25	24.06	24.31	24.22
		1	49	23.90	24.05	23.80



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
	16QAM	25	0	22.88	22.94	23.03
		25	13	22.86	22.88	22.95
		25	25	22.70	23.00	22.90
		50	0	22.85	23.07	22.95
		1	0	22.88	22.66	23.59
		1	25	22.85	23.02	23.73
		1	49	22.69	22.94	23.48
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20050/1720	20175/1732.5	20300/1745
15MHz	QPSK	1	0	24.00	23.98	24.00
		1	38	24.04	24.30	24.19
		1	74	23.87	24.00	23.76
		36	0	22.86	22.90	23.00
		36	18	22.83	22.83	22.91
		36	39	22.67	22.97	22.86
		75	0	22.83	23.03	22.90
	16QAM	1	0	22.83	22.64	23.57
		1	38	22.83	22.99	23.71
		1	74	22.66	22.90	23.45
20MHz	QPSK	1	0	23.97	23.94	23.97
		1	50	24.03	24.26	24.17
		1	99	23.85	23.99	23.73
		50	0	22.83	22.85	22.96
		50	25	22.81	22.79	22.88
		50	50	22.64	22.92	22.82
		100	0	22.80	22.98	22.86
	16QAM	1	0	22.81	22.60	23.52
		1	50	22.79	22.97	23.67
		1	99	22.64	22.87	23.43

LTE Band 12				AV Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				23017/699.7	23095/707.5	23173/715.3
1.4MHz	QPSK	1	0	23.76	23.95	23.57
		1	2	23.67	23.83	23.68
		1	5	23.81	23.91	23.53
		3	0	23.74	23.76	23.78
		3	2	23.58	23.71	23.69
		3	3	23.69	23.81	23.64
		6	0	22.70	22.78	22.83
	16QAM	1	0	23.53	23.16	22.71



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	2	23.83	23.07	22.68	
		1	5	23.63	22.90	22.60	
		1	0	23.92	23.75	23.64	
		1	7	24.23	23.94	23.82	
		1	14	23.51	23.73	23.65	
		8	0	22.86	22.98	22.87	
		8	4	22.99	23.03	22.68	
	8	7	22.85	22.89	22.97		
	15	0	22.85	22.93	22.99		
	16QAM	1	0	22.59	23.27	22.84	
		1	7	22.55	23.73	23.28	
		1	14	22.58	23.36	22.68	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	23.91	23.71	23.62	
		1	13	24.21	23.93	23.79	
		1	24	23.48	23.68	23.61	
		12	0	22.84	22.94	22.84	
		12	6	22.96	22.98	22.64	
		12	13	22.82	22.86	22.93	
		25	0	22.83	22.89	22.94	
	16QAM	1	0	22.54	23.25	22.82	
			1	13	22.53	23.70	23.26
			1	24	22.55	23.32	22.65
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	23.88	23.67	23.59	
		1	25	24.20	23.89	23.77	
		1	49	23.46	23.67	23.58	
		25	0	22.81	22.89	22.80	
		25	13	22.94	22.94	22.61	
		25	25	22.79	22.81	22.89	
		50	0	22.80	22.84	22.90	
	16QAM	1	0	22.52	23.21	22.77	
			1	25	22.49	23.68	23.22
			1	49	22.53	23.29	22.63



LTE Band 13				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				23205/779.5	23230/782	23255/784.5
5MHz	QPSK	1	0	23.73	23.60	23.61
		1	13	23.64	23.75	23.95
		1	24	23.58	23.74	23.82
		12	0	22.81	22.69	22.81
		12	6	22.65	22.71	22.83
		12	13	22.74	22.76	22.96
	25	0	22.76	22.78	22.89	
	16QAM	1	0	22.88	22.86	22.46
		1	13	22.49	22.81	22.64
1		24	23.12	22.65	22.56	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				/	23230/782	/
10MHz	QPSK	1	0	/	23.61	/
		1	25	/	23.77	/
		1	49	/	23.73	/
		25	0	/	22.71	/
		25	13	/	22.73	/
		25	25	/	22.82	/
	50	0	/	22.74	/	
	16QAM	1	0	/	22.98	/
		1	25	/	23.23	/
1		49	/	23.01	/	

5.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

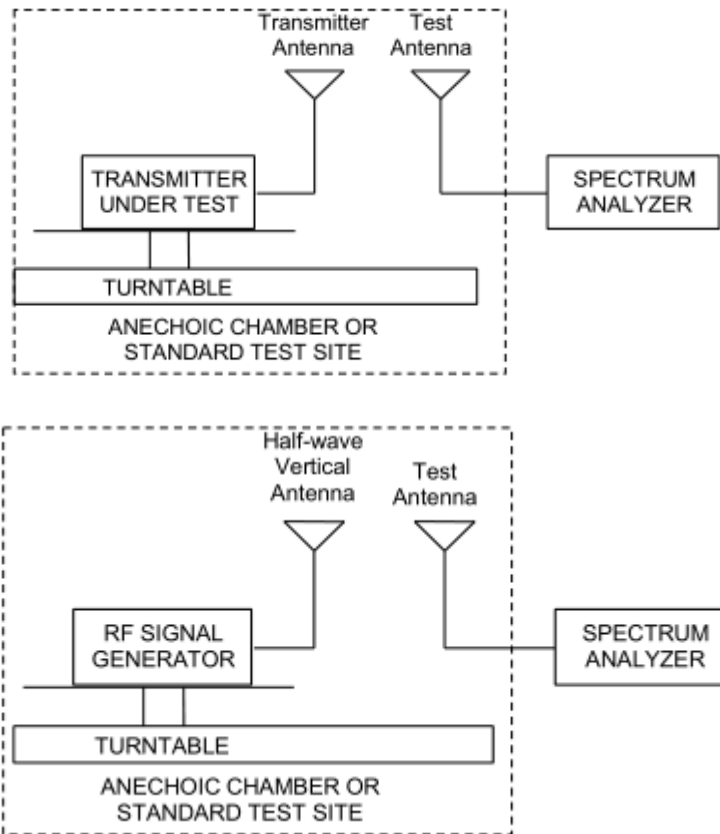

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Part 27.50(b)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(c)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(d)(4)Limit	≤ 1 W (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19$ dB

Test Results

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 4						
Bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1710.7	Horizontal	25.13	30	Pass
	Middle	1732.5	Horizontal	24.61	30	Pass
	High	1754.3	Horizontal	24.64	30	Pass
3 MHz (QPSK)	Low	1711.5	Horizontal	25.08	30	Pass
	Middle	1732.5	Horizontal	24.49	30	Pass
	High	1753.5	Horizontal	24.48	30	Pass
5 MHz (QPSK)	Low	1712.5	Horizontal	25.22	30	Pass
	Middle	1732.5	Horizontal	24.61	30	Pass
	High	1752.5	Horizontal	24.70	30	Pass
10 MHz (QPSK)	Low	1715	Horizontal	25.12	30	Pass
	Middle	1732.5	Horizontal	24.50	30	Pass
	High	1750	Horizontal	24.51	30	Pass
15 MHz (QPSK)	Low	1717.5	Horizontal	25.19	30	Pass
	Middle	1732.5	Horizontal	24.63	30	Pass
	High	1747.5	Horizontal	24.73	30	Pass
20 MHz (QPSK)	Low	1720	Horizontal	25.23	30	Pass
	Middle	1732.5	Horizontal	24.79	30	Pass
	High	1745	Horizontal	24.66	30	Pass
1.4 MHz (16QAM)	Low	1710.7	Horizontal	25.01	30	Pass
	Middle	1732.5	Horizontal	24.13	30	Pass
	High	1754.3	Horizontal	24.21	30	Pass
3 MHz (16QAM)	Low	1711.5	Horizontal	24.83	30	Pass
	Middle	1732.5	Horizontal	24.21	30	Pass
	High	1753.5	Horizontal	24.31	30	Pass
5 MHz (16QAM)	Low	1712.5	Horizontal	24.94	30	Pass
	Middle	1732.5	Horizontal	24.32	30	Pass
	High	1752.5	Horizontal	24.55	30	Pass
10 MHz (16QAM)	Low	1715	Horizontal	24.76	30	Pass
	Middle	1732.5	Horizontal	24.31	30	Pass
	High	1750	Horizontal	24.08	30	Pass
15 MHz (16QAM)	Low	1717.5	Horizontal	25.02	30	Pass
	Middle	1732.5	Horizontal	24.31	30	Pass
	High	1747.5	Horizontal	24.48	30	Pass
20 MHz (16QAM)	Low	1720	Horizontal	24.78	30	Pass
	Middle	1732.5	Horizontal	24.35	30	Pass
	High	1745	Horizontal	24.29	30	Pass

LTE Band 12						
Bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	699.7	Horizontal	18.88	34.77	Pass
	Middle	707.5	Horizontal	19.23	34.77	Pass
	High	715.3	Horizontal	19.26	34.77	Pass
3 MHz (QPSK)	Low	700.5	Horizontal	19.04	34.77	Pass
	Middle	707.5	Horizontal	19.39	34.77	Pass
	High	714.5	Horizontal	19.44	34.77	Pass
5 MHz (QPSK)	Low	701.5	Horizontal	18.79	34.77	Pass
	Middle	707.5	Horizontal	19.22	34.77	Pass
	High	713.5	Horizontal	18.99	34.77	Pass
10 MHz (QPSK)	Low	704	Horizontal	18.69	34.77	Pass
	Middle	707.5	Horizontal	19.11	34.77	Pass
	High	711	Horizontal	19.08	34.77	Pass
1.4 MHz (16QAM)	Low	699.7	Horizontal	18.53	34.77	Pass
	Middle	707.5	Horizontal	18.82	34.77	Pass
	High	715.3	Horizontal	19.03	34.77	Pass
3 MHz (16QAM)	Low	700.5	Horizontal	18.62	34.77	Pass
	Middle	707.5	Horizontal	18.90	34.77	Pass
	High	714.5	Horizontal	18.88	34.77	Pass
5 MHz (16QAM)	Low	701.5	Horizontal	18.64	34.77	Pass
	Middle	707.5	Horizontal	18.90	34.77	Pass
	High	713.5	Horizontal	18.74	34.77	Pass
10 MHz (16QAM)	Low	704	Horizontal	18.49	34.77	Pass
	Middle	707.5	Horizontal	18.77	34.77	Pass
	High	711	Horizontal	18.84	34.77	Pass

LTE Band 13						
Bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
5MHz (QPSK)	Low	779.5	Horizontal	22.11	34.77	Pass
	Middle	782	Horizontal	22.03	34.77	Pass
	High	784.5	Horizontal	22.36	34.77	Pass
10MHz (QPSK)	Middle	782	Horizontal	22.55	34.77	Pass
5MHz (16QAM)	Low	779.5	Horizontal	21.86	34.77	Pass
	Middle	782	Horizontal	21.72	34.77	Pass
	High	784.5	Horizontal	21.94	34.77	Pass
10MHz (16QAM)	Middle	782	Horizontal	22.47	34.77	Pass

5.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/12 (1.4MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/12 (3MHz).


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/12/13 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/12/13 (10MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4 (15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

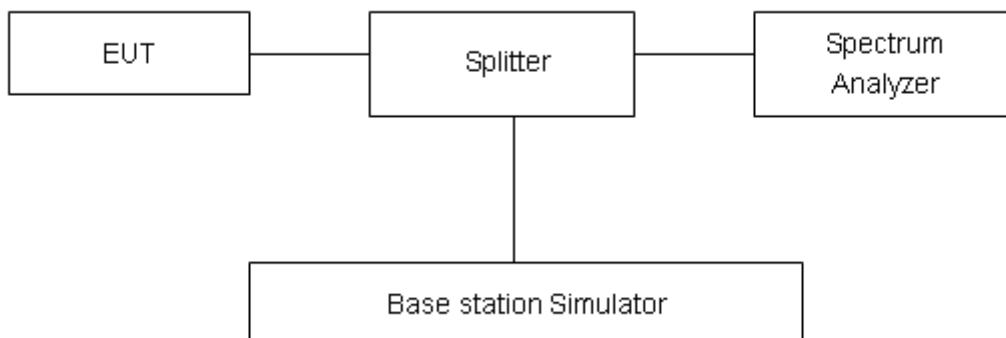

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty







The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.







Test Result







LTE Band 4						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	19957	1710.7	1.1274	1.3370
			20175	1732.5	1.1077	1.3150
			20393	1754.3	1.1108	1.3350
		3	19965	1711.5	2.7345	3.0400
			20175	1732.5	2.7353	3.0640
			20385	1753.5	2.7424	3.0340
		5	19975	1712.5	4.5308	5.0300
			20175	1732.5	4.5140	4.9760
			20375	1752.5	4.5177	5.0220
		10	20000	1715	9.0214	10.0400
			20175	1732.5	9.0081	10.0200
			20350	1750	9.0092	10.0800
		15	20025	1717.5	13.4740	14.7000
			20175	1732.5	13.4380	14.5600
			20325	1747.5	13.4310	14.6100
		20	20050	1720	17.8960	19.2100
			20175	1732.5	17.9110	19.0400
			20300	1745	17.8610	19.3600
	16QAM	1.4	19957	1710.7	1.0981	1.2850
			20175	1732.5	1.1007	1.3030
			20393	1754.3	1.1005	1.2980
		3	19965	1711.5	2.7149	3.0130
			20175	1732.5	2.7074	3.0170
			20385	1753.5	2.7044	3.0070
5		19975	1712.5	4.5355	5.0270	
		20175	1732.5	4.5029	5.0010	
		20375	1752.5	4.5297	5.0030	







LTE Band 12						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	23017	699.7	1.1165	1.3150
			23095	707.5	1.1136	1.3350
			23173	715.3	1.1154	1.3190
		3	23025	700.5	2.7422	3.0590
			23095	707.5	2.7444	3.0520
			23165	714.5	2.7392	3.0720
		5	23035	701.5	4.5137	5.0130
			23095	707.5	4.5160	4.9720
			23155	713.5	4.5174	5.0130
	10	23060	704	9.0155	10.1000	
		23095	707.5	9.0102	10.0300	
		23130	711	9.0204	9.9670	
	16QAM	1.4	23017	699.7	1.0976	1.2850
			23095	707.5	1.1000	1.2930
			23173	715.3	1.1049	1.3150
		3	23025	700.5	2.7052	3.0240
			23095	707.5	2.6991	2.9860
			23165	714.5	2.7077	2.9990
5		23035	701.5	4.5203	5.0170	
		23095	707.5	4.5256	5.0220	
		23155	713.5	4.5354	5.0260	




LTE Band 13						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	23205	779.5	4.4928	4.9500
			23230	782	4.5330	5.0620
			23255	784.5	4.5082	4.9480
	10	23230	782	9.0350	10.0500	
	16QAM	5	23205	779.5	4.5255	5.0120
			23230	782	4.4970	4.9710
23255			784.5	4.5233	5.0210	

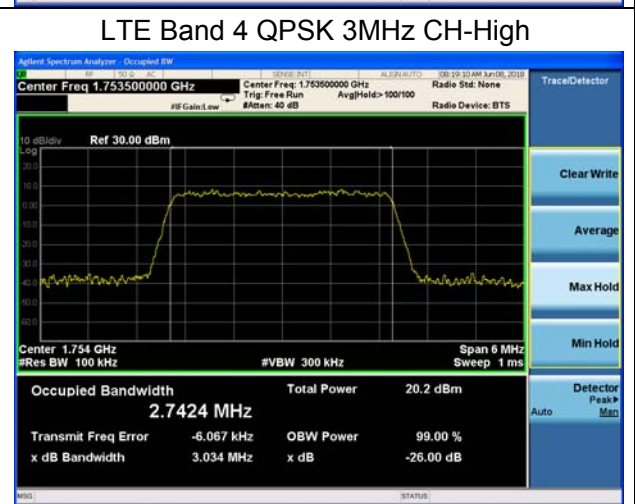
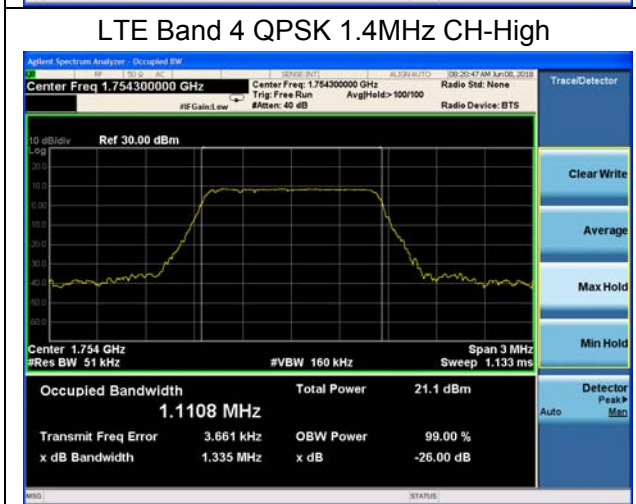
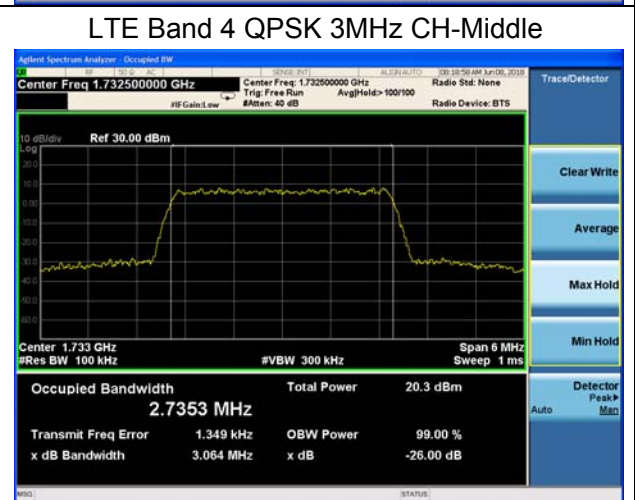
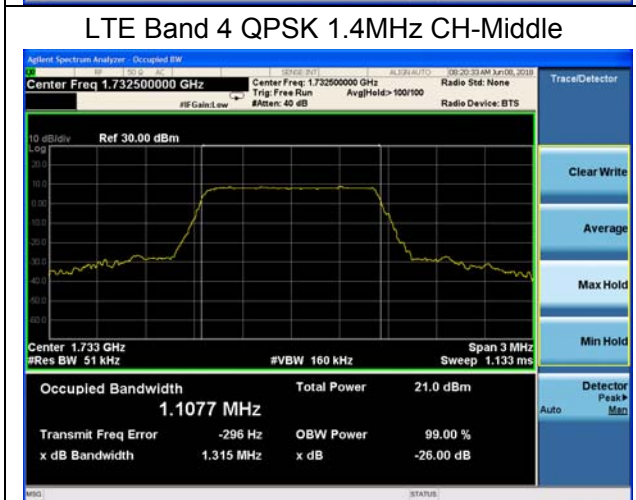
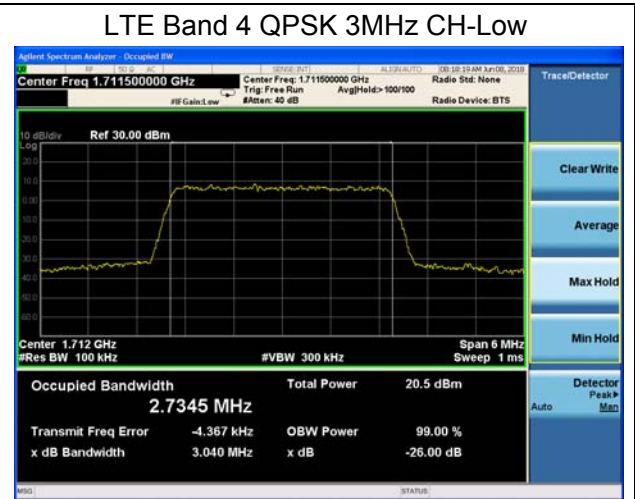
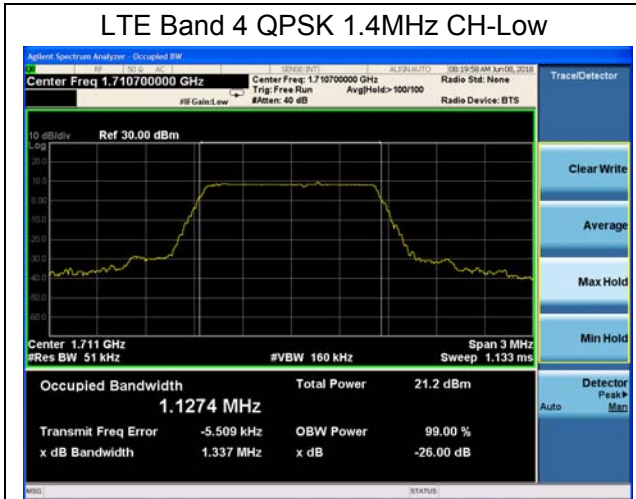


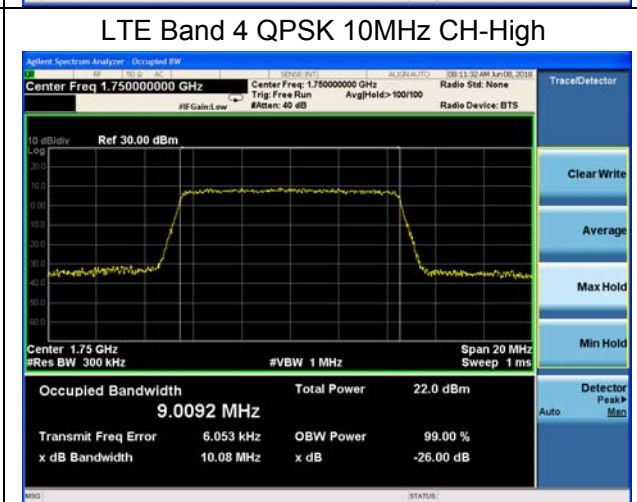
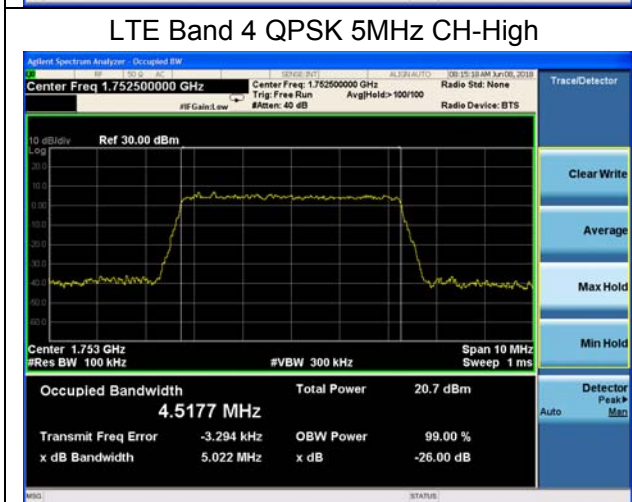
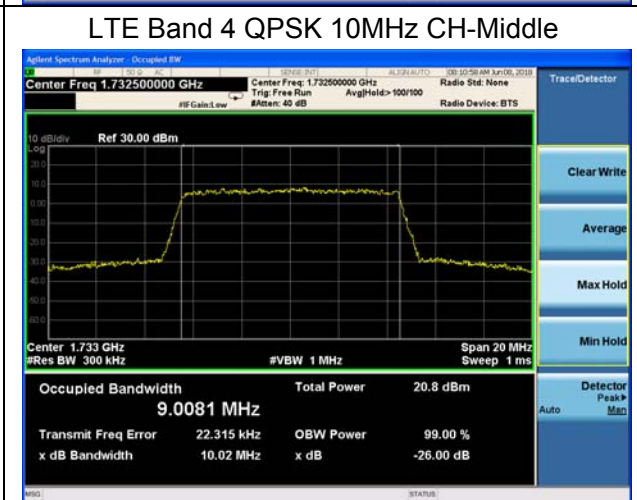
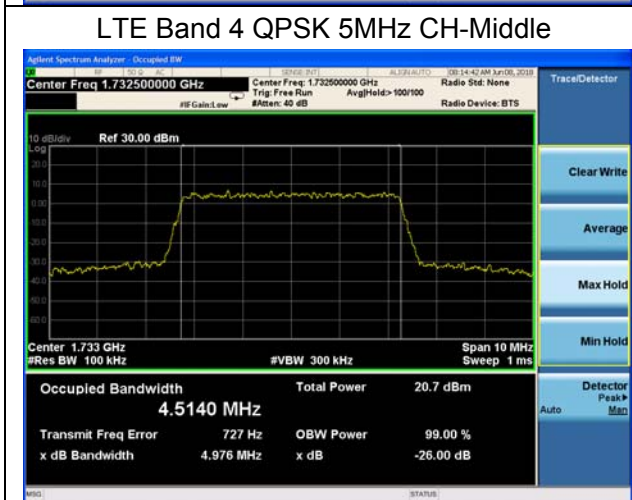
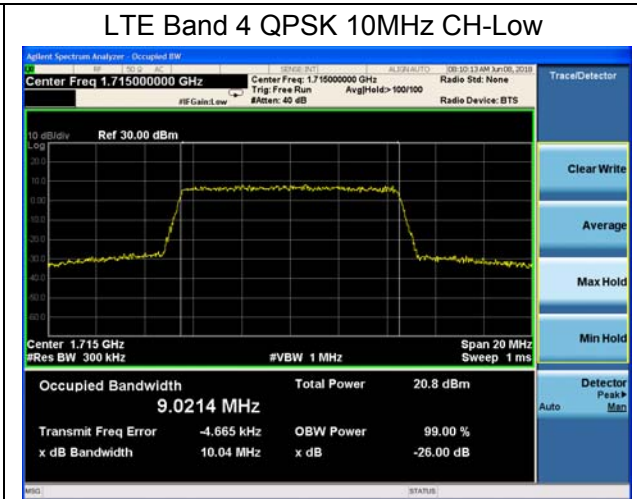
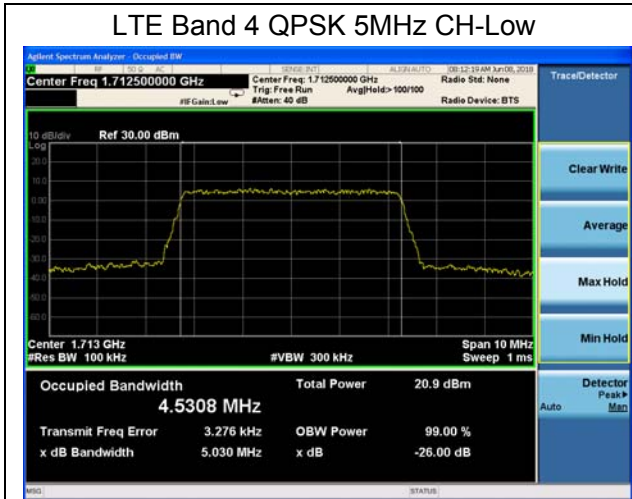


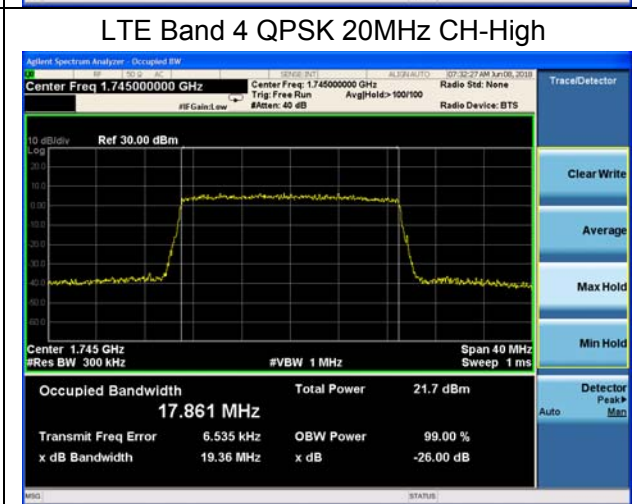
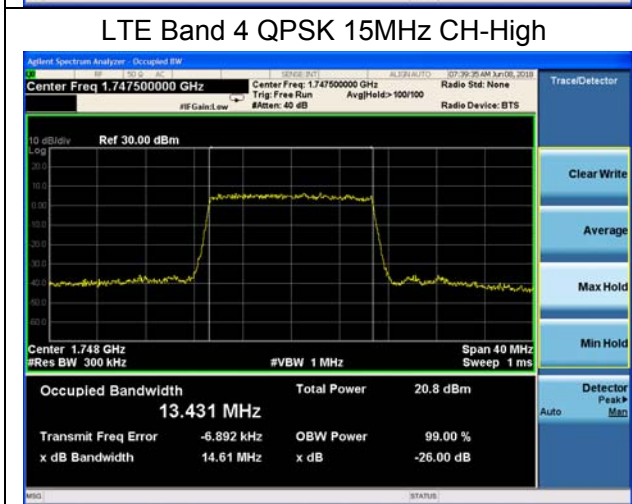
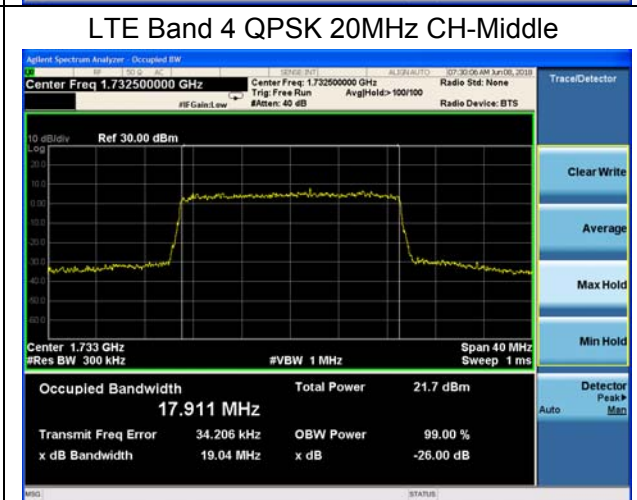
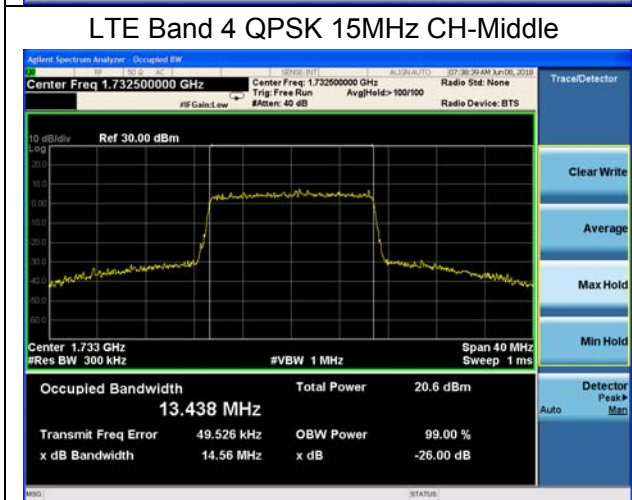
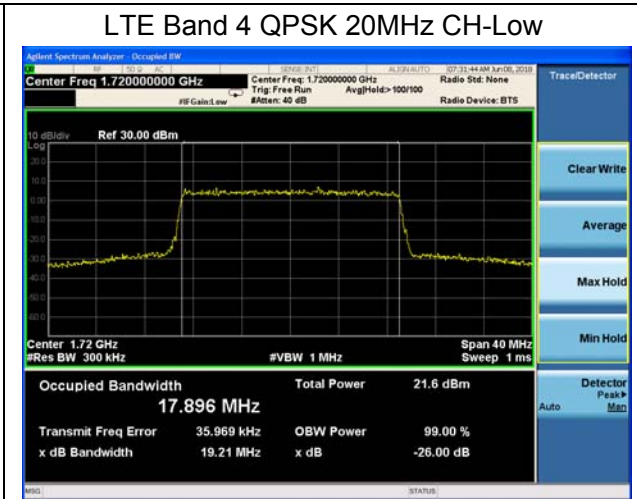
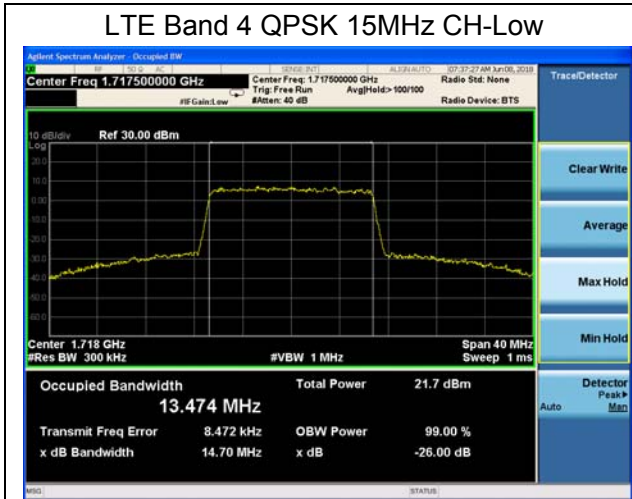


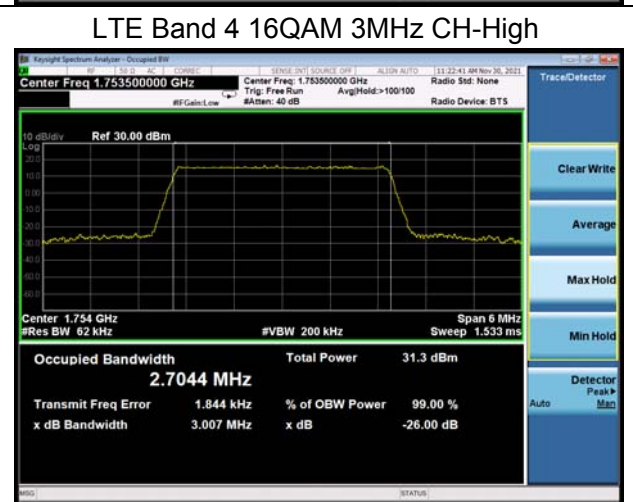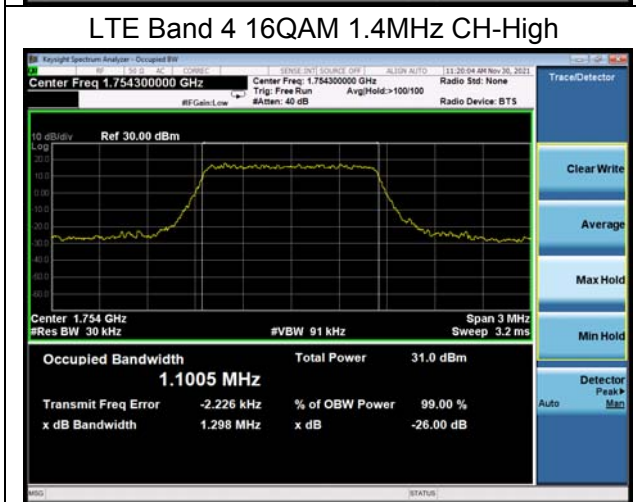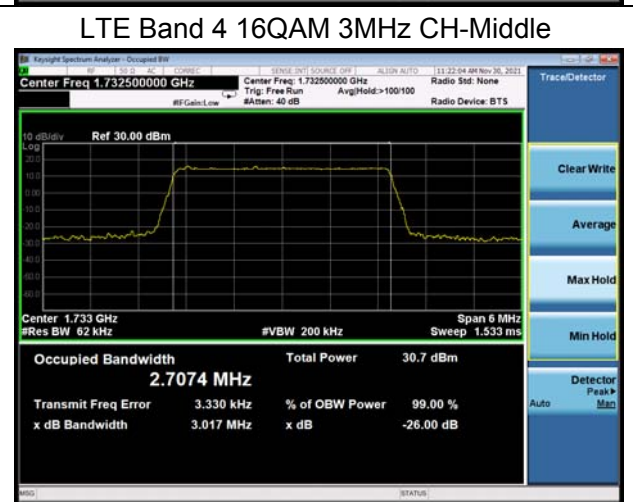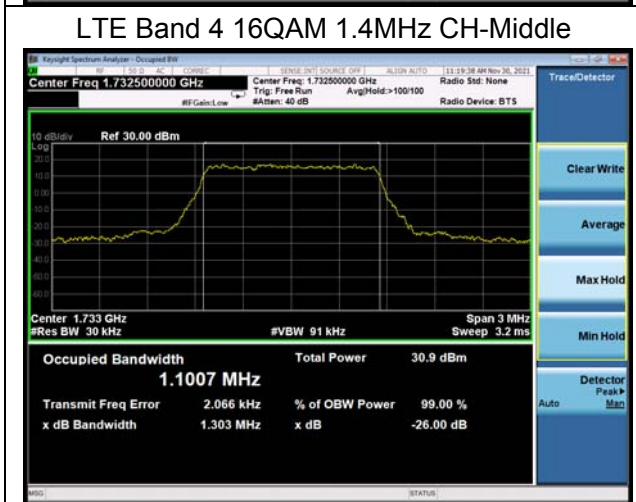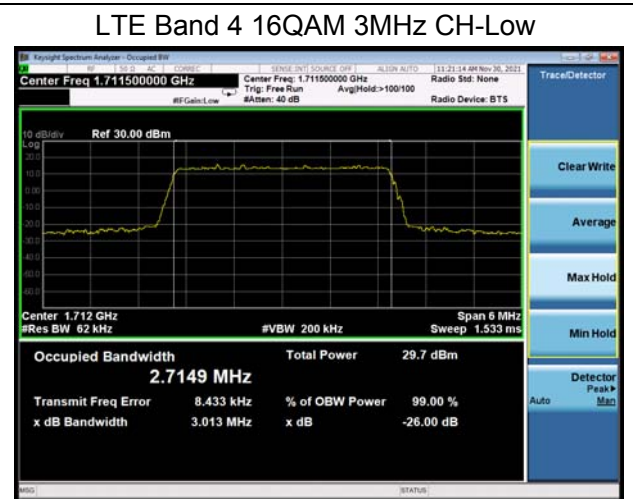
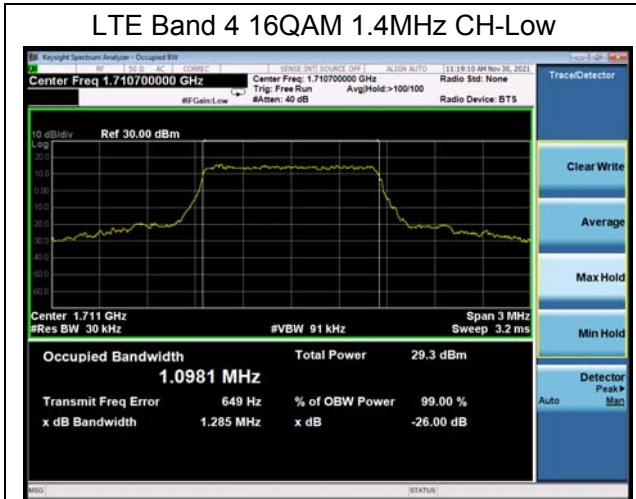


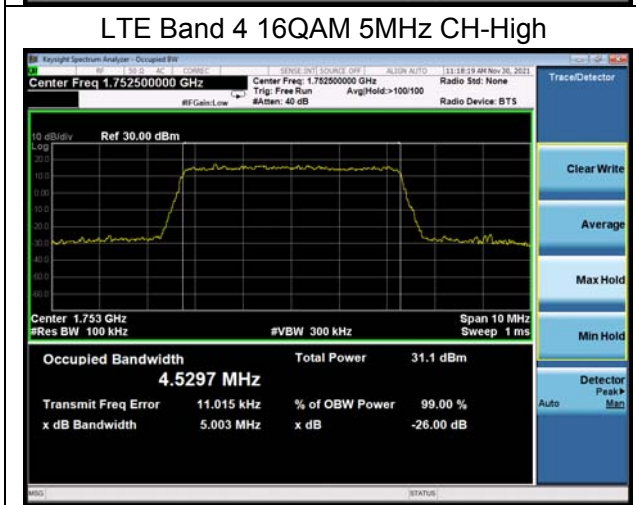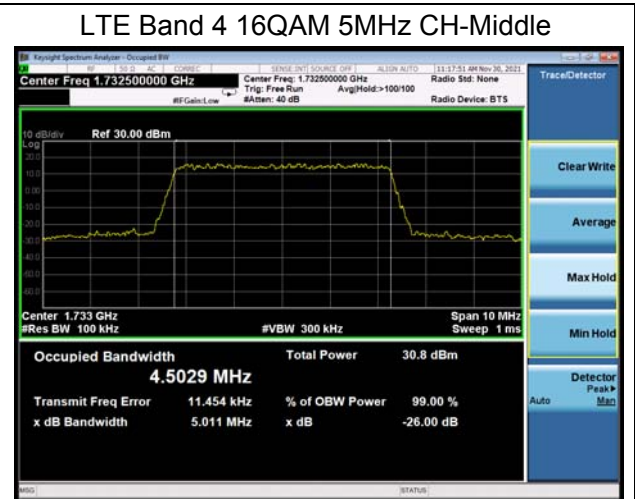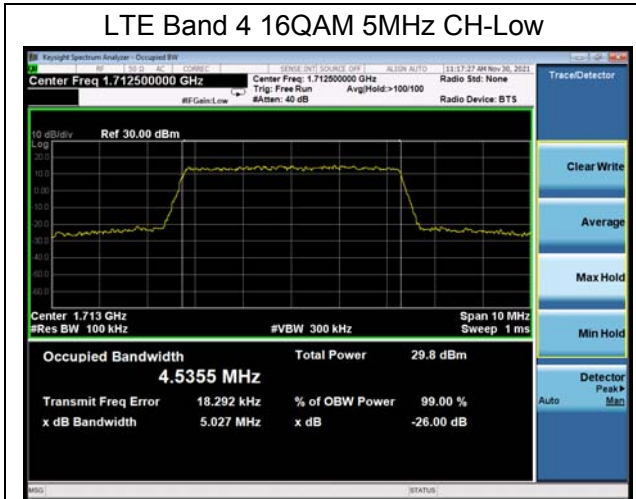

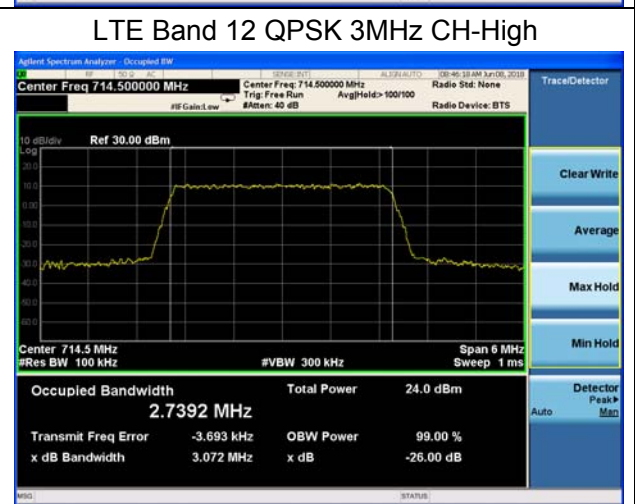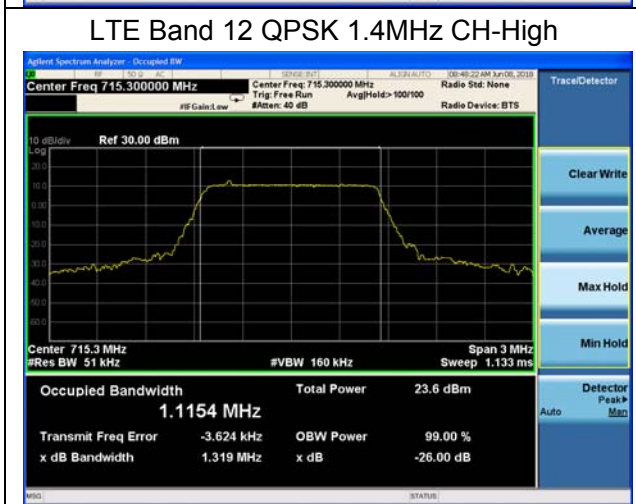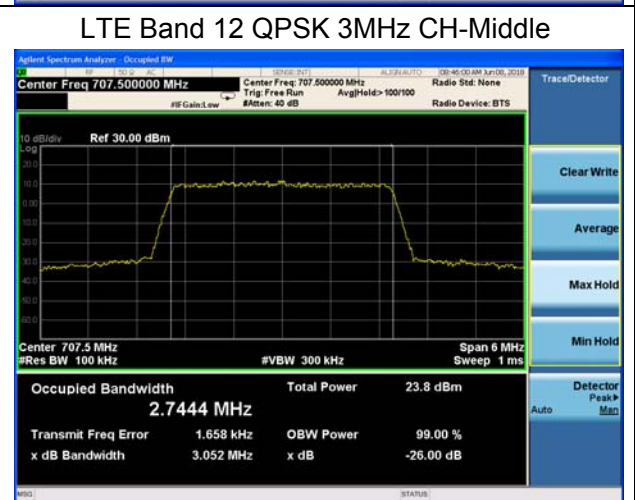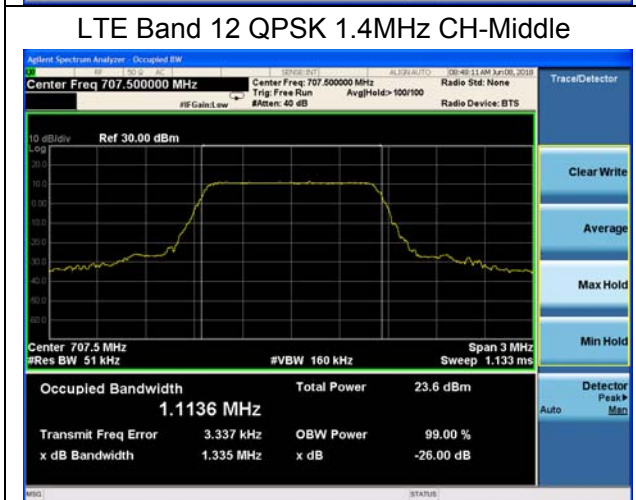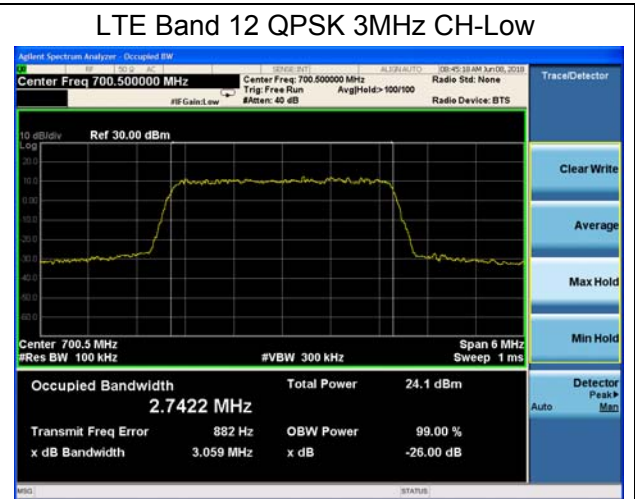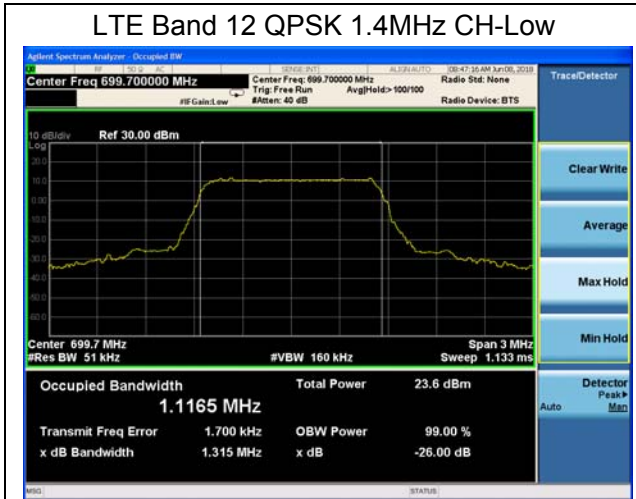

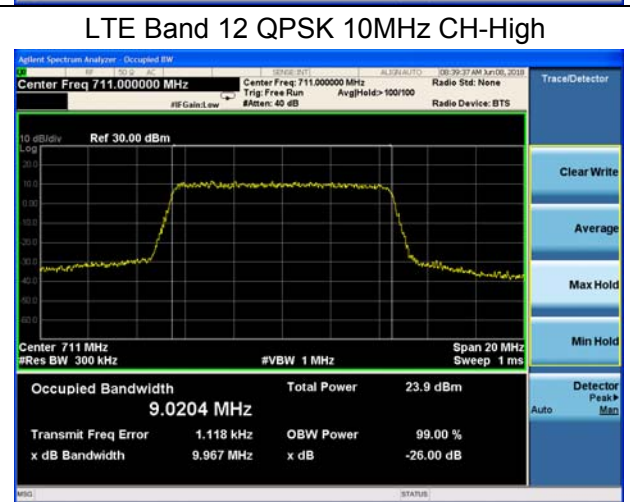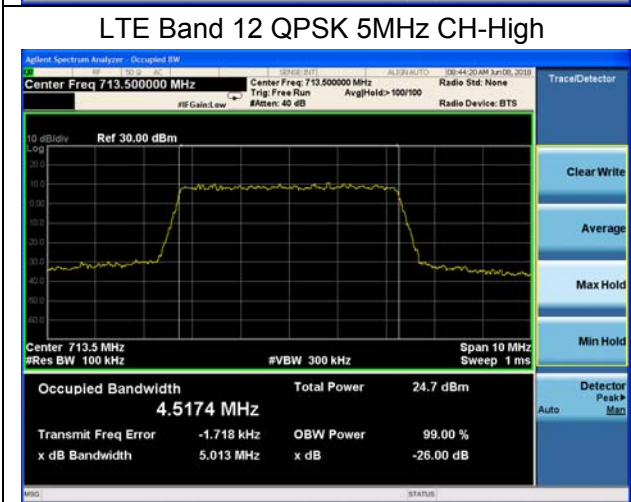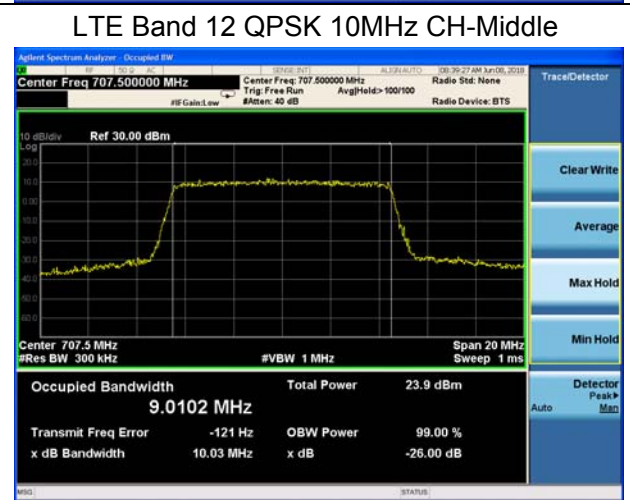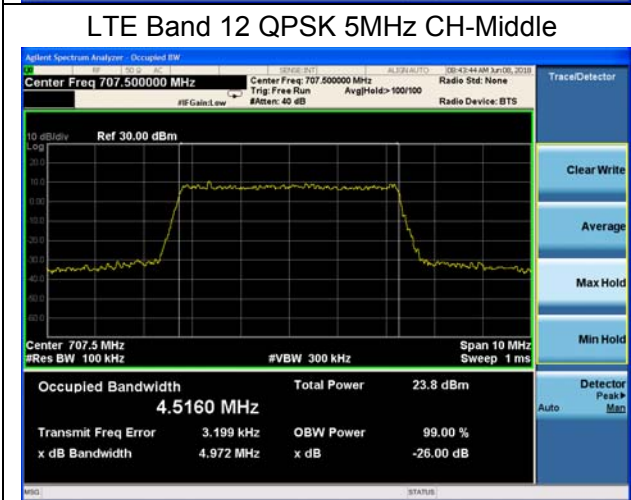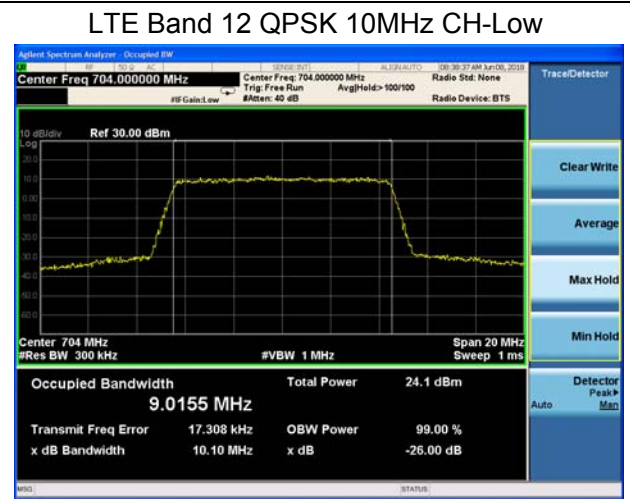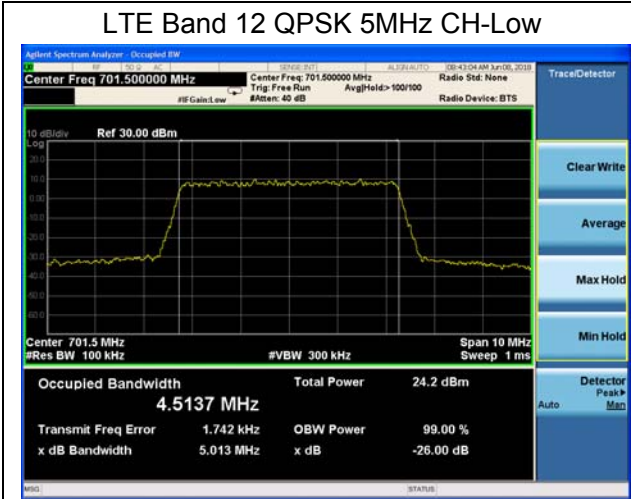


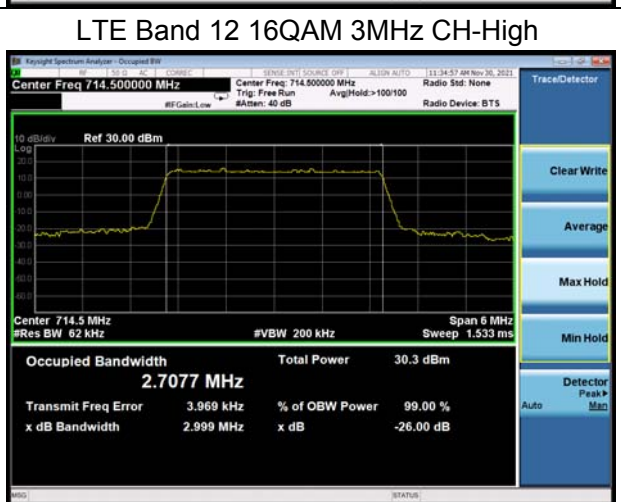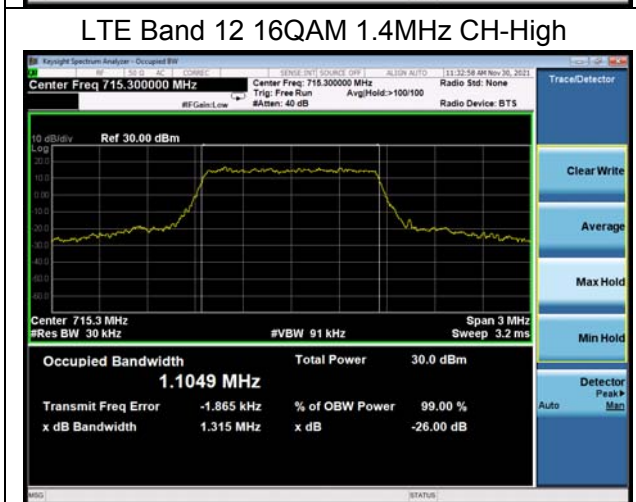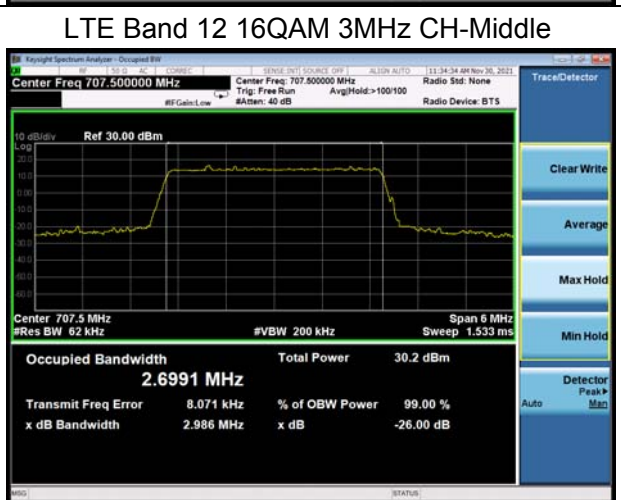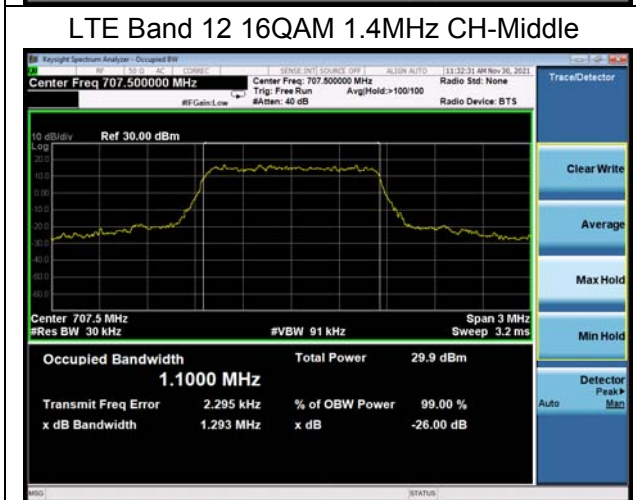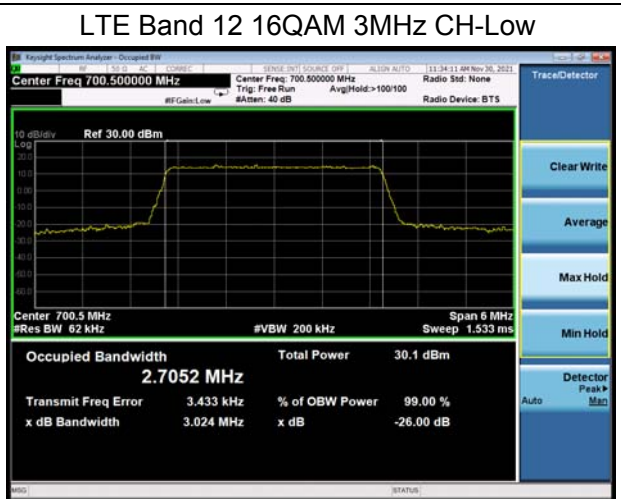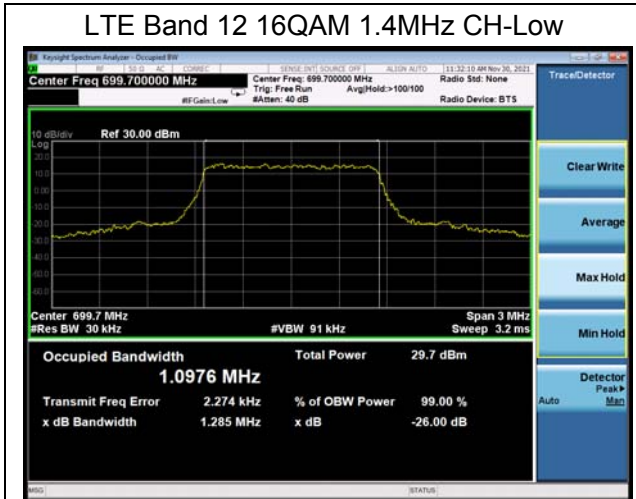

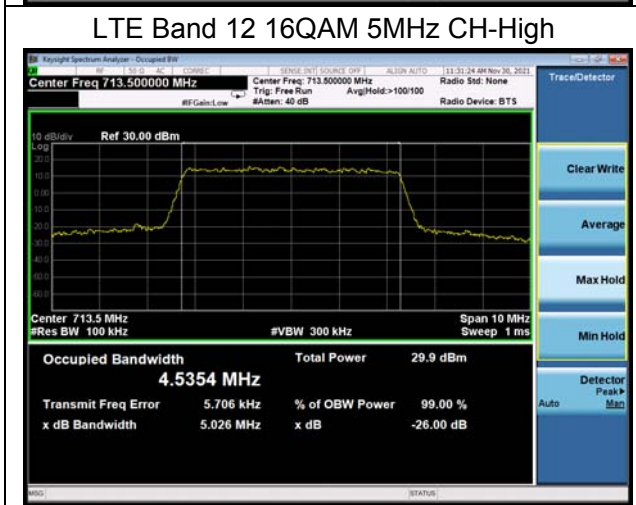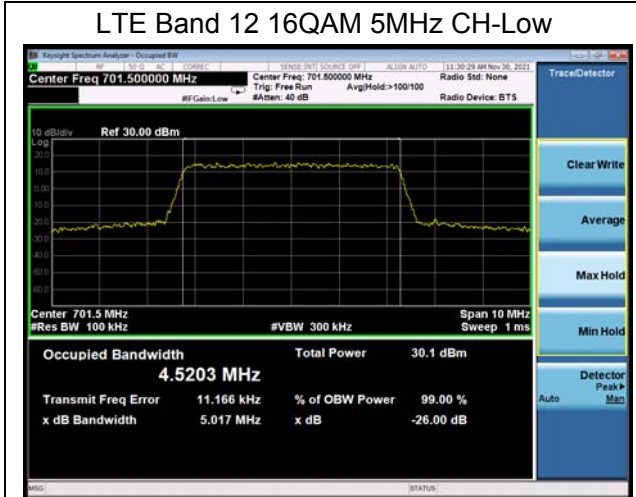




LTE Band 13 QPSK 5MHz CH-Low

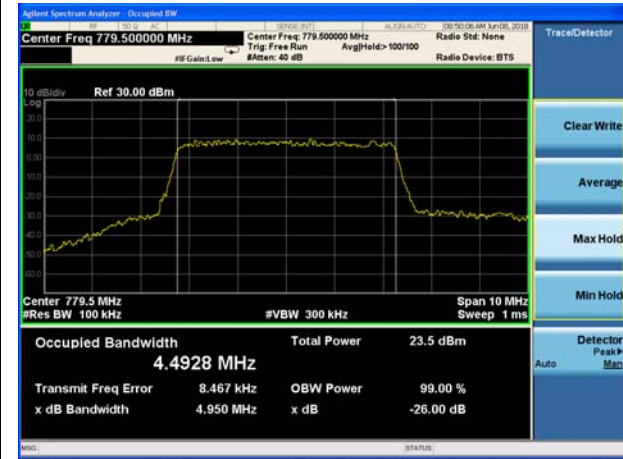

LTE Band 13 16QAM 5MHz CH-Low




LTE Band 13 QPSK 5MHz CH-Middle

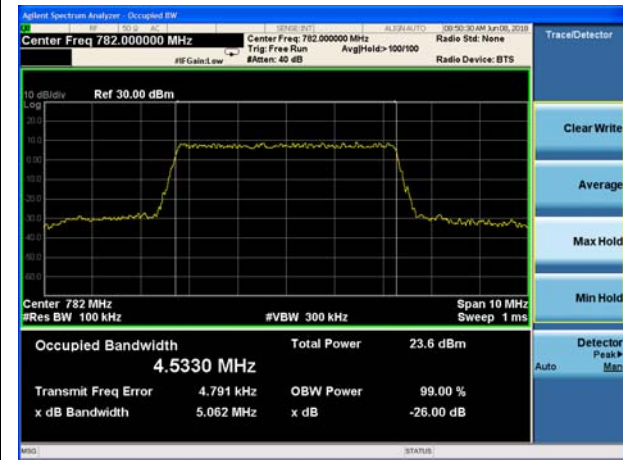

LTE Band 13 16QAM 5MHz CH-Middle




LTE Band 13 QPSK 5MHz CH-High

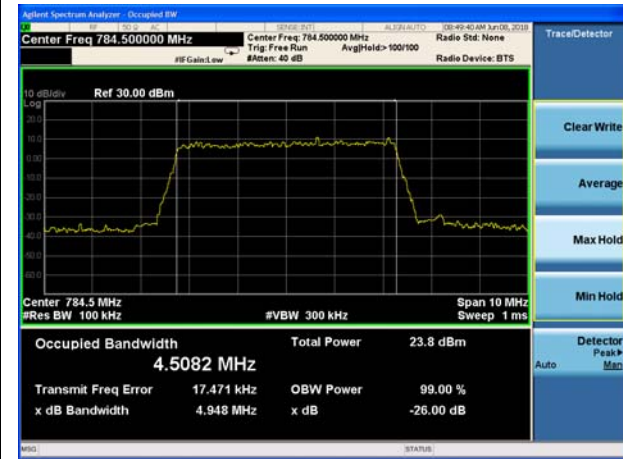

LTE Band 13 16QAM 5MHz CH-High



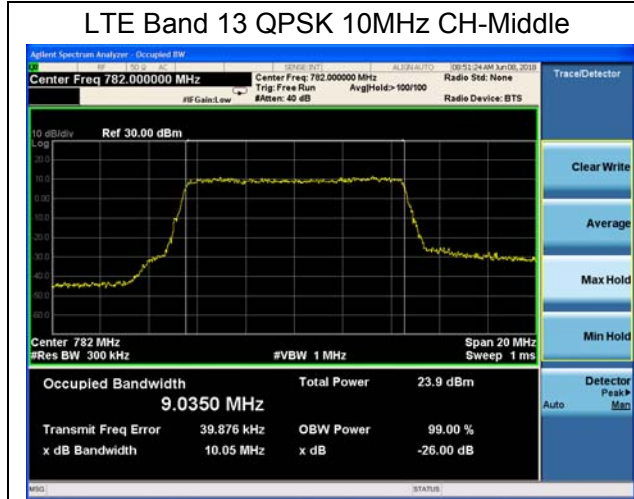

5.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

1.The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 4 (1.4MHz/ 3MHz).

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (5MHz).

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4 (10MHz).

RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 4(15MHz).

RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4(20MHz)

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 12(1.4MHz/3MHz/5MHz/10MHz).

RBW is set to 6.8 kHz for LTE Band 13 (763MHz~775MHz).

RBW is set to 100 kHz for LTE Band 13 (775MHz~776.9MHz).

RBW is set to 30 kHz for LTE Band 13 (776.9MHz~777MHz).

RBW is set to 30 kHz for LTE Band 13 (787MHz~787.1MHz).

RBW is set to 100 kHz for LTE Band 13 (787.1MHz~793MHz).

RBW is set to 6.8 kHz for LTE Band 13 (793MHz~805MHz).


on spectrum analyzer.

4. Set spectrum analyzer with RMS detector.

5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

6. Checked that all the results comply with the emission limit line.

Test Setup

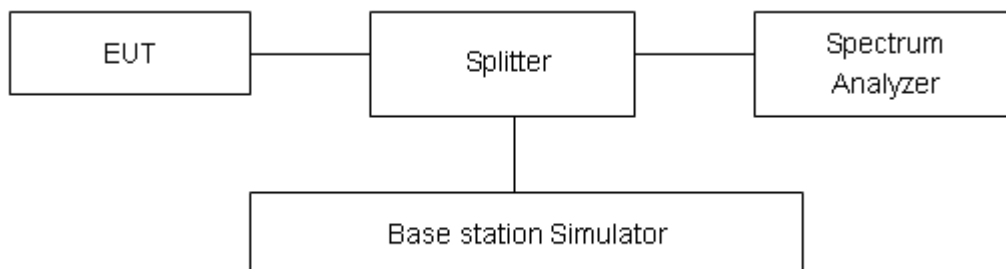

Limits

Rule Part 27.53(h) specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB”

Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.

Test Result

All the test traces in the plots shows the test results clearly.

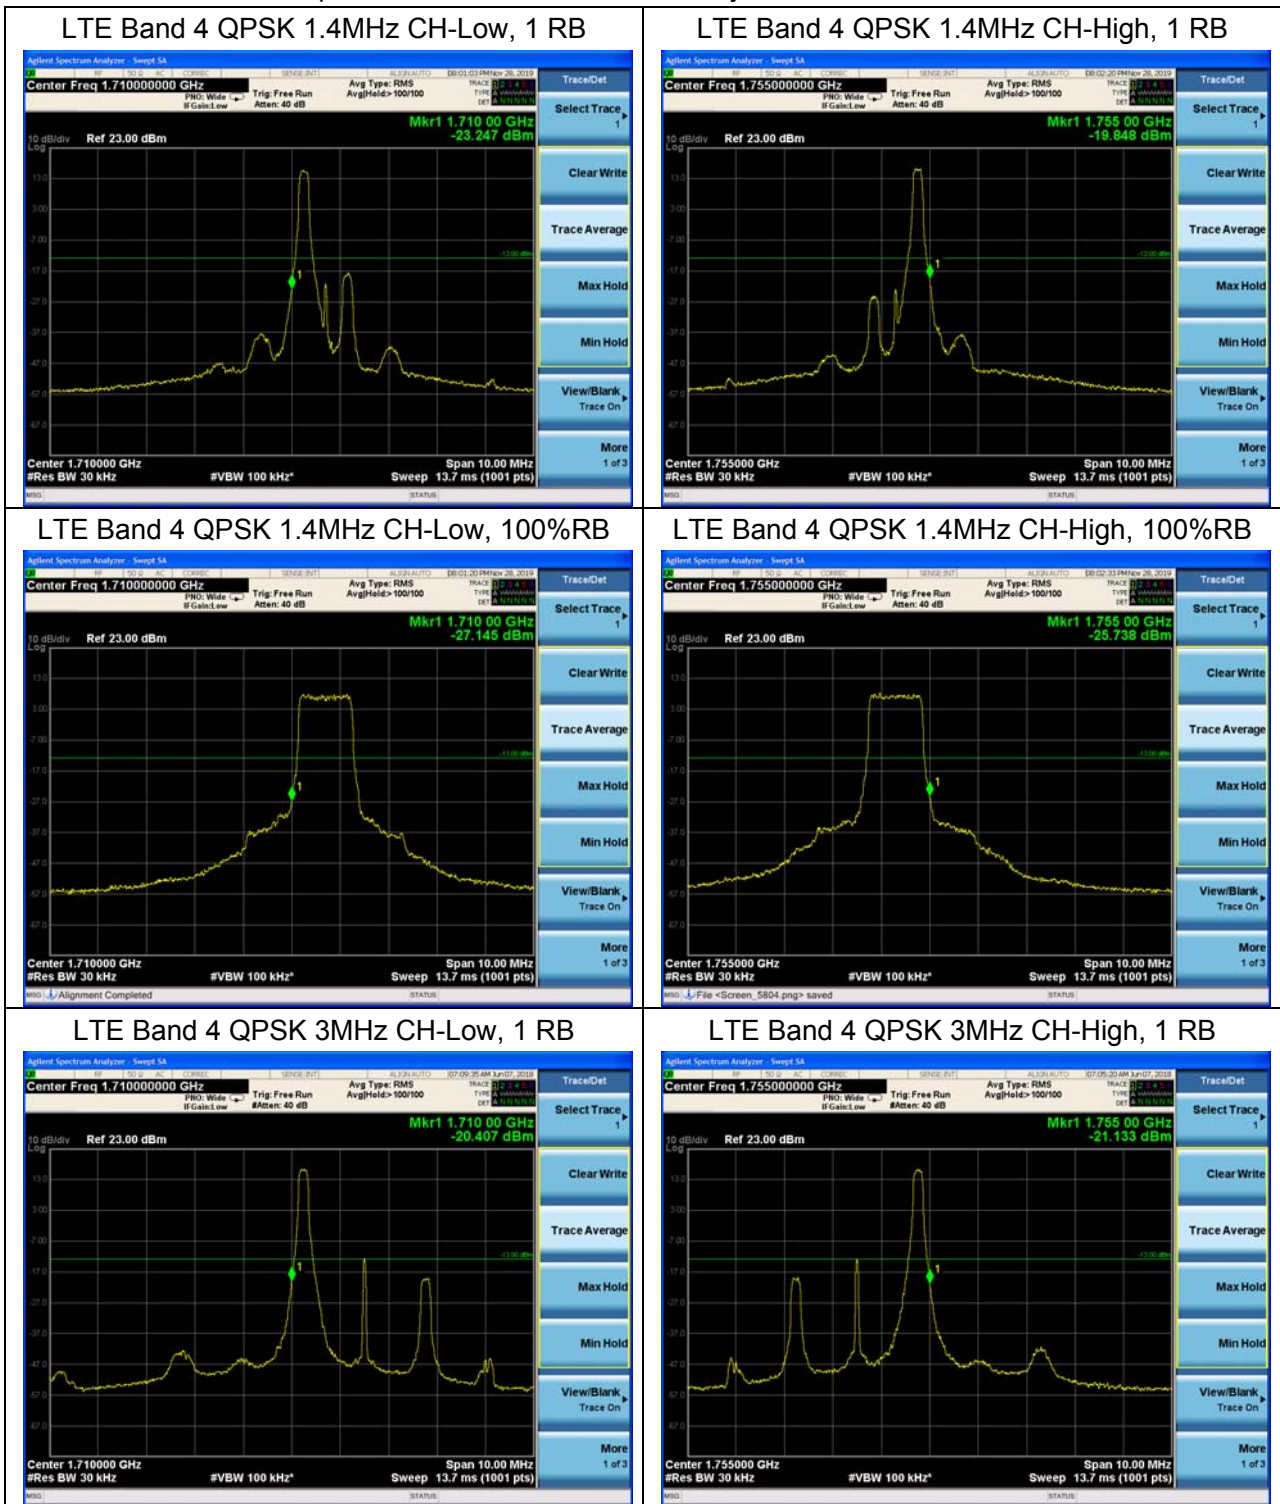




LTE Band 4 QPSK 3MHz CH-Low, 100%RB




LTE Band 4 QPSK 3MHz CH-High, 100%RB




LTE Band 4 QPSK 5MHz CH-Low, 1 RB

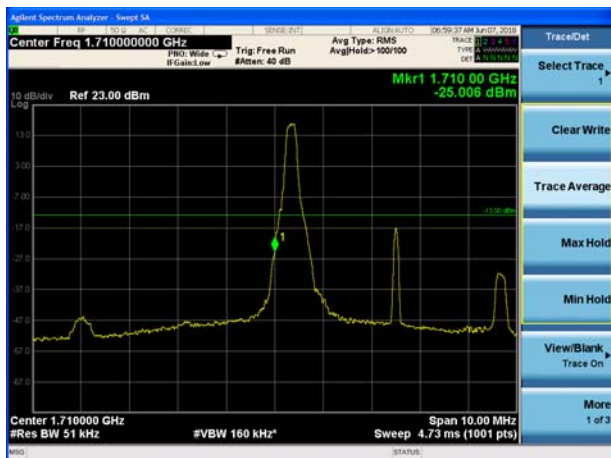

LTE Band 4 QPSK 5MHz CH-High, 1 RB






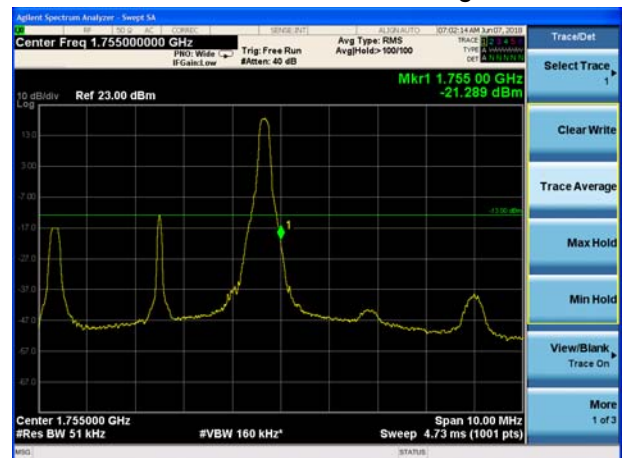








LTE Band 4 QPSK 5MHz CH-Low, 100%RB






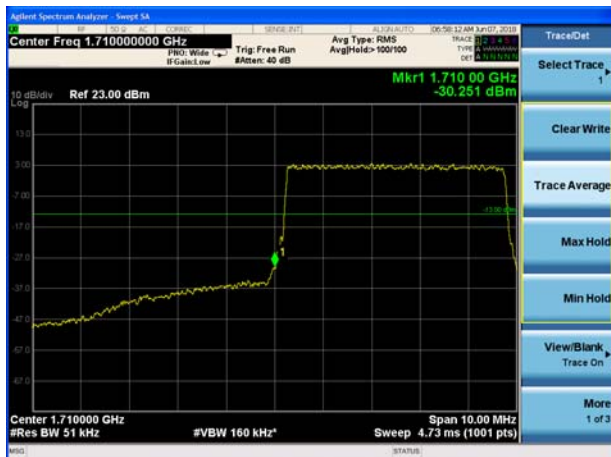


LTE Band 4 QPSK 5MHz CH-High, 100%RB



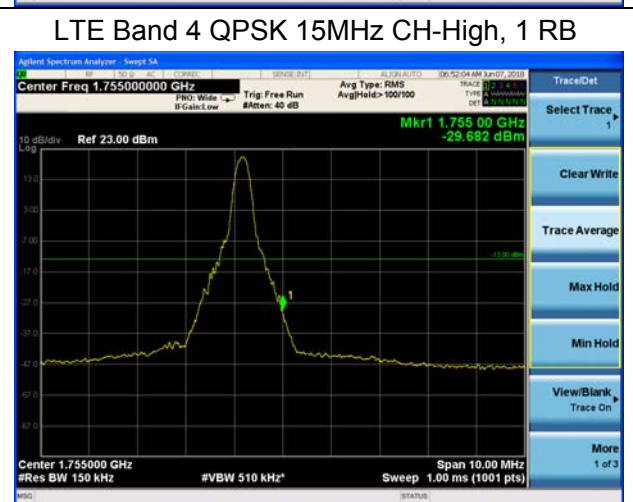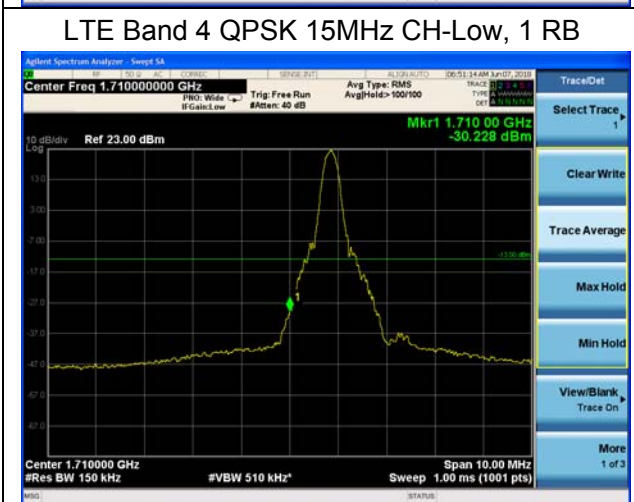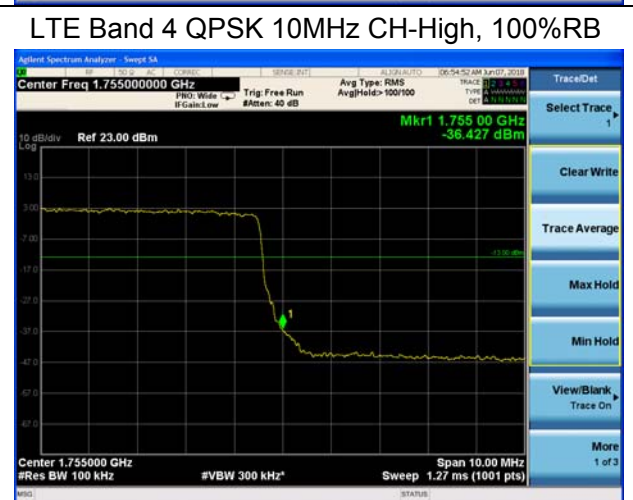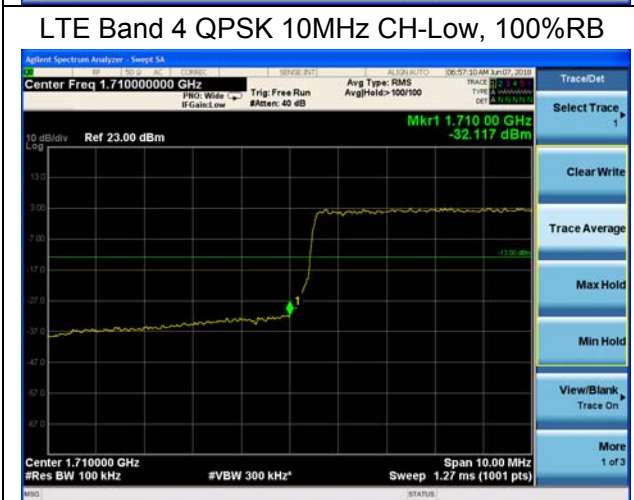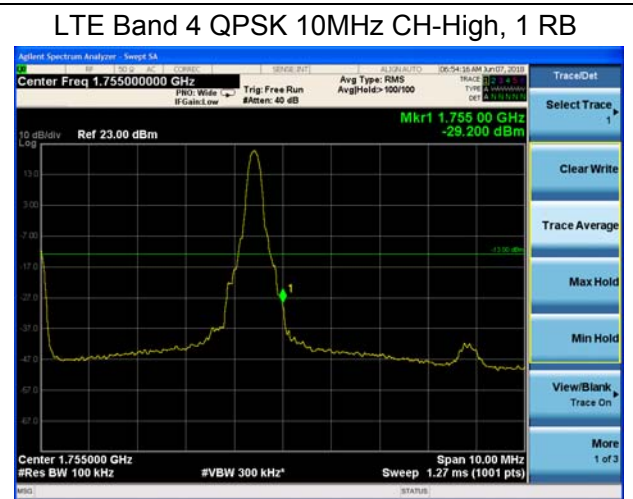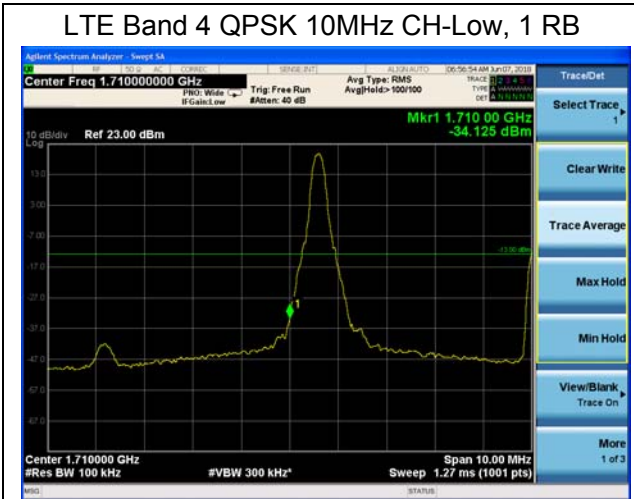

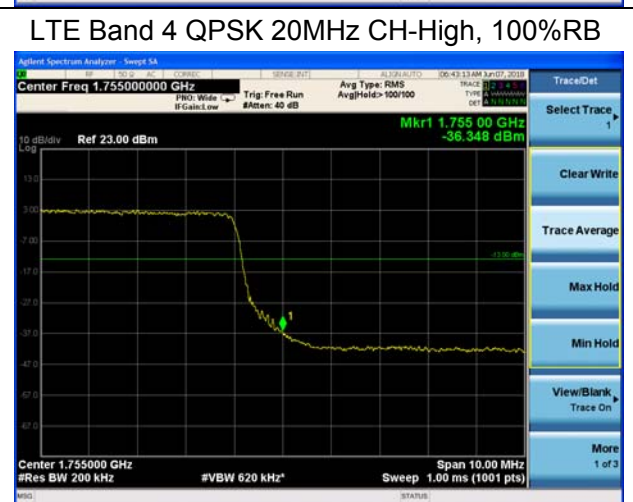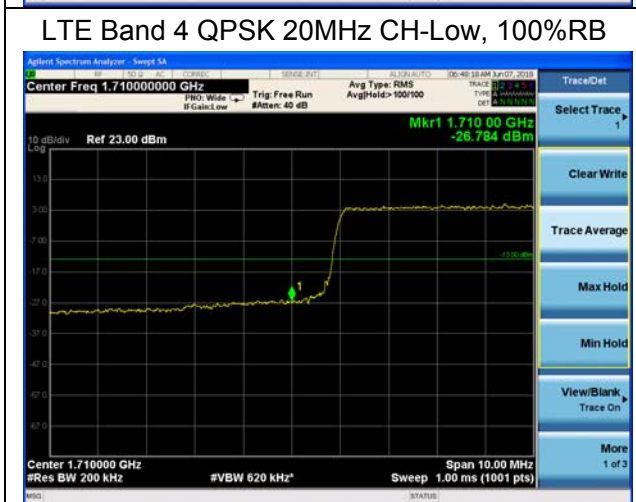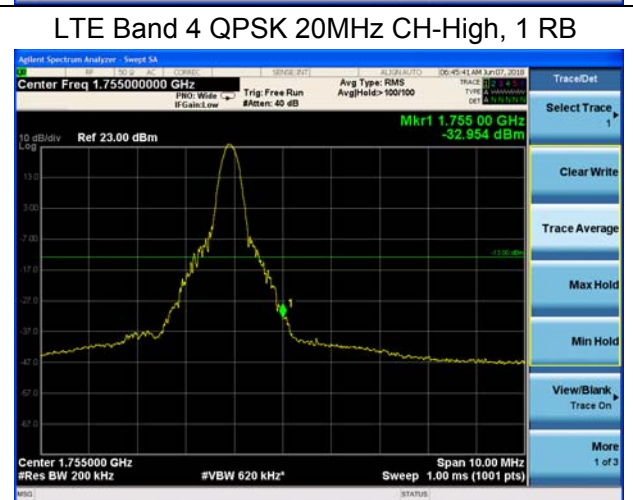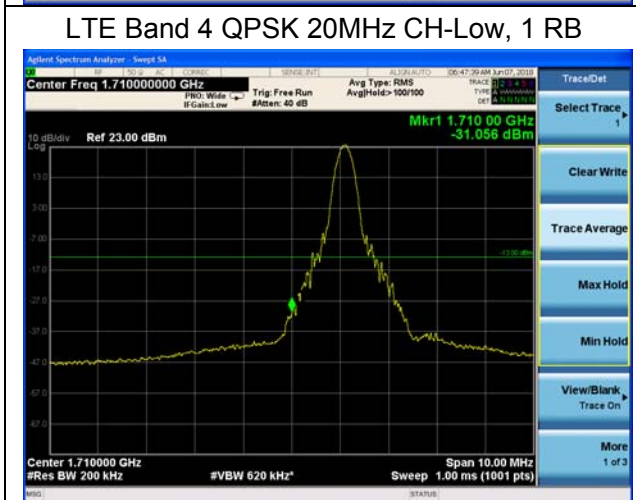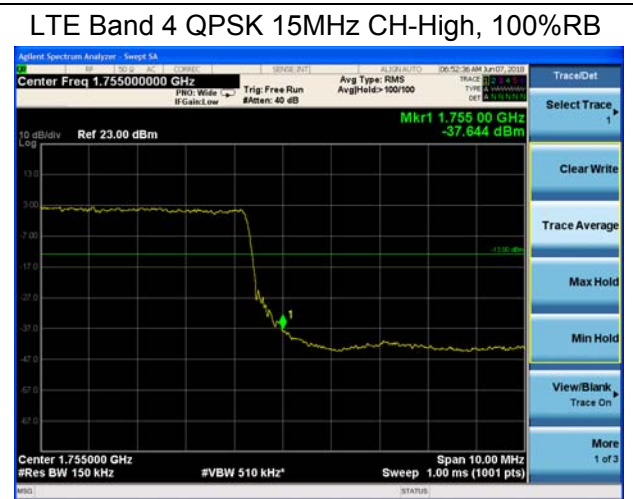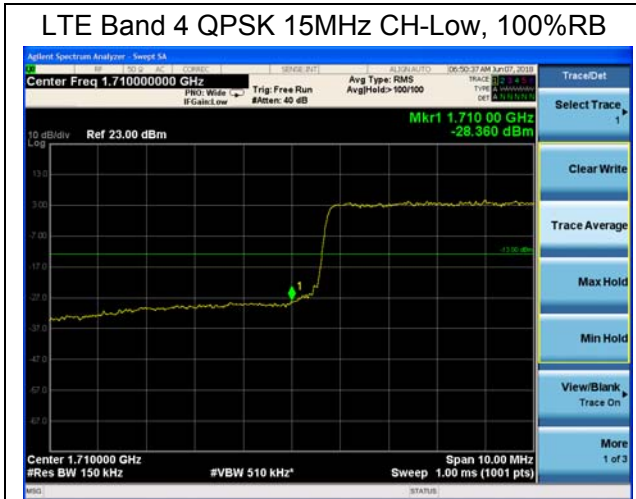

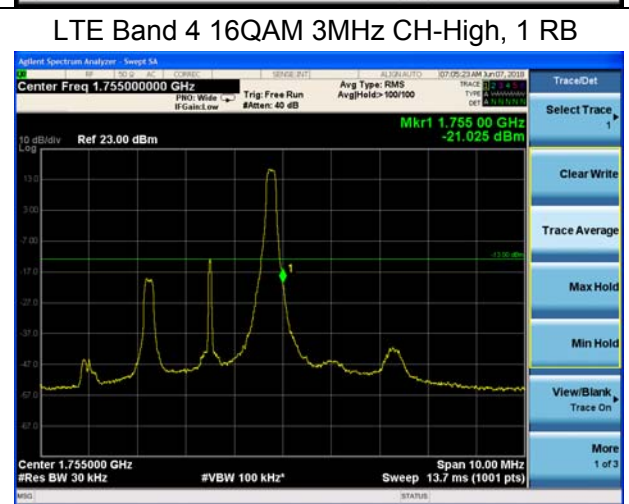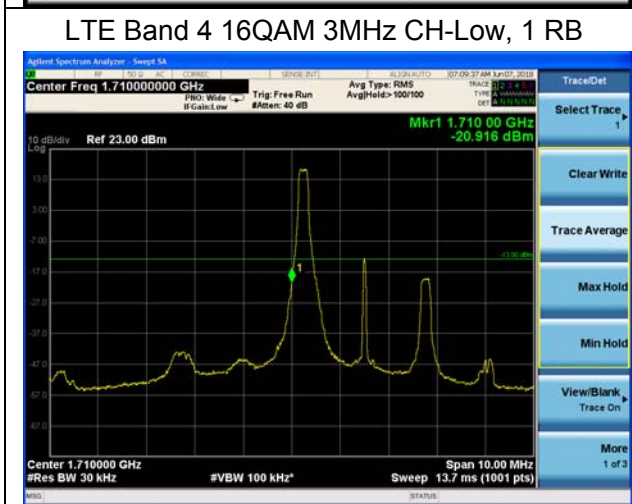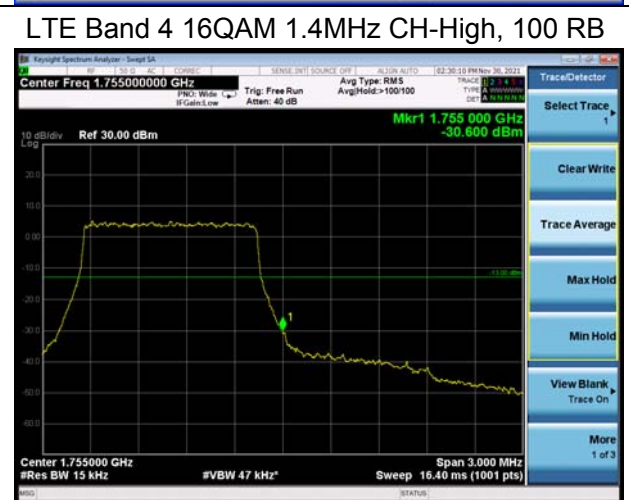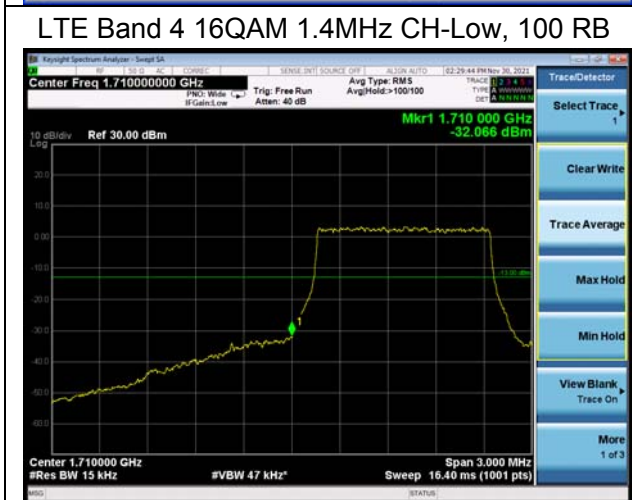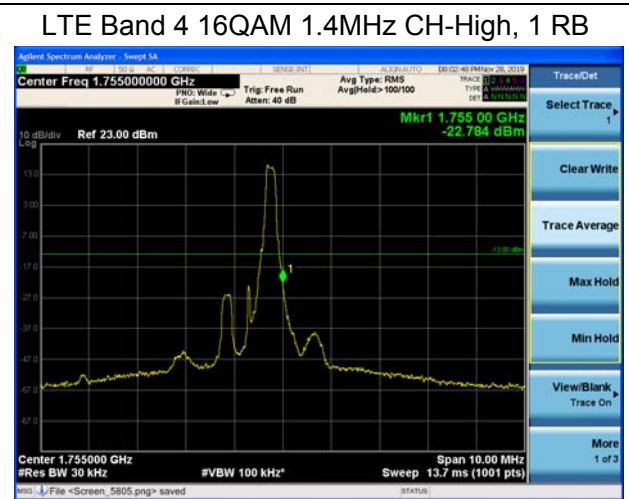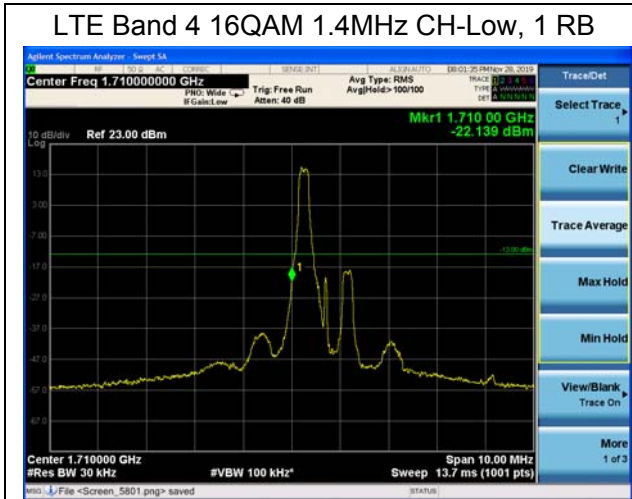



LTE Band 4 16QAM 3MHz CH-Low, 100 RB




LTE Band 4 16QAM 3MHz CH-High, 100 RB



LTE Band 4 16QAM 5MHz CH-Low, 1 RB



LTE Band 4 16QAM 5MHz CH-High, 1 RB






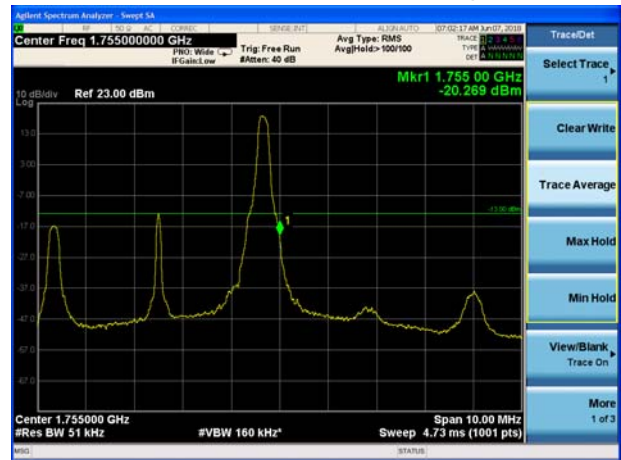








LTE Band 4 16QAM 5MHz CH-Low, 100 RB



LTE Band 4 16QAM 5MHz CH-High, 100RB




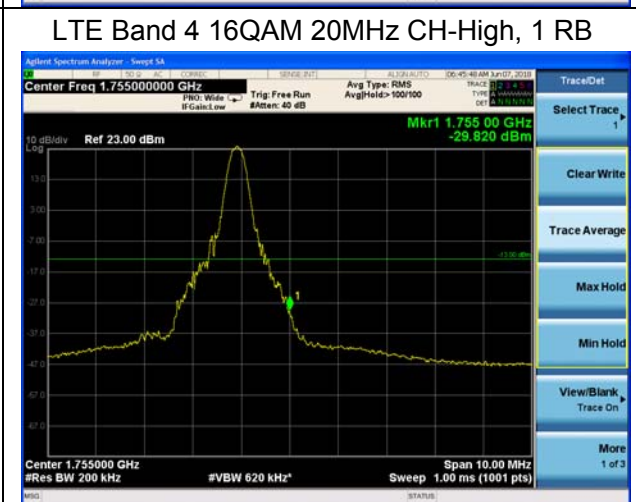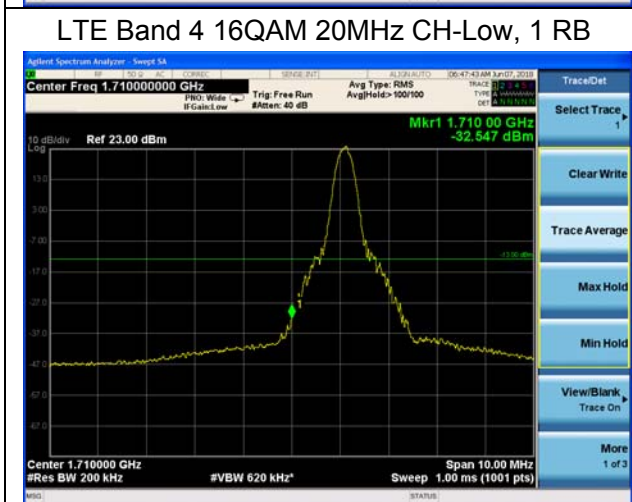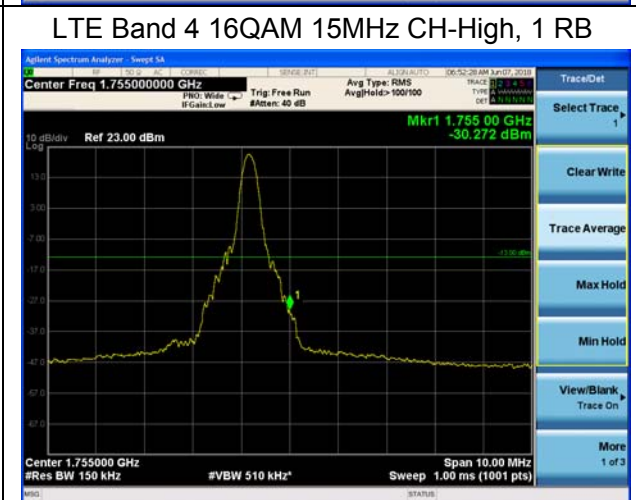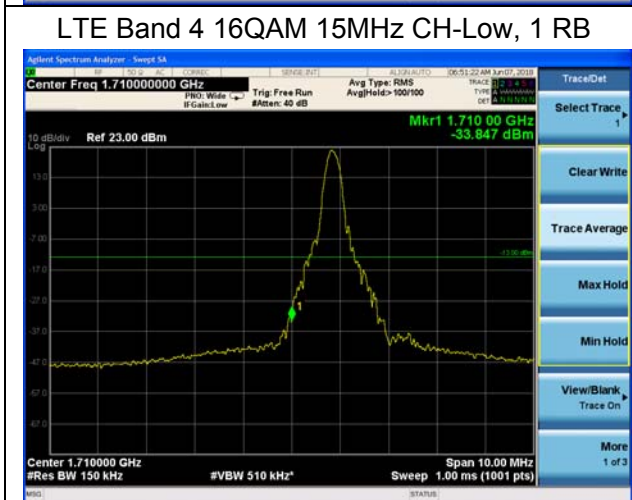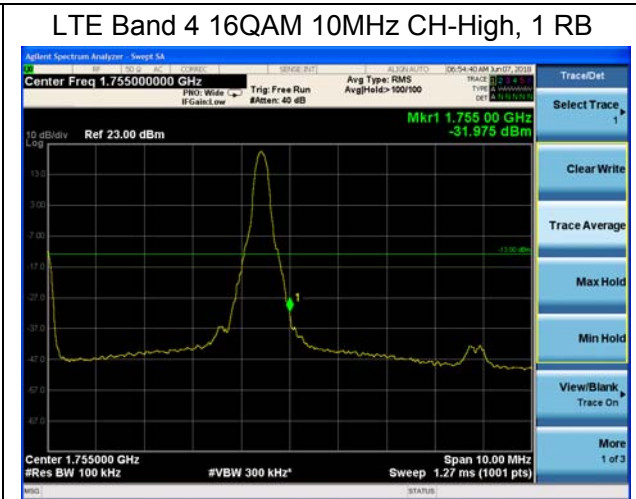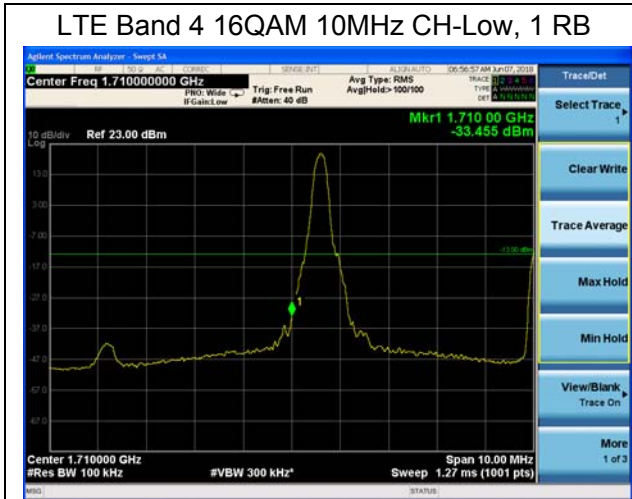

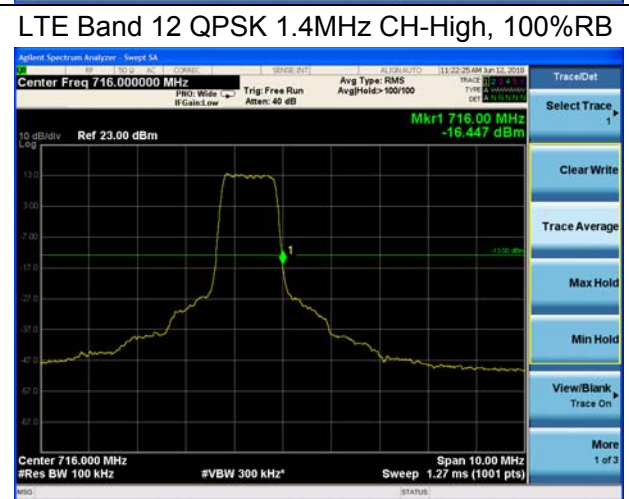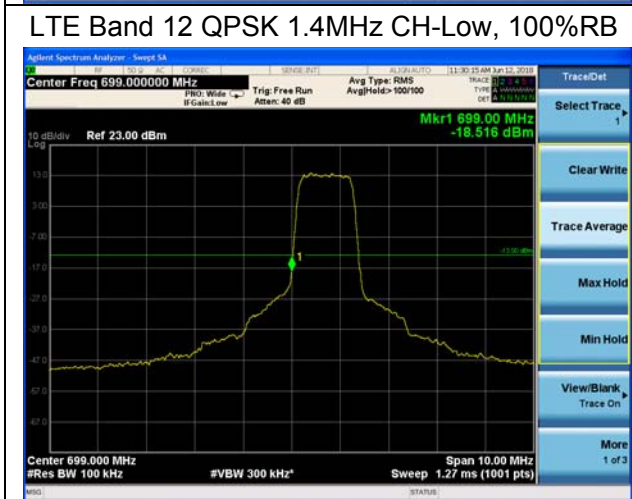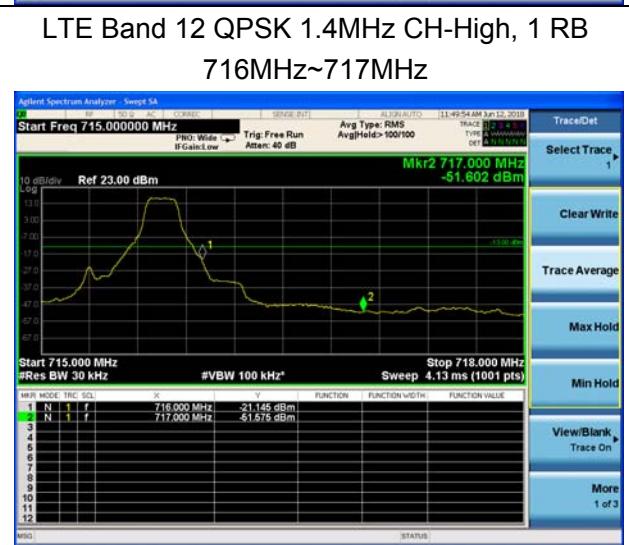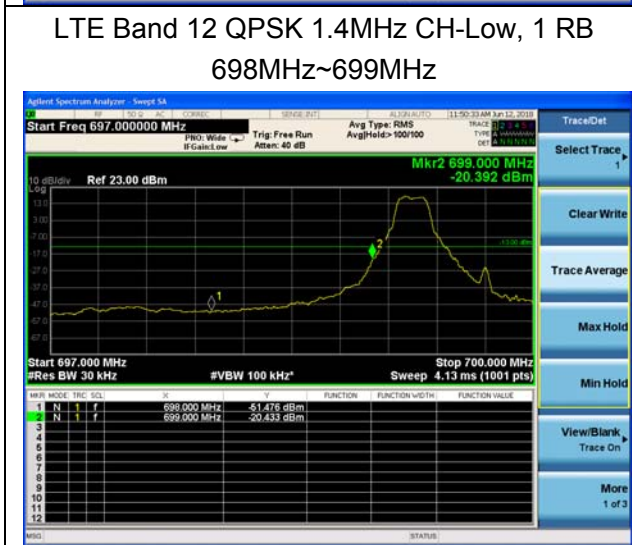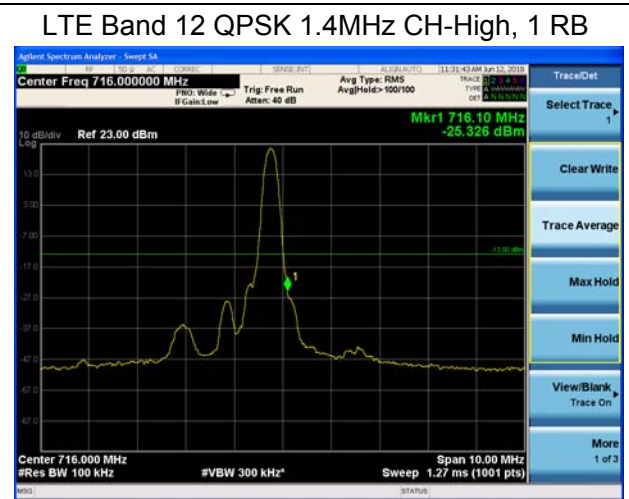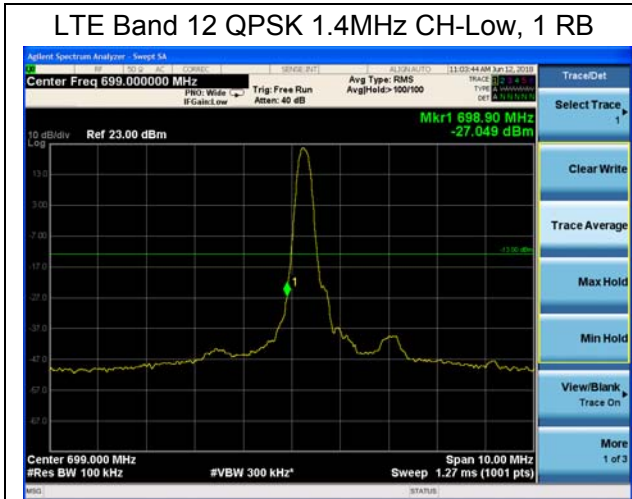




LTE Band 12 QPSK 3MHz CH-Low, 1 RB

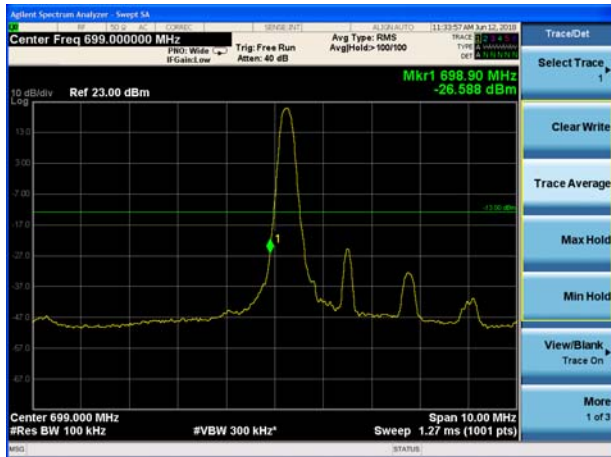


LTE Band 12 QPSK 3MHz CH-High, 1 RB

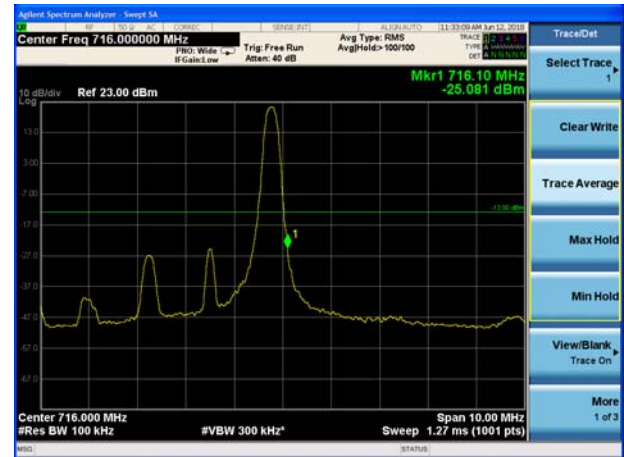

LTE Band 12 QPSK 3MHz CH-Low, 1RB
698MHz~699MHz



LTE Band 12 QPSK 3MHz CH-High, 1RB
698MHz~699MHz






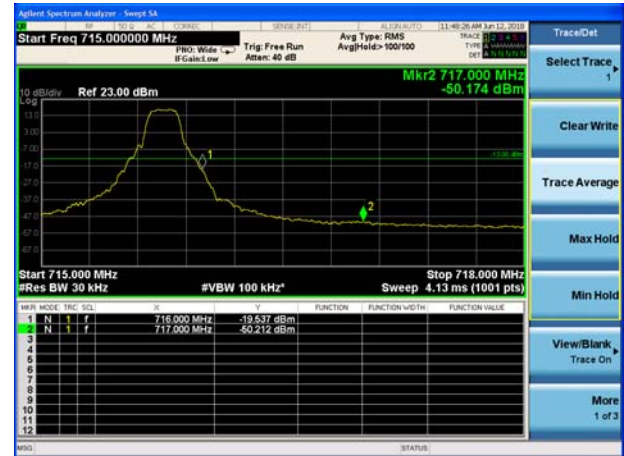


LTE Band 12 QPSK 3MHz CH-Low, 100%RB



LTE Band 12 QPSK 3MHz CH-High, 100%RB



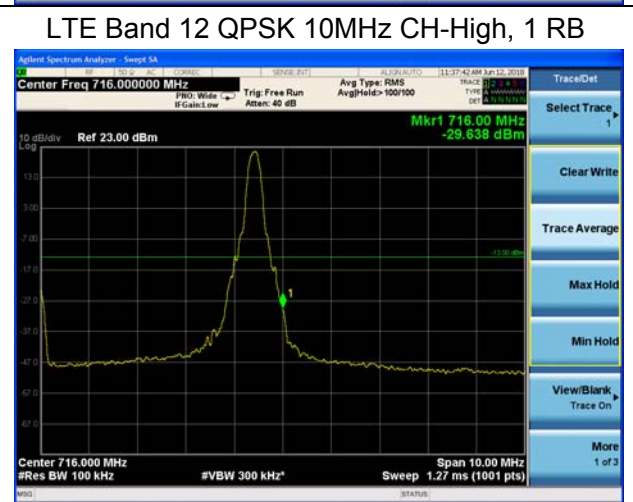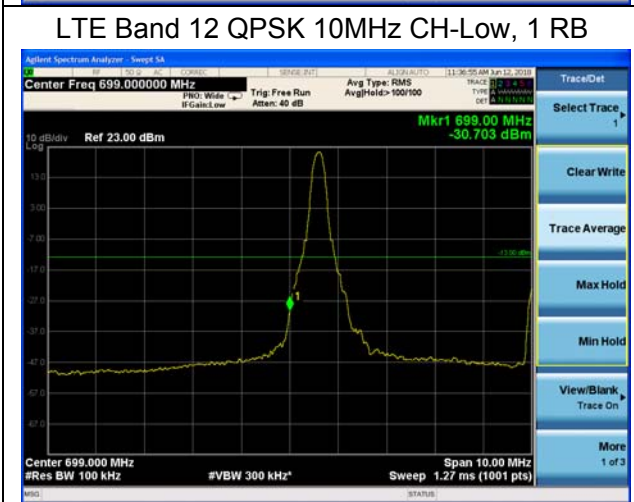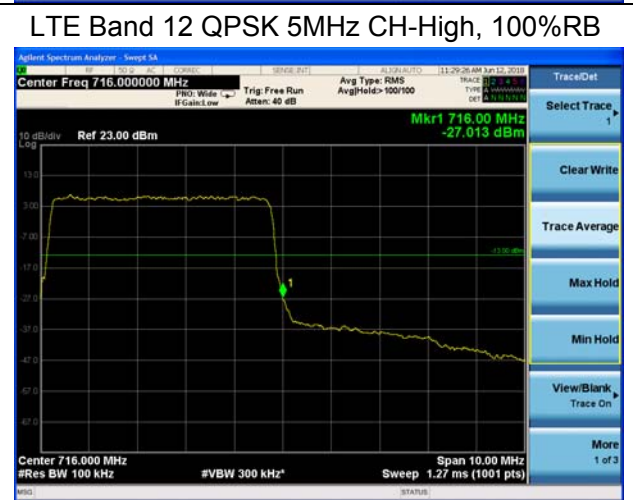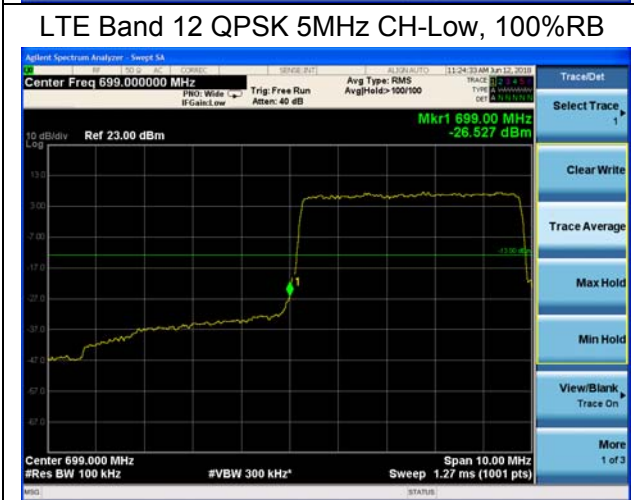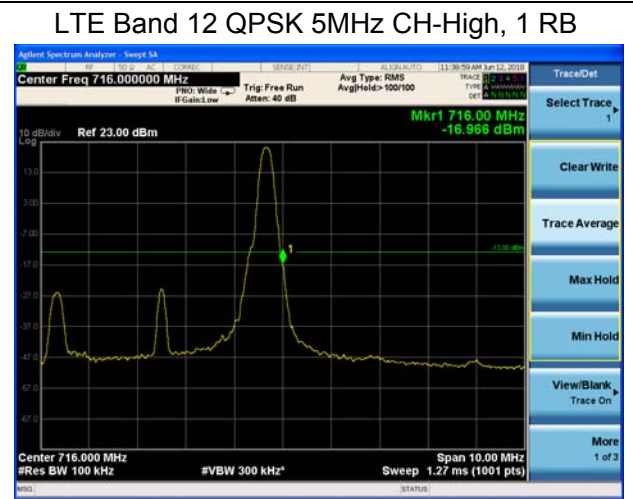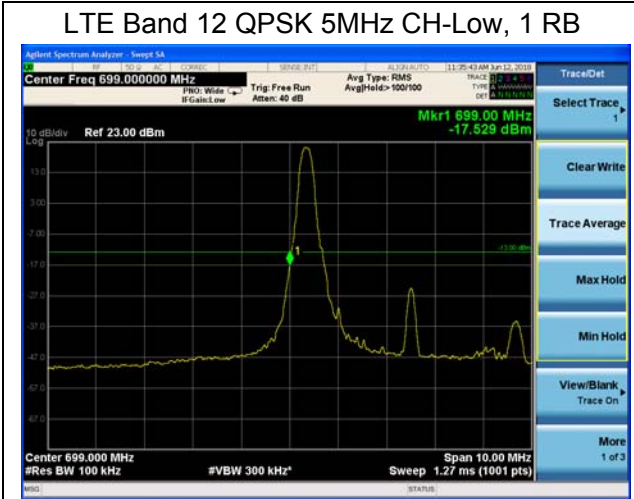




LTE Band 12 QPSK 10MHz CH-Low, 100%RB



LTE Band 12 QPSK 10MHz CH-High, 100%RB



LTE Band 12 16QAM 1.4MHz CH-Low, 1 RB

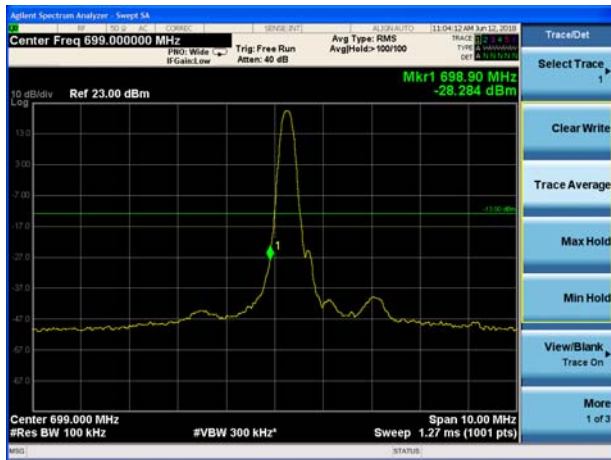

LTE Band 12 16QAM 1.4MHz CH-High, 1 RB



LTE Band 12 16QAM 1.4MHz CH-Low, 100 RB



LTE Band 12 16QAM 1.4MHz CH-High, 100 RB







LTE Band 12 16QAM 1.4MHz CH-Low, 1 RB 698MHz~699MHz




LTE Band 12 16QAM 1.4MHz CH-High, 1 RB 716MHz~717MHz

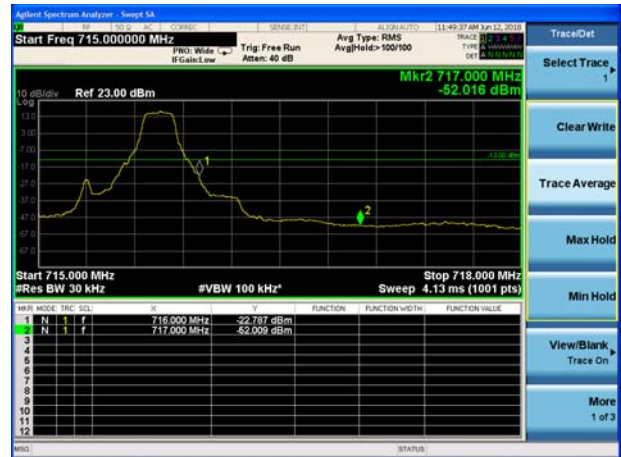

LTE Band 12 16QAM 3MHz CH-Low, 1 RB

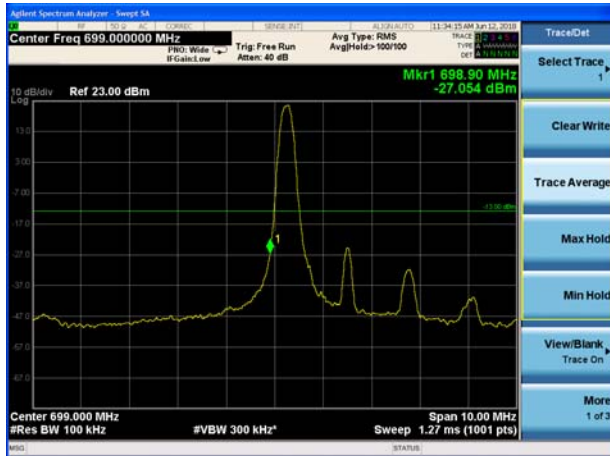


LTE Band 12 16QAM 3MHz CH-High, 1 RB

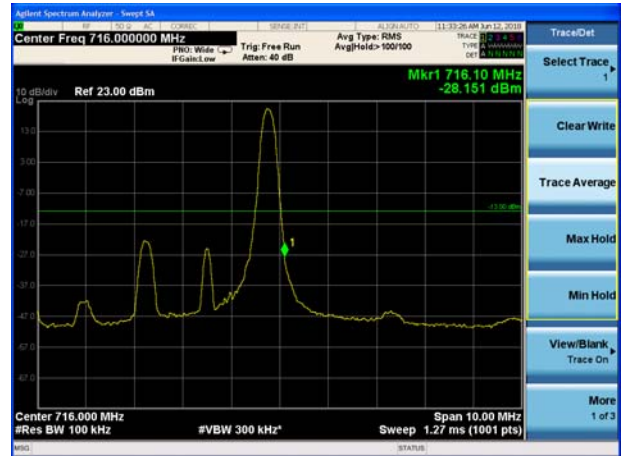

LTE Band 12 16QAM 3MHz CH-Low, 100 RB




LTE Band 12 16QAM 3MHz CH-High, 100 RB

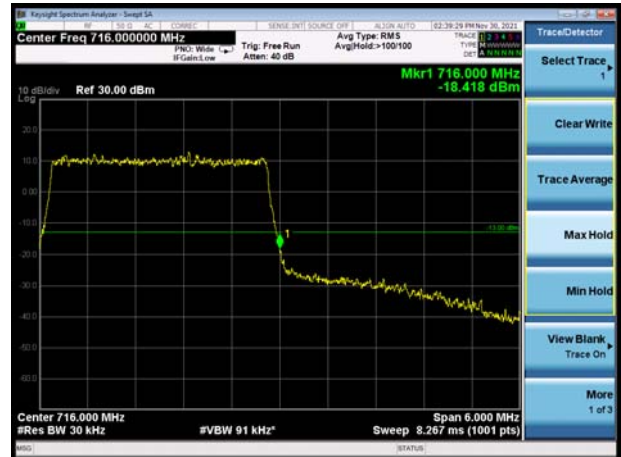





LTE Band 12 16QAM 3MHz CH-Low, 1 RB
698MHz~699MHz

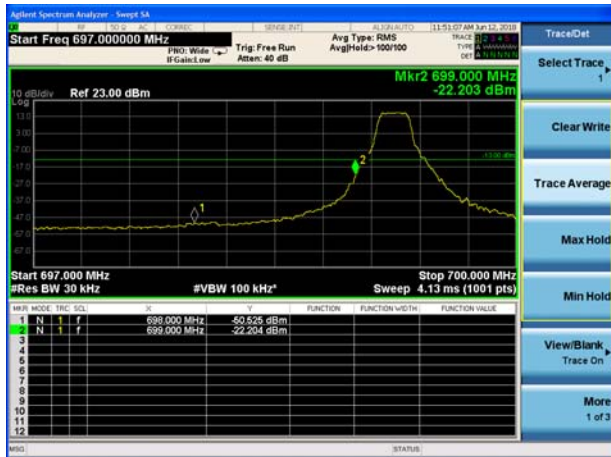


LTE Band 12 16QAM 3MHz CH-High, 1 RB
716MHz~717MHz

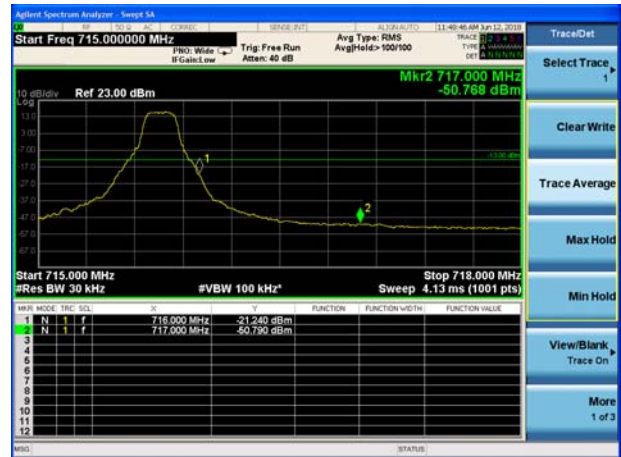

LTE Band 12 16QAM 5MHz CH-Low, 1 RB

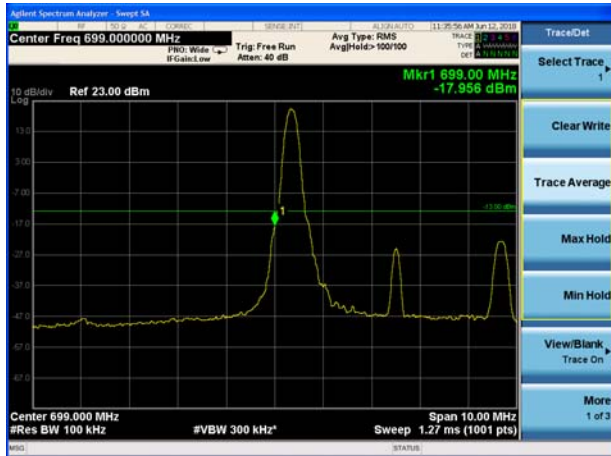

LTE Band 12 16QAM 5MHz CH-High, 1 RB

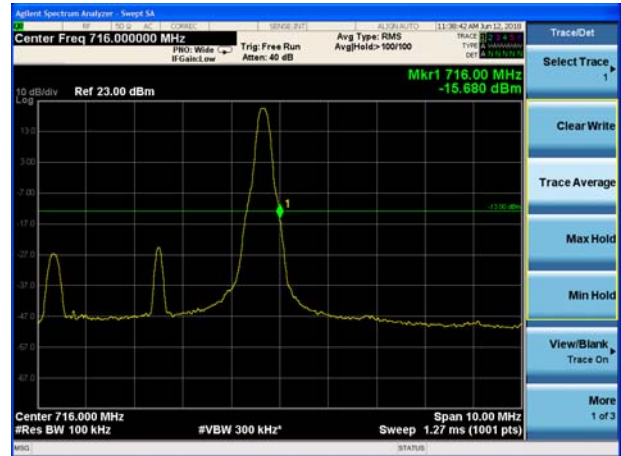

LTE Band 12 16QAM 5MHz CH-Low, 100 RB




LTE Band 12 16QAM 5MHz CH-High, 100 RB






LTE Band 12 16QAM 10MHz CH-Low, 1 RB

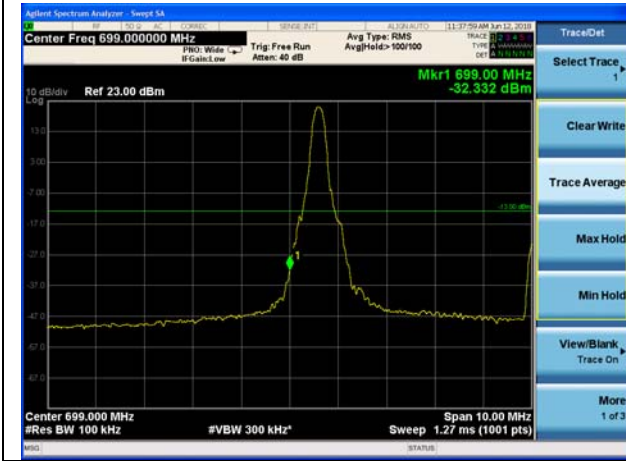


LTE Band 12 16QAM 10MHz CH-High, 1 RB

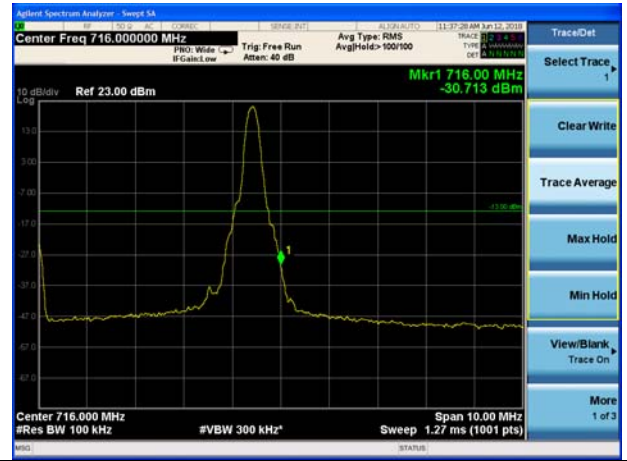


Variant:


LTE Band 13 QPSK 5MHz CH-Low, 1 RB

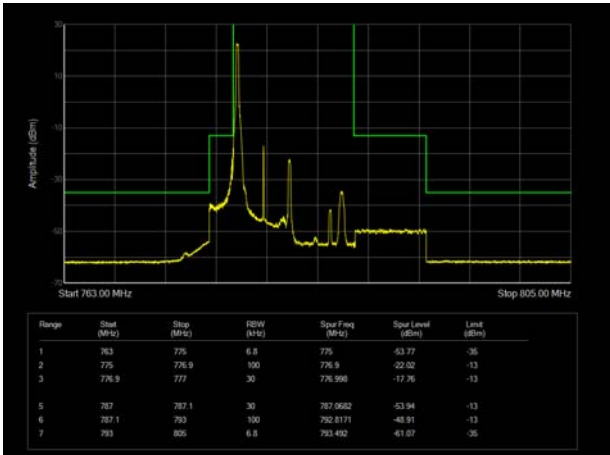


LTE Band 13 QPSK 5MHz CH-High, 1 RB

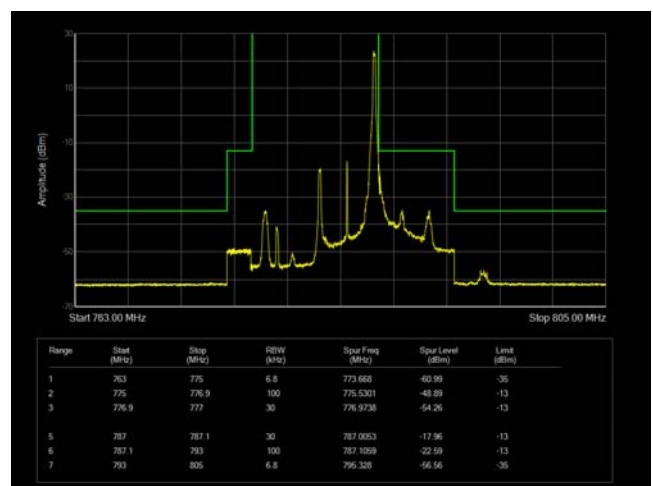


LTE Band 13 QPSK 5MHz CH-Low, 100%RB

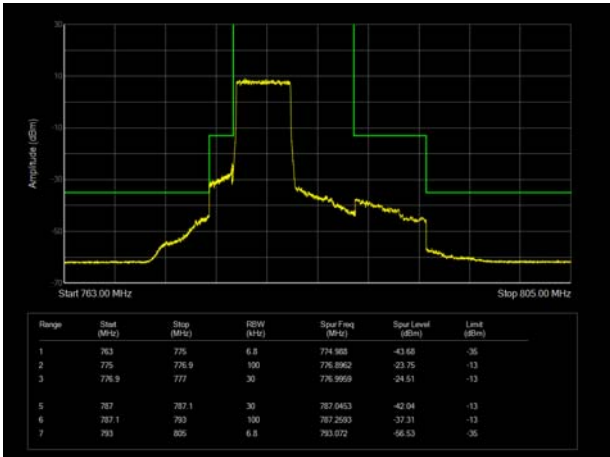


LTE Band 13 QPSK 5MHz CH-High, 100%RB

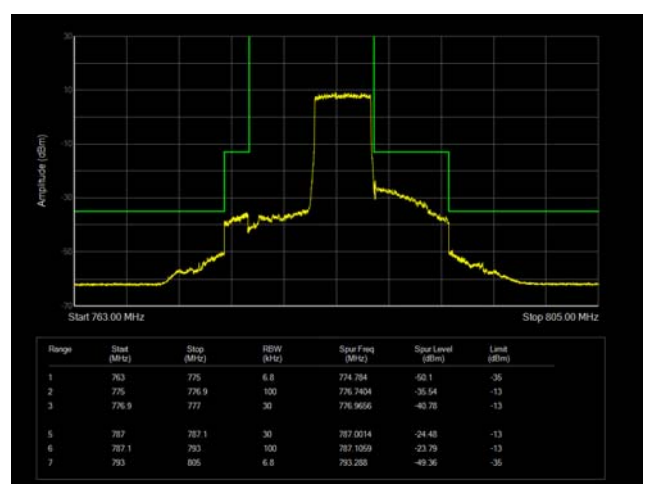

LTE Band 13 QPSK 10MHz CH-Low, 1 RB

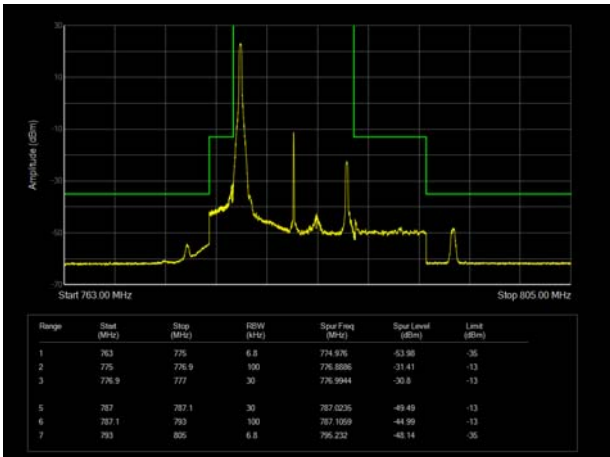


LTE Band 13 QPSK 10MHz CH-High, 1 RB

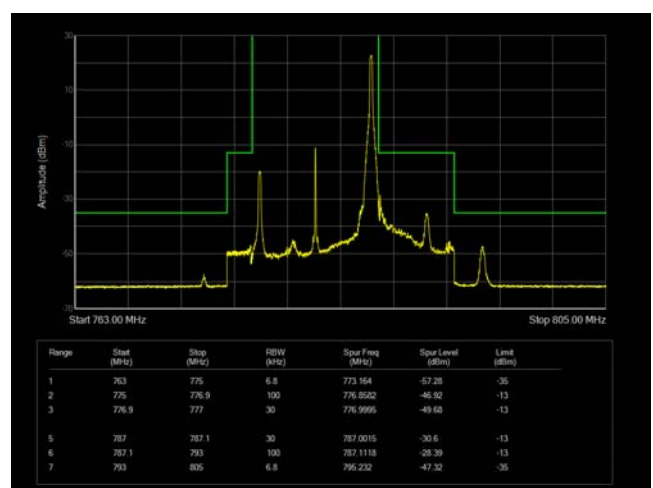





LTE Band 13 QPSK 10MHz CH-Middle, 100% RB

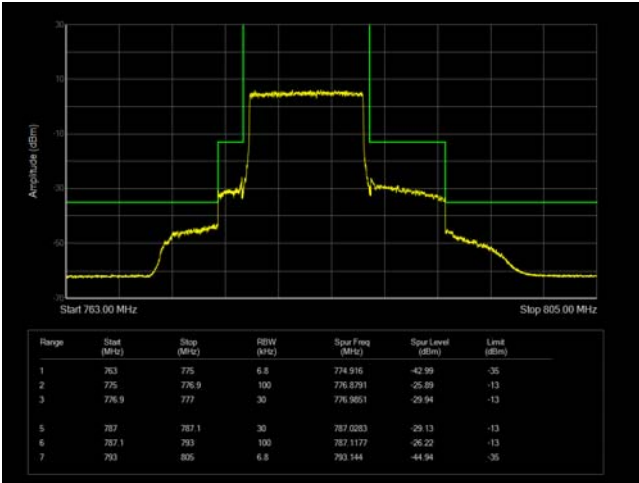


LTE Band 13 16QAM 5MHz CH-Low, 1 RB

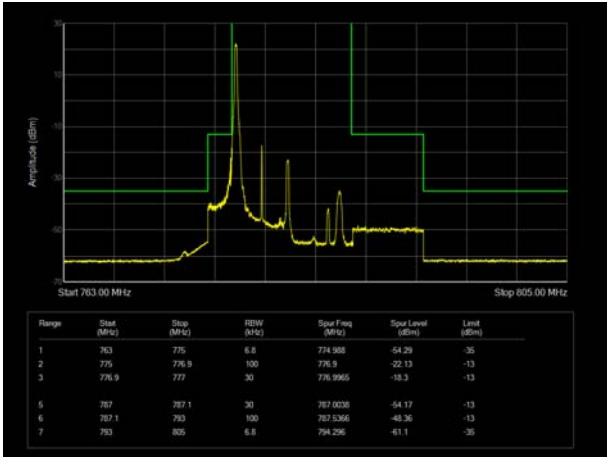


LTE Band 13 16QAM 5MHz CH-High, 1 RB

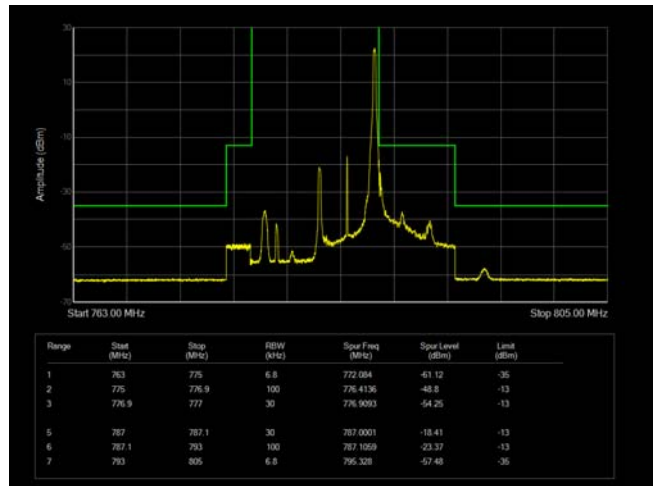

LTE Band 13 16QAM 5MHz CH-Low, 100% RB

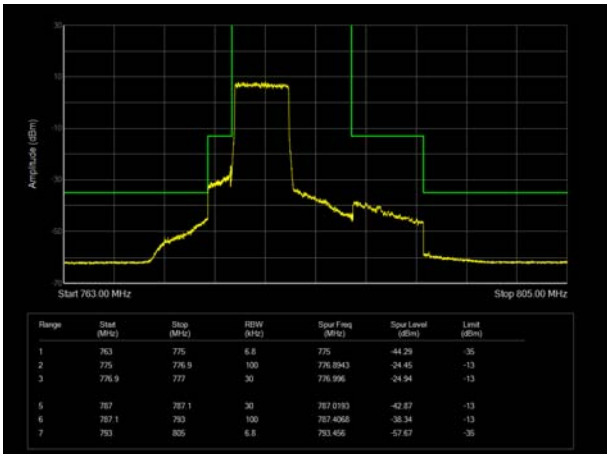



LTE Band 13 16QAM 5MHz CH-High, 100% RB

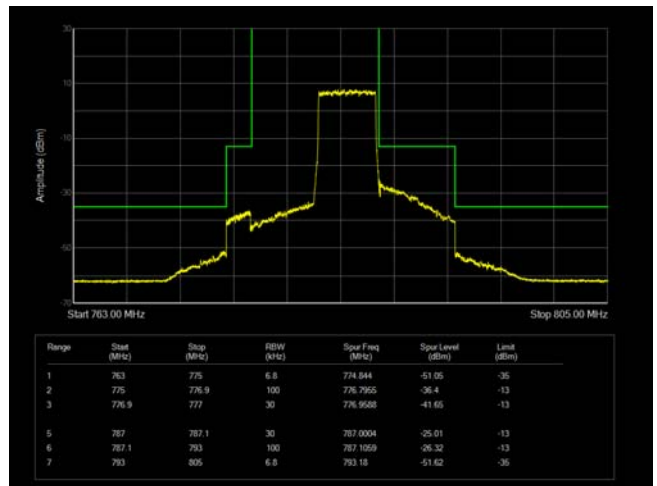



LTE Band 13 16QAM 10MHz CH-Low, 1 RB

LTE Band 13 16QAM 10MHz CH-High, 1 RB

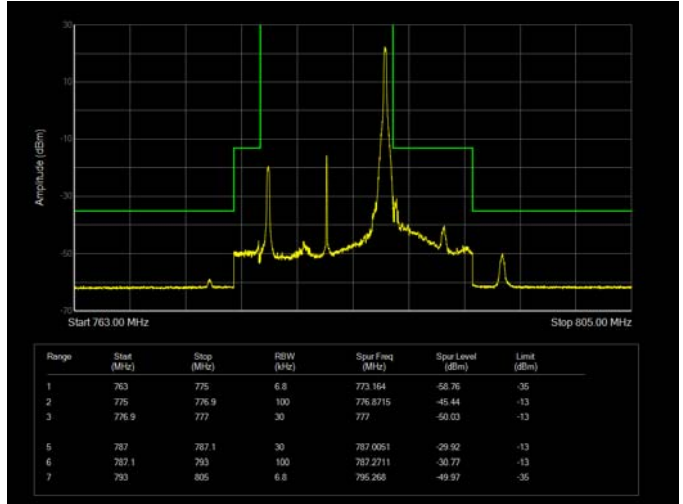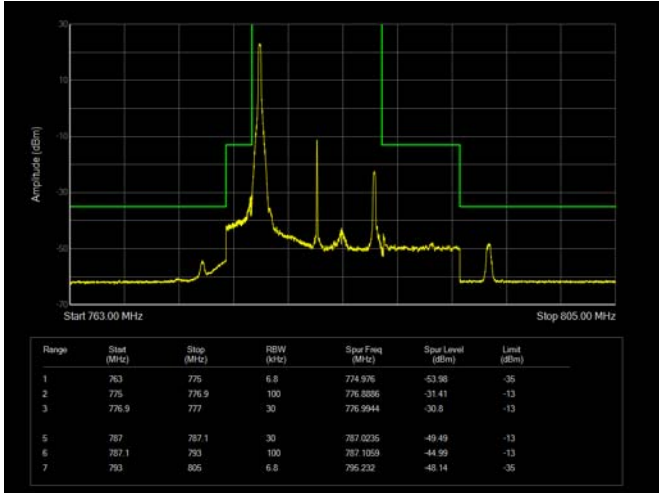

5.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as Ppk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = Ppk (dBm) - PAvg (dBm).$$

Test Setup

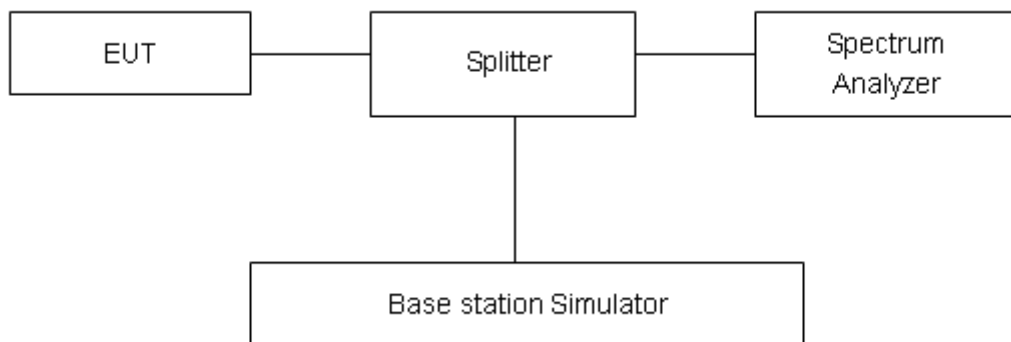

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U= 0.4 dB.

Test Results

LTE Band 4								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	19957	1710.7	28.43	23.06	5.37	≤13	PASS
		20175	1732.5	28.31	22.95	5.36	≤13	PASS
		20393	1754.3	28.39	22.98	5.41	≤13	PASS
	3	19965	1711.5	27.92	22.79	5.13	≤13	PASS
		20175	1732.5	28.21	23.06	5.15	≤13	PASS
		20385	1753.5	28.13	22.93	5.20	≤13	PASS
	5	19975	1712.5	28.31	22.77	5.54	≤13	PASS
		20175	1732.5	28.54	23.05	5.49	≤13	PASS
		20375	1752.5	28.51	22.91	5.60	≤13	PASS
	10	20000	1715	28.02	22.85	5.17	≤13	PASS
		20175	1732.5	28.18	23.07	5.11	≤13	PASS
		20350	1750	28.17	22.95	5.22	≤13	PASS
	15	20025	1717.5	29.16	22.83	6.33	≤13	PASS
		20175	1732.5	29.36	23.03	6.33	≤13	PASS
		20325	1747.5	29.30	22.90	6.40	≤13	PASS
20	20050	1720	28.99	22.80	6.19	≤13	PASS	
	20175	1732.5	29.18	22.98	6.20	≤13	PASS	
	20300	1745	29.17	22.86	6.31	≤13	PASS	
16QAM	1.4	19957	1710.7	26.99	20.75	6.24	≤13	PASS
		20175	1732.5	28.09	22.16	5.93	≤13	PASS
		20393	1754.3	28.05	22.39	5.66	≤13	PASS
	3	19965	1711.5	26.94	20.72	6.22	≤13	PASS
		20175	1732.5	28.08	22.17	5.91	≤13	PASS
		20385	1753.5	28.00	22.60	5.40	≤13	PASS
	5	19975	1712.5	26.96	20.67	6.29	≤13	PASS
		20175	1732.5	28.00	22.01	5.99	≤13	PASS
		20375	1752.5	27.99	22.38	5.61	≤13	PASS

LTE Band 12								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	23017	699.7	28.93	22.70	6.23	≤13	PASS
		23095	707.5	29.11	22.78	6.33	≤13	PASS
		23173	715.3	29.61	22.83	6.78	≤13	PASS
	3	23025	700.5	29.81	22.85	6.96	≤13	PASS
		23095	707.5	29.14	22.93	6.21	≤13	PASS
		23165	714.5	29.37	22.99	6.38	≤13	PASS
	5	23035	701.5	29.98	22.83	7.15	≤13	PASS
		23095	707.5	29.62	22.89	6.73	≤13	PASS
		23155	713.5	29.69	22.94	6.75	≤13	PASS
	10	23060	704	30.81	22.80	8.01	≤13	PASS
		23095	707.5	29.19	22.84	6.35	≤13	PASS
		23130	711	29.24	22.90	6.34	≤13	PASS
16QAM	1.4	23017	699.7	27.06	21.43	5.63	≤13	PASS
		23095	707.5	26.94	21.35	5.59	≤13	PASS
		23173	715.3	26.90	21.42	5.48	≤13	PASS
	3	23025	700.5	26.92	21.14	5.78	≤13	PASS
		23095	707.5	26.87	21.15	5.72	≤13	PASS
		23165	714.5	26.96	21.26	5.70	≤13	PASS
	5	23035	701.5	27.11	21.34	5.77	≤13	PASS
		23095	707.5	26.90	21.23	5.67	≤13	PASS
		23155	713.5	26.99	21.32	5.67	≤13	PASS

LTE Band 13								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	23205	779.5	29.31	22.76	6.55	≤13	PASS
		23230	782	30.14	22.78	7.36	≤13	PASS
		23255	784.5	29.72	22.89	6.83	≤13	PASS
	10	23230	782	28.43	22.74	5.69	≤13	PASS
16QAM	5	23205	779.5	27.87	21.77	6.10	≤13	PASS
		23230	782	28.29	21.96	6.33	≤13	PASS
		23255	784.5	28.43	21.89	6.54	≤13	PASS

5.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

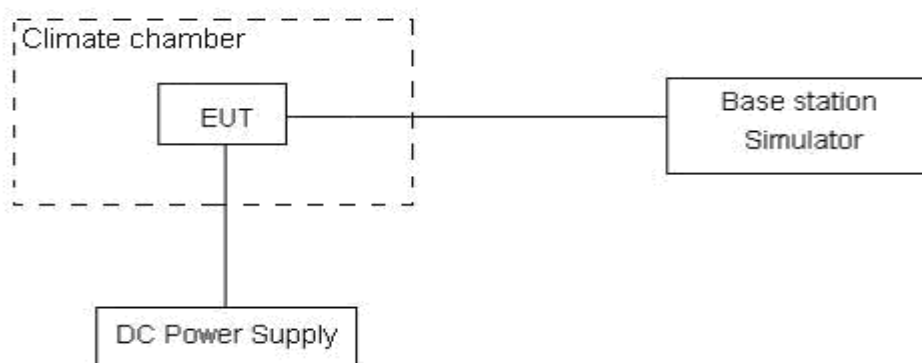

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.

**Test Result****Variant:**

LTE Band 4						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	13.43	16.39	0.00714	0.00872	PASS
Extreme (85°C)		5.60	8.06	0.00298	0.00429	PASS
Extreme (80°C)		8.51	15.57	0.00452	0.00828	PASS
Extreme (70°C)		3.74	6.56	0.00199	0.00349	PASS
Extreme (60°C)		8.24	11.66	0.00438	0.00620	PASS
Extreme (50°C)		9.25	10.47	0.00492	0.00557	PASS
Extreme (40°C)		12.56	6.58	0.00668	0.00350	PASS
Extreme (30°C)		9.33	12.85	0.00496	0.00684	PASS
Extreme (20°C)		8.68	8.98	0.00462	0.00478	PASS
Extreme (10°C)		2.10	17.01	0.00112	0.00905	PASS
Extreme (0°C)		8.28	12.41	0.00441	0.00660	PASS
Extreme (-10°C)		1.04	7.76	0.00055	0.00413	PASS
Extreme (-20°C)		12.95	16.06	0.00689	0.00854	PASS
Extreme (-30°C)		1.99	10.63	0.00106	0.00565	PASS
Extreme (-40°C)		16.96	17.20	0.00902	0.00915	PASS
25°C	LV	3.67	14.67	0.00195	0.00780	PASS
	HV	3.52	4.05	0.00187	0.00215	PASS



LTE Band 12						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	12.72	2.90	0.00677	0.00154	PASS
Extreme (85°C)		14.95	14.24	0.00795	0.00758	PASS
Extreme (80°C)		7.58	14.46	0.00403	0.00769	PASS
Extreme (70°C)		17.11	17.99	0.00910	0.00957	PASS
Extreme (60°C)		2.13	16.08	0.00113	0.00856	PASS
Extreme (50°C)		1.79	3.07	0.00095	0.00164	PASS
Extreme (40°C)		12.92	9.15	0.00687	0.00487	PASS
Extreme (30°C)		8.81	17.54	0.00468	0.00933	PASS
Extreme (20°C)		13.16	13.03	0.00700	0.00693	PASS
Extreme (10°C)		16.41	17.85	0.00873	0.00949	PASS
Extreme (0°C)		7.87	10.82	0.00418	0.00576	PASS
Extreme (-10°C)		6.43	8.63	0.00342	0.00459	PASS
Extreme (-20°C)		11.04	16.42	0.00587	0.00874	PASS
Extreme (-30°C)		15.48	7.57	0.00823	0.00403	PASS
Extreme (-40°C)		1.32	16.64	0.00070	0.00885	PASS
25°C		LV	13.69	15.07	0.00728	0.00801
	HV	11.41	2.85	0.00607	0.00152	PASS

LTE Band 13						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	3.92	3.64	0.00208	0.00194	PASS
Extreme (85°C)		11.63	15.32	0.00619	0.00815	PASS
Extreme (80°C)		8.76	3.77	0.00466	0.00201	PASS
Extreme (70°C)		10.92	5.88	0.00581	0.00313	PASS
Extreme (60°C)		11.74	6.84	0.00624	0.00364	PASS
Extreme (50°C)		14.70	5.96	0.00782	0.00317	PASS
Extreme (40°C)		11.46	4.30	0.00610	0.00229	PASS
Extreme (30°C)		8.30	16.60	0.00441	0.00883	PASS
Extreme (20°C)		4.26	6.56	0.00227	0.00349	PASS
Extreme (10°C)		8.66	1.25	0.00461	0.00067	PASS
Extreme (0°C)		15.77	13.01	0.00839	0.00692	PASS
Extreme (-10°C)		3.34	5.57	0.00178	0.00296	PASS
Extreme (-20°C)		1.77	13.30	0.00094	0.00708	PASS
Extreme (-30°C)		2.48	14.15	0.00132	0.00753	PASS
Extreme (-40°C)		12.89	15.73	0.00686	0.00837	PASS
25°C		LV	17.54	1.28	0.00933	0.00068
	HV	10.13	12.64	0.00539	0.00672	PASS

5.7 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz,

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz) for LTE Band 4/12/13,

RBW is set to 10 kHz (0.15 MHz~ 30 MHz) for LTE Band 4/12/13,

RBW is set to 100 kHz (30MHz~1000 MHz) for LTE Band 4/12/13,


RBW is set to 1000 kHz (above 1000MHz) for LTE Band 4/12/13,

Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

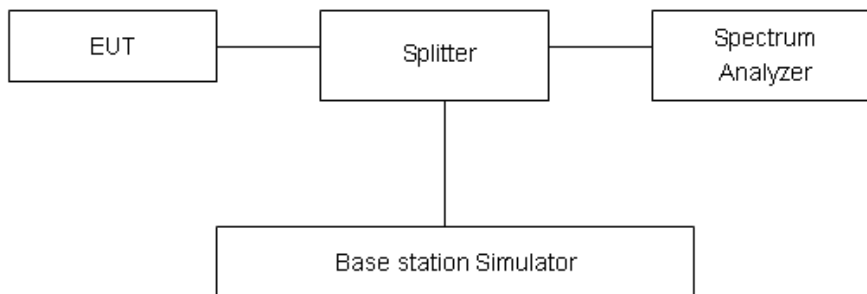

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB..”

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands



immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Part 27.53(h)/(g) Limit		-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB


Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

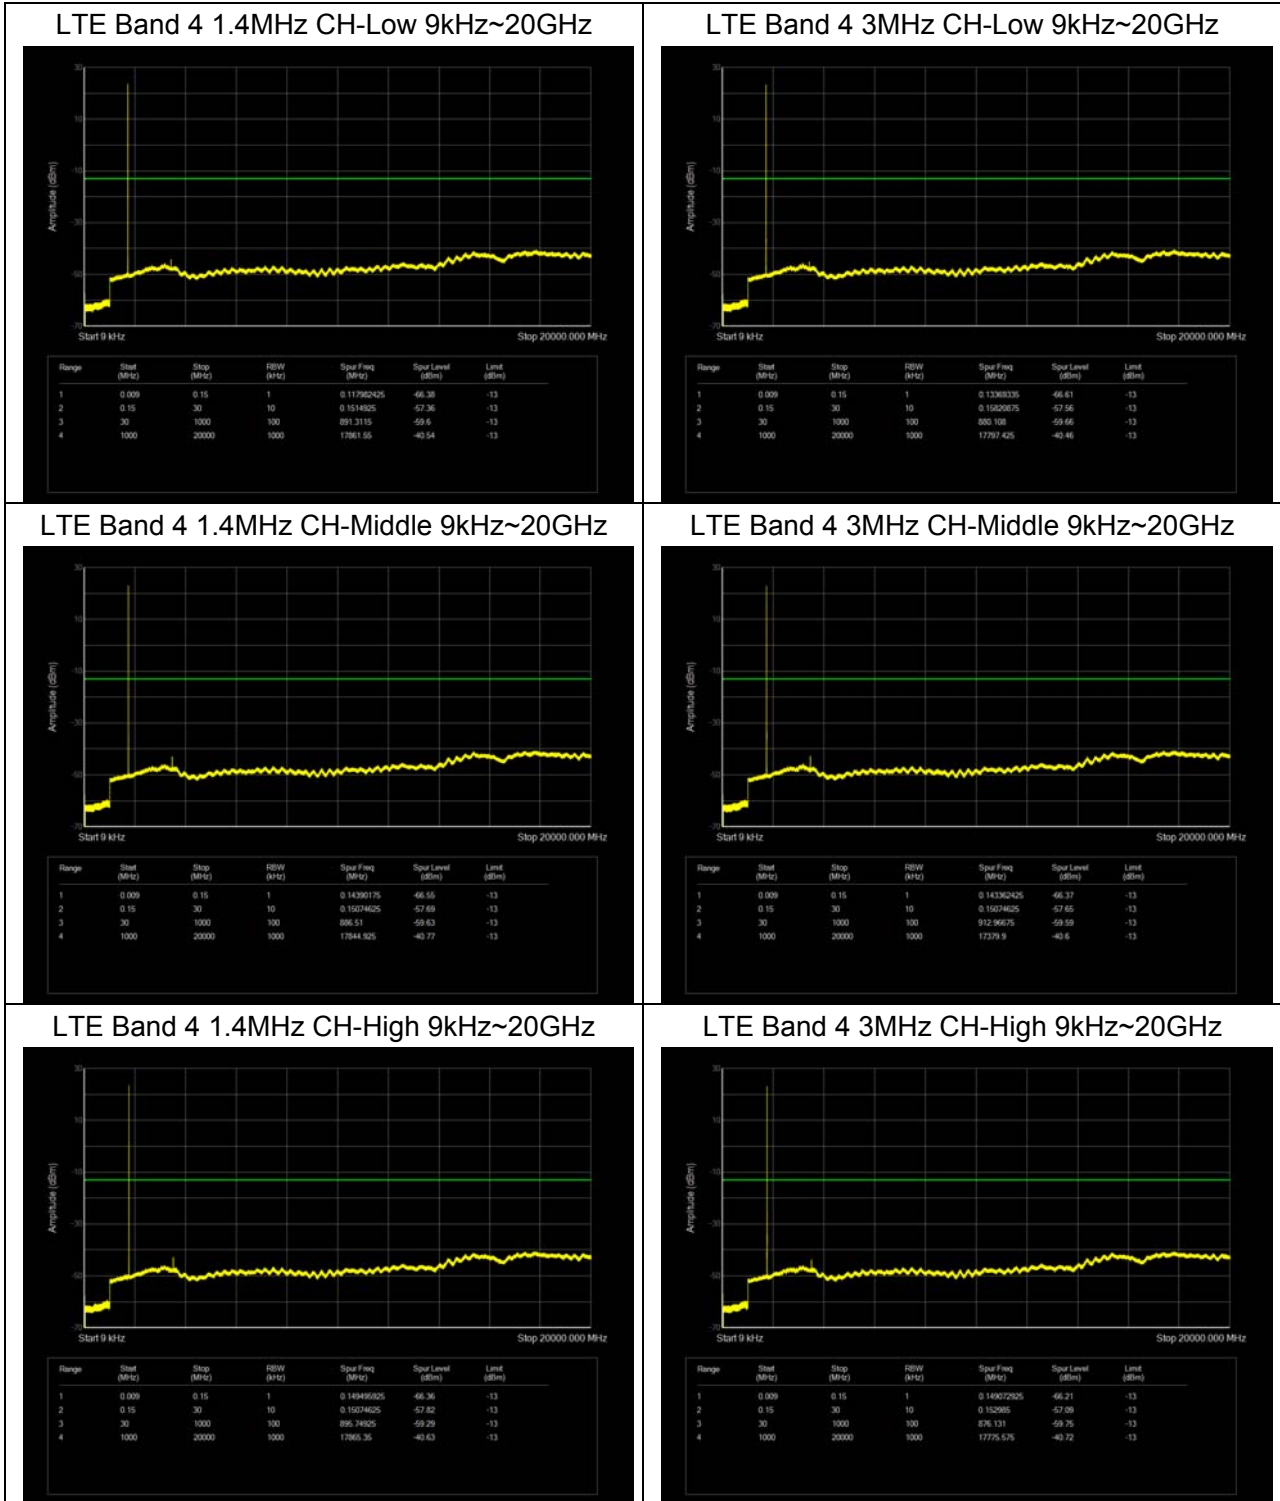


LTE Band 4 5MHz CH-Low 9kHz~20GHz

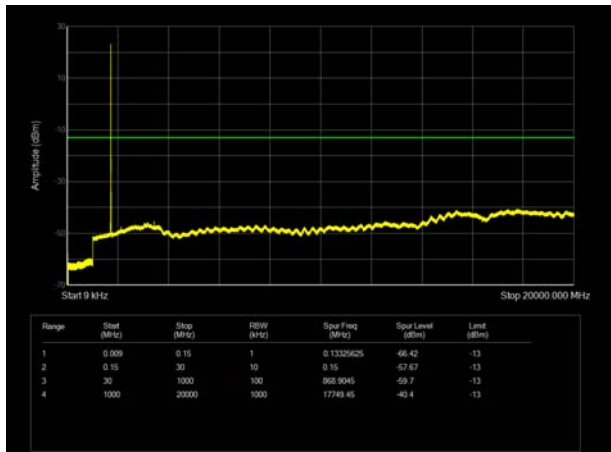


LTE Band 4 10MHz CH-Low 9kHz~20GHz

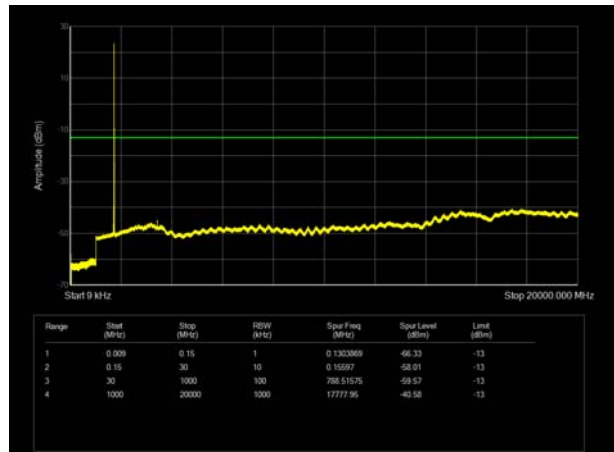


LTE Band 4 5MHz CH-Middle 9kHz~20GHz

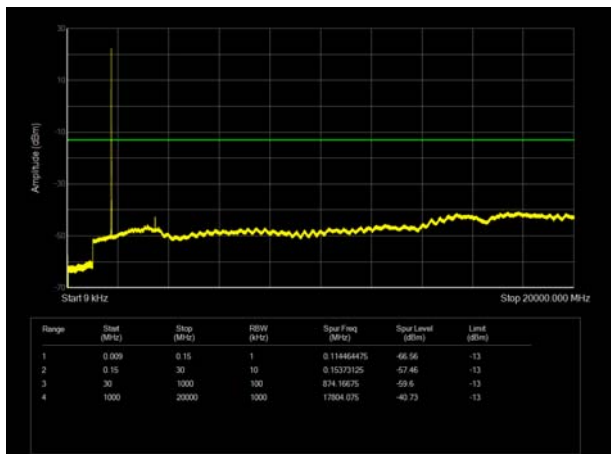


LTE Band 4 10MHz CH-Middle 9kHz~20GHz

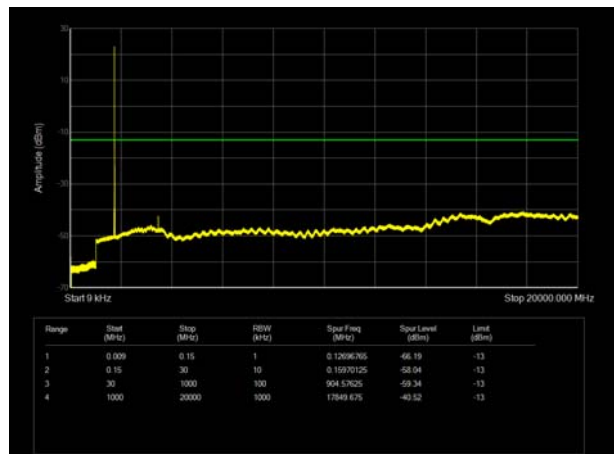

LTE Band 4 5MHz CH-High 9kHz~20GHz

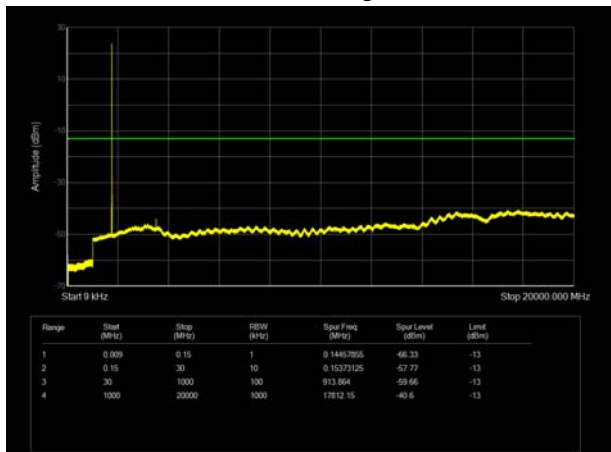


LTE Band 4 10MHz CH-High 9kHz~20GHz

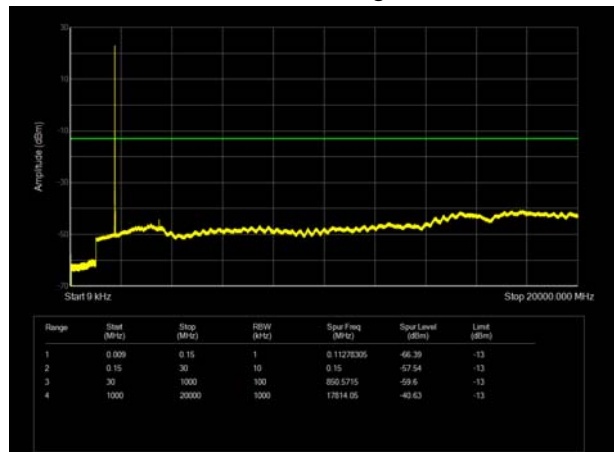





LTE Band 4 15MHz CH-Low 9kHz~20GHz

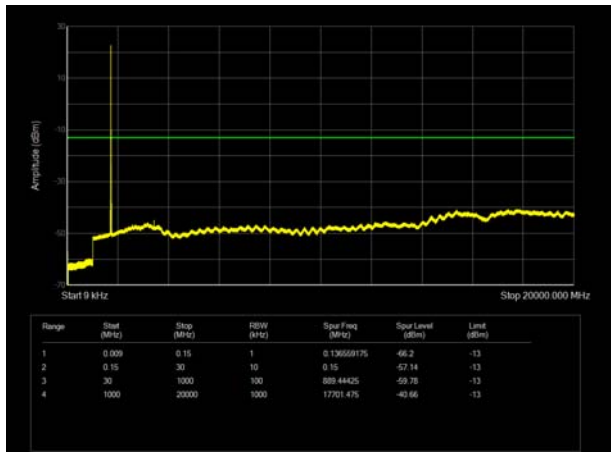


LTE Band 4 20MHz CH-Low 9kHz~20GHz

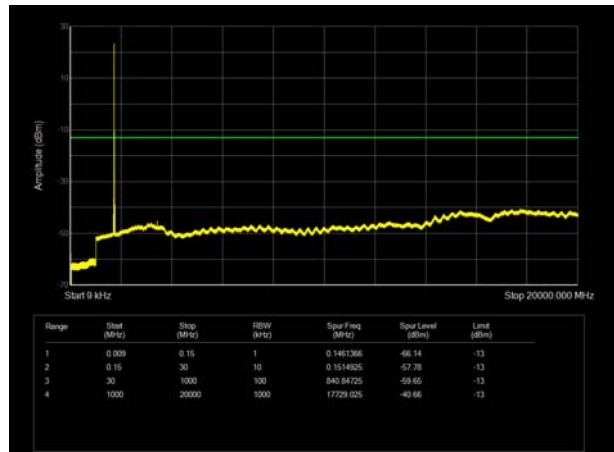


LTE Band 4 15MHz CH-Middle 9kHz~20GHz

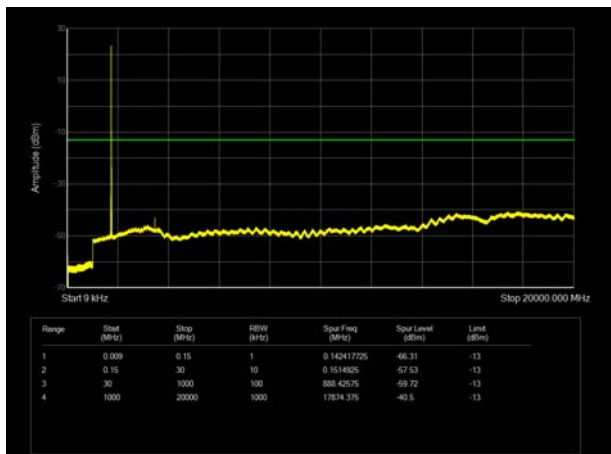


LTE Band 4 20MHz CH-Middle 9kHz~20GHz

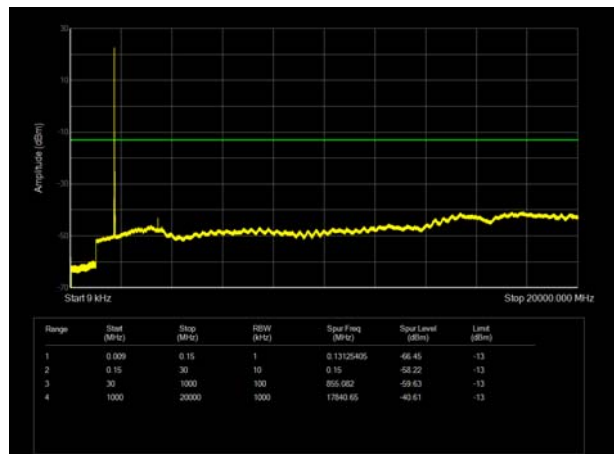


LTE Band 4 15MHz CH-High 9kHz~20GHz

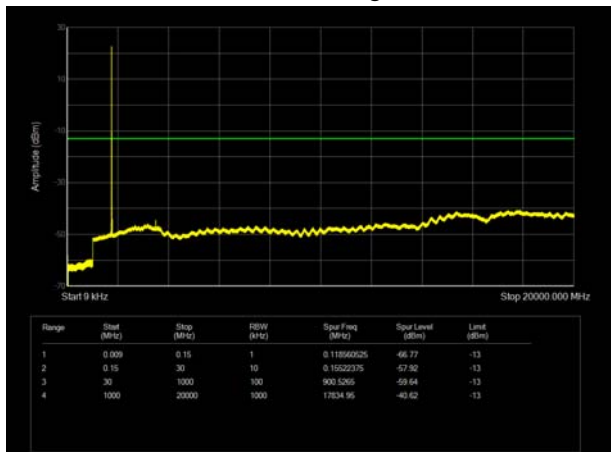


LTE Band 4 20MHz CH-High 9kHz~20GHz

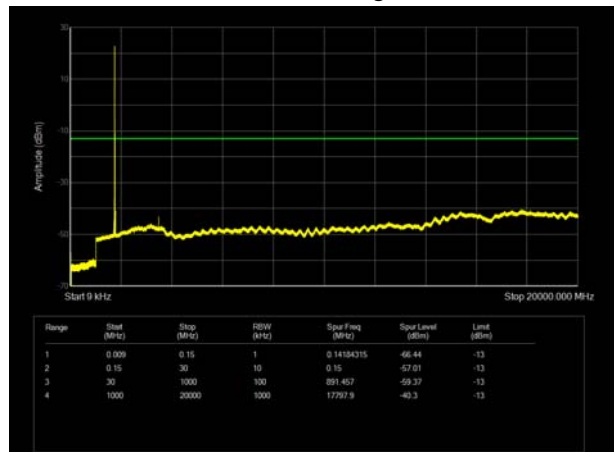


LTE Band 12 1.4MHz CH-Low 9kHz~10GHz

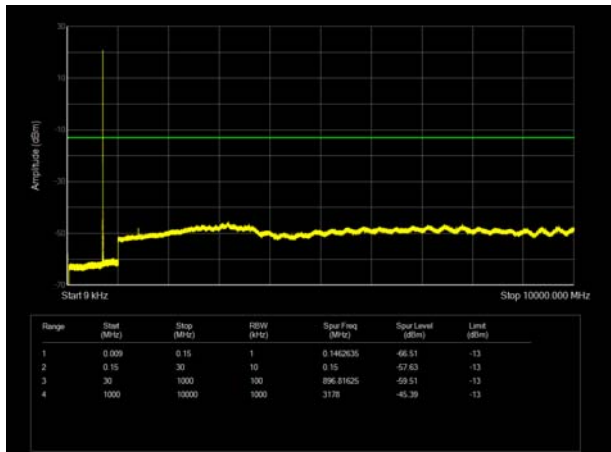


LTE Band 12 3MHz CH-Low 9kHz~10GHz

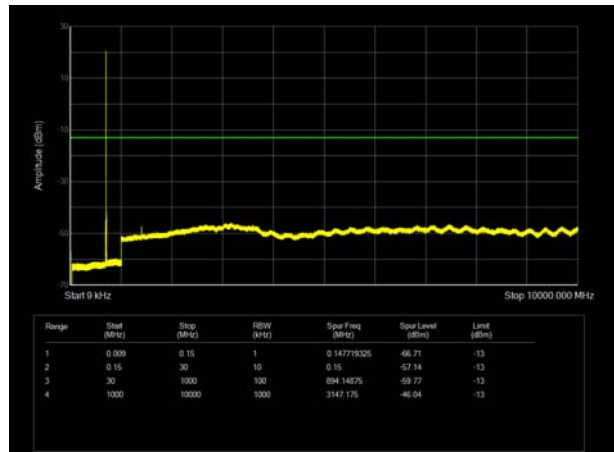


LTE Band 12 1.4MHz CH-Middle 9kHz~10GHz

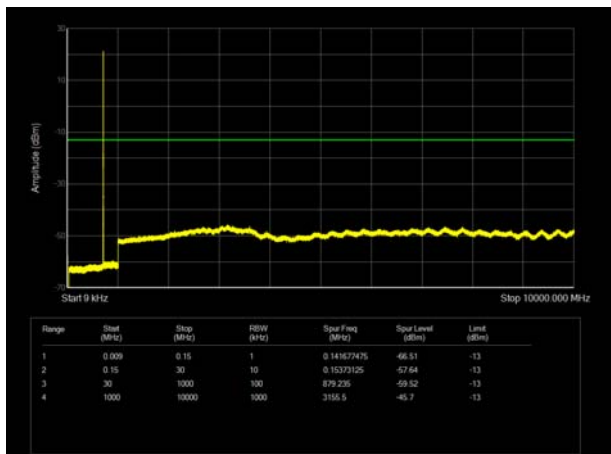


LTE Band 12 3MHz CH-Middle 9kHz~10GHz

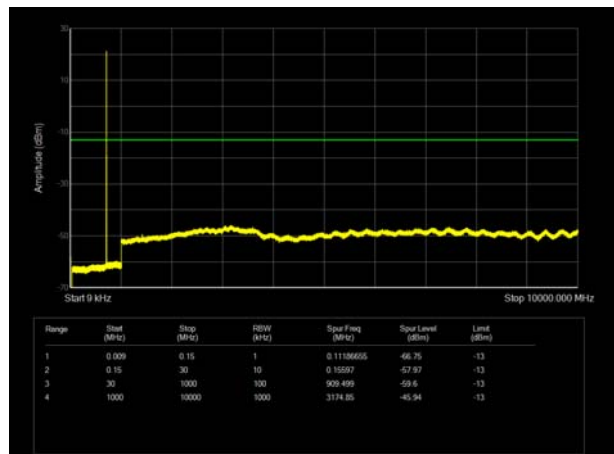

LTE Band 12 1.4MHz CH-High 9kHz~10GHz

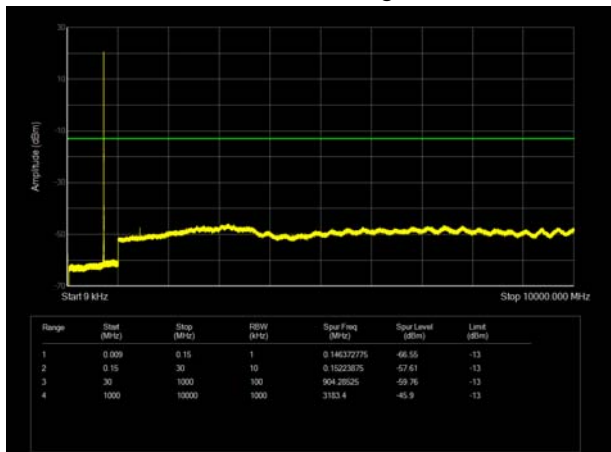


LTE Band 12 3MHz CH-High 9kHz~10GHz

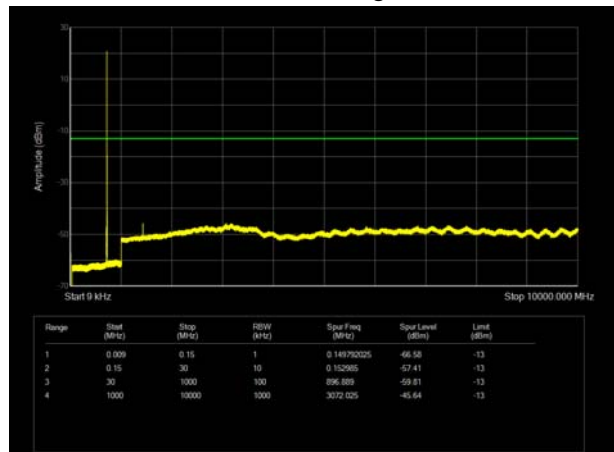





LTE Band 12 5MHz CH-Low 9kHz~10GHz

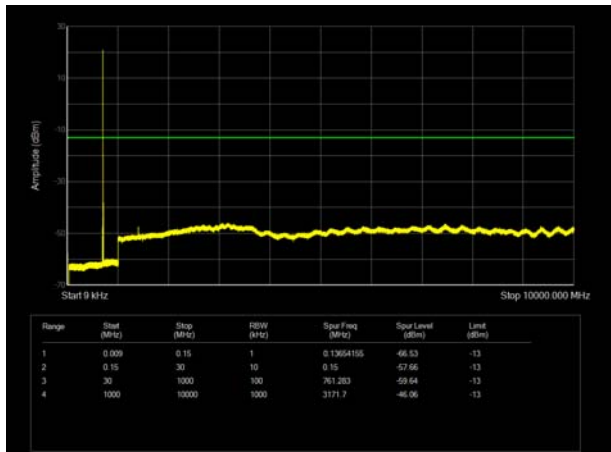


LTE Band 12 10MHz CH-Low 9kHz~10GHz

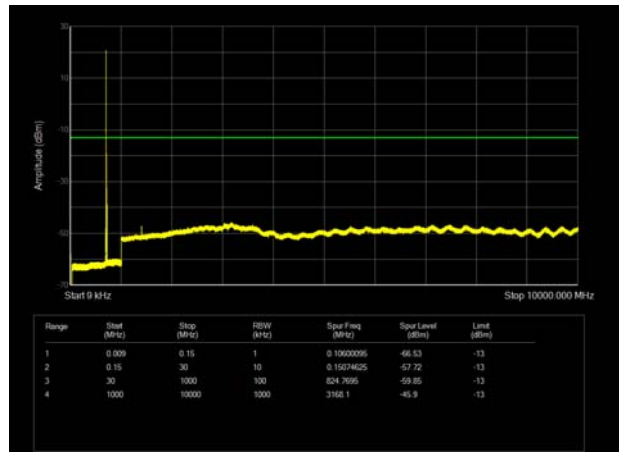


LTE Band 12 5MHz CH-Middle 9kHz~10GHz

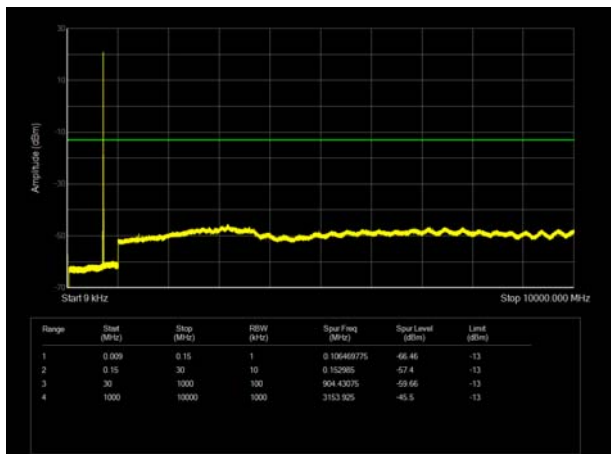


LTE Band 12 10MHz CH-Middle 9kHz~10GHz

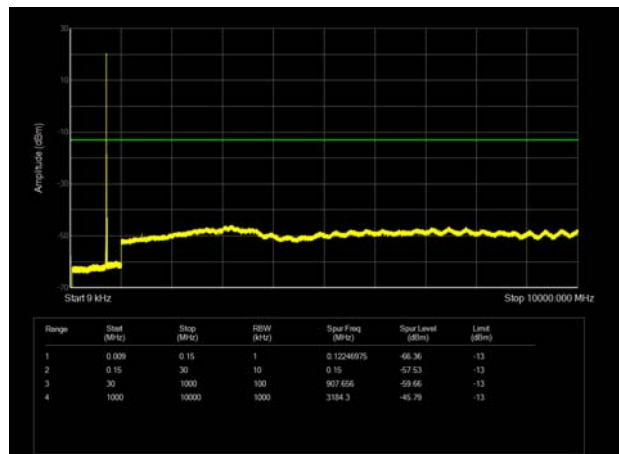

LTE Band 12 5MHz CH-High 9kHz~10GHz

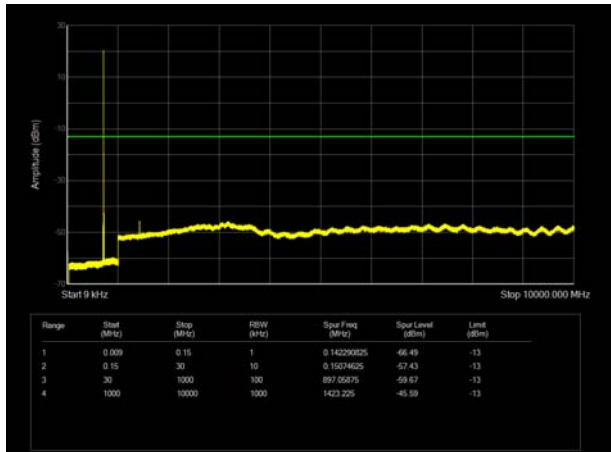


LTE Band 12 10MHz CH-High 9kHz~10GHz

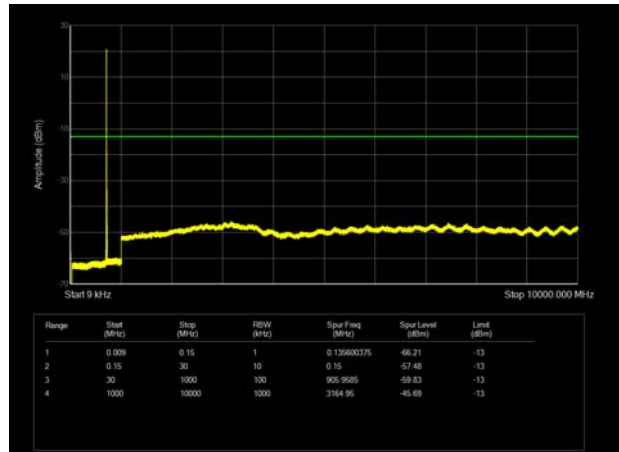





LTE Band 13 5MHz CH-Low 9kHz~10GHz

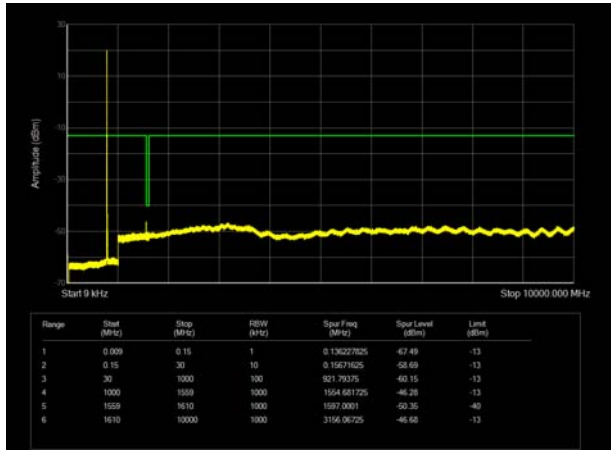


LTE Band 13 10MHz CH-Middle 9kHz~10GHz

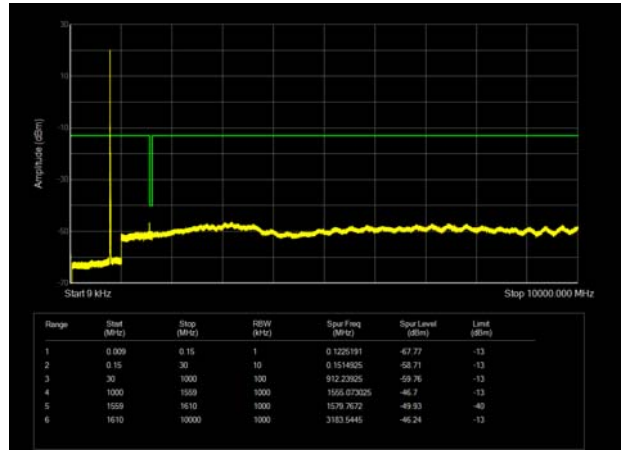

LTE Band 13 5MHz CH-Middle 9kHz~10GHz

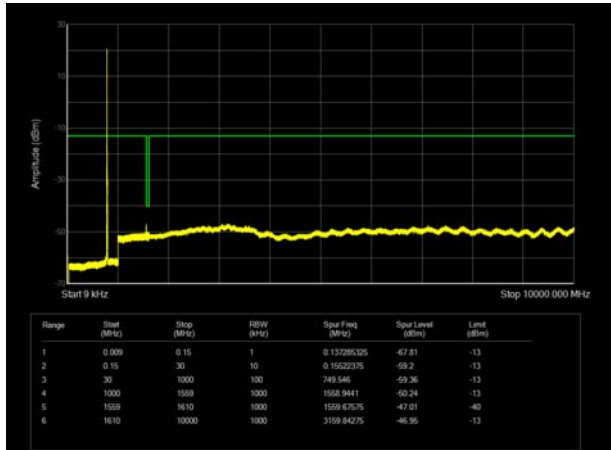

LTE Band 13 5MHz CH-High 9kHz~10GHz

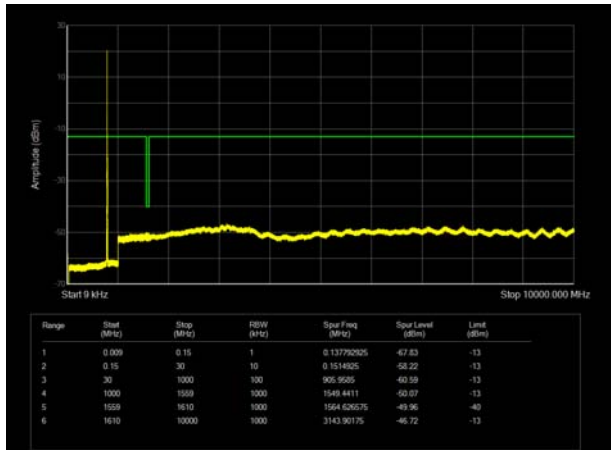

5.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


- The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.
 The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

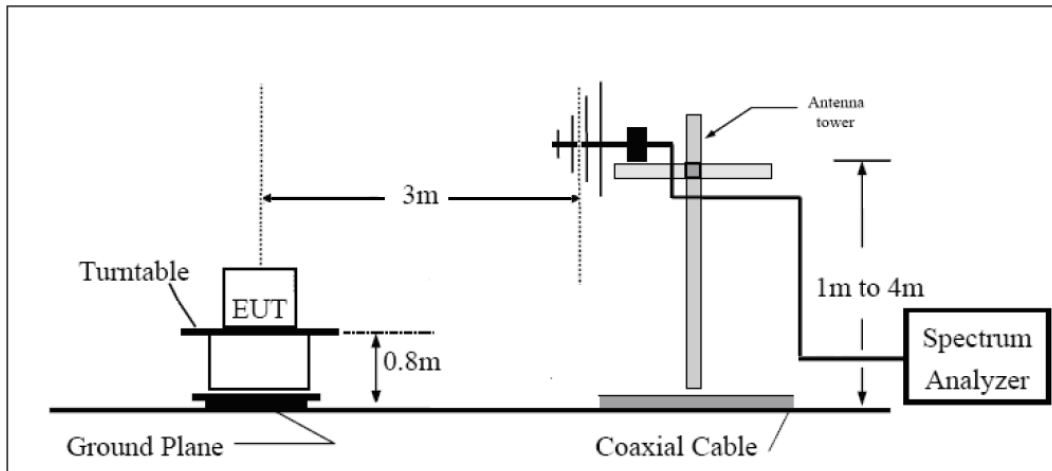

Above 1GHz

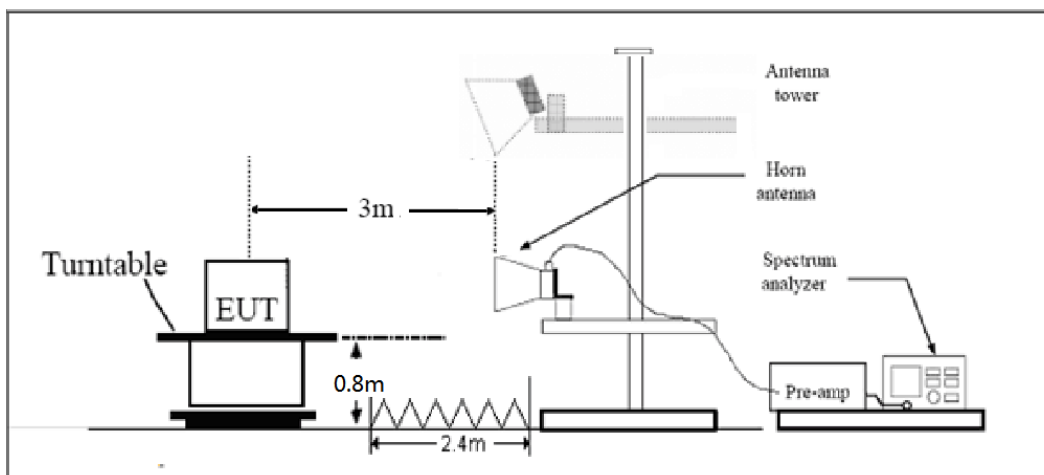

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB..”

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands



immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Part 27.53(h)(g) Limit		-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 4 QPSK 1.4MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.4	-51.60	2.70	12.70	Horizontal	-41.60	-13.00	28.60	0
3	5131.1	-45.20	3.20	12.50	Horizontal	-35.90	-13.00	22.90	0
4	6842.8	-54.20	4.20	11.80	Horizontal	-46.60	-13.00	33.60	45
5	8553.5	-54.90	4.40	12.50	Horizontal	-46.80	-13.00	33.80	315
6	10264.2	-51.10	4.70	11.30	Horizontal	-44.50	-13.00	31.50	315
7	11974.9	-51.70	5.20	13.80	Horizontal	-43.10	-13.00	30.10	315
8	13685.6	-47.10	5.70	11.30	Horizontal	-41.50	-13.00	28.50	270
9	15396.3	-51.20	6.10	16.80	Horizontal	-40.50	-13.00	27.50	90
10	17107.0	-47.90	6.10	14.20	Horizontal	-39.80	-13.00	26.80	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-53.70	2.70	12.70	Horizontal	-43.70	-13.00	30.70	135
3	5197.5	-45.40	3.20	12.50	Horizontal	-36.10	-13.00	23.10	180
4	6930.0	-54.90	4.20	11.80	Horizontal	-47.30	-13.00	34.30	180
5	8662.5	-54.60	4.40	12.50	Horizontal	-46.50	-13.00	33.50	180
6	10395.0	-50.80	4.70	11.30	Horizontal	-44.20	-13.00	31.20	45
7	12127.5	-52.20	5.20	13.80	Horizontal	-43.60	-13.00	30.60	315
8	13860.0	-47.30	5.70	11.30	Horizontal	-41.70	-13.00	28.70	45
9	15592.5	-51.20	6.10	16.80	Horizontal	-40.50	-13.00	27.50	135
10	17325.0	-46.70	6.10	14.20	Horizontal	-38.60	-13.00	25.60	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 1.4MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3507.8	-47.10	2.70	12.70	Horizontal	-37.10	-13.00	24.10	135
3	5261.6	-47.40	3.20	12.50	Horizontal	-38.10	-13.00	25.10	180
4	7017.2	-51.60	4.20	11.80	Horizontal	-44.00	-13.00	31.00	180
5	8771.5	-51.90	4.40	12.50	Horizontal	-43.80	-13.00	30.80	45
6	10525.8	-50.40	4.70	11.30	Horizontal	-43.80	-13.00	30.80	0
7	12280.1	-51.10	5.20	13.80	Horizontal	-42.50	-13.00	29.50	0
8	14034.4	-46.80	5.70	11.30	Horizontal	-41.20	-13.00	28.20	135
9	15788.7	-50.40	6.10	16.80	Horizontal	-39.70	-13.00	26.70	90
10	17543.0	-46.30	6.10	14.20	Horizontal	-38.20	-13.00	25.20	270

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3425.0	-51.90	2.70	12.70	Horizontal	-41.90	-13.00	28.90	0
3	5131.1	-45.40	3.20	12.50	Horizontal	-36.10	-13.00	23.10	90
4	6850.0	-54.60	4.20	11.80	Horizontal	-47.00	-13.00	34.00	180
5	8562.5	-55.30	4.40	12.50	Horizontal	-47.20	-13.00	34.20	270
6	10275.0	-50.10	4.70	11.30	Horizontal	-43.50	-13.00	30.50	315
7	11987.5	-51.30	5.20	13.80	Horizontal	-42.70	-13.00	29.70	135
8	13700.0	-45.30	5.70	11.30	Horizontal	-39.70	-13.00	26.70	180
9	15412.5	-52.70	6.10	16.80	Horizontal	-42.00	-13.00	29.00	45
10	17125.0	-47.30	6.10	14.20	Horizontal	-39.20	-13.00	26.20	90

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-55.10	2.70	12.70	Horizontal	-45.10	-13.00	32.10	0
3	5191.5	-45.50	3.20	12.50	Horizontal	-36.20	-13.00	23.20	0
4	6930.0	-54.80	4.20	11.80	Horizontal	-47.20	-13.00	34.20	0
5	8662.5	-54.50	4.40	12.50	Horizontal	-46.40	-13.00	33.40	90
6	10395.0	-50.40	4.70	11.30	Horizontal	-43.80	-13.00	30.80	315
7	12127.5	-51.10	5.20	13.80	Horizontal	-42.50	-13.00	29.50	45
8	13860.0	-45.00	5.70	11.30	Horizontal	-39.40	-13.00	26.40	45
9	15592.5	-52.60	6.10	16.80	Horizontal	-41.90	-13.00	28.90	90
10	17325.0	-46.90	6.10	14.20	Horizontal	-38.80	-13.00	25.80	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3500.6	-47.20	2.70	12.70	Horizontal	-37.20	-13.00	24.20	0
3	5251.1	-48.60	3.20	12.50	Horizontal	-39.30	-13.00	26.30	90
4	7010.0	-53.70	4.20	11.80	Horizontal	-46.10	-13.00	33.10	180
5	8762.5	-53.90	4.40	12.50	Horizontal	-45.80	-13.00	32.80	315
6	10515.0	-50.10	4.70	11.30	Horizontal	-43.50	-13.00	30.50	135
7	12267.5	-50.70	5.20	13.80	Horizontal	-42.10	-13.00	29.10	180
8	14020.0	-44.50	5.70	11.30	Horizontal	-38.90	-13.00	25.90	45
9	15772.5	-50.20	6.10	16.80	Horizontal	-39.50	-13.00	26.50	90
10	17525.0	-45.70	6.10	14.20	Horizontal	-37.60	-13.00	24.60	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3440.0	-52.20	2.70	12.70	Horizontal	-42.20	-13.00	29.20	90
3	5133.4	-44.90	3.20	12.50	Horizontal	-35.60	-13.00	22.60	45
4	6880.0	-54.50	4.20	11.80	Horizontal	-46.90	-13.00	33.90	180
5	8600.0	-53.80	4.40	12.50	Horizontal	-45.70	-13.00	32.70	315
6	10320.0	-49.10	4.70	11.30	Horizontal	-42.50	-13.00	29.50	45
7	12040.0	-52.30	5.20	13.80	Horizontal	-43.70	-13.00	30.70	0
8	13760.0	-47.70	5.70	11.30	Horizontal	-42.10	-13.00	29.10	45
9	15480.0	-51.90	6.10	16.80	Horizontal	-41.20	-13.00	28.20	90
10	17200.0	-46.80	6.10	14.20	Horizontal	-38.70	-13.00	25.70	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-58.10	2.70	12.70	Horizontal	-48.10	-13.00	35.10	135
3	5170.9	-48.30	3.20	12.50	Horizontal	-39.00	-13.00	26.00	180
4	6930.0	-55.00	4.20	11.80	Horizontal	-47.40	-13.00	34.40	45
5	8662.5	-53.60	4.40	12.50	Horizontal	-45.50	-13.00	32.50	90
6	10395.0	-49.40	4.70	11.30	Horizontal	-42.80	-13.00	29.80	0
7	12127.5	-50.70	5.20	13.80	Horizontal	-42.10	-13.00	29.10	90
8	13860.0	-46.80	5.70	11.30	Horizontal	-41.20	-13.00	28.20	45
9	15592.5	-52.10	6.10	16.80	Horizontal	-41.40	-13.00	28.40	180
10	17325.0	-46.30	6.10	14.20	Horizontal	-38.20	-13.00	25.20	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3490.0	-50.90	2.70	12.70	Horizontal	-40.90	-13.00	27.9	45
3	5208.4	-46.10	3.20	12.50	Horizontal	-36.80	-13.00	23.8	180
4	6980.0	-54.40	4.20	11.80	Horizontal	-46.80	-13.00	33.8	315
5	8725.0	-52.70	4.40	12.50	Horizontal	-44.60	-13.00	31.6	45
6	10470.0	-48.70	4.70	11.30	Horizontal	-42.10	-13.00	29.1	0
7	12215.0	-50.40	5.20	13.80	Horizontal	-41.80	-13.00	28.8	45
8	13960.0	-47.10	5.70	11.30	Horizontal	-41.50	-13.00	28.5	90
9	15705.0	-50.20	6.10	16.80	Horizontal	-39.50	-13.00	26.5	315
10	17450.0	-46.20	6.10	14.20	Horizontal	-38.10	-13.00	25.1	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 1.4MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1399.4	-54.75	1.70	8.70	Horizontal	-49.90	-13.00	36.90	180
3	2099.1	-59.05	2.10	11.10	Horizontal	-52.20	-13.00	39.20	315
4	2798.8	-63.55	2.30	13.10	Horizontal	-54.90	-13.00	36.90	45
5	3498.5	-62.55	2.60	12.70	Horizontal	-54.60	-13.00	41.60	180
6	4198.2	-61.25	3.30	12.50	Horizontal	-54.20	-13.00	41.20	315
7	4897.9	-60.35	3.40	12.50	Horizontal	-53.40	-13.00	40.40	45
8	5597.6	-58.25	3.30	12.50	Horizontal	-51.20	-13.00	38.20	0
9	6297.3	-56.15	3.80	11.50	Horizontal	-50.60	-13.00	37.60	45
10	6997.0	-53.25	4.20	11.80	Horizontal	-47.80	-13.00	34.80	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-56.75	1.70	8.70	Horizontal	-51.90	-13.00	38.90	45
3	2122.5	-58.55	2.10	11.10	Horizontal	-51.70	-13.00	38.70	0
4	2830.0	-62.45	2.30	13.10	Horizontal	-53.80	-13.00	40.80	315
5	3537.5	-62.75	2.60	12.70	Horizontal	-54.80	-13.00	41.80	315
6	4245.0	-61.65	3.30	12.50	Horizontal	-54.60	-13.00	41.60	135
7	4952.5	-60.35	3.40	12.50	Horizontal	-53.40	-13.00	40.40	45
8	5660.0	-58.45	3.30	12.50	Horizontal	-51.40	-13.00	38.40	0
9	6367.5	-55.75	3.80	11.50	Horizontal	-50.20	-13.00	37.20	315
10	7075.0	-52.95	4.20	11.80	Horizontal	-47.50	-13.00	34.50	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 1.4MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1430.6	-59.35	1.70	8.70	Horizontal	-54.50	-13.00	41.50	0
3	2145.9	-58.65	2.10	11.10	Horizontal	-51.80	-13.00	38.80	135
4	2861.2	-63.35	2.30	13.10	Horizontal	-54.70	-13.00	41.70	45
5	3576.5	-62.25	2.60	12.70	Horizontal	-54.30	-13.00	41.30	180
6	4291.8	-60.75	3.30	12.50	Horizontal	-53.70	-13.00	40.70	45
7	5007.1	-60.35	3.40	12.50	Horizontal	-53.40	-13.00	40.40	90
8	5722.4	-58.05	3.30	12.50	Horizontal	-51.00	-13.00	38.00	45
9	6437.7	-54.75	3.80	11.50	Horizontal	-49.20	-13.00	36.20	90
10	7153.0	-52.35	4.20	11.80	Horizontal	-46.90	-13.00	33.90	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1403.0	-52.95	1.70	8.70	Horizontal	-48.10	-13.00	35.10	180
3	2104.5	-59.85	2.10	11.10	Horizontal	-53.00	-13.00	40.00	45
4	2806.0	-63.25	2.30	13.10	Horizontal	-54.60	-13.00	41.60	90
5	3507.5	-62.65	2.60	12.70	Horizontal	-54.70	-13.00	41.70	90
6	4209.0	-61.65	3.30	12.50	Horizontal	-54.60	-13.00	41.60	315
7	4910.5	-61.15	3.40	12.50	Horizontal	-54.20	-13.00	41.20	135
8	5612.0	-59.35	3.30	12.50	Horizontal	-52.30	-13.00	39.30	45
9	6313.5	-56.35	3.80	11.50	Horizontal	-50.80	-13.00	37.80	0
10	7015.0	-53.45	4.20	11.80	Horizontal	-48.00	-13.00	35.00	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-57.85	1.70	8.70	Horizontal	-53.00	-13.00	40.00	45
3	2122.5	-60.45	2.10	11.10	Horizontal	-53.60	-13.00	40.60	90
4	2830.0	-62.85	2.30	13.10	Horizontal	-54.20	-13.00	41.20	315
5	3537.5	-62.85	2.60	12.70	Horizontal	-54.90	-13.00	41.90	45
6	4245.0	-61.65	3.30	12.50	Horizontal	-54.60	-13.00	41.60	0
7	4952.5	-60.35	3.40	12.50	Horizontal	-53.40	-13.00	40.40	315
8	5660.0	-59.15	3.30	12.50	Horizontal	-52.10	-13.00	39.10	135
9	6367.5	-56.05	3.80	11.50	Horizontal	-50.50	-13.00	37.50	180
10	7075.0	-53.05	4.20	11.80	Horizontal	-47.60	-13.00	34.60	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1427.0	-55.45	1.70	8.70	Horizontal	-50.60	-13.00	37.60	135
3	2140.5	-59.55	2.10	11.10	Horizontal	-52.70	-13.00	39.70	45
4	2854.0	-62.95	2.30	13.10	Horizontal	-54.30	-13.00	41.30	0
5	3567.5	-62.55	2.60	12.70	Horizontal	-54.60	-13.00	41.60	90
6	4281.0	-60.55	3.30	12.50	Horizontal	-53.50	-13.00	40.50	45
7	4994.5	-59.55	3.40	12.50	Horizontal	-52.60	-13.00	39.60	90
8	5708.0	-59.05	3.30	12.50	Horizontal	-52.00	-13.00	39.00	315
9	6421.5	-55.75	3.80	11.50	Horizontal	-50.20	-13.00	37.20	135
10	7135.0	-52.85	4.20	11.80	Horizontal	-47.40	-13.00	34.40	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1408.0	-55.25	1.70	8.70	Horizontal	-50.40	-13.00	37.40	90
3	2112.0	-60.05	2.10	11.10	Horizontal	-53.20	-13.00	40.20	315
4	2816.0	-63.75	2.30	13.10	Horizontal	-55.10	-13.00	42.10	180
5	3520.0	-64.35	2.60	12.70	Horizontal	-56.40	-13.00	43.40	135
6	4224.0	-62.95	3.30	12.50	Horizontal	-55.90	-13.00	42.90	180
7	4928.0	-61.35	3.40	12.50	Horizontal	-54.40	-13.00	41.40	45
8	5632.0	-58.85	3.30	12.50	Horizontal	-51.80	-13.00	38.80	90
9	6336.0	-56.05	3.80	11.50	Horizontal	-50.50	-13.00	37.50	45
10	7040.0	-53.75	4.20	11.80	Horizontal	-48.30	-13.00	35.30	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-59.65	1.70	8.70	Horizontal	-54.80	-13.00	41.80	135
3	2122.5	-59.95	2.10	11.10	Horizontal	-53.10	-13.00	40.10	225
4	2830.0	-64.25	2.30	13.10	Horizontal	-55.60	-13.00	42.60	45
5	3537.5	-64.15	2.60	12.70	Horizontal	-56.20	-13.00	43.20	45
6	4245.0	-62.25	3.30	12.50	Horizontal	-55.20	-13.00	42.20	90
7	4952.5	-60.85	3.40	12.50	Horizontal	-53.90	-13.00	40.90	315
8	5660.0	-60.55	3.30	12.50	Horizontal	-53.50	-13.00	40.50	90
9	6367.5	-56.15	3.80	11.50	Horizontal	-50.60	-13.00	37.60	315
10	7075.0	-52.45	4.20	11.80	Horizontal	-47.00	-13.00	34.00	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1422.0	-56.95	1.70	8.70	Horizontal	-52.10	-13.00	39.10	0
3	2133.0	-59.05	2.10	11.10	Horizontal	-52.20	-13.00	39.20	315
4	2844.0	-63.95	2.30	13.10	Horizontal	-55.30	-13.00	42.30	225
5	3555.0	-63.85	2.60	12.70	Horizontal	-55.90	-13.00	42.90	45
6	4266.0	-62.05	3.30	12.50	Horizontal	-55.00	-13.00	42.00	45
7	4977.0	-61.15	3.40	12.50	Horizontal	-54.20	-13.00	41.20	135
8	5688.0	-59.05	3.30	12.50	Horizontal	-52.00	-13.00	39.00	180
9	6399.0	-56.35	3.80	11.50	Horizontal	-50.80	-13.00	37.80	45
10	7110.0	-51.85	4.20	11.80	Horizontal	-46.40	-13.00	33.40	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.



LTE Band 13 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1555.8	-55.25	1.70	8.70	Horizontal	-50.40	-13.00	37.40	45
3	2338.5	-55.55	2.10	12.00	Horizontal	-47.80	-13.00	34.80	90
4	3118.0	-65.55	2.30	13.10	Horizontal	-56.90	-13.00	43.90	45
5	3897.5	-61.95	2.90	12.50	Horizontal	-54.50	-13.00	41.50	135
6	4677.0	-60.95	3.10	12.50	Horizontal	-53.70	-13.00	40.70	180
7	5456.5	-57.95	3.30	12.50	Horizontal	-50.90	-13.00	37.90	45
8	6236.0	-57.95	3.50	12.80	Horizontal	-50.80	-13.00	37.80	90
9	7015.5	-53.45	4.20	11.80	Horizontal	-48.00	-13.00	35.00	45
10	7795.0	-54.25	4.40	12.30	Horizontal	-48.50	-13.00	35.50	0

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 13 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1569.0	-55.65	1.70	8.70	Horizontal	-50.80	-40.00	10.80	45
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2353.5	-56.25	2.10	12.00	Horizontal	-48.50	-13.00	35.50	135
4	3138.0	-65.65	2.30	13.10	Horizontal	-57.00	-13.00	44.00	45
5	3922.5	-62.25	2.90	12.50	Horizontal	-54.80	-13.00	41.80	90
6	4707.0	-61.15	3.10	12.50	Horizontal	-53.90	-13.00	40.90	45
7	5491.5	-59.45	3.30	12.50	Horizontal	-52.40	-13.00	39.40	225
8	6276.0	-57.85	3.50	12.80	Horizontal	-50.70	-13.00	37.70	45
9	7060.5	-53.65	4.20	11.80	Horizontal	-48.20	-13.00	35.20	90
10	7845.0	-53.35	4.40	12.30	Horizontal	-47.60	-13.00	34.60	315

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 13 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1556.5	-55.05	1.70	8.70	Horizontal	-50.20	-13.00	37.20	180
3	2346.0	-57.05	2.10	12.00	Horizontal	-49.30	-13.00	36.30	45
4	3128.0	-65.45	2.30	13.10	Horizontal	-56.80	-13.00	43.80	135
5	3910.0	-62.85	2.90	12.50	Horizontal	-55.40	-13.00	42.40	45
6	4692.0	-60.15	3.10	12.50	Horizontal	-52.90	-13.00	39.90	135
7	5474.0	-60.15	3.30	12.50	Horizontal	-53.10	-13.00	40.10	180
8	6256.0	-58.05	3.50	12.80	Horizontal	-50.90	-13.00	37.90	45
9	7038.0	-53.15	4.20	11.80	Horizontal	-47.70	-13.00	34.70	90
10	7820.0	-53.65	4.40	12.30	Horizontal	-47.90	-13.00	34.90	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 13 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-55.55	1.70	8.70	Horizontal	-50.70	-40.00	10.70	225
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2346.0	-56.85	2.10	12.00	Horizontal	-49.10	-13.00	36.10	0
4	3128.0	-65.85	2.30	13.10	Horizontal	-57.20	-13.00	44.20	90
5	3910.0	-62.45	2.90	12.50	Horizontal	-55.00	-13.00	42.00	315
6	4692.0	-60.65	3.10	12.50	Horizontal	-53.40	-13.00	40.40	135
7	5474.0	-60.15	3.30	12.50	Horizontal	-53.10	-13.00	40.10	45
8	6256.0	-58.35	3.50	12.80	Horizontal	-51.20	-13.00	38.20	0
9	7038.0	-53.25	4.20	11.80	Horizontal	-47.80	-13.00	34.80	315
10	7820.0	-53.75	4.40	12.30	Horizontal	-48.00	-13.00	35.00	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

Variant:

LTE Band 13 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1559.8	-61.97	1.70	8.70	Horizontal	-57.12	-40.00	17.12	315
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2346.0	-65.01	2.10	12.00	Horizontal	-57.26	-13.00	44.26	135
4	3128.0	-62.19	2.30	13.10	Horizontal	-53.54	-13.00	40.54	90
5	3910.0	-59.51	2.90	12.50	Horizontal	-52.06	-13.00	39.06	45
6	4692.0	-58.52	3.10	12.50	Horizontal	-51.27	-13.00	38.27	225
7	5474.0	-57.02	3.30	12.50	Horizontal	-49.97	-13.00	36.97	45
8	6256.0	-60.35	3.50	12.80	Horizontal	-53.20	-13.00	40.20	90
9	7038.0	-57.09	4.20	11.80	Horizontal	-51.64	-13.00	38.64	315
10	7820.0	-55.13	4.40	12.30	Horizontal	-49.38	-13.00	36.38	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 13 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1554.6	-63.17	1.70	8.70	Horizontal	-58.32	-13.00	45.32	90
3	2346.0	-65.89	2.10	12.00	Horizontal	-58.14	-13.00	45.14	45
4	3128.0	-62.50	2.30	13.10	Horizontal	-53.85	-13.00	40.85	90
5	3910.0	-58.00	2.90	12.50	Horizontal	-50.55	-13.00	37.55	45
6	4692.0	-57.87	3.10	12.50	Horizontal	-50.62	-13.00	37.62	225
7	5474.0	-56.74	3.30	12.50	Horizontal	-49.69	-13.00	36.69	45
8	6256.0	-58.04	3.50	12.80	Horizontal	-50.89	-13.00	37.89	90
9	7038.0	-55.10	4.20	11.80	Horizontal	-49.65	-13.00	36.65	315
10	7820.0	-54.72	4.40	12.30	Horizontal	-48.97	-13.00	35.97	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

6 Main Test Instruments

(Original): May 25, 2018 ~ June 27, 2018 and November 28, 2019 and June 29, 2020 and July 6, 2020:

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2018-05-20	2019-05-19
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2015-01-30	2020-01-29
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-12-13
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Preampfier	R&S	SCU18	102327	2018-05-20	2019-05-19
Preampfier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
Software	R&S	EMC32	V 8.52.0	NA	NA



(Variant): October 22, 2021 and November 30, 2021~ December 1, 2021:

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	150415	2021-05-15	2022-05-14
Spectrum Analyzer	Keysight	N9020A	MY52330084	2021-05-15	2022-05-14

*****END OF REPORT *****

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Verify data

The Verify data are submitted separately.

ANNEX D: Product Change Description

The Product Change Description are submitted separately.