



SPOT CHECK REPORT

FCC PART 90

FCC ID: XMR2021EM121RGL
Application: Quectel Wireless Solutions Company Limited
Application Type: Certification
Product: LTE-A Cat 12 M.2 Module
Model No.: EM121R-GL
Brand Name: Quectel
FCC Rule Part(s): Part90 Subpart R
Test Procedure(s): ANSI C63.26: 2015
Test Date: April 28, 2021 ~ May 18, 2021

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

| Report No. | Version | Description | Issue Date | Note |
|---------------|---------|----------------|------------|-------|
| 2104RSU063-U3 | Rev. 01 | Initial Report | 05-30-2021 | Valid |
| | | | | |

Note: This application for certification is leveraging the data reuse procedures from KDB 484596 based on reference FCC ID: XMR2020EM120RGL to cover variant FCC ID: XMR2021EM121RGL.

CONTENTS

| Description | Page |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1. Applicant | 4 |
| 1.2. Manufacturer | 4 |
| 1.3. Testing Facility | 4 |
| 1.4. Product Information | 5 |
| 1.5. Radio Specification under Test | 5 |
| 1.6. Description of Available Antennas..... | 6 |
| 1.7. Test Methodology | 6 |
| 1.8. EMI Suppression Device(s)/Modifications..... | 6 |
| 1.9. Configuration of Tested System | 7 |
| 1.10. Test Environment Condition..... | 7 |
| 2. TEST EQUIPMENT CALIBRATION DATE..... | 8 |
| 3. MEASUREMENT UNCERTAINTY | 9 |
| 4. TEST RESULT | 10 |
| 4.1. Summary..... | 10 |
| 4.2. Equivalent Isotropically Radiated Power Measurement | 11 |
| 4.2.1. Test Limit | 11 |
| 4.2.2. Test Procedures Used | 11 |
| 4.2.3. Test Setting..... | 11 |
| 4.2.4. Test Setup | 12 |
| 4.2.5. Test Result..... | 13 |
| 4.3. Conducted Spurious Emissions..... | 14 |
| 4.3.1. Test Limit | 14 |
| 4.3.2. Test Procedure Used | 14 |
| 4.3.3. Test Setting..... | 14 |
| 4.3.4. Test Setup | 15 |
| 4.3.5. Test Result..... | 16 |
| 5. CONCLUSION | 17 |
| Appendix A - Test Setup Photograph | 18 |
| Appendix B - EUT Photograph..... | 19 |
| Appendix C - Reference Test Report | 20 |

1. GENERAL INFORMATION

1.1. Applicant

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.3. Testing Facility

| | |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | Test Site - MRT Suzhou Laboratory |
| | Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China |
| | Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China |
| | Laboratory Accreditations |
| | A2LA: 3628.01 CNAS: L10551 |
| | FCC: CN1166 ISED: CN0001 |
| | VCCI: R-20025, G-20034, C-20020, T-20020 |
| <input type="checkbox"/> | Test Site - MRT Shenzhen Laboratory |
| | Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China |
| | Laboratory Accreditations |
| | A2LA: 3628.02 CNAS: L10551 |
| | FCC: CN1284 ISED: CN0105 |
| <input type="checkbox"/> | Test Site - MRT Taiwan Laboratory |
| | Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) |
| | Laboratory Accreditations |
| | TAF: L3261-190725 |
| | FCC: 291082, TW3261 ISED: TW3261 |

1.4. Product Information

| | |
|------------------------|---|
| Product Name: | LTE-A Cat 12 M.2 Module |
| Model No.: | EM121R-GL |
| Brand Name: | Quectel |
| IMEI: | 862718050001670 |
| Operating Temperature: | -25 ~ 75 °C |
| Power Type: | 3.1 ~ 4.4Vdc, typical 3.7Vdc |
| UMTS Specification | |
| Single Band: | Band 2, 5 |
| Modulation: | Uplink up to 16QAM, Downlink up to 64QAM |
| E-UTRA Specification | |
| Single Band: | Band 2, 4, 5, 7, 12, 13, 14, 25, 26, 30, 38, 41, 48, 66 |
| Uplink CA Band: | Intra-Band CA_41C |
| Modulation: | Uplink up to 64QAM, Downlink up to 256QAM |

1.5. Radio Specification under Test

| | |
|-------------------------|------------------------|
| FDD Tx Frequency Range: | Band 14: 788 ~ 798 MHz |
| FDD Rx Frequency Range: | Band 14: 758 ~ 768 MHz |

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1.6. Description of Available Antennas

| Technology | Frequency Range (MHz) | Antenna Type | Max Peak Gain (dBi) |
|-------------|-----------------------|--------------|---------------------|
| LTE Band 2 | 1850 ~ 1910 | Dipole | 1.15 |
| LTE Band 4 | 1710 ~ 1755 | | -0.50 |
| LTE Band 5 | 824 ~ 849 | | 1.85 |
| LTE Band 7 | 2500 ~ 2570 | | 1.32 |
| LTE Band 12 | 699 ~ 716 | | -2.43 |
| LTE Band 13 | 777 ~ 787 | | -0.10 |
| LTE Band 14 | 788 ~ 798 | | 2.40 |
| LTE Band 25 | 1850 ~ 1915 | | 1.15 |
| LTE Band 26 | 814 ~ 849 | | 1.85 |
| LTE Band 30 | 2305 ~ 2315 | | -3.64 |
| LTE Band 38 | 2570 ~ 2620 | | 0.93 |
| LTE Band 41 | 2496 ~ 2690 | | 0.93 |
| LTE Band 48 | 3550 ~ 3700 | | -3.37 |
| LTE Band 66 | 1710 ~ 1780 | | -0.50 |

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

1.7. Test Methodology


According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices

1.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

1.9. Configuration of Tested System

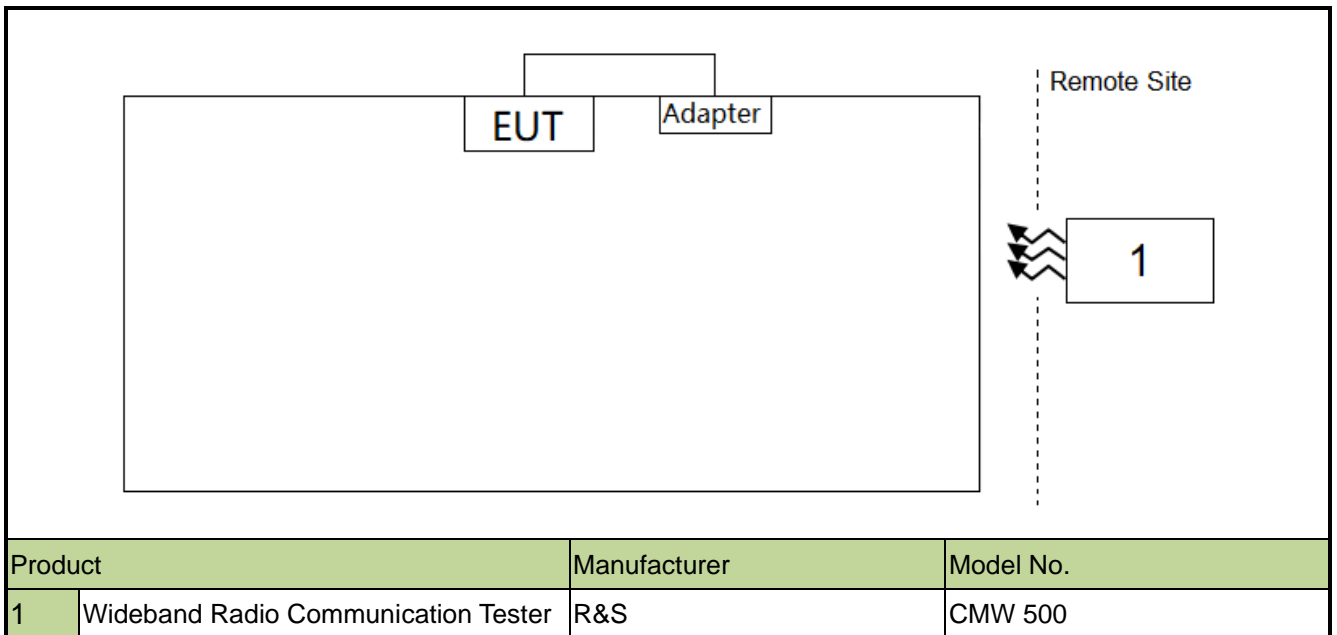

1.10. Test Environment Condition

| | |
|---------------------|-------------|
| Ambient Temperature | 15 ~ 35°C |
| Relative Humidity | 20% ~ 75%RH |

2. TEST EQUIPMENT CALIBRATION DATE

Conducted Test Equipment (WZ-SR6, WZ-TR3)

| Instrument | Manufacturer | Type No. | Asset No. | Cali. Interval | Cali. Due Date |
|--|--------------|-----------|-------------|----------------|----------------|
| EXA Signal Analyzer | Agilent | N9020A | MRTSUE06106 | 1 year | 2022/04/13 |
| EXA Signal Analyzer | Keysight | N9010B | MRTSUE06452 | 1 year | 2021/07/11 |
| Signal Analyzer | R&S | FSV40 | MRTSUE06218 | 1 year | 2022/04/13 |
| Wideband Radio Communication Tester | R&S | CMW 500 | MRTSUE06243 | 1 year | 2021/11/07 |
| Power Meter | Agilent | U2021XA | MRTSUE06030 | 1 year | 2021/11/18 |
| DC Power Supply | GWINSTEK | DPS-3303C | MRTSUE06064 | N/A | N/A |
| True RMS Clamp Meter | Fluke | 319 | MRTSUE06080 | 1 year | 2022/05/05 |
| Directional Coupler | Agilent | 87301D | MRTSUE06082 | 1 year | 2022/03/08 |
| Dual Directional Coupler | Agilent | 7778D | MRTSUE06083 | 1 year | 2022/03/24 |
| Attenuator | MVE | 6dB | MRTSUE06534 | 1 year | 2021/12/12 |
| Attenuator | MVE | 10dB | MRTSUE06543 | 1 year | 2021/12/12 |
| Temperature & Humidity Chamber | BAOYT | BYH-150CL | MRTSUE06051 | 1 year | 2021/11/07 |
| Thermohygrometer | testo | 608-H1 | MRTSUE06401 | 1 year | 2021/08/08 |

3. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

| |
|--|
| Conducted Spurious Emissions |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB |
| Output Power |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB |

4. TEST RESULT

4.1. Summary

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|----------------------|---------------------------|--|----------------|-------------|-------------|
| 90.542(a)(7) | Equivalent Radiated Power | <30 Watts Max ERP | Conducted | Pass | Section 4.2 |
| 2.1051, 90.543(e)(3) | Spurious Emission | < 43 + 10log ₁₀ (P _[Watts]) | | Pass | Section 4.3 |

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The difference compared with the original report is only different GNSS Bands. Output power and conducted spurious emissions verification worst test refer to original report.

4.2. Equivalent Isotropically Radiated Power Measurement

4.2.1. Test Limit

Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.

4.2.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

4.2.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

4.2.4. Test Setup

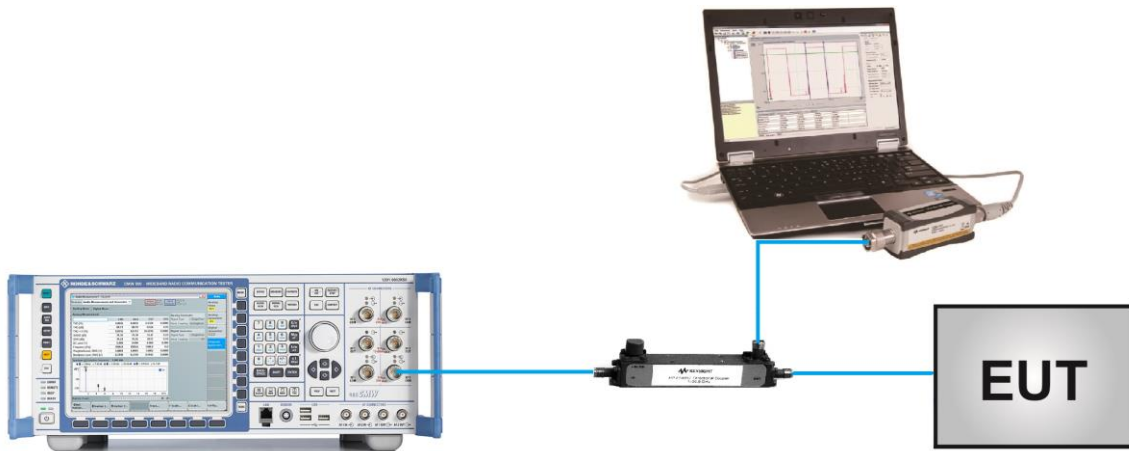

4.2.5. Test Result

| | | | |
|---------------|-------------------------|-----------|------------|
| Product | LTE-A Cat 12 M.2 Module | Test Site | WZ-SR6 |
| Test Engineer | Cloud Guo | Test Date | 2021/04/28 |

| Channel No. | Frequency (MHz) | Channel Bandwidth (MHz) | RB Size | RB Offset | Output Power (dBm) | ERP (dBm) | Limit (dBm) |
|-------------|-----------------|-------------------------|---------|-----------|--------------------|-----------|-------------|
| QPSK | | | | | | | |
| 23305 | 790.5 | 5 | 1 | 0 | 23.21 | 23.46 | < 44.77 |
| 23330 | 793.0 | | | | 23.21 | 23.46 | < 44.77 |
| 23355 | 795.5 | | | | 23.25 | 23.50 | < 44.77 |
| 23305 | 790.5 | 5 | 1 | 12 | 23.26 | 23.51 | < 44.77 |
| 23330 | 793.0 | | | | 23.33 | 23.58 | < 44.77 |
| 23355 | 795.5 | | | | 23.37 | 23.62 | < 44.77 |
| 23305 | 790.5 | 5 | 1 | 24 | 23.24 | 23.49 | < 44.77 |
| 23330 | 793.0 | | | | 23.31 | 23.56 | < 44.77 |
| 23355 | 795.5 | | | | 23.22 | 23.47 | < 44.77 |
| 23305 | 790.5 | 5 | 25 | 0 | 22.29 | 22.54 | < 44.77 |
| 23330 | 793.0 | | | | 22.26 | 22.51 | < 44.77 |
| 23355 | 795.5 | | | | 22.27 | 22.52 | < 44.77 |
| 23330 | 793.0 | 10 | 1 | 0 | 23.25 | 23.50 | < 44.77 |
| 23330 | 793.0 | | | 24 | 23.21 | 23.46 | < 44.77 |
| 23330 | 793.0 | | | 49 | 23.28 | 23.53 | < 44.77 |
| 23330 | 793.0 | 10 | 50 | 0 | 22.15 | 22.40 | < 44.77 |

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15

4.3. Conducted Spurious Emissions

4.3.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

4.3.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.7

4.3.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.


4.3.4. Test Setup



4.3.5. Test Result

| | | | |
|---------------|-------------------------|-----------|------------|
| Product | LTE-A Cat 12 M.2 Module | Test Site | WZ-SR6 |
| Test Engineer | Cloud Guo | Test Date | 2021/04/30 |

| Channel | Frequency (MHz) | Channel Bandwidth (MHz) | Frequency Range (MHz) | Max Spurious Emissions (dBm) | Limit (dBm) | Result |
|---------|-----------------|-------------------------|-----------------------|------------------------------|-------------|--------|
| QPSK | | | | | | |
| 23330 | 793.0 | 5 | 30 ~ 10000 | -31.26 | ≤ -13.00 | Pass |

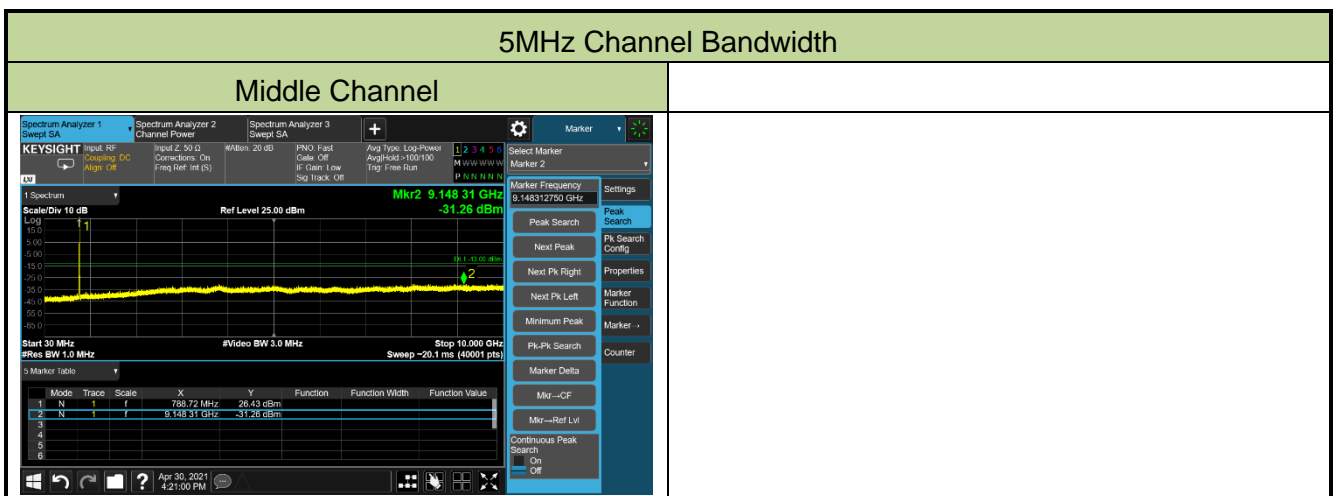

5. CONCLUSION

The data collected relate only the item(s) tested and show that unitis compliance with FCC Rules.

Appendix A - Test Setup Photograph

Refer to "2101RSU006-UT" file.

Appendix B - EUT Photograph

Refer to "2101RSU006-UE" file.

Appendix C - Reference Test Report