

# MEASUREMENT REPORT

## FCC PART 22 & 24 & 27

---


**FCC ID:** XMR2020EM120RGL

**Application:** Quectel Wireless Solutions Company Limited

**Application Type:** Certification

**Product:** LTE-A Cat 12 M.2 Module

**Model No.:** EM120R-GL

**Brand Name:** 

**FCC Rule Part(s):** Part 22 Subpart H, Part 24 Subpart E,  
Part 27 Subpart L

**Test Procedure(s):** ANSI C63.26-2015, KDB 971168 D01v03r01


**Test Date:** June 12 ~ August 27, 2020

Reviewed By:



( Sunny Sun )

Approved By:



( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
2006RSU085-U8	Rev. 01	Initial Report	08-28-2020	Valid

---

## CONTENTS

Description	Page
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Equipment Description .....	7
2.2. Product Specification Subjective to this Report .....	7
2.3. Description of Available Antennas .....	8
2.4. EMI Suppression Device(s)/Modifications .....	8
2.5. Maximum Power, Frequency Tolerance, and Emission Designator .....	8
2.6. Configuration of Tested System .....	9
2.7. Test Environment Condition .....	9
<b>3. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>10</b>
<b>4. MEASUREMENT UNCERTAINTY.....</b>	<b>12</b>
<b>5. TEST RESULT.....</b>	<b>13</b>
5.1. Summary .....	13
5.2. Occupied Bandwidth.....	14
5.2.1. Test Limit .....	14
5.2.2. Test Procedure.....	14
5.2.3. Test Setting .....	14
5.2.4. Test Setup .....	14
5.2.5. Test Result .....	15
5.3. Frequency Stability Measurement.....	18
5.3.1. Test Limit .....	18
5.3.2. Test Procedures Used.....	18
5.3.3. Test Setting .....	18
5.3.4. Test Setup .....	19
5.3.5. Test Result .....	20
5.4. Equivalent Isotropically Radiated Power Measurement .....	23
5.4.1. Test Limit .....	23
5.4.2. Test Procedures Used.....	23
5.4.3. Test Setting .....	23
5.4.4. Test Setup .....	24
5.4.5. Test Result .....	25
5.5. Band Edge Measurement .....	28

---

5.5.1.	Test Limit .....	28
5.5.2.	Test Procedure Used.....	28
5.5.3.	Test Setting .....	28
5.5.4.	Test Setup .....	29
5.5.5.	Test Result .....	30
5.6.	Peak to Average Ratio.....	31
5.6.1.	Test Limit .....	31
5.6.2.	Test Procedure Used.....	31
5.6.3.	Test Setting .....	31
5.6.4.	Test Setup .....	31
5.6.5.	Test Result .....	32
5.7.	Conducted Spurious Emissions.....	35
5.7.1.	Test Limit .....	35
5.7.2.	Test Procedure Used.....	35
5.7.3.	Test Setting .....	35
5.7.4.	Test Setup .....	36
5.7.5.	Test Result .....	37
5.8.	Radiated Spurious Emissions Measurements .....	41
5.8.1.	Test Limit .....	41
5.8.2.	Test Procedure Used.....	41
5.8.3.	Test Setting .....	41
5.8.4.	Test Setup .....	41
5.8.5.	Test Result .....	43
<b>6.</b>	<b>CONCLUSION .....</b>	<b>46</b>
	<b>Appendix A - Test Setup Photograph .....</b>	<b>47</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>48</b>

## General Information

<b>Applicant:</b>	Quectel Wireless Solutions Company Limited
<b>Applicant Address:</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
<b>Manufacturer:</b>	Quectel Wireless Solutions Company Limited
<b>Manufacturer Address:</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is an FCC accredited testing laboratory (MRT Designation No. CN1166) on the FCC website.
- MRT facility is an ISED recognized testing laboratory (MRT Reg. No. CN0001) on the ISED website.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the A2LA under the A2LA Program (Cert. No. 3628.01) and CNAS under the CNAS Program (Cert. No. L10551) in EMC, Safety, Radio, Telecommunications and SAR testing.

## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	LTE-A Cat 12 M.2 Module
Model No.:	EM120R-GL
Brand Name:	<b>QUECTEL</b>
IMEI:	860459050000725
WCDMA Band:	Band II, Band IV, Band V
Single Band:	Band 2, 4, 5, 7, 12, 13, 14, 25, 26, 30, 38, 41, 48, 66
Intra-Band:	CA_41C
Category:	Category 12
Operating Temperature:	-25 ~ 75 °C
Power Type:	3.1 ~ 4.4Vdc, typical 3.7Vdc

### 2.2. Product Specification Subjective to this Report

Tx Frequency Range:	Band II: 1850 ~ 1910MHz, Band IV: 1710 ~ 1755MHz Band V: 824 ~ 849MHz
Rx Frequency Range:	Band II: 1930 ~ 1990MHz, Band IV: 2110 ~ 2155MHz Band V: 869 ~ 894MHz
Type of Modulation:	QPSK, 16QAM (DL only)

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

### 2.3. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
WCDMA Band II	1850 ~ 1910	Dipole	1.15
WCDMA Band IV	1710 ~ 1755		-0.50
WCDMA Band V	824 ~ 849		1.85

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

### 2.4. EMI Suppression Device(s)/Modifications


No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.5. Maximum Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Modulation	Maximum Power (W)	Frequency Tolerance (ppm)	Emission Designator
Part 24	WCDMA Band II RMC 12.2Kbps	BPSK	0.2588	0.0048	4M15F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	BPSK	0.2667	0.0030	4M15F9W
Part 22	WCDMA Band V RMC 12.2Kbps	BPSK	0.3119	0.0020	4M14F9W



## 2.6. Configuration of Tested System

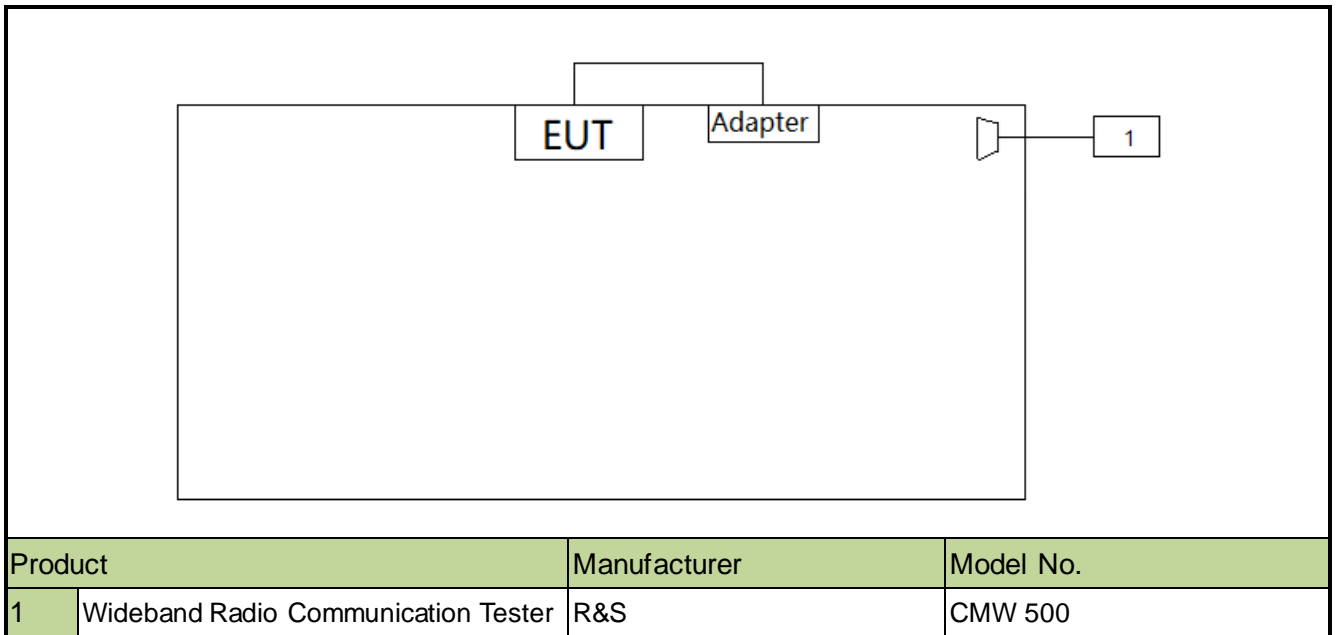

## 2.7. Test Environment Condition

Ambient Temperature	15°C~35°C
Relative Humidity	20%RH ~75%RH

### 3. TEST EQUIPMENT CALIBRATION DATE

#### Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
EMC Cable	HUBER+SUHN ER	SF126-2M	MRTSUE06732	1 year	2021/04/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

#### Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
EMC Cable	HUBER+SUHN ER	SF126-2M	MRTSUE06733	1 year	2021/04/10
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

## Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/15
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2021/05/06
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2021/03/25
Attenuator	MVE	6dB	MRTSUE06534	1 year	2020/12/12
Attenuator	MVE	10dB	MRTSUE06543	1 year	2020/12/12
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

#### 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Emission Measurement</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 9kHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 5. TEST RESULT

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section 5.2
2.1055, 22.355 24.235, 27.54	Frequency Stability	< 2.5 ppm		Pass	Section 5.3
22.913(a)(5)	Equivalent Radiated Power	< 7 Watts Max ERP		Pass	Section 5.4
27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts Max EIRP			
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts Max EIRP		Pass	Section 5.5, 5.7
2.1051, 22.917(a) 24.238(a), 27.53(h)	Band Edge	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )			
2.1051, 22.917(a) 24.238(a), 27.53(h)	Spurious Emission	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )			
24.232(d) 27.50(d)(5)	Peak to Average Ratio	< 13dB			
2.1053, 22.917(a) 24.238(a), 27.53(h)	Spurious Emissions	> 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )	Radiated	Pass	Section 5.8

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented in the test report.
- 3) This report is supplemented to MRT Original "2006RSU008-U8" Report, FCC ID: XMR2020EM160RGL updating product name and model number.

## 5.2. Occupied Bandwidth

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.


### 5.2.4. Test Setup

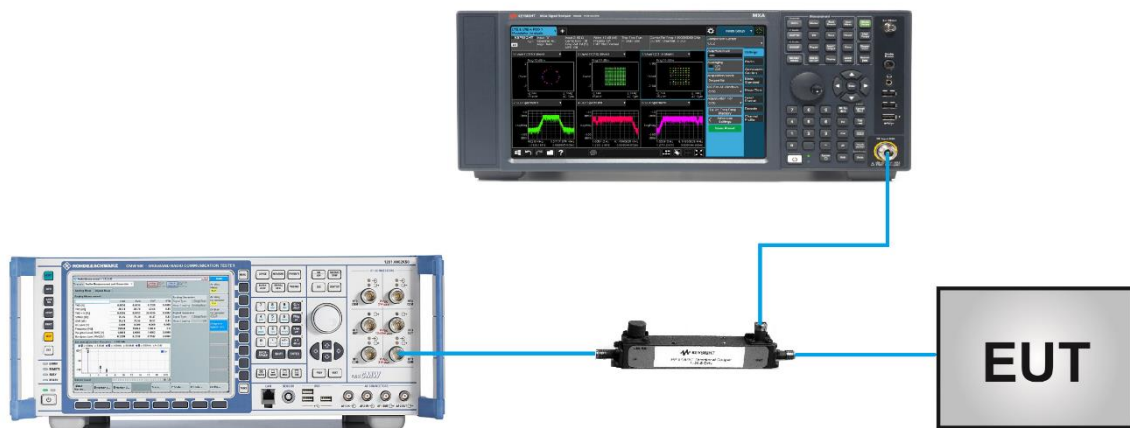

### 5.2.5. Test Result


Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/06/23	Test Site	SR6
Test Band	WCDMA Band II		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest	1852.4	4.66	4.15
Middle	1880.0	4.70	4.15
Highest	1907.6	4.69	4.14

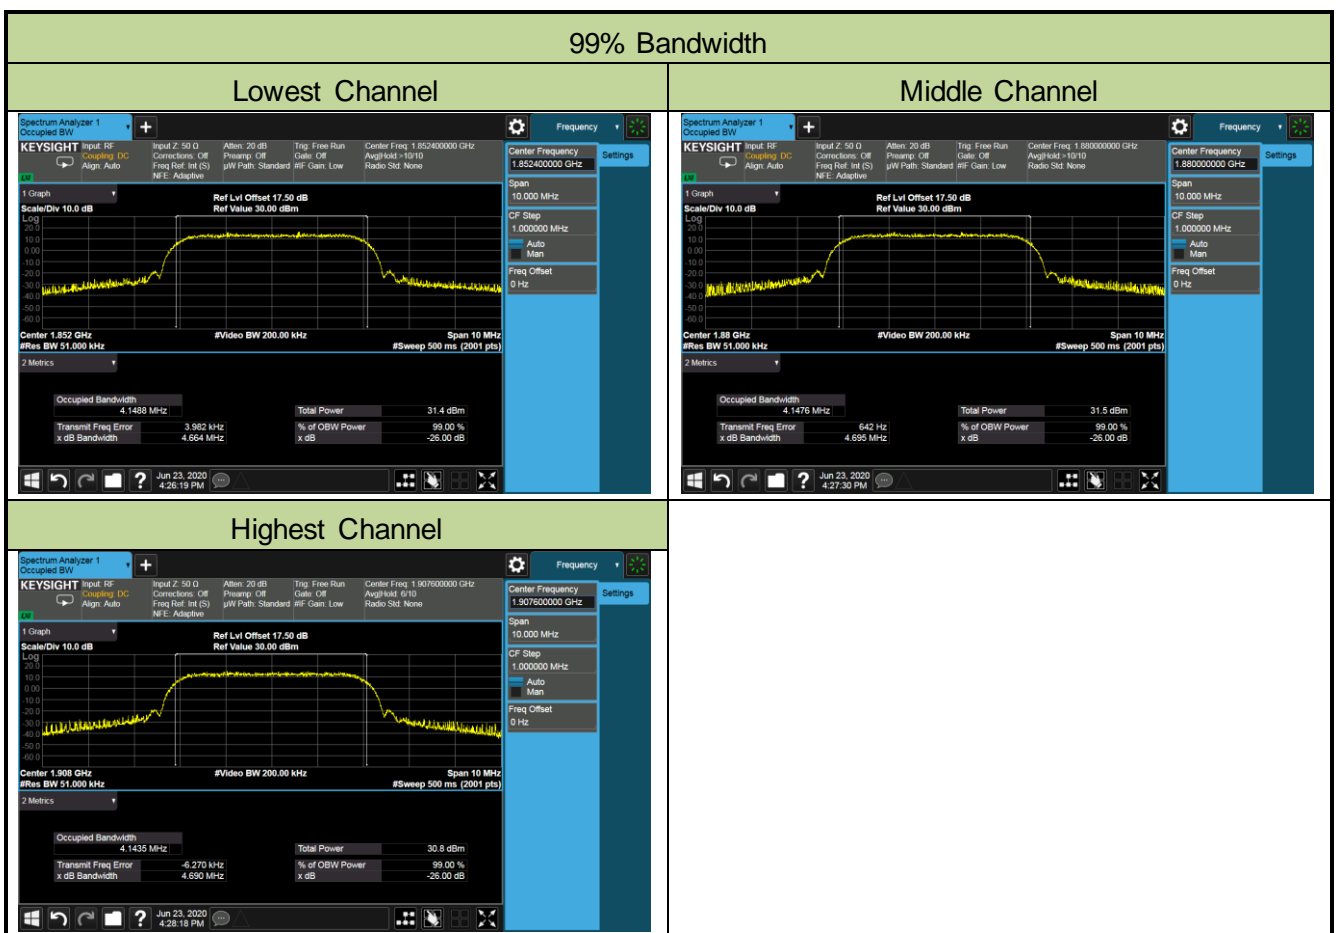

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/08/12	Test Site	SR6
Test Band	WCDMA Band IV		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest	1712.4	4.69	4.15
Middle	1732.4	4.68	4.14
Highest	1752.6	4.67	4.15

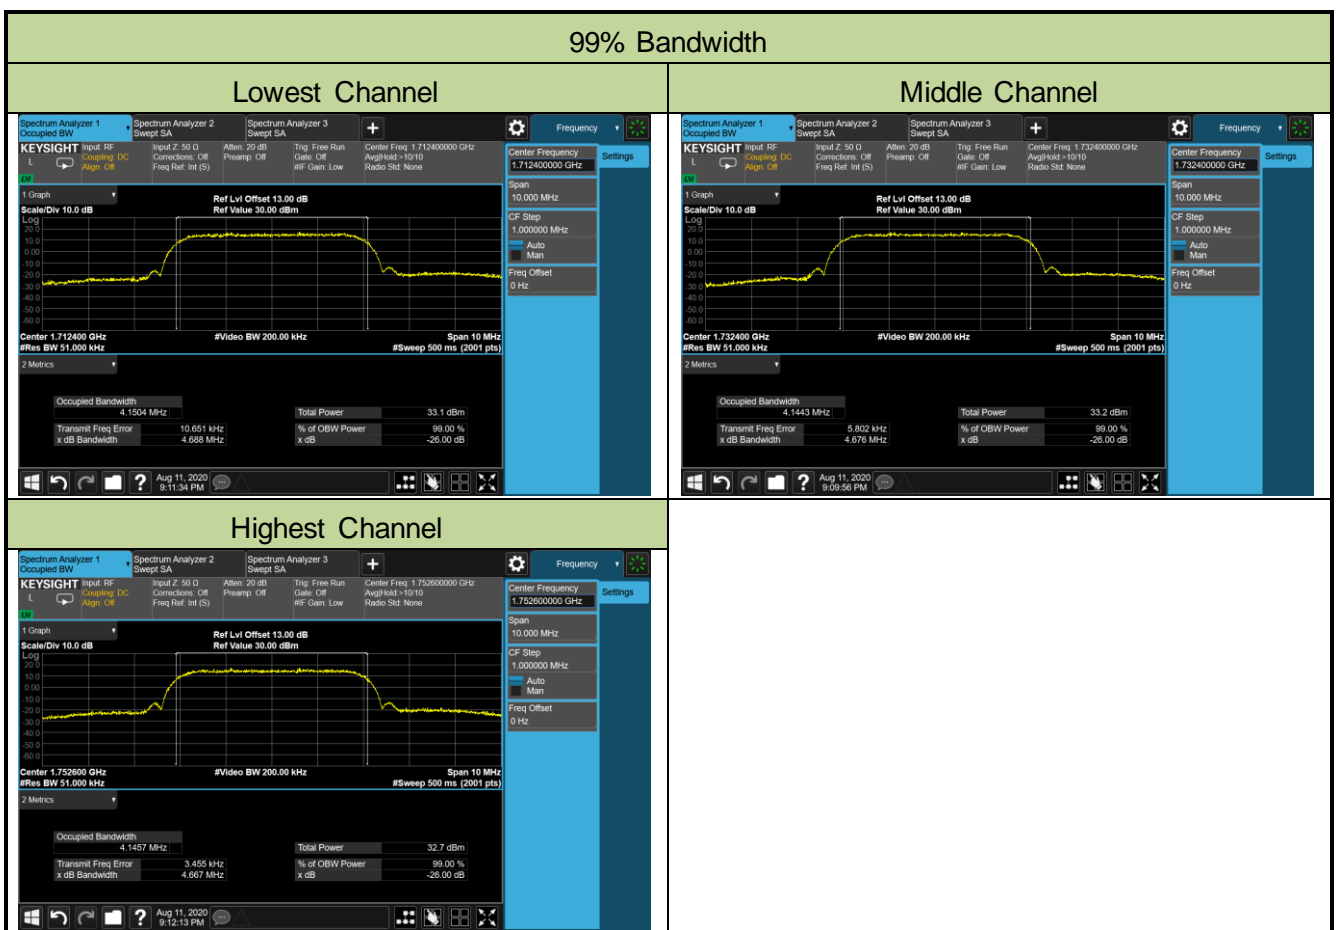



Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/06/23	Test Site	SR6
Test Band	WCDMA Band V		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest	826.4	4.69	4.14
Middle	836.4	4.68	4.14
Highest	846.6	4.66	4.12

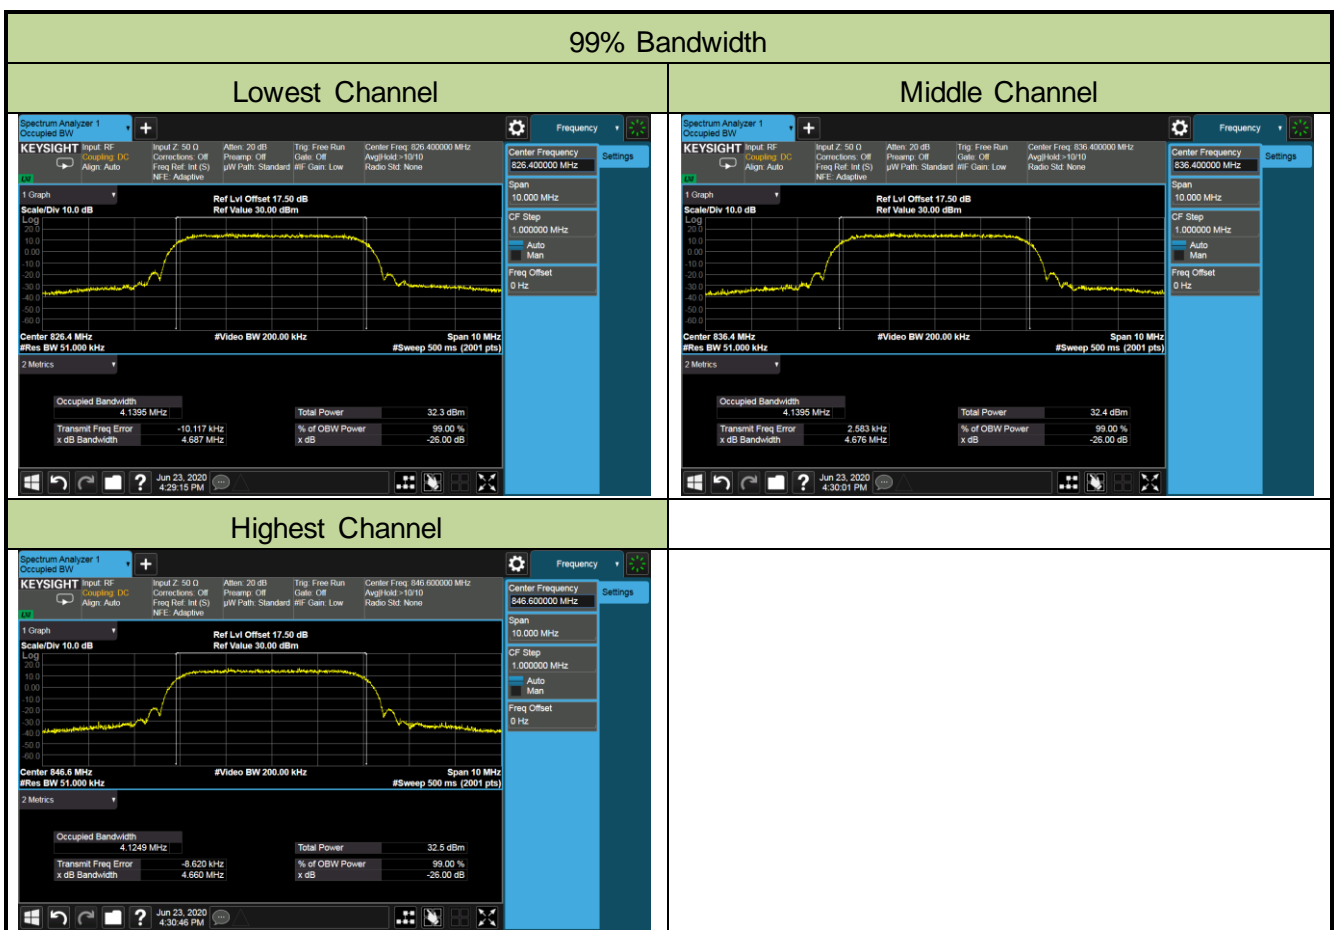

### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedures Used**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 5.3.4. Test Setup

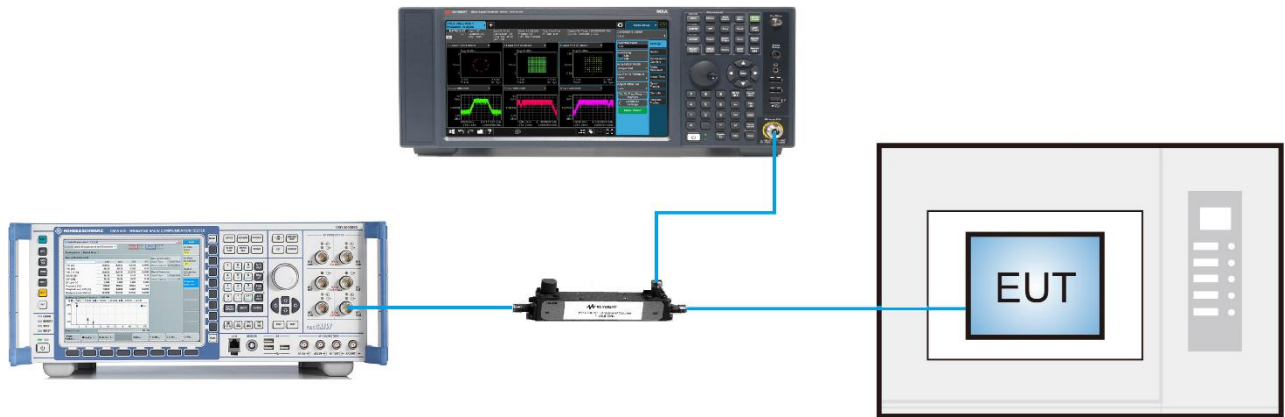

### 5.3.5. Test Result

Product	LTE-A Cat 12 M.2 Module	Temperature	-30 ~ 50°C
Test Engineer	Candy Luo	Relative Humidity	52%
Test Site	TR3	Test Date	2020/06/25
Test Band	WCDMA Band II		

Voltage (%)	Power (VDC)	Temp (°C)	Frequency Tolerance (ppm)
100%	3.7	- 30	-0.0029
		- 20	-0.0022
		- 10	-0.0029
		0	0.0007
		+ 10	-0.0024
		+ 20 (Ref)	-0.0031
		+ 30	-0.0027
		+ 40	-0.0027
		+ 50	-0.0048
115%	4.2	+ 20	-0.0028
85%	3.1	+ 20	-0.0024

Product	LTE-A Cat 12 M.2 Module	Temperature	-30 ~ 50°C
Test Engineer	Candy Luo	Relative Humidity	52%
Test Site	TR3	Test Date	2020/06/25
Test Band	WCDMA Band IV		

Voltage (%)	Power (VDC)	Temp (°C)	Frequency Tolerance (ppm)
100%	3.7	- 30	0.0024
		- 20	0.0023
		- 10	0.0029
		0	0.0022
		+ 10	0.0017
		+ 20 (Ref)	0.0026
		+ 30	0.0029
		+ 40	0.0028
		+ 50	0.0027
115%	4.2	+ 20	0.0022
85%	3.1	+ 20	0.0030

Product	LTE-A Cat 12 M.2 Module	Temperature	-30 ~ 50°C
Test Engineer	Candy Luo	Relative Humidity	52%
Test Site	TR3	Test Date	2020/06/25
Test Band	WCDMA Band V		

Voltage (%)	Power (VDC)	Temp (°C)	Frequency Tolerance (ppm)
100%	3.7	- 30	0.0014
		- 20	0.0020
		- 10	0.0015
		0	0.0018
		+ 10	0.0015
		+ 20 (Ref)	0.0005
		+ 30	0.0009
		+ 40	0.0018
		+ 50	-0.0014
115%	4.2	+ 20	0.0011
85%	3.1	+ 20	0.0009

## 5.4. Equivalent Isotropically Radiated Power Measurement

### 5.4.1. Test Limit

#### Band 2:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

#### Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

### 5.4.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

### 5.4.4. Test Setup

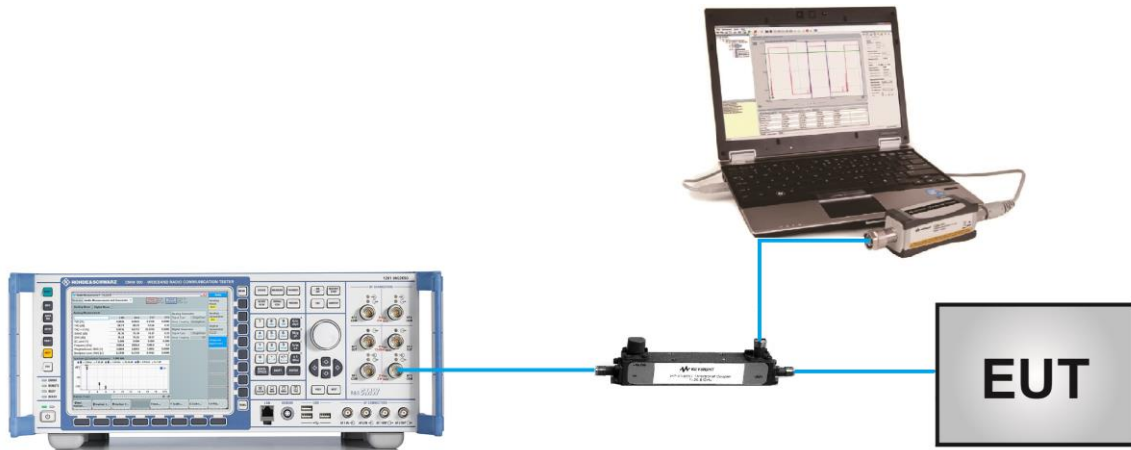



**5.4.5. Test Result**

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/08/27	Test Site	SR6
Test Band	WCDMA Band II		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band II Channel				Band II Channel		
		9262	9400	9538		9262	9400	9538
WCDMA R99	1	24.13	24.12	24.07	1.15	25.28	25.27	25.22
HSDPA	1	23.09	23.06	23.23	1.15	24.24	24.21	24.38
	2	23.01	22.94	23.07	1.15	24.16	24.09	24.22
	3	22.67	22.70	22.72	1.15	23.82	23.85	23.87
	4	22.74	22.62	22.61	1.15	23.89	23.77	23.76
HSUPA	1	23.05	23.06	23.07	1.15	24.20	24.21	24.22
	2	23.15	23.19	23.23	1.15	24.30	24.34	24.38
	3	22.64	22.71	22.62	1.15	23.79	23.86	23.77
	4	22.98	23.03	23.06	1.15	24.13	24.18	24.21
	5	22.68	22.53	22.55	1.15	23.83	23.68	23.70
HSDPA	1	22.91	22.92	23.04	1.15	24.06	24.07	24.19
	2	22.84	22.76	22.87	1.15	23.99	23.91	24.02
	3	22.52	22.54	22.58	1.15	23.67	23.69	23.73
	4	22.57	22.45	22.43	1.15	23.72	23.60	23.58
Limit		33.01dBm						

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/08/27	Test Site	SR6
Test Band	WCDMA Band IV		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band IV Channel				Band IV Channel		
		1312	1412	1513		1312	1412	1513
WCDMA R99	1	24.26	24.15	24.17	-0.5	23.76	23.65	23.67
HSDPA	1	24.15	24.18	24.20	-0.5	23.65	23.68	23.70
	2	24.16	24.17	24.21	-0.5	23.66	23.67	23.71
	3	24.16	24.15	24.20	-0.5	23.66	23.65	23.70
	4	24.14	24.16	24.20	-0.5	23.64	23.66	23.70
HSUPA	1	23.05	23.01	23.12	-0.5	22.55	22.51	22.62
	2	23.31	23.29	23.15	-0.5	22.81	22.79	22.65
	3	23.32	23.54	23.40	-0.5	22.82	23.04	22.90
	4	23.48	23.58	23.43	-0.5	22.98	23.08	22.93
	5	23.50	23.26	23.38	-0.5	23.00	22.76	22.88
HSDPA	1	24.00	24.01	24.05	-0.5	23.50	23.51	23.55
	2	23.98	23.98	24.01	-0.5	23.48	23.48	23.51
	3	23.98	23.97	24.05	-0.5	23.48	23.47	23.55
	4	24.00	24.01	24.02	-0.5	23.50	23.51	23.52
Limit		30.00dBm						

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/08/27	Test Site	SR6
Test Band	WCDMA Band V		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	ERP (dBm)		
		Band V Channel				Band V Channel		
		4132	4182	4233		4132	4182	4233
WCDMA R99	1	24.87	24.89	24.94	1.85	24.57	24.59	24.64
HSDPA	1	23.95	23.87	23.91	1.85	23.65	23.57	23.61
	2	23.87	23.90	24.93	1.85	23.57	23.60	24.63
	3	23.42	23.37	23.33	1.85	23.12	23.07	23.03
	4	23.29	23.31	23.15	1.85	22.99	23.01	22.85
HSUPA	1	24.00	23.91	23.92	1.85	23.70	23.61	23.62
	2	24.07	24.13	24.03	1.85	23.77	23.83	23.73
	3	23.39	23.51	23.54	1.85	23.09	23.21	23.24
	4	23.98	24.01	23.96	1.85	23.68	23.71	23.66
	5	23.57	23.47	23.72	1.85	23.27	23.17	23.42
HSDPA	1	23.78	23.68	23.77	1.85	23.48	23.38	23.47
	2	23.69	23.74	24.74	1.85	23.39	23.44	24.44
	3	23.25	23.20	23.17	1.85	22.95	22.90	22.87
	4	23.16	23.15	23.01	1.85	22.86	22.85	22.71
Limit		38.45dBm						

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) – 2.15

## 5.5. Band Edge Measurement

### 5.5.1. Test Limit

22.917(a), 24.238 (a), 27.53 (h)

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is  $43 + 10\log_{10}(P_{\text{[Watts]}})$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### 5.5.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.7

### 5.5.3. Test Setting


1. Set the analyzer frequency to low or high channel
2.  $RBW \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.5.4. Test Setup

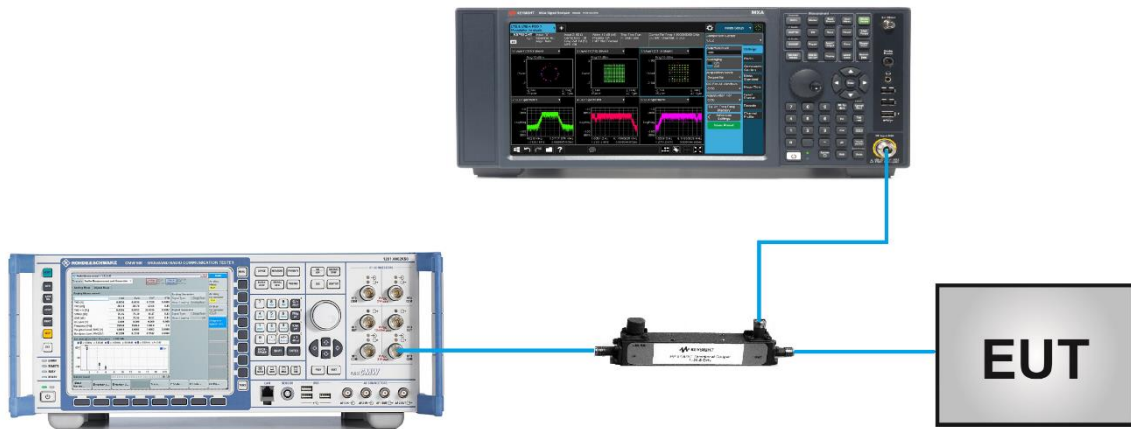

**5.5.5. Test Result**

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/06/23	Test Site	SR6
Test Band	Band 2, 4, 5	Test Result	Pass

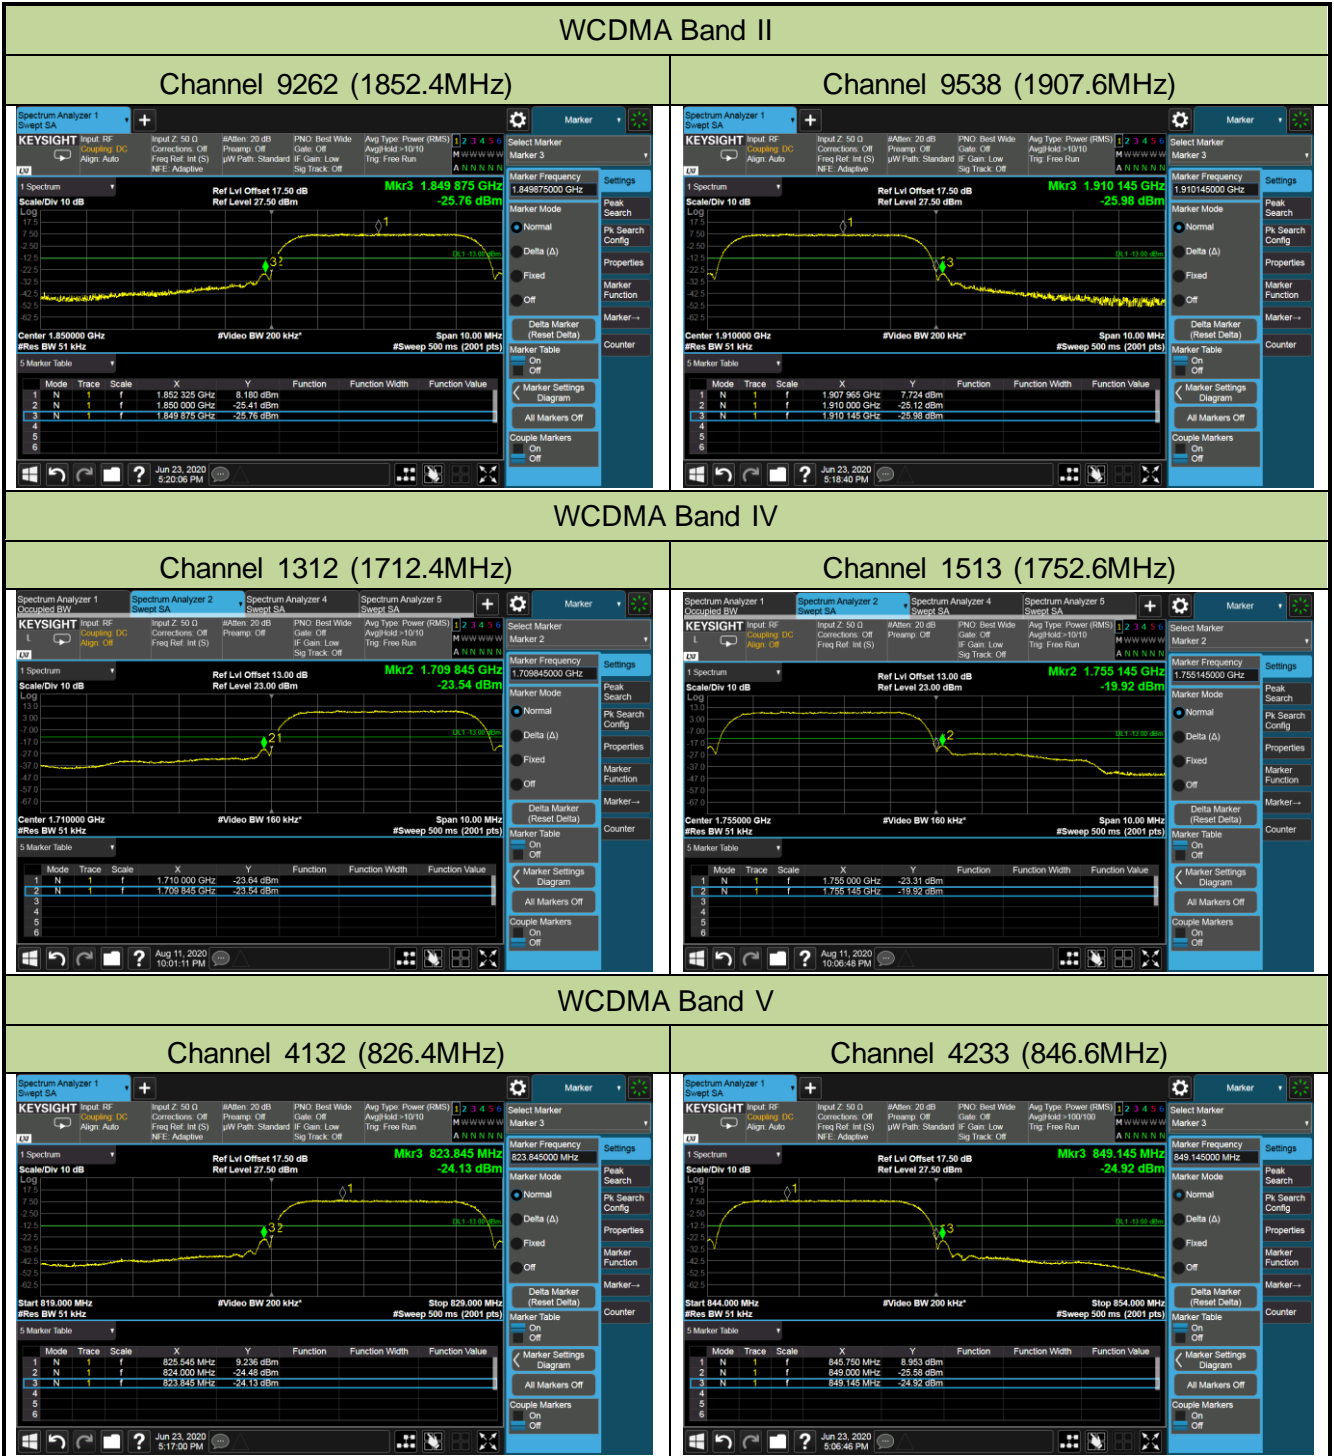

## 5.6. Peak to Average Ratio

### 5.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


### 5.6.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

### 5.6.3. Test Setting

1. Set the resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

### 5.6.4. Test Setup

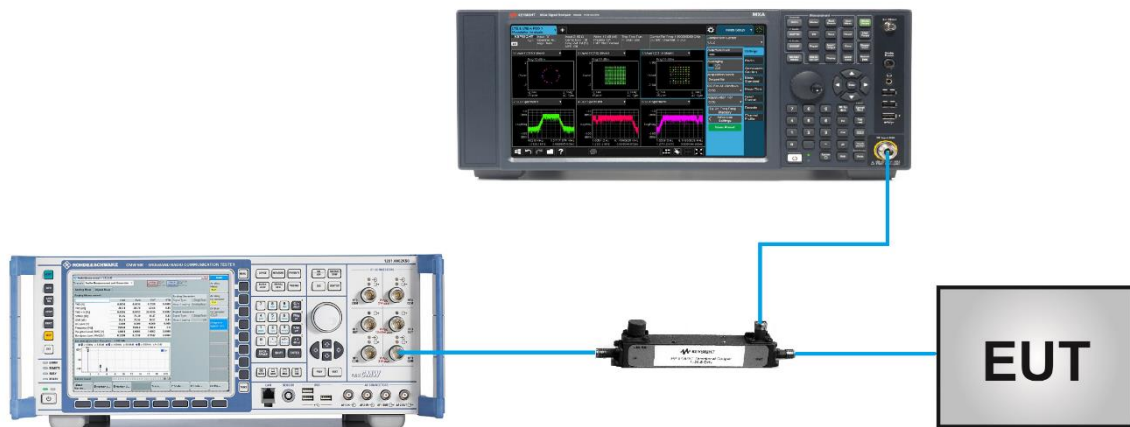

**5.6.5. Test Result**


Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/06/19	Test Site	SR6
Test Band	Band II, IV, V	Test Result	Pass

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
<b>Band II</b>					
9262	1852.5	5	3.07	≤ 13.00	Pass
9400	1880.0	5	3.06	≤ 13.00	Pass
9538	1907.6	5	3.35	≤ 13.00	Pass
<b>Band IV</b>					
1312	1712.4	5	3.08	≤ 13.00	Pass
1412	1732.4	5	3.39	≤ 13.00	Pass
1513	1752.6	5	3.43	≤ 13.00	Pass
<b>Band V (Report Only)</b>					
4132	826.4	5	3.12	≤ 13.00	Pass
4183	836.4	5	3.13	≤ 13.00	Pass
4233	846.6	5	3.16	≤ 13.00	Pass



## WCDMA Band II


## Channel 9262 (1852.4MHz)

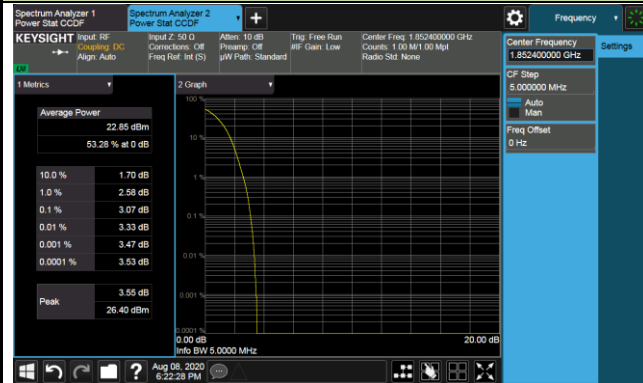

## Channel 9400 (1880.0MHz)




## Channel 9538 (1907.6MHz)

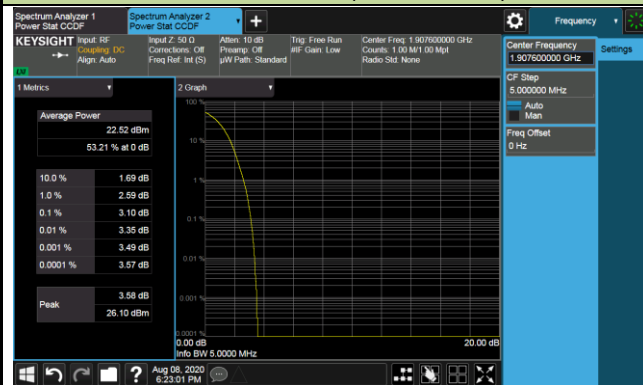


## WCDMA Band IV


## Channel 1312 (1712.4MHz)

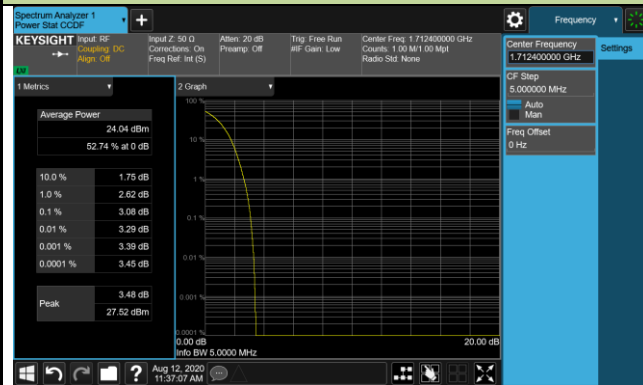


## Channel 1412 (1732.4MHz)

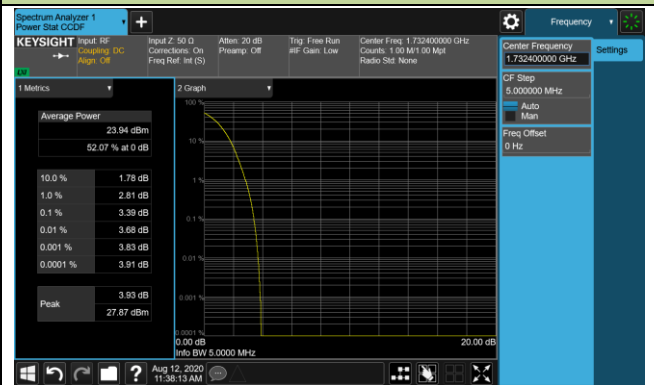

## Channel 1513 (1752.6MHz)

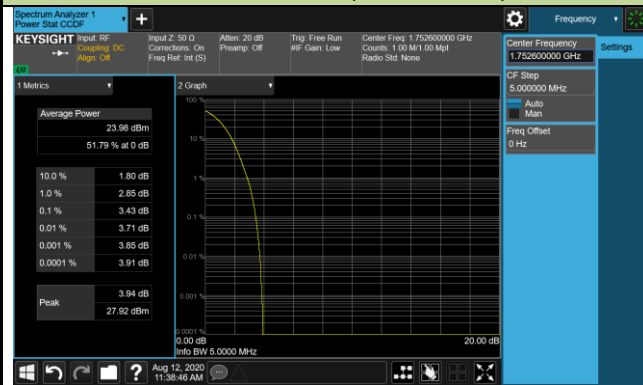

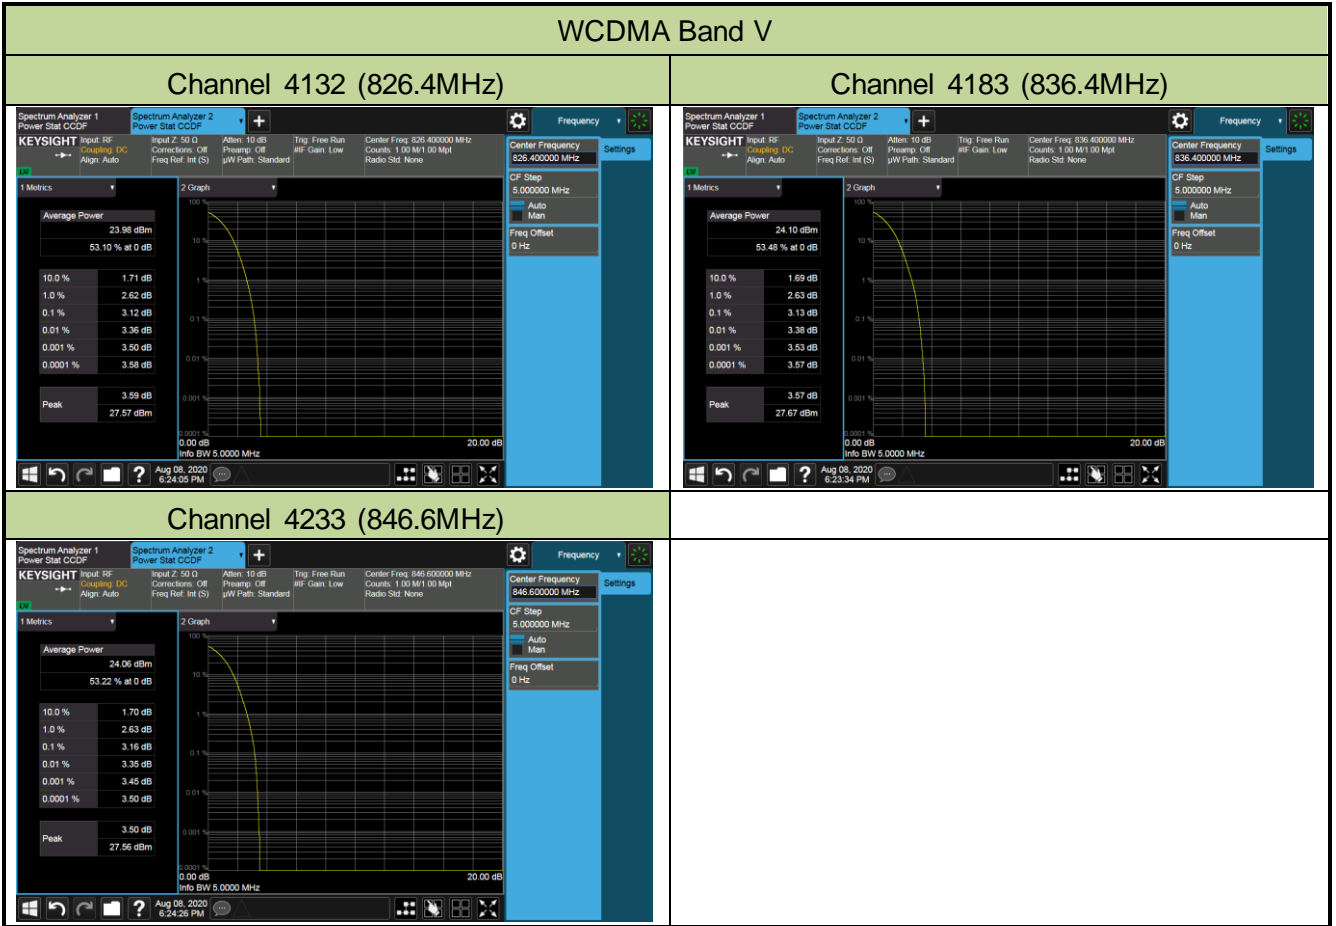

## **5.7. Conducted Spurious Emissions**

### **5.7.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **5.7.2. Test Procedure Used**


ANSI C63.26-2015 - Section 5.7

### **5.7.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.7.4. Test Setup

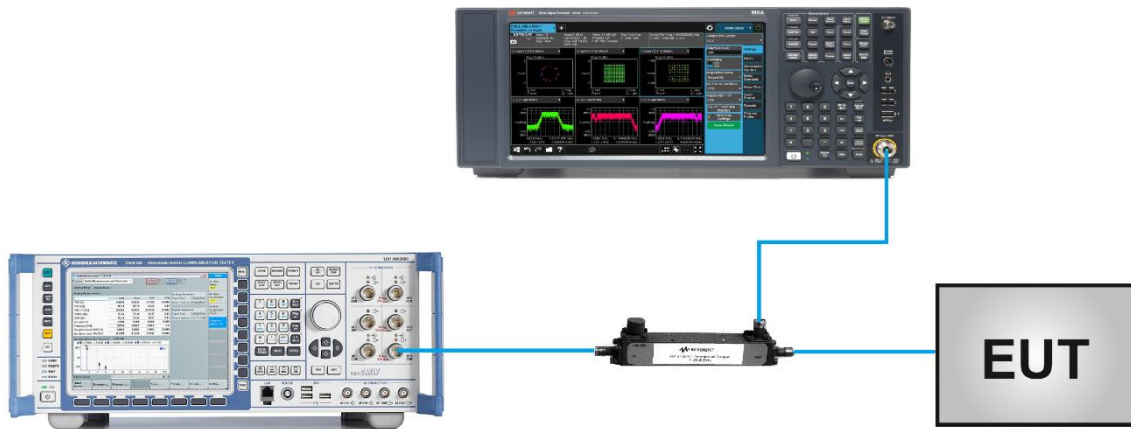


**5.7.5. Test Result**

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Candy Luo
Test Date	2020/06/23	Test Site	SR6
Test Band	Band II, IV, V	Test Result	Pass

Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
WCDMA Band II	1852.4	30 ~ 1000	-55.22	≤ -13.00	Pass
		1000 ~ 20000	-33.49	≤ -13.00	Pass
	1880.0	30 ~ 1000	-54.65	≤ -13.00	Pass
		1000 ~ 20000	-32.94	≤ -13.00	Pass
	1907.6	30 ~ 1000	-55.39	≤ -13.00	Pass
		1000 ~ 20000	-33.51	≤ -13.00	Pass
WCDMA Band IV	1712.4	30 ~ 1000	-57.67	≤ -13.00	Pass
		1000 ~ 20000	-38.87	≤ -13.00	Pass
	1732.4	30 ~ 1000	-57.69	≤ -13.00	Pass
		1000 ~ 20000	-38.19	≤ -13.00	Pass
	1752.6	30 ~ 1000	-57.80	≤ -13.00	Pass
		1000 ~ 20000	-37.85	≤ -13.00	Pass
WCDMA Band V	826.4	30 ~ 1000	-55.69	≤ -13.00	Pass
		1000 ~ 10000	-38.08	≤ -13.00	Pass
	836.4	30 ~ 1000	-55.78	≤ -13.00	Pass
		1000 ~ 10000	-37.61	≤ -13.00	Pass
	846.6	30 ~ 1000	-55.37	≤ -13.00	Pass
		1000 ~ 10000	-37.95	≤ -13.00	Pass

## WCDMA Band II


## Lowest Channel 30-1000MHz

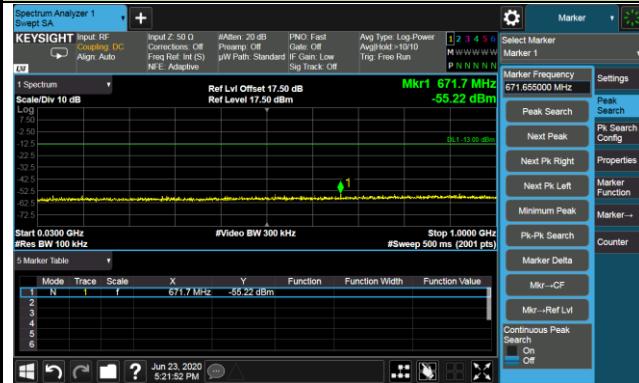


## Lowest Channel 1000-20000MHz




## Middle Channel 30-1000MHz

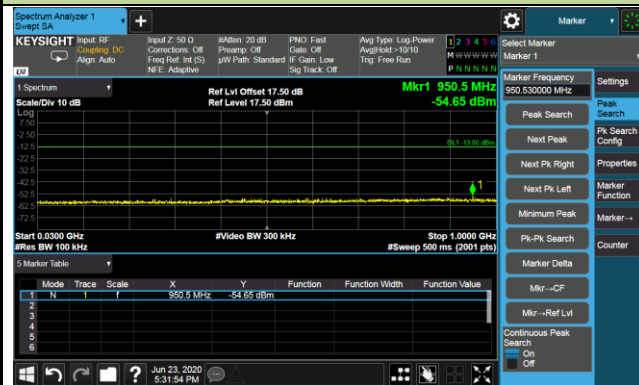


## Middle Channel 1000-20000MHz

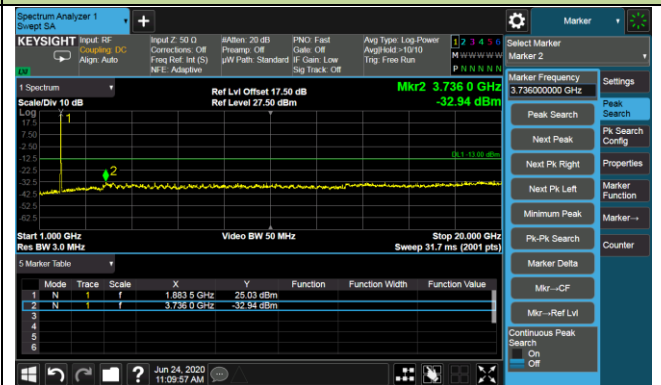

## Highest Channel 30-1000MHz

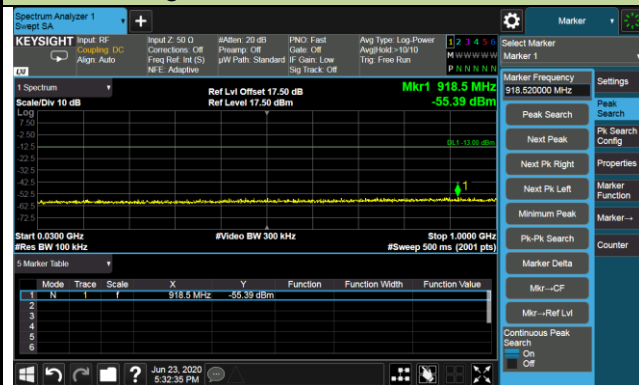


## Highest Channel 1000-20000MHz

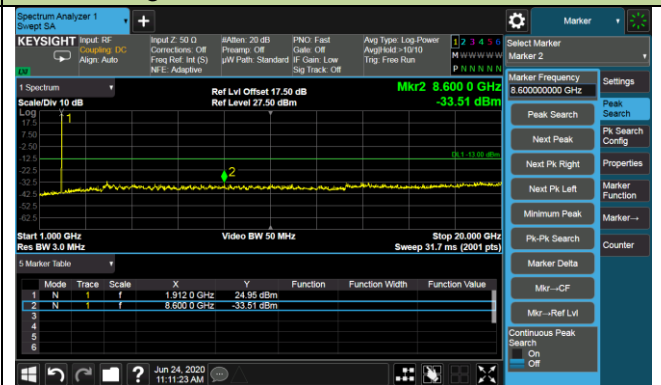


### WCDMA Band IV


#### Lowest Channel 30-1000MHz

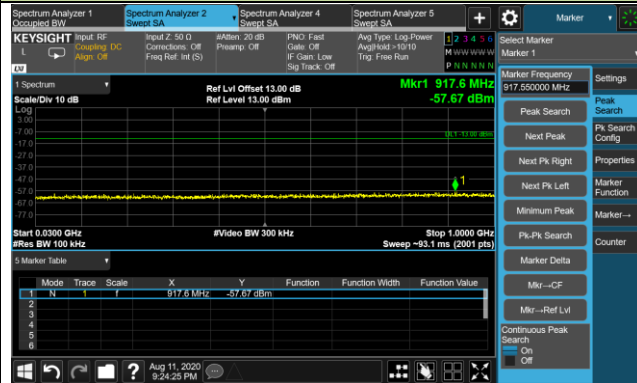


#### Lowest Channel 1000-20000MHz

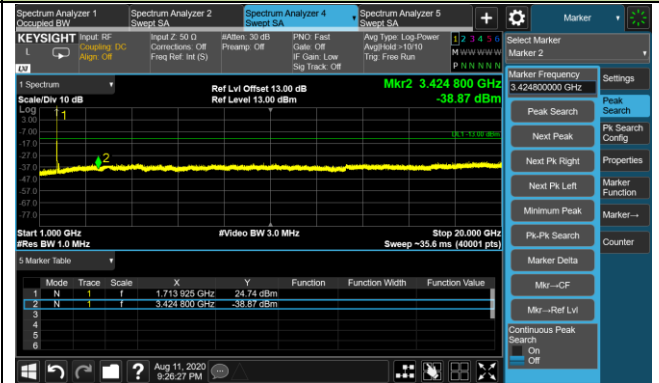


#### Middle Channel 30-1000MHz

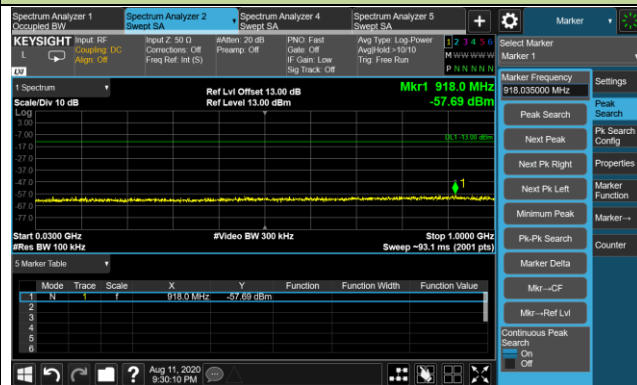


#### Middle Channel 1000-20000MHz

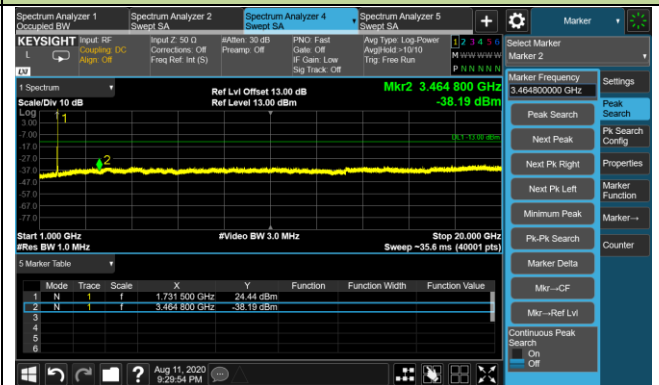

#### Highest Channel 30-1000MHz

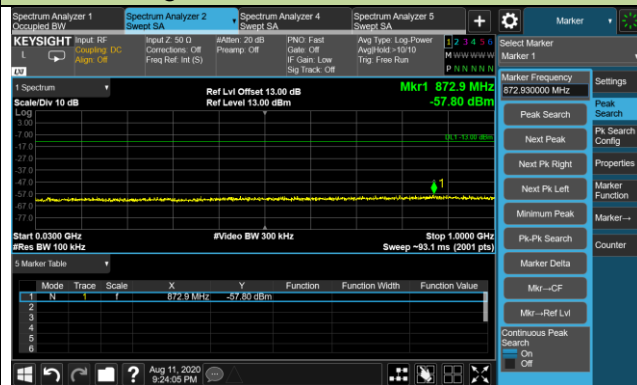


#### Highest Channel 1000-20000MHz

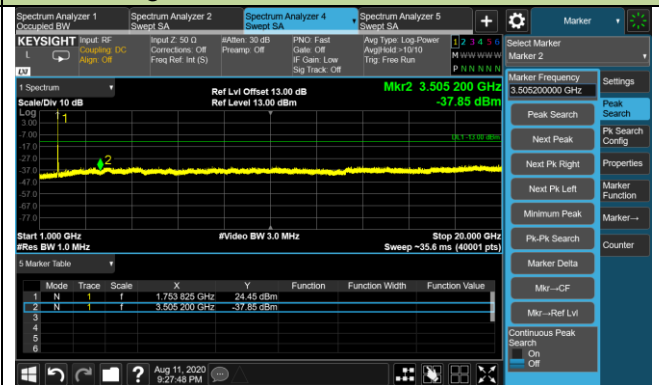




## WCDMA Band V


## Lowest Channel 30-1000MHz

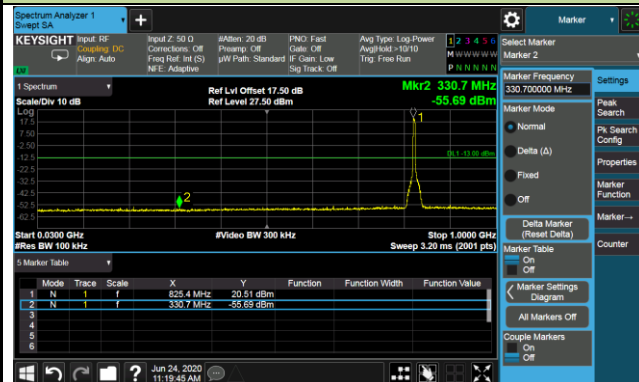


## Lowest Channel 1000-10000MHz

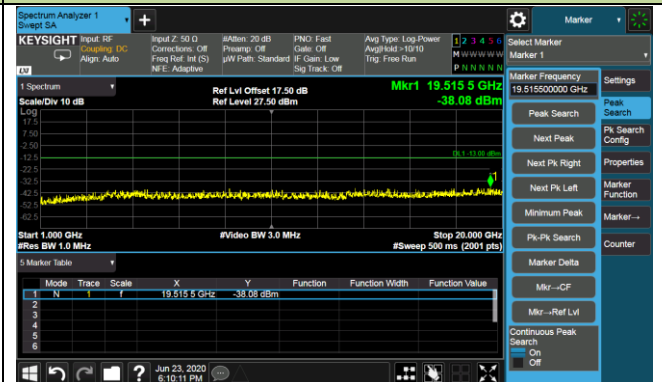


## Middle Channel 30-1000MHz

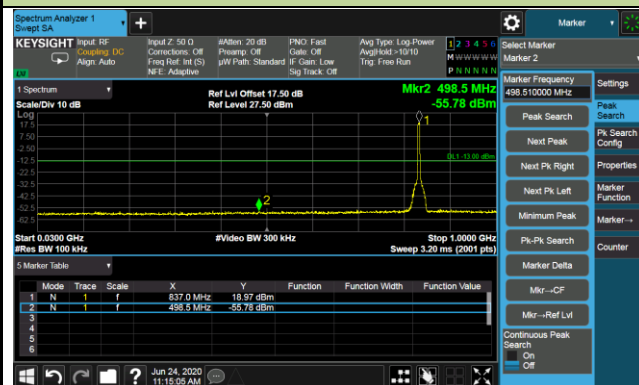


## Middle Channel 1000-10000MHz

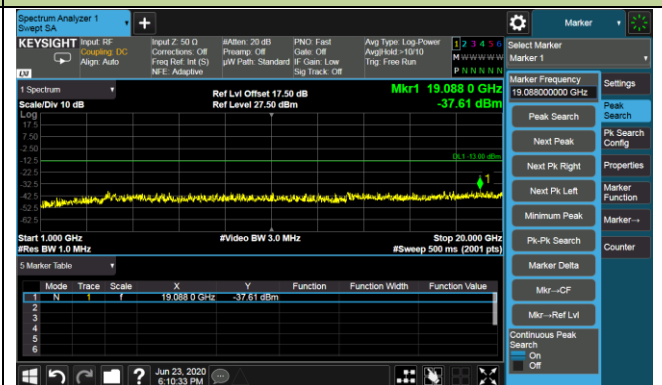

## Highest Channel 30-1000MHz

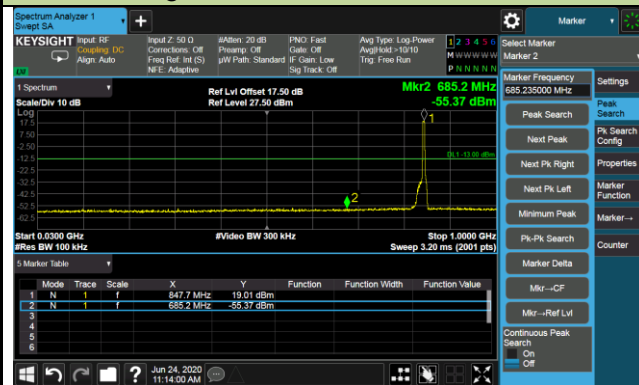

## Highest Channel 1000-10000MHz

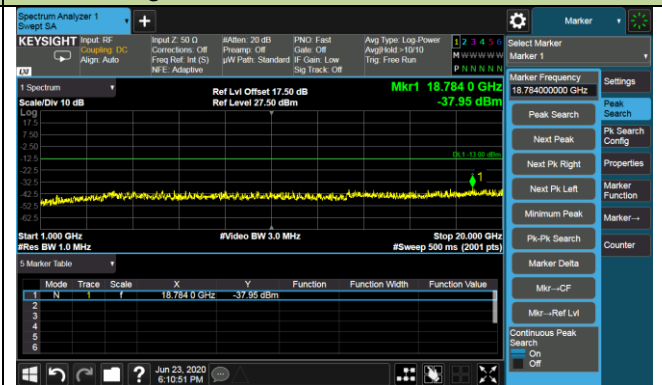



## 5.8. Radiated Spurious Emissions Measurements

### 5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The emission limit equal to -13dBm.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$ ; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu\text{V/m}$ .

### 5.8.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### 5.8.3. Test Setting


1. RBW = 1MHz
2. VBW  $\geq 3 \times$  RBW
3. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

### 5.8.4. Test Setup

Below 1GHz Test Setup:

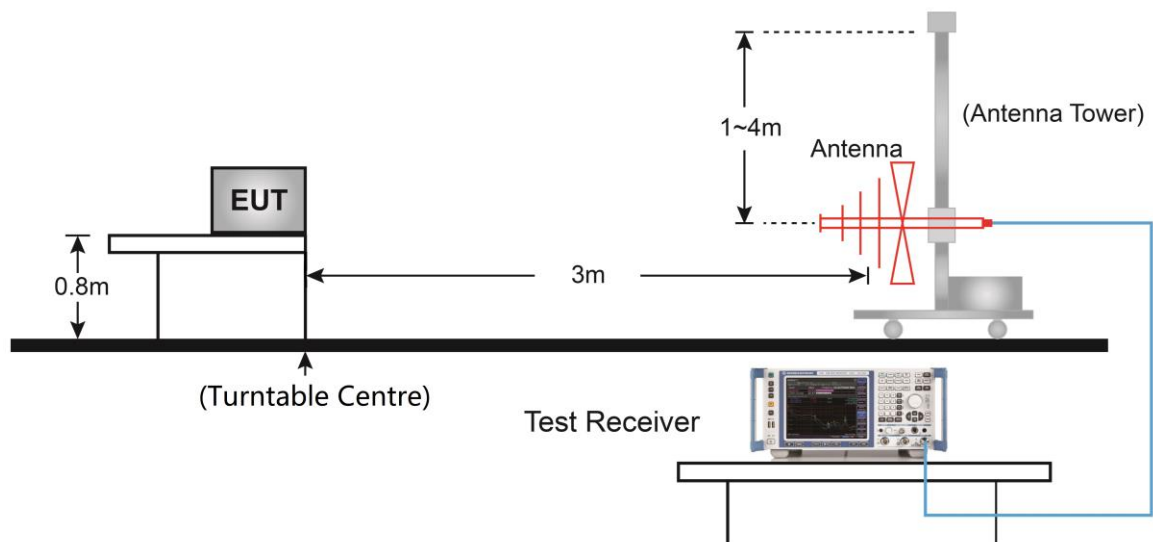

Above 1GHz Test Setup:

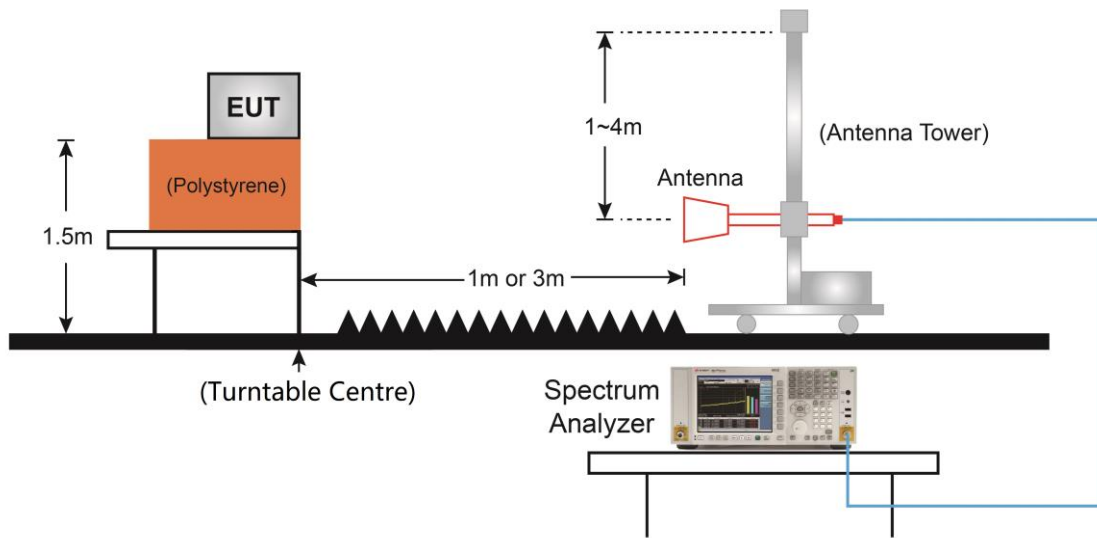

**5.8.5. Test Result**

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/10
Test Mode	WCDMA BAND II		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level(dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Bottom CH 9263 (1852.6MHz)</b>							
54.7	15.0	14.4	29.4	82.3	-52.9	Peak	Horizontal
301.1	15.2	14.8	30.1	82.3	-52.2	Peak	Horizontal
36.8	27.2	13.5	40.6	82.3	-41.7	Peak	Vertical
581.9	18.0	21.3	39.3	82.3	-43.0	Peak	Vertical
3975.0	37.9	3.5	41.4	82.3	-40.9	Peak	Horizontal
7434.5	36.8	10.9	47.6	82.3	-34.7	Peak	Horizontal
5505.0	35.9	6.5	42.4	82.3	-39.9	Peak	Vertical
9347.0	35.3	14.4	49.7	82.3	-32.6	Peak	Vertical
<b>Middle CH 9400 (1880.0MHz)</b>							
37.3	20.5	13.6	34.1	82.3	-48.2	Peak	Horizontal
301.1	15.2	14.8	30.1	82.3	-52.2	Peak	Horizontal
39.7	23.1	13.9	37.0	82.3	-45.3	Peak	Vertical
537.3	16.2	20.2	36.4	82.3	-45.9	Peak	Vertical
5989.5	37.5	7.0	44.5	82.3	-37.8	Peak	Horizontal
8811.5	36.8	13.3	50.1	82.3	-32.2	Peak	Horizontal
5437.0	36.6	6.4	43.0	82.3	-39.3	Peak	Vertical
9568.0	35.9	14.6	50.5	82.3	-31.8	Peak	Vertical
<b>Top CH 9537 (1907.4MHz)</b>							
120.2	17.4	12.0	29.4	82.3	-52.9	Peak	Horizontal
604.7	17.0	22.1	39.0	82.3	-43.3	Peak	Horizontal
33.9	25.1	13.2	38.2	82.3	-44.1	Peak	Vertical
488.3	16.2	19.4	35.5	82.3	-46.8	Peak	Vertical
5862.0	34.5	6.8	41.3	82.3	-41.0	Peak	Horizontal
8650.0	35.8	12.9	48.7	82.3	-33.6	Peak	Horizontal
4944.0	36.0	6.1	42.1	82.3	-40.2	Peak	Vertical
9228.0	35.9	14.3	50.1	82.3	-32.2	Peak	Vertical

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/10
Test Mode	WCDMA BAND IV		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level(dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Bottom CH 1312 (1712.4MHz)</b>							
126.0	21.1	12.5	33.6	82.3	-48.7	Peak	Horizontal
328.8	21.0	15.7	36.7	82.3	-45.6	Peak	Horizontal
32.9	27.9	12.9	40.8	82.3	-41.5	Peak	Vertical
415.1	23.4	17.6	41.0	82.3	-41.3	Peak	Vertical
5913.0	36.3	7.1	43.4	82.3	-38.9	Peak	Horizontal
9262.0	36.1	14.5	50.6	82.3	-31.7	Peak	Horizontal
4969.5	36.4	6.1	42.5	82.3	-39.8	Peak	Vertical
9236.5	36.2	14.3	50.5	82.3	-31.8	Peak	Vertical
<b>Middle CH 1412 (1732.4MHz)</b>							
33.4	27.1	13.0	40.1	82.3	-42.2	Peak	Horizontal
704.2	17.8	23.3	41.1	82.3	-41.2	Peak	Horizontal
35.8	30.2	13.5	43.6	82.3	-38.7	Peak	Vertical
365.1	22.7	16.4	39.0	82.3	-43.3	Peak	Vertical
5088.5	35.6	6.5	42.0	82.3	-40.3	Peak	Horizontal
10707.0	37.9	16.0	53.9	82.3	-28.4	Peak	Horizontal
4493.5	37.1	4.6	41.7	82.3	-40.6	Peak	Vertical
7936.0	37.8	11.4	49.2	82.3	-33.2	Peak	Vertical
<b>Top CH 1513 (1752.6MHz)</b>							
125.6	21.0	12.5	33.5	82.3	-48.8	Peak	Horizontal
405.9	23.6	17.4	41.0	82.3	-41.3	Peak	Horizontal
34.4	28.1	13.2	41.2	82.3	-41.1	Peak	Vertical
406.4	23.8	17.4	41.2	82.3	-41.1	Peak	Vertical
4825.0	36.3	5.8	42.1	82.3	-40.3	Peak	Horizontal
10086.5	36.4	14.9	51.4	82.3	-30.9	Peak	Horizontal
5309.5	36.3	5.9	42.2	82.3	-40.1	Peak	Vertical
9517.0	36.3	14.8	51.1	82.3	-31.2	Peak	Vertical

Product	LTE-A Cat 12 M.2 Module	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/10
Test Mode	WCDMA BAND V		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level(dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Bottom CH 4133 (826.6MHz)</b>							
31.5	19.8	13.0	32.7	82.3	-49.6	Peak	Horizontal
162.4	13.8	14.4	28.2	82.3	-54.1	Peak	Horizontal
61.5	19.3	13.8	33.1	82.3	-49.2	Peak	Vertical
454.9	16.3	19.0	35.3	82.3	-47.0	Peak	Vertical
4808.0	36.1	5.9	42.1	82.3	-40.2	Peak	Horizontal
10367.0	36.3	16.0	52.3	82.3	-30.0	Peak	Horizontal
4833.5	36.2	5.8	42.0	82.3	-40.3	Peak	Vertical
10681.5	36.3	16.2	52.5	82.3	-29.8	Peak	Vertical
<b>Middle CH 4175 (835.0MHz)</b>							
65.4	15.4	13.2	28.6	82.3	-53.7	Peak	Horizontal
531.5	15.2	20.2	35.4	82.3	-46.9	Peak	Horizontal
31.9	20.5	13.0	33.5	82.3	-48.8	Peak	Vertical
405.9	17.0	17.4	34.3	82.3	-48.0	Peak	Vertical
4536.0	36.3	5.0	41.3	82.3	-41.0	Peak	Horizontal
10945.0	35.8	16.8	52.6	82.3	-29.7	Peak	Horizontal
5063.0	35.5	6.6	42.2	82.3	-40.2	Peak	Vertical
11540.0	36.9	15.8	52.7	82.3	-29.6	Peak	Vertical
<b>Top CH 4232 (846.4MHz)</b>							
62.0	15.7	13.7	29.4	82.3	-52.9	Peak	Horizontal
584.8	16.9	21.5	38.4	82.3	-43.9	Peak	Horizontal
62.0	20.4	13.7	34.1	82.3	-48.2	Peak	Vertical
599.4	17.4	21.9	39.3	82.3	-43.0	Peak	Vertical
5615.5	36.1	6.5	42.6	82.3	-39.7	Peak	Horizontal
9058.0	36.2	13.5	49.7	82.3	-32.6	Peak	Horizontal
5097.0	35.8	6.6	42.3	82.3	-40.0	Peak	Vertical
10137.5	36.2	15.6	51.8	82.3	-30.5	Peak	Vertical

## 6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

## **Appendix A - Test Setup Photograph**

Refer to "2006RSU085-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2006RSU085-UE" file.