





MEASUREMENT REPORT

FCC PART 96

FCC ID: XMR2021RM502QGL
Application: Quectel Wireless Solutions Company Limited
Application Type: Certification
Product: 5G Sub-6 GHz M.2 Module
Model No.: RM502Q-GL
Brand Name: Quectel
FCC Rule Part(s): Part 96
Test Procedure(s): ANSI C63.26: 2015
Test Date: January 21 ~ May 30, 2021

Reviewed By: 
Sunny Sun
Approved By: 
Robin Wu



The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2101RSU049-U1	Rev. 01	Initial Report	05-19-2021	Invalid
2101RSU049-U1	Rev. 02	Added EIRP of full bandwidth	05-31-2021	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology	7
1.8. EMI Suppression Device(s)/Modifications.....	7
1.9. Maximum Power, Frequency Tolerance, and Emission Designator	8
1.10. Configuration of Tested System	9
1.11. Test Environment Condition.....	9
2. TEST EQUIPMENT CALIBRATION DATE.....	10
3. MEASUREMENT UNCERTAINTY	12
4. TEST RESULT	13
4.1. Summary.....	13
4.2. Occupied Bandwidth Measurement.....	14
4.2.1. Test Limit	14
4.2.2. Test Procedure	14
4.2.3. Test Setting.....	14
4.2.4. Test Setup	14
4.2.4.1. Test Result.....	15
4.3. Frequency Stability Measurement	23
4.3.1. Test Limit	23
4.3.2. Test Procedure	23
4.3.3. Test Setting.....	23
4.3.4. Test Setup	24
4.3.5. Test Result.....	25
4.4. Equivalent Isotropically Radiated Power Measurement	26
4.4.1. Test Limit	26
4.4.2. Test Procedure	26
4.4.3. Test Setting.....	26
4.4.4. Test Setup	27
4.4.5. Test Result.....	28
4.5. Band Edge Measurement.....	40

4.5.1.	Test Limit	40
4.5.2.	Test Procedure	40
4.5.3.	Test Setting.....	40
4.5.4.	Test Setup	41
4.5.5.	Test Result.....	42
4.6.	Conducted Spurious Emission Measurement.....	60
4.6.1.	Test Limit	60
4.6.2.	Test Procedure	60
4.6.3.	Test Setting.....	60
4.6.4.	Test Setup	61
4.6.5.	Test Result.....	62
4.7.	Radiated Spurious Emission Measurement.....	70
4.7.1.	Test Limit	70
4.7.2.	Test Procedure	70
4.7.3.	Test Setting.....	70
4.7.4.	Test Setup	70
4.7.5.	Test Result.....	72
4.8.	End User Device Additional Requirement (CBSD Protocol).....	73
4.8.1.	Test Limit	73
4.8.2.	Test Procedure	73
4.8.3.	Test Setting.....	73
4.8.4.	Test Result.....	74
5.	CONCLUSION	76
	Appendix A - Test Setup Photograph.....	77
	Appendix B - EUT Photograph.....	78

1. GENERAL INFORMATION

1.1. Applicant

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: R-20025, G-20034, C-20020, T-20020
<input type="checkbox"/>	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725
	FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	5G Sub-6 GHz M.2 Module
Model No.	RM502Q-GL
Brand Name	Quectel
IMEI	Conducted Measurement: 355878110939501 Radiated Measurement: 865776040001173
Operating Temperature	-30 ~ 70 °C
Power Type	3.135 ~ 4.4Vdc, typical 3.7Vdc
UMTS Specification	
Single Band	Band 2, 4, 5
Modulation	Uplink up to 16QAM, Downlink up to 64QAM
E-UTRA Specification	
Single Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
Intra-Band	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_48C, CA_66C
HPUE Band	Band 41
Modulation	UL & DL up to 256QAM
5G NR Specification	
SA Band	n2, n7, n5, n12, n25, n41, n66, n71, n77
SA UL MIMO Band	n41, n77
EN-DC Band	DC_25A_n41A, DC_26A_n41A, DC_2A_n41A, DC_66A_n41A DC_4A_n41A, DC_2A_n77A, DC_7A_n77A, DC_12A_n77A, DC_41A_n77A, DC_66A_n77A
HPUE Band	n41, n77 (SA & UL MIMO)
SCS for NR cell	FDD Band: 15kHz; TDD Band: 30kHz
Modulation	UL & DL up to 256QAM

1.5. Radio Specification under Test

Frequency Range	TDD Band 48: 3550 ~ 3700 MHz
Device Type	End User Device

Note: For other features of this EUT, test report will be issued separately.

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	0.25
LTE Band 4	1710 ~ 1755		1.47
LTE Band 5	824 ~ 849		2.68
LTE Band 7	2500 ~ 2570		0.78
LTE Band 12	699 ~ 716		-0.20
LTE Band 13	777 ~ 787		1.54
LTE Band 14	788 ~ 798		2.42
LTE Band 17	704 ~ 716		-0.20
LTE Band 25	1850 ~ 1915		0.25
LTE Band 26	814 ~ 849		2.68
LTE Band 30	2305 ~ 2315		-3.06
LTE Band 38	2570 ~ 2620		0.78
LTE Band 41	2500 ~ 2690		0.78
LTE Band 48	3550 ~ 3700		-4.29
LTE Band 66	1710 ~ 1780		1.47
LTE Band 71	663 ~ 698		1.22

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 96
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- WINNF-TS-0122 V1.0.0: Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)


1.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

1.9. Maximum Power, Frequency Tolerance, and Emission Designator

LTE Band 48		QPSK			16QAM		
BW (MHz)	BW (MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)
5	3552.5 ~ 3697.5	4M45G7D	-	0.0603	4M46W7D	-	0.0383
10	3555.0 ~ 3695.0	8M96G7D	-	0.0548	8M95W7D	-	0.0467
15	3557.5 ~ 3692.5	13M4G7D	-	0.0419	13M4W7D	-	0.0300
20	3560.0 ~ 3690.0	17M8G7D	-0.0103	0.0315	17M8W7D	-	0.0249
LTE Band 48		64QAM			256QAM		
BW (MHz)	BW (MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)
5	3552.5 ~ 3697.5	4M47W7D	-	0.0352	4M45W7D	-	0.0193
10	3555.0 ~ 3695.0	8M95W7D	-	0.0390	8M95W7D	-	0.0182
15	3557.5 ~ 3692.5	13M4W7D	-	0.0279	13M4W7D	-	0.0132
20	3560.0 ~ 3690.0	17M9W7D	-	0.0230	17M8W7D	-	0.0097
Intra Band CA_48C		QPSK			16QAM		
BW (MHz)	BW (MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)
5+20	3552.5 ~ 3697.5	22M5G7D	-	0.0480	22M5W7D	-	0.0408
20+5	3555.0 ~ 3695.0	22M7G7D	-	0.0240	22M8W7D	-	0.0163
10+20	3557.5 ~ 3692.5	27M4G7D	-	0.0426	27M4W7D	-	0.0402
20+10	3560.0 ~ 3690.0	27M4G7D	-	0.0213	27M6W7D	-	0.0160
15+20	3552.5 ~ 3697.5	32M3G7D	-	0.0301	32M3W7D	-	0.0261
20+15	3555.0 ~ 3695.0	32M4G7D	-	0.0235	32M3W7D	-	0.0190
20+20	3557.5 ~ 3692.5	37M3G7D	-	0.0234	37M2W7D	-	0.0168
Intra Band CA_48C		64QAM			256QAM		
BW (MHz)	BW (MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)	Designator	Tolerance (ppm)	Max EIPR (W/10MHz)
5+20	3552.5 ~ 3697.5	22M5W7D	-	0.0401	22M4W7D	-	0.0156
20+5	3555.0 ~ 3695.0	22M8W7D	-	0.0190	22M7W7D	-	0.0063
10+20	3557.5 ~ 3692.5	27M4W7D	-	0.0395	27M4W7D	-	0.0117
20+10	3560.0 ~ 3690.0	27M5W7D	-	0.0159	27M6W7D	-	0.0077
15+20	3552.5 ~ 3697.5	32M3W7D	-	0.0269	32M4W7D	-	0.0099
20+15	3555.0 ~ 3695.0	32M3W7D	-	0.0190	32M3W7D	-	0.0073
20+20	3557.5 ~ 3692.5	37M3W7D	-	0.0155	37M2W7D	-	0.0073

1.10. Configuration of Tested System

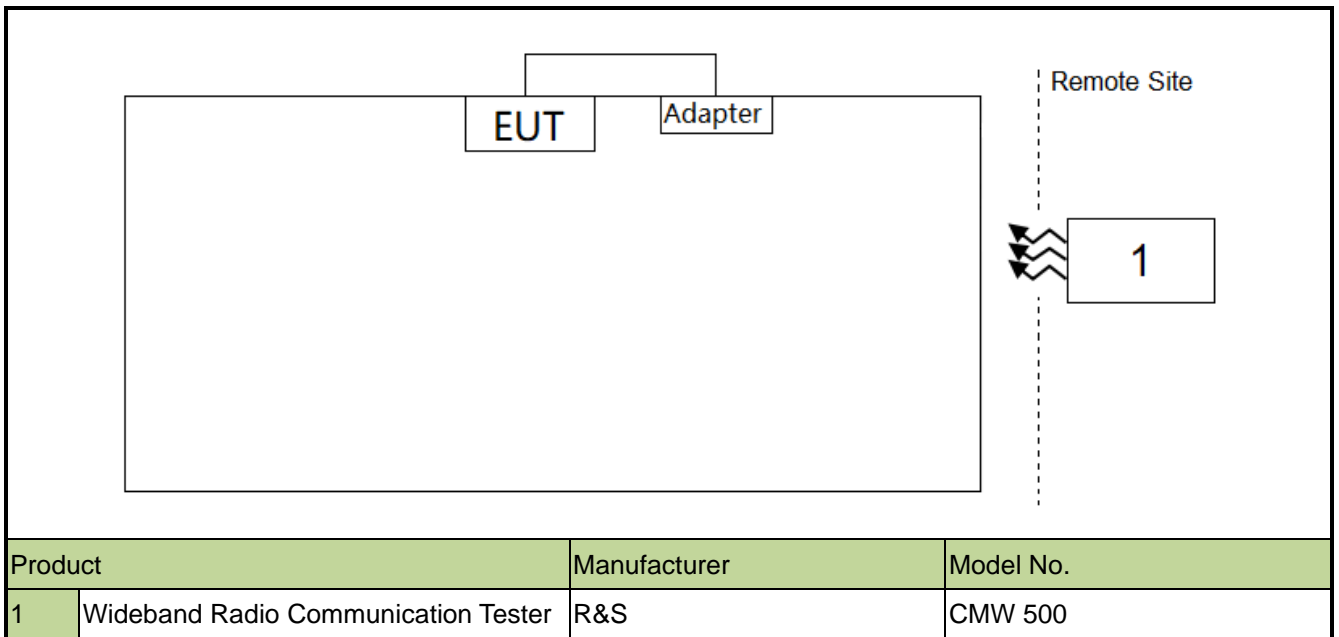

1.11. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

2. TEST EQUIPMENT CALIBRATION DATE

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/03/30
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/02/22
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2021/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/02/22
Broad Band Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2021/12/14
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

Conducted Test Equipment (WZ-SR6, WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/14
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/11/17
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2022/05/05
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2022/03/24
Dual Directional Coupler	Agilent	7778D	MRTSUE06083	1 year	2022/03/24
Attenuator	MVE	6dB	MRTSUE06534	1 year	2021/12/11
Attenuator	MVE	10dB	MRTSUE06543	1 year	2021/12/11
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

3. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

4. TEST RESULT

4.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section5.2
2.1055	Frequency Stability	Refer to section 5.3		Pass	Section5.3
96.41(b)	Equivalent Isotropic Radiated Power	Refer to section 5.4		Pass	Section5.4
2.1051 96.41(e)	Spurious Emission; Band Edge Emission	Refer to section 5.5, 5.6		Pass	Section 5.5, 5.6
2.1053, 96.41(e)	Spurious Emission	Refer to section 5.7	Radiated	Pass	Section5.7
96.47	End User Device Additional Requirements (CBSD Protocol)	Refer to section 5.8		Pass	Section5.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations the worst-case was found.
- 3) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Band Edge, Radiated & Conducted Spurious Emission were presented worst case in the test report.

4.2. Occupied Bandwidth Measurement

4.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


4.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

4.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

4.2.4. Test Setup

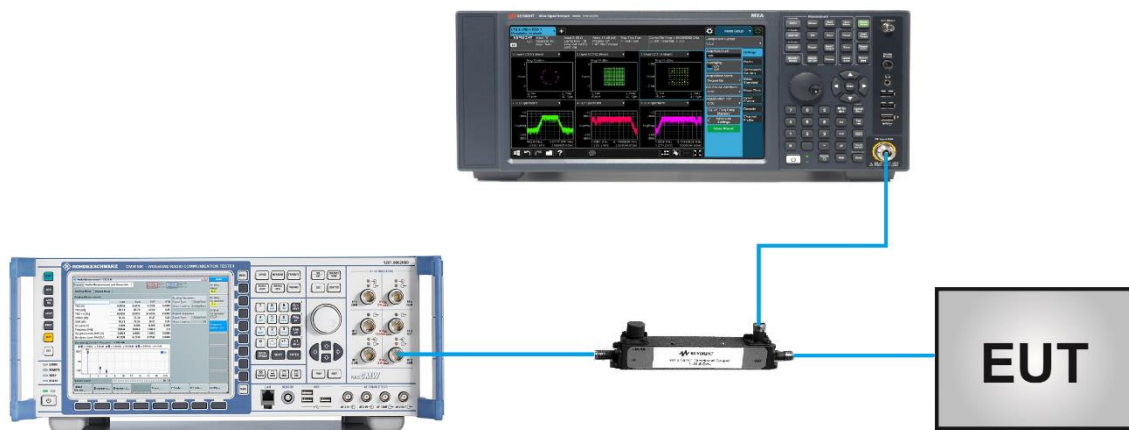


4.2.4.1. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/12
Test Band	LTE Band 48		


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3625.0	5	4.45
		10	8.96
		15	13.43
		20	17.84
16QAM	3625.0	5	4.46
		10	8.95
		15	13.40
		20	17.83
64QAM	3625.0	5	4.47
		10	8.95
		15	13.43
		20	17.88
256QAM	3625.0	5	4.45
		10	8.95
		15	13.37
		20	17.84

99% Bandwidth - QPSK


5MHz Channel Bandwidth

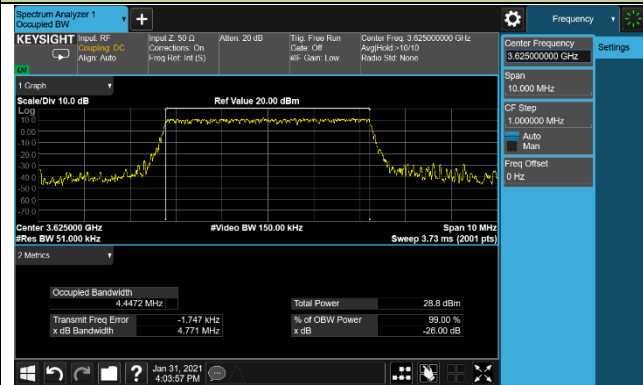


10MHz Channel Bandwidth

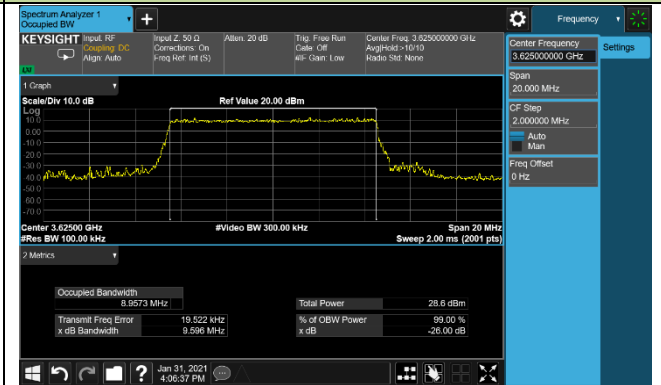

15MHz Channel Bandwidth

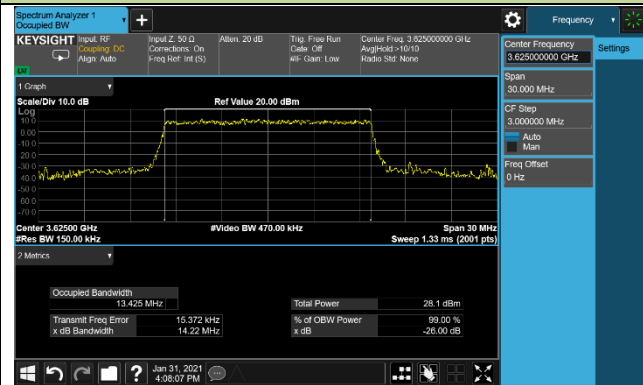


20MHz Channel Bandwidth

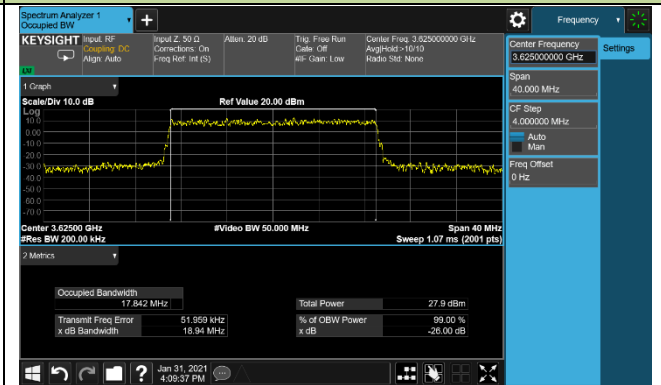


99% Bandwidth - 16QAM


5MHz Channel Bandwidth

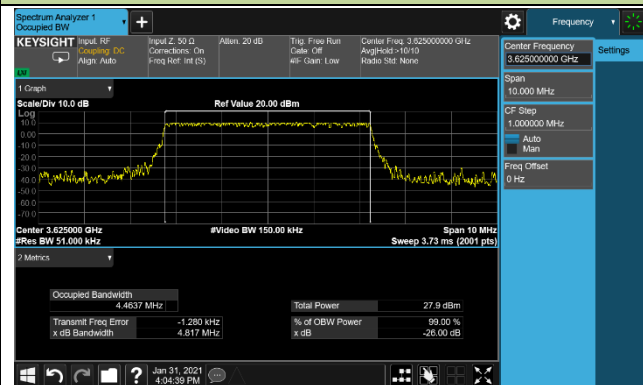


10MHz Channel Bandwidth

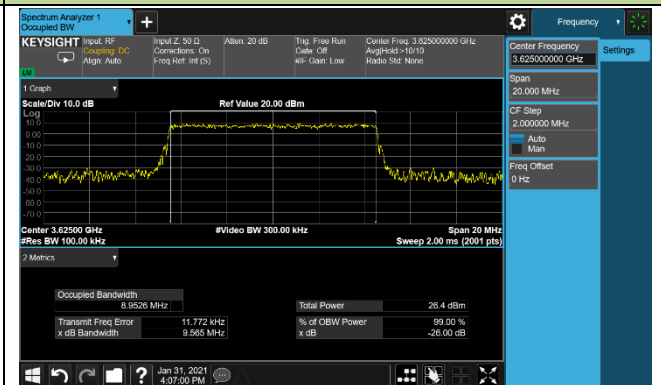

15MHz Channel Bandwidth

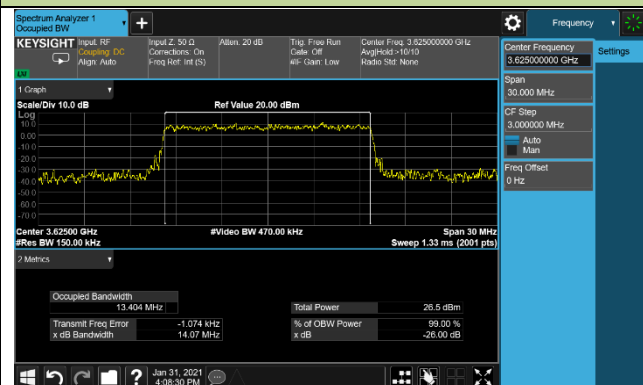


20MHz Channel Bandwidth

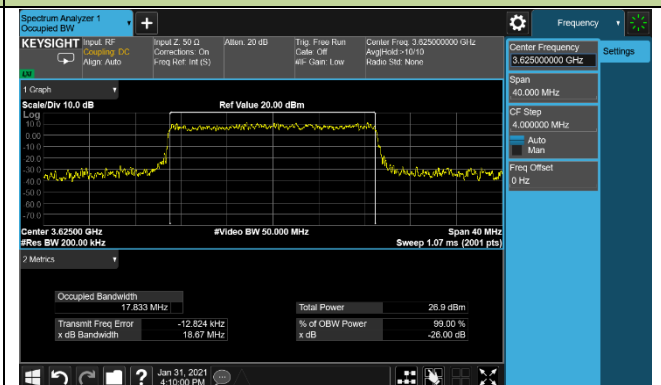


99% Bandwidth - 64QAM


5MHz Channel Bandwidth

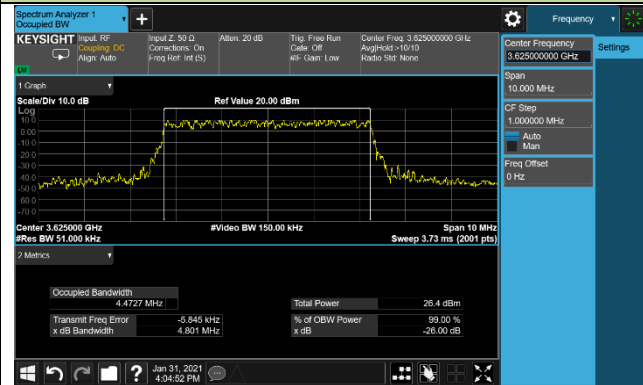


10MHz Channel Bandwidth

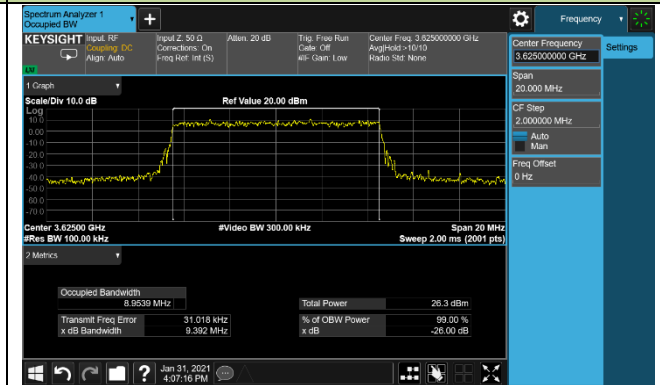

15MHz Channel Bandwidth

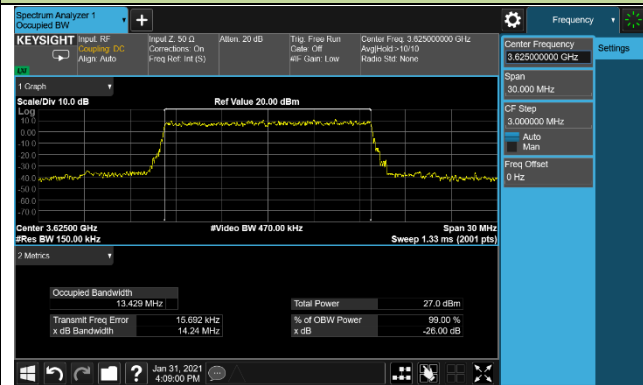


20MHz Channel Bandwidth

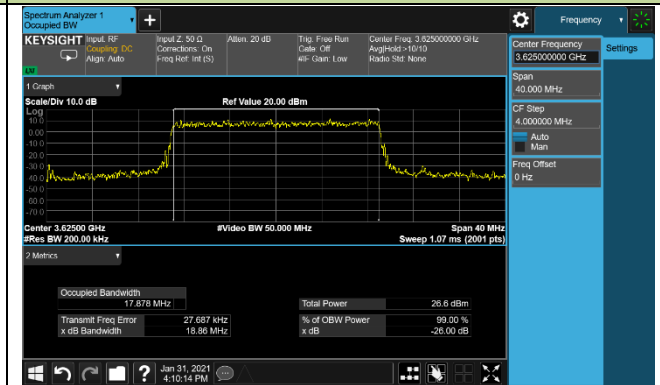


99% Bandwidth - 256QAM


5MHz Channel Bandwidth

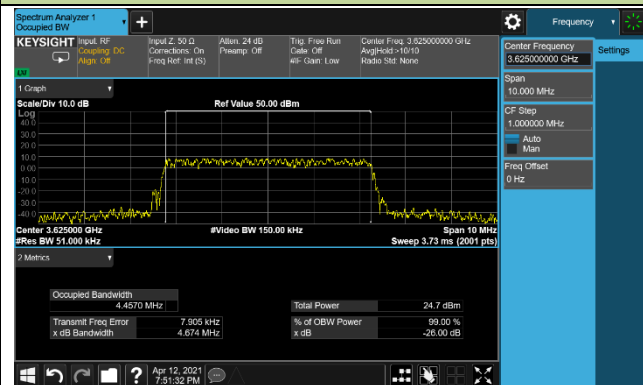


10MHz Channel Bandwidth

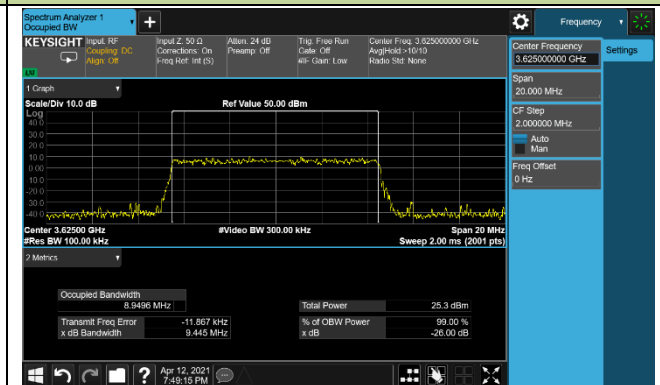

15MHz Channel Bandwidth

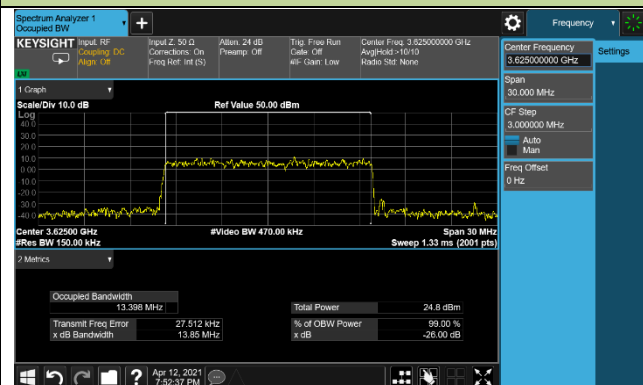

20MHz Channel Bandwidth

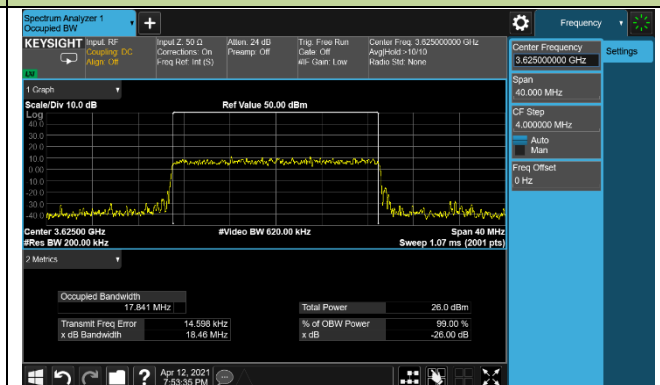


Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/12
Test Band	Intra-Band CA_48C		


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3615.8+3627.5	5+20	22.48
	3622.5+3634.2	20+5	22.74
	3615.6+3630.0	10+20	27.40
	3620.1+3634.5	20+10	27.44
	3615.3+3632.4	15+20	32.28
	3617.6+3634.7	20+15	32.41
	3615.1+3634.9	20+20	37.30
16QAM	3615.8+3627.5	5+20	22.49
	3622.5+3634.2	20+5	22.76
	3615.6+3630.0	10+20	27.38
	3620.1+3634.5	20+10	27.55
	3615.3+3632.4	15+20	32.24
	3617.6+3634.7	20+15	32.29
	3615.1+3634.9	20+20	37.19
64QAM	3615.8+3627.5	5+20	22.54
	3622.5+3634.2	20+5	22.78
	3615.6+3630.0	10+20	27.36
	3620.1+3634.5	20+10	27.47
	3615.3+3632.4	15+20	32.34
	3617.6+3634.7	20+15	32.27
	3615.1+3634.9	20+20	37.26
256QAM	3615.8+3627.5	5+20	22.37
	3622.5+3634.2	20+5	22.71
	3615.6+3630.0	10+20	27.39
	3620.1+3634.5	20+10	27.59
	3615.3+3632.4	15+20	32.38
	3617.6+3634.7	20+15	32.31
	3615.1+3634.9	20+20	37.19

99% Bandwidth - QPSK


5+20MHz Channel Bandwidth

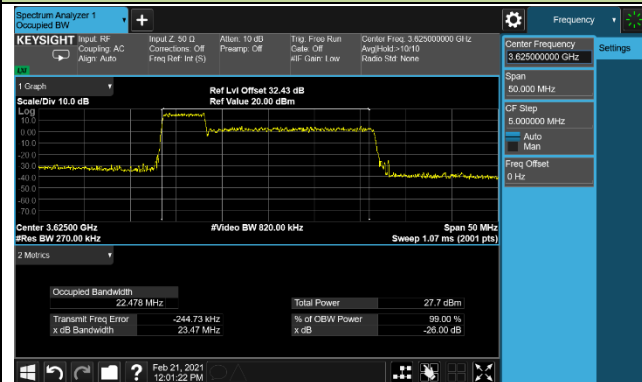


20+5MHz Channel Bandwidth

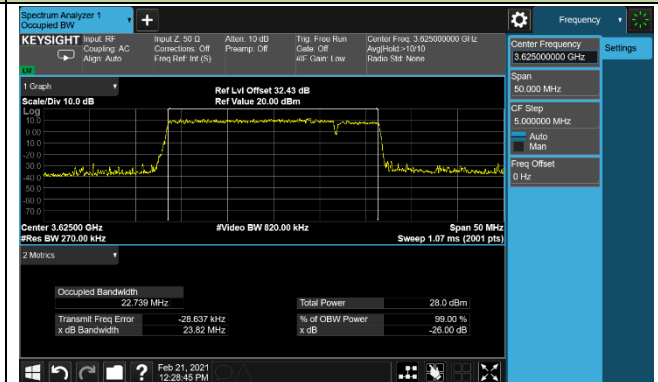


10+20MHz Channel Bandwidth

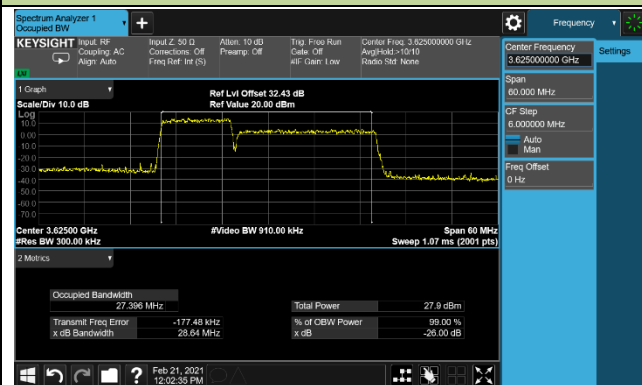


20+10MHz Channel Bandwidth

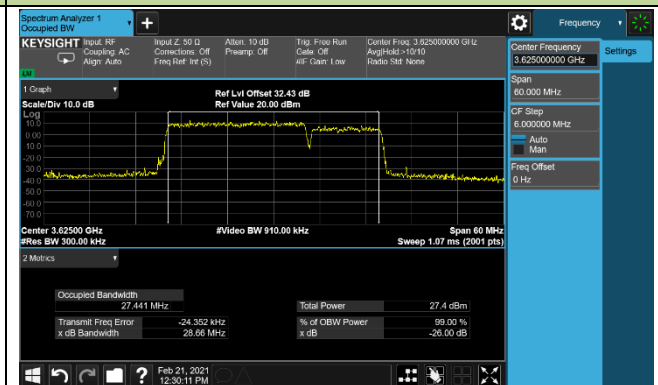


15+20MHz Channel Bandwidth

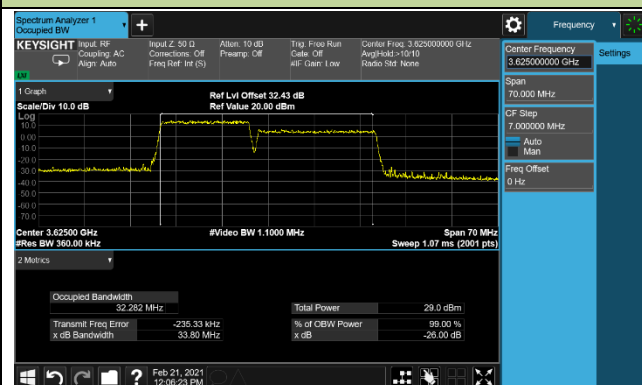

20+15MHz Channel Bandwidth

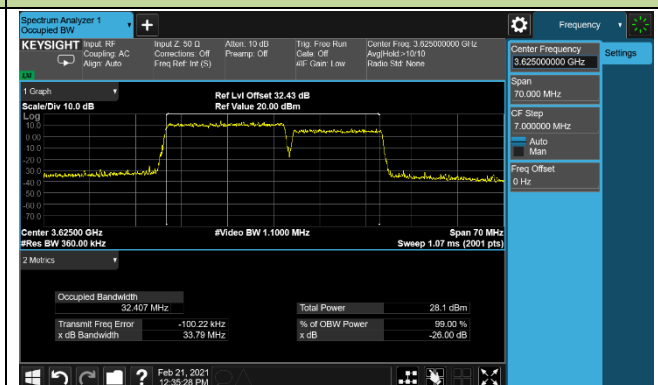


20+20MHz Channel Bandwidth

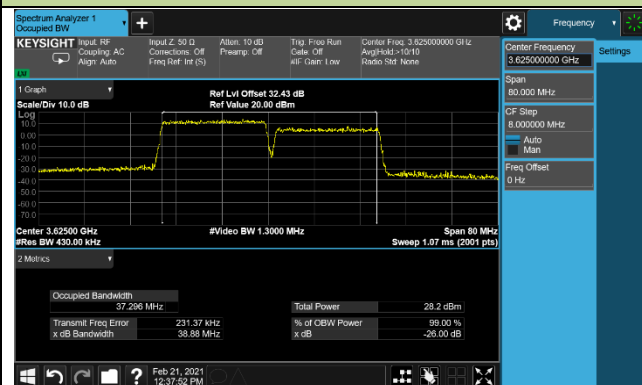


99% Bandwidth – 16QAM


5+20MHz Channel Bandwidth

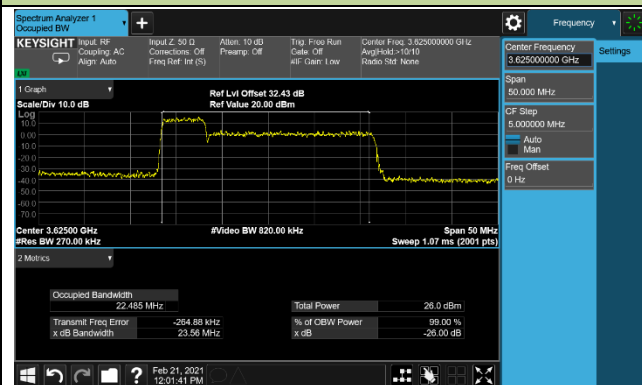


20+5MHz Channel Bandwidth

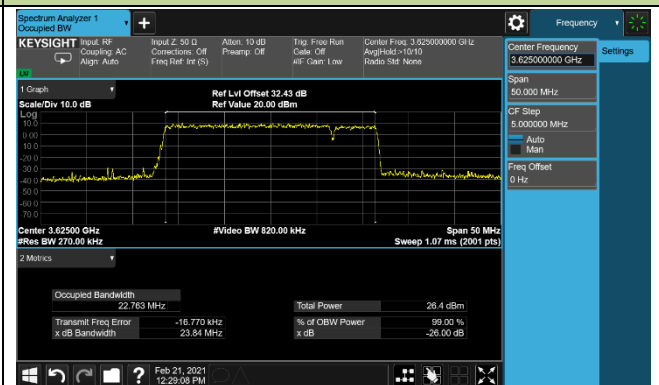


10+20MHz Channel Bandwidth

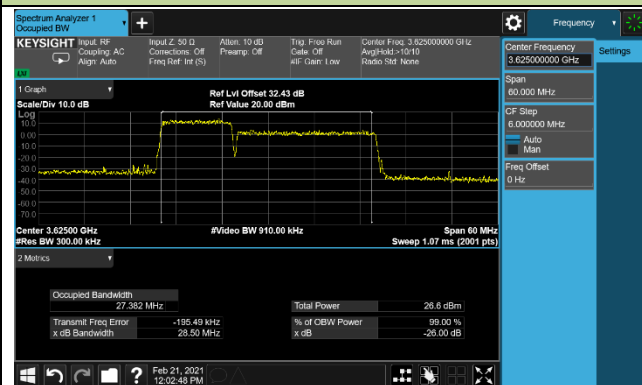


20+10MHz Channel Bandwidth

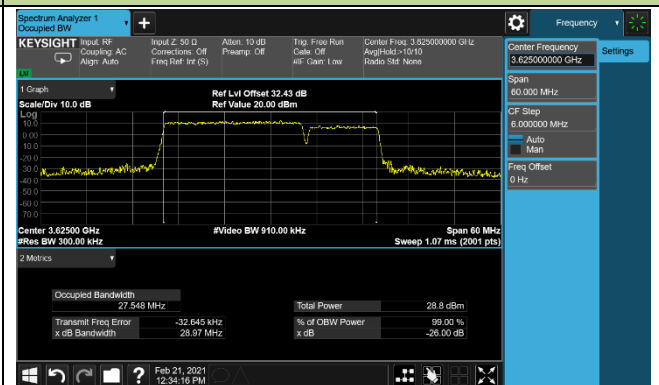


15+20MHz Channel Bandwidth

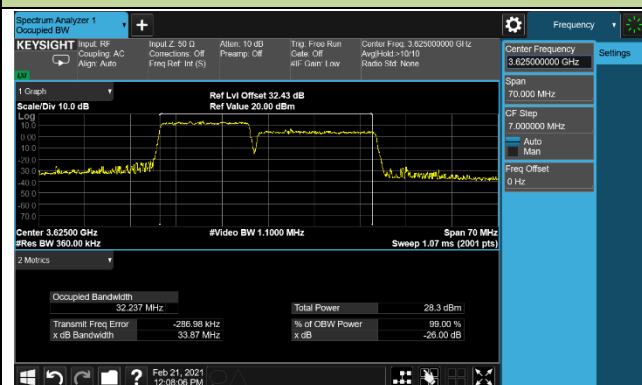

20+15MHz Channel Bandwidth

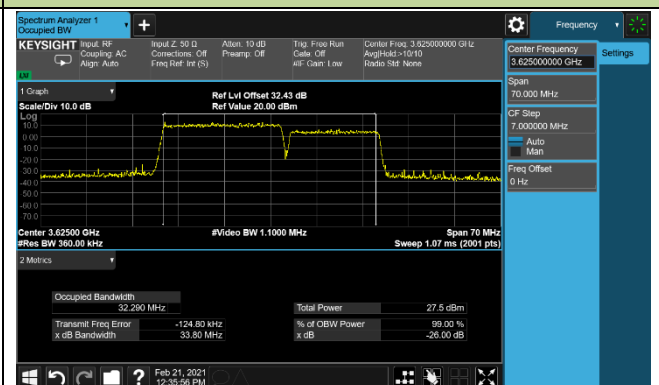


20+20MHz Channel Bandwidth

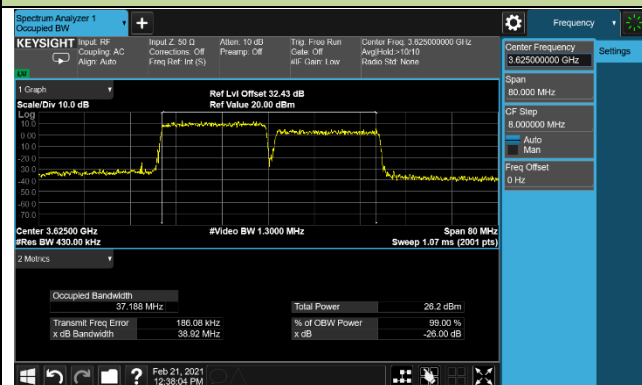


99% Bandwidth – 64QAM


5+20MHz Channel Bandwidth

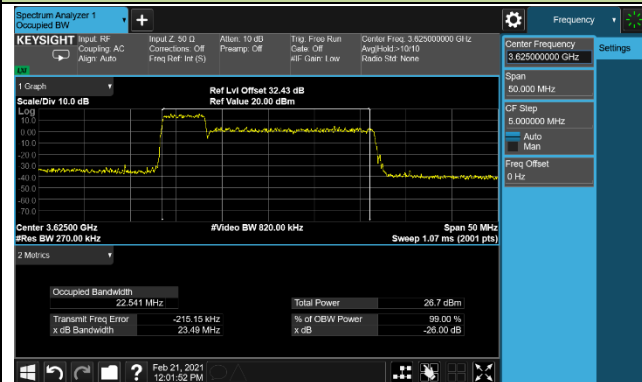


20+5MHz Channel Bandwidth

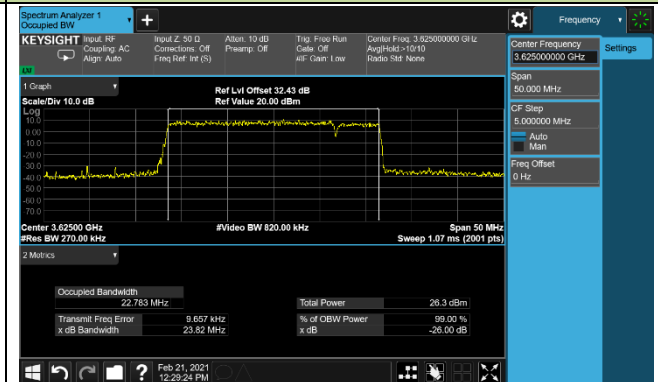


10+20MHz Channel Bandwidth

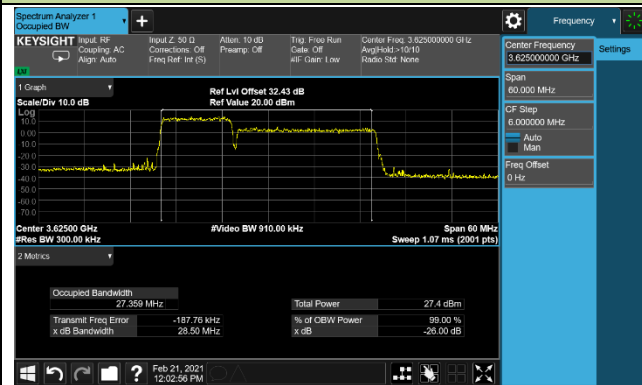


20+10MHz Channel Bandwidth

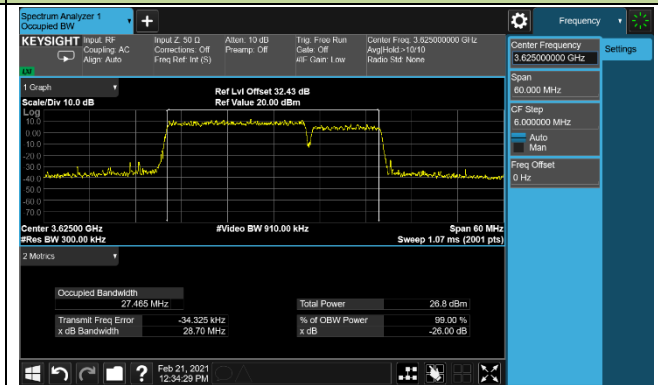


15+20MHz Channel Bandwidth

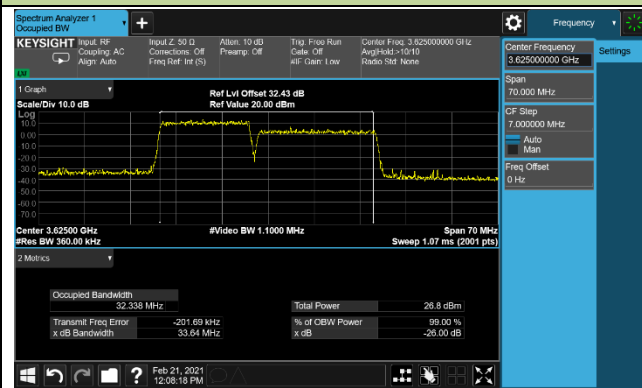

20+15MHz Channel Bandwidth

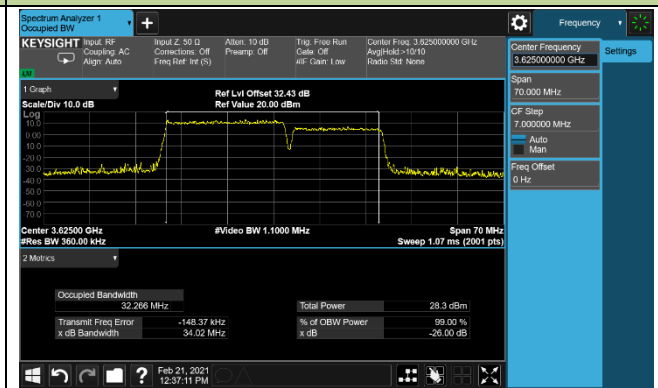


20+20MHz Channel Bandwidth

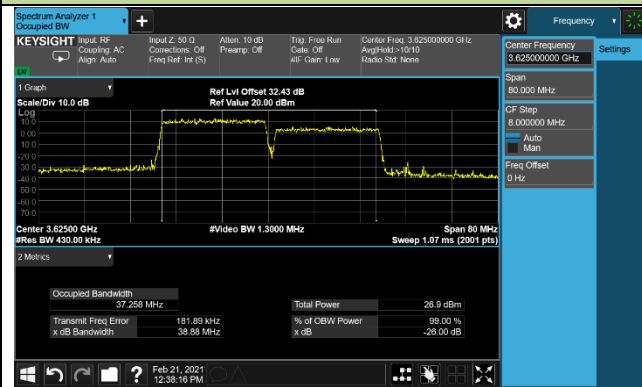


99% Bandwidth – 256QAM


5+20MHz Channel Bandwidth

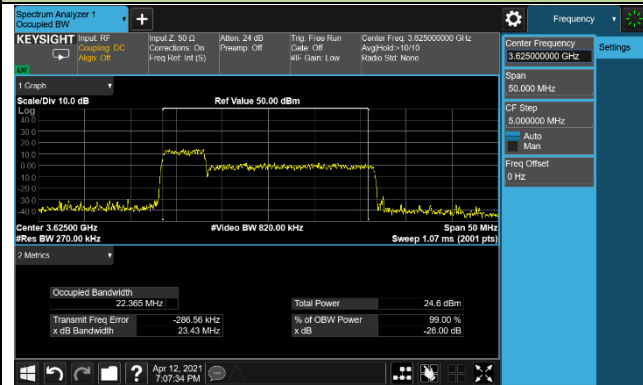


20+5MHz Channel Bandwidth

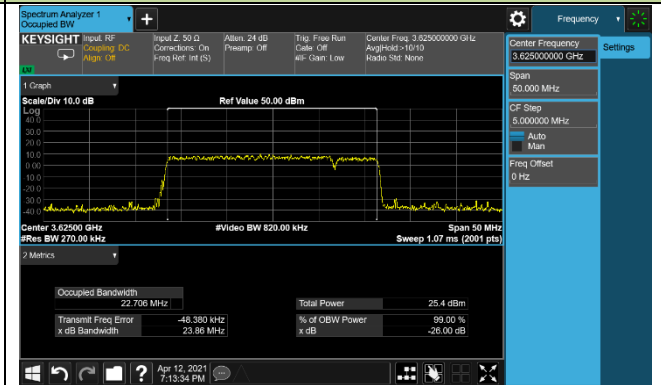


10+20MHz Channel Bandwidth

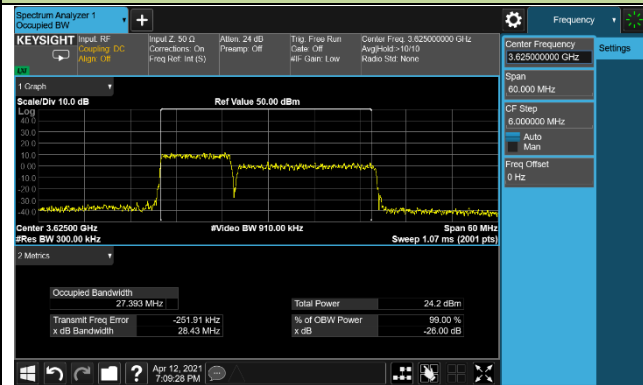


20+10MHz Channel Bandwidth

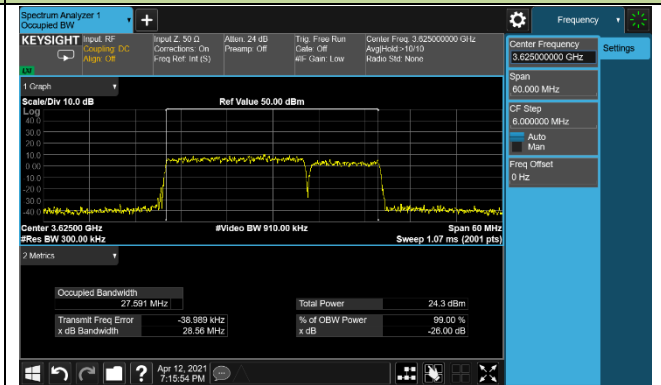


15+20MHz Channel Bandwidth

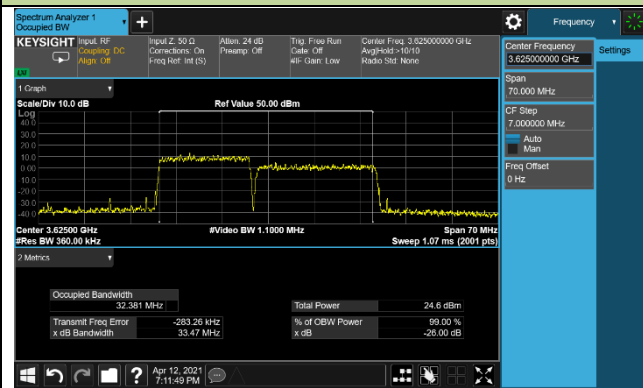

20+15MHz Channel Bandwidth

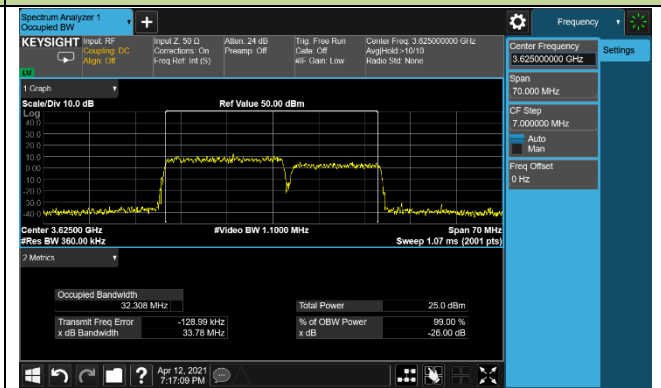

20+20MHz Channel Bandwidth

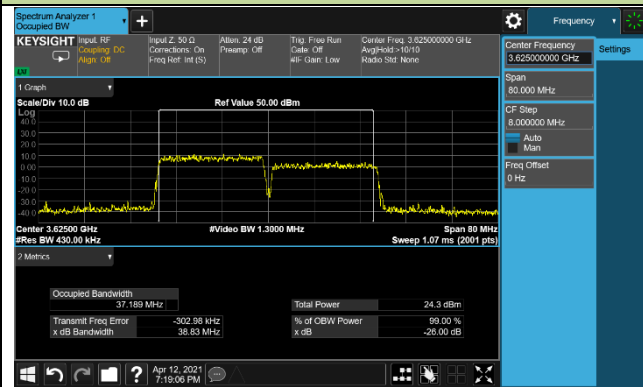

4.3. Frequency Stability Measurement

4.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

4.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

4.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

4.3.4. Test Setup

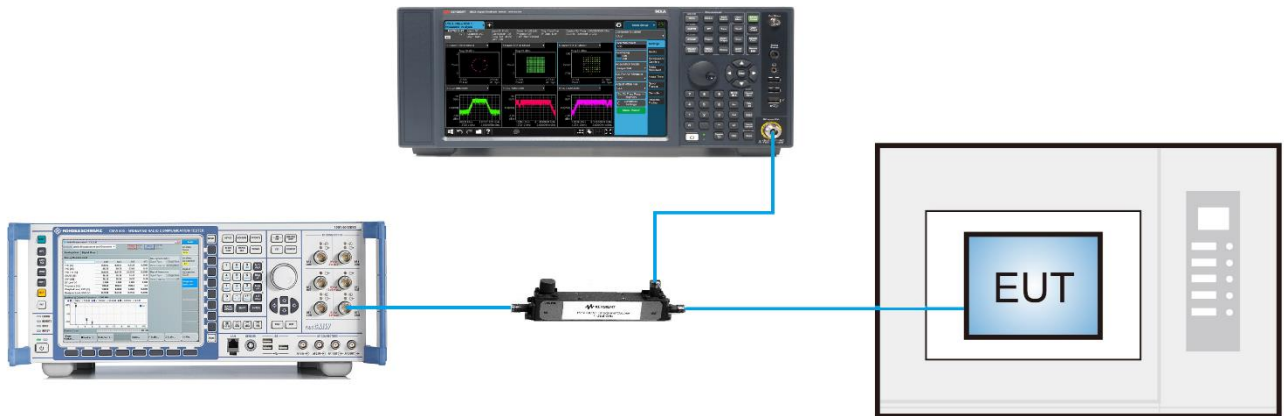

4.3.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-TR1
Test Engineer	Candy Luo	Test Date	2021/01/31
Test Band	LTE Band 48_QPSK		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0006
	- 20	0.0001
	- 10	-0.0002
	0	-0.0060
	+ 10	-0.0027
	+ 20	-0.0103
	+ 30	-0.0035
	+ 40	0.0053
	+ 50	-0.0007
4.4	+ 20	-0.0011
3.135	+ 20	-0.0015

4.4. Equivalent Isotropically Radiated Power Measurement

4.4.1. Test Limit

The maximum effective isotropic radiated power (EIRP) End User Device is 23dBm/10MHz

4.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.4.2 & 5.2.5.5

4.4.3. Test Setting

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT can not be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to $\pm 2\%$).

- a) Set span to 2 x to 3 x the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ for single sweep (automation-compatible) measurement.
- f) Detector = power averaging (rms).
- g) Set sweep trigger to "free run."
- h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
- i) Using the marker function to identify the maximum PSD.
- j) Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output

power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} \quad (1)$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

4.4.4. Test Setup

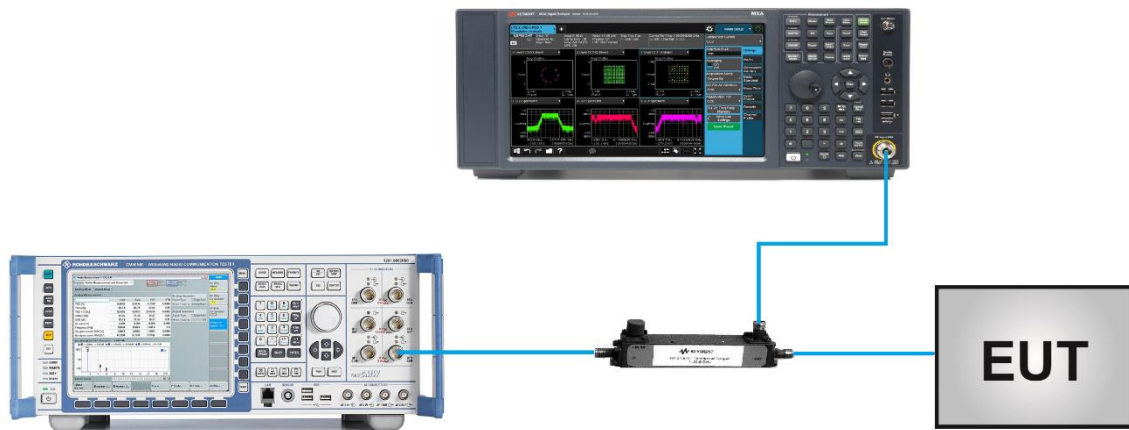

4.4.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/05 ~ 2021/03/29
Test Band	LTE Band 48		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
QPSK							
55265	3552.50	5	25	0	21.36	17.07	< 23.00
55900	3625.00				20.90	16.61	< 23.00
56715	3697.50				22.09	17.80	< 23.00
55290	3555.00	10	50	0	21.33	17.04	< 23.00
55900	3625.00				21.68	17.39	< 23.00
56690	3695.00				21.64	17.35	< 23.00
55315	3557.50	15	75	0	19.95	15.66	< 23.00
55990	3625.00				19.96	15.67	< 23.00
56665	3692.50				20.51	16.22	< 23.00
55340	3560.00	20	100	0	18.94	14.65	< 23.00
55990	3625.00				19.27	14.98	< 23.00
56640	3690.00				18.89	14.60	< 23.00
16QAM							
55265	3552.50	5	25	0	19.89	15.60	< 23.00
55900	3625.00				20.12	15.83	< 23.00
56715	3697.50				20.01	15.72	< 23.00
55290	3555.00	10	50	0	20.14	15.85	< 23.00
55900	3625.00				20.61	16.32	< 23.00
56690	3695.00				20.98	16.69	< 23.00
55315	3557.50	15	75	0	19.06	14.77	< 23.00
55990	3625.00				18.85	14.56	< 23.00
56665	3692.50				18.78	14.49	< 23.00
55340	3560.00	20	100	0	17.20	12.91	< 23.00
55990	3625.00				17.99	13.70	< 23.00
56640	3690.00				18.26	13.97	< 23.00

Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
64QAM							
55265	3552.50	5	25	0	19.32	15.03	< 23.00
55900	3625.00				19.76	15.47	< 23.00
56715	3697.50				18.98	14.69	< 23.00
55290	3555.00	10	50	0	20.01	15.72	< 23.00
55900	3625.00				20.12	15.83	< 23.00
56690	3695.00				20.20	15.91	< 23.00
55315	3557.50	15	75	0	18.34	14.05	< 23.00
55990	3625.00				18.75	14.46	< 23.00
56665	3692.50				18.62	14.33	< 23.00
55340	3560.00	20	100	0	16.54	12.25	< 23.00
55990	3625.00				17.02	12.73	< 23.00
56640	3690.00				17.90	13.61	< 23.00
256QAM							
55265	3552.50	5	25	0	16.34	12.05	< 23.00
55900	3625.00				17.15	12.86	< 23.00
56715	3697.50				16.91	12.62	< 23.00
55290	3555.00	10	50	0	16.51	12.22	< 23.00
55900	3625.00				16.89	12.60	< 23.00
56690	3695.00				16.75	12.46	< 23.00
55315	3557.50	15	75	0	15.15	10.86	< 23.00
55990	3625.00				15.50	11.21	< 23.00
56665	3692.50				15.39	11.10	< 23.00
55340	3560.00	20	100	0	13.77	9.48	< 23.00
55990	3625.00				14.17	9.88	< 23.00
56640	3690.00				14.06	9.77	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/05/29 ~ 2021/05/30
Test Band	LTE Band 48		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK							
55265	3552.50	5	25	0	22.32	18.03	N/A
55900	3625.00				22.46	18.17	N/A
56715	3697.50				22.65	18.36	N/A
55290	3555.00	10	50	0	22.30	18.01	N/A
55900	3625.00				22.53	18.24	N/A
56690	3695.00				22.39	18.10	N/A
55315	3557.50	15	75	0	22.23	17.94	N/A
55990	3625.00				22.39	18.10	N/A
56665	3692.50				22.46	18.17	N/A
55340	3560.00	20	100	0	22.29	18.00	N/A
55990	3625.00				22.38	18.09	N/A
56640	3690.00				22.51	18.22	N/A
16QAM							
55265	3552.50	5	25	0	21.38	17.09	N/A
55900	3625.00				21.48	17.19	N/A
56715	3697.50				21.56	17.27	N/A
55290	3555.00	10	50	0	21.48	17.19	N/A
55900	3625.00				21.41	17.12	N/A
56690	3695.00				21.53	17.24	N/A
55315	3557.50	15	75	0	21.31	17.02	N/A
55990	3625.00				21.36	17.07	N/A
56665	3692.50				21.52	17.23	N/A
55340	3560.00	20	100	0	21.34	17.05	N/A
55990	3625.00				21.47	17.18	N/A
56640	3690.00				21.52	17.23	N/A

Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);

Note 2: The EIRP is reported for FCC form 731.

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM							
55265	3552.50	5	25	0	20.41	16.12	N/A
55900	3625.00				20.48	16.19	N/A
56715	3697.50				20.55	16.26	N/A
55290	3555.00	10	50	0	20.39	16.10	N/A
55900	3625.00				20.46	16.17	N/A
56690	3695.00				20.63	16.34	N/A
55315	3557.50	15	75	0	20.28	15.99	N/A
55990	3625.00				20.51	16.22	N/A
56665	3692.50				20.59	16.30	N/A
55340	3560.00	20	100	0	20.32	16.03	N/A
55990	3625.00				20.46	16.17	N/A
56640	3690.00				20.63	16.34	N/A
256QAM							
55265	3552.50	5	25	0	17.23	12.94	N/A
55900	3625.00				17.72	13.22	N/A
56715	3697.50				17.36	13.17	N/A
55290	3555.00	10	50	0	17.16	12.87	N/A
55900	3625.00				17.51	13.22	N/A
56690	3695.00				17.35	13.06	N/A
55315	3557.50	15	75	0	17.28	12.99	N/A
55990	3625.00				17.59	13.30	N/A
56665	3692.50				17.53	13.24	N/A
55340	3560.00	20	100	0	17.27	12.98	N/A
55990	3625.00				17.51	13.22	N/A
56640	3690.00				17.46	13.17	N/A
Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi); Note 2: The EIRP is reported for FCC form 731.							

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/03/31
Test Band	Intra-Band CA_48C		

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
QPSK							
3553.3	3565.0	5+20	P_25@0	S_100@0	21.10	16.81	< 23.00
3615.8	3627.5				20.58	16.29	< 23.00
3678.3	3690.0				20.88	16.59	< 23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	18.10	13.81	< 23.00
3622.5	3634.2				17.08	12.79	< 23.00
3685.0	3696.7				16.30	12.01	< 23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	20.58	16.29	< 23.00
3615.6	3630.0				17.85	13.56	< 23.00
3675.6	3690.0				20.08	15.79	< 23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	17.58	13.29	< 23.00
3620.1	3634.5				17.28	12.99	< 23.00
3680.1	3694.5				16.77	12.48	< 23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	18.75	14.46	< 23.00
3615.3	3632.4				18.16	13.87	< 23.00
3672.9	3690.0				19.08	14.79	< 23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	18.00	13.71	< 23.00
3617.6	3634.7				14.94	10.65	< 23.00
3675.1	3692.2				15.81	11.52	< 23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	17.98	13.69	< 23.00
3615.1	3634.9				15.73	11.44	< 23.00
3670.2	3690.0				17.51	13.22	< 23.00

Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
16QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	19.86	15.57	< 23.00
3615.8	3627.5				20.40	16.11	< 23.00
3678.3	3690.0				19.31	15.02	< 23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	15.73	11.44	< 23.00
3622.5	3634.2				16.41	12.12	< 23.00
3685.0	3696.7				15.79	11.50	< 23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	19.55	15.26	< 23.00
3615.6	3630.0				18.53	14.24	< 23.00
3675.6	3690.0				20.33	16.04	< 23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	16.34	12.05	< 23.00
3620.1	3634.5				15.12	10.83	< 23.00
3680.1	3694.5				15.88	11.59	< 23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	18.46	14.17	< 23.00
3615.3	3632.4				18.12	13.83	< 23.00
3672.9	3690.0				15.93	11.64	< 23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	16.24	11.95	< 23.00
3617.6	3634.7				17.07	12.78	< 23.00
3675.1	3692.2				16.01	11.72	< 23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	15.17	10.88	< 23.00
3615.1	3634.9				16.54	12.25	< 23.00
3670.2	3690.0				16.25	11.96	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
64QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	19.80	15.51	< 23.00
3615.8	3627.5				20.32	16.03	< 23.00
3678.3	3690.0				19.31	15.02	< 23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	17.08	12.79	< 23.00
3622.5	3634.2				16.32	12.03	< 23.00
3685.0	3696.7				15.91	11.62	< 23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	19.89	15.60	< 23.00
3615.6	3630.0				18.40	14.11	< 23.00
3675.6	3690.0				20.26	15.97	< 23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	16.30	12.01	< 23.00
3620.1	3634.5				15.20	10.91	< 23.00
3680.1	3694.5				15.88	11.59	< 23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	16.56	12.27	< 23.00
3615.3	3632.4				18.58	14.29	< 23.00
3672.9	3690.0				15.10	10.81	< 23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	16.23	11.94	< 23.00
3617.6	3634.7				17.07	12.78	< 23.00
3675.1	3692.2				16.01	11.72	< 23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	15.65	11.36	< 23.00
3615.1	3634.9				14.44	10.15	< 23.00
3670.2	3690.0				16.19	11.90	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
256QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	14.37	10.08	< 23.00
3615.8	3627.5				16.21	11.92	< 23.00
3678.3	3690.0				15.19	10.90	< 23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	11.95	7.66	< 23.00
3622.5	3634.2				12.31	8.02	< 23.00
3685.0	3696.7				12.31	8.02	< 23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	14.77	10.48	< 23.00
3615.6	3630.0				14.97	10.68	< 23.00
3675.6	3690.0				14.91	10.62	< 23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	11.81	7.52	< 23.00
3620.1	3634.5				12.59	8.30	< 23.00
3680.1	3694.5				13.14	8.85	< 23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	14.12	9.83	< 23.00
3615.3	3632.4				14.26	9.97	< 23.00
3672.9	3690.0				13.58	9.29	< 23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	12.95	8.66	< 23.00
3617.6	3634.7				12.58	8.29	< 23.00
3675.1	3692.2				12.84	8.55	< 23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	12.91	8.62	< 23.00
3615.1	3634.9				12.62	8.33	< 23.00
3670.2	3690.0				12.85	8.56	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/05/30
Test Band	Intra-Band CA_48C		

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
3553.3	3565.0	5+20	P_25@0	S_100@0	22.74	18.45	N/A
3615.8	3627.5				22.81	18.52	N/A
3678.3	3690.0				23.02	18.73	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	22.57	18.28	N/A
3622.5	3634.2				22.54	18.25	N/A
3685.0	3696.7				22.56	18.27	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	22.56	18.27	N/A
3615.6	3630.0				22.60	18.31	N/A
3675.6	3690.0				22.68	18.39	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	22.59	18.30	N/A
3620.1	3634.5				22.61	18.32	N/A
3680.1	3694.5				22.67	18.38	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	22.52	18.23	N/A
3615.3	3632.4				22.57	18.28	N/A
3672.9	3690.0				22.71	18.42	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	22.59	18.30	N/A
3617.6	3634.7				22.64	18.35	N/A
3675.1	3692.2				22.73	18.44	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	22.61	18.32	N/A
3615.1	3634.9				22.65	18.36	N/A
3670.2	3690.0				22.73	18.44	N/A

Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);

Note 2: The EIRP is reported for FCC form 731.

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	21.60	17.31	N/A
3615.8	3627.5				21.61	17.32	N/A
3678.3	3690.0				21.81	17.52	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	21.67	17.38	N/A
3622.5	3634.2				21.72	17.43	N/A
3685.0	3696.7				21.70	17.41	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	21.59	17.30	N/A
3615.6	3630.0				21.72	17.43	N/A
3675.6	3690.0				21.76	17.47	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	21.62	17.33	N/A
3620.1	3634.5				21.66	17.37	N/A
3680.1	3694.5				21.71	17.42	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	21.59	17.30	N/A
3615.3	3632.4				21.69	17.40	N/A
3672.9	3690.0				21.78	17.49	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	21.67	17.38	N/A
3617.6	3634.7				21.68	17.39	N/A
3675.1	3692.2				21.77	17.48	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	21.62	17.33	N/A
3615.1	3634.9				21.70	17.41	N/A
3670.2	3690.0				21.78	17.49	N/A
Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);							
Note 2: The EIRP is reported for FCC form 731.							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	21.58	17.29	N/A
3615.8	3627.5				21.61	17.32	N/A
3678.3	3690.0				21.65	17.36	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	21.57	17.28	N/A
3622.5	3634.2				21.72	17.43	N/A
3685.0	3696.7				21.67	17.38	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	21.49	17.20	N/A
3615.6	3630.0				21.58	17.29	N/A
3675.6	3690.0				21.66	17.37	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	21.56	17.27	N/A
3620.1	3634.5				21.64	17.35	N/A
3680.1	3694.5				21.70	17.41	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	21.64	17.35	N/A
3615.3	3632.4				21.69	17.40	N/A
3672.9	3690.0				21.77	17.48	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	21.60	17.31	N/A
3617.6	3634.7				21.65	17.36	N/A
3675.1	3692.2				21.75	17.46	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	21.58	17.29	N/A
3615.1	3634.9				21.63	17.34	N/A
3670.2	3690.0				21.76	17.47	N/A

Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);

Note 2: The EIRP is reported for FCC form 731.

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	16.12	11.83	N/A
3615.8	3627.5				16.66	12.37	N/A
3678.3	3690.0				16.39	12.10	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	16.15	11.86	N/A
3622.5	3634.2				16.48	12.19	N/A
3685.0	3696.7				16.25	11.96	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	16.08	11.79	N/A
3615.6	3630.0				16.63	12.34	N/A
3675.6	3690.0				16.62	12.33	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	16.13	11.84	N/A
3620.1	3634.5				16.61	12.32	N/A
3680.1	3694.5				16.49	12.20	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	16.11	11.82	N/A
3615.3	3632.4				16.53	12.24	N/A
3672.9	3690.0				16.63	12.34	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	16.11	11.82	N/A
3617.6	3634.7				16.70	12.41	N/A
3675.1	3692.2				16.46	12.17	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	16.29	12.00	N/A
3615.1	3634.9				16.62	12.33	N/A
3670.2	3690.0				16.41	12.12	N/A

Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);

Note 2: The EIRP is reported for FCC form 731.

4.5. Band Edge Measurement

4.5.1. Test Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

4.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

4.5.3. Test Setting

1. Set the analyzer frequency to low, middle, high channel.
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full

power


8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
9. Used power integration when using a measurement bandwidth smaller than the specified bandwidth.


4.5.4. Test Setup



4.5.5. Test Result


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/02 ~ 2021/02/04
Test Band	LTE Band 48_QPSK	Test Result	Pass

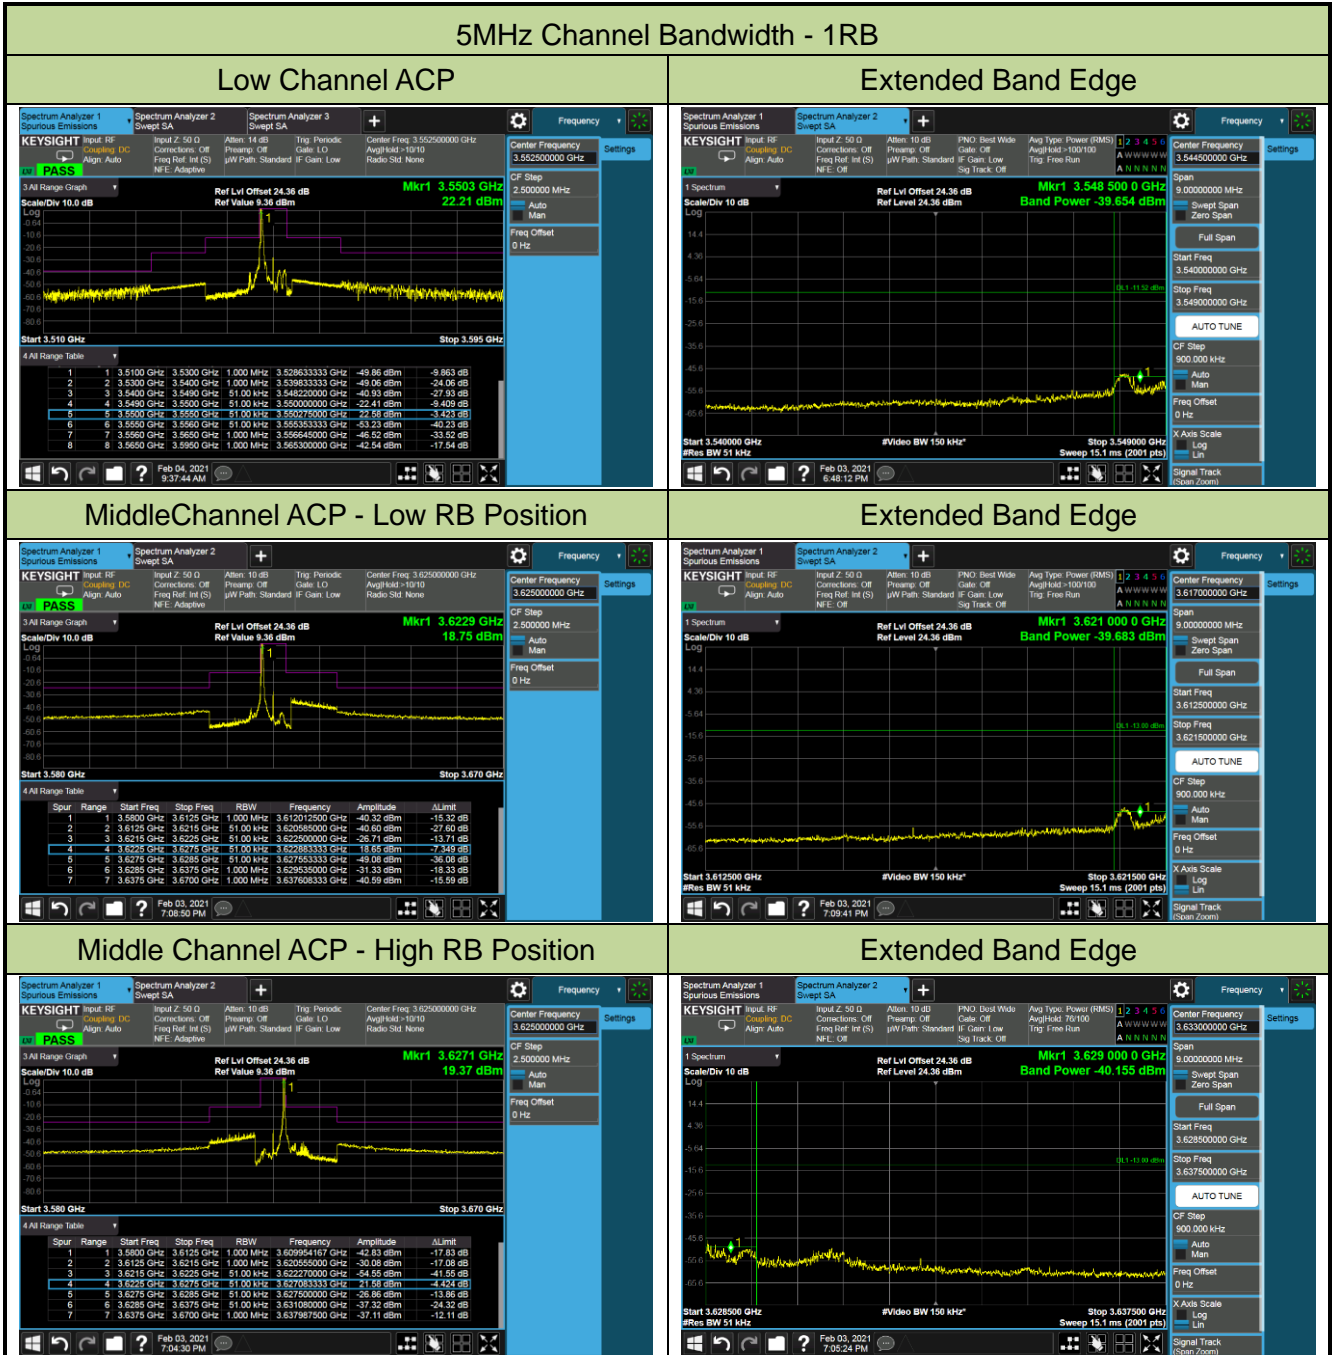

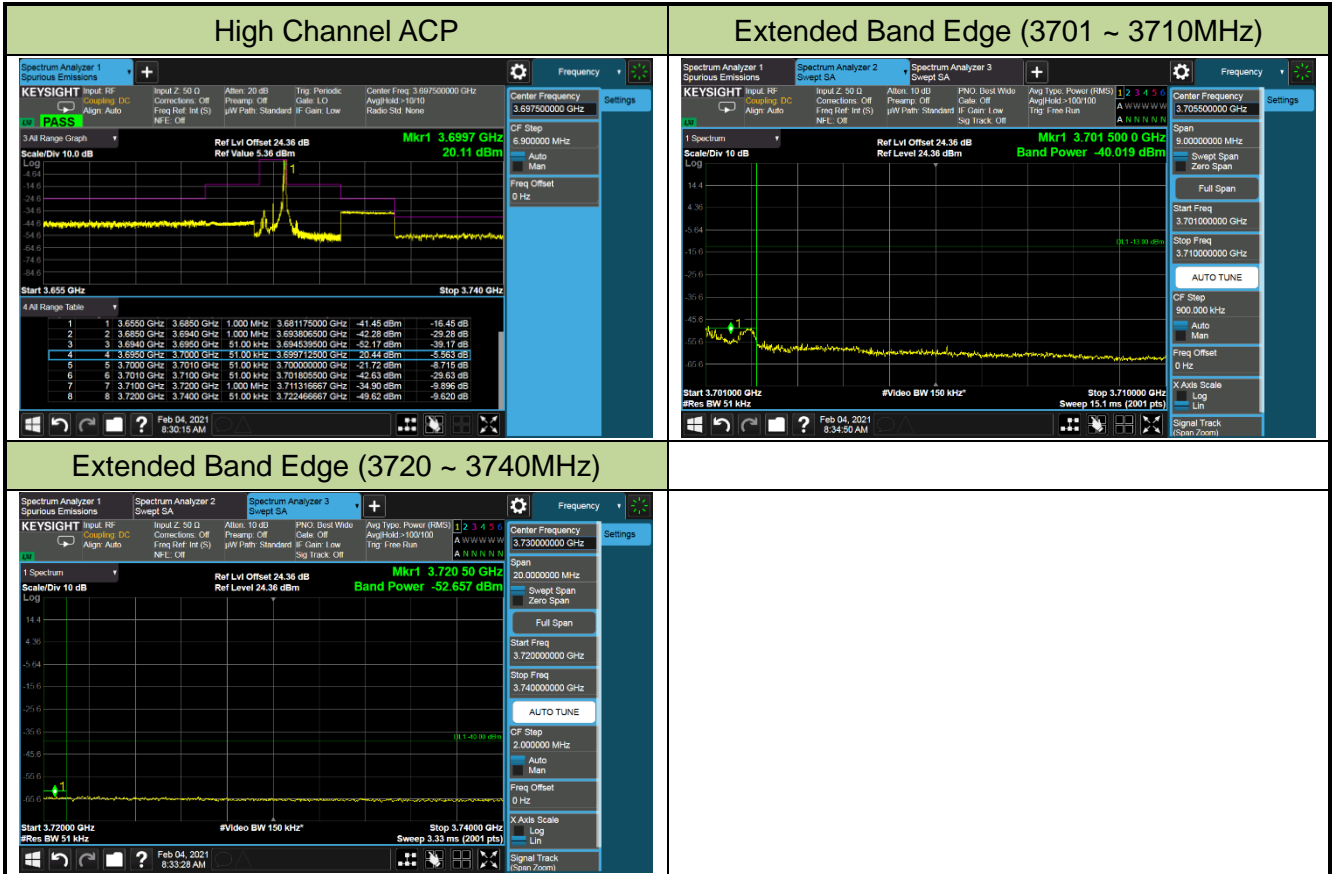


10MHz Channel Bandwidth - 1RB


Low Channel ACP

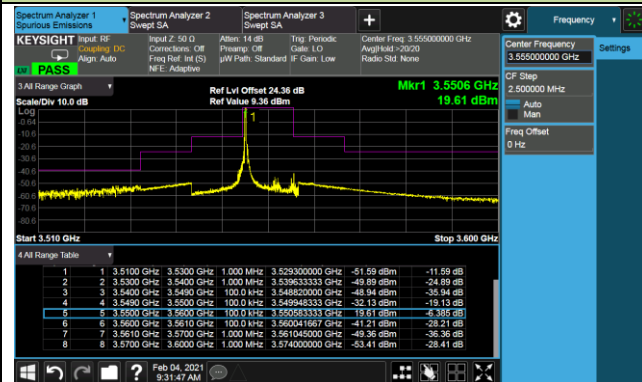


Extended Band Edge

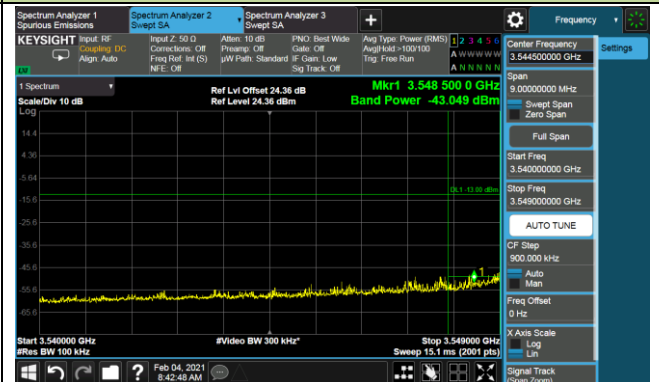


MiddleChannel ACP - Low RB Position

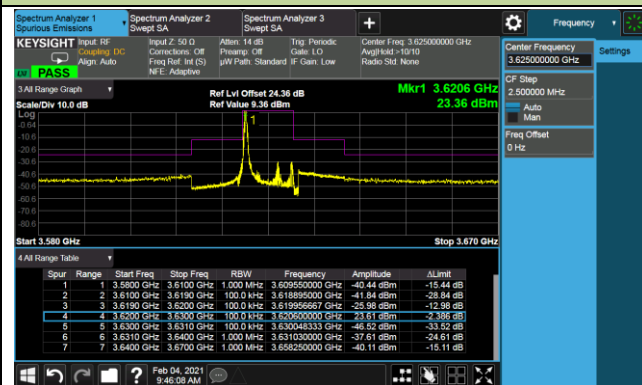


Extended Band Edge

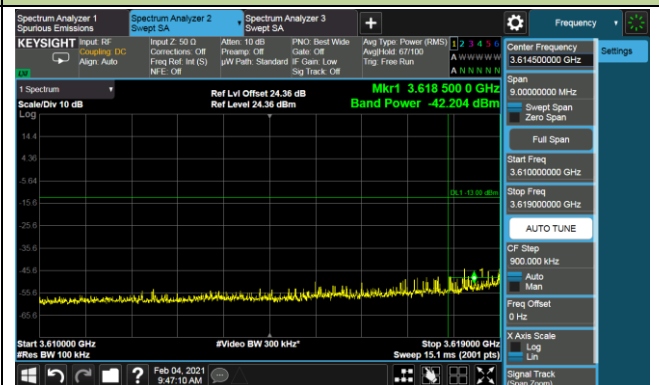


MiddleChannel ACP - High RB Position

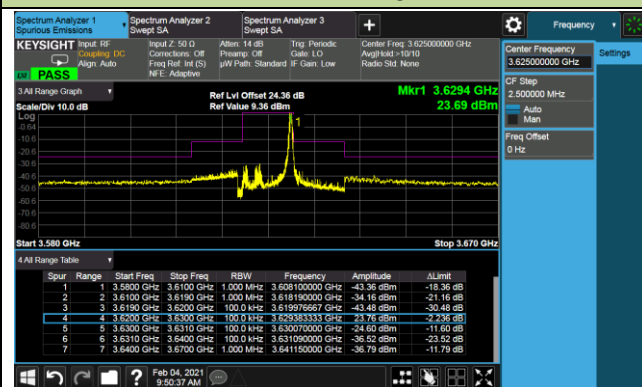


Extended Band Edge

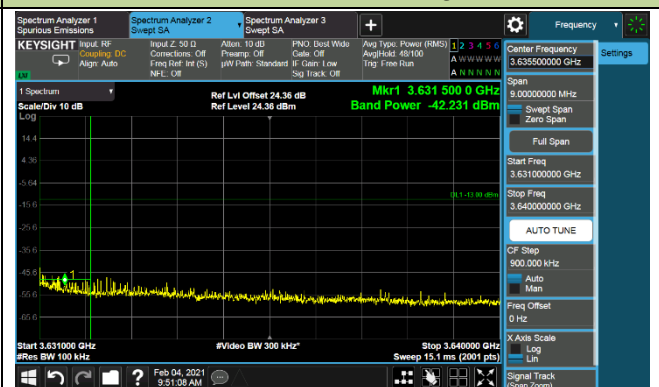

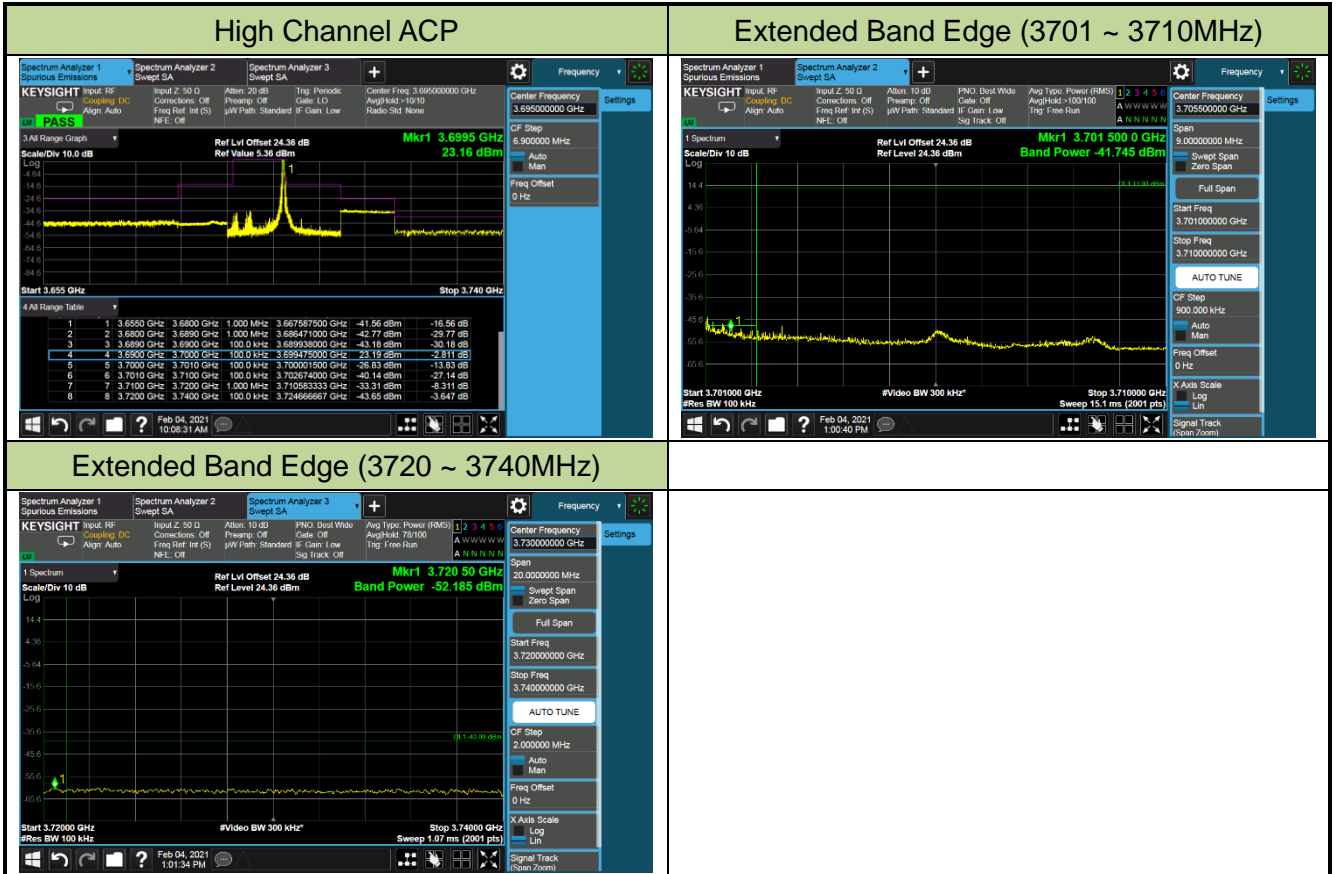


15MHz Channel Bandwidth - 1RB


Low Channel ACP

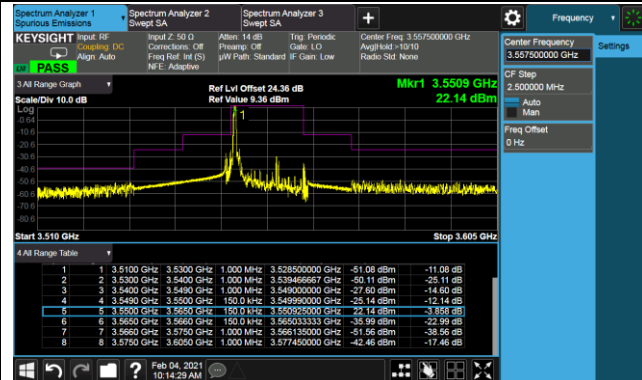


MiddleChannel ACP - Low RB Position

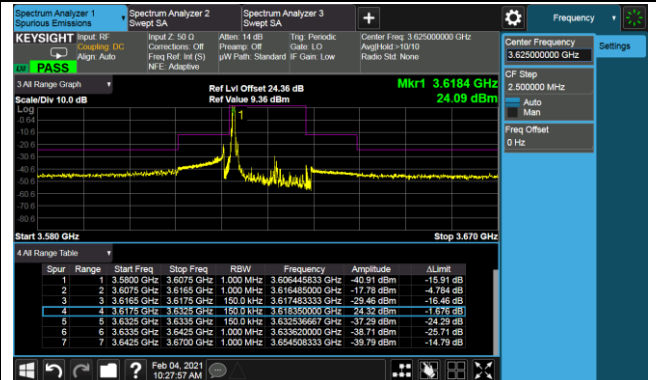

MiddleChannel ACP - High RB Position

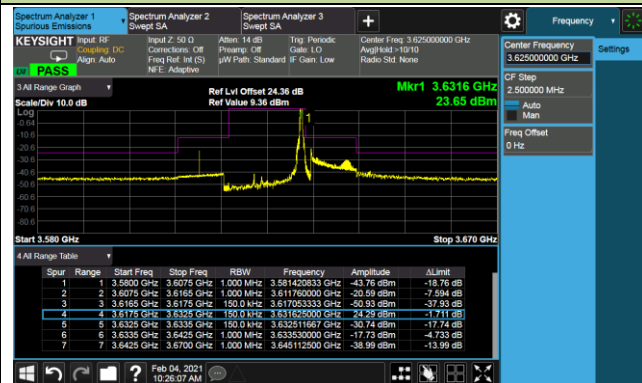

High Channel ACP

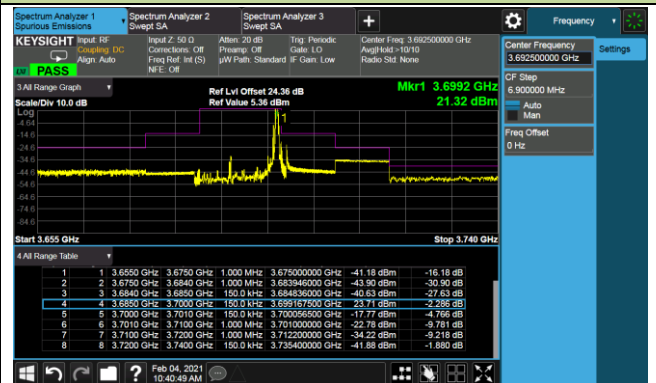

Extended Band Edge

