



5+20MHz Channel Bandwidth Full RB

Lower Band Edge

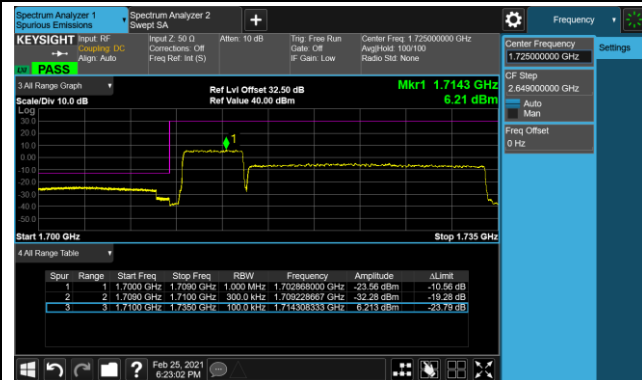


Upper Band Edge

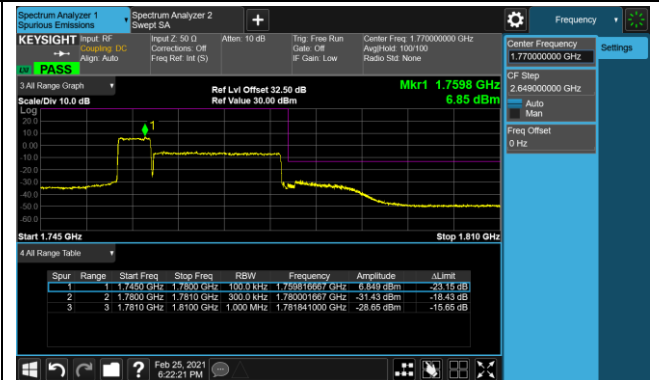

10+15MHz Channel Bandwidth Full RB

Lower Band Edge

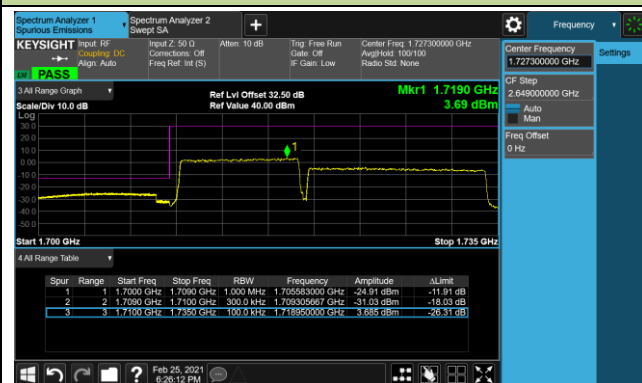


Upper Band Edge




10+20MHz Channel Bandwidth Full RB

Lower Band Edge

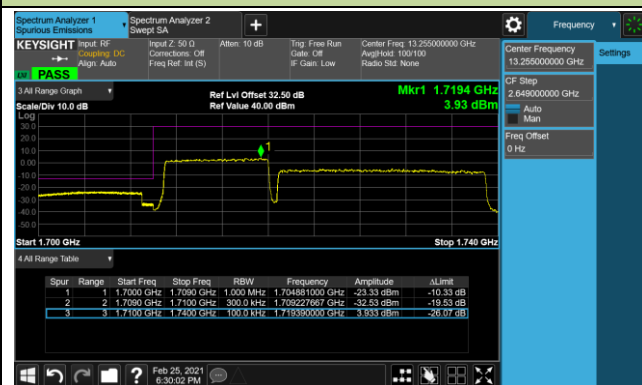


Upper Band Edge

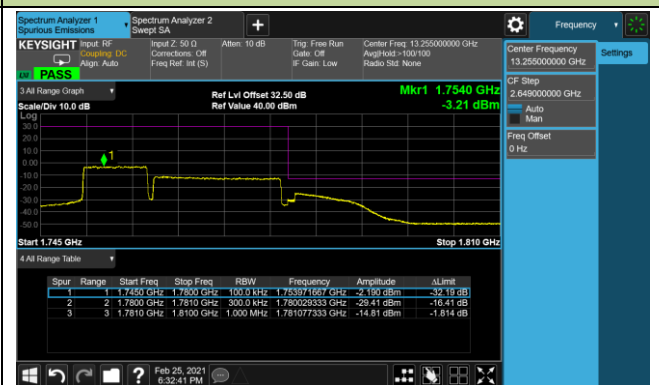


15+10MHz Channel Bandwidth Full RB

Lower Band Edge

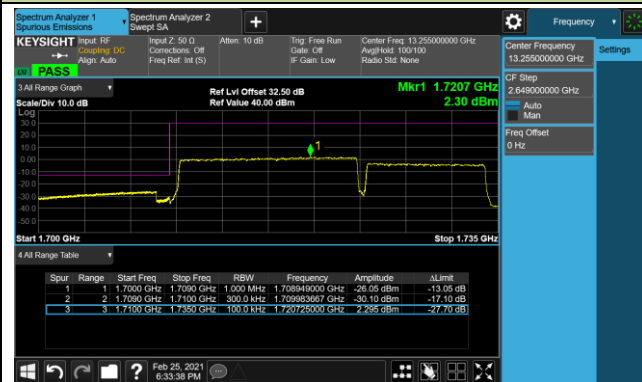


Upper Band Edge

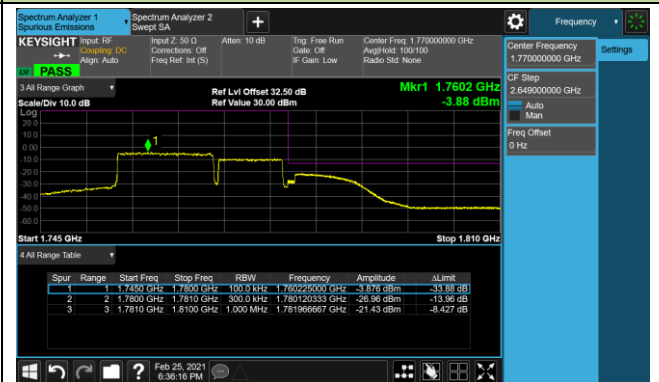


15+15MHz Channel Bandwidth Full RB

Lower Band Edge

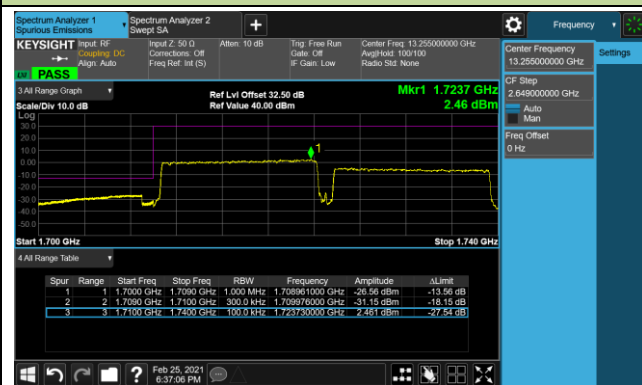


Upper Band Edge

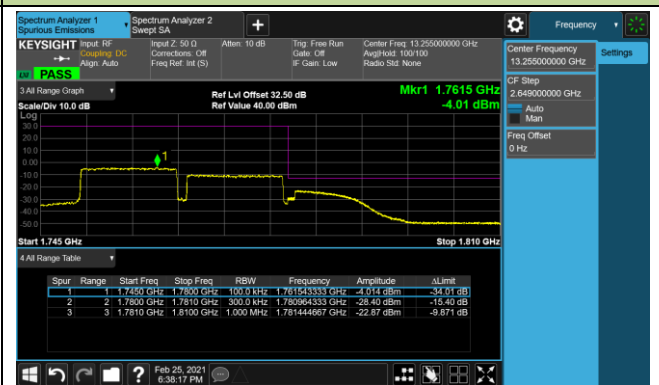


15+20MHz Channel Bandwidth Full RB

Lower Band Edge

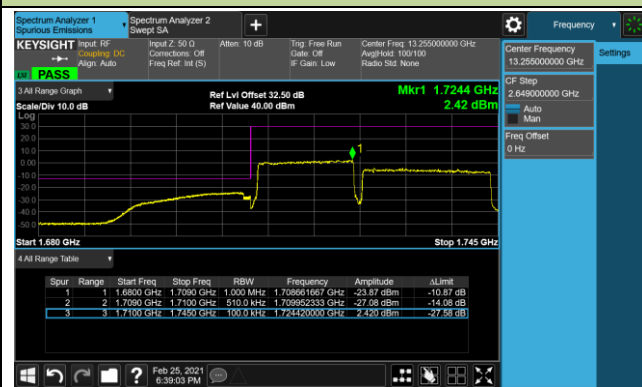


Upper Band Edge

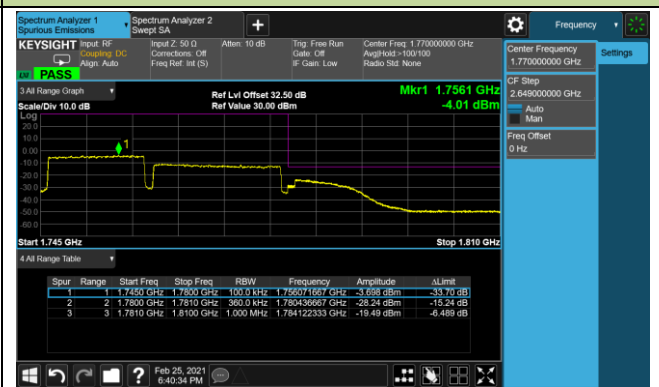


20+5MHz Channel Bandwidth Full RB

Lower Band Edge

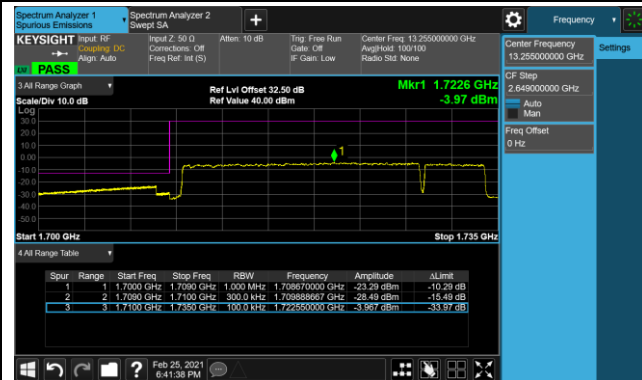


Upper Band Edge

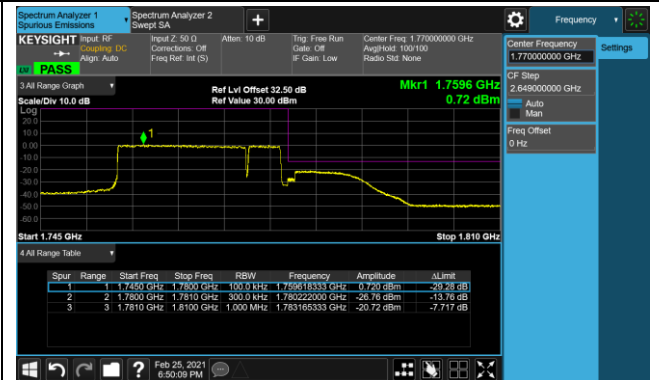


20+10MHz Channel Bandwidth Full RB

Lower Band Edge

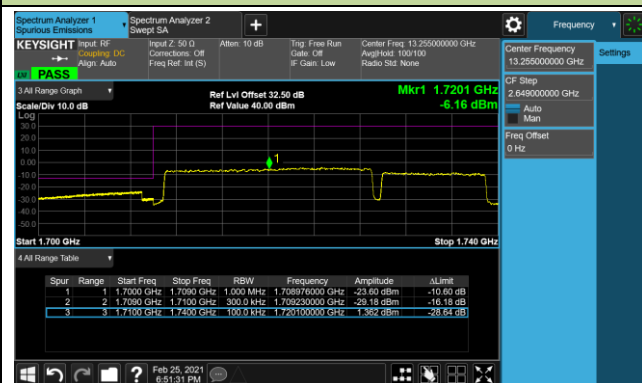


Upper Band Edge

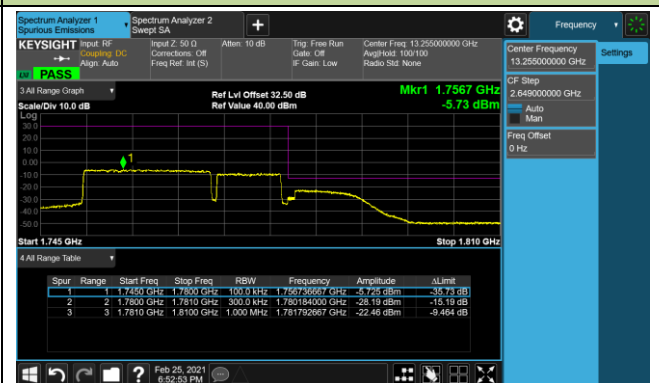


20+15MHz Channel Bandwidth Full RB

Lower Band Edge

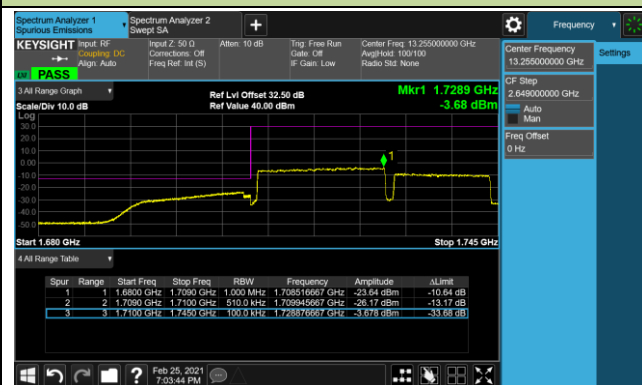

Upper Band Edge



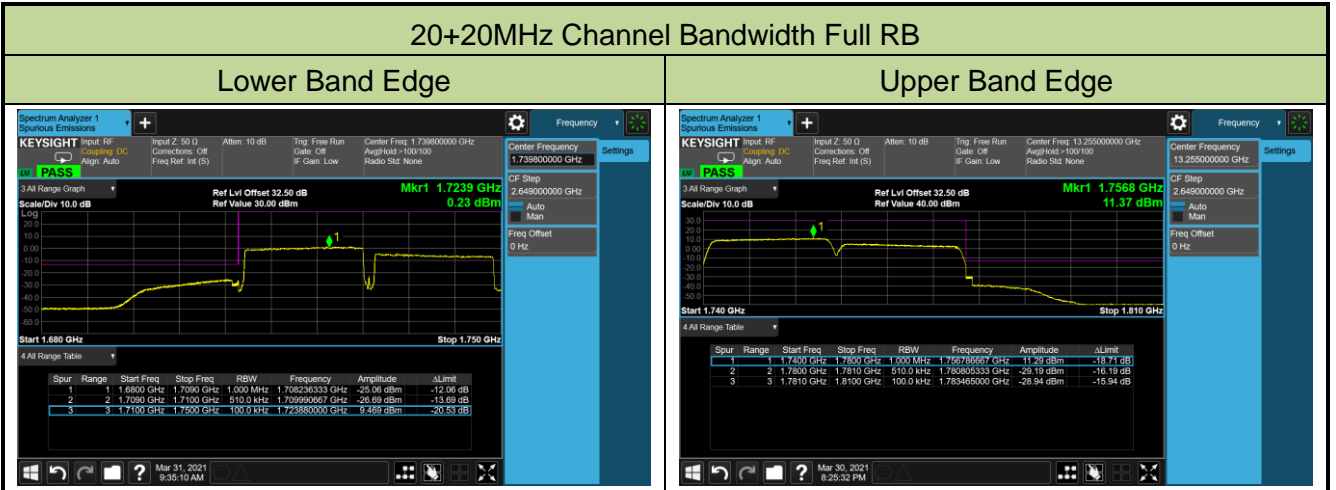

4.6. Peak to Average Ratio Measurement

4.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


4.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

4.6.3. Test Setting

1. Set the resolution / measurement bandwidth \geq signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%


4.6.4. Test Setup

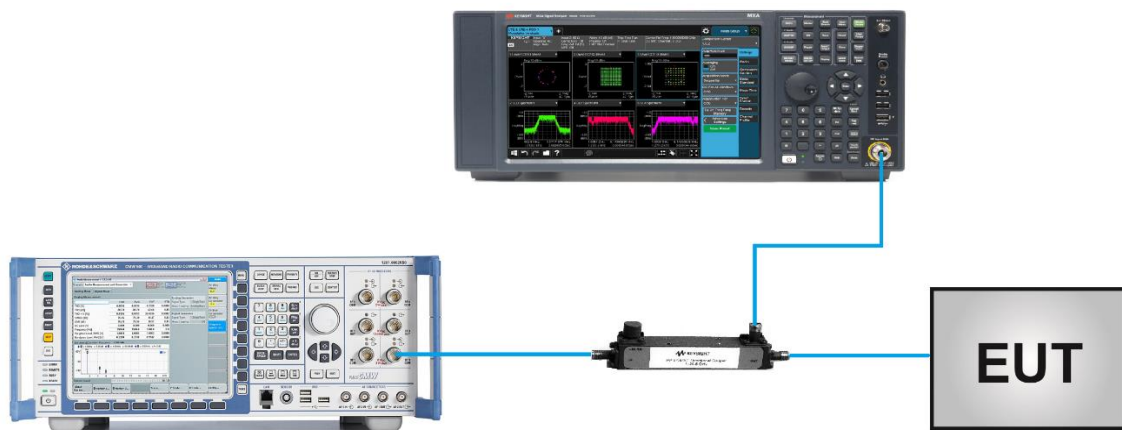

4.6.5. Test Result


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	Band 2/25		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
26365	1882.5	20	5.32	≤ 13.00	Pass
16QAM					
26365	1882.5	20	6.07	≤ 13.00	Pass
64QAM					
26365	1882.5	20	6.04	≤ 13.00	Pass
256QAM					
26365	1882.5	20	6.55	≤ 13.00	Pass

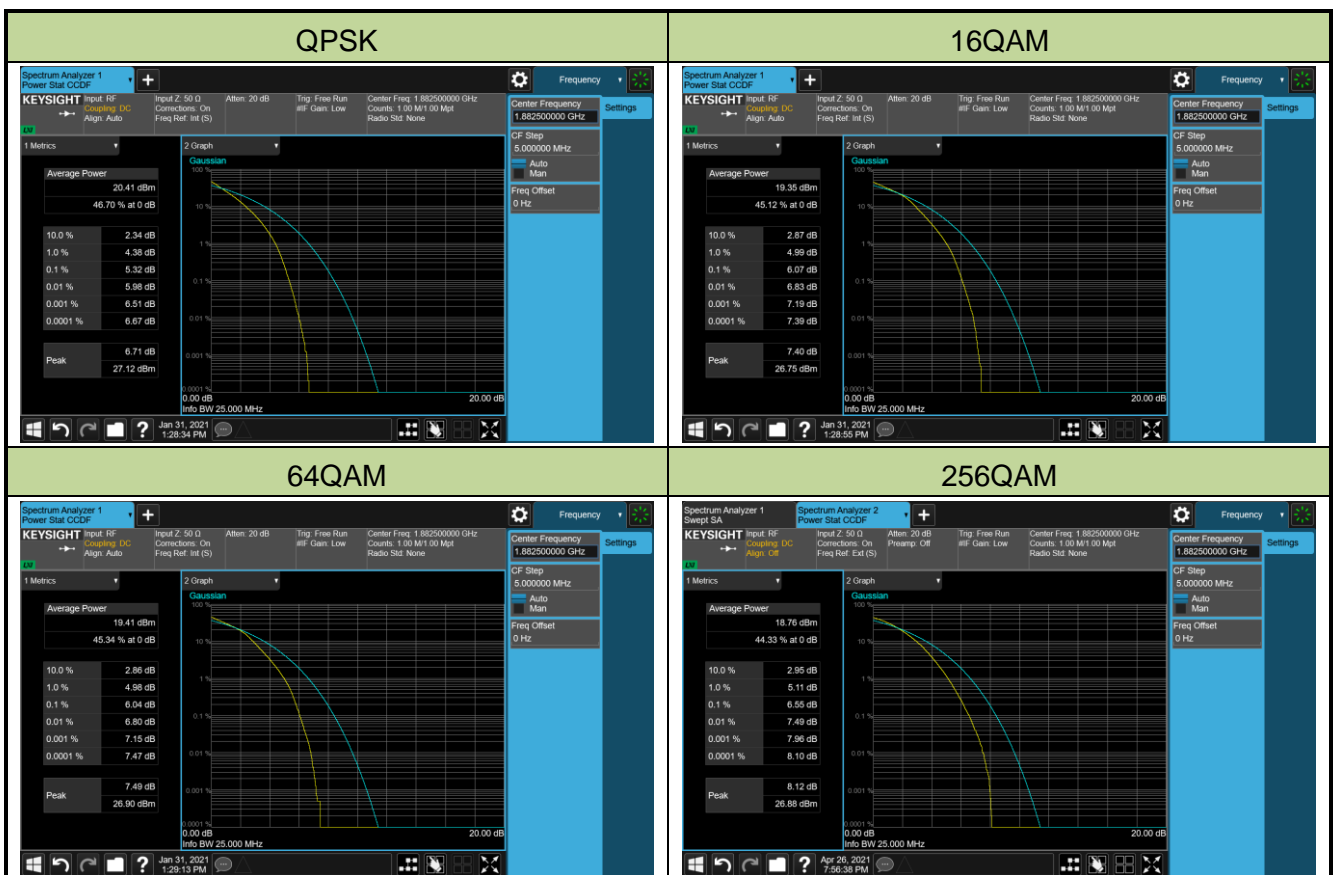


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	Band 4/66		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
132322	1745.0	20	4.91	≤ 13.00	Pass
16QAM					
132322	1745.0	20	5.83	≤ 13.00	Pass
64QAM					
132322	1745.0	20	5.82	≤ 13.00	Pass
256QAM					
132322	1745.0	20	6.64	≤ 13.00	Pass

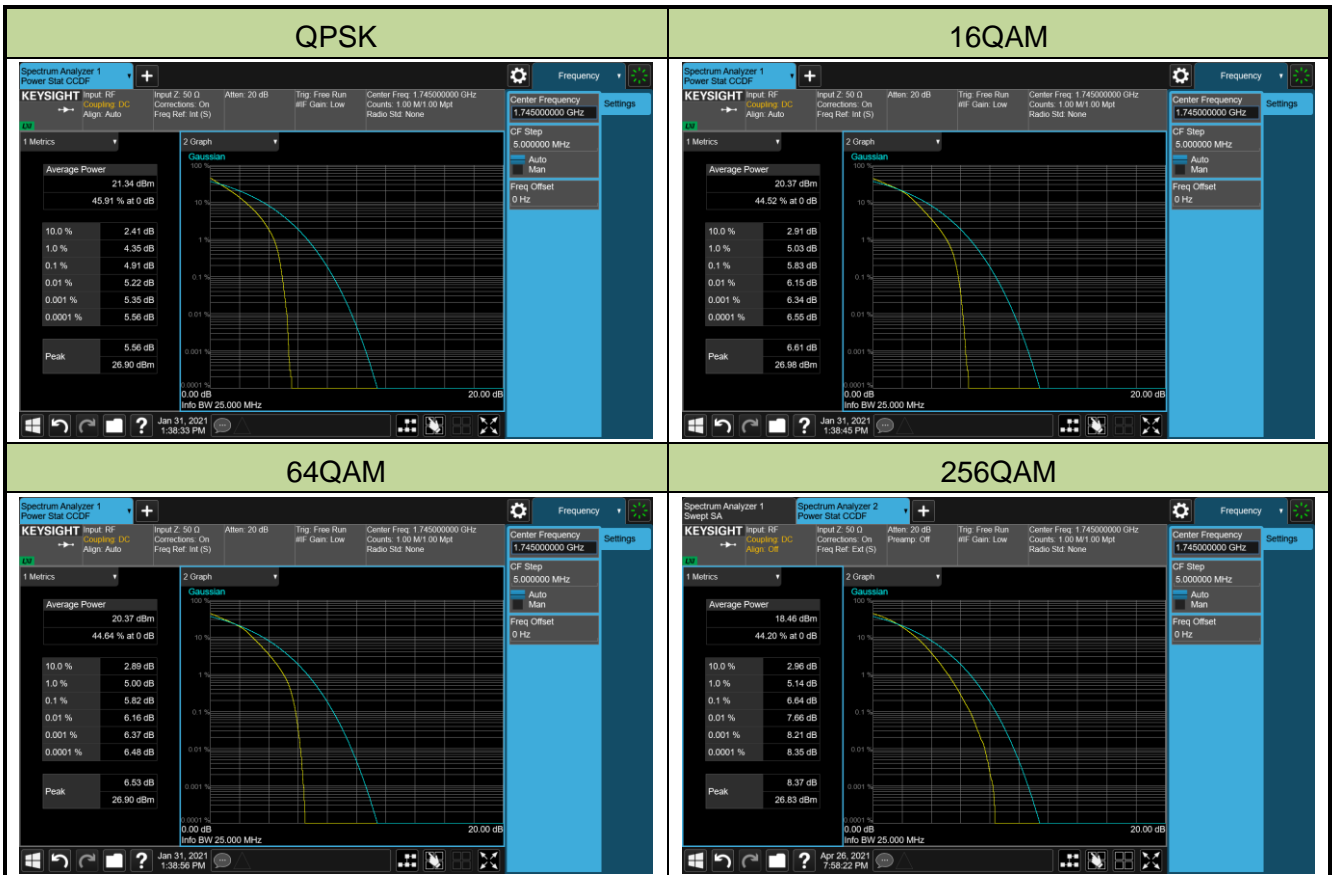


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	Band 5/26		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
20525	836.5	10	5.54	≤ 13.00	Pass
16QAM					
20525	836.5	10	6.10	≤ 13.00	Pass
64QAM					
20525	836.5	10	6.10	≤ 13.00	Pass
256QAM					
20525	836.5	10	6.56	≤ 13.00	Pass

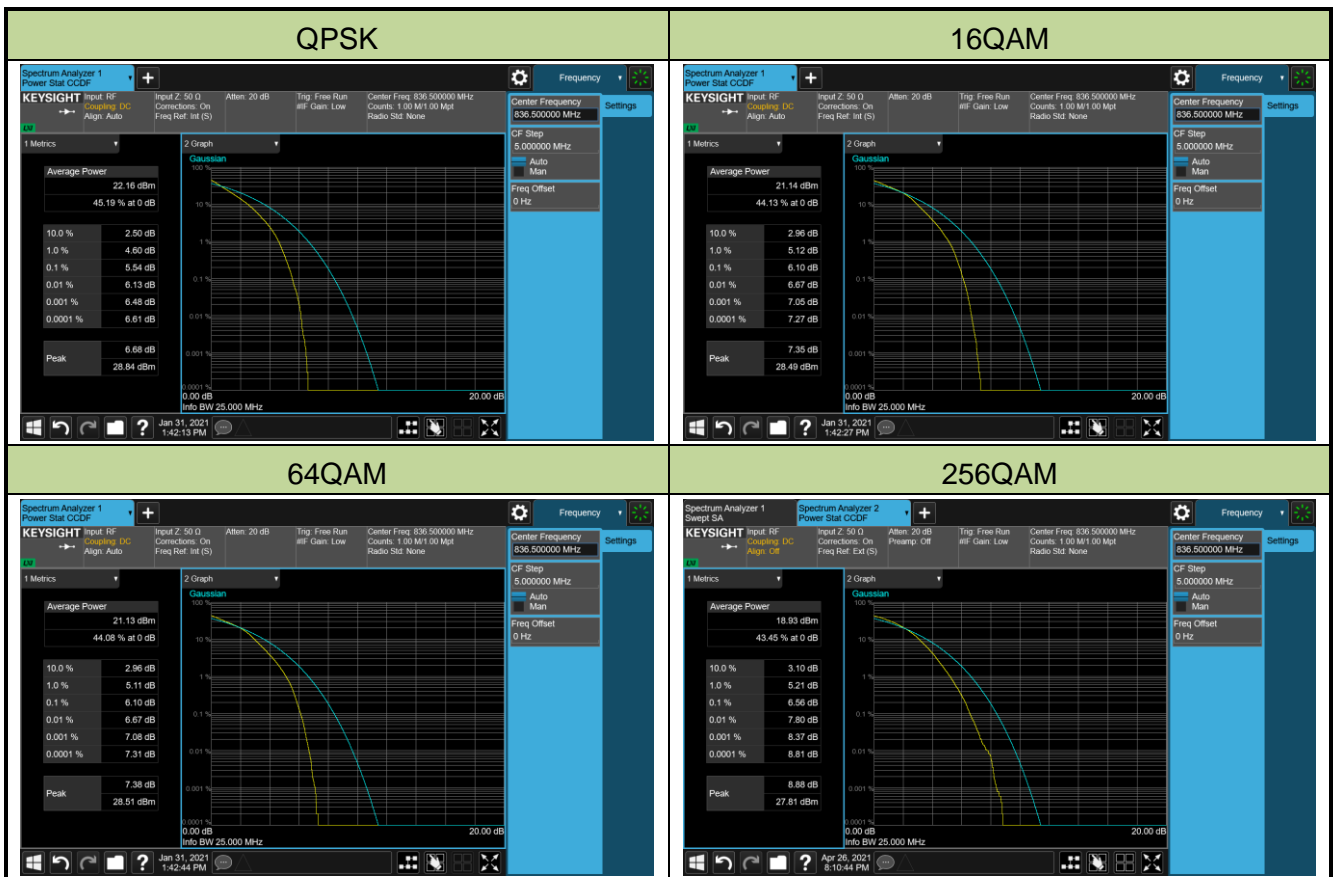


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 7		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
21100	2535.0	20	5.32	≤ 13.00	Pass
16QAM					
21100	2535.0	20	6.03	≤ 13.00	Pass
64QAM					
21100	2535.0	20	6.06	≤ 13.00	Pass
256QAM					
21100	2535.0	20	6.64	≤ 13.00	Pass

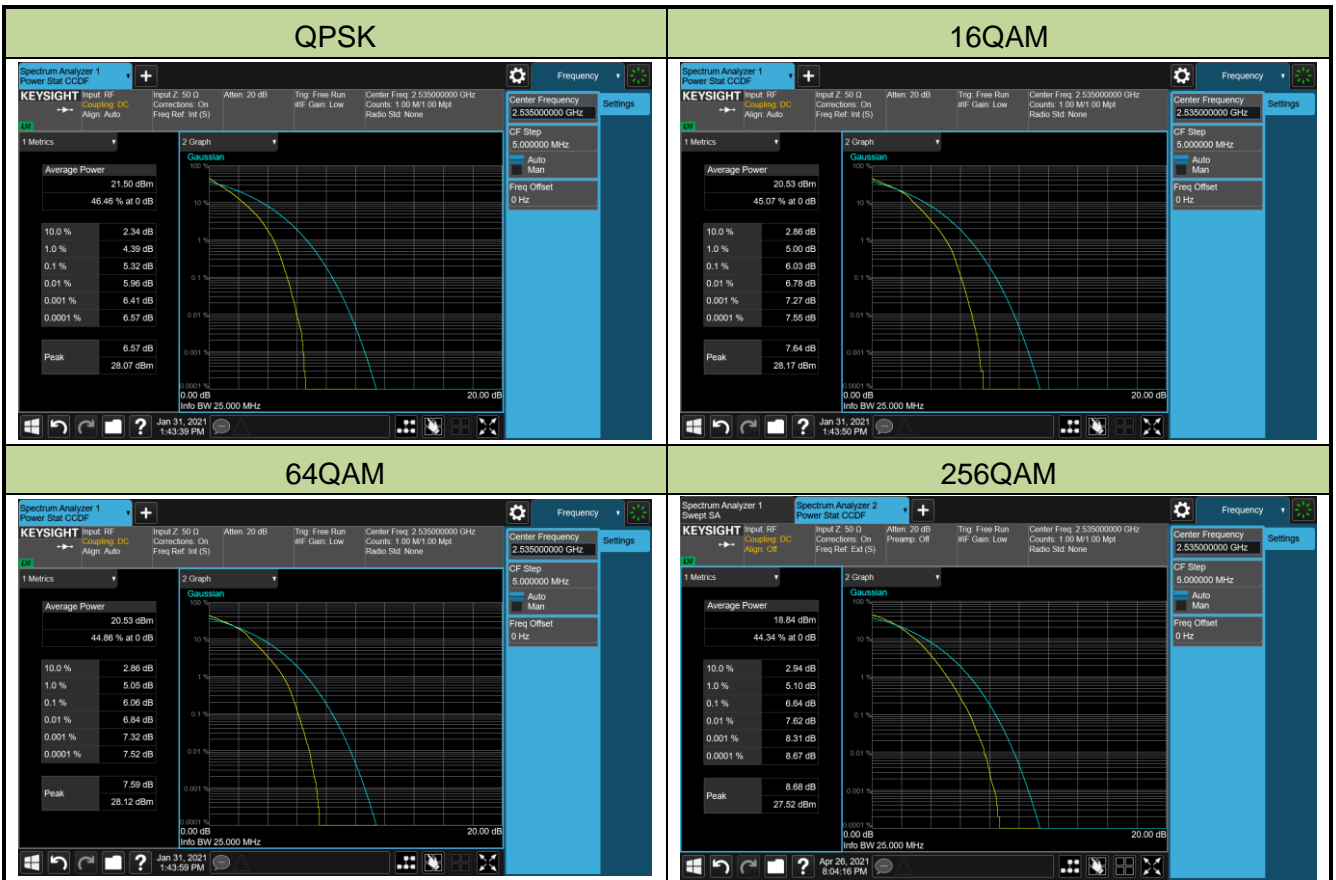


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 12		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
26365	707.5	10	5.11	≤ 13.00	Pass
16QAM					
26365	707.5	10	5.90	≤ 13.00	Pass
64QAM					
26365	707.5	10	5.87	≤ 13.00	Pass
256QAM					
26365	707.5	10	6.84	≤ 13.00	Pass

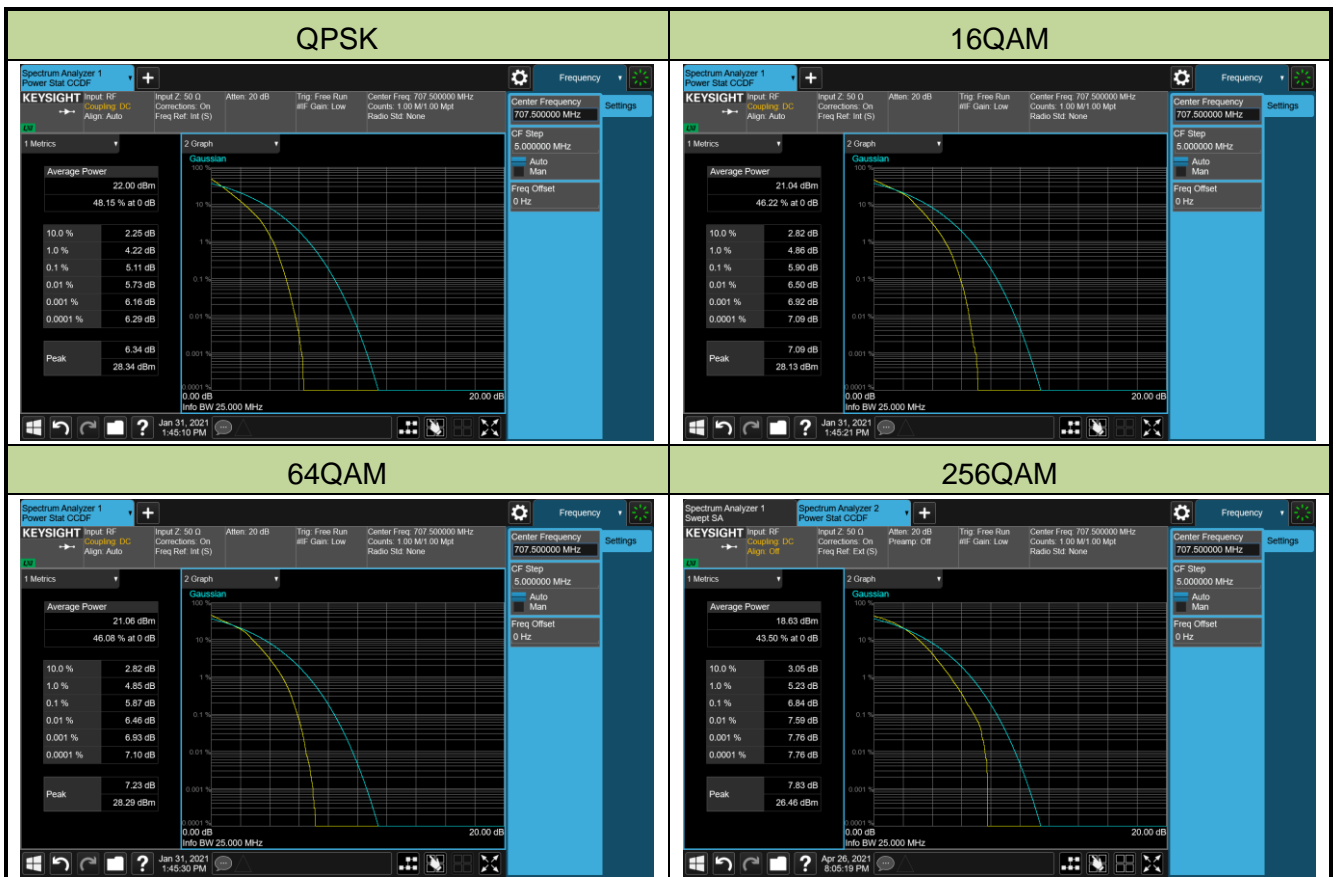


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 13		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
132322	782	10	5.19	≤ 13.00	Pass
16QAM					
132322	782	10	6.04	≤ 13.00	Pass
64QAM					
132322	782	10	6.09	≤ 13.00	Pass
256QAM					
132322	782	10	6.43	≤ 13.00	Pass

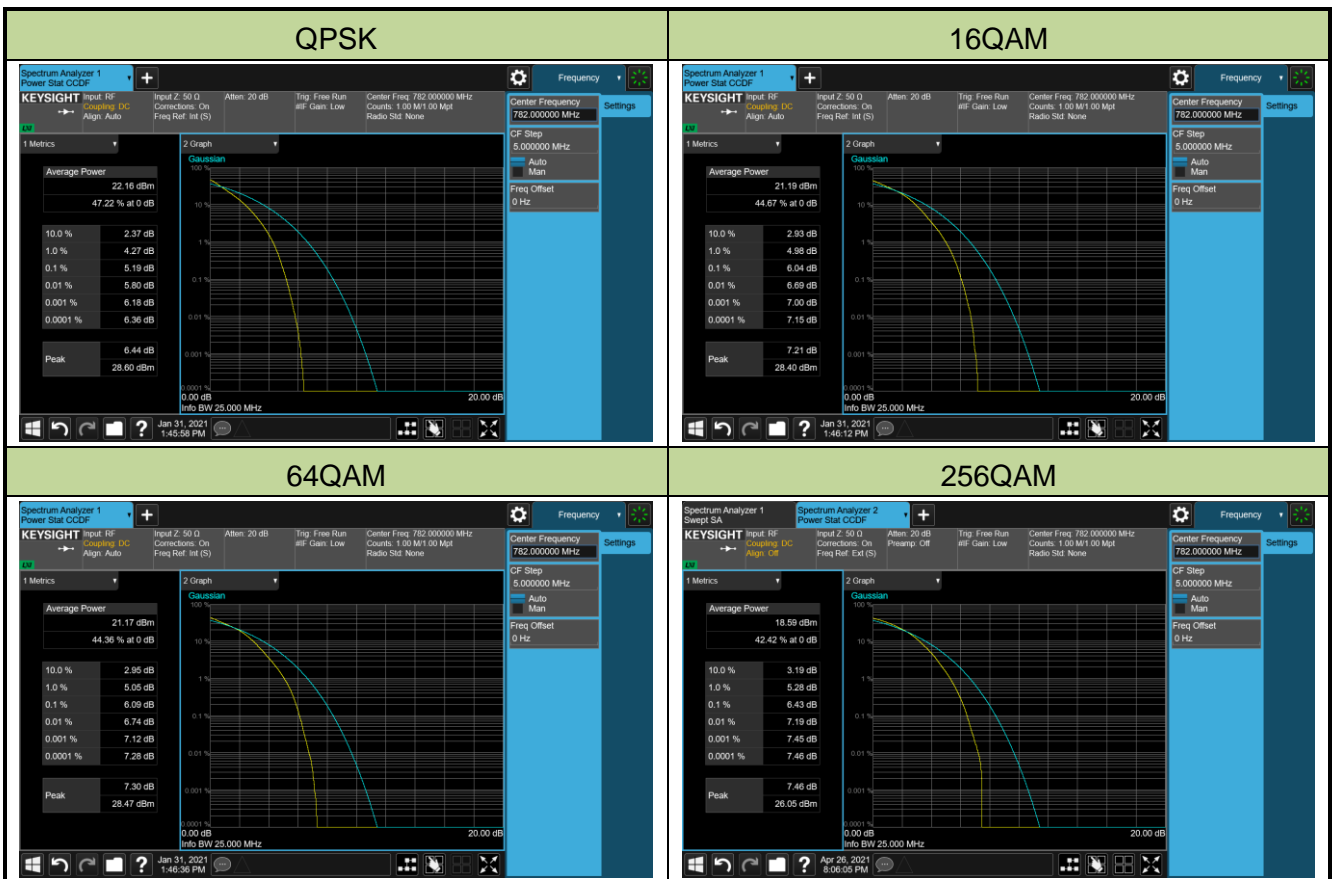


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 17		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
23790	710.0	10	5.19	≤ 13.00	Pass
16QAM					
23790	710.0	10	5.98	≤ 13.00	Pass
64QAM					
23790	710.0	10	6.00	≤ 13.00	Pass
256QAM					
23790	710.0	10	6.64	≤ 13.00	Pass

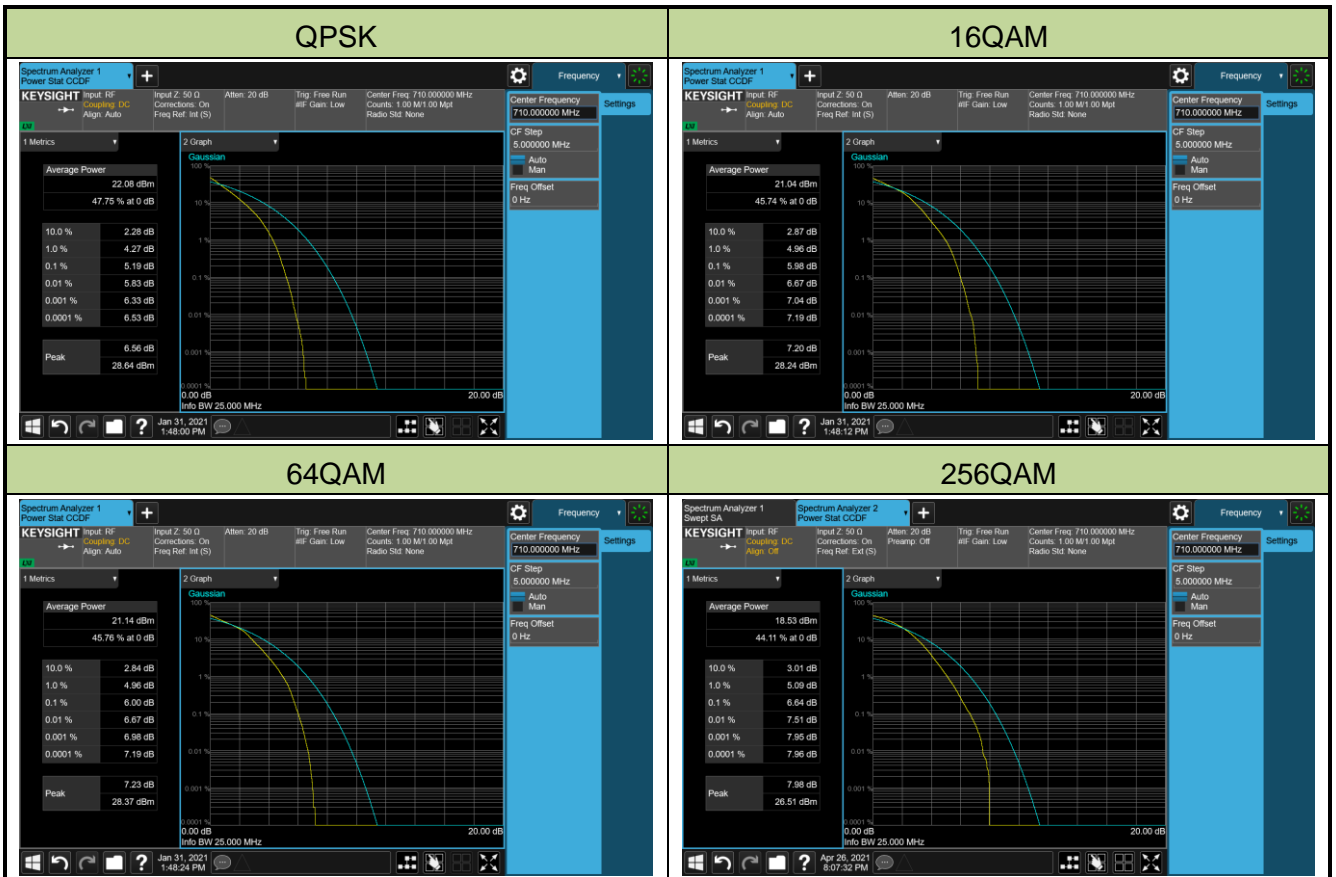


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 38/41_HPUE		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
40620	2593.0	20	7.78	≤ 13.00	Pass
16QAM					
40620	2593.0	20	9.17	≤ 13.00	Pass
64QAM					
40620	2593.0	20	9.08	≤ 13.00	Pass
256QAM					
40620	2593.0	20	8.13	≤ 13.00	Pass

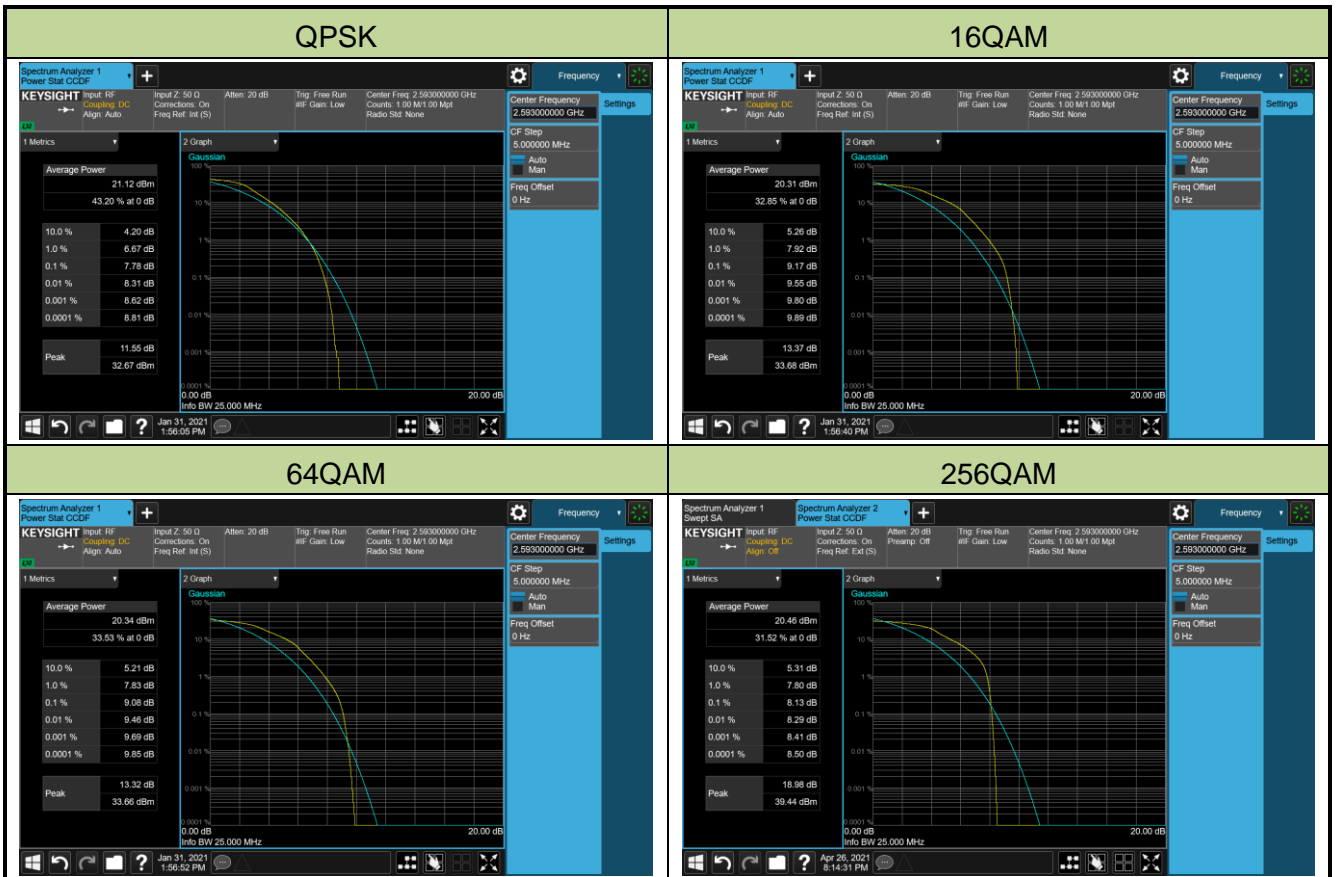

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/26
Test Band	LTE Band 71		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK					
133297	680.5	20	5.12	≤ 13.00	Pass
16QAM					
133297	680.5	20	5.90	≤ 13.00	Pass
64QAM					
133297	680.5	20	5.90	≤ 13.00	Pass
256QAM					
133297	680.5	20	6.83	≤ 13.00	Pass

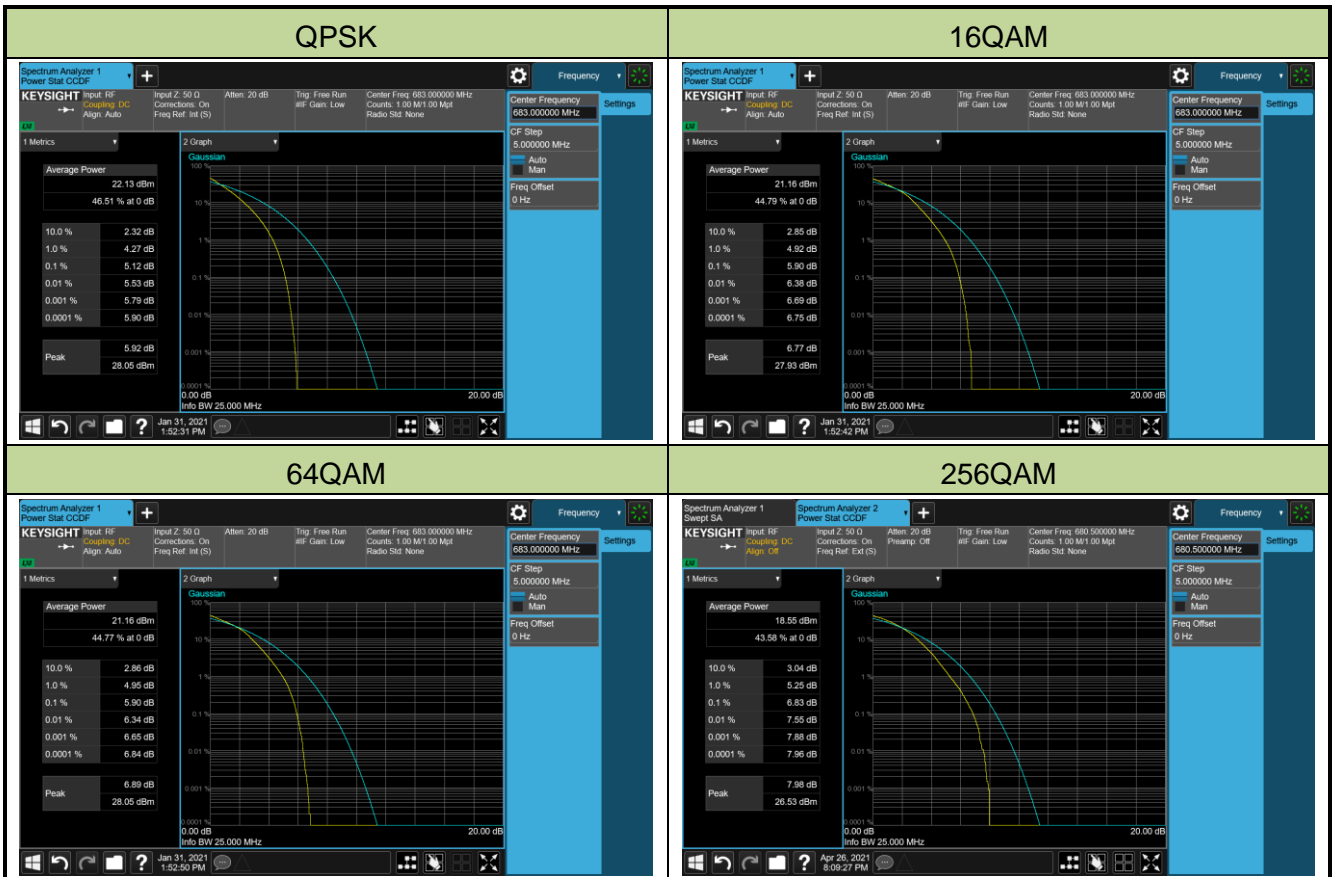

4.7. Conducted Spurious Emission Measurement

4.7.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For Band 7, 38/41 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB.

4.7.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

4.7.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

4.7.4. Test Setup



4.7.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/01
Test Band	LTE Band 2/25_1RB_QPSK		


Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
26047	1850.7	1.4	30 ~ 20000	-51.05	≤ -13.00	Pass
26365	1882.5	1.4	30 ~ 20000	-51.17	≤ -13.00	Pass
26683	1914.3	1.4	30 ~ 20000	-51.35	≤ -13.00	Pass
26055	1851.5	3	30 ~ 20000	-51.79	≤ -13.00	Pass
26365	1882.5	3	30 ~ 20000	-50.47	≤ -13.00	Pass
26675	1913.5	3	30 ~ 20000	-51.69	≤ -13.00	Pass
26065	1852.5	5	30 ~ 20000	-51.47	≤ -13.00	Pass
26365	1882.5	5	30 ~ 20000	-50.74	≤ -13.00	Pass
26665	1912.5	5	30 ~ 20000	-50.53	≤ -13.00	Pass
16390	1855.0	10	30 ~ 20000	-50.66	≤ -13.00	Pass
26365	1882.5	10	30 ~ 20000	-50.95	≤ -13.00	Pass
26640	1910.0	10	30 ~ 20000	-51.82	≤ -13.00	Pass
26115	1857.5	15	30 ~ 20000	-50.81	≤ -13.00	Pass
26365	1882.5	15	30 ~ 20000	-50.32	≤ -13.00	Pass
26615	1907.5	15	30 ~ 20000	-51.51	≤ -13.00	Pass
26140	1860.0	20	30 ~ 20000	-52.91	≤ -13.00	Pass
26365	1882.5	20	30 ~ 20000	-49.55	≤ -13.00	Pass
26590	1905.0	20	30 ~ 20000	-49.93	≤ -13.00	Pass

1.4MHz Channel Bandwidth


Channel 26047 (1850.7MHz)



Channel 26365 (1882.5MHz)

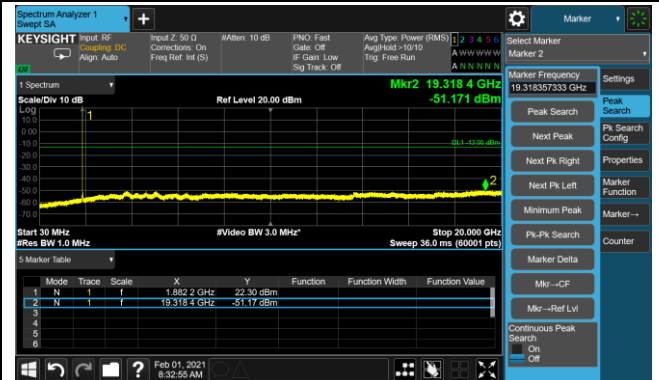

Channel 26683 (1914.3MHz)

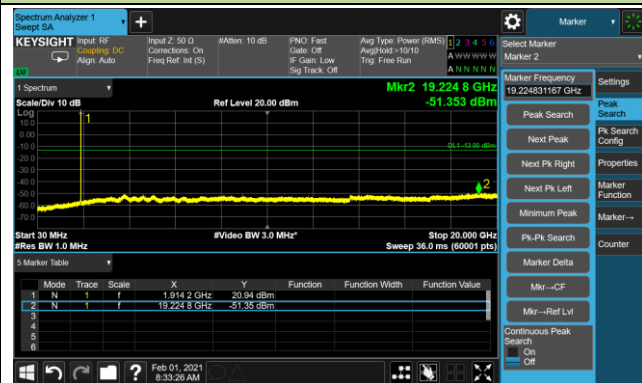

3MHz Channel Bandwidth


Channel 26055 (1851.5MHz)



Channel 26365 (1882.5MHz)



Channel 26675 (1913.5MHz)

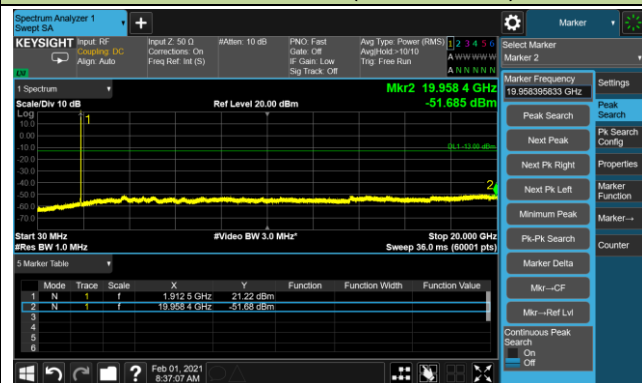


5MHz Channel Bandwidth


Channel 26065 (1852.5MHz)



Channel 26365 (1882.5MHz)

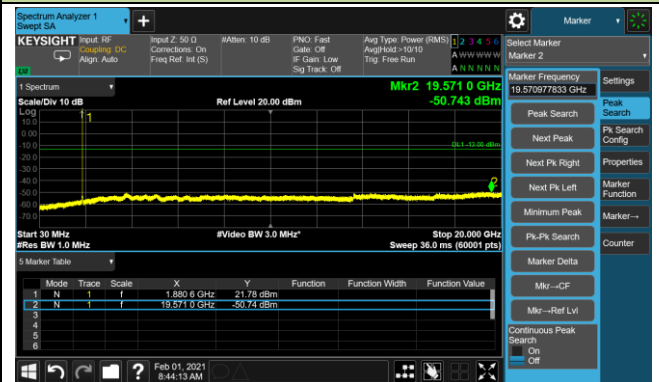

Channel 26665 (1912.5MHz)

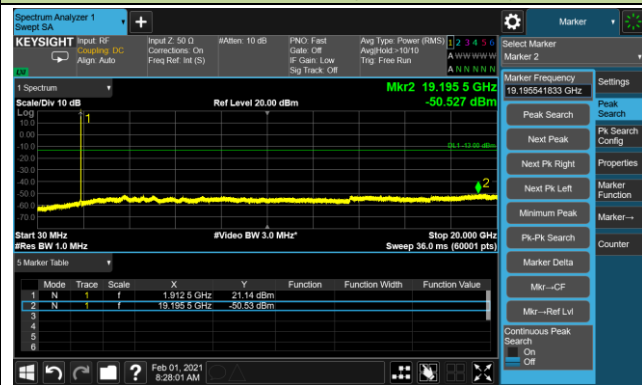


10MHz Channel Bandwidth


Channel 16390 (1855MHz)



Channel 26365 (1882.5MHz)

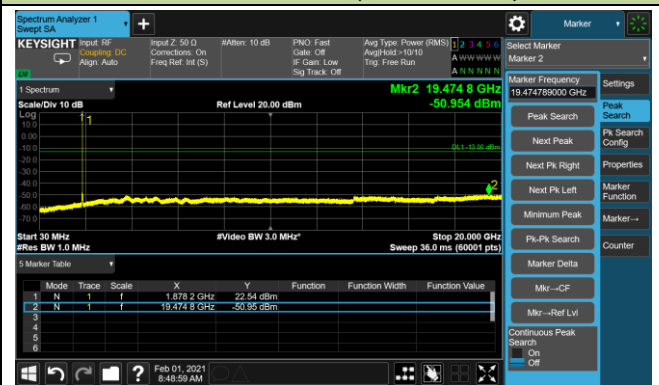


Channel 26640 (1910MHz)

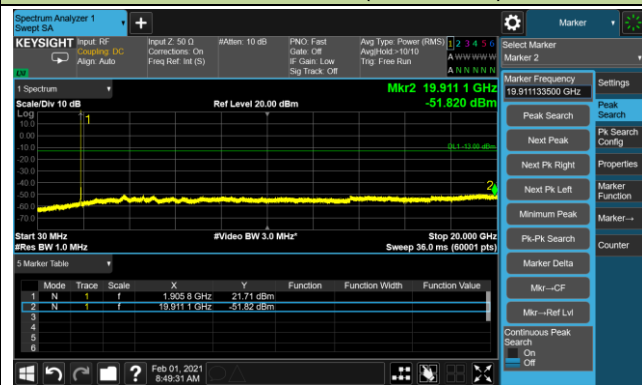

15MHz Channel Bandwidth


Channel 26115 (1857MHz)

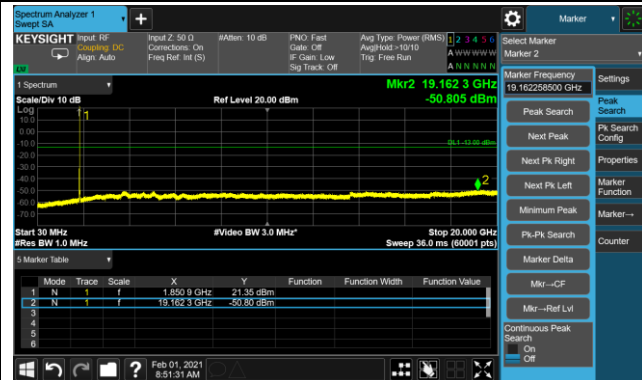

Channel 26365 (1882.5MHz)



Channel 26615 (1907.5MHz)

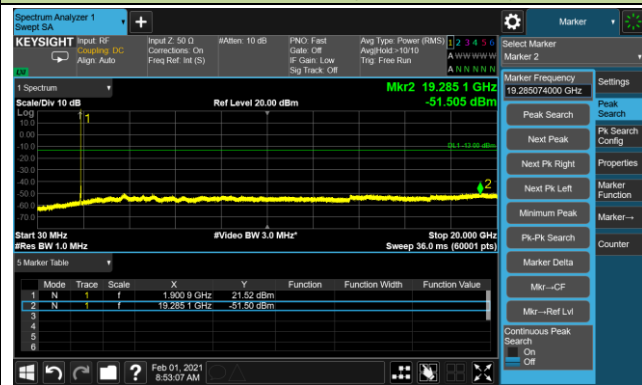

20MHz Channel Bandwidth


Channel 26140 (1860MHz)



Channel 26365 (1882.5MHz)



Channel 26590 (1905MHz)

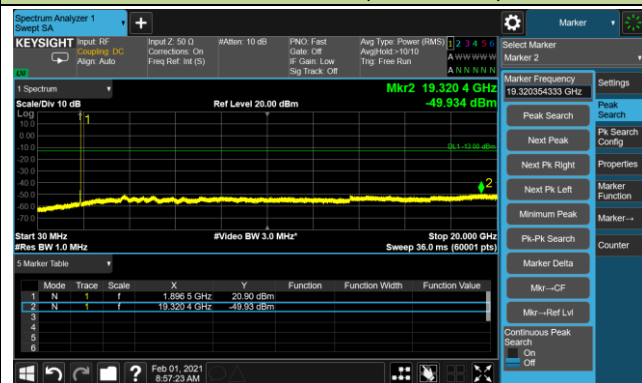


Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/01
Test Band	LTE Band 4/66_1RB_QPSK		


Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
131979	1710.7	1.4	30 ~ 20000	-49.67	≤ -13.00	Pass
132322	1745.0	1.4	30 ~ 20000	-49.02	≤ -13.00	Pass
132665	1779.3	1.4	30 ~ 20000	-50.97	≤ -13.00	Pass
131987	1711.5	3	30 ~ 20000	-50.95	≤ -13.00	Pass
132322	1745.0	3	30 ~ 20000	-51.10	≤ -13.00	Pass
132657	1778.5	3	30 ~ 20000	-47.87	≤ -13.00	Pass
131997	1712.5	5	30 ~ 20000	-49.28	≤ -13.00	Pass
132322	1745.0	5	30 ~ 20000	-49.43	≤ -13.00	Pass
132647	1777.5	5	30 ~ 20000	-50.79	≤ -13.00	Pass
132022	1715.0	10	30 ~ 20000	-50.63	≤ -13.00	Pass
132322	1745.0	10	30 ~ 20000	-47.77	≤ -13.00	Pass
132622	1775.0	10	30 ~ 20000	-48.40	≤ -13.00	Pass
132047	1717.5	15	30 ~ 20000	-51.71	≤ -13.00	Pass
132322	1745.0	15	30 ~ 20000	-50.53	≤ -13.00	Pass
132597	1772.5	15	30 ~ 20000	-48.40	≤ -13.00	Pass
132072	1720.0	20	30 ~ 20000	-50.16	≤ -13.00	Pass
132322	1745.0	20	30 ~ 20000	-51.41	≤ -13.00	Pass
132572	1770.0	20	30 ~ 20000	-49.98	≤ -13.00	Pass

1.4MHz Channel Bandwidth


Channel 131979 (1710.7MHz)

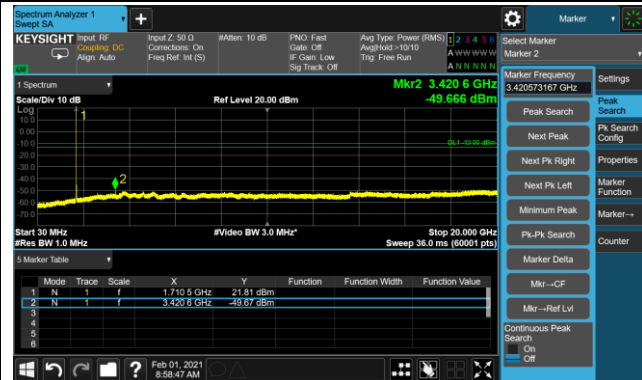

Channel 132322 (1745MHz)

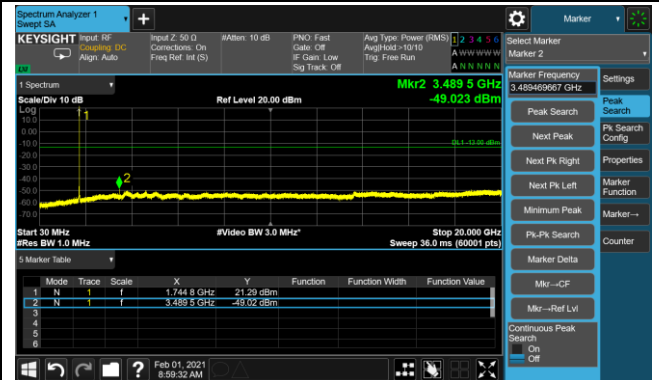


Channel 132665 (1779.3MHz)

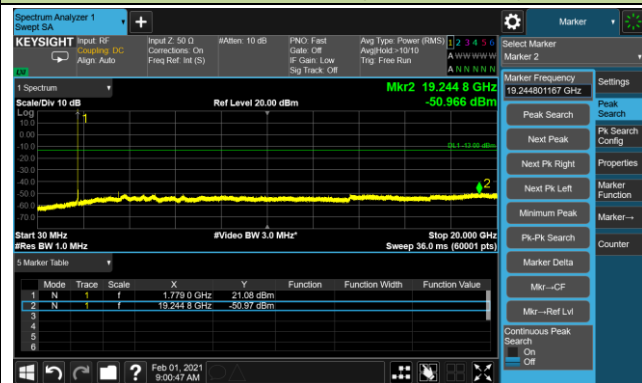


3MHz Channel Bandwidth

Channel 131987 (1711.5MHz)

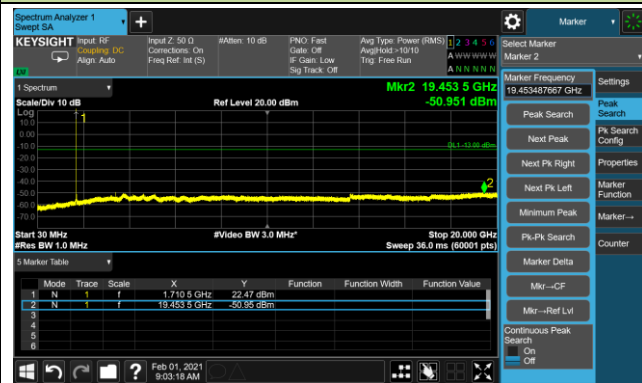

Channel 132322 (1745MHz)

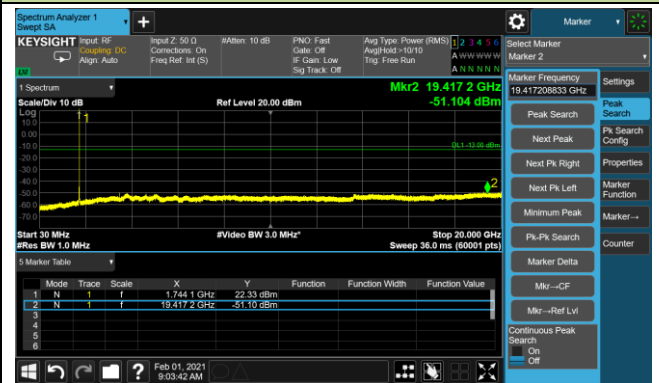

Channel 132657 (1778.5MHz)

