




MEASUREMENT REPORT

FCC PART 90

FCC ID: XMR2021RM502QGL
Application: Quectel Wireless Solutions Company Limited
Application Type: Certification
Product: 5G Sub-6 GHz M.2 Module
Model No.: RM502Q-GL
Brand Name: Quectel
FCC Rule Part(s): Part 90 Subpart S
Test Procedure(s): ANSI C63.26: 2015
Test Date: January 31 ~ April 30, 2021

Reviewed By: 
Sunny Sun

Approved By: 
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2101RSU049-U4	Rev. 01	Initial Report	05-19-2021	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology	7
1.8. EMI Suppression Device(s)/Modifications.....	7
1.9. Maximum Power, Frequency Tolerance, and Emission Designator.....	8
1.10. Configuration of Tested System.....	8
1.11. Test Environment Condition.....	8
2. TEST EQUIPMENT CALIBRATION DATE.....	9
3. MEASUREMENT UNCERTAINTY	11
4. TEST RESULT	12
4.1. Summary.....	12
4.2. Occupied Bandwidth Measurement.....	13
4.2.1. Test Limit	13
4.2.2. Test Procedure	13
4.2.3. Test Setting.....	13
4.2.4. Test Setup	13
4.2.5. Test Result.....	14
4.3. Frequency Stability Measurement	19
4.3.1. Test Limit	19
4.3.2. Test Procedure	19
4.3.3. Test Setting.....	19
4.3.4. Test Setup	20
4.3.5. Test Result.....	21
4.4. Conducted Output Power Measurement.....	22
4.4.1. Test Limit	22
4.4.2. Test Procedure	22
4.4.3. Test Setting.....	22
4.4.4. Test Setup	22
4.4.5. Test Result.....	23
4.5. Band Edge Measurement.....	31

4.5.1.	Test Limit	31
4.5.2.	Test Procedure	31
4.5.3.	Test Setting.....	31
4.5.4.	Test Setup	32
4.5.5.	Test Result.....	33
4.6.	Conducted Spurious Emission Measurement.....	37
4.6.1.	Test Limit	37
4.6.2.	Test Procedure	37
4.6.3.	Test Setting.....	37
4.6.4.	Test Setup	38
4.6.5.	Test Result.....	39
4.7.	Radiated Spurious Emission Measurement.....	43
4.7.1.	Test Limit	43
4.7.2.	Test Procedure	43
4.7.3.	Test Setting.....	43
4.7.4.	Test Setup	43
4.7.5.	Test Result.....	45
5.	CONCLUSION	46
	Appendix A - Test Setup Photograph.....	47
	Appendix B - EUT Photograph.....	48

1. GENERAL INFORMATION

1.1. Applicant

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Company Limited
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,
 Shanghai, China 200233

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: R-20025, G-20034, C-20020, T-20020
<input type="checkbox"/>	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725
	FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	5G Sub-6 GHz M.2 Module
Model No.	RM502Q-GL
Brand Name	Quectel
IMEI	Conducted Measurement: 355878110939501 Radiated Measurement: 865776040001173
Operating Temperature	-30 ~ 70 °C
Power Type	3.135 ~ 4.4Vdc, typical 3.7Vdc
UMTS Specification	
Single Band	Band 2, 4, 5
Modulation	Uplink up to 16QAM, Downlink up to 64QAM
E-UTRA Specification	
Single Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
Intra-Band	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_48C, CA_66C
HPUE Band	Band 41
Modulation	UL & DL up to 256QAM
5G NR Specification	
SA Band	n2, n7, n5, n12, n25, n41, n66, n71, n77
SA UL MIMO Band	n41, n77
EN-DC Band	DC_25A_n41A, DC_26A_n41A, DC_2A_n41A, DC_66A_n41A DC_4A_n41A, DC_2A_n77A, DC_7A_n77A, DC_12A_n77A, DC_41A_n77A, DC_66A_n77A
HPUE Band	n41, n77 (SA & UL MIMO)
SCS for NR cell	FDD Band: 15kHz; TDD Band: 30kHz
Modulation	UL & DL up to 256QAM

1.5. Radio Specification under Test

FDD T _x Frequency Range	Band 26: 814 ~ 824 MHz
FDD R _x Frequency Range	Band 26: 859 ~ 869 MHz

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 3: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	0.25
LTE Band 4	1710 ~ 1755		1.47
LTE Band 5	824 ~ 849		2.68
LTE Band 7	2500 ~ 2570		0.78
LTE Band 12	699 ~ 716		-0.20
LTE Band 13	777 ~ 787		1.54
LTE Band 14	788 ~ 798		2.42
LTE Band 17	704 ~ 716		-0.20
LTE Band 25	1850 ~ 1915		0.25
LTE Band 26	814 ~ 849		2.68
LTE Band 30	2305 ~ 2315		-3.06
LTE Band 38	2570 ~ 2620		0.78
LTE Band 41	2500 ~ 2690		0.78
LTE Band 48	3550 ~ 3700		-4.29
LTE Band 66	1710 ~ 1780		1.47
LTE Band 71	663 ~ 698		1.22

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices


1.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

1.9. Maximum Power, Frequency Tolerance, and Emission Designator

LTE Band 26		QPSK			16QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
1.4	814.7 ~ 823.3	1M08G7D	-	0.1879	1M08W7D	-	0.1578
3	815.5 ~ 822.5	2M73G7D	-	0.1945	2M73W7D	-	0.1718
5	816.5 ~ 821.5	4M47G7D	-	0.1901	4M46W7D	-	0.1603
10	819.0	8M94G7D	0.0204	0.1945	8M94W7D	-	0.1730
15	821.5	13M4G7D	-	0.1866	13M4W7D	-	0.1641
LTE Band 26		64QAM			256QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
1.4	814.7 ~ 823.3	1M08W7D	-	0.1340	1M09W7D	-	0.0676
3	815.5 ~ 822.5	2M72W7D	-	0.1514	2M69W7D	-	0.0743
5	816.5 ~ 821.5	4M46W7D	-	0.1374	4M47W7D	-	0.0716
10	819.0	8M94W7D	-	0.1567	8M93W7D	-	0.0766
15	821.5	13M4W7D	-	0.1476	13M4W7D	-	0.0728

1.10. Configuration of Tested System

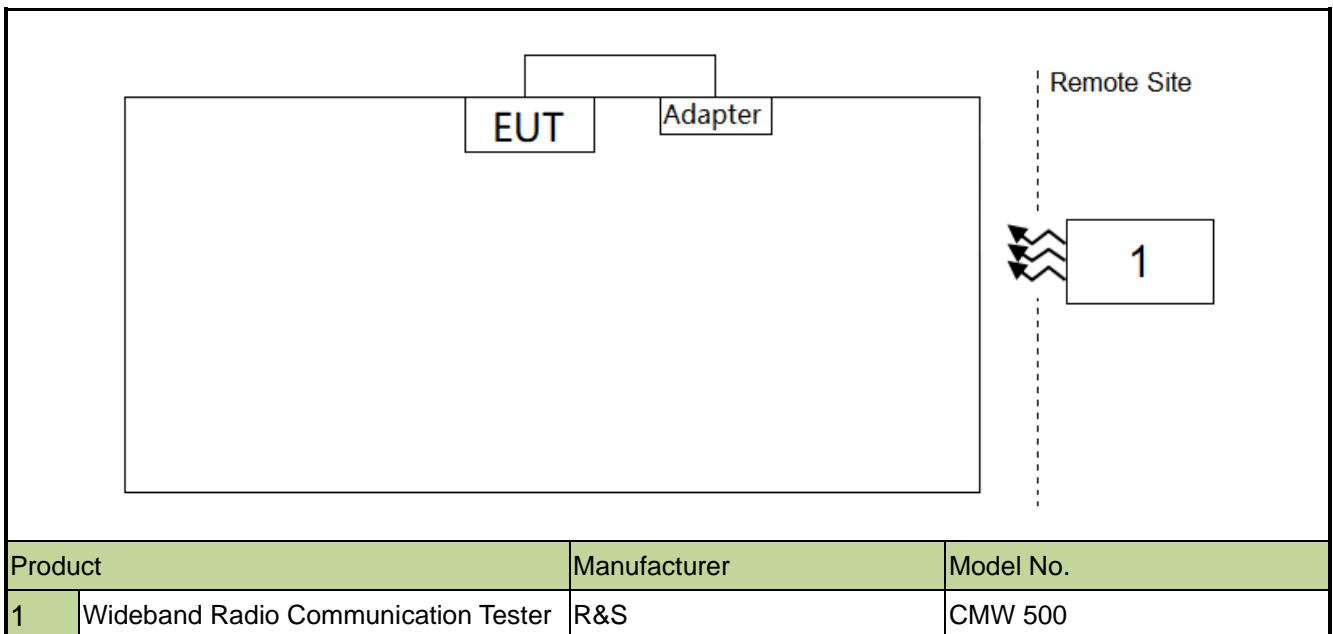

1.11. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

2. TEST EQUIPMENT CALIBRATION DATE

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/03/30
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/02/22
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2021/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/02/22
Broad Band Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2021/12/14
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

Conducted Test Equipment (WZ-SR6, WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/14
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/11/17
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2022/05/05
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2022/03/24
Dual Directional Coupler	Agilent	7778D	MRTSUE06083	1 year	2022/03/24
Attenuator	MVE	6dB	MRTSUE06534	1 year	2021/12/11
Attenuator	MVE	10dB	MRTSUE06543	1 year	2021/12/11
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

3. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

4. TEST RESULT

4.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section 5.2
2.1055, 90.213	Frequency Stability	< 2.5 ppm		Pass	Section 5.3
90.635	Conducted Output Power	< 100W		Pass	Section 5.4
2.1051, 90.691(a)	Band Edge	< 50 + 10log ₁₀ (P _[Watts]) within 37.5kHz of Block Edge		Pass	Section 5.5, 5.6
2.1051, 90.691(a)	Spurious Emission	< 43 + 10log ₁₀ (P _[Watts])			
2.1053, 90.691(a)	Spurious Emission	< 43 + 10log ₁₀ (P _[Watts])	Radiated	Pass	Section 5.7

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

4.2. Occupied Bandwidth Measurement

4.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


4.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

4.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

4.2.4. Test Setup

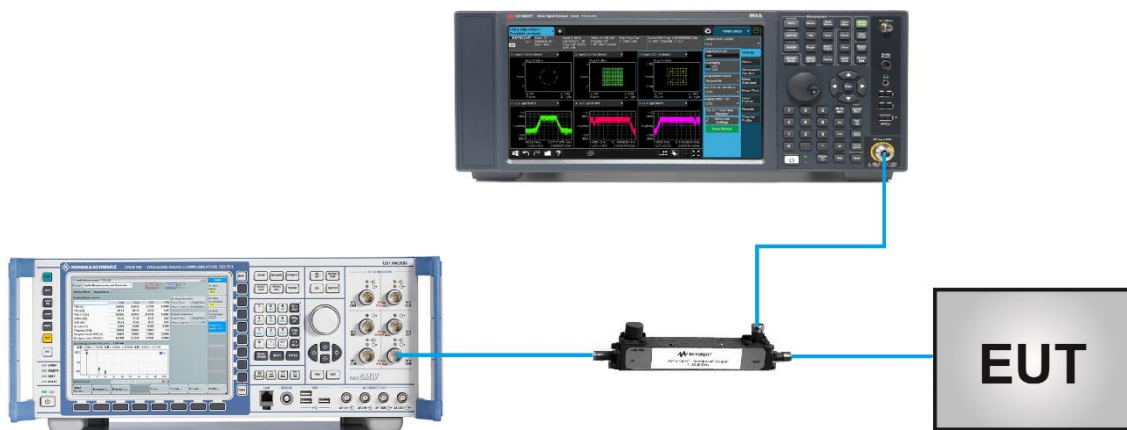


4.2.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31 ~ 2021/04/12
Test Band	LTE Band 26		


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	819.0	1.4	1.08
		3	2.73
		5	4.47
		10	8.94
16QAM	819.0	1.4	1.08
		3	2.73
		5	4.47
		10	8.95
64QAM	819.0	1.4	1.08
		3	2.72
		5	4.46
		10	8.94
256QAM	819.0	1.4	1.09
		3	2.69
		5	4.47
		10	8.93
QPSK	821.5	15	13.38
16QAM			13.40
64QAM			13.41
256QAM			13.40

99% Bandwidth - QPSK


1.4MHz Channel Bandwidth

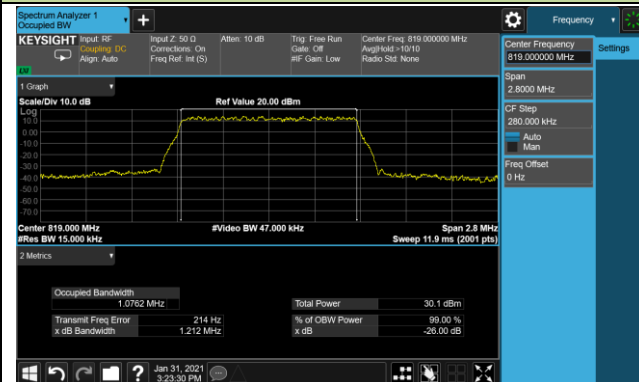


3MHz Channel Bandwidth

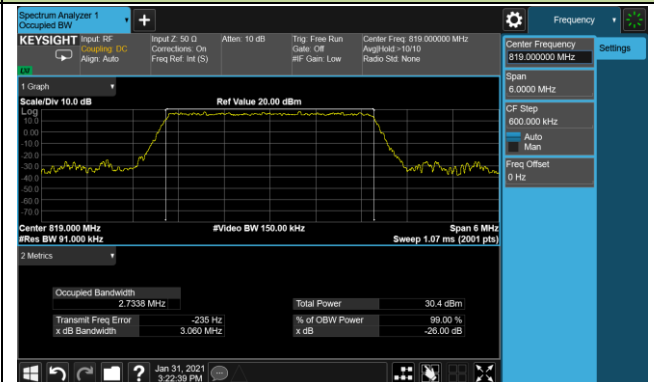


5MHz Channel Bandwidth

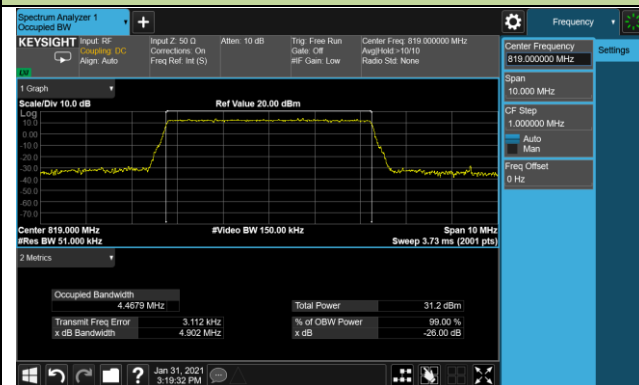

10MHz Channel Bandwidth

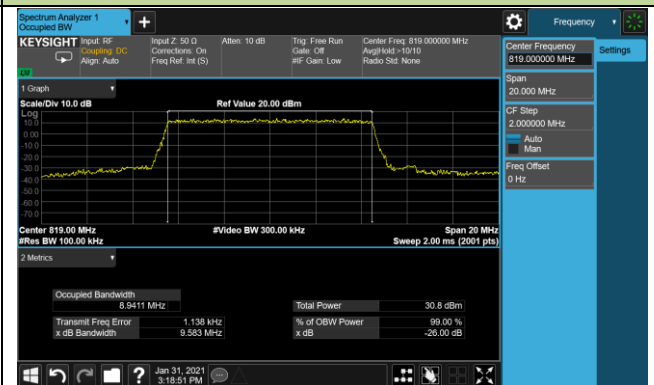


15MHz Channel Bandwidth

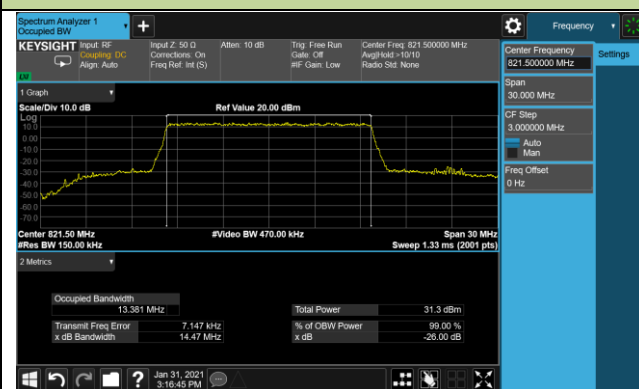


99% Bandwidth - 16QAM


1.4MHz Channel Bandwidth

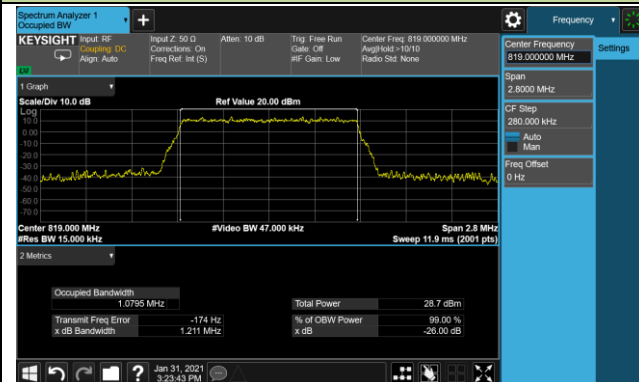


3MHz Channel Bandwidth

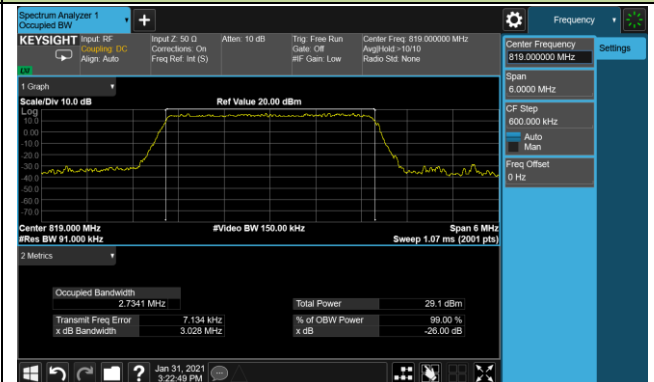


5MHz Channel Bandwidth

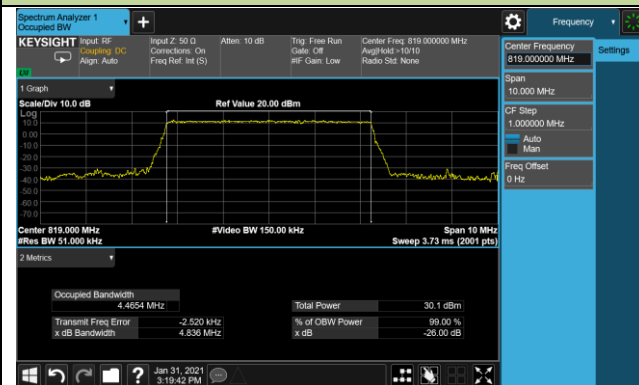

10MHz Channel Bandwidth

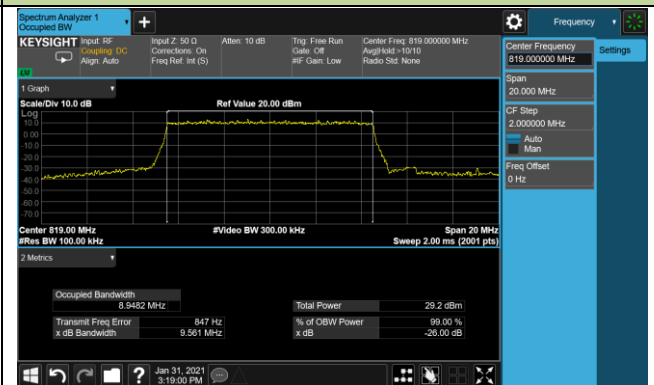


15MHz Channel Bandwidth

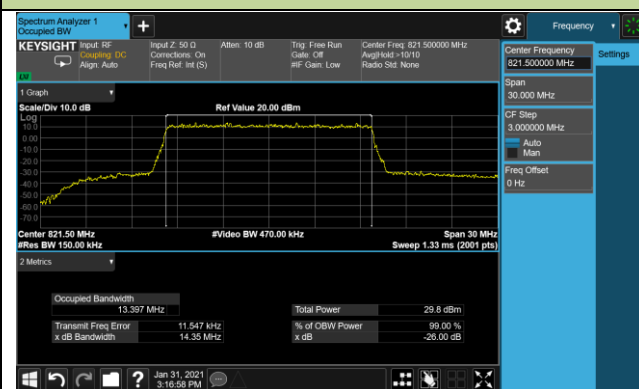


99% Bandwidth - 64QAM


1.4MHz Channel Bandwidth

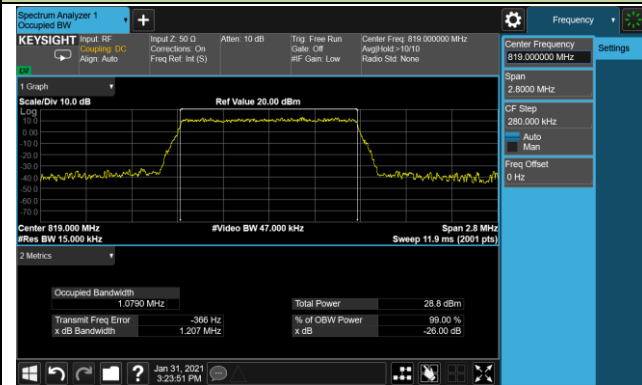


3MHz Channel Bandwidth

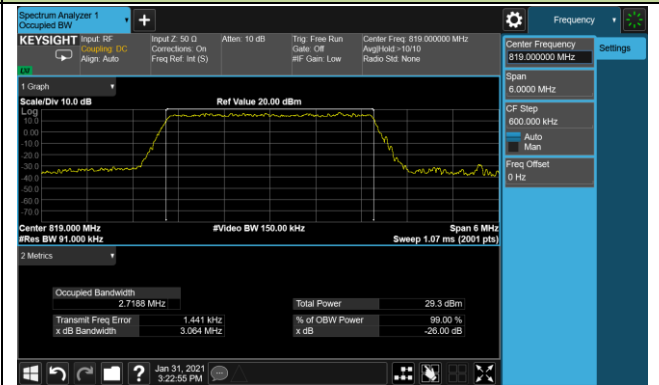


5MHz Channel Bandwidth

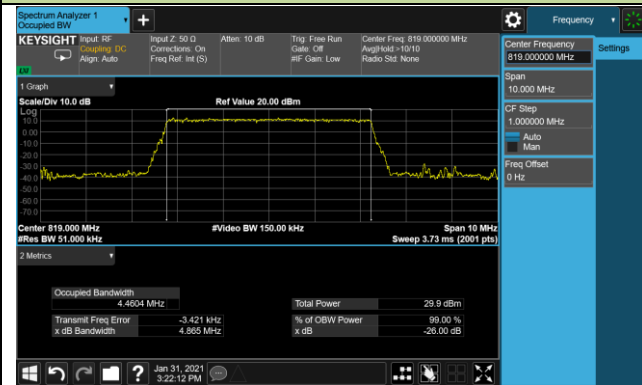


10MHz Channel Bandwidth

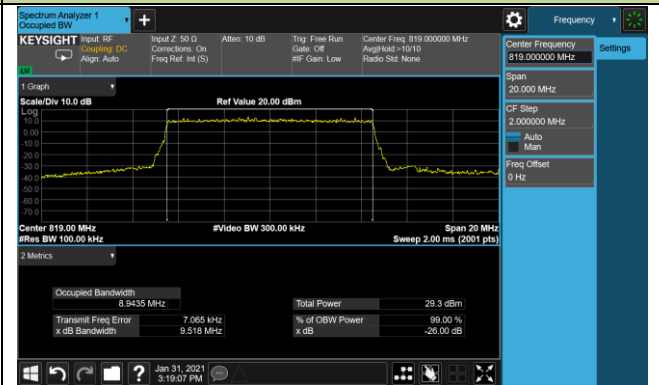

15MHz Channel Bandwidth

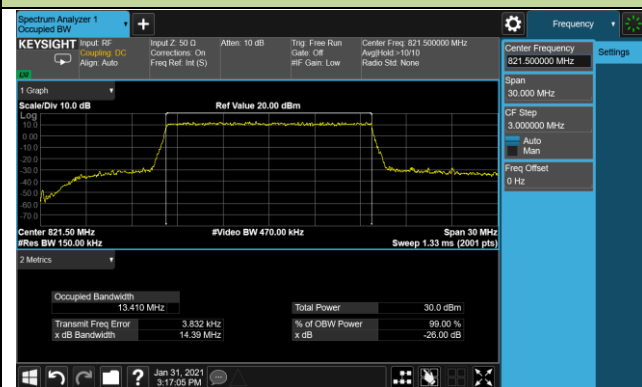

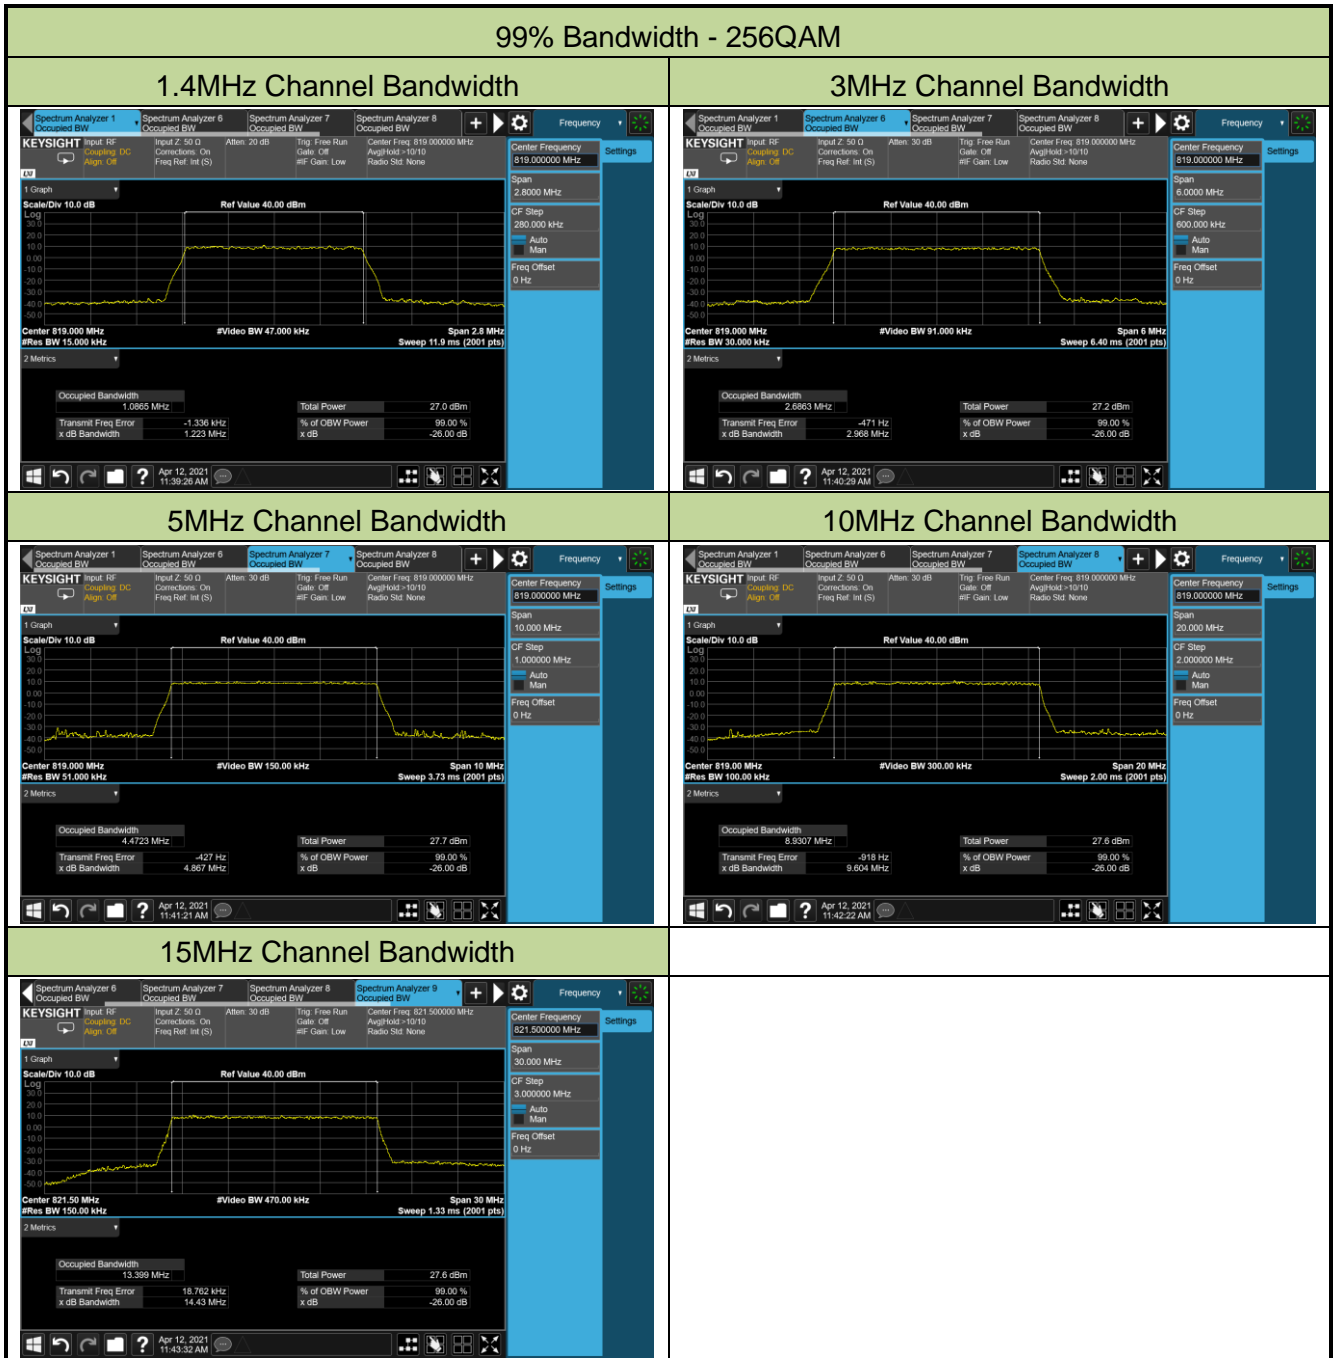

4.3. Frequency Stability Measurement

4.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

4.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

4.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

4.3.4. Test Setup

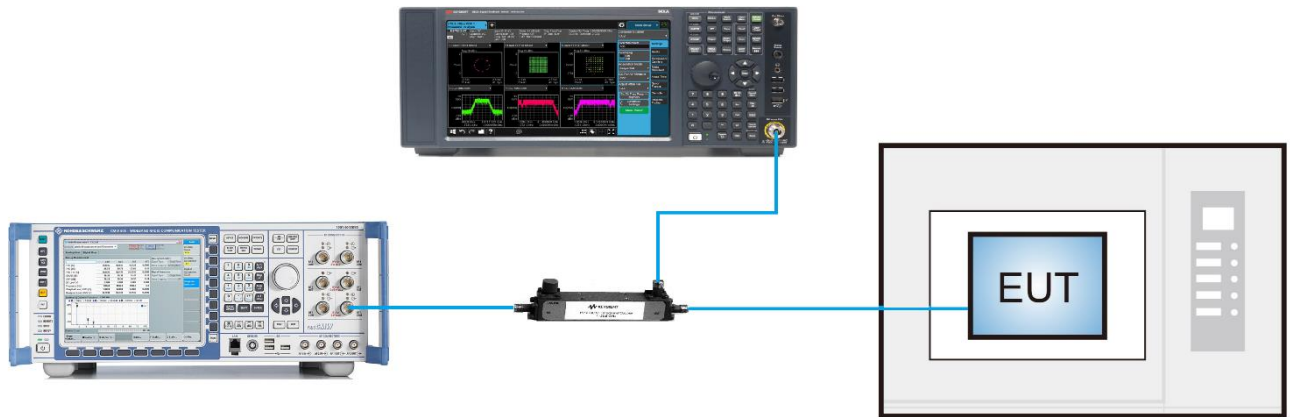

4.3.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-TR1
Test Engineer	Candy Luo	Test Date	2021/01/31
Test Band	LTE Band 26_QPSK		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0079
	- 20	-0.0073
	- 10	-0.0091
	0	-0.0008
	+ 10	0.0149
	+ 20 (Ref)	-0.0010
	+ 30	0.0014
	+ 40	-0.0103
	+ 50	0.0204
4.4	+ 20	-0.0147
3.135	+ 20	0.0093

4.4. Conducted Output Power Measurement

4.4.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).


4.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

4.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

4.4.4. Test Setup

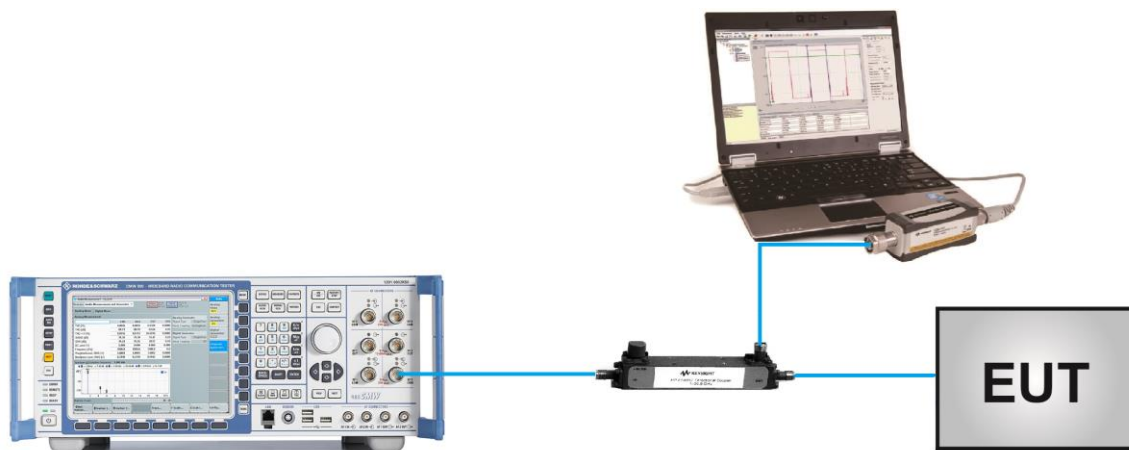

4.4.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/01/31
Test Band	LTE Band 26		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK							
26697	814.7	1.4	1	0	22.74	0.1879	< 100
26740	819.0				22.60	0.1820	< 100
26783	823.3				22.46	0.1762	< 100
26697	814.7	1.4	1	2	22.67	0.1849	< 100
26740	819.0				22.67	0.1849	< 100
26783	823.3				22.60	0.1820	< 100
26697	814.7	1.4	1	6	22.59	0.1816	< 100
26740	819.0				22.58	0.1811	< 100
26783	823.3				22.57	0.1807	< 100
26697	814.7	1.4	6	0	21.62	0.1452	< 100
26740	819.0				21.63	0.1455	< 100
26783	823.3				21.50	0.1413	< 100
26705	815.5	3	1	0	22.89	0.1945	< 100
26740	819.0				22.64	0.1837	< 100
26775	822.5				22.63	0.1832	< 100
26705	815.5	3	1	7	22.72	0.1871	< 100
26740	819.0				22.80	0.1905	< 100
26775	822.5				22.70	0.1862	< 100
26705	815.5	3	1	14	22.64	0.1837	< 100
26740	819.0				22.57	0.1807	< 100
26775	822.5				22.55	0.1799	< 100
26705	815.5	3	15	0	21.70	0.1479	< 100
26740	819.0				21.71	0.1483	< 100
26775	822.5				21.72	0.1486	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK							
26715	816.5	5	1	0	22.79	0.1901	< 100
26740	819.0				22.76	0.1888	< 100
26765	821.5				22.64	0.1837	< 100
26715	816.5	5	1	12	22.70	0.1862	< 100
26740	819.0				22.74	0.1879	< 100
26765	821.5				22.69	0.1858	< 100
26715	816.5	5	1	24	22.78	0.1897	< 100
26740	819.0				22.64	0.1837	< 100
26765	821.5				22.50	0.1778	< 100
26715	816.5	5	25	0	21.68	0.1472	< 100
26740	819.0				21.64	0.1459	< 100
26765	821.5				21.65	0.1462	< 100
26740	819.0	10	1	0	22.89	0.1945	< 100
			1	24	22.67	0.1849	< 100
			1	49	22.60	0.1820	< 100
			50	0	21.76	0.1500	< 100
26765	821.5	15	1	0	22.71	0.1866	< 100
			1	36	22.34	0.1714	< 100
			1	74	22.40	0.1738	< 100
			75	0	21.63	0.1455	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM							
26697	814.7	1.4	1	0	21.92	0.1556	< 100
26740	819.0				21.95	0.1567	< 100
26783	823.3				21.78	0.1507	< 100
26697	814.7	1.4	1	2	21.98	0.1578	< 100
26740	819.0				21.80	0.1514	< 100
26783	823.3				21.84	0.1528	< 100
26697	814.7	1.4	1	6	21.91	0.1552	< 100
26740	819.0				21.82	0.1521	< 100
26783	823.3				21.64	0.1459	< 100
26697	814.7	1.4	6	0	20.76	0.1191	< 100
26740	819.0				20.64	0.1159	< 100
26783	823.3				20.54	0.1132	< 100
26705	815.5	3	1	0	22.01	0.1589	< 100
26740	819.0				21.97	0.1574	< 100
26775	822.5				22.33	0.1710	< 100
26705	815.5	3	1	7	22.11	0.1626	< 100
26740	819.0				21.95	0.1567	< 100
26775	822.5				22.21	0.1663	< 100
26705	815.5	3	1	14	21.97	0.1574	< 100
26740	819.0				22.35	0.1718	< 100
26775	822.5				21.85	0.1531	< 100
26705	815.5	3	15	0	20.82	0.1208	< 100
26740	819.0				20.80	0.1202	< 100
26775	822.5				20.61	0.1151	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM							
26715	816.5	5	1	0	22.05	0.1603	< 100
26740	819.0				21.97	0.1574	< 100
26765	821.5				21.73	0.1489	< 100
26715	816.5	5	1	12	21.95	0.1567	< 100
26740	819.0				21.97	0.1574	< 100
26765	821.5				21.77	0.1503	< 100
26715	816.5	5	1	24	21.98	0.1578	< 100
26740	819.0				21.91	0.1552	< 100
26765	821.5				21.72	0.1486	< 100
26715	816.5	5	25	0	20.79	0.1199	< 100
26740	819.0				20.63	0.1156	< 100
26765	821.5				20.72	0.1180	< 100
26740	819.0	10	1	0	22.38	0.1730	< 100
			1	24	22.09	0.1618	< 100
			1	49	22.05	0.1603	< 100
			50	0	20.75	0.1189	< 100
26765	821.5	15	1	0	22.10	0.1622	< 100
			1	36	21.97	0.1574	< 100
			1	74	22.15	0.1641	< 100
			75	0	20.73	0.1183	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM							
26697	814.7	1.4	1	0	21.26	21.79	< 100
26740	819.0				20.57	21.10	< 100
26783	823.3				21.14	21.67	< 100
26697	814.7	1.4	1	2	21.23	21.76	< 100
26740	819.0				20.94	21.47	< 100
26783	823.3				21.10	21.63	< 100
26697	814.7	1.4	1	6	21.27	21.80	< 100
26740	819.0				20.93	21.46	< 100
26783	823.3				21.11	21.64	< 100
26697	814.7	1.4	6	0	20.46	20.99	< 100
26740	819.0				20.12	20.65	< 100
26783	823.3				20.21	20.74	< 100
26705	815.5	3	1	0	21.48	22.01	< 100
26740	819.0				20.79	21.32	< 100
26775	822.5				21.75	22.28	< 100
26705	815.5	3	1	7	21.13	21.66	< 100
26740	819.0				20.75	21.28	< 100
26775	822.5				21.80	22.33	< 100
26705	815.5	3	1	14	21.17	21.70	< 100
26740	819.0				20.74	21.27	< 100
26775	822.5				21.80	22.33	< 100
26705	815.5	3	15	0	20.41	20.94	< 100
26740	819.0				20.24	20.77	< 100
26775	822.5				20.21	20.74	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM							
26715	816.5	5	1	0	21.10	21.63	< 100
26740	819.0				21.03	21.56	< 100
26765	821.5				21.33	21.86	< 100
26715	816.5	5	1	12	21.09	21.62	< 100
26740	819.0				21.04	21.57	< 100
26765	821.5				21.36	21.89	< 100
26715	816.5	5	1	24	20.98	21.51	< 100
26740	819.0				21.32	21.85	< 100
26765	821.5				21.37	21.90	< 100
26715	816.5	5	25	0	20.13	20.66	< 100
26740	819.0				20.13	20.66	< 100
26765	821.5				21.38	21.91	< 100
26740	819.0	10	1	0	21.95	22.48	< 100
			1	24	21.90	22.43	< 100
			1	49	21.83	22.36	< 100
			50	0	20.26	20.79	< 100
26765	821.5	15	1	0	21.41	21.94	< 100
			1	36	21.68	22.21	< 100
			1	74	21.69	22.22	< 100
			75	0	20.23	20.76	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
256QAM							
26697	814.7	1.4	1	0	18.12	18.65	< 100
26740	819.0				17.99	18.52	< 100
26783	823.3				17.90	18.43	< 100
26697	814.7	1.4	1	2	18.12	18.65	< 100
26740	819.0				18.00	18.53	< 100
26783	823.3				18.01	18.54	< 100
26697	814.7	1.4	1	6	18.07	18.60	< 100
26740	819.0				18.22	18.75	< 100
26783	823.3				17.99	18.52	< 100
26697	814.7	1.4	6	0	18.30	18.83	< 100
26740	819.0				18.06	18.59	< 100
26783	823.3				18.17	18.70	< 100
26705	815.5	3	1	0	18.13	18.66	< 100
26740	819.0				18.28	18.81	< 100
26775	822.5				18.60	19.13	< 100
26705	815.5	3	1	7	18.16	18.69	< 100
26740	819.0				18.31	18.84	< 100
26775	822.5				18.71	19.24	< 100
26705	815.5	3	1	14	18.00	18.53	< 100
26740	819.0				18.19	18.72	< 100
26775	822.5				18.57	19.10	< 100
26705	815.5	3	15	0	18.38	18.91	< 100
26740	819.0				18.34	18.87	< 100
26775	822.5				18.21	18.74	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
256QAM							
26715	816.5	5	1	0	18.55	19.08	< 100
26740	819.0				18.51	19.04	< 100
26765	821.5				18.26	18.79	< 100
26715	816.5	5	1	12	18.48	19.01	< 100
26740	819.0				18.47	19.00	< 100
26765	821.5				18.41	18.94	< 100
26715	816.5	5	1	24	18.33	18.86	< 100
26740	819.0				18.36	18.89	< 100
26765	821.5				18.36	18.89	< 100
26715	816.5	5	25	0	18.32	18.85	< 100
26740	819.0				18.26	18.79	< 100
26765	821.5				18.23	18.76	< 100
26740	819.0	10	1	0	18.84	19.37	< 100
			1	24	18.61	19.14	< 100
			1	49	18.84	19.37	< 100
			50	0	18.29	18.82	< 100
26765	821.5	15	1	0	18.46	18.99	< 100
			1	36	18.55	19.08	< 100
			1	74	18.62	19.15	< 100
			75	0	18.25	18.78	< 100

4.5. Band Edge Measurement

4.5.1. Test Limit

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}(f/6.1)$ decibels or $50 + 10 \text{ Log}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

4.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7


4.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $\text{RBW} \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $\text{VBW} \geq 3 * \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to “free run.”
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full

power

- Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

4.5.4.Test Setup

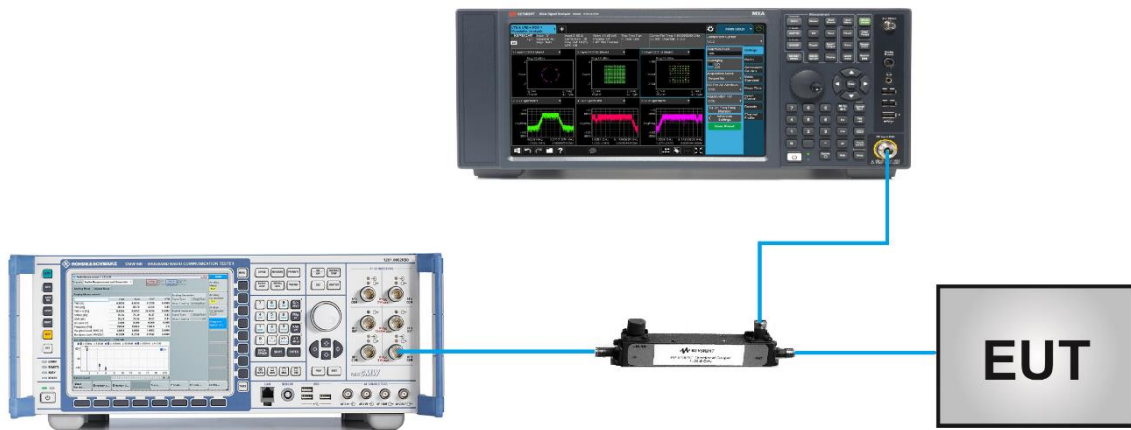


4.5.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/02
Test Band	LTE Band 26_QPSK		

1.4MHz Channel Bandwidth - 1RB

Lower Band Edge

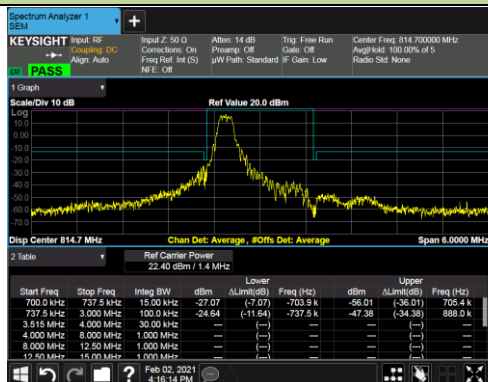


Upper Band Edge




3MHz Channel Bandwidth - 1RB

Lower Band Edge

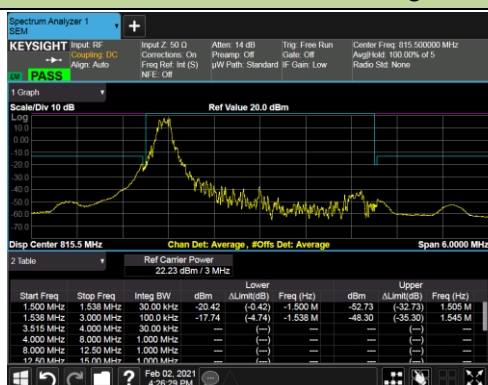

Upper Band Edge

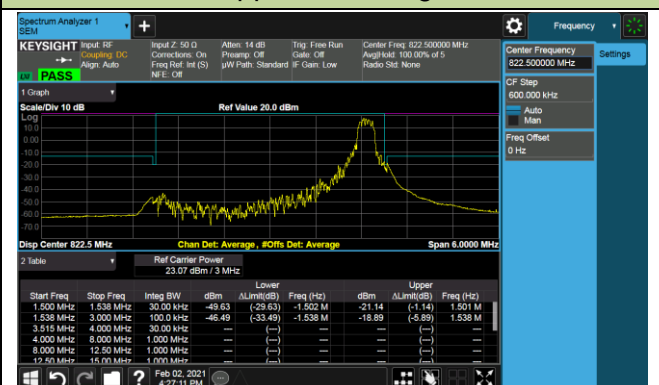


5MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge

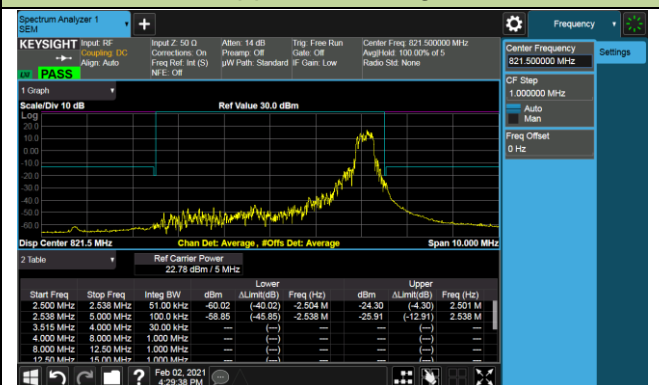

10MHz Channel Bandwidth - 1RB

Lower Band Edge




Upper Band Edge




15MHz Channel Bandwidth - 1RB

Lower Band Edge

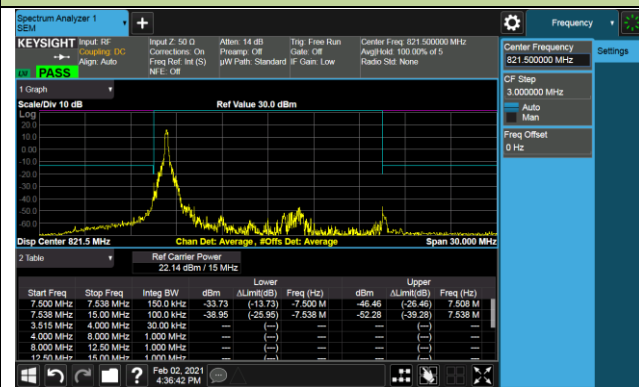


Upper Band Edge

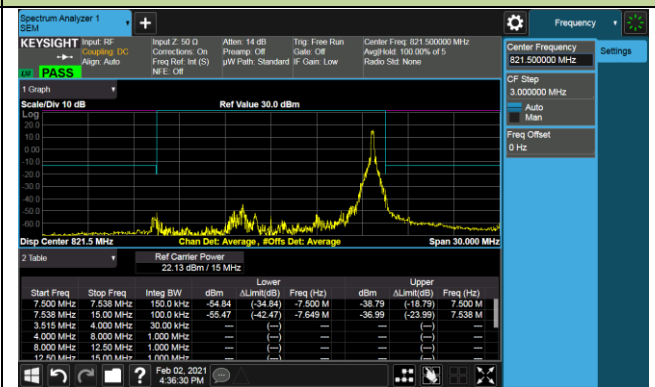


1.4MHz Channel Bandwidth - Full RB

Lower Band Edge

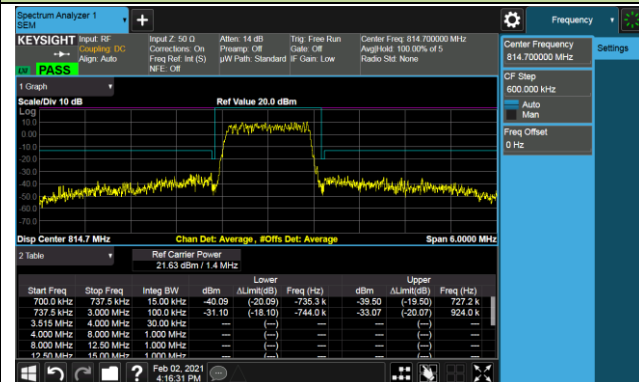


Upper Band Edge

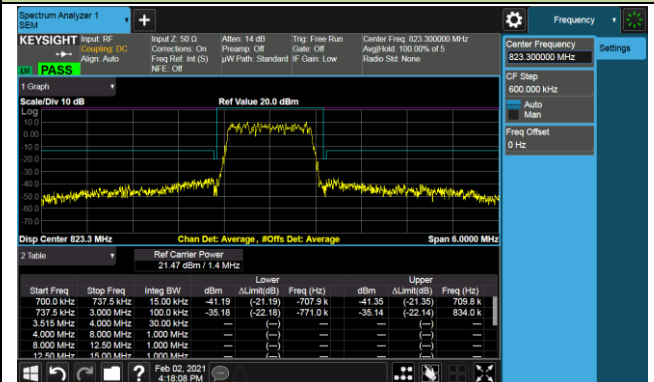


3MHz Channel Bandwidth - Full RB

Lower Band Edge

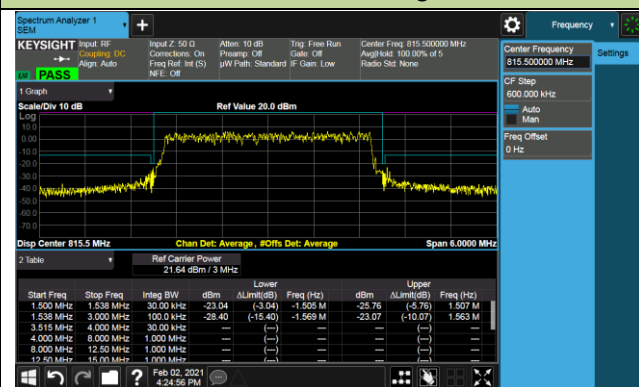


Upper Band Edge

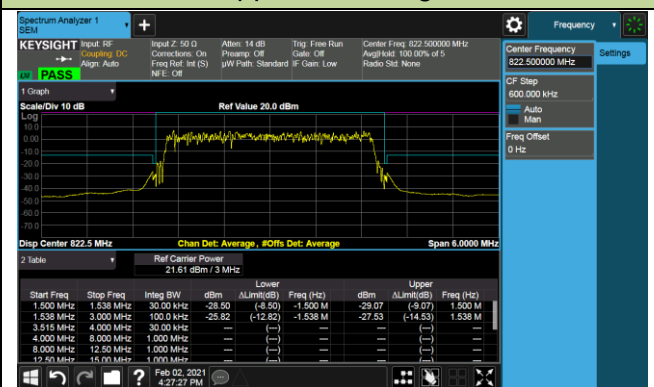


5MHz Channel Bandwidth - Full RB

Lower Band Edge

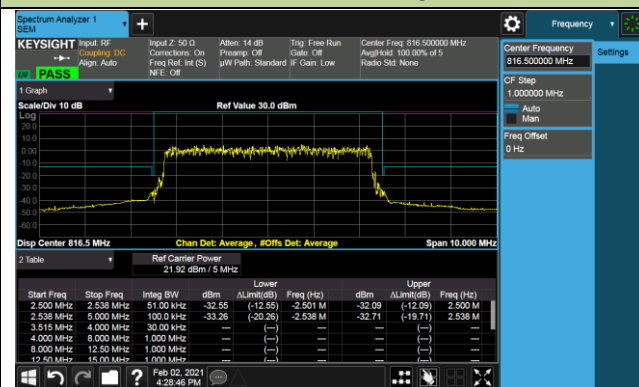


Upper Band Edge

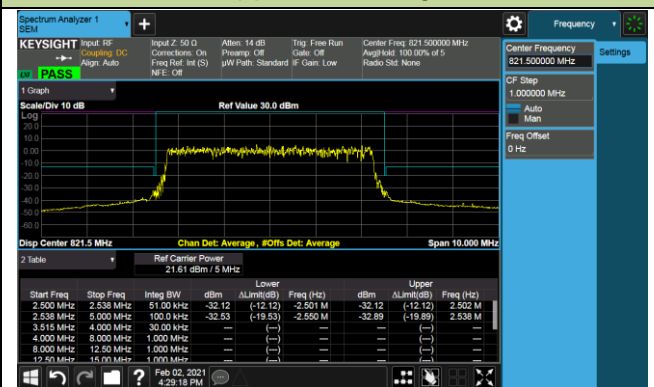


10MHz Channel Bandwidth - Full RB

Band Edge

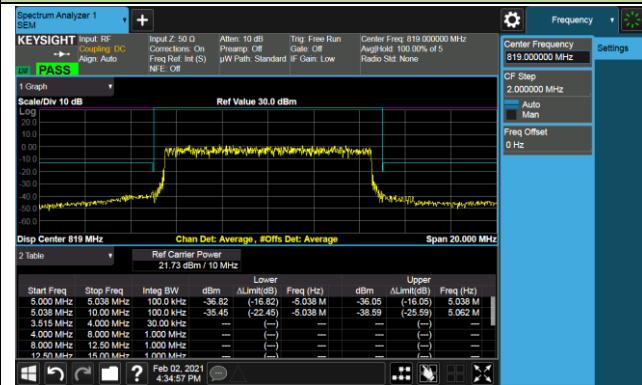

15MHz Channel Bandwidth - Full RB

Band Edge

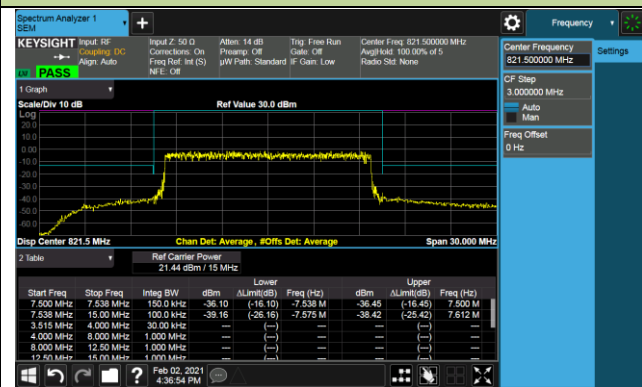

4.6. Conducted Spurious Emission Measurement

4.6.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

4.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

4.6.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

4.6.4.Test Setup




4.6.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	SIP-SR5
Test Engineer	Candy Luo	Test Date	2021/02/01
Test Band	LTE Band 26_QPSK		


Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
26697	814.7	1.4	30 ~ 10000	-43.58	≤ -13.00	Pass
26740	819.0	1.4	30 ~ 10000	-41.36	≤ -13.00	Pass
26783	823.3	1.4	30 ~ 10000	-41.33	≤ -13.00	Pass
26705	815.5	3	30 ~ 10000	-40.78	≤ -13.00	Pass
26740	819.0	3	30 ~ 10000	-41.64	≤ -13.00	Pass
26775	822.5	3	30 ~ 10000	-41.58	≤ -13.00	Pass
26715	816.5	5	30 ~ 10000	-41.71	≤ -13.00	Pass
26740	819.0	5	30 ~ 10000	-42.75	≤ -13.00	Pass
26765	821.5	5	30 ~ 10000	-40.32	≤ -13.00	Pass
26740	819.0	10	30 ~ 10000	-43.74	≤ -13.00	Pass
26745	821.5	15	30 ~ 10000	-42.53	≤ -13.00	Pass

1.4MHz Channel Bandwidth

Low Channel

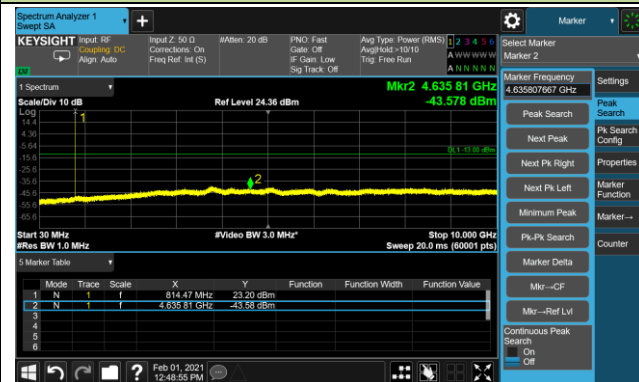

Middle Channel

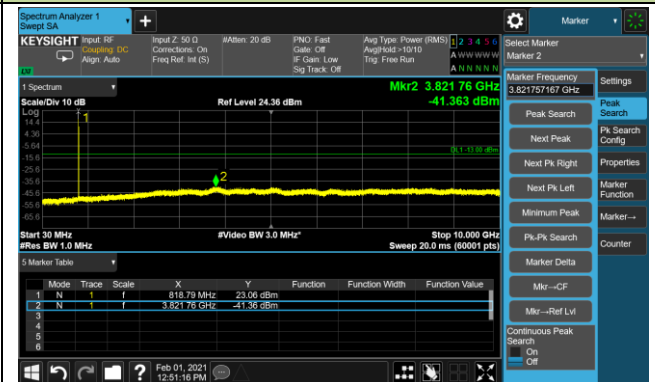


High Channel




3MHz Channel Bandwidth


Low Channel

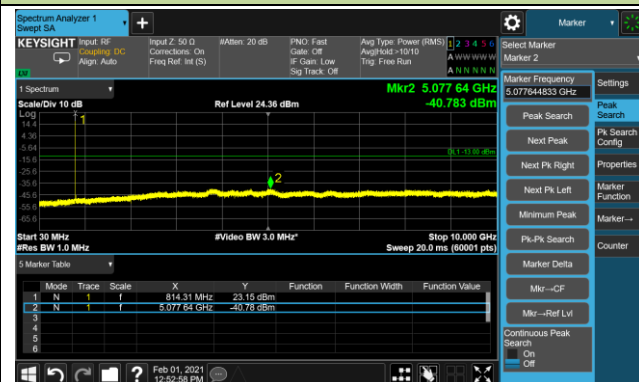

Middle Channel

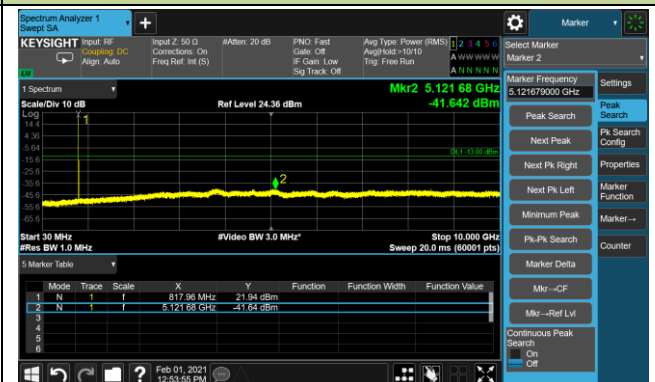

High Channel

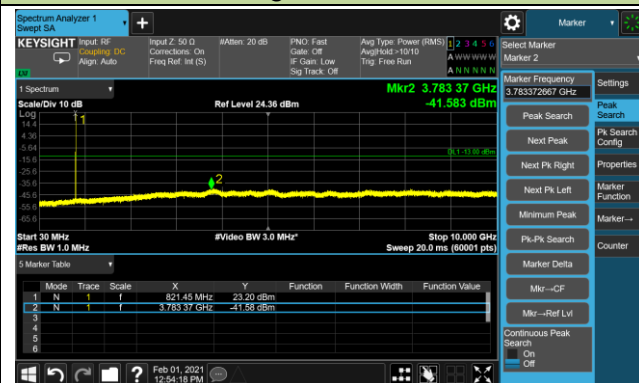

5MHz Channel Bandwidth

Low Channel



Middle Channel



High Channel



10MHz Channel Bandwidth

Middle Channel



Marker

Select Marker
Marker 2

Marker Frequency
5.106724000 GHz


Settings

- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Minimum Peak
- Pk-Pk Search
- Marker Delta
- Mkr--CF
- Mkr--Ref Lvl
- Continuous Peak Search
- On
- Off

Counter

15MHz Channel Bandwidth

Middle Channel

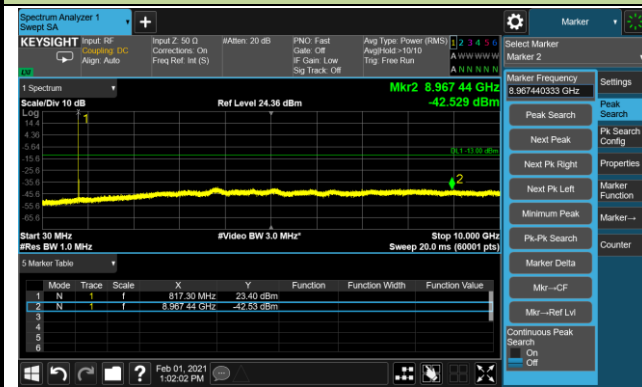

Marker

Select Marker
Marker 2

Marker Frequency
8.967440333 GHz

Settings

- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Minimum Peak
- Pk-Pk Search
- Marker Delta
- Mkr--CF
- Mkr--Ref Lvl
- Continuous Peak Search
- On
- Off

Counter

4.7. Radiated Spurious Emission Measurement

4.7.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m.

4.7.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

4.7.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

4.7.4. Test Setup

Below 1GHz Test Setup:

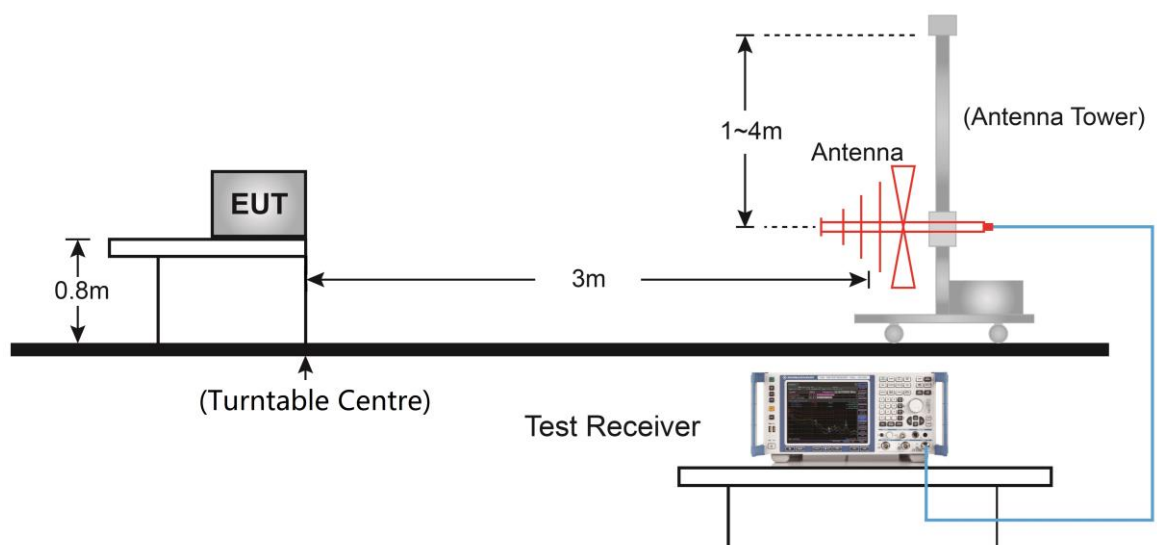

Above 1GHz Test Setup:

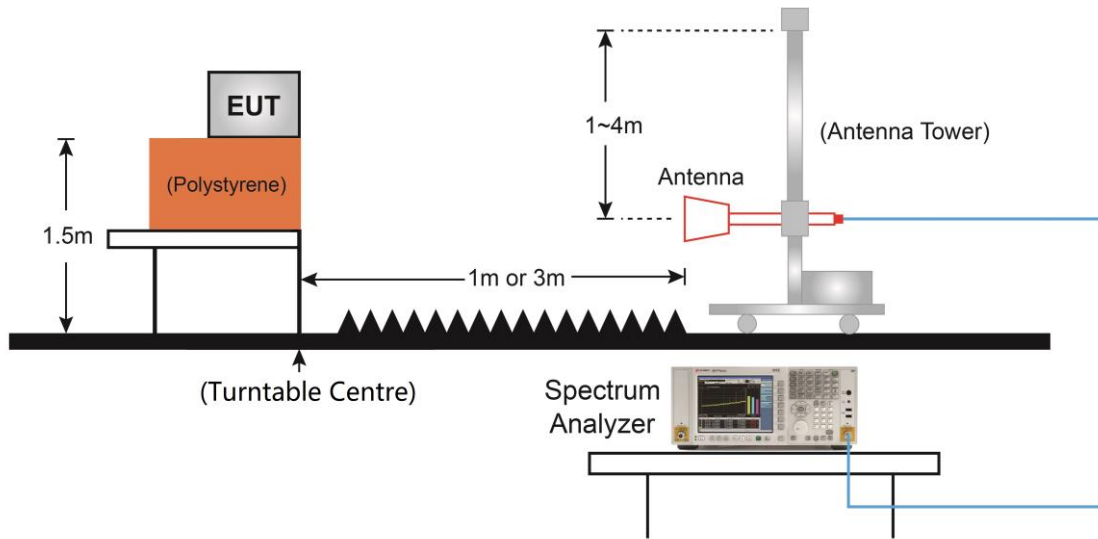

4.7.5.Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-AC1
Test Engineer	Buter Shi	Test Date	2021/02/05
Test Band	LTE Band 26_1.4MHz_1RB_QPSK		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level(dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
315.7	39.3	19.2	58.5	82.3	-23.8	Peak	Horizontal
361.7	36.0	20.1	56.1	82.3	-26.2	Peak	Horizontal
314.7	34.5	19.2	53.7	82.3	-28.7	Peak	Vertical
363.7	31.9	20.2	52.1	82.3	-30.2	Peak	Vertical
9525.5	37.4	13.7	51.1	82.3	-31.2	Peak	Horizontal
14506.5	37.2	17.7	54.9	82.3	-27.4	Peak	Horizontal
12118.0	37.5	14.9	52.4	82.3	-29.9	Peak	Vertical
14039.0	37.7	17.1	54.8	82.3	-27.5	Peak	Vertical
Middle Channel							
314.2	39.6	19.1	58.7	82.3	-23.6	Peak	Horizontal
361.7	35.0	20.1	55.1	82.3	-27.2	Peak	Horizontal
316.2	33.1	19.2	52.3	82.3	-30.0	Peak	Vertical
369.0	30.7	20.4	51.1	82.3	-31.2	Peak	Vertical
11557.0	37.4	15.2	52.6	82.3	-29.7	Peak	Horizontal
14855.0	36.6	17.4	54.0	82.3	-28.4	Peak	Horizontal
7120.0	38.0	10.1	48.1	82.3	-34.2	Peak	Vertical
14889.0	37.8	17.1	54.9	82.3	-27.5	Peak	Vertical
High Channel							
316.2	39.5	19.2	58.6	82.3	-23.7	Peak	Horizontal
362.2	35.2	20.1	55.3	82.3	-27.0	Peak	Horizontal
313.7	34.6	19.1	53.7	82.3	-28.6	Peak	Vertical
364.7	31.5	20.2	51.7	82.3	-30.6	Peak	Vertical
10571.0	37.6	15.2	52.8	82.3	-29.5	Peak	Horizontal
14634.0	37.3	17.6	54.9	82.3	-27.4	Peak	Horizontal
11353.0	36.8	15.5	52.3	82.3	-30.0	Peak	Vertical
14540.5	36.7	17.7	54.4	82.3	-27.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

5. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

Appendix A - Test Setup Photograph

Refer to "2101RSU049-UT" file.

Appendix B - EUT Photograph

Refer to "2101RSU049-UE" file.