


RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd.
FCC ID XMR2022BG772AGL
Product LTE Cat M1 & Cat NB2 Module
Brand Quectel
Model BG772A-GL
Report No. R2301A0034-R7
Issue Date July 18, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR47 Part 27C (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying

Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

| | | |
|------|---|----|
| 1 | Test Laboratory..... | 5 |
| 1.1 | Notes of the Test Report..... | 5 |
| 1.2. | Test facility..... | 5 |
| 1.3 | Testing Location..... | 5 |
| 2 | General Description of Equipment under Test..... | 6 |
| 2.1 | Applicant and Manufacturer Information..... | 6 |
| 2.2 | General information..... | 6 |
| 3 | Applied Standards..... | 8 |
| 4 | Test Configuration..... | 9 |
| 5 | Test Case..... | 11 |
| 5.1 | RF Power Output and Effective Isotropic Radiated Power..... | 11 |
| 5.2 | Occupied Bandwidth..... | 13 |
| 5.3 | Band Edge Compliance..... | 14 |
| 5.4 | Peak-to-Average Power Ratio (PAPR)..... | 16 |
| 5.5 | Frequency Stability..... | 17 |
| 5.6 | Spurious Emissions at Antenna Terminals..... | 18 |
| 5.7 | Radiated Spurious Emission..... | 20 |
| 6 | Test Results..... | 23 |
| 6.1 | RF Power Output and Effective Isotropic Radiated Power..... | 23 |
| 6.2 | Occupied Bandwidth..... | 25 |
| 6.3 | Band Edge Compliance..... | 41 |
| 6.4 | Peak-to-Average Power Ratio (PAPR)..... | 50 |
| 6.5 | Frequency Stability..... | 51 |
| 6.6 | Spurious Emissions at Antenna Terminals..... | 56 |
| 6.7 | Radiated Spurious Emission..... | 59 |
| 7 | Main Test Instruments..... | 68 |
| | ANNEX A: The EUT Appearance..... | 69 |
| | ANNEX B: Test Setup Photos..... | 70 |
| | ANNEX C: Product Change Description (Variant 1)..... | 71 |
| | ANNEX D: Product Change Description (Variant 2)..... | 72 |

Summary of Measurement Results

| Number | Test Case | Clause in FCC rules | Verdict |
|--|--|--|---------|
| 1 | RF Power Output and Effective Isotropic Radiated Power | 2.1046 /27.50(d)(4) /27.50(b)(10) /27.50(c)(10) | PASS |
| 2 | Occupied Bandwidth | 2.1049 | PASS |
| 3 | Band Edge Compliance | 27.53(h) /27.53(g) /27.53(f) /27.53(c) | PASS |
| 4 | Peak-to-Average Power Ratio | 27.50(d)/KDB971168 D01(5.7) | PASS |
| 5 | Frequency Stability | 2.1055 / 27.54 | PASS |
| 6 | Spurious Emissions at Antenna Terminals | 2.1051 /27.53(h) /27.53(g) /27.53(f) /27.53(c) | PASS |
| 7 | Radiated Spurious Emission | 2.1053 /27.53(h) /27.53(g) /27.53(f) /27.53(c) | PASS |
| Date of Testing: (Original) April 21, 2021 ~ May 14, 2021 (Variant 1) January 16, 2022 ~ January 17, 2022 Date of Sample Received: (Original) April 16, 2021 (Variant 1) December 28, 2021 | | | |
| Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. | | | |

BG772A-GL (Report No.: R2301A0034-R7) is a variant model (Variant 2) of BG772A-GL (Report No.: R2112A1193-R7). BG772A-GL supports from Cat NB1 (3GPP R13) to Cat NB2 (3GPP R14) only by FW updating, the hardware remains the same.

The detailed product change description please refers to following table:

| Module | BG772A-GL (Cat NB1) | BG772A-GL (Cat NB2) |
|------------------|---|---|
| Category | Cat M1 & NB1 | Cat M1 & NB2 |
| Frequency Bands | Cat M1 Band 2/4/5/12/13/25/26/66 Cat NB1 Band 2/4/5/12/13/17/25/66 | Cat M1 Band 2/4/5/12/13/25/26/66 Cat NB2 Band 2/4/5/12/13/17/25/66 |
| Software Version | BG772AGLAAR01A03 | BG772AGLAAR02A01 |
| Product Name | LTE Module | LTE Cat M1 & Cat NB2 Module |
| Others | The same | |

There is only verified RF Power Output, Band Edge Compliance, Spurious Emissions at Antenna Terminals and Radiated Spurious Emission (NB-IoT Band 13 3.75 KHz BPSK CH-Middle), and did not worsen, so they were not recorded in the report.

The detailed product change description please refers to the *Difference Declaration Letter (Variant 2)*.

BG772A-GL (Report No.: R2112A1193-R7) is a variant model (Variant 1) of BG770A-GL (Report No.: R2104A0331-R7). Test values partial duplicated from Original for variant. There is only test Radiates Spurious Emission (NB-IoT Band 13) for variant in this report.

The detailed product change description please refers to the *Difference Declaration Letter (Variant 1)*.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
 Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
 City: Shanghai
 Post code: 201201
 Country: P. R. China
 Contact: Xu Kai
 Telephone: +86-021-50791141/2/3
 Fax: +86-021-50791141/2/3-8000
 Website: <http://www.ta-shanghai.com>
 E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

| | |
|----------------------|---|
| Applicant | Quectel Wireless Solutions Co., Ltd |
| Applicant address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China |
| Manufacturer | Quectel Wireless Solutions Co., Ltd |
| Manufacturer address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China |

2.2 General information

| EUT Description | | | |
|---------------------|----------------------------------|-----------------|------------|
| Model | BG772A-GL | | |
| IMEI | Original | 863593050006733 | |
| | Variant 1 | 863593050007525 | |
| Hardware Version | R1.1 | | |
| Software Version | BG772AGLAAR02A01 | | |
| Power Supply | External power supply | | |
| Antenna Type | External Antenna | | |
| Antenna Gain | Mode | Frequency (MHz) | Gain (dBi) |
| | NB-IoT Band 4 | 1700 | 1.67 |
| | | 1720 | 1.94 |
| | | 1740 | 2.00 |
| | | 1760 | 1.57 |
| | NB-IoT Band 12/17 | 700 | 1.66 |
| | | 710 | 3.26 |
| | | 720 | 3.95 |
| | NB-IoT Band 13 | 770 | 3.98 |
| | | 780 | 4.45 |
| | | 790 | 3.63 |
| | NB-IoT Band 66 | 1700 | 1.67 |
| | | 1720 | 1.94 |
| | | 1740 | 2.00 |
| | | 1760 | 1.57 |
| | | 1780 | 0.97 |
| Test Mode(s) | NB-IoT Band 4/12/13/17/66 | | |
| Test Modulation | BPSK, QPSK | | |
| Category | NB2 | | |
| Deployment | stand-alone, In-band, Guard-band | | |
| Sub-carrier spacing | 3.75KHz, 15KHz | | |

| | | | |
|--|---------------------------------|-------------|-------------|
| Ntones | single-tone, multi-tone | | |
| Maximum E.I.R.P./ E.R.P. | NB-IoT Band 4 | 25.45 dBm | |
| | NB-IoT Band 12 | 25.54 dBm | |
| | NB-IoT Band 13 | 26.19 dBm | |
| | NB-IoT Band 17 | 25.34 dBm | |
| | NB-IoT Band 66 | 25.60 dBm | |
| Rated Power Supply Voltage | 3.3V | | |
| Operating Voltage | Minimum: 3.1V Maximum: 4.2V | | |
| Operating Temperature | Lowest: -35°C Highest: +75°C | | |
| Testing Temperature | Lowest: -30°C Highest: +50°C | | |
| Frequency Range(s) | Mode | Tx (MHz) | Rx (MHz) |
| | NB-IoT Band 4 | 1710 ~ 1755 | 2110 ~ 2155 |
| | NB-IoT Band 12 | 699 ~ 716 | 729 ~ 746 |
| | NB-IoT Band 13 | 777 ~ 787 | 746 ~ 756 |
| | NB-IoT Band 17 | 704 ~ 716 | 734 ~ 746 |
| | NB-IoT Band 66 | 1710 ~ 1780 | 2110 ~ 2180 |
| Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. | | | |

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2022)

FCC CFR47 Part 2 (2022)

Reference standard:

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT polarization (horizontal and vertical). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (horizontal polarization, horizontal polarization) and the worst case was recorded.

All modes as Subcarrier Spacing, modulations, Channel were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in NB-IoT is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below for NB-IoT Band 4/12/13/17/66:

| Test items | Mode | Deployment mode | Subcarrier Spacing (kHz) | | Modulation | | Test Channel | | |
|--|------------|-----------------|--------------------------|----|------------|------|--------------|---|---|
| | | Stand-alone | 3.75 | 15 | BPSK | QPSK | L | M | H |
| RF Power Output and Effective Isotropic Radiated Power | NB-IoT B4 | O | O | O | O | O | O | O | O |
| | NB-IoT B12 | O | O | O | O | O | O | O | O |
| | NB-IoT B13 | O | O | O | O | O | O | O | O |
| | NB-IoT B17 | O | O | O | O | O | O | O | O |
| | NB-IoT B66 | O | O | O | O | O | O | O | O |
| Occupied Bandwidth | NB-IoT B4 | O | O | O | O | O | O | O | O |
| | NB-IoT B12 | O | O | O | O | O | O | O | O |
| | NB-IoT B13 | O | O | O | O | O | O | O | O |
| | NB-IoT B17 | O | O | O | O | O | O | O | O |
| | NB-IoT B66 | O | O | O | O | O | O | O | O |
| Band Edge Compliance | NB-IoT B4 | O | O | O | O | O | O | - | O |
| | NB-IoT B12 | O | O | O | O | O | O | - | O |
| | NB-IoT B13 | O | O | O | O | O | O | - | O |
| | NB-IoT B17 | O | O | O | O | O | O | - | O |
| | NB-IoT B66 | O | O | O | O | O | O | - | O |
| Peak-to-Average Power Ratio | NB-IoT B4 | O | O | O | O | O | - | O | - |
| | NB-IoT B12 | O | O | O | O | O | - | O | - |
| | NB-IoT B13 | O | O | O | O | O | - | O | - |
| | NB-IoT B17 | O | O | O | O | O | - | O | - |
| | NB-IoT B66 | O | O | O | O | O | - | O | - |
| Frequency Stability | NB-IoT B4 | O | O | O | O | O | - | O | - |
| | NB-IoT B12 | O | O | O | O | O | - | O | - |
| | NB-IoT B13 | O | O | O | O | O | - | O | - |
| | NB-IoT B17 | O | O | O | O | O | - | O | - |
| | NB-IoT B66 | O | O | O | O | O | - | O | - |

| | | | | | | | | | |
|--|------------|---|---|---|---|---|---|---|---|
| Conducted Spurious Emissions | NB-IoT B4 | O | - | O | - | O | O | O | O |
| | NB-IoT B12 | O | - | O | - | O | O | O | O |
| | NB-IoT B13 | O | - | O | - | O | O | O | O |
| | NB-IoT B17 | O | - | O | - | O | O | O | O |
| | NB-IoT B66 | O | - | O | - | O | O | O | O |
| Radiated Spurious Emission | NB-IoT B4 | O | - | O | - | O | O | O | O |
| | NB-IoT B12 | O | - | O | - | O | O | O | O |
| | NB-IoT B13 | O | - | O | - | O | O | O | O |
| | NB-IoT B17 | O | - | O | - | O | O | O | O |
| | NB-IoT B66 | O | - | O | - | O | O | O | O |
| Note 1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing. | | | | | | | | | |

5 Test Case

5.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement


During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.

ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$$

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

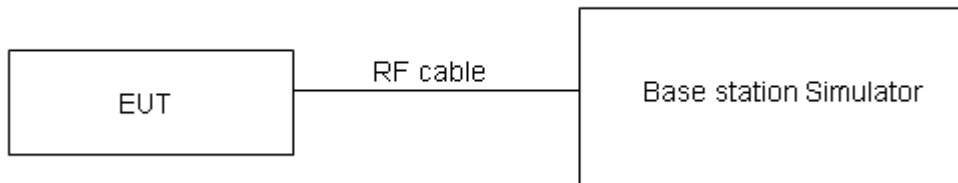

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

| | |
|------------------------|-------------------|
| Part 27.50(b)(10)Limit | ≤ 3 W (34.77 dBm) |
| Part 27.50(c)(10)Limit | ≤ 3 W (34.77 dBm) |
| Part 27.50(d)(4)Limit | ≤ 1 W (30 dBm) |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB for RF power output, $k = 2$, $U= 1.19$ dB for ERP/EIRP.

Test Results

Refer to the section 6.1 of this report for test data.

5.2 Occupied Bandwidth

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

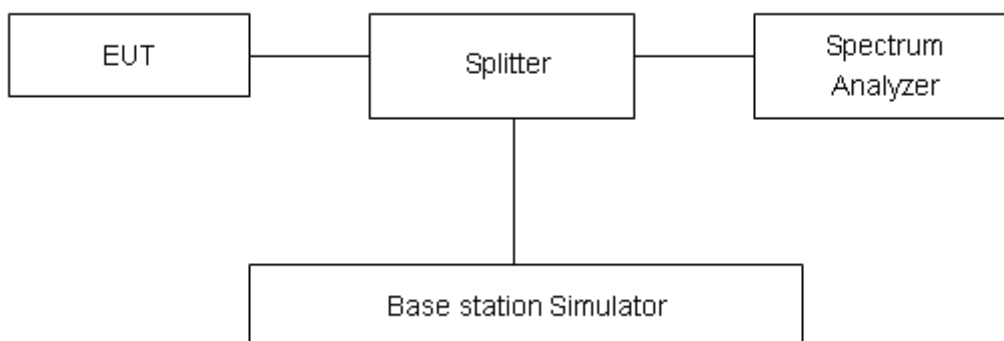

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Results

Refer to the section 6.2 of this report for test data.

5.3 Band Edge Compliance

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.


RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

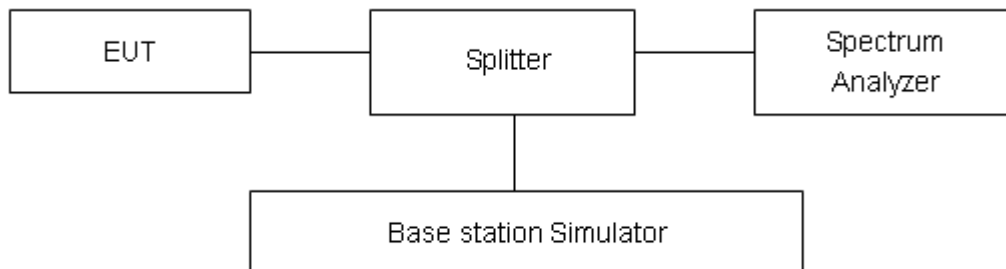

Limits

Rule Part 27.53(h) specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB”

Rule Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands,

emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.

Test Results

Refer to the section 6.3 of this report for test data.

5.4 Peak-to-Average Power Ratio (PAPR)

Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}$$

Test Setup

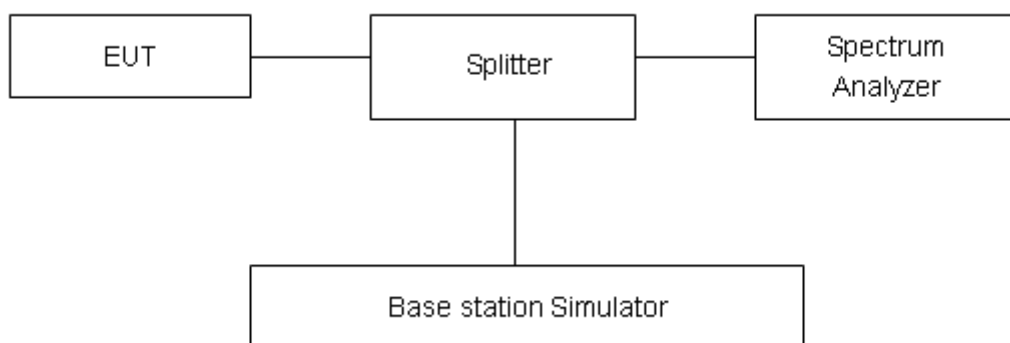

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Refer to the section 6.4 of this report for test data.

5.5 Frequency Stability

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size.

(1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2)Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.1 V and 4.2 V, with a nominal voltage of 3.3V.

Test setup

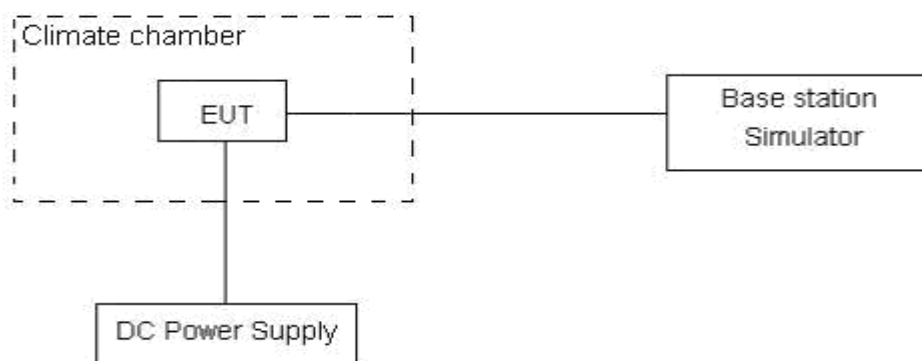

Limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.

Test Results

Refer to the section 6.5 of this report for test data.

5.6 Spurious Emissions at Antenna Terminals

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),

RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)


RBW is set to 1000 kHz (above 1000MHz)

Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

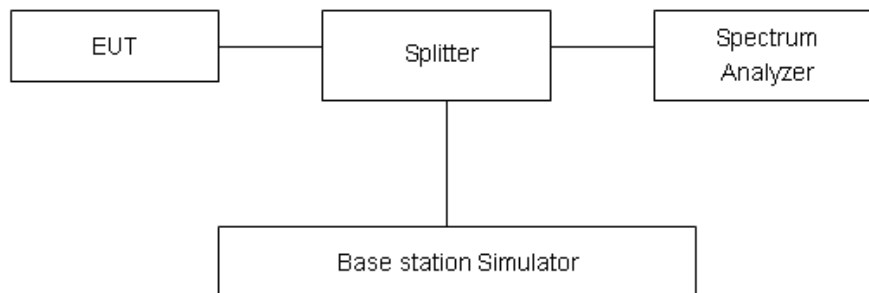

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB..”

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands,

emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation. Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

| | | |
|-------------------------|-------------------------------------|---------|
| Part 27.53(h)/(g) Limit | | -13 dBm |
| Part 27.53(f) Limit | Limit out of the band 1559-1610 MHz | -13 dBm |
| | Limit in the band 1559-1610 MHz | -40 dBm |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|------------|-------------|
| 9kHz-1GHz | 0.684 dB |
| 1GHz-20GHz | 1.407 dB |

Test Results

Refer to the section 6.6 of this report for test data.

5.7 Radiated Spurious Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

- The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26-2015.
- Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dB}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz~ 30MHz

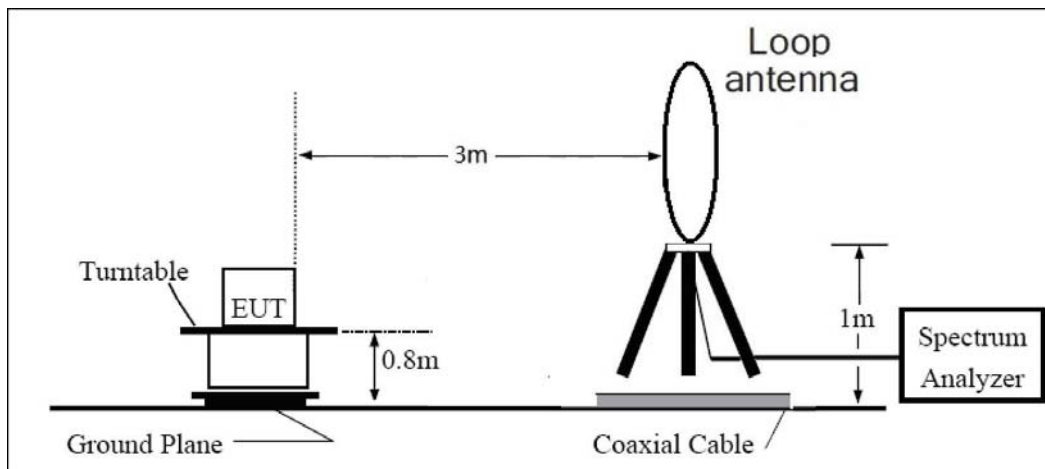

30MHz~ 1GHz

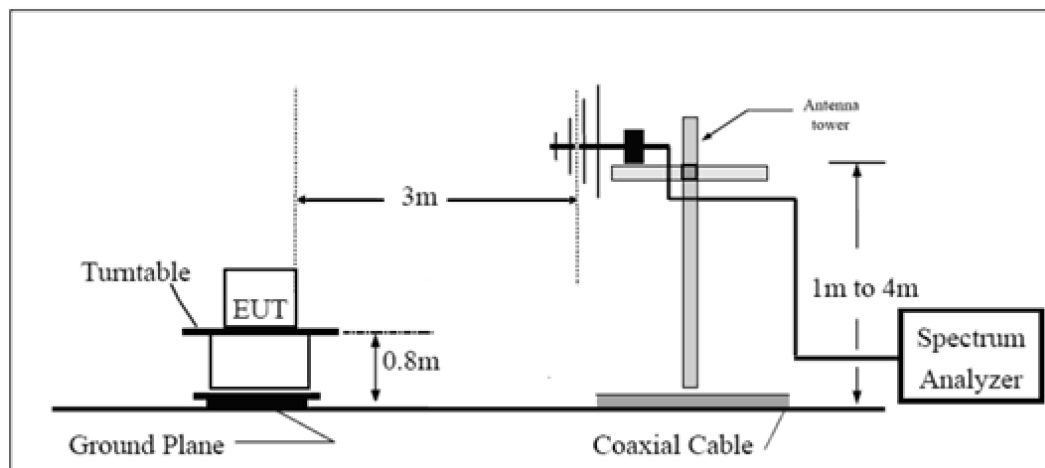

Above 1GHz

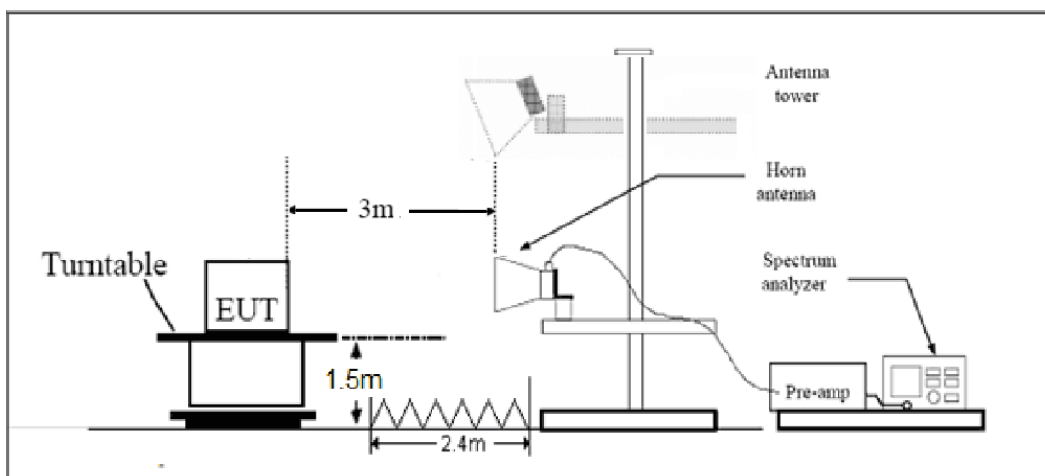

Note: Area side:2.4mX3.6m

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.”

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

| | | |
|--------------------------|-------------------------------------|---------|
| Part 27.53 (h)/(g) Limit | | -13 dBm |
| Part 27.53(f) Limit | Limit out of the band 1559-1610 MHz | -13 dBm |
| | Limit in the band 1559-1610 MHz | -40 dBm |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Results

Refer to the section 6.7 of this report for test data.

6 Test Results

6.1 RF Power Output and Effective Isotropic Radiated Power

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel | | | EIRP (dBm) | | |
|---------------|------------|---------------------------|--------|--|----------------------|----------------------|---------------------|----------------------|----------------------|
| | | | | 19952/ 1710.2MHz | 20175/ 1732.5 MHz | 20398/ 1754.8 MHz | 19952/ 1710.2MHz | 20175/ 1732.5 MHz | 20398/ 1754.8 MHz |
| NB-IoT Band 4 | BPSK | 3.75 | 1@0 | 23.29 | 23.37 | 23.66 | 25.23 | 25.37 | 25.23 |
| | | | 1@47 | 23.30 | 23.39 | 23.68 | 25.24 | 25.39 | 25.25 |
| | | 15 | 1@0 | 23.51 | 23.32 | 23.59 | 25.45 | 25.32 | 25.16 |
| | | | 1@11 | 23.44 | 23.38 | 23.47 | 25.38 | 25.38 | 25.04 |
| | QPSK | 3.75 | 1@0 | 23.31 | 23.33 | 23.65 | 25.25 | 25.33 | 25.22 |
| | | | 1@47 | 23.28 | 23.37 | 23.64 | 25.22 | 25.37 | 25.21 |
| | | 15 | 1@0 | 23.35 | 23.32 | 23.41 | 25.29 | 25.32 | 24.98 |
| | | | 1@11 | 23.51 | 23.45 | 23.51 | 25.45 | 25.45 | 25.08 |
| | | 15 | 12@0 | 21.90 | 21.62 | 21.78 | 23.84 | 23.62 | 23.35 |

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel | | | ERP (dBm) | | |
|----------------|------------|---------------------------|--------|--|---------------------|---------------------|---------------------|---------------------|---------------------|
| | | | | 23012/ 699.2 MHz | 23095/ 707.5 MHz | 23178/ 715.8 MHz | 23012/ 699.2 MHz | 23095/ 707.5 MHz | 23178/ 715.8 MHz |
| NB-IoT Band 12 | BPSK | 3.75 | 1@0 | 22.83 | 22.95 | 23.12 | 22.34 | 24.06 | 24.92 |
| | | | 1@47 | 22.78 | 22.97 | 23.15 | 22.29 | 24.08 | 24.95 |
| | | 15 | 1@0 | 23.78 | 23.84 | 23.65 | 23.29 | 24.95 | 25.45 |
| | | | 1@11 | 23.95 | 23.75 | 23.63 | 23.46 | 24.86 | 25.43 |
| | QPSK | 3.75 | 1@0 | 22.73 | 22.92 | 23.17 | 22.24 | 24.03 | 24.97 |
| | | | 1@47 | 22.77 | 22.94 | 23.12 | 22.28 | 24.05 | 24.92 |
| | | 15 | 1@0 | 23.75 | 23.70 | 23.55 | 23.26 | 24.81 | 25.35 |
| | | | 1@11 | 23.75 | 23.64 | 23.74 | 23.26 | 24.75 | 25.54 |
| | | 15 | 12@0 | 22.08 | 22.11 | 21.95 | 21.59 | 23.22 | 23.75 |

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel | | | ERP (dBm) | | |
|-------------------|------------|---------------------------|--------|--|------------------|---------------------|---------------------|------------------|---------------------|
| | | | | 23182/ 777.2 MHz | 23230/ 782MHz | 23278/ 786.8 MHz | 23182/ 777.2 MHz | 23230/ 782MHz | 23278/ 786.8 MHz |
| NB-IoT Band 13 | BPSK | 3.75 | 1@0 | 23.70 | 23.55 | 23.48 | 26.00 | 25.85 | 24.96 |
| | | | 1@47 | 23.63 | 23.54 | 23.40 | 25.93 | 25.84 | 24.88 |
| | | 15 | 1@0 | 23.73 | 23.78 | 23.78 | 26.03 | 26.08 | 25.26 |
| | | | 1@11 | 23.68 | 23.74 | 23.75 | 25.98 | 26.04 | 25.23 |
| | QPSK | 3.75 | 1@0 | 23.61 | 23.50 | 23.42 | 25.91 | 25.80 | 24.90 |
| | | | 1@47 | 23.58 | 23.52 | 23.44 | 25.88 | 25.82 | 24.92 |
| | | 15 | 1@0 | 23.66 | 23.70 | 23.67 | 25.96 | 26.00 | 25.15 |
| | | | 1@11 | 23.79 | 23.89 | 23.82 | 26.09 | 26.19 | 25.30 |
| | | 15 | 12@0 | 22.16 | 22.21 | 22.18 | 24.46 | 24.51 | 23.66 |

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel | | | ERP (dBm) | | |
|-------------------|------------|---------------------------|--------|--|-------------------|---------------------|---------------------|-------------------|---------------------|
| | | | | 23732/ 704.2 MHz | 23790/ 710 MHz | 23848/ 715.8 MHz | 23732/ 704.2 MHz | 23790/ 710 MHz | 23848/ 715.8 MHz |
| NB-IoT Band 17 | BPSK | 3.75 | 1@0 | 22.84 | 22.88 | 23.02 | 22.35 | 23.99 | 24.82 |
| | | | 1@47 | 22.82 | 22.92 | 23.05 | 22.33 | 24.03 | 24.85 |
| | | 15 | 1@0 | 23.56 | 23.42 | 23.54 | 23.07 | 24.53 | 25.34 |
| | | | 1@11 | 23.62 | 23.59 | 23.52 | 23.13 | 24.70 | 25.32 |
| | QPSK | 3.75 | 1@0 | 22.76 | 22.88 | 23.03 | 22.27 | 23.99 | 24.83 |
| | | | 1@47 | 22.78 | 22.87 | 23.04 | 22.29 | 23.98 | 24.84 |
| | | 15 | 1@0 | 23.52 | 23.44 | 23.36 | 23.03 | 24.55 | 25.16 |
| | | | 1@11 | 23.59 | 23.55 | 23.54 | 23.10 | 24.66 | 25.34 |
| | | 15 | 12@0 | 21.99 | 21.89 | 21.84 | 21.50 | 23.00 | 23.64 |

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel | | | EIRP (dBm) | | |
|-------------------|------------|---------------------------|--------|--|---------------------|-----------------------|-----------------------|---------------------|-----------------------|
| | | | | 131974/ 1710.2 MHz | 132322/ 1745 MHz | 132670/ 1779.8 MHz | 131974/ 1710.2 MHz | 132322/ 1745 MHz | 132670/ 1779.8 MHz |
| NB-IoT Band 66 | BPSK | 3.75 | 1@0 | 23.28 | 23.50 | 23.67 | 25.22 | 25.50 | 24.64 |
| | | | 1@47 | 23.32 | 23.52 | 23.68 | 25.26 | 25.52 | 24.65 |
| | | 15 | 1@0 | 23.44 | 23.49 | 23.50 | 25.38 | 25.49 | 24.47 |
| | | | 1@11 | 23.47 | 23.60 | 23.58 | 25.41 | 25.60 | 24.55 |
| | QPSK | 3.75 | 1@0 | 23.31 | 23.51 | 23.63 | 25.25 | 25.51 | 24.60 |
| | | | 1@47 | 23.26 | 23.44 | 23.64 | 25.20 | 25.44 | 24.61 |
| | | 15 | 1@0 | 23.39 | 23.34 | 23.45 | 25.33 | 25.34 | 24.42 |
| | | | 1@11 | 23.48 | 23.48 | 23.56 | 25.42 | 25.48 | 24.53 |
| | | 15 | 12@0 | 21.96 | 21.68 | 21.73 | 23.90 | 23.68 | 22.70 |

6.2 Occupied Bandwidth

| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Bandwidth(KHz) for low/mid/high channel | | | | | |
|--------------------|------------|---------------------------|--------|---|--------|------------------|--------|-------------------|--------|
| | | | | 19952/1710.2 MHz | | 20175/1732.5 MHz | | 20398/1754.8 MHz | |
| | | | | 99% Power | -26dBc | 99% Power | -26dBc | 99% Power | -26dBc |
| Band 4 Standalone | BPSK | 3.75 | 1@0 | 39.77 | 37.44 | 39.22 | 38.12 | 39.16 | 37.77 |
| | QPSK | 3.75 | 1@0 | 43.74 | 42.04 | 42.54 | 41.43 | 42.43 | 42.15 |
| | BPSK | 15 | 1@0 | 75.77 | 99.32 | 75.18 | 93.06 | 73.00 | 92.55 |
| | QPSK | 15 | 1@0 | 74.17 | 90.86 | 73.59 | 91.00 | 75.20 | 114.40 |
| | QPSK | 15 | 12@0 | 186.62 | 251.80 | 184.37 | 249.60 | 186.14 | 264.00 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Bandwidth(KHz) for low/mid/high channel | | | | | |
| | | | | 23012/699.2 MHz | | 23095/707.5 MHz | | 23178/715.8 MHz | |
| | | | | 99% Power | -26dBc | 99% Power | -26dBc | 99% Power | -26dBc |
| Band 12 Standalone | BPSK | 3.75 | 1@0 | 37.41 | 38.03 | 36.71 | 37.55 | 37.50 | 37.35 |
| | QPSK | 3.75 | 1@0 | 41.46 | 41.77 | 41.60 | 42.14 | 41.91 | 41.59 |
| | BPSK | 15 | 1@0 | 71.66 | 89.55 | 74.92 | 99.15 | 72.80 | 90.17 |
| | QPSK | 15 | 1@0 | 74.37 | 91.34 | 71.85 | 88.15 | 72.61 | 90.59 |
| | QPSK | 15 | 12@0 | 183.67 | 253.30 | 183.88 | 254.60 | 185.81 | 242.10 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Bandwidth(KHz) for low/mid/high channel | | | | | |
| | | | | 23182/777.2 MHz | | 23230/782 MHz | | 23278/786.8 MHz | |
| | | | | 99% Power | -26dBc | 99% Power | -26dBc | 99% Power | -26dBc |
| Band 13 Standalone | BPSK | 3.75 | 1@0 | 38.27 | 38.40 | 36.71 | 37.03 | 38.22 | 38.58 |
| | QPSK | 3.75 | 1@0 | 41.64 | 41.38 | 41.16 | 41.51 | 42.15 | 42.52 |
| | BPSK | 15 | 1@0 | 72.28 | 90.52 | 74.21 | 93.27 | 72.90 | 89.68 |
| | QPSK | 15 | 1@0 | 75.40 | 101.00 | 71.06 | 89.91 | 74.55 | 104.20 |
| | QPSK | 15 | 12@0 | 183.25 | 264.10 | 185.08 | 241.50 | 183.53 | 251.40 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Bandwidth(KHz) for low/mid/high channel | | | | | |
| | | | | 23732/704.2 MHz | | 23790/710 MHz | | 23848/715.8 MHz | |
| | | | | 99% Power | -26dBc | 99% Power | -26dBc | 99% Power | -26dBc |
| Band 17 Standalone | BPSK | 3.75 | 1@0 | 37.44 | 38.15 | 37.13 | 37.11 | 36.75 | 37.91 |
| | QPSK | 3.75 | 1@0 | 41.67 | 41.20 | 40.67 | 40.94 | 41.23 | 41.23 |
| | BPSK | 15 | 1@0 | 73.54 | 90.02 | 72.10 | 87.52 | 74.10 | 90.74 |
| | QPSK | 15 | 1@0 | 72.70 | 99.05 | 73.50 | 90.55 | 73.66 | 101.50 |
| | QPSK | 15 | 12@0 | 185.75 | 268.30 | 185.89 | 249.60 | 185.94 | 254.30 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Ntones | Bandwidth(KHz) for low/mid/high channel | | | | | |
| | | | | 131974/1710.2 MHz | | 132322/1745 MHz | | 132670/1779.8 MHz | |
| | | | | 99% Power | -26dBc | 99% Power | -26dBc | 99% Power | -26dBc |
| Band 66 Standalone | BPSK | 3.75 | 1@0 | 38.64 | 38.05 | 40.47 | 38.47 | 39.27 | 38.39 |
| | QPSK | 3.75 | 1@0 | 42.74 | 41.48 | 42.70 | 41.89 | 43.26 | 42.71 |
| | BPSK | 15 | 1@0 | 72.74 | 89.77 | 73.91 | 92.88 | 72.63 | 90.19 |
| | QPSK | 15 | 1@0 | 73.41 | 102.60 | 73.89 | 103.20 | 72.82 | 102.80 |
| | QPSK | 15 | 12@0 | 184.72 | 267.60 | 185.88 | 238.80 | 186.27 | 261.20 |


NB-IoT Band 4 BPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 4 BPSK 15KHz 1@0 CH-Low




NB-IoT Band 4 BPSK 3.75KHz 1@0 CH-Middle

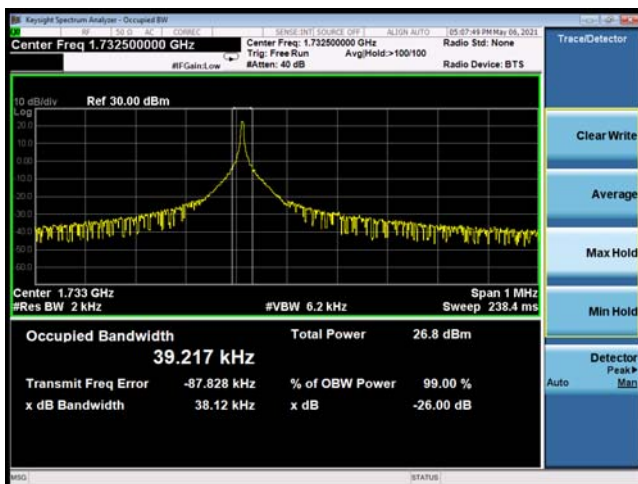

NB-IoT Band 4 BPSK 15KHz 1@0 CH-Middle




NB-IoT Band 4 BPSK 3.75KHz 1@0 CH-High

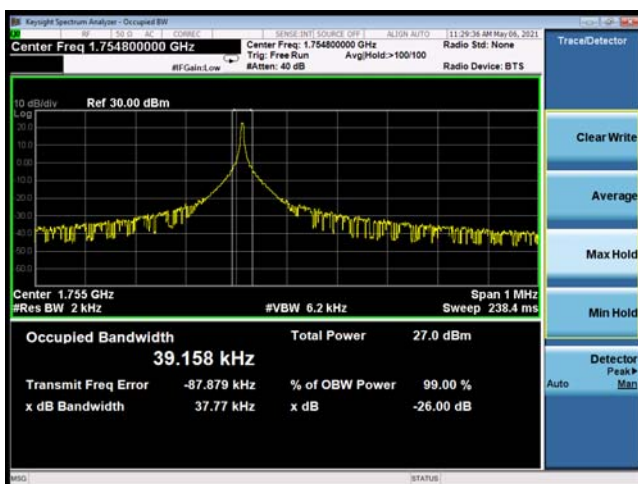

NB-IoT Band 4 BPSK 15KHz 1@0 CH-High



NB-IoT Band 4 QPSK 3.75KHz 1@0 CH-Low

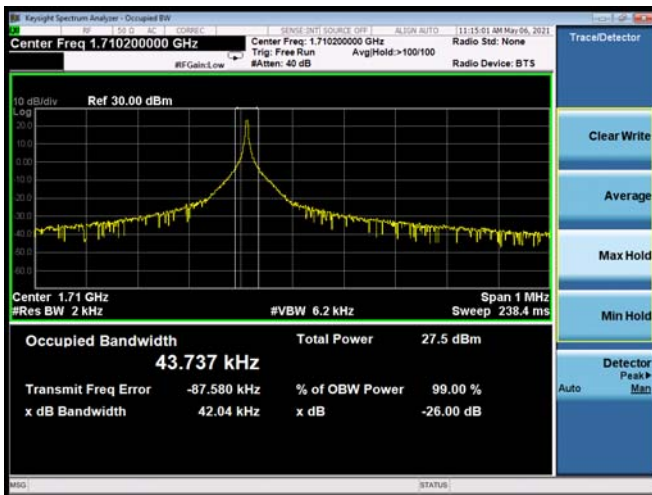

NB-IoT Band 4 QPSK 15KHz 1@0 CH-Low



NB-IoT Band 4 QPSK 3.75KHz 1@0 CH-Middle



NB-IoT Band 4 QPSK 15KHz 1@0 CH-Middle






NB-IoT Band 4 QPSK 3.75KHz 1@0 CH-High



NB-IoT Band 4 QPSK 15KHz 1@0 CH-High



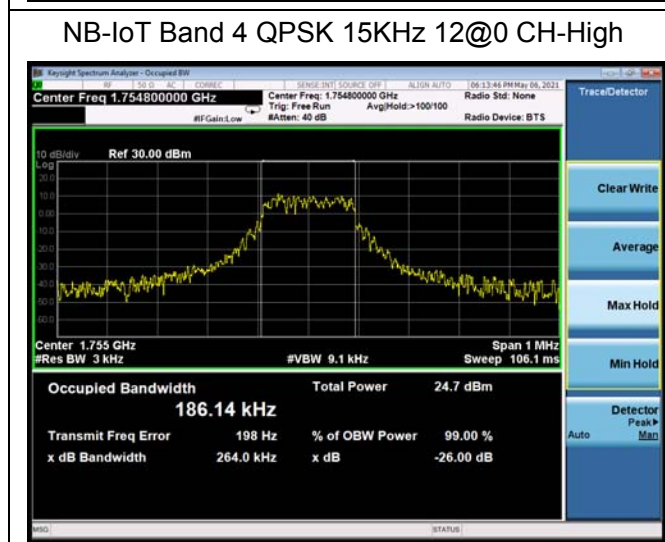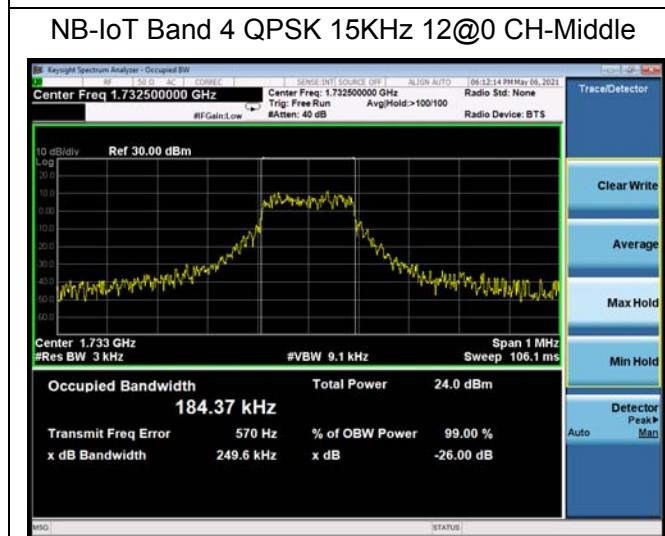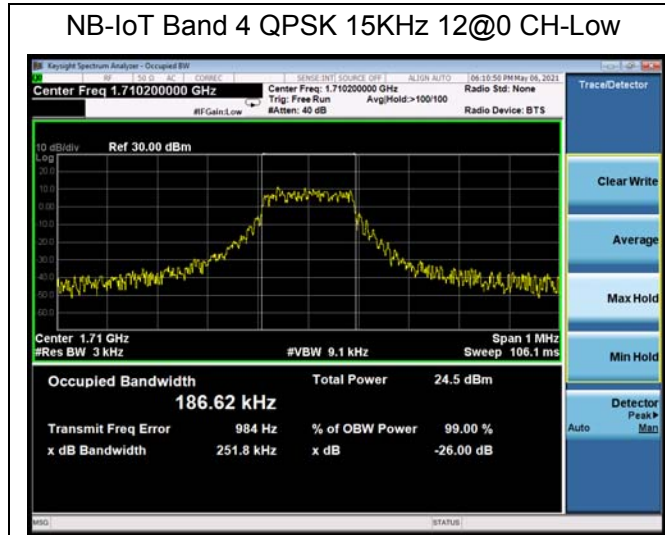


NB-IoT Band 12 BPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 12 BPSK 15KHz 1@0 CH-Low



NB-IoT Band 12 BPSK 3.75KHz 1@0 CH-Middle

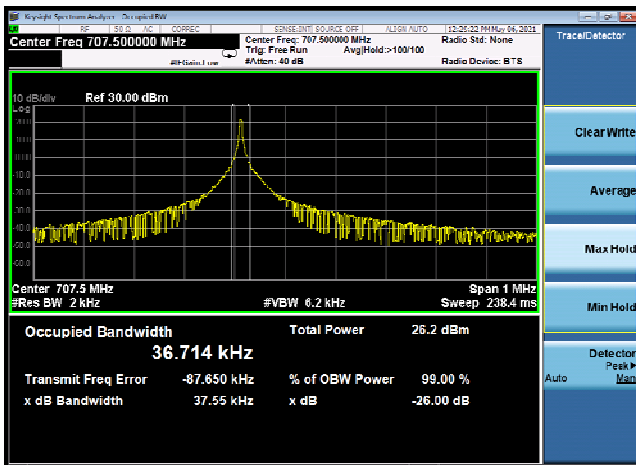

NB-IoT Band 12 BPSK 15KHz 1@0 CH-Middle



NB-IoT Band 12 BPSK 3.75KHz 1@0 CH-High




NB-IoT Band 12 BPSK 15KHz 1@0 CH-High



NB-IoT Band 12 QPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 12 QPSK 15KHz 1@0 CH-Low

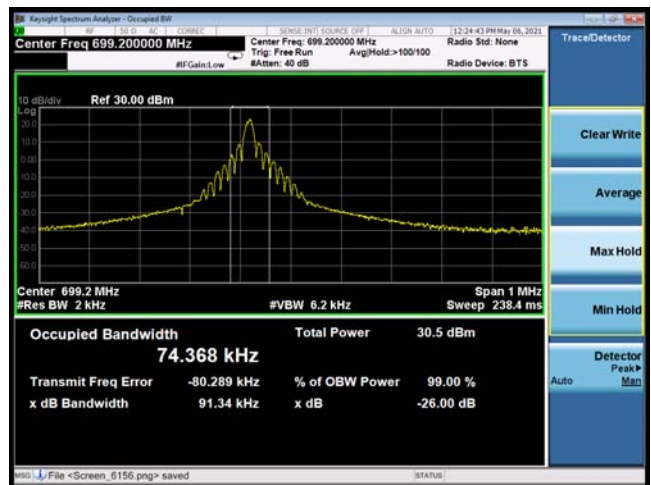


NB-IoT Band 12 QPSK 3.75KHz 1@0 CH-Middle



NB-IoT Band 12 QPSK 15KHz 1@0 CH-Middle






NB-IoT Band 12 QPSK 3.75KHz 1@0 CH-High

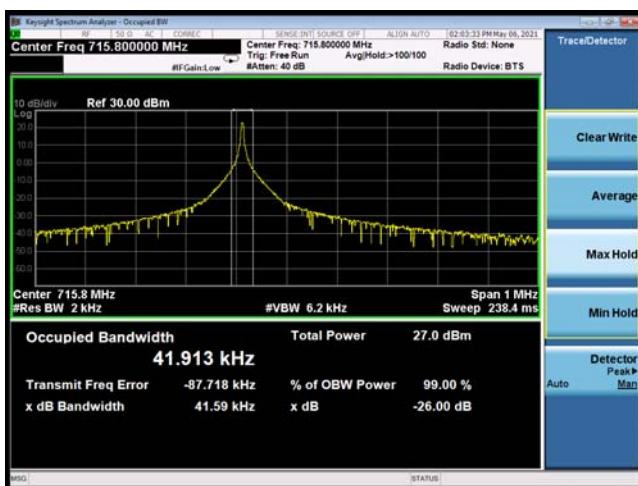

NB-IoT Band 12 QPSK 15KHz 1@0 CH-High



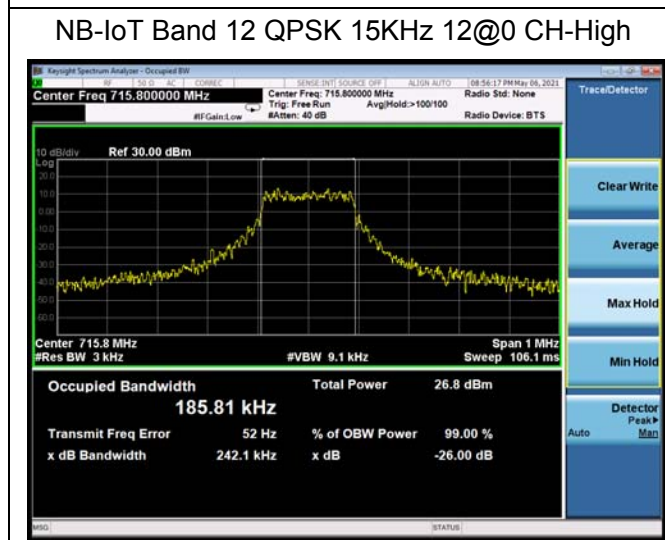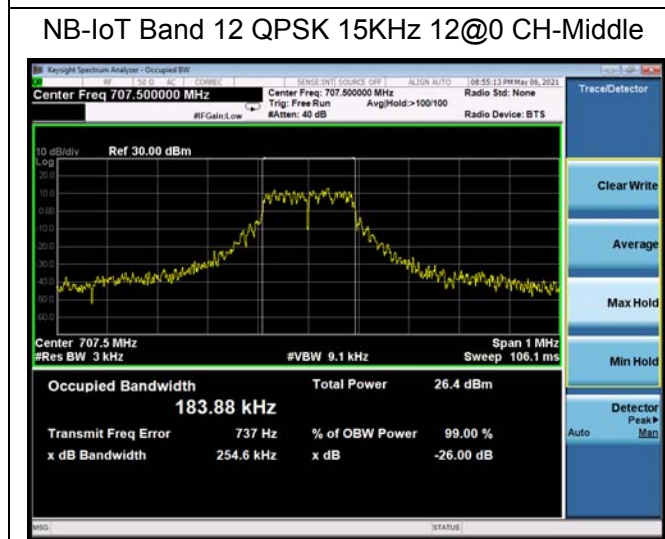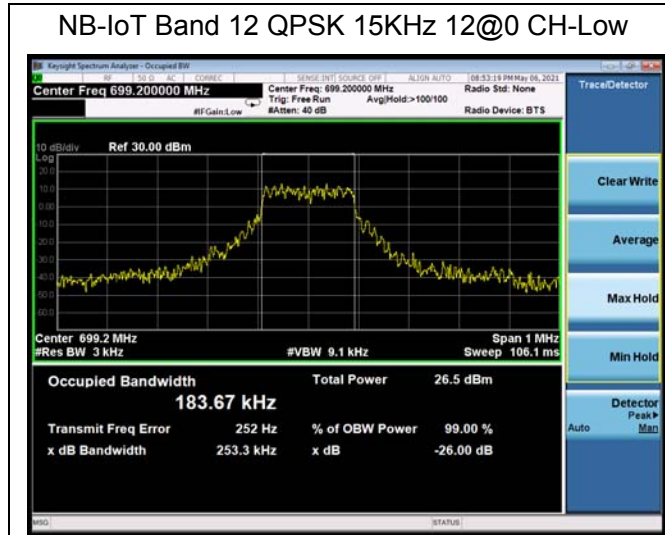

NB-IoT Band 13 BPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 13 BPSK 15KHz 1@0 CH-Low




NB-IoT Band 13 BPSK 3.75KHz 1@0 CH-Middle



NB-IoT Band 13 BPSK 15KHz 1@0 CH-Middle



NB-IoT Band 13 BPSK 3.75KHz 1@0 CH-High

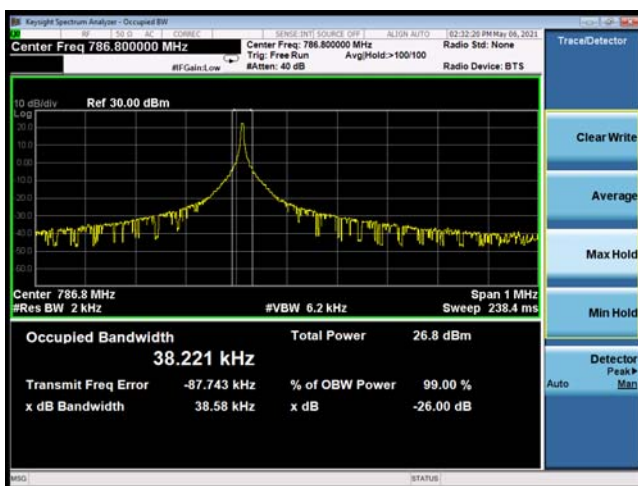

NB-IoT Band 13 BPSK 15KHz 1@0 CH-High




NB-IoT Band 13 QPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 13 QPSK 15KHz 1@0 CH-Low



NB-IoT Band 13 QPSK 3.75KHz 1@0 CH-Middle

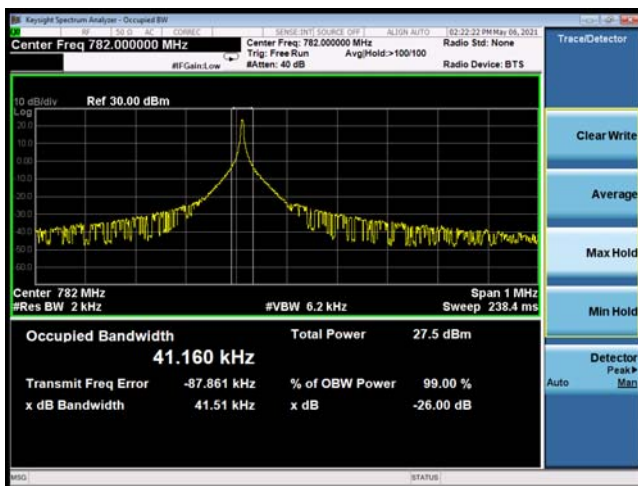

NB-IoT Band 13 QPSK 15KHz 1@0 CH-Middle






NB-IoT Band 13 QPSK 3.75KHz 1@0 CH-High



NB-IoT Band 13 QPSK 15KHz 1@0 CH-High



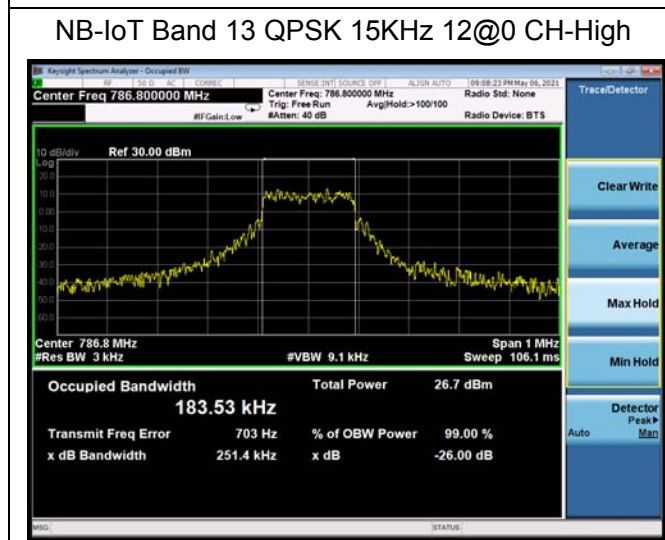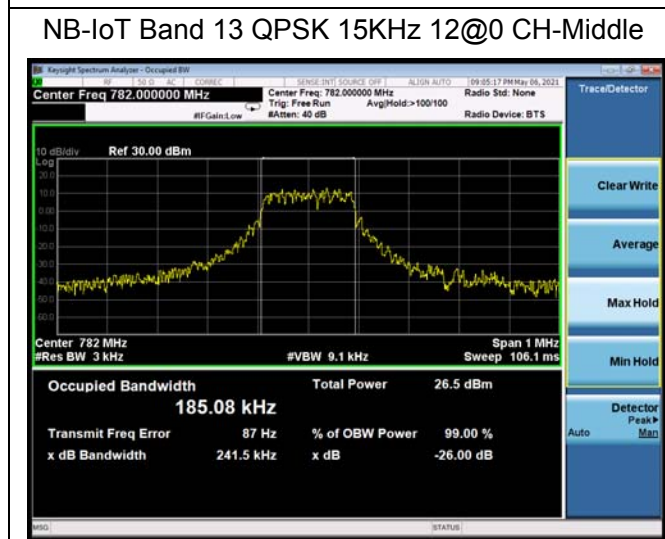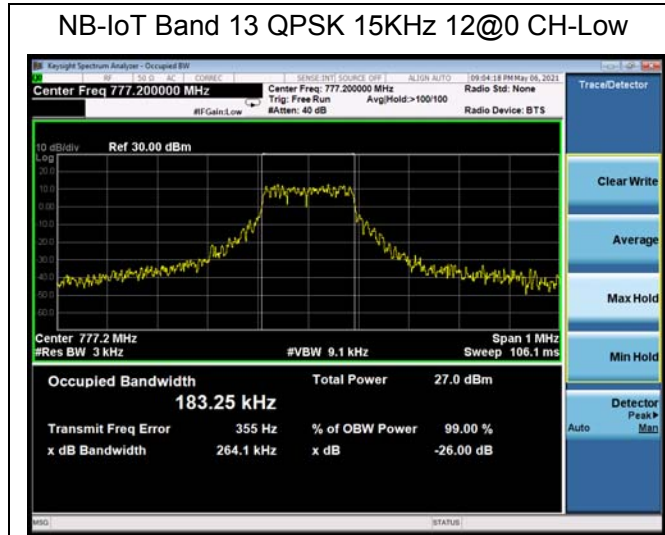

NB-IoT Band 17 BPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 17 BPSK 15KHz 1@0 CH-Low




NB-IoT Band 17 BPSK 3.75KHz 1@0 CH-Middle




NB-IoT Band 17 BPSK 15KHz 1@0 CH-Middle




NB-IoT Band 17 BPSK 3.75KHz 1@0 CH-High

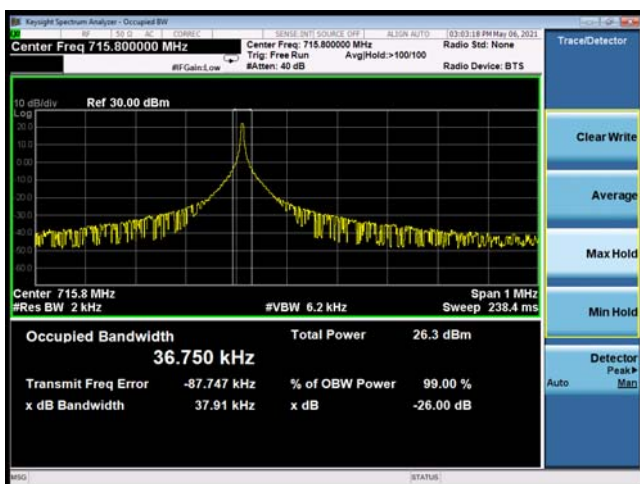

NB-IoT Band 17 BPSK 15KHz 1@0 CH-High

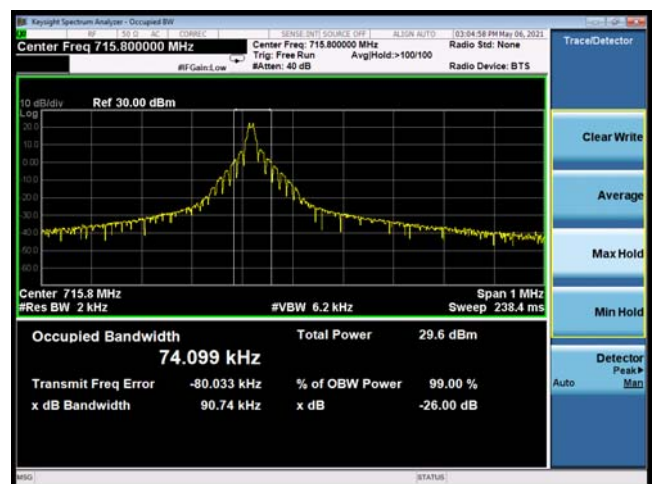


NB-IoT Band 17 QPSK 3.75KHz 1@0 CH-Low

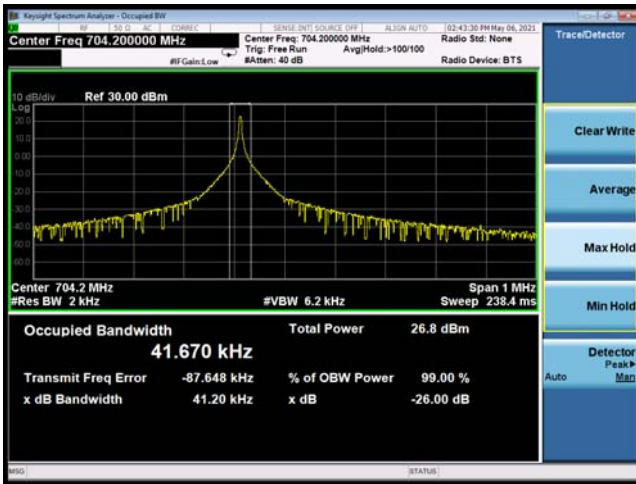

NB-IoT Band 17 QPSK 15KHz 1@0 CH-Low




NB-IoT Band 17 QPSK 3.75KHz 1@0 CH-Middle

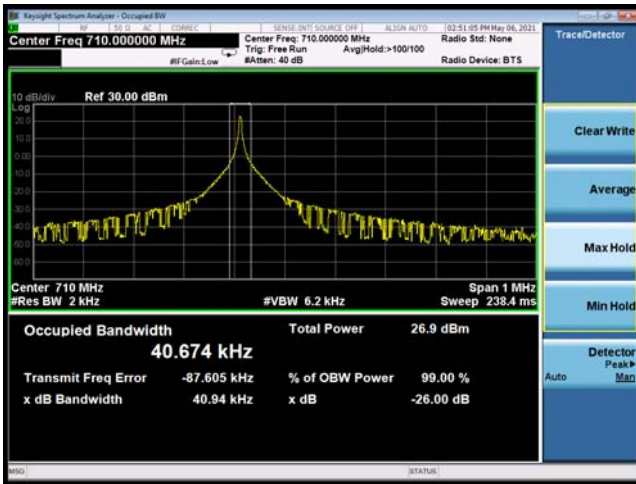


NB-IoT Band 17 QPSK 15KHz 1@0 CH-Middle



NB-IoT Band 17 QPSK 3.75KHz 1@0 CH-High

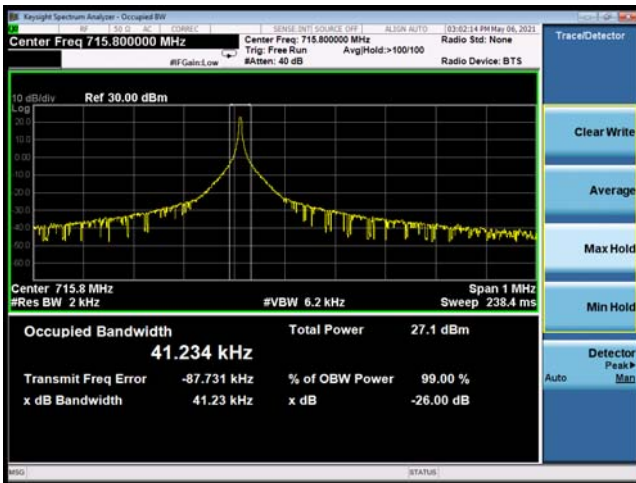

NB-IoT Band 17 QPSK 15KHz 1@0 CH-High

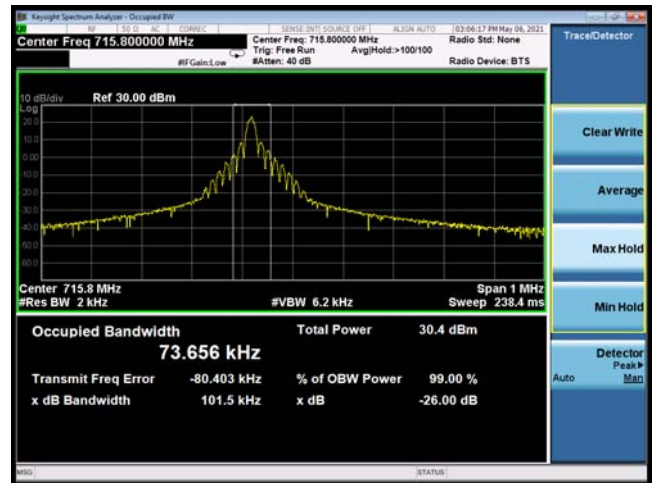


NB-IoT Band 17 QPSK 15KHz 12@0 CH-Low




NB-IoT Band 17 QPSK 15KHz 12@0 CH-Middle




NB-IoT Band 17 QPSK 15KHz 12@0 CH-High

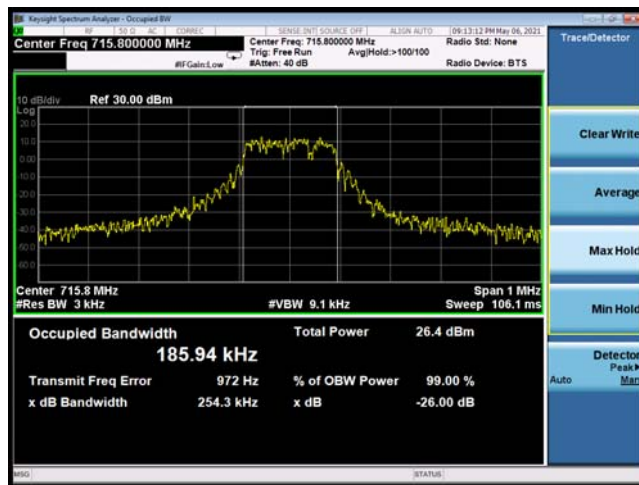

NB-IoT Band 66 BPSK 3.75KHz 1@0 CH-Low

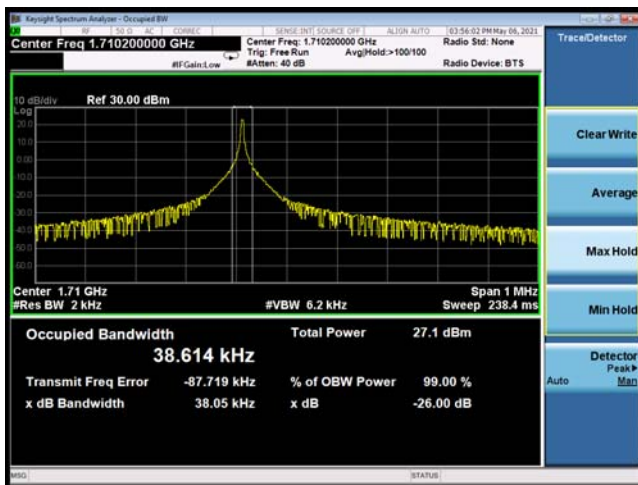

NB-IoT Band 66 BPSK 15KHz 1@0 CH-Low

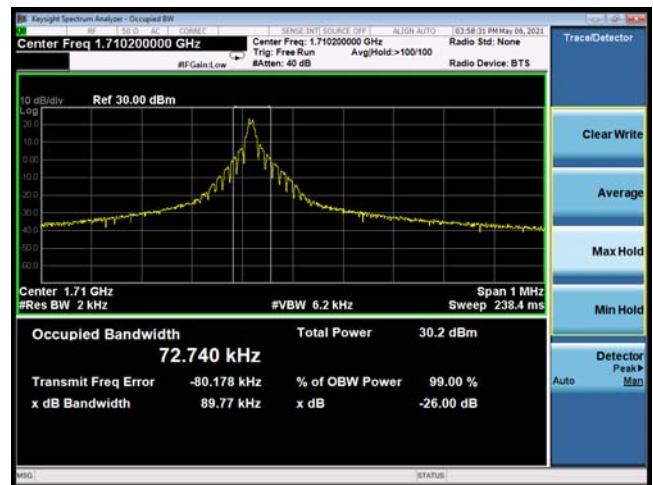


NB-IoT Band 66 BPSK 3.75KHz 1@0 CH-Middle




NB-IoT Band 66 BPSK 15KHz 1@0 CH-Middle



NB-IoT Band 66 BPSK 3.75KHz 1@0 CH-High

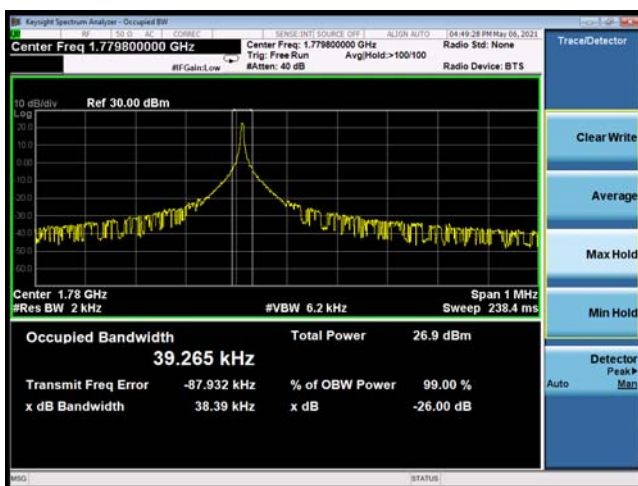

NB-IoT Band 66 BPSK 15KHz 1@0 CH-High

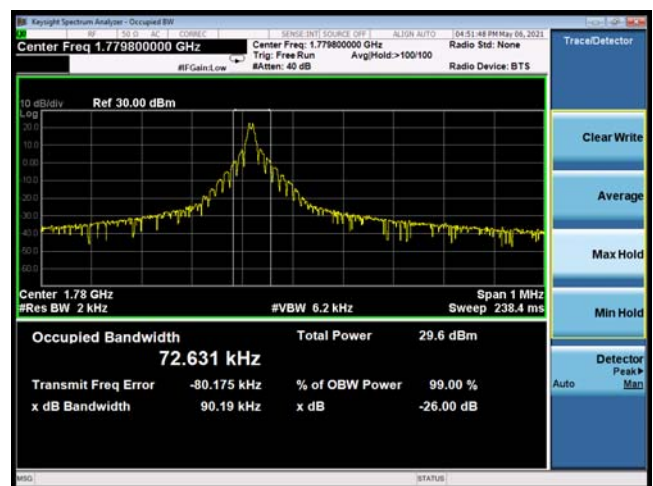


NB-IoT Band 66 QPSK 3.75KHz 1@0 CH-Low



NB-IoT Band 66 QPSK 15KHz 1@0 CH-Low




NB-IoT Band 66 QPSK 3.75KHz 1@0 CH-Middle

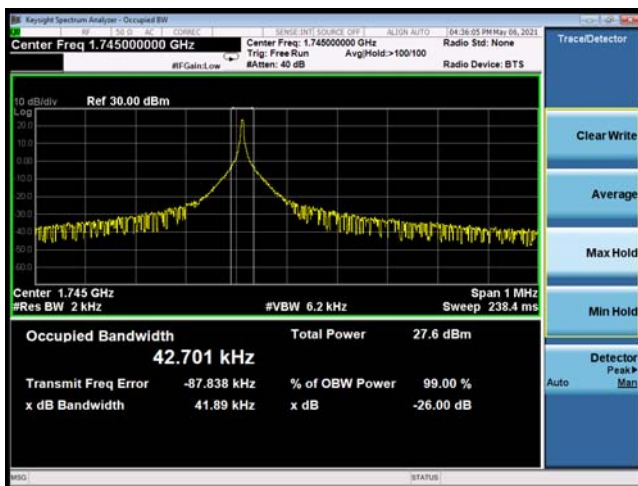

NB-IoT Band 66 QPSK 15KHz 1@0 CH-Middle



NB-IoT Band 66 QPSK 3.75KHz 1@0 CH-High

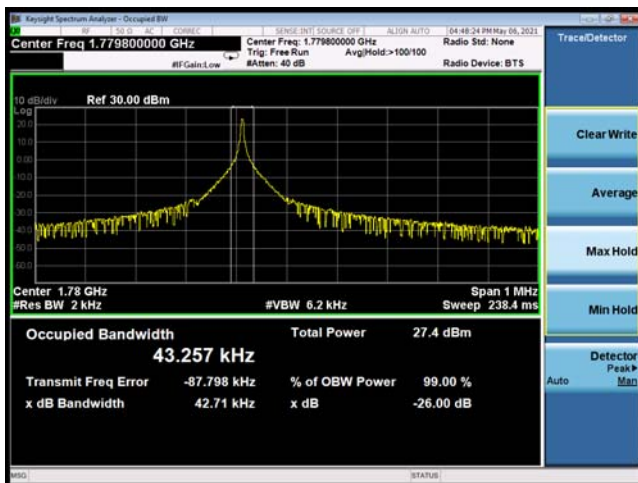


NB-IoT Band 66 QPSK 15KHz 1@0 CH-High




NB-IoT Band 66 QPSK 15KHz 12@0 CH-Low



NB-IoT Band 66 QPSK 15KHz 12@0 CH-Middle

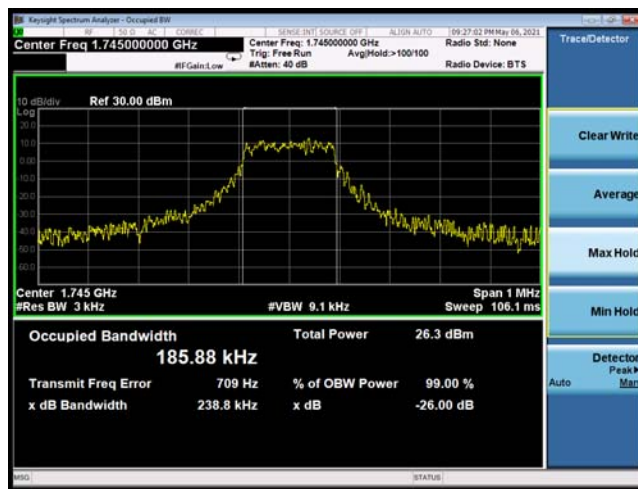


NB-IoT Band 66 QPSK 15KHz 12@0 CH-High

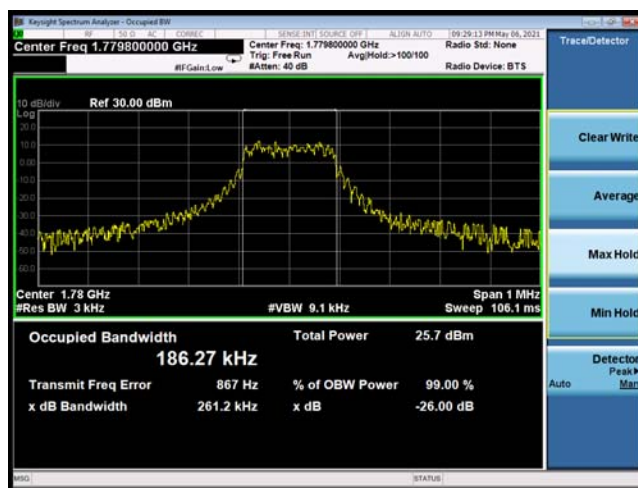


6.3 Band Edge Compliance

All the test traces in the plots shows the test results clearly.


NB-IoT Band 4 BPSK 3.75KHz 1@0 CH-Low

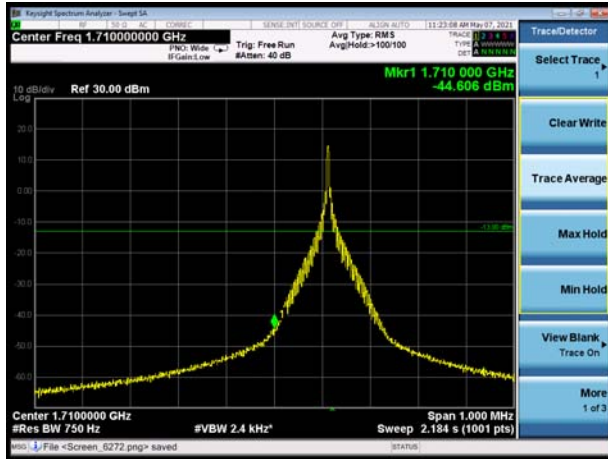


NB-IoT Band 4 BPSK 3.75KHz 1@0 CH-High

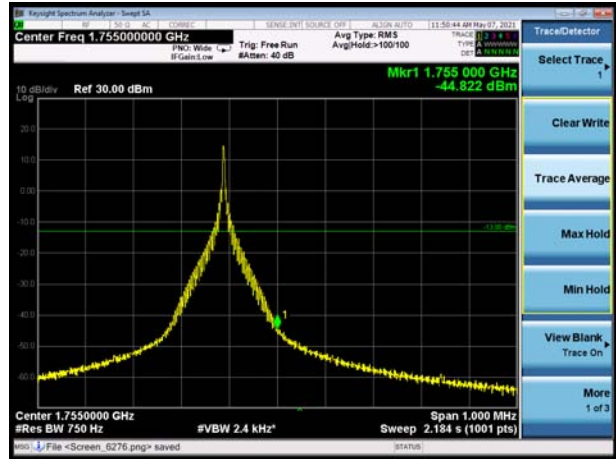


NB-IoT Band 4 QPSK 3.75KHz 1@0 CH-Low

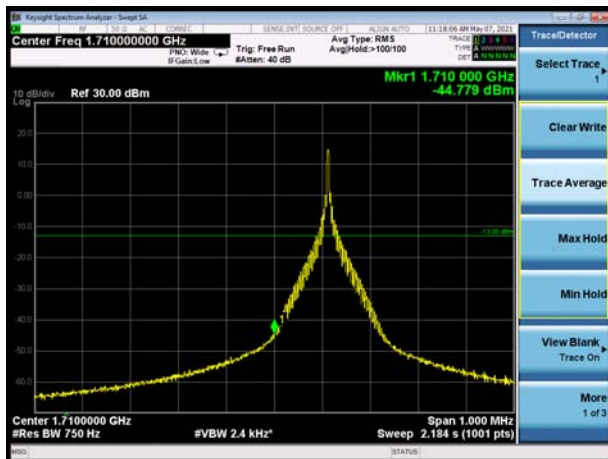


NB-IoT Band 4 QPSK 3.75KHz 1@0 CH-High

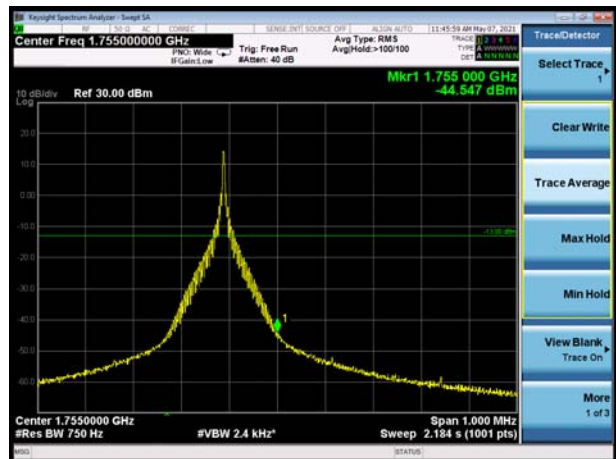


NB-IoT Band 4 BPSK 15KHz 1@0 CH-Low

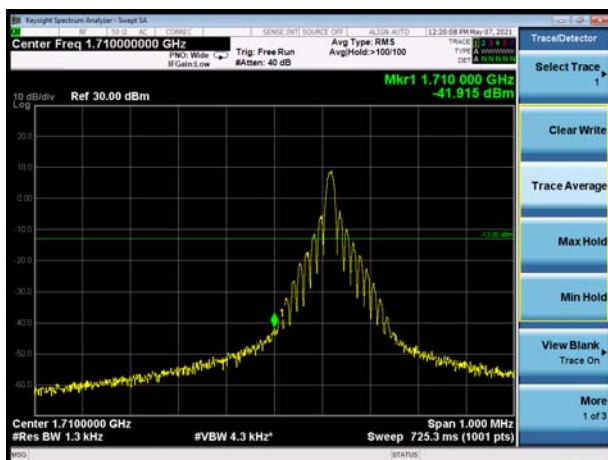


NB-IoT Band 4 BPSK 15KHz 1@0 CH- High

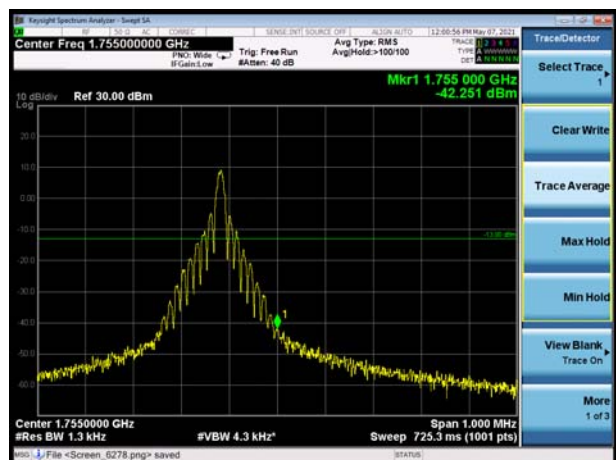


NB-IoT Band 4 QPSK 15KHz 1@0 CH-Low

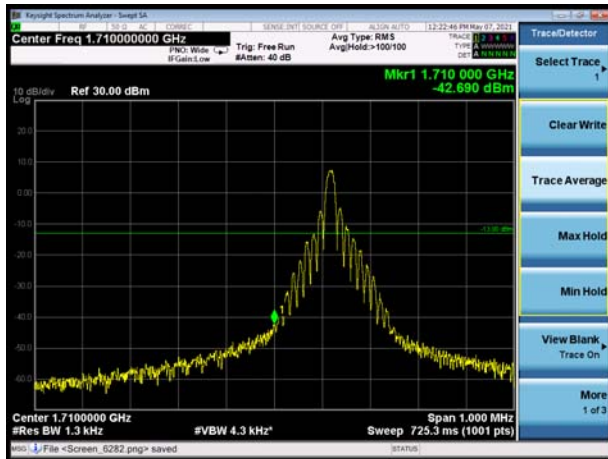


NB-IoT Band 4 QPSK 15KHz 1@0 CH- High

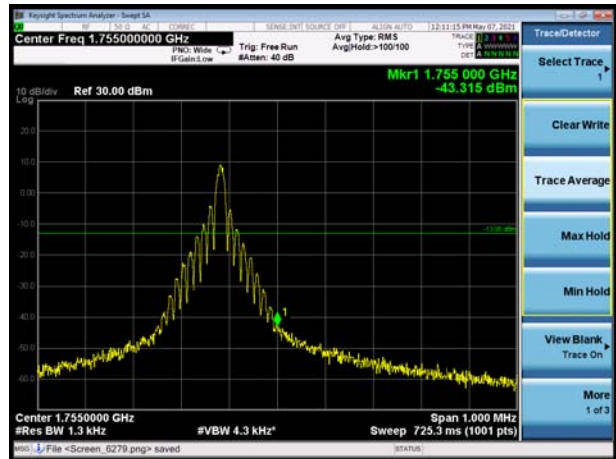


NB-IoT Band 4 QPSK 15KHz 12@0 CH-Low

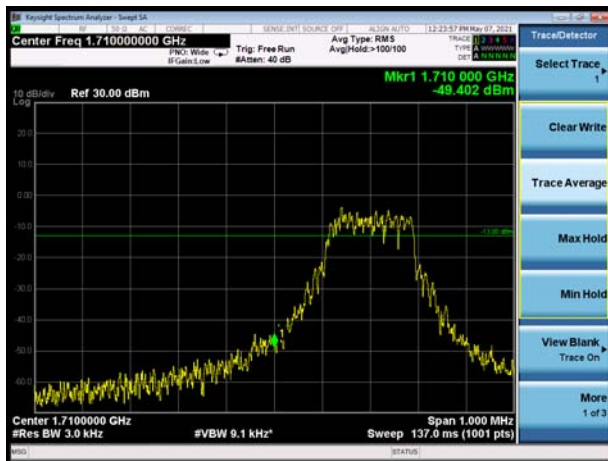


NB-IoT Band 4 QPSK 15KHz 12@0 CH- High

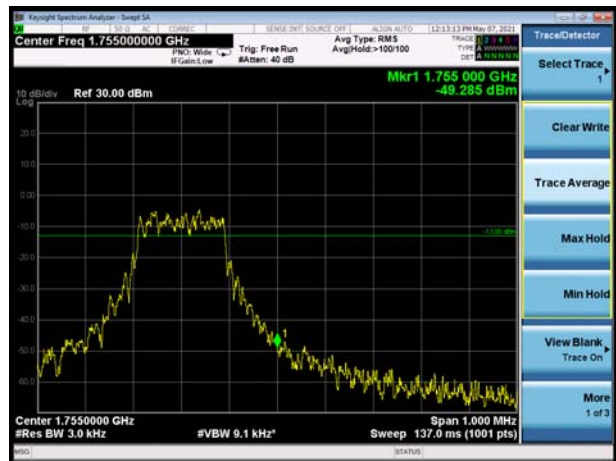


NB-IoT Band 12 BPSK 3.75KHz 1@0 CH-Low

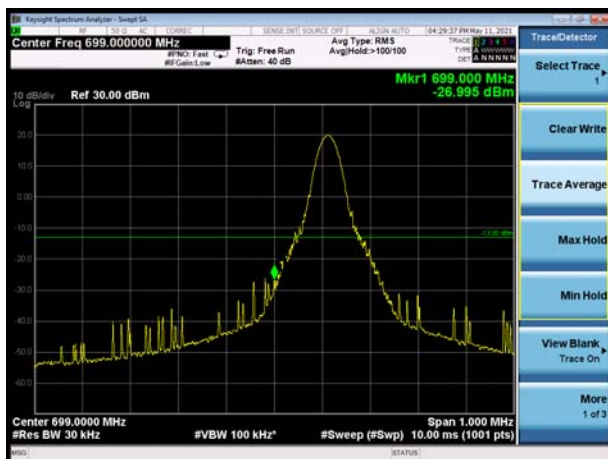


NB-IoT Band 12 BPSK 3.75KHz 1@0 CH- High

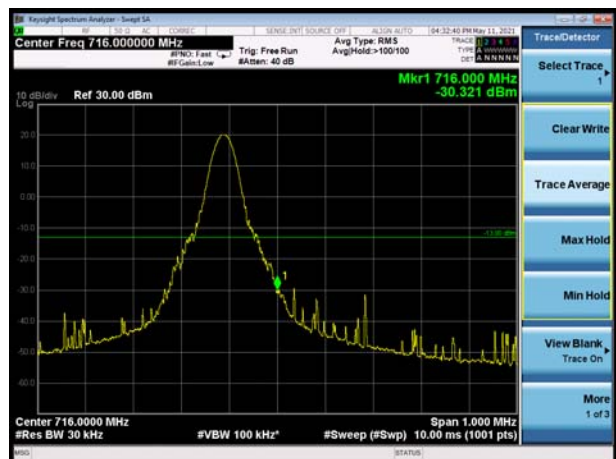


NB-IoT Band 12 QPSK 3.75KHz 1@0 CH-Low

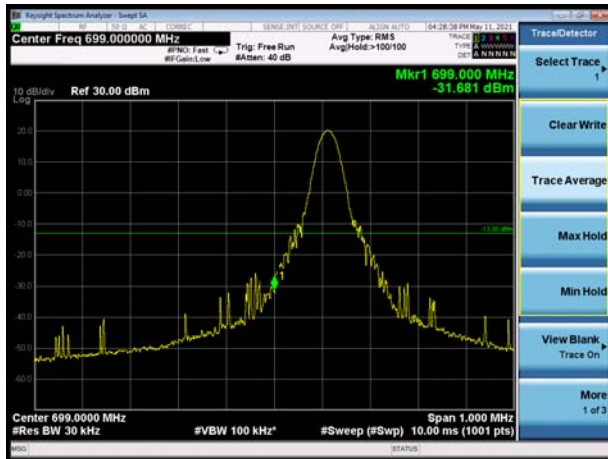


NB-IoT Band 12 QPSK 3.75KHz 1@0 CH- High

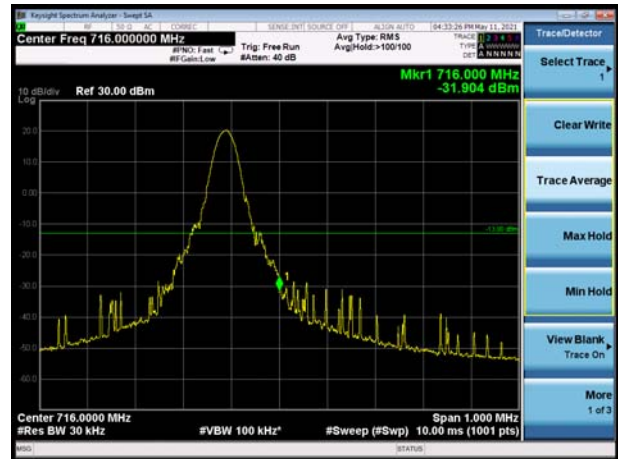


NB-IoT Band 12 BPSK 15KHz 1@0 CH-Low

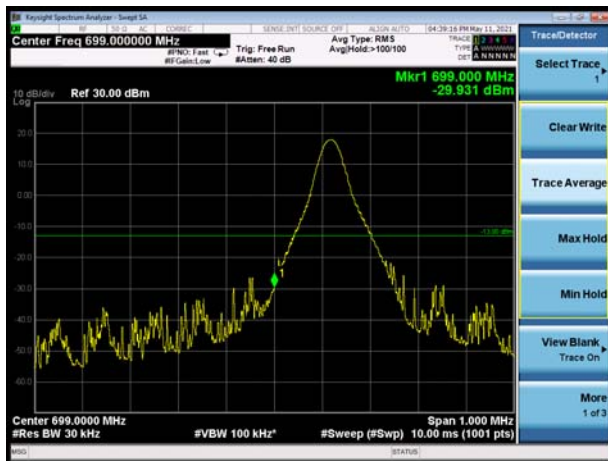


NB-IoT Band 12 BPSK 15KHz 1@0 CH- High

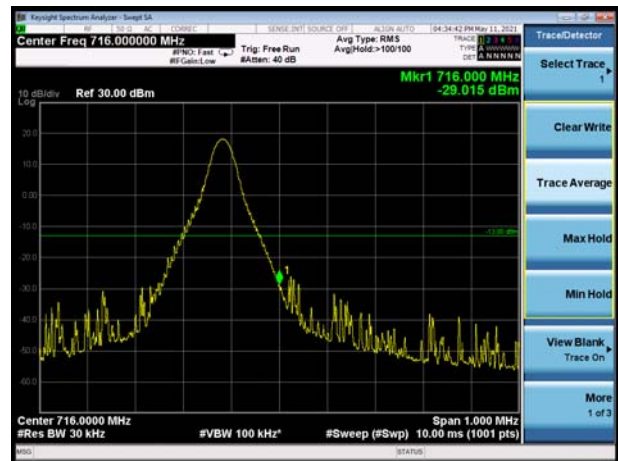


NB-IoT Band 12 QPSK 15KHz 1@0 CH-Low

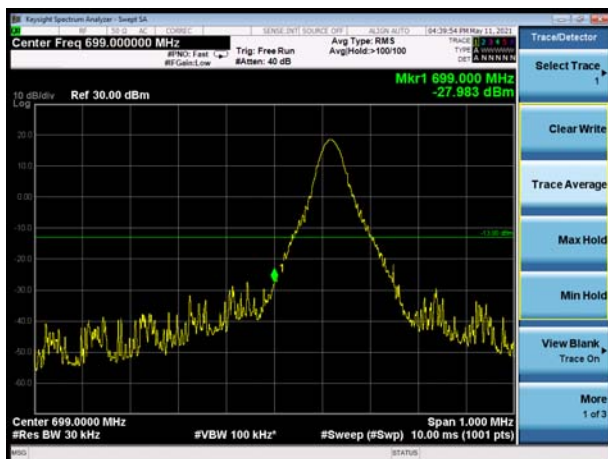


NB-IoT Band 12 QPSK 15KHz 1@0 CH- High

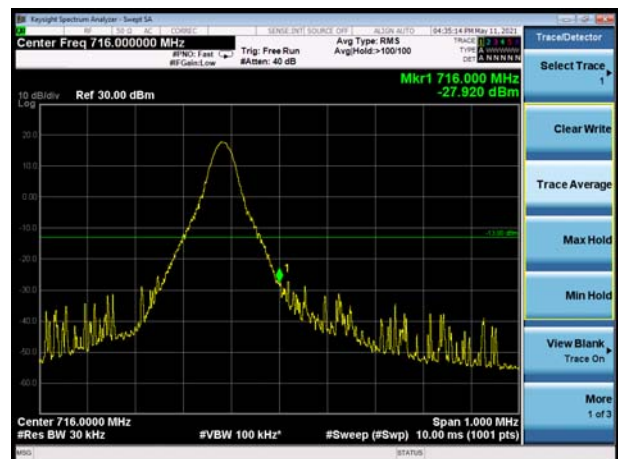


NB-IoT Band 12 QPSK 15KHz 12@0 CH-Low

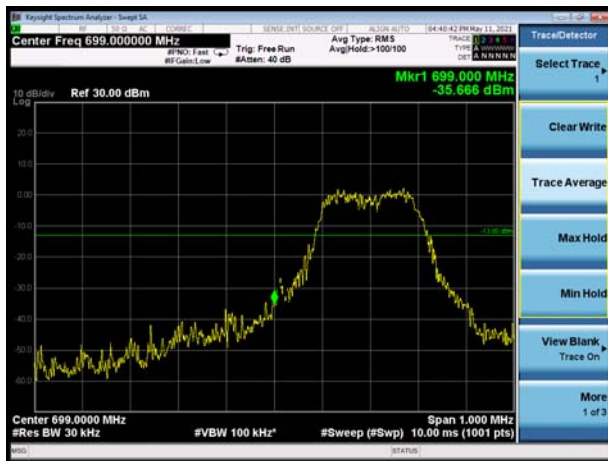


NB-IoT Band 12 QPSK 15KHz 12@0 CH- High

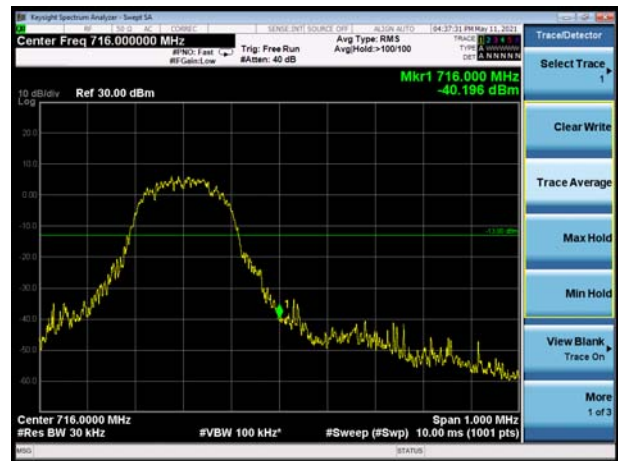


NB-IoT Band 13 BPSK 3.75KHz 1@0 CH-Low

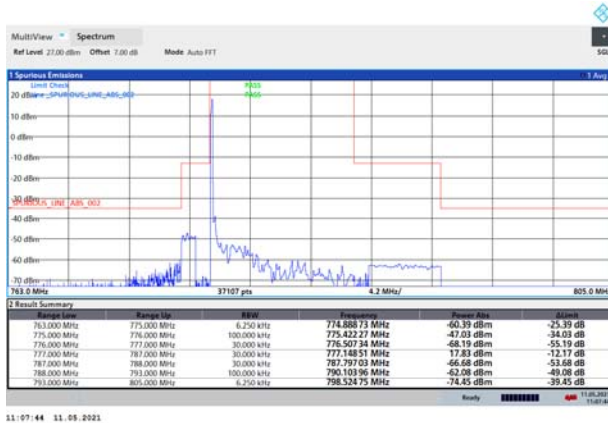


NB-IoT Band 13 BPSK 3.75KHz 1@0 CH- High

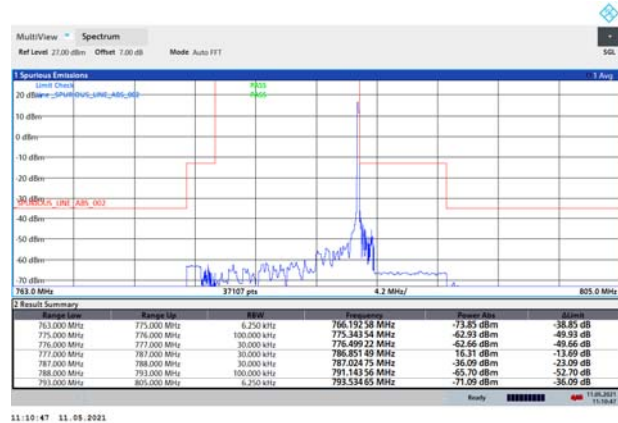


NB-IoT Band 13 QPSK 3.75KHz 1@0 CH-Low

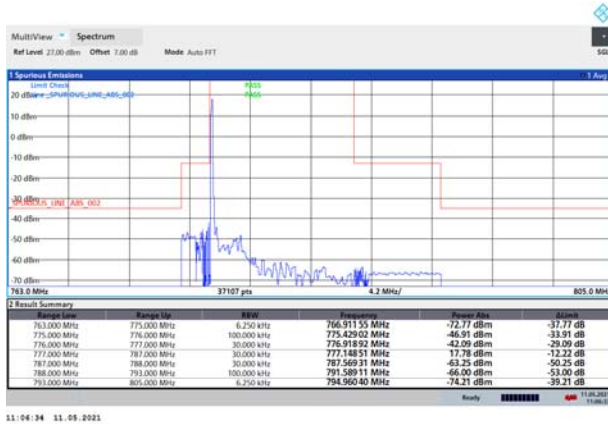

NB-IoT Band 13 QPSK 3.75KHz 1@0 CH- High

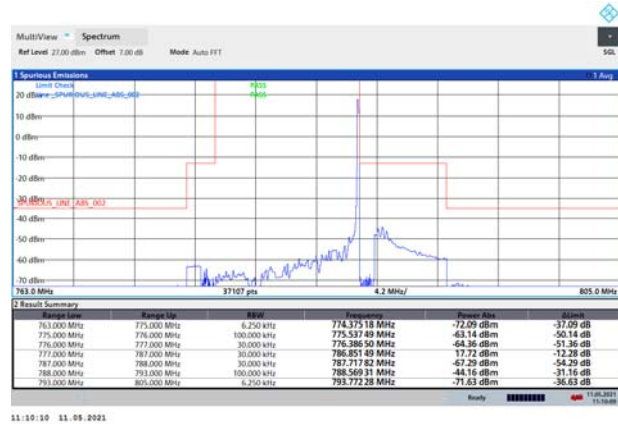


NB-IoT Band 13 BPSK 15KHz 1@0 CH-Low

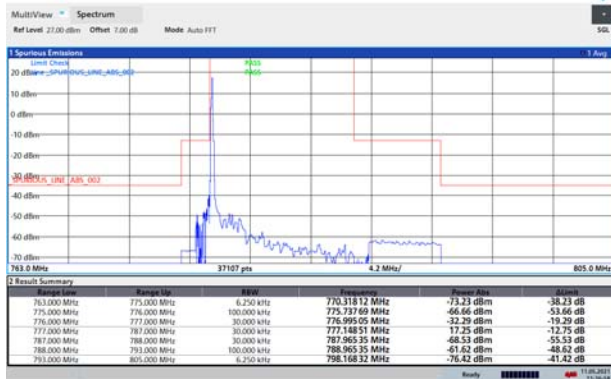


11:24:59 11.05.2021

NB-IoT Band 13 BPSK 15KHz 1@0 CH- High

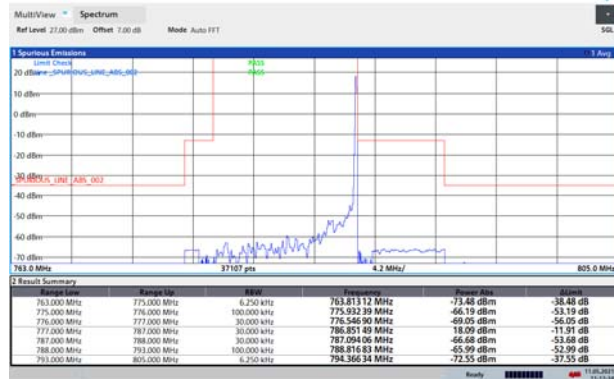


11:12:34 11.05.2021

NB-IoT Band 13 QPSK 15KHz 1@0 CH-Low

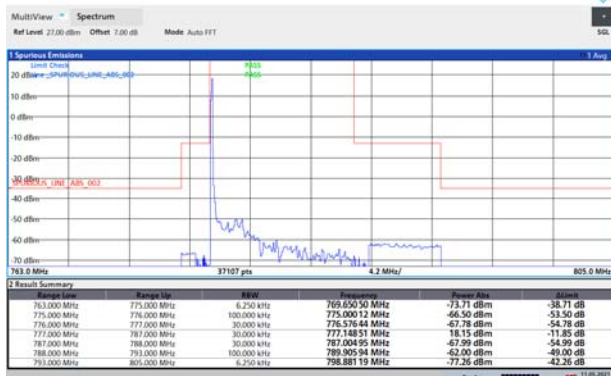


11:25:48 11.05.2021

NB-IoT Band 13 QPSK 15KHz 1@0 CH- High

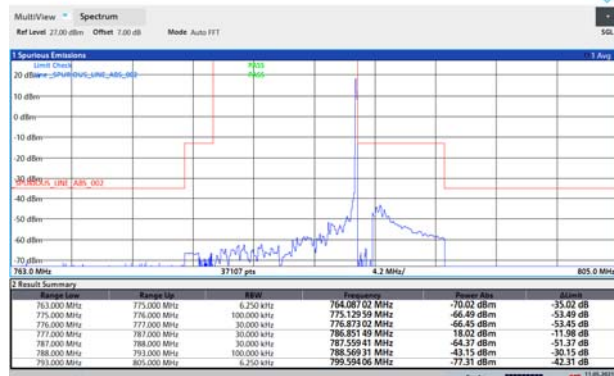


11:12:23 11.05.2021

NB-IoT Band 13 QPSK 15KHz 12@0 CH-Low

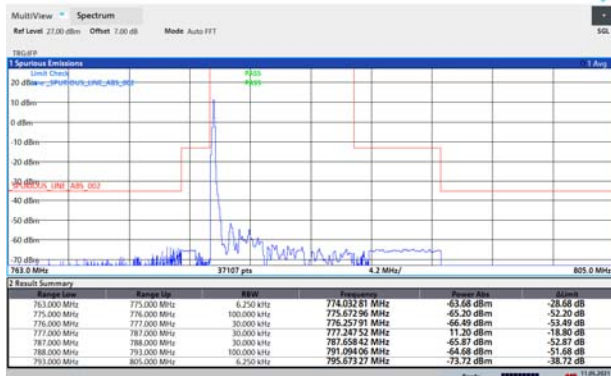


12:00:04 11.05.2021

NB-IoT Band 13 QPSK 15KHz 12@0 CH- High

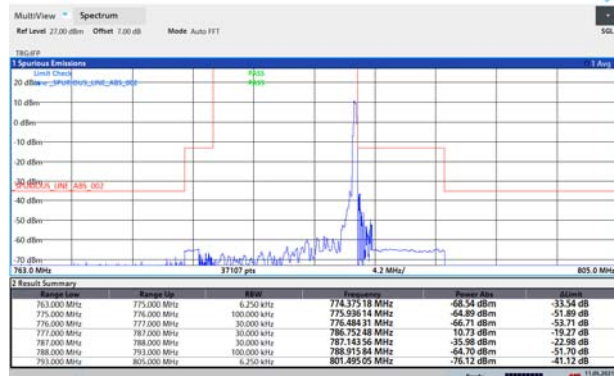


12:02:00 11.05.2021


NB-IoT Band 17 BPSK 3.75KHz 1@0 CH-Low

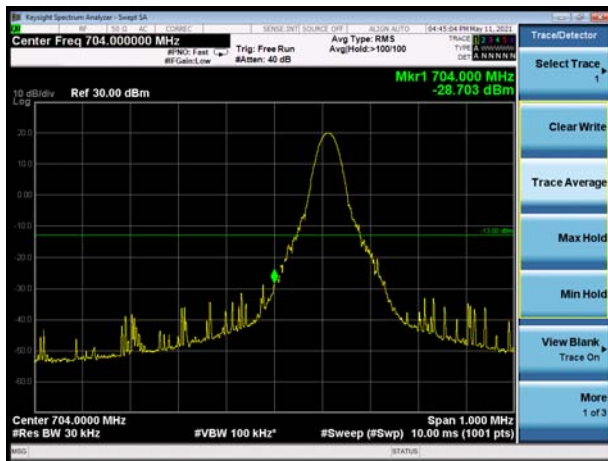


NB-IoT Band 17 BPSK 3.75KHz 1@0 CH- High

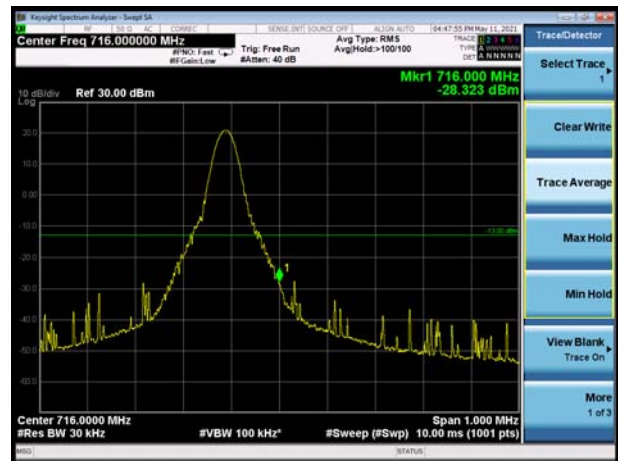


NB-IoT Band 17 QPSK 3.75KHz 1@0 CH-Low

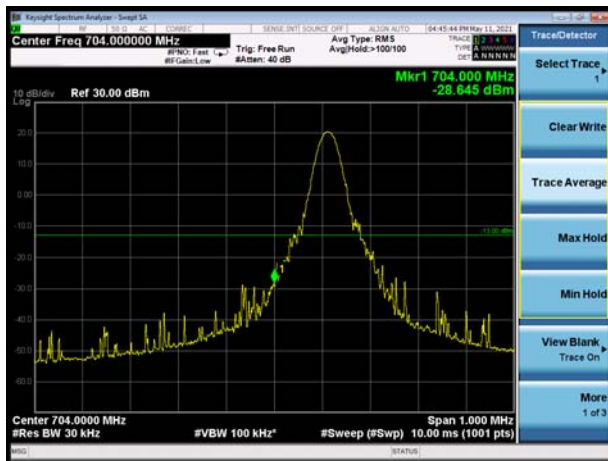


NB-IoT Band 17 QPSK 3.75KHz 1@0 CH- High

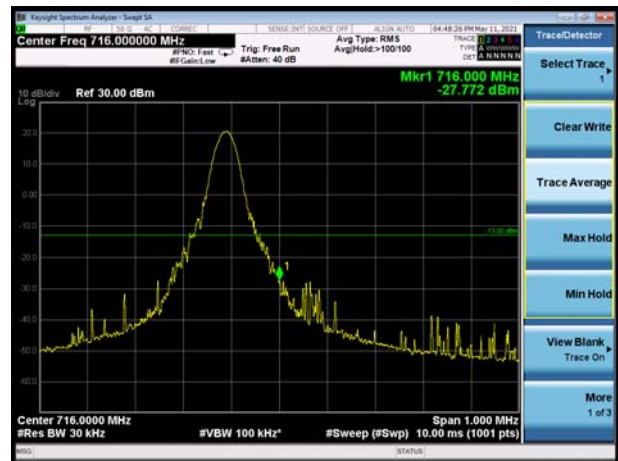


NB-IoT Band 17 BPSK 15KHz 1@0 CH-Low

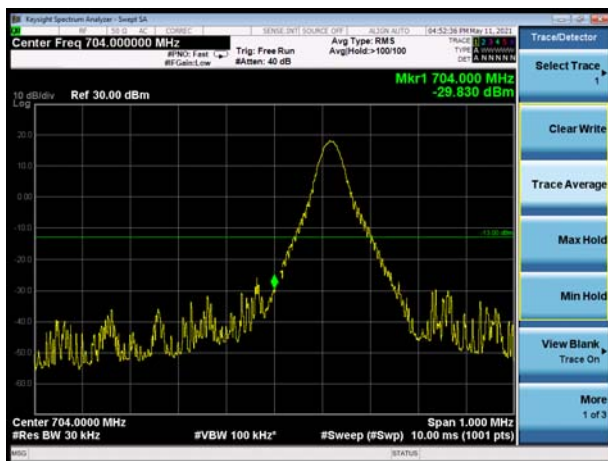


NB-IoT Band 17 BPSK 15KHz 1@0 CH- High

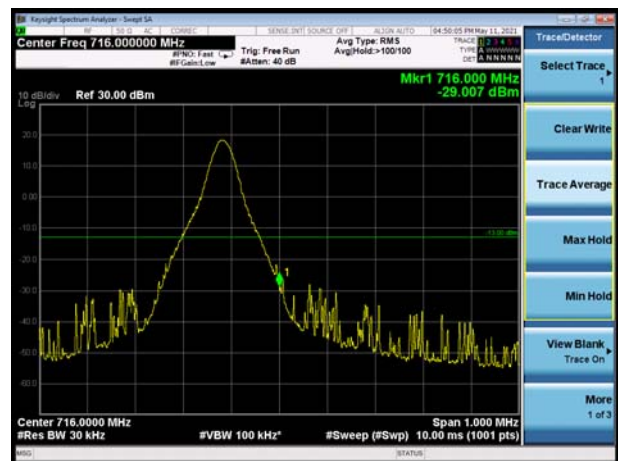


NB-IoT Band 17 QPSK 15KHz 1@0 CH-Low

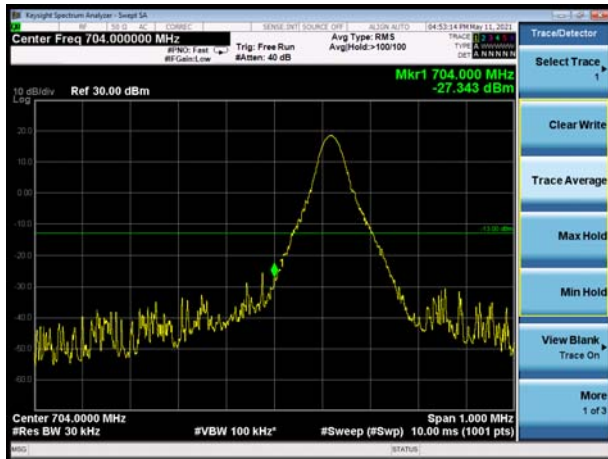


NB-IoT Band 17 QPSK 15KHz 1@0 CH- High

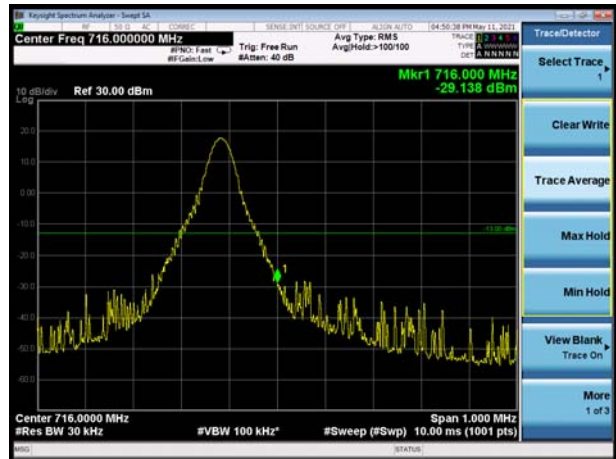


NB-IoT Band 17 QPSK 15KHz 12@0 CH-Low

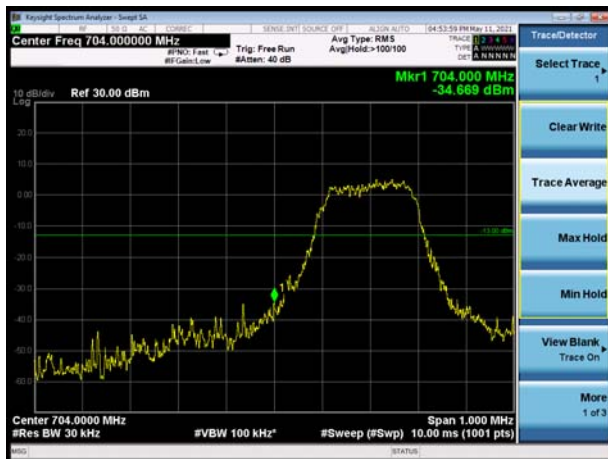


NB-IoT Band 17 QPSK 15KHz 12@0 CH- High

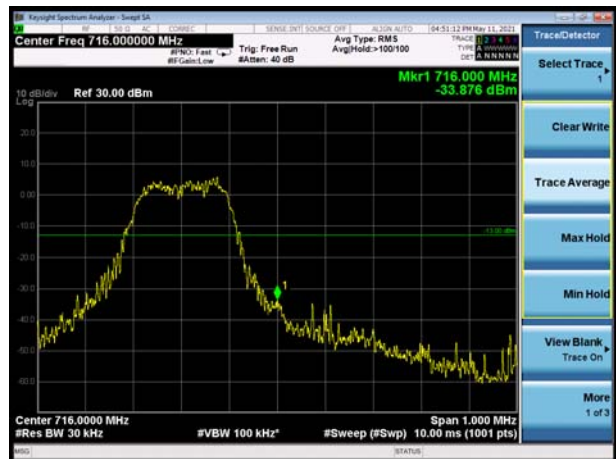


NB-IoT Band 66 BPSK 3.75KHz 1@0 CH-Low

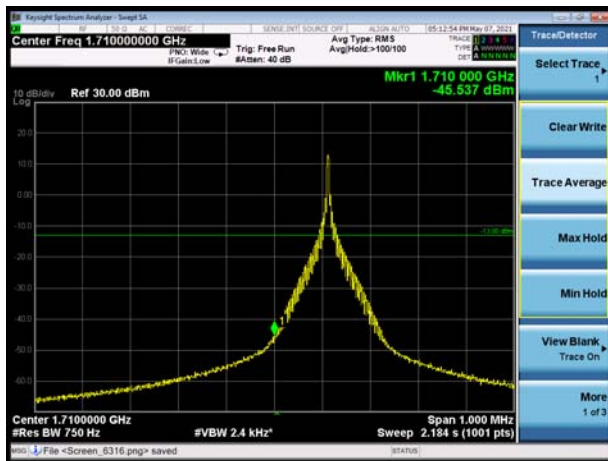


NB-IoT Band 66 BPSK 3.75KHz 1@0 CH- High

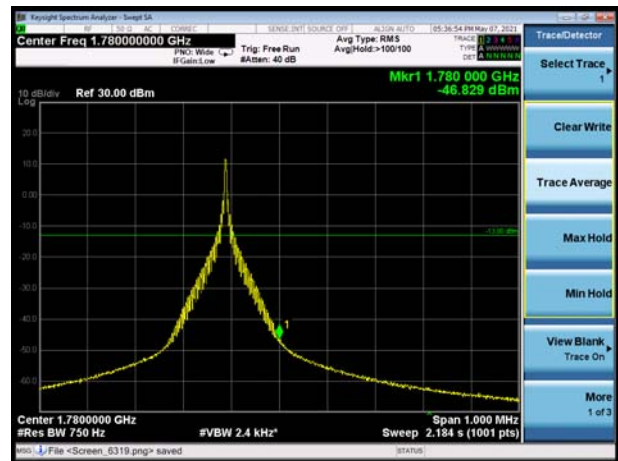


NB-IoT Band 66 QPSK 3.75KHz 1@0 CH-Low

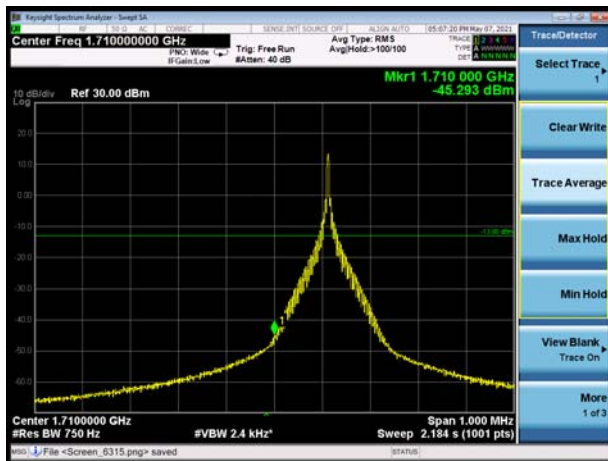


NB-IoT Band 66 QPSK 3.75KHz 1@0 CH- High

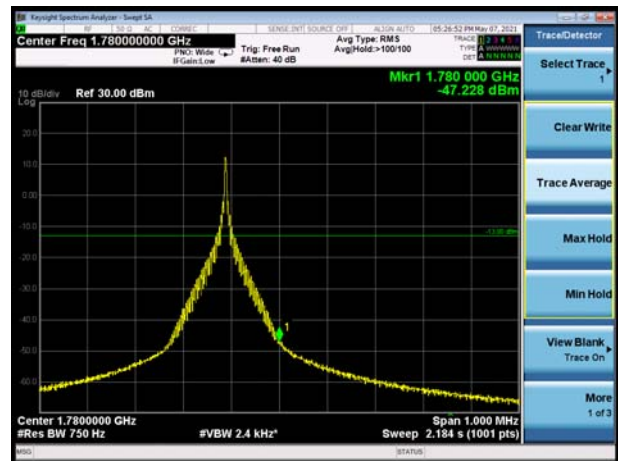


NB-IoT Band 66 BPSK 15KHz 1@0 CH-Low

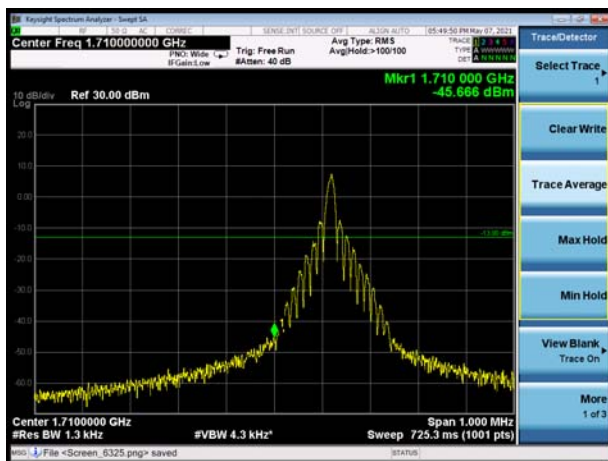


NB-IoT Band 66 BPSK 15KHz 1@0 CH- High

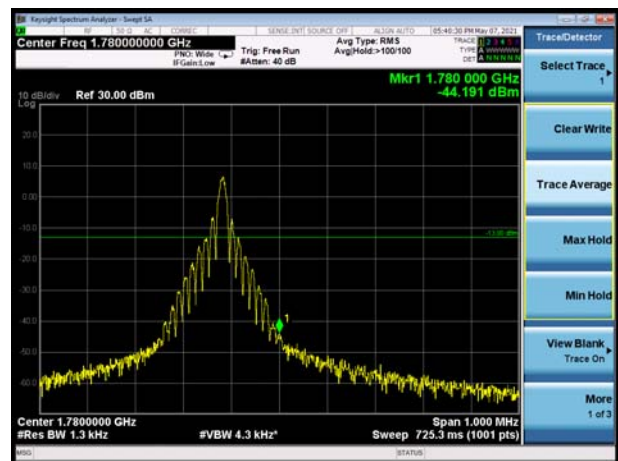


NB-IoT Band 66 QPSK 15KHz 1@0 CH-Low

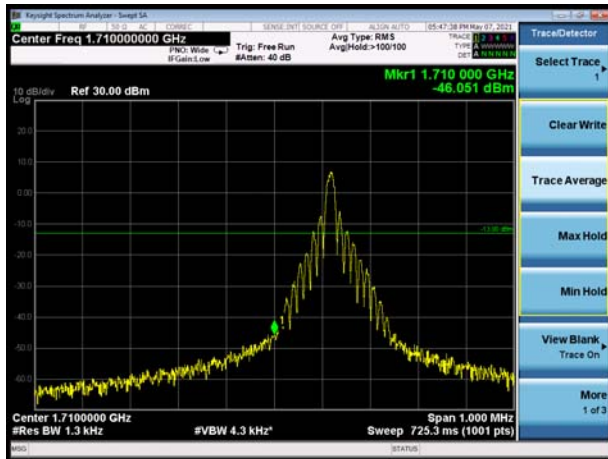

NB-IoT Band 66 QPSK 15KHz 1@0 CH- High

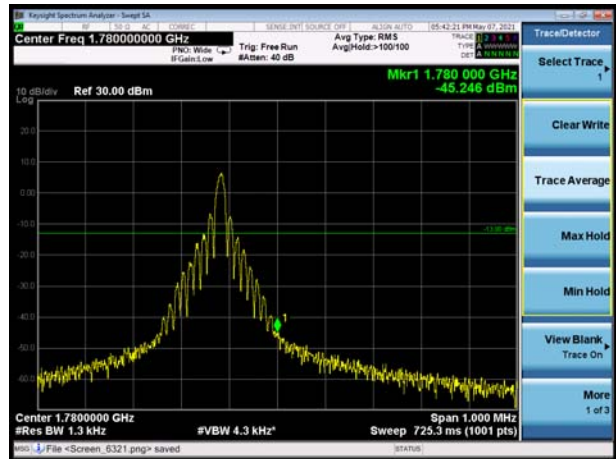

NB-IoT Band 66 QPSK 15KHz 12@0 CH-Low

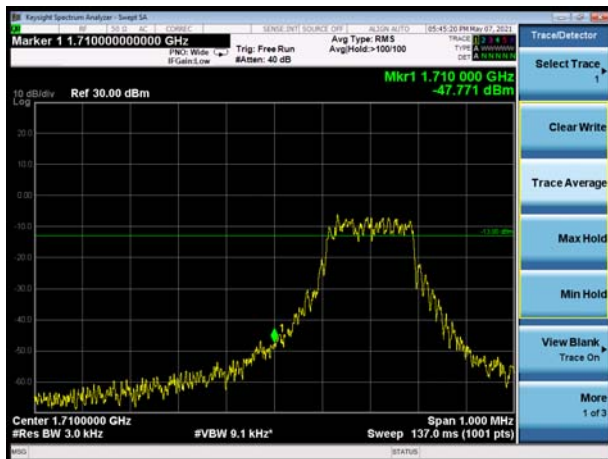

NB-IoT Band 66 QPSK 15KHz 12@0 CH- High



6.4 Peak-to-Average Power Ratio (PAPR)

| Mode | Modulation | Sub-carrier spacing (KHz) | Channel/ Frequency(MHz) | Peak-to-Average Power Ratio (PAPR) | | |
|--------------------|------------|---------------------------|-------------------------|------------------------------------|----------|----------|
| | | | | Peak(dBm) | Avg(dBm) | PAPR(dB) |
| Band 4 Standalone | BPSK | 3.75 | 20175/1732.5 | 24.10 | 19.61 | 4.49 |
| | QPSK | 3.75 | 20175/1732.5 | 24.35 | 19.62 | 4.73 |
| | BPSK | 15 | 20175/1732.5 | 24.39 | 15.82 | 8.57 |
| | QPSK | 15 | 20175/1732.5 | 24.42 | 15.87 | 8.55 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Channel/ Frequency(MHz) | Peak-to-Average Power Ratio (PAPR) | | |
| | | | | Peak(dBm) | Avg(dBm) | PAPR(dB) |
| Band 12 Standalone | BPSK | 3.75 | 23095/707.5 | 22.64 | 18.15 | 4.49 |
| | QPSK | 3.75 | 23095/707.5 | 22.94 | 18.23 | 4.71 |
| | BPSK | 15 | 23095/707.5 | 24.31 | 15.39 | 8.92 |
| | QPSK | 15 | 23095/707.5 | 24.53 | 15.32 | 9.21 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Channel/ Frequency(MHz) | Peak-to-Average Power Ratio (PAPR) | | |
| | | | | Peak(dBm) | Avg(dBm) | PAPR(dB) |
| Band 13 Standalone | BPSK | 3.75 | 23230/782 | 23.34 | 18.88 | 4.46 |
| | QPSK | 3.75 | 23230/782 | 23.56 | 18.82 | 4.74 |
| | BPSK | 15 | 23230/782 | 23.94 | 15.44 | 8.50 |
| | QPSK | 15 | 23230/782 | 23.99 | 15.52 | 8.47 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Channel/ Frequency(MHz) | Peak-to-Average Power Ratio (PAPR) | | |
| | | | | Peak(dBm) | Avg(dBm) | PAPR(dB) |
| Band17 Standalone | BPSK | 3.75 | 23790/710 | 22.76 | 18.27 | 4.49 |
| | QPSK | 3.75 | 23790/710 | 23.03 | 18.29 | 4.74 |
| | BPSK | 15 | 23790/710 | 23.94 | 15.46 | 8.48 |
| | QPSK | 15 | 23790/710 | 24.01 | 15.42 | 8.59 |
| Mode | Modulation | Sub-carrier spacing (KHz) | Channel/ Frequency(MHz) | Peak-to-Average Power Ratio (PAPR) | | |
| | | | | Peak(dBm) | Avg(dBm) | PAPR(dB) |
| Band 66 Standalone | BPSK | 3.75 | 132322/1745 | 24.19 | 19.72 | 4.47 |
| | QPSK | 3.75 | 132322/1745 | 24.48 | 19.77 | 4.71 |
| | BPSK | 15 | 132322/1745 | 24.47 | 15.91 | 8.56 |
| | QPSK | 15 | 132322/1745 | 24.51 | 15.99 | 8.52 |

6.5 Frequency Stability

| NB-IoT Band 4 | | | | | | |
|---------------------------|---------|-----------------|-----------------|--------------------------|--------------------------|---------|
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 3.75 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 9.64 | 1.39 | 0.00513 | 0.00074 | PASS |
| Extreme (50°C) | | 8.07 | 9.94 | 0.00429 | 0.00529 | PASS |
| Extreme (40°C) | | 12.65 | 15.03 | 0.00673 | 0.00799 | PASS |
| Extreme (30°C) | | 6.60 | 9.03 | 0.00351 | 0.00480 | PASS |
| Extreme (20°C) | | 6.83 | 6.24 | 0.00363 | 0.00332 | PASS |
| Extreme (10°C) | | 2.96 | 6.46 | 0.00157 | 0.00344 | PASS |
| Extreme (0°C) | | 8.27 | 11.31 | 0.00440 | 0.00602 | PASS |
| Extreme (-10°C) | | 12.76 | 2.17 | 0.00679 | 0.00115 | PASS |
| Extreme (-20°C) | | 11.69 | 11.23 | 0.00622 | 0.00598 | PASS |
| Extreme (-30°C) | | 17.94 | 10.09 | 0.00954 | 0.00537 | PASS |
| 25°C | LV | 11.28 | 2.80 | 0.00600 | 0.00149 | PASS |
| | HV | 15.68 | 14.35 | 0.00834 | 0.00764 | PASS |
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 15 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 2.74 | 6.49 | 0.00145 | 0.00345 | PASS |
| Extreme (50°C) | | 16.96 | 15.39 | 0.00902 | 0.00818 | PASS |
| Extreme (40°C) | | 12.70 | 17.45 | 0.00675 | 0.00928 | PASS |
| Extreme (30°C) | | 17.26 | 2.51 | 0.00918 | 0.00134 | PASS |
| Extreme (20°C) | | 5.81 | 4.80 | 0.00309 | 0.00256 | PASS |
| Extreme (10°C) | | 10.73 | 10.55 | 0.00570 | 0.00561 | PASS |
| Extreme (0°C) | | 17.55 | 11.85 | 0.00934 | 0.00631 | PASS |
| Extreme (-10°C) | | 8.41 | 15.39 | 0.00447 | 0.00819 | PASS |
| Extreme (-20°C) | | 14.06 | 4.23 | 0.00748 | 0.00225 | PASS |
| Extreme (-30°C) | | 14.48 | 11.75 | 0.00770 | 0.00625 | PASS |
| 25°C | LV | 8.63 | 17.30 | 0.00459 | 0.00920 | PASS |
| | HV | 4.57 | 9.28 | 0.00243 | 0.00494 | PASS |

| NB-IoT Band 12 | | | | | | |
|---------------------------|---------|-----------------|-----------------|--------------------------|--------------------------|---------|
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 3.75 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 8.34 | 12.44 | 0.00443 | 0.00662 | PASS |
| Extreme (50°C) | | 3.31 | 1.85 | 0.00176 | 0.00099 | PASS |
| Extreme (40°C) | | 5.56 | 7.48 | 0.00296 | 0.00398 | PASS |
| Extreme (30°C) | | 16.81 | 14.86 | 0.00894 | 0.00790 | PASS |
| Extreme (20°C) | | 9.32 | 7.54 | 0.00496 | 0.00401 | PASS |
| Extreme (10°C) | | 7.98 | 11.57 | 0.00425 | 0.00615 | PASS |
| Extreme (0°C) | | 2.42 | 13.86 | 0.00129 | 0.00737 | PASS |
| Extreme (-10°C) | | 10.71 | 9.70 | 0.00570 | 0.00516 | PASS |
| Extreme (-20°C) | | 17.97 | 3.35 | 0.00956 | 0.00178 | PASS |
| Extreme (-30°C) | | 1.85 | 1.33 | 0.00099 | 0.00071 | PASS |
| 25°C | LV | 2.76 | 16.25 | 0.00147 | 0.00864 | PASS |
| | HV | 3.40 | 15.44 | 0.00181 | 0.00821 | PASS |
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 15 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 10.86 | 10.63 | 0.00578 | 0.00566 | PASS |
| Extreme (50°C) | | 4.14 | 12.95 | 0.00220 | 0.00689 | PASS |
| Extreme (40°C) | | 7.96 | 13.37 | 0.00424 | 0.00711 | PASS |
| Extreme (30°C) | | 14.74 | 11.09 | 0.00784 | 0.00590 | PASS |
| Extreme (20°C) | | 6.06 | 3.71 | 0.00322 | 0.00197 | PASS |
| Extreme (10°C) | | 12.47 | 1.19 | 0.00663 | 0.00063 | PASS |
| Extreme (0°C) | | 2.93 | 8.65 | 0.00156 | 0.00460 | PASS |
| Extreme (-10°C) | | 13.67 | 15.19 | 0.00727 | 0.00808 | PASS |
| Extreme (-20°C) | | 9.52 | 7.96 | 0.00507 | 0.00424 | PASS |
| Extreme (-30°C) | | 11.84 | 12.59 | 0.00630 | 0.00669 | PASS |
| 25°C | LV | 14.96 | 15.27 | 0.00796 | 0.00812 | PASS |
| | HV | 8.21 | 17.95 | 0.00436 | 0.00955 | PASS |


| NB-IoT Band 13 | | | | | | |
|---------------------------|---------|-----------------|-----------------|--------------------------|--------------------------|---------|
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 3.75 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 6.77 | 16.59 | 0.00360 | 0.00882 | PASS |
| Extreme (50°C) | | 3.69 | 9.97 | 0.00196 | 0.00530 | PASS |
| Extreme (40°C) | | 4.05 | 13.76 | 0.00215 | 0.00732 | PASS |
| Extreme (30°C) | | 3.63 | 16.71 | 0.00193 | 0.00889 | PASS |
| Extreme (20°C) | | 6.23 | 9.67 | 0.00331 | 0.00514 | PASS |
| Extreme (10°C) | | 9.99 | 2.78 | 0.00532 | 0.00148 | PASS |
| Extreme (0°C) | | 2.26 | 16.77 | 0.00120 | 0.00892 | PASS |
| Extreme (-10°C) | | 14.08 | 10.40 | 0.00749 | 0.00553 | PASS |
| Extreme (-20°C) | | 13.14 | 4.92 | 0.00699 | 0.00262 | PASS |
| Extreme (-30°C) | | 5.75 | 9.23 | 0.00306 | 0.00491 | PASS |
| 25°C | LV | 9.47 | 10.94 | 0.00504 | 0.00582 | PASS |
| | HV | 8.89 | 8.44 | 0.00473 | 0.00449 | PASS |
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 15 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 13.55 | 5.31 | 0.00721 | 0.00282 | PASS |
| Extreme (50°C) | | 4.32 | 5.00 | 0.00230 | 0.00266 | PASS |
| Extreme (40°C) | | 17.83 | 5.65 | 0.00949 | 0.00300 | PASS |
| Extreme (30°C) | | 7.65 | 5.73 | 0.00407 | 0.00305 | PASS |
| Extreme (20°C) | | 6.36 | 7.96 | 0.00338 | 0.00423 | PASS |
| Extreme (10°C) | | 9.75 | 5.78 | 0.00519 | 0.00307 | PASS |
| Extreme (0°C) | | 7.63 | 9.83 | 0.00406 | 0.00523 | PASS |
| Extreme (-10°C) | | 11.77 | 8.72 | 0.00626 | 0.00464 | PASS |
| Extreme (-20°C) | | 12.86 | 9.11 | 0.00684 | 0.00485 | PASS |
| Extreme (-30°C) | | 13.41 | 4.50 | 0.00714 | 0.00239 | PASS |
| 25°C | LV | 8.47 | 4.91 | 0.00450 | 0.00261 | PASS |
| | HV | 1.12 | 16.72 | 0.00059 | 0.00890 | PASS |

| NB-IoT Band 17 | | | | | | |
|---------------------------|---------|-----------------|-----------------|--------------------------|--------------------------|---------|
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 3.75 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 11.28 | 4.69 | 0.00600 | 0.00250 | PASS |
| Extreme (50°C) | | 14.86 | 13.65 | 0.00791 | 0.00726 | PASS |
| Extreme (40°C) | | 1.17 | 16.14 | 0.00062 | 0.00859 | PASS |
| Extreme (30°C) | | 10.66 | 11.51 | 0.00567 | 0.00612 | PASS |
| Extreme (20°C) | | 8.34 | 9.31 | 0.00443 | 0.00495 | PASS |
| Extreme (10°C) | | 7.88 | 3.26 | 0.00419 | 0.00174 | PASS |
| Extreme (0°C) | | 7.02 | 16.26 | 0.00374 | 0.00865 | PASS |
| Extreme (-10°C) | | 2.56 | 15.81 | 0.00136 | 0.00841 | PASS |
| Extreme (-20°C) | | 3.93 | 12.00 | 0.00209 | 0.00638 | PASS |
| Extreme (-30°C) | | 7.46 | 17.53 | 0.00397 | 0.00933 | PASS |
| 25°C | LV | 6.84 | 13.80 | 0.00364 | 0.00734 | PASS |
| | HV | 14.49 | 8.62 | 0.00770 | 0.00458 | PASS |
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 15 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 7.06 | 16.85 | 0.00375 | 0.00897 | PASS |
| Extreme (50°C) | | 16.87 | 8.16 | 0.00897 | 0.00434 | PASS |
| Extreme (40°C) | | 4.21 | 9.44 | 0.00224 | 0.00502 | PASS |
| Extreme (30°C) | | 13.72 | 11.73 | 0.00730 | 0.00624 | PASS |
| Extreme (20°C) | | 12.45 | 8.77 | 0.00662 | 0.00467 | PASS |
| Extreme (10°C) | | 12.32 | 14.44 | 0.00655 | 0.00768 | PASS |
| Extreme (0°C) | | 1.09 | 11.81 | 0.00058 | 0.00628 | PASS |
| Extreme (-10°C) | | 4.41 | 7.98 | 0.00235 | 0.00424 | PASS |
| Extreme (-20°C) | | 7.04 | 7.35 | 0.00375 | 0.00391 | PASS |
| Extreme (-30°C) | | 6.92 | 14.04 | 0.00368 | 0.00747 | PASS |
| 25°C | LV | 6.71 | 3.88 | 0.00357 | 0.00206 | PASS |
| | HV | 7.20 | 12.65 | 0.00383 | 0.00673 | PASS |


| NB-IoT Band 66 | | | | | | |
|---------------------------|---------|-----------------|-----------------|--------------------------|--------------------------|---------|
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 3.75 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 5.76 | 14.90 | 0.00306 | 0.00793 | PASS |
| Extreme (50°C) | | 2.80 | 8.53 | 0.00149 | 0.00454 | PASS |
| Extreme (40°C) | | 2.24 | 10.16 | 0.00119 | 0.00540 | PASS |
| Extreme (30°C) | | 11.01 | 10.04 | 0.00586 | 0.00534 | PASS |
| Extreme (20°C) | | 12.78 | 3.90 | 0.00680 | 0.00207 | PASS |
| Extreme (10°C) | | 14.47 | 17.62 | 0.00770 | 0.00937 | PASS |
| Extreme (0°C) | | 8.05 | 12.71 | 0.00428 | 0.00676 | PASS |
| Extreme (-10°C) | | 17.59 | 5.49 | 0.00935 | 0.00292 | PASS |
| Extreme (-20°C) | | 15.48 | 8.78 | 0.00823 | 0.00467 | PASS |
| Extreme (-30°C) | | 15.92 | 7.67 | 0.00847 | 0.00408 | PASS |
| 25°C | LV | 8.32 | 4.70 | 0.00443 | 0.00250 | PASS |
| | HV | 1.31 | 2.36 | 0.00070 | 0.00126 | PASS |
| Condition | | Freq.Error (Hz) | Freq.Error (Hz) | Frequency Stability(ppm) | Frequency Stability(ppm) | Verdict |
| Sub-carrier spacing (KHz) | 15 | | | | | |
| Temperature | Voltage | BPSK | QPSK | BPSK | QPSK | |
| Normal (25°C) | Normal | 5.79 | 2.81 | 0.00308 | 0.00150 | PASS |
| Extreme (50°C) | | 8.59 | 3.19 | 0.00457 | 0.00170 | PASS |
| Extreme (40°C) | | 15.37 | 1.96 | 0.00818 | 0.00104 | PASS |
| Extreme (30°C) | | 5.15 | 10.13 | 0.00274 | 0.00539 | PASS |
| Extreme (20°C) | | 15.49 | 10.48 | 0.00824 | 0.00557 | PASS |
| Extreme (10°C) | | 3.17 | 7.26 | 0.00169 | 0.00386 | PASS |
| Extreme (0°C) | | 3.64 | 16.79 | 0.00194 | 0.00893 | PASS |
| Extreme (-10°C) | | 9.51 | 15.10 | 0.00506 | 0.00803 | PASS |
| Extreme (-20°C) | | 4.95 | 1.69 | 0.00263 | 0.00090 | PASS |
| Extreme (-30°C) | | 5.61 | 1.85 | 0.00298 | 0.00098 | PASS |
| 25°C | LV | 8.69 | 15.78 | 0.00462 | 0.00839 | PASS |
| | HV | 11.62 | 5.01 | 0.00618 | 0.00266 | PASS |

6.6 Spurious Emissions at Antenna Terminals

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported. The signal beyond the limit is carrier.

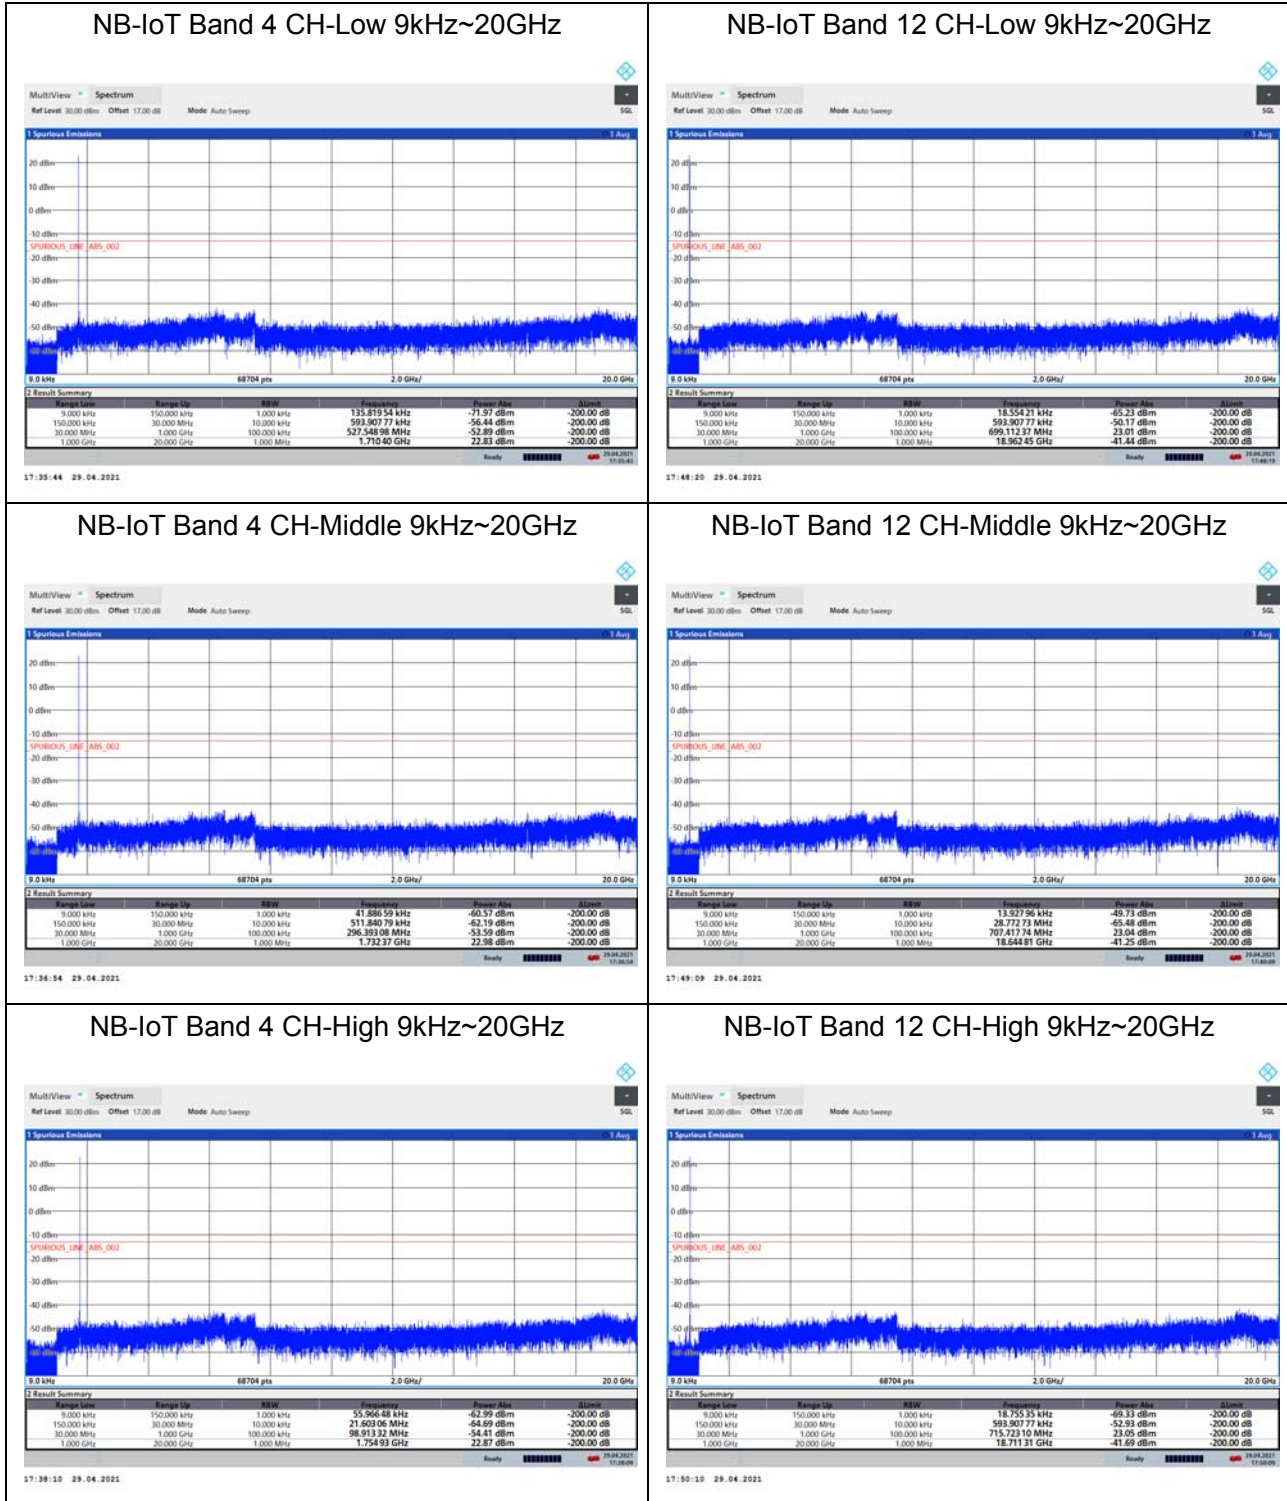


NB-IoT Band 13 CH-Low 9kHz~12.75GHz

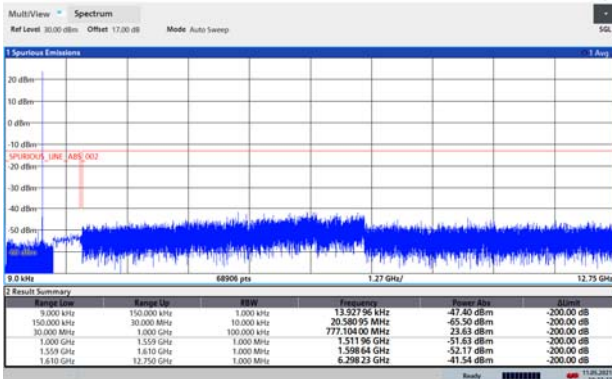


10:27:33 11.05.2021

NB-IoT Band 17 CH-Low 9kHz~20GHz

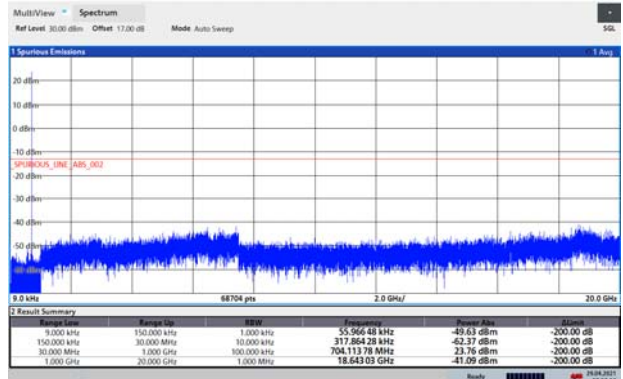


17:57:55 29.04.2021

NB-IoT Band 13 CH-Middle 9kHz~12.75GHz

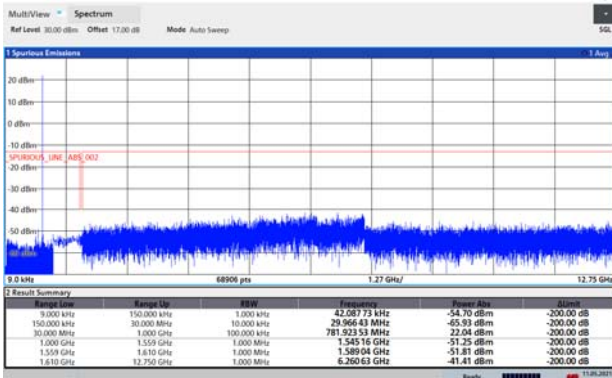


10:29:32 11.05.2021

NB-IoT Band 17 CH-Middle 9kHz~20GHz

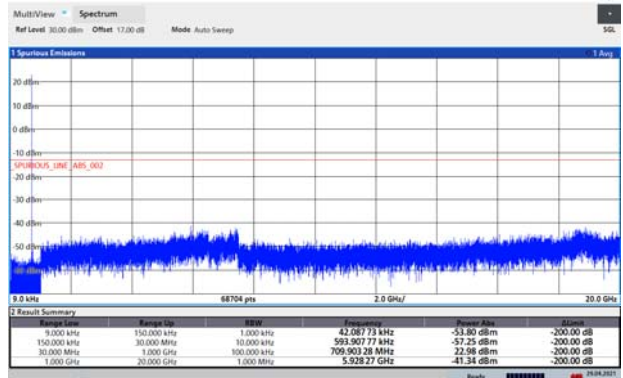


17:58:59 29.04.2021

NB-IoT Band 13 CH-High 9kHz~12.75GHz

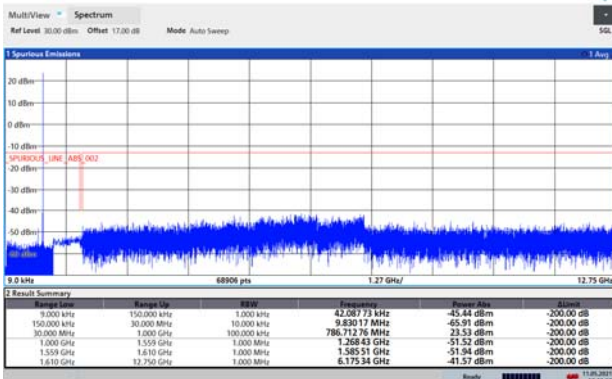


10:31:53 11.05.2021

NB-IoT Band 17 CH-High 9kHz~20GHz

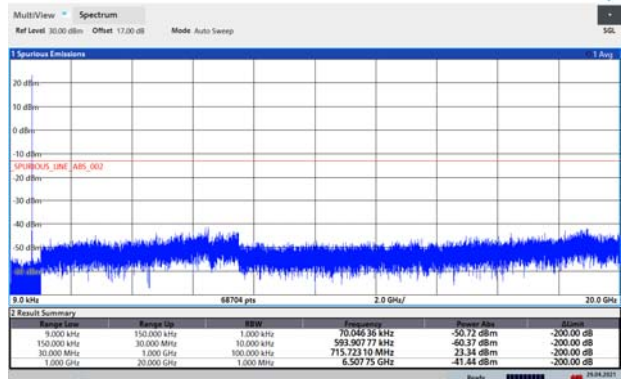

18:00:29 29.04.2021

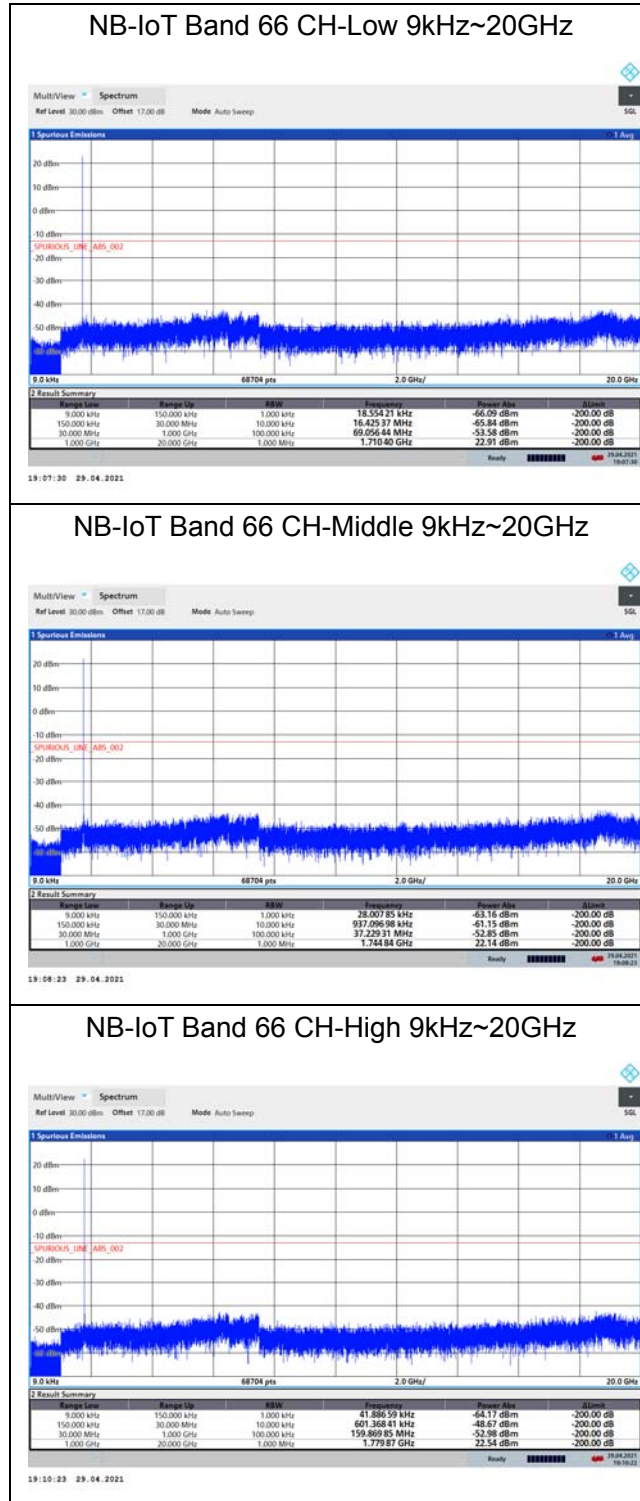

6.7 Radiated Spurious Emission

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Original

NB-IoT Band 4 QPSK 15kHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3420.0 | -44.39 | 2.70 | 12.70 | Horizontal | -34.39 | -13.00 | 21.39 | 315 |
| 3 | 5130.0 | -48.37 | 3.20 | 12.50 | Horizontal | -39.07 | -13.00 | 26.07 | 0 |
| 4 | 6840.0 | -60.70 | 4.20 | 11.80 | Horizontal | -53.10 | -13.00 | 40.10 | 225 |
| 5 | 8550.0 | -56.31 | 4.40 | 12.50 | Horizontal | -48.21 | -13.00 | 35.21 | 45 |
| 6 | 10260.0 | -51.29 | 4.70 | 11.30 | Horizontal | -44.69 | -13.00 | 31.69 | 180 |
| 7 | 11970.0 | -53.20 | 5.20 | 13.80 | Horizontal | -44.60 | -13.00 | 31.60 | 0 |
| 8 | 13680.0 | -50.35 | 5.70 | 11.30 | Horizontal | -44.75 | -13.00 | 31.75 | 315 |
| 9 | 15390.0 | -53.02 | 6.10 | 16.80 | Horizontal | -42.32 | -13.00 | 29.32 | 225 |
| 10 | 17100.0 | -51.07 | 6.10 | 14.20 | Horizontal | -42.97 | -13.00 | 29.97 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 4 QPSK 15kHz CH- Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3465.0 | -48.04 | 2.70 | 12.70 | Horizontal | -38.04 | -13.00 | 25.04 | 45 |
| 3 | 5197.5 | -50.33 | 3.20 | 12.50 | Horizontal | -41.03 | -13.00 | 28.03 | 270 |
| 4 | 6930.0 | -61.52 | 4.20 | 11.80 | Horizontal | -53.92 | -13.00 | 40.92 | 180 |
| 5 | 8662.5 | -55.81 | 4.40 | 12.50 | Horizontal | -47.71 | -13.00 | 34.71 | 0 |
| 6 | 10395.0 | -49.72 | 4.70 | 11.30 | Horizontal | -43.12 | -13.00 | 30.12 | 90 |
| 7 | 12127.5 | -52.30 | 5.20 | 13.80 | Horizontal | -43.70 | -13.00 | 30.70 | 225 |
| 8 | 13860.0 | -50.21 | 5.70 | 11.30 | Horizontal | -44.61 | -13.00 | 31.61 | 0 |
| 9 | 15592.5 | -52.99 | 6.10 | 16.80 | Horizontal | -42.29 | -13.00 | 29.29 | 45 |
| 10 | 17325.0 | -48.78 | 6.10 | 14.20 | Horizontal | -40.68 | -13.00 | 27.68 | 315 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 4 QPSK 15kHz CH- High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3509.8 | -49.01 | 2.70 | 12.70 | Horizontal | -39.01 | -13.00 | 26.01 | 315 |
| 3 | 5264.7 | -55.97 | 3.20 | 12.50 | Horizontal | -46.67 | -13.00 | 33.67 | 270 |
| 4 | 7019.6 | -59.35 | 4.20 | 11.80 | Horizontal | -51.75 | -13.00 | 38.75 | 180 |
| 5 | 8774.5 | -55.59 | 4.40 | 12.50 | Horizontal | -47.49 | -13.00 | 34.49 | 0 |
| 6 | 10529.4 | -50.84 | 4.70 | 11.30 | Horizontal | -44.24 | -13.00 | 31.24 | 90 |
| 7 | 12284.3 | -52.15 | 5.20 | 13.80 | Horizontal | -43.55 | -13.00 | 30.55 | 225 |
| 8 | 14039.2 | -49.21 | 5.70 | 11.30 | Horizontal | -43.61 | -13.00 | 30.61 | 315 |
| 9 | 15794.1 | -54.14 | 6.10 | 16.80 | Horizontal | -43.44 | -13.00 | 30.44 | 0 |
| 10 | 17549.0 | -50.83 | 6.10 | 14.20 | Horizontal | -42.73 | -13.00 | 29.73 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 12 QPSK 15kHz CH- Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1398.2 | -42.69 | 1.70 | 8.70 | Horizontal | -37.84 | -13.00 | 24.84 | 180 |
| 3 | 2097.3 | -55.88 | 2.10 | 11.10 | Horizontal | -49.03 | -13.00 | 36.03 | 90 |
| 4 | 2796.4 | -64.48 | 2.30 | 13.10 | Horizontal | -55.83 | -13.00 | 42.83 | 45 |
| 5 | 3495.5 | -63.13 | 2.60 | 12.70 | Horizontal | -55.18 | -13.00 | 42.18 | 180 |
| 6 | 4194.6 | -62.65 | 3.30 | 12.50 | Horizontal | -55.60 | -13.00 | 42.60 | 45 |
| 7 | 4893.7 | -60.38 | 3.40 | 12.50 | Horizontal | -53.43 | -13.00 | 40.43 | 135 |
| 8 | 5592.8 | -58.89 | 3.30 | 12.50 | Horizontal | -51.84 | -13.00 | 38.84 | 45 |
| 9 | 6291.9 | -58.39 | 3.80 | 11.50 | Horizontal | -52.84 | -13.00 | 39.84 | 315 |
| 10 | 6991.0 | -60.34 | 4.20 | 11.80 | Horizontal | -54.89 | -13.00 | 41.89 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 12 QPSK 15kHz CH- Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1415.0 | -53.43 | 1.70 | 8.70 | Horizontal | -48.58 | -13.00 | 35.58 | 45 |
| 3 | 2122.5 | -59.82 | 2.10 | 11.10 | Horizontal | -52.97 | -13.00 | 39.97 | 315 |
| 4 | 2830.0 | -63.81 | 2.30 | 13.10 | Horizontal | -55.16 | -13.00 | 42.16 | 90 |
| 5 | 3525.5 | -64.15 | 2.60 | 12.70 | Horizontal | -56.20 | -13.00 | 43.20 | 180 |
| 6 | 4230.6 | -62.34 | 3.30 | 12.50 | Horizontal | -55.29 | -13.00 | 42.29 | 270 |
| 7 | 4935.7 | -60.32 | 3.40 | 12.50 | Horizontal | -53.37 | -13.00 | 40.37 | 90 |
| 8 | 5640.8 | -60.11 | 3.30 | 12.50 | Horizontal | -53.06 | -13.00 | 40.06 | 45 |
| 9 | 6345.9 | -58.44 | 3.80 | 11.50 | Horizontal | -52.89 | -13.00 | 39.89 | 135 |
| 10 | 7051.0 | -56.56 | 4.20 | 11.80 | Horizontal | -51.11 | -13.00 | 38.11 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 12 QPSK 15kHz CH- High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1431.8 | -70.25 | 1.70 | 8.70 | Horizontal | -65.40 | -13.00 | 52.40 | 45 |
| 3 | 2147.7 | -62.25 | 2.10 | 11.10 | Horizontal | -55.40 | -13.00 | 42.40 | 315 |
| 4 | 2863.6 | -63.03 | 2.30 | 13.10 | Horizontal | -54.38 | -13.00 | 41.38 | 90 |
| 5 | 3579.5 | -63.73 | 2.60 | 12.70 | Horizontal | -55.78 | -13.00 | 42.78 | 90 |
| 6 | 4295.4 | -62.64 | 3.30 | 12.50 | Horizontal | -55.59 | -13.00 | 42.59 | 180 |
| 7 | 5011.3 | -59.80 | 3.40 | 12.50 | Horizontal | -52.85 | -13.00 | 39.85 | 135 |
| 8 | 5727.2 | -58.91 | 3.30 | 12.50 | Horizontal | -51.86 | -13.00 | 38.86 | 45 |
| 9 | 6443.1 | -58.40 | 3.80 | 11.50 | Horizontal | -52.85 | -13.00 | 39.85 | 315 |
| 10 | 7159.0 | -54.96 | 4.20 | 11.80 | Horizontal | -49.51 | -13.00 | 36.51 | 180 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 13 QPSK 15kHz CH- Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1554.2 | -54.54 | 1.70 | 8.70 | Horizontal | -49.69 | -13.00 | 36.69 | 45 |
| 3 | 2331.3 | -61.06 | 2.10 | 12.00 | Horizontal | -53.31 | -13.00 | 40.31 | 225 |
| 4 | 3108.4 | -64.15 | 2.30 | 13.10 | Horizontal | -55.50 | -13.00 | 42.50 | 90 |
| 5 | 3885.5 | -63.23 | 2.90 | 12.50 | Horizontal | -55.78 | -13.00 | 42.78 | 315 |
| 6 | 4662.6 | -60.06 | 3.10 | 12.50 | Horizontal | -52.81 | -13.00 | 39.81 | 180 |
| 7 | 5439.7 | -59.57 | 3.30 | 12.50 | Horizontal | -52.52 | -13.00 | 39.52 | 45 |
| 8 | 6216.8 | -59.46 | 3.50 | 12.80 | Horizontal | -52.31 | -13.00 | 39.31 | 90 |
| 9 | 6993.9 | -59.11 | 4.20 | 11.80 | Horizontal | -53.66 | -13.00 | 40.66 | 315 |
| 10 | 7771.0 | -55.80 | 4.40 | 12.30 | Horizontal | -50.05 | -13.00 | 37.05 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 13 QPSK 15kHz CH- Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 1564.0 | -58.30 | 1.70 | 8.70 | Horizontal | -51.30 | -40.00 | 11.30 | 315 |
| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
| 3 | 2346.0 | -61.66 | 2.10 | 12.00 | Horizontal | -53.91 | -13.00 | 40.91 | 90 |
| 4 | 3128.0 | -64.62 | 2.30 | 13.10 | Horizontal | -55.97 | -13.00 | 42.97 | 0 |
| 5 | 3910.0 | -63.66 | 2.90 | 12.50 | Horizontal | -56.21 | -13.00 | 43.21 | 45 |
| 6 | 4692.0 | -59.98 | 3.10 | 12.50 | Horizontal | -52.73 | -13.00 | 39.73 | 180 |
| 7 | 5474.0 | -59.16 | 3.30 | 12.50 | Horizontal | -52.11 | -13.00 | 39.11 | 135 |
| 8 | 6256.0 | -59.56 | 3.50 | 12.80 | Horizontal | -52.41 | -13.00 | 39.41 | 45 |
| 9 | 7038.0 | -56.06 | 4.20 | 11.80 | Horizontal | -50.61 | -13.00 | 37.61 | 315 |
| 10 | 7820.0 | -53.38 | 4.40 | 12.30 | Horizontal | -47.63 | -13.00 | 34.63 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 13 QPSK 15kHz CH- High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 1573.8 | -59.79 | 1.70 | 8.70 | Horizontal | -52.79 | -40.00 | 12.79 | 90 |
| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
| 3 | 2360.7 | -62.96 | 2.10 | 12.00 | Horizontal | -55.21 | -13.00 | 42.21 | 225 |
| 4 | 3147.6 | -64.64 | 2.30 | 13.10 | Horizontal | -55.99 | -13.00 | 42.99 | 180 |
| 5 | 3934.5 | -63.80 | 2.90 | 12.50 | Horizontal | -56.35 | -13.00 | 43.35 | 225 |
| 6 | 4721.4 | -60.45 | 3.10 | 12.50 | Horizontal | -53.20 | -13.00 | 40.20 | 45 |
| 7 | 5508.3 | -59.73 | 3.30 | 12.50 | Horizontal | -52.68 | -13.00 | 39.68 | 135 |
| 8 | 6295.2 | -59.54 | 3.50 | 12.80 | Horizontal | -52.39 | -13.00 | 39.39 | 0 |
| 9 | 7082.1 | -55.95 | 4.20 | 11.80 | Horizontal | -50.50 | -13.00 | 37.50 | 315 |
| 10 | 7869.0 | -54.43 | 4.40 | 12.30 | Horizontal | -48.68 | -13.00 | 35.68 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 17 QPSK 15kHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1408.2 | -64.39 | 1.70 | 8.70 | Horizontal | -59.54 | -13.00 | 46.54 | 45 |
| 3 | 2112.3 | -64.03 | 2.10 | 11.10 | Horizontal | -57.18 | -13.00 | 44.18 | 315 |
| 4 | 2816.4 | -63.02 | 2.50 | 13.10 | Horizontal | -54.57 | -13.00 | 41.57 | 225 |
| 5 | 3520.5 | -63.30 | 2.60 | 12.70 | Horizontal | -55.35 | -13.00 | 42.35 | 45 |
| 6 | 4224.6 | -61.83 | 3.30 | 12.50 | Horizontal | -54.78 | -13.00 | 41.78 | 135 |
| 7 | 4928.7 | -61.14 | 3.40 | 12.50 | Horizontal | -54.19 | -13.00 | 41.19 | 270 |
| 8 | 5632.8 | -58.81 | 3.40 | 12.80 | Horizontal | -51.56 | -13.00 | 38.56 | 90 |
| 9 | 6336.9 | -57.73 | 4.10 | 11.50 | Horizontal | -52.48 | -13.00 | 39.48 | 45 |
| 10 | 7041.0 | -55.43 | 4.20 | 12.20 | Horizontal | -49.58 | -13.00 | 36.58 | 315 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 17 QPSK 15MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1420.0 | -66.87 | 1.70 | 8.70 | Horizontal | -62.02 | -13.00 | 49.02 | 135 |
| 3 | 2130.0 | -58.63 | 2.10 | 11.10 | Horizontal | -51.78 | -13.00 | 38.78 | 90 |
| 4 | 2840.0 | -64.90 | 2.50 | 13.10 | Horizontal | -56.45 | -13.00 | 43.45 | 225 |
| 5 | 3550.0 | -65.10 | 2.60 | 12.70 | Horizontal | -57.15 | -13.00 | 44.15 | 45 |
| 6 | 4260.0 | -61.99 | 3.30 | 12.50 | Horizontal | -54.94 | -13.00 | 41.94 | 135 |
| 7 | 4970.0 | -59.87 | 3.40 | 12.50 | Horizontal | -52.92 | -13.00 | 39.92 | 270 |
| 8 | 5680.0 | -60.08 | 3.40 | 12.80 | Horizontal | -52.83 | -13.00 | 39.83 | 90 |
| 9 | 6390.0 | -58.44 | 4.10 | 11.50 | Horizontal | -53.19 | -13.00 | 40.19 | 45 |
| 10 | 7100.0 | -55.78 | 4.20 | 12.20 | Horizontal | -49.93 | -13.00 | 36.93 | 315 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 17 QPSK 15MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2 | 1431.8 | -65.61 | 1.70 | 8.70 | Horizontal | -60.76 | -13.00 | 47.76 | 90 |
| 3 | 2147.7 | -65.16 | 2.10 | 11.10 | Horizontal | -58.31 | -13.00 | 45.31 | 45 |
| 4 | 2863.6 | -64.42 | 2.50 | 13.10 | Horizontal | -55.97 | -13.00 | 42.97 | 225 |
| 5 | 3579.50 | -62.51 | 2.60 | 12.70 | Horizontal | -54.56 | -13.00 | 41.56 | 270 |
| 6 | 4295.40 | -62.79 | 3.30 | 12.50 | Horizontal | -55.74 | -13.00 | 42.74 | 315 |
| 7 | 5011.30 | -59.98 | 3.40 | 12.50 | Horizontal | -53.03 | -13.00 | 40.03 | 90 |
| 8 | 5727.20 | -59.19 | 3.40 | 12.80 | Horizontal | -51.94 | -13.00 | 38.94 | 45 |
| 9 | 6443.10 | -58.52 | 4.10 | 11.50 | Horizontal | -53.27 | -13.00 | 40.27 | 225 |
| 10 | 7159.00 | -55.33 | 4.20 | 12.20 | Horizontal | -49.48 | -13.00 | 36.48 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 66 QPSK 1.4MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3420.2 | -48.80 | 2.70 | 12.70 | Horizontal | -38.80 | -13.00 | 25.80 | 225 |
| 3 | 5130.3 | -45.58 | 3.20 | 12.50 | Horizontal | -36.28 | -13.00 | 23.28 | 0 |
| 4 | 6840.4 | -61.11 | 4.20 | 11.80 | Horizontal | -53.51 | -13.00 | 40.51 | 45 |
| 5 | 8550.5 | -55.11 | 4.40 | 12.50 | Horizontal | -47.01 | -13.00 | 34.01 | 180 |
| 6 | 10260.6 | -50.76 | 4.70 | 11.80 | Horizontal | -43.66 | -13.00 | 30.66 | 90 |
| 7 | 11970.7 | -51.34 | 5.20 | 13.80 | Horizontal | -42.74 | -13.00 | 29.74 | 225 |
| 8 | 13680.8 | -51.06 | 5.70 | 13.20 | Horizontal | -43.56 | -13.00 | 30.56 | 315 |
| 9 | 15390.9 | -51.12 | 6.10 | 16.80 | Horizontal | -40.42 | -13.00 | 27.42 | 225 |
| 10 | 17101.0 | -49.44 | 6.10 | 14.20 | Horizontal | -41.34 | -13.00 | 28.34 | 0 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 66 QPSK 5MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3510.0 | -51.27 | 2.70 | 12.70 | Horizontal | -41.27 | -13.00 | 28.27 | 45 |
| 3 | 5265.0 | -50.57 | 3.20 | 12.50 | Horizontal | -41.27 | -13.00 | 28.27 | 315 |
| 4 | 7020.0 | -58.47 | 4.20 | 11.80 | Horizontal | -50.87 | -13.00 | 37.87 | 270 |
| 5 | 8775.0 | -55.34 | 4.40 | 12.50 | Horizontal | -47.24 | -13.00 | 34.24 | 180 |
| 6 | 10530.0 | -50.81 | 4.70 | 11.80 | Horizontal | -43.71 | -13.00 | 30.71 | 0 |
| 7 | 12285.0 | -52.33 | 5.20 | 13.80 | Horizontal | -43.73 | -13.00 | 30.73 | 45 |
| 8 | 14040.0 | -52.72 | 5.70 | 13.20 | Horizontal | -45.22 | -13.00 | 32.22 | 315 |
| 9 | 15795.0 | -55.26 | 6.10 | 16.80 | Horizontal | -44.56 | -13.00 | 31.56 | 225 |
| 10 | 17550.0 | -51.24 | 6.10 | 14.20 | Horizontal | -43.14 | -13.00 | 30.14 | 0 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 66 QPSK 20MHz CH-Middle, RB 1

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3559.8 | -55.12 | 2.70 | 12.70 | Horizontal | -45.12 | -13.00 | 32.12 | 270 |
| 3 | 5339.7 | -55.77 | 3.20 | 12.50 | Horizontal | -46.47 | -13.00 | 33.47 | 180 |
| 4 | 7119.6 | -58.34 | 4.20 | 11.80 | Horizontal | -50.74 | -13.00 | 37.74 | 0 |
| 5 | 8899.5 | -56.43 | 4.40 | 12.50 | Horizontal | -48.33 | -13.00 | 35.33 | 315 |
| 6 | 10679.4 | -51.68 | 4.70 | 11.80 | Horizontal | -44.58 | -13.00 | 31.58 | 90 |
| 7 | 12459.3 | -53.08 | 5.20 | 13.80 | Horizontal | -44.48 | -13.00 | 31.48 | 225 |
| 8 | 14239.2 | -50.83 | 5.70 | 13.20 | Horizontal | -43.33 | -13.00 | 30.33 | 0 |
| 9 | 16019.1 | -54.29 | 6.10 | 16.80 | Horizontal | -43.59 | -13.00 | 30.59 | 45 |
| 10 | 17799.0 | -51.20 | 6.10 | 14.20 | Horizontal | -43.10 | -13.00 | 30.10 | 315 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

Variant 1

NB-IoT Band 13 15 kHz QPSK CH- Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 1563.8 | -66.41 | 1.70 | 8.70 | Horizontal | -59.41 | -40.00 | 19.41 | 180 |
| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
| 3 | 2346.4 | -64.33 | 2.10 | 12.00 | Horizontal | -56.58 | -13.00 | 43.58 | 0 |
| 4 | 3128.0 | -65.28 | 2.30 | 13.10 | Horizontal | -56.63 | -13.00 | 43.63 | 315 |
| 5 | 3910.0 | -63.85 | 2.90 | 12.50 | Horizontal | -56.40 | -13.00 | 43.40 | 135 |
| 6 | 4692.0 | -61.58 | 3.10 | 12.50 | Horizontal | -54.33 | -13.00 | 41.33 | 45 |
| 7 | 5474.0 | -61.36 | 3.30 | 12.50 | Horizontal | -54.31 | -13.00 | 41.31 | 270 |
| 8 | 6256.0 | -60.89 | 3.50 | 12.80 | Horizontal | -53.74 | -13.00 | 40.74 | 90 |
| 9 | 7038.0 | -58.00 | 4.20 | 11.80 | Horizontal | -52.55 | -13.00 | 39.55 | 0 |
| 10 | 7820.0 | -57.43 | 4.40 | 12.30 | Horizontal | -51.68 | -13.00 | 38.68 | 225 |

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

7 Main Test Instruments

Date of Testing: (Original) April 21, 2021 ~ May 14, 2021

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Date |
|--------------------------|--------------|--------------|---------------|------------------|-----------------|
| Base Station Simulator | R&S | CMW500 | 113824 | 2020-05-18 | 2021-05-17 |
| Power Splitter | Hua Xiang | SHX-GF2-2-13 | 10120101 | / | / |
| Spectrum Analyzer | Key sight | N9010A | MY50210259 | 2020-05-18 | 2021-05-17 |
| Signal Analyzer | R&S | FSV30 | 100815 | 2020-12-13 | 2021-12-12 |
| Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-047 | 2020-04-02 | 2023-04-01 |
| TRILOG Broadband Antenna | SCHWARZBECK | VULB 9163 | 391 | 2019-12-16 | 2021-12-15 |
| Horn Antenna | R&S | HF907 | 102723 | 2018-08-11 | 2021-08-10 |
| Horn Antenna | ETS-Lindgren | 3160-09 | 00102643 | 2018-06-20 | 2021-06-19 |
| Signal generator | R&S | SMB 100A | 102594 | 2020-05-18 | 2021-05-17 |
| Climatic Chamber | ESPEC | SU-242 | 93000506 | 2020-12-13 | 2021-12-12 |
| Preamplifier | R&S | SCU18 | 102327 | 2020-05-18 | 2021-05-17 |
| MOB COMMS DC SUPPLY | Keysight | 66319D | MY43004105 | 2020-05-18 | 2021-05-17 |
| RF Cable | Agilent | SMA 15cm | 0001 | 2021-5-15 | 2022-5-14 |
| Software | R&S | EMC32 | 9.26.0 | / | / |

Date of Testing: (Variant 1) January 16, 2022 ~ January 17, 2022

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Date |
|--------------------------|--------------|------------|---------------|------------------|-----------------|
| Signal Analyzer | R&S | FSV30 | 100815 | 2021-12-12 | 2022-12-11 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 01439 | 2021-06-30 | 2024-06-29 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 01799 | 2019-09-21 | 2022-09-20 |
| Software | R&S | EMC32 | 9.26.0 | / | / |

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

ANNEX C: Product Change Description (Variant 1)

The Product Change Description are submitted separately.

ANNEX D: Product Change Description (Variant 2)

The Product Change Description are submitted separately.

***** END OF REPORT *****