

## #01\_WCDMA II\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch9262


Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium:HSL\_1900\_221211 Medium parameters used:  $f=1852.4$  MHz;  $\sigma=1.41$  S/m;  $\epsilon_r=39.6$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.49, 8.49, 8.49); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAB

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.932 W/kg; SAR (10g) = 0.541 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.954 W/kg; SAR (8g) = 0.590 W/kg; SAR (10g) = 0.549 W/kg

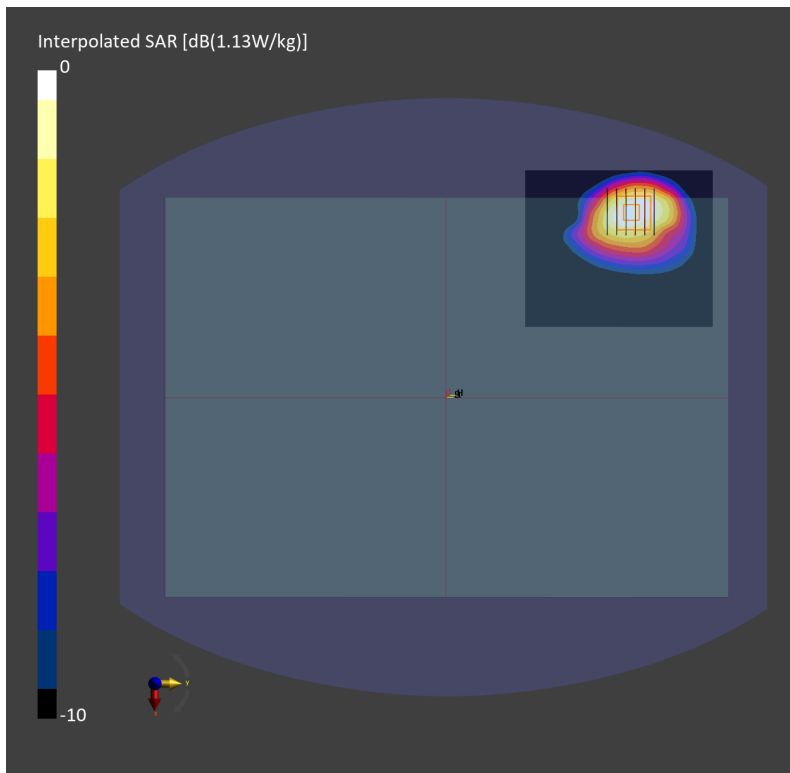

## #02\_WCDMA IV\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch1312

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_221211 Medium parameters used:  $f=1712.4$  MHz;  $\sigma=1.34$  S/m;  $\epsilon_r=41.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.0, 9.0, 9.0); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: WCDMA, 10011-CAB


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.854 W/kg; SAR (10g) = 0.489 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.892 W/kg; SAR (8g) = 0.543 W/kg; SAR (10g) = 0.504 W/kg

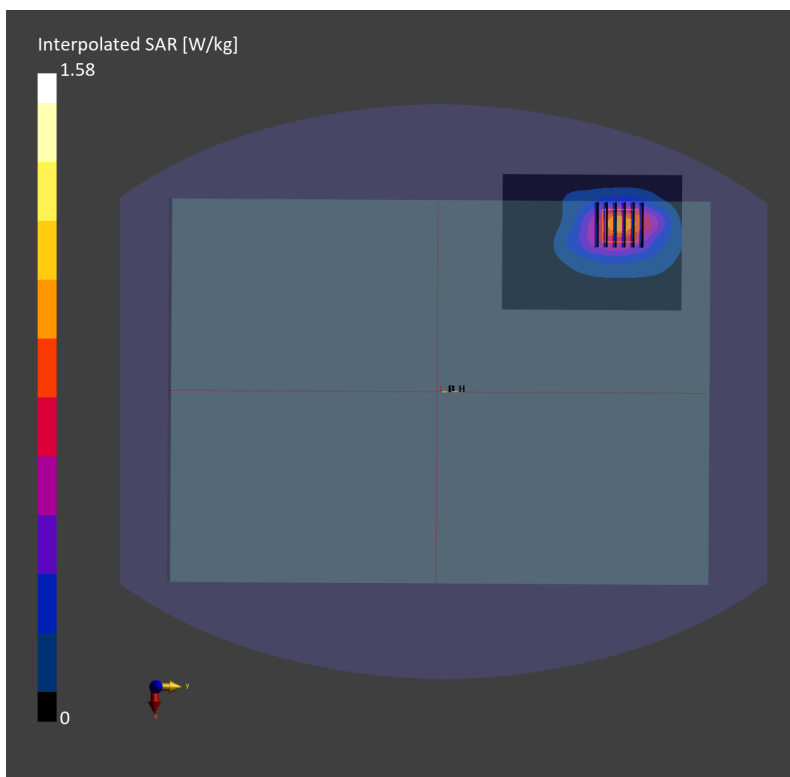

### #03\_WCDMA V\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_221213 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.2$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.21, 10.21, 10.21); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10457-AAA

**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.601 W/kg; SAR (10g) = 0.389 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.00 dB  
SAR (1g) = 0.614 W/kg; SAR (8g) = 0.399 W/kg; SAR (10g) = 0.375 W/kg

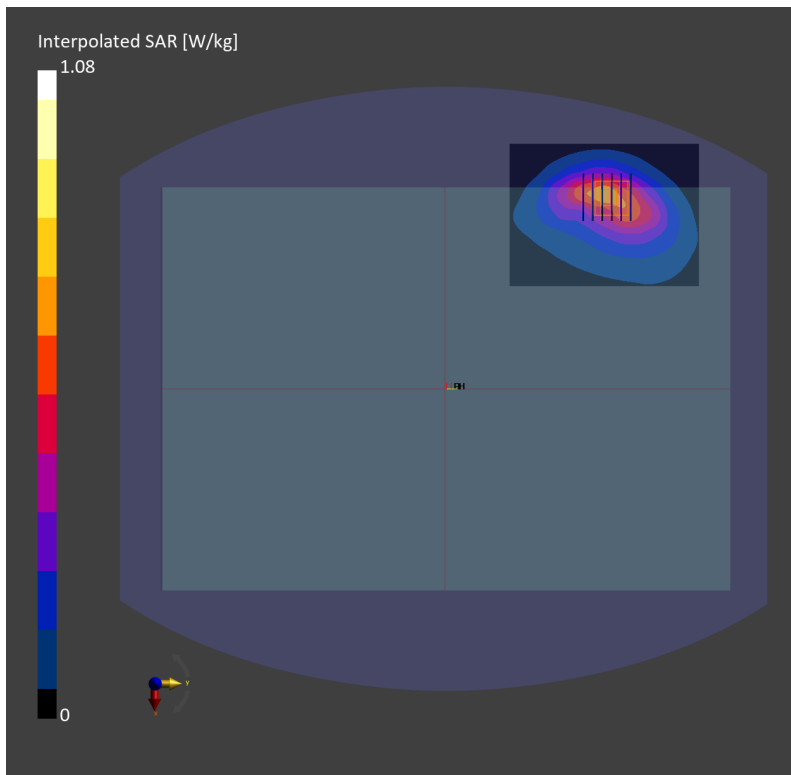

## #04\_LTE Band 7\_20M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch21350

Communication System: LTE-FDD Frequency: 2560.0 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_221212 Medium parameters used:  $f = 2560.0$  MHz;  $\sigma = 1.89$  S/m;  $\epsilon_r = 38.1$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.82, 7.82, 7.82); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10169-CAE


**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.186 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.426 W/kg; SAR (8g) = 0.212 W/kg; SAR (10g) = 0.191 W/kg

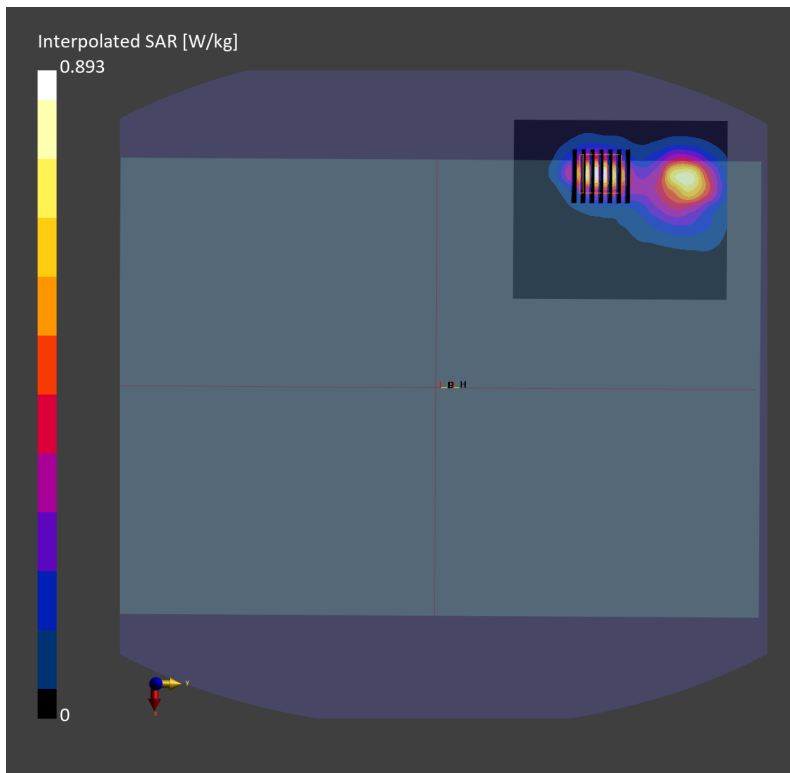

## #05\_LTE Band 12\_10M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch23095

Communication System: LTE-FDD; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_221213 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.8$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.45, 10.45, 10.45); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10175-CAG


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.488 W/kg; SAR (10g) = 0.328 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.488 W/kg; SAR (8g) = 0.326 W/kg; SAR (10g) = 0.308 W/kg

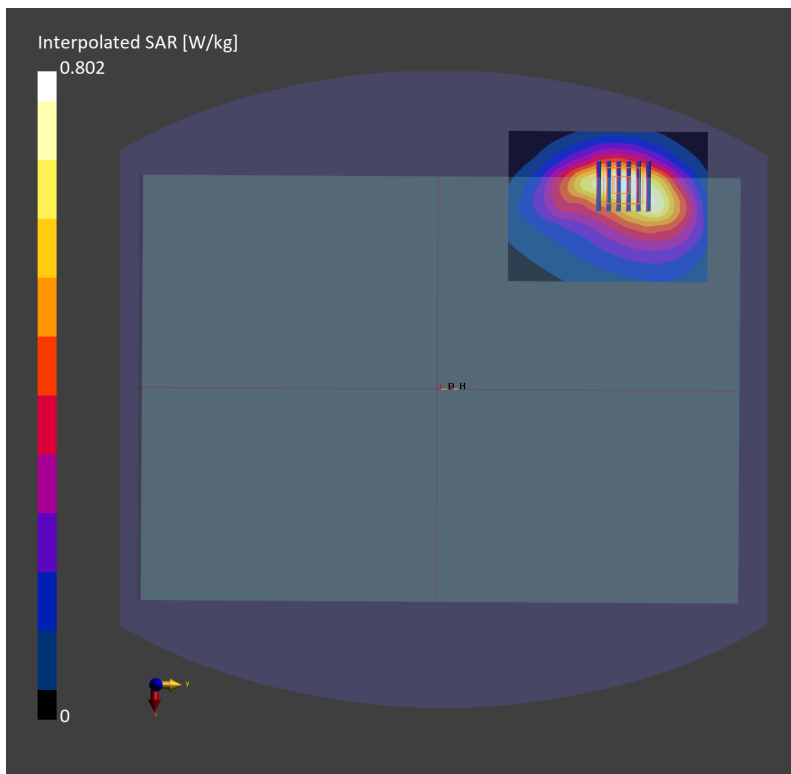

## #06\_LTE Band 13\_10M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch23230

Communication System: LTE-FDD; Frequency: 782.0 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_221213 Medium parameters used:  $f = 782.0$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 42.7$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.45, 10.45, 10.45); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10175-CAG


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.790 W/kg; SAR (10g) = 0.520 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.781 W/kg; SAR (8g) = 0.518 W/kg; SAR (10g) = 0.488 W/kg

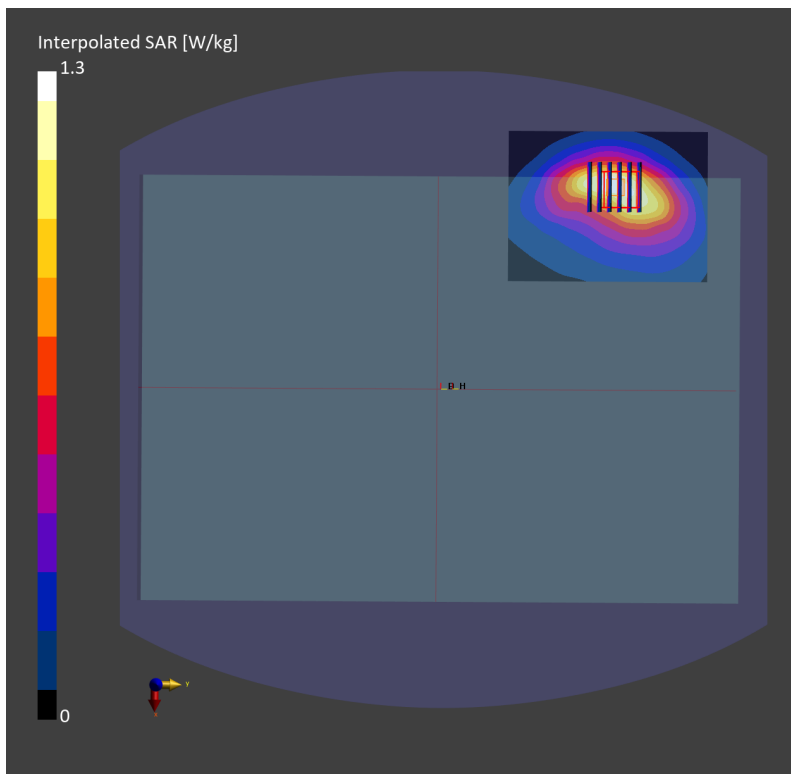

## #07\_LTE Band 14\_10M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch23330

Communication System: LTE-FDD; Frequency: 793.0 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_221213 Medium parameters used:  $f = 793.0$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 42.6$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.45, 10.45, 10.45); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10175-CAG


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.663 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.673 W/kg; SAR (10g) = 0.634 W/kg

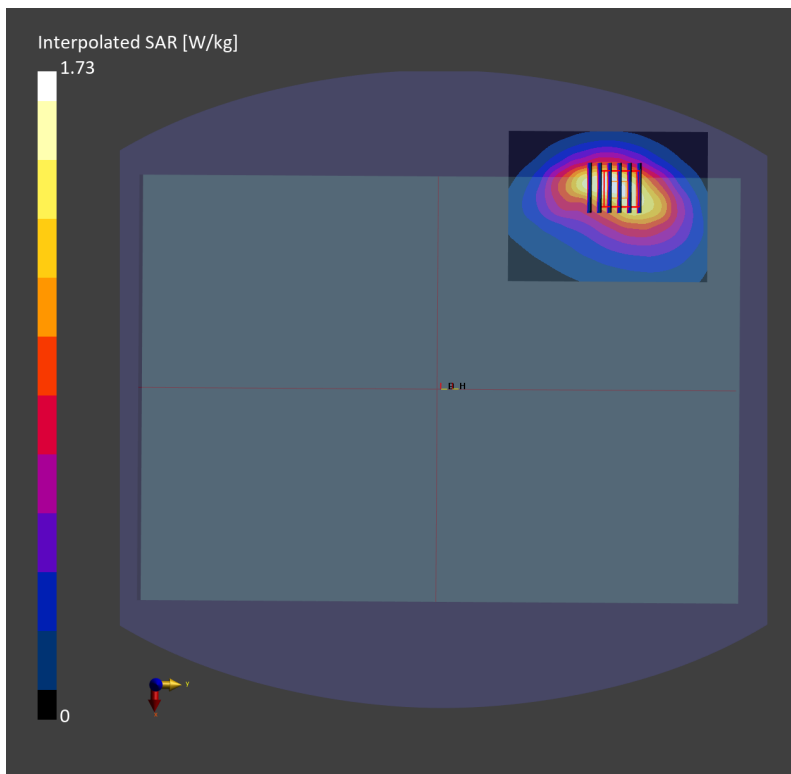

## #08\_LTE Band 25\_20M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch26340


Communication System: LTE-FDD Frequency: 1880.0 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_221211 Medium parameters used:  $f=1880.0$  MHz;  $\sigma=1.44$  S/m;  $\epsilon_r=39.5$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.49, 8.49, 8.49); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAE

**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.945 W/kg; SAR (10g) = 0.538 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.07 dB  
SAR (1g) = 0.939 W/kg; SAR (8g) = 0.580 W/kg; SAR (10g) = 0.539 W/kg

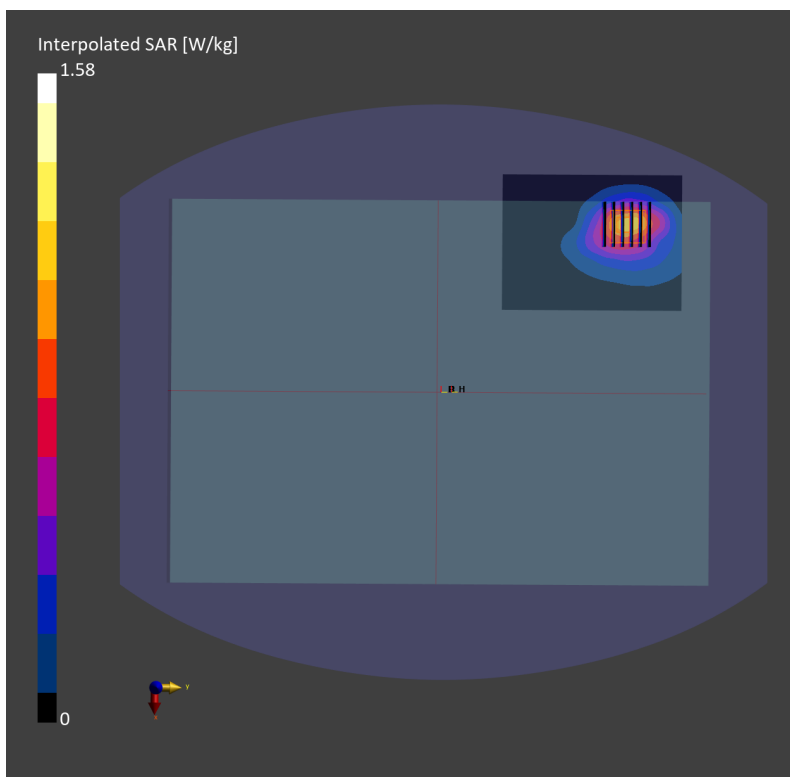



## #09\_LTE Band 26\_15M\_QPSK\_1\_37\_Bottom of Laptop\_0mm\_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_221213 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.900$  S/m;  $\epsilon_r = 42.2$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.21, 10.21, 10.21); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAE


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.769 W/kg; SAR (10g) = 0.496 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.809 W/kg; SAR (8g) = 0.525 W/kg; SAR (10g) = 0.494 W/kg

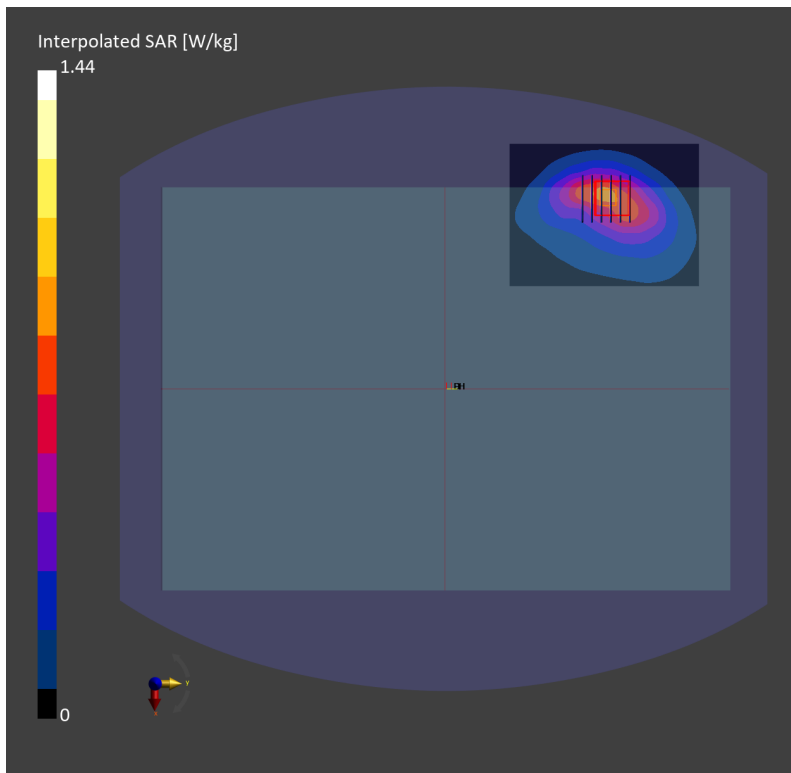

### #10\_LTE Band 66\_20M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch132072

Communication System: LTE-FDD; Frequency: 1720.0 MHz; Duty Cycle: 1:1  
Medium:HSL\_1750\_221211 Medium parameters used:  $f=1720.0$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=41.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.0, 9.0, 9.0); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10169-CAE


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.946 W/kg; SAR (10g) = 0.562 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 1.06 W/kg; SAR (8g) = 0.643 W/kg; SAR (10g) = 0.597 W/kg

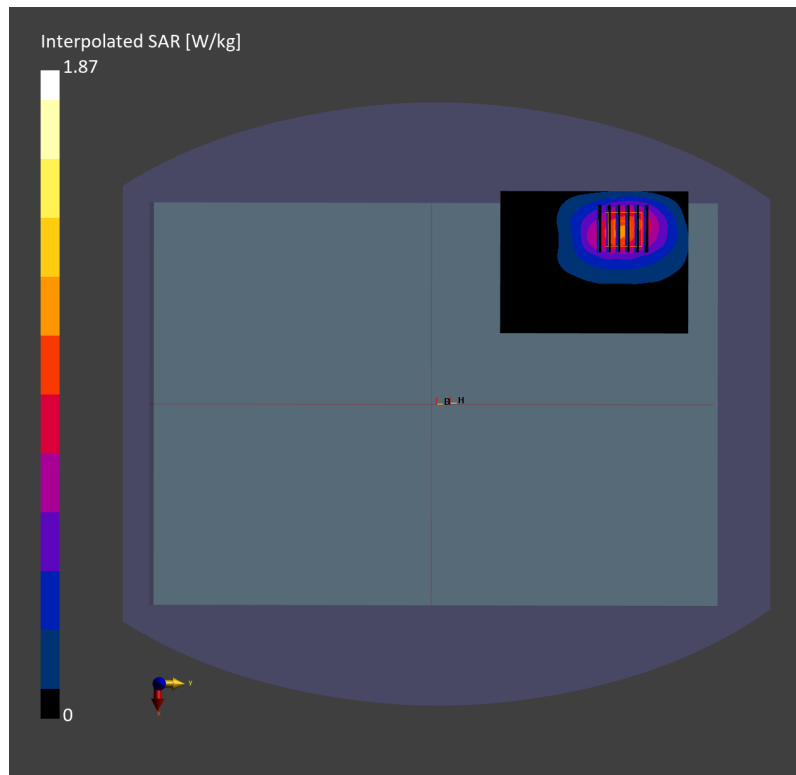

## #11\_LTE Band 71\_20M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch133297

Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_221213 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.9$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.45, 10.45, 10.45); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-FDD, 10169-CAE


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.603 W/kg; SAR (10g) = 0.405 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.592 W/kg; SAR (8g) = 0.394 W/kg; SAR (10g) = 0.372 W/kg

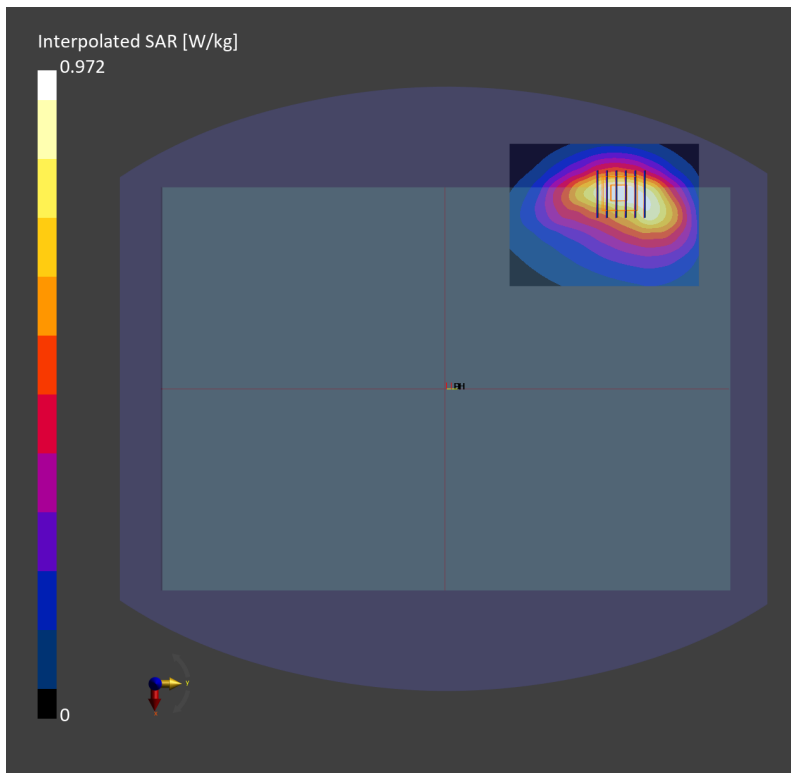

## #12\_LTE Band 41\_20M\_QPSK\_1\_49\_Bottom of Laptop\_0mm\_Ch41055

Communication System: LTE-TDD Frequency: 2636.5 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600\_221212 Medium parameters used:  $f = 2636.5$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 37.9$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.82, 7.82, 7.82); Calibrated: 2022-01-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: cDASY6V6.6.0.13926
- UID: LTE-TDD, 10172-CAG

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.625 W/kg; SAR (10g) = 0.293 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.667 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.305 W/kg

