



FCC RF Test Report

APPLICANT : Quetel Wireless Solutions Co., Ltd.
EQUIPMENT : Smart Module
BRAND NAME : Quetel
MODEL NAME : SC668S-WF
FCC ID : XMR2022SC668SWF
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Nov. 25, 2022 ~ Dec. 12, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 8

 1.7 Test Software..... 8

 1.8 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode..... 12

 2.3 Connection Diagram of Test System..... 14

 2.4 Support Unit used in test configuration and system 15

 2.5 EUT Operation Test Setup 15

 2.6 Measurement Results Explanation Example..... 15

3 TEST RESULT..... 16

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 16

 3.2 Maximum Conducted Output Power Measurement 18

 3.3 Power Spectral Density Measurement 20

 3.4 Unwanted Emissions Measurement 23

 3.5 AC Conducted Emission Measurement..... 28

 3.6 Antenna Requirements 30

4 LIST OF MEASURING EQUIPMENT 31

5 UNCERTAINTY OF EVALUATION 32

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 1.40 dB at 5350.180 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 3.40 dB at 0.580 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Module
Brand Name	Quectel
Model Name	SC668S-WF
FCC ID	XMR2022SC668SWF
SN	Conduction: E1C22HA09000049 Radiation: E1C22HA09000044 Conducted: E1C22HA09000011
HW Version	R1.0
SW Version	SC668SWFNAR01A02
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><5180 MHz ~ 5240 MHz> 802.11a : 15.94 dBm / 0.0393 W 802.11n HT20 : 15.75 dBm / 0.0376 W 802.11n HT40 : 16.56 dBm / 0.0453 W 802.11ac VHT20: 14.69 dBm / 0.0294 W 802.11ac VHT40: 14.55 dBm / 0.0285 W 802.11ac VHT80: 14.08 dBm / 0.0256 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 15.93 dBm / 0.0392 W 802.11n HT20 : 15.76 dBm / 0.0377 W 802.11n HT40 : 16.37 dBm / 0.0434 W 802.11ac VHT20: 14.65 dBm / 0.0292 W 802.11ac VHT40: 14.36 dBm / 0.0273 W 802.11ac VHT80: 14.05 dBm / 0.0254 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 15.89 dBm / 0.0388 W 802.11n HT20 : 15.73 dBm / 0.0374 W 802.11n HT40 : 15.94 dBm / 0.0393 W 802.11ac VHT20: 14.61 dBm / 0.0289 W 802.11ac VHT40: 13.87 dBm / 0.0244 W 802.11ac VHT80: 13.90 dBm / 0.0245 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 15.31 dBm / 0.0340 W 802.11n HT20 : 15.12 dBm / 0.0325 W 802.11n HT40 : 15.79 dBm / 0.0379 W 802.11ac VHT20: 14.25 dBm / 0.0266 W 802.11ac VHT40: 13.86 dBm / 0.0243 W 802.11ac VHT80: 13.50 dBm / 0.0224 W</p>



<p>99% Occupied Bandwidth</p>	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.063 MHz 802.11n HT20 : 18.262 MHz 802.11n HT40 : 36.603 MHz 802.11ac VHT80 : 76.084 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.143 MHz 802.11n HT20 : 18.222 MHz 802.11n HT40 : 36.603 MHz 802.11ac VHT80 : 76.084 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.223 MHz 802.11n HT20 : 18.262 MHz 802.11n HT40 : 36.683 MHz 802.11ac VHT80 : 76.244 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.103 MHz 802.11n HT20 : 18.222 MHz 802.11n HT40 : 36.603 MHz 802.11ac VHT80 : 76.084 MHz</p>
<p>Antenna Type / Gain</p>	<p><5180 MHz ~ 5240 MHz> Folded Dipole Antenna with gain -0.67 dBi <5260 MHz ~ 5320 MHz> Folded Dipole Antenna with gain -0.19 dBi <5500 MHz ~ 5720 MHz> Folded Dipole Antenna with gain 1.28 dBi <5745 MHz ~ 5825 MHz> Folded Dipole Antenna with gain 1.10 dBi</p>
<p>Type of Modulation</p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test data subcontracted: Test case for Conducted in section 3.1~3.3 and Conduction in section 3.5 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link (5G) + Charging from Test Jig
--------------------------------------	---

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT20	802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT40	802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

For Conducted Emission:

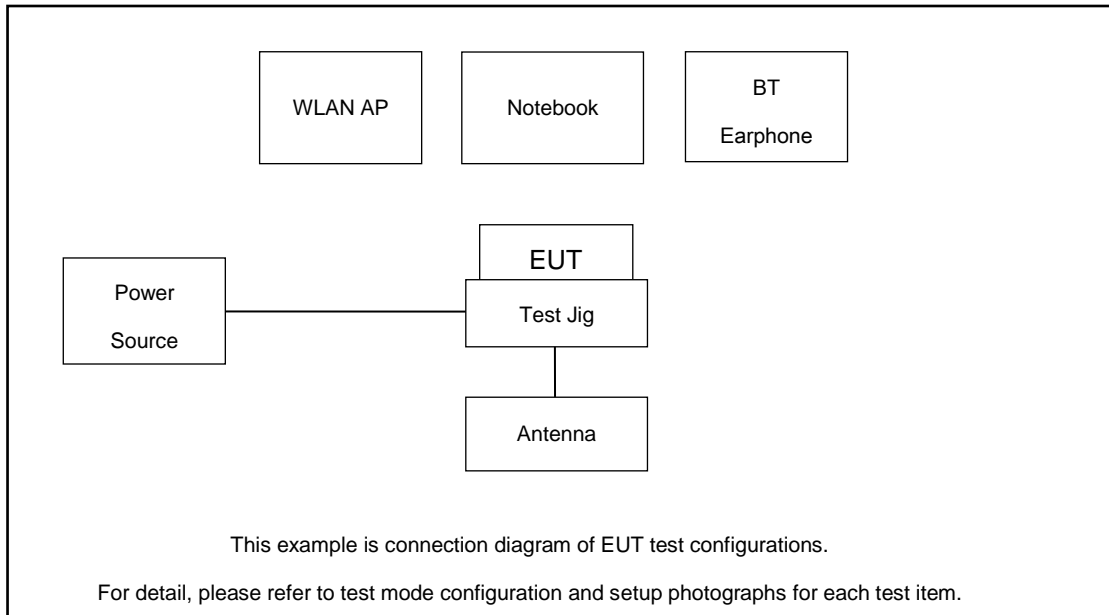

For Radiated Emission:

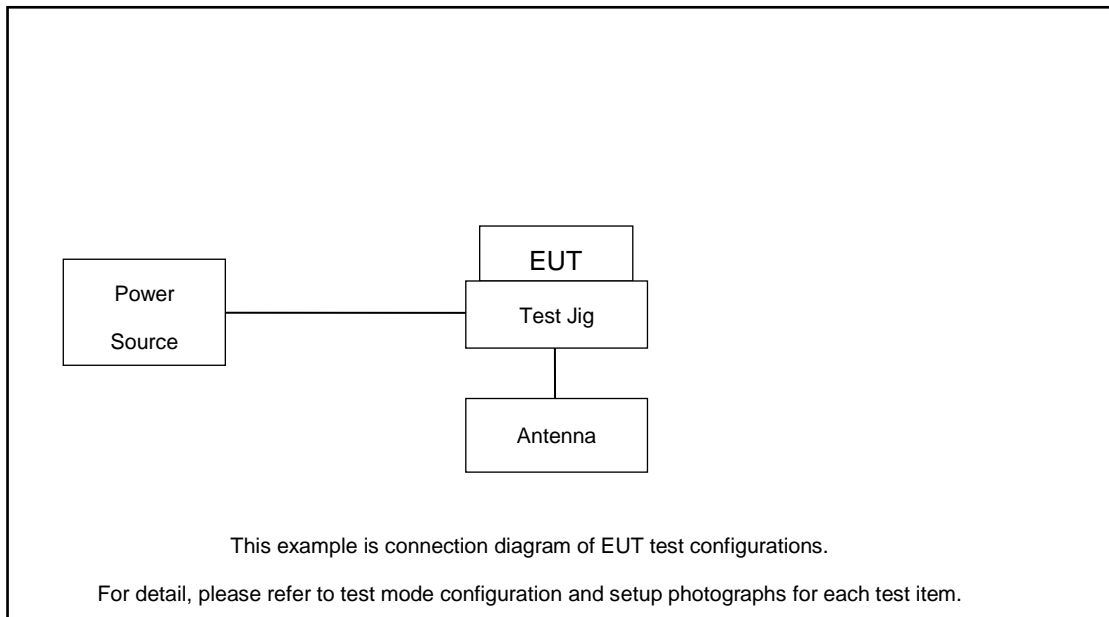

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
3.	Notebook	Lenovo	E540	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A
6.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.9 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.9 + 10 = 14.9 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.

3.1.4 Test Setup

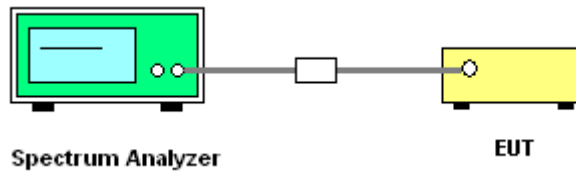

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log B$, dBm, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

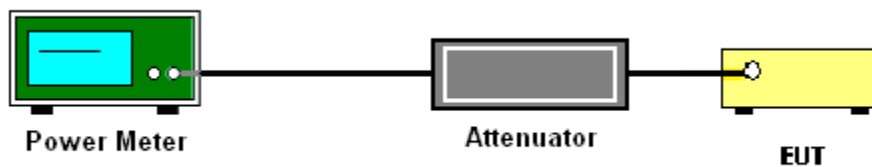

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band 5.725 - 5.85 GHz


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

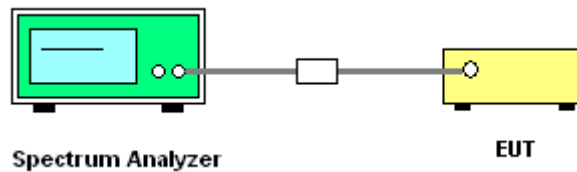

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 3 MHz
 - Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging(RMS)
 - The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal

polarization and vertical polarization of the antenna.


5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

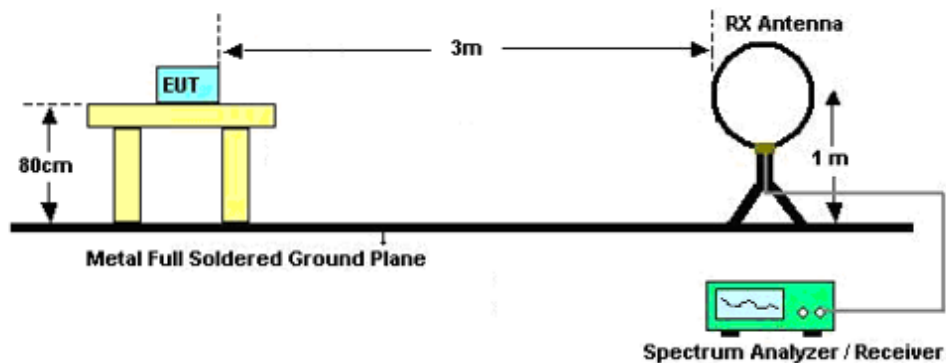

For radiated emissions from 30MHz to 1GHz

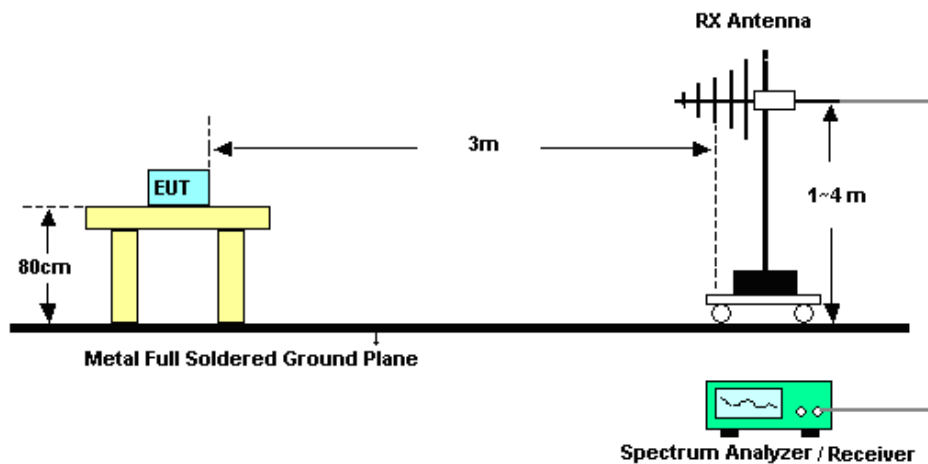

For radiated emissions above 1GHz

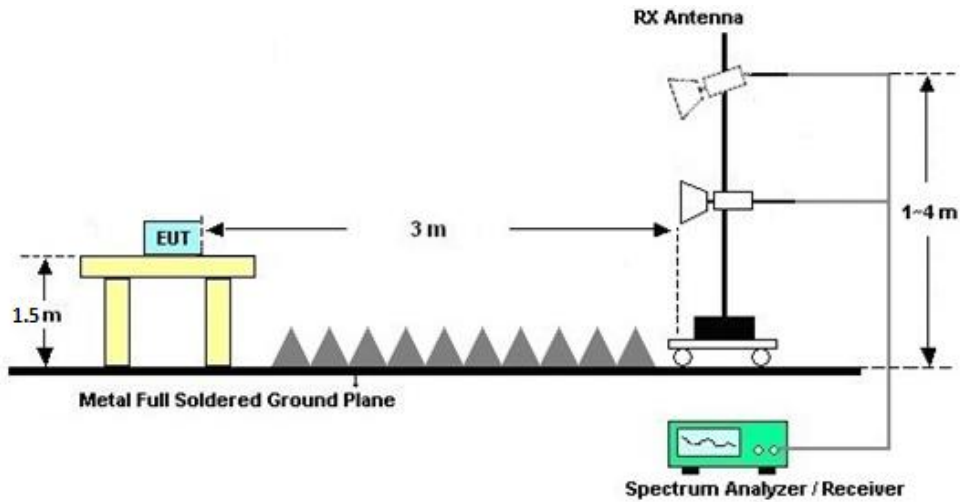

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

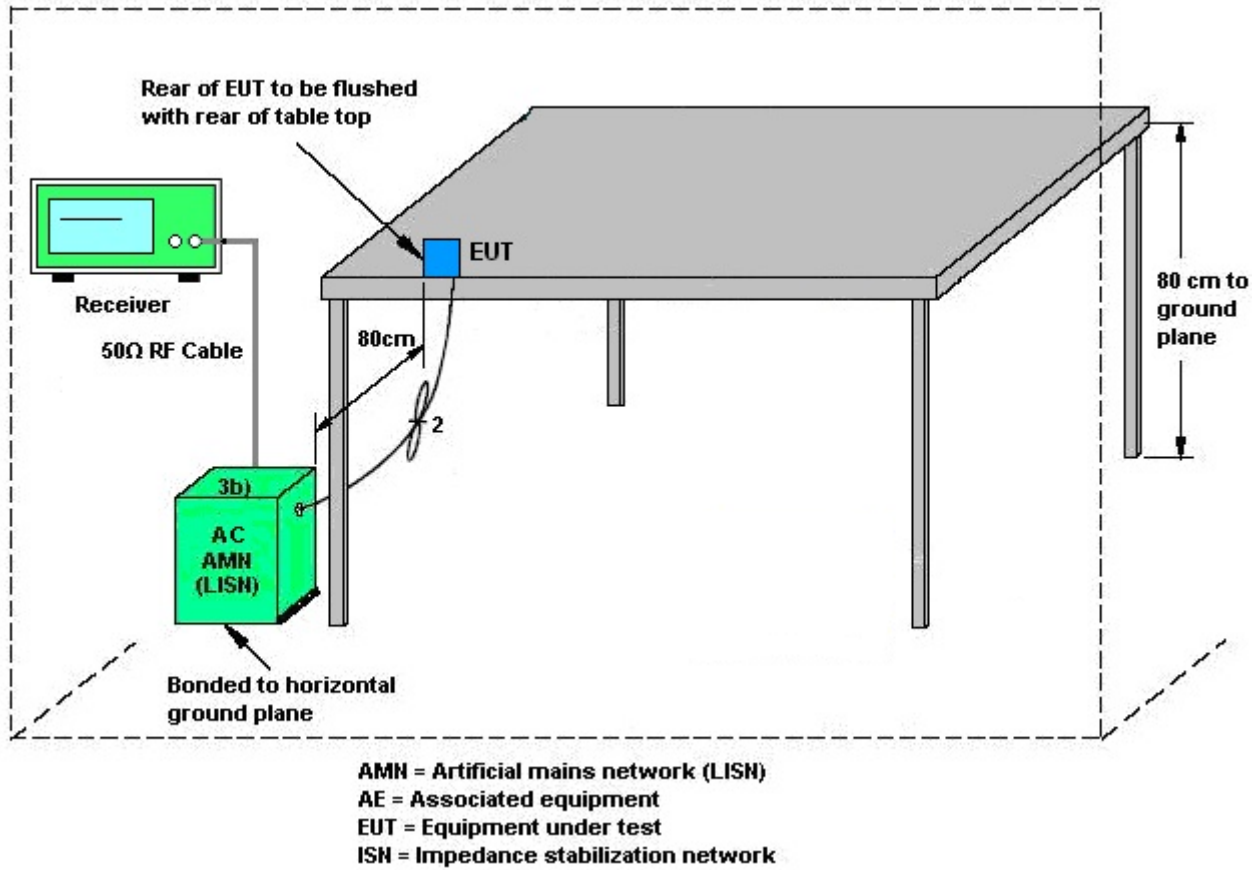

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Dec. 04, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Dec. 04, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Dec. 04, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Dec. 12, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 13, 2022	Dec. 12, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 12, 2022	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Dec. 12, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Dec. 12, 2022	Apr. 17, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Dec. 12, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Dec. 12, 2022	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Dec. 12, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2022	Dec. 12, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Dec. 12, 2022	Oct. 11, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 12, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 12, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 12, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Nov. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Nov. 25, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Nov. 25, 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Nov. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±1.2 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Tang ZhaoYang	Temperature:	21~25	°C
Test Date:	2022/12/4	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.08	15.87	24.00	-0.67		Pass
11a	6Mbps	1	44	5220	0.08	15.94	24.00	-0.67		Pass
11a	6Mbps	1	48	5240	0.08	15.84	24.00	-0.67		Pass
HT20	MCS0	1	36	5180	0.08	15.71	24.00	-0.67		Pass
HT20	MCS0	1	44	5220	0.08	15.75	24.00	-0.67		Pass
HT20	MCS0	1	48	5240	0.08	15.69	24.00	-0.67		Pass
HT40	MCS0	1	38	5190	0.16	16.56	24.00	-0.67		Pass
HT40	MCS0	1	46	5230	0.16	16.50	24.00	-0.67		Pass
VHT20	MCS0	1	36	5180	0.08	14.56	24.00	-0.67		Pass
VHT20	MCS0	1	44	5220	0.08	14.69	24.00	-0.67		Pass
VHT20	MCS0	1	48	5240	0.08	14.58	24.00	-0.67		Pass
VHT40	MCS0	1	38	5190	0.16	14.55	24.00	-0.67		Pass
VHT40	MCS0	1	46	5230	0.16	14.39	24.00	-0.67		Pass
VHT80	MCS0	1	42	5210	0.32	14.08	24.00	-0.67		Pass

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.08	15.93	23.98	-0.19	30.00	Pass
11a	6M bps	1	60	5300	0.08	15.80	23.98	-0.19	30.00	Pass
11a	6M bps	1	64	5320	0.08	15.82	23.98	-0.19	30.00	Pass
HT20	MCS 0	1	52	5260	0.08	15.76	23.98	-0.19	30.00	Pass
HT20	MCS 0	1	60	5300	0.08	15.62	23.98	-0.19	30.00	Pass
HT20	MCS 0	1	64	5320	0.08	15.65	23.98	-0.19	30.00	Pass
HT40	MCS 0	1	54	5270	0.16	16.24	23.98	-0.19	30.00	Pass
HT40	MCS 0	1	62	5310	0.16	16.37	23.98	-0.19	30.00	Pass
VHT20	MCS 0	1	52	5260	0.08	14.65	23.98	-0.19	30.00	Pass
VHT20	MCS 0	1	60	5300	0.08	14.54	23.98	-0.19	30.00	Pass
VHT20	MCS 0	1	64	5320	0.08	14.53	23.98	-0.19	30.00	Pass
VHT40	MCS 0	1	54	5270	0.16	14.26	23.98	-0.19	30.00	Pass
VHT40	MCS 0	1	62	5310	0.16	14.36	23.98	-0.19	30.00	Pass
VHT80	MCS 0	1	58	5290	0.32	14.05	23.98	-0.19	30.00	Pass

TEST RESULTS DATA
Average Power Table

FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.08	15.89	23.98	1.28	30.00	Pass
11a	6M bps	1	116	5580	0.08	15.60	23.98	1.28	30.00	Pass
11a	6M bps	1	140	5700	0.08	15.28	23.98	1.28	30.00	Pass
11a	6M bps	1	144	5720	0.08	15.22	23.98	1.28	30.00	Pass
HT20	MCS 0	1	100	5500	0.08	15.73	23.98	1.28	30.00	Pass
HT20	MCS 0	1	116	5580	0.08	15.34	23.98	1.28	30.00	Pass
HT20	MCS 0	1	140	5700	0.08	15.06	23.98	1.28	30.00	Pass
HT20	MCS 0	1	144	5720	0.08	15.02	23.98	1.28	30.00	Pass
HT40	MCS 0	1	102	5510	0.16	15.59	23.98	1.28	30.00	Pass
HT40	MCS 0	1	110	5550	0.16	15.94	23.98	1.28	30.00	Pass
HT40	MCS 0	1	134	5670	0.16	15.57	23.98	1.28	30.00	Pass
HT40	MCS 0	1	142	5710	0.16	15.68	23.98	1.28	30.00	Pass
VHT20	MCS 0	1	100	5500	0.08	14.61	23.98	1.28	30.00	Pass
VHT20	MCS 0	1	116	5580	0.08	14.28	23.98	1.28	30.00	Pass
VHT20	MCS 0	1	140	5700	0.08	14.18	23.98	1.28	30.00	Pass
VHT20	MCS 0	1	144	5720	0.08	14.06	23.98	1.28	30.00	Pass
VHT40	MCS 0	1	102	5510	0.16	13.71	23.98	1.28	30.00	Pass
VHT40	MCS 0	1	110	5550	0.16	13.87	23.98	1.28	30.00	Pass
VHT40	MCS 0	1	134	5670	0.16	13.47	23.98	1.28	30.00	Pass
VHT40	MCS 0	1	142	5710	0.16	13.76	23.98	1.28	30.00	Pass
VHT80	MCS 0	1	106	5530	0.32	13.90	23.98	1.28	30.00	Pass
VHT80	MCS 0	1	122	5610	0.32	13.40	23.98	1.28	30.00	Pass
VHT80	MCS 0	1	138	5690	0.32	13.60	23.98	1.28	30.00	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.08	15.06	30.00	1.10		Pass
11a	6Mbps	1	157	5785	0.08	15.30	30.00	1.10		Pass
11a	6Mbps	1	165	5825	0.08	15.31	30.00	1.10		Pass
HT20	MCS 0	1	149	5745	0.08	15.01	30.00	1.10		Pass
HT20	MCS 0	1	157	5785	0.08	15.03	30.00	1.10		Pass
HT20	MCS 0	1	165	5825	0.08	15.12	30.00	1.10		Pass
HT40	MCS 0	1	151	5755	0.16	15.57	30.00	1.10		Pass
HT40	MCS 0	1	159	5795	0.16	15.79	30.00	1.10		Pass
VHT20	MCS 0	1	149	5745	0.08	14.25	30.00	1.10		Pass
VHT20	MCS 0	1	157	5785	0.08	14.21	30.00	1.10		Pass
VHT20	MCS 0	1	165	5825	0.08	14.22	30.00	1.10		Pass
VHT40	MCS 0	1	151	5755	0.16	13.58	30.00	1.10		Pass
VHT40	MCS 0	1	159	5795	0.16	13.86	30.00	1.10		Pass
VHT80	MCS 0	1	155	5775	0.32	13.50	30.00	1.10		Pass



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	22.12	5168.96	5191.08	---	---
		5220	22.16	5208.96	5231.12	---	---
		5240	22.16	5228.96	5251.12	---	---
		5260	22.20	5248.96	5271.16	---	---
		5300	22.08	5289.00	5311.08	---	---
		5320	22.20	5308.96	5331.16	---	---
		5500	22.16	5488.96	5511.12	---	---
		5580	22.20	5568.92	5591.12	---	---
		5700	22.24	5688.88	5711.12	---	---
		5720	22.24	5708.92	5731.16	---	---
		5745	22.20	5733.96	5756.16	---	---
		5785	21.64	5774.52	5796.16	---	---
		5825	21.68	5814.48	5836.16	---	---
11N20SISO	Ant1	5180	22.84	5168.92	5191.76	---	---
		5220	22.72	5208.64	5231.36	---	---
		5240	22.88	5228.88	5251.76	---	---
		5260	23.04	5248.92	5271.96	---	---
		5300	23.12	5288.64	5311.76	---	---
		5320	22.68	5308.72	5331.40	---	---
		5500	23.08	5488.68	5511.76	---	---
		5580	23.12	5568.68	5591.80	---	---
		5700	22.64	5688.68	5711.32	---	---
		5720	23.12	5708.64	5731.76	---	---
		5745	22.52	5733.88	5756.40	---	---
		5785	22.60	5773.60	5796.20	---	---
		5825	22.92	5813.88	5836.80	---	---
11N40SISO	Ant1	5190	41.36	5169.44	5210.80	---	---
		5230	41.36	5209.44	5250.80	---	---
		5270	41.52	5249.36	5290.88	---	---
		5310	41.68	5289.28	5330.96	---	---




		5510	41.60	5489.12	5530.72	---	---
		5550	41.20	5529.52	5570.72	---	---
		5670	41.52	5649.20	5690.72	---	---
		5710	41.92	5689.20	5731.12	---	---
		5755	41.52	5734.44	5775.96	---	---
		5795	41.76	5774.12	5815.88	---	---
11AC80SISO	Ant1	5210	83.68	5168.56	5252.24	---	---
		5290	83.84	5248.24	5332.08	---	---
		5530	84.32	5487.76	5572.08	---	---
		5610	84.16	5567.92	5652.08	---	---
		5690	83.68	5648.56	5732.24	---	---
		5775	83.52	5733.72	5817.24	---	---




Test Graphs

11A_Ant1_5180

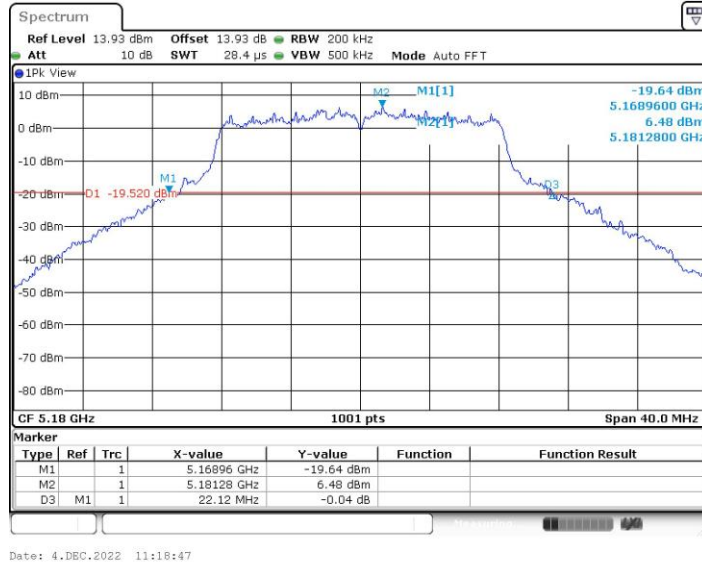


11A_Ant1_5220

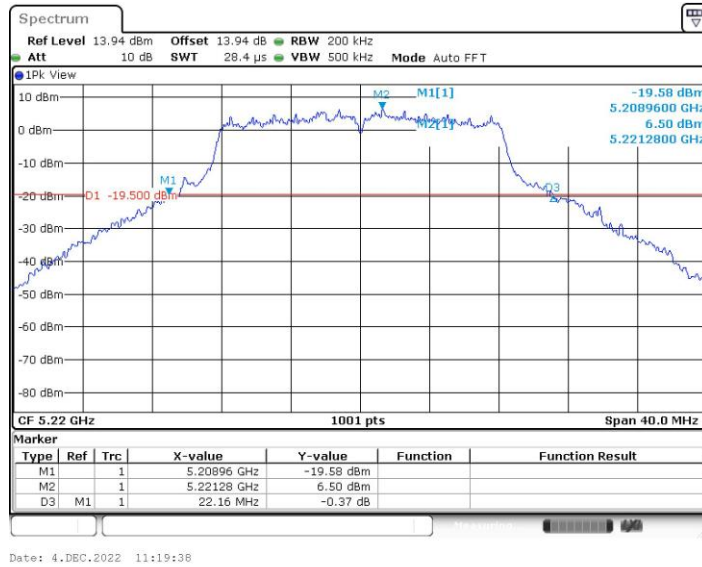




11A_Ant1_5240

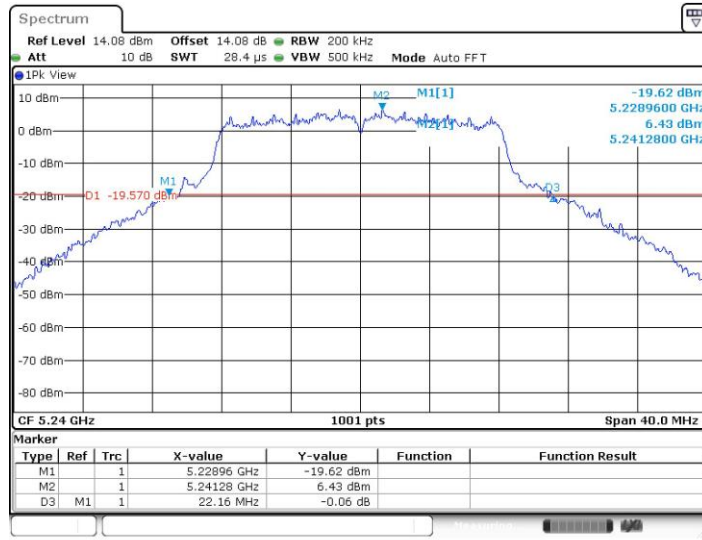

Date: 4.DEC.2022 11:20:26


11A_Ant1_5260

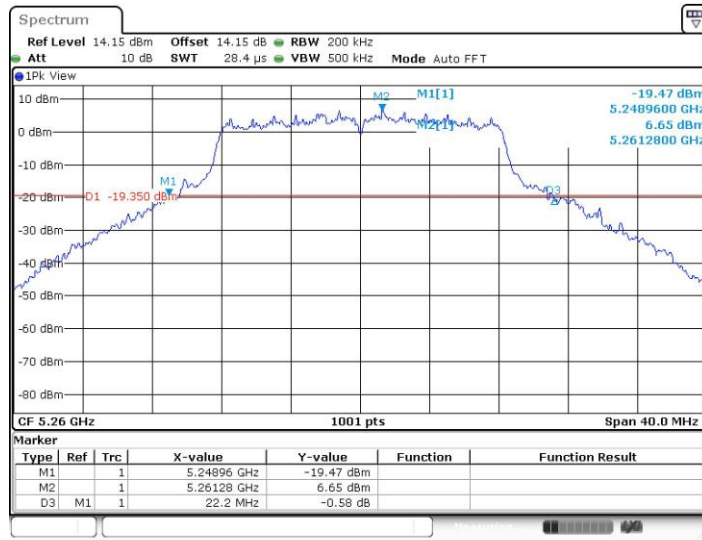

Date: 4.DEC.2022 11:21:18




11A_Ant1_5300

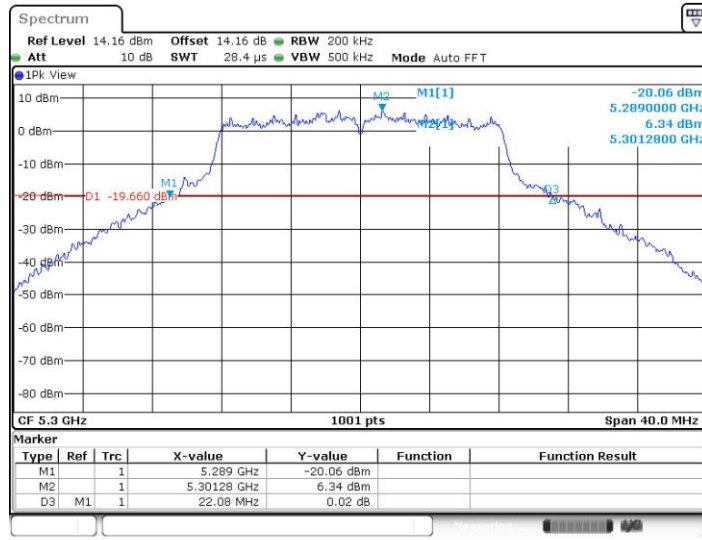

Date: 4.DEC.2022 11:22:11


11A_Ant1_5320

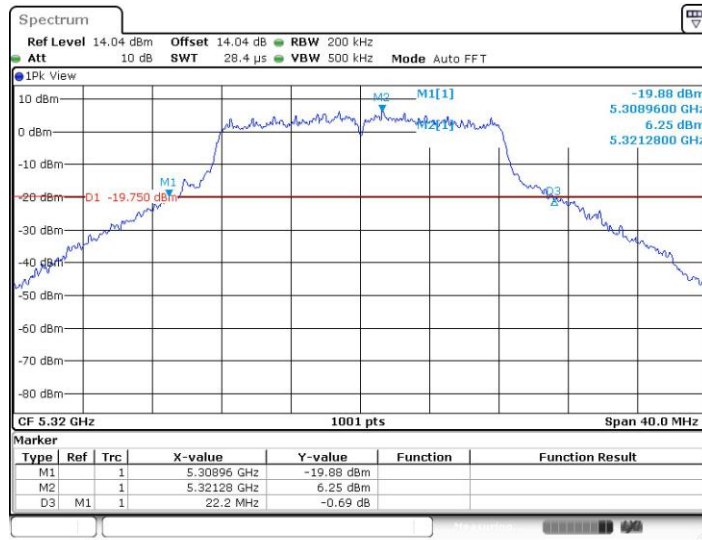

Date: 4.DEC.2022 11:23:05




11A_Ant1_5500

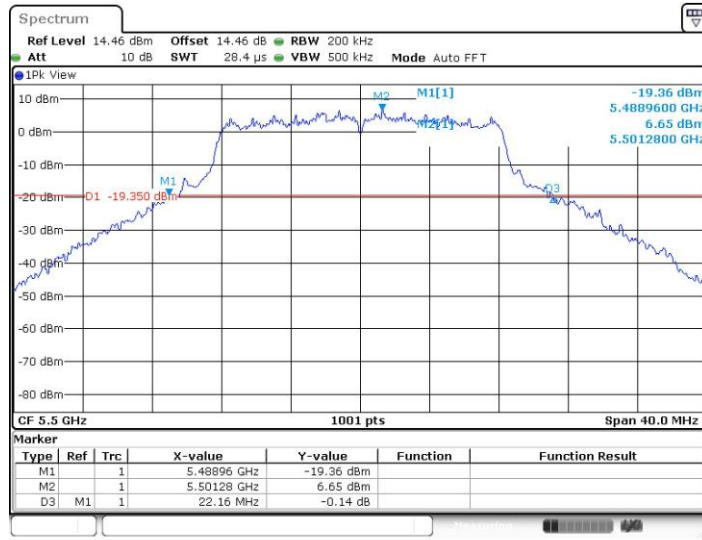

Date: 4.DEC.2022 11:24:04


11A_Ant1_5580

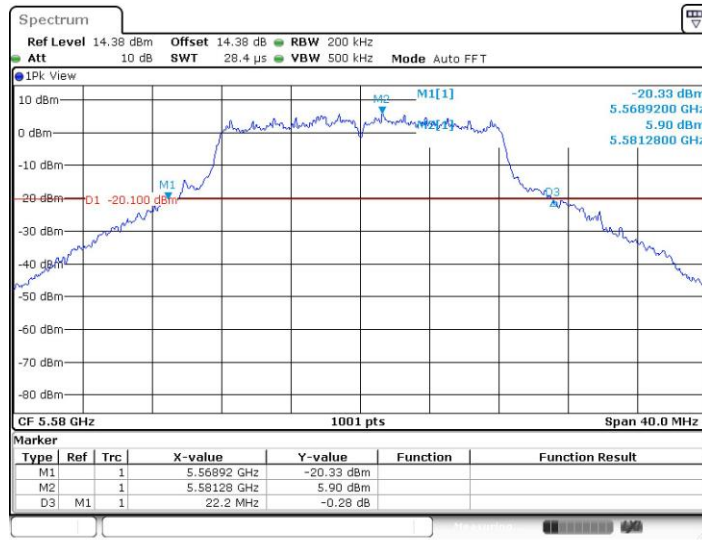

Date: 4.DEC.2022 11:25:06




11A_Ant1_5700

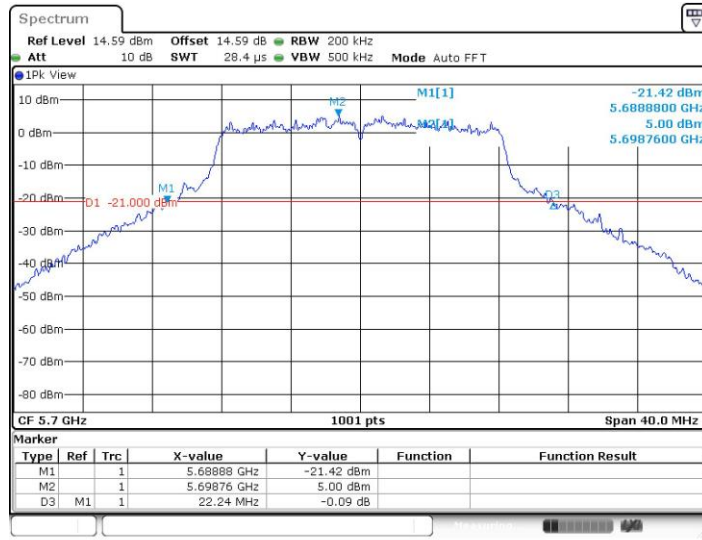

Date: 4.DEC.2022 11:26:06


11A_Ant1_5720

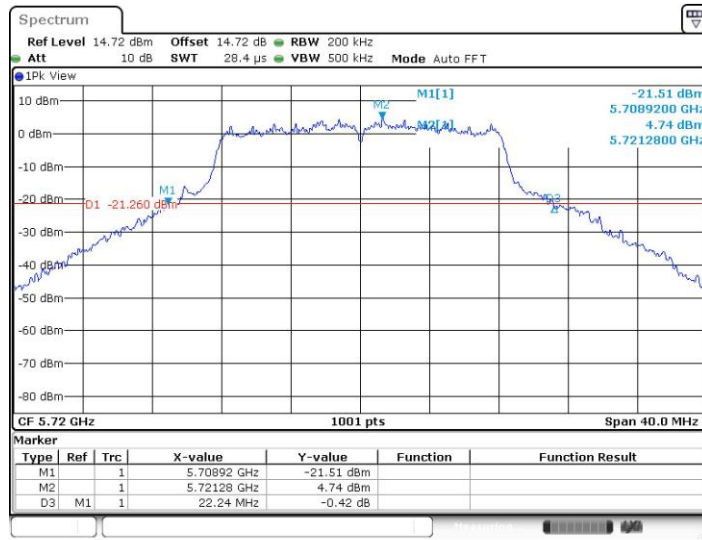

Date: 4.DEC.2022 11:27:02




11A_Ant1_5745

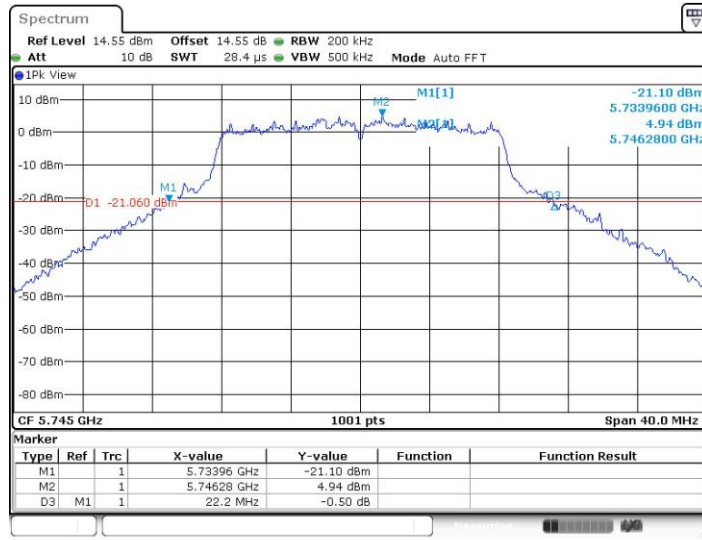

Date: 4.DEC.2022 11:28:00


11A_Ant1_5785

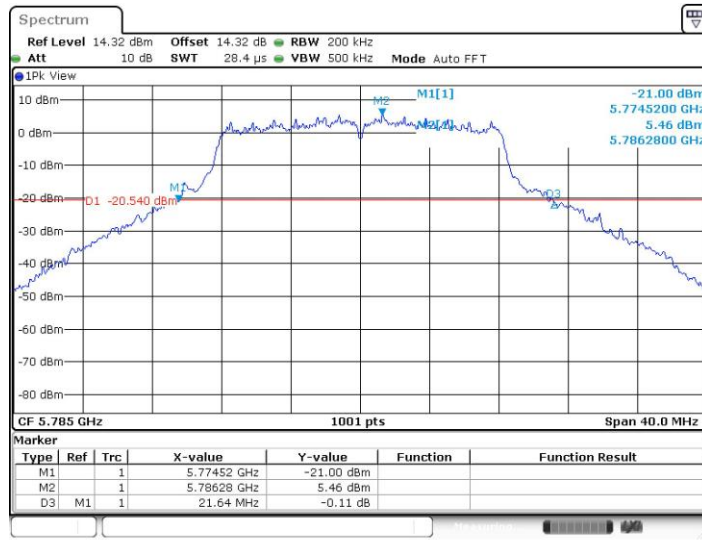

Date: 4.DEC.2022 11:29:16




11A_Ant1_5825

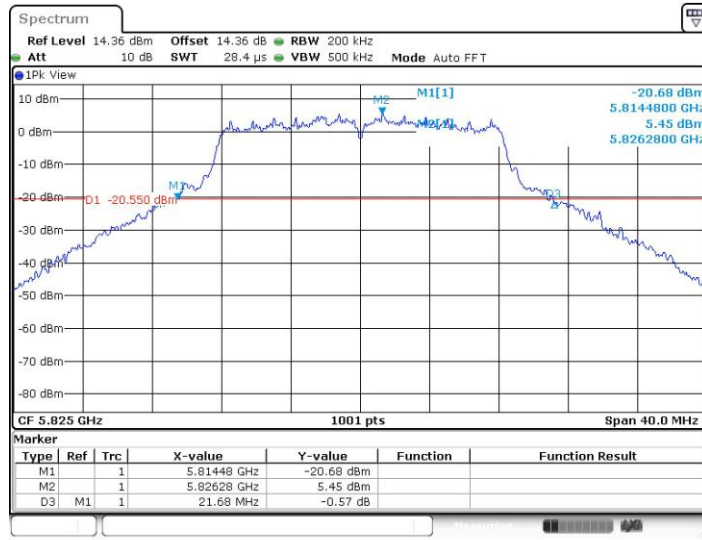

Date: 4.DEC.2022 11:30:34


11N20SISO_Ant1_5180

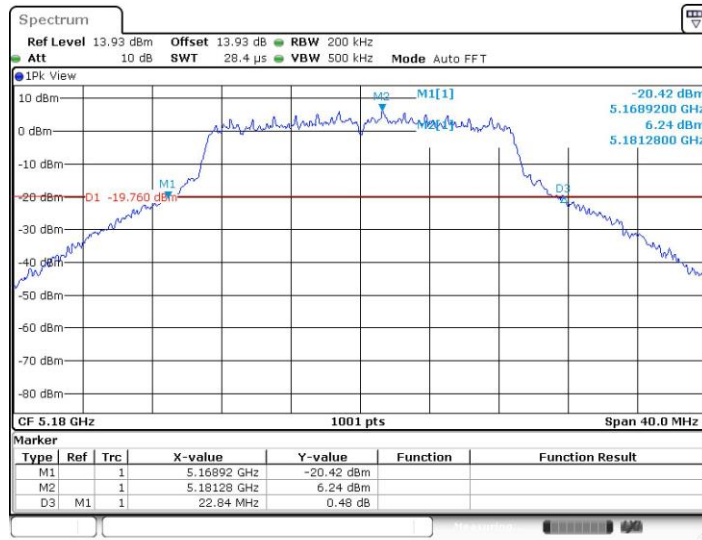

Date: 4.DEC.2022 11:32:36




11N20SISO_Ant1_5220

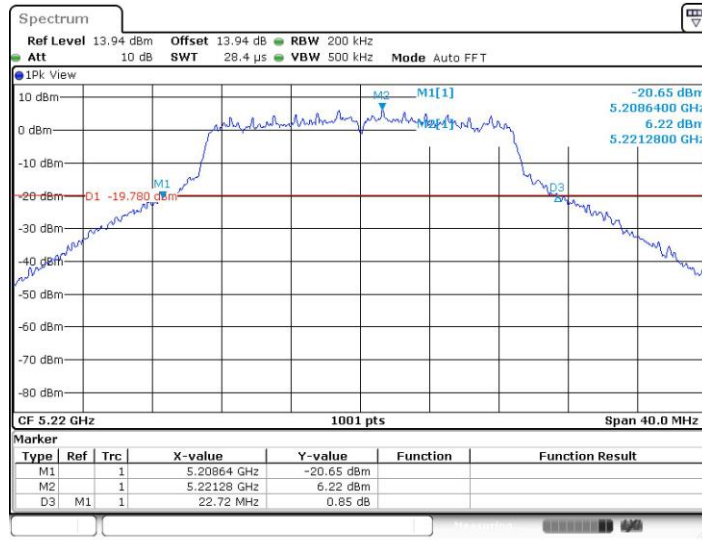

Date: 4.DEC.2022 11:33:35


11N20SISO_Ant1_5240

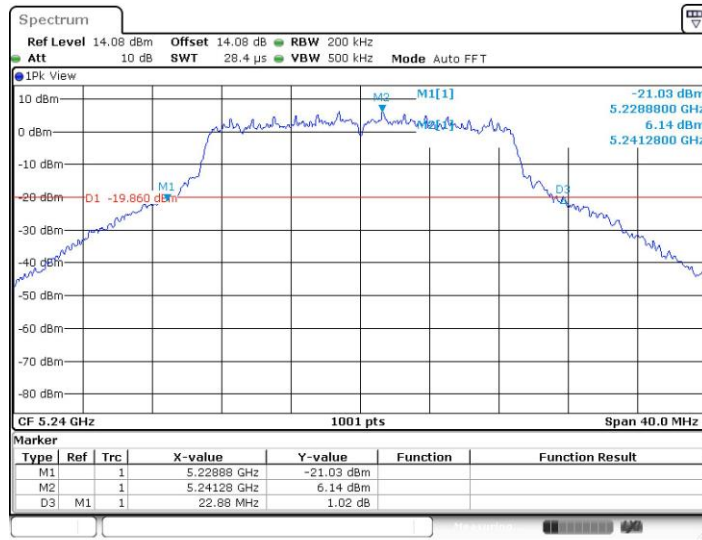

Date: 4.DEC.2022 11:34:30




11N20SISO_Ant1_5260

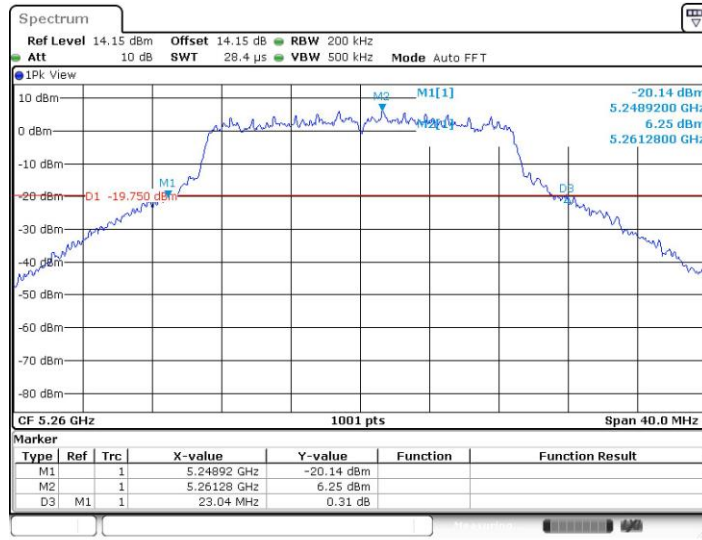

Date: 4.DEC.2022 11:35:28


11N20SISO_Ant1_5300

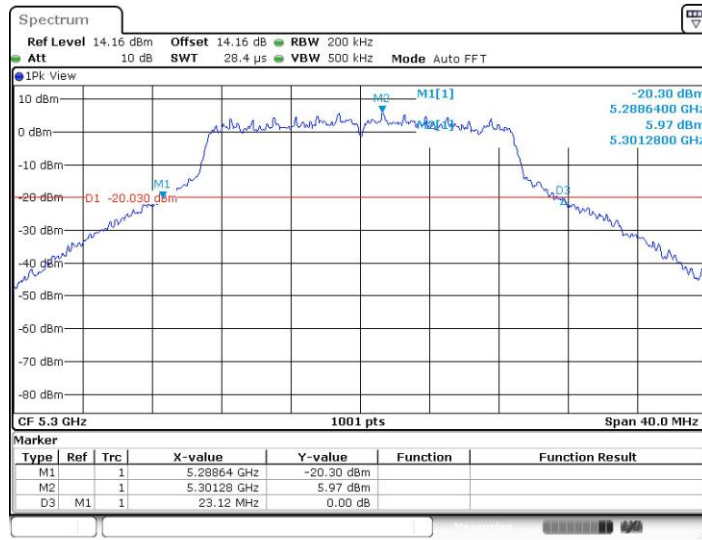

Date: 4.DEC.2022 11:36:30




11N20SISO_Ant1_5320

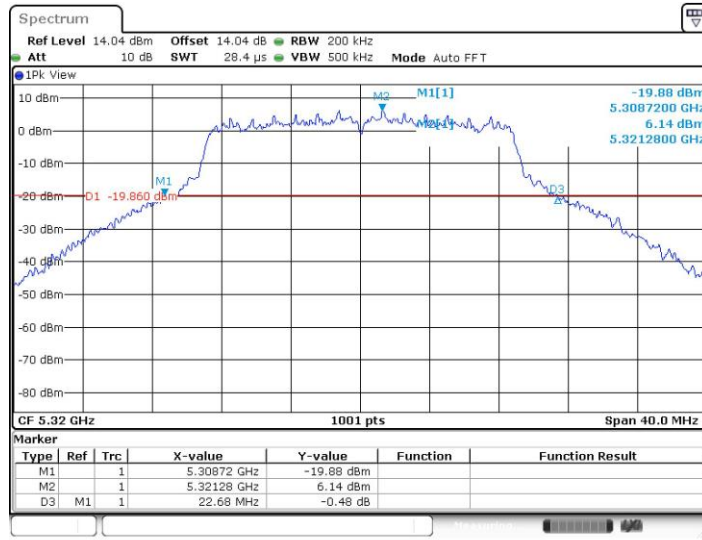

Date: 4.DEC.2022 11:37:25


11N20SISO_Ant1_5500

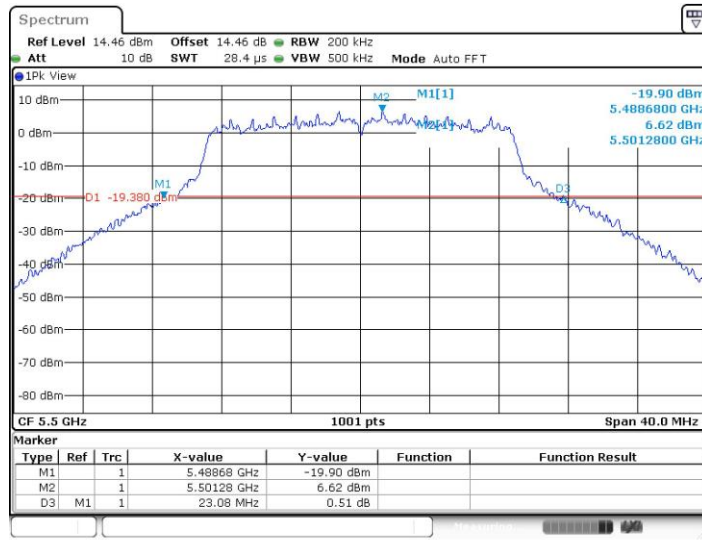

Date: 4.DEC.2022 11:38:26




11N20SISO_Ant1_5580

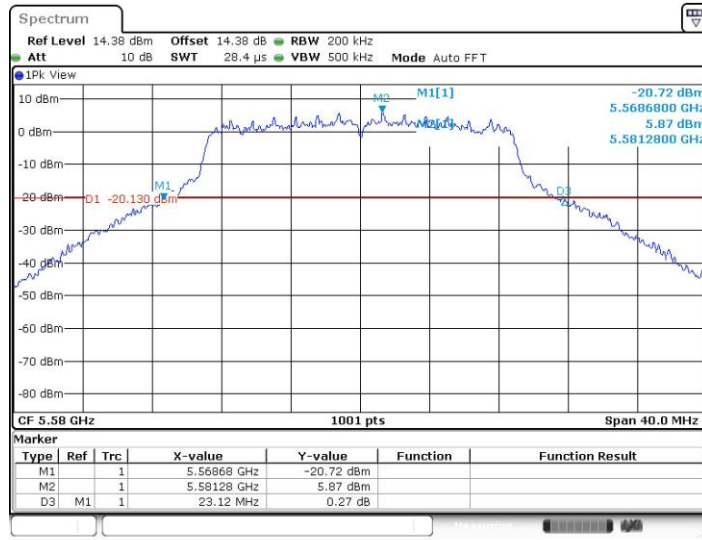

Date: 4.DEC.2022 11:39:34


11N20SISO_Ant1_5700

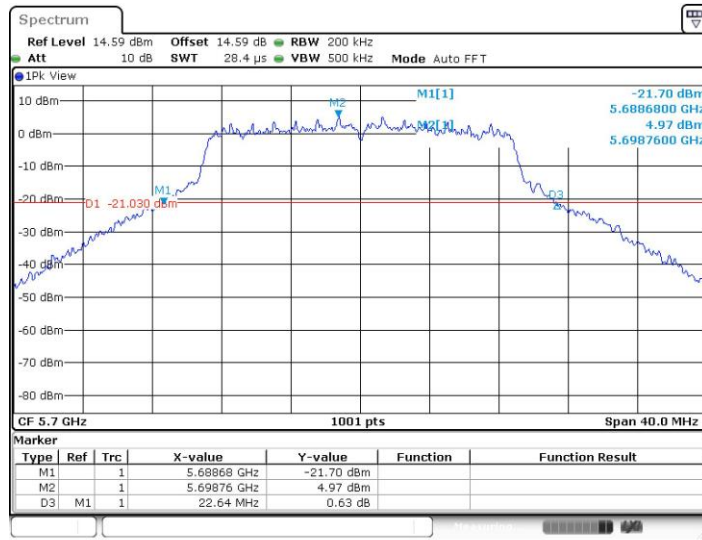


Date: 4.DEC.2022 11:40:52



11N20SISO_Ant1_5720

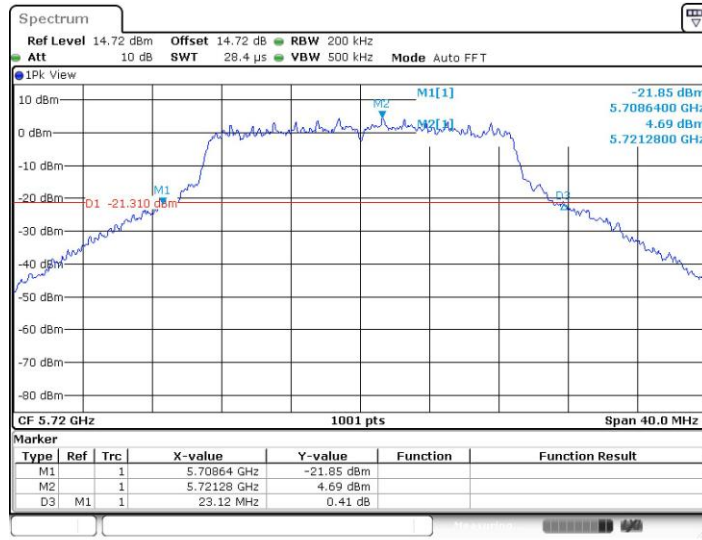


11N20SISO_Ant1_5745

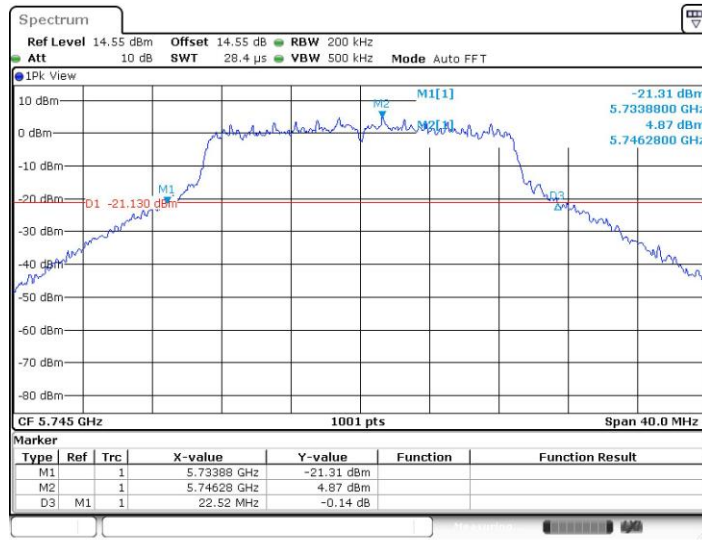




11N20SISO_Ant1_5785

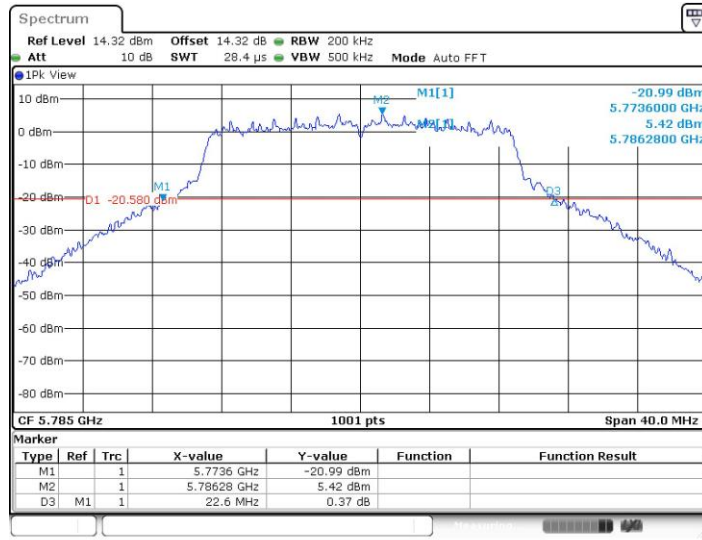

Date: 4.DEC.2022 11:44:24


11N20SISO_Ant1_5825

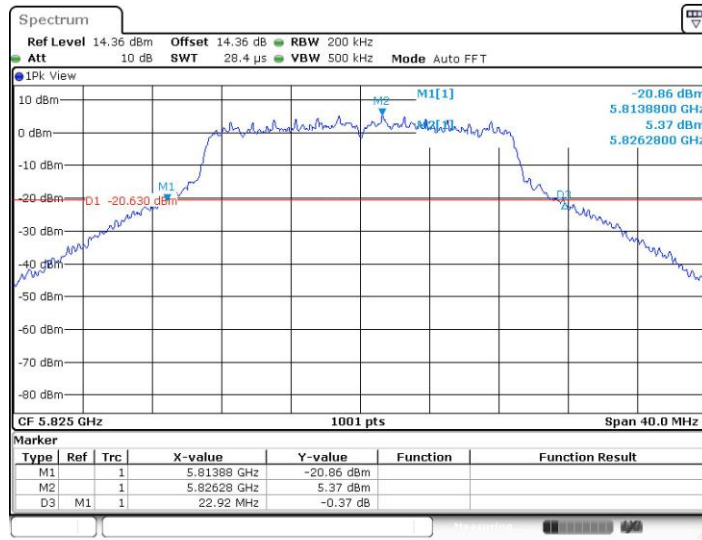

Date: 4.DEC.2022 11:45:42




11N40SISO_Ant1_5190

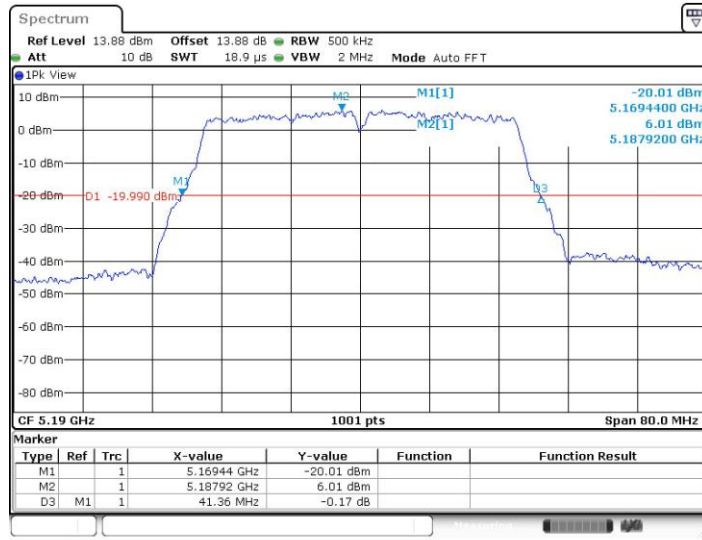

Date: 4.DEC.2022 11:47:06


11N40SISO_Ant1_5230

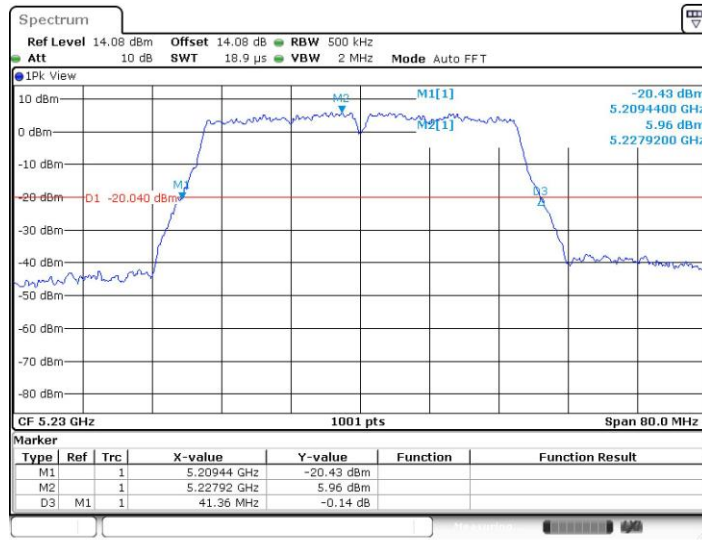

Date: 4.DEC.2022 11:48:15




11N40SISO_Ant1_5270

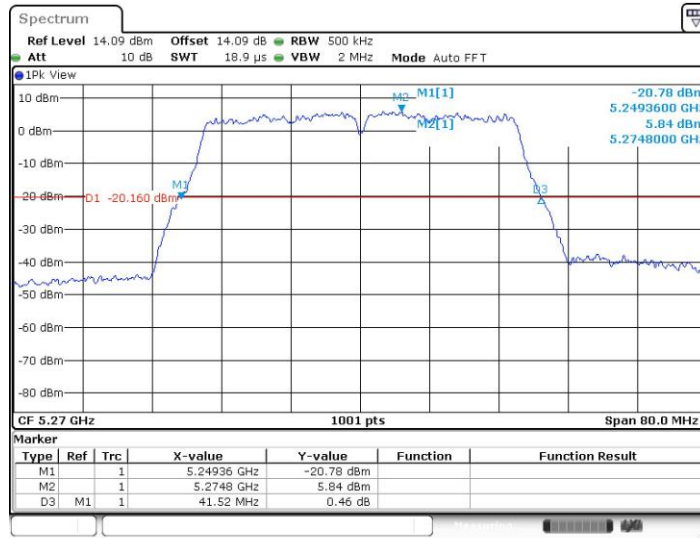

Date: 4.DEC.2022 11:49:14


11N40SISO_Ant1_5310

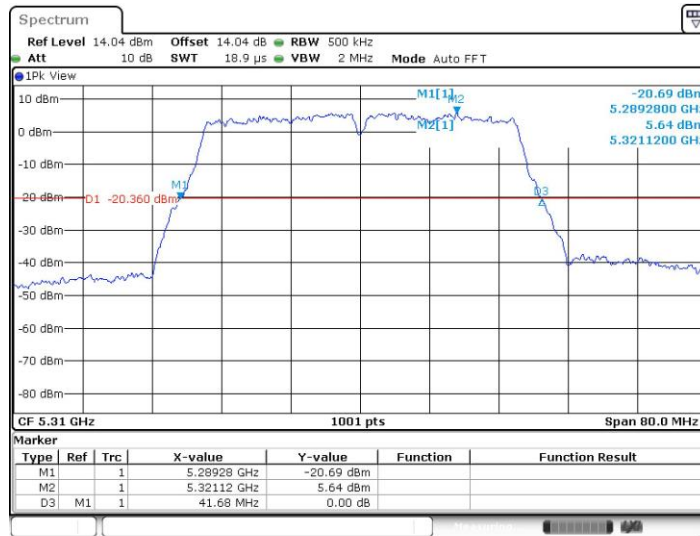

Date: 4.DEC.2022 11:50:15




11N40SISO_Ant1_5510

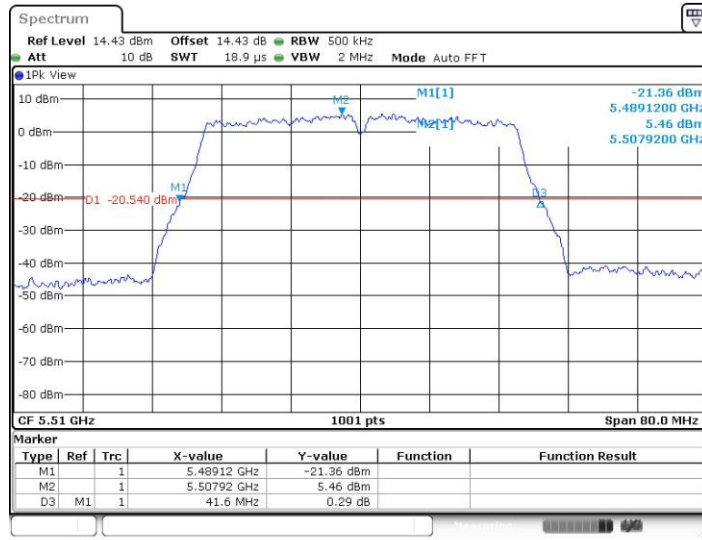

Date: 4.DEC.2022 11:51:18


11N40SISO_Ant1_5550

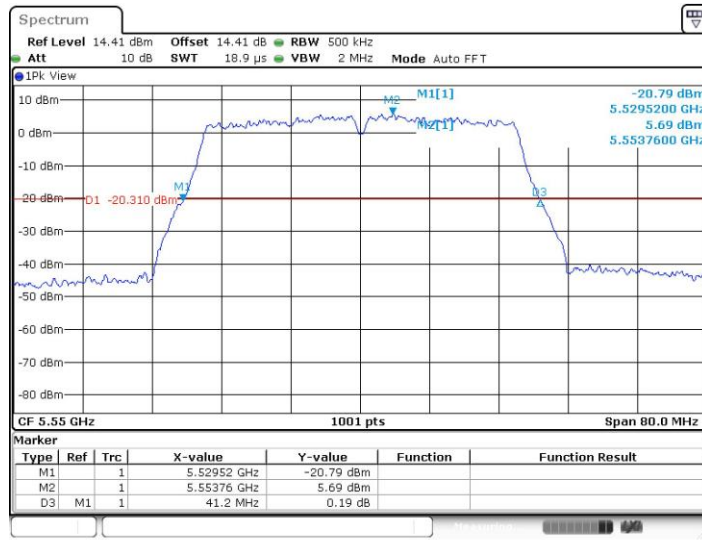

Date: 4.DEC.2022 11:52:17




11N40SISO_Ant1_5670

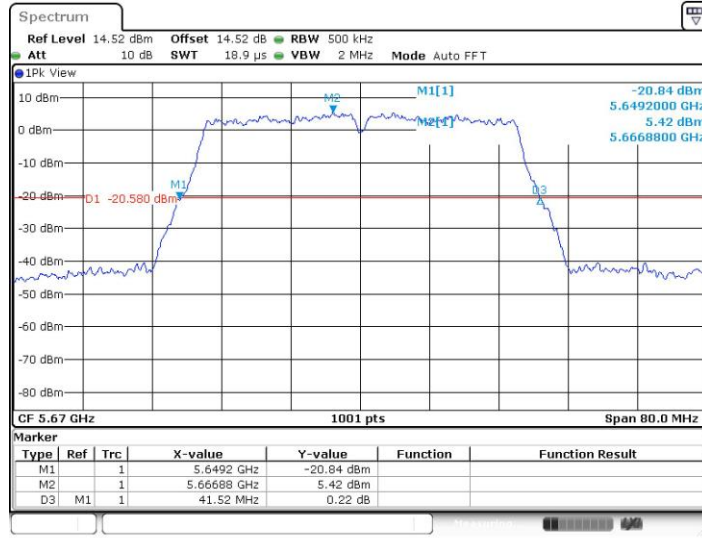

Date: 4.DEC.2022 11:53:22


11N40SISO_Ant1_5710

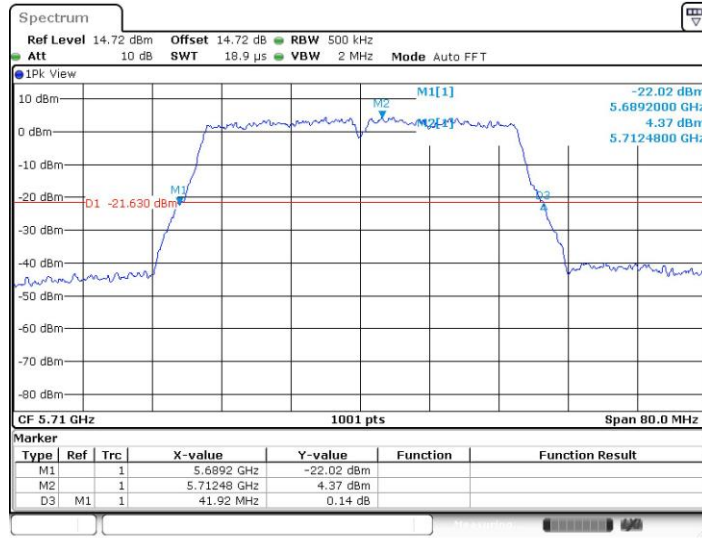


Date: 4.DEC.2022 11:54:27



11N40SISO_Ant1_5755

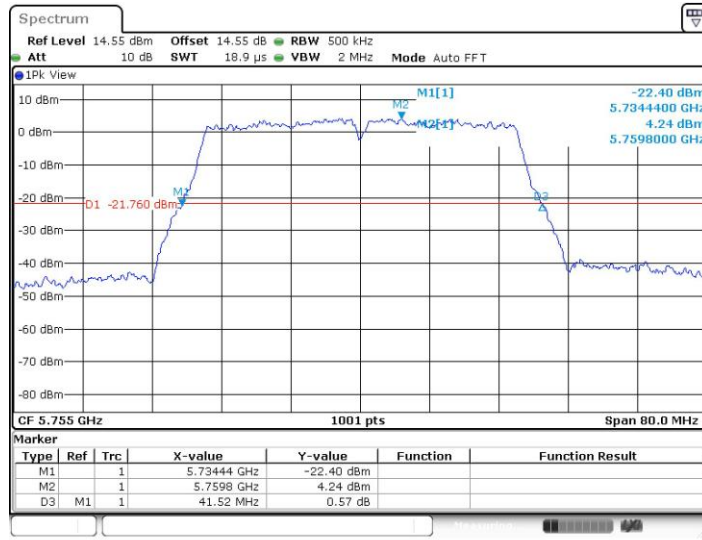

11N40SISO_Ant1_5795

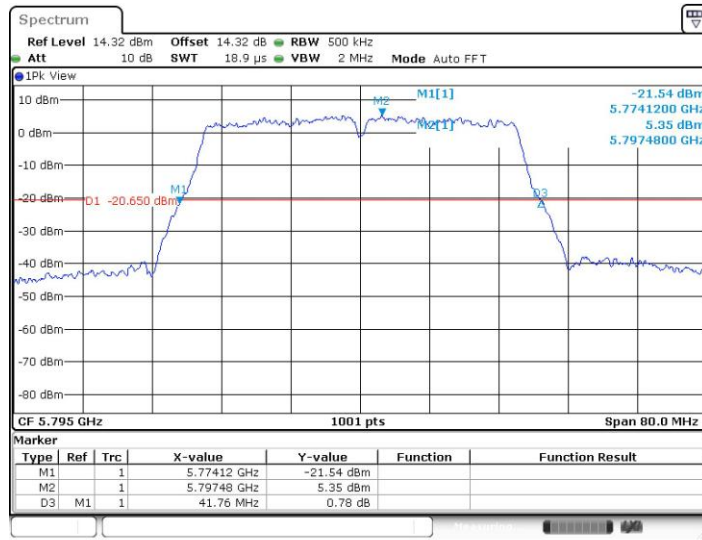




11AC80SISO_Ant1_5210



Date: 4.DEC.2022 11:58:12


11AC80SISO_Ant1_5290

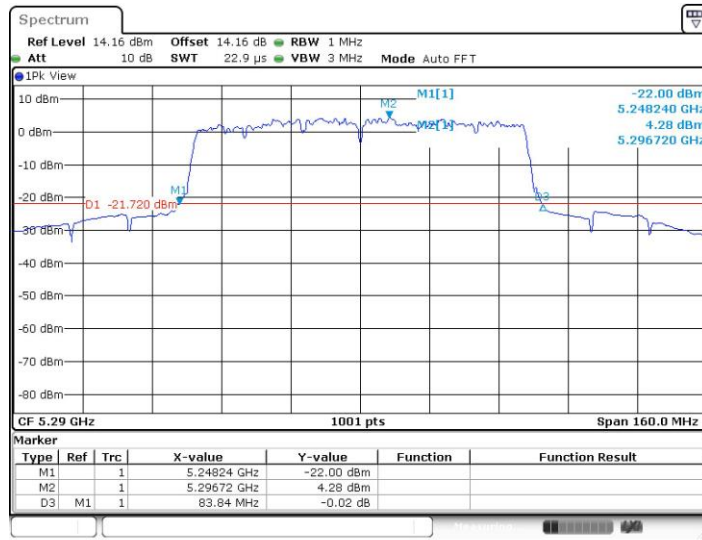


Date: 4.DEC.2022 12:01:13



11AC80SISO_Ant1_5530

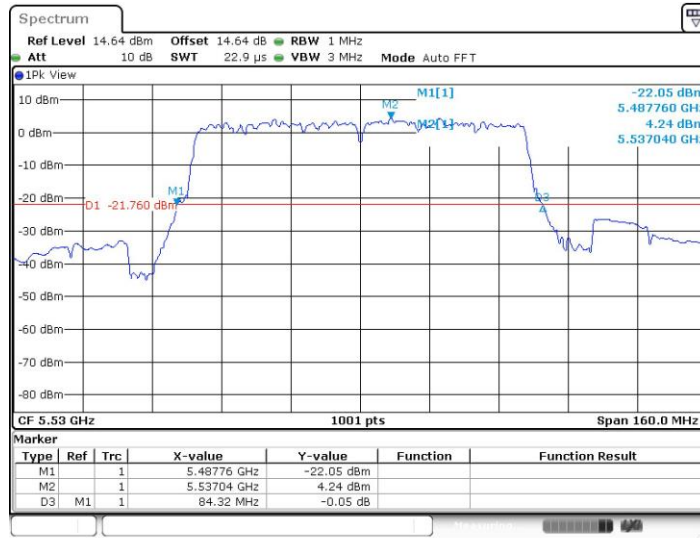


11AC80SISO_Ant1_5610

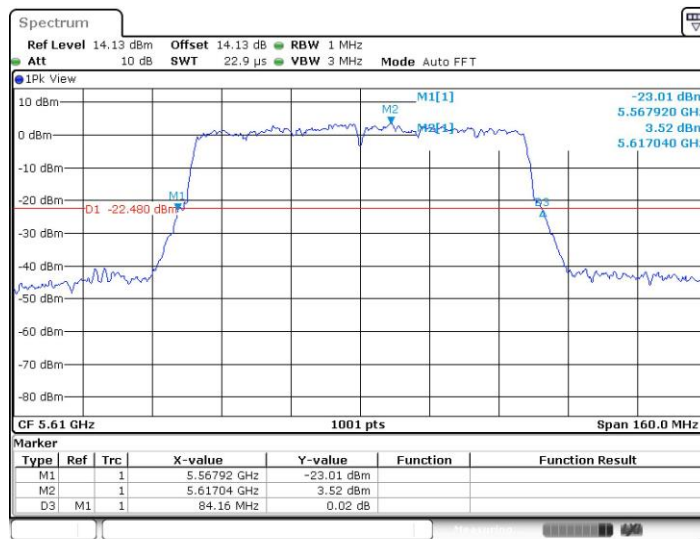




11AC80SISO_Ant1_5690

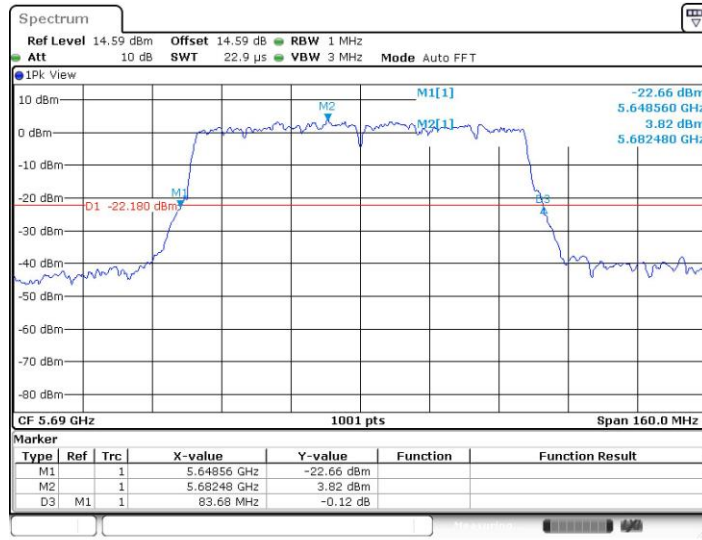

Date: 4.DEC.2022 12:04:23

11AC80SISO_Ant1_5775

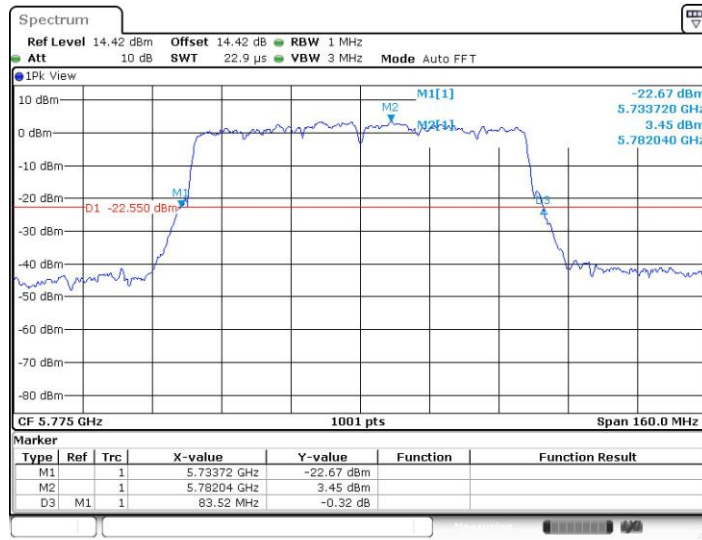

Date: 4.DEC.2022 12:05:22



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.023	5171.5684	5188.5914	---	---
		5220	17.023	5211.5285	5228.5514	---	---
		5240	17.063	5231.4885	5248.5514	---	---
		5260	17.143	5251.4086	5268.5514	---	---
		5300	17.103	5291.4885	5308.5914	---	---
		5320	17.023	5311.5285	5328.5514	---	---
		5500	16.983	5491.5684	5508.5514	---	---
		5580	17.063	5571.4885	5588.5514	---	---
		5700	17.223	5691.4885	5708.7113	---	---
		5720	17.023	5711.5285	5728.5514	---	---
		5745	16.983	5736.5684	5753.5514	---	---
		5785	17.103	5776.4885	5793.5914	---	---
		5825	17.063	5816.4885	5833.5514	---	---
11N20SISO	Ant1	5180	18.182	5170.9291	5189.1109	---	---
		5220	18.262	5210.9291	5229.1908	---	---
		5240	18.222	5230.9690	5249.1908	---	---
		5260	18.222	5250.9291	5269.1508	---	---
		5300	18.222	5290.9291	5309.1508	---	---
		5320	18.182	5310.9690	5329.1508	---	---
		5500	18.182	5490.9690	5509.1508	---	---
		5580	18.222	5570.9690	5589.1908	---	---
		5700	18.262	5690.9291	5709.1908	---	---
		5720	18.222	5710.9690	5729.1908	---	---
		5745	18.182	5735.9690	5754.1508	---	---
		5785	18.222	5775.9690	5794.1908	---	---
		5825	18.222	5815.9690	5834.1908	---	---
11N40SISO	Ant1	5190	36.603	5171.8581	5208.4615	---	---
		5230	36.603	5211.6983	5248.3017	---	---
		5270	36.523	5251.8581	5288.3816	---	---
		5310	36.603	5291.7782	5328.3816	---	---
		5510	36.444	5491.8581	5528.3017	---	---
		5550	36.444	5531.9381	5568.3816	---	---




		5670	36.603	5651.7782	5688.3816	---	---
		5710	36.683	5691.6983	5728.3816	---	---
		5755	36.603	5736.7782	5773.3816	---	---
		5795	36.444	5776.8581	5813.3017	---	---
11AC80SISO	Ant1	5210	76.084	5172.1179	5248.2018	---	---
		5290	76.084	5252.1179	5328.2018	---	---
		5530	76.084	5492.1179	5568.2018	---	---
		5610	75.924	5572.2777	5648.2018	---	---
		5690	76.244	5651.9580	5728.2018	---	---
		5775	76.084	5737.2777	5813.3616	---	---




Test Graphs

11A_Ant1_5180

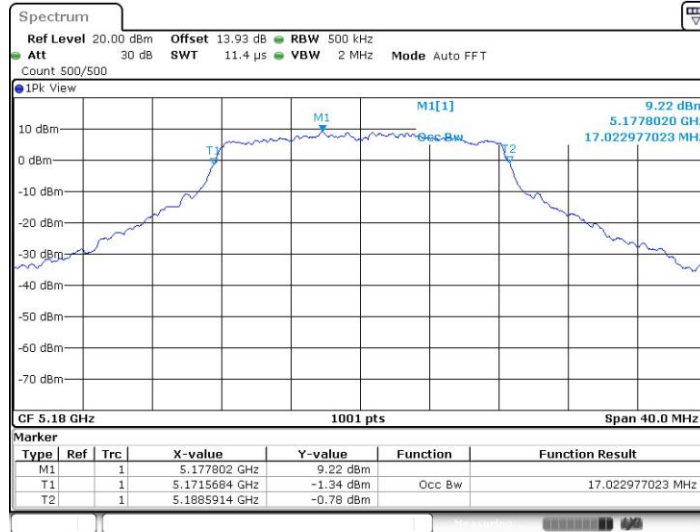

Date: 4.DEC.2022 11:18:58


11A_Ant1_5220

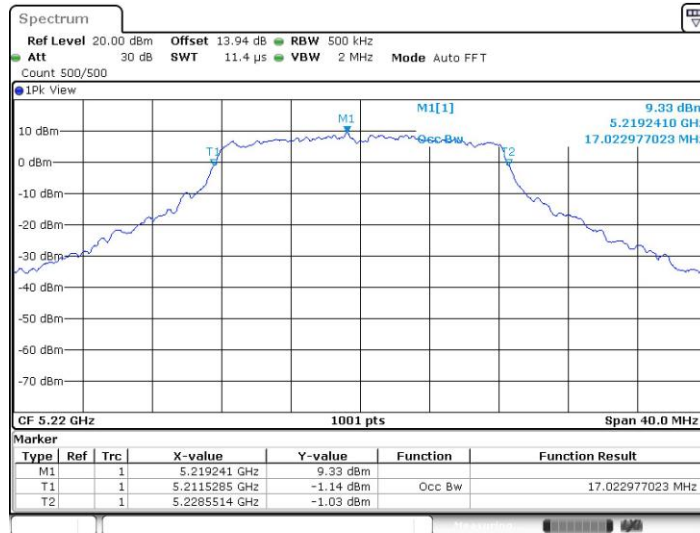

Date: 4.DEC.2022 11:19:51




11A_Ant1_5240

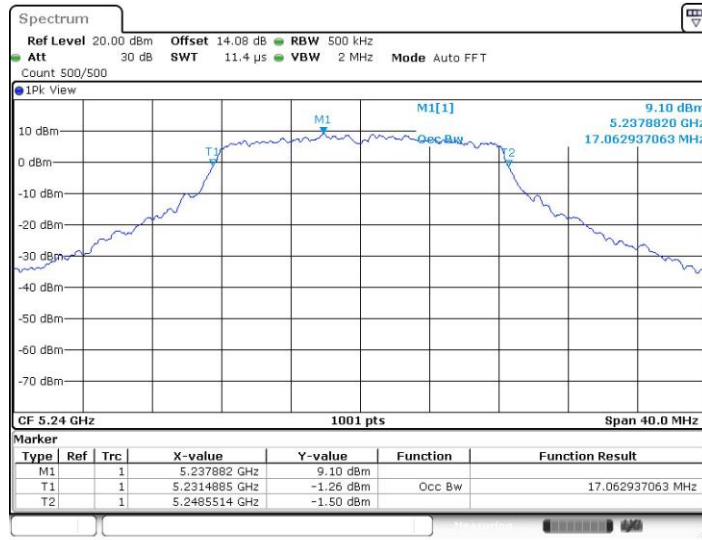

Date: 4.DEC.2022 11:20:41


11A_Ant1_5260

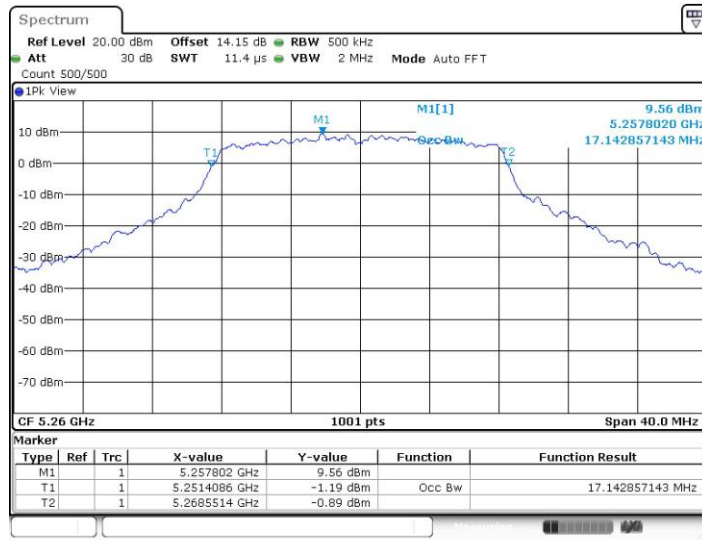


Date: 4.DEC.2022 11:21:31



11A_Ant1_5300

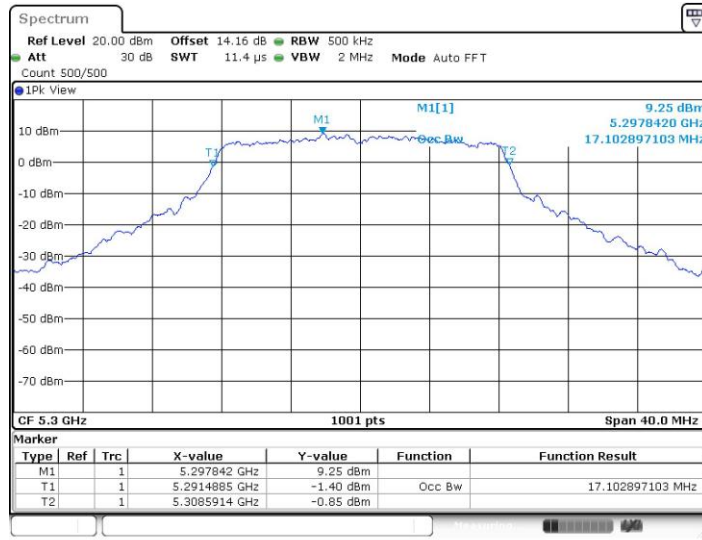


11A_Ant1_5320

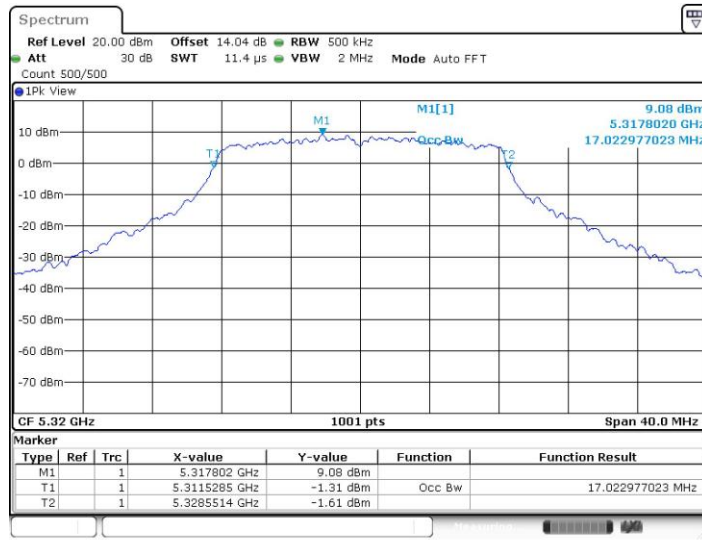




11A_Ant1_5500

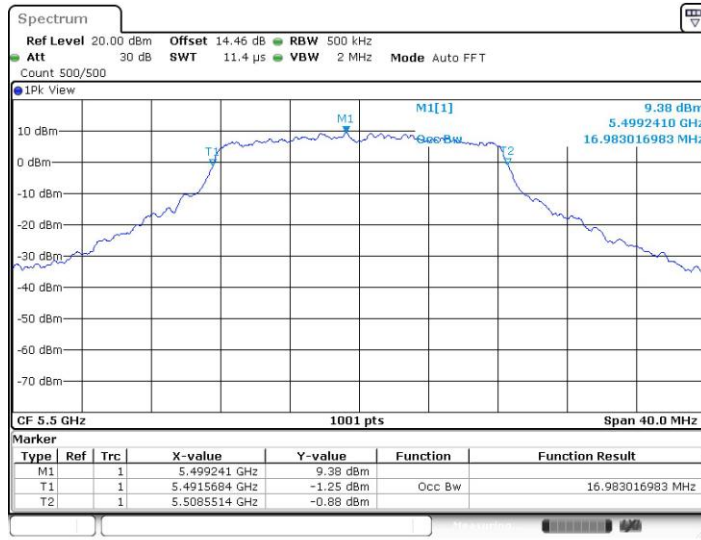

Date: 4.DEC.2022 11:24:20


11A_Ant1_5580

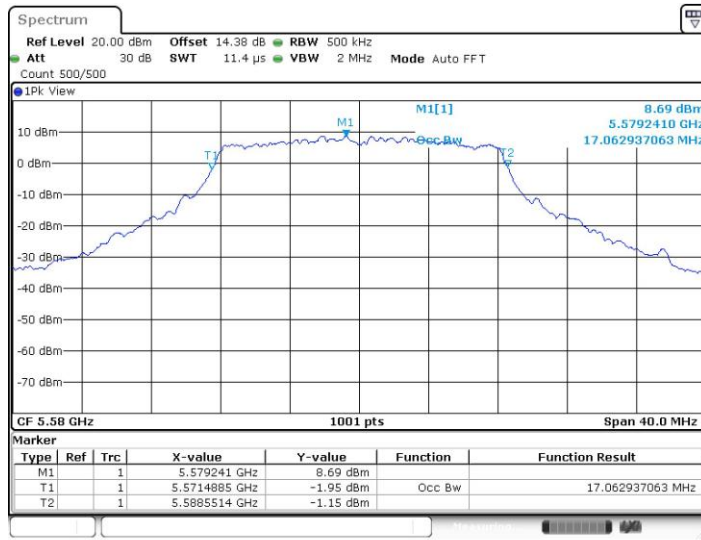

Date: 4.DEC.2022 11:25:21




11A_Ant1_5700

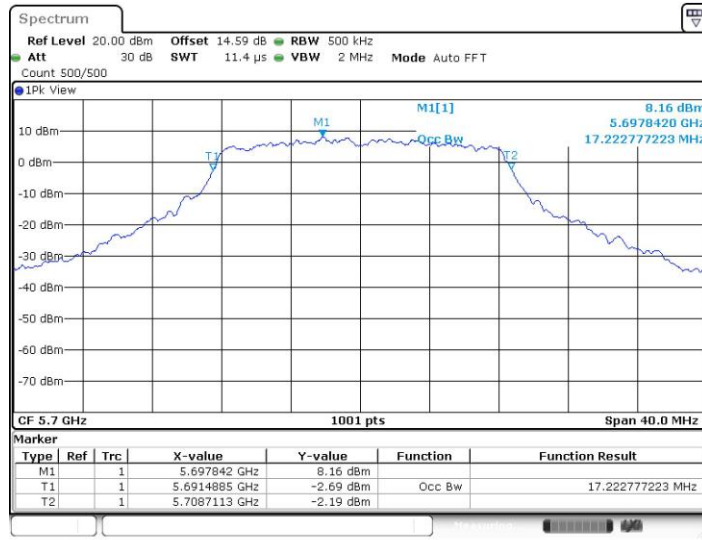

Date: 4.DEC.2022 11:26:23


11A_Ant1_5720

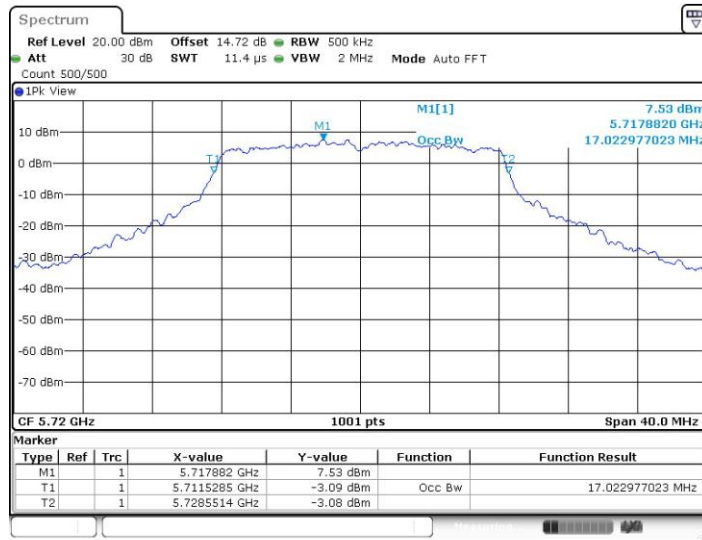

Date: 4.DEC.2022 11:27:16




11A_Ant1_5745

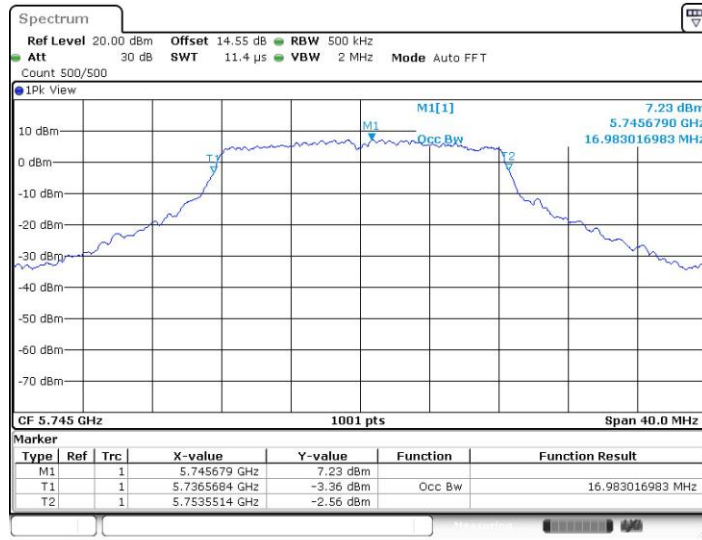

Date: 4.DEC.2022 11:28:34


11A_Ant1_5785

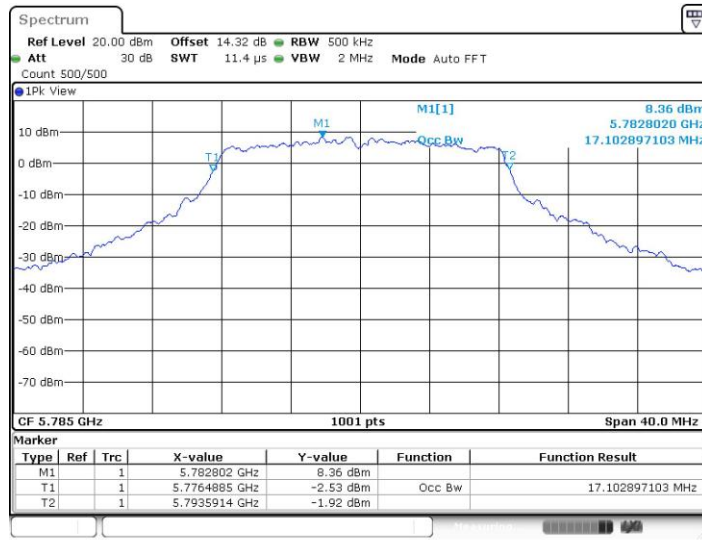

Date: 4.DEC.2022 11:29:51




11A_Ant1_5825

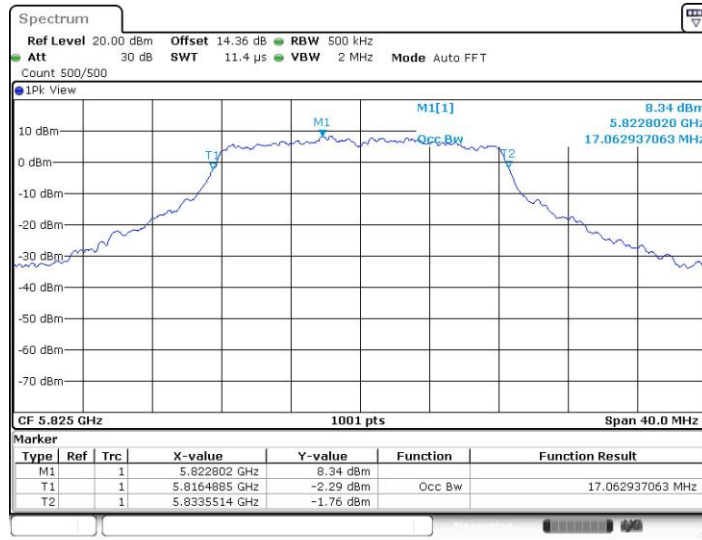

Date: 4.DEC.2022 11:31:05


11N20SISO_Ant1_5180

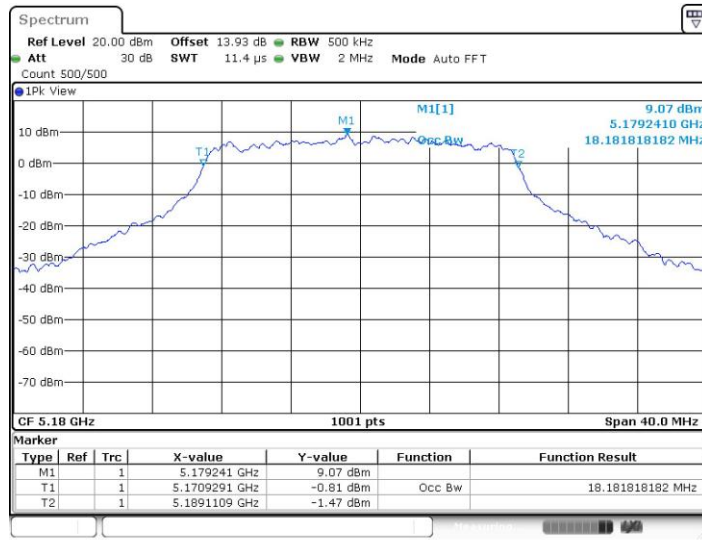

Date: 4.DEC.2022 11:32:51




11N20SISO_Ant1_5220

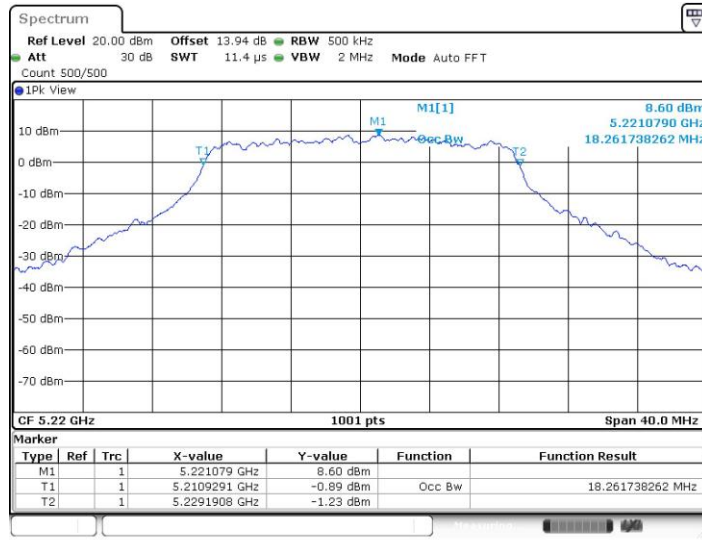

Date: 4.DEC.2022 11:33:52


11N20SISO_Ant1_5240

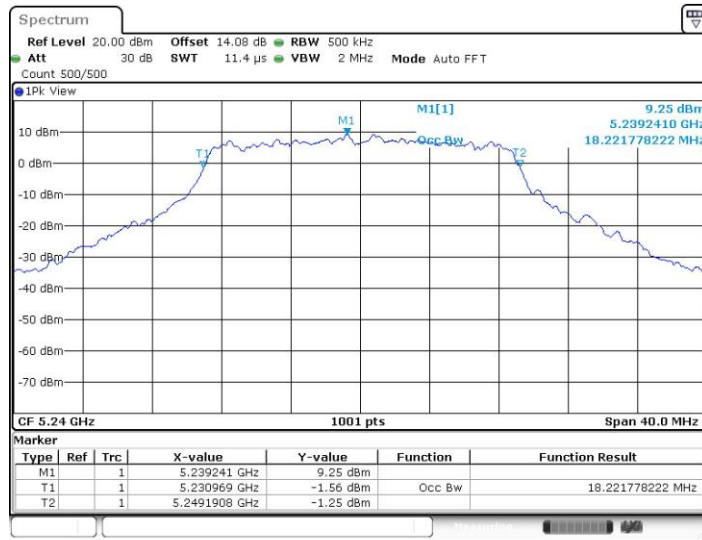

Date: 4.DEC.2022 11:34:45




11N20SISO_Ant1_5260

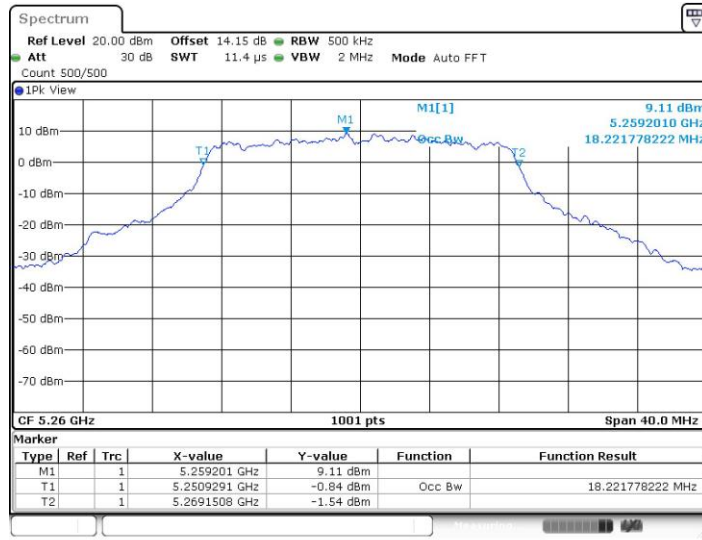

Date: 4.DEC.2022 11:35:45


11N20SISO_Ant1_5300

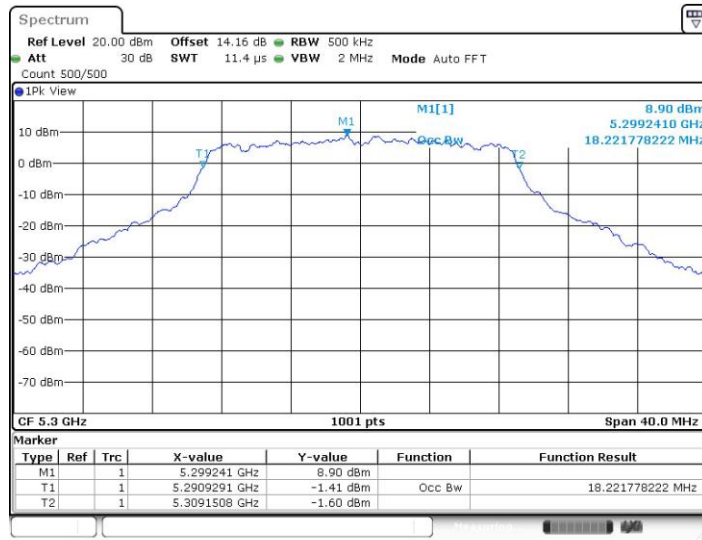

Date: 4.DEC.2022 11:36:44




11N20SISO_Ant1_5320

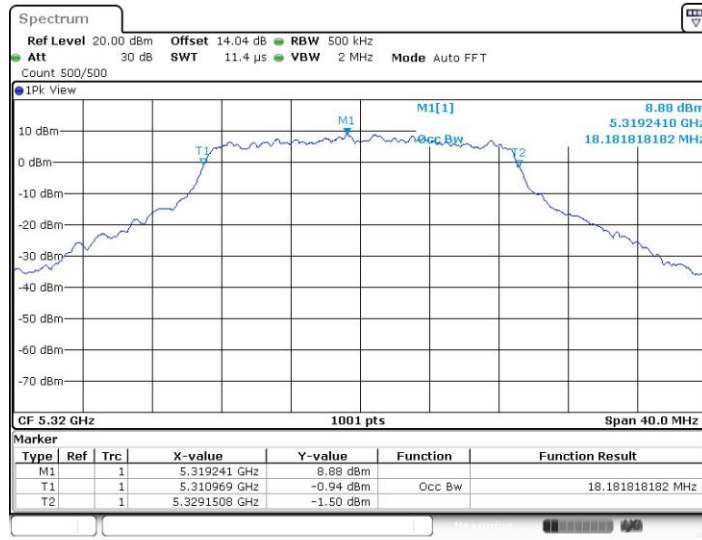

Date: 4.DEC.2022 11:37:40


11N20SISO_Ant1_5500

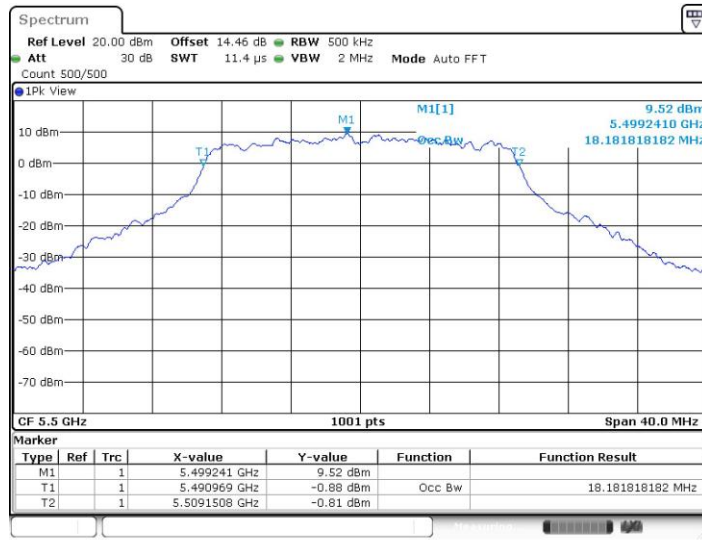

Date: 4.DEC.2022 11:38:43




11N20SISO_Ant1_5580

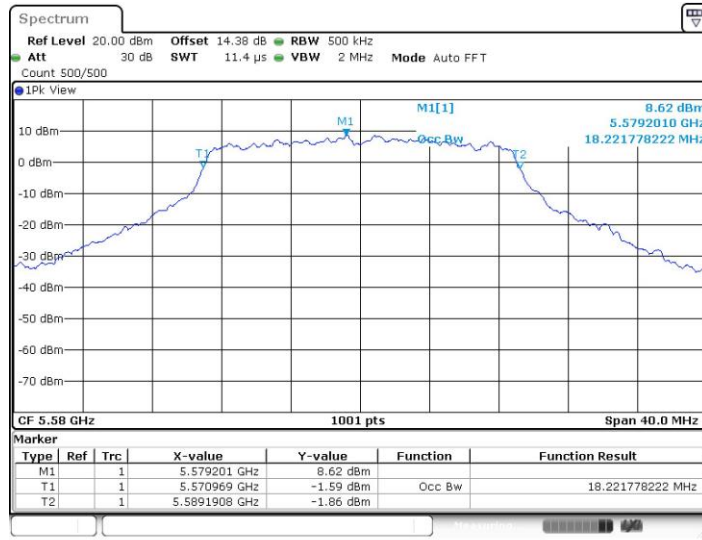

Date: 4.DEC.2022 11:39:48

11N20SISO_Ant1_5700

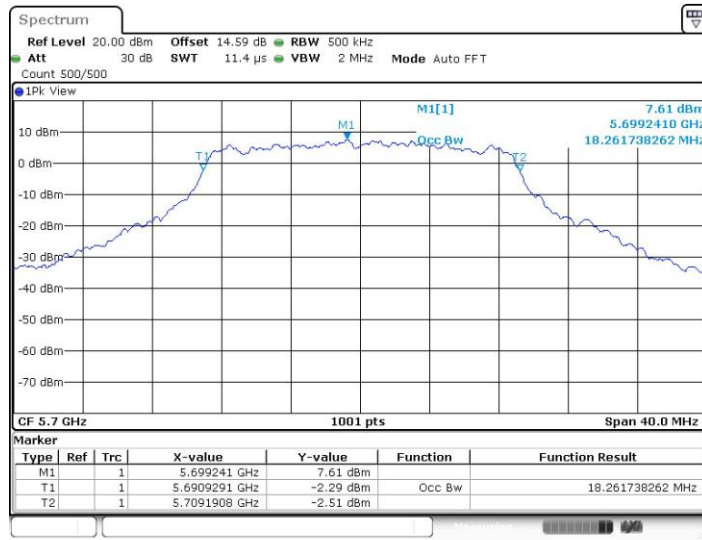

Date: 4.DEC.2022 11:41:08