

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_8mm_Ch6;Ant 1


Communication System: IEEE 802.11b ; Frequency: 2437.000 MHz; Duty Cycle: 1:1.036
Medium: HSL_2450_240222 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.79$ S/m; $\epsilon_r=39.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.67, 7.67, 7.67); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2023-11-17
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.417 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.440 W/kg; SAR (8g) = 0.238 W/kg; SAR (10g) = 0.217 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 81.2 %

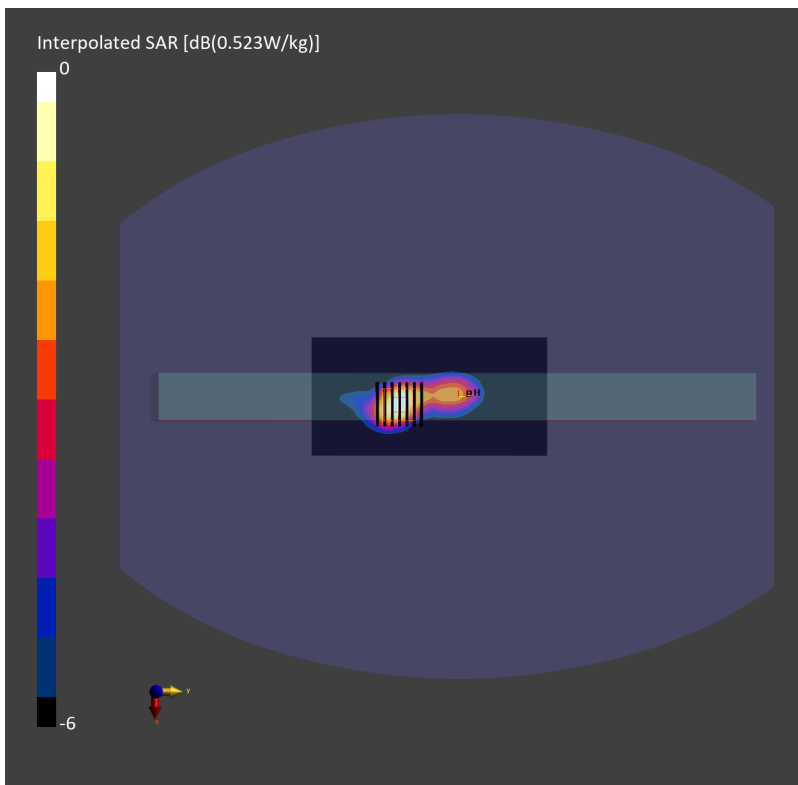

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom Side_8mm_Ch54;Ant 1


Communication System: IEEE 802.11n ; Frequency: 5270.000 MHz; Duty Cycle: 1:1.058
Medium: HSL_5G_240221 Medium parameters used: $f= 5270.000$ MHz; $\sigma= 4.61$ S/m; $\epsilon_r = 36.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.48, 5.48, 5.48); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2023-11-17
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10114-CAE

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.534 W/kg; SAR (10g) = 0.210 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 0.573 W/kg; SAR (8g) = 0.245 W/kg; SAR (10g) = 0.219 W/kg
Smallest distance from peaks to all points 3 dB below = 12.1 mm
Ratio of SAR at M2 to SAR at M1 = 64.7 %

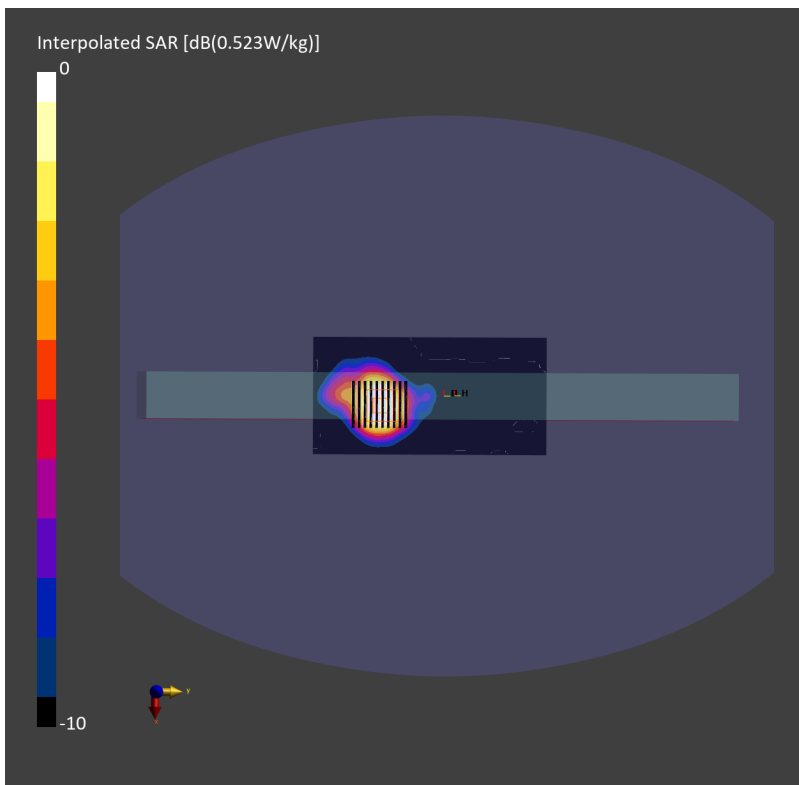

#03_WLAN5GHz_802.11a 6Mbps_Bottom Side_8mm_Ch116;Ant 1


Communication System: IEEE 802.11a; Frequency: 5580.000 MHz; Duty Cycle: 1:1.025
Medium: HSL_5G_240221 Medium parameters used: $f = 5580.000$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 36.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.87, 4.87, 4.87); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2023-11-17
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.417 W/kg; SAR (10g) = 0.160 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.04 dB
SAR (1g) = 0.436 W/kg; SAR (8g) = 0.184 W/kg; SAR (10g) = 0.164 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 61.9 %

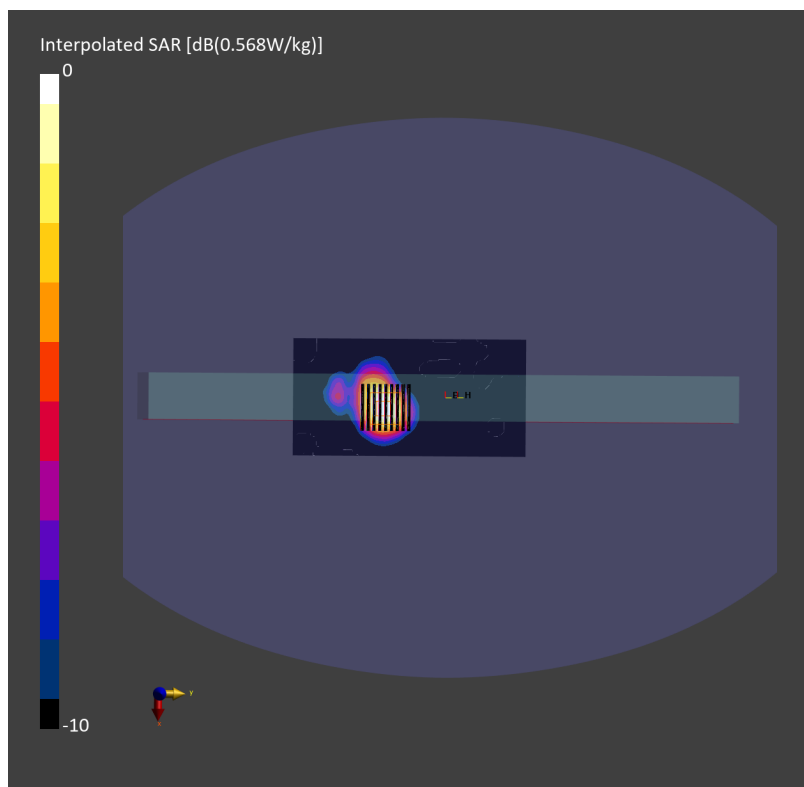

#04_WLAN5GHz_802.11a 6Mbps_Bottom Side_8mm_Ch149;Ant 1


Communication System: IEEE 802.11a; Frequency: 5745.000 MHz; Duty Cycle: 1:1.025
Medium: HSL_5G_240221 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 36.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.96, 4.96, 4.96); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2023-11-17
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.515 W/kg; SAR (10g) = 0.203 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.526 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.203 W/kg
Smallest distance from peaks to all points 3 dB below = 13.2 mm
Ratio of SAR at M2 to SAR at M1 = 60.5 %

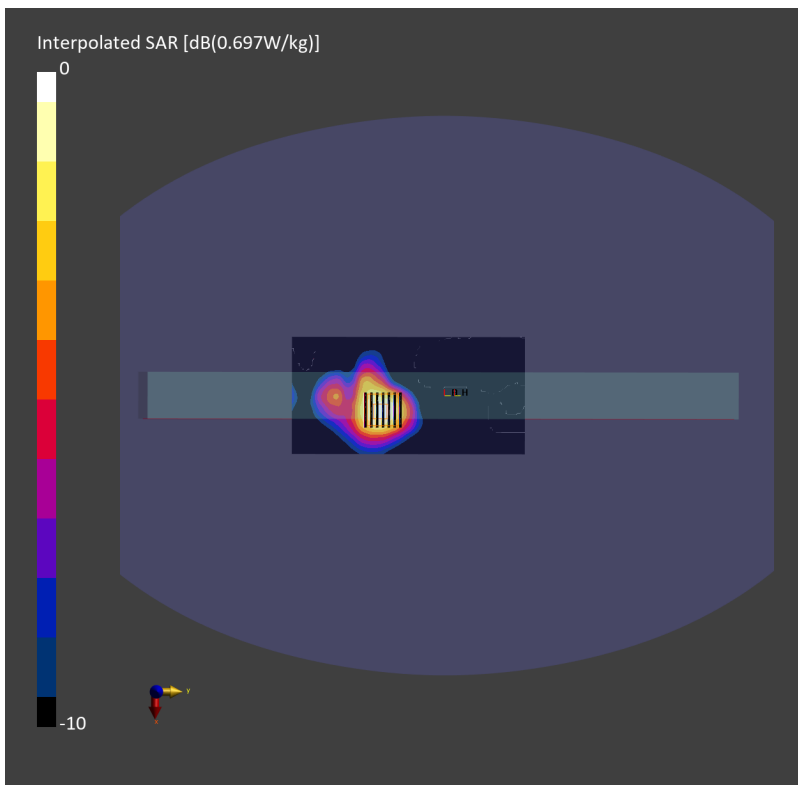

#05_Bluetooth_1Mbps_Bottom Side_8mm_Ch0;Ant 1

Communication System: Bluetooth ; Frequency: 2402.000 MHz; Duty Cycle: 1:1.305
Medium: HSL_2450_240222 Medium parameters used: $f=2402.000$ MHz; $\sigma=1.74$ S/m; $\epsilon_r=39.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.67, 7.67, 7.67); Calibrated: 2023-12-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2023-11-17
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.073 W/kg; SAR (10g) = 0.035 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.077 W/kg; SAR (8g) = 0.039 W/kg; SAR (10g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.2 %

