

**#01\_WLAN2.4GHz\_802.11b 1Mbps\_Edge 3\_0mm\_Ch1**

Communication System: IEEE 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1.010  
Medium: HSL\_2450\_230720 Medium parameters used:  $f= 2412$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 39.0$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C


**DASY6 Configuration:**

- Probe: EX3DV4 - SN7700; ConvF(8.18, 8.18, 8.18); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

**Area Scan (60.0 mm x 180.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.700 W/kg; SAR (10g) = 0.320 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.684 W/kg; SAR (8g) = 0.335 W/kg; SAR (10g) = 0.300 W/kg

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.293 W/kg; SAR (8g) = 0.116 W/kg; SAR (10g) = 0.102 W/kg

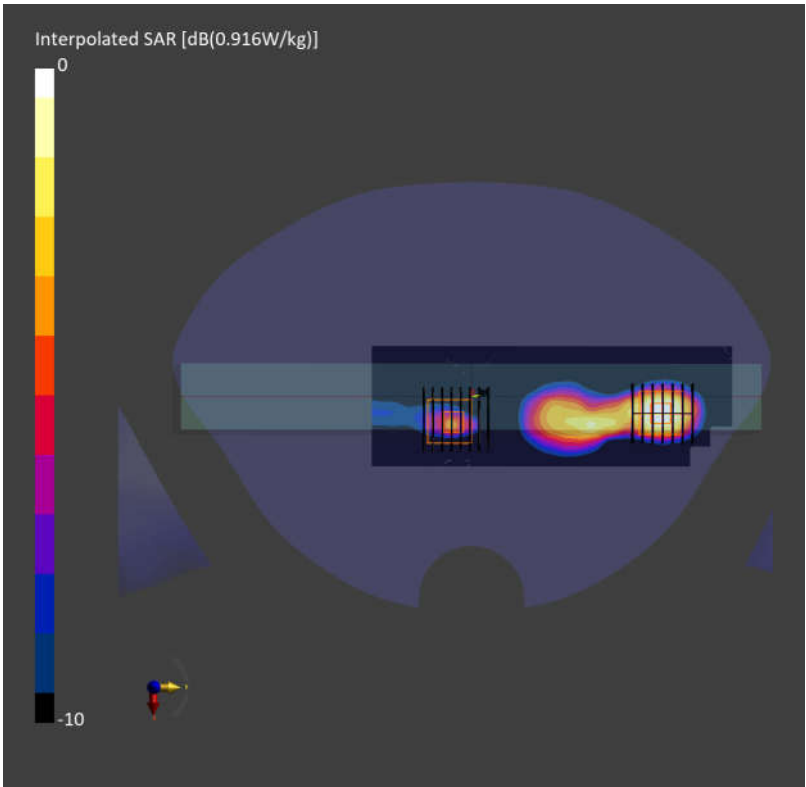

## #02\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Edge 3\_0mm\_Ch50

Communication System: IEEE 802.11ac; Frequency: 5250 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.86$  S/m;  $\epsilon_r = 37.5$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.91, 5.91, 5.91); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

**Area Scan (60.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.246 W/kg; SAR (10g) = 0.082 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.15 dB  
SAR (1g) = 0.119 W/kg; SAR (8g) = 0.036 W/kg; SAR (10g) = 0.029 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.15 dB  
SAR (1g) = 0.273 W/kg; SAR (8g) = 0.093 W/kg; SAR (10g) = 0.080 W/kg

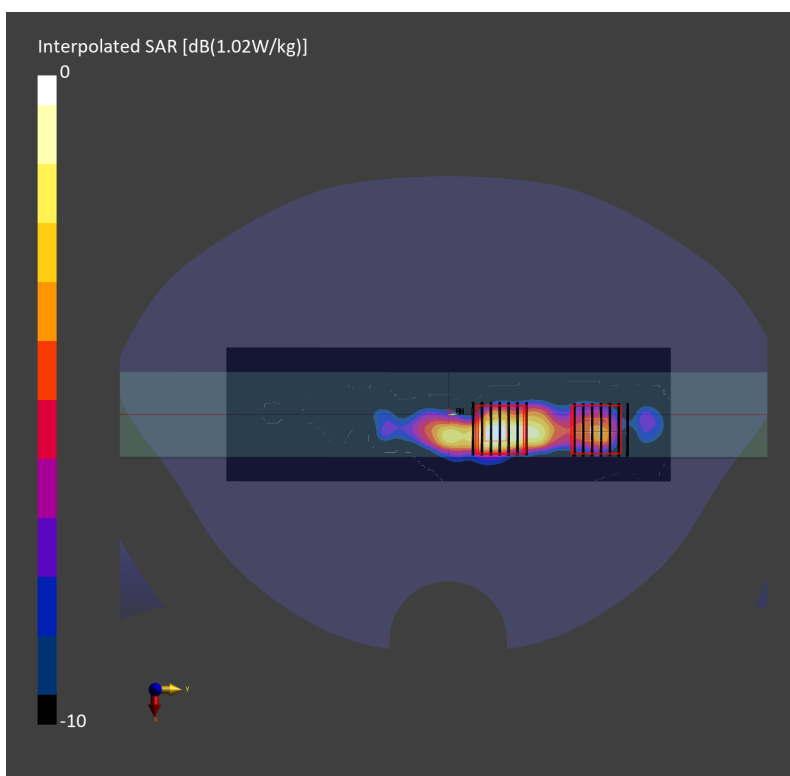

### #03\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Edge 3\_0mm\_Ch114

Communication System: IEEE 802.11ac ; Frequency: 5570 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f= 5570$  MHz;  $\sigma= 5.22$  S/m;  $\epsilon_r = 37.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


#### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.07, 5.07, 5.07); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

**Area Scan (60.0 mm x 180.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.300 W/kg; SAR (10g) = 0.092 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.07 dB  
SAR (1g) = 0.022 W/kg; SAR (8g) = 0 W/kg; SAR (10g) = 0 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.07 dB  
SAR (1g) = 0.337 W/kg; SAR (8g) = 0.107 W/kg; SAR (10g) = 0.091 W/kg

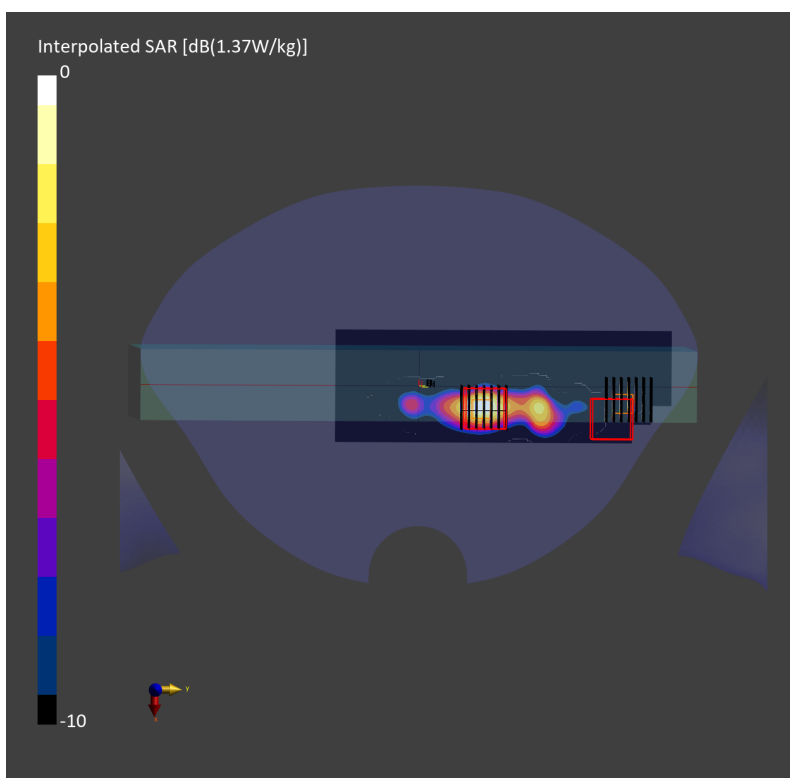

## #04\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 3\_0mm\_Ch155

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.46$  S/m;  $\epsilon_r = 36.7$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.24, 5.24, 5.24); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

**Area Scan (60.0 mm x 180.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.513 W/kg; SAR (10g) = 0.152 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.11 dB  
SAR (1g) = 0.093 W/kg; SAR (8g) = 0.017 W/kg; SAR (10g) = 0.013 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.11 dB  
SAR (1g) = 0.575 W/kg; SAR (8g) = 0.192 W/kg; SAR (10g) = 0.166 W/kg

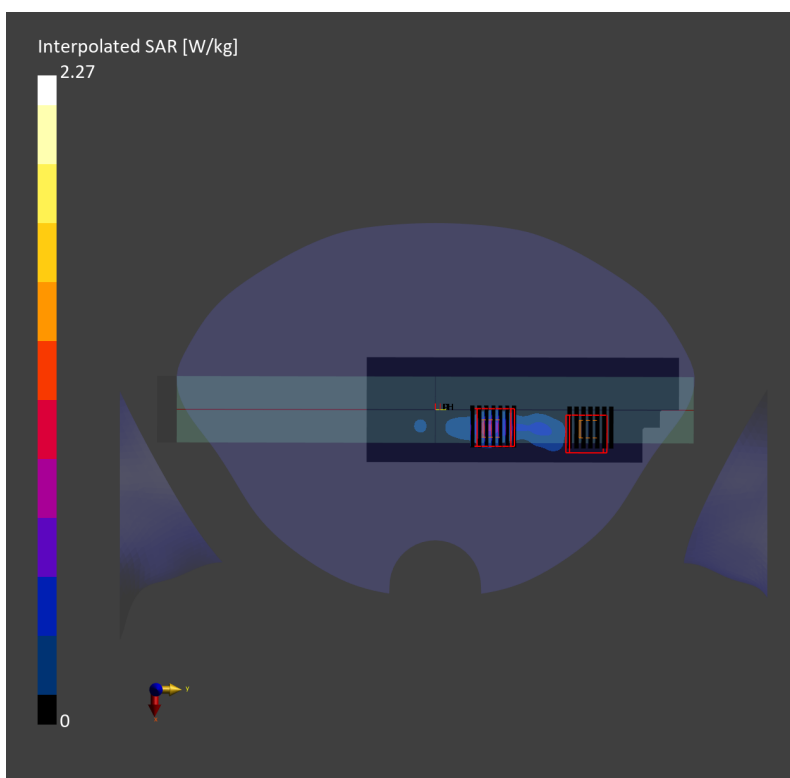

## #05\_WLAN6GHz\_802.11ax-HE160 MCS0\_Edge 3\_0mm\_Ch47


Communication System: 802.11ax; Frequency: 6185.000 MHz; Duty Cycle: 1:1.009  
Medium: HSL\_6G\_230722 Medium parameters used:  $f=6185.000$  MHz;  $\sigma=5.84$  S/m;  $\epsilon_r=35.1$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

**Area Scan (51.0 mm x 187.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm  
SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 2.1 mm x 2.1 mm x 1.2 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.014 W/kg; SAR (8g) = 0.002 W/kg; SAR (10g) = 0.002 W/kg  
psAPD (1.0cm<sup>2</sup>, sq) = 0.136 [W/m<sup>2</sup>]; psAPD (4.0cm<sup>2</sup>, sq) = 0.043 [W/m<sup>2</sup>]

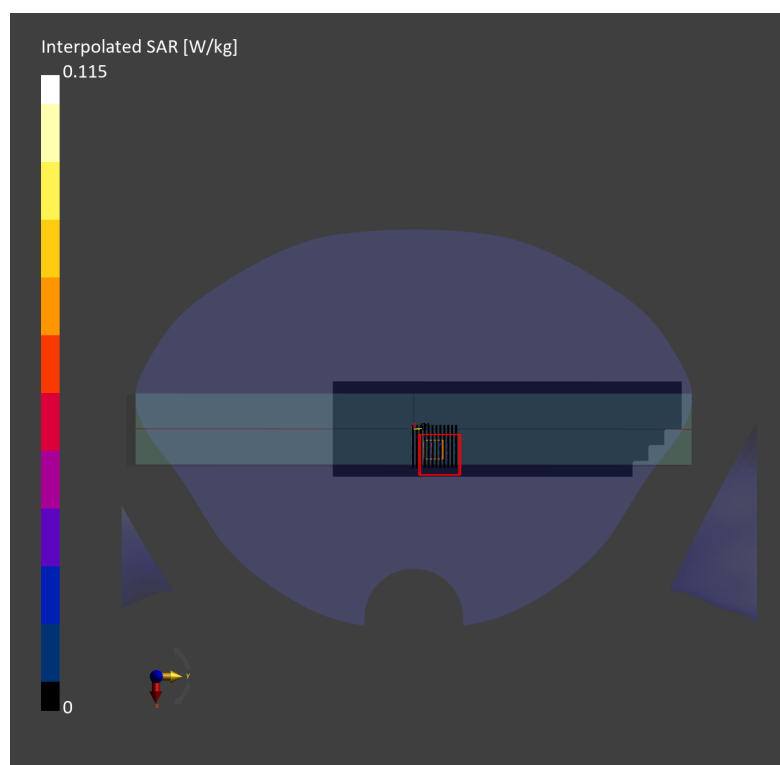

## #06\_Bluetooth\_1Mbps\_Bottom Face\_0mm\_Ch0

Communication System:Bluetooth ; Frequency: 2402 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_230720 Medium parameters used:  $f= 2402$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 39.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.18, 8.18, 8.18); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA


**Area Scan (160.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.002 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.005 W/kg; SAR (8g) = 0 W/kg; SAR (10g) = 0 W/kg

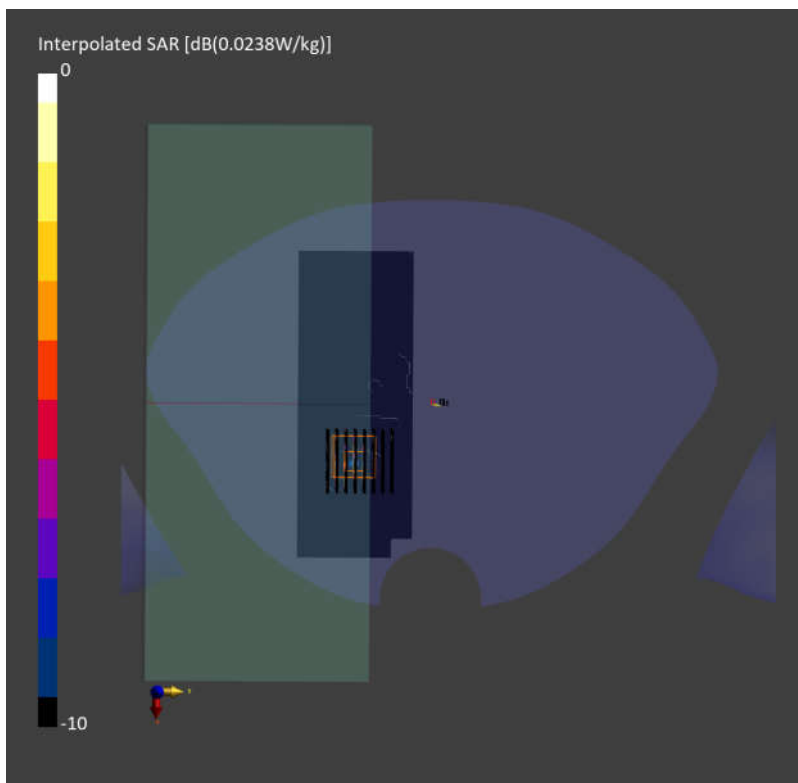

Date: 2023-07-20

## #07\_WLAN2.4GHz\_802.11b 1Mbps\_Front Face\_0mm\_Ch1

Communication System: IEEE 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1.010  
Medium: HSL\_2450\_230720 Medium parameters used:  $f= 2412$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 39.0$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7700; ConvF(8.18, 8.18, 8.18); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

**Area Scan (140.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.975 W/kg; SAR (10g) = 0.434 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5 mm x 5 mm x 1.5 mm  
Power Drift = 0.11 dB  
SAR (1g) = 0.878 W/kg; SAR (8g) = 0.421 W/kg; SAR (10g) = 0.379 W/kg

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm  
Power Drift = 0.11 dB  
SAR (1g) = 0.347 W/kg; SAR (8g) = 0.134 W/kg; SAR (10g) = 0.117 W/kg



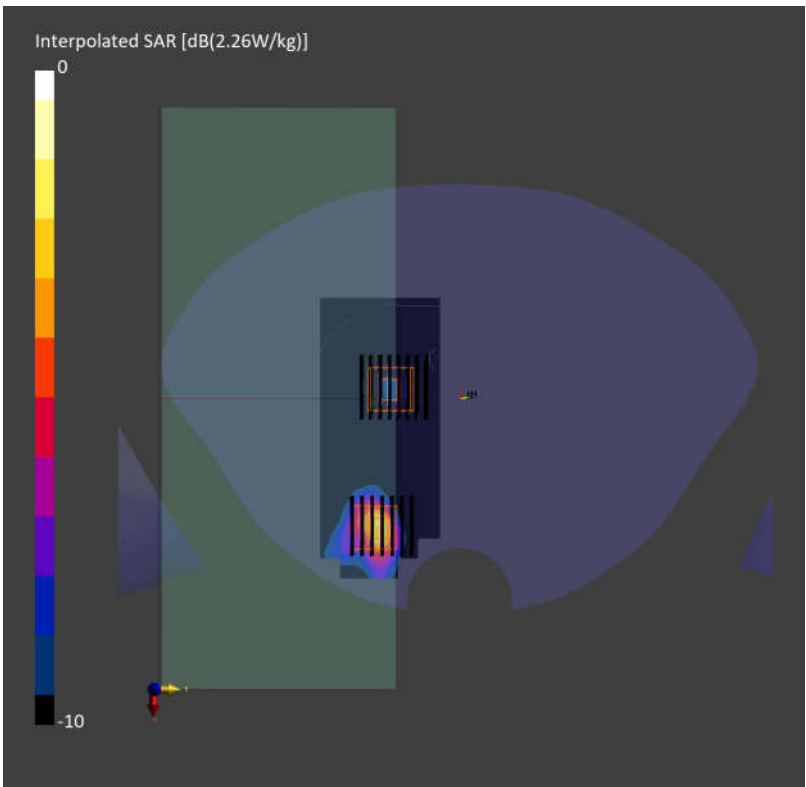

**#08\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Front Face\_0mm\_Ch50**

Communication System: IEEE 802.11ac ; Frequency: 5250 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f=5250$  MHz;  $\sigma=4.86$  S/m;  $\epsilon_r=37.5$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


**DASY6 Configuration:**

- Probe: EX3DV4 - SN7700; ConvF(5.91, 5.91, 5.91); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

**Area Scan (160.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.342 W/kg; SAR (10g) = 0.108 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.05 dB  
SAR (1g) = 0.213 W/kg; SAR (8g) = 0.068 W/kg; SAR (10g) = 0.057 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.05 dB  
SAR (1g) = 0.413 W/kg; SAR (8g) = 0.129 W/kg; SAR (10g) = 0.108 W/kg

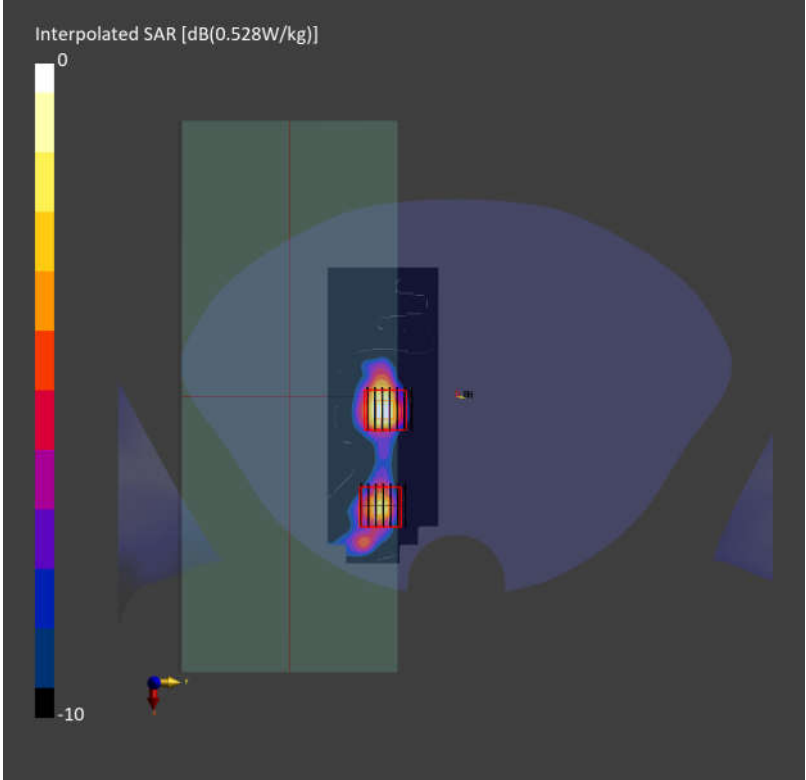

Date: 2023-07-21

**#09\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Front Face\_0mm\_Ch114**

Communication System: IEEE 802.11ac ; Frequency: 5570 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f= 5570$  MHz;  $\sigma= 5.22$  S/m;  $\epsilon_r = 37.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


**DASY6 Configuration:**

- Probe: EX3DV4 - SN7700; ConvF(5.07, 5.07, 5.07); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

**Area Scan (160.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.336 W/kg; SAR (10g) = 0.103 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.09 dB  
SAR (1g) = 0.349 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.093 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.09 dB  
SAR (1g) = 0.171 W/kg; SAR (8g) = 0.046 W/kg; SAR (10g) = 0.036 W/kg

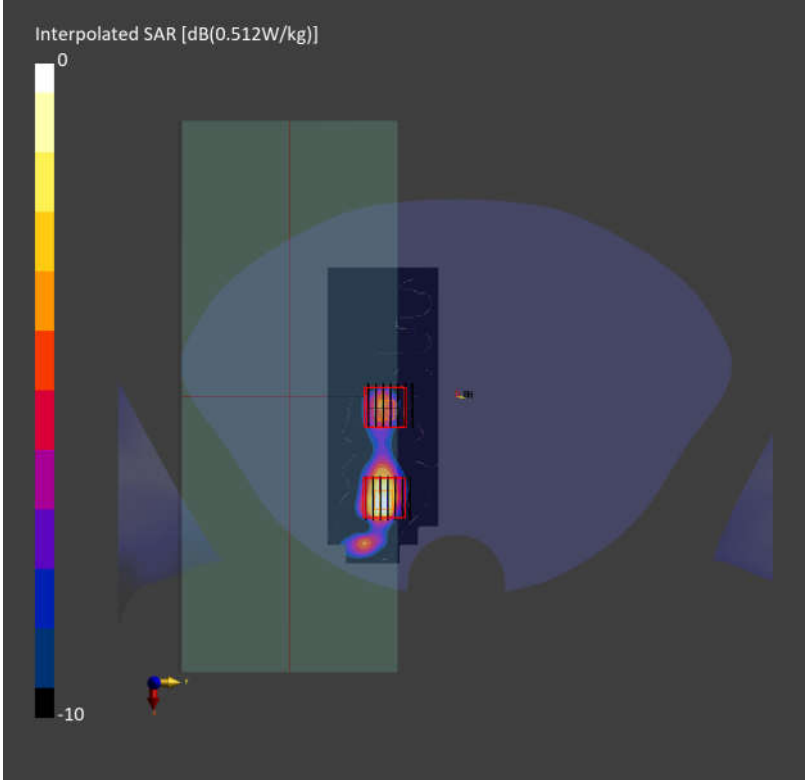

## #10\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Front Face\_0mm\_Ch155

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5G\_230721 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.46$  S/m;  $\epsilon_r = 36.7$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.24, 5.24, 5.24); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

**Area Scan (160.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.503 W/kg; SAR (10g) = 0.170 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.03 dB  
SAR (1g) = 0.528 W/kg; SAR (8g) = 0.167 W/kg; SAR (10g) = 0.139 W/kg

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.03 dB  
SAR (1g) = 0.279 W/kg; SAR (8g) = 0.087 W/kg; SAR (10g) = 0.071 W/kg

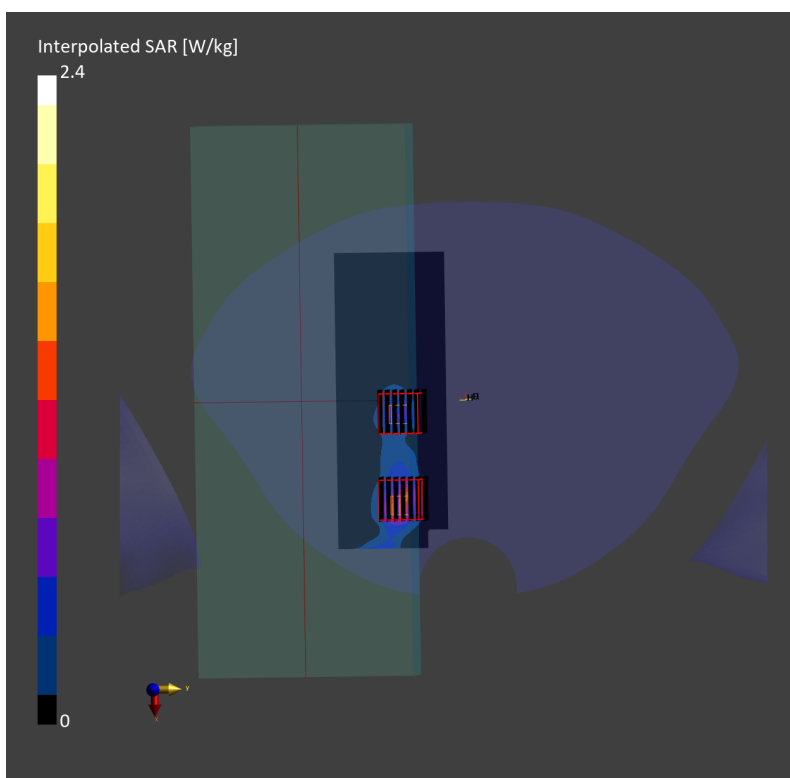

## #11\_WLAN6GHz\_802.11ax-HE160 MCS0\_Front Face\_0mm\_Ch47

Communication System: 802.11ax; Frequency: 6185.000 MHz; Duty Cycle: 1:1.009  
Medium: HSL\_6G\_230722 Medium parameters used:  $f=6185.000$  MHz;  $\sigma=5.84$  S/m;  $\epsilon_r=35.1$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC


**Area Scan (170.0 mm x 68.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.011 W/kg; SAR (10g) = 0.001 W/kg;

**Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.016 W/kg; SAR (8g) = 0.004 W/kg; SAR (10g) = 0.003 W/kg  
psAPD (1.0cm<sup>2</sup>, sq) = 0.160 [W/m<sup>2</sup>]; psAPD (4.0cm<sup>2</sup>, sq) = 0.083 [W/m<sup>2</sup>]

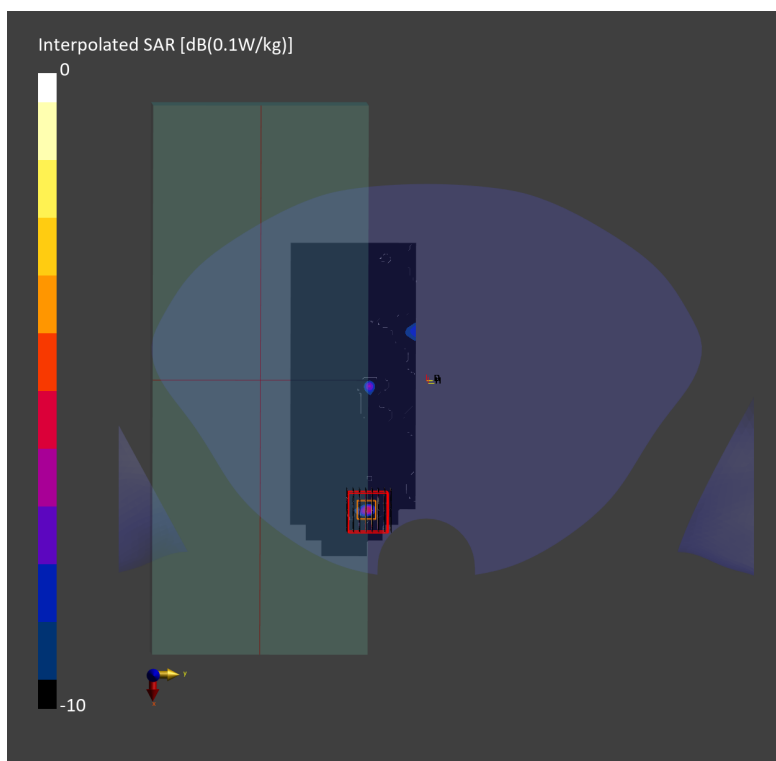

## #12\_Bluetooth\_1Mbps\_Front Face\_0mm\_Ch0

Communication System: Bluetooth ; Frequency: 2402 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_230720 Medium parameters used:  $f= 2402$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 39.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.18, 8.18, 8.18); Calibrated: 2023-01-24
- Sensor-Surface: 1.4mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

**Area Scan (160.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

