



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi & Bluetooth Module
BRAND NAME : Quectel
MODEL NAME : FCE860L
FCC ID : XMR2023FCE860L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Aug. 15, 2023 ~ Dec. 18, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 Hopping Channel Separation Measurement 13

 3.3 Dwell Time Measurement..... 19

 3.4 20dB and 99% Bandwidth Measurement 21

 3.5 Output Power Measurement..... 32

 3.6 Conducted Band Edges Measurement..... 33

 3.7 Conducted Spurious Emission Measurement 40

 3.8 Radiated Band Edges and Spurious Emission Measurement 50

 3.9 AC Conducted Emission Measurement..... 54

 3.10 Antenna Requirements 56

4 LIST OF MEASURING EQUIPMENT..... 57

5 MEASUREMENT UNCERTAINTY 58

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR352903A	Rev. 01	Initial issue of report	Dec. 22, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.30 dB at 2483.54 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.20 dB at 0.435 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi & Bluetooth Module
Brand Name	Quectel
Model Name	FCE860L
FCC ID	XMR2023FCE860L
SN Code	Conducted: E1N23CH0F000074 Conduction: D1823HKCC000062 Radiation: E1N23CH0F000074
HW Version	R1.0
SW Version	NA
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 8.16 dBm (0.0065 W) Bluetooth EDR (2Mbps) : 6.80 dBm (0.0048 W) Bluetooth EDR (3Mbps) : 7.25 dBm (0.0053 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.836 MHz Bluetooth EDR (2Mbps) : 1.120 MHz Bluetooth EDR (3Mbps) : 1.117 MHz
Antenna Type / Gain	Dipole Antenna type with gain 0.73 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC BT2.0 Ver3.0_For_CHINA_190111	3.0
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π/4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link (2.4G)+ Test Jig		
Remark: <ol style="list-style-type: none"> 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission. 2. For Radiated Test Cases, The tests were performed with Test Jig + Notebook. 			

2.3 Connection Diagram of Test System

AC Conducted Emission:

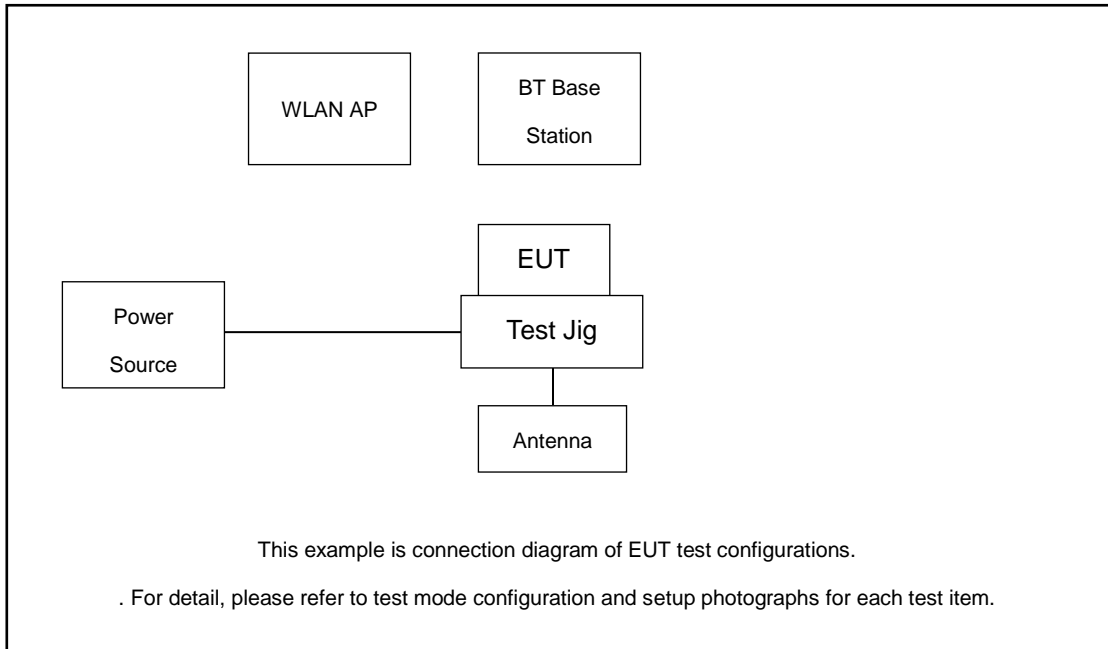

Radiated Emission:

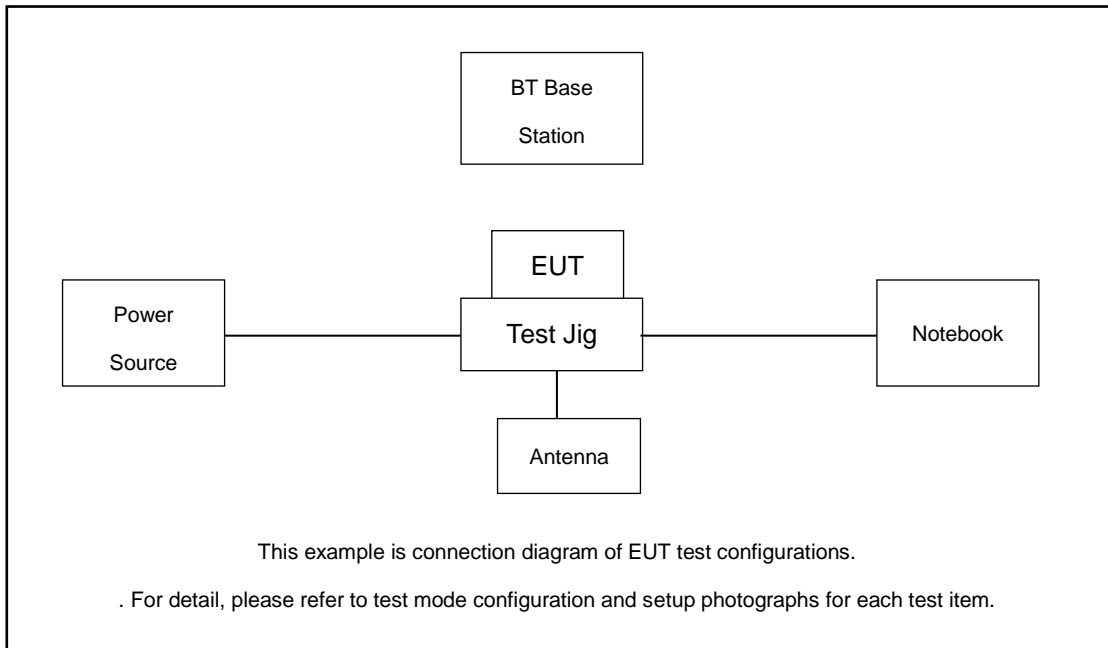



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m ; Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Adapter	N/A	N/A	N/A	N/A	N/A
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 6.00 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.00 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup




3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.



Number of Hopping Channel Plot on Channel 00 - 78

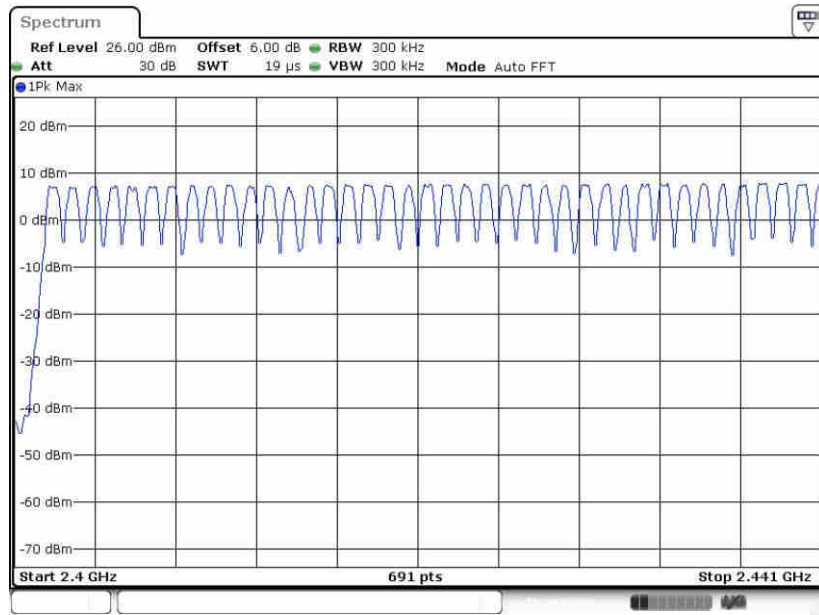

Date: 15.AUG.2023 01:11:39

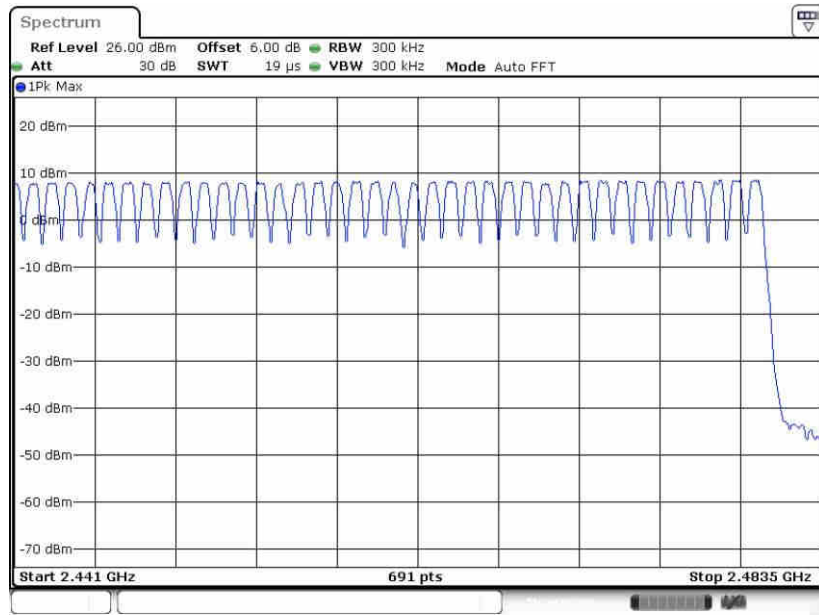

Date: 15.AUG.2023 01:12:00

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup




3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<1Mbps>

Channel Separation Plot on Channel 00 - 01

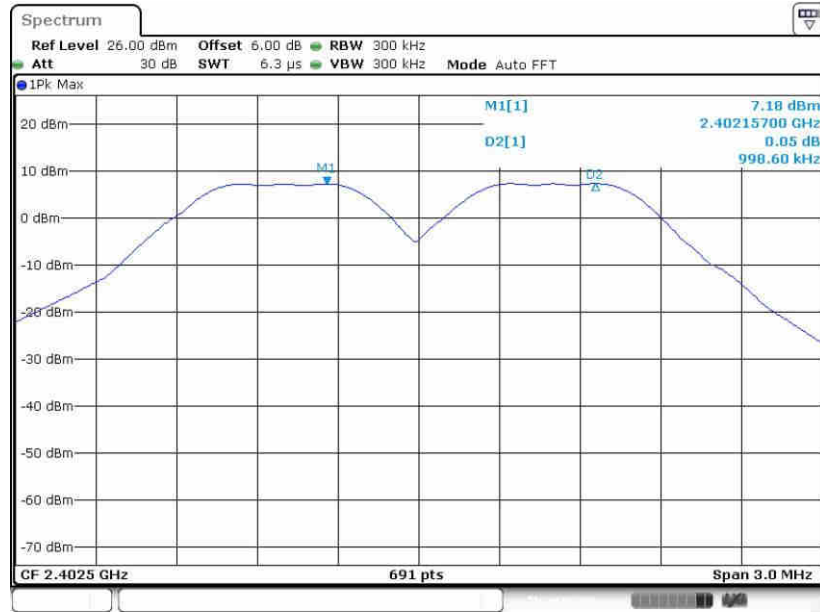

Date: 15.AUG.2023 00:58:36


Channel Separation Plot on Channel 39 - 40

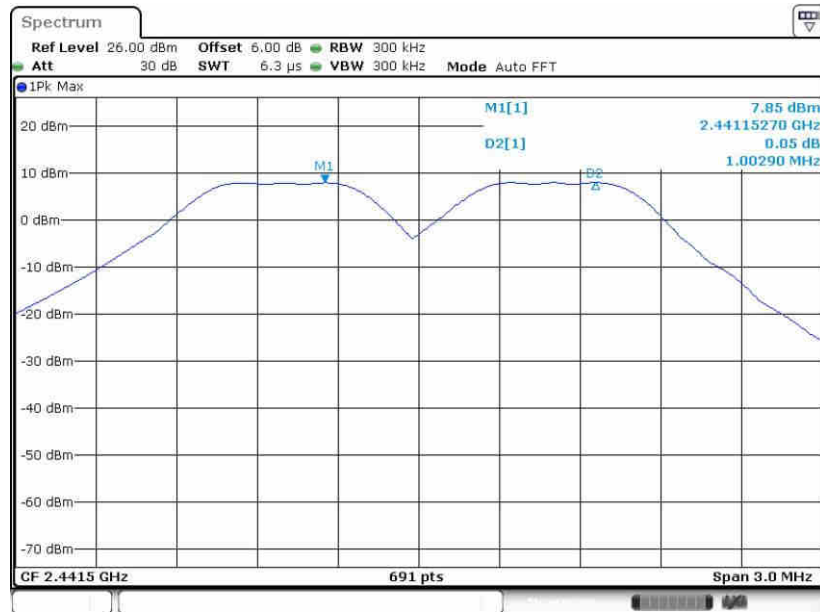

Date: 15.AUG.2023 01:05:22




Channel Separation Plot on Channel 77 - 78

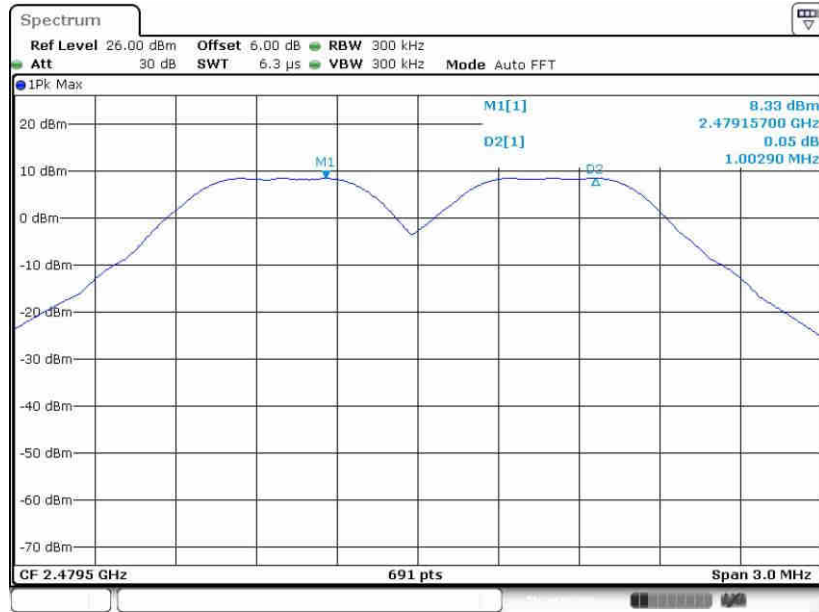

Date: 15.AUG.2023 01:10:37

<2Mbps>


Channel Separation Plot on Channel 00 - 01

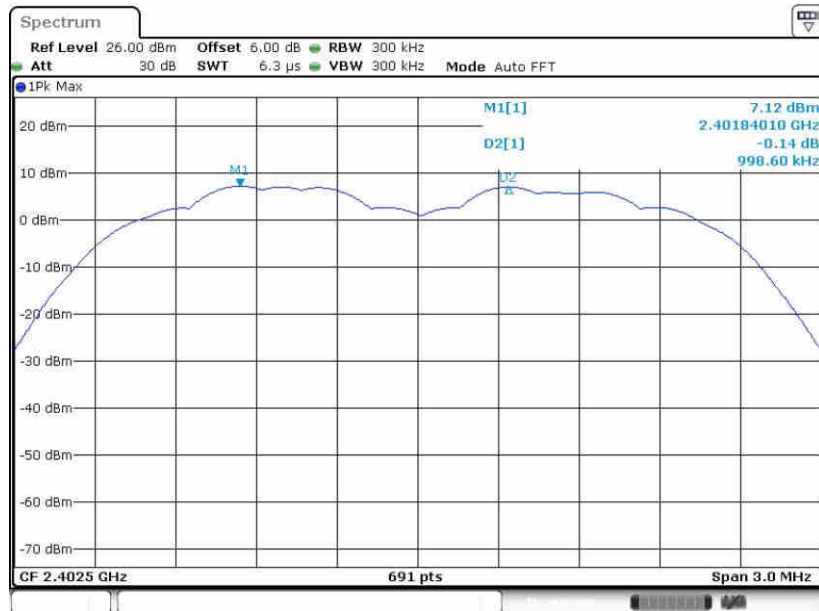

Date: 15.AUG.2023 01:24:33




Channel Separation Plot on Channel 39 - 40

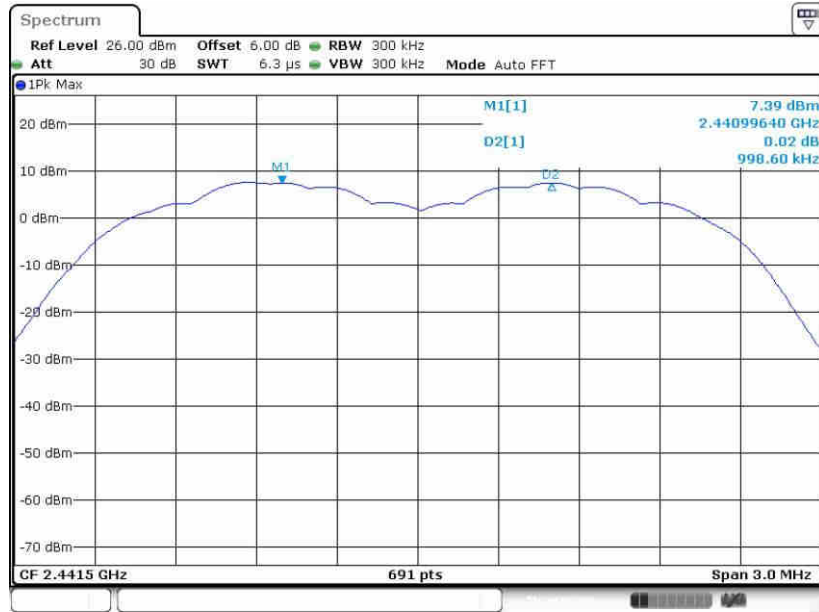

Date: 15.AUG.2023 01:30:29

Channel Separation Plot on Channel 77 - 78

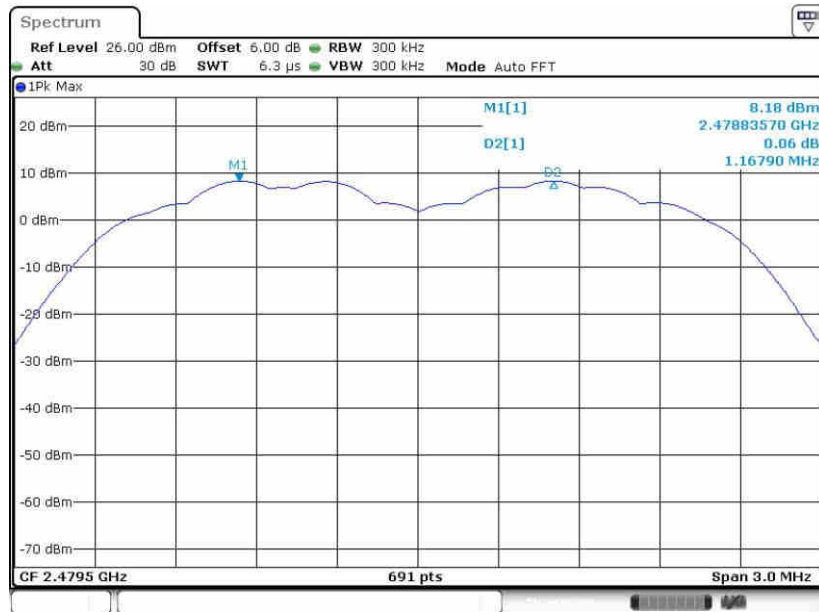


Date: 15.AUG.2023 01:35:23




<3Mbps>

Channel Separation Plot on Channel 00 - 01

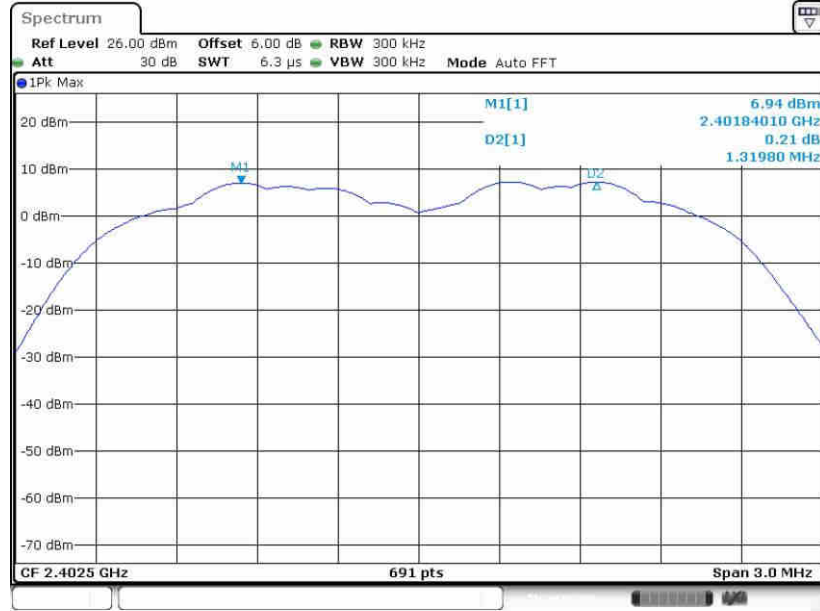

Date: 15.AUG.2023 01:45:27


Channel Separation Plot on Channel 39 - 40

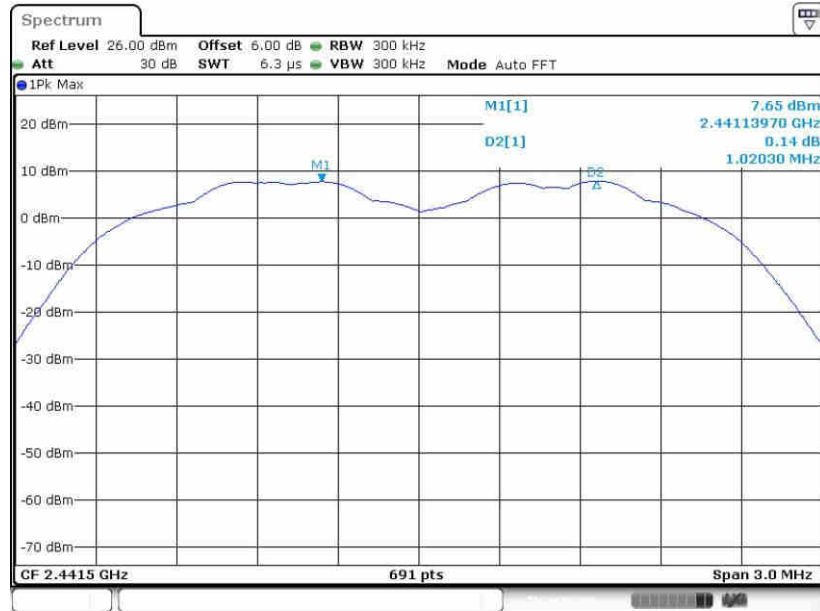

Date: 15.AUG.2023 01:49:36



Channel Separation Plot on Channel 77 - 78

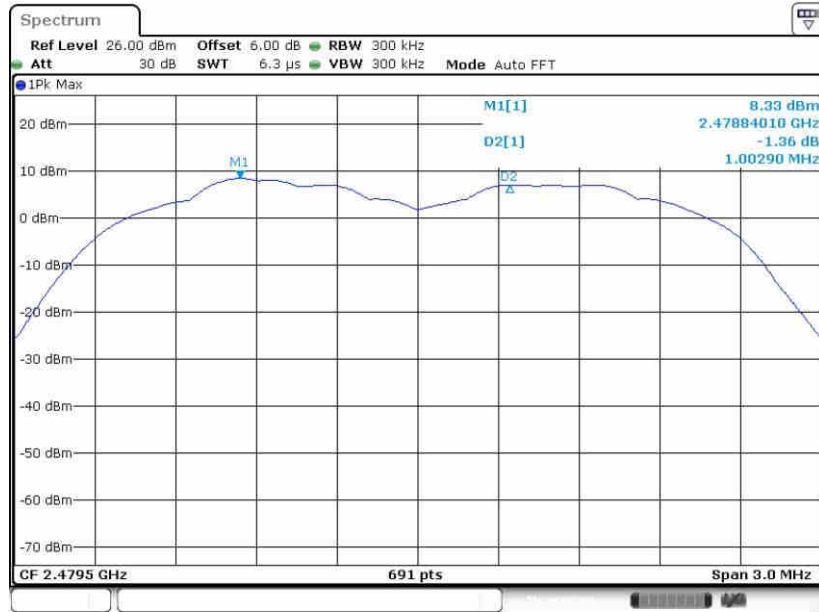

Date: 15.AUG.2023 01:53:46

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup






3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

Package Transfer Time Plot

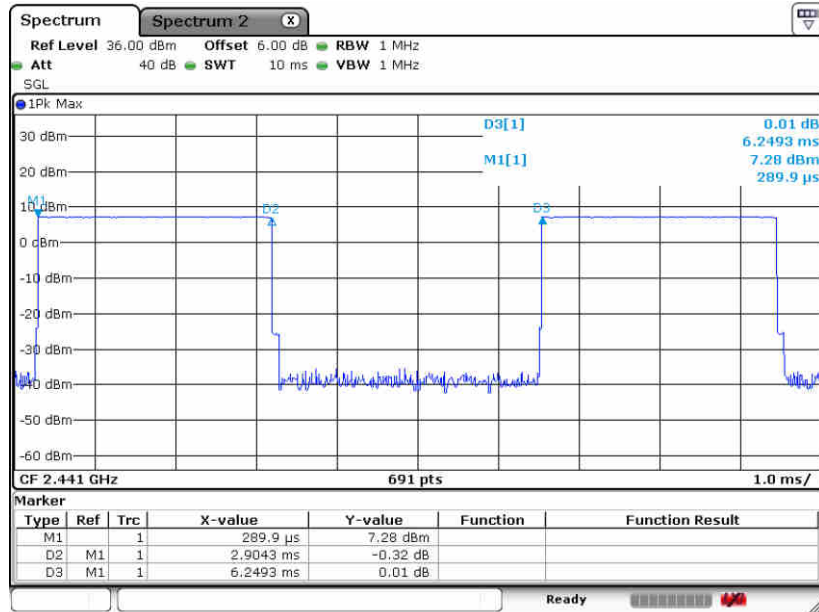

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

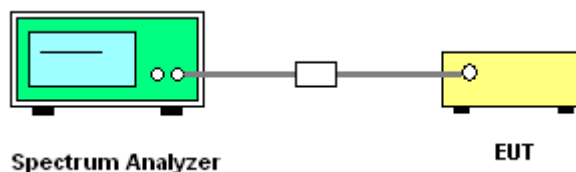


3.4.5 Test Result

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00

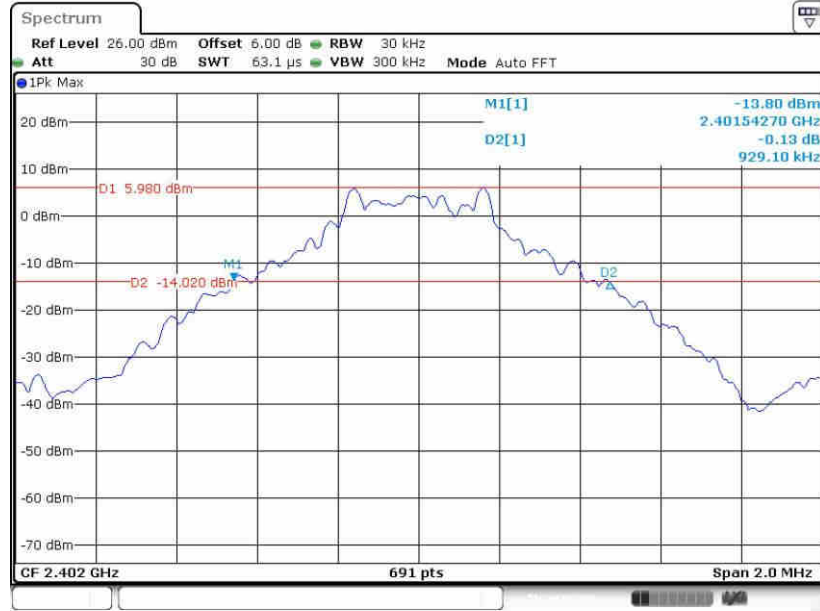

Date: 15.AUG.2023 00:57:22


20 dB Bandwidth Plot on Channel 39

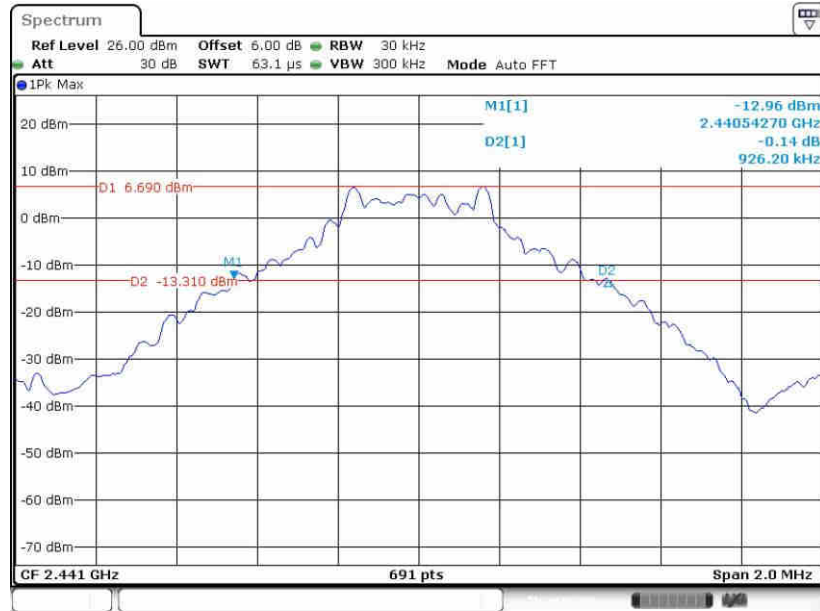

Date: 15.AUG.2023 01:02:33




20 dB Bandwidth Plot on Channel 78

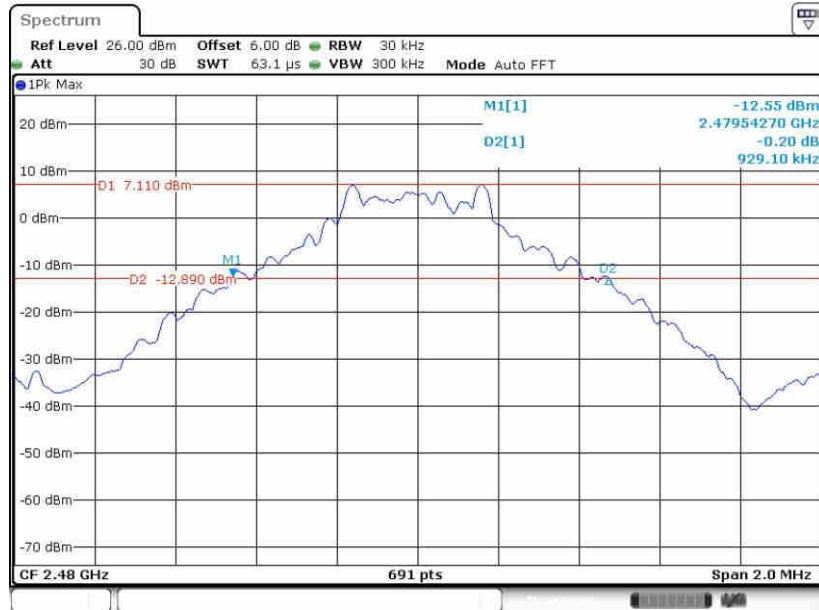

Date: 15.AUG.2023 01:06:44

<2Mbps>


20 dB Bandwidth Plot on Channel 00

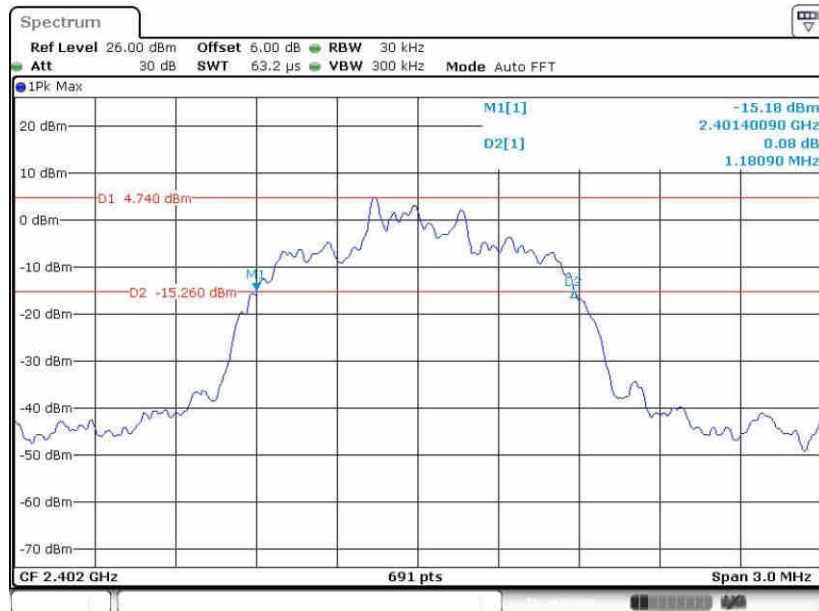

Date: 15.AUG.2023 01:20:41




20 dB Bandwidth Plot on Channel 39

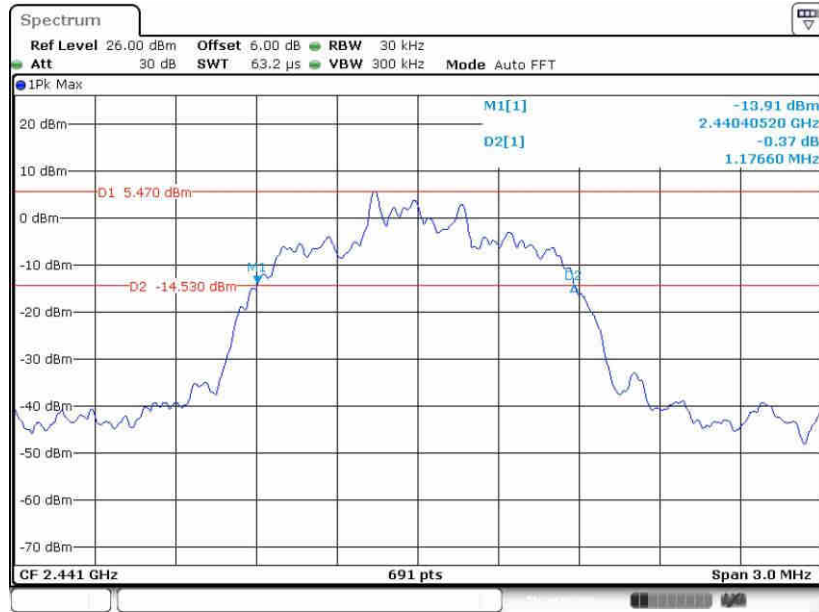

Date: 15.AUG.2023 01:26:54

20 dB Bandwidth Plot on Channel 78

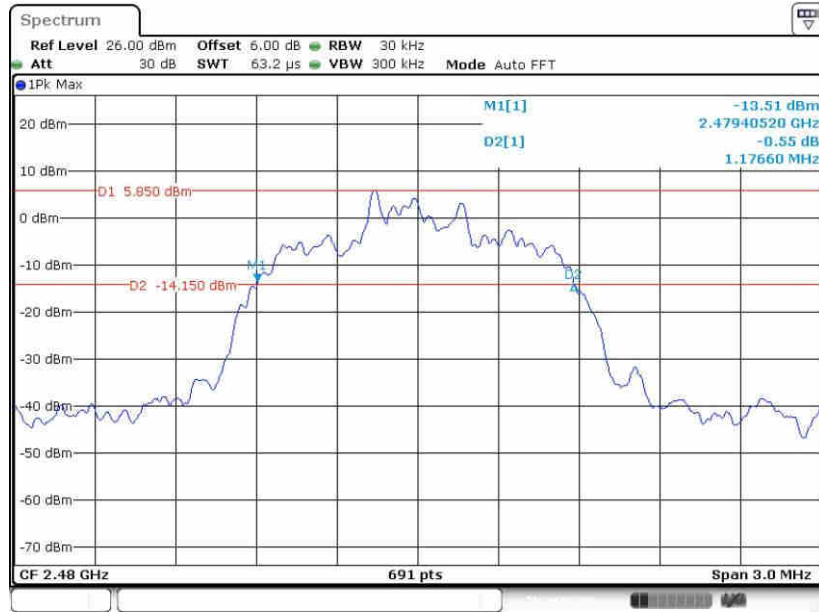


Date: 15.AUG.2023 01:31:32



<3Mbps>

20 dB Bandwidth Plot on Channel 00

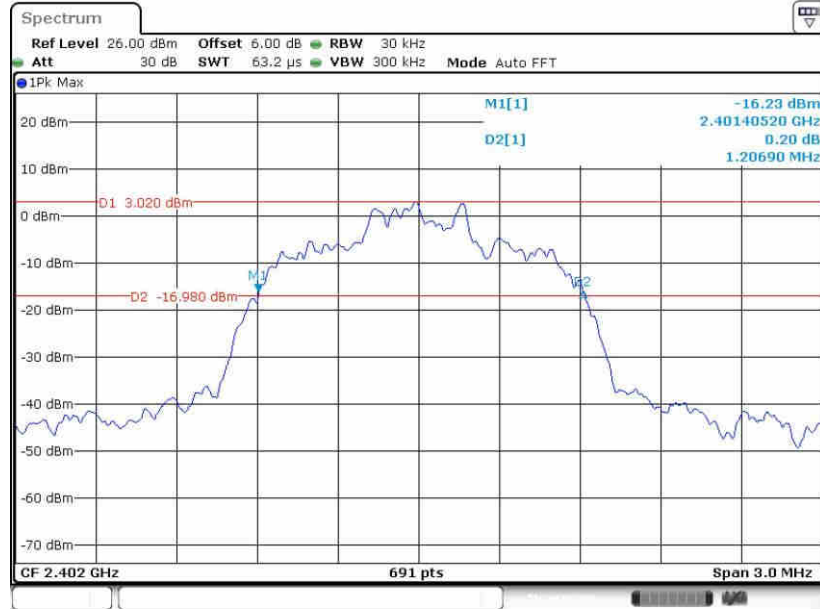

Date: 15.AUG.2023 01:38:11


20 dB Bandwidth Plot on Channel 39



Date: 15.AUG.2023 01:46:28



20 dB Bandwidth Plot on Channel 78

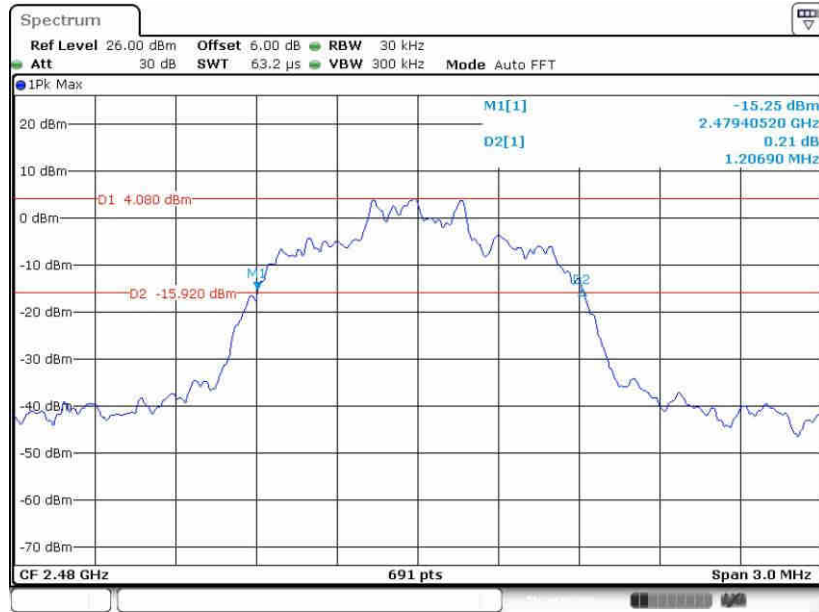

Date: 15.AUG.2023 01:50:37



3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 15.AUG,2023 00:59:48




99% Occupied Bandwidth Plot on Channel 39



Date: 15.AUG.2023 01:03:13

99% Occupied Bandwidth Plot on Channel 78

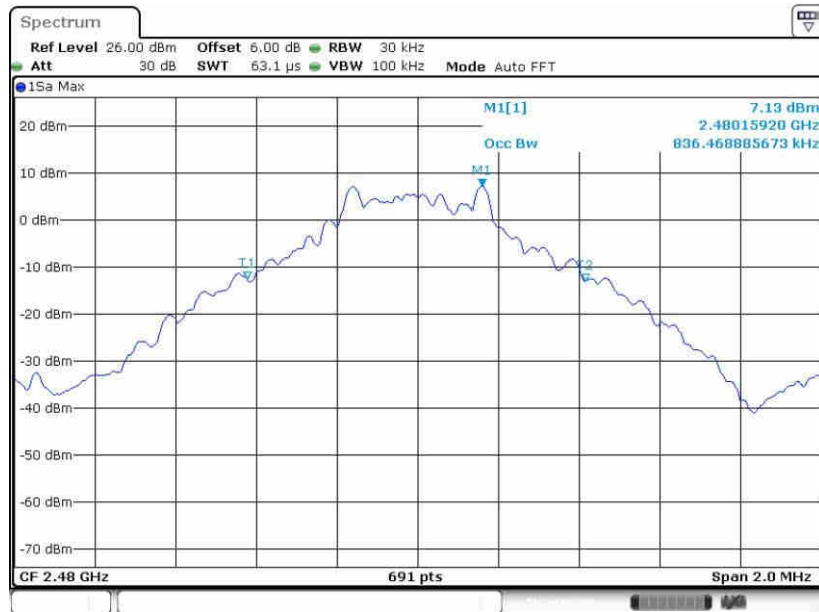

Date: 15.AUG.2023 01:08:02



<2Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 15.AUG.2023 01:21:36


99% Occupied Bandwidth Plot on Channel 39



Date: 15.AUG.2023 01:27:55




99% Occupied Bandwidth Plot on Channel 78

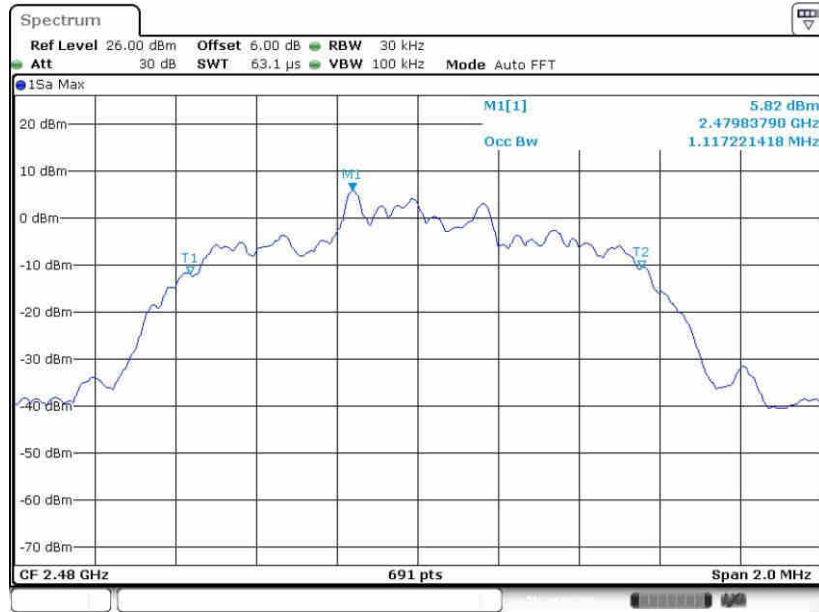

Date: 15.AUG.2023 01:32:47

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

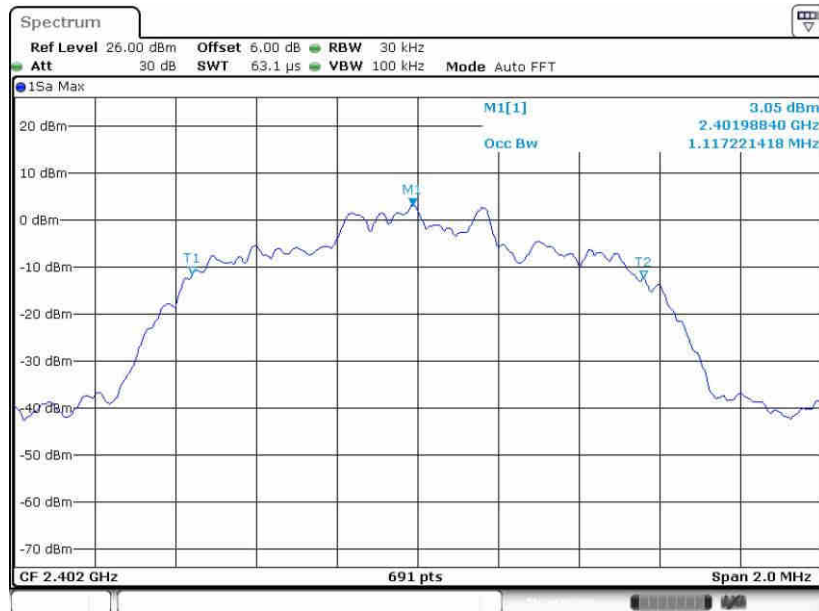

Date: 15.AUG.2023 01:39:11



99% Occupied Bandwidth Plot on Channel 39

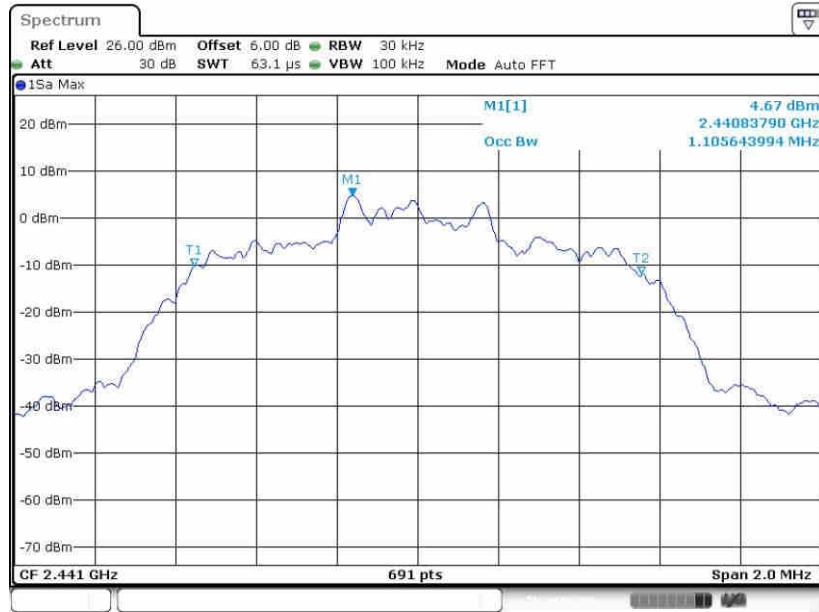

Date: 15.AUG.2023 01:47:05

99% Occupied Bandwidth Plot on Channel 78



Date: 15.AUG.2023 01:51:54

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

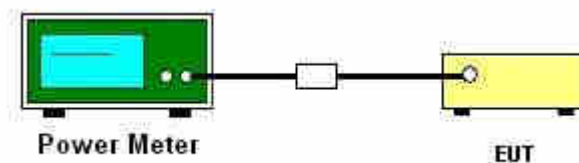

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup







3.6.5 Test Result of Conducted Band Edges

<1Mbps>

Low Band Edge Plot on Channel 00

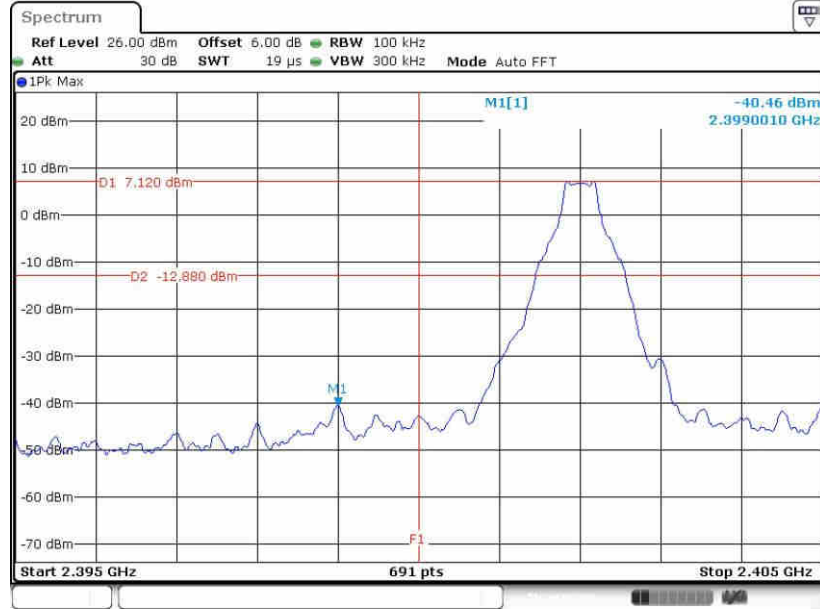


High Band Edge Plot on Channel 78

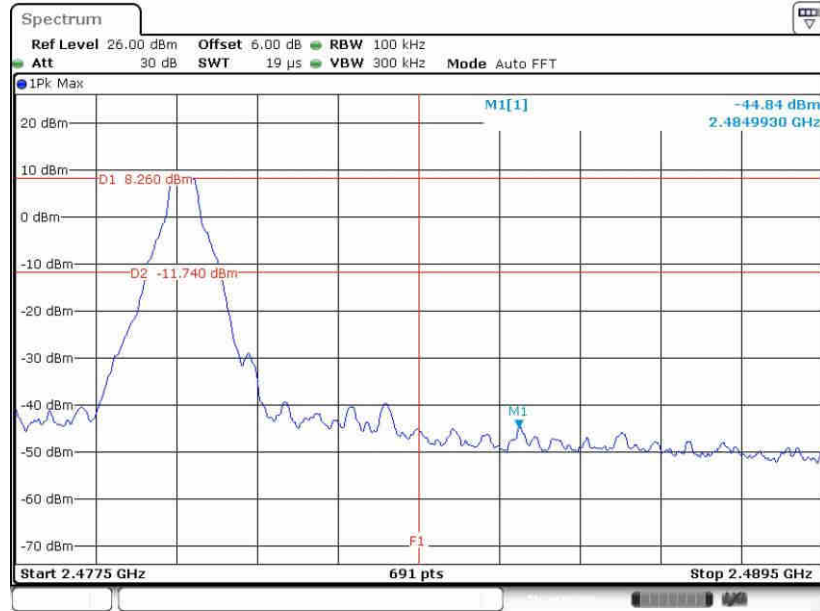




<2Mbps>

Low Band Edge Plot on Channel 00

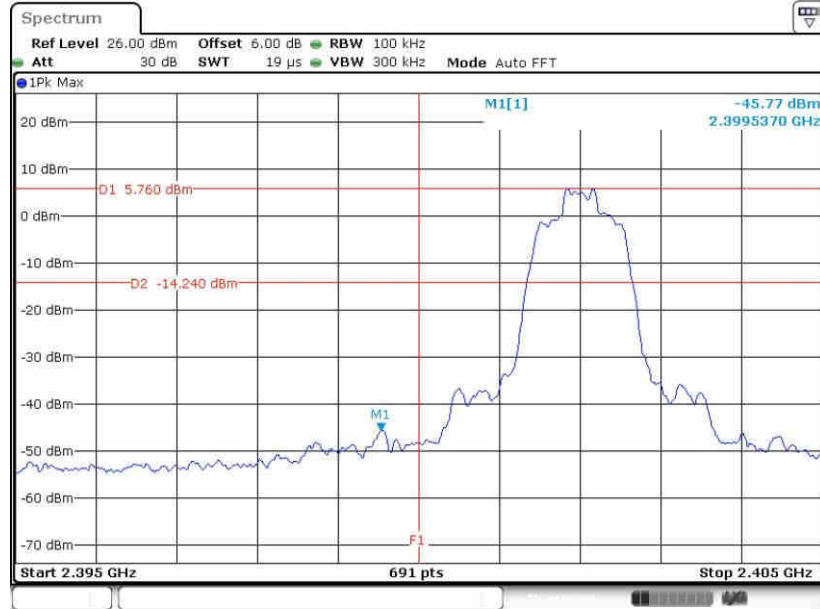

Date: 15.AUG.2023 01:21:01

High Band Edge Plot on Channel 78

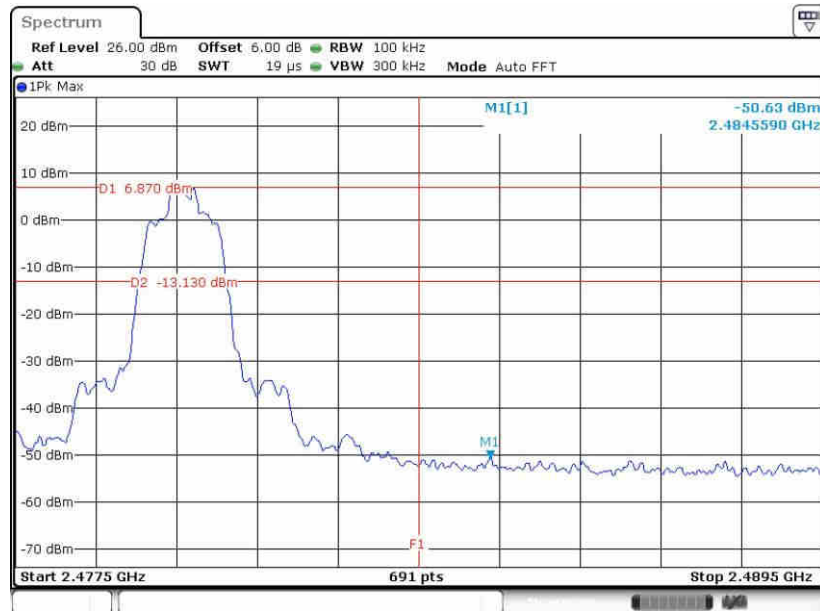


Date: 15.AUG.2023 01:32:12




<3Mbps>

Low Band Edge Plot on Channel 00

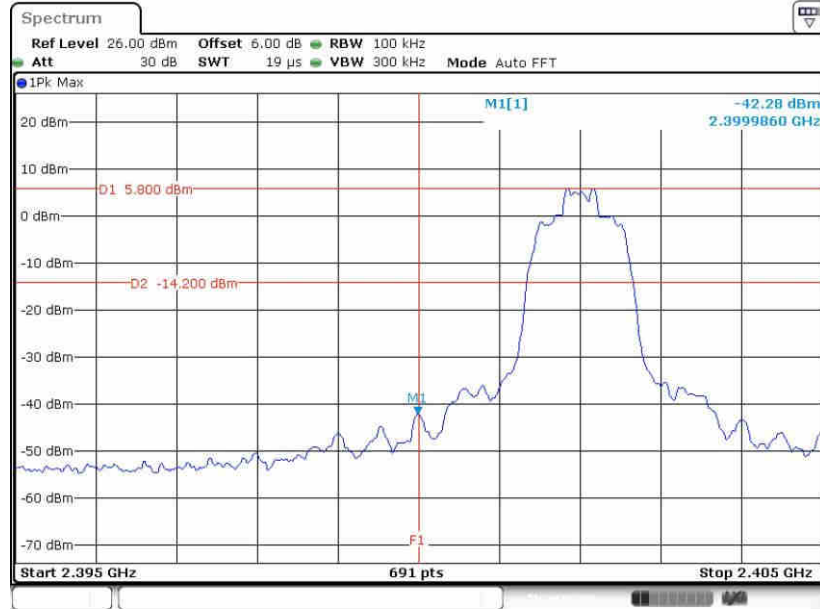

Date: 15.AUG.2023 01:38:34

High Band Edge Plot on Channel 78

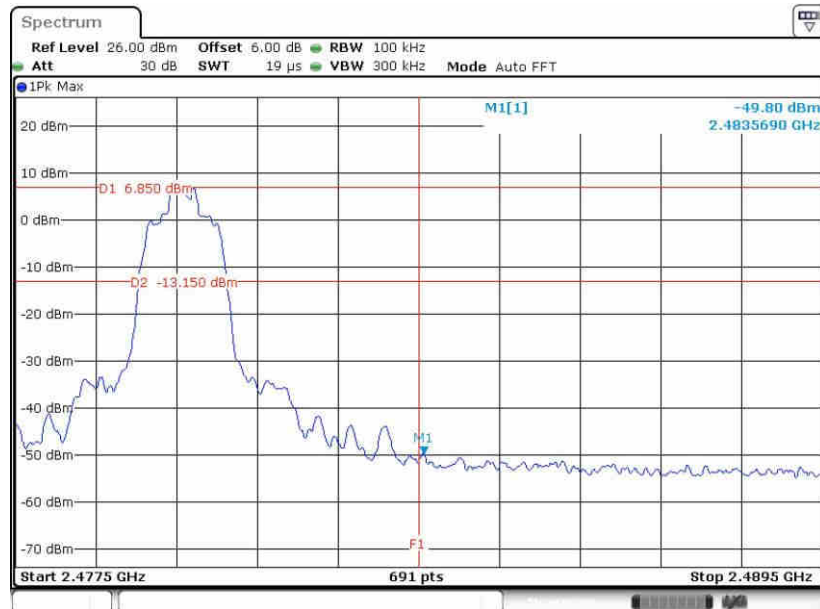


Date: 15.AUG.2023 01:51:18



3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

Hopping Mode Low Band Edge Plot

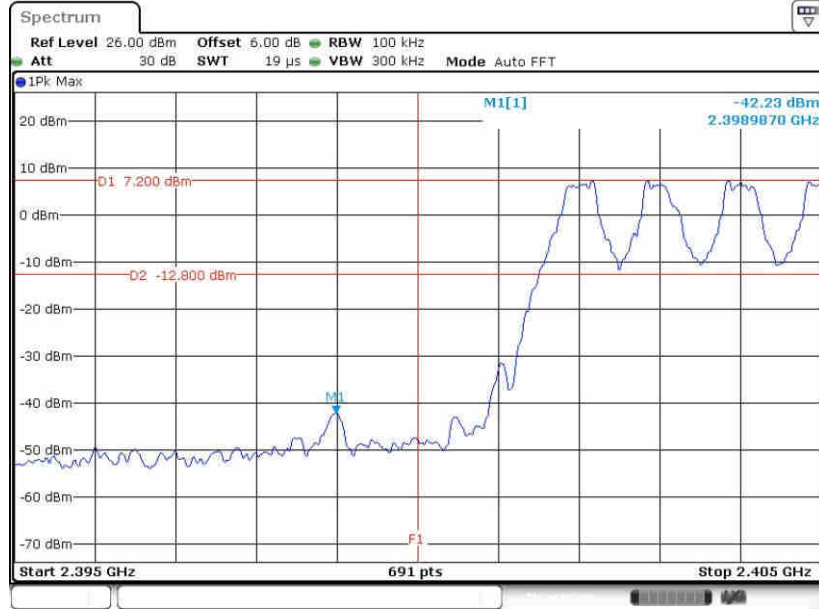

Date: 15.AUG,2023 01:12:23

Hopping Mode High Band Edge Plot

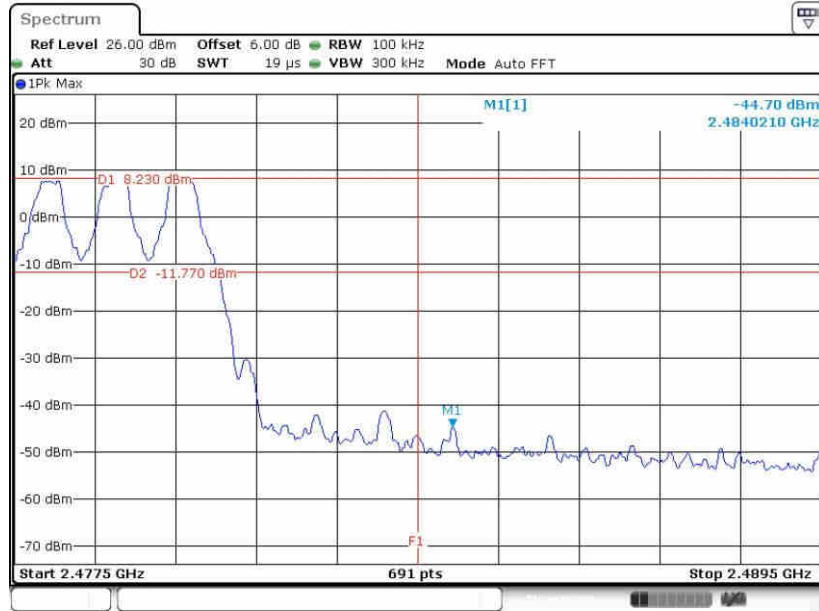


Date: 15.AUG,2023 01:12:49



<2Mbps>

Hopping Mode Low Band Edge Plot

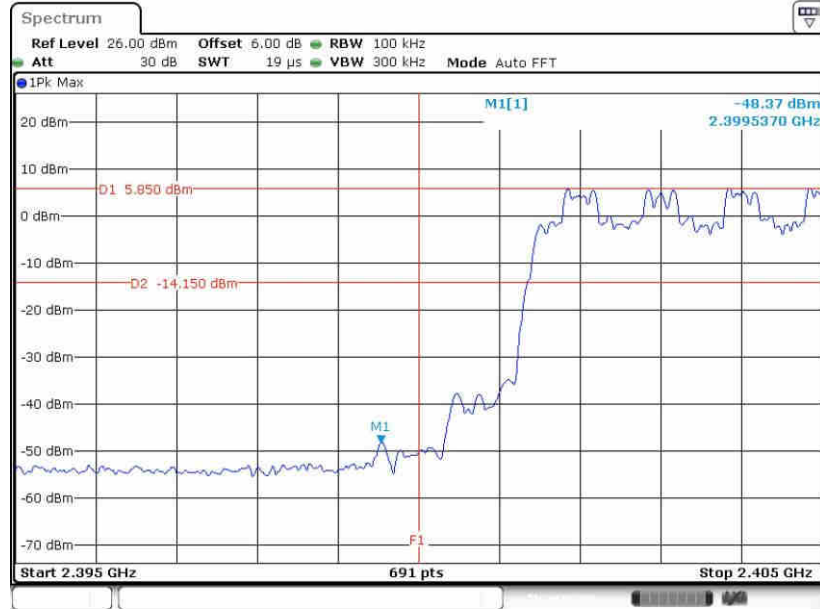

Date: 15.AUG.2023 01:36:26

Hopping Mode High Band Edge Plot




Date: 15.AUG.2023 01:36:04




<3Mbps>

Hopping Mode Low Band Edge Plot

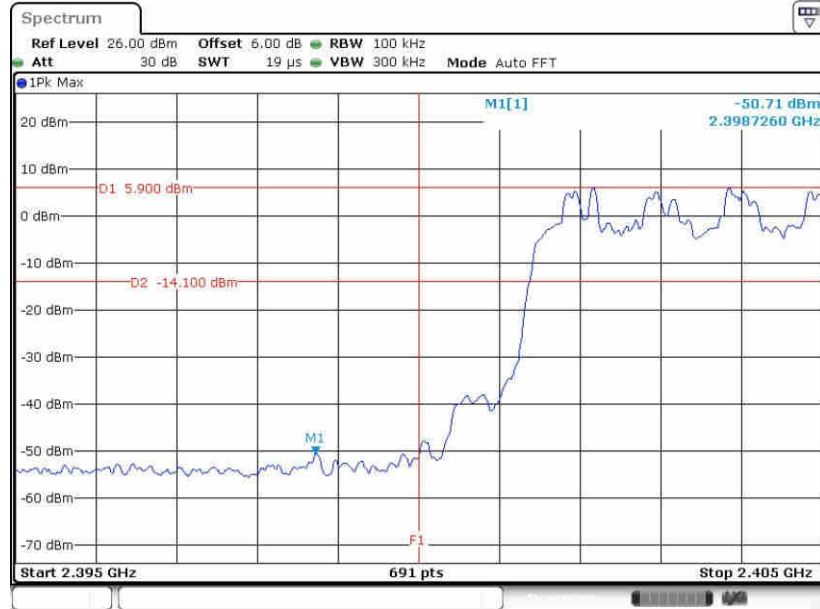

Date: 15.AUG.2023 01:55:29

Hopping Mode High Band Edge Plot

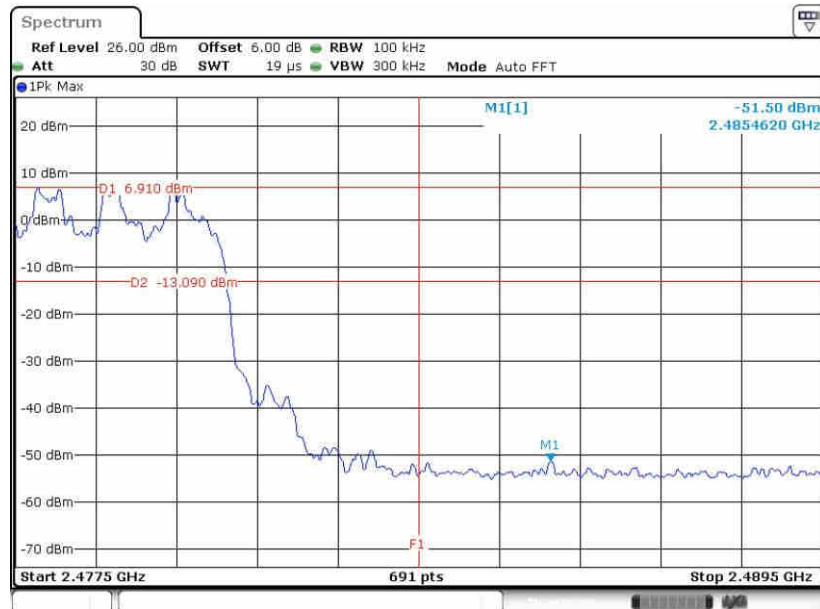

Date: 15.AUG.2023 01:54:11

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

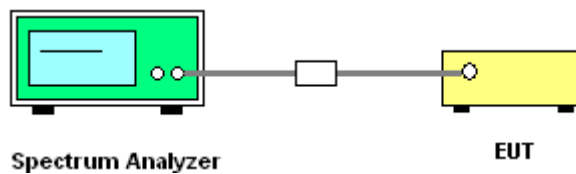





3.7.5 Test Result of Conducted Spurious Emission

<1Mbps>

CSE Plot on Ch 00

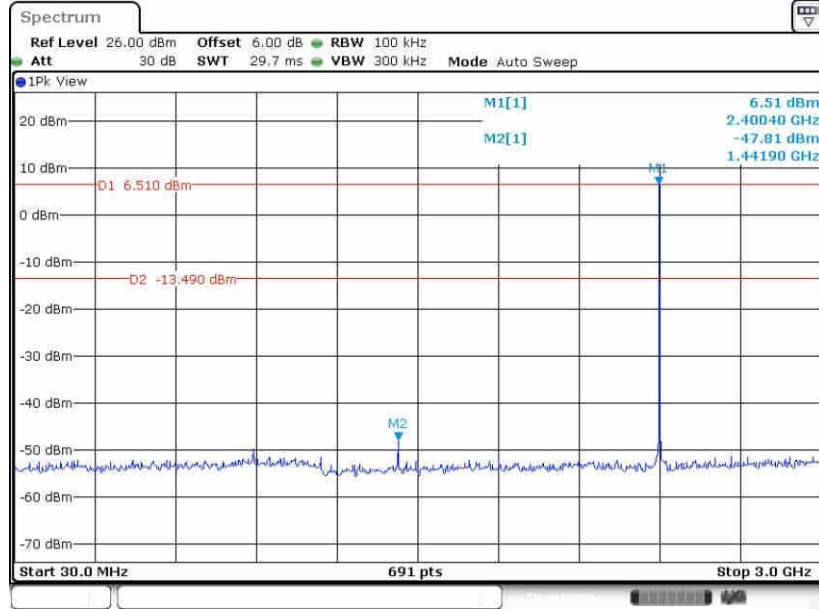


CSE Plot on Ch 00

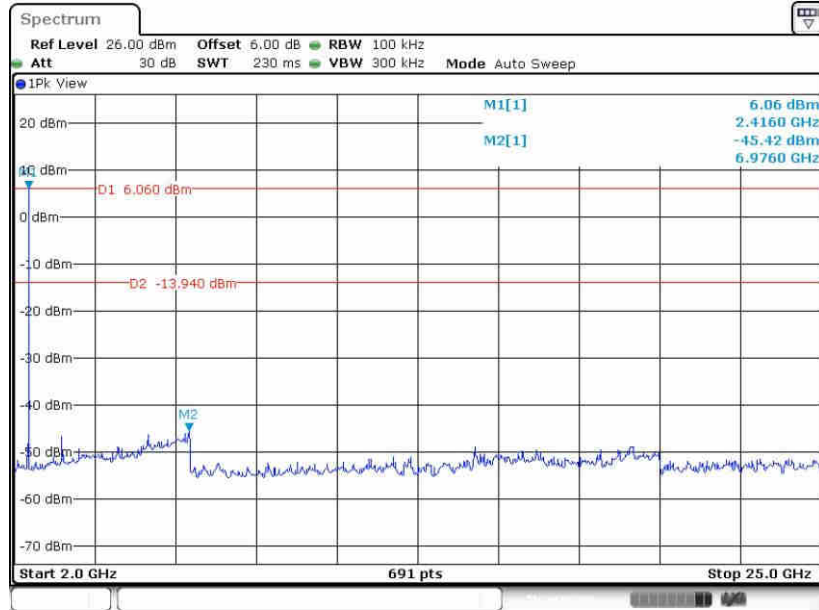




CSE Plot on Ch 39

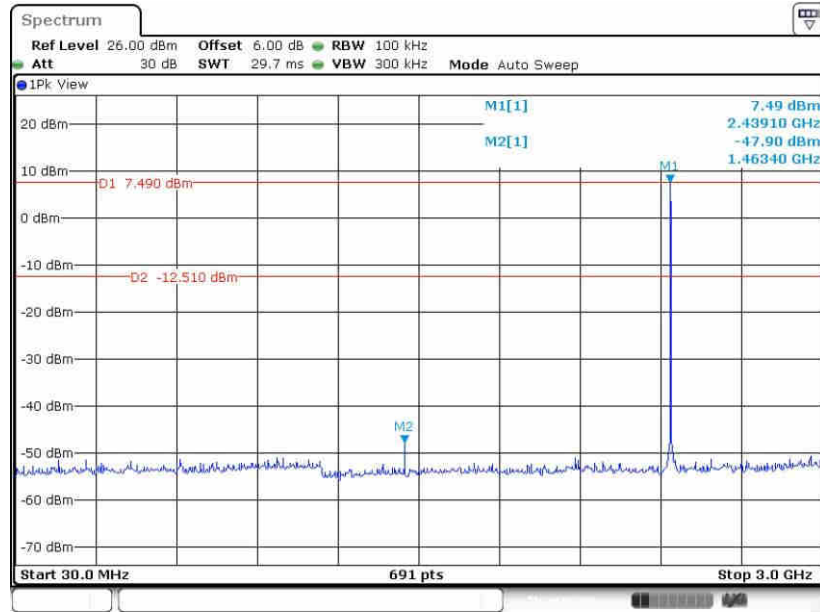

Date: 15.AUG.2023 01:03:49


CSE Plot on Ch 39

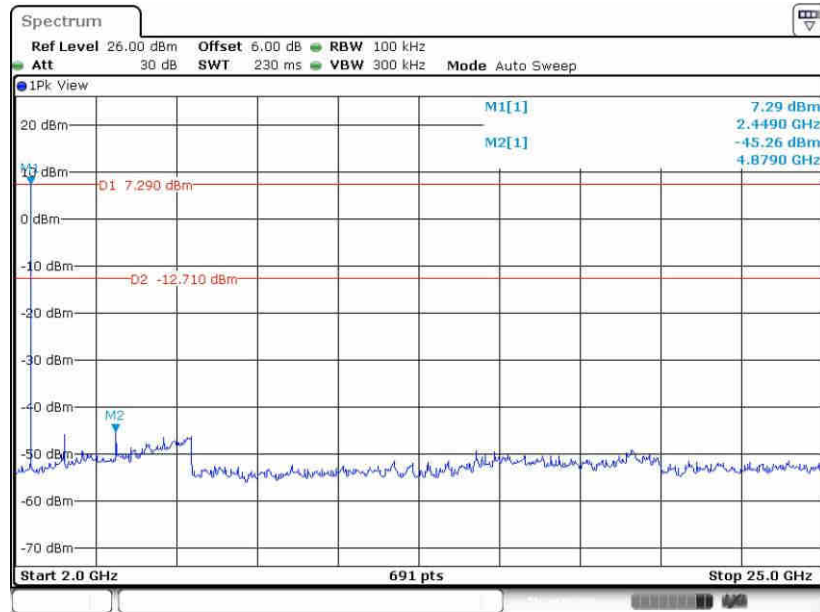

Date: 15.AUG.2023 01:04:17




CSE Plot on Ch 78

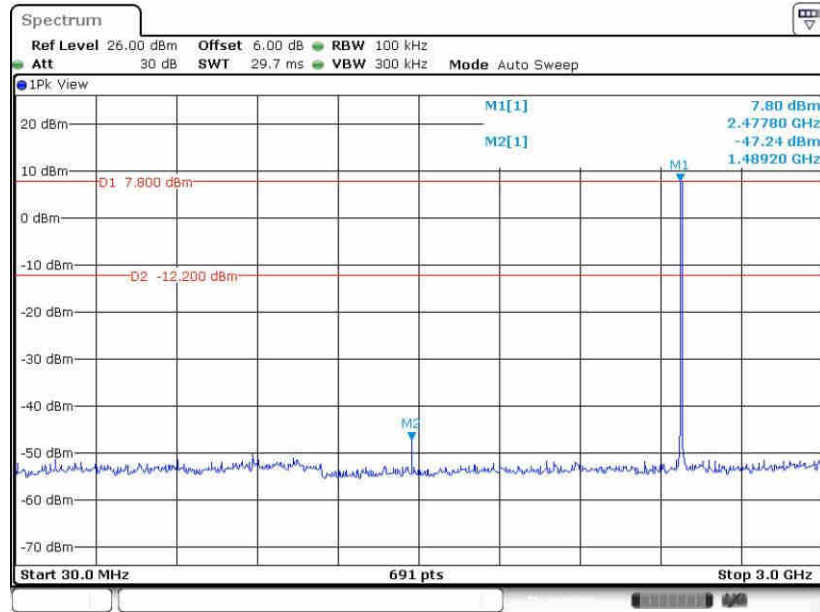

Date: 15.AUG.2023 01:08:34

CSE Plot on Ch 78

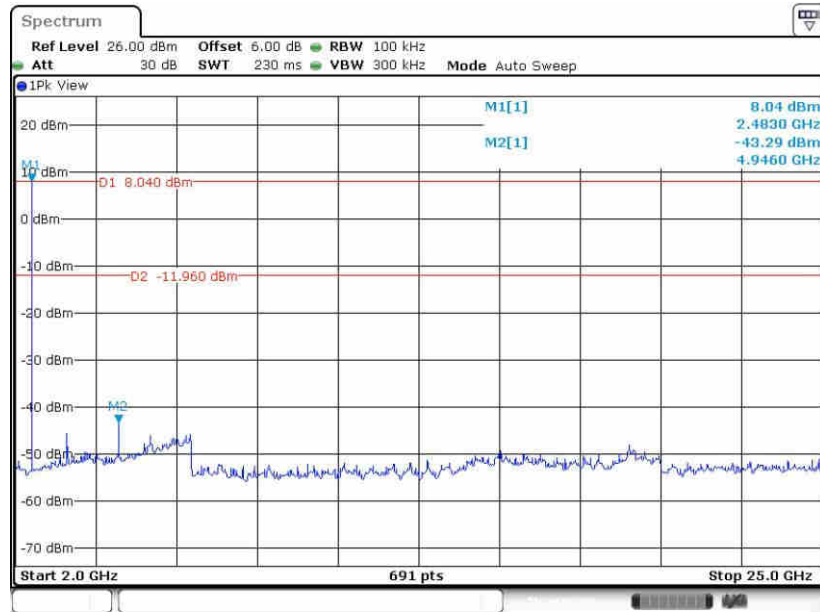


Date: 15.AUG.2023 01:09:02




<2Mbps>

CSE Plot on Ch 00

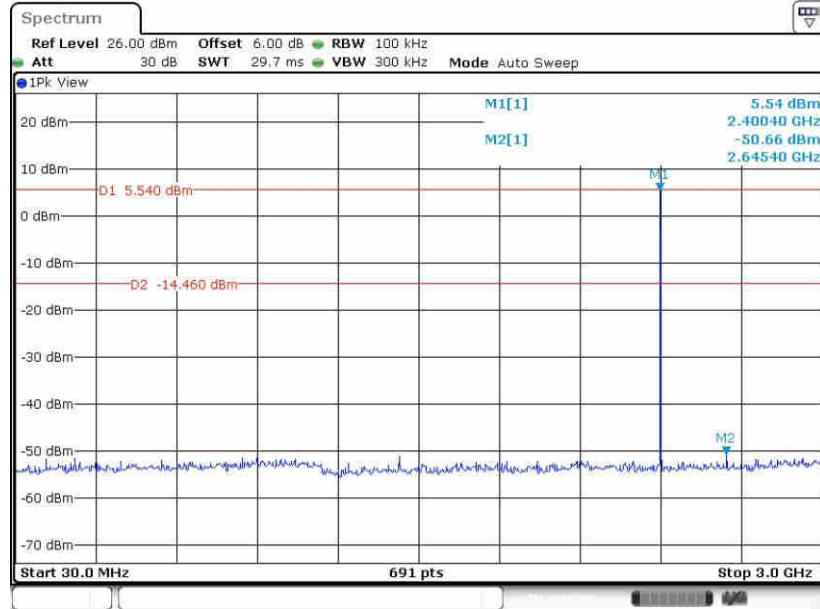

Date: 15.AUG.2023 01:22:17


CSE Plot on Ch 00

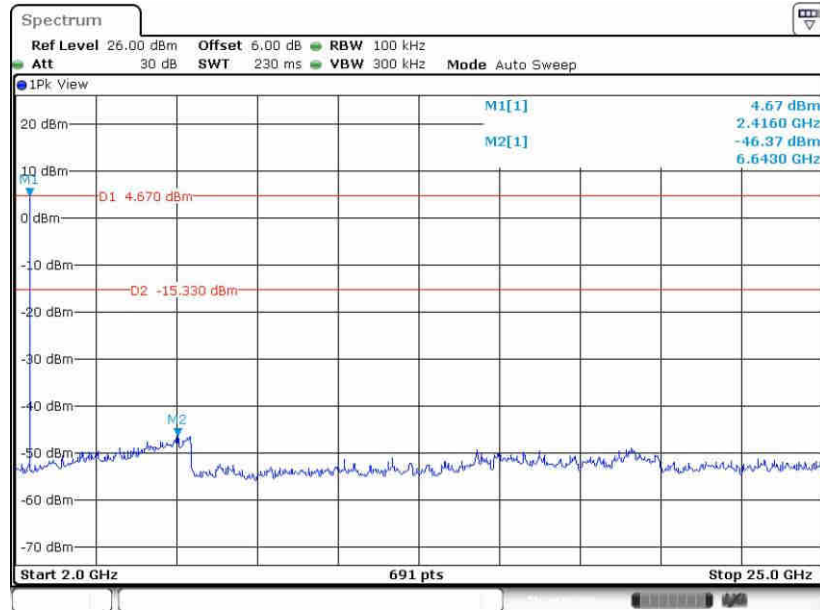

Date: 15.AUG.2023 01:22:58




CSE Plot on Ch 39

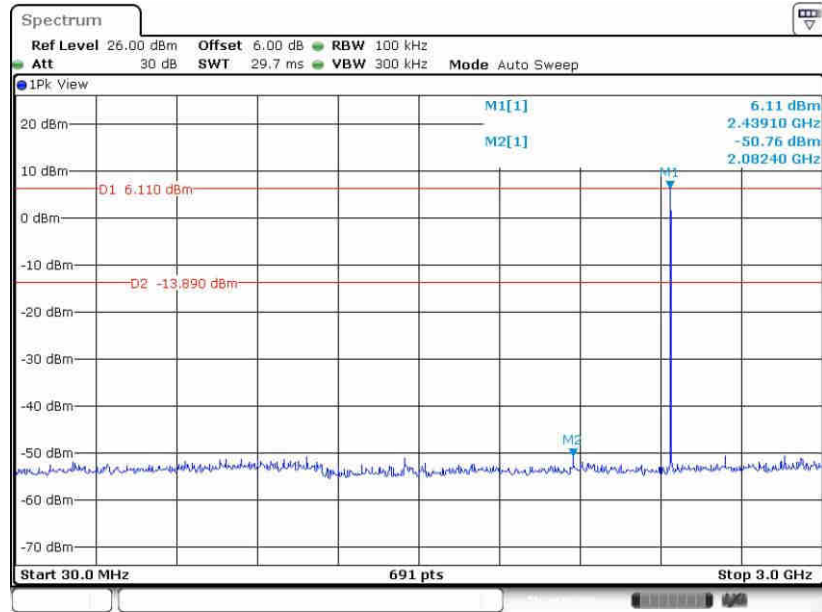

Date: 15.AUG.2023 01:28:28


CSE Plot on Ch 39

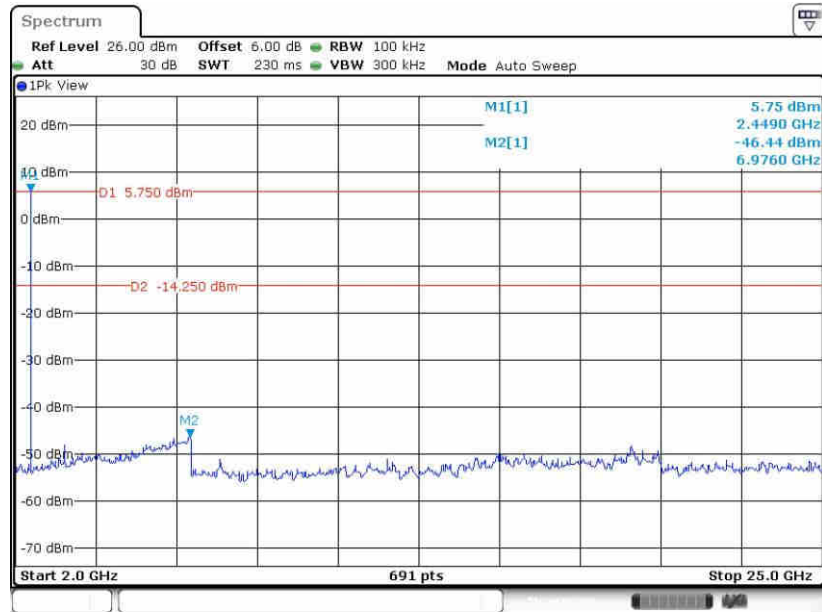

Date: 15.AUG.2023 01:28:56




CSE Plot on Ch 78

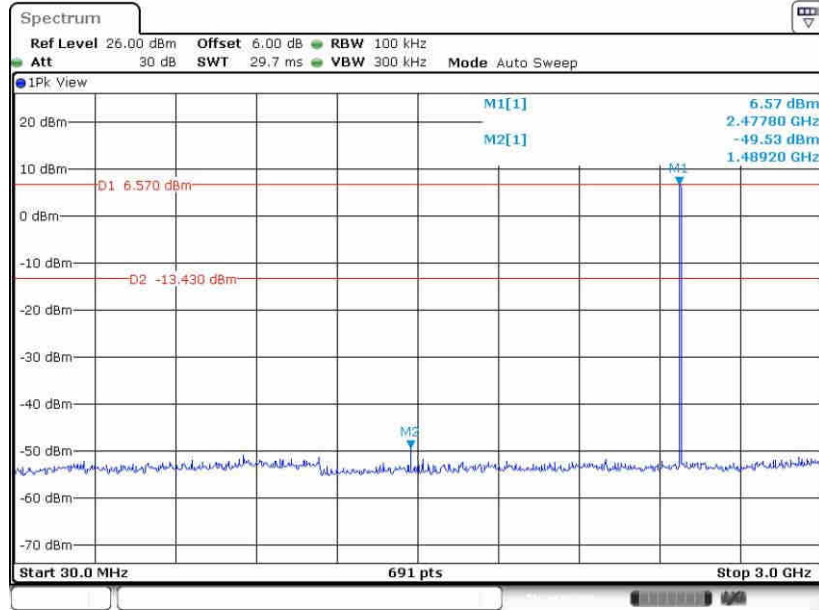

Date: 15.AUG.2023 01:33:19

CSE Plot on Ch 78

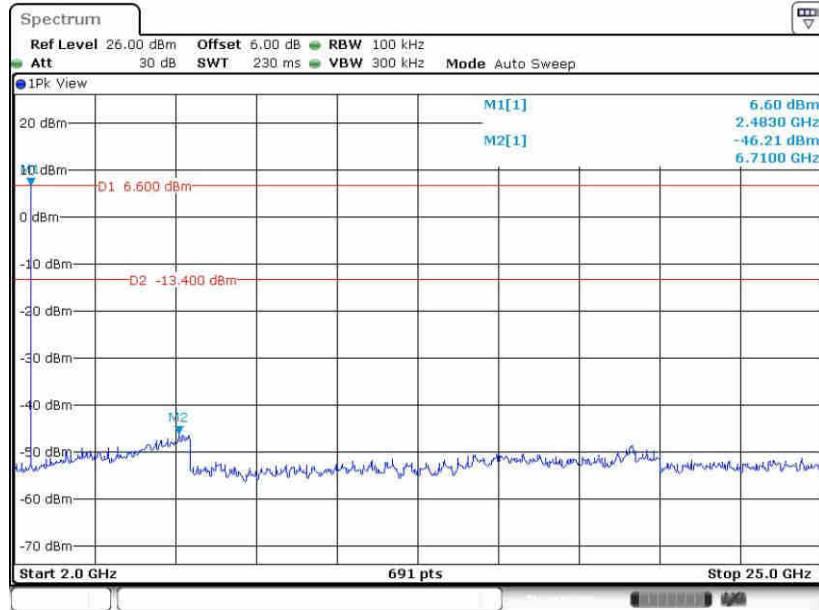


Date: 15.AUG.2023 01:33:47




<3Mbps>

CSE Plot on Ch 00

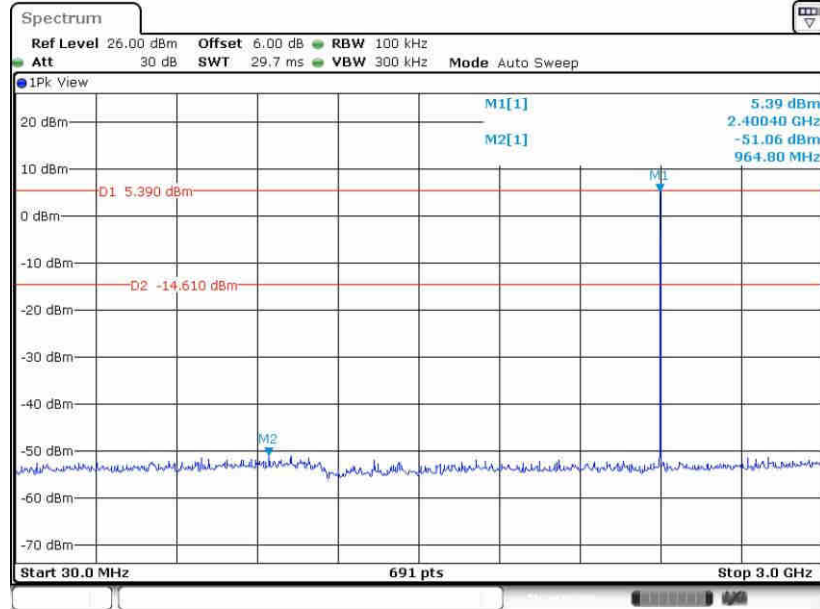

Date: 15.AUG.2023 01:42:36


CSE Plot on Ch 00

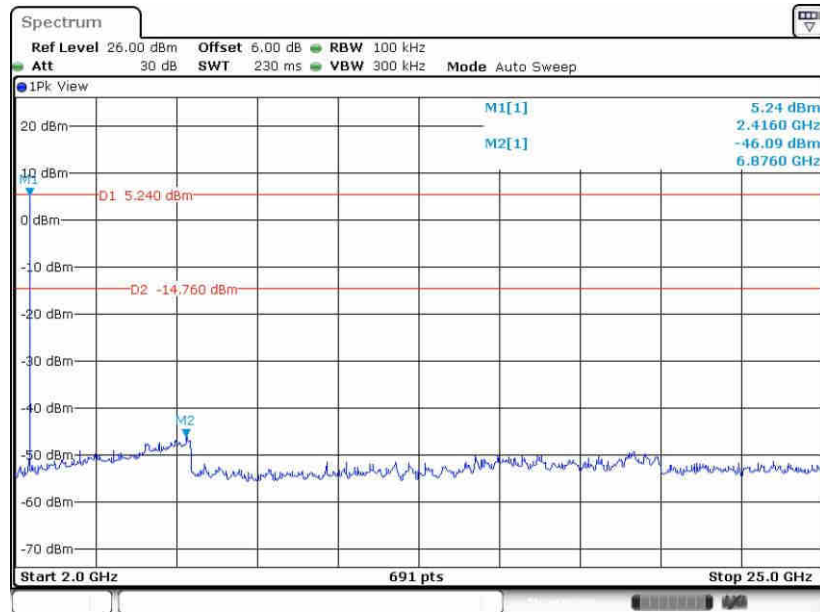

Date: 15.AUG.2023 01:43:05




CSE Plot on Ch 39

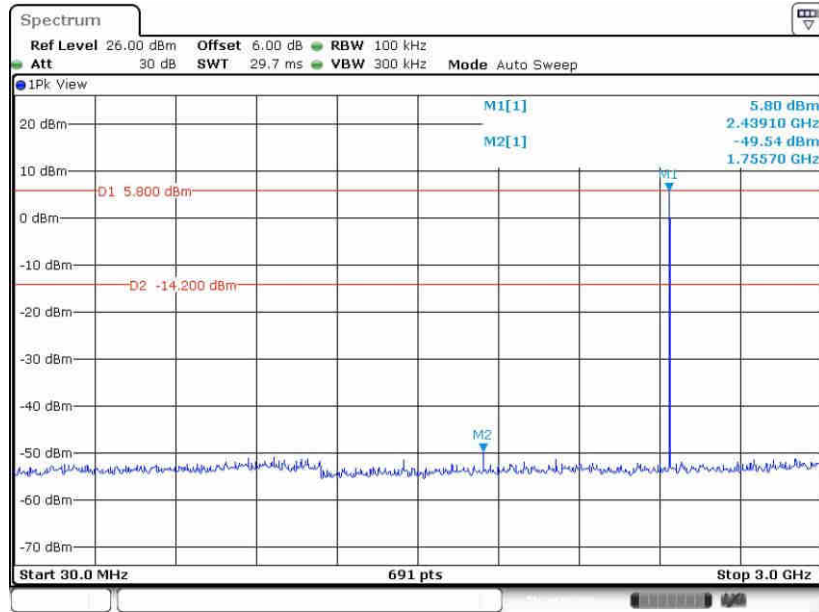

Date: 15.AUG.2023 01:47:34


CSE Plot on Ch 39

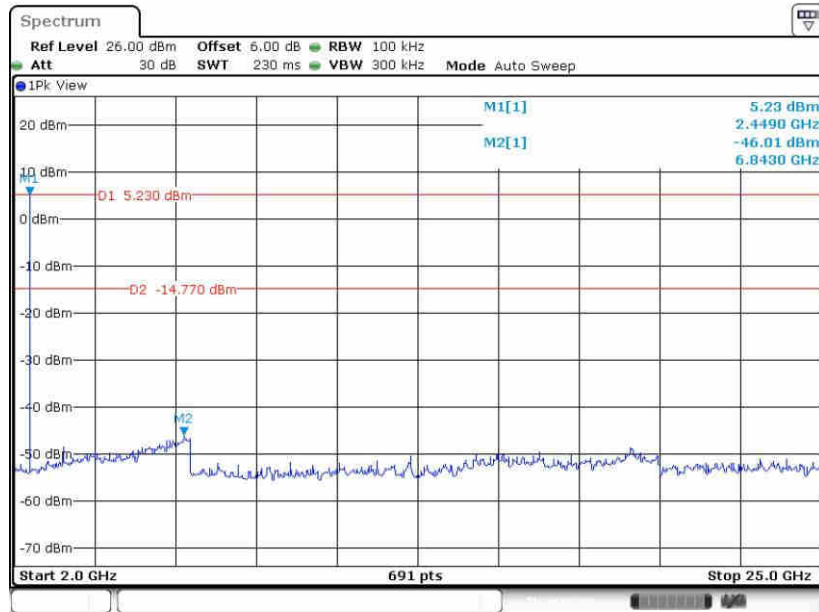

Date: 15.AUG.2023 01:48:02




CSE Plot on Ch 78

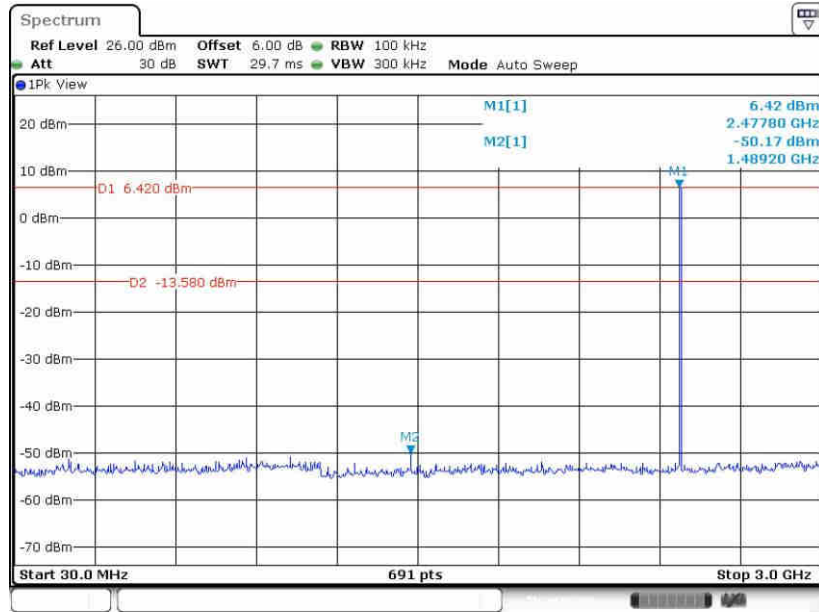

Date: 15.AUG.2023 01:52:30

CSE Plot on Ch 78

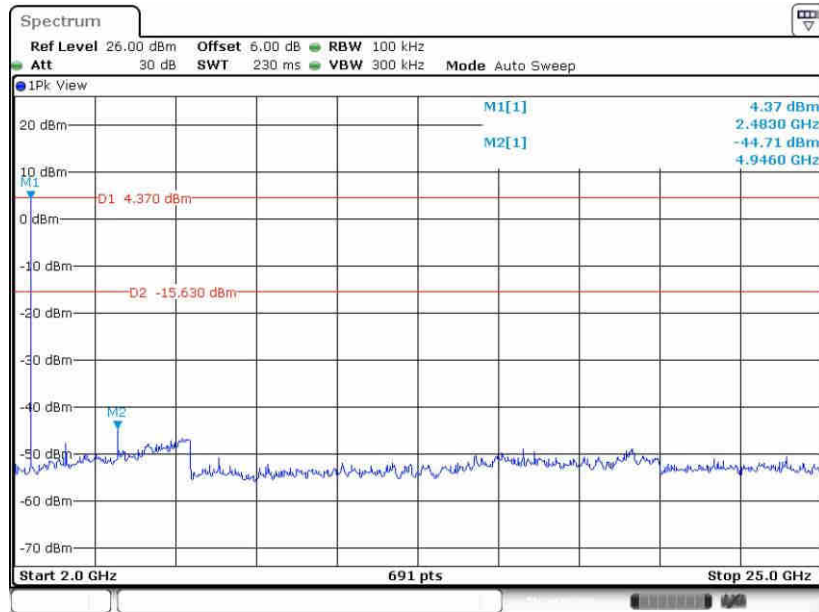

Date: 15.AUG.2023 01:52:59



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

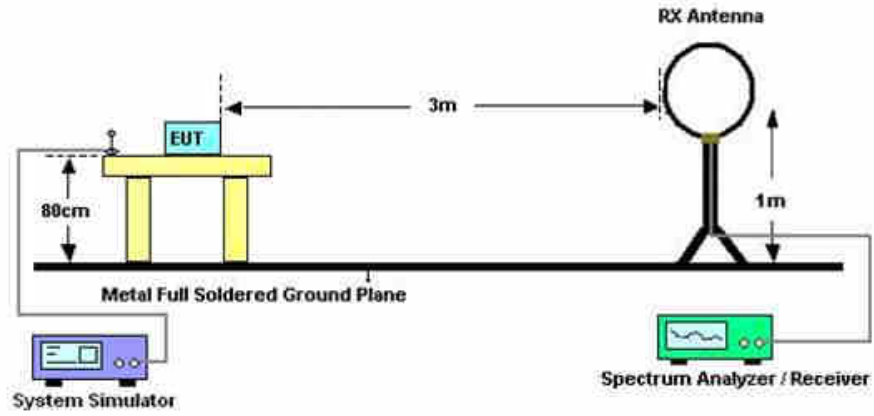

For radiated emissions from 30MHz to 1GHz

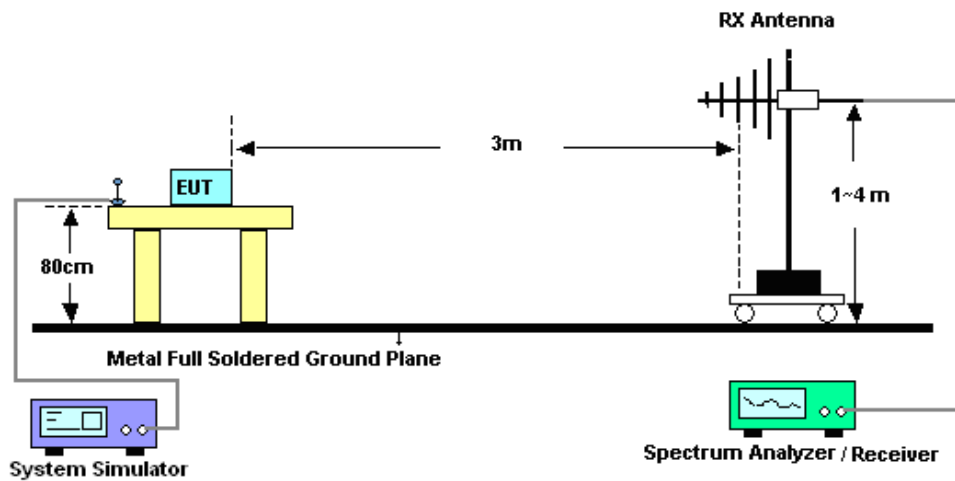

For radiated emissions above 1GHz

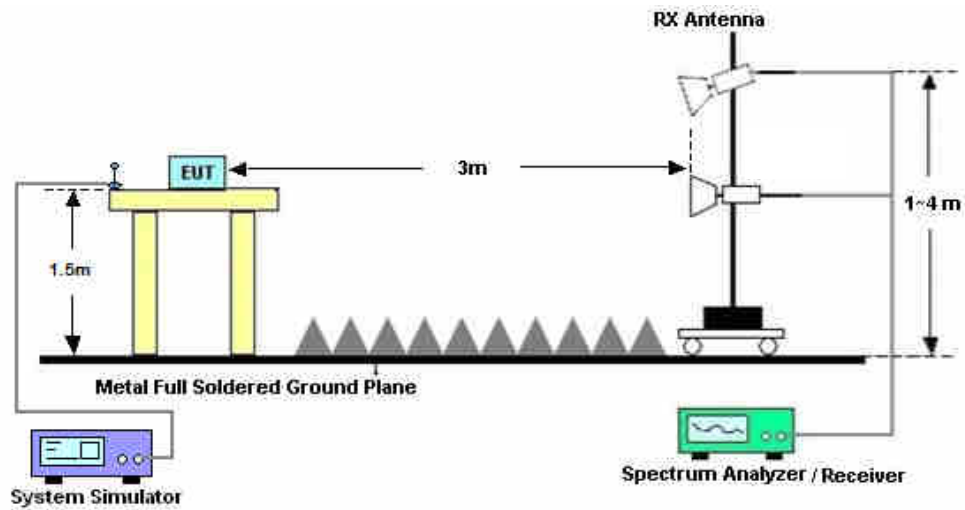



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

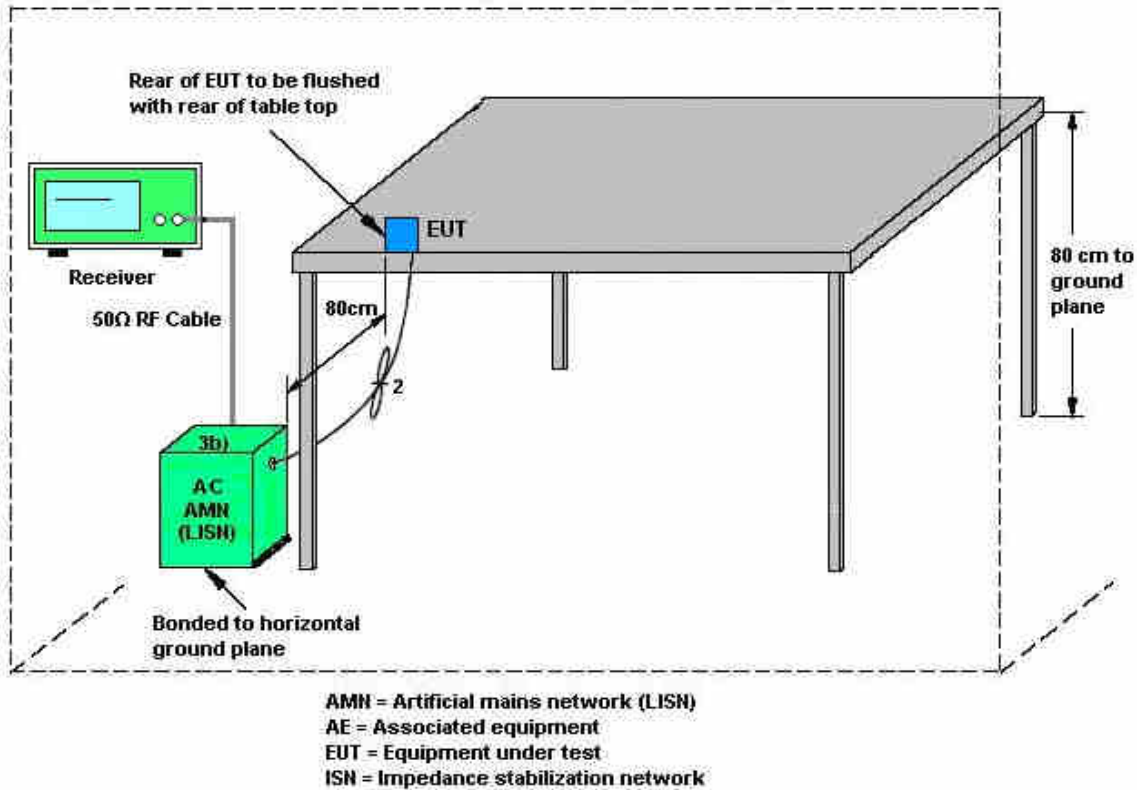

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2023	Dec. 18, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Dec. 18, 2023	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Dec. 18, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Dec. 18, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 06, 2023	Dec. 18, 2023	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 18, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 18, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 18, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Oct. 19, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Oct. 19, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Oct. 19, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Oct. 19, 2023	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Aug. 15, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Aug. 15, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Aug. 15, 2023	Jan. 04, 2024	Conducted (TH01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2023.8.15	Relative Humidity:	40~51	%

BT2.0-Ant1**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.929	0.831	998.600	0.6194	Pass
DH	1Mbps	1	39	2441	0.926	0.836	1002.900	0.6175	Pass
DH	1Mbps	1	78	2480	0.929	0.836	1002.900	0.6194	Pass
2DH	2Mbps	1	0	2402	1.181	1.120	998.600	0.7873	Pass
2DH	2Mbps	1	39	2441	1.177	1.120	998.600	0.7844	Pass
2DH	2Mbps	1	78	2480	1.177	1.117	1167.900	0.7844	Pass
3DH	3Mbps	1	0	2402	1.207	1.117	1319.800	0.8046	Pass
3DH	3Mbps	1	39	2441	1.207	1.106	1020.300	0.8046	Pass
3DH	3Mbps	1	78	2480	1.207	1.111	1002.900	0.8046	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.9043	0.31	0.4	Pass
AFH	20	53.33	2.9043	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	6.91	20.97	Pass
	39	1	7.71	20.97	Pass
	78	1	8.16	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	5.66	20.97	Pass
	39	1	6.46	20.97	Pass
	78	1	6.80	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	6.46	20.97	Pass
	39	1	6.89	20.97	Pass
	78	1	7.25	20.97	Pass


TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

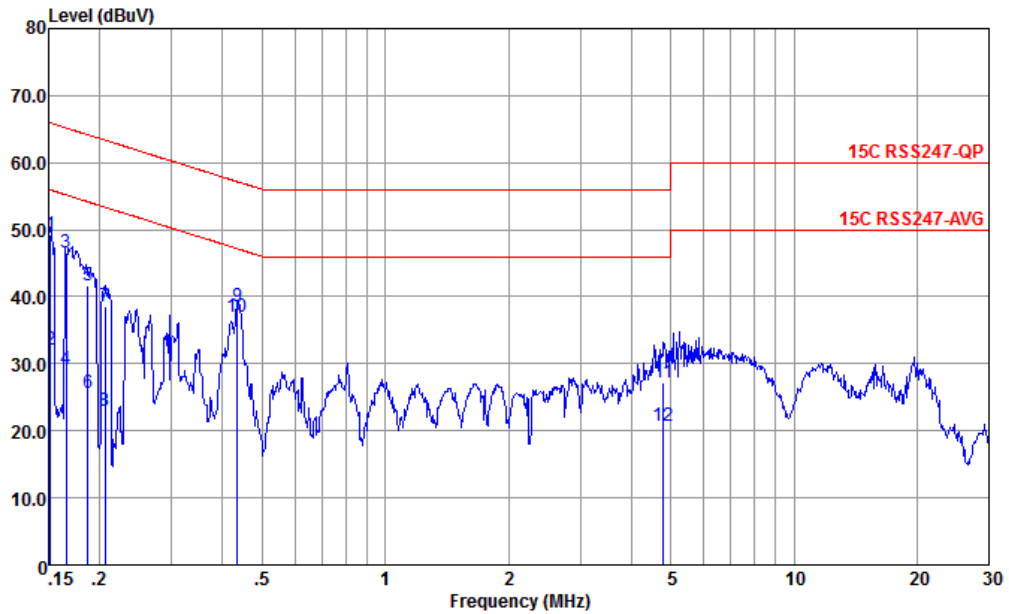


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	49.18	-16.73	65.91	38.70	0.05	10.43	QP
2	0.152	32.08	-23.83	55.91	21.60	0.05	10.43	Average
3	0.166	46.57	-18.59	65.16	36.10	0.04	10.43	QP
4	0.166	29.27	-25.89	55.16	18.80	0.04	10.43	Average
5	0.187	41.76	-22.39	64.15	31.31	0.03	10.42	QP
6	0.187	25.56	-28.59	54.15	15.11	0.03	10.42	Average
7	0.206	38.55	-24.81	63.36	28.11	0.03	10.41	QP
8	0.206	22.95	-30.41	53.36	12.51	0.03	10.41	Average
9	0.435	38.55	-18.60	57.15	28.29	-0.01	10.27	QP
10 *	0.435	36.95	-10.20	47.15	26.69	-0.01	10.27	Average
11	4.797	27.12	-28.88	56.00	17.20	-0.14	10.06	QP
12	4.797	20.82	-25.18	46.00	10.90	-0.14	10.06	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

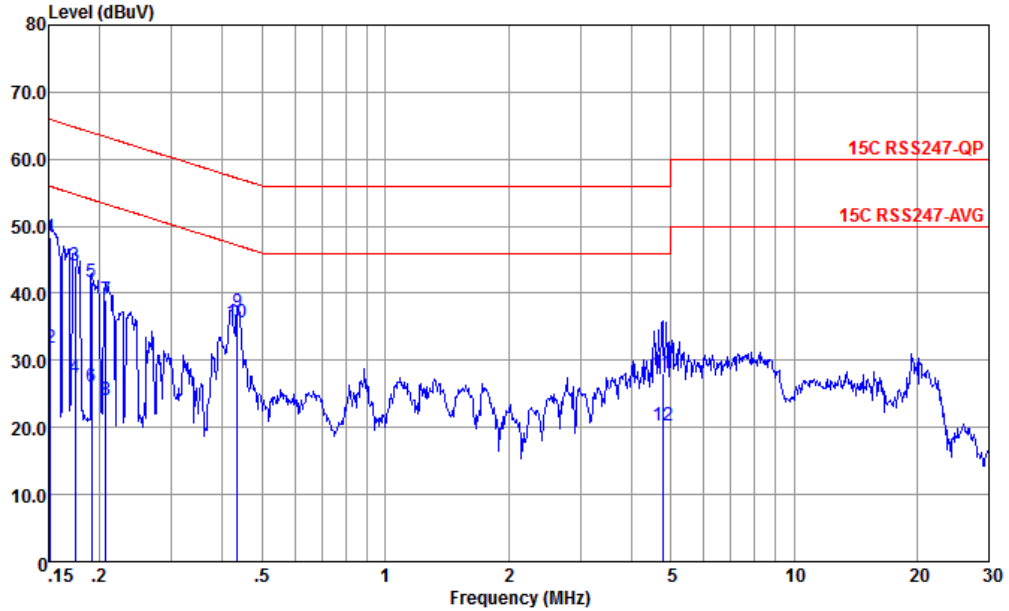

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	48.27	-17.64	65.91	37.80	0.04	10.43	QP
2	0.152	31.77	-24.14	55.91	21.30	0.04	10.43	Average
3	0.174	44.07	-20.70	64.77	33.60	0.05	10.42	QP
4	0.174	27.37	-27.40	54.77	16.90	0.05	10.42	Average
5	0.191	41.67	-22.31	63.98	31.20	0.05	10.42	QP
6	0.191	25.97	-28.01	53.98	15.50	0.05	10.42	Average
7	0.207	38.95	-24.37	63.32	28.50	0.04	10.41	QP
8	0.207	24.05	-29.27	53.32	13.60	0.04	10.41	Average
9	0.435	37.10	-20.05	57.15	26.89	-0.06	10.27	QP
10 *	0.435	35.60	-11.55	47.15	25.39	-0.06	10.27	Average
11	4.772	28.13	-27.87	56.00	18.20	-0.13	10.06	QP
12	4.772	20.23	-25.77	46.00	10.30	-0.13	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	Bluetooth BR_GFSK	00	2402	1Mbps	-
Mode 2	2400-2483.5	Bluetooth BR_GFSK	39	2441	1Mbps	-
Mode 3	2400-2483.5	Bluetooth BR_GFSK	78	2480	1Mbps	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2388.39	51.06	74.00	-22.94	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4803.00	30.09	54.00	-23.91	H	Average	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	4882.50	48.83	74.00	-25.17	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.54	60.70	74.00	-13.30	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	3472.50	49.57	74.00	-24.43	H	PEAK	Pass	Harmonic





		1																																																																																																																												
Mode		Band Edge																																																																																																																												
		2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																												
Pol.		Horizontal					Fundamental																																																																																																																							
Peak																																																																																																																														
		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.39</td> <td>51.06</td> <td>74.00</td> <td>-22.94</td> <td>43.17</td> <td>31.71</td> <td>7.10</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>8 PEAK</td> </tr> <tr> <td>2</td> <td>2388.39</td> <td>26.27</td> <td>54.00</td> <td>-27.73</td> <td>18.38</td> <td>31.71</td> <td>7.10</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>8 AVERAGE</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>103.76</td> <td>-----</td> <td>95.76</td> <td>31.80</td> <td>7.12</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>8 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>78.97</td> <td>-----</td> <td>70.97</td> <td>31.80</td> <td>7.12</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>8 AVERAGE</td> </tr> </tbody> </table>												Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.39	51.06	74.00	-22.94	43.17	31.71	7.10	36.92	6.00	300	8 PEAK	2	2388.39	26.27	54.00	-27.73	18.38	31.71	7.10	36.92	6.00	300	8 AVERAGE			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2402.00	103.76	-----	95.76	31.80	7.12	36.92	6.00	300	8 PEAK	2	2402.00	78.97	-----	70.97	31.80	7.12	36.92	6.00	300
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2388.39	51.06	74.00	-22.94	43.17	31.71	7.10	36.92	6.00	300	8 PEAK																																																																																																																			
2	2388.39	26.27	54.00	-27.73	18.38	31.71	7.10	36.92	6.00	300	8 AVERAGE																																																																																																																			
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2402.00	103.76	-----	95.76	31.80	7.12	36.92	6.00	300	8 PEAK																																																																																																																				
2	2402.00	78.97	-----	70.97	31.80	7.12	36.92	6.00	300	8 AVERAGE																																																																																																																				



		1																																																																																																																																										
Mode		Band Edge																																																																																																																																										
		2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																										
Pol.		Vertical					Fundamental																																																																																																																																					
Peak																																																																																																																																												
		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>48.54</td> <td>74.00</td> <td>-25.46</td> <td>40.65</td> <td>31.71</td> <td>7.10</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2389.17</td> <td>23.75</td> <td>54.00</td> <td>-30.25</td> <td>15.86</td> <td>31.71</td> <td>7.10</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>91.91</td> <td>74.00</td> <td>17.91</td> <td>83.91</td> <td>31.80</td> <td>7.12</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>67.12</td> <td>74.00</td> <td>6.88</td> <td>59.12</td> <td>31.80</td> <td>7.12</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>												Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	2389.17	48.54	74.00	-25.46	40.65	31.71	7.10	36.92	6.00	300	247	PEAK	2	2389.17	23.75	54.00	-30.25	15.86	31.71	7.10	36.92	6.00	300	247	AVERAGE			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	2402.00	91.91	74.00	17.91	83.91	31.80	7.12	36.92	6.00	300	247	PEAK	2	2402.00	67.12	74.00	6.88	59.12	31.80	7.12	36.92	6.00	300	247
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	2389.17	48.54	74.00	-25.46	40.65	31.71	7.10	36.92	6.00	300	247	PEAK																																																																																																																																
2	2389.17	23.75	54.00	-30.25	15.86	31.71	7.10	36.92	6.00	300	247	AVERAGE																																																																																																																																
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	2402.00	91.91	74.00	17.91	83.91	31.80	7.12	36.92	6.00	300	247	PEAK																																																																																																																																
2	2402.00	67.12	74.00	6.88	59.12	31.80	7.12	36.92	6.00	300	247	AVERAGE																																																																																																																																

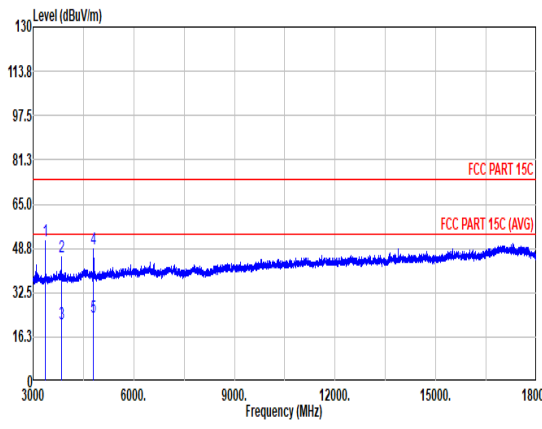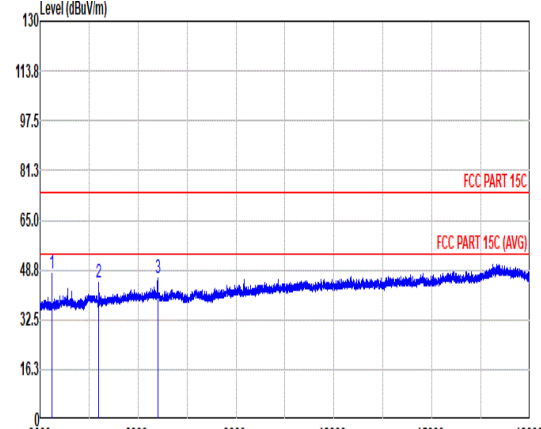

Mode	1																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around a mean level of approximately 40 dBuV/m. Two red horizontal lines indicate limits: FCC PART 15C at 81.3 dBuV/m and FCC PART 15C (AVG) at 65.0 dBuV/m. Five vertical blue lines mark specific frequencies: 1, 2, 3, 4, and 5.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3363.00</td> <td>51.63</td> <td>83.76</td> <td>-32.13</td> <td>76.07</td> <td>32.70</td> <td>8.48</td> <td>65.62</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>3843.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>69.36</td> <td>33.29</td> <td>9.11</td> <td>66.02</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>3843.00</td> <td>20.95</td> <td>54.00</td> <td>-33.05</td> <td>44.57</td> <td>33.29</td> <td>9.11</td> <td>66.02</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>4</td> <td>4803.00</td> <td>48.51</td> <td>74.00</td> <td>-25.49</td> <td>69.76</td> <td>33.00</td> <td>10.20</td> <td>65.25</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>4803.00</td> <td>23.72</td> <td>54.00</td> <td>-30.28</td> <td>44.97</td> <td>33.00</td> <td>10.20</td> <td>65.25</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3363.00	51.63	83.76	-32.13	76.07	32.70	8.48	65.62	0.00	--	--	PEAK	2	3843.00	45.74	74.00	-28.26	69.36	33.29	9.11	66.02	0.00	--	--	PEAK	3	3843.00	20.95	54.00	-33.05	44.57	33.29	9.11	66.02	0.00	--	--	Average	4	4803.00	48.51	74.00	-25.49	69.76	33.00	10.20	65.25	0.00	--	--	PEAK	5	4803.00	23.72	54.00	-30.28	44.97	33.00	10.20	65.25	0.00	--	--	Average	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around a mean level of approximately 40 dBuV/m. Two red horizontal lines indicate limits: FCC PART 15C at 81.3 dBuV/m and FCC PART 15C (AVG) at 65.0 dBuV/m. Three vertical blue lines mark specific frequencies: 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3363.00</td> <td>47.39</td> <td>71.91</td> <td>-24.52</td> <td>71.83</td> <td>32.70</td> <td>8.48</td> <td>65.62</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4804.50</td> <td>44.41</td> <td>74.00</td> <td>-29.59</td> <td>65.65</td> <td>33.80</td> <td>10.21</td> <td>65.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>6601.50</td> <td>45.92</td> <td>71.91</td> <td>-25.99</td> <td>64.29</td> <td>35.40</td> <td>12.10</td> <td>65.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3363.00	47.39	71.91	-24.52	71.83	32.70	8.48	65.62	0.00	---	---	PEAK	2	4804.50	44.41	74.00	-29.59	65.65	33.80	10.21	65.25	0.00	---	---	PEAK	3	6601.50	45.92	71.91	-25.99	64.29	35.40	12.10	65.87	0.00	---	---	PEAK
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	3363.00	51.63	83.76	-32.13	76.07	32.70	8.48	65.62	0.00	--	--	PEAK																																																																																																																																																		
2	3843.00	45.74	74.00	-28.26	69.36	33.29	9.11	66.02	0.00	--	--	PEAK																																																																																																																																																		
3	3843.00	20.95	54.00	-33.05	44.57	33.29	9.11	66.02	0.00	--	--	Average																																																																																																																																																		
4	4803.00	48.51	74.00	-25.49	69.76	33.00	10.20	65.25	0.00	--	--	PEAK																																																																																																																																																		
5	4803.00	23.72	54.00	-30.28	44.97	33.00	10.20	65.25	0.00	--	--	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	3363.00	47.39	71.91	-24.52	71.83	32.70	8.48	65.62	0.00	---	---	PEAK																																																																																																																																																		
2	4804.50	44.41	74.00	-29.59	65.65	33.80	10.21	65.25	0.00	---	---	PEAK																																																																																																																																																		
3	6601.50	45.92	71.91	-25.99	64.29	35.40	12.10	65.87	0.00	---	---	PEAK																																																																																																																																																		
Avg																																																																																																																																																														



		2																																																																																																										
Mode		Harmonic																																																																																																										
		2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3417.00</td> <td>49.47</td> <td>77.91</td> <td>-28.44</td> <td>73.81</td> <td>32.70</td> <td>8.55</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4882.50</td> <td>48.83</td> <td>74.00</td> <td>-25.17</td> <td>70.01</td> <td>33.80</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7365.00</td> <td>39.20</td> <td>74.00</td> <td>-34.80</td> <td>57.54</td> <td>35.53</td> <td>12.73</td> <td>66.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3417.00	49.47	77.91	-28.44	73.81	32.70	8.55	65.59	0.00	---	---	PEAK	2	4882.50	48.83	74.00	-25.17	70.01	33.80	10.30	65.28	0.00	---	---	PEAK	3	7365.00	39.20	74.00	-34.80	57.54	35.53	12.73	66.60	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>97.91</td> <td>74.00</td> <td>23.91</td> <td>89.33</td> <td>32.31</td> <td>7.19</td> <td>36.92</td> <td>6.00</td> <td>108</td> <td>368</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.00	97.91	74.00	23.91	89.33	32.31	7.19	36.92	6.00	108	368	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	3417.00	49.47	77.91	-28.44	73.81	32.70	8.55	65.59	0.00	---	---	PEAK																																																																																																
2	4882.50	48.83	74.00	-25.17	70.01	33.80	10.30	65.28	0.00	---	---	PEAK																																																																																																
3	7365.00	39.20	74.00	-34.80	57.54	35.53	12.73	66.60	0.00	---	---	Peak																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2441.00	97.91	74.00	23.91	89.33	32.31	7.19	36.92	6.00	108	368	Peak																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3417.00</td> <td>44.09</td> <td>74.90</td> <td>-30.81</td> <td>68.43</td> <td>32.70</td> <td>8.55</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4882.50</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>68.30</td> <td>33.00</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>6603.00</td> <td>47.66</td> <td>74.90</td> <td>-27.24</td> <td>66.03</td> <td>35.40</td> <td>12.10</td> <td>65.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3417.00	44.09	74.90	-30.81	68.43	32.70	8.55	65.59	0.00	---	---	PEAK	2	4882.50	47.12	74.00	-26.88	68.30	33.00	10.30	65.28	0.00	---	---	PEAK	3	6603.00	47.66	74.90	-27.24	66.03	35.40	12.10	65.87	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>94.90</td> <td>74.00</td> <td>20.90</td> <td>86.32</td> <td>32.31</td> <td>7.19</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.00	94.90	74.00	20.90	86.32	32.31	7.19	36.92	6.00	300	306	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	3417.00	44.09	74.90	-30.81	68.43	32.70	8.55	65.59	0.00	---	---	PEAK																																																																																																
2	4882.50	47.12	74.00	-26.88	68.30	33.00	10.30	65.28	0.00	---	---	PEAK																																																																																																
3	6603.00	47.66	74.90	-27.24	66.03	35.40	12.10	65.87	0.00	---	---	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2441.00	94.90	74.00	20.90	86.32	32.31	7.19	36.92	6.00	300	306	PEAK																																																																																																



		3																																																																	
Mode		Band Edge																																																																	
		2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																	
Pol.		Horizontal					Fundamental																																																												
Peak																																																																			
		<table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>60.70</td> <td>74.00</td> <td>-13.30</td> <td>52.47</td> <td>31.93</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>121</td> <td>360 PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>35.91</td> <td>54.00</td> <td>-18.09</td> <td>27.68</td> <td>31.93</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>121</td> <td>360 AVERAGE</td> </tr> </tbody> </table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.54	60.70	74.00	-13.30	52.47	31.93	7.26	36.96	6.00	121	360 PEAK	2	2483.54	35.91	54.00	-18.09	27.68	31.93	7.26	36.96	6.00	121
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	2483.54	60.70	74.00	-13.30	52.47	31.93	7.26	36.96	6.00	121	360 PEAK																																																								
2	2483.54	35.91	54.00	-18.09	27.68	31.93	7.26	36.96	6.00	121	360 AVERAGE																																																								





		3																																																																																																																																
Mode		Band Edge																																																																																																																																
		2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																
Pol.		Vertical					Fundamental																																																																																																																											
Peak																																																																																																																																		
		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>56.72</td> <td>74.00</td> <td>-17.28</td> <td>48.49</td> <td>31.93</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>389</td> <td>78 PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>31.93</td> <td>54.00</td> <td>-22.07</td> <td>23.70</td> <td>31.93</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>389</td> <td>78 AVERAGE</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.86</td> <td>-----</td> <td>-----</td> <td>91.65</td> <td>31.92</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>389</td> <td>78 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>75.07</td> <td>-----</td> <td>-----</td> <td>66.86</td> <td>31.92</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>389</td> <td>78 AVERAGE</td> </tr> </tbody> </table>												Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.54	56.72	74.00	-17.28	48.49	31.93	7.26	36.96	6.00	389	78 PEAK	2	2483.54	31.93	54.00	-22.07	23.70	31.93	7.26	36.96	6.00	389	78 AVERAGE			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	99.86	-----	-----	91.65	31.92	7.25	36.96	6.00	389	78 PEAK	2	2480.00	75.07	-----	-----	66.86	31.92	7.25	36.96	6.00	389
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	2483.54	56.72	74.00	-17.28	48.49	31.93	7.26	36.96	6.00	389	78 PEAK																																																																																																																							
2	2483.54	31.93	54.00	-22.07	23.70	31.93	7.26	36.96	6.00	389	78 AVERAGE																																																																																																																							
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	2480.00	99.86	-----	-----	91.65	31.92	7.25	36.96	6.00	389	78 PEAK																																																																																																																							
2	2480.00	75.07	-----	-----	66.86	31.92	7.25	36.96	6.00	389	78 AVERAGE																																																																																																																							



		3																																																																																																																																						
Mode		Harmonic																																																																																																																																						
		2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg																																																																																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>3472.50</td> <td>49.57</td> <td>84.39</td> <td>-34.62</td> <td>73.77</td> <td>32.74</td> <td>8.61</td> <td>65.55</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4960.50</td> <td>48.98</td> <td>74.00</td> <td>-25.02</td> <td>70.09</td> <td>33.00</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>41.65</td> <td>74.00</td> <td>-32.35</td> <td>60.08</td> <td>35.60</td> <td>12.78</td> <td>66.81</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3472.50	49.57	84.39	-34.62	73.77	32.74	8.61	65.55	0.00	--	PEAK	2	4960.50	48.98	74.00	-25.02	70.09	33.00	10.40	65.31	0.00	--	Peak	3	7440.00	41.65	74.00	-32.35	60.08	35.60	12.78	66.81	0.00	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>3472.50</td> <td>46.17</td> <td>79.86</td> <td>-33.69</td> <td>70.37</td> <td>32.74</td> <td>8.61</td> <td>65.55</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4960.50</td> <td>47.06</td> <td>74.00</td> <td>-26.94</td> <td>68.17</td> <td>33.00</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>40.60</td> <td>74.00</td> <td>-33.32</td> <td>59.11</td> <td>35.60</td> <td>12.78</td> <td>66.81</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3472.50	46.17	79.86	-33.69	70.37	32.74	8.61	65.55	0.00	--	PEAK	2	4960.50	47.06	74.00	-26.94	68.17	33.00	10.40	65.31	0.00	--	PEAK	3	7440.00	40.60	74.00	-33.32	59.11	35.60	12.78	66.81	0.00	--
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3472.50	49.57	84.39	-34.62	73.77	32.74	8.61	65.55	0.00	--	PEAK																																																																																																																													
2	4960.50	48.98	74.00	-25.02	70.09	33.00	10.40	65.31	0.00	--	Peak																																																																																																																													
3	7440.00	41.65	74.00	-32.35	60.08	35.60	12.78	66.81	0.00	--	Peak																																																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3472.50	46.17	79.86	-33.69	70.37	32.74	8.61	65.55	0.00	--	PEAK																																																																																																																													
2	4960.50	47.06	74.00	-26.94	68.17	33.00	10.40	65.31	0.00	--	PEAK																																																																																																																													
3	7440.00	40.60	74.00	-33.32	59.11	35.60	12.78	66.81	0.00	--	Peak																																																																																																																													

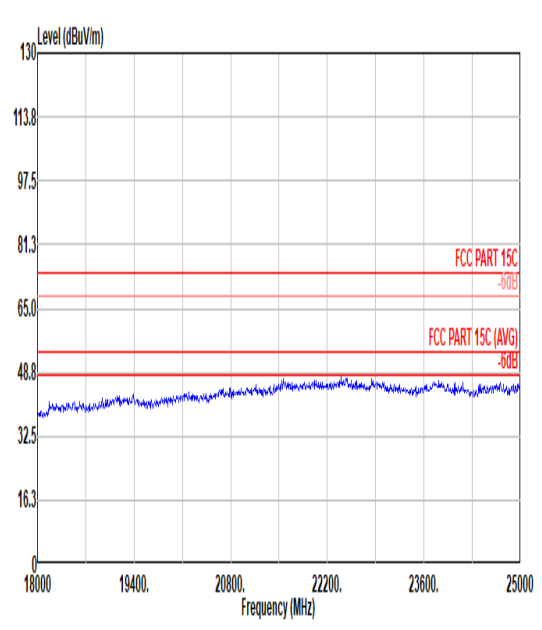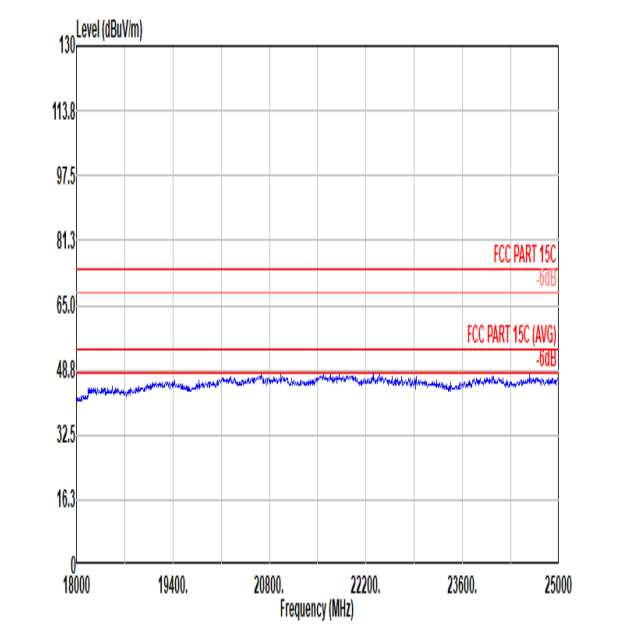

Mode	3	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
Pol.	Horizontal	Vertical
Peak Avg		




Mode	3																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.91</td> <td>20.11</td> <td>-19.89</td> <td>40.00</td> <td>29.23</td> <td>23.06</td> <td>0.76</td> <td>32.94</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>175.50</td> <td>21.73</td> <td>-21.77</td> <td>43.50</td> <td>36.65</td> <td>15.91</td> <td>2.00</td> <td>32.83</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>3</td> <td>484.93</td> <td>36.09</td> <td>-9.91</td> <td>46.00</td> <td>42.41</td> <td>23.28</td> <td>3.36</td> <td>32.96</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>4</td> <td>624.61</td> <td>32.59</td> <td>-13.41</td> <td>46.00</td> <td>36.71</td> <td>25.08</td> <td>3.81</td> <td>33.01</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>5</td> <td>749.74</td> <td>36.61</td> <td>-9.39</td> <td>46.00</td> <td>39.38</td> <td>25.83</td> <td>4.19</td> <td>32.79</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>6</td> <td>874.87</td> <td>33.89</td> <td>-12.11</td> <td>46.00</td> <td>34.84</td> <td>26.63</td> <td>4.52</td> <td>32.10</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	Pol/Phas	1	32.91	20.11	-19.89	40.00	29.23	23.06	0.76	32.94	---	---	Peak HORIZONTAL	2	175.50	21.73	-21.77	43.50	36.65	15.91	2.00	32.83	---	---	Peak HORIZONTAL	3	484.93	36.09	-9.91	46.00	42.41	23.28	3.36	32.96	---	---	Peak HORIZONTAL	4	624.61	32.59	-13.41	46.00	36.71	25.08	3.81	33.01	---	---	Peak HORIZONTAL	5	749.74	36.61	-9.39	46.00	39.38	25.83	4.19	32.79	---	---	Peak HORIZONTAL	6	874.87	33.89	-12.11	46.00	34.84	26.63	4.52	32.10	---	---	Peak HORIZONTAL	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>57.16</td> <td>25.51</td> <td>-14.49</td> <td>40.00</td> <td>44.20</td> <td>13.10</td> <td>1.12</td> <td>32.91</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>250.19</td> <td>21.00</td> <td>-25.00</td> <td>46.00</td> <td>32.93</td> <td>18.42</td> <td>2.42</td> <td>32.77</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>3</td> <td>352.04</td> <td>31.31</td> <td>-14.69</td> <td>46.00</td> <td>40.90</td> <td>20.48</td> <td>2.86</td> <td>32.93</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>4</td> <td>624.61</td> <td>30.11</td> <td>-15.89</td> <td>46.00</td> <td>34.23</td> <td>25.08</td> <td>3.81</td> <td>33.01</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>5</td> <td>749.74</td> <td>33.70</td> <td>-12.30</td> <td>46.00</td> <td>36.47</td> <td>25.83</td> <td>4.19</td> <td>32.79</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>6</td> <td>913.67</td> <td>33.13</td> <td>-12.87</td> <td>46.00</td> <td>33.37</td> <td>26.91</td> <td>4.62</td> <td>31.77</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	Pol/Phas	1	57.16	25.51	-14.49	40.00	44.20	13.10	1.12	32.91	---	---	Peak VERTICAL	2	250.19	21.00	-25.00	46.00	32.93	18.42	2.42	32.77	---	---	Peak VERTICAL	3	352.04	31.31	-14.69	46.00	40.90	20.48	2.86	32.93	---	---	Peak VERTICAL	4	624.61	30.11	-15.89	46.00	34.23	25.08	3.81	33.01	---	---	Peak VERTICAL	5	749.74	33.70	-12.30	46.00	36.47	25.83	4.19	32.79	---	---	Peak VERTICAL	6	913.67	33.13	-12.87	46.00	33.37	26.91	4.62	31.77	---	---	Peak VERTICAL
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	Pol/Phas																																																																																																																																																															
1	32.91	20.11	-19.89	40.00	29.23	23.06	0.76	32.94	---	---	Peak HORIZONTAL																																																																																																																																																															
2	175.50	21.73	-21.77	43.50	36.65	15.91	2.00	32.83	---	---	Peak HORIZONTAL																																																																																																																																																															
3	484.93	36.09	-9.91	46.00	42.41	23.28	3.36	32.96	---	---	Peak HORIZONTAL																																																																																																																																																															
4	624.61	32.59	-13.41	46.00	36.71	25.08	3.81	33.01	---	---	Peak HORIZONTAL																																																																																																																																																															
5	749.74	36.61	-9.39	46.00	39.38	25.83	4.19	32.79	---	---	Peak HORIZONTAL																																																																																																																																																															
6	874.87	33.89	-12.11	46.00	34.84	26.63	4.52	32.10	---	---	Peak HORIZONTAL																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	Pol/Phas																																																																																																																																																															
1	57.16	25.51	-14.49	40.00	44.20	13.10	1.12	32.91	---	---	Peak VERTICAL																																																																																																																																																															
2	250.19	21.00	-25.00	46.00	32.93	18.42	2.42	32.77	---	---	Peak VERTICAL																																																																																																																																																															
3	352.04	31.31	-14.69	46.00	40.90	20.48	2.86	32.93	---	---	Peak VERTICAL																																																																																																																																																															
4	624.61	30.11	-15.89	46.00	34.23	25.08	3.81	33.01	---	---	Peak VERTICAL																																																																																																																																																															
5	749.74	33.70	-12.30	46.00	36.47	25.83	4.19	32.79	---	---	Peak VERTICAL																																																																																																																																																															
6	913.67	33.13	-12.87	46.00	33.37	26.91	4.62	31.77	---	---	Peak VERTICAL																																																																																																																																																															



Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot

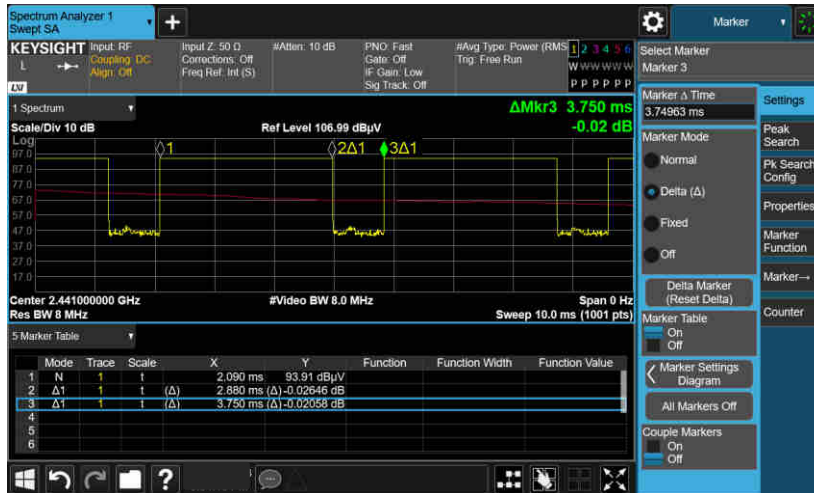

DH5 on time (Count Pulses) Plot on Channel 00



Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.