



FCC RF Test Report

APPLICANT : Quetcel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi Module
BRAND NAME : QUECTEL
MODEL NAME : FCU741R
FCC ID : XMR2023FCU741R
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jul. 03, 2023 ~ Aug. 04, 2023

We, Sporton International Inc. (Kunshan) , would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement..... 24

 3.6 Antenna Requirements 26

4 LIST OF MEASURING EQUIPMENT 27

5 MEASUREMENT UNCERTAINTY 28

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.03 dB at 5728.04 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 10.58 dB at 0.151 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233,China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233,China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi Module
Brand Name	QUECTEL
Model Name	FCU741R
FCC ID	XMR2023FCU741R
SN	Conducted: E1M23E110000048 Conduction: E1M23E110000035 Radiation: E1M23E110000045
HW Version	R1.0
SW Version	NA
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	SISO <Ant. 6> <5180 MHz ~ 5240 MHz> 802.11a : 18.94 dBm / 0.0783 W 802.11n HT20 : 18.52 dBm / 0.0711 W 802.11n HT40 : 19.05 dBm / 0.0804 W <5260 MHz ~ 5320 MHz> 802.11a : 18.76 dBm / 0.0752 W 802.11n HT20 : 18.32 dBm / 0.0679 W 802.11n HT40 : 18.99 dBm / 0.0793 W <5500 MHz ~ 5700 MHz > 802.11a : 19.00 dBm / 0.0794 W 802.11n HT20 : 18.40 dBm / 0.0692 W 802.11n HT40 : 19.16 dBm / 0.0824W <5745 MHz ~ 5825 MHz> 802.11a : 19.17 dBm / 0.0826 W 802.11n HT20 : 18.51 dBm / 0.0710 W 802.11n HT40 : 19.12 dBm / 0.0817 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.463 MHz 802.11n HT20 : 18.581 MHz 802.11n HT40 : 36.124 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.383 MHz 802.11n HT20 : 18.342 MHz 802.11n HT40 : 36.204 MHz <5500 MHz ~ 5700 MHz> 802.11a : 17.502 MHz 802.11n HT20 : 18.541 MHz 802.11n HT40 : 36.204 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.862 MHz 802.11n HT20 : 18.541 MHz 802.11n HT40 : 36.124 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> Dipole Antenna with gain 1.14 dBi <5260 MHz ~ 5320 MHz> Dipole Antenna with gain 1.00 dBi <5500 MHz ~ 5700 MHz> Dipole Antenna with gain 0.60 dBi <5745 MHz ~ 5825 MHz> Dipole Antenna with gain 0.95 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
			134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
			165	5825

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
			128	5640

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : WLAN Link(5G) + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performed with Notebook	




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT20	802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT40	802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159

2.3 Connection Diagram of Test System

For AC Conducted Emission:

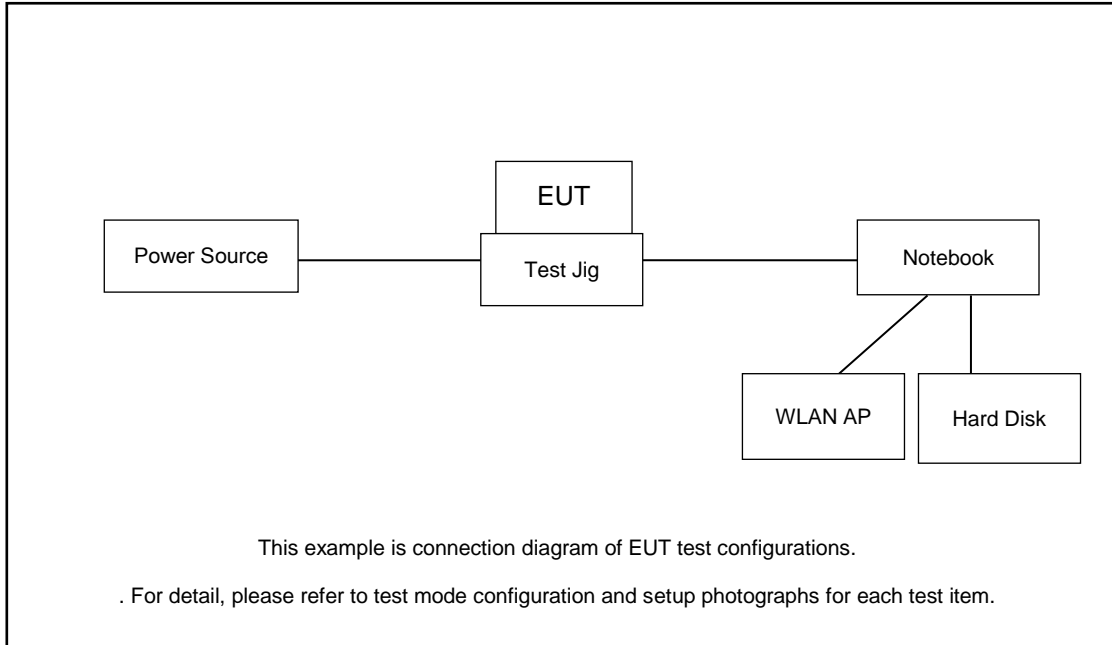

For Radiated Emission:

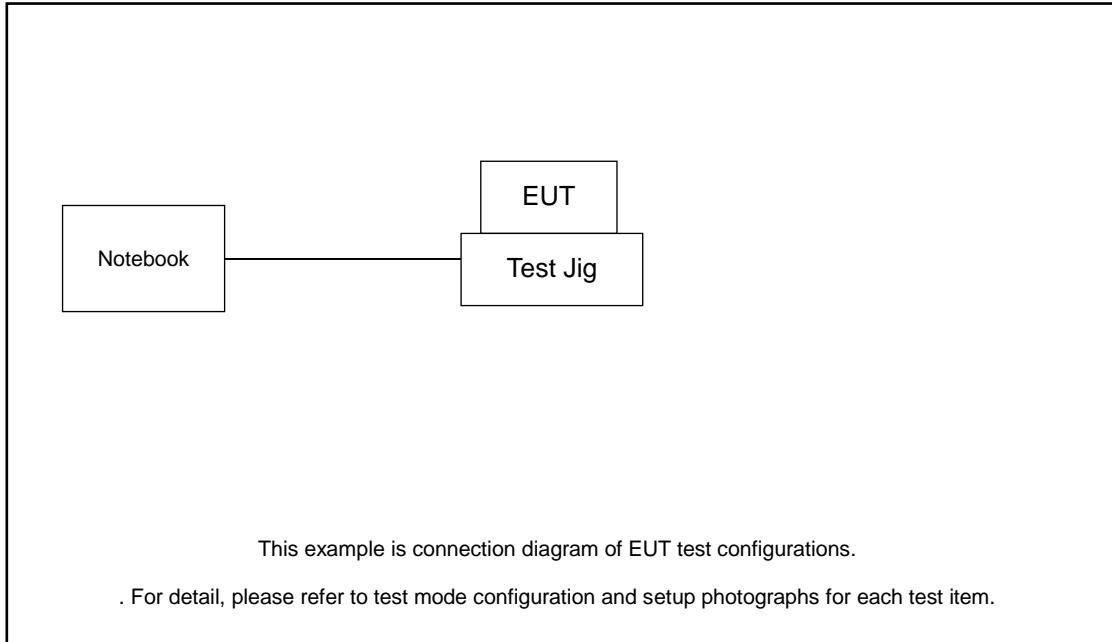

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	AC Adapter	N/A	N/A	N/A	N/A	N/A
6.	USB Cable	N/A	N/A	N/A	N/A	N/A
7.	test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss

$$\text{Offset} = \text{RF cable loss}$$

Following shows an offset computation example with cable loss 7.50dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.50(\text{dB}) \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.

3.1.4 Test Setup

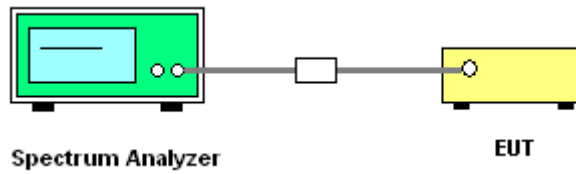

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

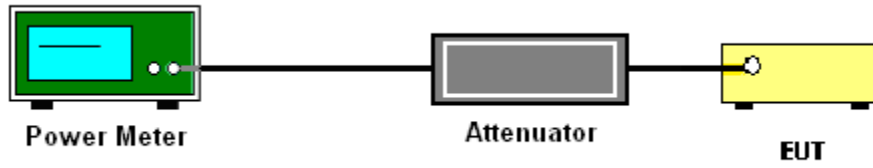

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


For devices operating in the band 5.725 - 5.85 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

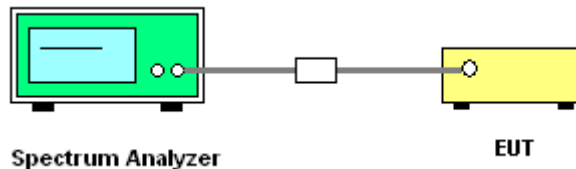

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold



(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq $1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 3 MHz
- Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
- Averaging type = power averaging(RMS)
- The correction factor shall be offset is $10 \log (1/x)$, where x is the duty cycle.

2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be


measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

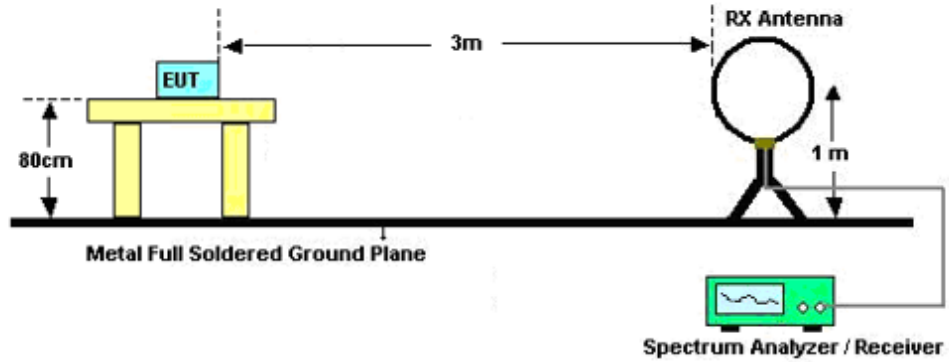

For radiated emissions from 30MHz to 1GHz

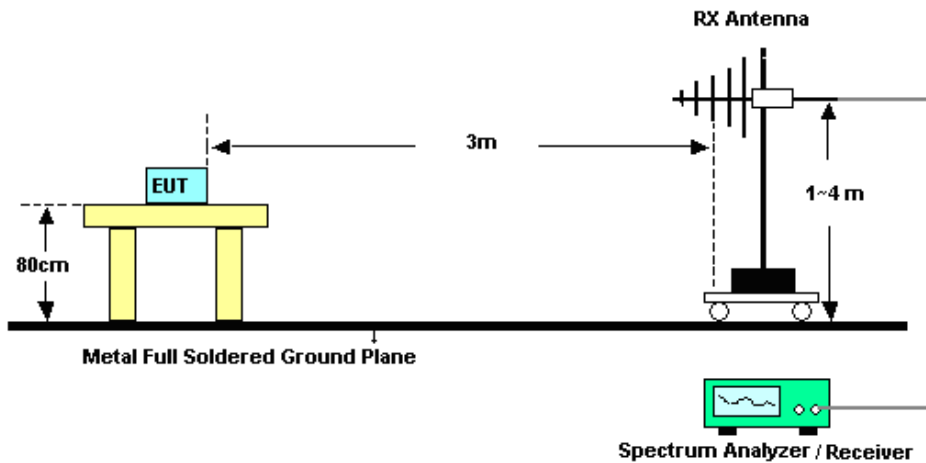

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

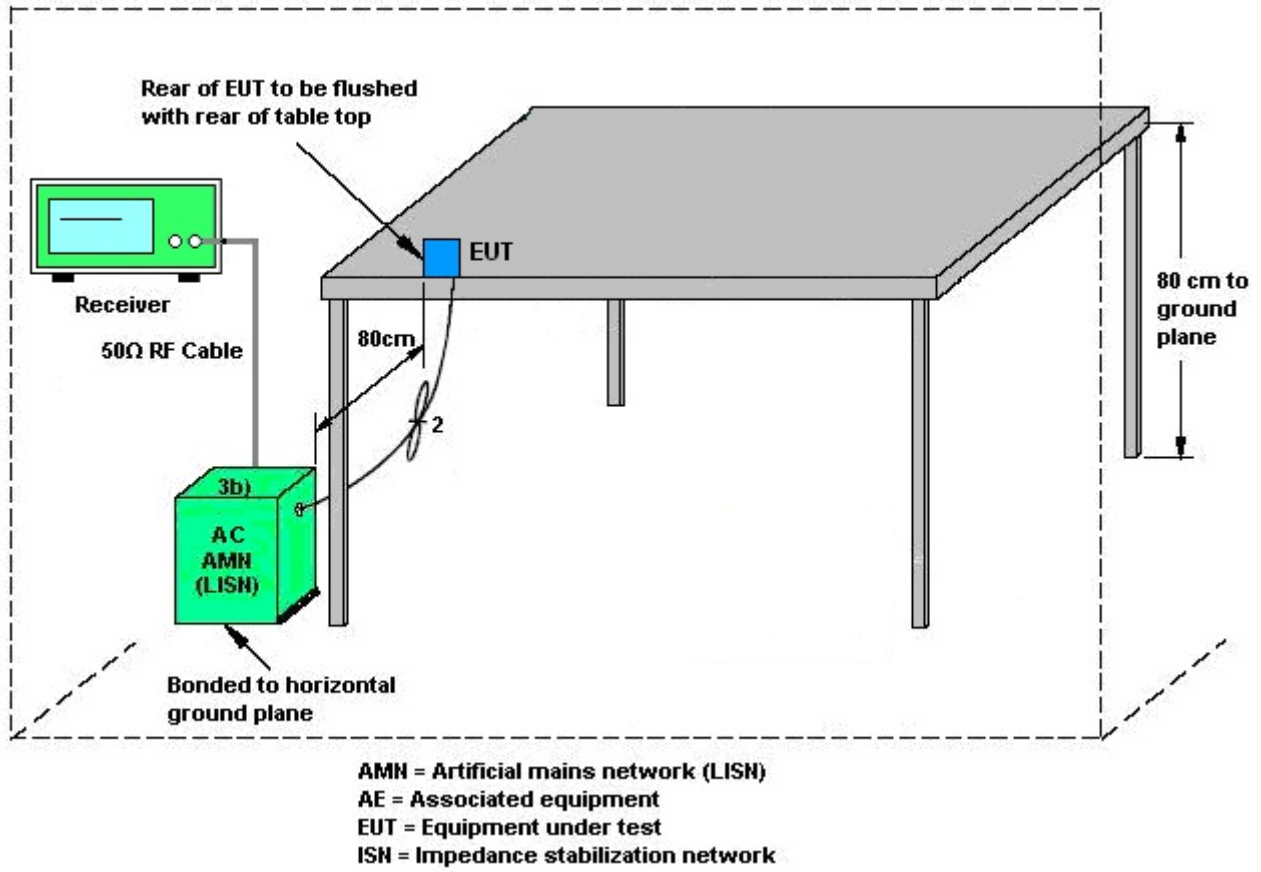

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jul. 05, 2023~ Aug. 04, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Jul. 05, 2023~ Aug. 04, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Jul. 05, 2023~ Aug. 04, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max x 30dBm	Oct. 13, 2022	Jul. 03, 2023~ Jul. 28, 2023	Oct. 12, 2023	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	May 15, 2023	Jul. 03, 2023~ Jul. 28, 2023	May 14, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jul. 03, 2023~ Jul. 28, 2023	Oct. 15, 2023	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 23, 2022	Jul. 03, 2023~ Jul. 28, 2023	Dec. 22, 2023	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 15, 2022	Jul. 03, 2023~ Jul. 28, 2023	Nov. 14, 2023	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 17, 2022	Jul. 03, 2023~ Jul. 28, 2023	Oct. 16, 2023	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 05, 2023	Jul. 03, 2023~ Jul. 28, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 05, 2023	Jul. 03, 2023~ Jul. 28, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 05, 2023	Jul. 03, 2023~ Jul. 28, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 12, 2022	Jul. 03, 2023~ Jul. 28, 2023	Oct. 11, 2023	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 03, 2023~ Jul. 28, 2023	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 03, 2023~ Jul. 28, 2023	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 03, 2023~ Jul. 28, 2023	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jul. 14, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jul. 14, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jul. 14, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jul. 14, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.88 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jack Fan	Temperature:	21~25	°C
Test Date:	2023/7/05~2023/8/4	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
					Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	36	5180	18.94	24.00	1.14		Pass
11a	6Mbps	1	44	5220	16.79	24.00	1.14		Pass
11a	6Mbps	1	48	5240	16.76	24.00	1.14		Pass
HT20	MCS0	1	36	5180	18.52	24.00	1.14		Pass
HT20	MCS0	1	44	5220	18.48	24.00	1.14		Pass
HT20	MCS0	1	48	5240	17.42	24.00	1.14		Pass
HT40	MCS0	1	38	5190	16.58	24.00	1.14		Pass
HT40	MCS0	1	46	5230	19.05	24.00	1.14		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	52	5260	17.32	23.98	1.00	30.00	Pass
11a	6Mbps	1	60	5300	18.74	23.98	1.00	30.00	Pass
11a	6Mbps	1	64	5320	18.76	23.98	1.00	30.00	Pass
HT20	MCS0	1	52	5260	17.41	23.98	1.00	30.00	Pass
HT20	MCS0	1	60	5300	17.88	23.98	1.00	30.00	Pass
HT20	MCS0	1	64	5320	18.32	23.98	1.00	30.00	Pass
HT40	MCS0	1	54	5270	18.99	23.98	1.00	30.00	Pass
HT40	MCS0	1	62	5310	16.51	23.98	1.00	30.00	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	100	5500	19.00	23.98	0.60	30.00	Pass
11a	6Mbps	1	116	5580	18.35	23.98	0.60	30.00	Pass
11a	6Mbps	1	140	5700	17.41	23.98	0.60	30.00	Pass
HT20	MCS0	1	100	5500	18.40	23.98	0.60	30.00	Pass
HT20	MCS0	1	116	5580	17.82	23.98	0.60	30.00	Pass
HT20	MCS0	1	140	5700	17.48	23.98	0.60	30.00	Pass
HT40	MCS0	1	102	5510	18.53	23.98	0.60	30.00	Pass
HT40	MCS0	1	110	5550	19.12	23.98	0.60	30.00	Pass
HT40	MCS0	1	134	5670	19.16	23.98	0.60	30.00	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			Pass/Fail
					Ant 1	Ant 1	SUM	FCC Conducted Power Limit	DG (dBi)	
11a	6Mbps	1	149	5745	0.62	16.52		30.00	0.95	Pass
11a	6Mbps	1	157	5785	0.62	19.09		30.00	0.95	Pass
11a	6Mbps	1	161	5805	0.62	19.17		30.00	0.95	Pass
11a	6Mbps	1	165	5825	0.62	14.80		30.00	0.95	Pass
HT20	MCS0	1	149	5745	0.37	18.48		30.00	0.95	Pass
HT20	MCS0	1	157	5785	0.37	18.51		30.00	0.95	Pass
HT20	MCS0	1	165	5825	0.37	16.86		30.00	0.95	Pass
HT40	MCS0	1	151	5755	1.21	19.07		30.00	0.95	Pass
HT40	MCS0	1	159	5795	1.21	19.12		30.00	0.95	Pass




Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	---	---
11A	Ant1	5180	22.30	5170.00	5192.30	---	---
		5220	19.20	5210.50	5229.70	---	---
		5240	19.20	5230.50	5249.70	---	---
		5260	19.10	5250.40	5269.50	---	---
		5300	21.20	5288.70	5309.90	---	---
		5320	20.50	5310.20	5330.70	---	---
		5500	23.50	5488.20	5511.70	---	---
		5580	22.20	5568.00	5590.20	---	---
		5700	19.80	5690.20	5710.00	---	---
		5745	19.60	5735.30	5754.90	---	---
		5785	19.20	5775.40	5794.60	---	---
		5805	23.90	5793.10	5817.00	---	---
		5825	19.30	5815.50	5834.80	---	---
11N20SISO	Ant1	5180	23.50	5168.80	5192.30	---	---
		5220	23.60	5209.00	5232.60	---	---
		5240	20.30	5229.80	5250.10	---	---
		5260	20.10	5249.90	5270.00	---	---
		5300	20.30	5289.90	5310.20	---	---
		5320	21.20	5310.20	5331.40	---	---
		5500	24.60	5488.40	5513.00	---	---
		5580	20.60	5569.70	5590.30	---	---
		5700	20.30	5690.10	5710.40	---	---
		5745	22.30	5733.90	5756.20	---	---
		5785	24.00	5773.20	5797.20	---	---
5825	19.90	5815.10	5835.00	---	---		
11N40SISO	Ant1	5190	38.20	5171.00	5209.20	---	---
		5230	51.80	5208.00	5259.80	---	---
		5270	48.80	5248.80	5297.60	---	---
		5310	38.20	5291.00	5329.20	---	---
		5510	38.40	5491.00	5529.40	---	---
		5550	39.20	5531.00	5570.20	---	---
		5670	60.40	5637.40	5697.80	---	---
		5755	56.20	5726.60	5782.80	---	---
		5795	60.40	5762.40	5822.80	---	---




Test Graphs

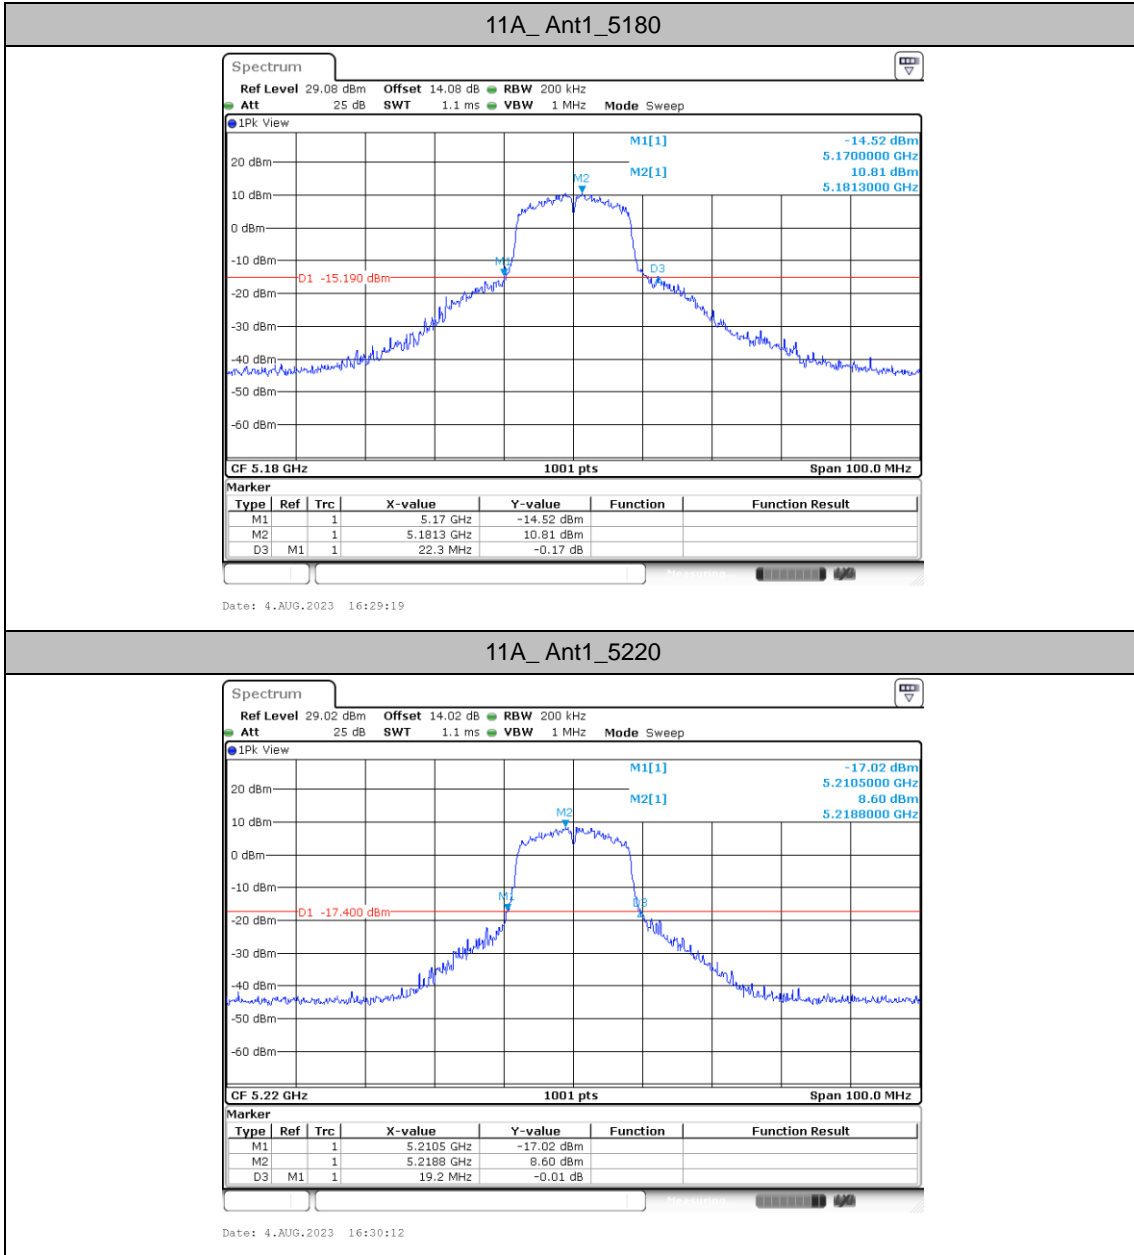




11A_Ant1_5240

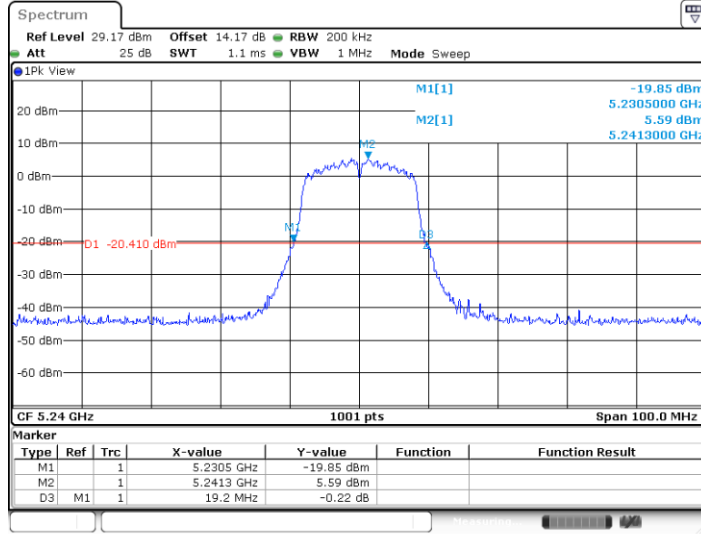

Date: 4.AUG.2023 16:30:39


11A_Ant1_5260

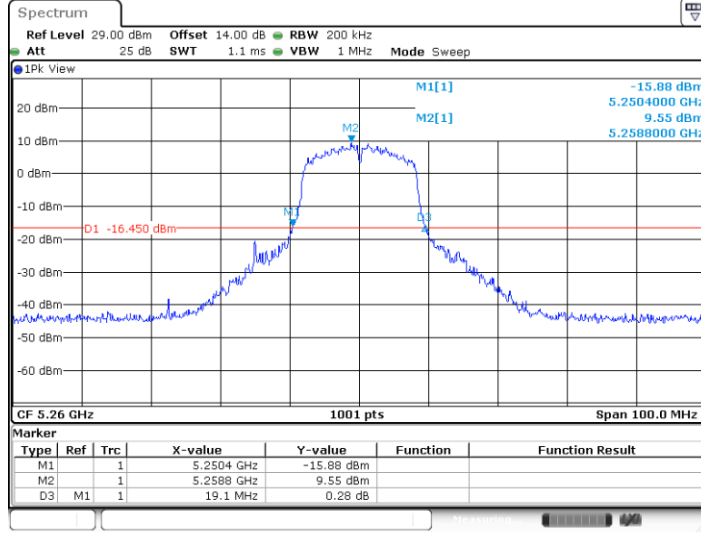


Date: 4.AUG.2023 16:31:15



11A_Ant1_5300

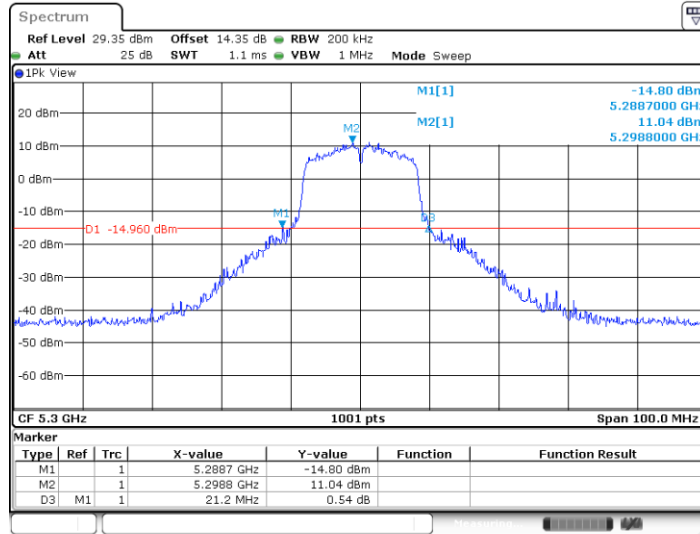


11A_Ant1_5320

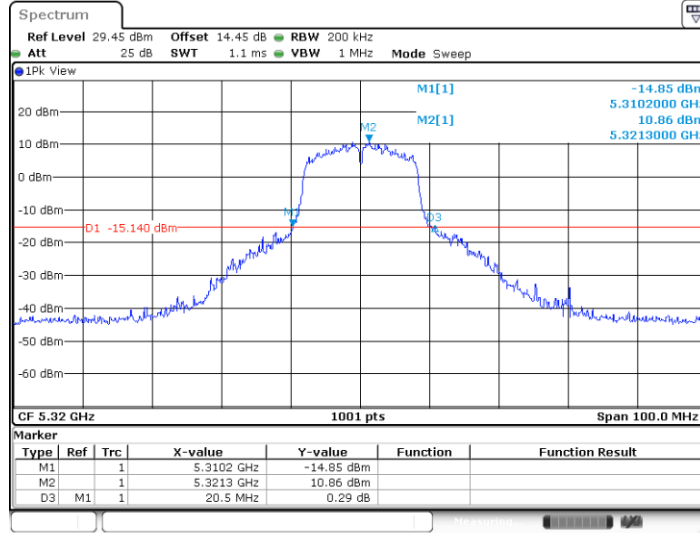




11A_Ant1_5500

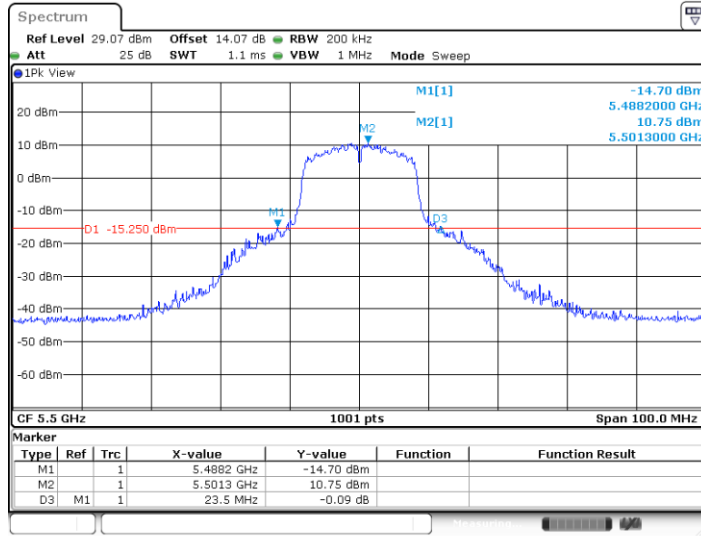


Date: 4.AUG.2023 16:32:50

11A_Ant1_5580

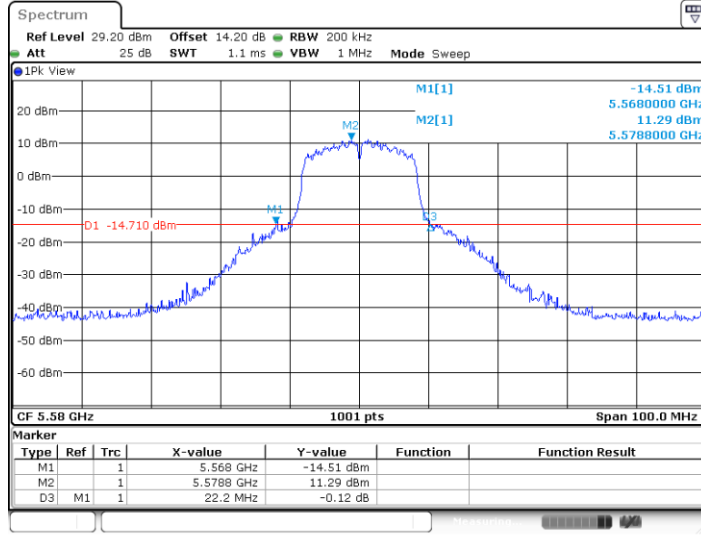


Date: 4.AUG.2023 16:33:23

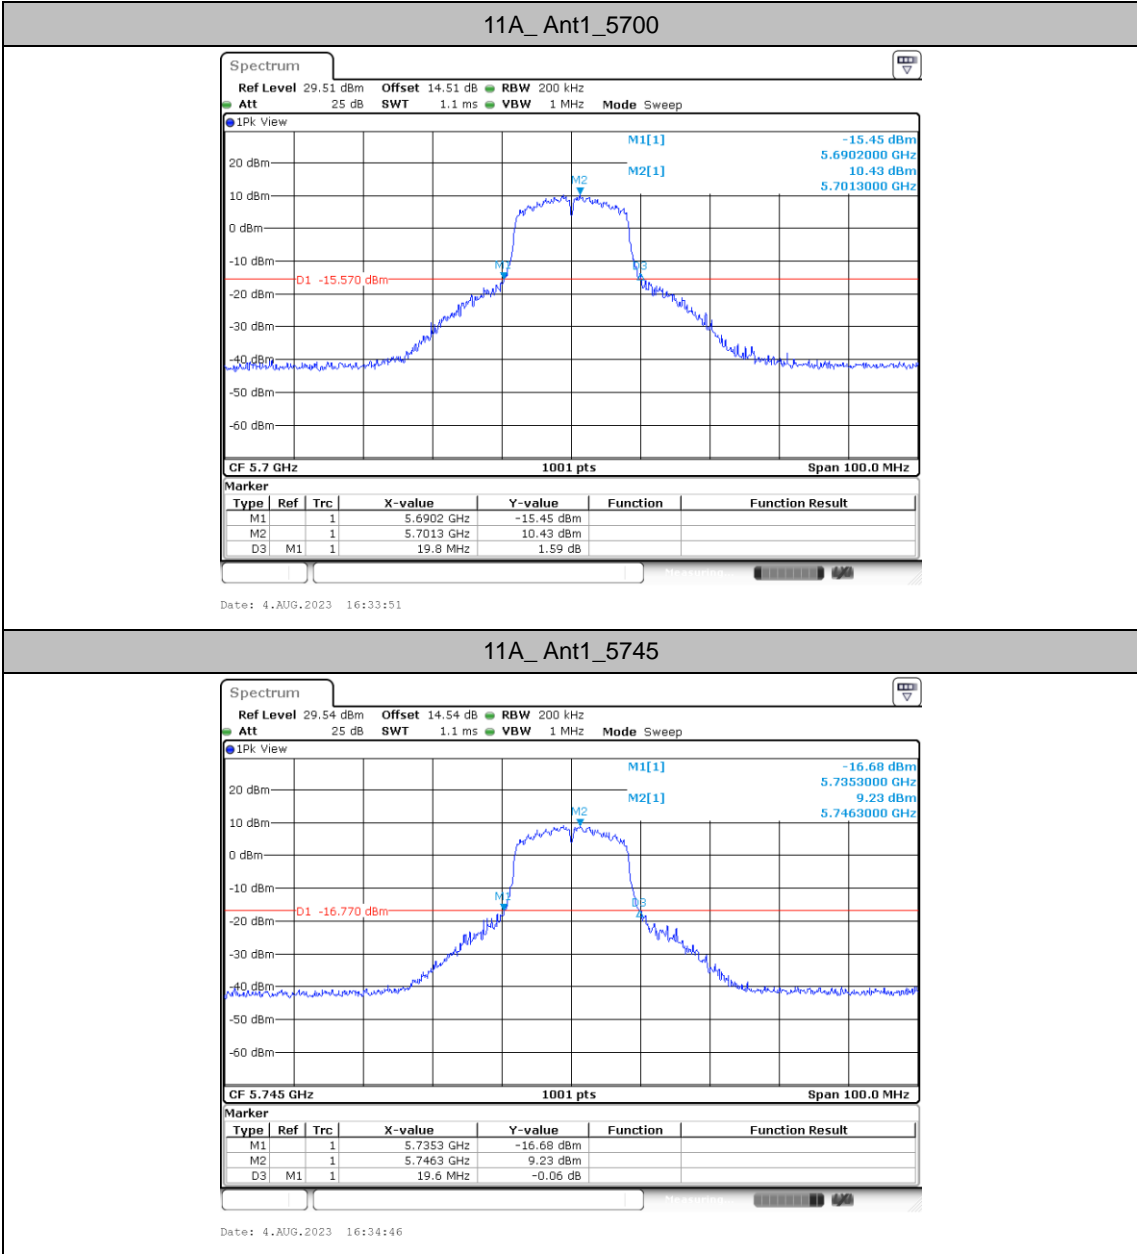




11A_Ant1_5785

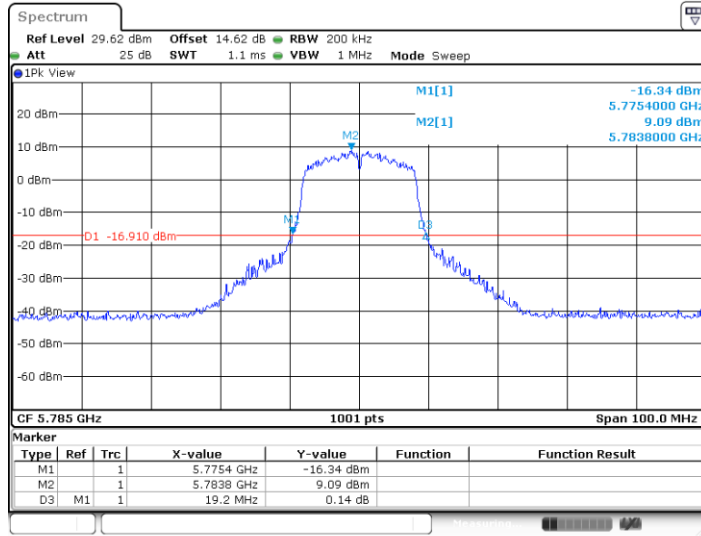


Date: 4.AUG.2023 16:35:15

11A_Ant1_5805

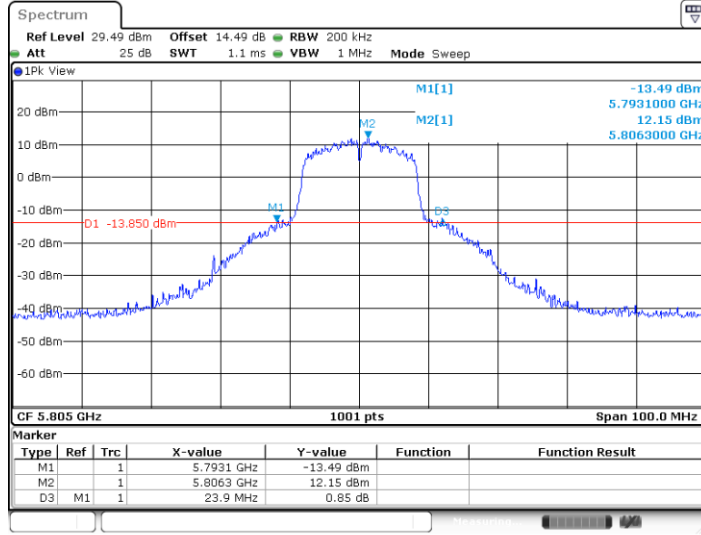


Date: 4.AUG.2023 16:35:50

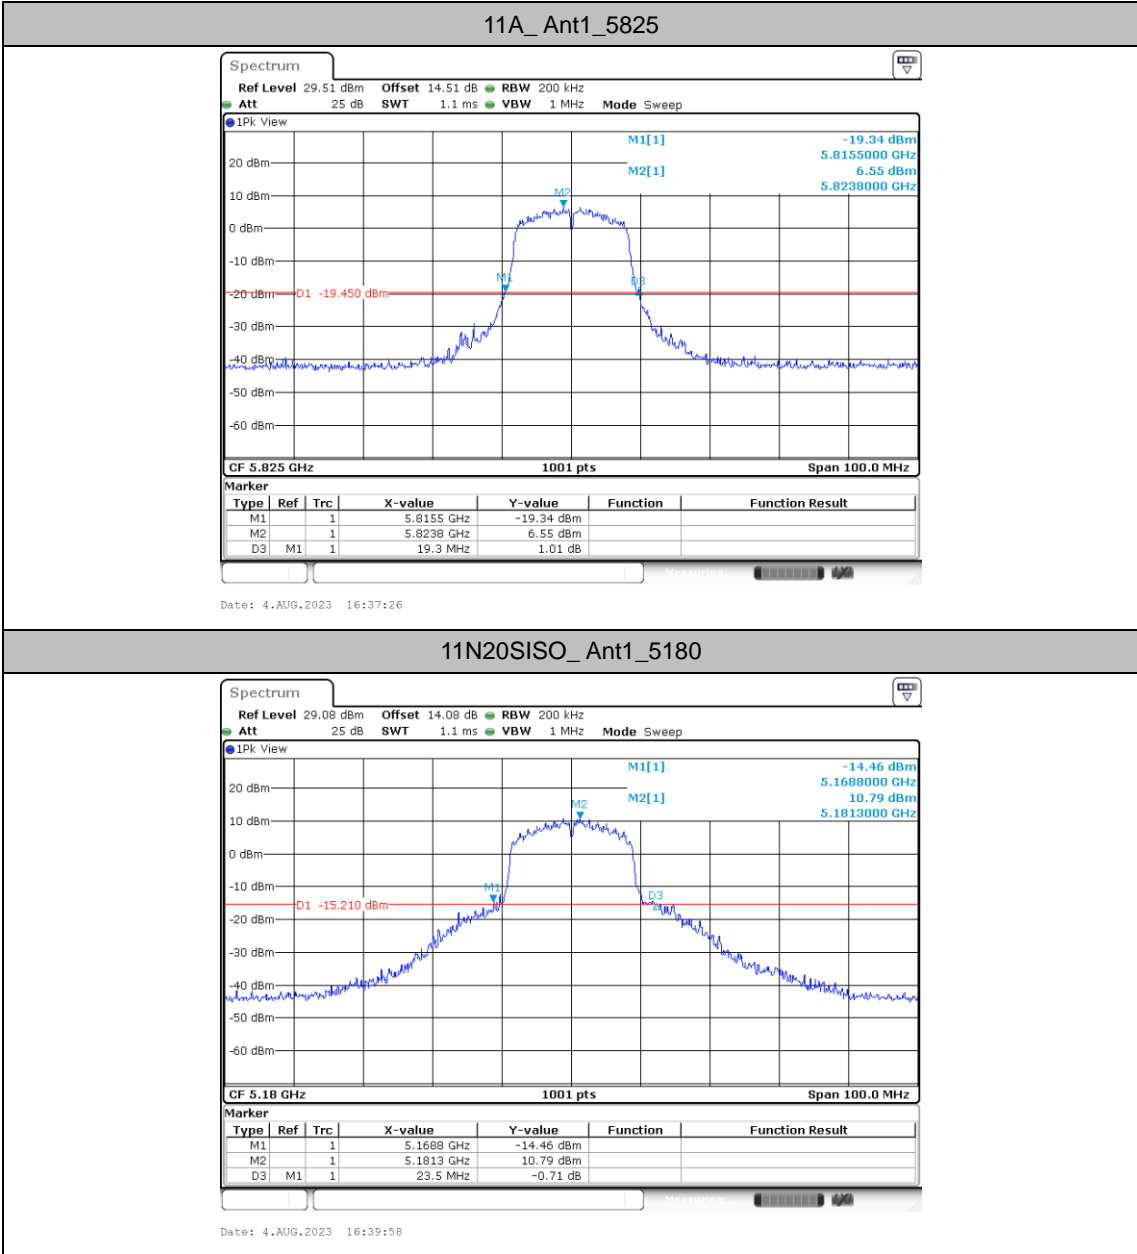




11N20SISO_Ant1_5220

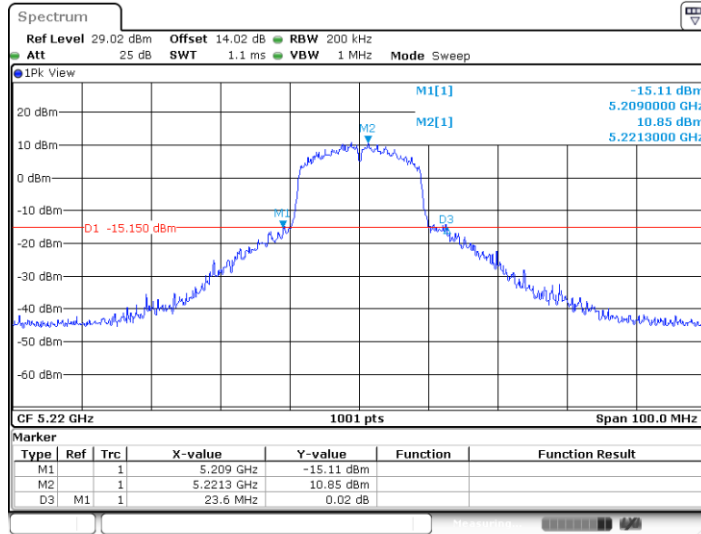

Date: 4.AUG.2023 16:40:31


11N20SISO_Ant1_5240

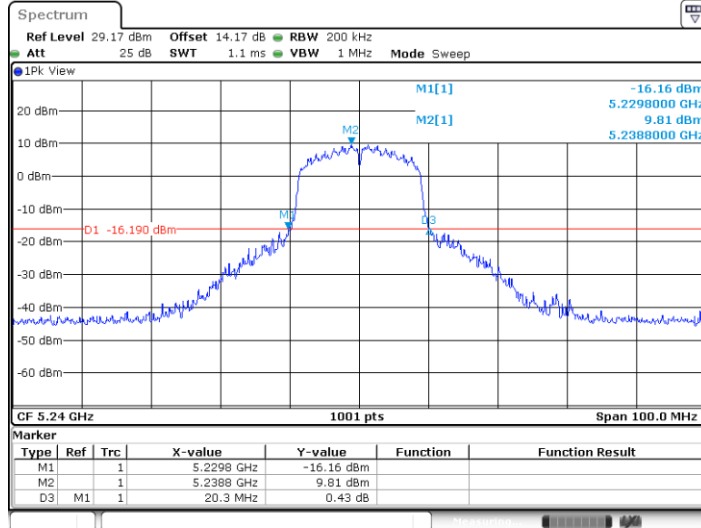

Date: 4.AUG.2023 16:40:58




11N20SISO_Ant1_5260

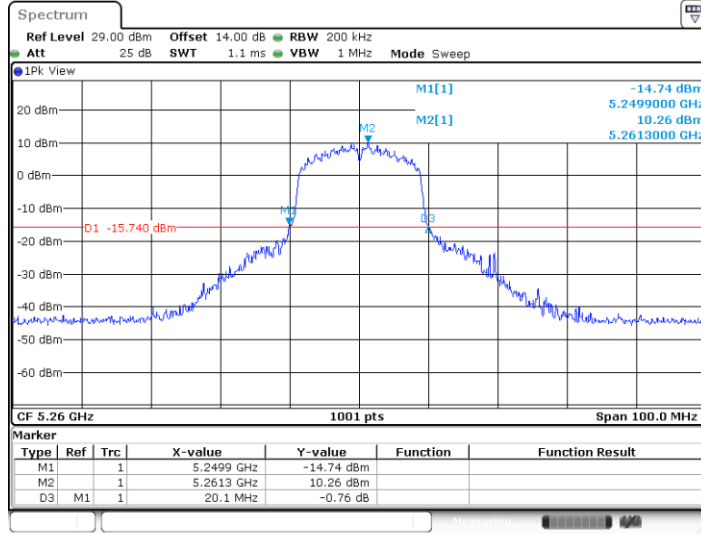

Date: 4.AUG.2023 16:41:32


11N20SISO_Ant1_5300

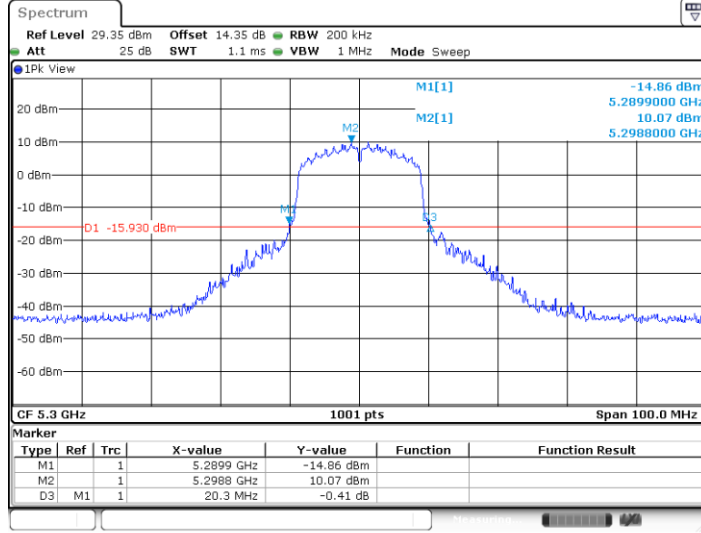

Date: 4.AUG.2023 16:41:55




11N20SISO_Ant1_5320

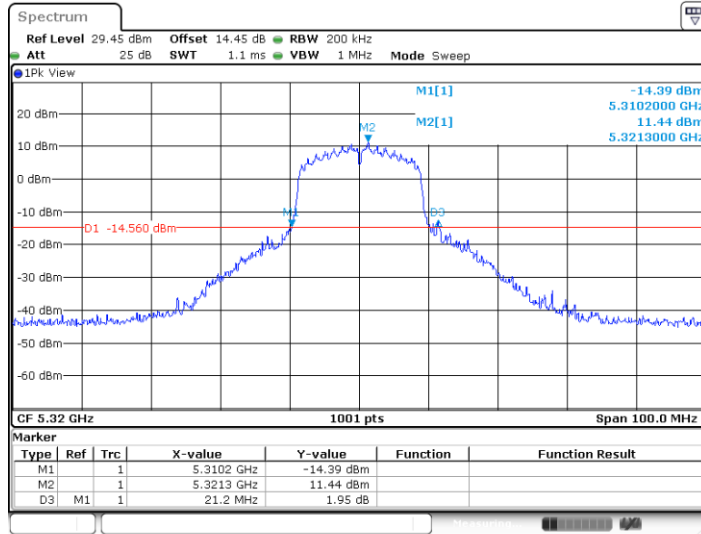

Date: 4.AUG.2023 16:42:20


11N20SISO_Ant1_5500

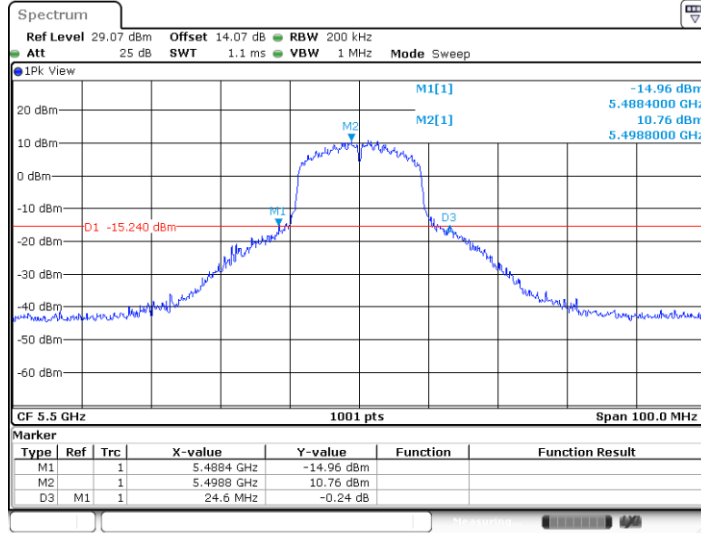

Date: 4.AUG.2023 16:42:45




11N20SISO_Ant1_5580

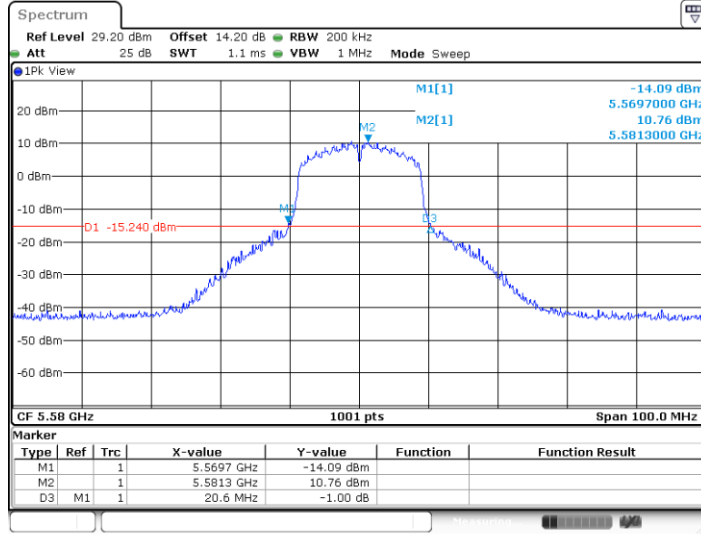


Date: 4.AUG.2023 16:43:17

11N20SISO_Ant1_5700

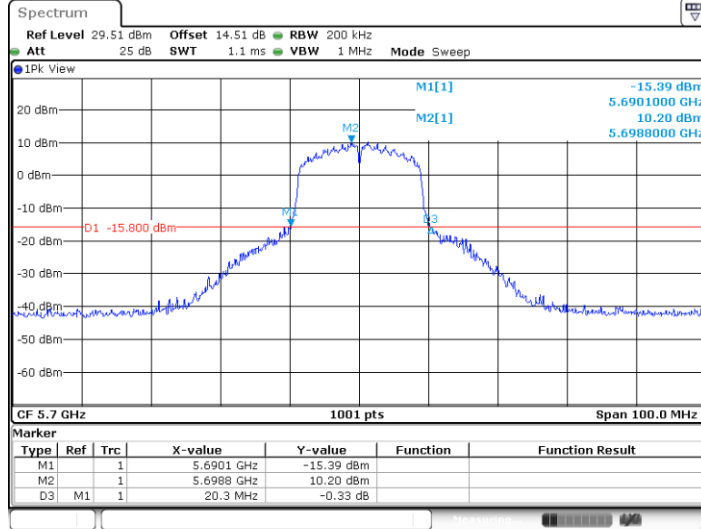


Date: 4.AUG.2023 16:43:51

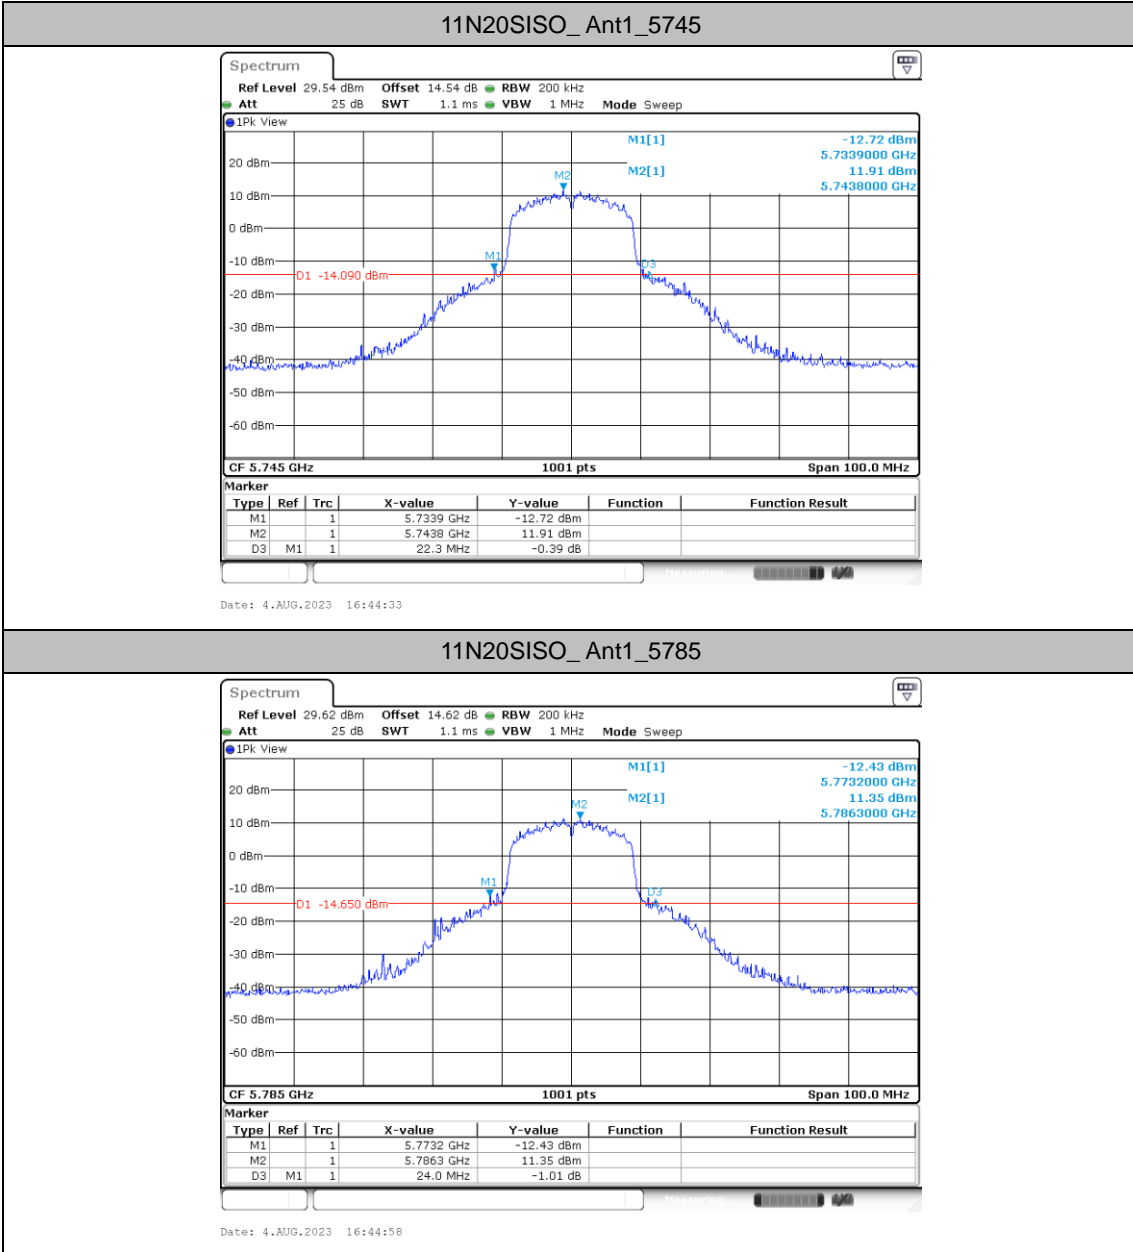




11N20SISO_Ant1_5825

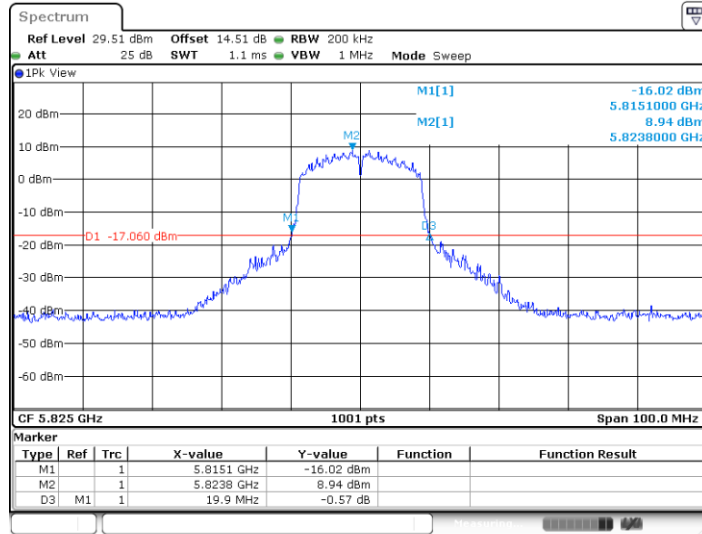

Date: 4.AUG.2023 16:45:23


11N40SISO_Ant1_5190

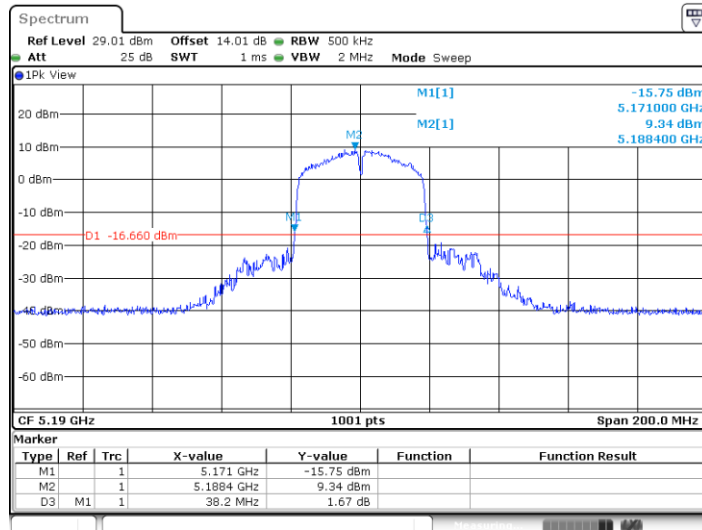


Date: 4.AUG.2023 16:46:03



11N40SISO_Ant1_5230

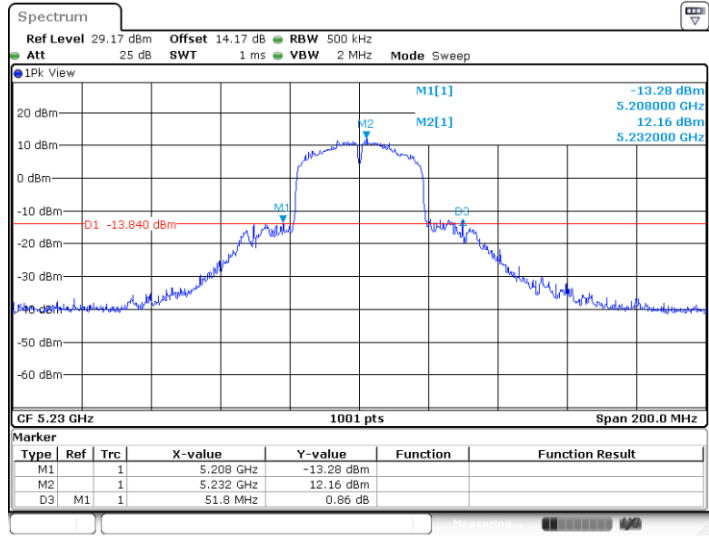


11N40SISO_Ant1_5270

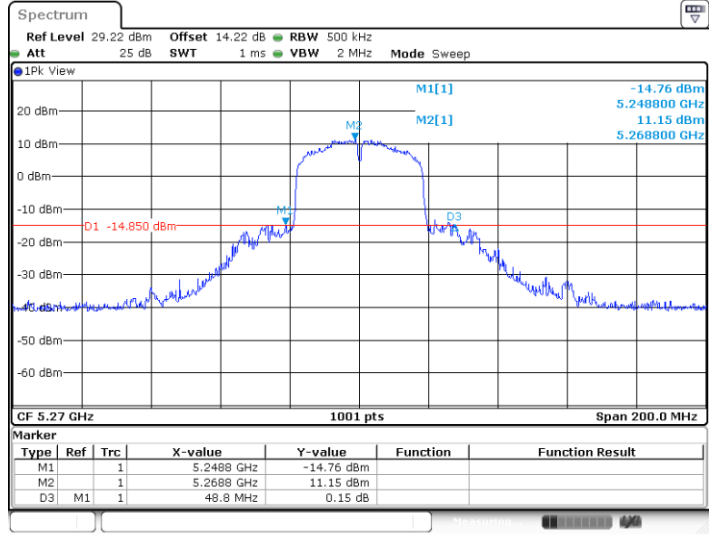




11N40SISO_Ant1_5310

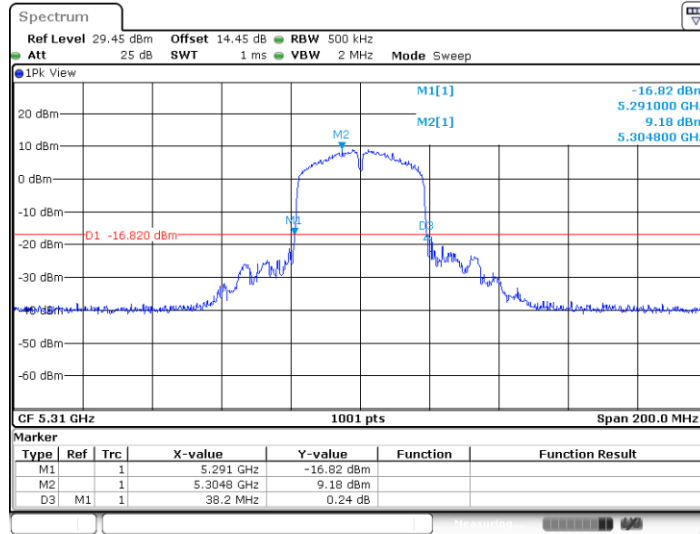


11N40SISO_Ant1_5510

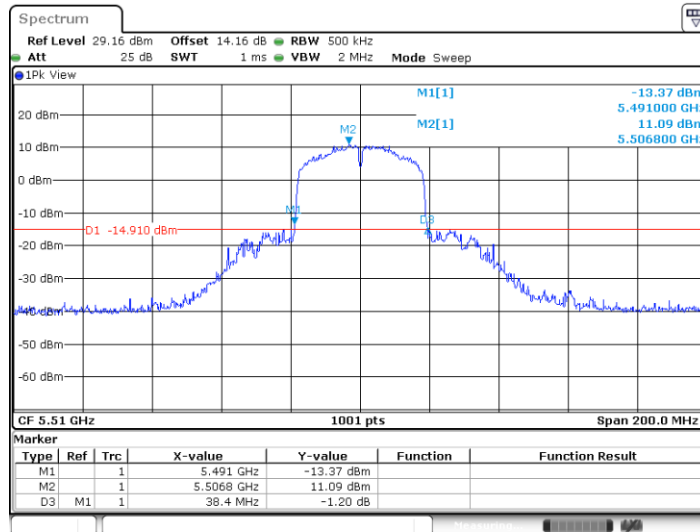




11N40SISO_Ant1_5550

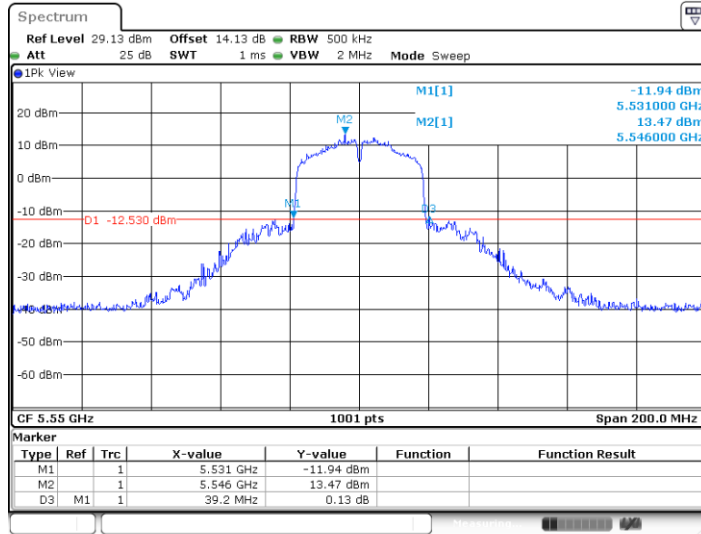


11N40SISO_Ant1_5670

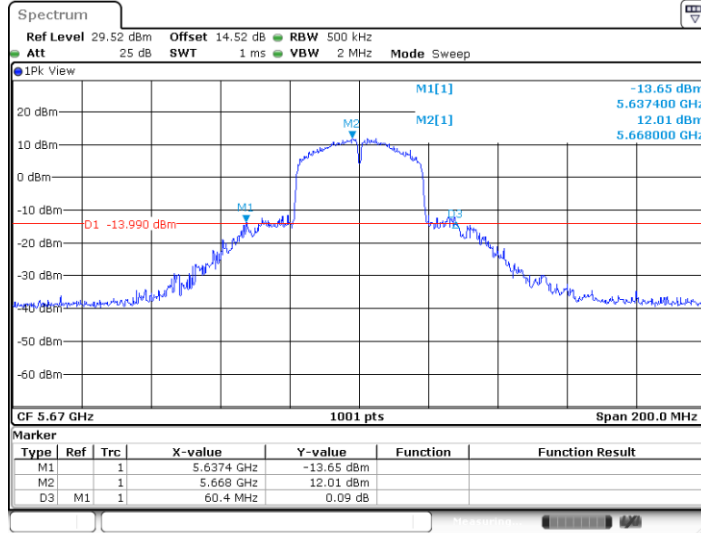




11N40SISO_Ant1_5755

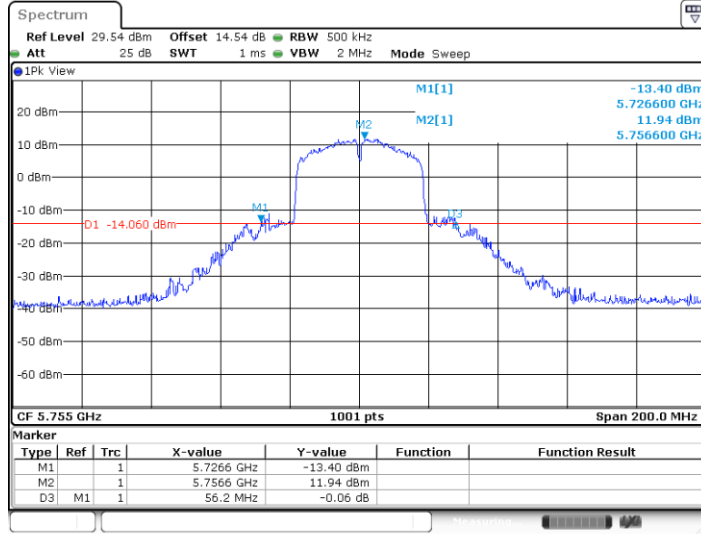

Date: 4.AUG.2023 16:49:45

11N40SISO_Ant1_5795

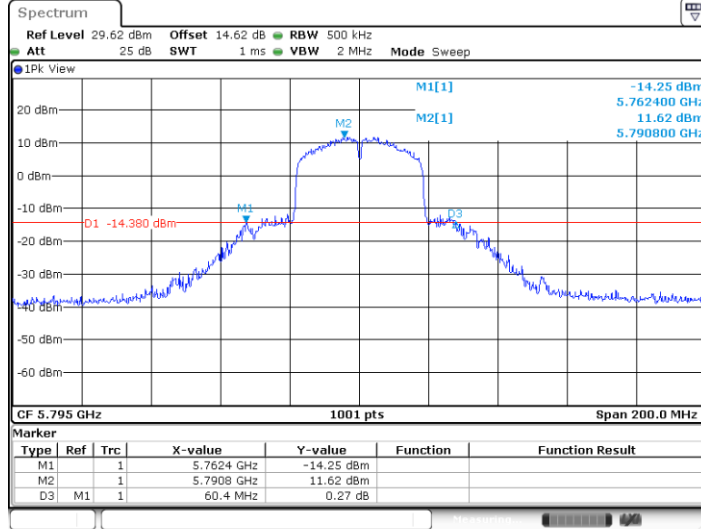

Date: 4.AUG.2023 16:50:17




Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.463	5171.3287	5188.7912	---	---
		5220	17.463	5211.2887	5228.7512	---	---
		5240	17.383	5231.3287	5248.7113	---	---
		5260	17.383	5251.3287	5268.7113	---	---
		5300	17.303	5291.3686	5308.6713	---	---
		5320	17.383	5311.3287	5328.7113	---	---
		5500	17.423	5491.3287	5508.7512	---	---
		5580	17.502	5571.2488	5588.7512	---	---
		5700	17.502	5691.2488	5708.7512	---	---
		5745	17.423	5736.3287	5753.7512	---	---
		5785	17.423	5776.2887	5793.7113	---	---
		5805	17.862	5796.1688	5814.0310	---	---
5825	17.502	5816.2488	5833.7512	---	---		
11N20SISO	Ant1	5180	18.581	5170.7692	5189.3506	---	---
		5220	18.422	5210.8092	5229.2308	---	---
		5240	18.422	5230.8092	5249.2308	---	---
		5260	18.302	5250.8891	5269.1908	---	---
		5300	18.302	5290.8492	5309.1508	---	---
		5320	18.342	5310.8492	5329.1908	---	---
		5500	18.382	5490.8492	5509.2308	---	---
		5580	18.382	5570.8092	5589.1908	---	---
		5700	18.541	5690.7293	5709.2707	---	---
		5745	18.422	5735.8492	5754.2707	---	---
		5785	18.541	5775.7293	5794.2707	---	---
		5825	18.462	5815.7692	5834.2308	---	---
11N40SISO	Ant1	5190	36.124	5172.0180	5208.1419	---	---
		5230	36.124	5211.9381	5248.0619	---	---
		5270	36.044	5252.0180	5288.0619	---	---
		5310	36.204	5291.9381	5328.1419	---	---
		5510	35.964	5492.0180	5527.9820	---	---
		5550	35.964	5532.0180	5567.9820	---	---
		5670	36.204	5651.8581	5688.0619	---	---
		5755	36.044	5737.0180	5773.0619	---	---
5795	36.124	5776.9381	5813.0619	---	---		




Test Graphs

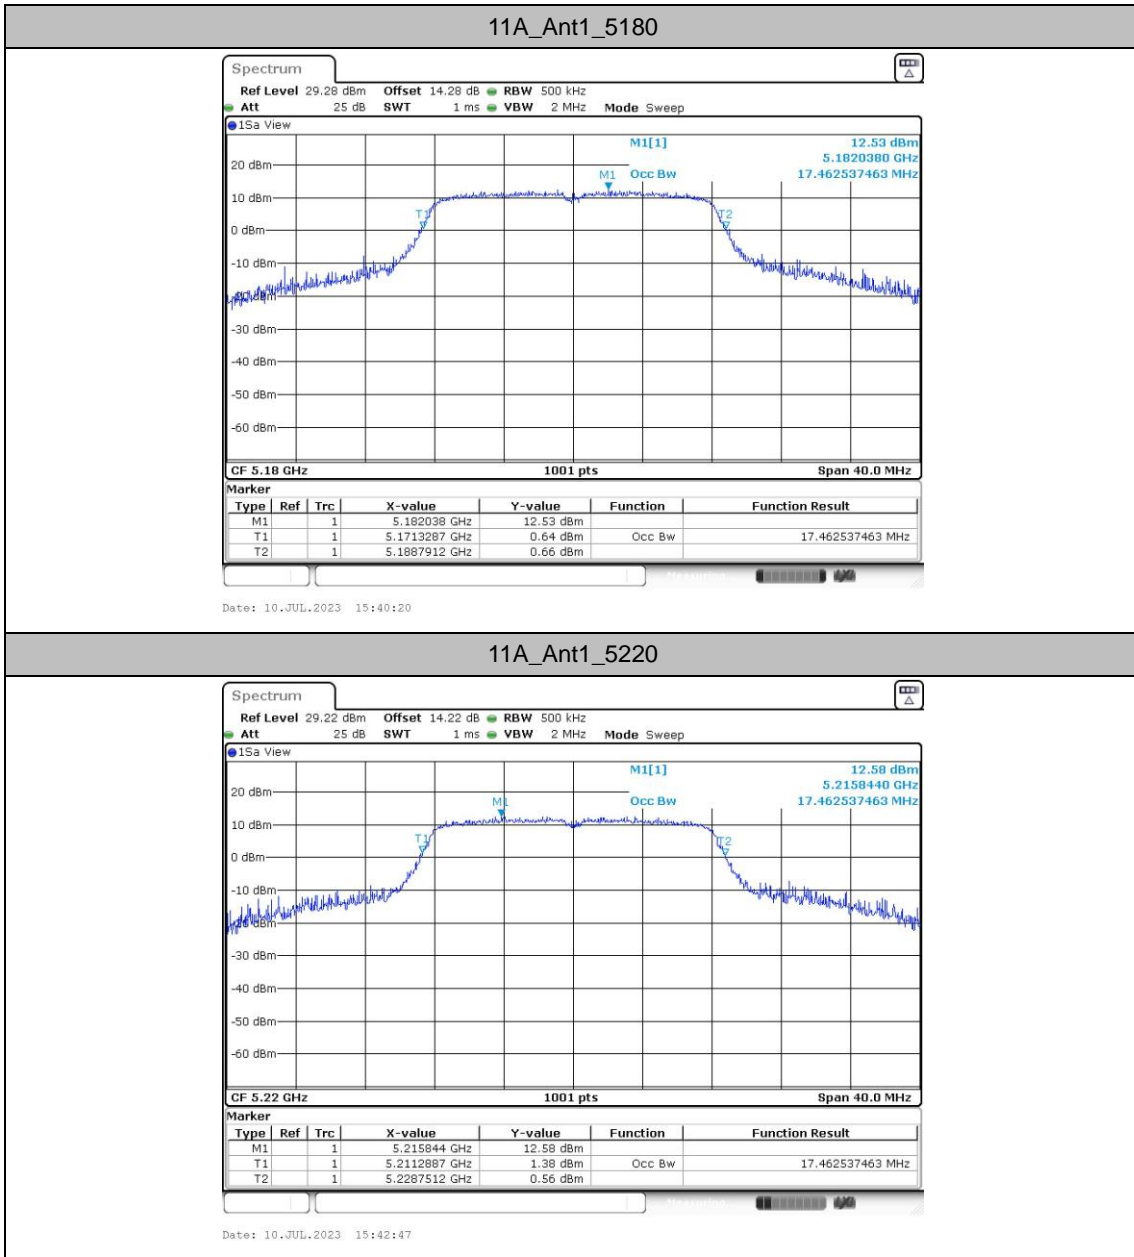




11A_Ant1_5240

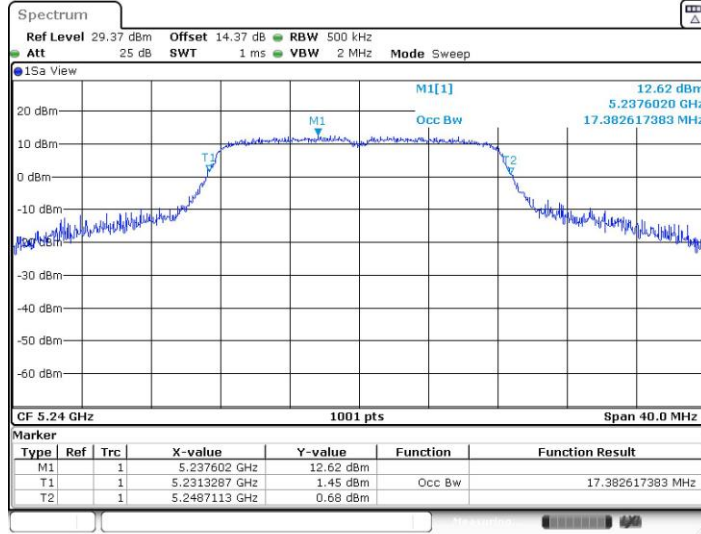

Date: 10.JUL.2023 15:43:30


11A_Ant1_5260

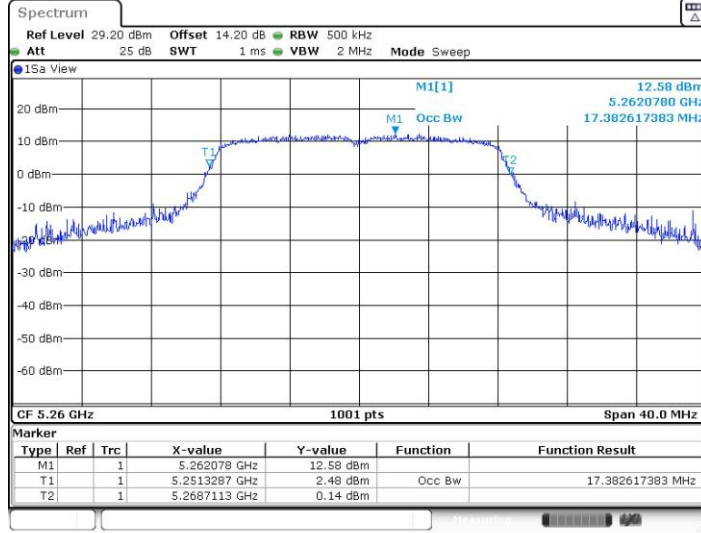

Date: 10.JUL.2023 15:44:20




11A_Ant1_5300

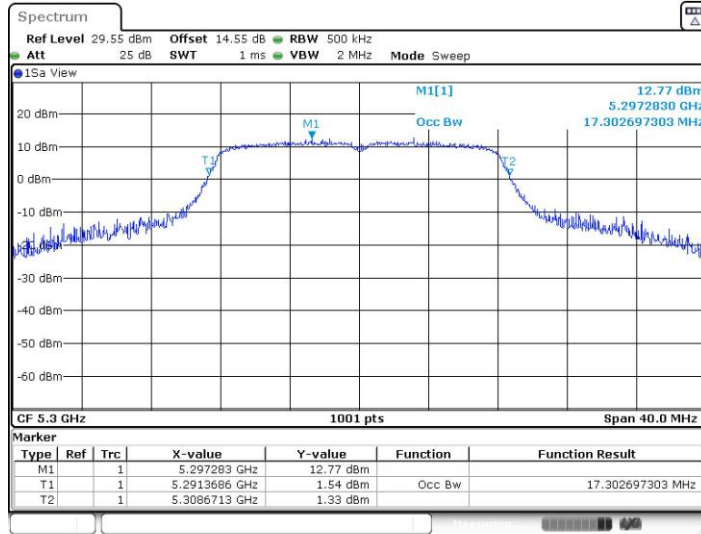

Date: 10.JUL.2023 15:45:04


11A_Ant1_5320

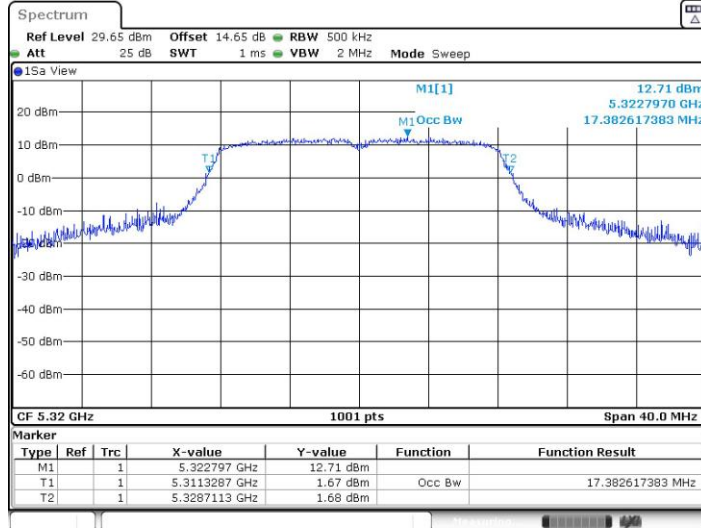

Date: 10.JUL.2023 15:45:46




11A_Ant1_5500

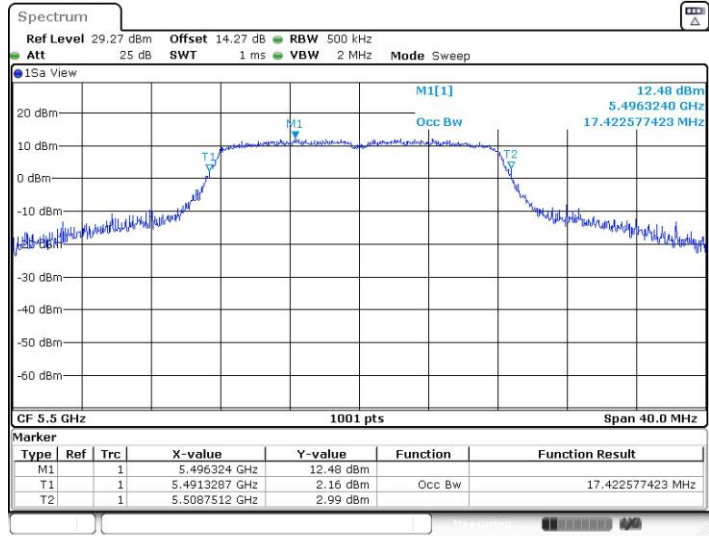


Date: 10.JUL.2023 15:46:27

11A_Ant1_5580

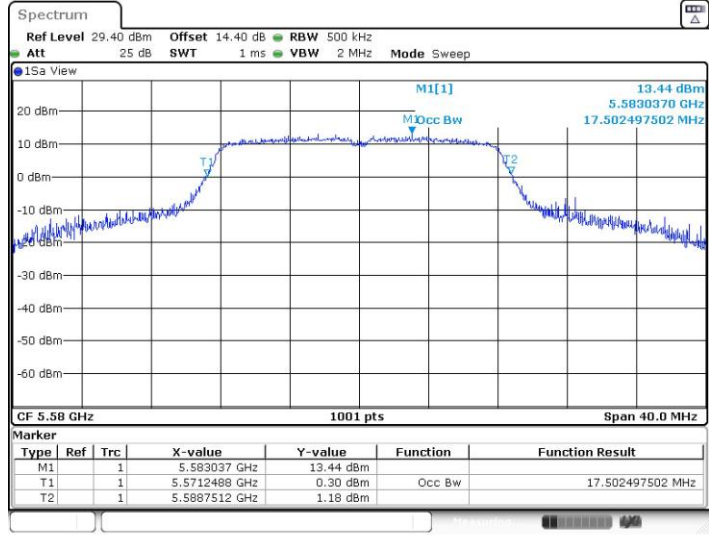


Date: 10.JUL.2023 15:47:15

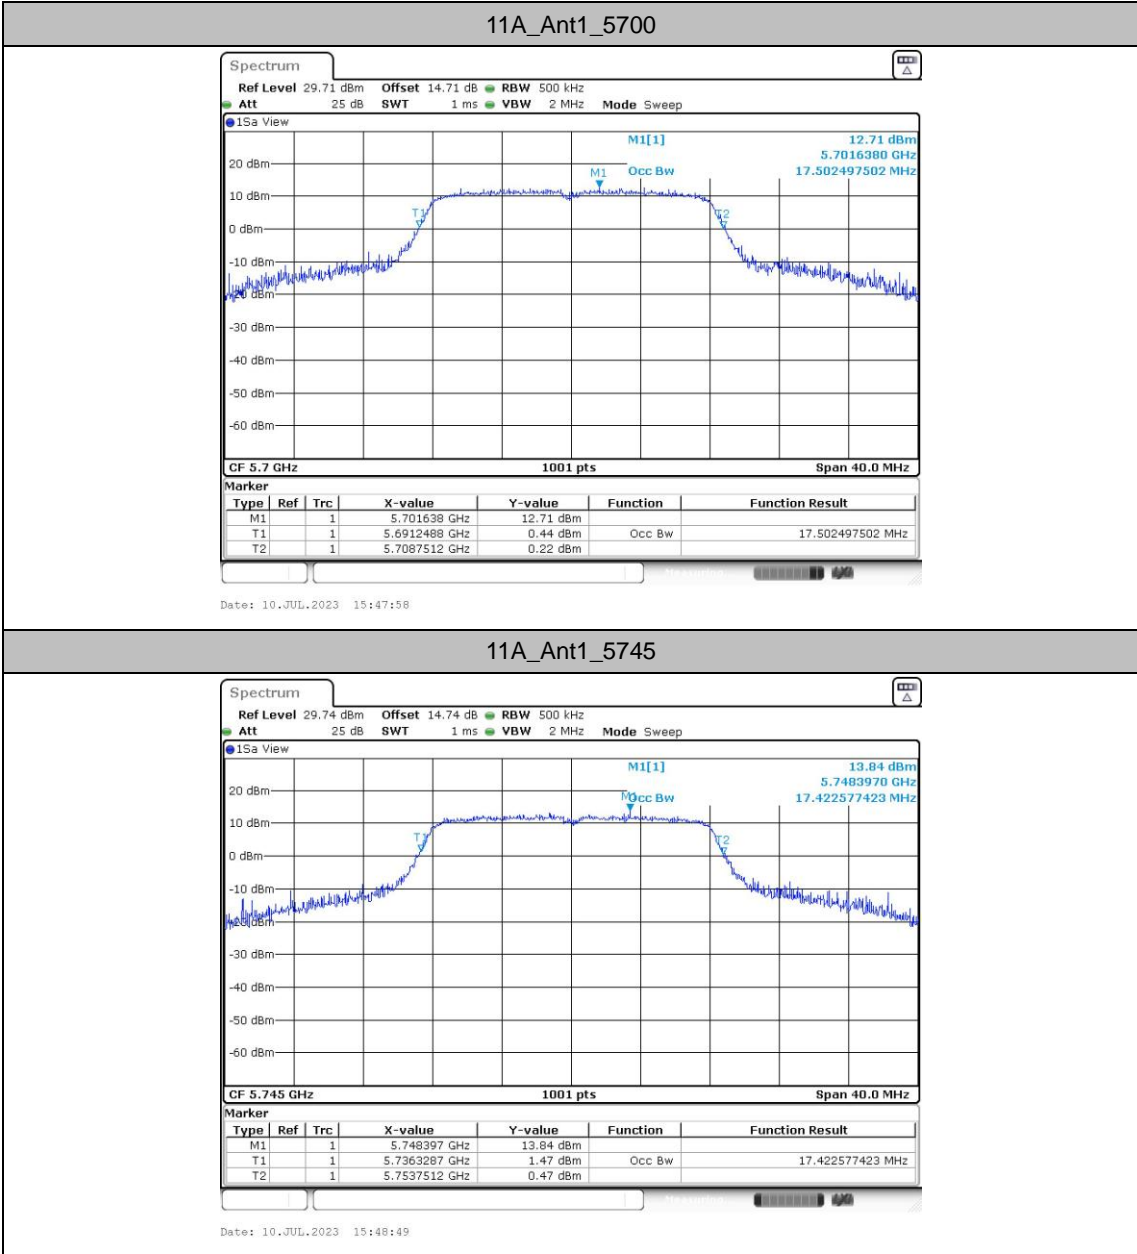




11A_Ant1_5785

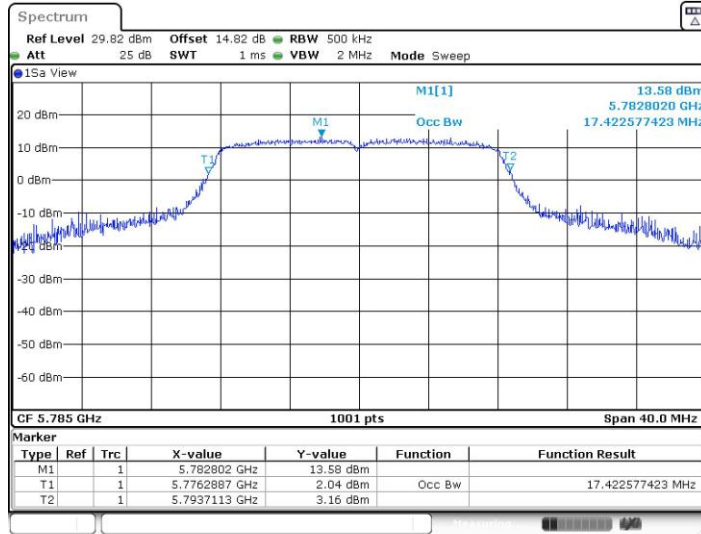


Date: 10.JUL.2023 15:49:49

11A_Ant1_5805

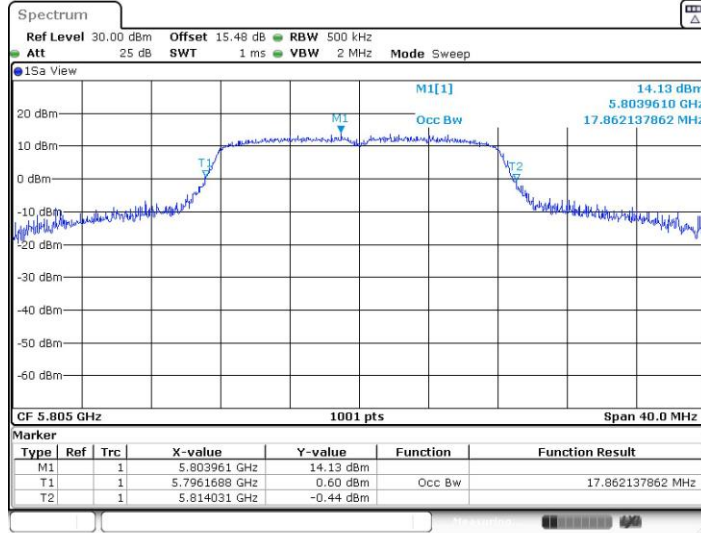


Date: 24.JUL.2023 12:07:51

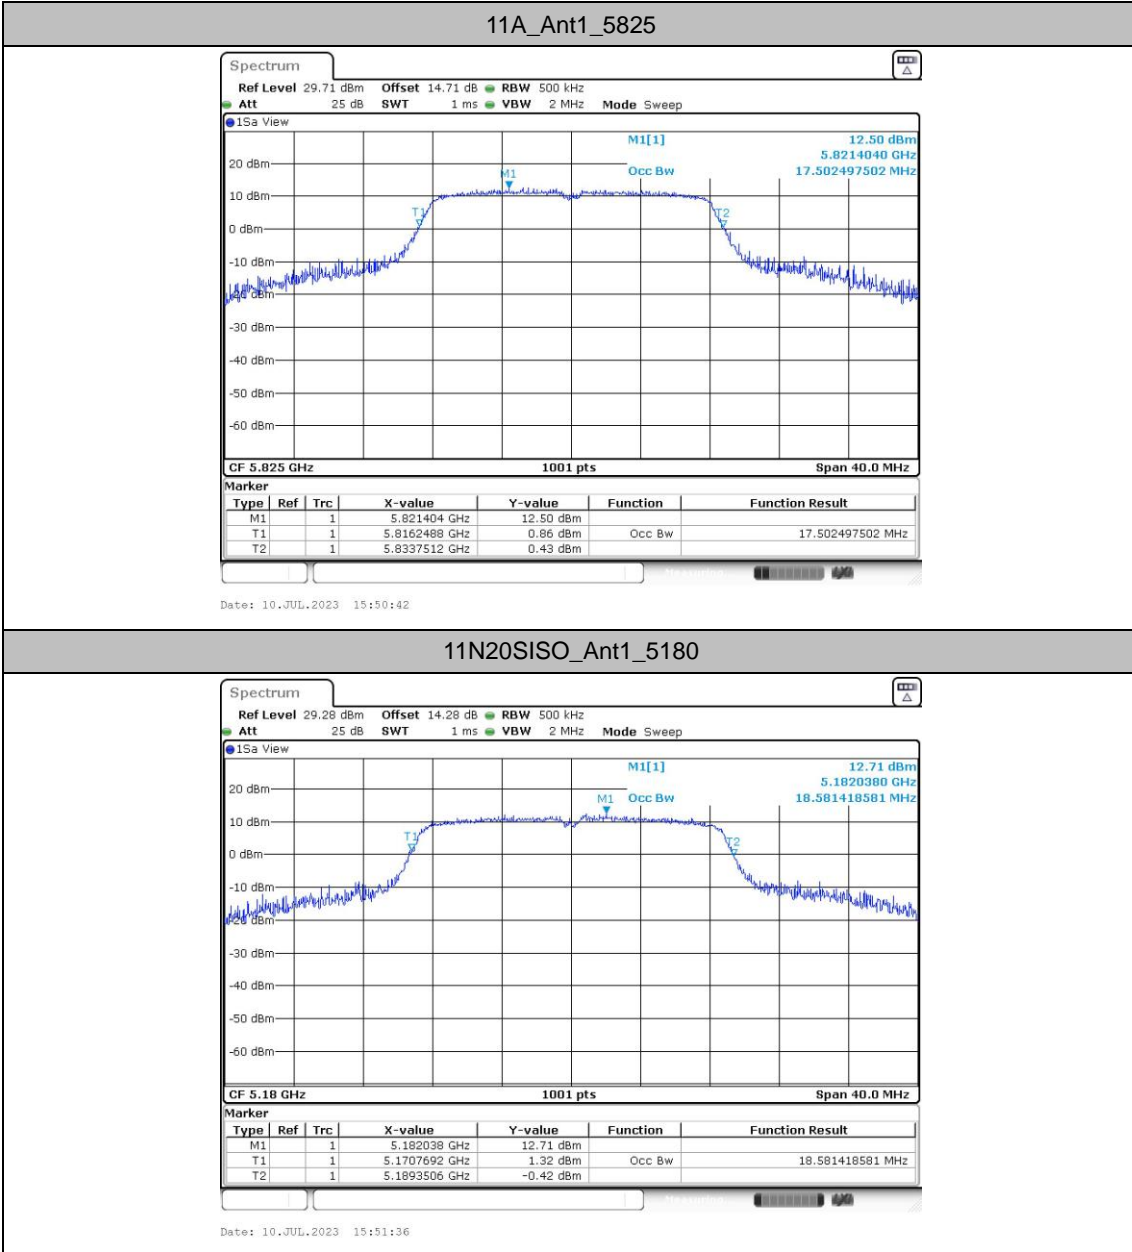




11N20SISO_Ant1_5220

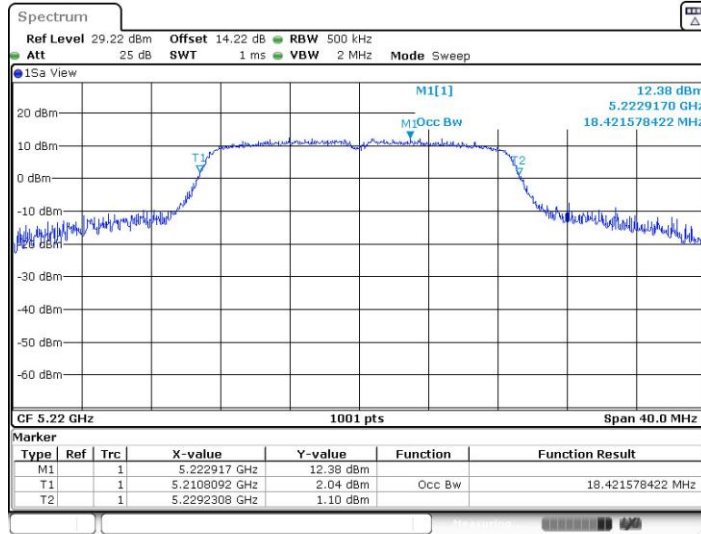

Date: 10.JUL.2023 15:52:32


11N20SISO_Ant1_5240

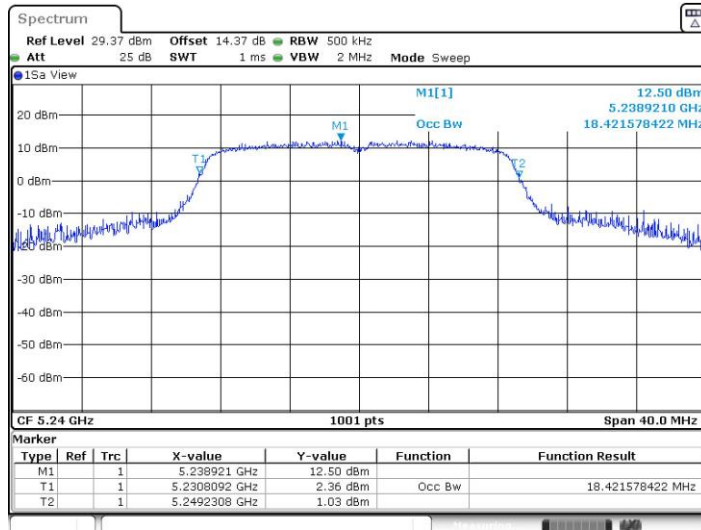

Date: 10.JUL.2023 15:53:53




11N20SISO_Ant1_5260

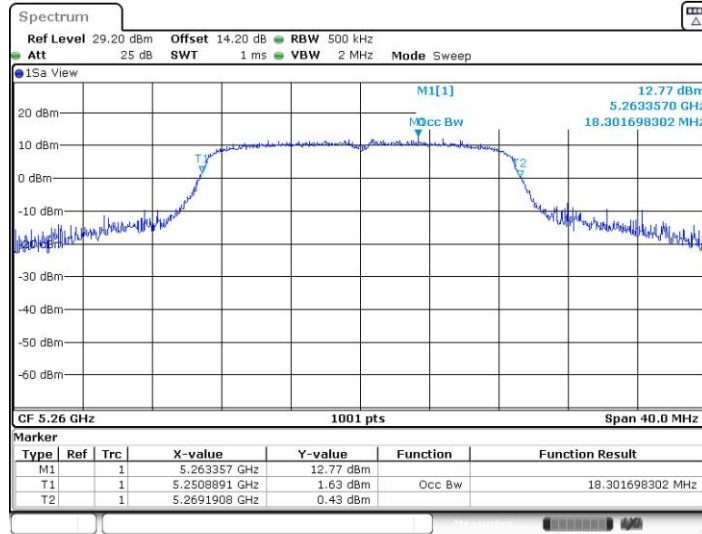

Date: 10.JUL.2023 15:54:37


11N20SISO_Ant1_5300

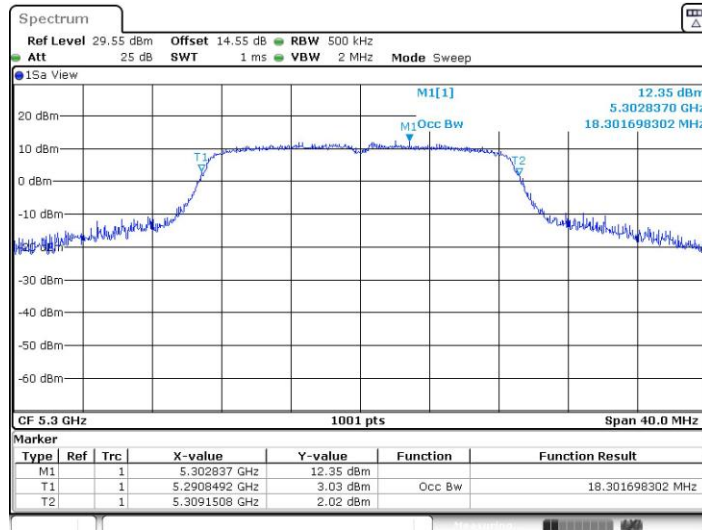

Date: 10.JUL.2023 15:55:21




11N20SISO_Ant1_5320

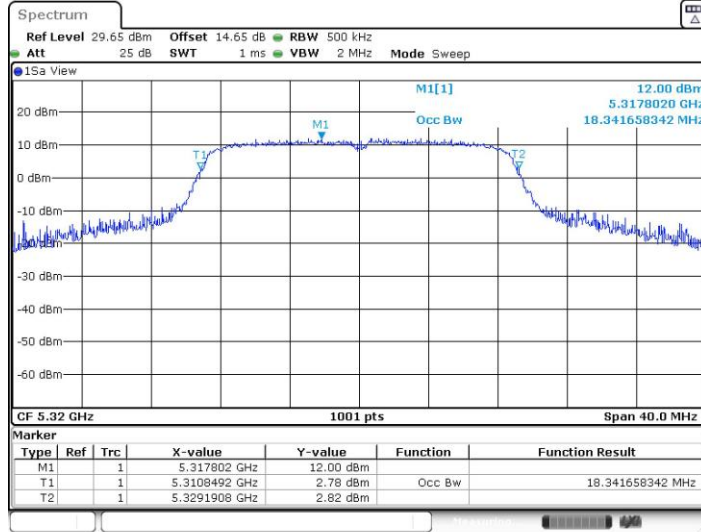

Date: 10.JUL.2023 15:56:03


11N20SISO_Ant1_5500

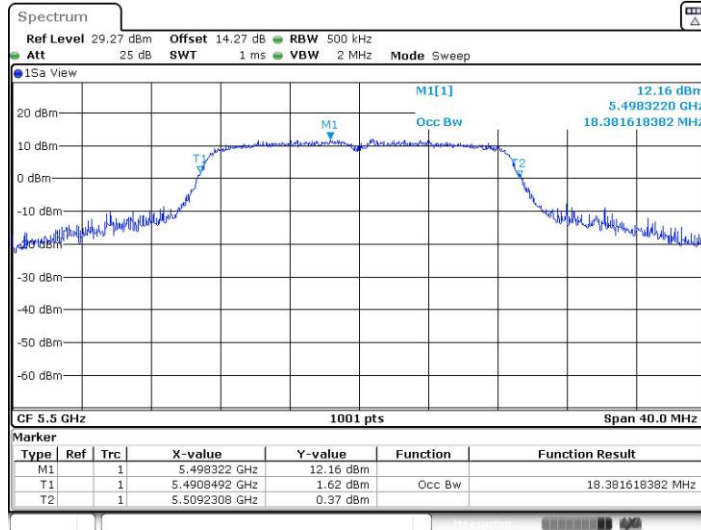

Date: 10.JUL.2023 15:56:57




11N20SISO_Ant1_5580

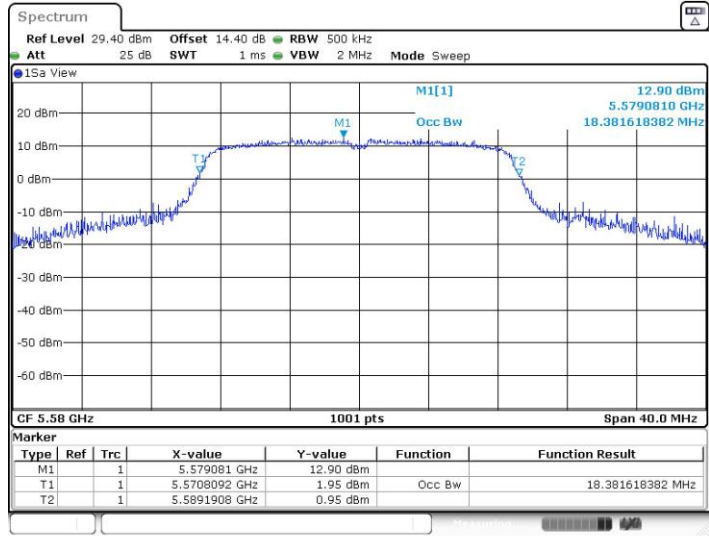


Date: 10.JUL.2023 15:57:41

11N20SISO_Ant1_5700

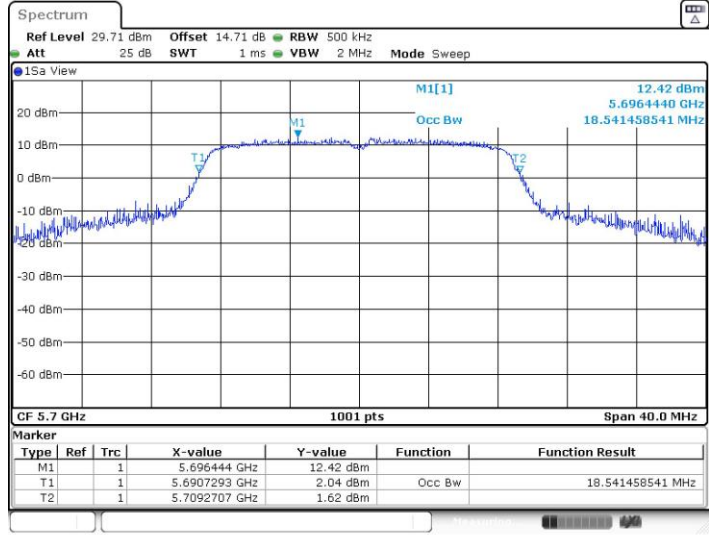


Date: 10.JUL.2023 15:58:25

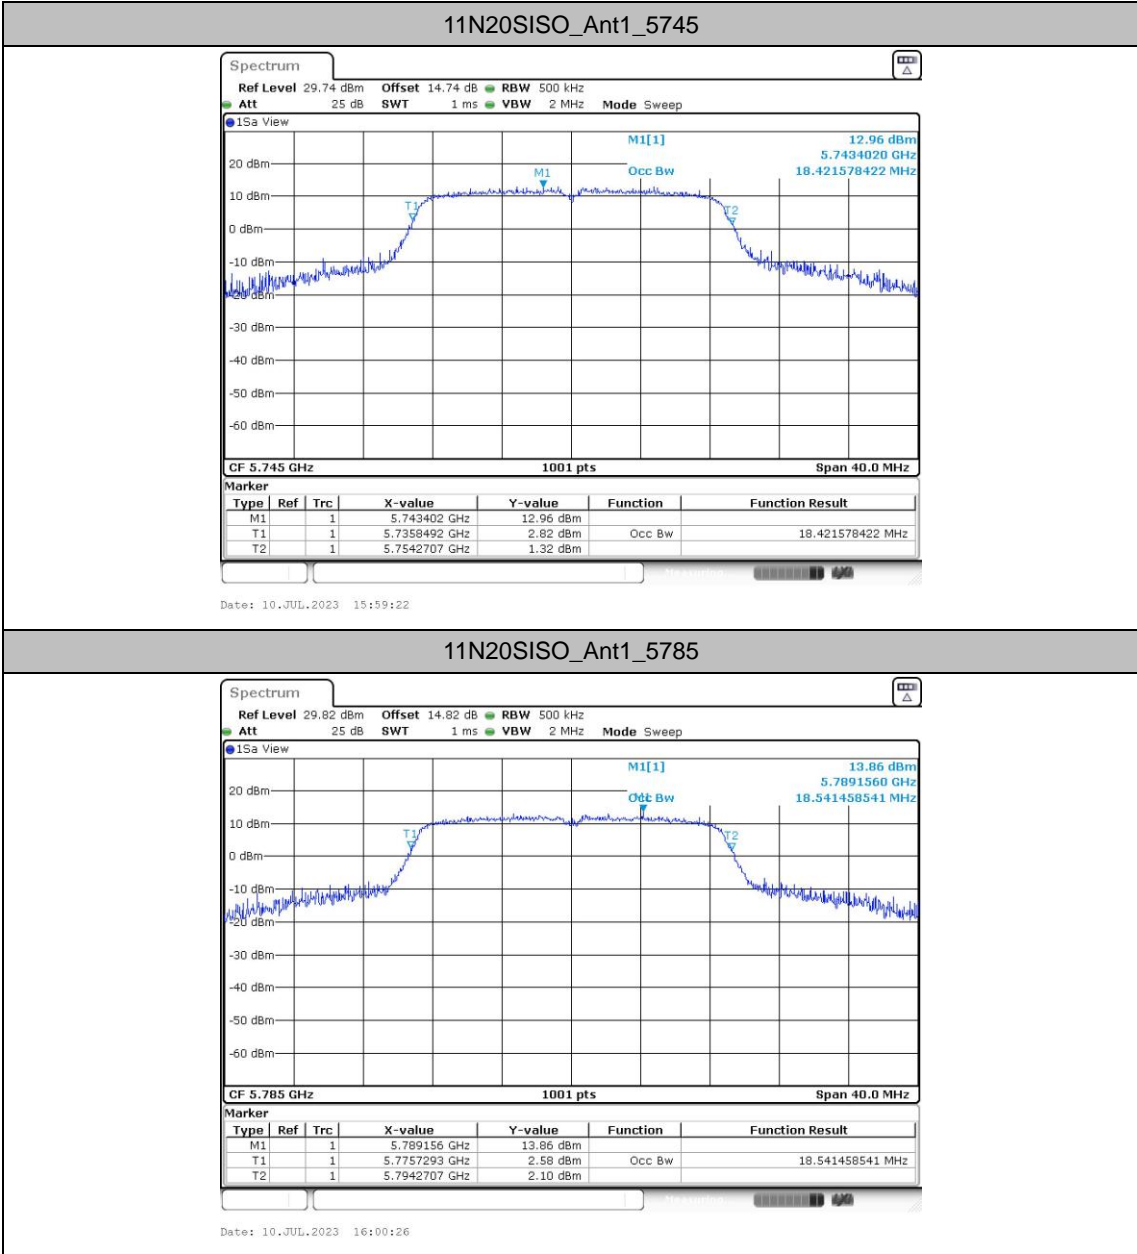




11N20SISO_Ant1_5825

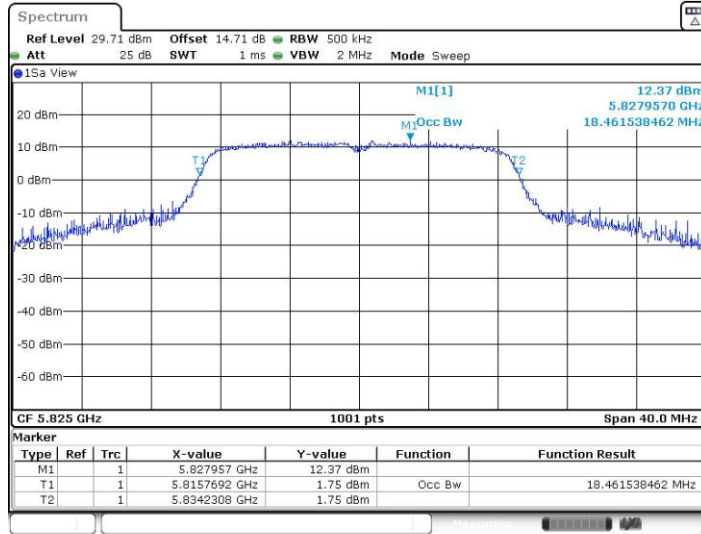

Date: 10.JUL.2023 16:01:17


11N40SISO_Ant1_5190

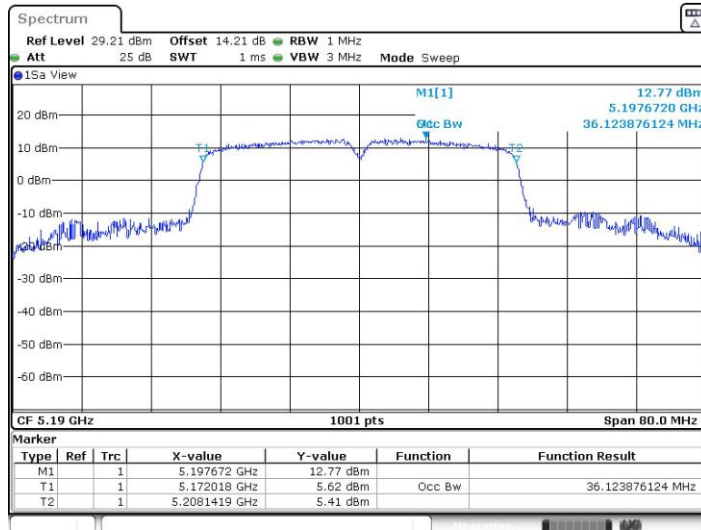

Date: 10.JUL.2023 16:02:12




11N40SISO_Ant1_5230

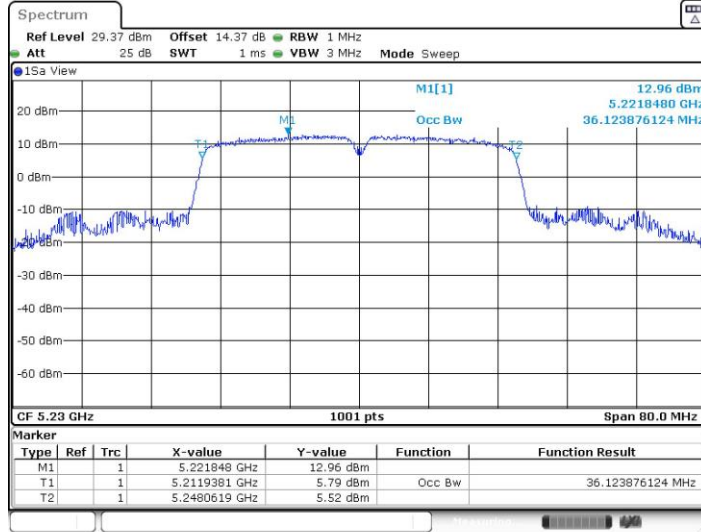

Date: 10.JUL.2023 16:03:24


11N40SISO_Ant1_5270

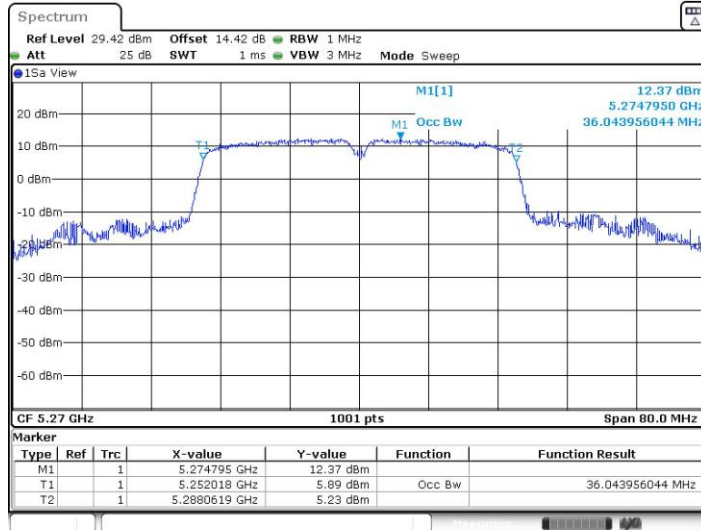

Date: 10.JUL.2023 16:04:18




11N40SISO_Ant1_5310

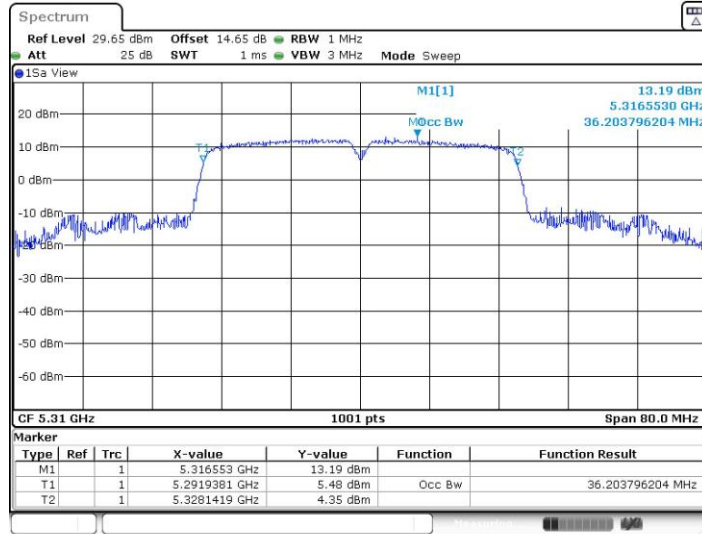

Date: 10.JUL.2023 16:04:58


11N40SISO_Ant1_5510

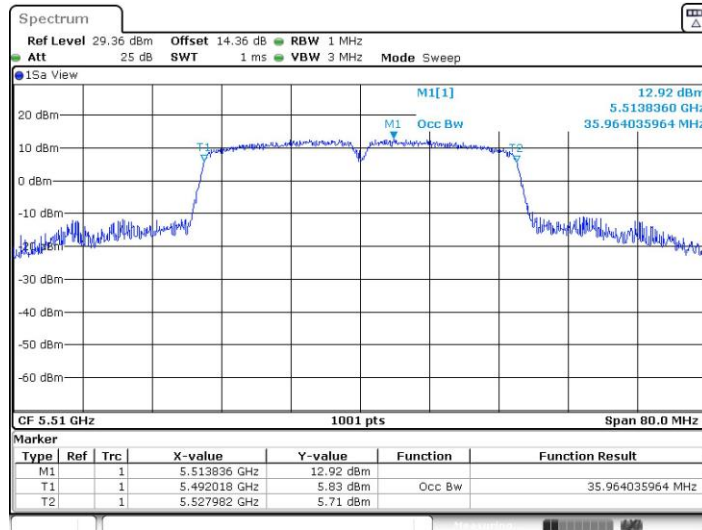

Date: 10.JUL.2023 16:05:46




11N40SISO_Ant1_5550

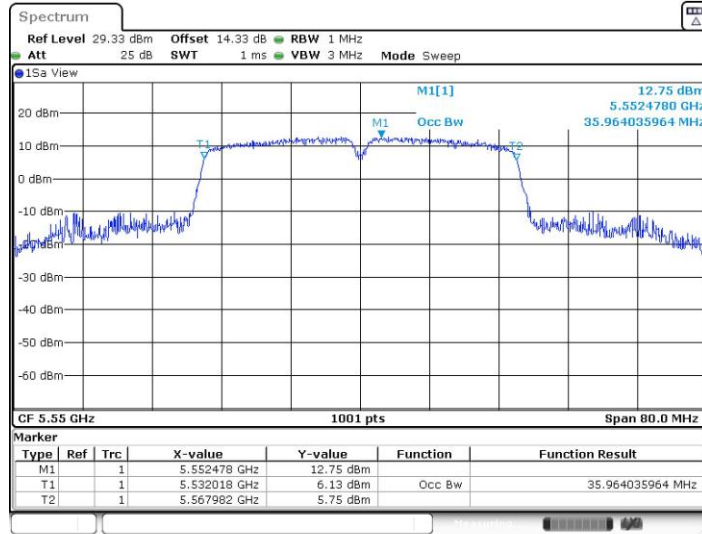

Date: 10.JUL.2023 16:06:29


11N40SISO_Ant1_5670

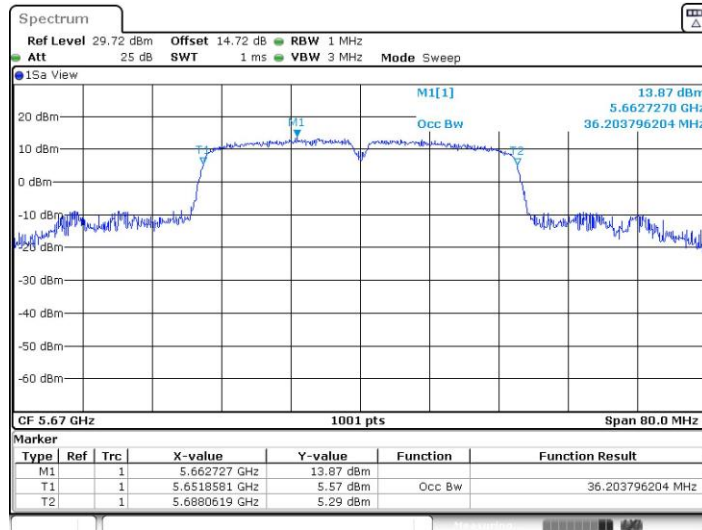

Date: 10.JUL.2023 16:07:10




11N40SISO_Ant1_5755

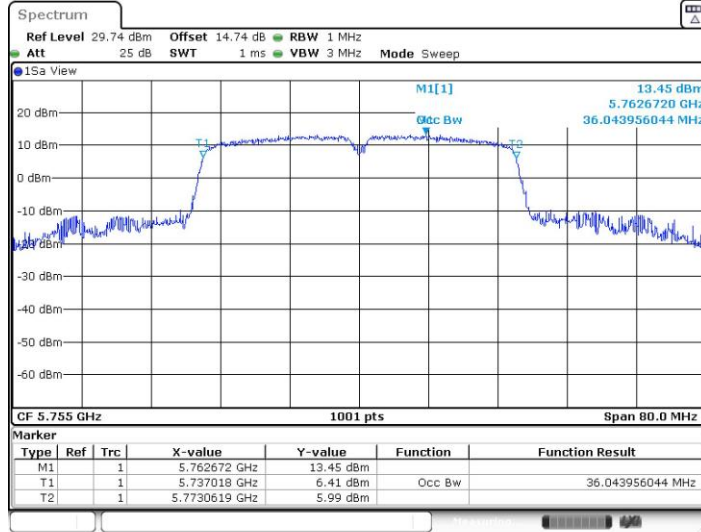

Date: 10.JUL.2023 16:10:50

11N40SISO_Ant1_5795

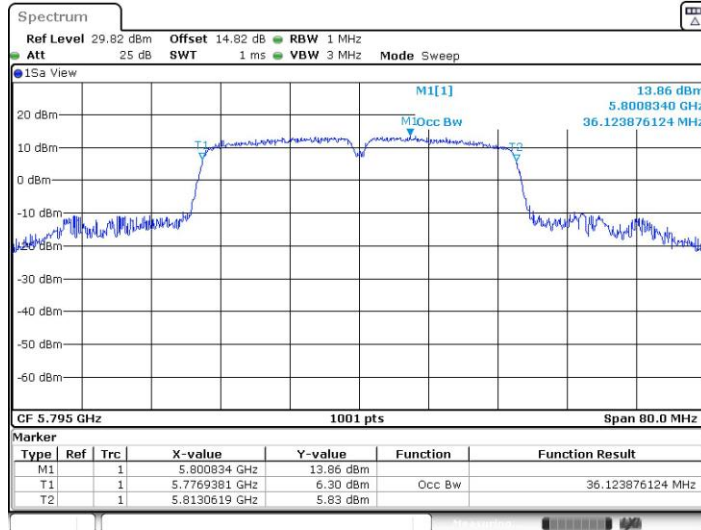

Date: 10.JUL.2023 16:11:57



Min emission bandwidth

Test Result B4

TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.24	5736.88	5753.12	0.5	PASS
		5785	16.04	5776.88	5792.92	0.5	PASS
		5805	16.24	5796.88	5813.12	0.5	PASS
		5825	16.00	5816.88	5832.88	0.5	PASS
11N20SISO	Ant1	5745	16.92	5736.48	5753.40	0.5	PASS
		5785	16.52	5776.88	5793.40	0.5	PASS
		5825	16.04	5816.84	5832.88	0.5	PASS
11N40SISO	Ant1	5755	35.12	5737.48	5772.60	0.5	PASS
		5795	35.12	5777.48	5812.60	0.5	PASS