



Mode	1																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																	
Peak																																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>55.14</td> <td>74.00</td> <td>-18.86</td> <td>38.83</td> <td>32.38</td> <td>8.88</td> <td>30.95</td> <td>6.00</td> <td>162</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2389.95</td> <td>30.35</td> <td>54.00</td> <td>-23.65</td> <td>14.04</td> <td>32.38</td> <td>8.88</td> <td>30.95</td> <td>6.00</td> <td>162</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	55.14	74.00	-18.86	38.83	32.38	8.88	30.95	6.00	162	0 PEAK	2	2389.95	30.35	54.00	-23.65	14.04	32.38	8.88	30.95	6.00	162	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>102.95</td> <td>-----</td> <td>86.56</td> <td>32.40</td> <td>8.93</td> <td>30.94</td> <td>6.00</td> <td>162</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>78.16</td> <td>-----</td> <td>61.77</td> <td>32.40</td> <td>8.93</td> <td>30.94</td> <td>6.00</td> <td>162</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	102.95	-----	86.56	32.40	8.93	30.94	6.00	162	0 PEAK	2	2402.00	78.16	-----	61.77	32.40	8.93	30.94	6.00	162
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2389.95	55.14	74.00	-18.86	38.83	32.38	8.88	30.95	6.00	162	0 PEAK																																																																																																								
2	2389.95	30.35	54.00	-23.65	14.04	32.38	8.88	30.95	6.00	162	0 AVERAGE																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2402.00	102.95	-----	86.56	32.40	8.93	30.94	6.00	162	0 PEAK																																																																																																									
2	2402.00	78.16	-----	61.77	32.40	8.93	30.94	6.00	162	0 AVERAGE																																																																																																									



Mode	1																																																																																																																																																																					
	Harmonic																																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																					
ANT	1																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>46.64</td> <td>74.00</td> <td>-27.36</td> <td>65.74</td> <td>34.29</td> <td>12.30</td> <td>65.69</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7206.00</td> <td>52.25</td> <td>70.36</td> <td>-18.11</td> <td>66.32</td> <td>35.80</td> <td>14.66</td> <td>64.53</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.64	74.00	-27.36	65.74	34.29	12.30	65.69	0.00	---	---	Peak	2	7206.00	52.25	70.36	-18.11	66.32	35.80	14.66	64.53	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>49.73</td> <td>74.00</td> <td>-24.27</td> <td>68.83</td> <td>34.29</td> <td>12.30</td> <td>65.69</td> <td>0.00</td> <td>120</td> <td>31</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>24.94</td> <td>54.00</td> <td>-29.06</td> <td>44.04</td> <td>34.29</td> <td>12.30</td> <td>65.69</td> <td>0.00</td> <td>120</td> <td>31</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7206.00</td> <td>55.39</td> <td>82.00</td> <td>-26.61</td> <td>69.46</td> <td>35.80</td> <td>14.66</td> <td>64.53</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>12187.00</td> <td>49.55</td> <td>74.00</td> <td>-24.45</td> <td>56.45</td> <td>39.00</td> <td>19.15</td> <td>65.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>12499.00</td> <td>54.63</td> <td>74.00</td> <td>-19.37</td> <td>61.50</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>304</td> <td>56</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12499.00</td> <td>50.81</td> <td>54.00</td> <td>-3.19</td> <td>57.68</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>304</td> <td>56</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	49.73	74.00	-24.27	68.83	34.29	12.30	65.69	0.00	120	31	Peak	2	4804.00	24.94	54.00	-29.06	44.04	34.29	12.30	65.69	0.00	120	31	Average	3	7206.00	55.39	82.00	-26.61	69.46	35.80	14.66	64.53	0.00	---	---	Peak	4	12187.00	49.55	74.00	-24.45	56.45	39.00	19.15	65.05	0.00	---	---	Peak	5	12499.00	54.63	74.00	-19.37	61.50	38.21	19.77	64.85	0.00	304	56	Peak	6	12499.00	50.81	54.00	-3.19	57.68	38.21	19.77	64.85	0.00	304	56	Average
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	4804.00	46.64	74.00	-27.36	65.74	34.29	12.30	65.69	0.00	---	---	Peak																																																																																																																																																										
2	7206.00	52.25	70.36	-18.11	66.32	35.80	14.66	64.53	0.00	---	---	Peak																																																																																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	4804.00	49.73	74.00	-24.27	68.83	34.29	12.30	65.69	0.00	120	31	Peak																																																																																																																																																										
2	4804.00	24.94	54.00	-29.06	44.04	34.29	12.30	65.69	0.00	120	31	Average																																																																																																																																																										
3	7206.00	55.39	82.00	-26.61	69.46	35.80	14.66	64.53	0.00	---	---	Peak																																																																																																																																																										
4	12187.00	49.55	74.00	-24.45	56.45	39.00	19.15	65.05	0.00	---	---	Peak																																																																																																																																																										
5	12499.00	54.63	74.00	-19.37	61.50	38.21	19.77	64.85	0.00	304	56	Peak																																																																																																																																																										
6	12499.00	50.81	54.00	-3.19	57.68	38.21	19.77	64.85	0.00	304	56	Average																																																																																																																																																										
100KHz Ref. Level	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.36</td> <td>74.00</td> <td>16.36</td> <td>73.97</td> <td>32.40</td> <td>8.93</td> <td>30.94</td> <td>6.00</td> <td>195</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.36	74.00	16.36	73.97	32.40	8.93	30.94	6.00	195	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>102.00</td> <td>74.00</td> <td>28.00</td> <td>85.61</td> <td>32.40</td> <td>8.93</td> <td>30.94</td> <td>6.00</td> <td>100</td> <td>132</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.00	74.00	28.00	85.61	32.40	8.93	30.94	6.00	100	132	PEAK																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	2402.00	90.36	74.00	16.36	73.97	32.40	8.93	30.94	6.00	195	0	PEAK																																																																																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	2402.00	102.00	74.00	28.00	85.61	32.40	8.93	30.94	6.00	100	132	PEAK																																																																																																																																																										



Mode	2																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																			
ANT	1																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>43.30</td> <td>74.00</td> <td>-30.70</td> <td>62.50</td> <td>34.20</td> <td>12.06</td> <td>65.54</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>54.05</td> <td>74.00</td> <td>-19.95</td> <td>68.12</td> <td>35.00</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>100</td> <td>29</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>29.26</td> <td>54.00</td> <td>-24.74</td> <td>43.33</td> <td>35.00</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>100</td> <td>29</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	43.30	74.00	-30.70	62.50	34.20	12.06	65.54	0.00	---	---	Peak	2	7323.00	54.05	74.00	-19.95	68.12	35.00	14.99	64.86	0.00	100	29	Peak	3	7323.00	29.26	54.00	-24.74	43.33	35.00	14.99	64.86	0.00	100	29	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>46.13</td> <td>74.00</td> <td>-27.87</td> <td>65.41</td> <td>34.20</td> <td>12.06</td> <td>65.54</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>55.79</td> <td>74.00</td> <td>-18.21</td> <td>69.86</td> <td>35.80</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>300</td> <td>46</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>31.00</td> <td>54.00</td> <td>-23.00</td> <td>45.07</td> <td>35.80</td> <td>14.99</td> <td>64.86</td> <td>0.00</td> <td>300</td> <td>46</td> <td>Average</td> </tr> <tr> <td>4</td> <td>12187.00</td> <td>49.51</td> <td>74.00</td> <td>-24.49</td> <td>56.41</td> <td>39.00</td> <td>19.15</td> <td>65.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>12499.00</td> <td>54.41</td> <td>74.00</td> <td>-19.59</td> <td>61.28</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>307</td> <td>56</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12499.00</td> <td>50.82</td> <td>54.00</td> <td>-3.18</td> <td>57.69</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>307</td> <td>56</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	46.13	74.00	-27.87	65.41	34.20	12.06	65.54	0.00	---	---	Peak	2	7323.00	55.79	74.00	-18.21	69.86	35.80	14.99	64.86	0.00	300	46	Peak	3	7323.00	31.00	54.00	-23.00	45.07	35.80	14.99	64.86	0.00	300	46	Average	4	12187.00	49.51	74.00	-24.49	56.41	39.00	19.15	65.05	0.00	---	---	Peak	5	12499.00	54.41	74.00	-19.59	61.28	38.21	19.77	64.85	0.00	307	56	Peak	6	12499.00	50.82	54.00	-3.18	57.69	38.21	19.77	64.85	0.00	307	56
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																										
1	4882.00	43.30	74.00	-30.70	62.50	34.20	12.06	65.54	0.00	---	---	Peak																																																																																																																																																																								
2	7323.00	54.05	74.00	-19.95	68.12	35.00	14.99	64.86	0.00	100	29	Peak																																																																																																																																																																								
3	7323.00	29.26	54.00	-24.74	43.33	35.00	14.99	64.86	0.00	100	29	Average																																																																																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																										
1	4882.00	46.13	74.00	-27.87	65.41	34.20	12.06	65.54	0.00	---	---	Peak																																																																																																																																																																								
2	7323.00	55.79	74.00	-18.21	69.86	35.80	14.99	64.86	0.00	300	46	Peak																																																																																																																																																																								
3	7323.00	31.00	54.00	-23.00	45.07	35.80	14.99	64.86	0.00	300	46	Average																																																																																																																																																																								
4	12187.00	49.51	74.00	-24.49	56.41	39.00	19.15	65.05	0.00	---	---	Peak																																																																																																																																																																								
5	12499.00	54.41	74.00	-19.59	61.28	38.21	19.77	64.85	0.00	307	56	Peak																																																																																																																																																																								
6	12499.00	50.82	54.00	-3.18	57.69	38.21	19.77	64.85	0.00	307	56	Average																																																																																																																																																																								



Mode	3																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2499.41</td> <td>56.16</td> <td>74.00</td> <td>-17.84</td> <td>39.76</td> <td>32.40</td> <td>8.87</td> <td>30.87</td> <td>6.00</td> <td>142</td> <td>208</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2499.41</td> <td>31.37</td> <td>54.00</td> <td>-22.63</td> <td>14.97</td> <td>32.40</td> <td>8.87</td> <td>30.87</td> <td>6.00</td> <td>142</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	2499.41	56.16	74.00	-17.84	39.76	32.40	8.87	30.87	6.00	142	208	PEAK	2	2499.41	31.37	54.00	-22.63	14.97	32.40	8.87	30.87	6.00	142	208	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.85</td> <td>-----</td> <td>-----</td> <td>78.45</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>142</td> <td>208</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>70.06</td> <td>-----</td> <td>-----</td> <td>53.66</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>142</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	2480.00	94.85	-----	-----	78.45	32.40	8.88	30.88	6.00	142	208	PEAK	2	2480.00	70.06	-----	-----	53.66	32.40	8.88	30.88	6.00	142	208	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																					
1	2499.41	56.16	74.00	-17.84	39.76	32.40	8.87	30.87	6.00	142	208	PEAK																																																																																		
2	2499.41	31.37	54.00	-22.63	14.97	32.40	8.87	30.87	6.00	142	208	AVERAGE																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																					
1	2480.00	94.85	-----	-----	78.45	32.40	8.88	30.88	6.00	142	208	PEAK																																																																																		
2	2480.00	70.06	-----	-----	53.66	32.40	8.88	30.88	6.00	142	208	AVERAGE																																																																																		



Mode	3																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																
ANT	1																																																																																																																
Pol.	Vertical	Fundamental																																																																																																															
Peak																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.95</td> <td>56.30</td> <td>74.00</td> <td>-17.70</td> <td>39.90</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>226</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2483.95</td> <td>31.51</td> <td>54.00</td> <td>-22.49</td> <td>15.11</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>226</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.95	56.30	74.00	-17.70	39.90	32.40	8.88	30.88	6.00	226	0 PEAK	2	2483.95	31.51	54.00	-22.49	15.11	32.40	8.88	30.88	6.00	226	0 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>105.58</td> <td>-----</td> <td>89.18</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>226</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>80.79</td> <td>-----</td> <td>64.39</td> <td>32.40</td> <td>8.88</td> <td>30.88</td> <td>6.00</td> <td>226</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.58	-----	89.18	32.40	8.88	30.88	6.00	226	0 PEAK	2	2480.00	80.79	-----	64.39	32.40	8.88	30.88	6.00	226
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.95	56.30	74.00	-17.70	39.90	32.40	8.88	30.88	6.00	226	0 PEAK																																																																																																						
2	2483.95	31.51	54.00	-22.49	15.11	32.40	8.88	30.88	6.00	226	0 AVERAGE																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	105.58	-----	89.18	32.40	8.88	30.88	6.00	226	0 PEAK																																																																																																							
2	2480.00	80.79	-----	64.39	32.40	8.88	30.88	6.00	226	0 AVERAGE																																																																																																							





Mode	3																																																																																																																																																																										
	Harmonic																																																																																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																										
ANT	1																																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																																									
Peak Avg																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.17</td> <td>74.00</td> <td>-28.83</td> <td>64.32</td> <td>34.24</td> <td>12.01</td> <td>65.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>52.95</td> <td>74.00</td> <td>-21.05</td> <td>67.82</td> <td>35.80</td> <td>15.32</td> <td>65.19</td> <td>0.00</td> <td>100</td> <td>26</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>28.16</td> <td>54.00</td> <td>-25.84</td> <td>42.23</td> <td>35.80</td> <td>15.32</td> <td>65.19</td> <td>0.00</td> <td>100</td> <td>26</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	4960.00	45.17	74.00	-28.83	64.32	34.24	12.01	65.40	0.00	---	---	Peak	2	7440.00	52.95	74.00	-21.05	67.82	35.80	15.32	65.19	0.00	100	26	Peak	3	7440.00	28.16	54.00	-25.84	42.23	35.80	15.32	65.19	0.00	100	26	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>49.98</td> <td>74.00</td> <td>-24.02</td> <td>69.13</td> <td>34.24</td> <td>12.01</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>134</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>25.19</td> <td>54.00</td> <td>-28.81</td> <td>44.34</td> <td>34.24</td> <td>12.01</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>134</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>56.43</td> <td>74.00</td> <td>-17.57</td> <td>70.50</td> <td>35.80</td> <td>15.32</td> <td>65.19</td> <td>0.00</td> <td>300</td> <td>50</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>31.64</td> <td>54.00</td> <td>-22.36</td> <td>45.71</td> <td>35.80</td> <td>15.32</td> <td>65.19</td> <td>0.00</td> <td>300</td> <td>50</td> <td>Average</td> </tr> <tr> <td>5</td> <td>12187.00</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>56.78</td> <td>39.00</td> <td>19.15</td> <td>65.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12499.00</td> <td>54.82</td> <td>74.00</td> <td>-19.18</td> <td>61.69</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>303</td> <td>55</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>12499.00</td> <td>50.62</td> <td>54.00</td> <td>-3.38</td> <td>57.49</td> <td>38.21</td> <td>19.77</td> <td>64.85</td> <td>0.00</td> <td>303</td> <td>55</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	4960.00	49.98	74.00	-24.02	69.13	34.24	12.01	65.40	0.00	300	134	Peak	2	4960.00	25.19	54.00	-28.81	44.34	34.24	12.01	65.40	0.00	300	134	Average	3	7440.00	56.43	74.00	-17.57	70.50	35.80	15.32	65.19	0.00	300	50	Peak	4	7440.00	31.64	54.00	-22.36	45.71	35.80	15.32	65.19	0.00	300	50	Average	5	12187.00	49.88	74.00	-24.12	56.78	39.00	19.15	65.05	0.00	---	---	Peak	6	12499.00	54.82	74.00	-19.18	61.69	38.21	19.77	64.85	0.00	303	55	Peak	7	12499.00	50.62	54.00	-3.38	57.49	38.21	19.77	64.85	0.00	303	55
Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																			
1	4960.00	45.17	74.00	-28.83	64.32	34.24	12.01	65.40	0.00	---	---	Peak																																																																																																																																																															
2	7440.00	52.95	74.00	-21.05	67.82	35.80	15.32	65.19	0.00	100	26	Peak																																																																																																																																																															
3	7440.00	28.16	54.00	-25.84	42.23	35.80	15.32	65.19	0.00	100	26	Average																																																																																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																			
1	4960.00	49.98	74.00	-24.02	69.13	34.24	12.01	65.40	0.00	300	134	Peak																																																																																																																																																															
2	4960.00	25.19	54.00	-28.81	44.34	34.24	12.01	65.40	0.00	300	134	Average																																																																																																																																																															
3	7440.00	56.43	74.00	-17.57	70.50	35.80	15.32	65.19	0.00	300	50	Peak																																																																																																																																																															
4	7440.00	31.64	54.00	-22.36	45.71	35.80	15.32	65.19	0.00	300	50	Average																																																																																																																																																															
5	12187.00	49.88	74.00	-24.12	56.78	39.00	19.15	65.05	0.00	---	---	Peak																																																																																																																																																															
6	12499.00	54.82	74.00	-19.18	61.69	38.21	19.77	64.85	0.00	303	55	Peak																																																																																																																																																															
7	12499.00	50.62	54.00	-3.38	57.49	38.21	19.77	64.85	0.00	303	55	Average																																																																																																																																																															



Mode	1																																																																																																																																																																									
	30M-1G																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>177.44</td><td>27.90</td><td>-15.60</td><td>43.50</td><td>44.02</td><td>14.90</td><td>1.93</td><td>32.95</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>213.33</td><td>32.80</td><td>-10.70</td><td>43.50</td><td>48.75</td><td>14.92</td><td>2.13</td><td>33.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>283.17</td><td>25.70</td><td>-20.30</td><td>46.00</td><td>37.42</td><td>18.82</td><td>2.46</td><td>33.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>441.28</td><td>22.47</td><td>-23.53</td><td>46.00</td><td>29.91</td><td>22.66</td><td>3.06</td><td>33.16</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>704.15</td><td>26.50</td><td>-19.50</td><td>46.00</td><td>29.58</td><td>26.40</td><td>3.88</td><td>33.36</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>918.52</td><td>31.23</td><td>-14.77</td><td>46.00</td><td>29.71</td><td>29.30</td><td>4.41</td><td>32.19</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	177.44	27.90	-15.60	43.50	44.02	14.90	1.93	32.95	---	---	Peak	2	213.33	32.80	-10.70	43.50	48.75	14.92	2.13	33.00	---	---	Peak	3	283.17	25.70	-20.30	46.00	37.42	18.82	2.46	33.00	---	---	Peak	4	441.28	22.47	-23.53	46.00	29.91	22.66	3.06	33.16	---	---	Peak	5	704.15	26.50	-19.50	46.00	29.58	26.40	3.88	33.36	---	---	Peak	6	918.52	31.23	-14.77	46.00	29.71	29.30	4.41	32.19	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>54.25</td><td>32.87</td><td>-7.13</td><td>40.00</td><td>52.46</td><td>12.50</td><td>0.83</td><td>32.92</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>67.83</td><td>30.07</td><td>-9.93</td><td>40.00</td><td>49.78</td><td>12.20</td><td>1.02</td><td>32.93</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>207.51</td><td>27.58</td><td>-15.92</td><td>43.50</td><td>43.41</td><td>15.05</td><td>2.11</td><td>32.99</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>259.89</td><td>23.75</td><td>-22.25</td><td>46.00</td><td>34.41</td><td>20.00</td><td>2.35</td><td>33.01</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>507.24</td><td>24.60</td><td>-21.40</td><td>46.00</td><td>30.89</td><td>23.00</td><td>3.28</td><td>33.37</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>768.17</td><td>29.18</td><td>-16.82</td><td>46.00</td><td>30.12</td><td>28.10</td><td>4.03</td><td>33.07</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	54.25	32.87	-7.13	40.00	52.46	12.50	0.83	32.92	---	---	Peak	2	67.83	30.07	-9.93	40.00	49.78	12.20	1.02	32.93	---	---	Peak	3	207.51	27.58	-15.92	43.50	43.41	15.05	2.11	32.99	---	---	Peak	4	259.89	23.75	-22.25	46.00	34.41	20.00	2.35	33.01	---	---	Peak	5	507.24	24.60	-21.40	46.00	30.89	23.00	3.28	33.37	---	---	Peak	6	768.17	29.18	-16.82	46.00	30.12	28.10	4.03	33.07	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	177.44	27.90	-15.60	43.50	44.02	14.90	1.93	32.95	---	---	Peak																																																																																																																																																															
2	213.33	32.80	-10.70	43.50	48.75	14.92	2.13	33.00	---	---	Peak																																																																																																																																																															
3	283.17	25.70	-20.30	46.00	37.42	18.82	2.46	33.00	---	---	Peak																																																																																																																																																															
4	441.28	22.47	-23.53	46.00	29.91	22.66	3.06	33.16	---	---	Peak																																																																																																																																																															
5	704.15	26.50	-19.50	46.00	29.58	26.40	3.88	33.36	---	---	Peak																																																																																																																																																															
6	918.52	31.23	-14.77	46.00	29.71	29.30	4.41	32.19	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	54.25	32.87	-7.13	40.00	52.46	12.50	0.83	32.92	---	---	Peak																																																																																																																																																															
2	67.83	30.07	-9.93	40.00	49.78	12.20	1.02	32.93	---	---	Peak																																																																																																																																																															
3	207.51	27.58	-15.92	43.50	43.41	15.05	2.11	32.99	---	---	Peak																																																																																																																																																															
4	259.89	23.75	-22.25	46.00	34.41	20.00	2.35	33.01	---	---	Peak																																																																																																																																																															
5	507.24	24.60	-21.40	46.00	30.89	23.00	3.28	33.37	---	---	Peak																																																																																																																																																															
6	768.17	29.18	-16.82	46.00	30.12	28.10	4.03	33.07	---	---	Peak																																																																																																																																																															

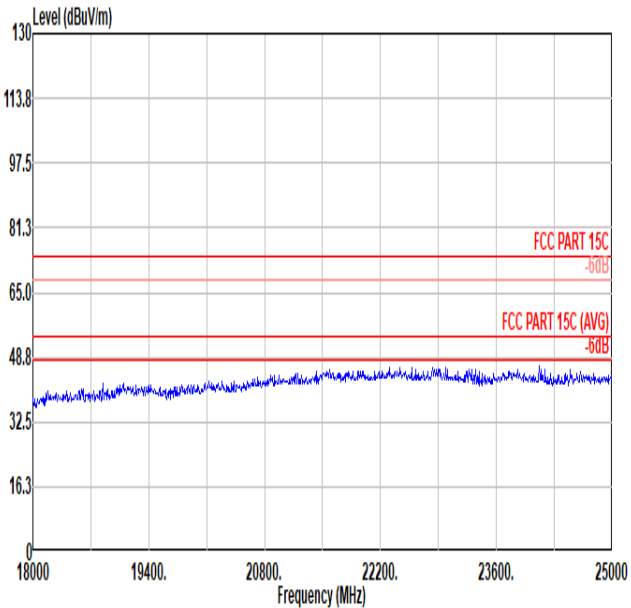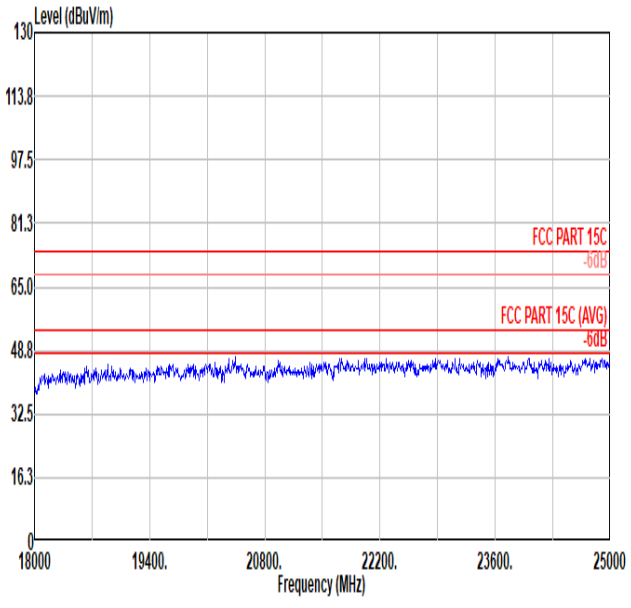


Mode	1	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak		
Avg		




Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot

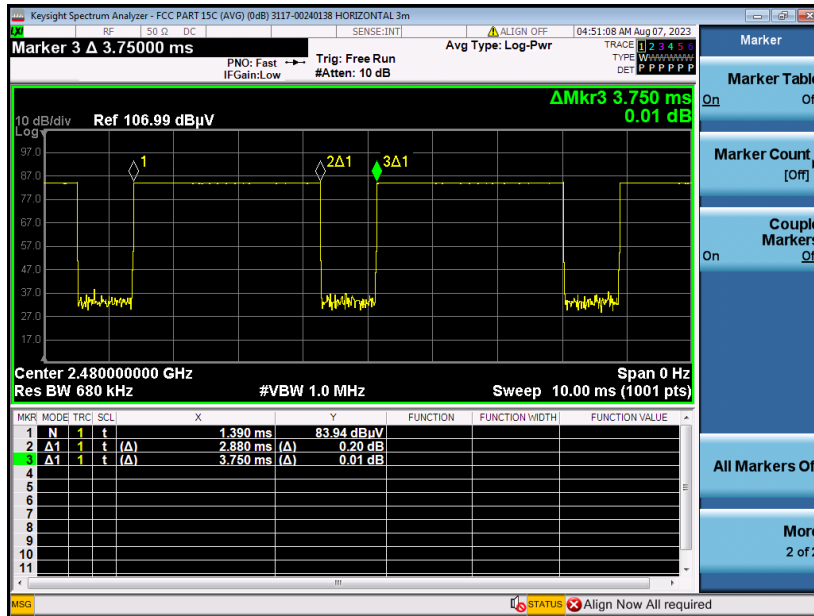

DH5 on time (Count Pulses) Plot on Channel 00

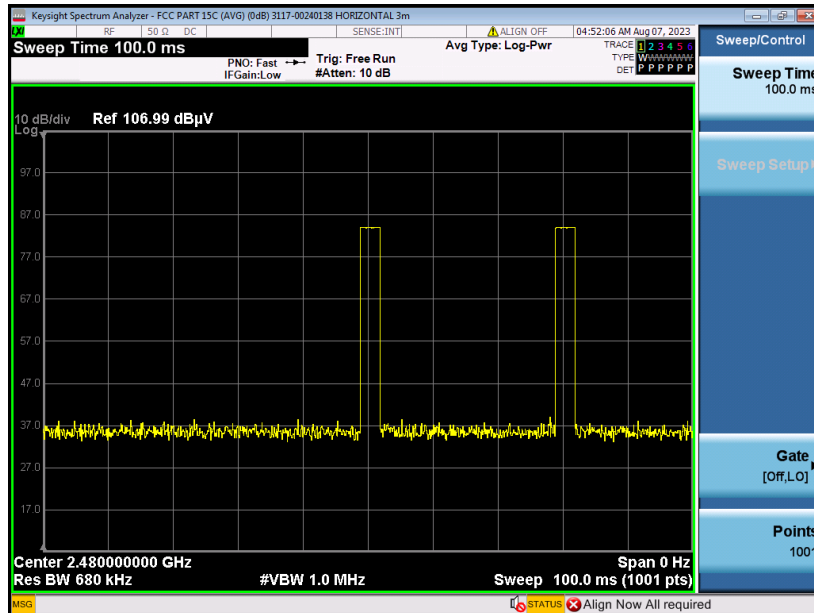

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.