

RF MEASUREMENT REPORT

FCC ID: XMR2023RG520NNA
Applicant: Quectel Wireless Solutions Co., Ltd
Product: 5G Sub-6 GHz LGA Module
Model No.: RG520N-NA
Brand Name: Quectel
FCC Rule Part(s): Part90 Subpart R
Test Procedure(s): ANSI C63.26: 2015
Result: Complies
Test Date: 2022-04-26 ~ 2022-06-15

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2303RSU050-U8	Rev. 01	Initial Report	2023-04-24	Valid

Note: This application for certification is leveraging the data reuse procedures from KDB 484596 based on reference FCC ID: XMR2022RG520NNA to cover variant FCC ID: XMR2023RG520NNA, copied the MRT “2204RSU037-U2” report.

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility.....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology.....	7
2. Test Configuration.....	8
2.1. Test System Connection Diagram.....	8
2.2. Test Environment Condition.....	8
3. Measuring Instrument.....	9
4. Decision Rules and Measurement Uncertainty.....	11
4.1. Decision Rules.....	11
4.2. Measurement Uncertainty.....	11
5. Test Result.....	12
5.1. Summary.....	12
5.2. Occupied Bandwidth Measurement.....	13
5.2.1. Test Limit.....	13
5.2.2. Test Procedure.....	13
5.2.3. Test Setting.....	13
5.2.4. Test Setup.....	13
5.2.5. Test Result.....	13
5.3. Frequency Stability Measurement.....	14
5.3.1. Test Limit.....	14
5.3.2. Test Procedure.....	14
5.3.3. Test Setting.....	14
5.3.4. Test Setup.....	15
5.3.5. Test Result.....	15
5.4. Equivalent Isotropically Radiated Power Measurement.....	16
5.4.1. Test Limit.....	16
5.4.2. Test Procedure.....	16
5.4.3. Test Setting.....	16
5.4.4. Test Setup.....	16

5.4.5.	Test Result	17
5.5.	Band Edge Measurement	18
5.5.1.	Test Limit.....	18
5.5.2.	Test Procedure	18
5.5.3.	Test Setting	18
5.5.4.	Test Setup.....	19
5.5.5.	Test Result	19
5.6.	Emission Mask Measurement	20
5.6.1.	Test Limit.....	20
5.6.2.	Test Procedure	20
5.6.3.	Test Setting	20
5.6.4.	Test Setup.....	21
5.6.5.	Test Result	21
5.7.	Conducted Spurious Emissions Measurement	22
5.7.1.	Test Limit.....	22
5.7.2.	Test Procedure	22
5.7.3.	Test Setting	22
5.7.4.	Test Setup.....	23
5.7.5.	Test Result	23
5.8.	Radiated Spurious Emissions Measurement	24
5.8.1.	Test Limit.....	24
5.8.2.	Test Procedure	24
5.8.3.	Test Setting	24
5.8.4.	Test Setup.....	25
5.8.5.	Test Result	26
Appendix A - Test Result		27
A.1	Occupied Bandwidth Test Result.....	27
A.2	Frequency Stability Test Result	29
A.3	Equivalent Isotropically Radiated Power Test Result	30
A.4	Band Edge Test Result	34
A.5	Emission Mask Test Result	36
A.6	Conducted Spurious Emissions Test Result	39
A.7	Radiated Spurious Emissions Test Result	41
Appendix B - Test Setup Photograph		42
Appendix C - EUT Photograph		43

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.3. Testing Facility

<input checked="" type="checkbox"/>	<p>Test Site - MRT Suzhou Laboratory</p> <p>Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China</p> <p>Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China</p> <p>Laboratory Accreditations</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td>A2LA: 3628.01</td> <td style="text-align: right;">CNAS: L10551</td> </tr> <tr> <td>FCC: CN1166</td> <td style="text-align: right;">ISED: CN0001</td> </tr> <tr> <td colspan="2">VCCI: R-20025, G-20034, C-20020, T-20020</td> </tr> </table>	A2LA: 3628.01	CNAS: L10551	FCC: CN1166	ISED: CN0001	VCCI: R-20025, G-20034, C-20020, T-20020	
A2LA: 3628.01	CNAS: L10551						
FCC: CN1166	ISED: CN0001						
VCCI: R-20025, G-20034, C-20020, T-20020							
<input type="checkbox"/>	<p>Test Site - MRT Shenzhen Laboratory</p> <p>Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China</p> <p>Laboratory Accreditations</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td>A2LA: 3628.02</td> <td style="text-align: right;">CNAS: L10551</td> </tr> <tr> <td>FCC: CN1284</td> <td style="text-align: right;">ISED: CN0105</td> </tr> </table>	A2LA: 3628.02	CNAS: L10551	FCC: CN1284	ISED: CN0105		
A2LA: 3628.02	CNAS: L10551						
FCC: CN1284	ISED: CN0105						
<input type="checkbox"/>	<p>Test Site - MRT Taiwan Laboratory</p> <p>Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)</p> <p>Laboratory Accreditations</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">TAF: L3261-190725</td> </tr> <tr> <td>FCC: 291082, TW3261</td> <td style="text-align: right;">ISED: TW3261</td> </tr> </table>	TAF: L3261-190725		FCC: 291082, TW3261	ISED: TW3261		
TAF: L3261-190725							
FCC: 291082, TW3261	ISED: TW3261						

1.4. Product Information

Product Name	5G Sub-6 GHz LGA Module
Model No.	RG520N-NA
Brand Name	Quectel
IMEI	Conducted Measurement 1: 863109050007421 Conducted Measurement 2: 863109050005151 Radiated Measurement: 863109050007306
E-UTRA Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
5G NR Band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n48, n66, n71, n77, n78
Operating Temperature	-30 ~ 75 °C
Power Type	3.3 ~ 4.4Vdc, typical 3.8Vdc
Remark: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.	

1.5. Radio Specification under Test

FDD TxFrequency Range	Band 14: 788 ~ 798 MHz
FDD RxFrequency Range	Band 14: 758 ~ 768 MHz
Modulation	UL up to 256QAM, DL up to 256QAM
Remark: For other features of this EUT, test report will be issued separately.	

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	MaxPeak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	1.37
LTE Band 4	1710 ~ 1755		1.37
LTE Band 5	824 ~ 849		1.18
LTE Band 7	2500 ~ 2570		2.07
LTE Band 12	699 ~ 716		1.18
LTE Band 13	777 ~ 787		1.18
LTE Band 14	788 ~ 798		1.18
LTE Band 17	704~ 716		1.18
LTE Band 25	1850 ~ 1915		1.37
LTE Band 26	814~849		1.18
LTE Band 30	2305 ~ 2315		1.11
LTE Band 38	2570 ~ 2620		2.07
LTE Band 41	2496 ~ 2690		2.07
LTE Band 48	3550 ~ 3700		0.58
LTE Band 66	1710 ~ 1780		1.37
LTE Band 71	663 ~ 698		1.18

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.


1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2. Test Configuration

2.1. Test System Connection Diagram

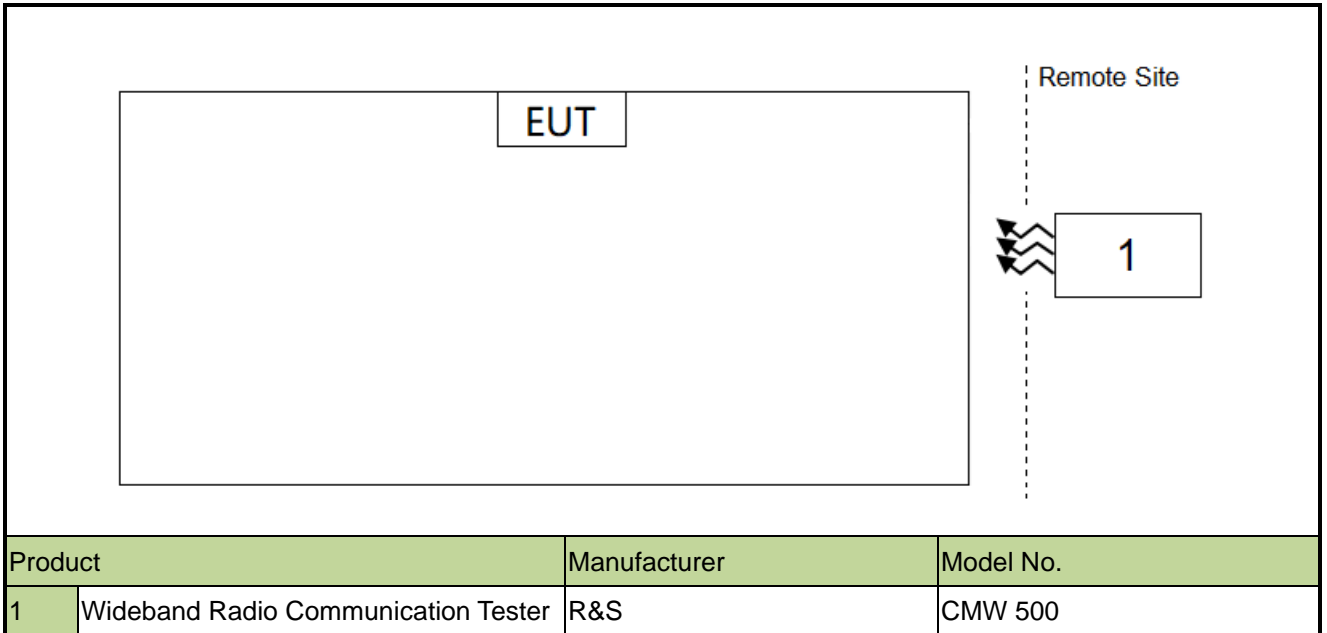

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022-12-09	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2023-06-01	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022-10-31	SIP-SR1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022-10-10	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2023-06-01	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023-01-06	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2022-11-23	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022-11-23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	N/A	N/A	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	N/A	N/A	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	N/A	N/A	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	N/A	N/A	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022-12-29	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023-02-27	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	N/A	N/A	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06954	3 years	2024-06-02	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06955	3 years	2024-06-02	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06956	1 year	2023-06-01	SIP-SR1
Common Interface Unit	Keysight	E7770A	MRTSUE06957	N/A	N/A	SIP-SR1
Directional Coupler	ar	DC7200A	MRTSUE06147	N/A	N/A	SIP
Directional Coupler	ar	DC6080A	MRTSUE06148	N/A	N/A	SIP-SR1
Directional Coupler	narda	4226-10	MRTSUE06564	1 year	2022-10-11	SIP-SR1
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06846	1 year	2023-06-02	SIP-SR1
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06848	1 year	2023-06-02	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11055	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11056	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11057	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11058	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11059	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11060	1 year	2023-06-09	SIP-SR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	Conducted	Pass	Section 5.2
2.1055,90.539(e)	Frequency Stability		Pass	Section 5.3
90.542(a)(7)	Equivalent Radiated Power		Pass	Section 5.4
2.1051, 90.543(e)(2)(3)	Band Edge		Pass	Section 5.5, 5.6, 5.7
2.1051, 90.210(n)	Emission Mask			
2.1051, 90.543(e)(3)	Spurious Emission			
2.1053, 90.543(e)(3) 90.543(f)	Spurious Emissions	Radiated	Pass	Section 5.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

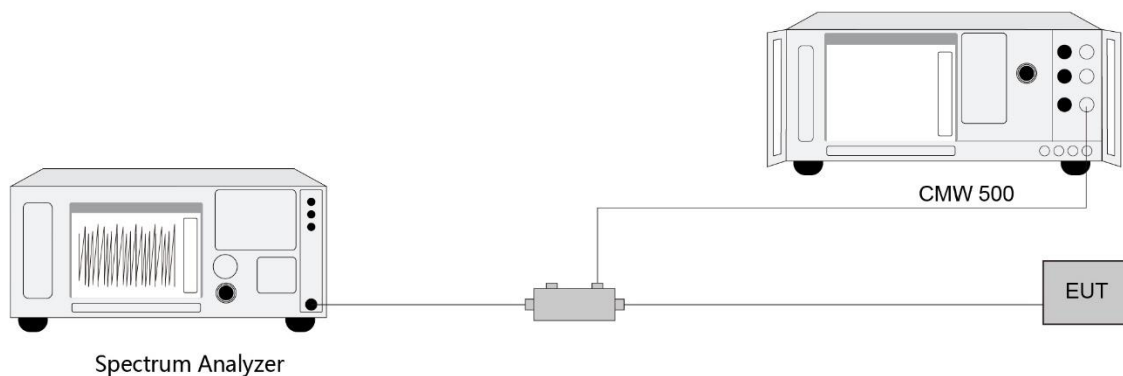

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the inputvoltage to specify extreme voltage variation ($\pm 15\%$) and end point, record the maximum frequency change.

5.3.4. Test Setup

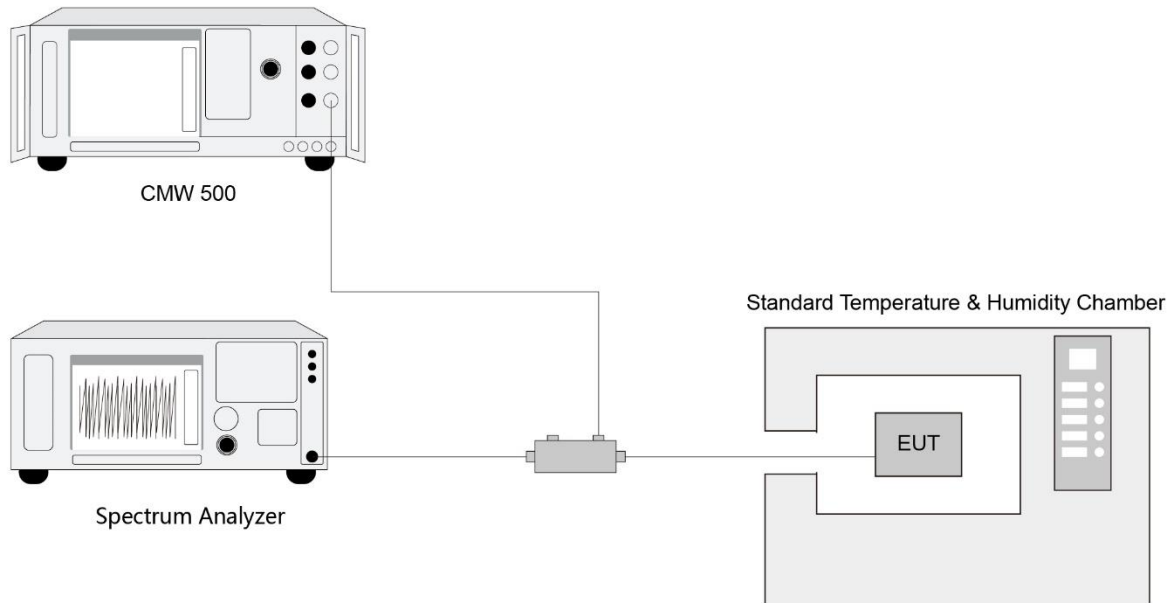

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Equivalent Isotropically Radiated Power Measurement

5.4.1. Test Limit

Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.

5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

5.4.4. Test Setup

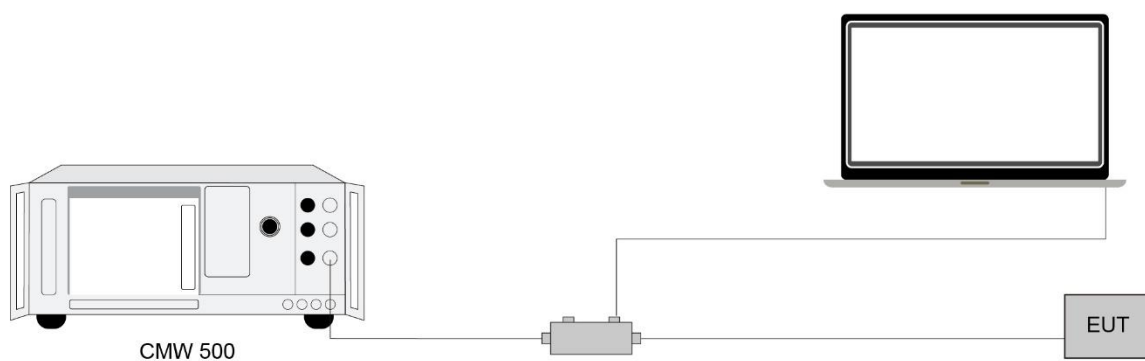

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Band Edge Measurement

5.5.1. Test Limit

For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (2) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.


5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.5.4. Test Setup

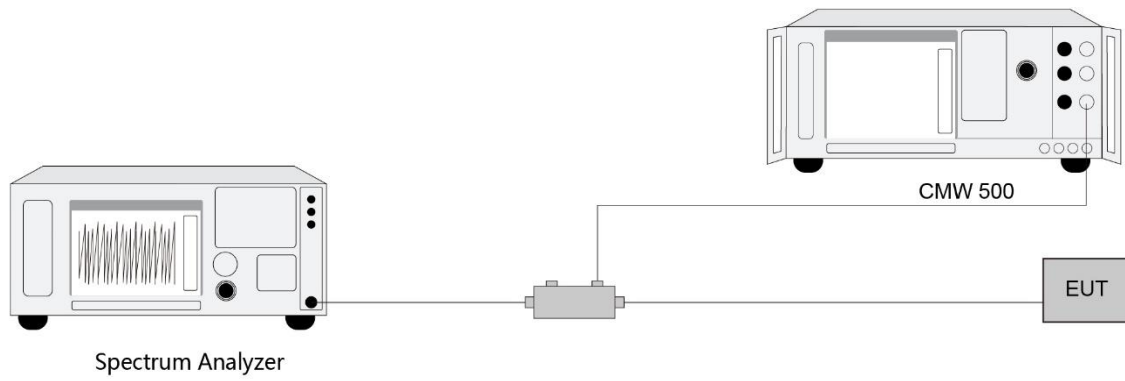

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Emission Mask Measurement

5.6.1. Test Limit

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

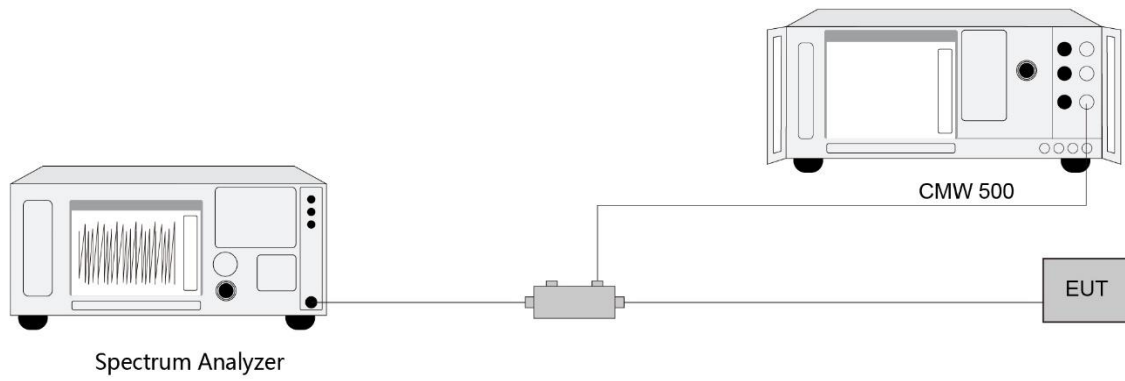

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Conducted Spurious Emissions Measurement

5.7.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.


5.7.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.7.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.7.4. Test Setup

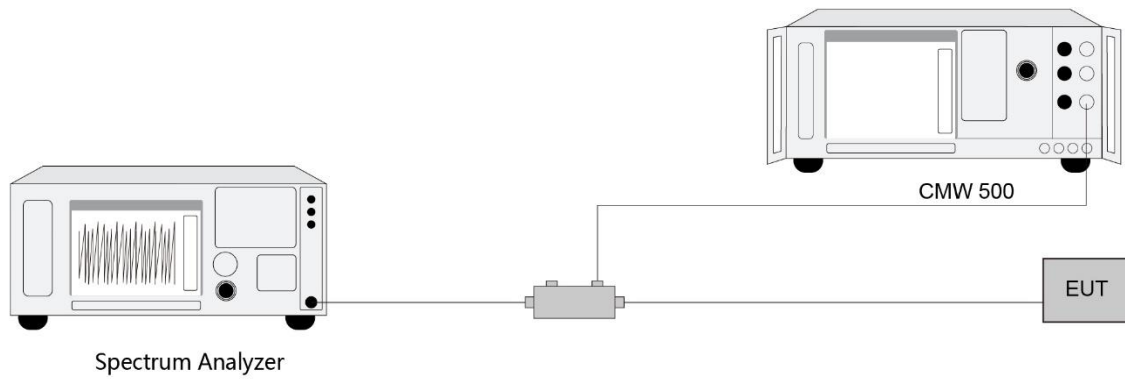

5.7.5. Test Result

Refer to Appendix A.6.

5.8. Radiated Spurious Emissions Measurement

5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz (-40 dBm/MHz) equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW (-50 dBm) EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m or 55.3dB μ V/m.

5.8.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.8.3. Test Setting


1. RBW = 1MHz
2. VBW ≥ 3 *RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.8.4. Test Setup

Below 1GHz Test Setup:

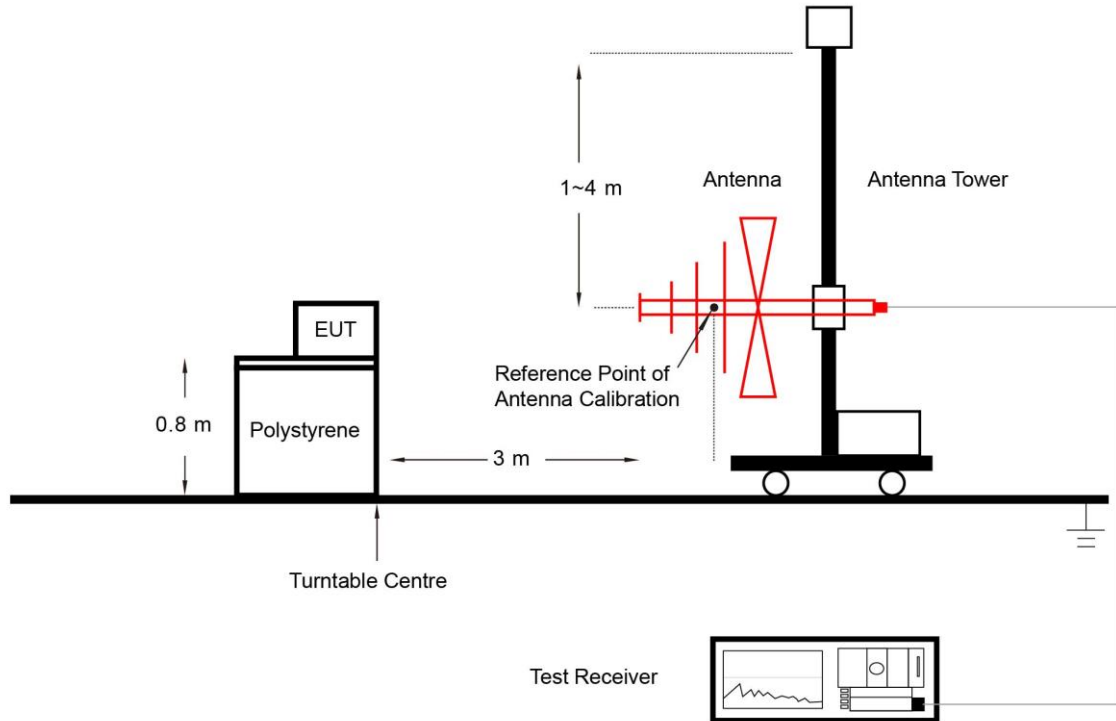

Above 1GHz Test Setup:

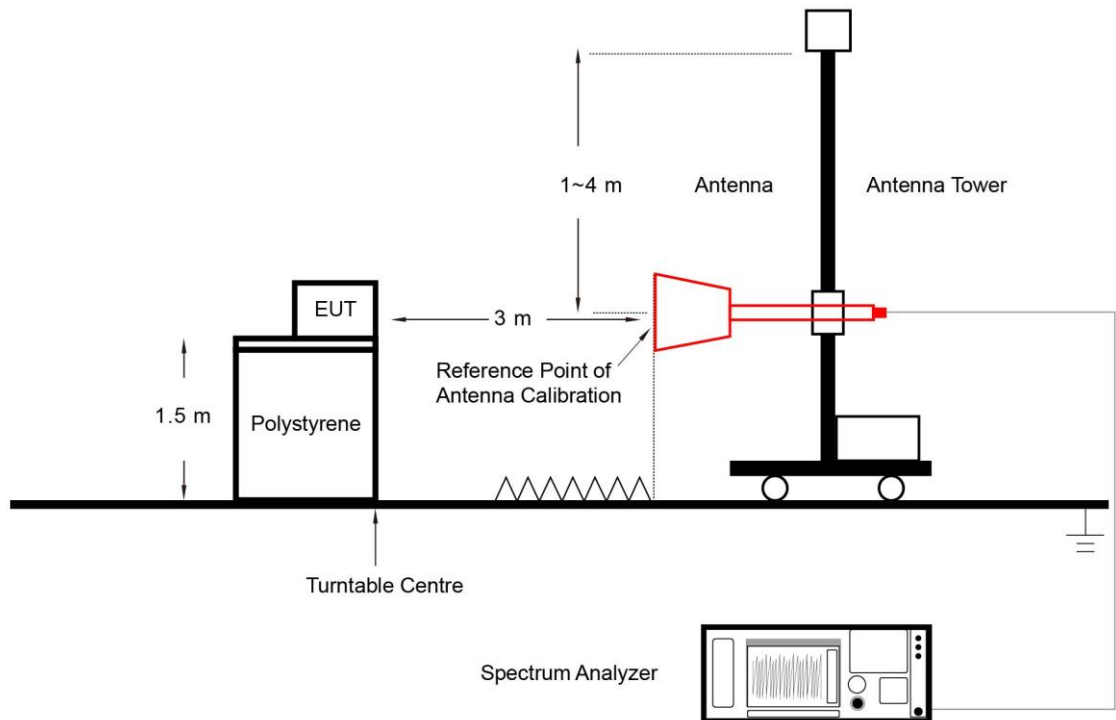

5.8.5. Test Result



Refer to Appendix A.7.

Appendix A - Test Result

A.1 Occupied Bandwidth Test Result


Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/12	Test Band	Band 14

Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	793.0	5	4.48
		10	8.91
16QAM	793.0	5	4.47
		10	8.92
64QAM	793.0	5	4.47
		10	8.92
256QAM	793.0	5	4.47
		10	8.92

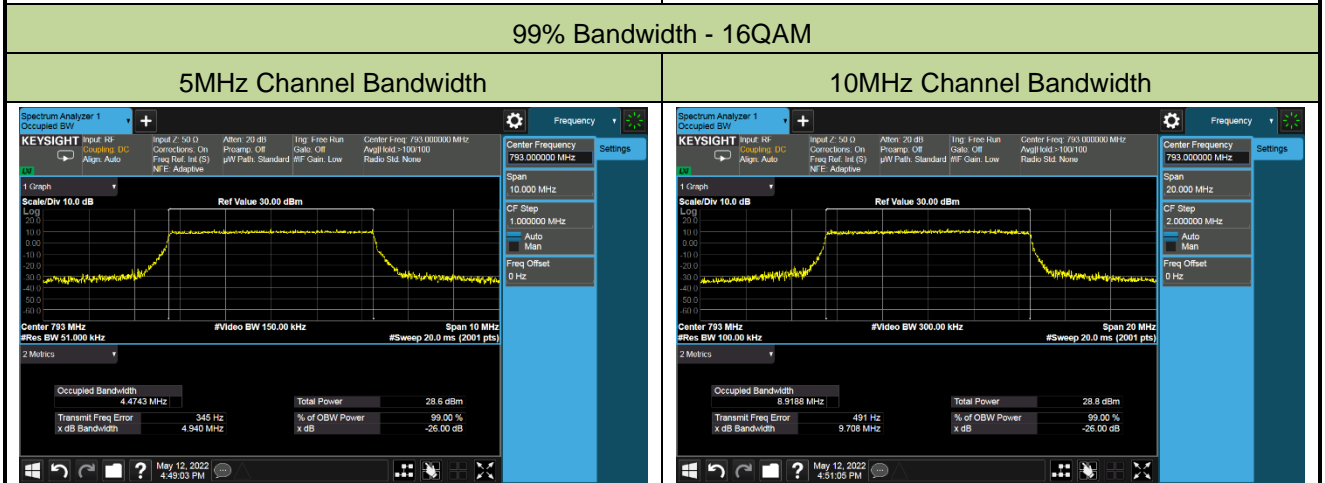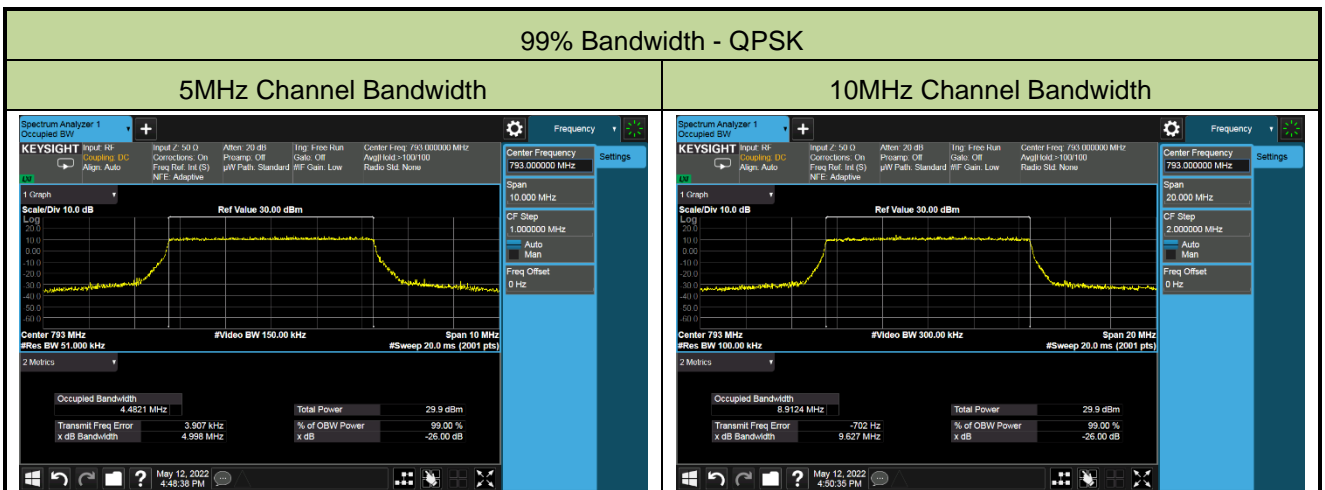


99% Bandwidth - 64QAM

5MHz Channel Bandwidth

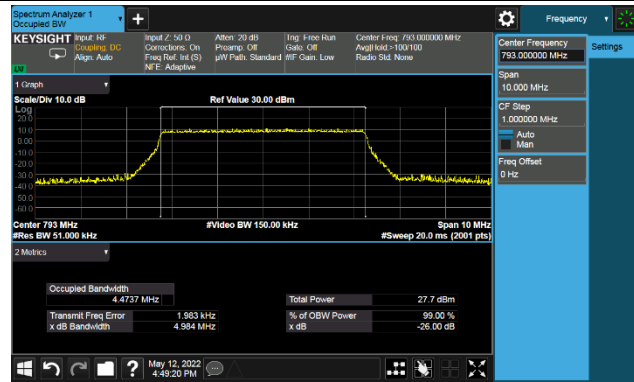

10MHz Channel Bandwidth

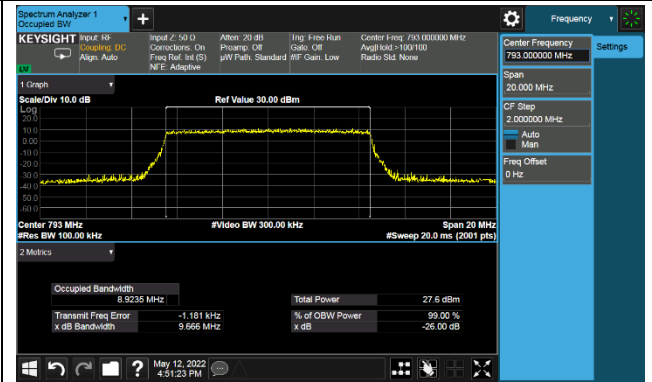


99% Bandwidth - 256QAM

5MHz Channel Bandwidth



10MHz Channel Bandwidth

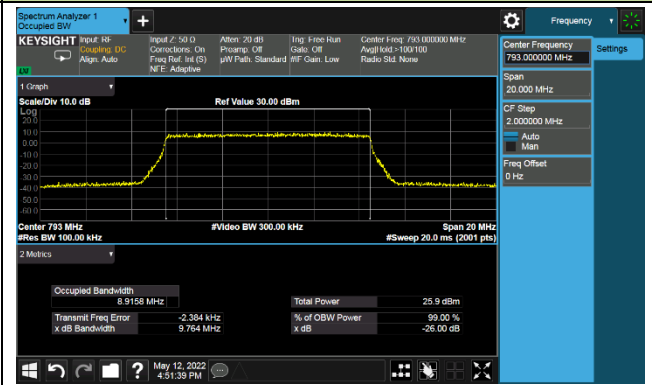

A.2 Frequency Stability Test Result

Test Site	SIP-TR1	Test Engineer	Allen Zou
Test Date	2022/05/09	Test Band	Band 14

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	0.0008
	- 20	0.0009
	- 10	-0.0024
	0	-0.0013
	+ 10	-0.0015
	+ 20	-0.0014
	+ 30	-0.0029
	+ 40	0.0020
	+ 50	-0.0024
4.4	+ 20	-0.0025
3.3	+ 20	-0.0028

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/04/26 ~ 2022/05/19	Test Band	Band 14

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
QPSK						
790.5	5	1	0	22.36	21.39	<44.77
793.0				22.39	21.42	<44.77
795.5				22.35	21.38	<44.77
790.5	5	1	12	22.44	21.47	<44.77
793.0				22.41	21.44	<44.77
795.5				22.44	21.47	<44.77
790.5	5	1	24	22.43	21.46	<44.77
793.0				22.35	21.38	<44.77
795.5				22.37	21.40	<44.77
790.5	5	25	0	22.01	21.04	<44.77
793.0				21.91	20.94	<44.77
795.5				21.93	20.96	<44.77
793.0	10	1	0	22.51	21.54	<44.77
793.0			24	22.49	21.52	<44.77
793.0			49	22.44	21.47	<44.77
793.0	10	50	0	21.91	20.94	<44.77

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15



Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
16QAM						
790.5	5	1	0	22.12	21.15	<44.77
793.0				22.10	21.13	<44.77
795.5				22.23	21.26	<44.77
790.5	5	1	12	22.24	21.27	<44.77
793.0				22.11	21.14	<44.77
795.5				22.26	21.29	<44.77
790.5	5	1	24	22.32	21.35	<44.77
793.0				22.02	21.05	<44.77
795.5				22.20	21.23	<44.77
790.5	5	25	0	21.04	20.07	<44.77
793.0				20.91	19.94	<44.77
795.5				20.95	19.98	<44.77
793.0	10	1	0	21.99	21.02	<44.77
793.0			24	22.10	21.13	<44.77
793.0			49	22.21	21.24	<44.77
793.0	10	50	0	20.92	19.95	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
64QAM						
790.5	5	1	0	21.11	20.14	<44.77
793.0				21.04	20.07	<44.77
795.5				21.19	20.22	<44.77
790.5	5	1	12	21.22	20.25	<44.77
793.0				21.06	20.09	<44.77
795.5				21.21	20.24	<44.77
790.5	5	1	24	21.22	20.25	<44.77
793.0				21.00	20.03	<44.77
795.5				21.02	20.05	<44.77
790.5	5	25	0	20.08	19.11	<44.77
793.0				20.13	19.16	<44.77
795.5				20.10	19.13	<44.77
793.0	10	1	0	21.54	20.57	<44.77
793.0			24	21.39	20.42	<44.77
793.0			49	21.25	20.28	<44.77
793.0	10	50	0	20.15	19.18	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	ERP (dBm)	Limit (dBm)
256QAM						
790.5	5	1	0	17.95	16.98	<44.77
793.0				18.19	17.22	<44.77
795.5				18.05	17.08	<44.77
790.5	5	1	12	18.24	17.27	<44.77
793.0				18.41	17.44	<44.77
795.5				18.38	17.41	<44.77
790.5	5	1	24	18.28	17.31	<44.77
793.0				18.24	17.27	<44.77
795.5				18.21	17.24	<44.77
790.5	5	25	0	18.11	17.14	<44.77
793.0				18.03	17.06	<44.77
795.5				18.11	17.14	<44.77
793.0	10	1	0	17.92	16.95	<44.77
793.0			24	18.50	17.53	<44.77
793.0			49	17.99	17.02	<44.77
793.0	10	50	0	18.11	17.14	<44.77
Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) - 2.15						


A.4 Band Edge Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/19	Test Band	Band 14

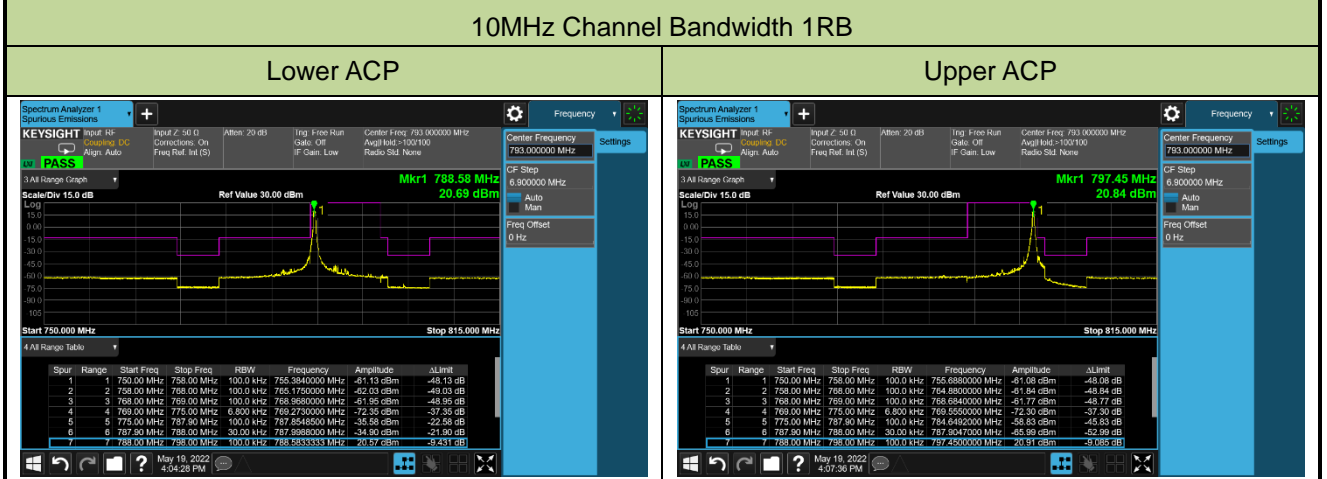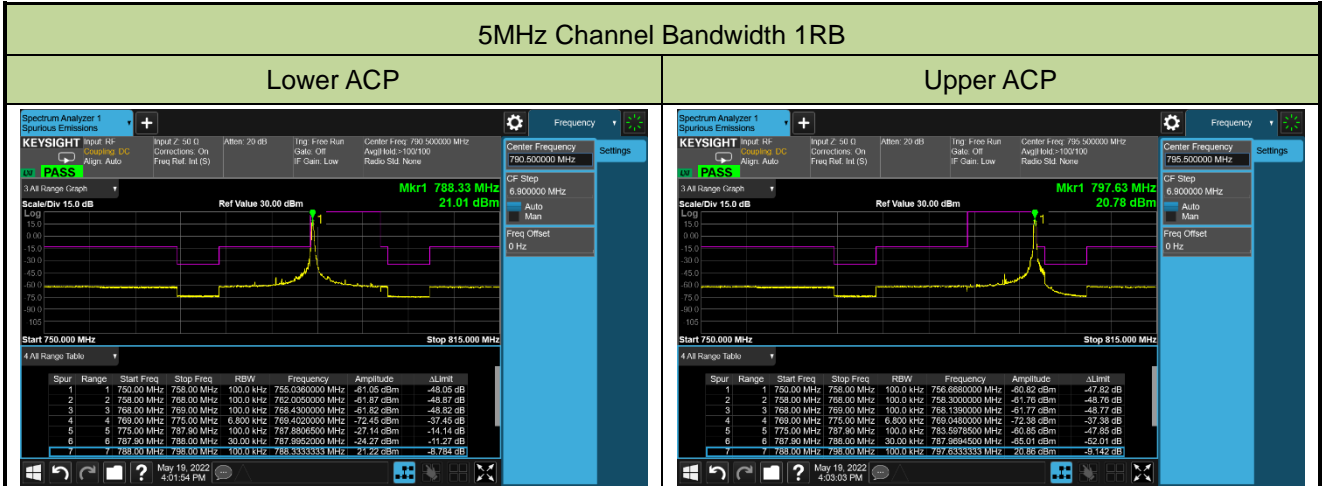


5MHz Channel Bandwidth Full RB

Lower ACP

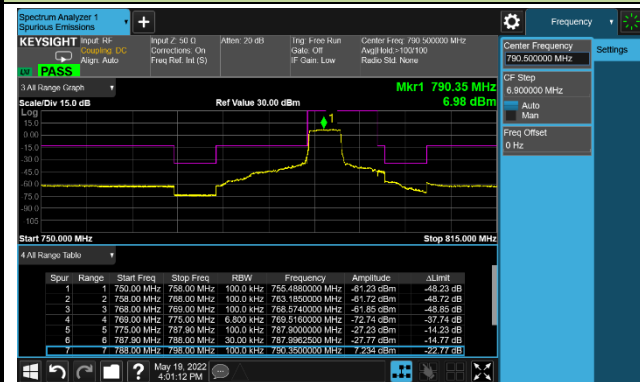


Upper ACP

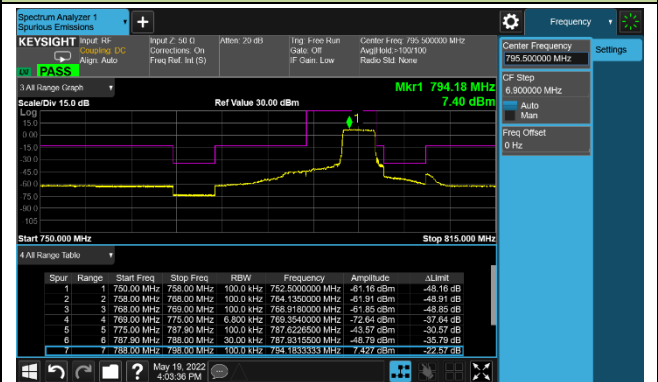

10MHz Channel Bandwidth Full RB

Middle ACP

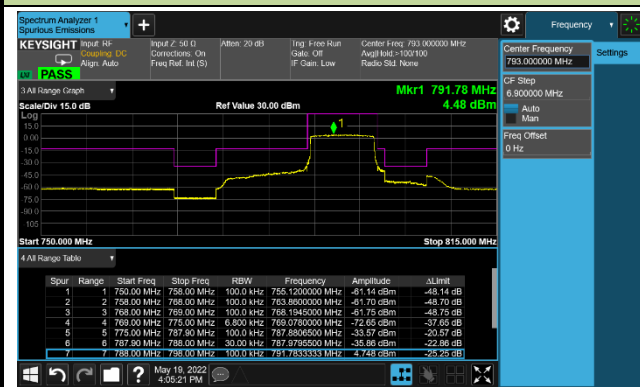

A.5 Emission Mask Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/06/15	Test Band	Band 14

5MHz Channel Bandwidth 1RB@0

Low Channel

Start Freq	Stop Freq	Integ BW	dBm	ΔLimit(dB)	Freq (Hz)	dBm	ΔLimit(dB)	Freq (Hz)
2.500 MHz	5.000 MHz	51.00 kHz	-21.87	(-20.37)	-2.500 M	-59.41	(-57.91)	4.213 M
5.000 MHz	12.50 MHz	100.0 kHz	-46.47	(-34.97)	-6.355 M	-60.25	(-48.75)	5.098 M
12.50 MHz	30.00 MHz	1.000 MHz	-52.05	(-38.05)	-12.50 M	-52.32	(-38.32)	12.50 M
40.30 MHz	44.30 MHz	1.000 MHz	--	(--)	--	--	(--)	--
8.000 MHz	12.50 MHz	1.000 MHz	--	(--)	--	--	(--)	--
12.50 MHz	15.00 MHz	1.000 MHz	--	(--)	--	--	(--)	--

Middle Channel


Start Freq	Stop Freq	Integ BW	dBm	ΔLimit(dB)	Freq (Hz)	dBm	ΔLimit(dB)	Freq (Hz)
2.500 MHz	5.000 MHz	51.00 kHz	-20.80	(-19.17)	-2.500 M	-57.21	(-55.58)	2.513 M
5.000 MHz	12.50 MHz	100.0 kHz	-54.40	(-42.78)	-6.555 M	-58.23	(-47.10)	7.554 M
12.50 MHz	30.00 MHz	1.000 MHz	-51.88	(-38.88)	-13.03 M	-52.50	(-39.50)	12.59 M
40.30 MHz	44.30 MHz	1.000 MHz	--	(--)	--	--	(--)	--
8.000 MHz	12.50 MHz	1.000 MHz	--	(--)	--	--	(--)	--
12.50 MHz	15.00 MHz	1.000 MHz	--	(--)	--	--	(--)	--

High Channel


Start Freq	Stop Freq	Integ BW	dBm	ΔLimit(dB)	Freq (Hz)	dBm	ΔLimit(dB)	Freq (Hz)
2.500 MHz	5.000 MHz	51.00 kHz	-20.69	(-19.30)	-2.500 M	-58.57	(-57.23)	2.575 M
5.000 MHz	12.50 MHz	100.0 kHz	-54.05	(-42.71)	-6.068 M	-60.69	(-49.25)	5.785 M
12.50 MHz	30.00 MHz	1.000 MHz	-51.94	(-38.94)	-12.50 M	-52.54	(-39.54)	29.56 M
40.30 MHz	44.30 MHz	1.000 MHz	--	(--)	--	--	(--)	--
8.000 MHz	12.50 MHz	1.000 MHz	--	(--)	--	--	(--)	--
12.50 MHz	15.00 MHz	1.000 MHz	--	(--)	--	--	(--)	--

5MHz Channel Bandwidth 1RB@24


Low Channel

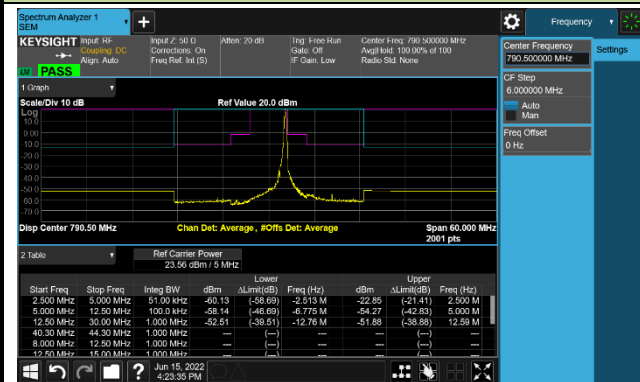

Middle Channel

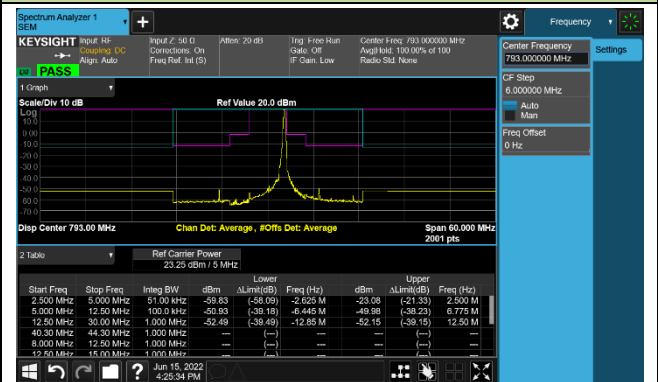


High Channel

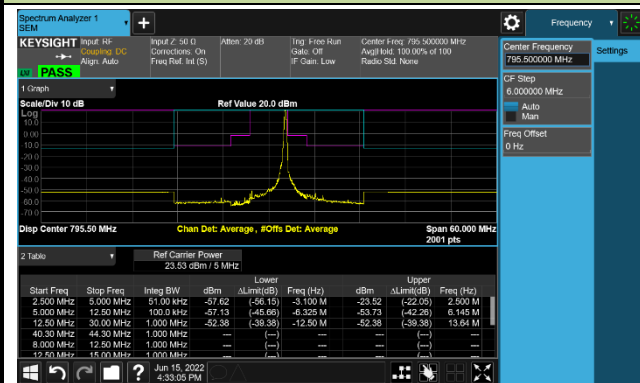


5MHz Channel Bandwidth Full RB


Low Channel

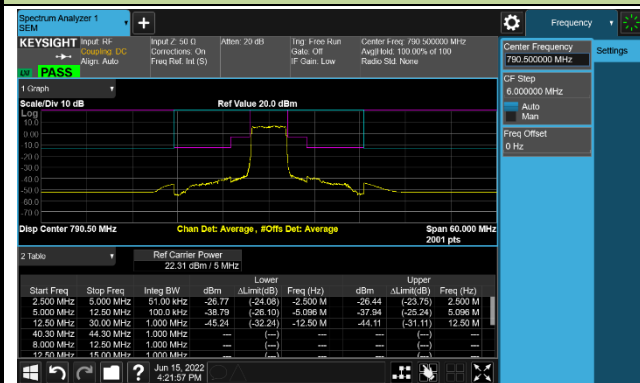


Middle Channel

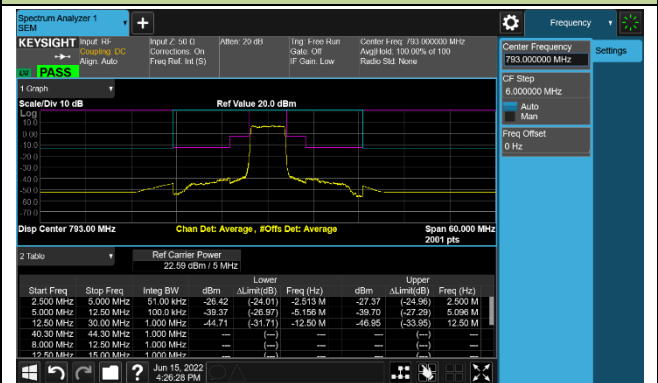

High Channel

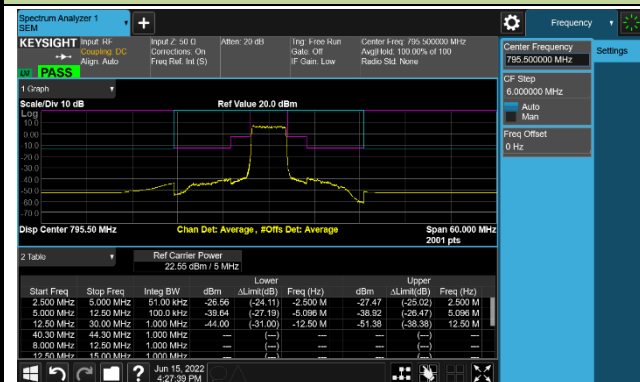


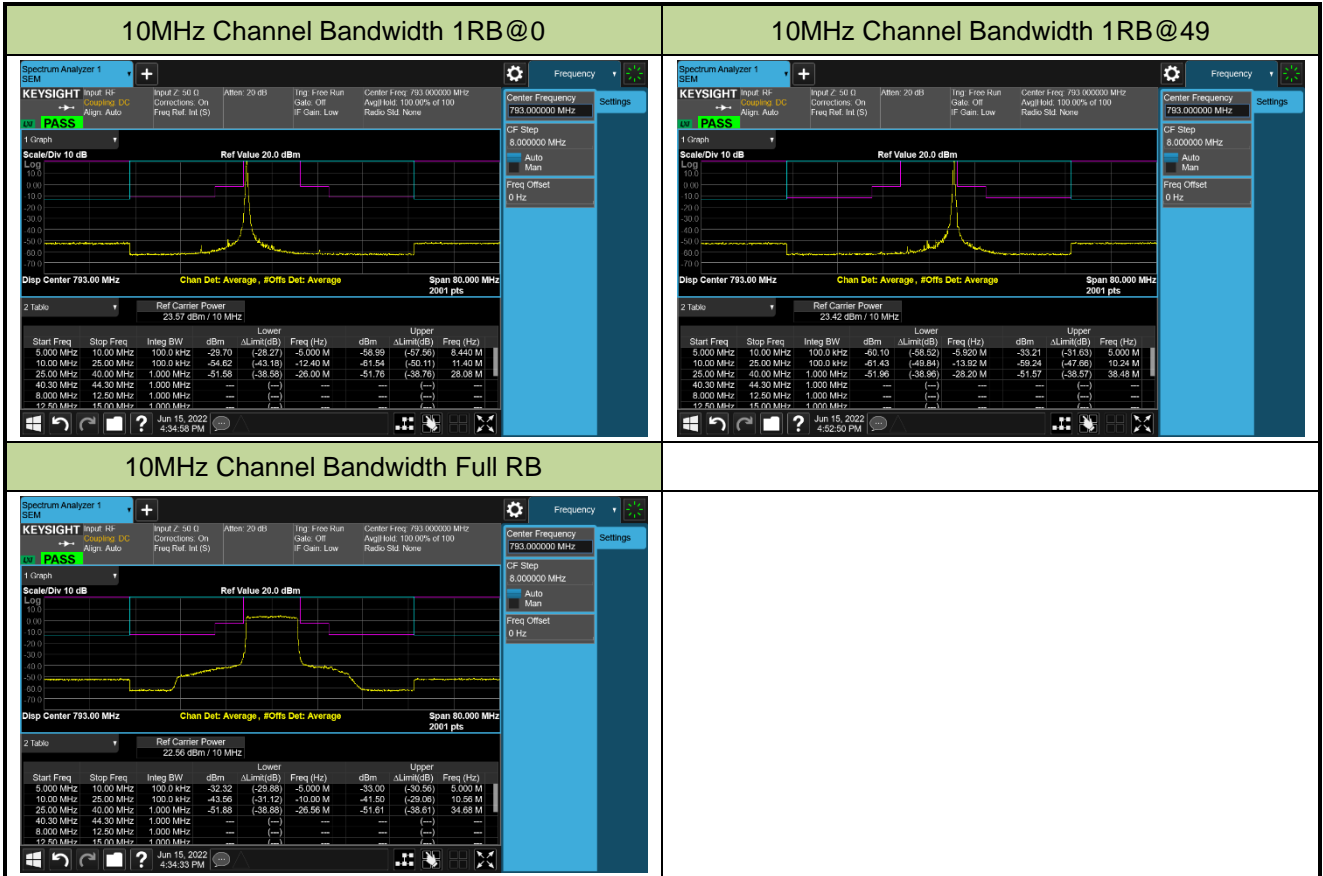


A.6 Conducted Supurious Emissions Test Result


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/05	Test Band	Band 14

Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
QPSK					
790.5	5	30 ~ 10000	-45.27	≤ -13.00	Pass
793.0	5	30 ~ 10000	-45.36	≤ -13.00	Pass
795.5	5	30 ~ 10000	-45.23	≤ -13.00	Pass
793.0	10	30 ~ 10000	-45.43	≤ -13.00	Pass

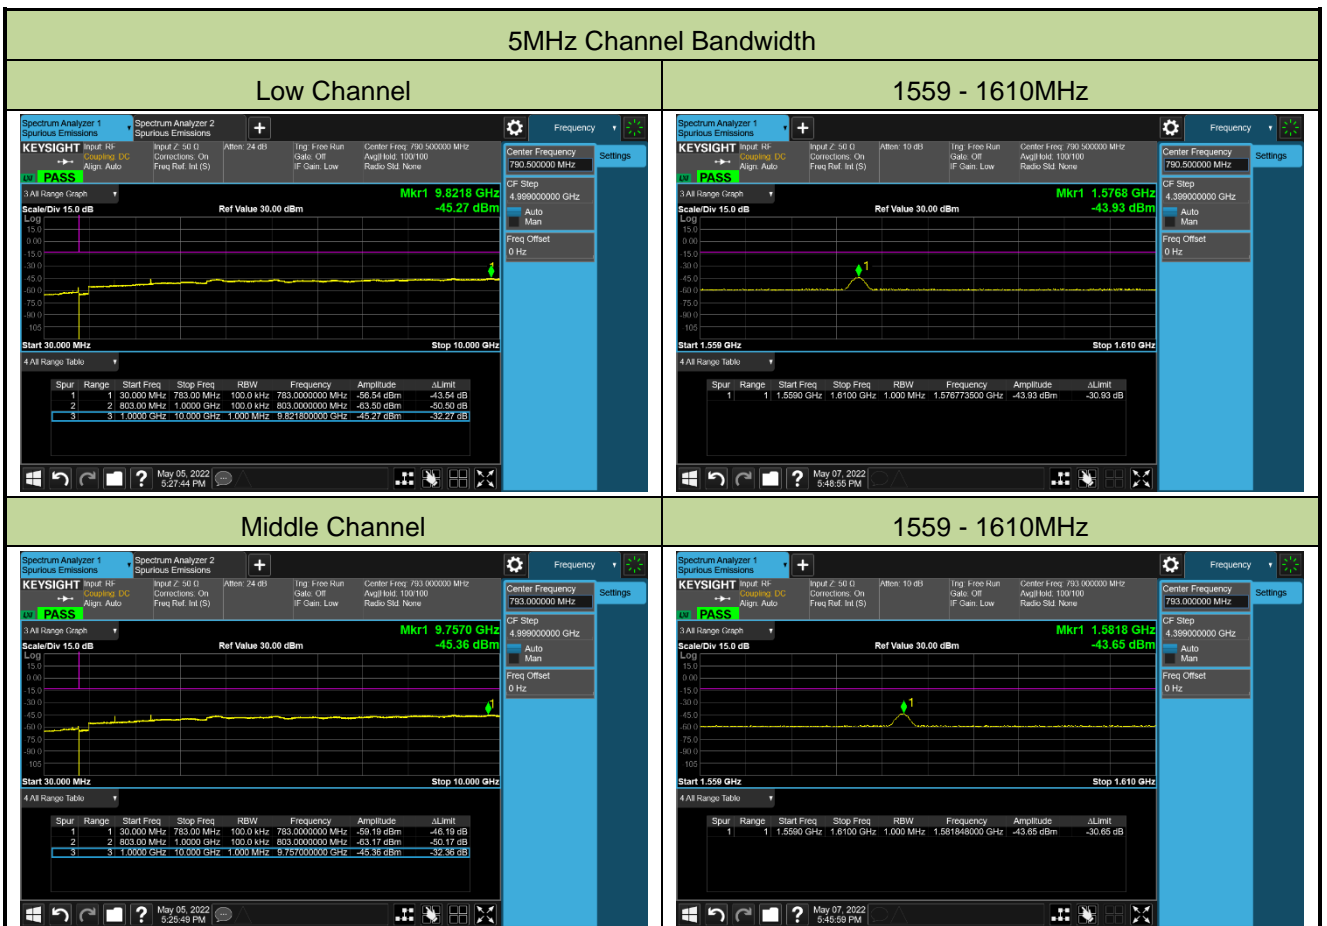

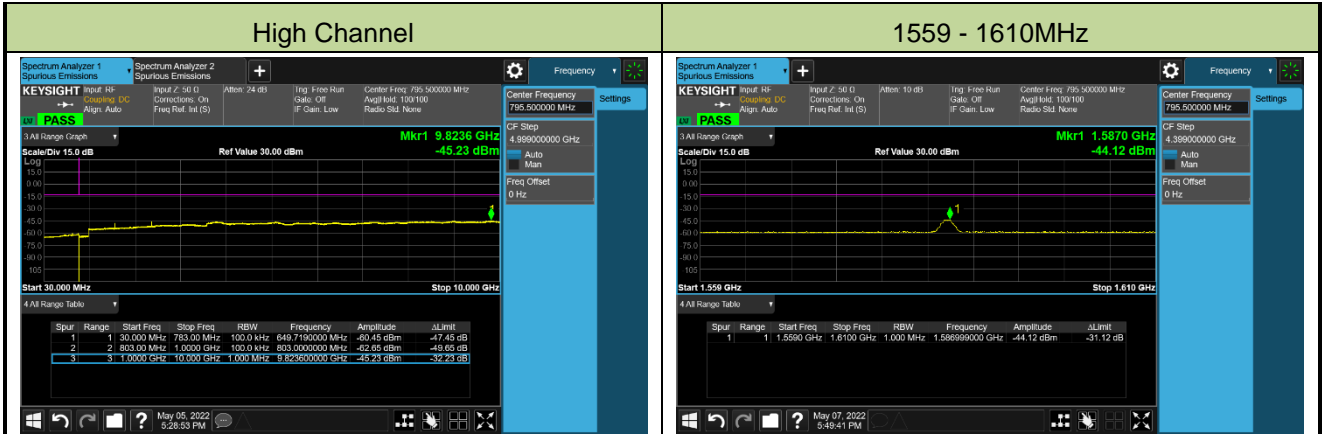

10MHz Channel Bandwidth

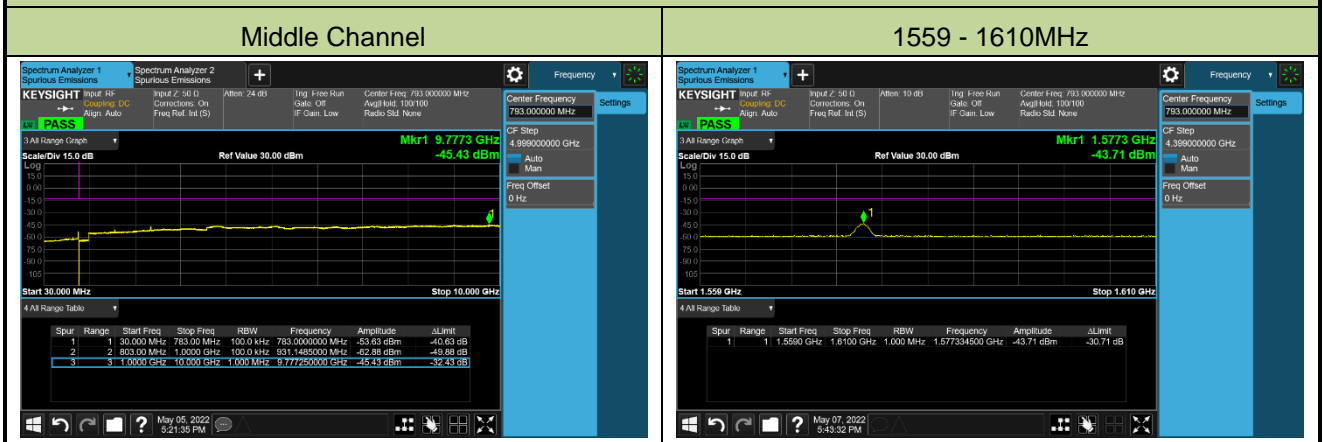

A.7 Radiated Spurious Emissions Test Result

Test Site	SIP-AC3	Test Engineer	Wayen Wang
Test Date	2022/05/20~2022/05/30	Test Band	LTE Band 14, 5MHz, 1RB

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level(dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
419.9	21.0	21.3	42.3	82.3	-40.0	Peak	Horizontal
566.9	19.5	24.5	44.0	82.3	-38.3	Peak	Horizontal
425.3	21.5	21.5	43.0	82.3	-39.3	Peak	Vertical
597.9	22.3	25.4	47.7	82.3	-34.6	Peak	Vertical
1569.5	50.6	-18.2	32.4	55.2	-22.8	Peak	Horizontal
5403.0	50.2	-8.2	42.0	82.3	-40.3	Peak	Horizontal
1569.5	49.6	-18.2	31.4	55.2	-23.8	Peak	Vertical
5029.0	50.4	-8.3	42.1	82.3	-40.2	Peak	Vertical
Middle Channel							
539.7	20.8	23.7	44.5	82.3	-37.8	Peak	Horizontal
658.6	21.7	26.3	48.0	82.3	-34.3	Peak	Horizontal
449.0	21.4	22.4	43.8	82.3	-38.5	Peak	Vertical
632.4	22.4	26.1	48.5	82.3	-33.8	Peak	Vertical
1578.0	49.9	-18.2	31.7	55.2	-23.5	Peak	Horizontal
4357.5	50.3	-9.1	41.2	82.3	-41.1	Peak	Horizontal
1595.0	49.7	-18.1	31.6	55.2	-23.6	Peak	Vertical
4408.5	50.3	-9.0	41.3	82.3	-41.0	Peak	Vertical
High Channel							
518.4	21.9	23.7	45.6	82.3	-36.7	Peak	Horizontal
659.5	21.5	26.3	47.8	82.3	-34.5	Peak	Horizontal
474.7	21.0	22.7	43.7	82.3	-38.6	Peak	Vertical
630.9	21.8	26.0	47.8	82.3	-34.5	Peak	Vertical
1569.5	49.7	-18.2	31.5	55.2	-23.7	Peak	Horizontal
4340.5	50.0	-8.8	41.2	82.3	-41.1	Peak	Horizontal
1569.5	50.4	-18.2	32.2	55.2	-23.0	Peak	Vertical
4289.5	49.8	-8.9	40.9	82.3	-41.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2303RSU050-UT" file.

Appendix C - EUT Photograph

Refer to "2303RSU050-UE" file.