


Test Mode	NSA 4A n78A	Test Date	2023/12/5
Test Channel	CH636666	Polarization	Vertical
Temp	21°C	Hum.	56%

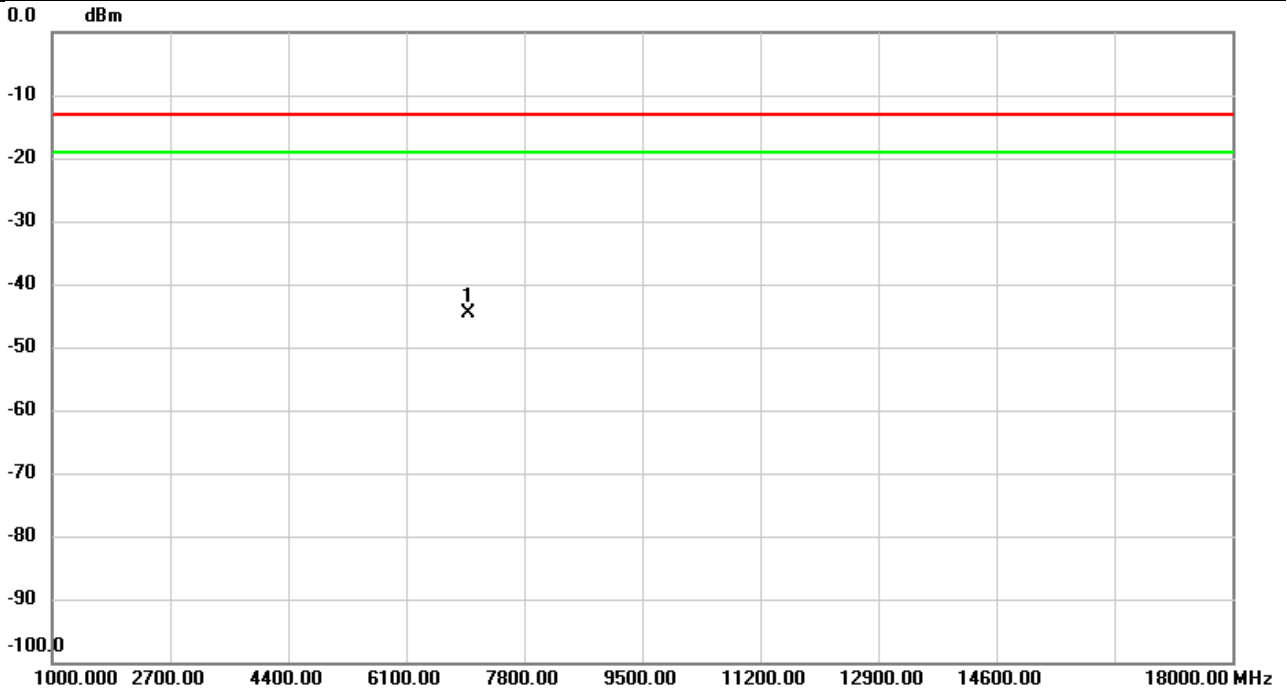


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6999.980	-62.49	17.93	-44.56	-13.00	-31.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2023/12/5
Test Channel	CH636666	Polarization	Horizontal
Temp	21°C	Hum.	56%

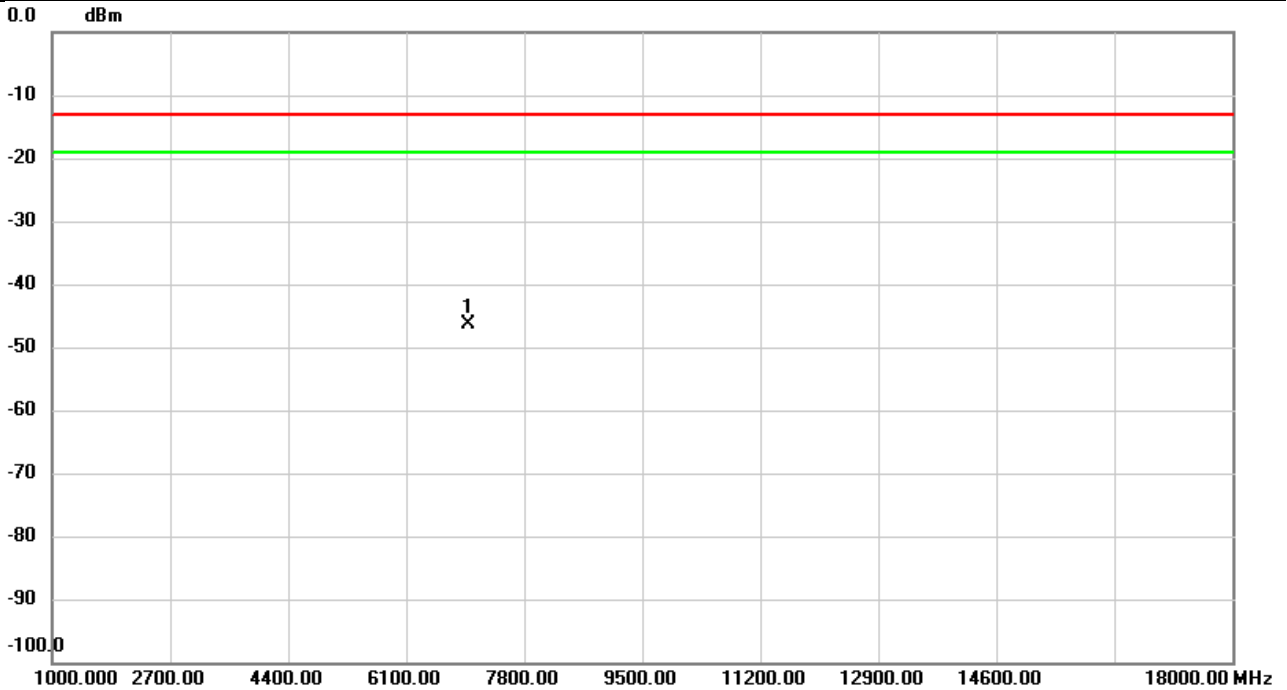


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6999.980	-63.94	17.69	-46.25	-13.00	-33.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2023/12/5
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

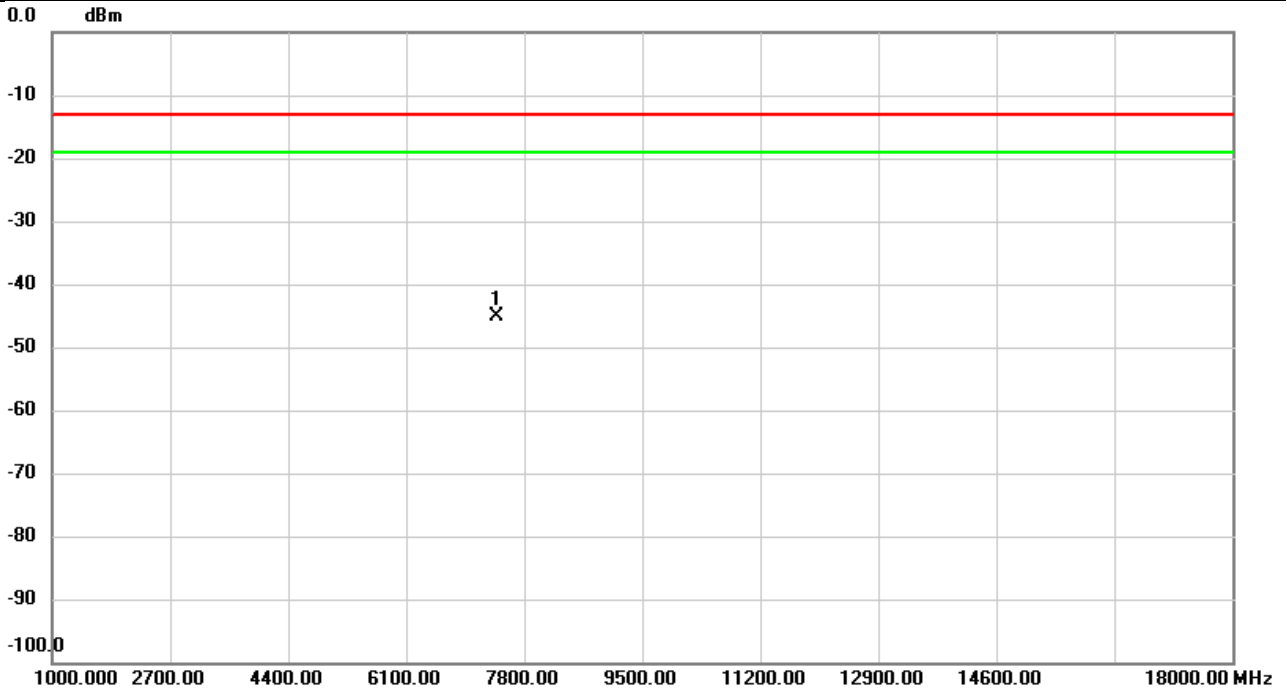


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.26	18.12	-45.14	-13.00	-32.14	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2023/12/5
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

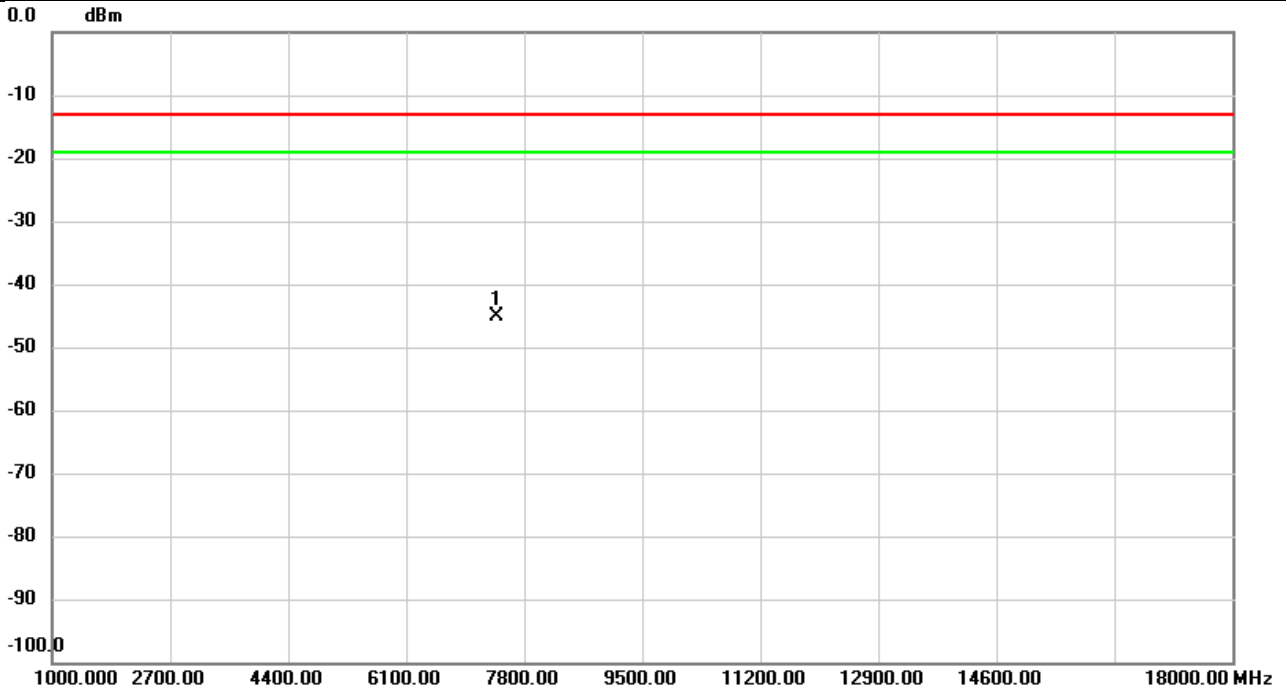


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.12	18.07	-45.05	-13.00	-32.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2023/12/4
Test Channel	CH636666	Polarization	Vertical
Temp	22°C	Hum.	58%

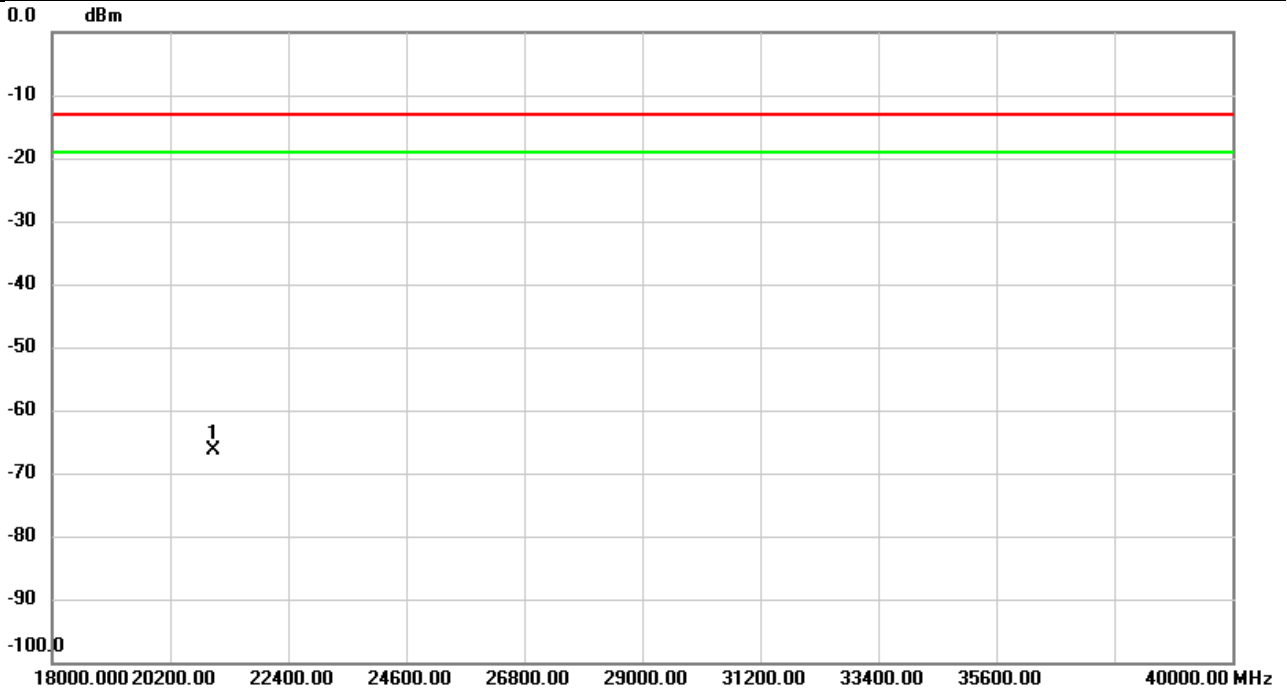


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20999.94	-60.22	-6.27	-66.49	-13.00	-53.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2023/12/4
Test Channel	CH636666	Polarization	Horizontal
Temp	22°C	Hum.	58%

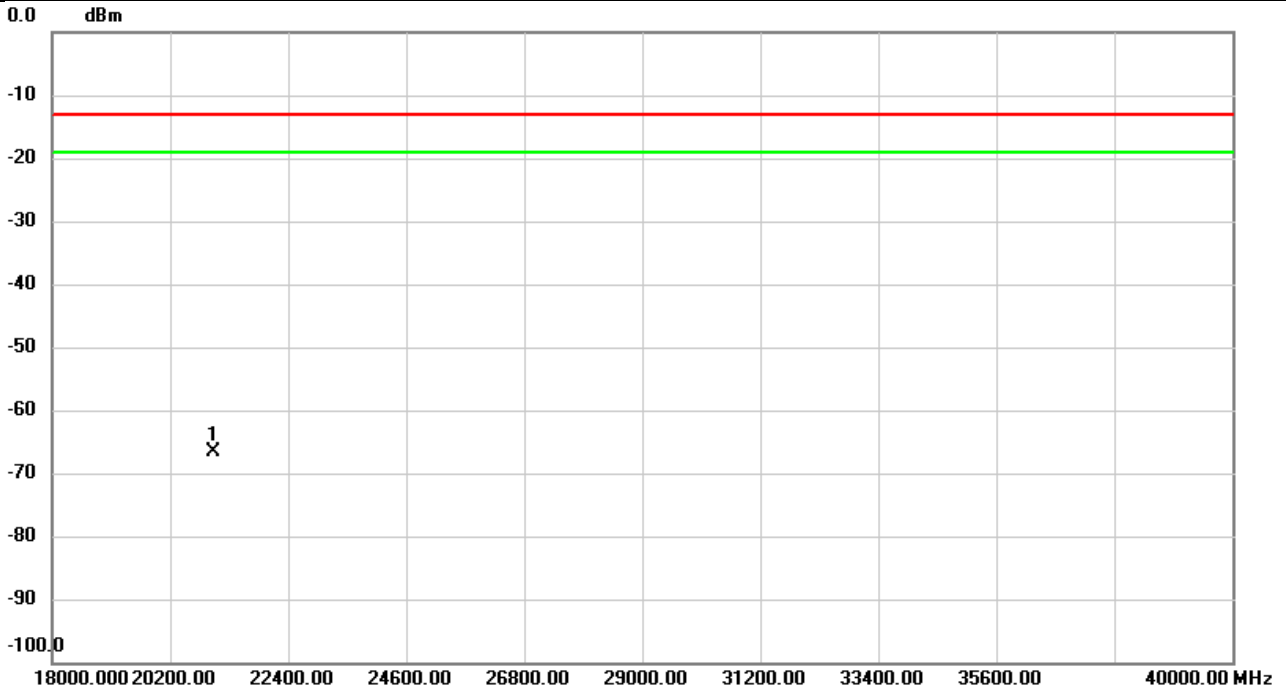


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20999.94	-60.32	-6.27	-66.59	-13.00	-53.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/4
Test Channel	CH519000	Polarization	Vertical
Temp	22°C	Hum.	58%

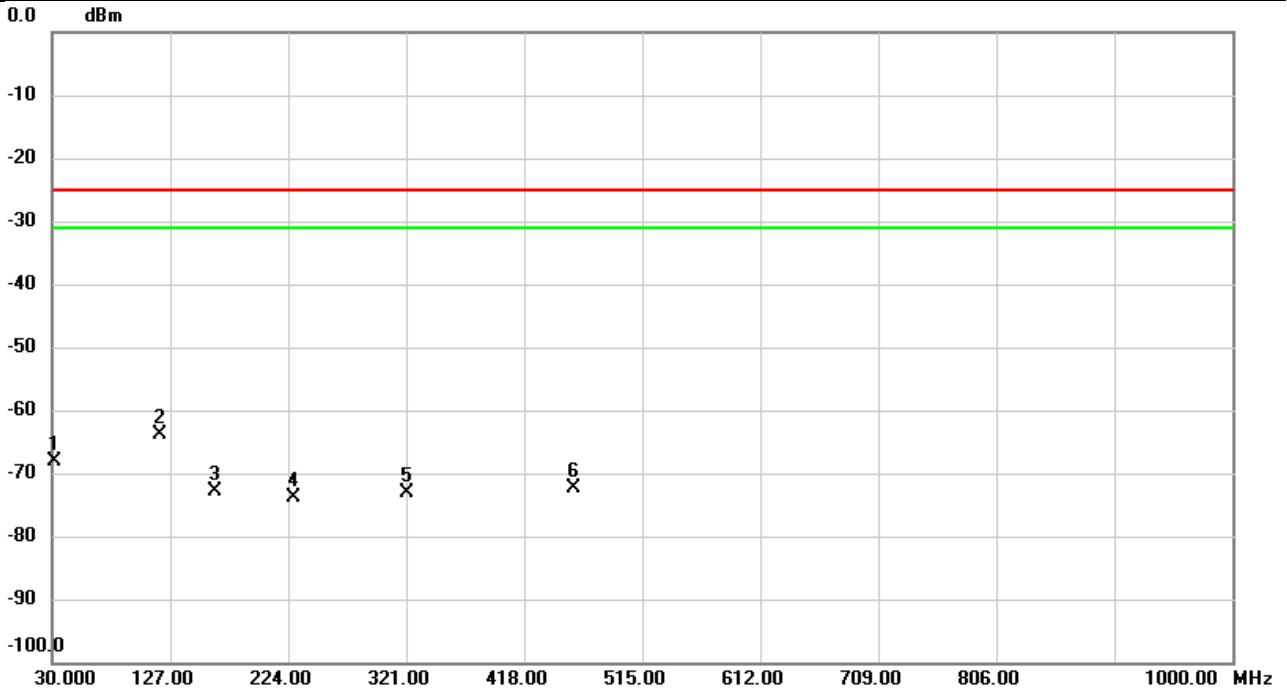


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		32.1340	-66.04	-2.15	-68.19	-25.00	-43.19	peak	
2	*	118.1407	-61.68	-2.15	-63.83	-25.00	-38.83	peak	
3		163.4396	-70.69	-2.15	-72.84	-25.00	-47.84	peak	
4		228.0417	-71.61	-2.15	-73.76	-25.00	-48.76	peak	
5		321.0000	-70.91	-2.15	-73.06	-25.00	-48.06	peak	
6		458.4490	-70.29	-2.15	-72.44	-25.00	-47.44	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/4
Test Channel	CH519000	Polarization	Horizontal
Temp	22°C	Hum.	58%

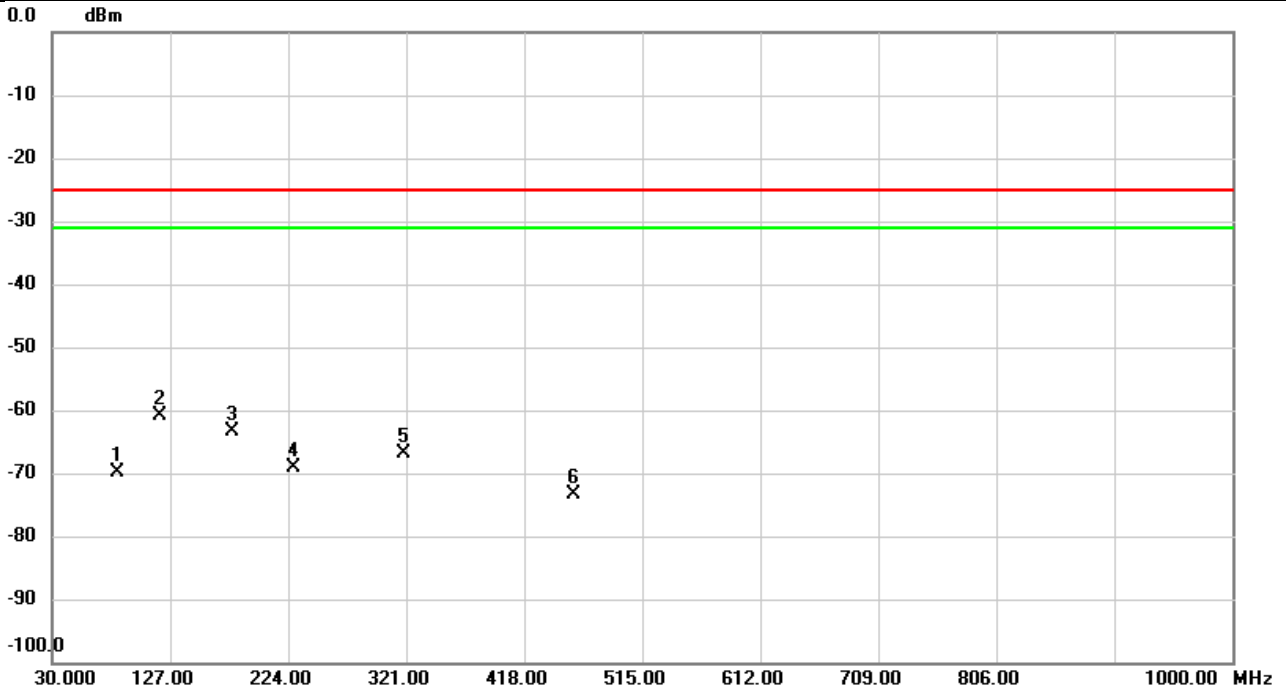


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		84.2553	-67.83	-2.15	-69.98	-25.00	-44.98	peak	
2	*	118.6257	-58.72	-2.15	-60.87	-25.00	-35.87	peak	
3		178.0220	-61.34	-2.15	-63.49	-25.00	-38.49	peak	
4		229.1087	-67.08	-2.15	-69.23	-25.00	-44.23	peak	
5		318.7690	-64.77	-2.15	-66.92	-25.00	-41.92	peak	
6		458.1580	-71.34	-2.15	-73.49	-25.00	-48.49	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH518000	Polarization	Vertical
Temp	21°C	Hum.	57%

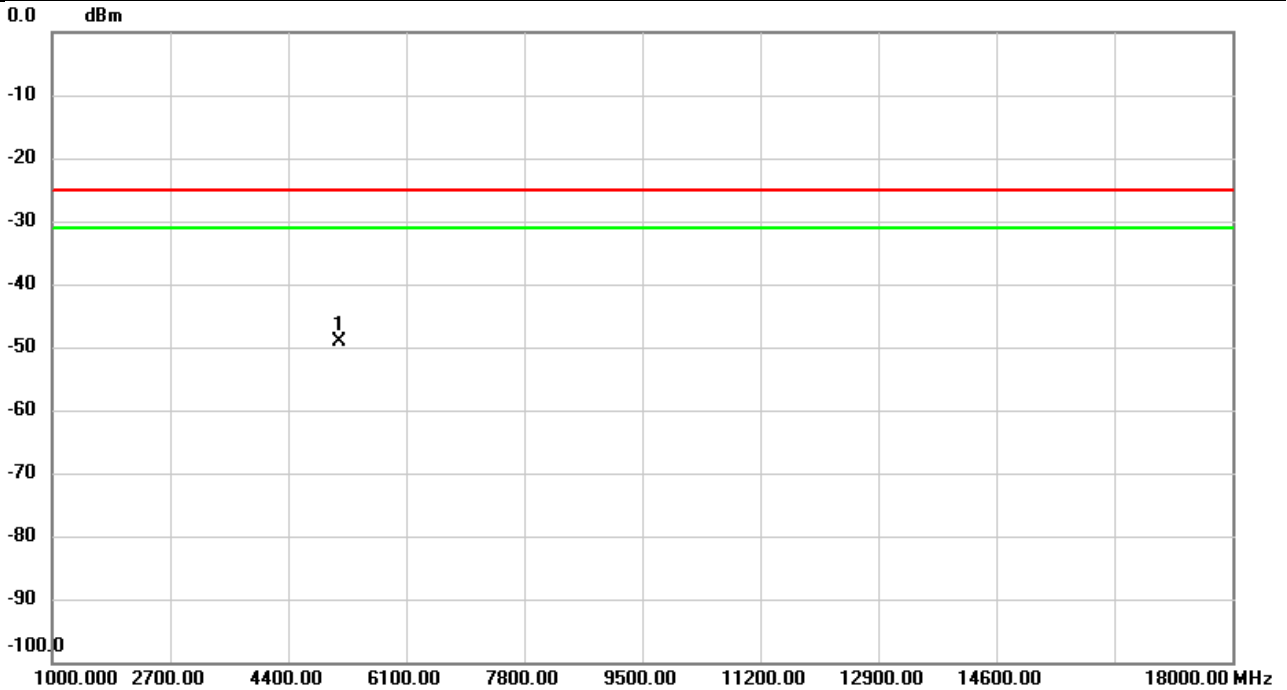


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-62.88	13.77	-49.11	-25.00	-24.11	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH518000	Polarization	Horizontal
Temp	21°C	Hum.	57%

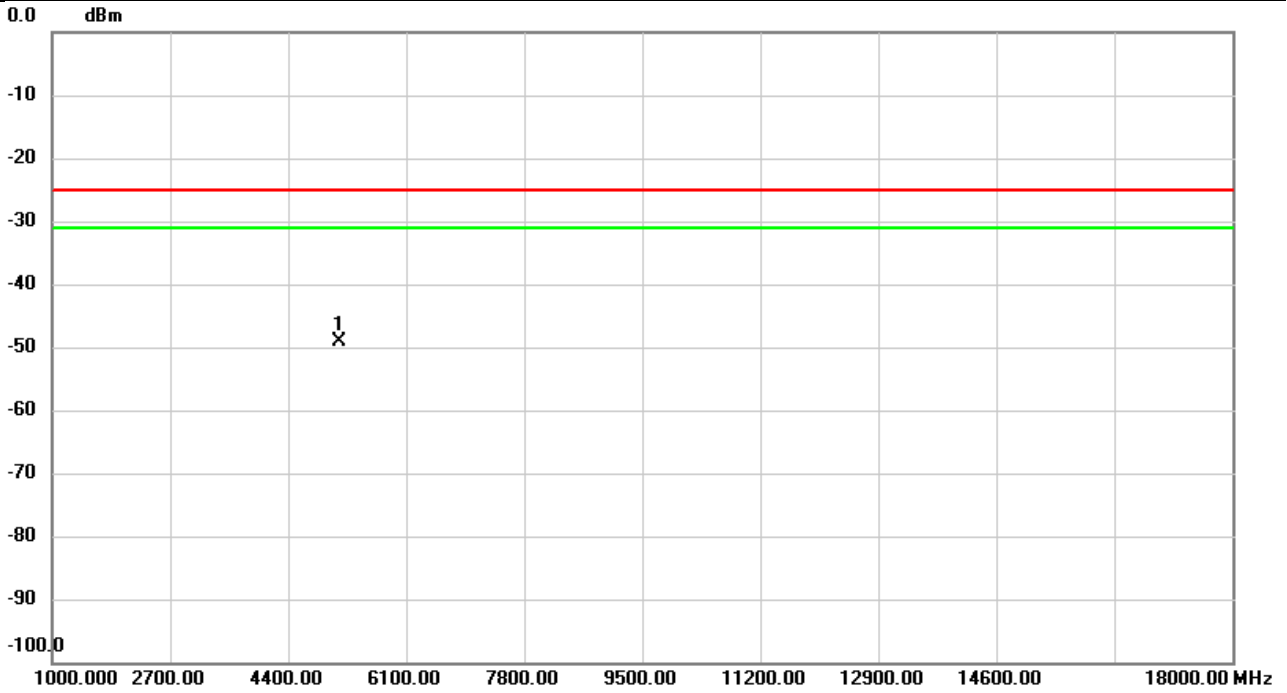


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-63.20	13.97	-49.23	-25.00	-24.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH519000	Polarization	Vertical
Temp	21°C	Hum.	57%

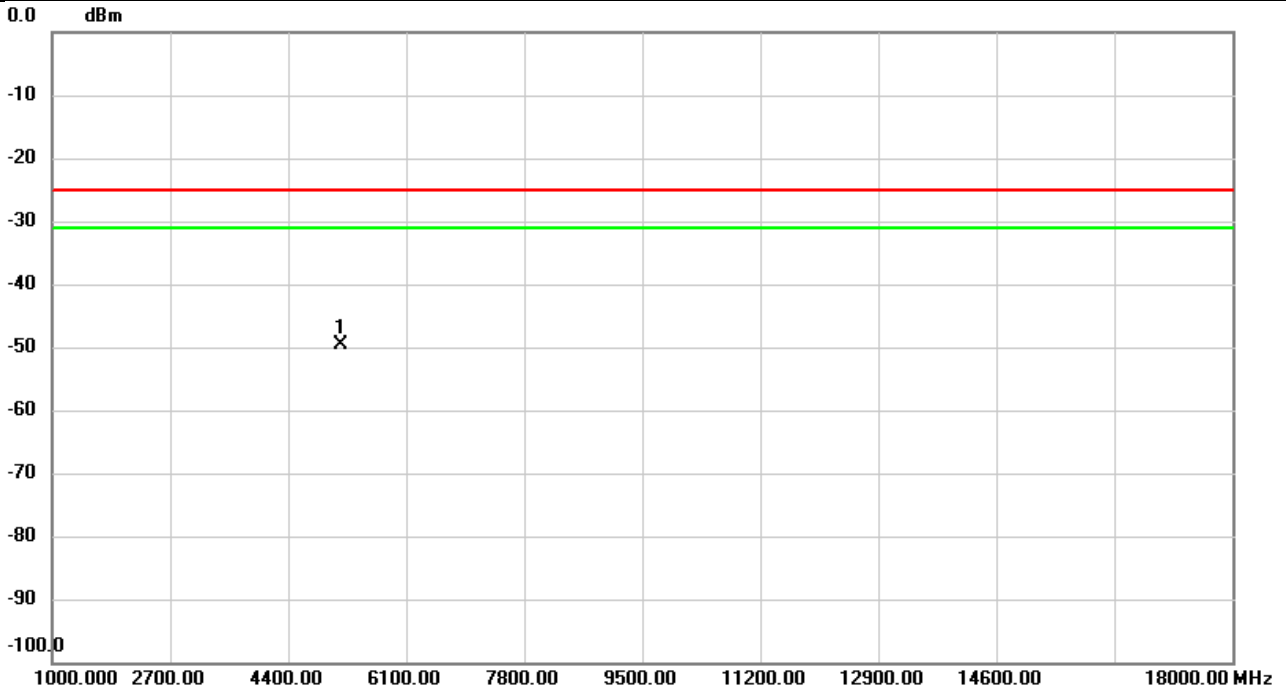


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-63.27	13.75	-49.52	-25.00	-24.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH519000	Polarization	Horizontal
Temp	21°C	Hum.	57%

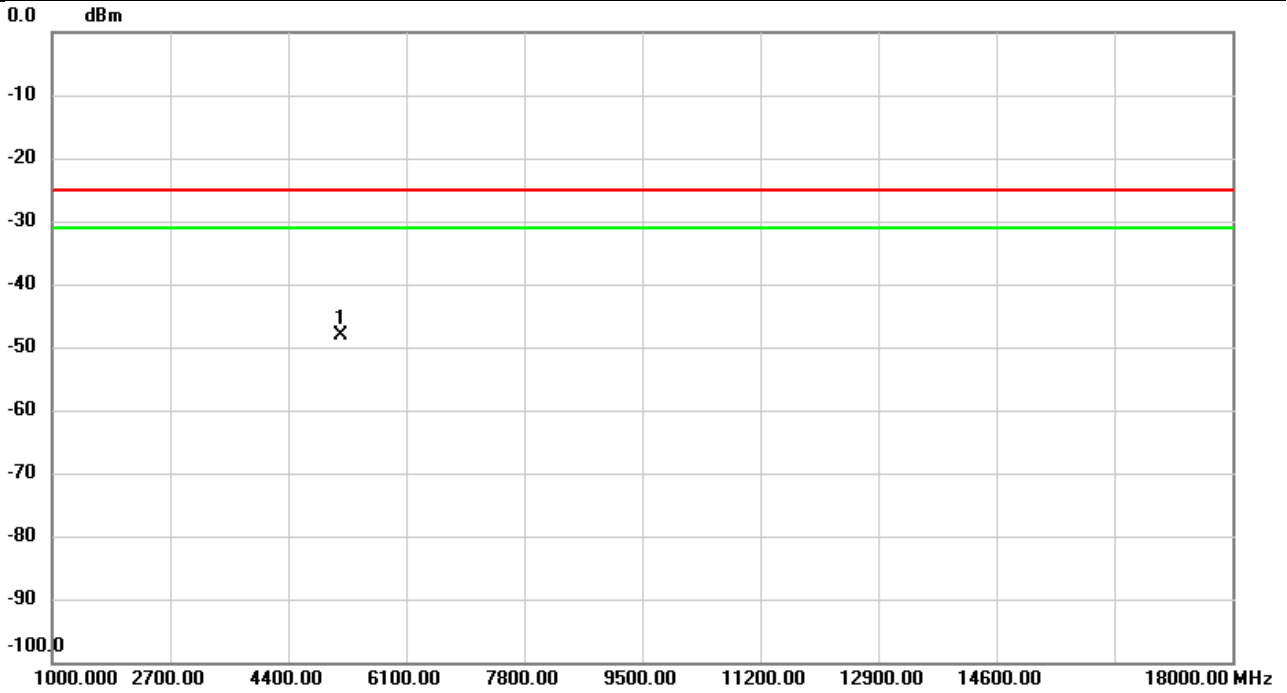


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-62.04	14.00	-48.04	-25.00	-23.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH520000	Polarization	Vertical
Temp	21°C	Hum.	57%

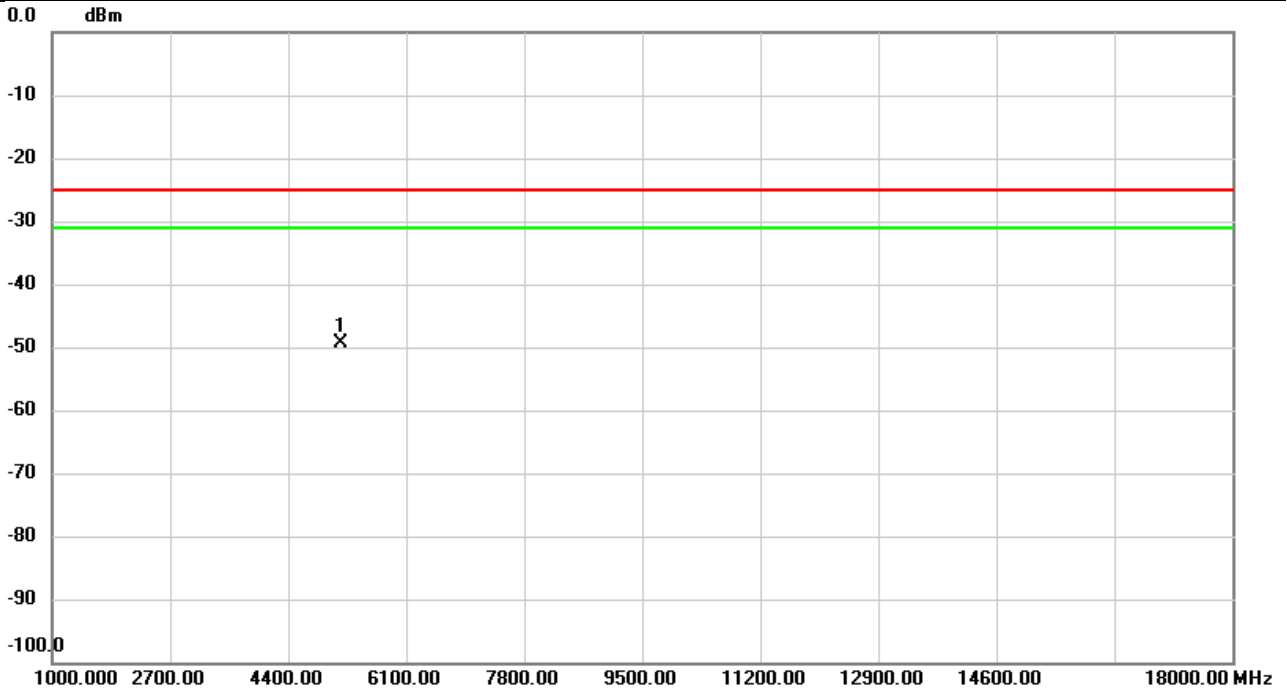


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-63.07	13.66	-49.41	-25.00	-24.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/12/1
Test Channel	CH520000	Polarization	Horizontal
Temp	21°C	Hum.	57%

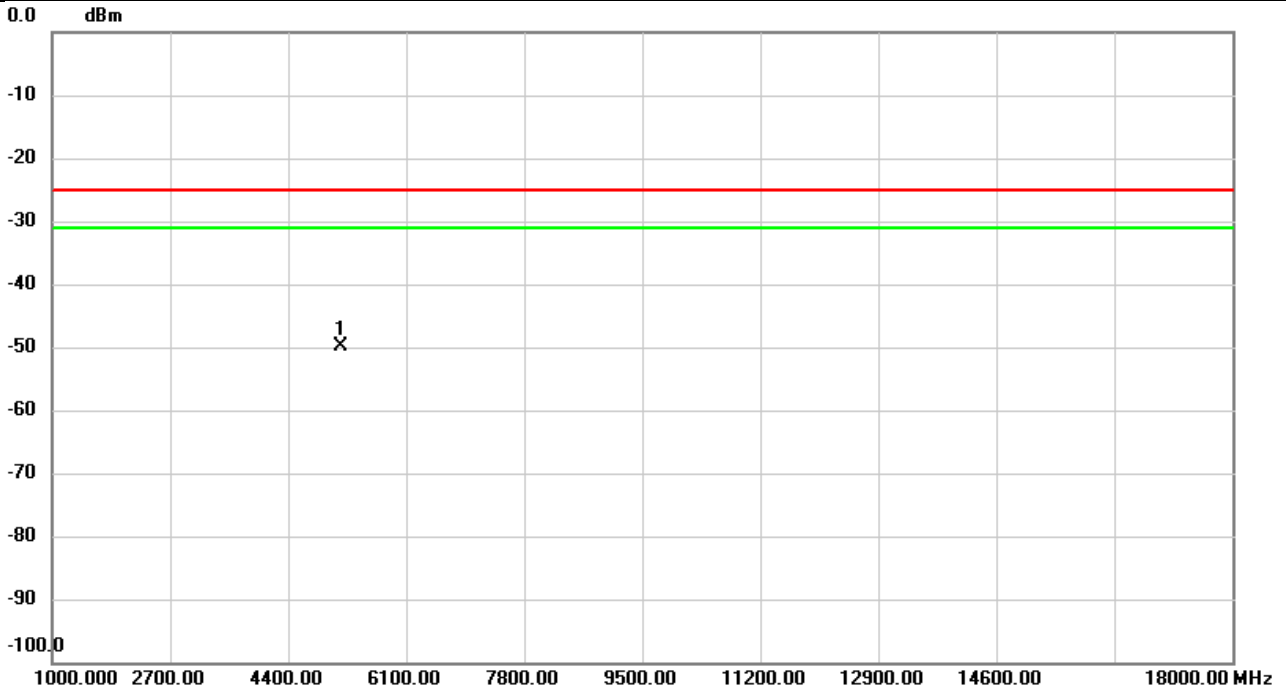


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-63.75	13.90	-49.85	-25.00	-24.85	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/11/30
Test Channel	CH519000	Polarization	Vertical
Temp	22°C	Hum.	59%

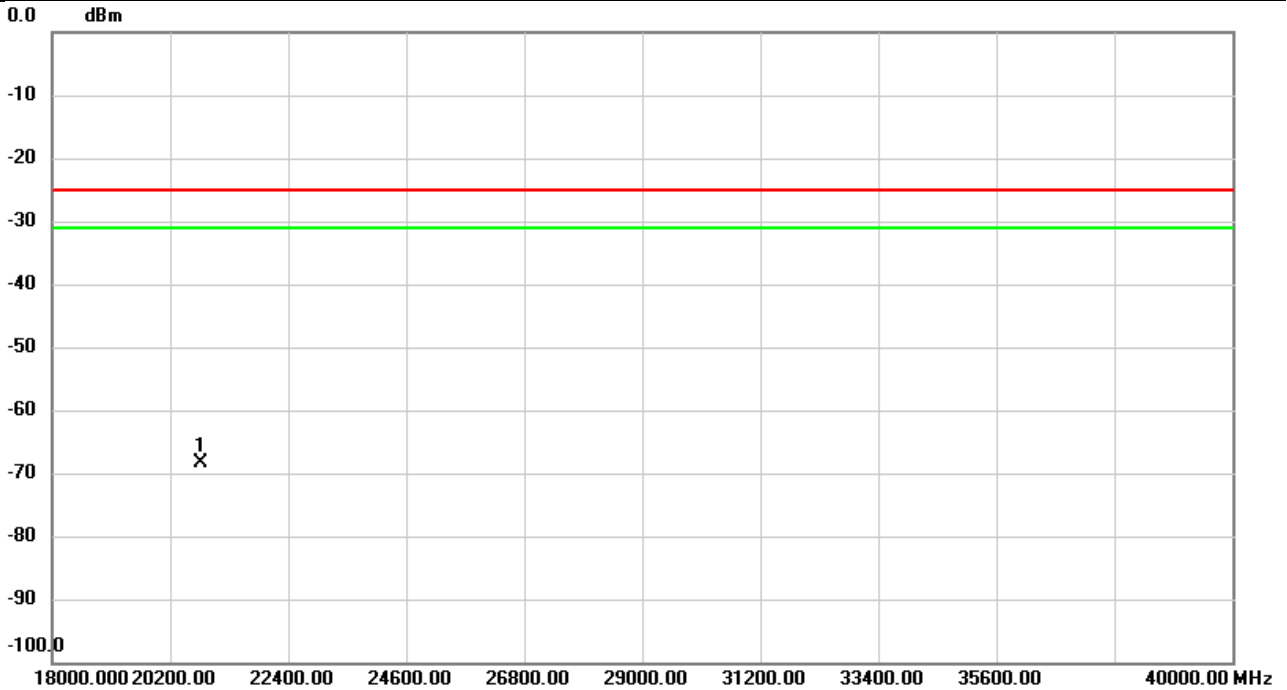


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20760.00	-61.82	-6.56	-68.38	-25.00	-43.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2023/11/30
Test Channel	CH519000	Polarization	Horizontal
Temp	22°C	Hum.	59%

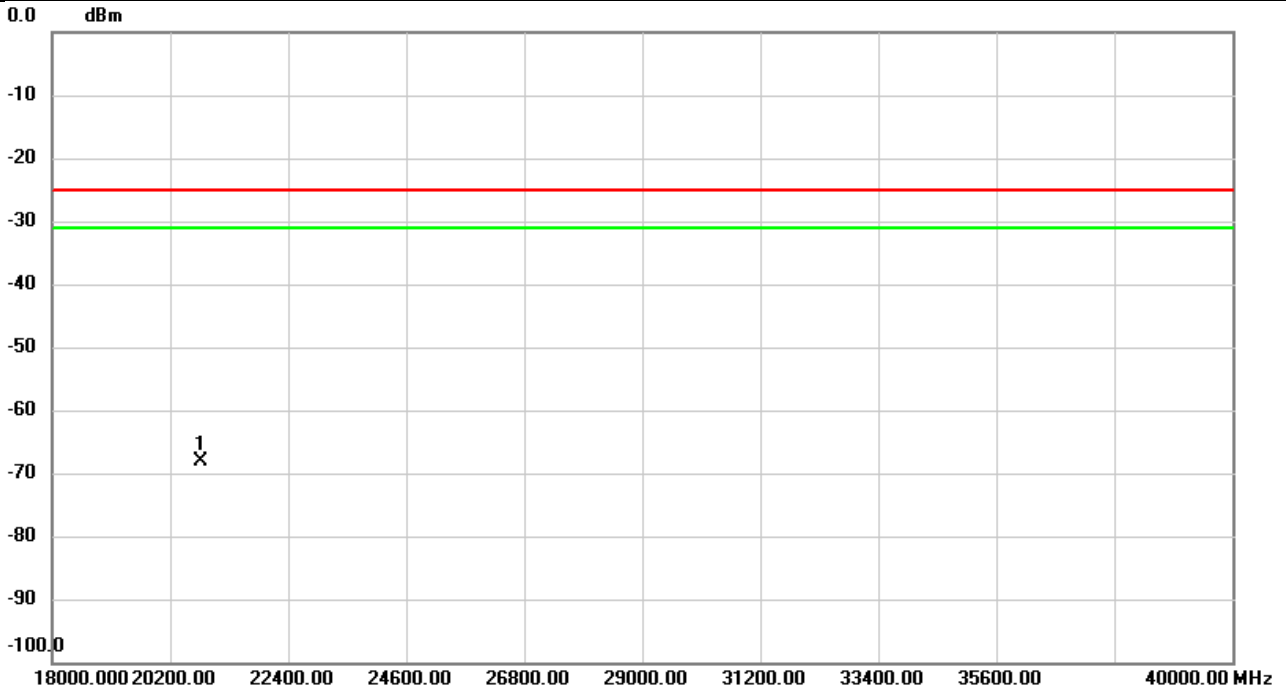


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20760.00	-61.55	-6.56	-68.11	-25.00	-43.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n41 HPUE	Test Date	2023/12/4
Test Channel	CH518598	Polarization	Vertical
Temp	22°C	Hum.	58%

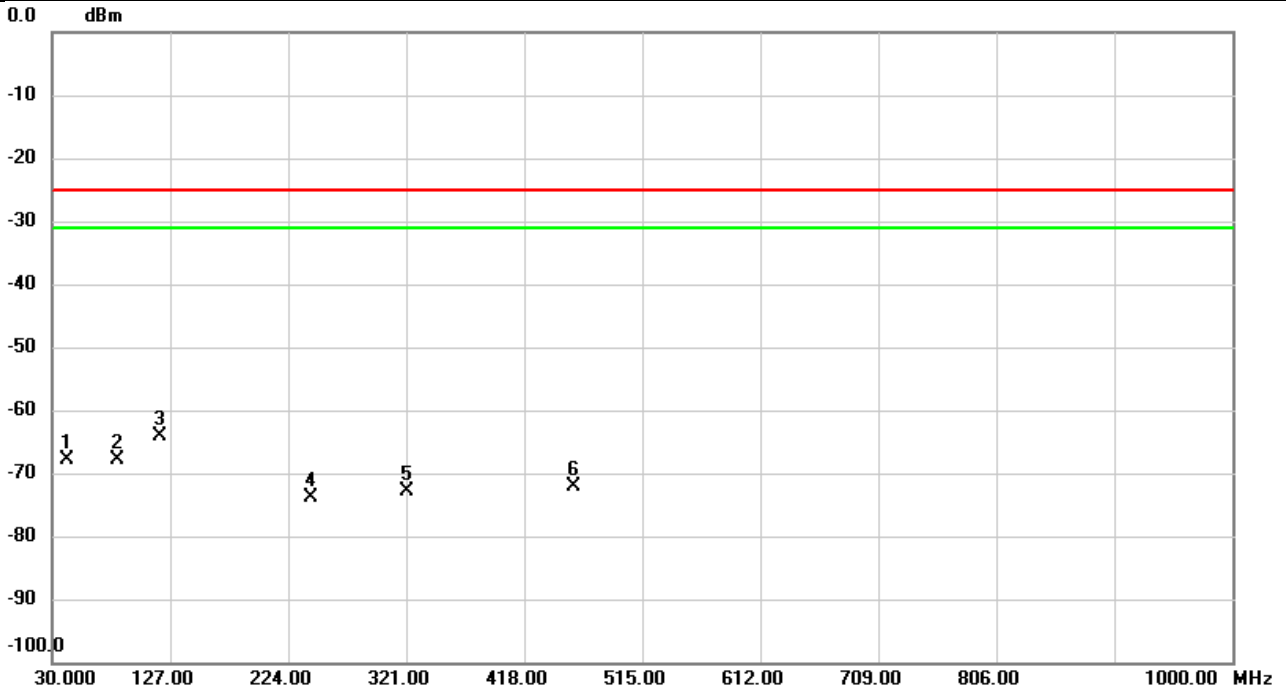


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		42.9010	-65.62	-2.15	-67.77	-25.00	-42.77	peak	
2		83.6087	-65.65	-2.15	-67.80	-25.00	-42.80	peak	
3	*	118.0760	-61.90	-2.15	-64.05	-25.00	-39.05	peak	
4		243.3353	-71.63	-2.15	-73.78	-25.00	-48.78	peak	
5		321.0323	-70.63	-2.15	-72.78	-25.00	-47.78	peak	
6		458.1580	-70.00	-2.15	-72.15	-25.00	-47.15	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/4
Test Channel	CH518598	Polarization	Horizontal
Temp	22°C	Hum.	58%

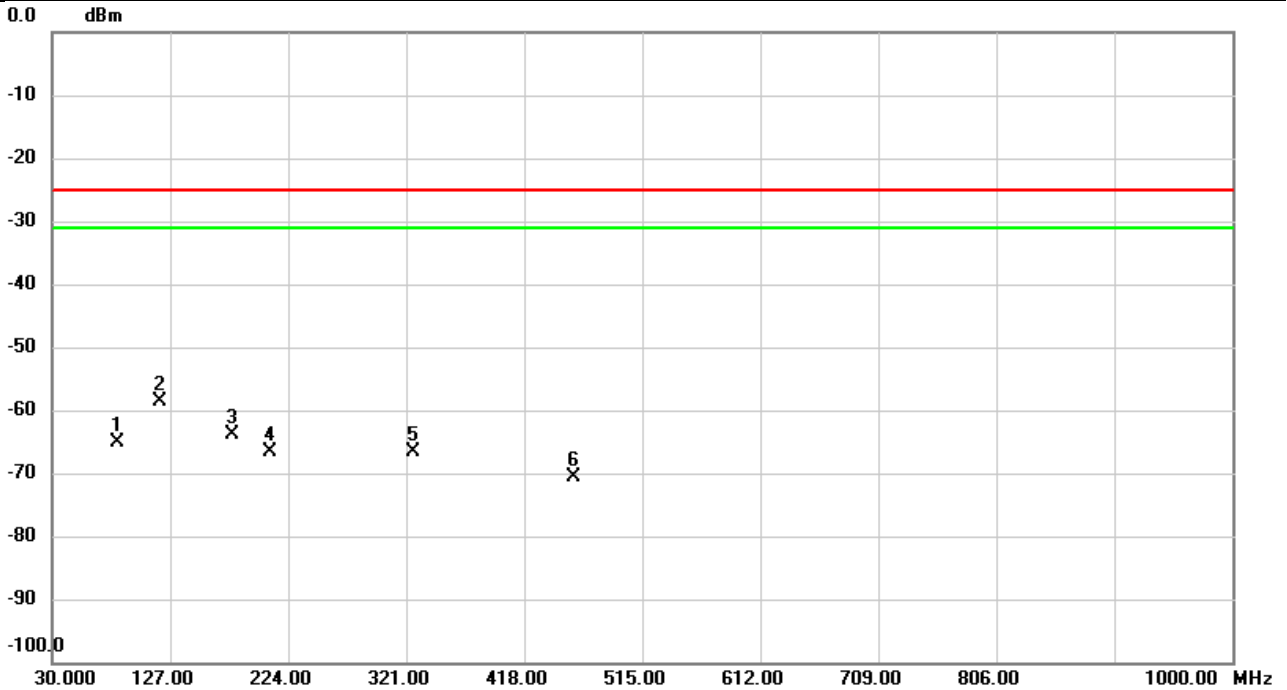


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		83.3823	-62.87	-2.15	-65.02	-25.00	-40.02	peak	
2	*	119.1107	-56.45	-2.15	-58.60	-25.00	-33.60	peak	
3		178.0867	-61.73	-2.15	-63.88	-25.00	-38.88	peak	
4		209.3207	-64.58	-2.15	-66.73	-25.00	-41.73	peak	
5		327.4020	-64.53	-2.15	-66.68	-25.00	-41.68	peak	
6		458.2873	-68.35	-2.15	-70.50	-25.00	-45.50	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	57%

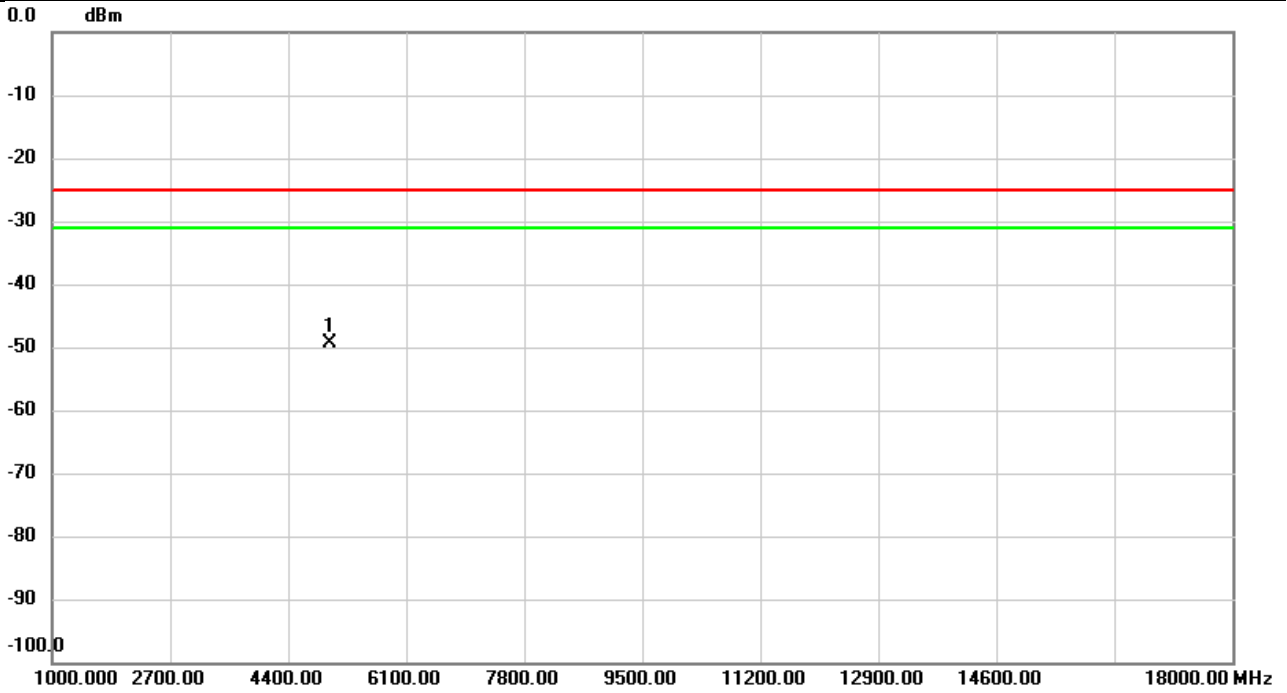


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-62.86	13.43	-49.43	-25.00	-24.43	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	57%

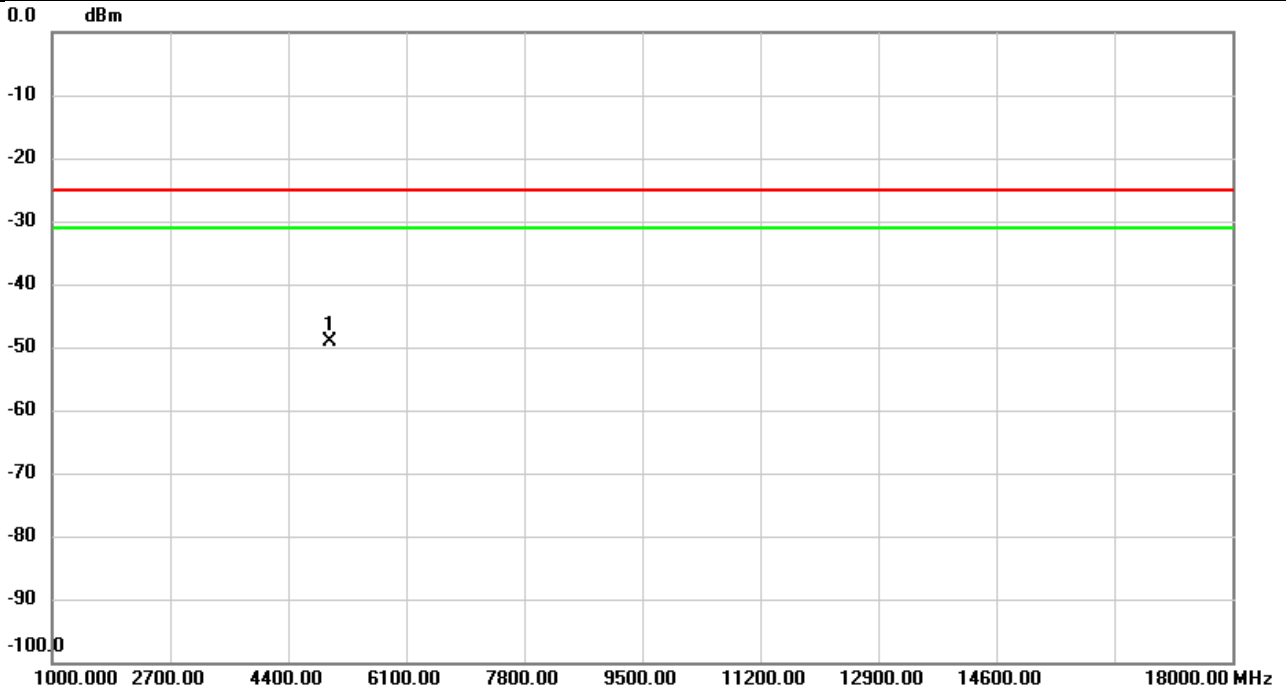


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-62.52	13.39	-49.13	-25.00	-24.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH518598	Polarization	Vertical
Temp	21°C	Hum.	57%

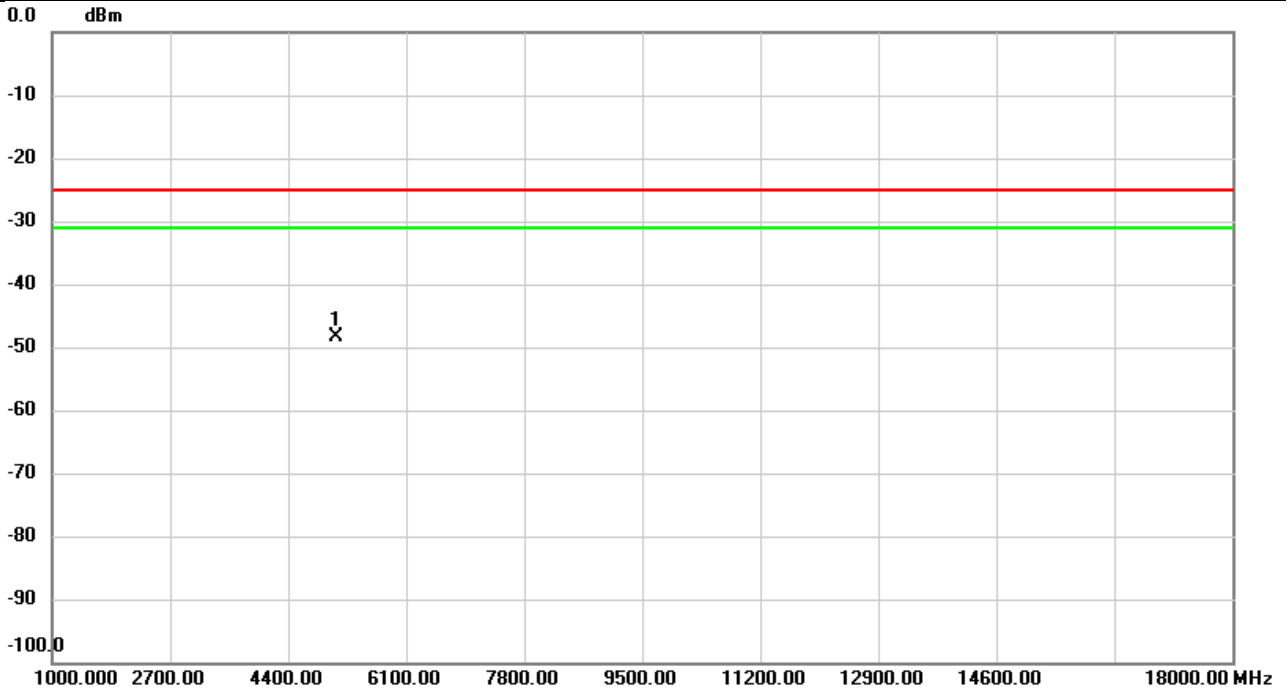


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.42	13.93	-48.49	-25.00	-23.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH518598	Polarization	Horizontal
Temp	21°C	Hum.	57%

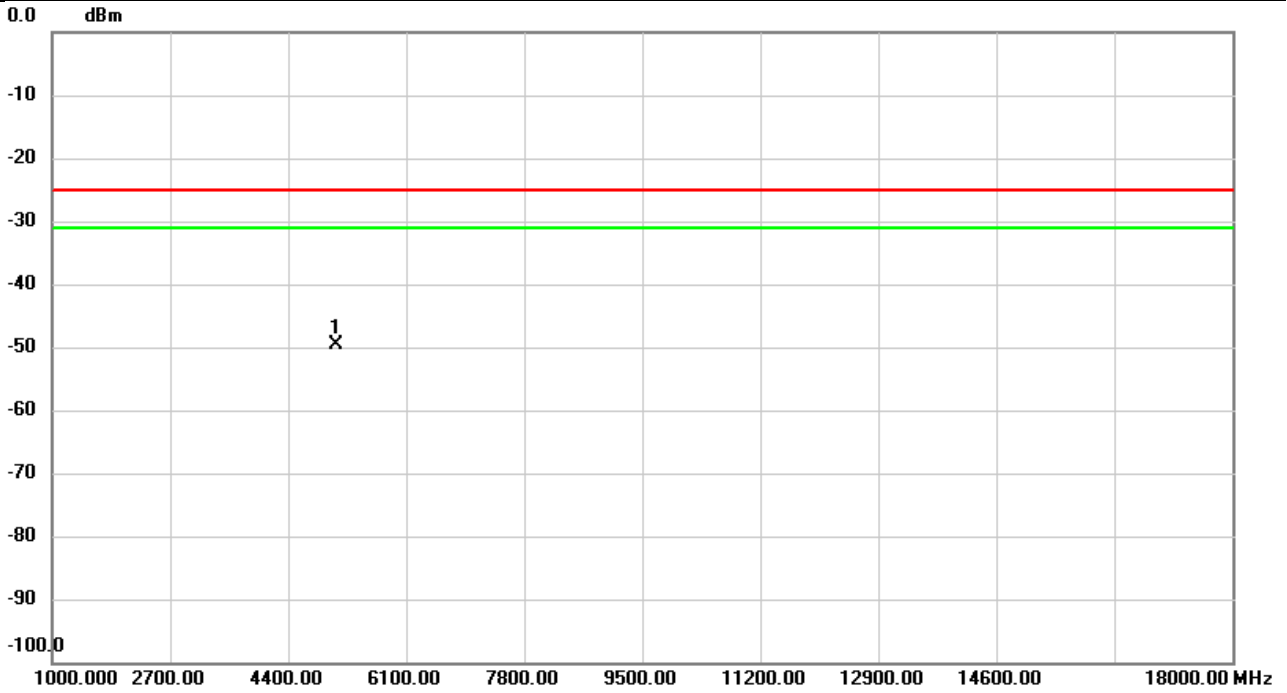


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-63.53	13.95	-49.58	-25.00	-24.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	57%

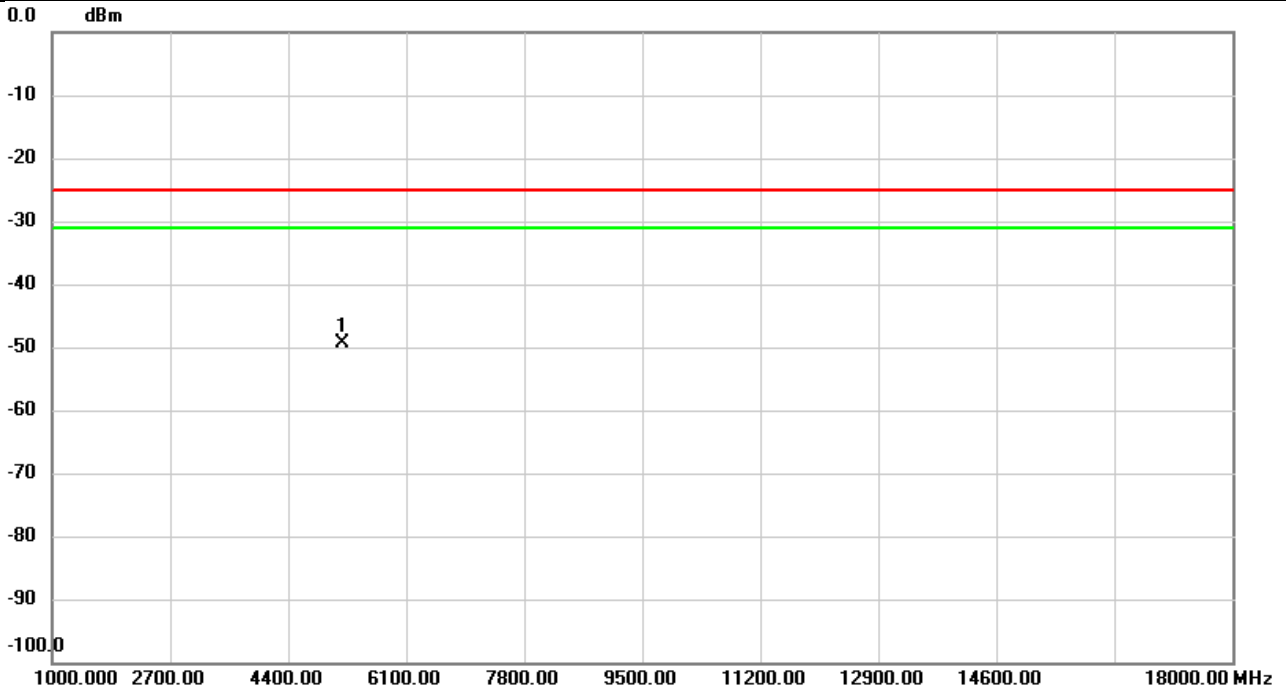


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.75	13.49	-49.26	-25.00	-24.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/1
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	57%

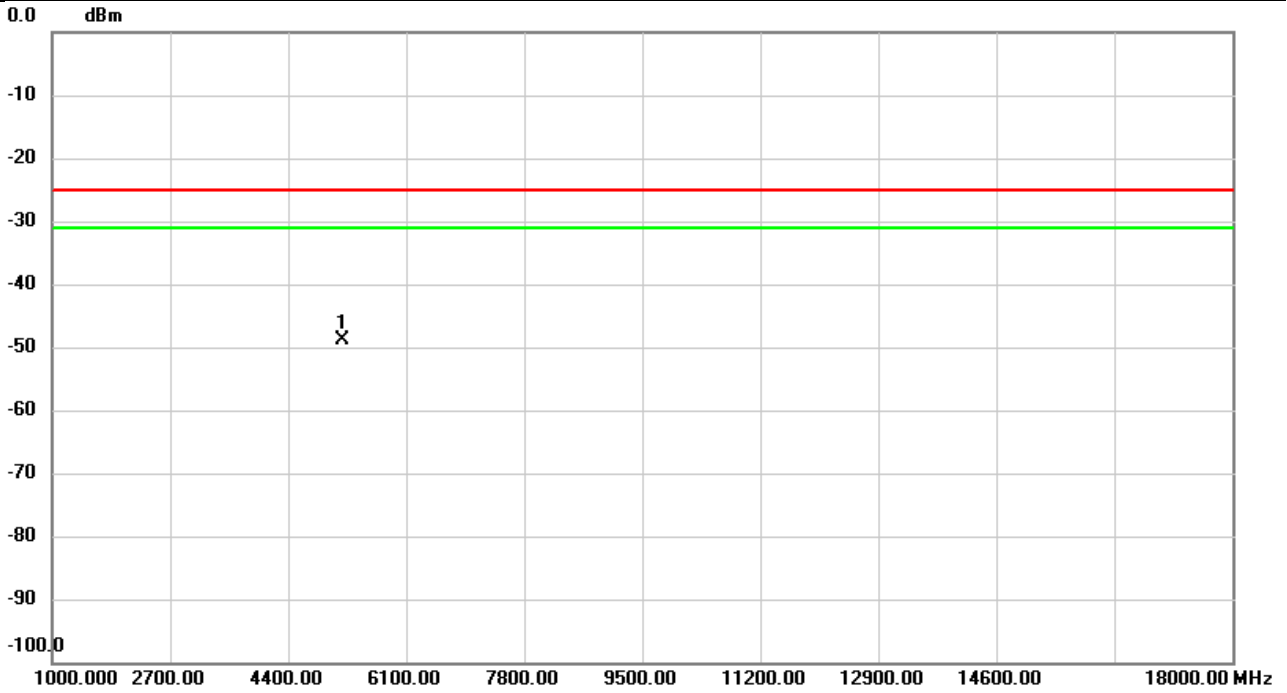


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.58	13.69	-48.89	-25.00	-23.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n41 HPUE	Test Date	2023/11/30
Test Channel	CH518598	Polarization	Vertical
Temp	22°C	Hum.	59%

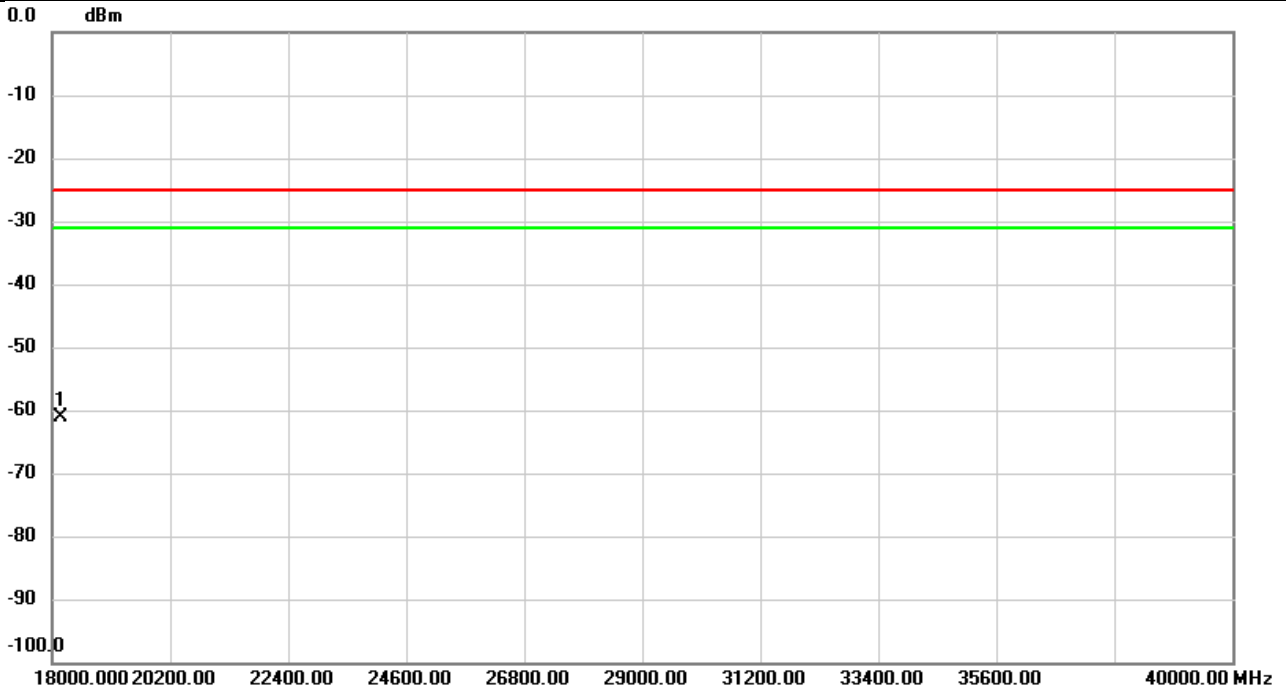


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18150.93	-54.46	-6.66	-61.12	-25.00	-36.12	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/11/30
Test Channel	CH518598	Polarization	Horizontal
Temp	22°C	Hum.	59%

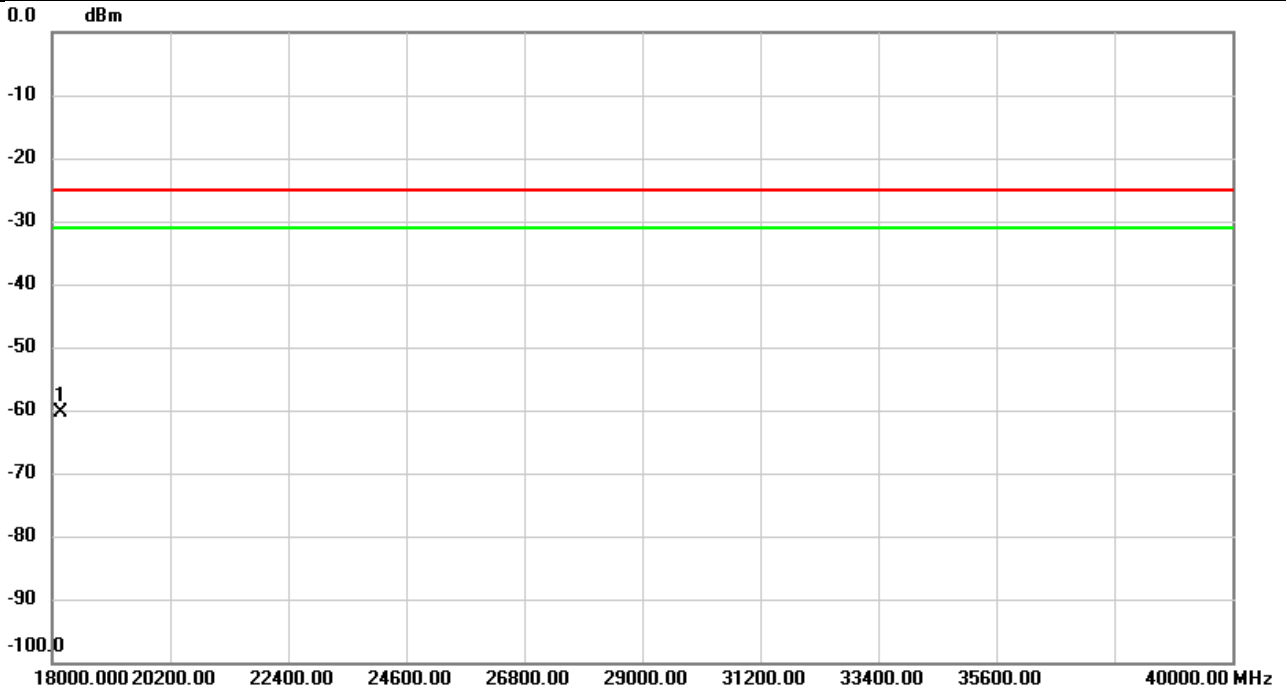


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18150.93	-53.70	-6.66	-60.36	-25.00	-35.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n77 HPUE	Test Date	2023/12/4
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	58%

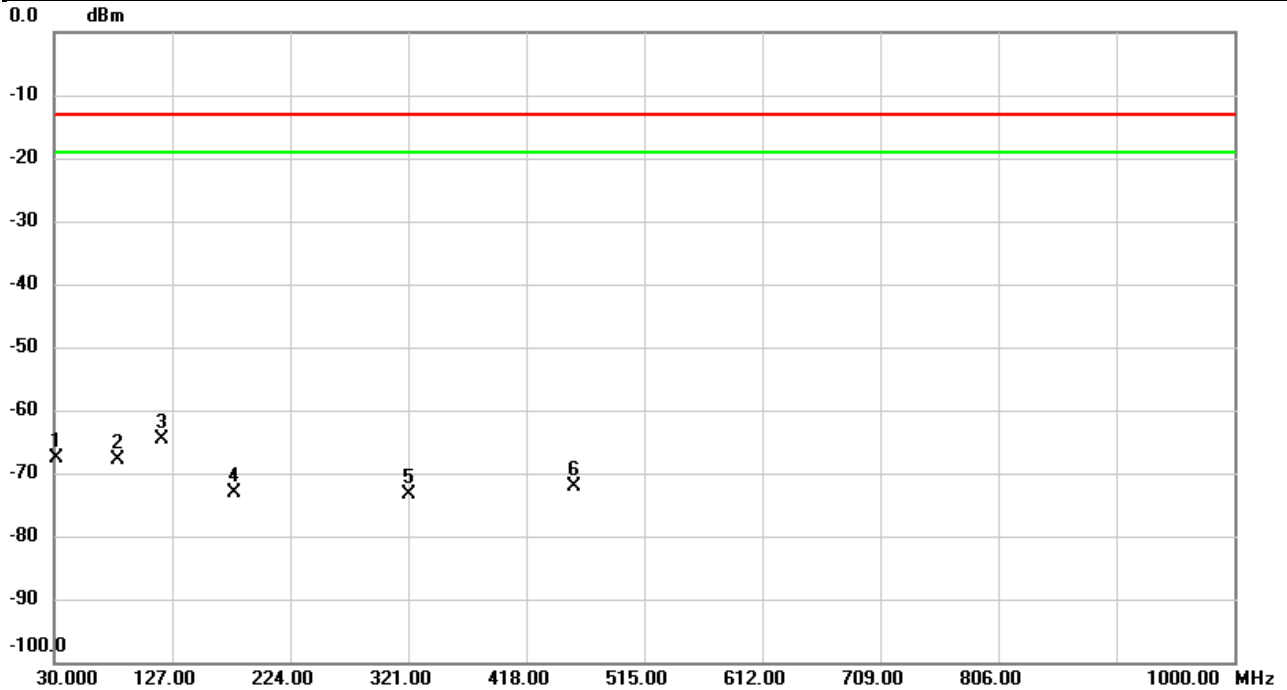


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		32.0047	-65.58	-2.15	-67.73	-13.00	-54.73	peak	
2		82.6710	-65.79	-2.15	-67.94	-13.00	-54.94	peak	
3	*	118.6903	-62.50	-2.15	-64.65	-13.00	-51.65	peak	
4		178.2160	-70.86	-2.15	-73.01	-13.00	-60.01	peak	
5		321.0323	-71.25	-2.15	-73.40	-13.00	-60.40	peak	
6		457.9317	-70.07	-2.15	-72.22	-13.00	-59.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/4
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	58%

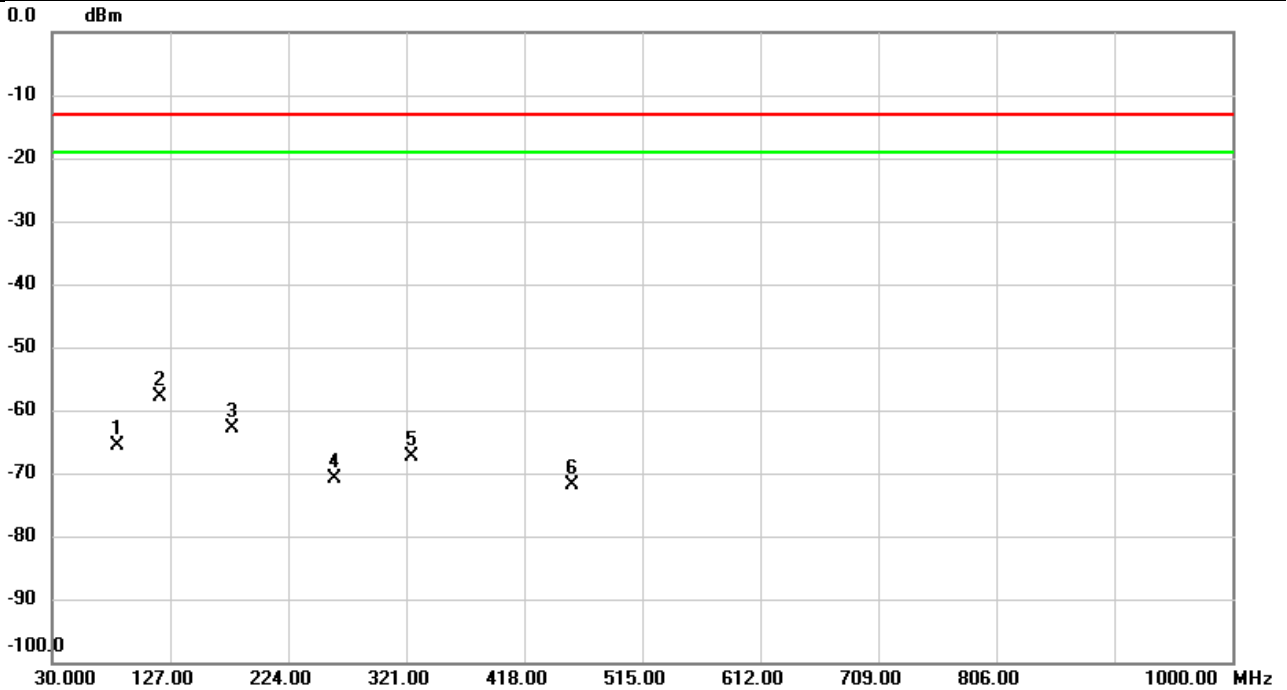


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		84.0613	-63.54	-2.15	-65.69	-13.00	-52.69	peak	
2	*	118.2700	-55.75	-2.15	-57.90	-13.00	-44.90	peak	
3		178.1513	-60.82	-2.15	-62.97	-13.00	-49.97	peak	
4		262.3150	-68.73	-2.15	-70.88	-13.00	-57.88	peak	
5		325.4620	-65.14	-2.15	-67.29	-13.00	-54.29	peak	
6		457.9317	-69.74	-2.15	-71.89	-13.00	-58.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	57%

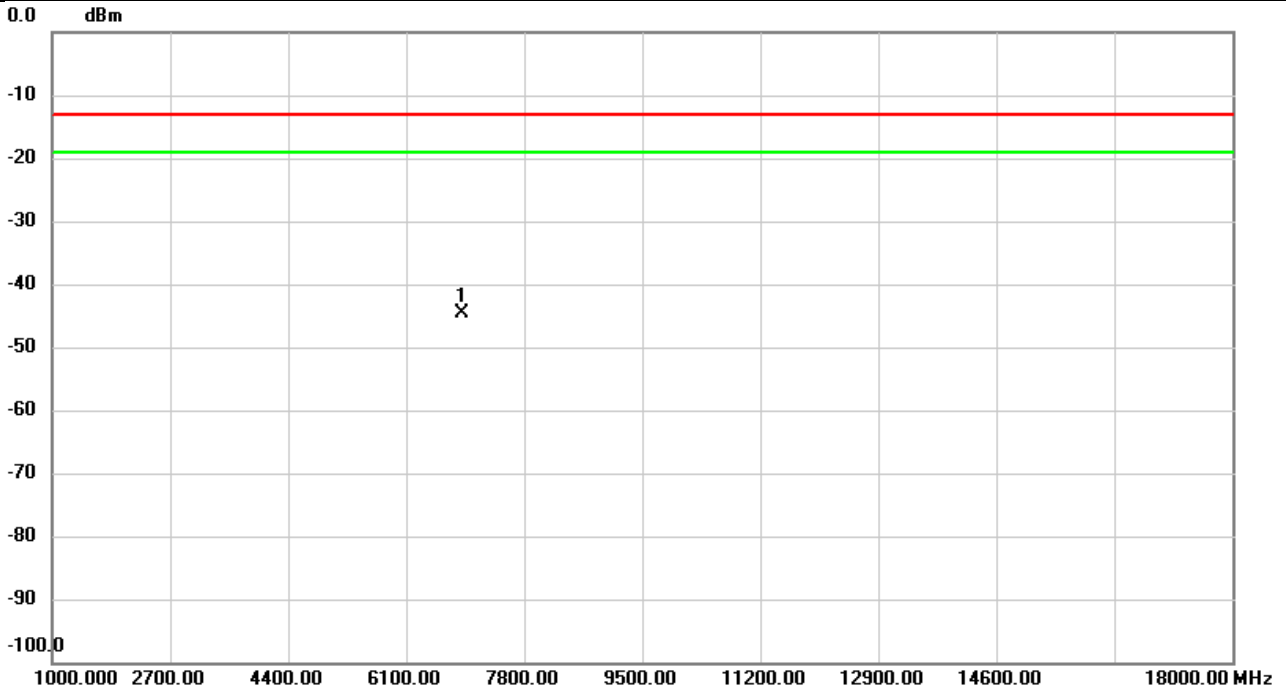


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.53	18.00	-44.53	-13.00	-31.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	57%

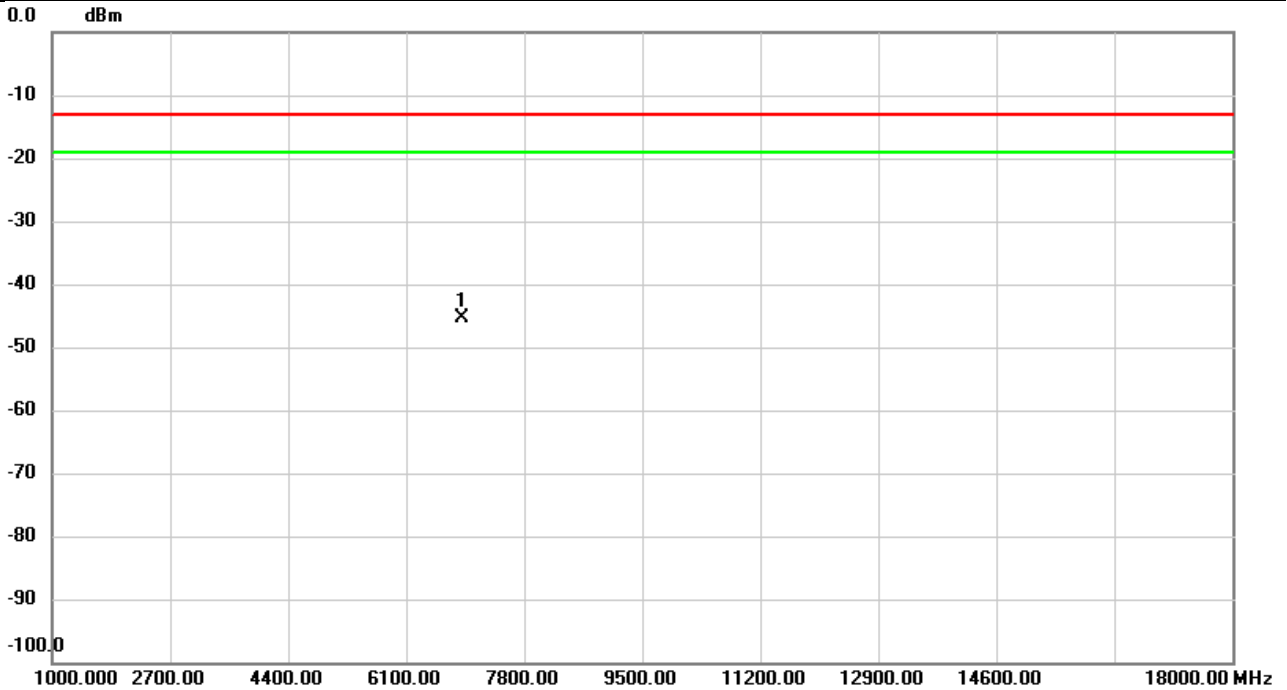


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.10	17.74	-45.36	-13.00	-32.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/11/30
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	59%

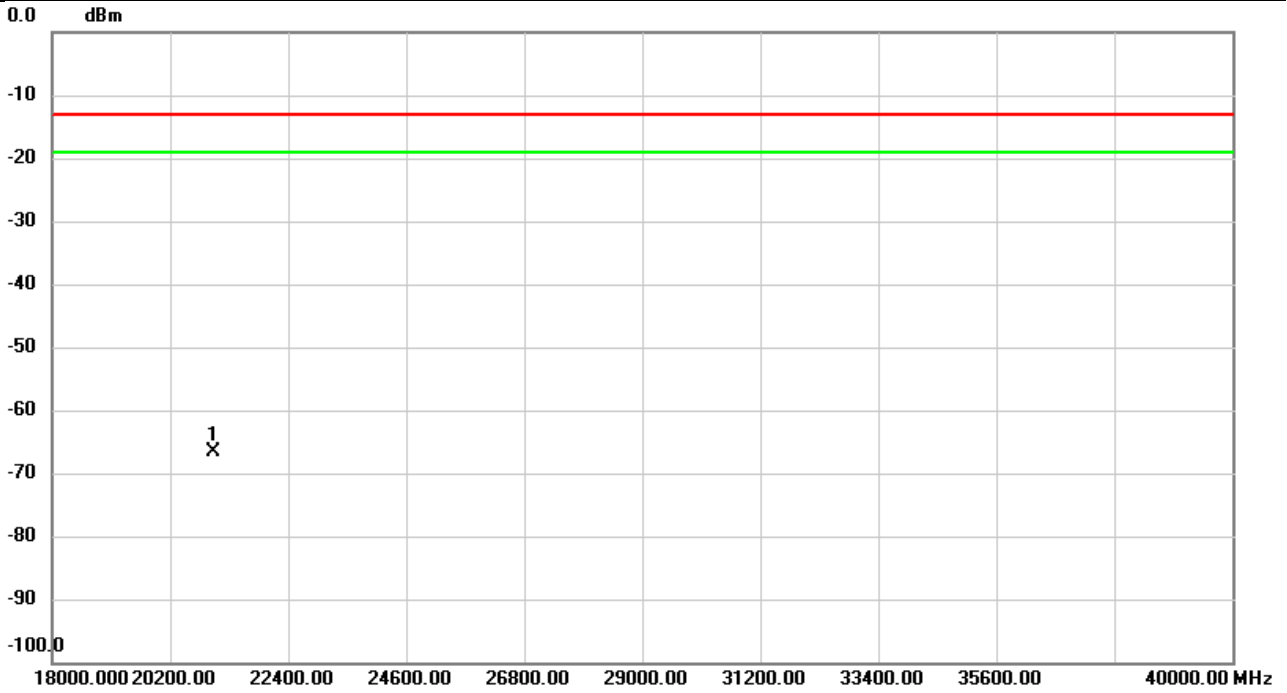


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-60.47	-6.27	-66.74	-13.00	-53.74	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/11/30
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	59%

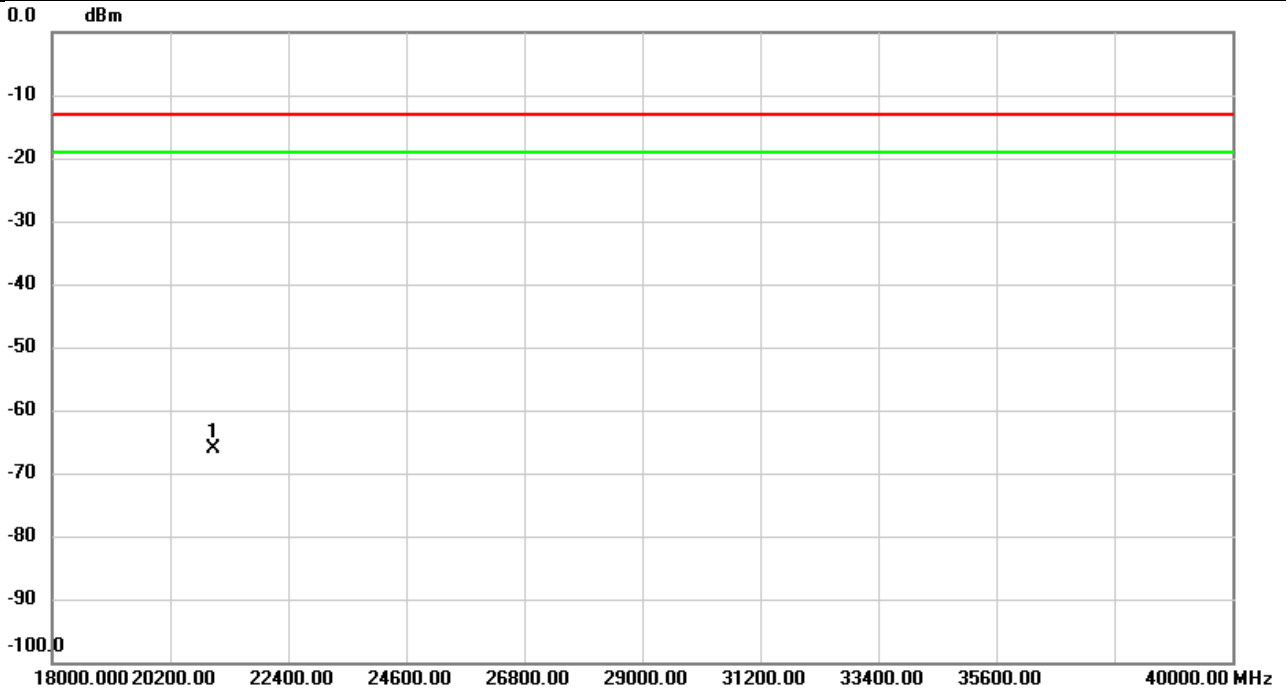

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.89	-6.27	-66.16	-13.00	-53.16	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	NR n77 HPUE	Test Date	2023/12/4
Test Channel	CH656000	Polarization	Vertical
Temp	22°C	Hum.	58%

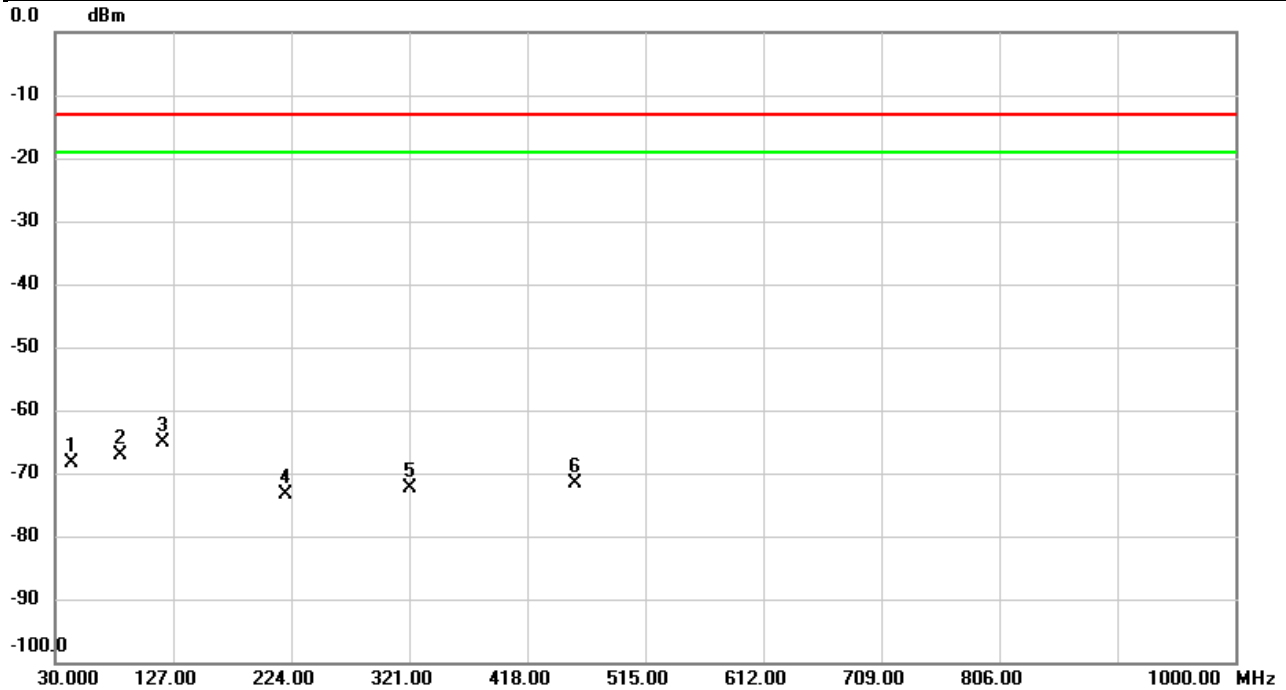


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		42.9980	-66.16	-2.15	-68.31	-13.00	-55.31	peak	
2		83.7380	-64.99	-2.15	-67.14	-13.00	-54.14	peak	
3	*	118.6903	-62.90	-2.15	-65.05	-13.00	-52.05	peak	
4		218.8590	-71.16	-2.15	-73.31	-13.00	-60.31	peak	
5		321.0323	-70.16	-2.15	-72.31	-13.00	-59.31	peak	
6		458.0610	-69.48	-2.15	-71.63	-13.00	-58.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/4
Test Channel	CH656000	Polarization	Horizontal
Temp	22°C	Hum.	58%

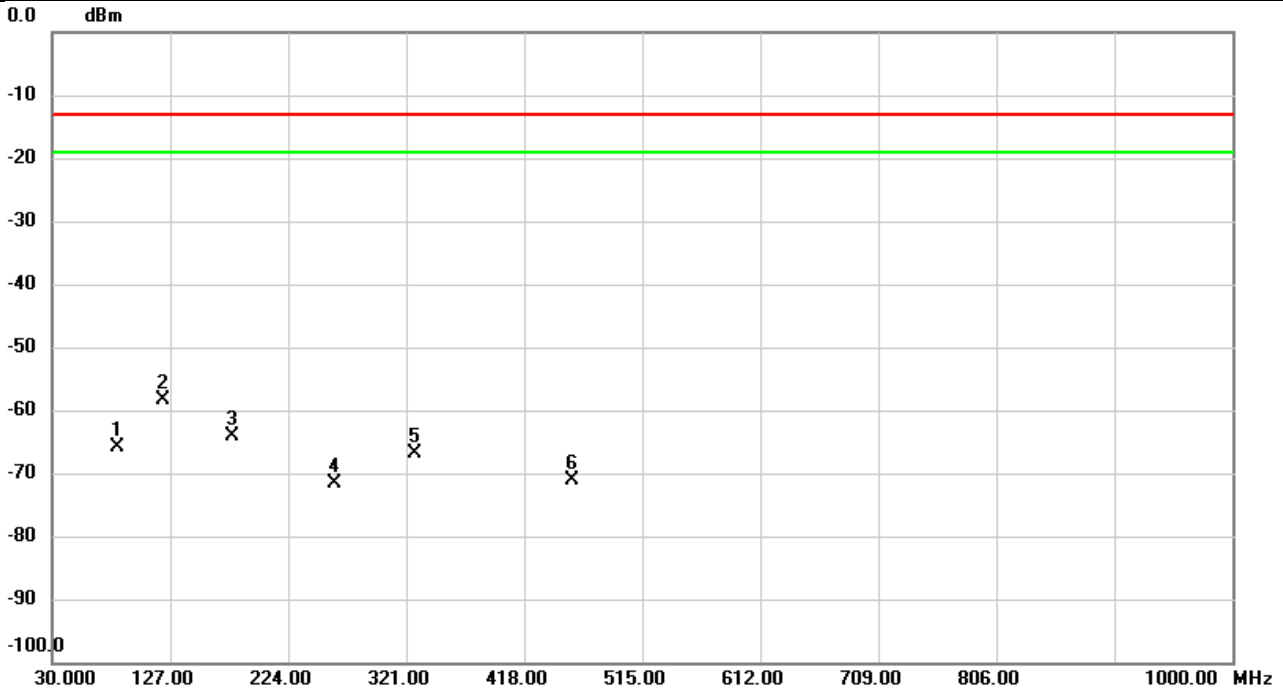


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		84.2877	-63.75	-2.15	-65.90	-13.00	-52.90	peak	
2	*	120.6950	-56.26	-2.15	-58.41	-13.00	-45.41	peak	
3		178.2483	-61.89	-2.15	-64.04	-13.00	-51.04	peak	
4		262.6707	-69.36	-2.15	-71.51	-13.00	-58.51	peak	
5		328.4690	-64.69	-2.15	-66.84	-13.00	-53.84	peak	
6		458.0610	-69.09	-2.15	-71.24	-13.00	-58.24	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	57%

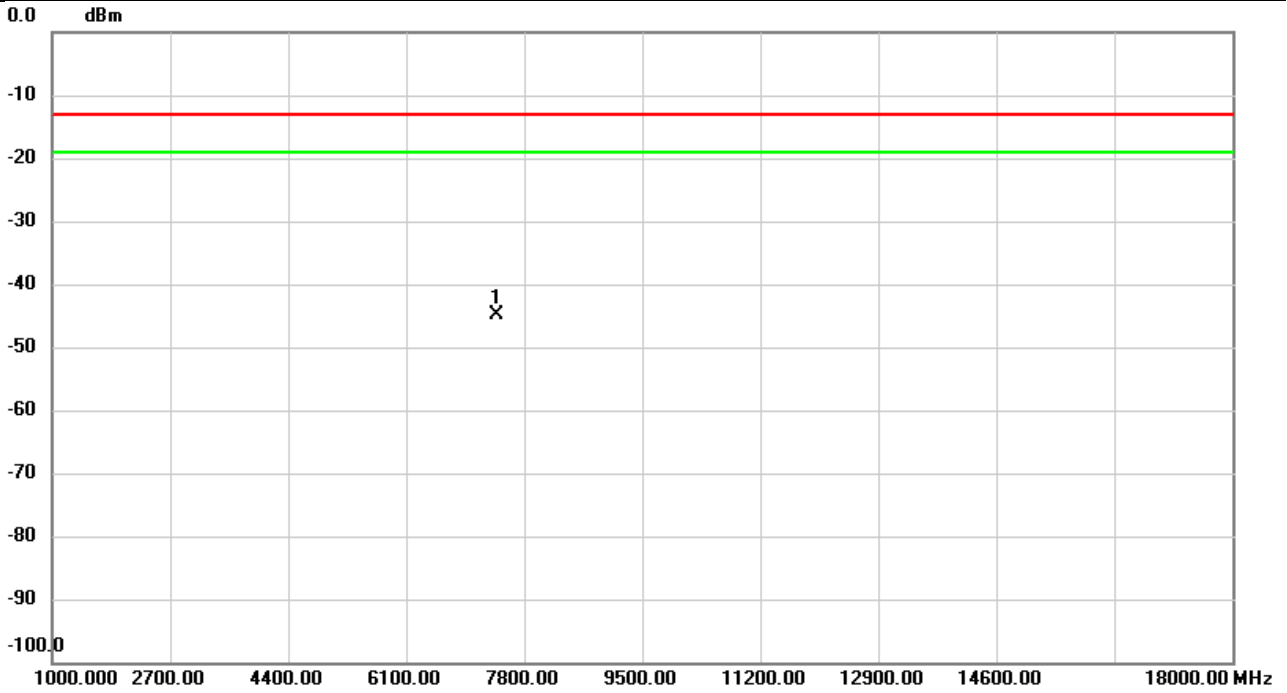


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.03	18.12	-44.91	-13.00	-31.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	57%

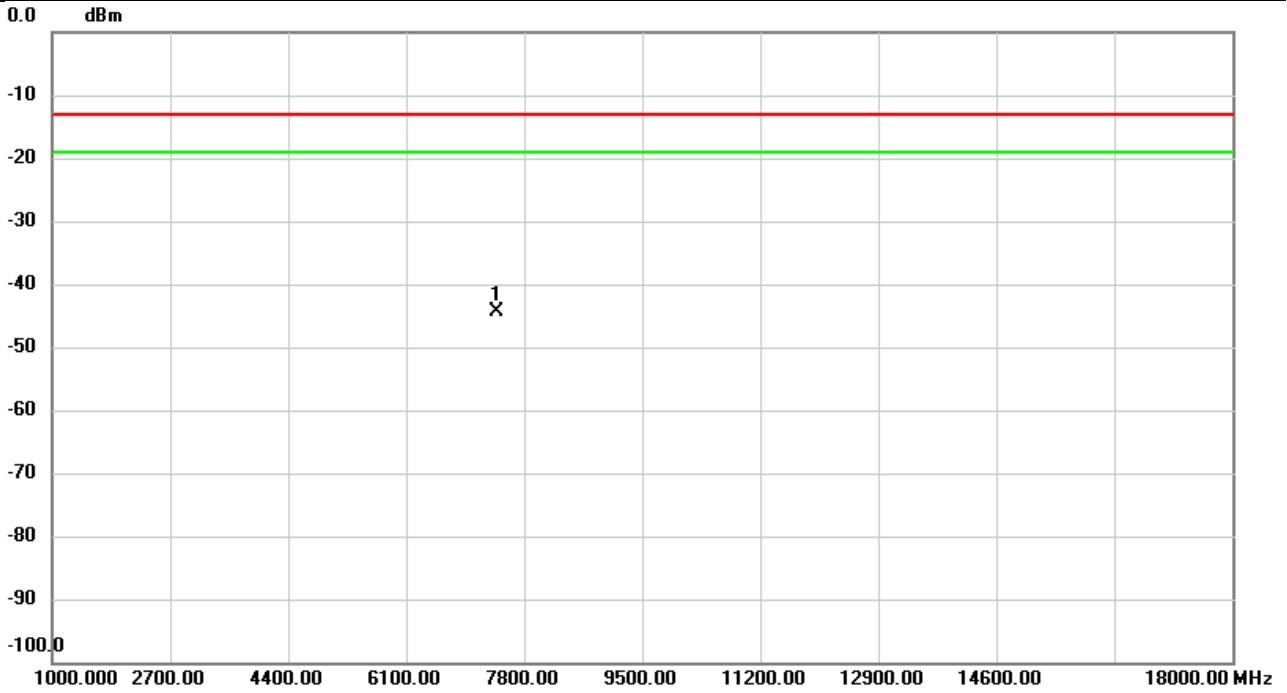


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.44	18.07	-44.37	-13.00	-31.37	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH656000	Polarization	Vertical
Temp	21°C	Hum.	57%

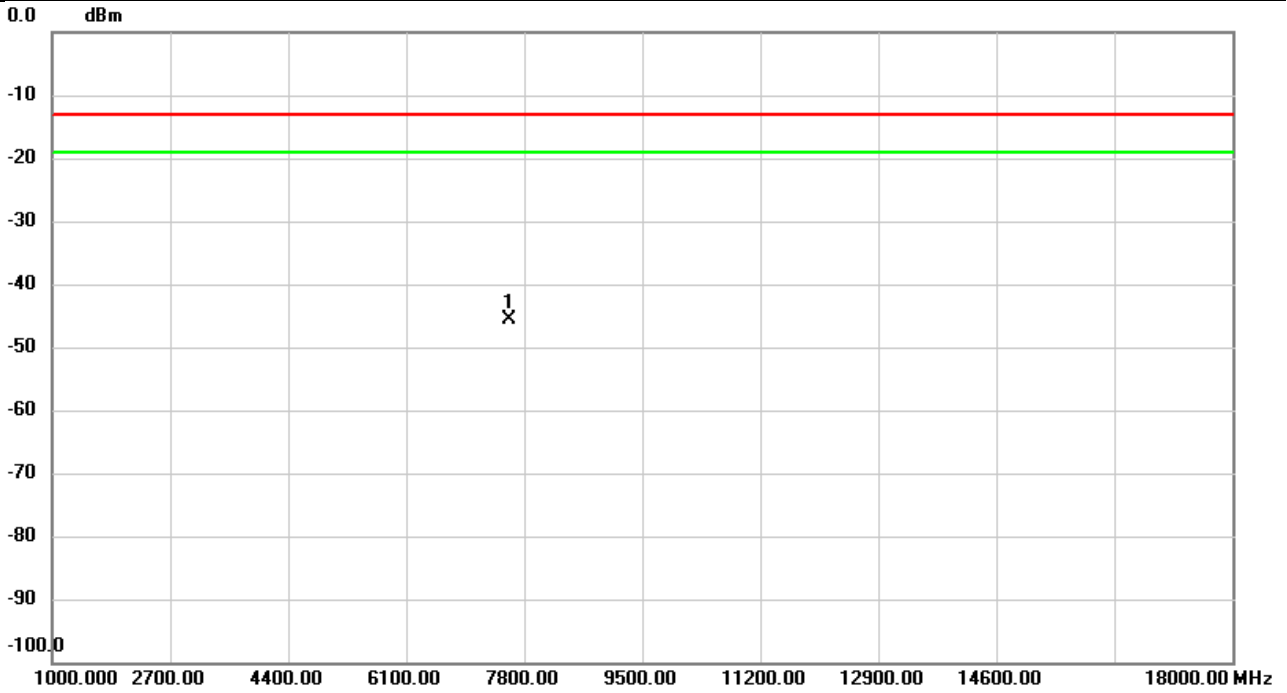


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-62.93	17.29	-45.64	-13.00	-32.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH656000	Polarization	Horizontal
Temp	21°C	Hum.	57%

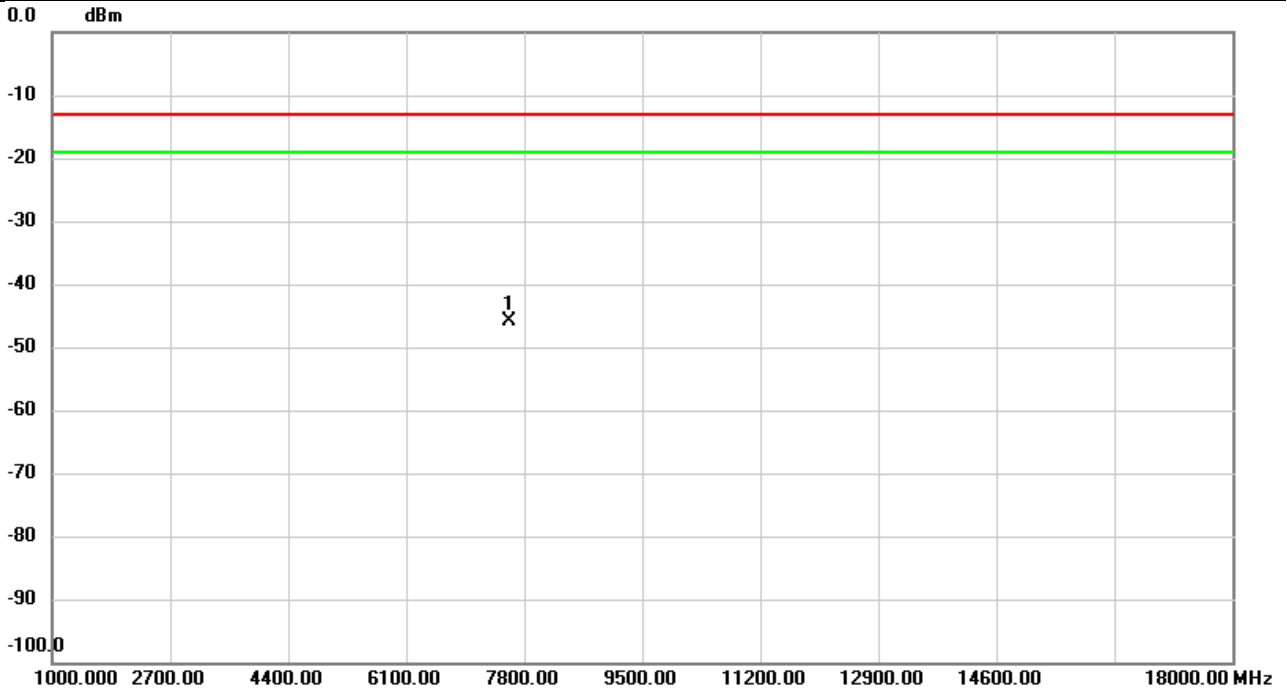


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-63.21	17.22	-45.99	-13.00	-32.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH656000	Polarization	Vertical
Temp	21°C	Hum.	57%

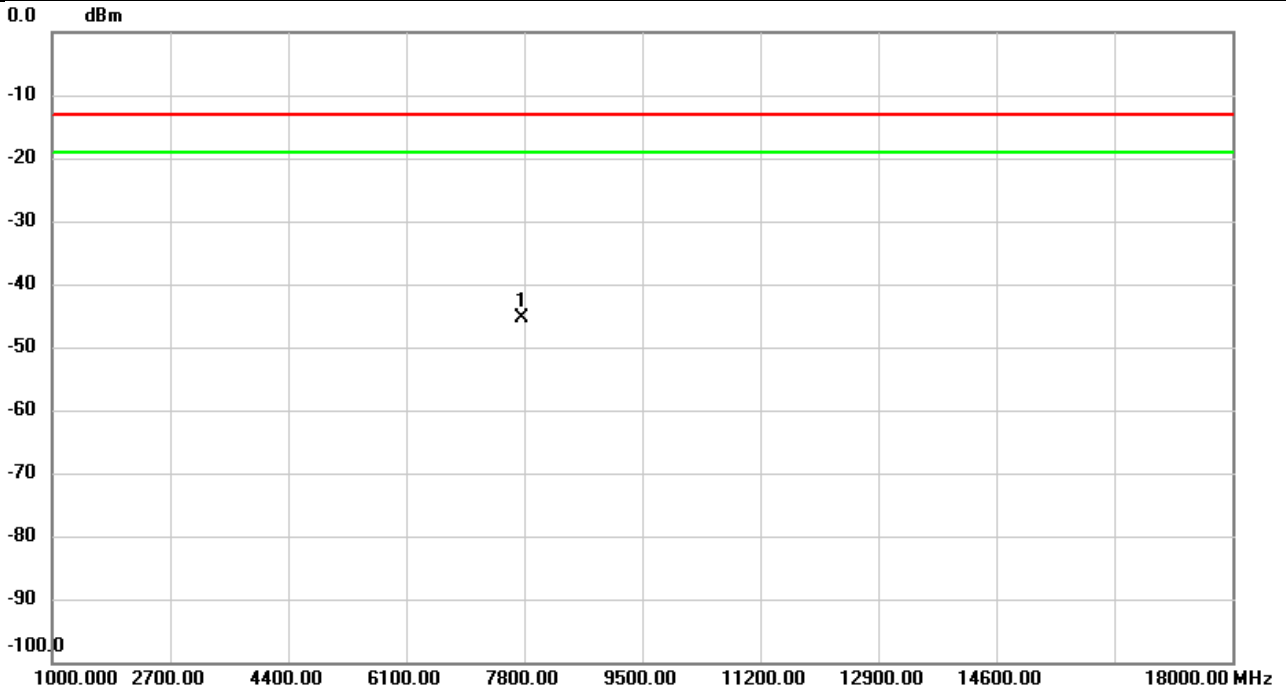


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-62.68	17.41	-45.27	-13.00	-32.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/1
Test Channel	CH656000	Polarization	Horizontal
Temp	21°C	Hum.	57%

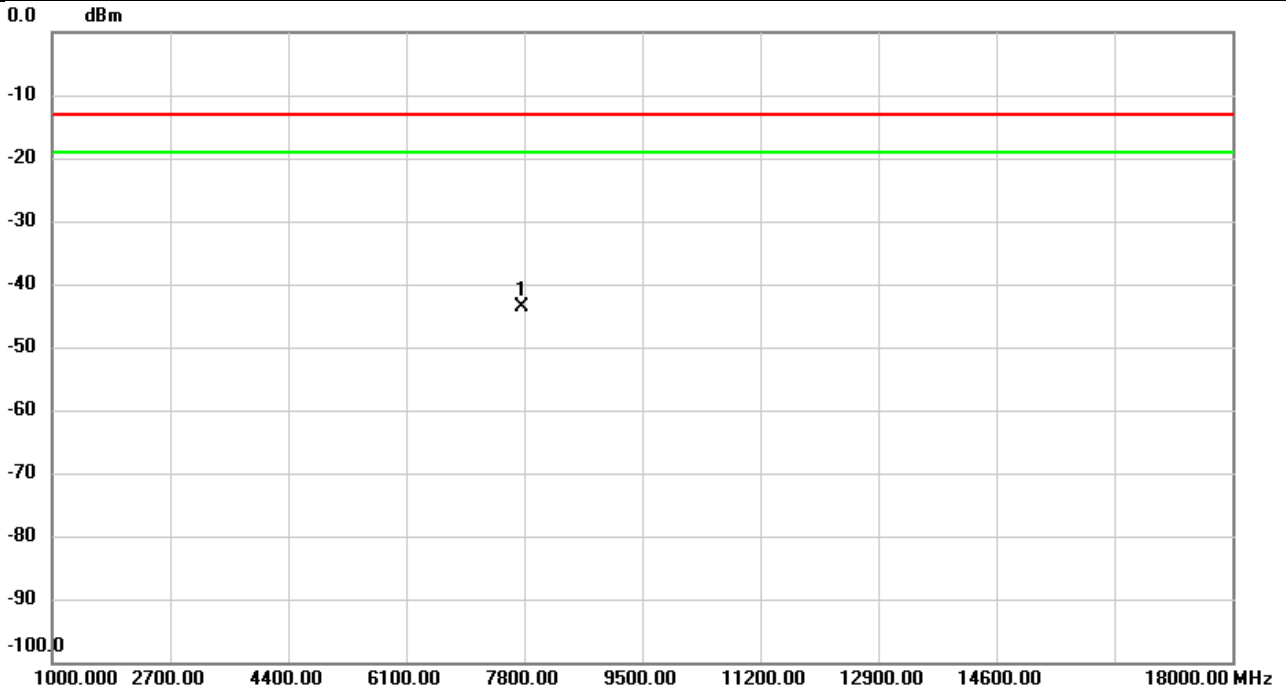


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-60.93	17.37	-43.56	-13.00	-30.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n77 HPUE	Test Date	2023/11/30
Test Channel	CH656000	Polarization	Vertical
Temp	22°C	Hum.	59%

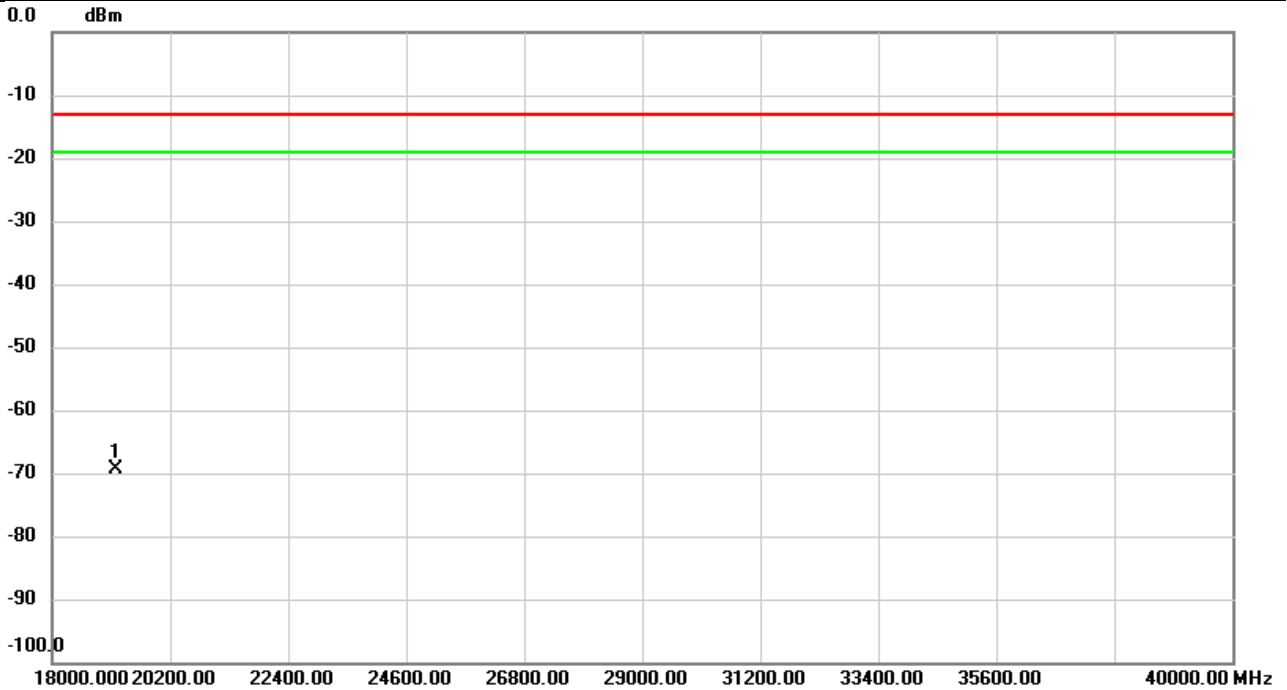


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	19200.00	-62.15	-7.21	-69.36	-13.00	-56.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/11/30
Test Channel	CH656000	Polarization	Horizontal
Temp	22°C	Hum.	59%

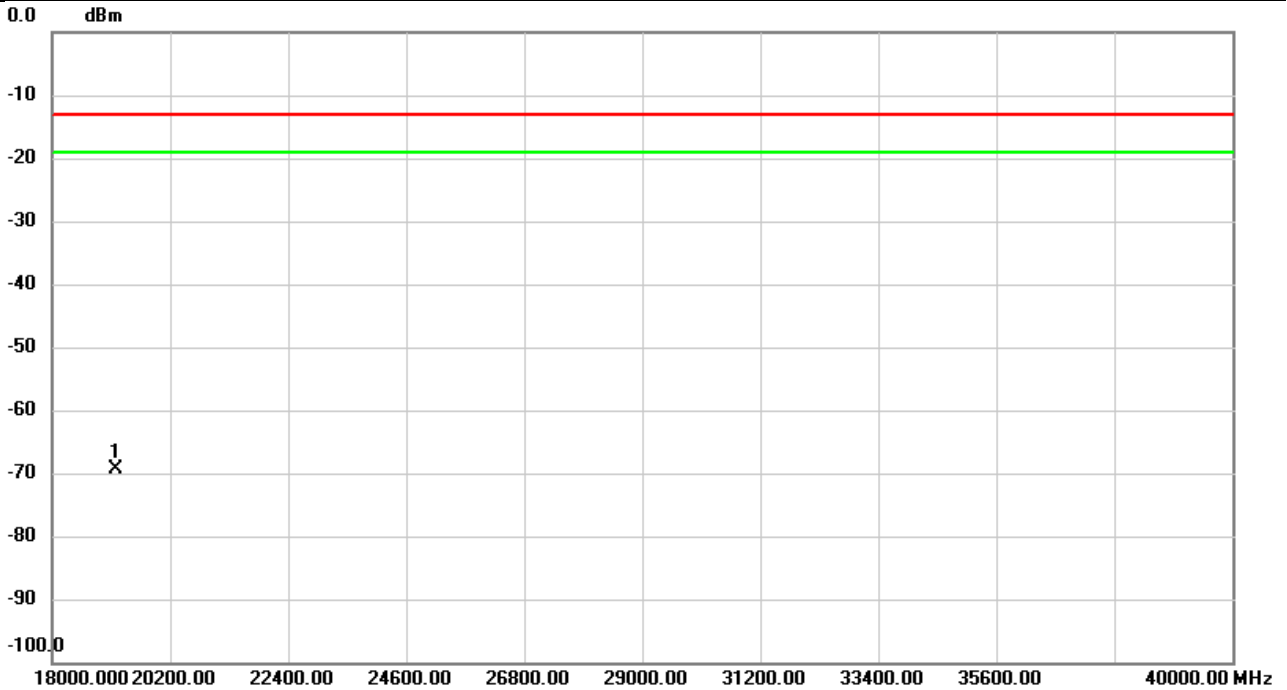


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	19200.00	-62.18	-7.21	-69.39	-13.00	-56.39	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n78 HPUE	Test Date	2023/12/4
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	58%

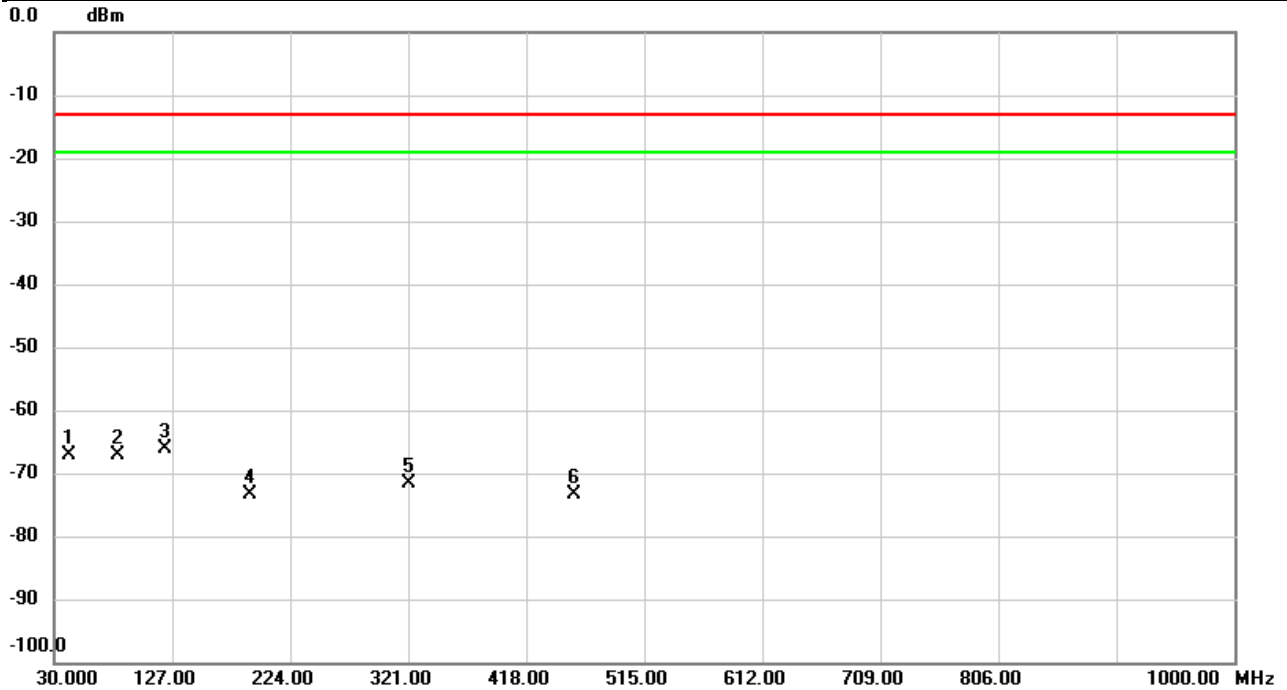


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		42.0927	-65.01	-2.15	-67.16	-13.00	-54.16	peak	
2		81.7657	-65.06	-2.15	-67.21	-13.00	-54.21	peak	
3	*	120.6627	-63.99	-2.15	-66.14	-13.00	-53.14	peak	
4		190.8260	-71.21	-2.15	-73.36	-13.00	-60.36	peak	
5		321.0647	-69.47	-2.15	-71.62	-13.00	-58.62	peak	
6		457.9317	-71.19	-2.15	-73.34	-13.00	-60.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/4
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	58%

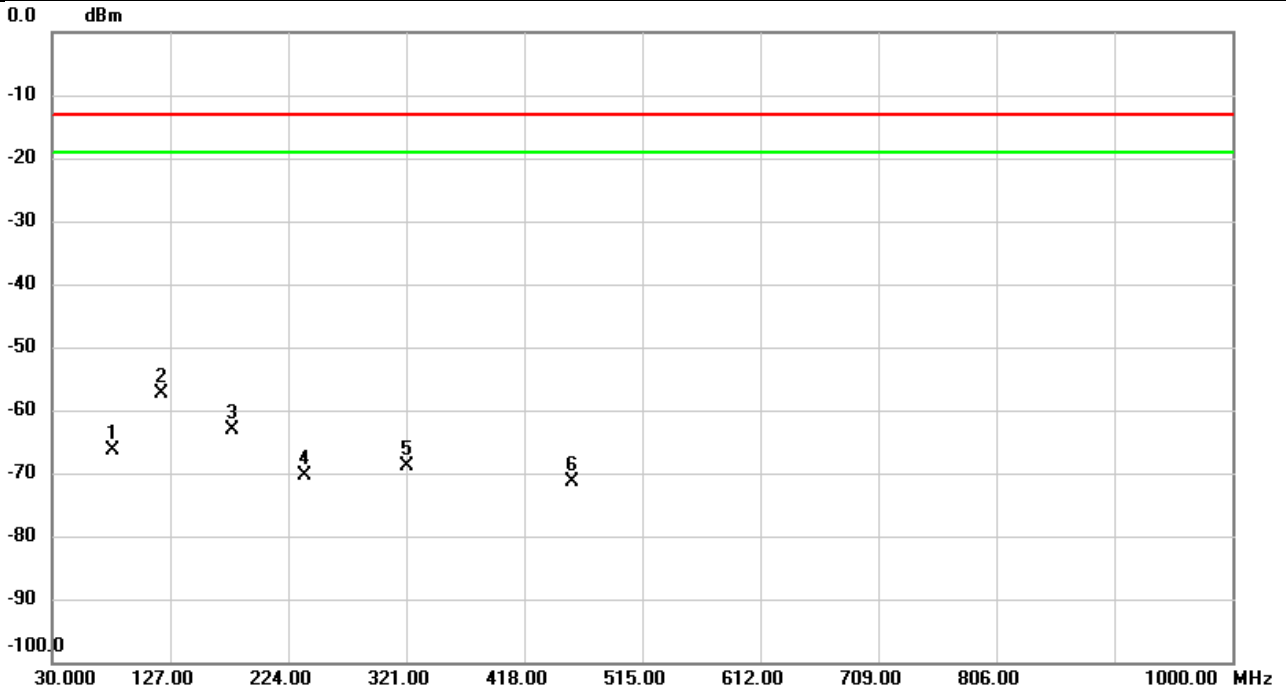


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		79.2113	-64.27	-2.15	-66.42	-13.00	-53.42	peak	
2	*	120.3393	-55.32	-2.15	-57.47	-13.00	-44.47	peak	
3		178.2483	-61.09	-2.15	-63.24	-13.00	-50.24	peak	
4		238.0003	-68.25	-2.15	-70.40	-13.00	-57.40	peak	
5		321.0647	-66.79	-2.15	-68.94	-13.00	-55.94	peak	
6		458.0287	-69.25	-2.15	-71.40	-13.00	-58.40	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/1
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	57%

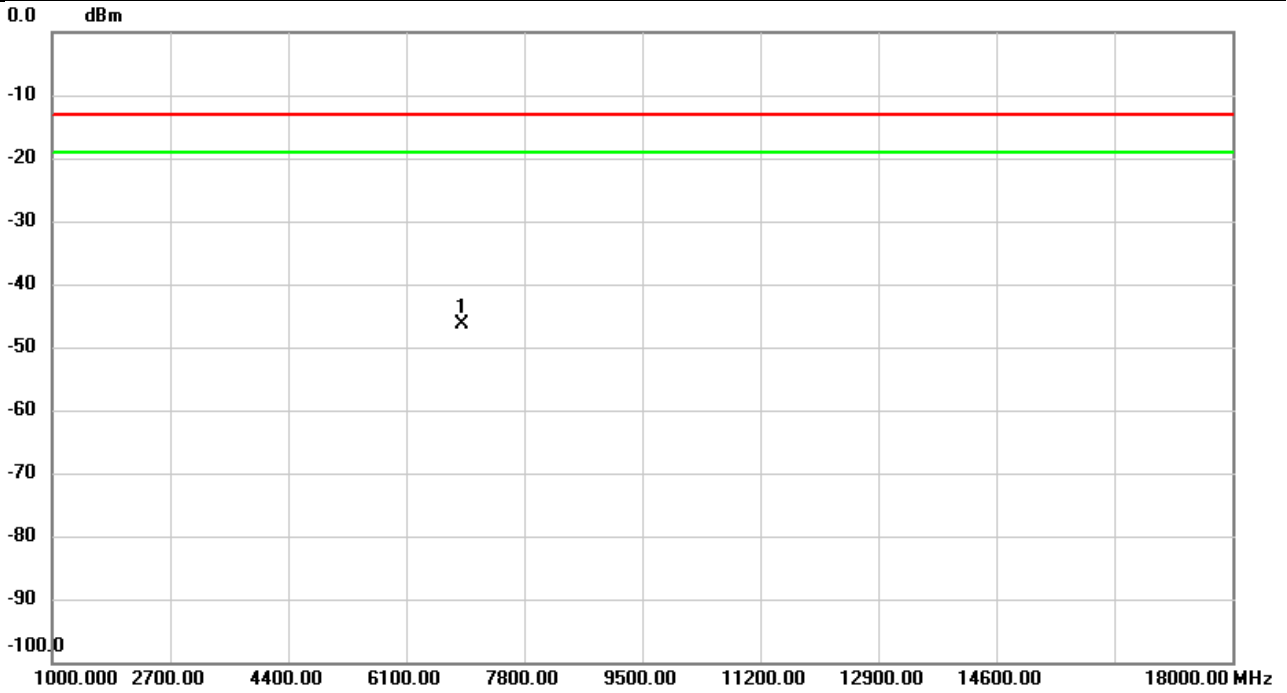


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-64.25	18.00	-46.25	-13.00	-33.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/1
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	57%

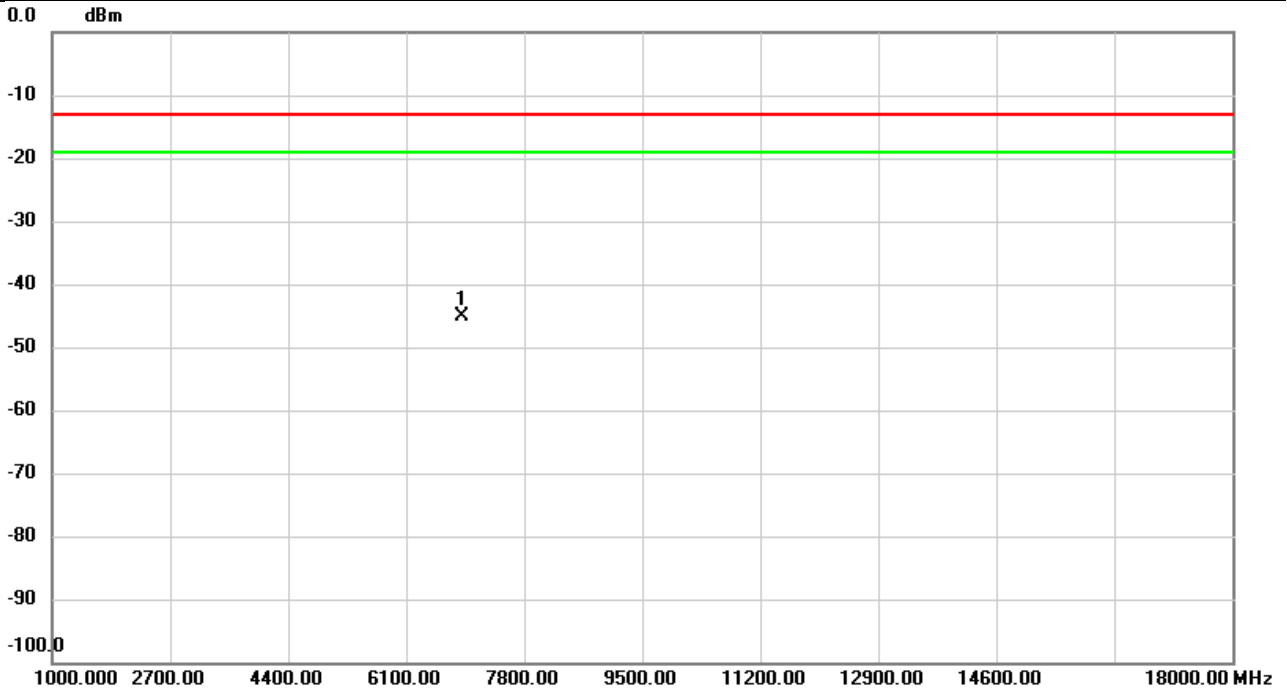


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.76	17.74	-45.02	-13.00	-32.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/11/30
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	59%

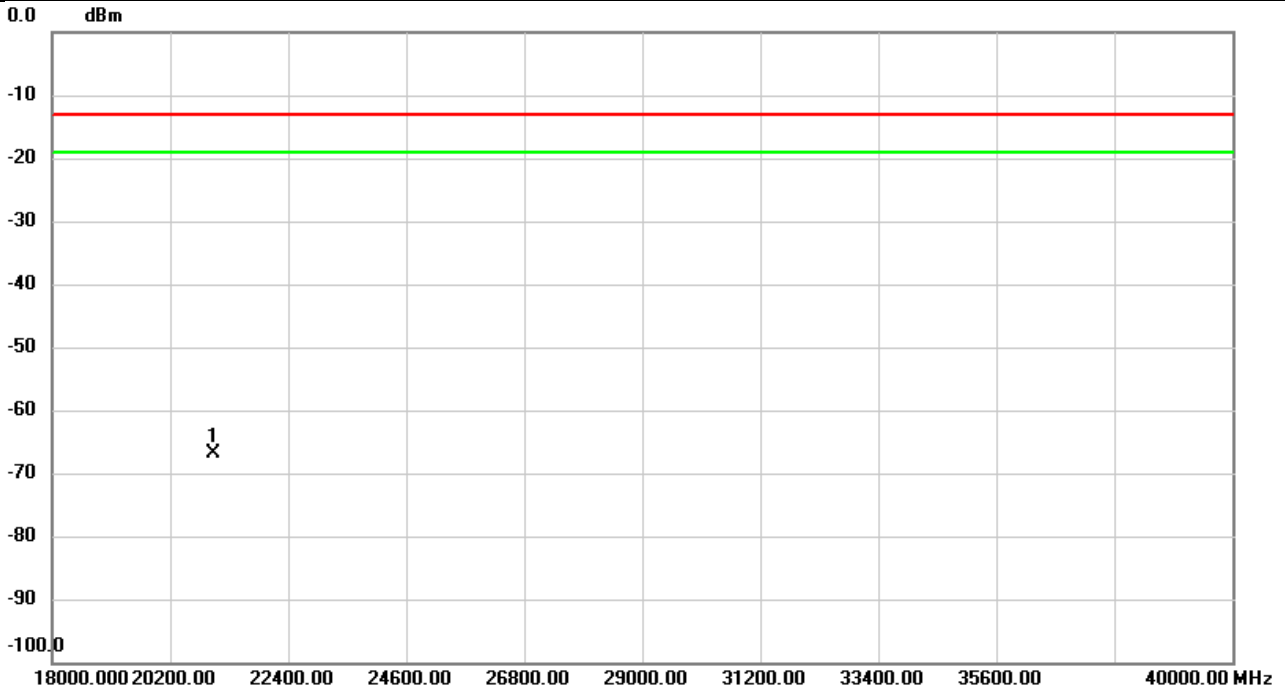


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-60.65	-6.27	-66.92	-13.00	-53.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/11/30
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	59%

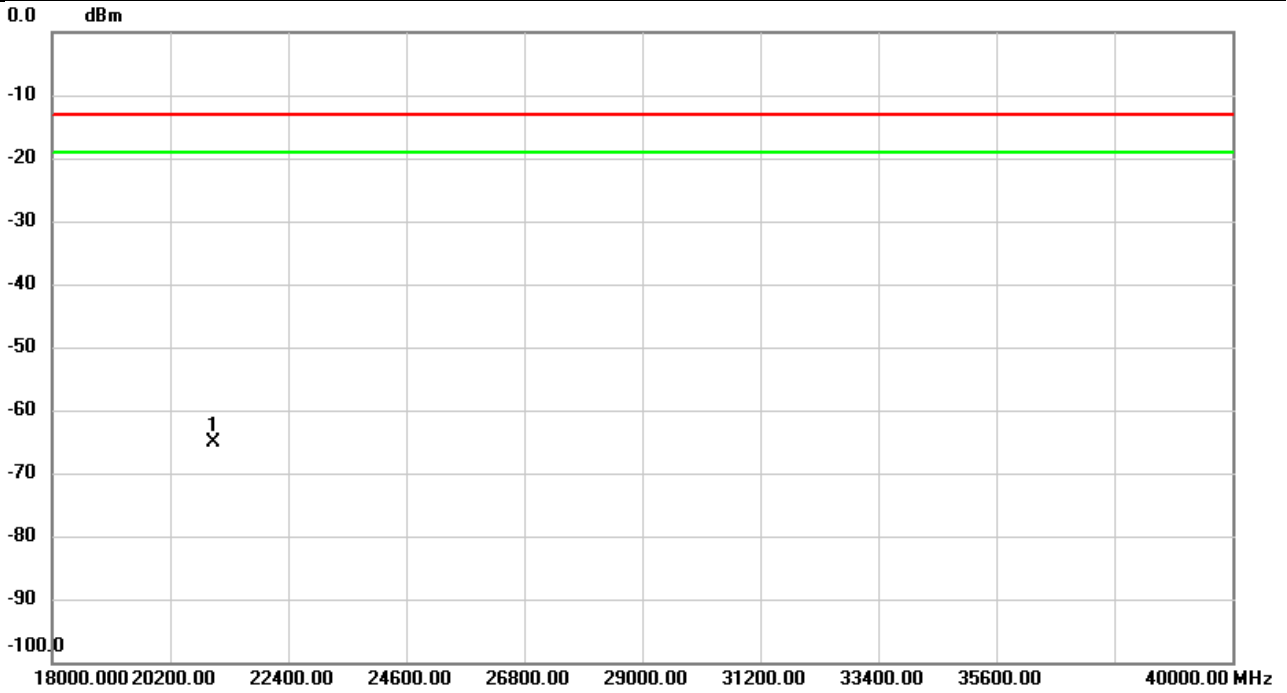

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-58.90	-6.27	-65.17	-13.00	-52.17	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	NR n78 HPUE	Test Date	2023/12/4
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	58%

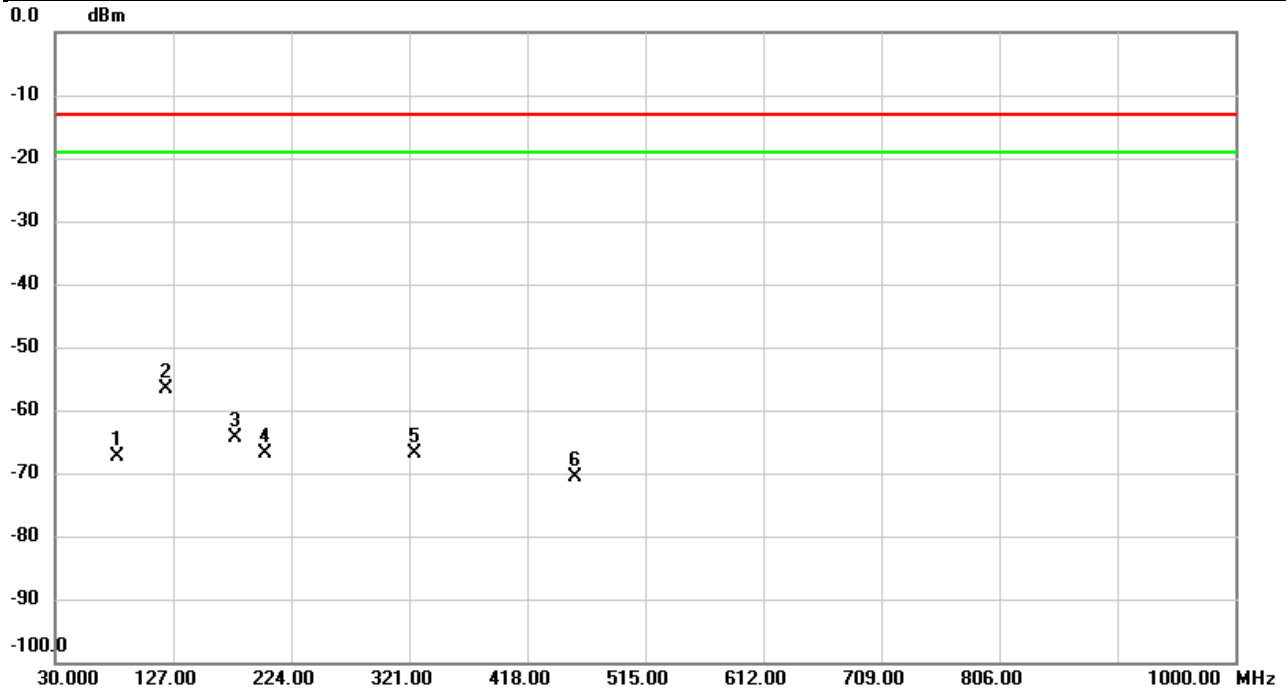


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		81.7333	-65.30	-2.15	-67.45	-13.00	-54.45	peak	
2	*	120.5657	-54.51	-2.15	-56.66	-13.00	-43.66	peak	
3		178.1190	-62.20	-2.15	-64.35	-13.00	-51.35	peak	
4		203.0157	-64.71	-2.15	-66.86	-13.00	-53.86	peak	
5		325.7853	-64.83	-2.15	-66.98	-13.00	-53.98	peak	
6		458.0610	-68.54	-2.15	-70.69	-13.00	-57.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/4
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	58%

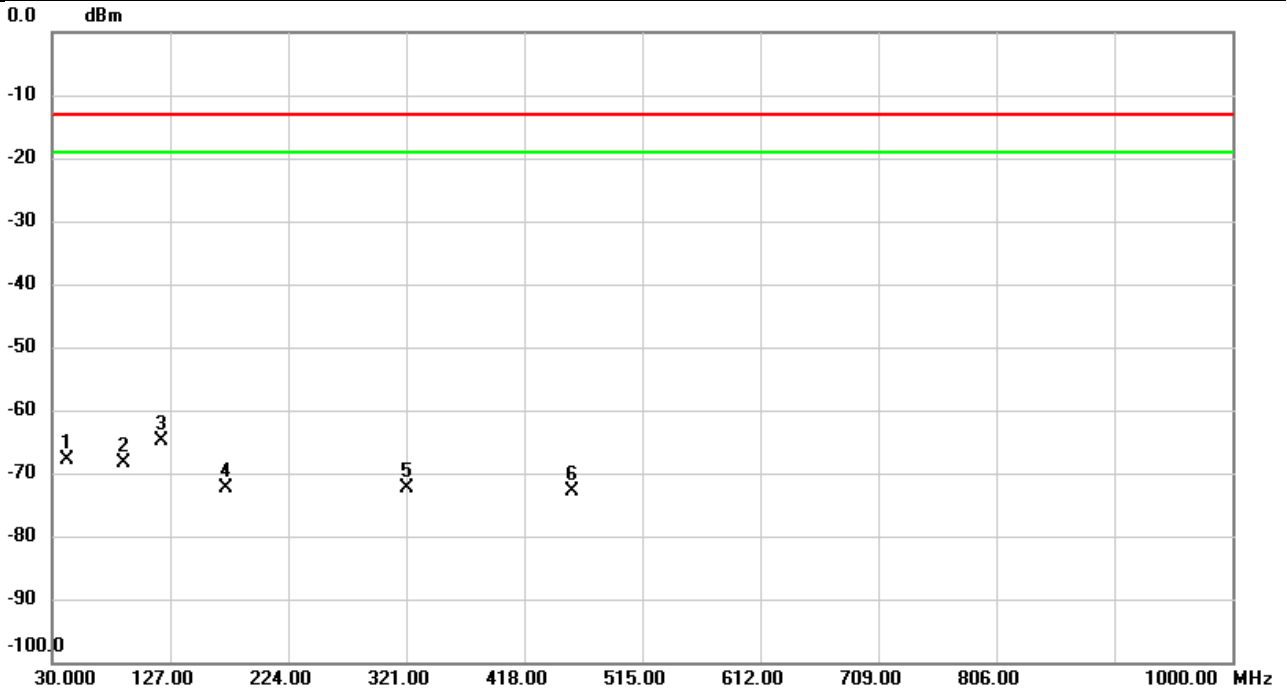


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		42.0603	-65.60	-2.15	-67.75	-13.00	-54.75	peak	
2		89.0730	-66.23	-2.15	-68.38	-13.00	-55.38	peak	
3	*	119.6927	-62.82	-2.15	-64.97	-13.00	-51.97	peak	
4		172.7516	-70.25	-2.15	-72.40	-13.00	-59.40	peak	
5		321.0323	-70.13	-2.15	-72.28	-13.00	-59.28	peak	
6		457.8347	-70.77	-2.15	-72.92	-13.00	-59.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/1
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	57%

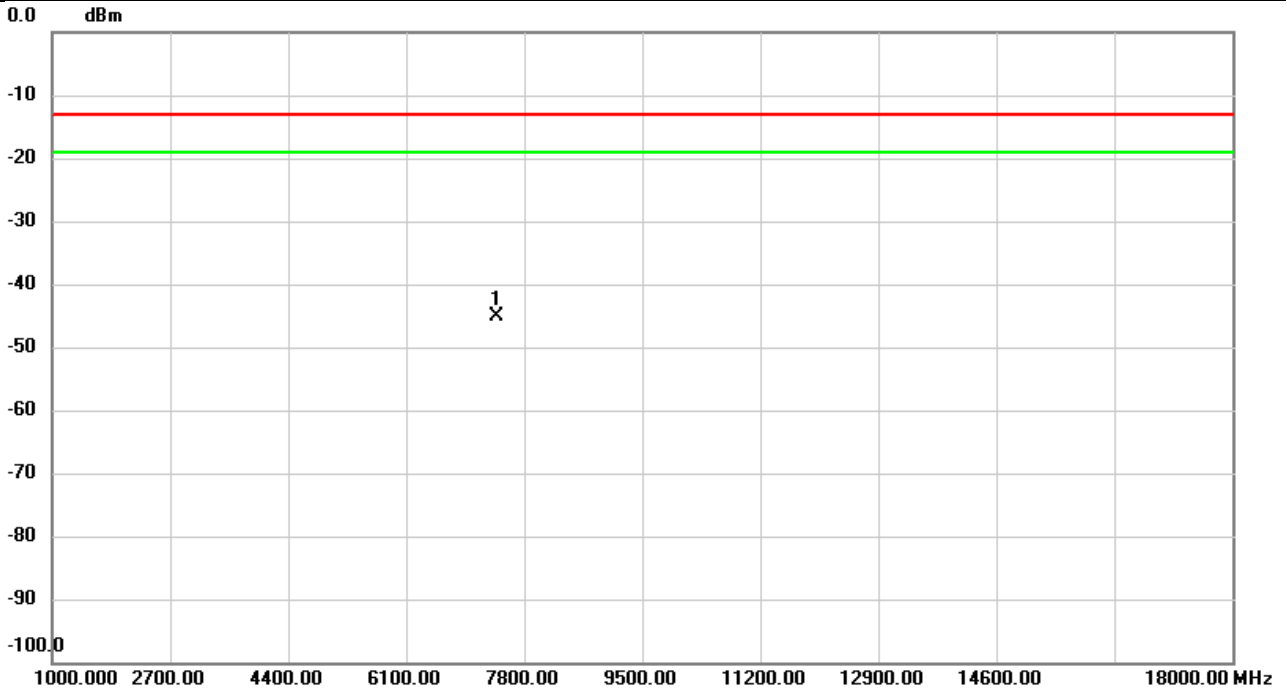


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.18	18.12	-45.06	-13.00	-32.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/1
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	57%

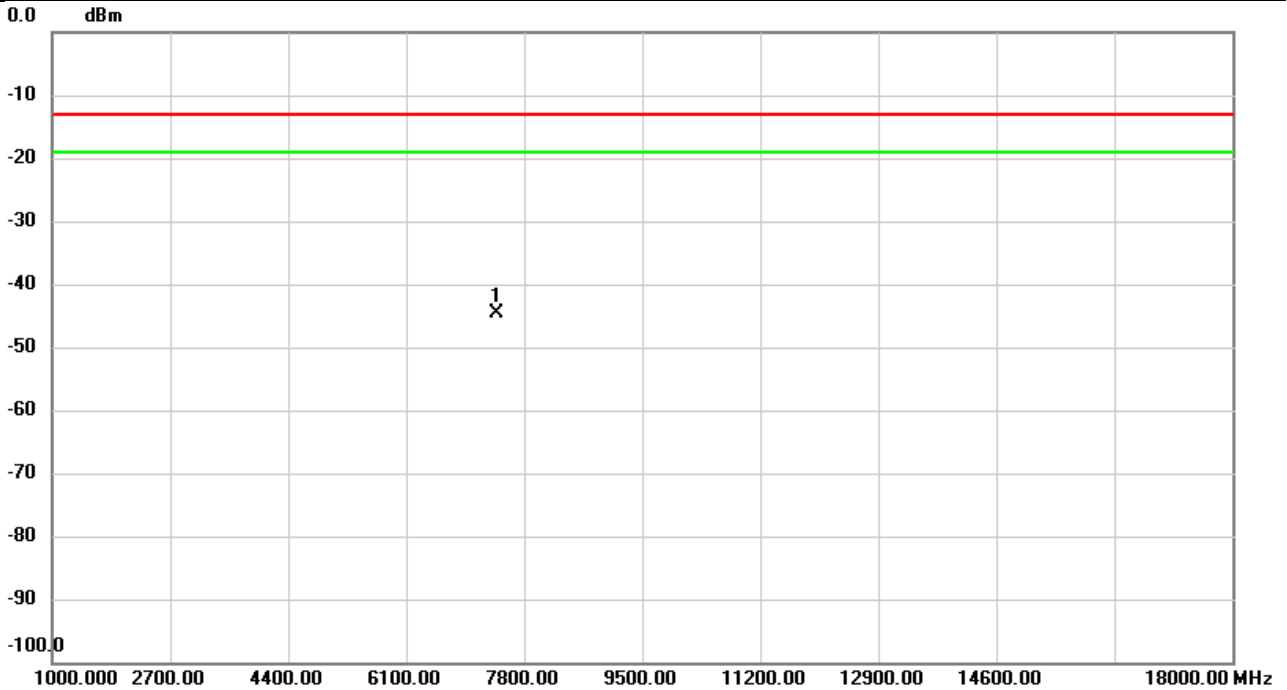


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.77	18.07	-44.70	-13.00	-31.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/11/30
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	59%

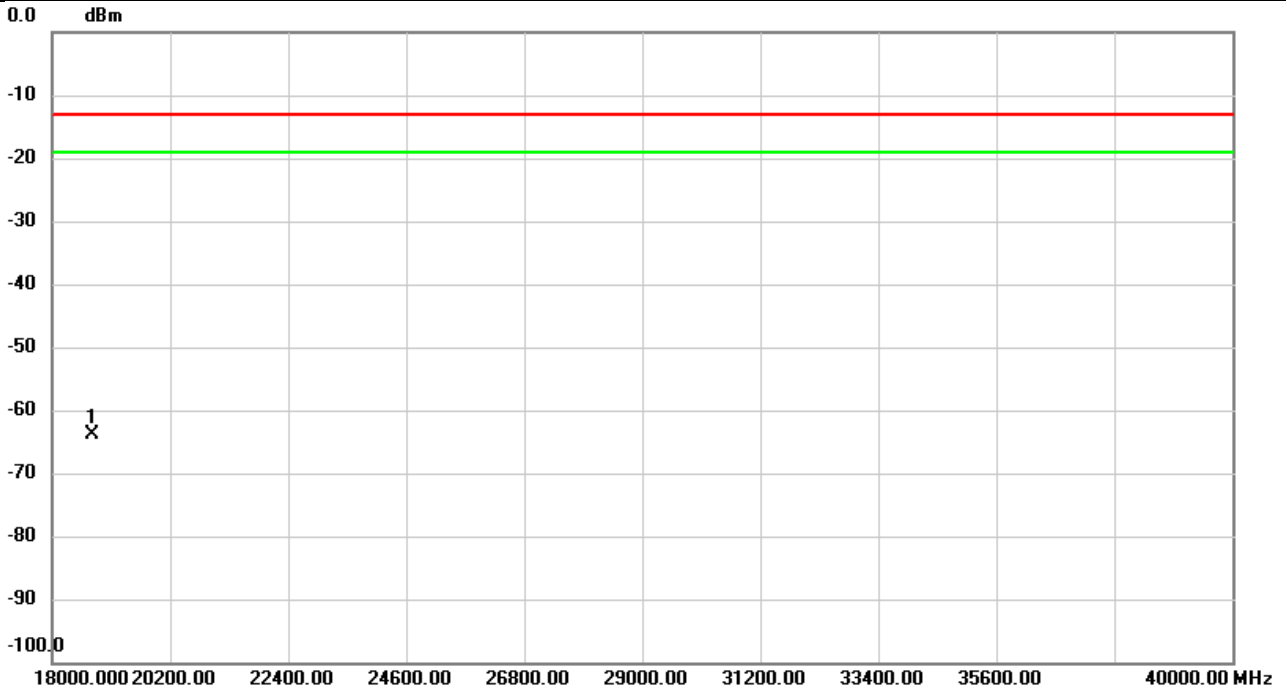


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-57.56	-6.32	-63.88	-13.00	-50.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/11/30
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	59%

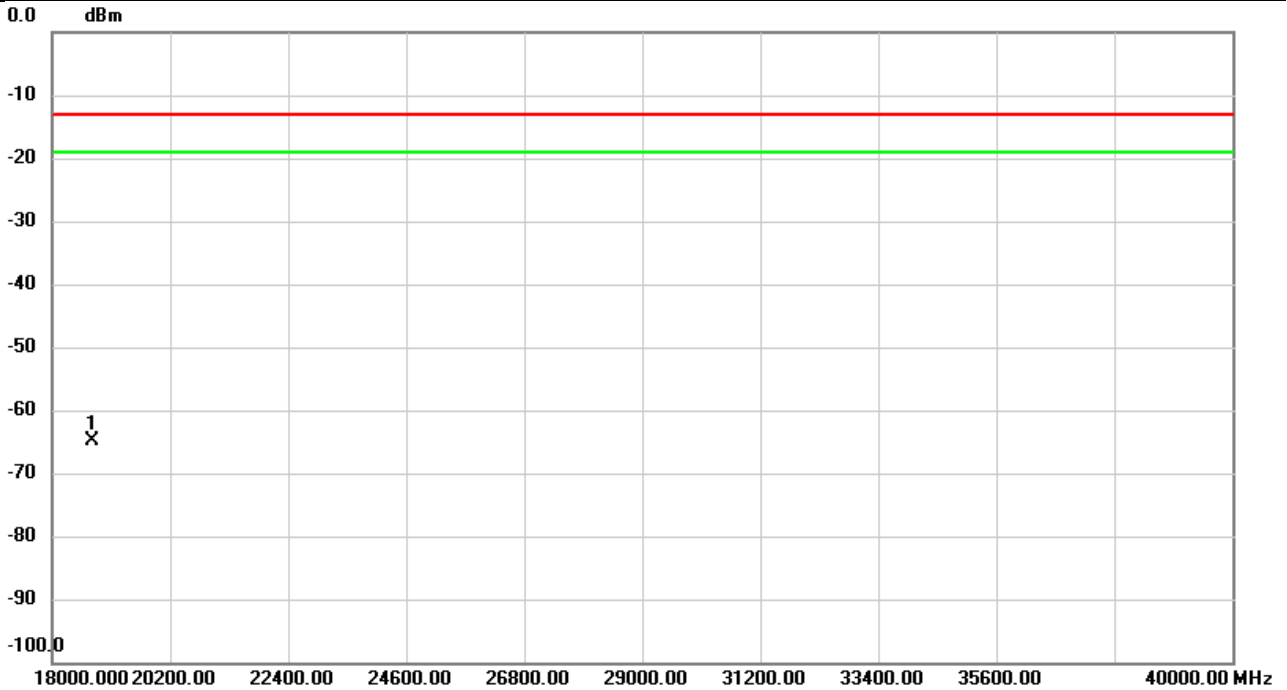


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-58.54	-6.32	-64.86	-13.00	-51.86	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**For UL MIMO:**

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Vertical
Temp	23°C	Hum.	55%

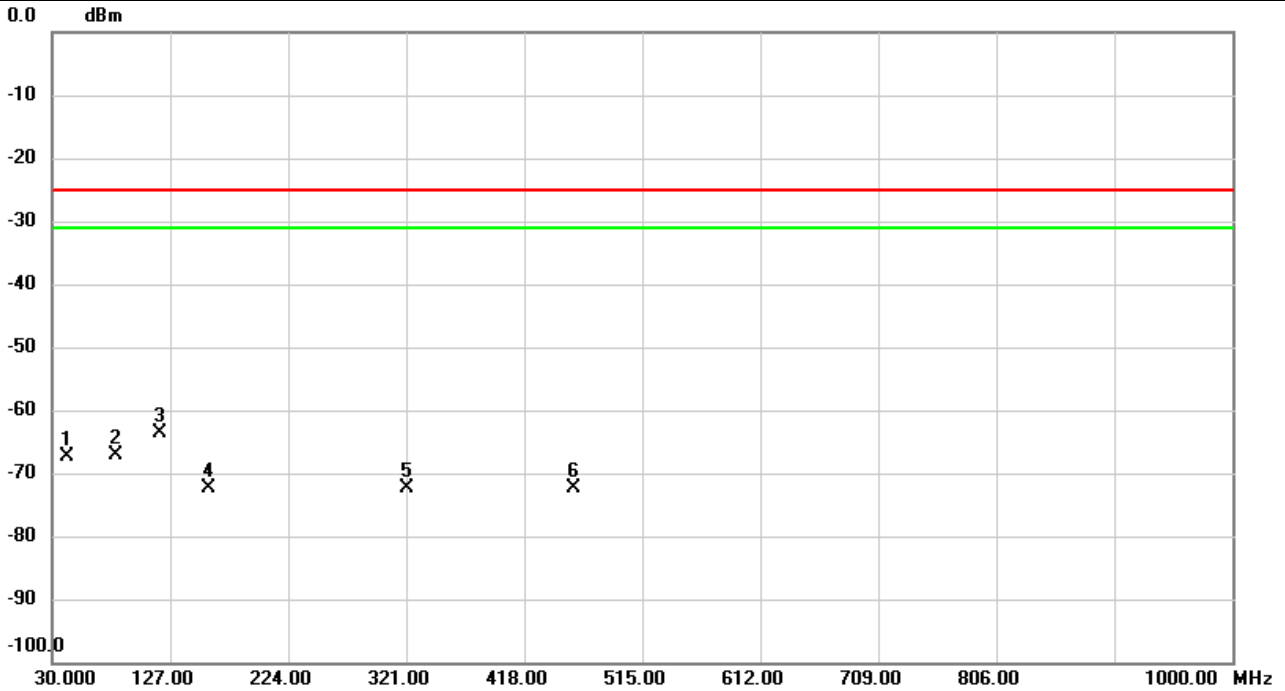


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		42.9010	-65.12	-2.15	-67.27	-25.00	-42.27	peak	
2		83.0266	-64.85	-2.15	-67.00	-25.00	-42.00	peak	
3	*	118.7224	-61.39	-2.15	-63.54	-25.00	-38.54	peak	
4		159.1391	-70.22	-2.15	-72.37	-25.00	-47.37	peak	
5		321.0000	-70.14	-2.15	-72.29	-25.00	-47.29	peak	
6		458.3520	-70.32	-2.15	-72.47	-25.00	-47.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Horizontal
Temp	23°C	Hum.	55%

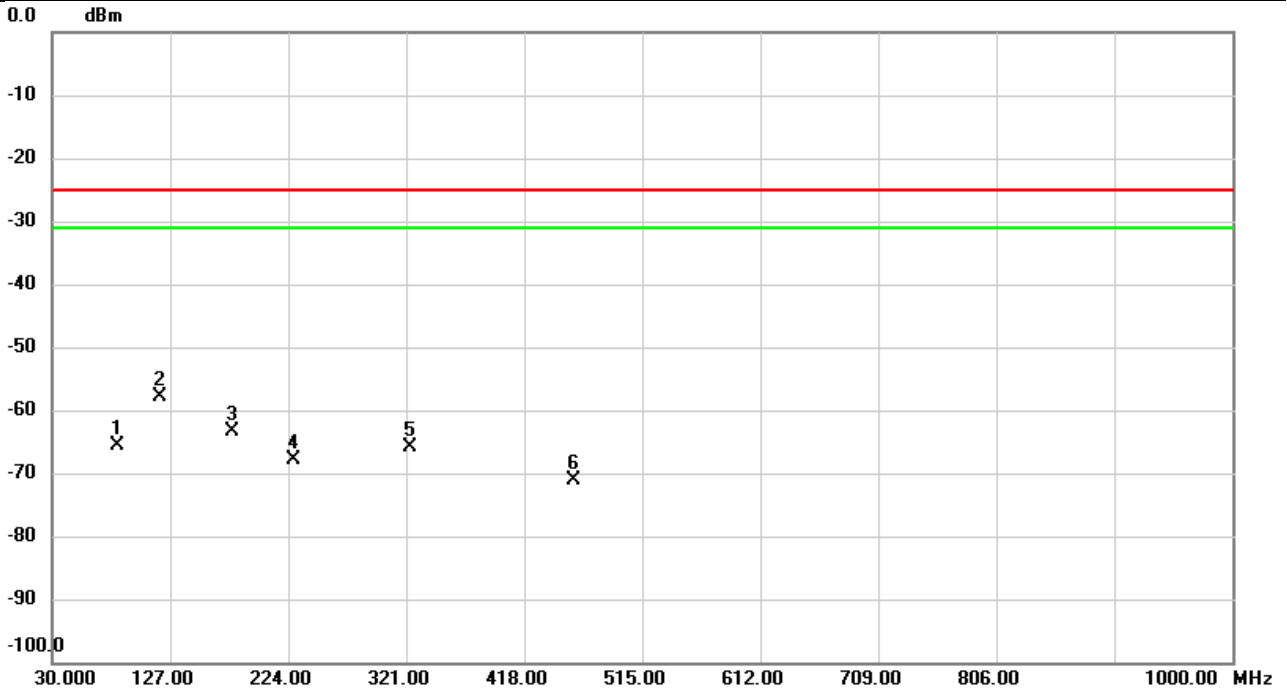


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		83.5440	-63.38	-2.15	-65.53	-25.00	-40.53	peak	
2	*	118.9490	-55.81	-2.15	-57.96	-25.00	-32.96	peak	
3		178.0866	-61.11	-2.15	-63.26	-25.00	-38.26	peak	
4		229.1733	-65.69	-2.15	-67.84	-25.00	-42.84	peak	
5		324.3625	-63.65	-2.15	-65.80	-25.00	-40.80	peak	
6		458.4490	-69.02	-2.15	-71.17	-25.00	-46.17	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Vertical
Temp	23°C	Hum.	55%

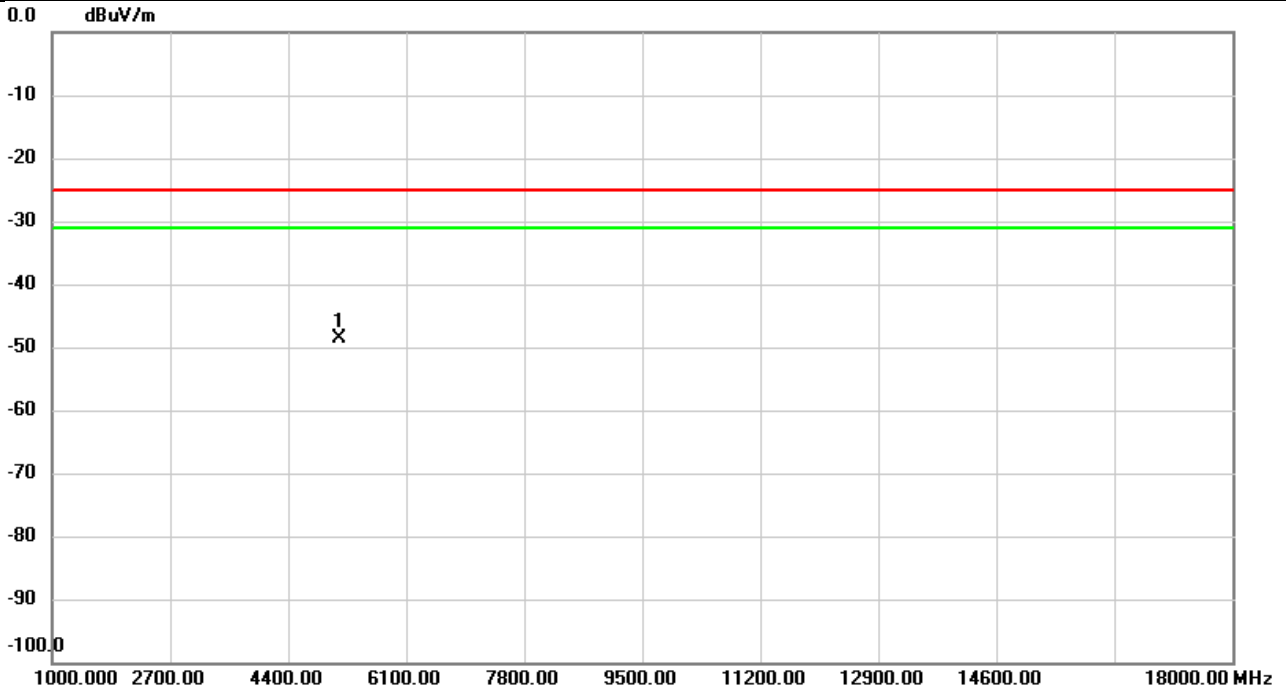


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5140.000	-62.45	13.77	-48.68	-25.00	-23.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Horizontal
Temp	23°C	Hum.	55%

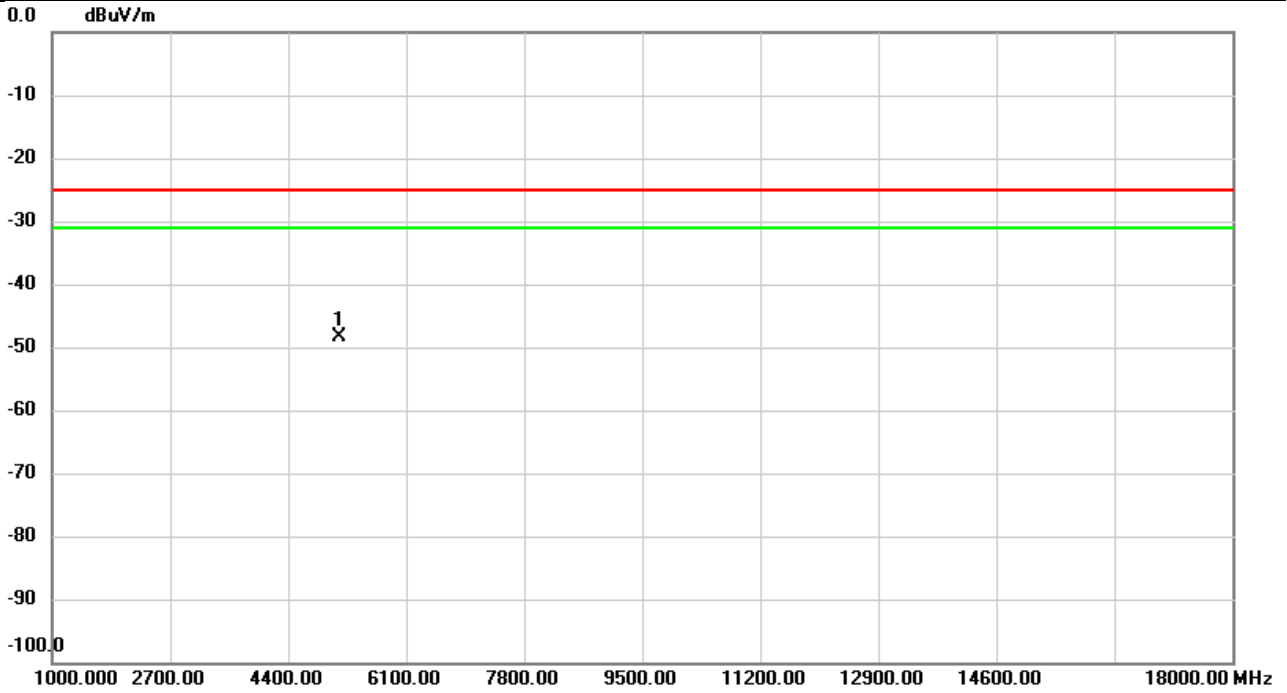


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5140.000	-62.07	13.77	-48.30	-25.00	-23.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	55%

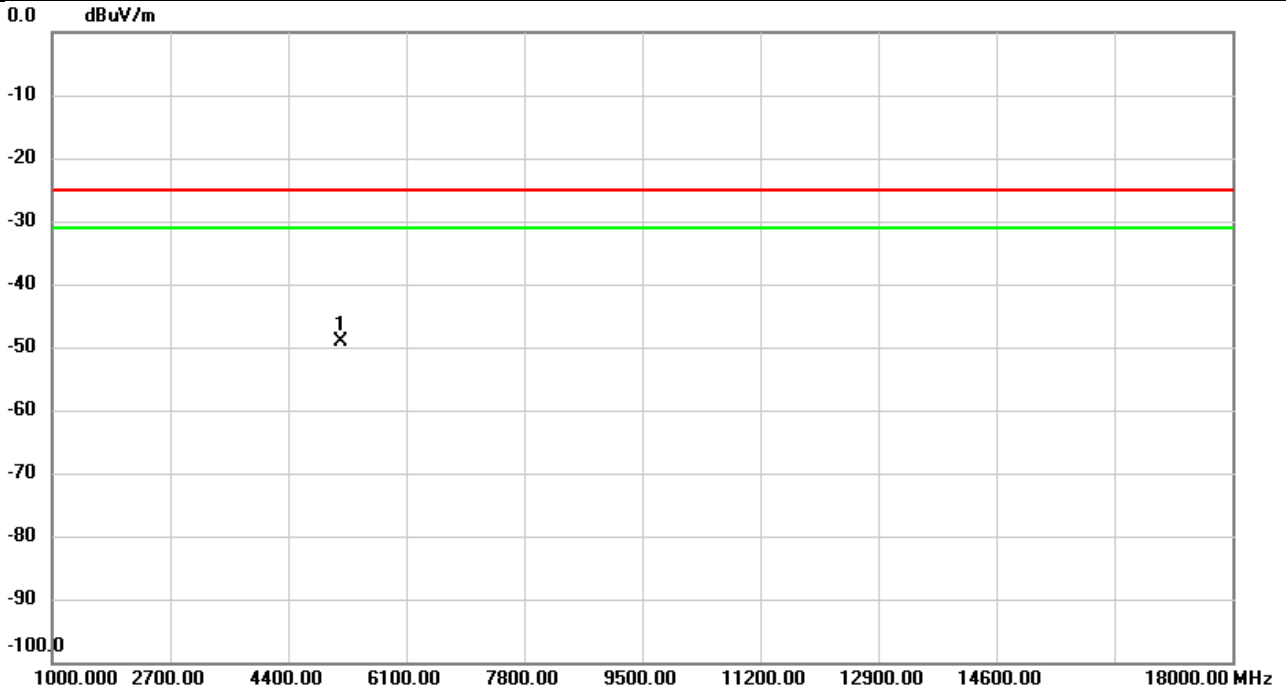


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5150.000	-62.76	13.75	-49.01	-25.00	-24.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	55%

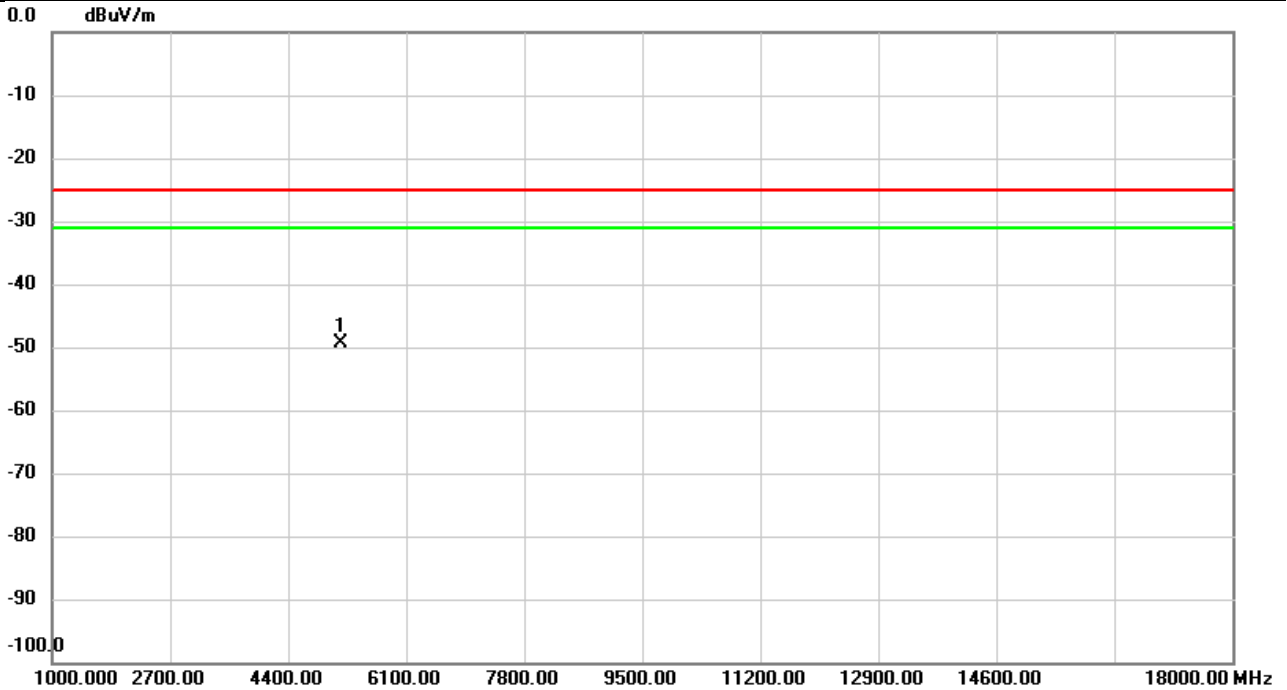


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5150.000	-63.14	13.75	-49.39	-25.00	-24.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH520000	Polarization	Vertical
Temp	23°C	Hum.	55%

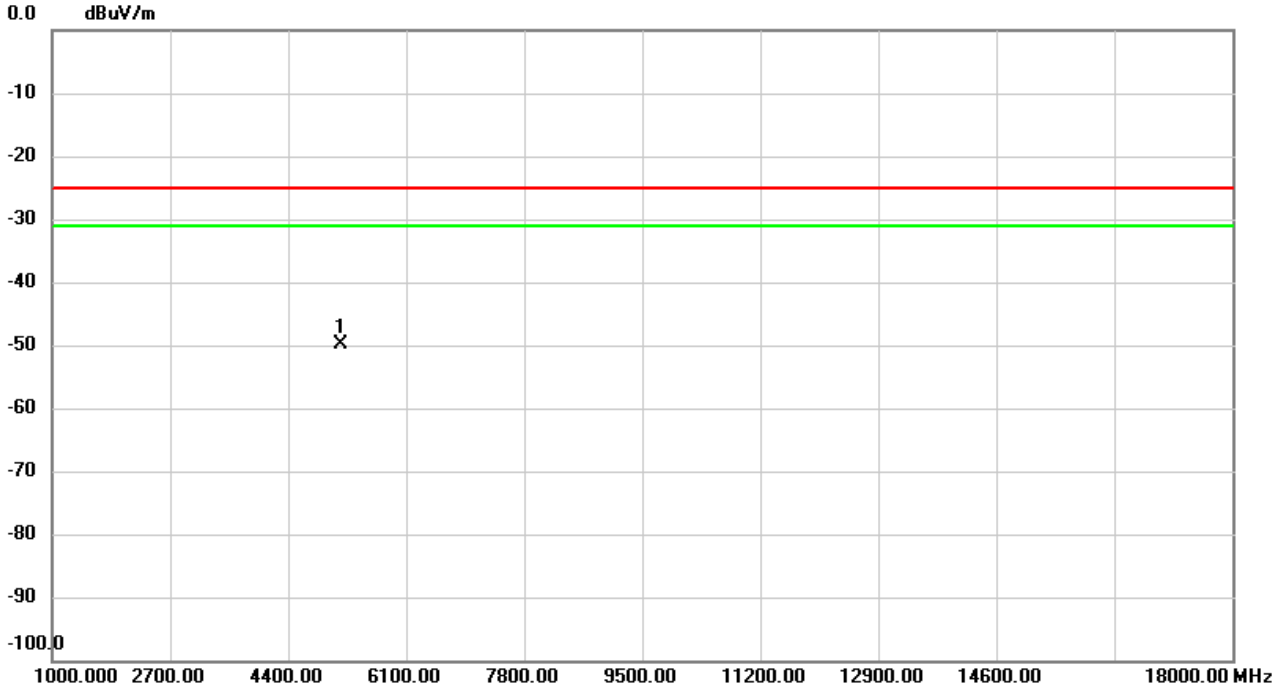


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5160.000	-63.60	13.66	-49.94	-25.00	-24.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH520000	Polarization	Horizontal
Temp	23°C	Hum.	55%

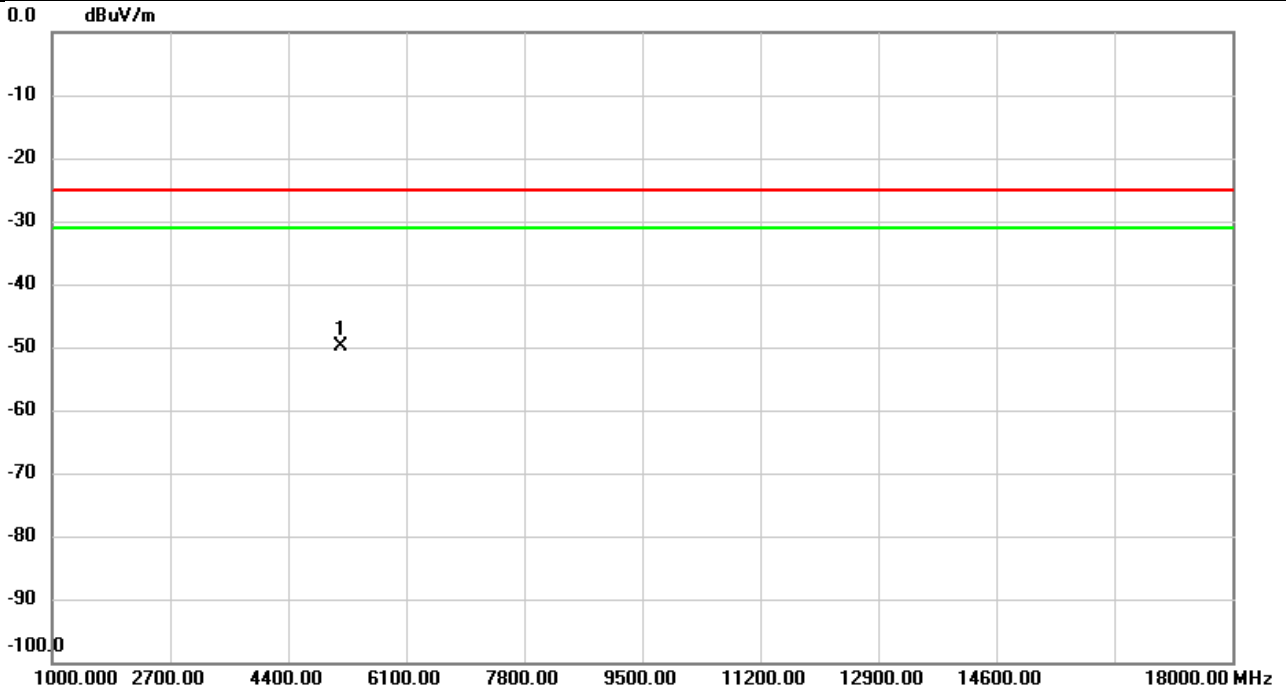


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5160.000	-63.60	13.66	-49.94	-25.00	-24.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Vertical
Temp	23°C	Hum.	55%

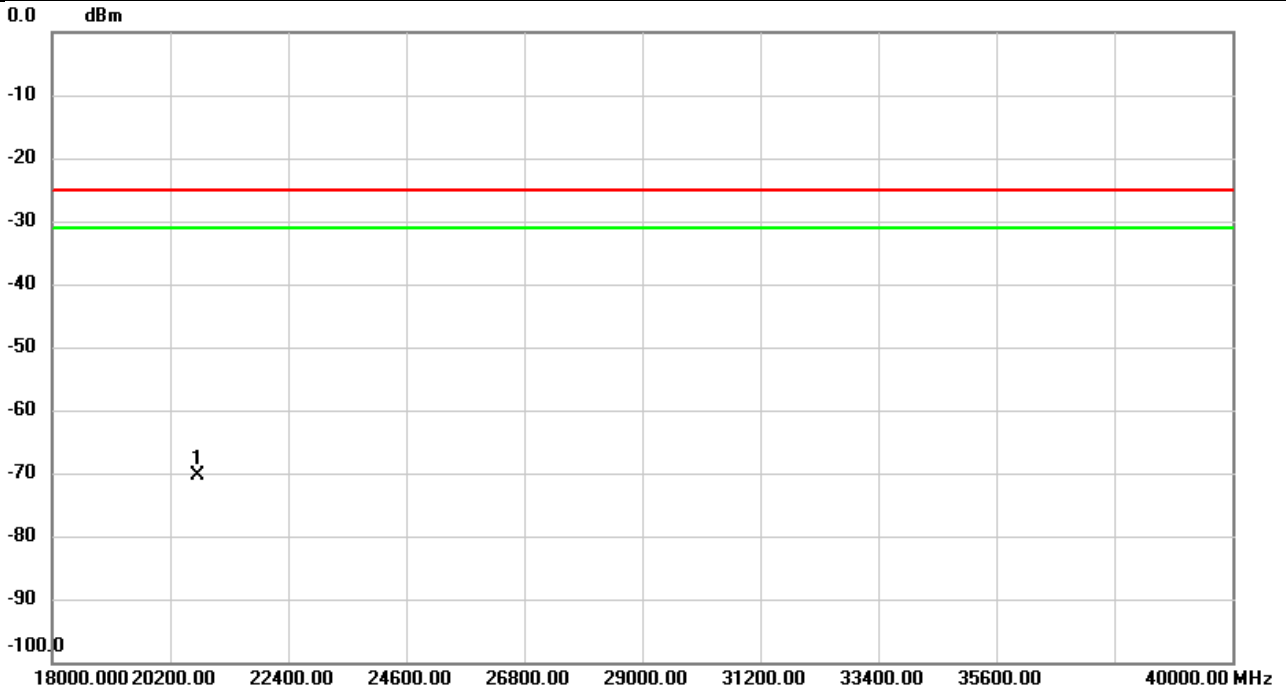


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20720.00	-63.69	-6.62	-70.31	-25.00	-45.31	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Horizontal
Temp	23°C	Hum.	55%

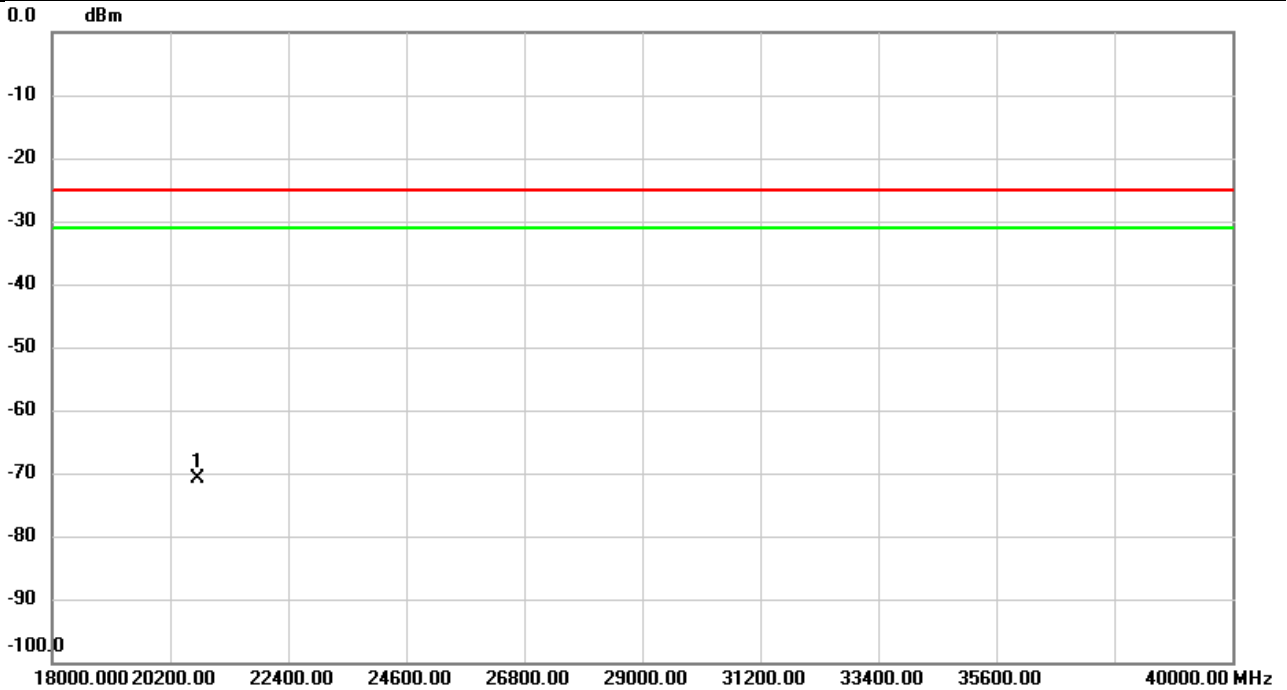


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20720.00	-64.16	-6.62	-70.78	-25.00	-45.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

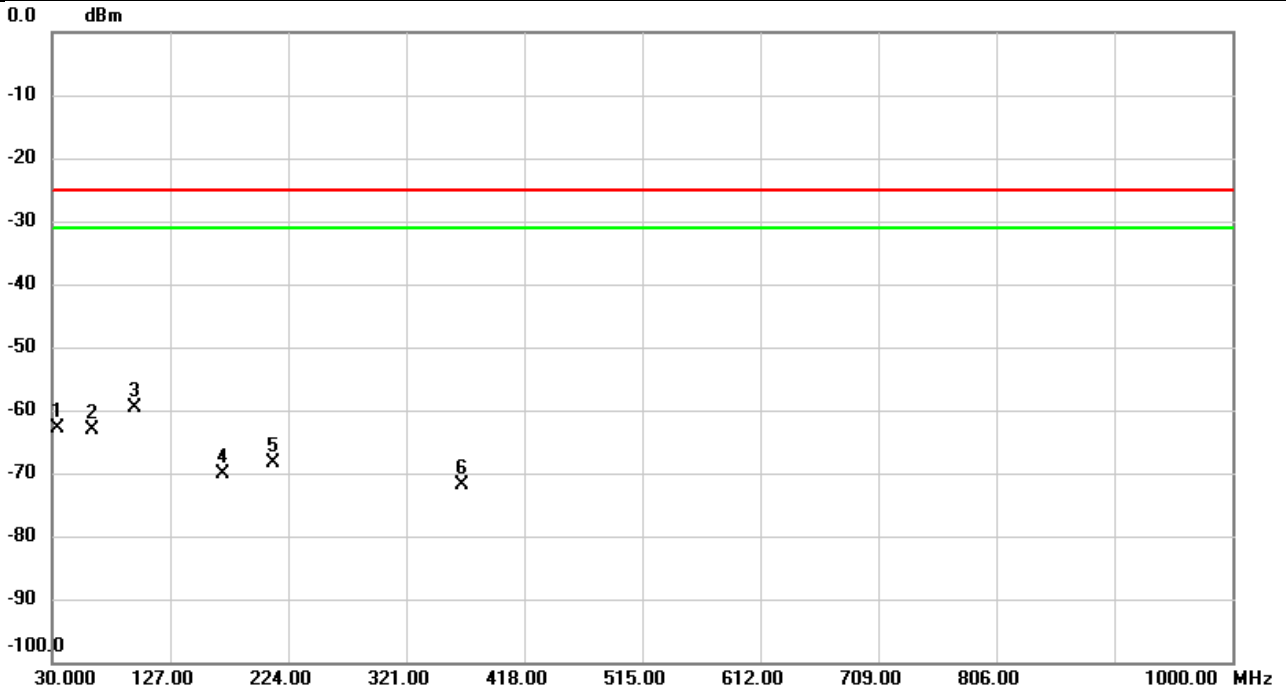


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		34.7853	-53.43	-9.34	-62.77	-25.00	-37.77	peak	
2		62.4627	-55.51	-7.49	-63.00	-25.00	-38.00	peak	
3	*	97.6413	-53.51	-6.15	-59.66	-25.00	-34.66	peak	
4		170.7147	-68.23	-1.93	-70.16	-25.00	-45.16	peak	
5		211.7457	-64.88	-3.55	-68.43	-25.00	-43.43	peak	
6		366.6223	-69.20	-2.61	-71.81	-25.00	-46.81	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

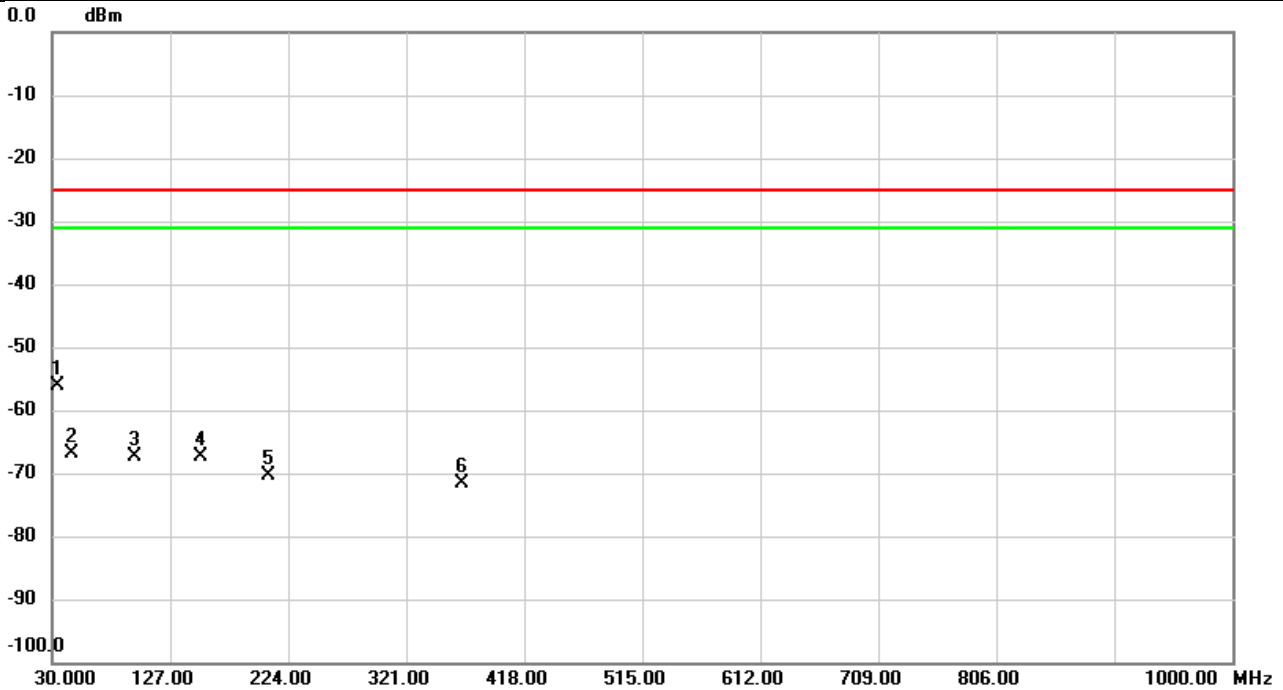


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	34.6883	-58.39	2.35	-56.04	-25.00	-31.04	peak	
2		45.5523	-67.87	0.99	-66.88	-25.00	-41.88	peak	
3		97.7060	-59.49	-7.94	-67.43	-25.00	-42.43	peak	
4		152.5756	-61.52	-5.74	-67.26	-25.00	-42.26	peak	
5		207.8656	-60.98	-9.45	-70.43	-25.00	-45.43	peak	
6		366.5900	-69.16	-2.57	-71.73	-25.00	-46.73	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	56%

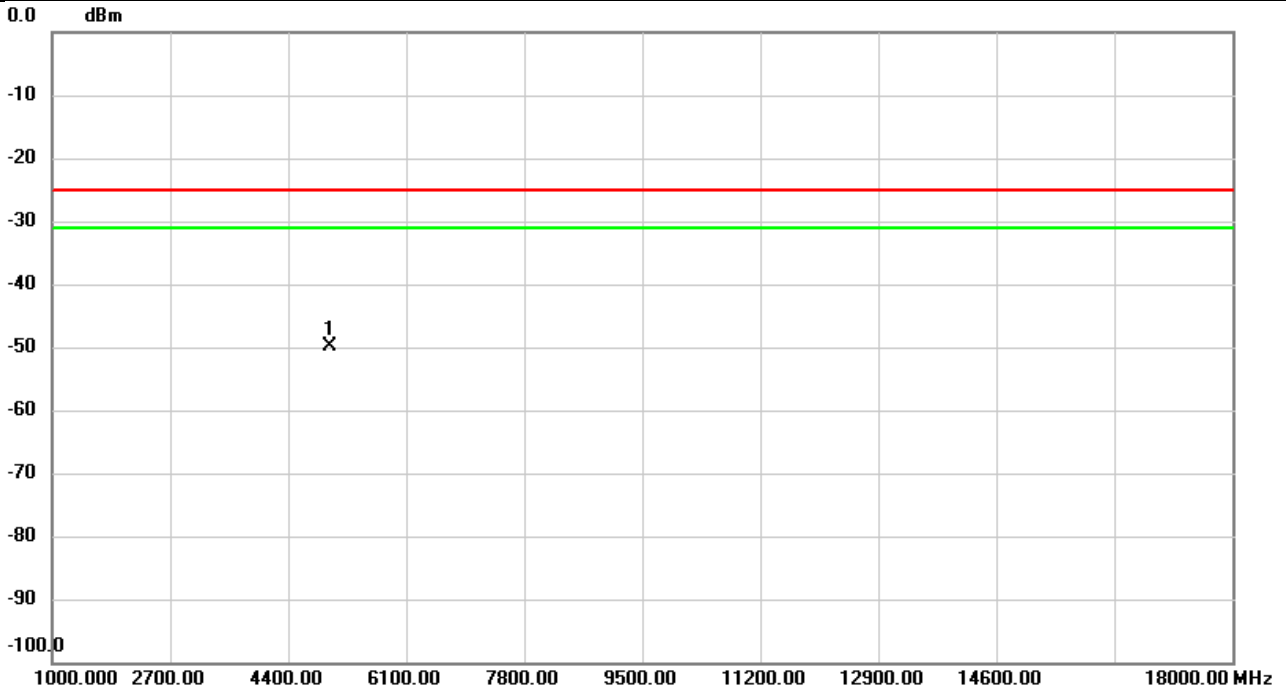


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-63.36	13.43	-49.93	-25.00	-24.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	56%

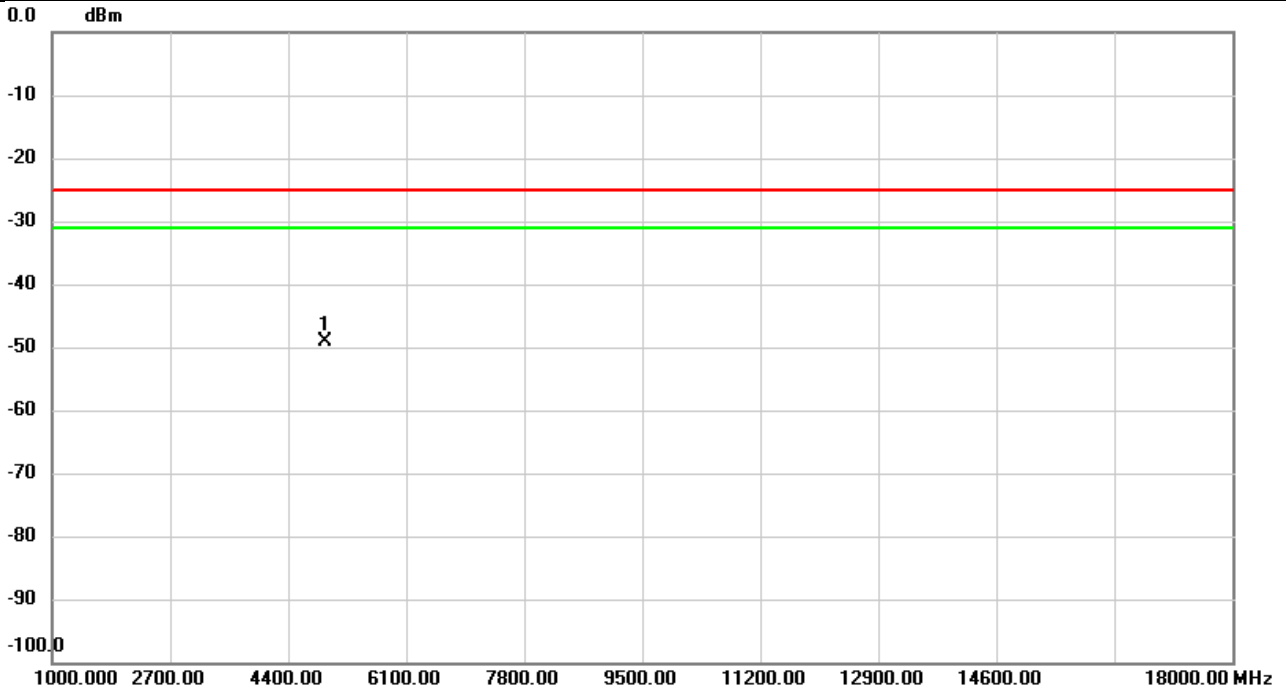


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4922.020	-62.60	13.42	-49.18	-25.00	-24.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH518598	Polarization	Vertical
Temp	21°C	Hum.	56%

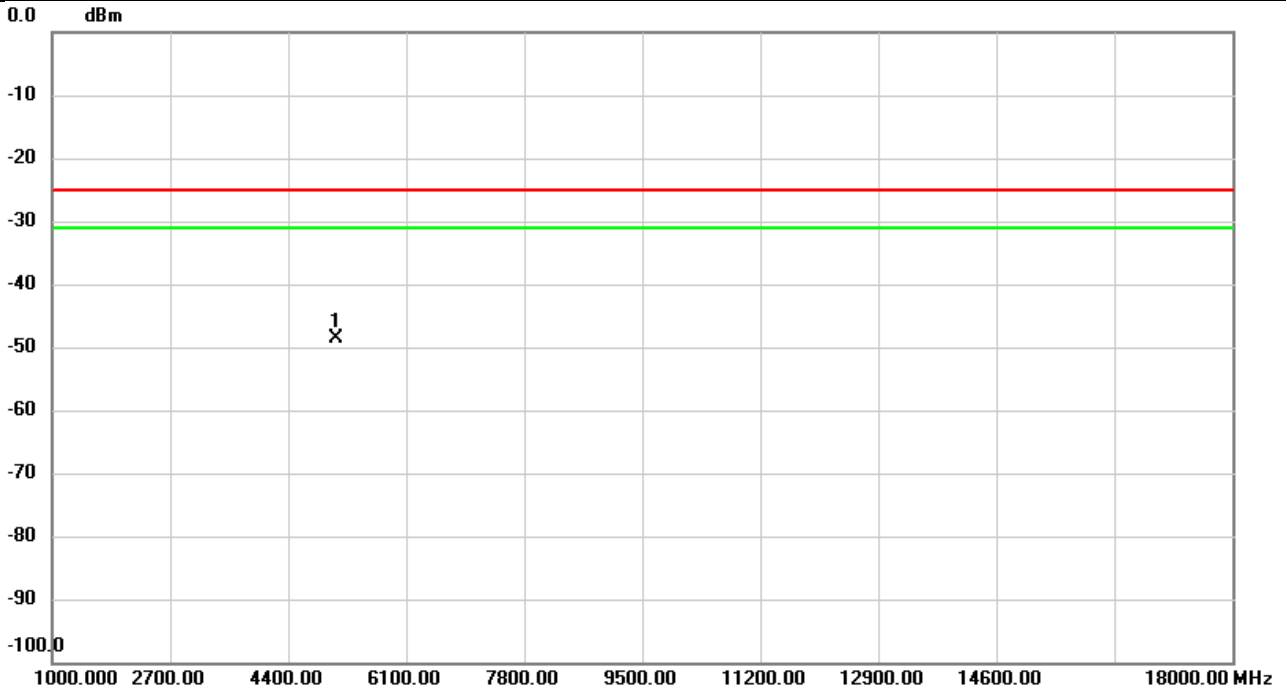


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.62	13.93	-48.69	-25.00	-23.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH518598	Polarization	Horizontal
Temp	21°C	Hum.	56%

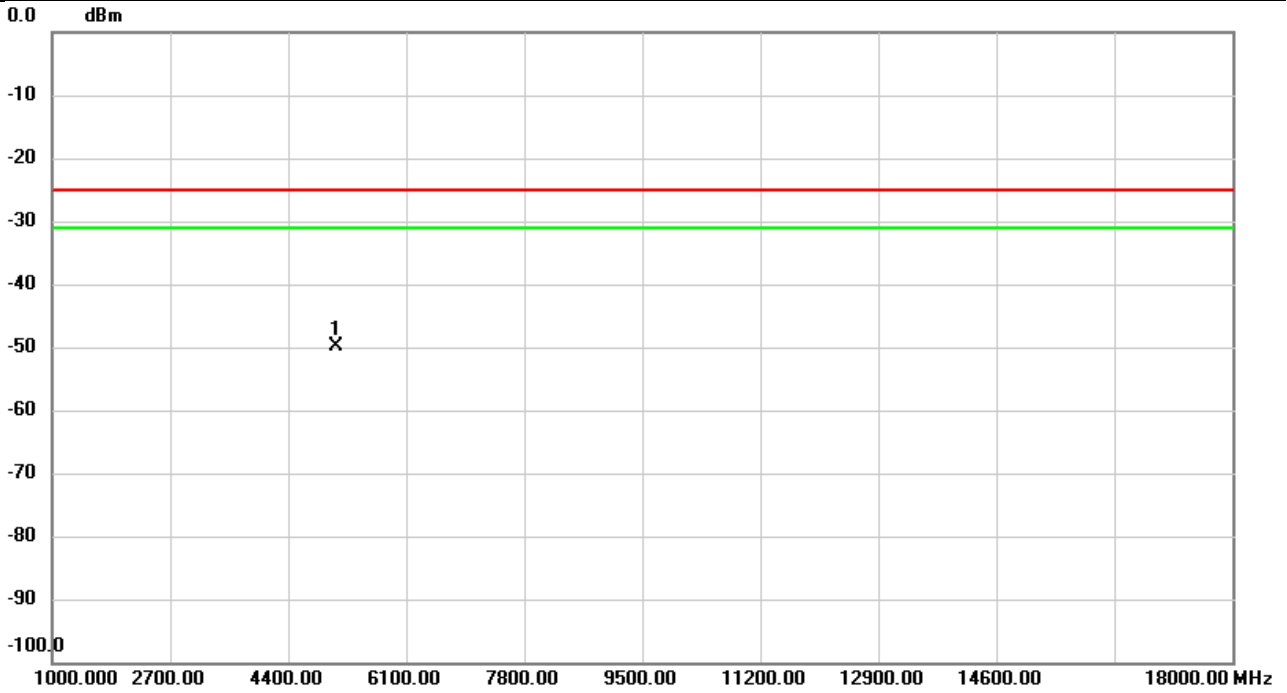


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-63.83	13.95	-49.88	-25.00	-24.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

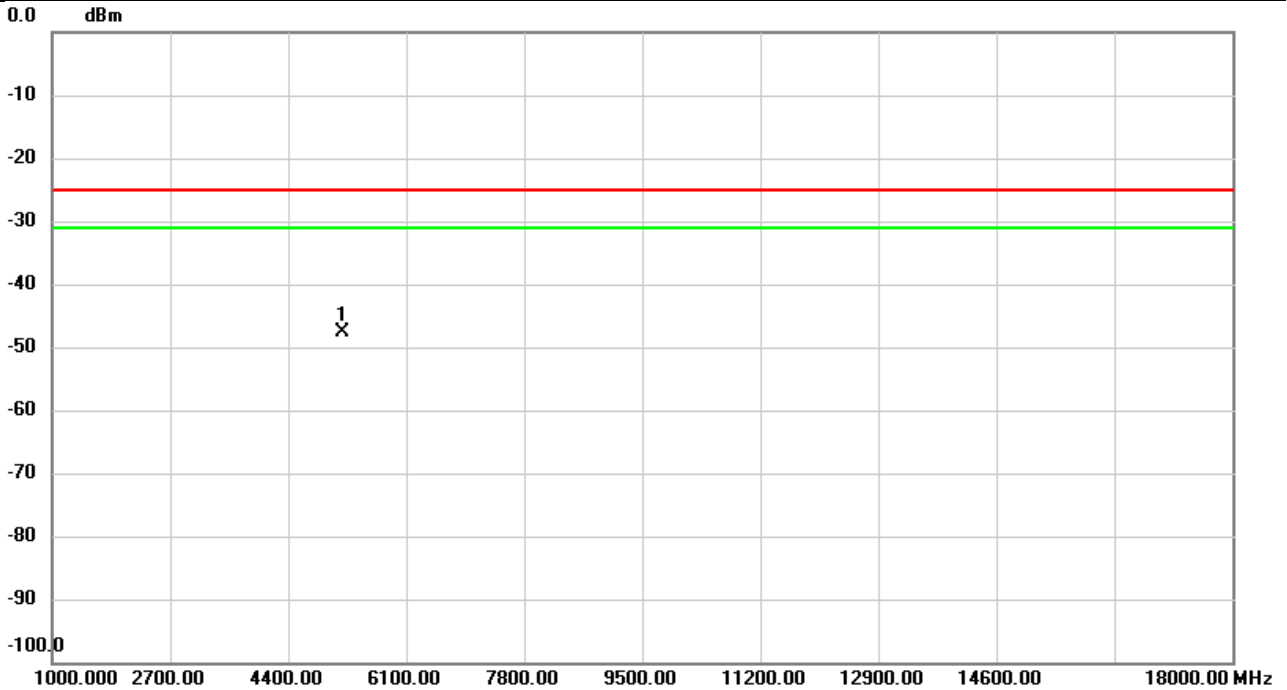


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-61.21	13.49	-47.72	-25.00	-22.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

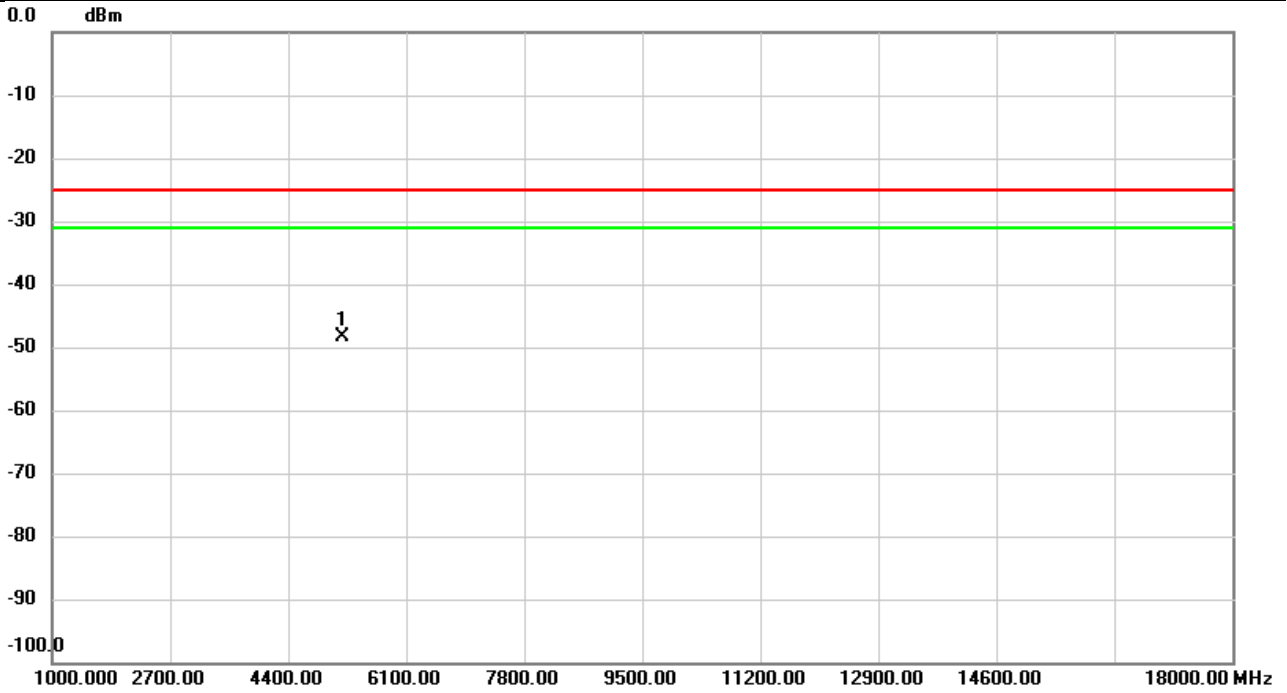


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-61.99	13.69	-48.30	-25.00	-23.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

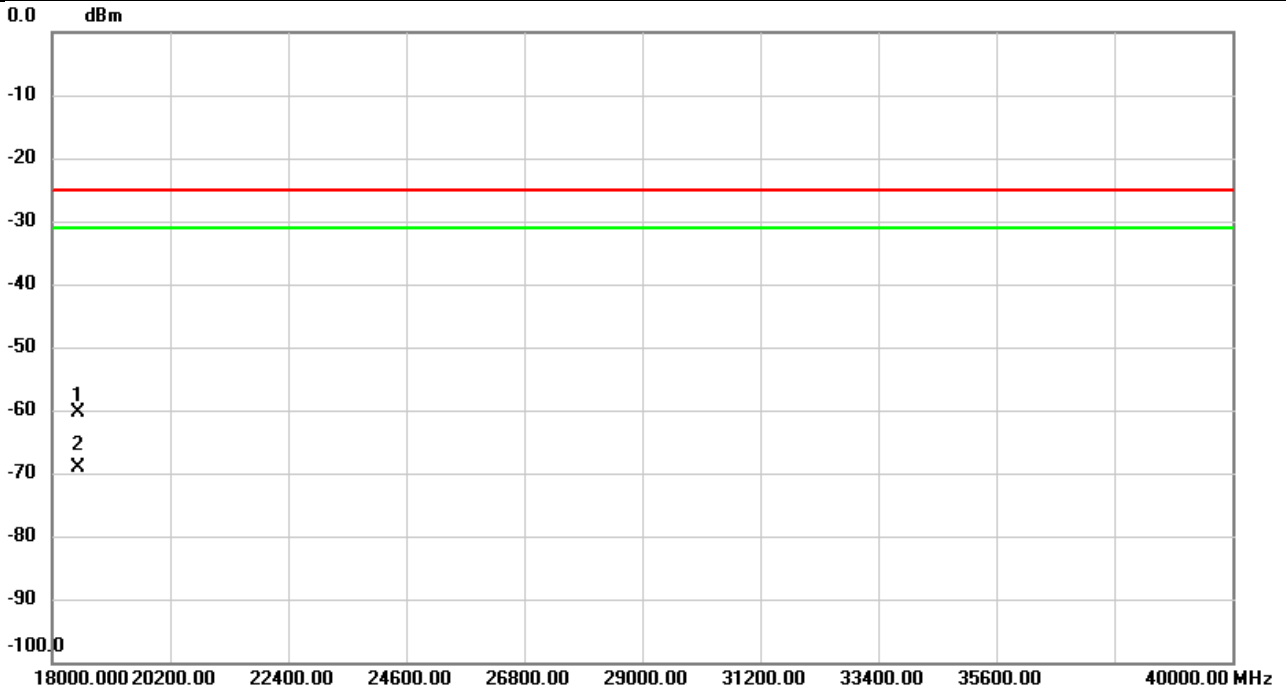


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18480.00	-54.63	-5.79	-60.42	-25.00	-35.42	peak	
2		18480.00	-63.38	-5.79	-69.17	-25.00	-44.17	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

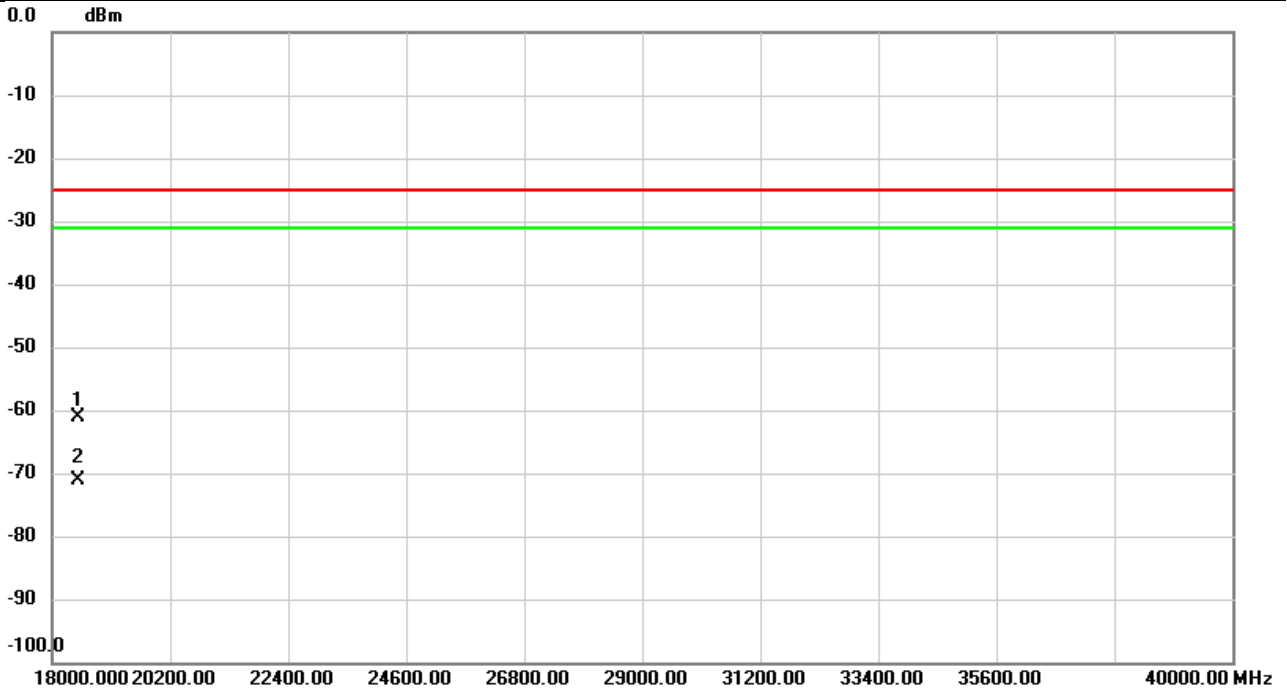


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18480.00	-55.38	-5.79	-61.17	-25.00	-36.17	peak	
2		18480.00	-65.23	-5.79	-71.02	-25.00	-46.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

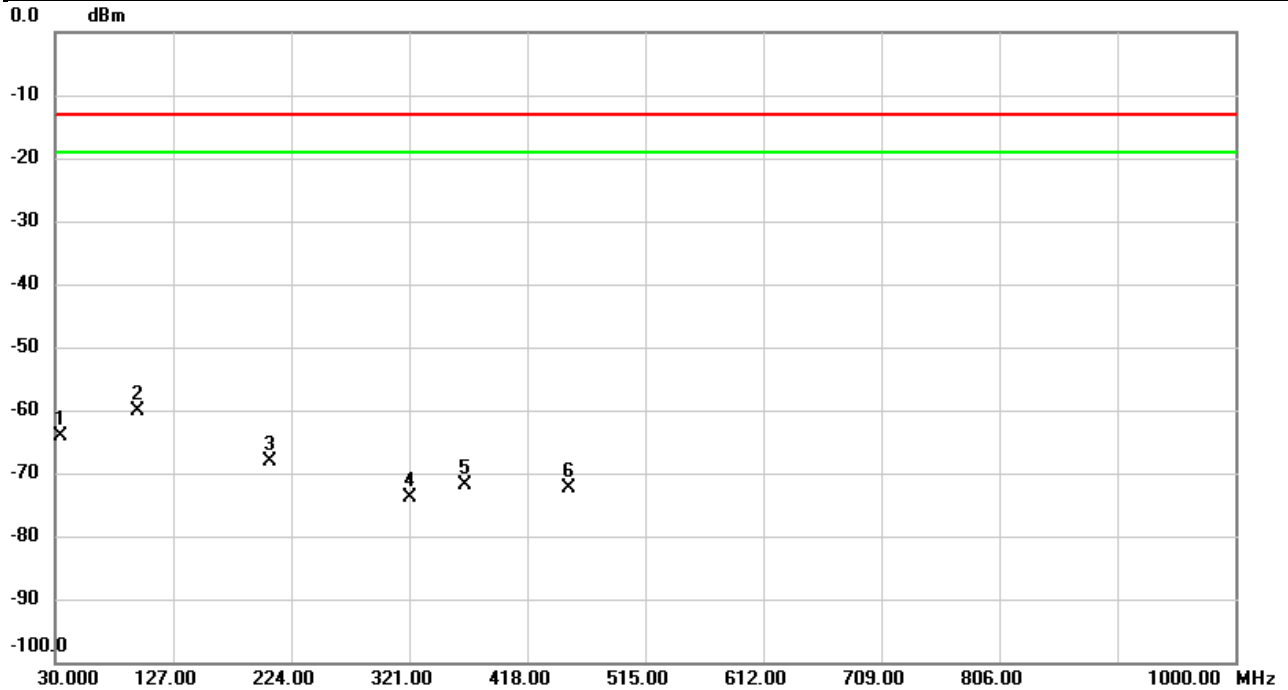


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		34.6560	-54.69	-9.34	-64.03	-13.00	-51.03	peak	
2	*	97.6413	-53.90	-6.15	-60.05	-13.00	-47.05	peak	
3		207.0573	-64.60	-3.42	-68.02	-13.00	-55.02	peak	
4		321.0000	-70.81	-3.09	-73.90	-13.00	-60.90	peak	
5		366.6223	-69.20	-2.61	-71.81	-13.00	-58.81	peak	
6		452.3380	-71.03	-1.32	-72.35	-13.00	-59.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

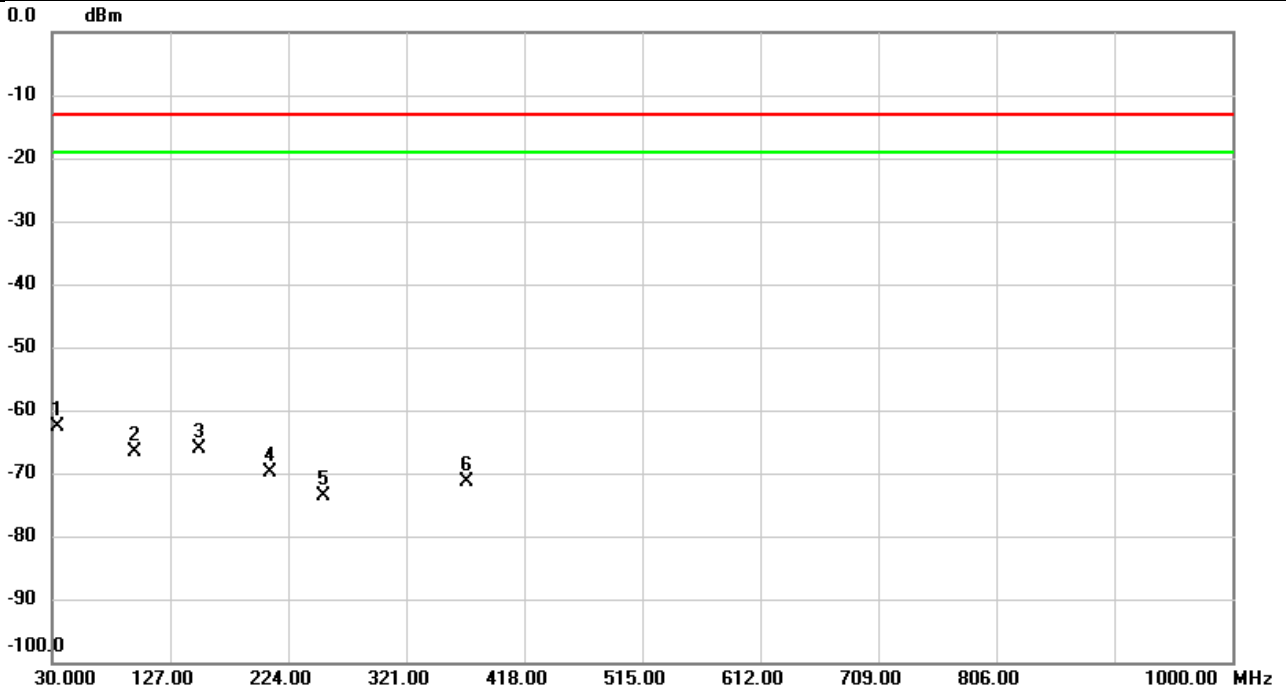


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	34.5913	-65.07	2.36	-62.71	-13.00	-49.71	peak	
2		97.6737	-58.72	-7.94	-66.66	-13.00	-53.66	peak	
3		151.4763	-60.39	-5.69	-66.08	-13.00	-53.08	peak	
4		209.7410	-60.53	-9.43	-69.96	-13.00	-56.96	peak	
5		253.5527	-65.68	-7.86	-73.54	-13.00	-60.54	peak	
6		371.2460	-68.87	-2.55	-71.42	-13.00	-58.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

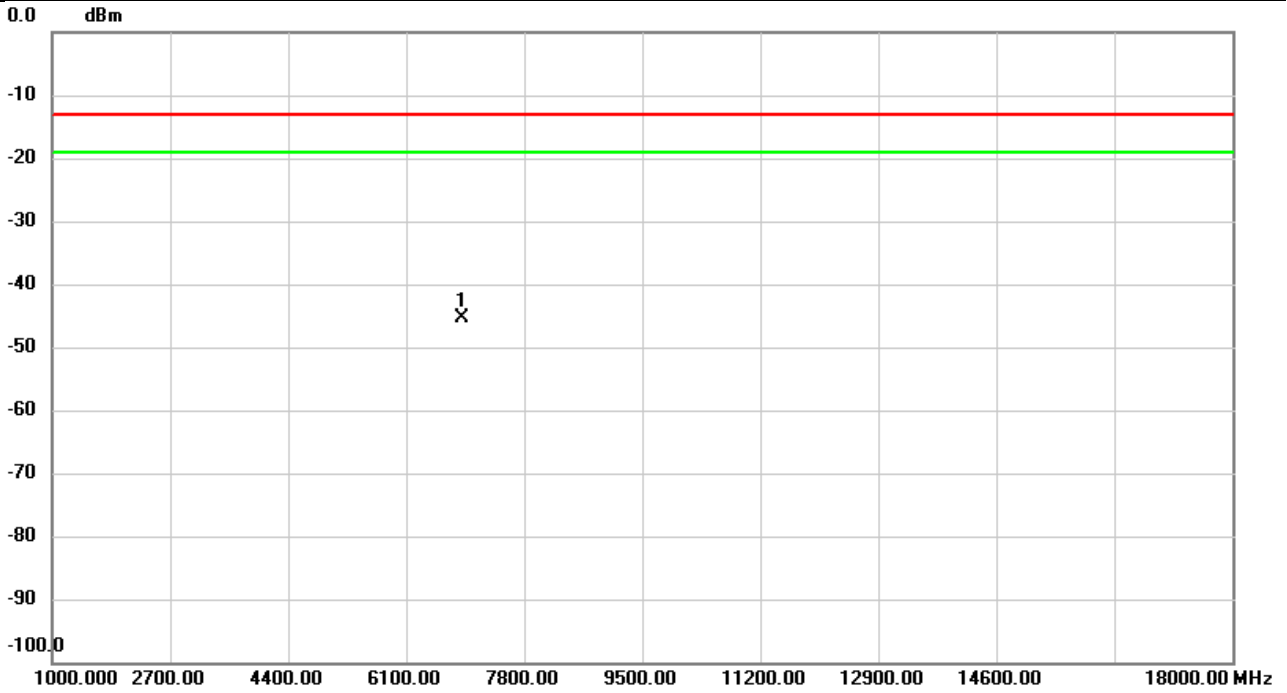


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.31	18.00	-45.31	-13.00	-32.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

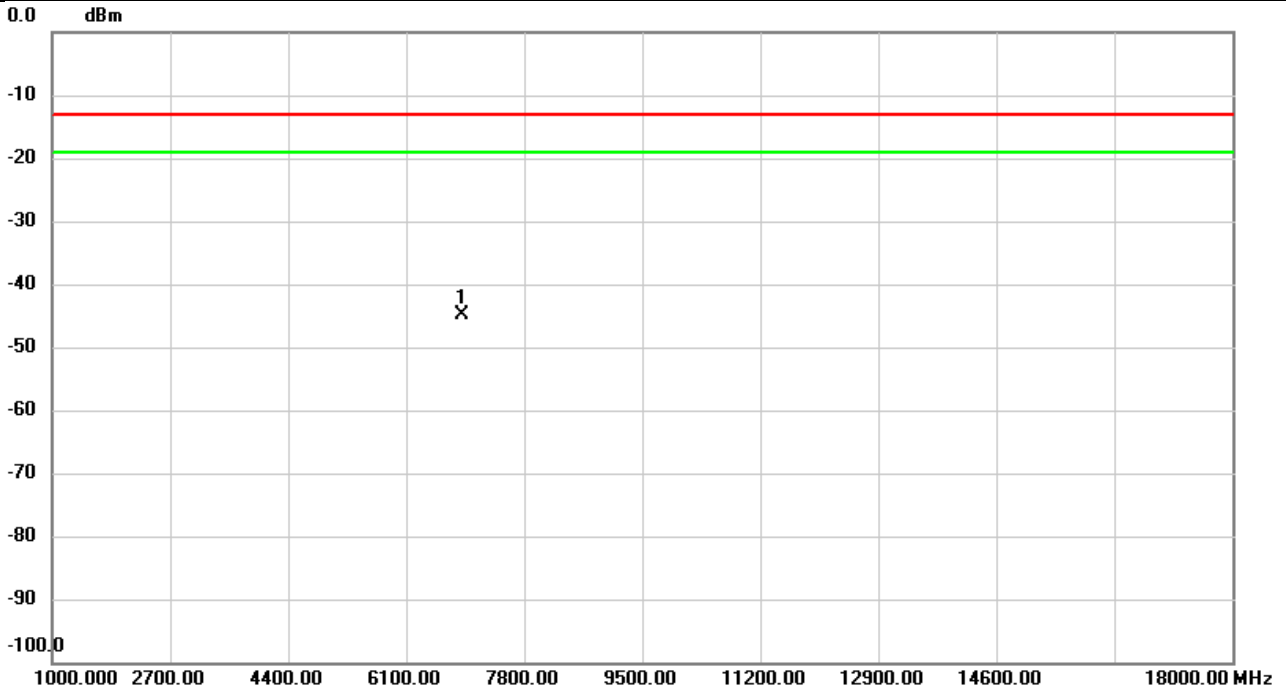


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.68	17.74	-44.94	-13.00	-31.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/30
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

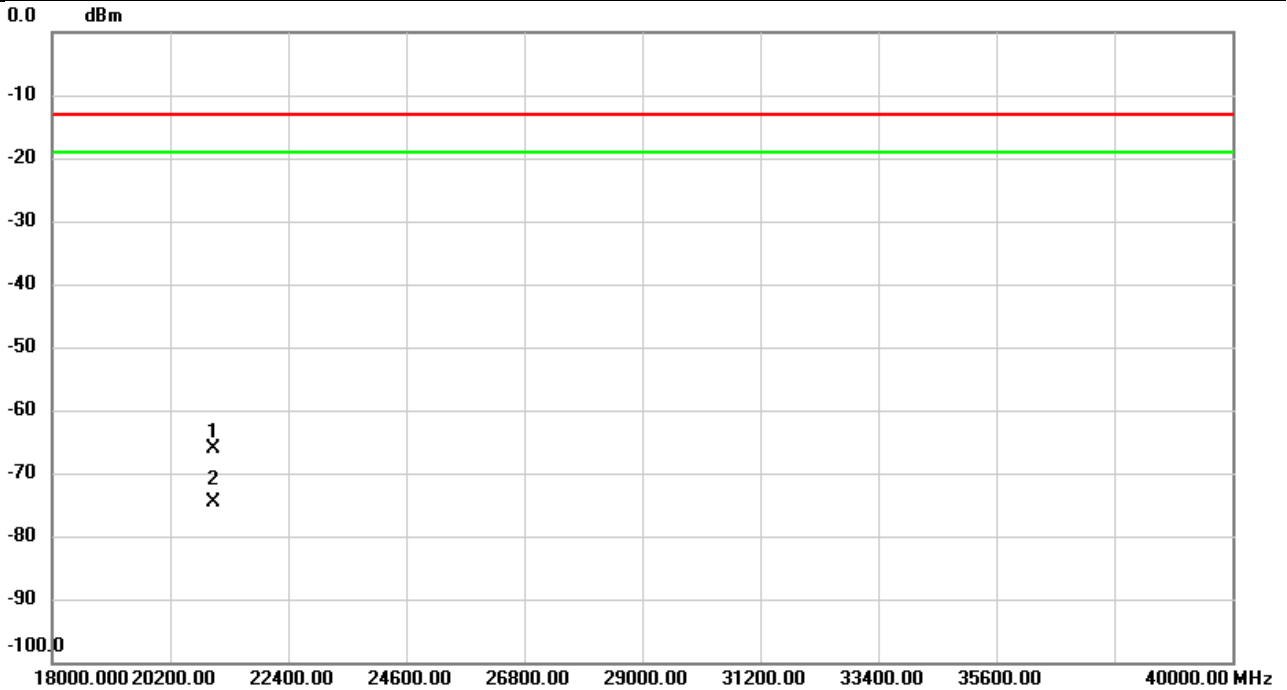


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.92	-6.27	-66.19	-13.00	-53.19	peak	
2		21000.06	-68.23	-6.27	-74.50	-13.00	-61.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/30
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

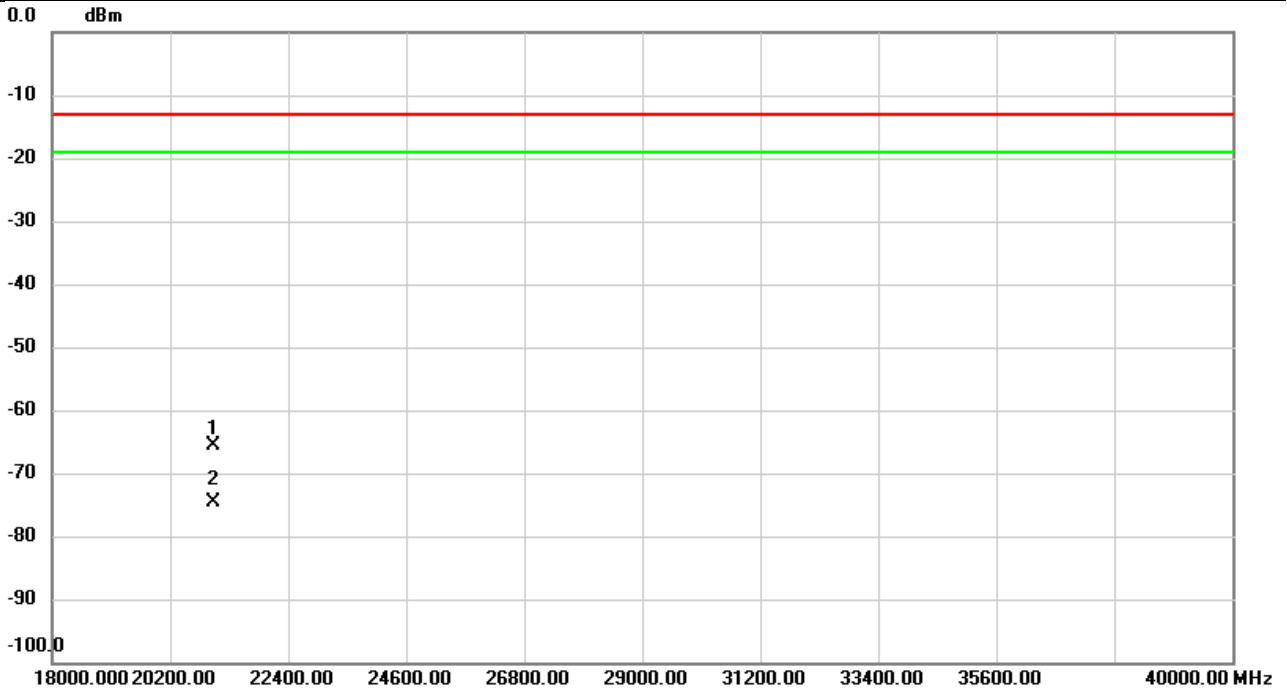

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.30	-6.27	-65.57	-13.00	-52.57	peak	
2		21000.06	-68.31	-6.27	-74.58	-13.00	-61.58	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

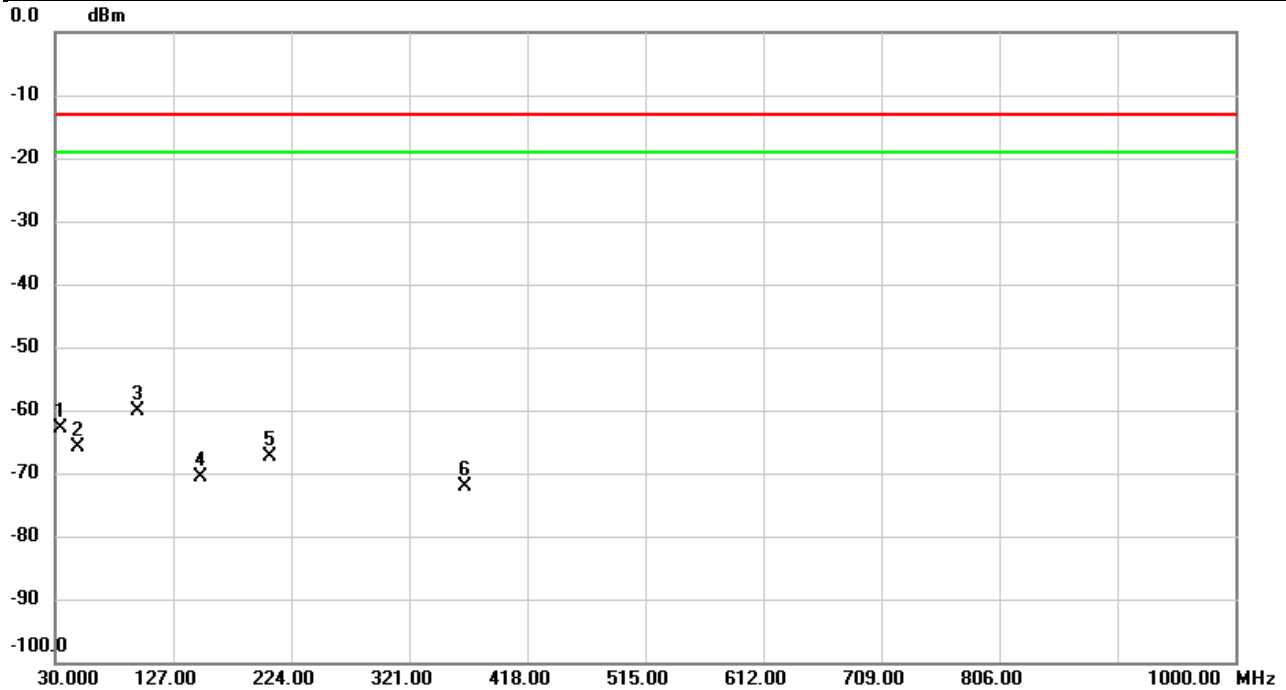


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		34.5267	-53.63	-9.33	-62.96	-13.00	-49.96	peak	
2		48.7210	-57.87	-7.88	-65.75	-13.00	-52.75	peak	
3	*	97.6737	-54.06	-6.15	-60.21	-13.00	-47.21	peak	
4		150.2477	-67.76	-2.74	-70.50	-13.00	-57.50	peak	
5		206.1197	-63.92	-3.40	-67.32	-13.00	-54.32	peak	
6		366.5900	-69.46	-2.61	-72.07	-13.00	-59.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

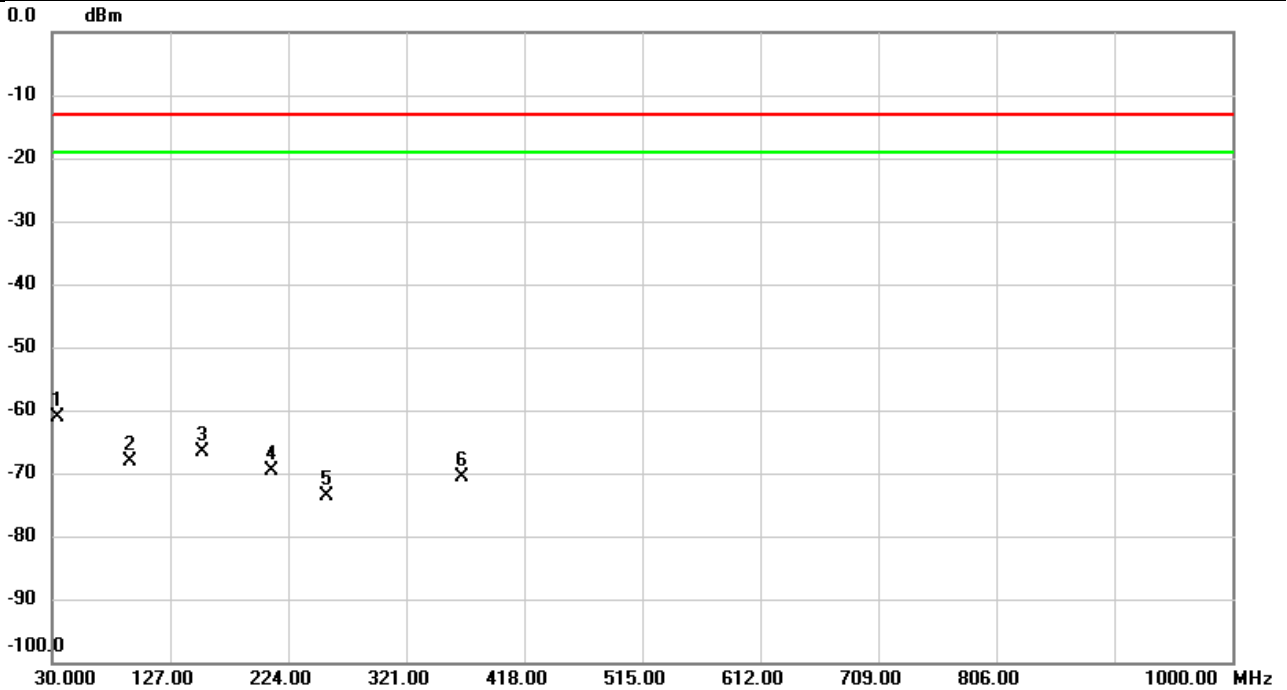


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	34.8177	-63.41	2.34	-61.07	-13.00	-48.07	peak	
2		93.8583	-59.95	-8.14	-68.09	-13.00	-55.09	peak	
3		153.1900	-60.76	-5.77	-66.53	-13.00	-53.53	peak	
4		210.0320	-60.16	-9.43	-69.59	-13.00	-56.59	peak	
5		255.3633	-65.87	-7.80	-73.67	-13.00	-60.67	peak	
6		366.6223	-68.13	-2.57	-70.70	-13.00	-57.70	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

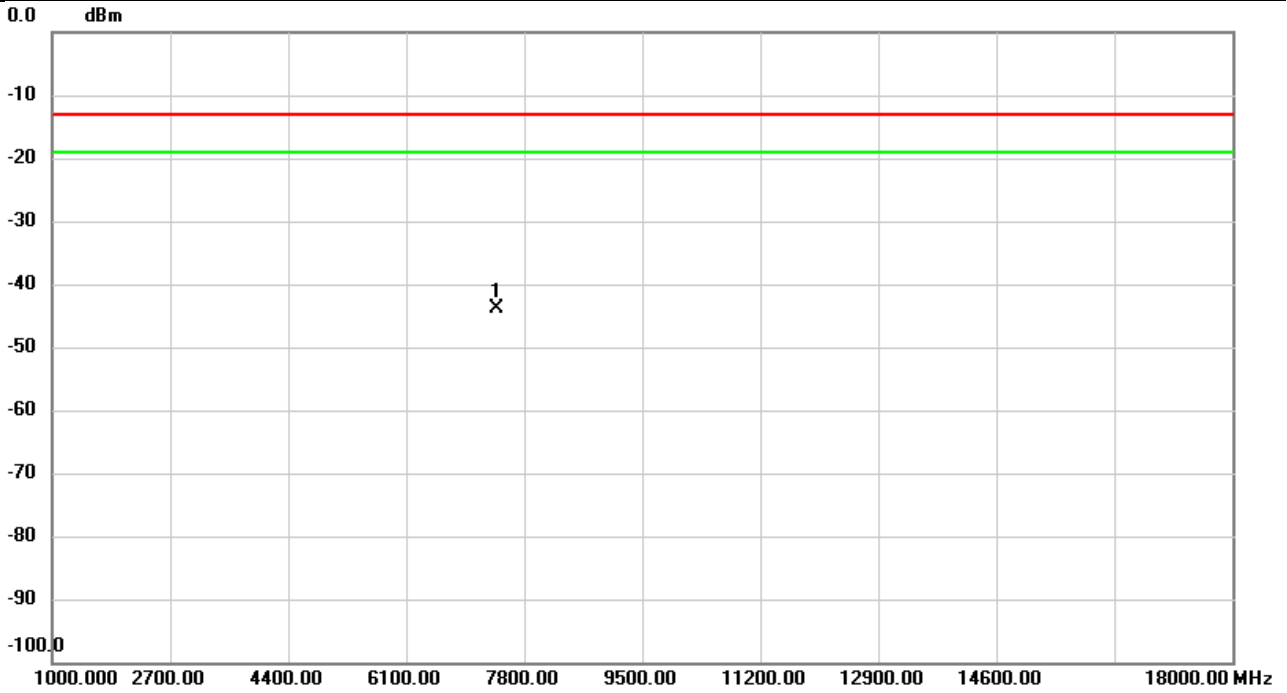


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-61.98	18.12	-43.86	-13.00	-30.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

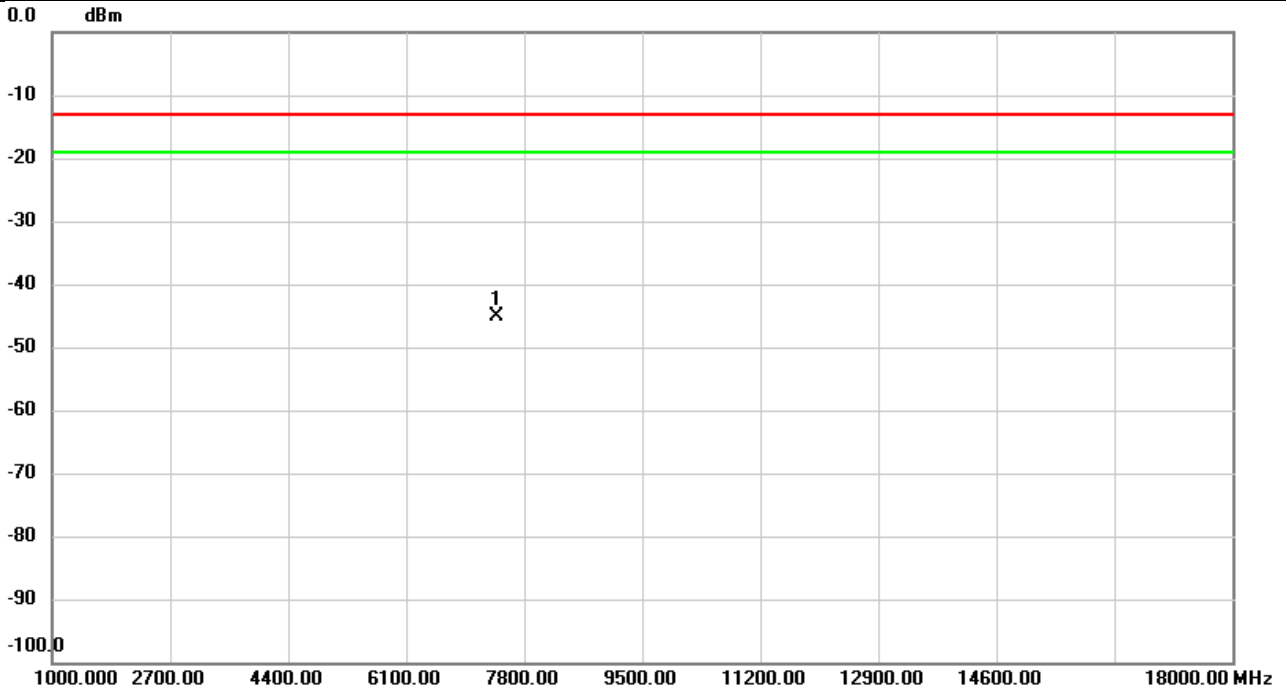


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.27	18.07	-45.20	-13.00	-32.20	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

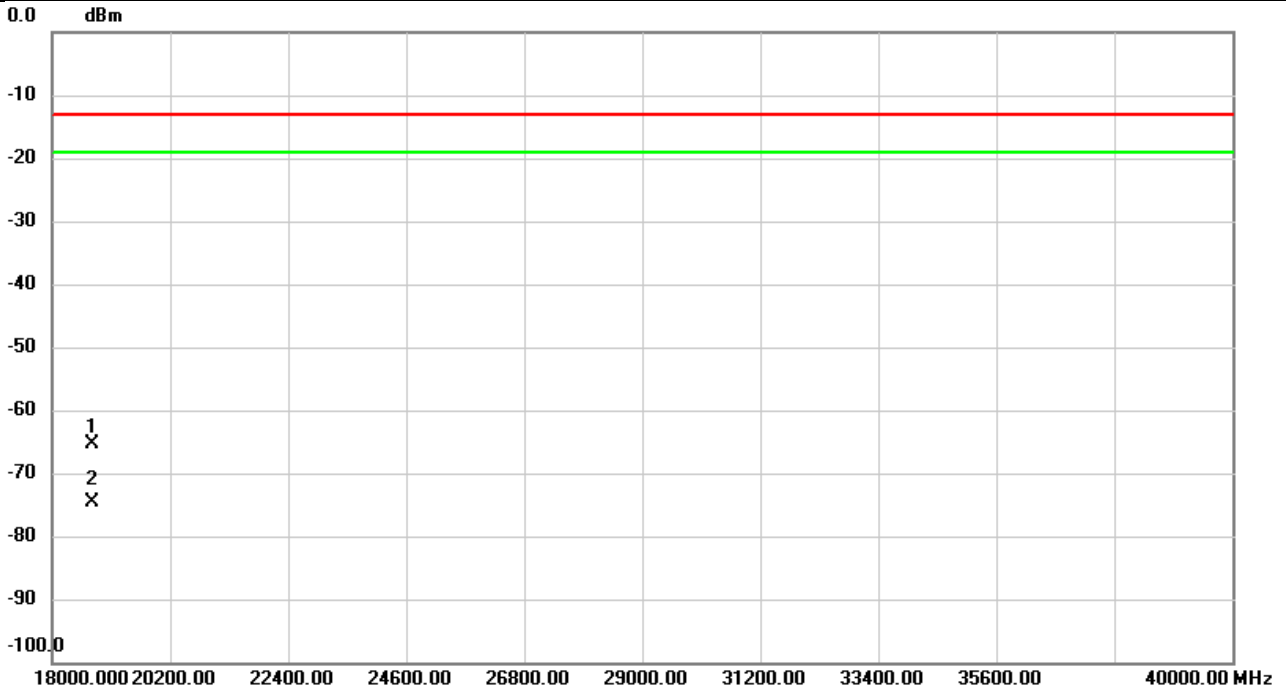


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	18750.00	-59.17	-6.32	-65.49	-13.00	-52.49	peak	
2		18750.00	-68.35	-6.32	-74.67	-13.00	-61.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

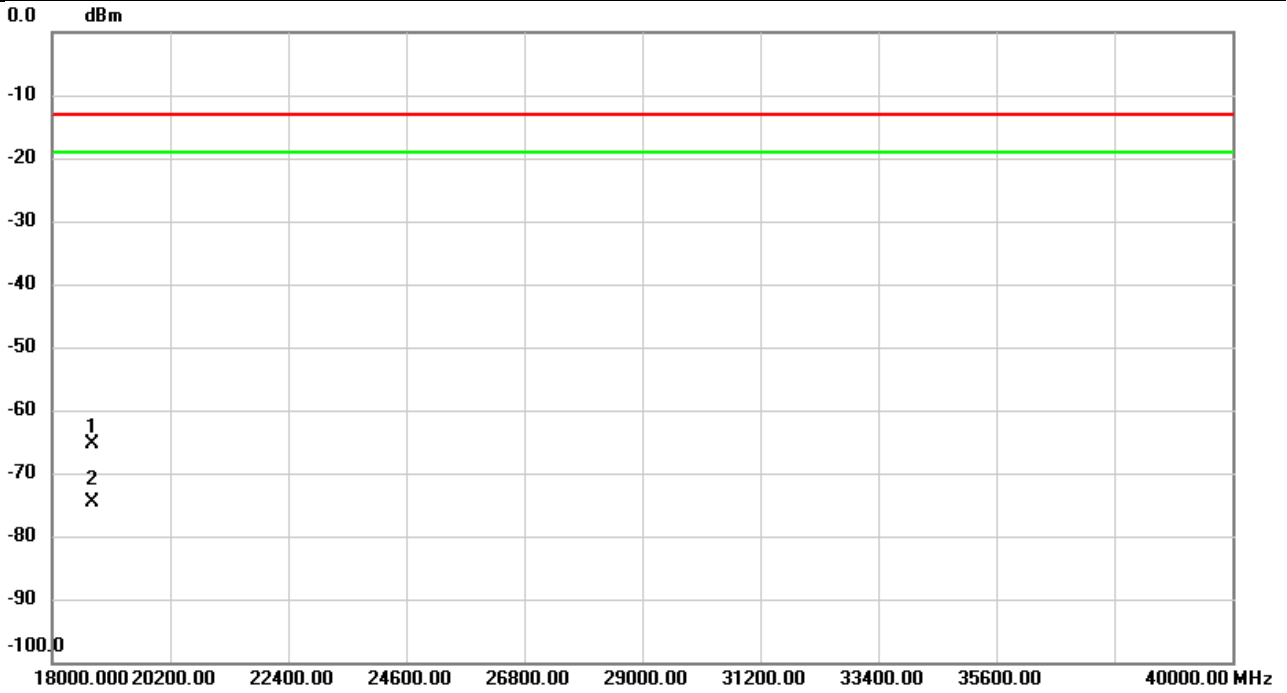


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.11	-6.32	-65.43	-13.00	-52.43	peak	
2		18750.00	-68.21	-6.32	-74.53	-13.00	-61.53	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

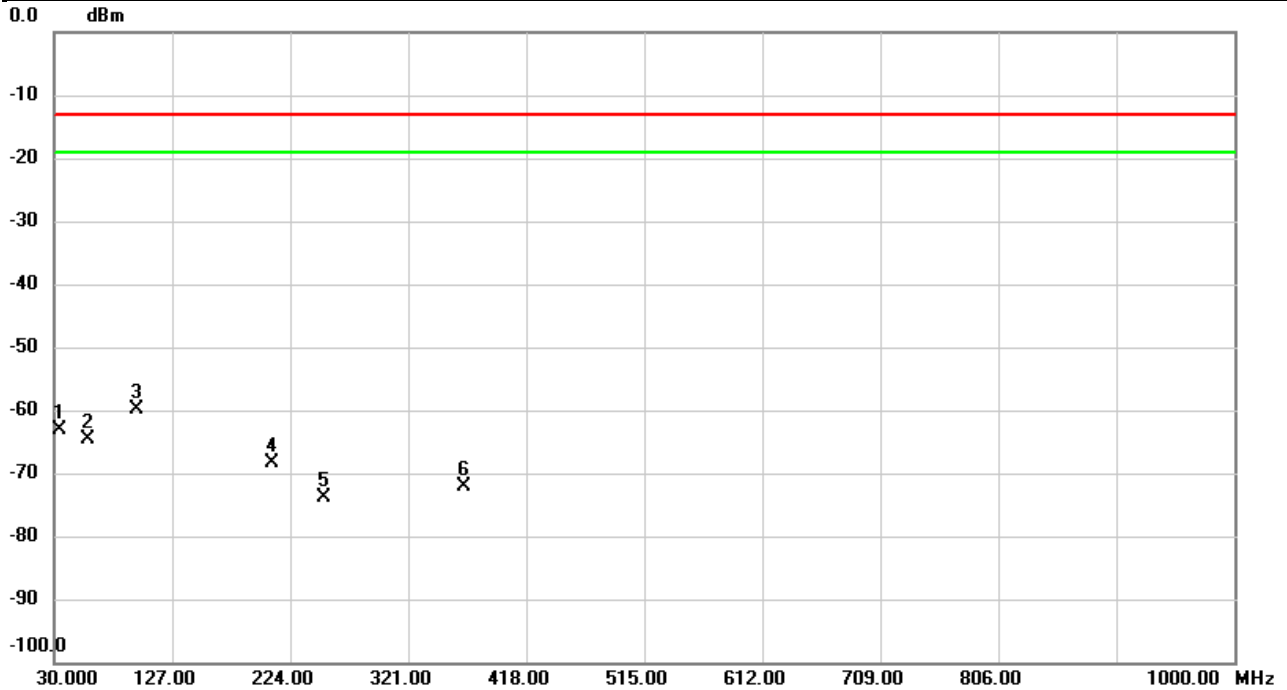


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		34.3327	-53.86	-9.32	-63.18	-13.00	-50.18	peak	
2		57.6450	-57.28	-7.33	-64.61	-13.00	-51.61	peak	
3	*	97.6413	-53.71	-6.15	-59.86	-13.00	-46.86	peak	
4		208.5123	-64.91	-3.44	-68.35	-13.00	-55.35	peak	
5		252.0007	-70.94	-2.98	-73.92	-13.00	-60.92	peak	
6		366.6223	-69.47	-2.61	-72.08	-13.00	-59.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

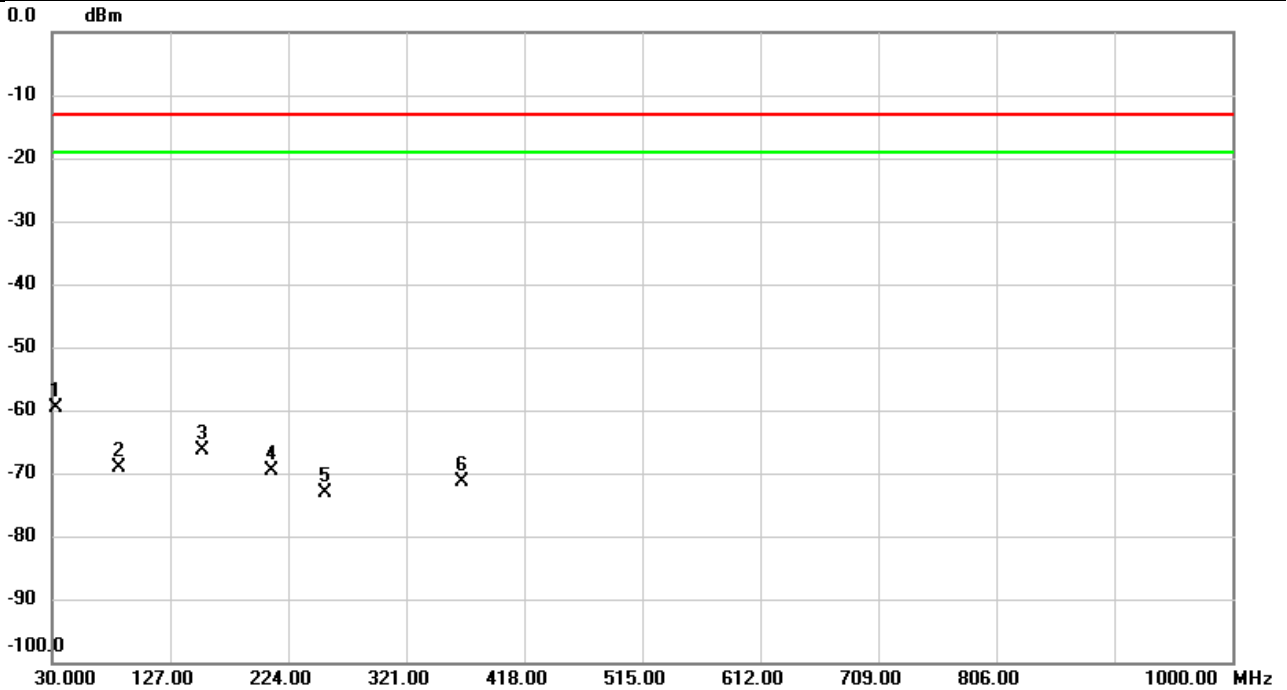


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	32.7807	-62.06	2.56	-59.50	-13.00	-46.50	peak	
2		85.4193	-61.07	-8.14	-69.21	-13.00	-56.21	peak	
3		153.1253	-60.70	-5.76	-66.46	-13.00	-53.46	peak	
4		210.6463	-60.29	-9.41	-69.70	-13.00	-56.70	peak	
5		254.5227	-65.20	-7.83	-73.03	-13.00	-60.03	peak	
6		366.6223	-68.81	-2.57	-71.38	-13.00	-58.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

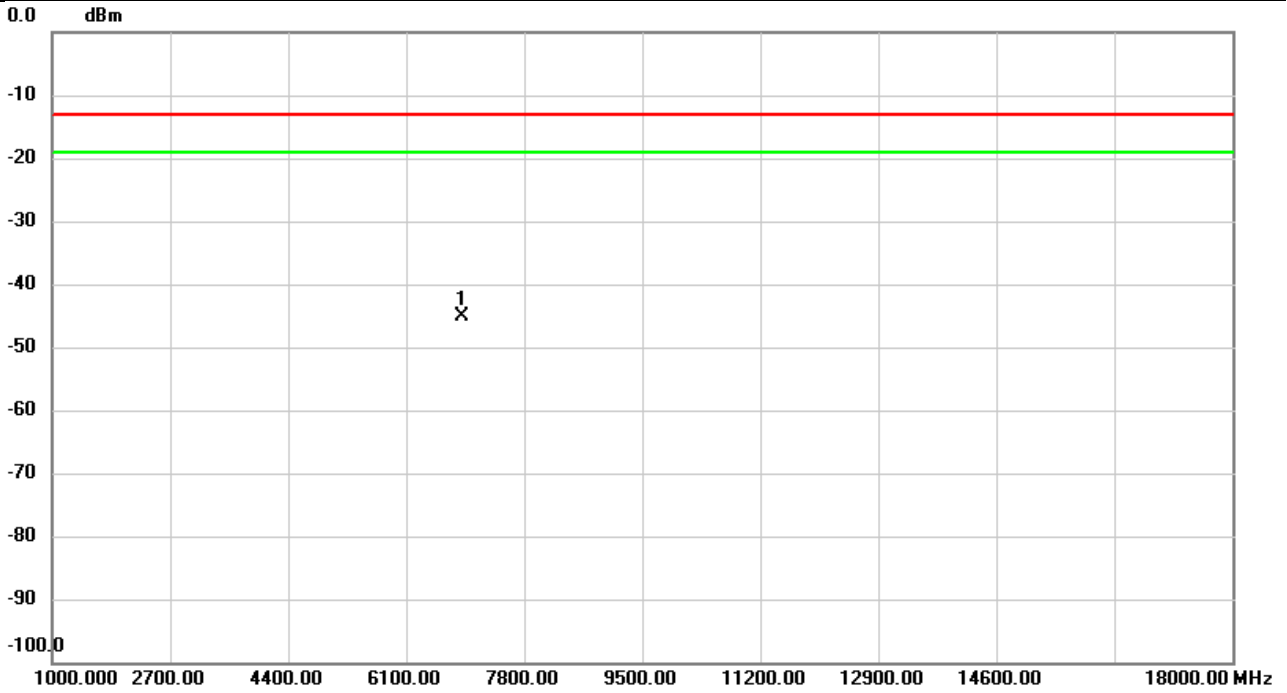


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.09	18.00	-45.09	-13.00	-32.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

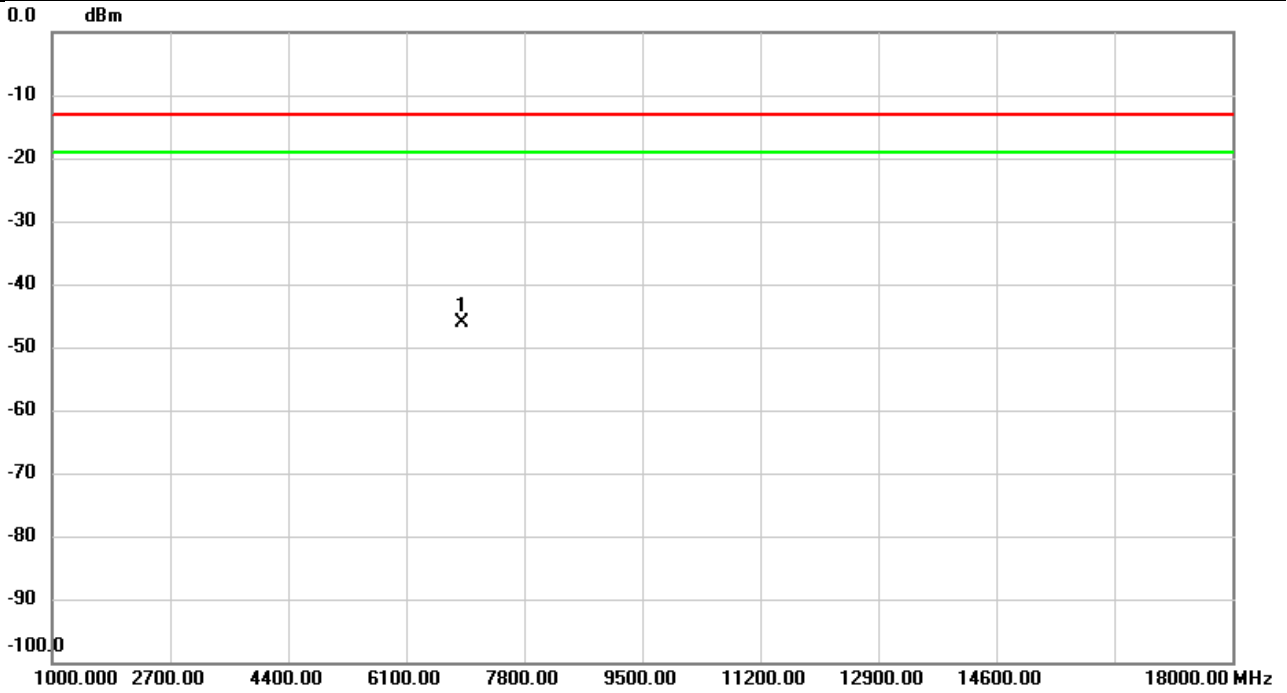


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.77	17.74	-46.03	-13.00	-33.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

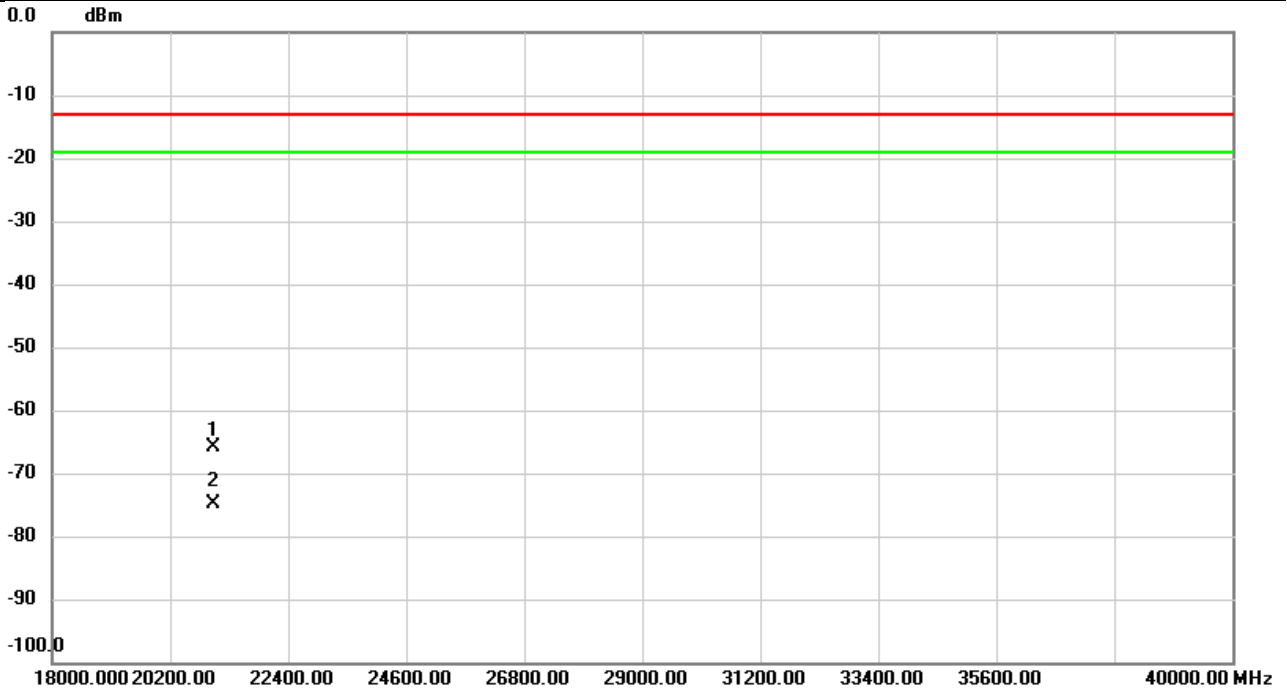


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.65	-6.27	-65.92	-13.00	-52.92	peak	
2		21000.06	-68.49	-6.27	-74.76	-13.00	-61.76	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

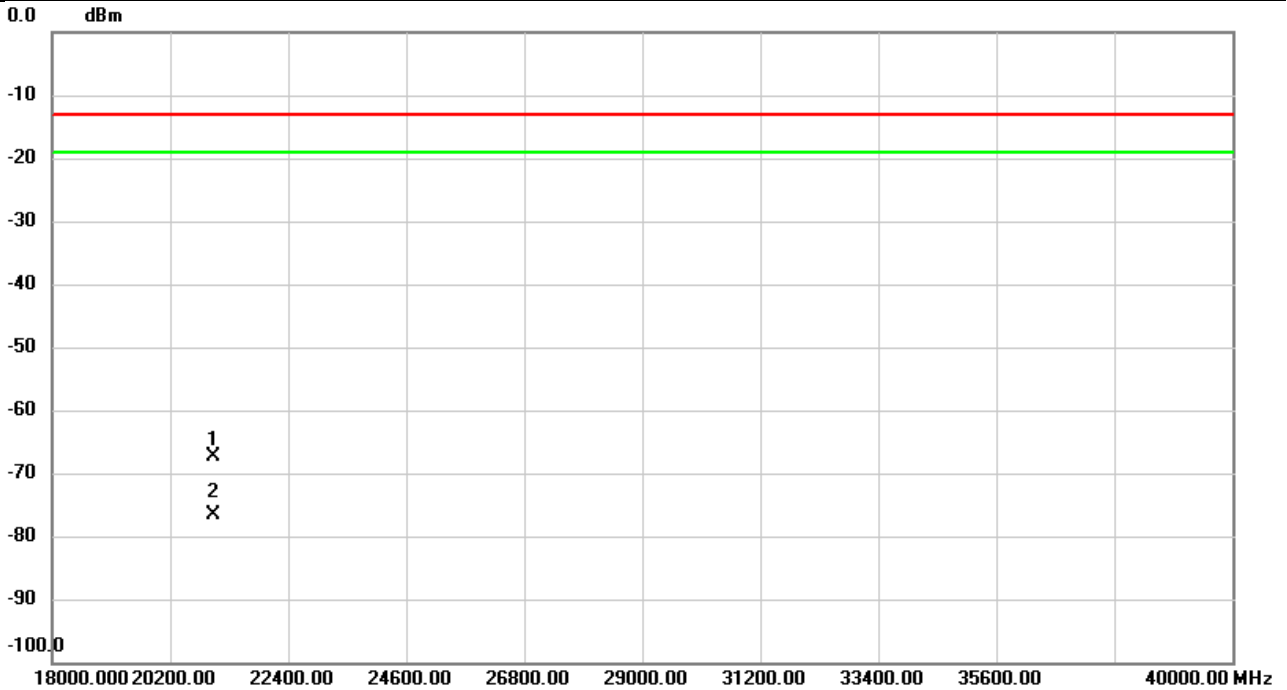


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	21000.06	-61.09	-6.27	-67.36	-13.00	-54.36	peak	
2		21000.06	-70.39	-6.27	-76.66	-13.00	-63.66	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3700 ~ 3980 MHz:

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

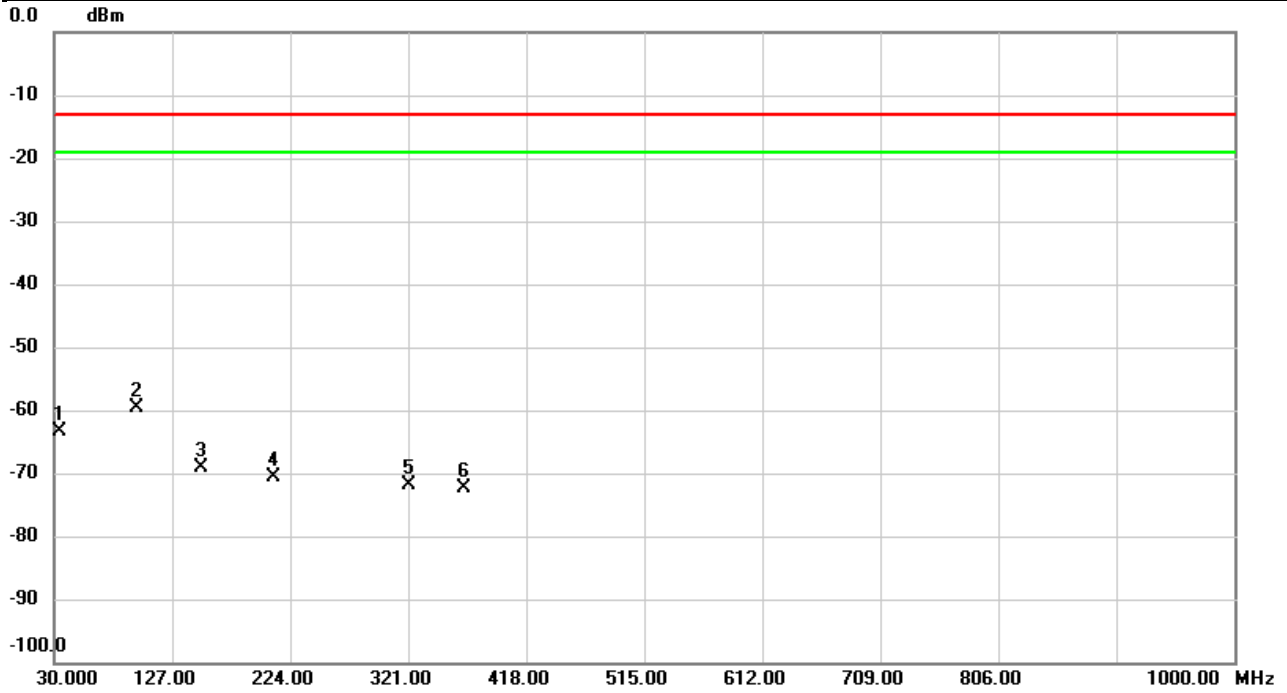


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		34.7530	-53.97	-9.34	-63.31	-13.00	-50.31	peak	
2	*	97.6737	-53.58	-6.15	-59.73	-13.00	-46.73	peak	
3		150.7003	-66.37	-2.72	-69.09	-13.00	-56.09	peak	
4		210.2260	-67.02	-3.48	-70.50	-13.00	-57.50	peak	
5		321.0323	-68.74	-3.09	-71.83	-13.00	-58.83	peak	
6		366.5900	-69.69	-2.61	-72.30	-13.00	-59.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

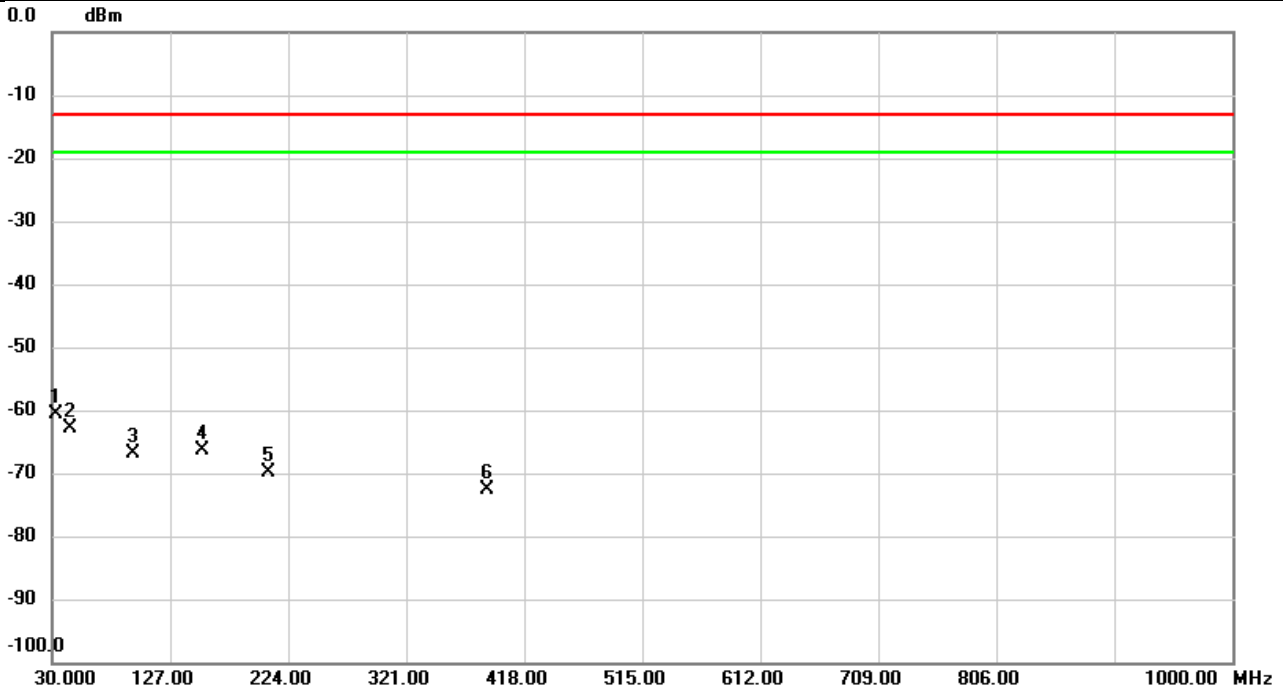


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	33.0070	-63.07	2.54	-60.53	-13.00	-47.53	peak	
2		45.4553	-63.95	1.02	-62.93	-13.00	-49.93	peak	
3		96.9300	-58.86	-7.98	-66.84	-13.00	-53.84	peak	
4		153.0283	-60.66	-5.76	-66.42	-13.00	-53.42	peak	
5		207.4453	-60.52	-9.45	-69.97	-13.00	-56.97	peak	
6		387.4127	-70.02	-2.48	-72.50	-13.00	-59.50	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

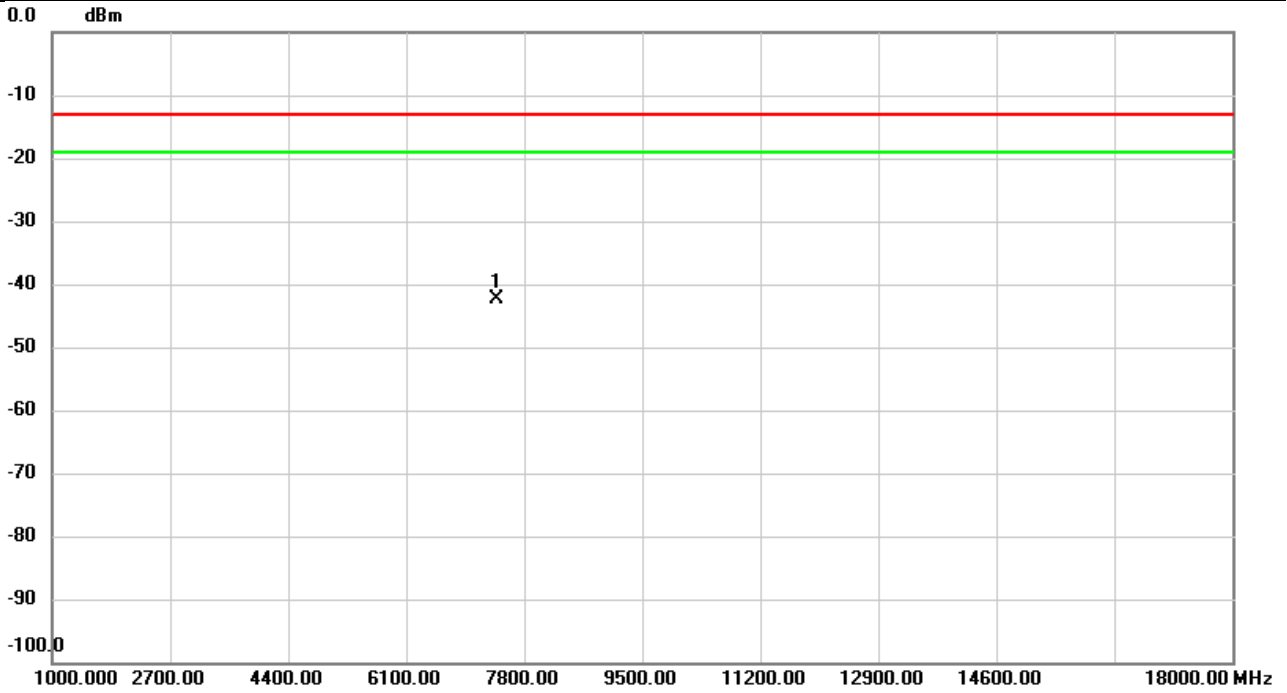


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-60.41	18.12	-42.29	-13.00	-29.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

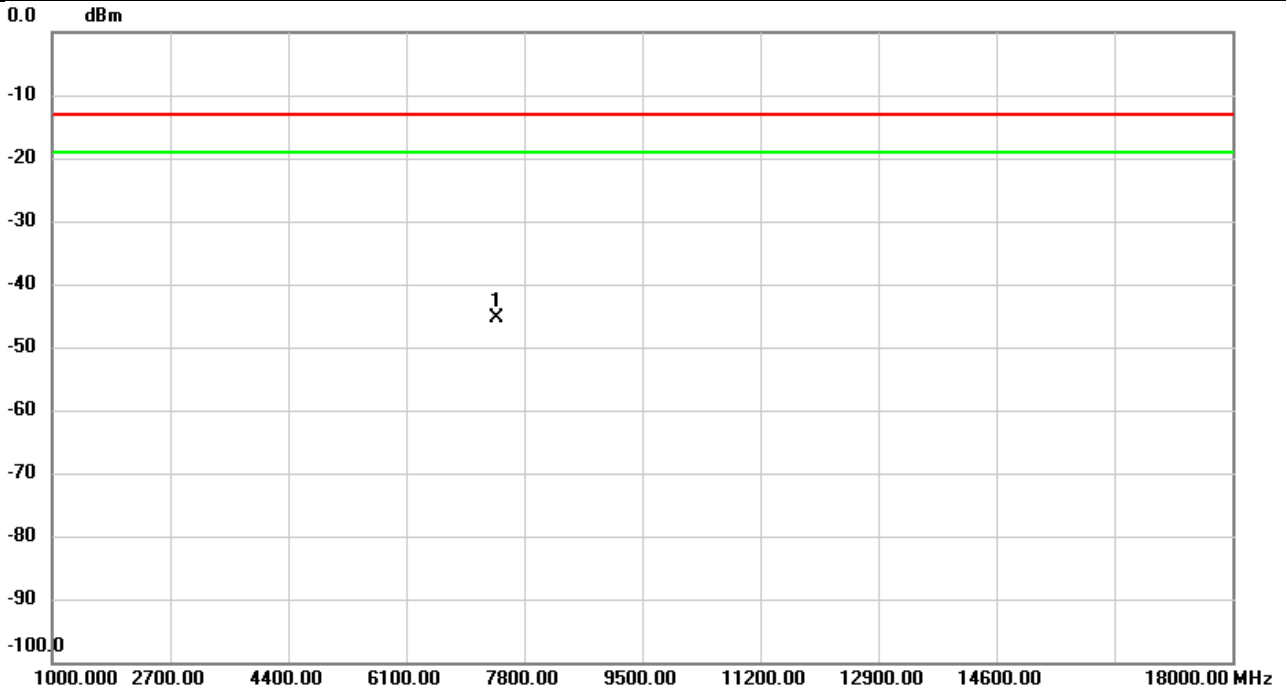


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.47	18.07	-45.40	-13.00	-32.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

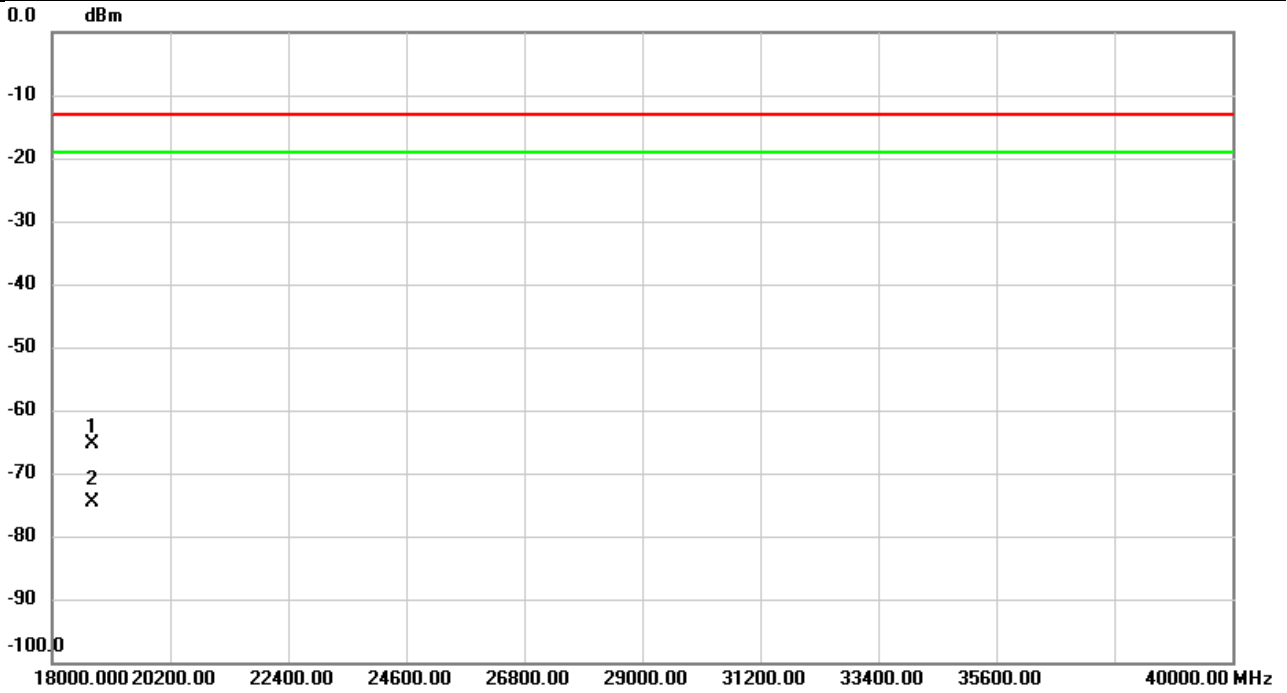


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.02	-6.32	-65.34	-13.00	-52.34	peak	
2		18750.00	-68.41	-6.32	-74.73	-13.00	-61.73	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

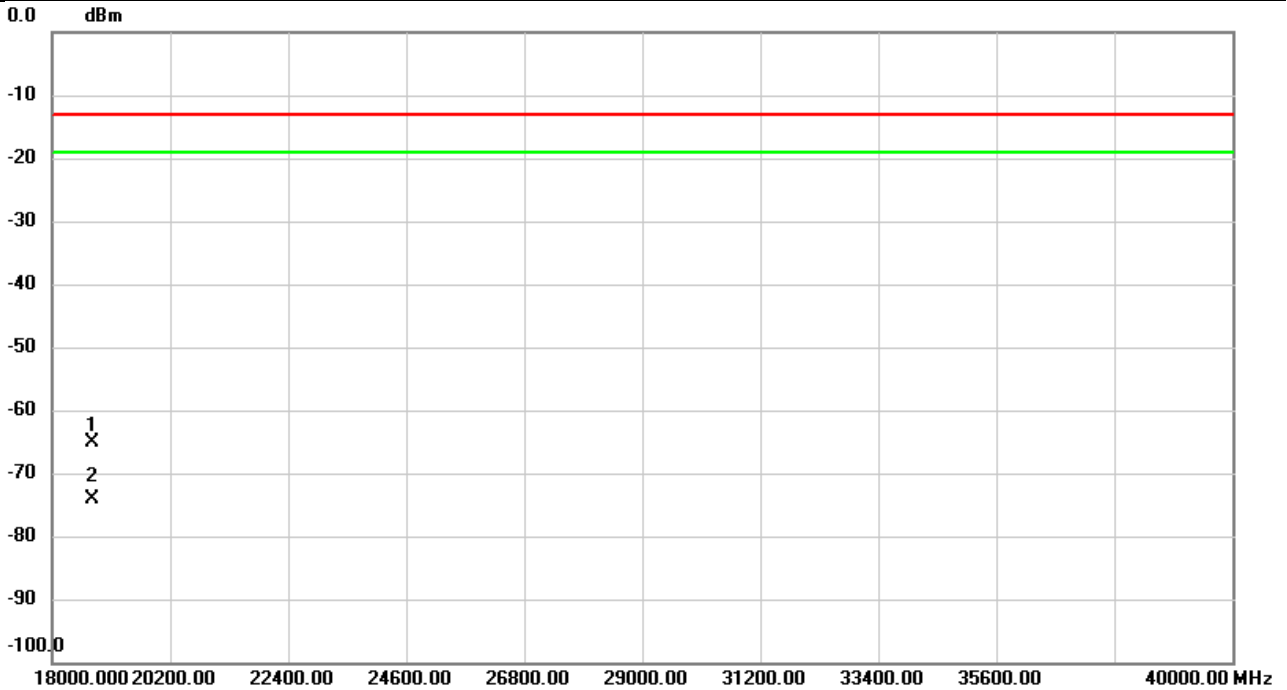


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	18750.00	-58.68	-6.32	-65.00	-13.00	-52.00	peak	
2		18750.00	-67.86	-6.32	-74.18	-13.00	-61.18	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	55%

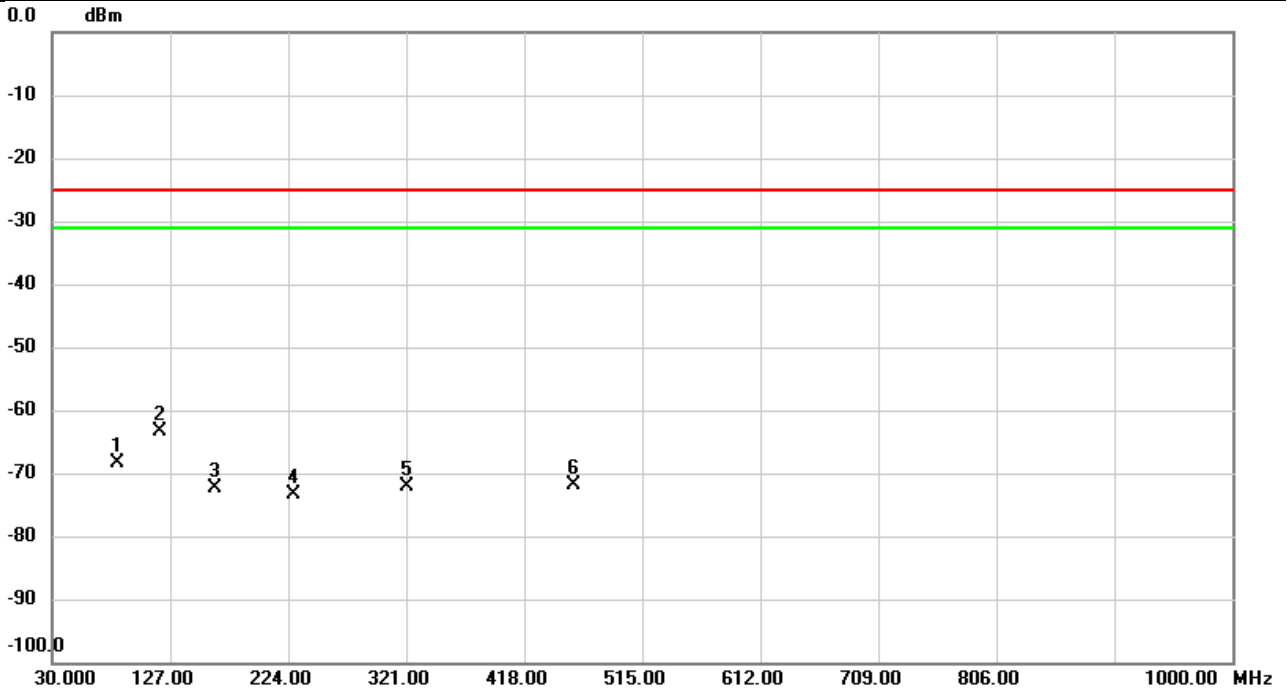


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		84.2230	-66.21	-2.15	-68.36	-25.00	-43.36	peak	
2	*	118.1406	-61.18	-2.15	-63.33	-25.00	-38.33	peak	
3		163.4396	-70.19	-2.15	-72.34	-25.00	-47.34	peak	
4		228.0415	-71.11	-2.15	-73.26	-25.00	-48.26	peak	
5		321.0000	-69.91	-2.15	-72.06	-25.00	-47.06	peak	
6		458.4490	-69.79	-2.15	-71.94	-25.00	-46.94	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	55%

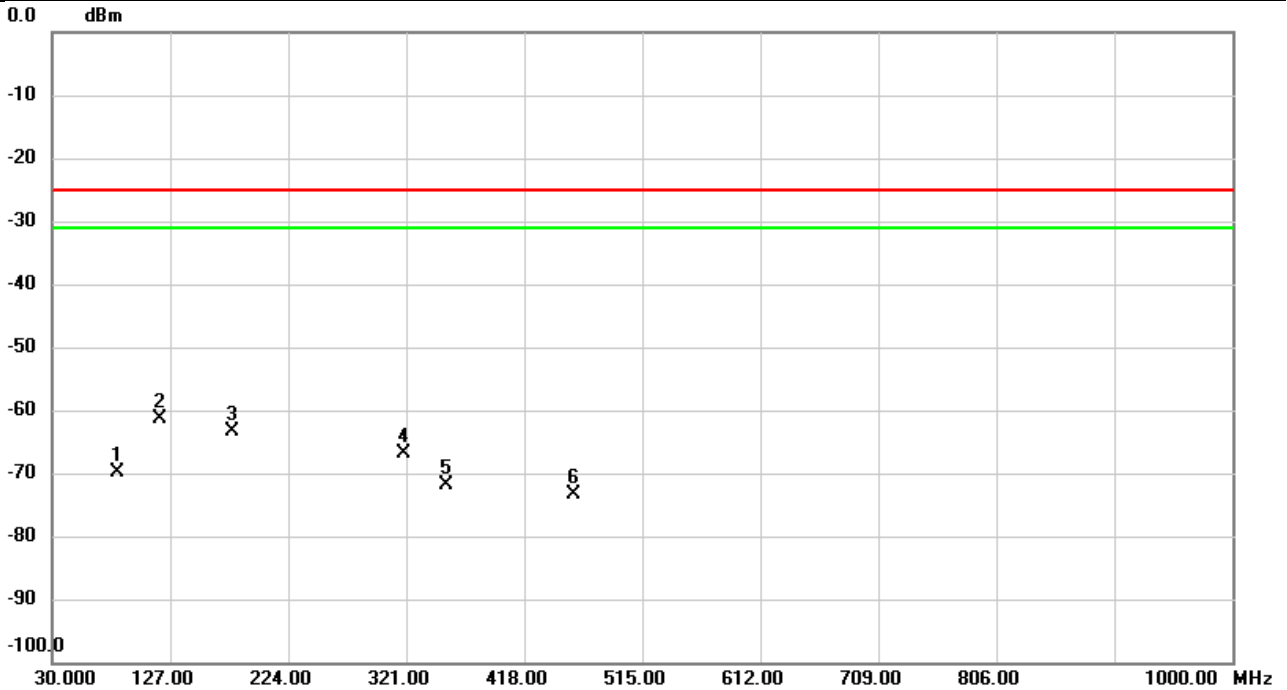


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		84.2553	-67.83	-2.15	-69.98	-25.00	-44.98	peak	
2	*	118.6256	-59.22	-2.15	-61.37	-25.00	-36.37	peak	
3		178.0220	-61.34	-2.15	-63.49	-25.00	-38.49	peak	
4		318.7690	-64.77	-2.15	-66.92	-25.00	-41.92	peak	
5		354.3032	-69.82	-2.15	-71.97	-25.00	-46.97	peak	
6		458.1580	-71.34	-2.15	-73.49	-25.00	-48.49	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Vertical
Temp	23°C	Hum.	55%

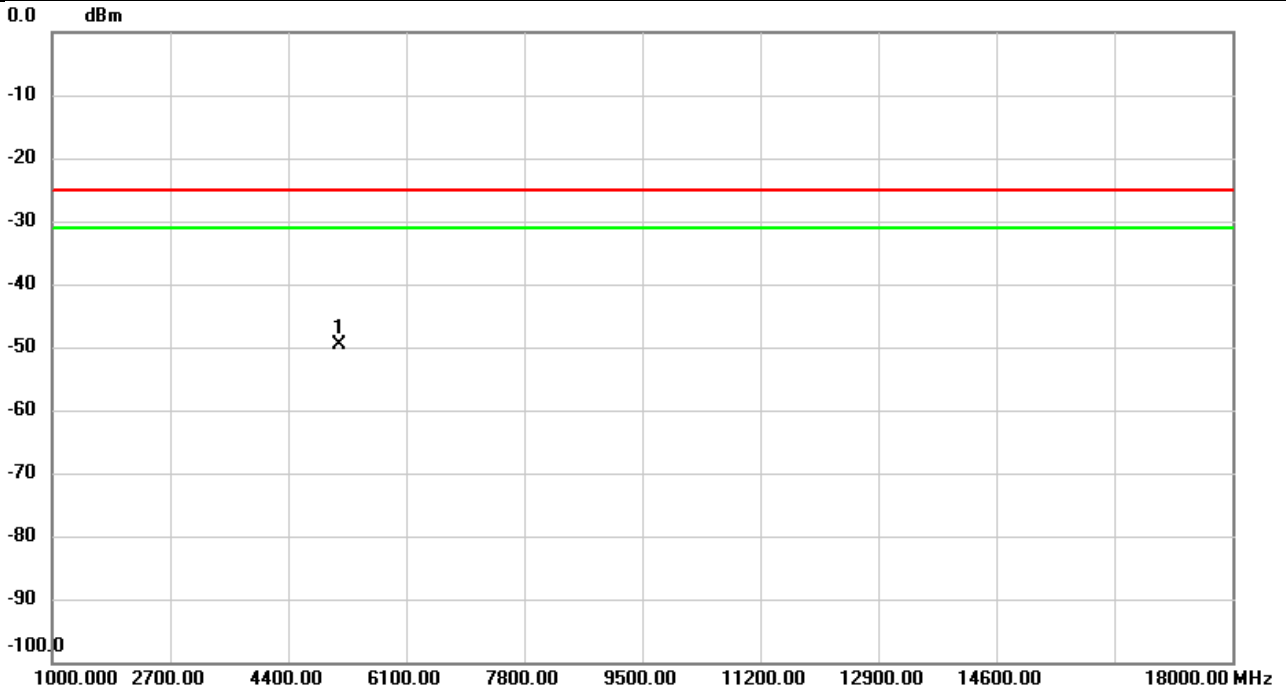


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-63.38	13.77	-49.61	-25.00	-24.61	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH518000	Polarization	Horizontal
Temp	23°C	Hum.	55%

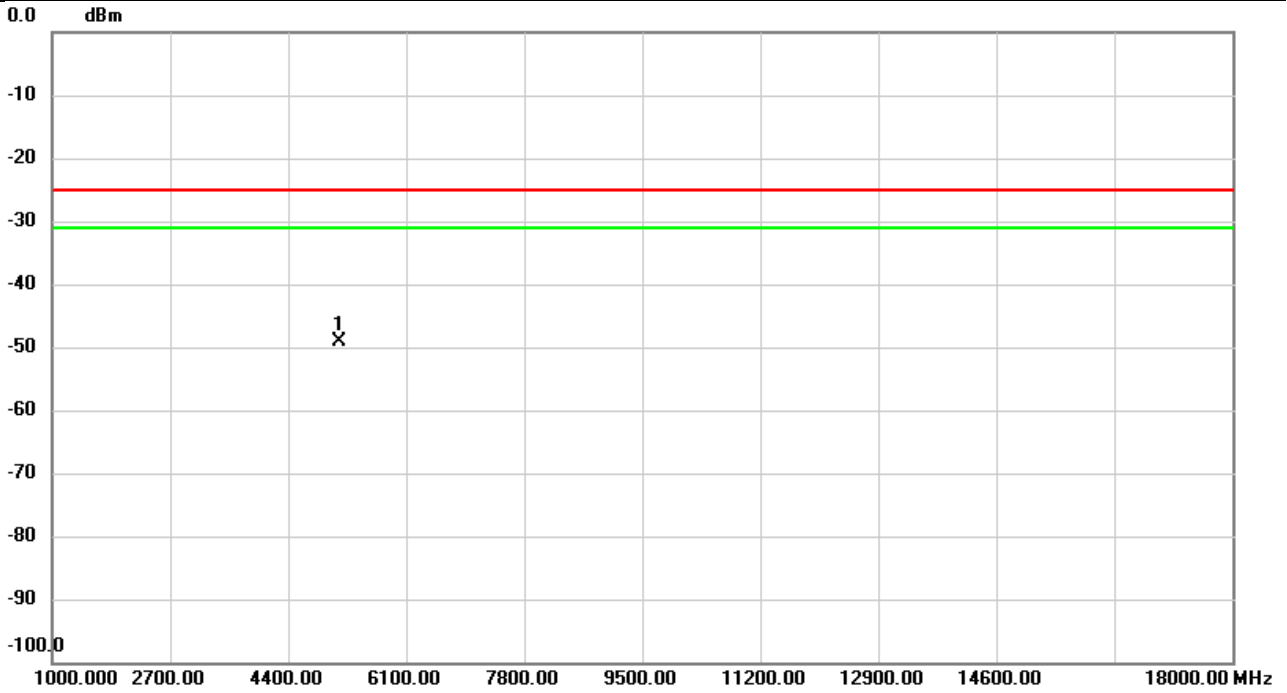


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-63.20	13.97	-49.23	-25.00	-24.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	55%

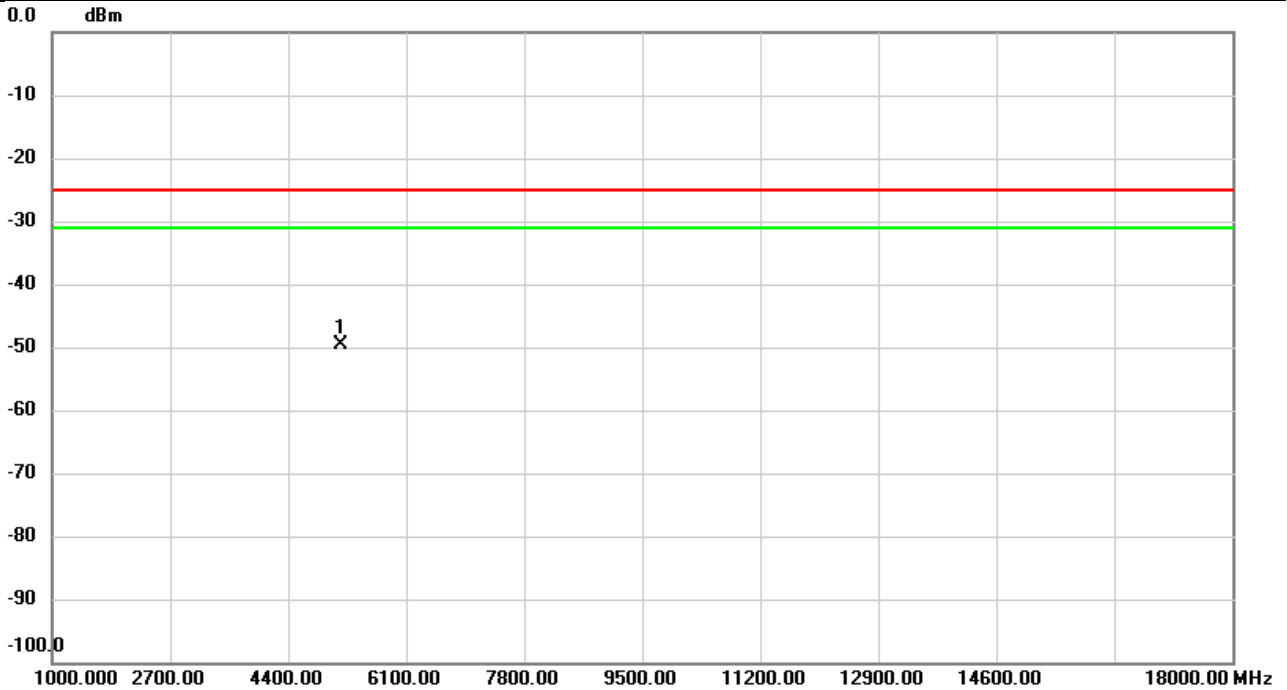


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-63.27	13.75	-49.52	-25.00	-24.52	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	55%

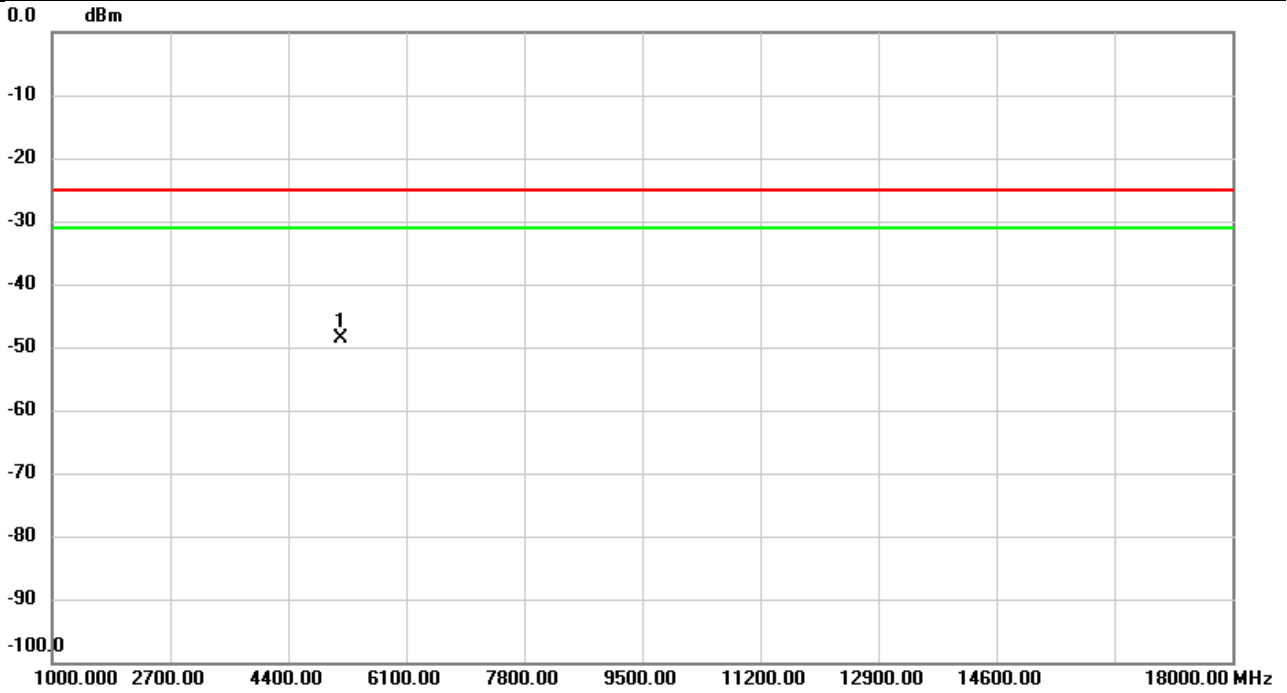


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-62.54	14.00	-48.54	-25.00	-23.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH520000	Polarization	Vertical
Temp	23°C	Hum.	55%

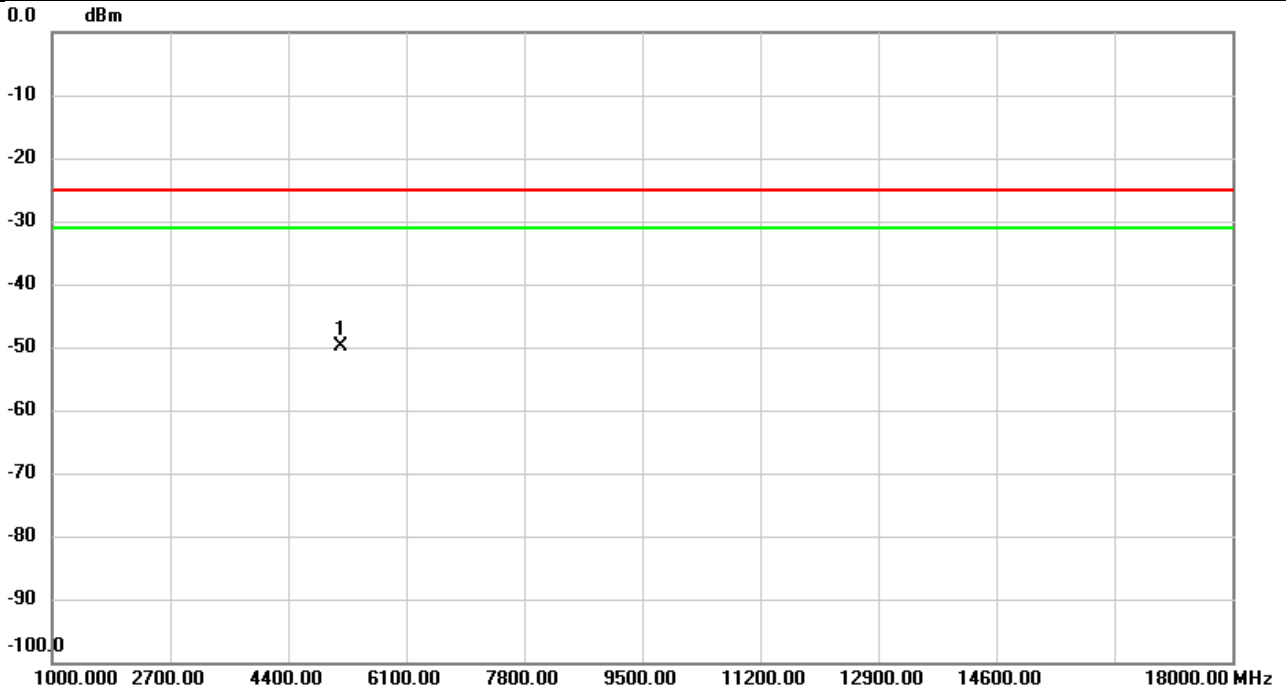


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-63.57	13.66	-49.91	-25.00	-24.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH520000	Polarization	Horizontal
Temp	23°C	Hum.	55%

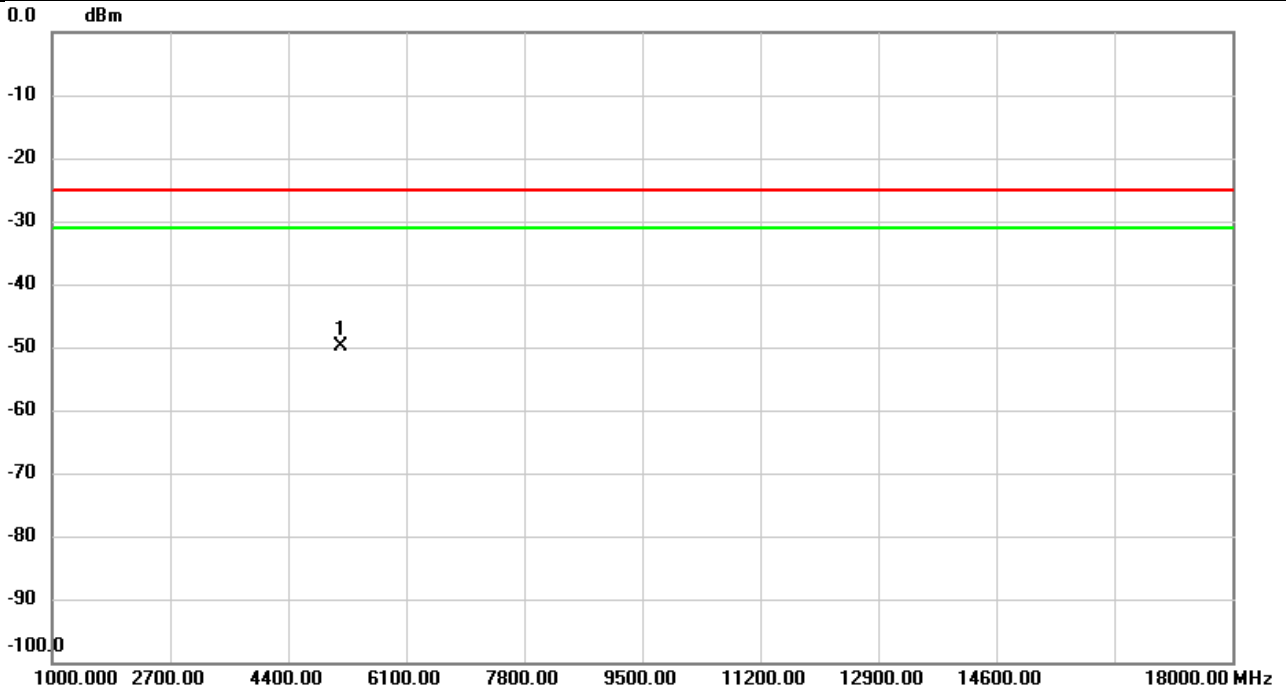


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-63.75	13.90	-49.85	-25.00	-24.85	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	55%

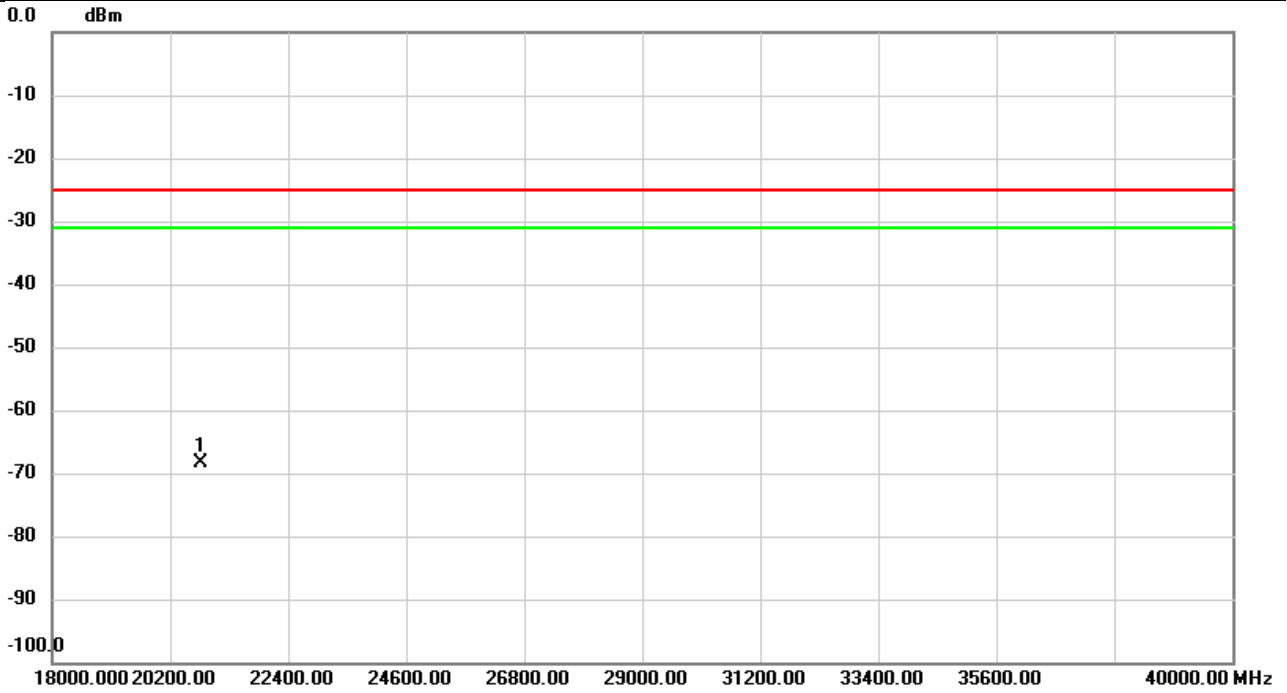


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20760.00	-61.82	-6.56	-68.38	-25.00	-43.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38 HPUE	Test Date	2024/1/4
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	55%

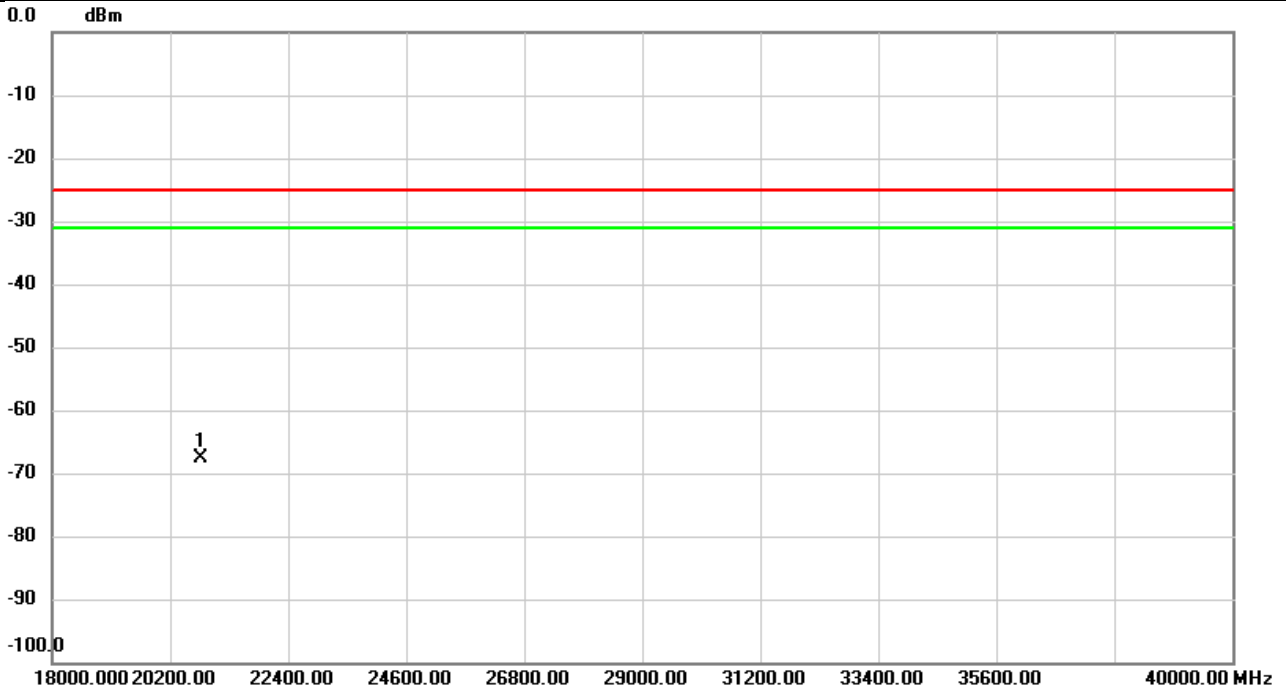


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20760.00	-61.05	-6.56	-67.61	-25.00	-42.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

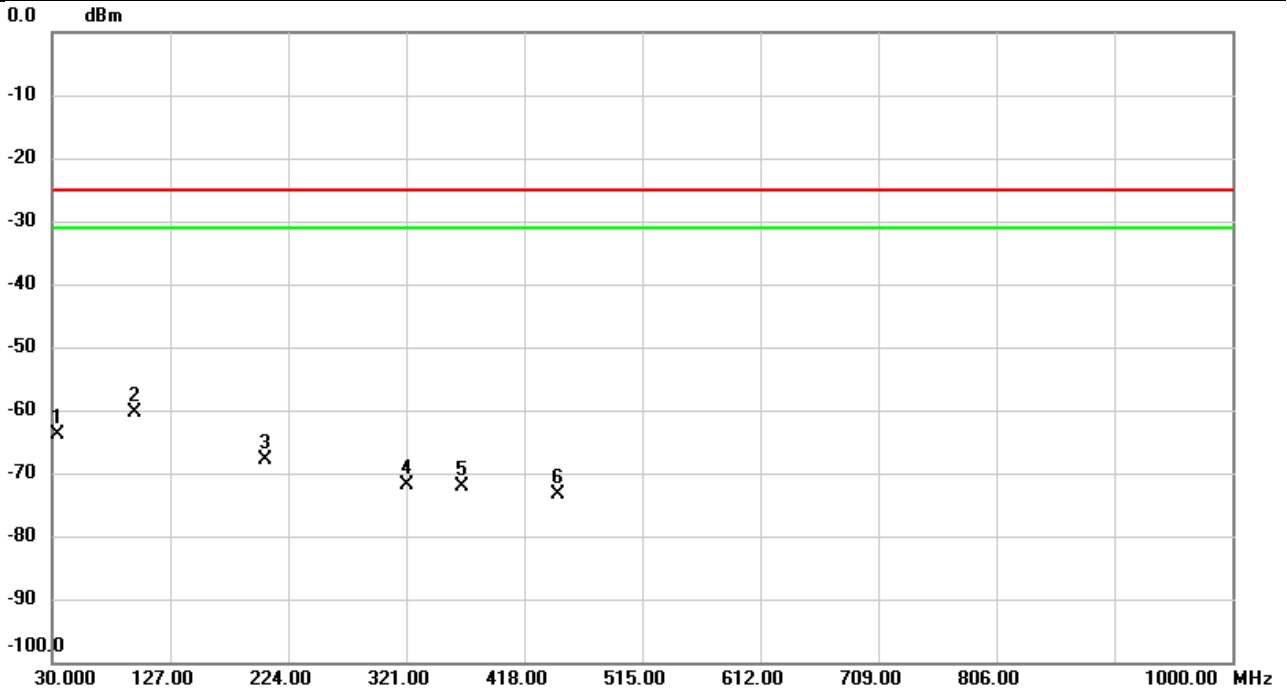


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		34.4943	-54.59	-9.33	-63.92	-25.00	-38.92	peak	
2	*	97.6737	-54.34	-6.15	-60.49	-25.00	-35.49	peak	
3		205.8933	-64.59	-3.40	-67.99	-25.00	-42.99	peak	
4		321.0323	-68.79	-3.09	-71.88	-25.00	-46.88	peak	
5		366.6223	-69.53	-2.61	-72.14	-25.00	-47.14	peak	
6		445.5157	-72.01	-1.46	-73.47	-25.00	-48.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

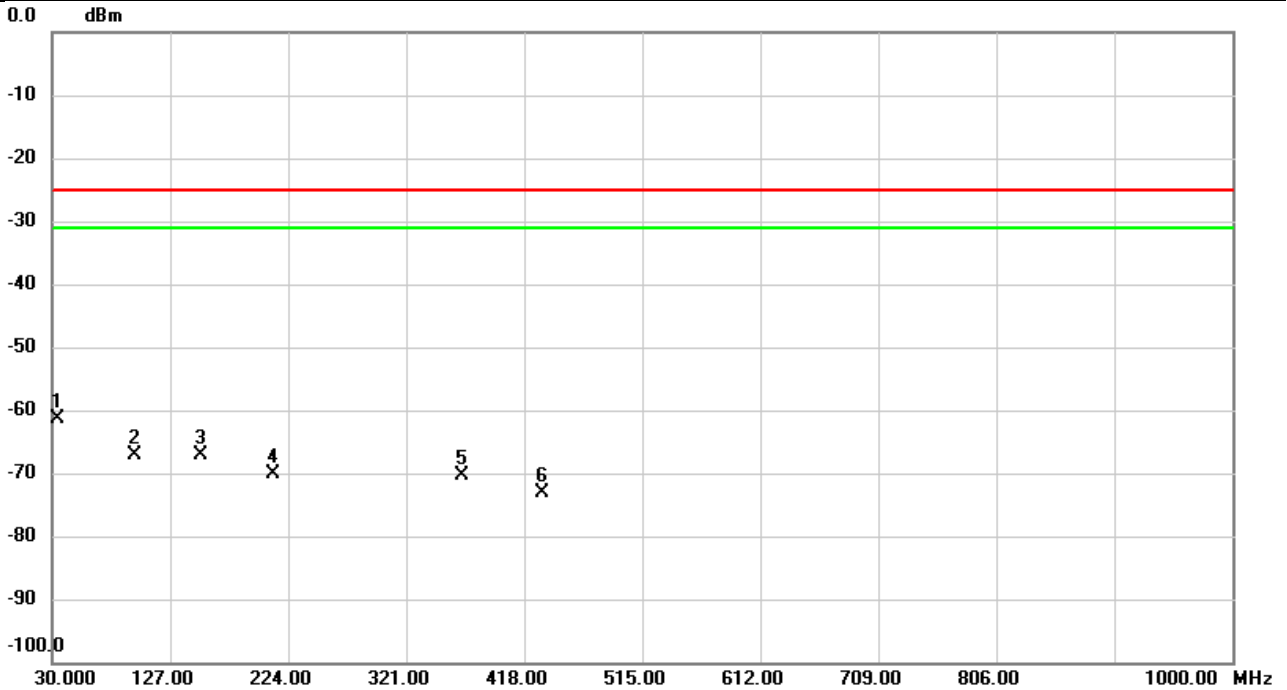


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	34.5267	-63.73	2.37	-61.36	-25.00	-36.36	peak	
2		97.7060	-59.11	-7.94	-67.05	-25.00	-42.05	peak	
3		152.1552	-61.52	-5.72	-67.24	-25.00	-42.24	peak	
4		211.1960	-60.61	-9.39	-70.00	-25.00	-45.00	peak	
5		366.6223	-67.91	-2.57	-70.48	-25.00	-45.48	peak	
6		433.2613	-70.91	-2.16	-73.07	-25.00	-48.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	56%

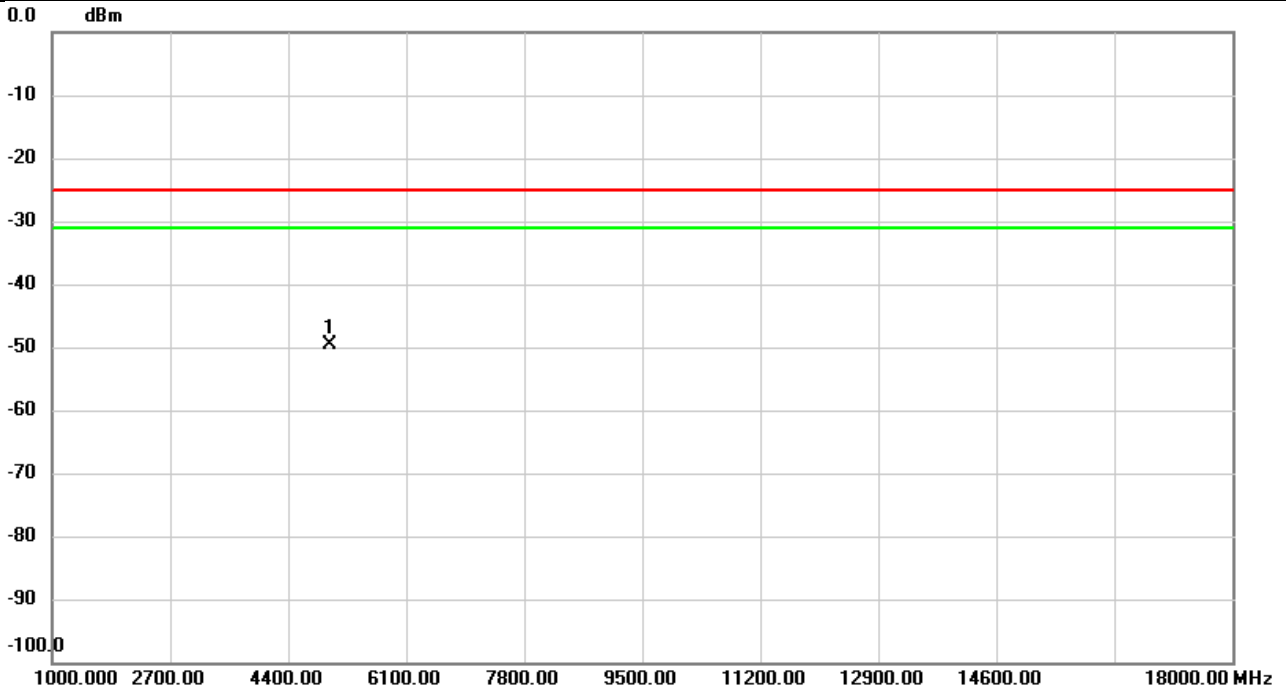


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-63.10	13.43	-49.67	-25.00	-24.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	56%

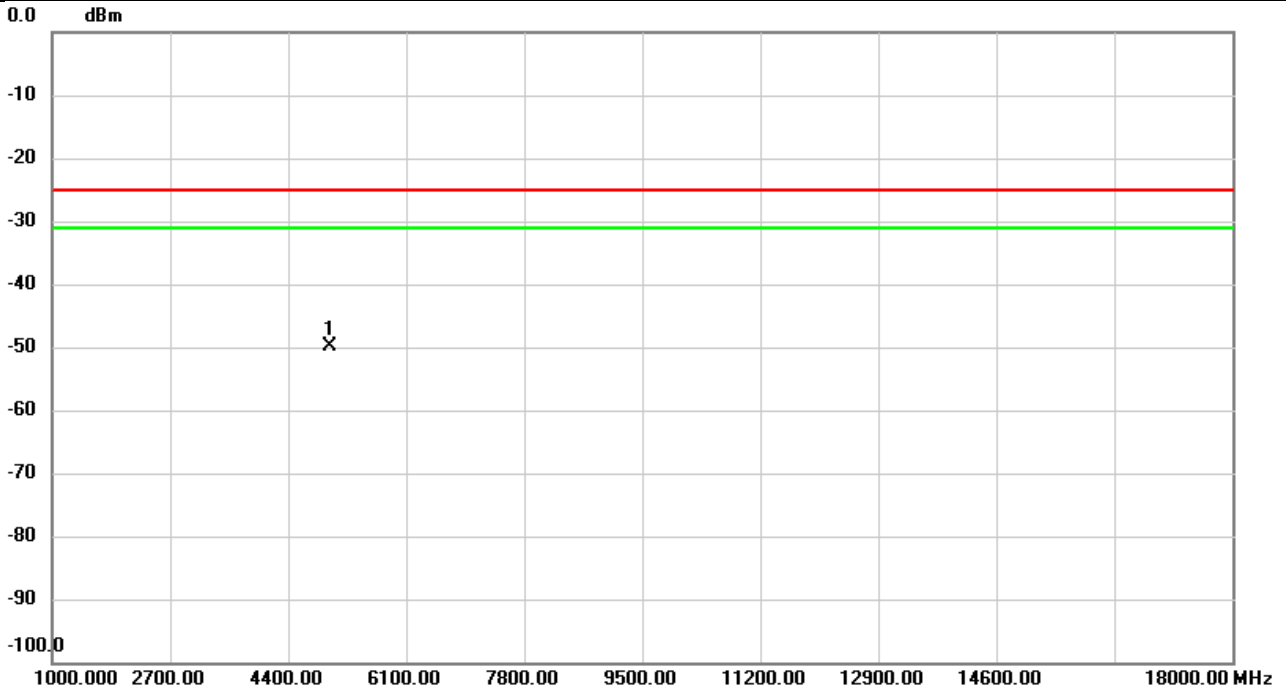


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-63.35	13.39	-49.96	-25.00	-24.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH518598	Polarization	Vertical
Temp	21°C	Hum.	56%

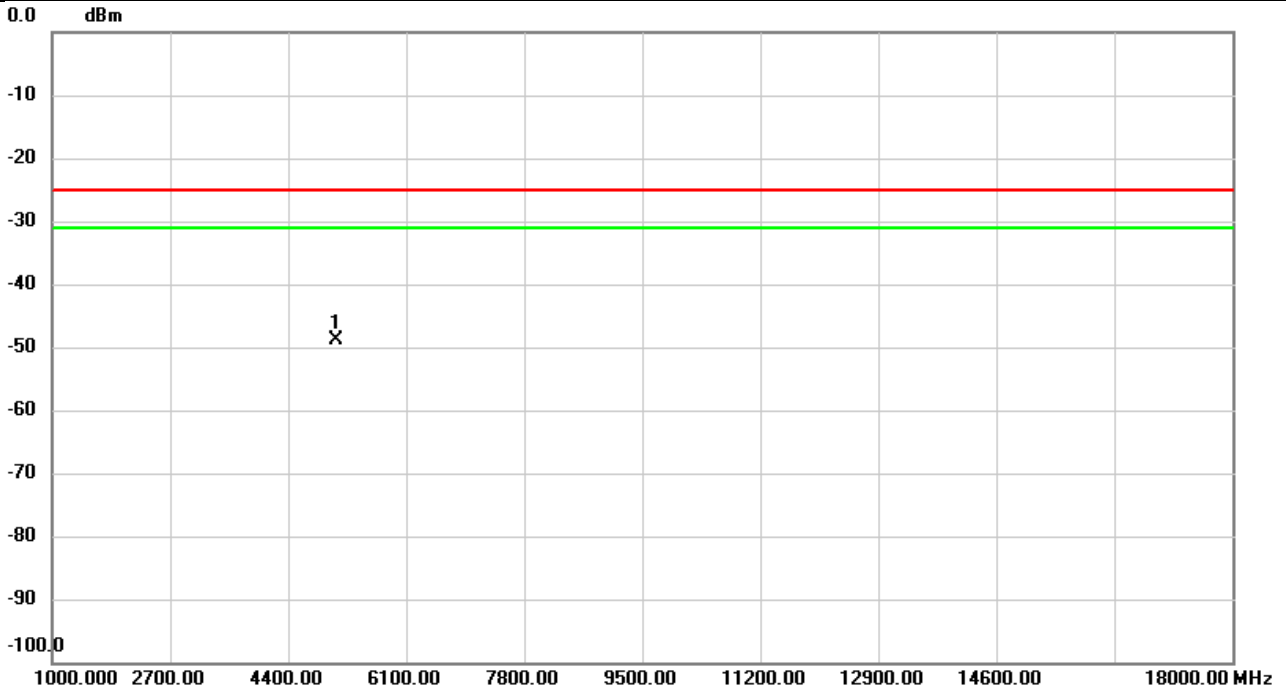


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.78	13.93	-48.85	-25.00	-23.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH518598	Polarization	Horizontal
Temp	21°C	Hum.	56%

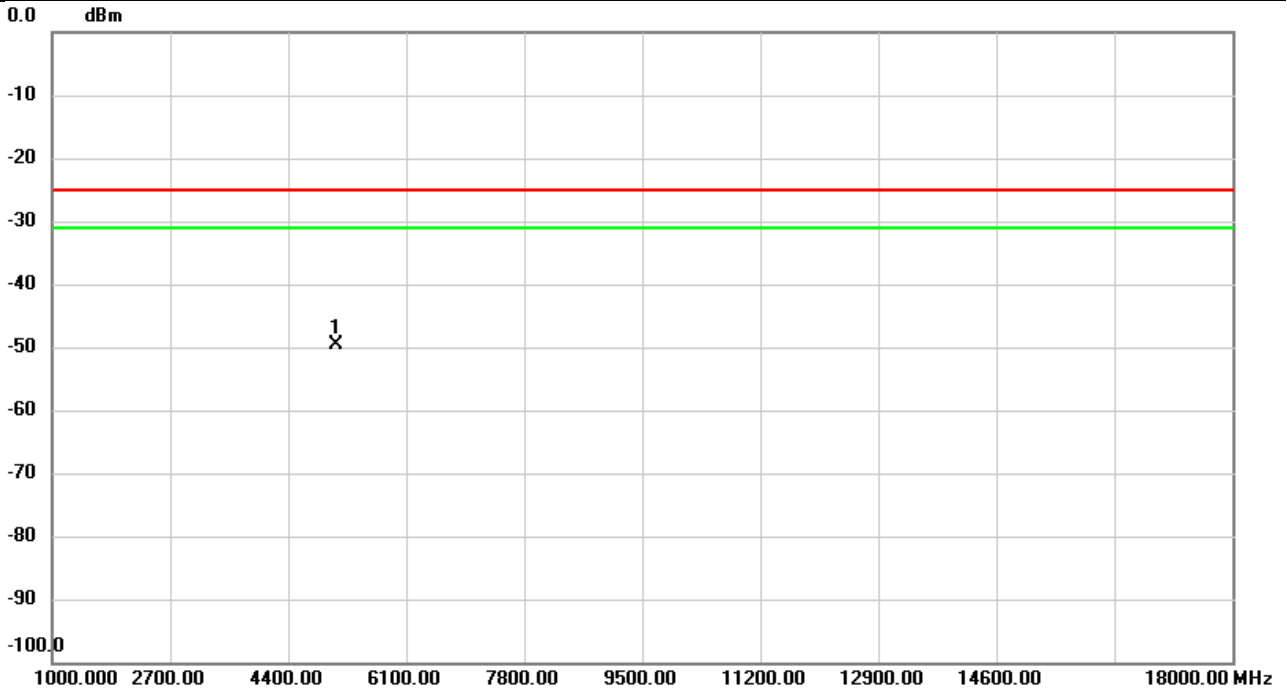


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-63.61	13.95	-49.66	-25.00	-24.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

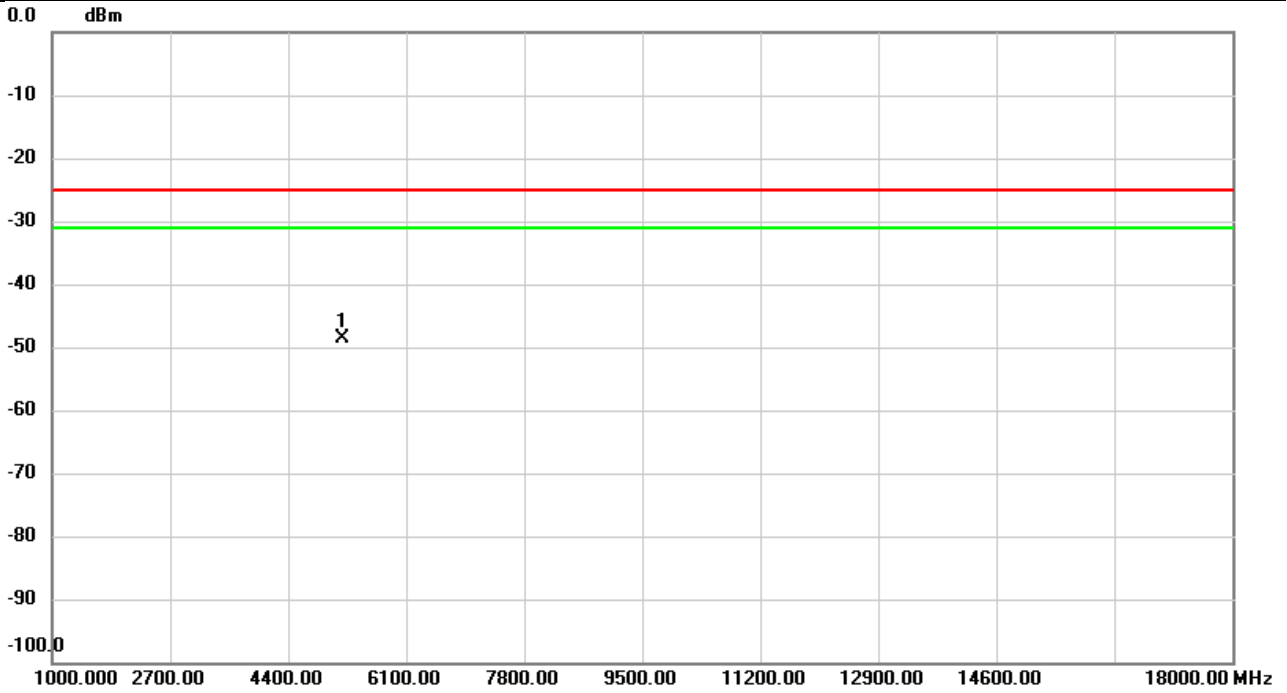


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.15	13.49	-48.66	-25.00	-23.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

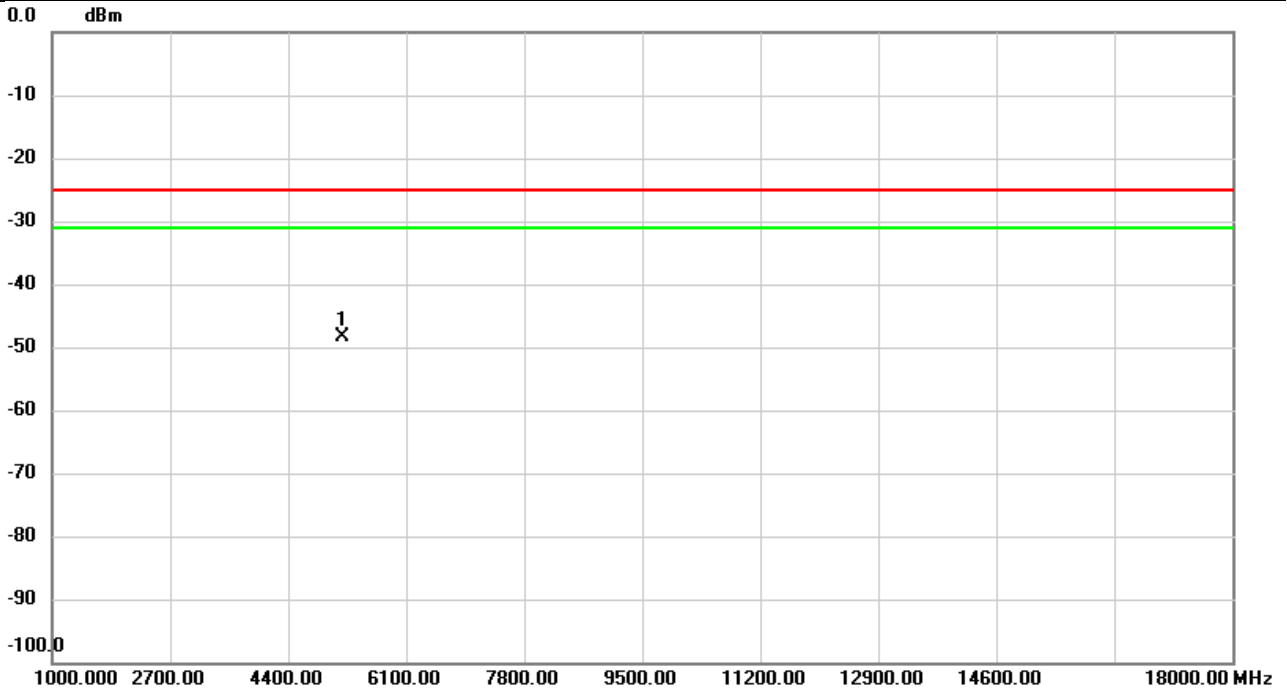


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.08	13.69	-48.39	-25.00	-23.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	56%

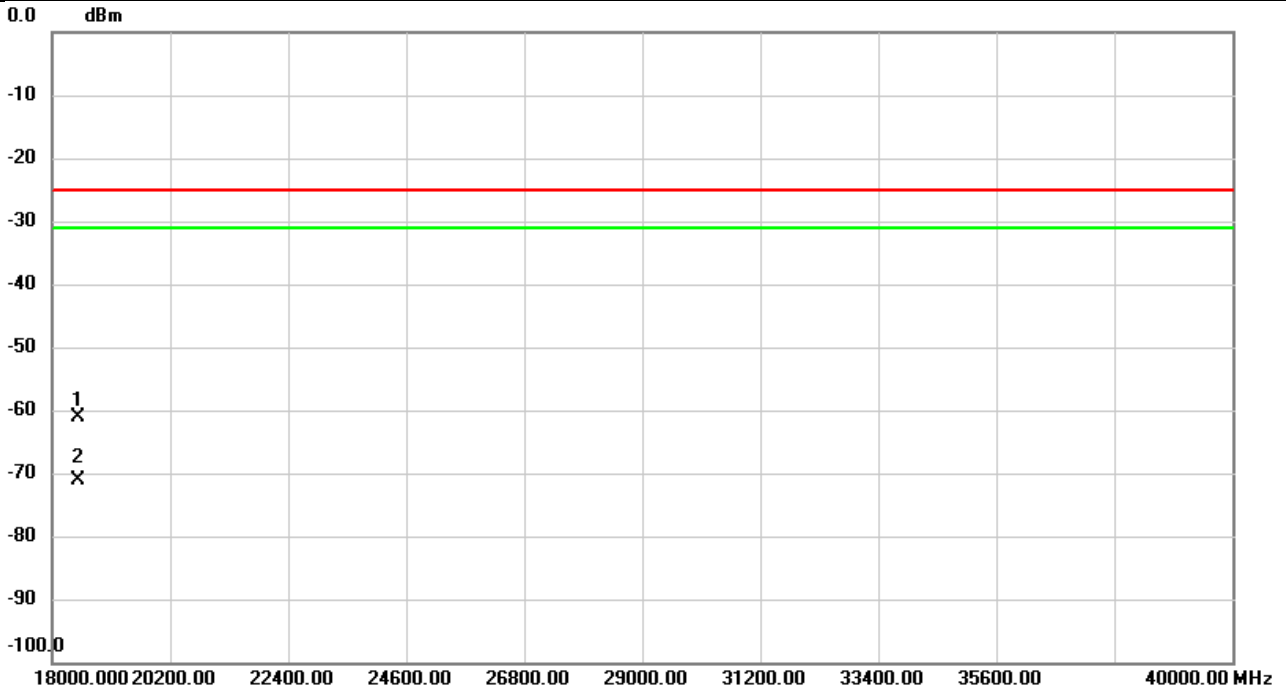


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	18480.00	-55.22	-5.79	-61.01	-25.00	-36.01	peak	
2		18480.00	-65.34	-5.79	-71.13	-25.00	-46.13	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41 HPUE	Test Date	2023/12/20
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	56%

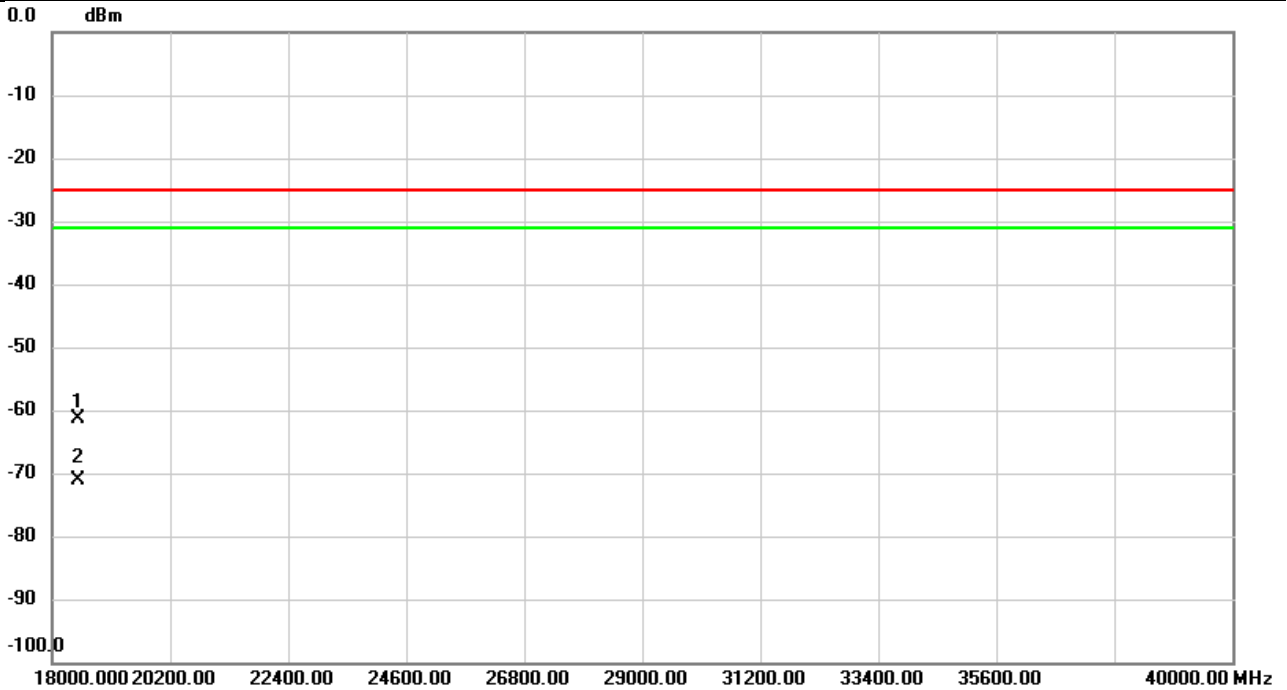


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18480.00	-55.47	-5.79	-61.26	-25.00	-36.26	peak	
2		18480.00	-65.39	-5.79	-71.18	-25.00	-46.18	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

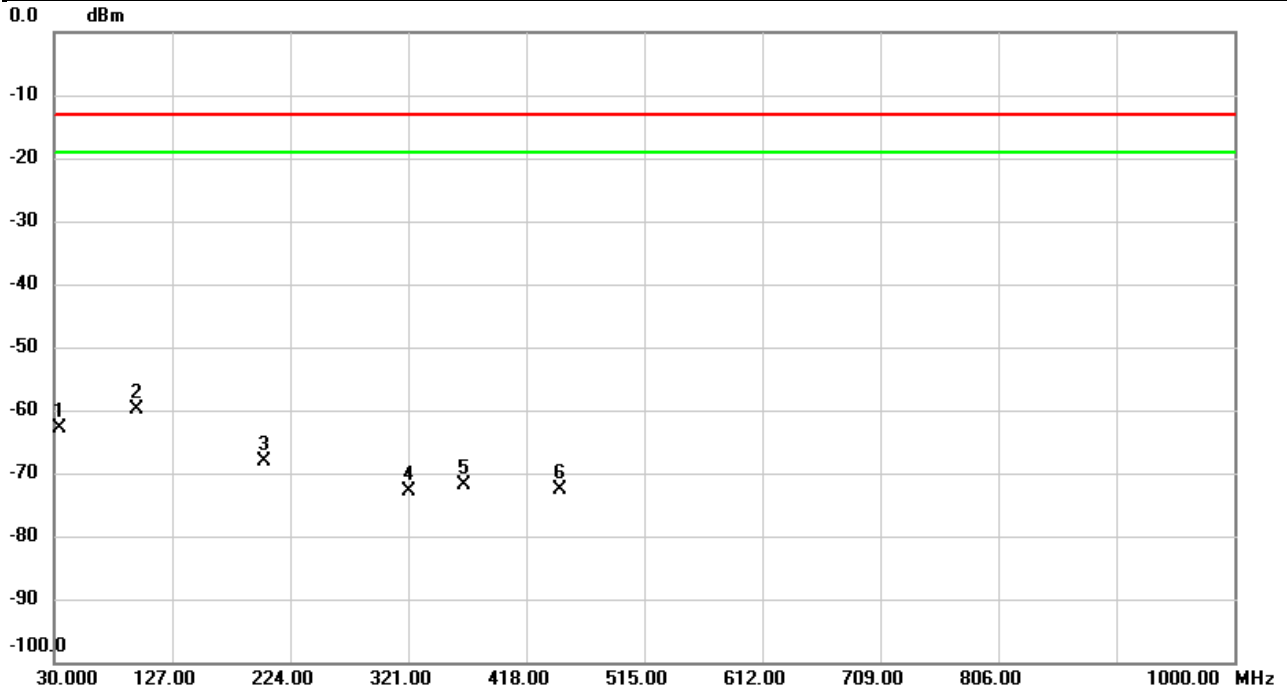


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		34.7853	-53.57	-9.34	-62.91	-13.00	-49.91	peak	
2	*	97.6737	-53.76	-6.15	-59.91	-13.00	-46.91	peak	
3		202.0780	-64.86	-3.33	-68.19	-13.00	-55.19	peak	
4		321.0000	-69.73	-3.09	-72.82	-13.00	-59.82	peak	
5		366.5900	-69.26	-2.61	-71.87	-13.00	-58.87	peak	
6		445.5157	-71.19	-1.46	-72.65	-13.00	-59.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

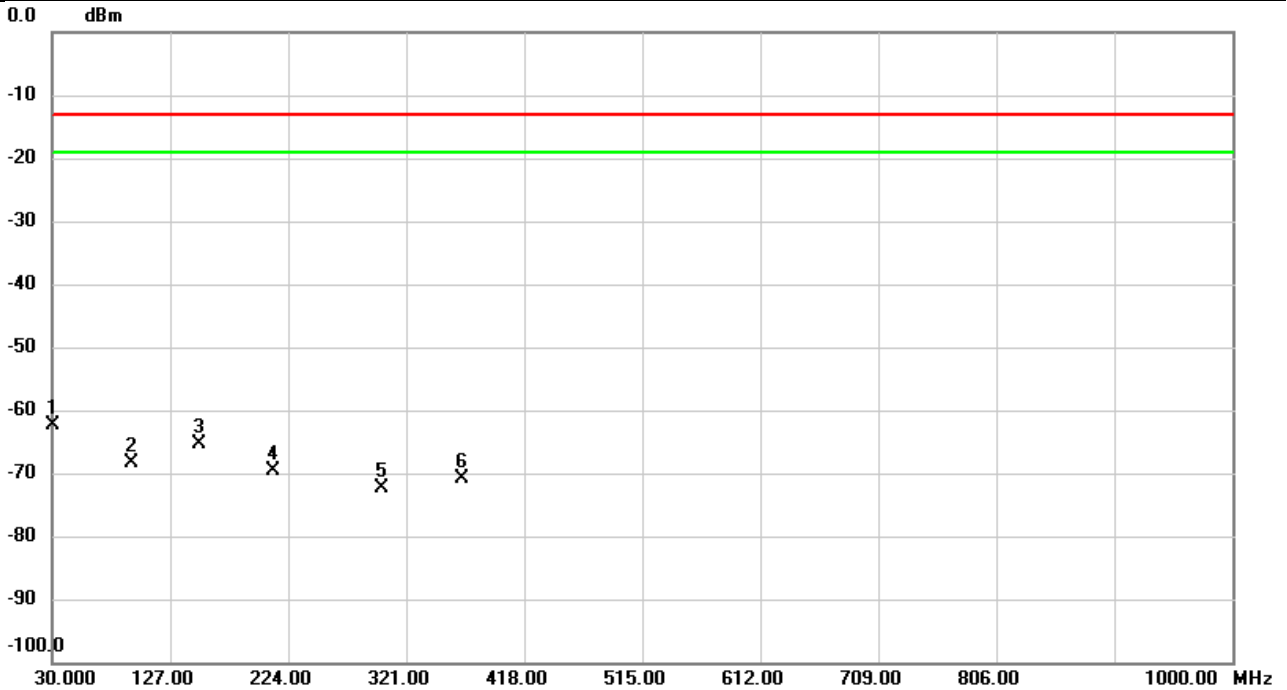


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	30.0000	-65.19	2.87	-62.32	-13.00	-49.32	peak	
2		95.0547	-60.34	-8.08	-68.42	-13.00	-55.42	peak	
3		151.4440	-59.70	-5.69	-65.39	-13.00	-52.39	peak	
4		211.8750	-60.32	-9.36	-69.68	-13.00	-56.68	peak	
5		300.4037	-66.30	-6.07	-72.37	-13.00	-59.37	peak	
6		366.5900	-68.25	-2.57	-70.82	-13.00	-57.82	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

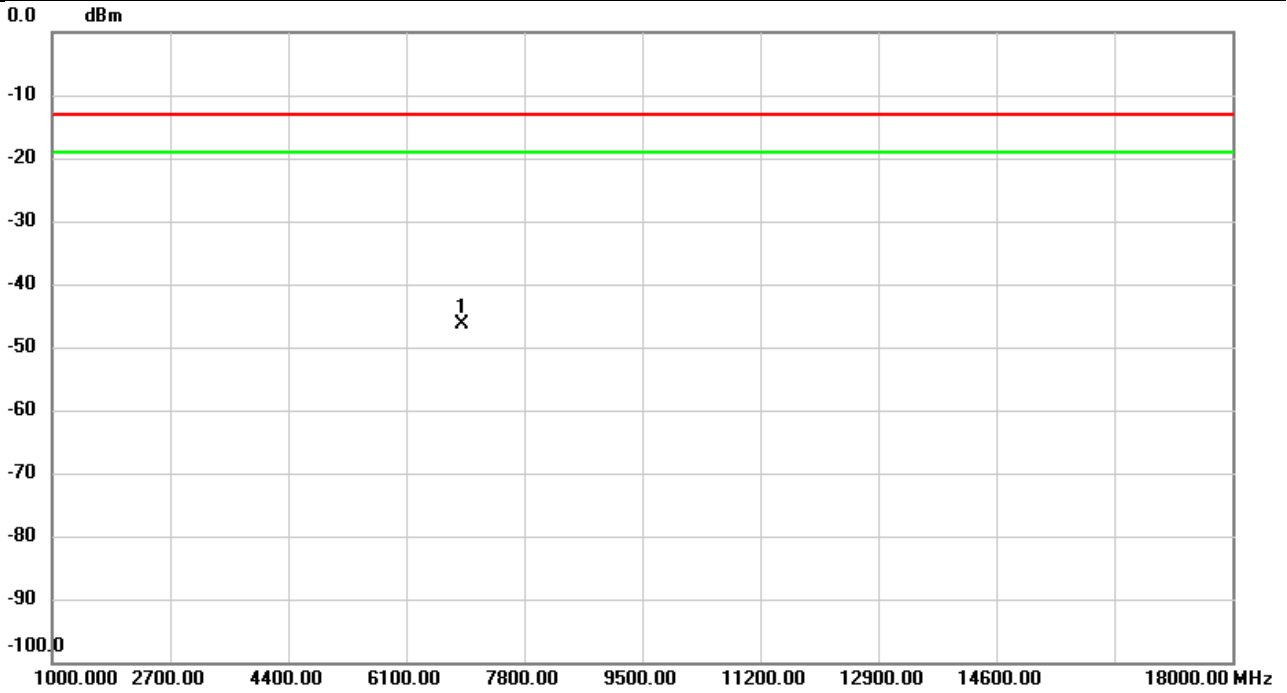


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6900.020	-64.40	18.00	-46.40	-13.00	-33.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

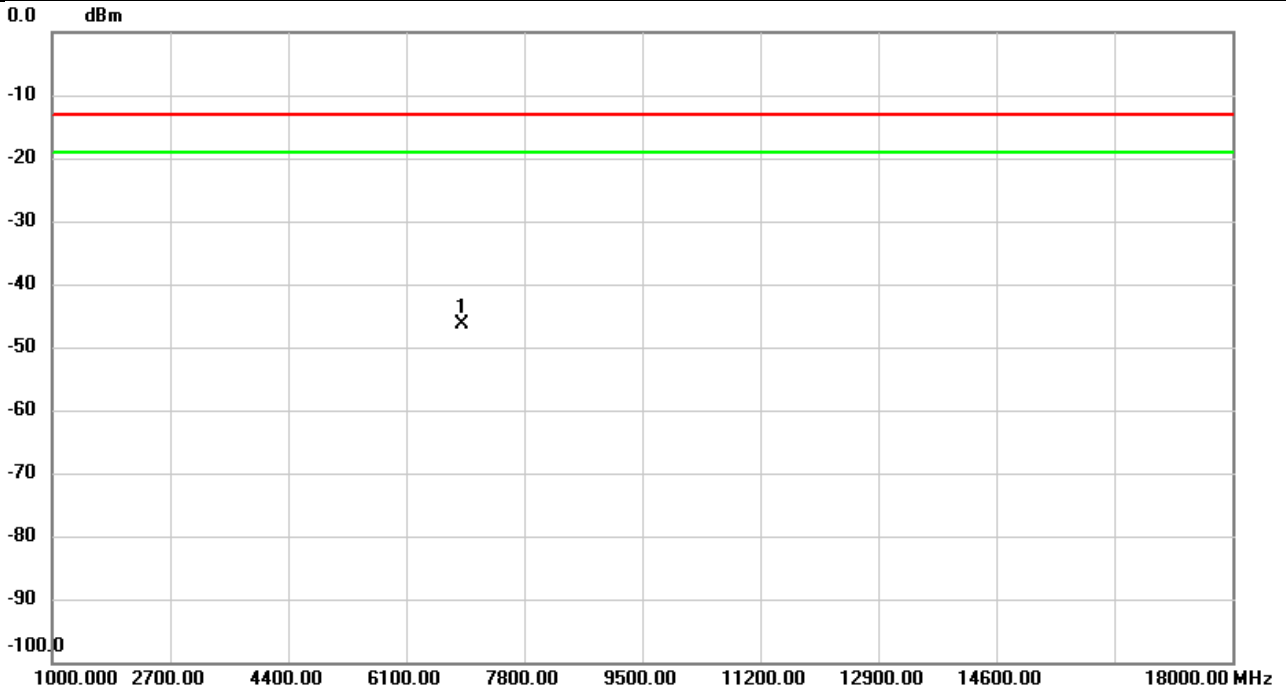


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6900.020	-64.03	17.74	-46.29	-13.00	-33.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

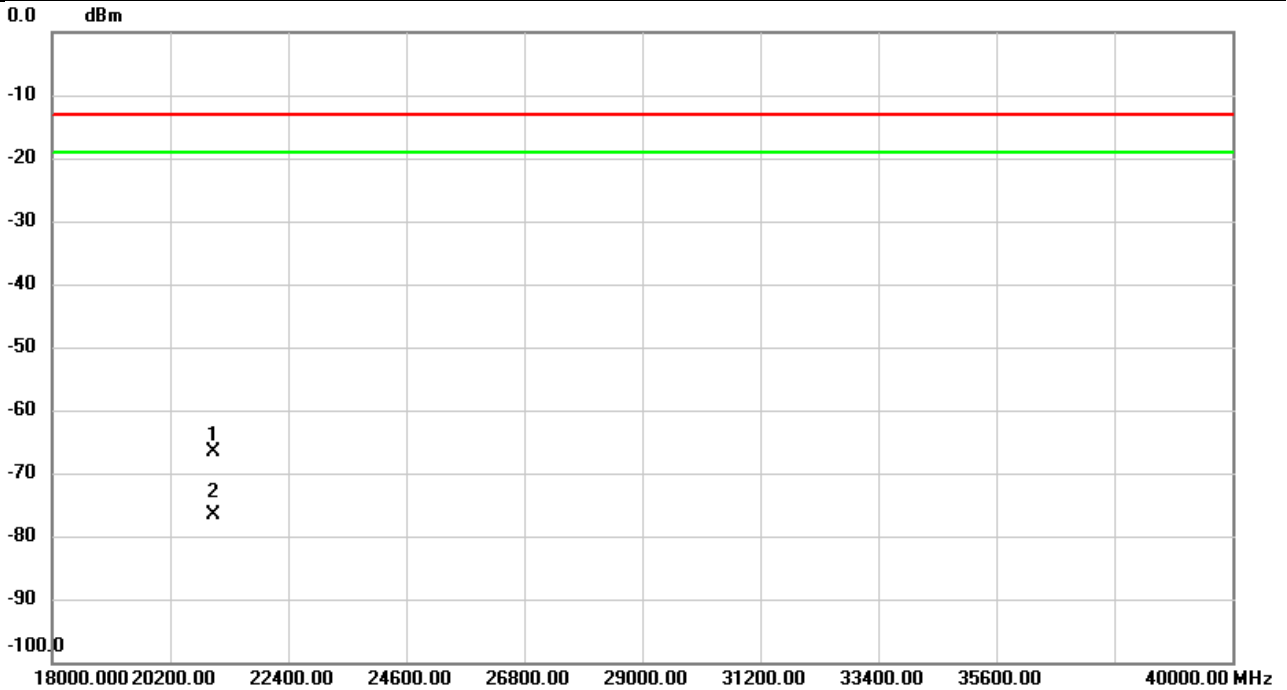


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-60.47	-6.27	-66.74	-13.00	-53.74	peak	
2		21000.06	-70.23	-6.27	-76.50	-13.00	-63.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

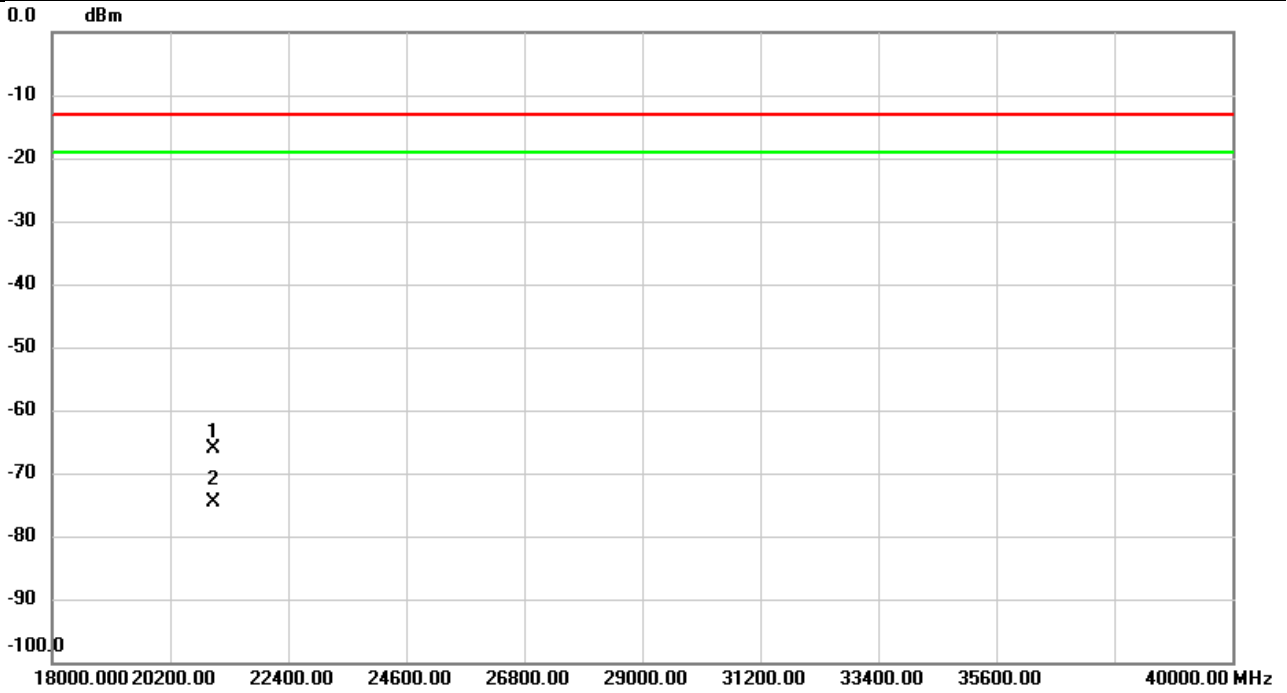


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.89	-6.27	-66.16	-13.00	-53.16	peak	
2		21000.06	-68.39	-6.27	-74.66	-13.00	-61.66	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3700 ~ 3980 MHz:

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

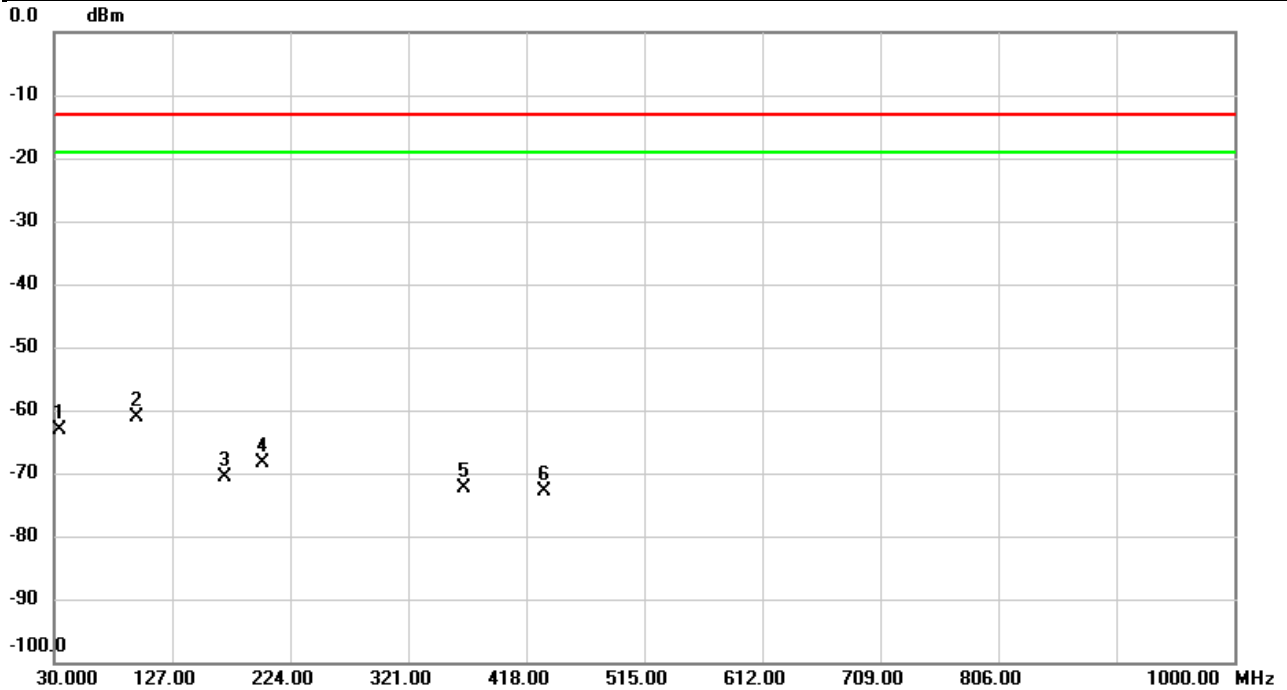


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		34.6883	-53.67	-9.34	-63.01	-13.00	-50.01	peak	
2	*	97.6737	-54.98	-6.15	-61.13	-13.00	-48.13	peak	
3		169.8417	-68.75	-1.87	-70.62	-13.00	-57.62	peak	
4		201.2373	-65.08	-3.31	-68.39	-13.00	-55.39	peak	
5		366.6223	-69.73	-2.61	-72.34	-13.00	-59.34	peak	
6		433.2937	-71.21	-1.67	-72.88	-13.00	-59.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

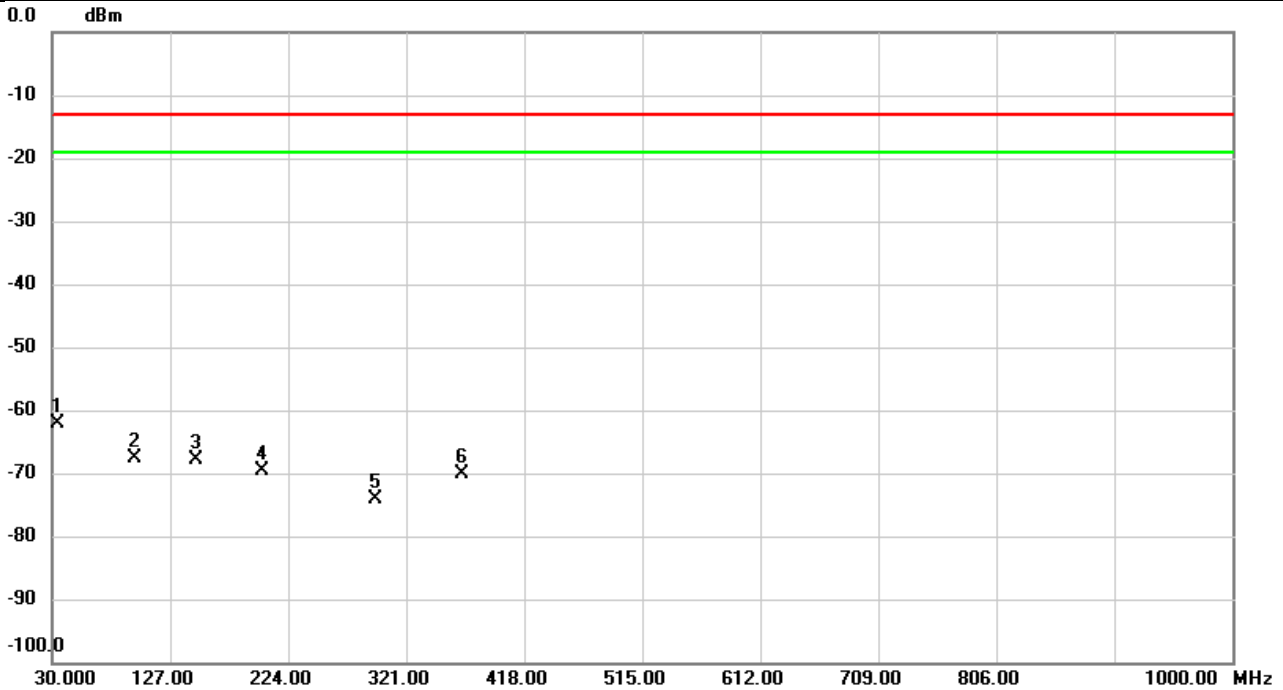


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	34.3327	-64.46	2.39	-62.07	-13.00	-49.07	peak	
2		97.6737	-59.60	-7.94	-67.54	-13.00	-54.54	peak	
3		148.1137	-62.14	-5.62	-67.76	-13.00	-54.76	peak	
4		202.9510	-60.24	-9.49	-69.73	-13.00	-56.73	peak	
5		296.1356	-67.79	-6.25	-74.04	-13.00	-61.04	peak	
6		366.5900	-67.55	-2.57	-70.12	-13.00	-57.12	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

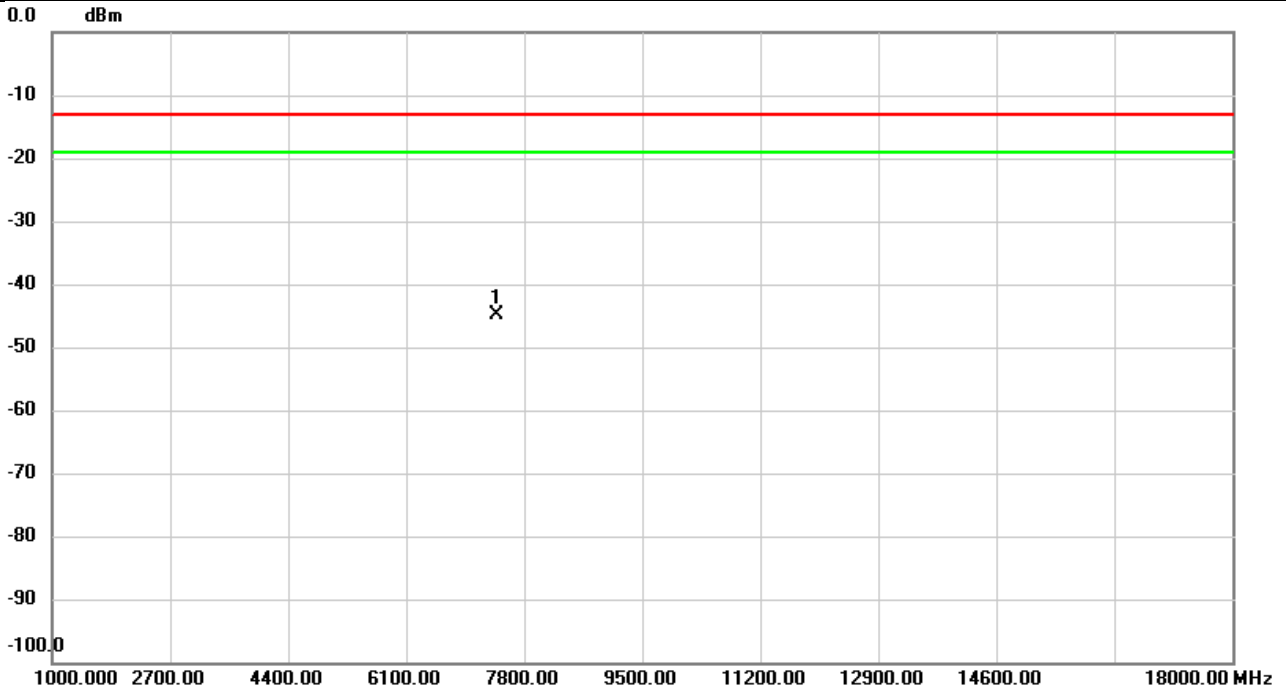


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.10	18.12	-44.98	-13.00	-31.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

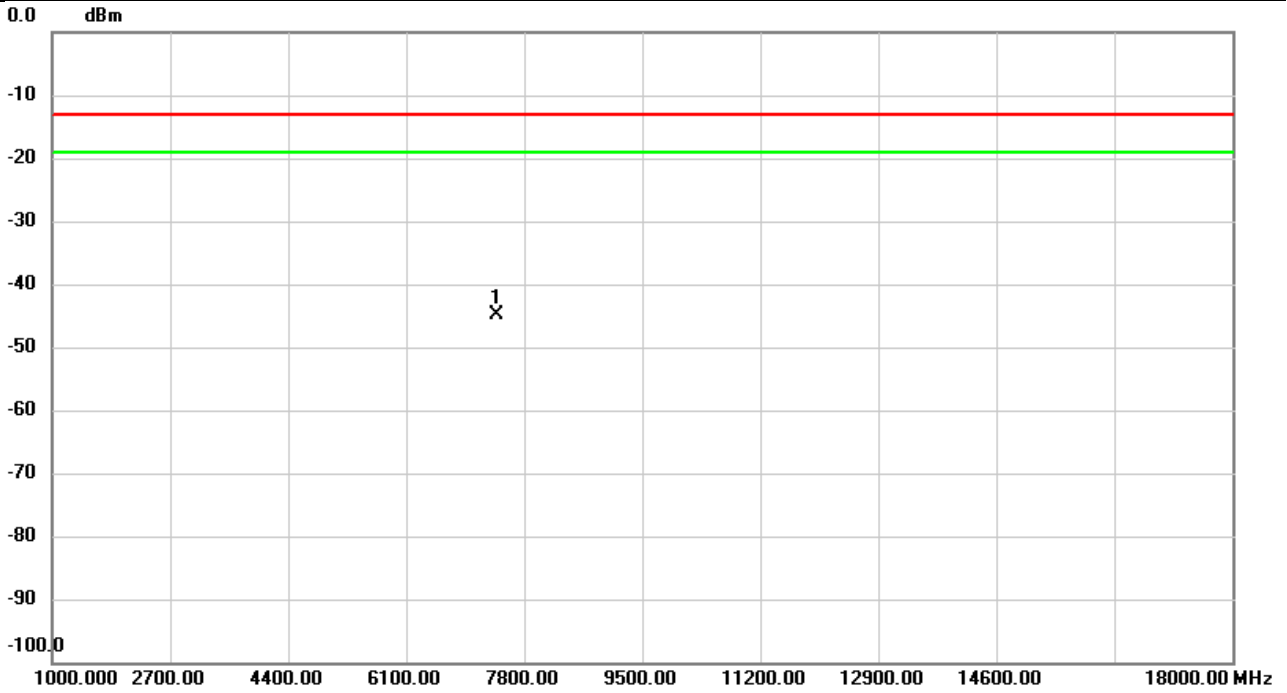


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.84	18.07	-44.77	-13.00	-31.77	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

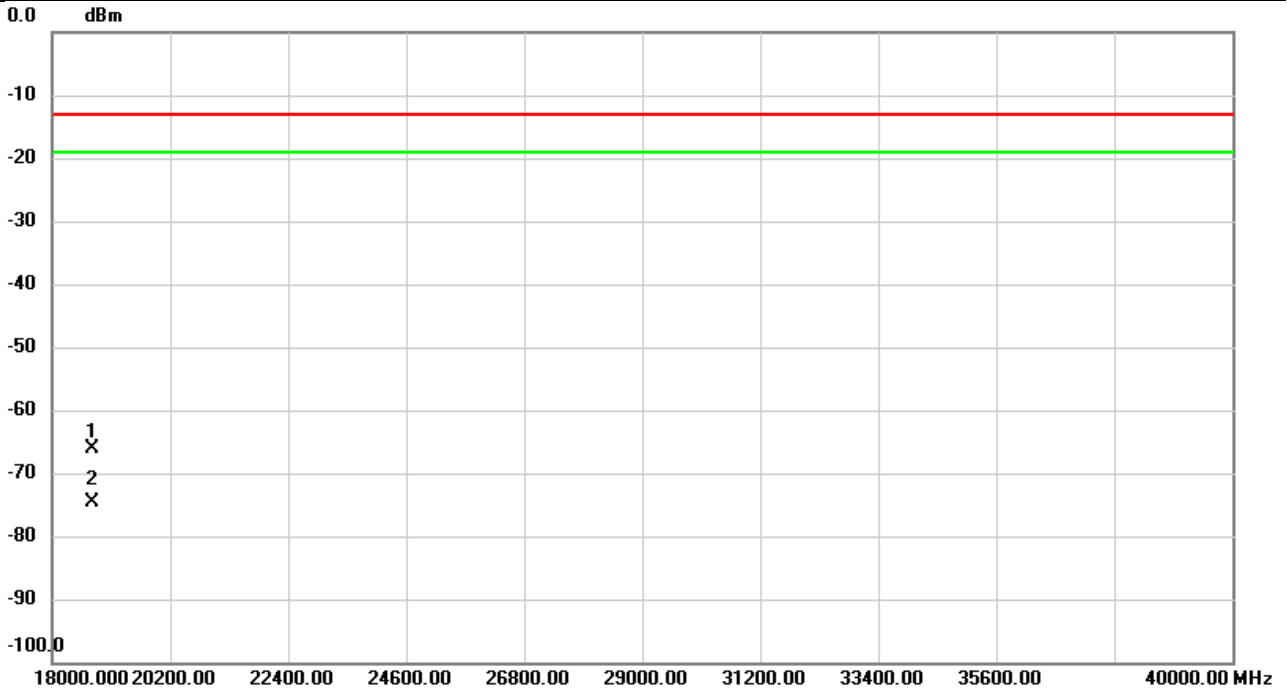


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.86	-6.32	-66.18	-13.00	-53.18	peak	
2		18750.00	-68.39	-6.32	-74.71	-13.00	-61.71	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

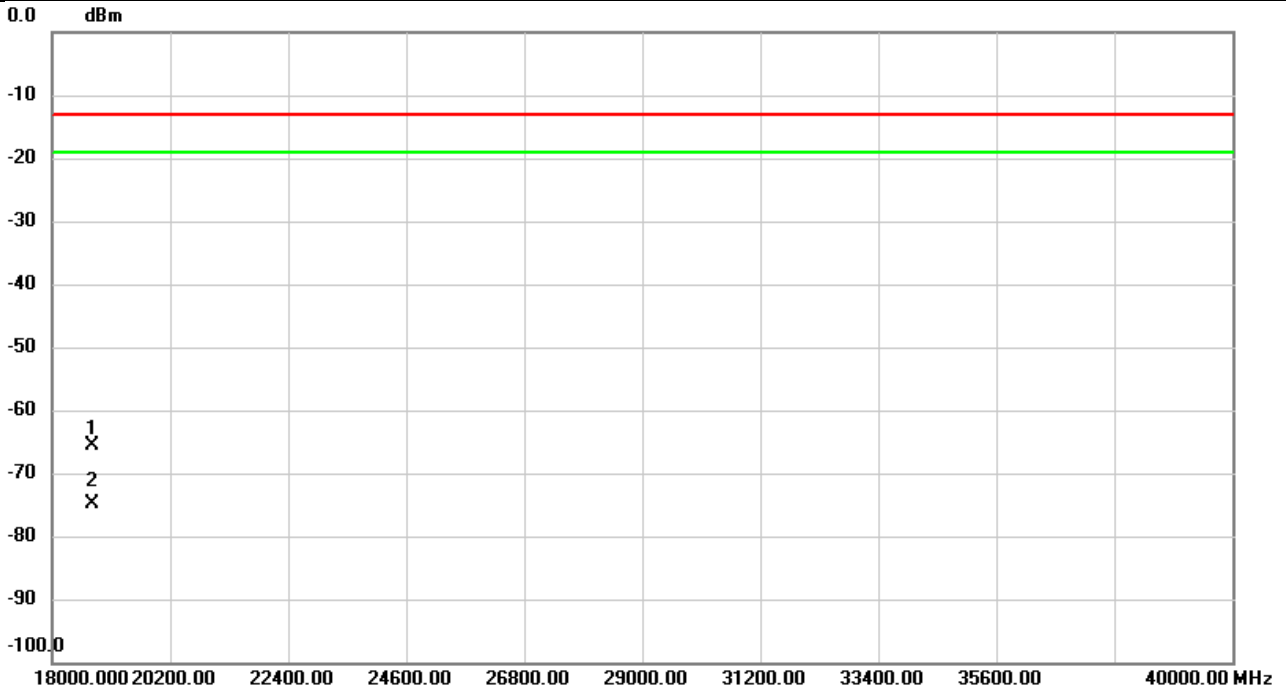


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.20	-6.32	-65.52	-13.00	-52.52	peak	
2		18750.00	-68.56	-6.32	-74.88	-13.00	-61.88	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

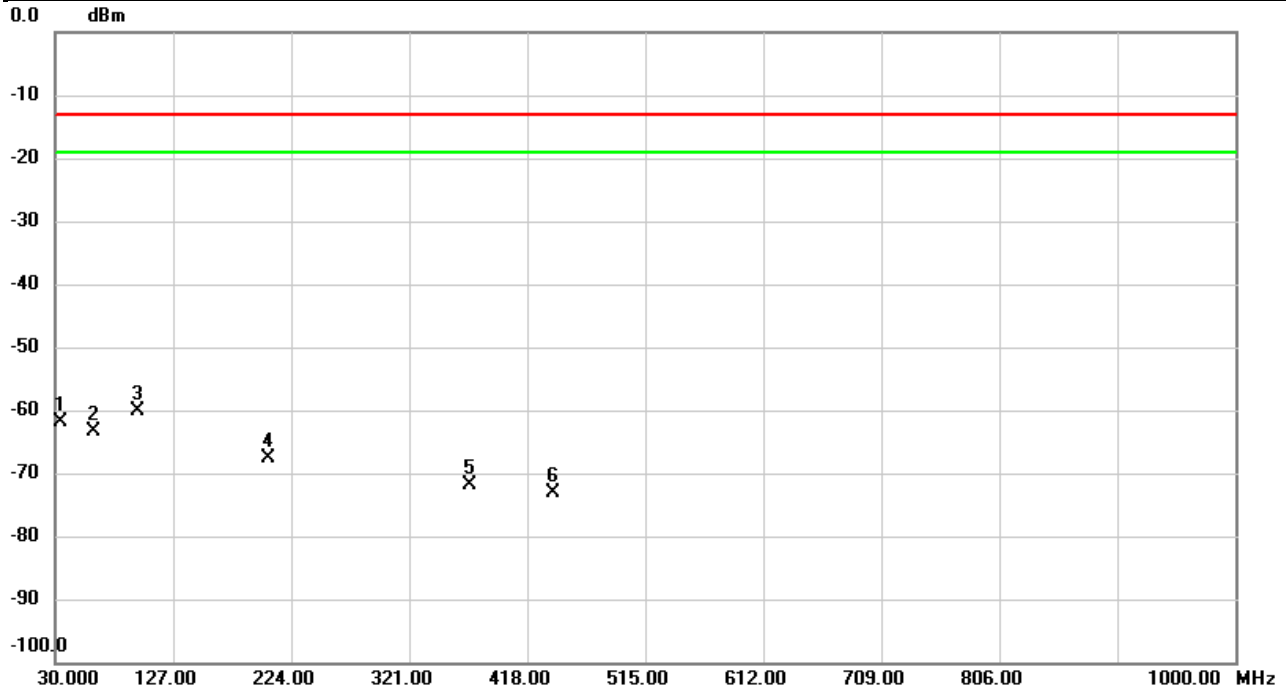


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		34.9793	-52.46	-9.35	-61.81	-13.00	-48.81	peak	
2		62.3333	-55.92	-7.50	-63.42	-13.00	-50.42	peak	
3	*	97.6737	-53.99	-6.15	-60.14	-13.00	-47.14	peak	
4		205.4083	-64.32	-3.39	-67.71	-13.00	-54.71	peak	
5		371.2460	-69.36	-2.56	-71.92	-13.00	-58.92	peak	
6		439.5663	-71.46	-1.56	-73.02	-13.00	-60.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

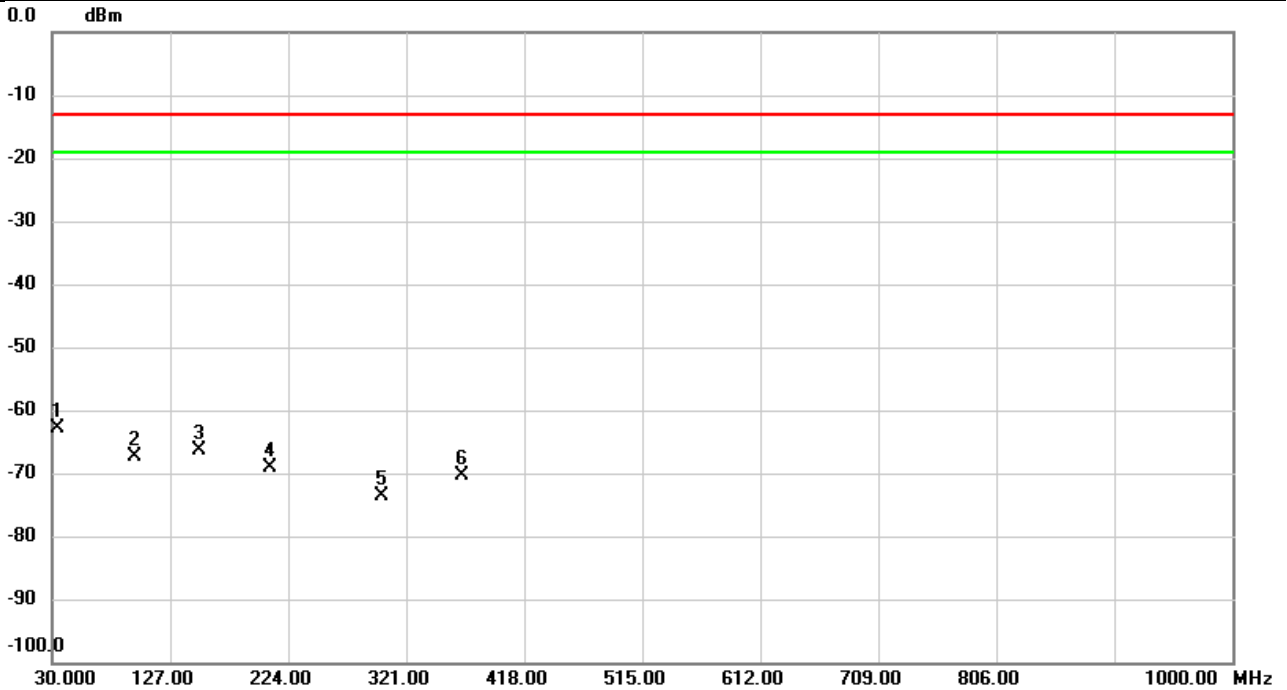


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	34.6883	-65.24	2.35	-62.89	-13.00	-49.89	peak	
2		97.6737	-59.48	-7.94	-67.42	-13.00	-54.42	peak	
3		150.5063	-60.79	-5.65	-66.44	-13.00	-53.44	peak	
4		209.0620	-59.78	-9.44	-69.22	-13.00	-56.22	peak	
5		301.5030	-67.58	-6.00	-73.58	-13.00	-60.58	peak	
6		366.6223	-67.75	-2.57	-70.32	-13.00	-57.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

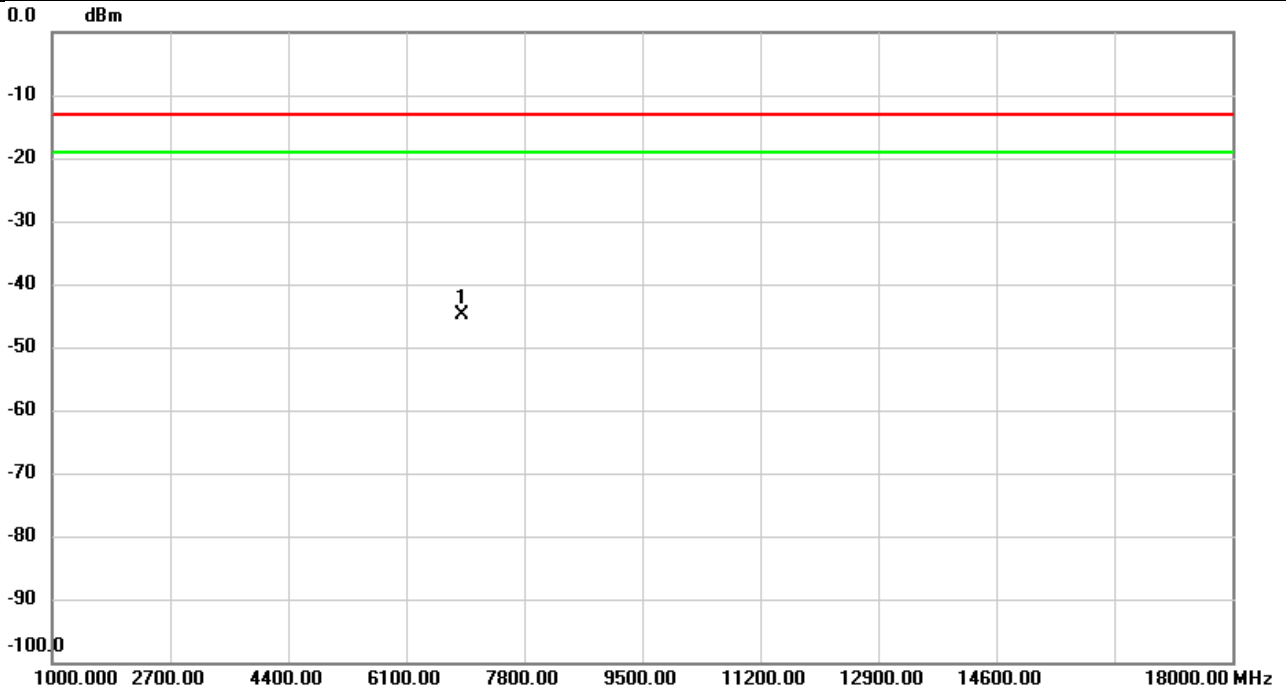


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6900.020	-62.94	18.00	-44.94	-13.00	-31.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

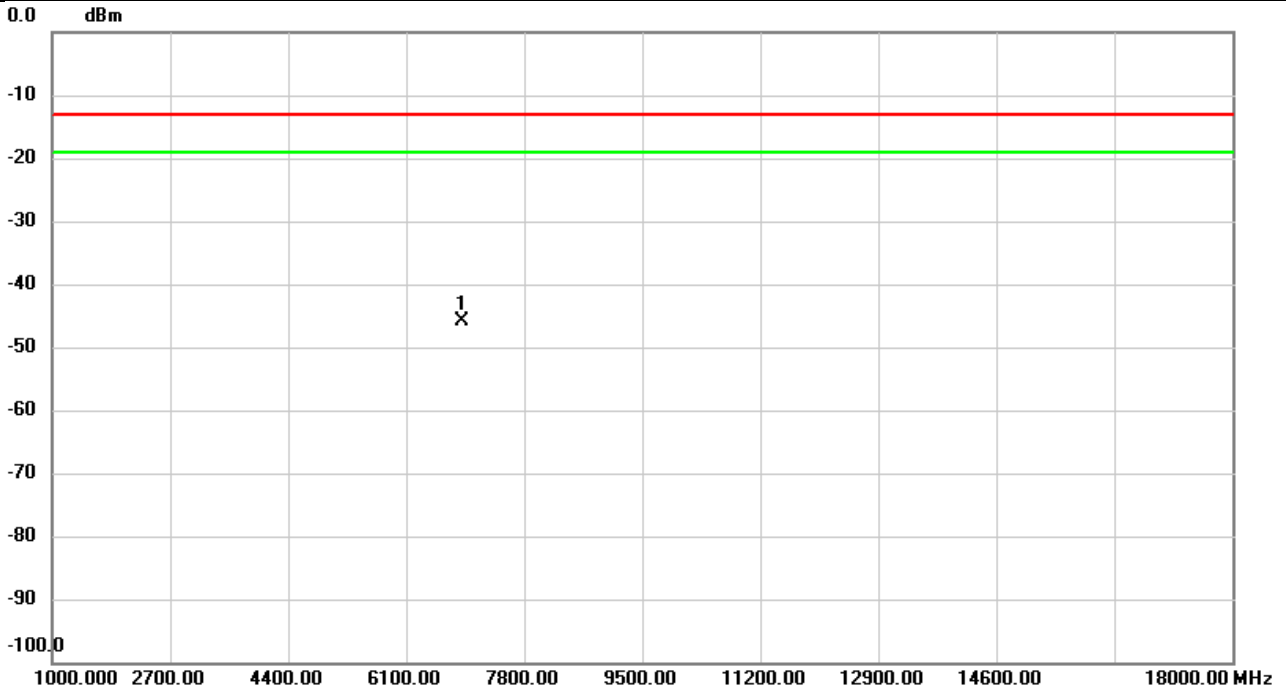


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6900.020	-63.57	17.74	-45.83	-13.00	-32.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	56%

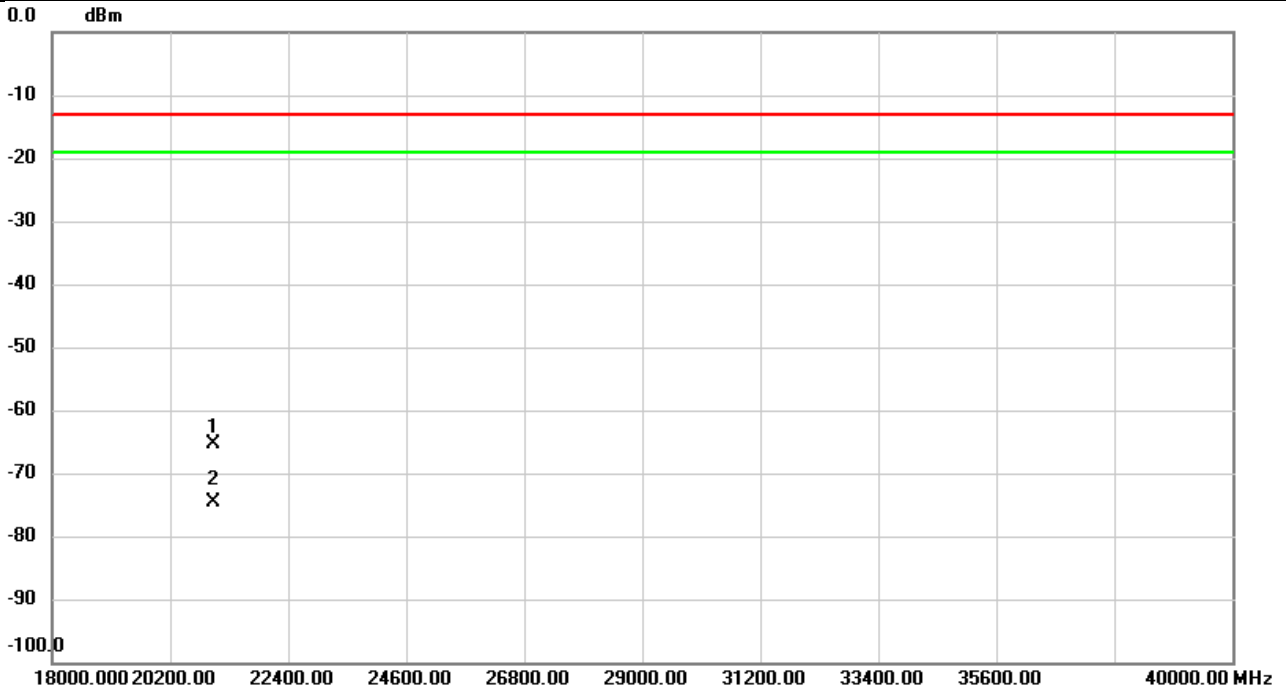


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-59.22	-6.27	-65.49	-13.00	-52.49	peak	
2		21000.06	-68.39	-6.27	-74.66	-13.00	-61.66	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	56%

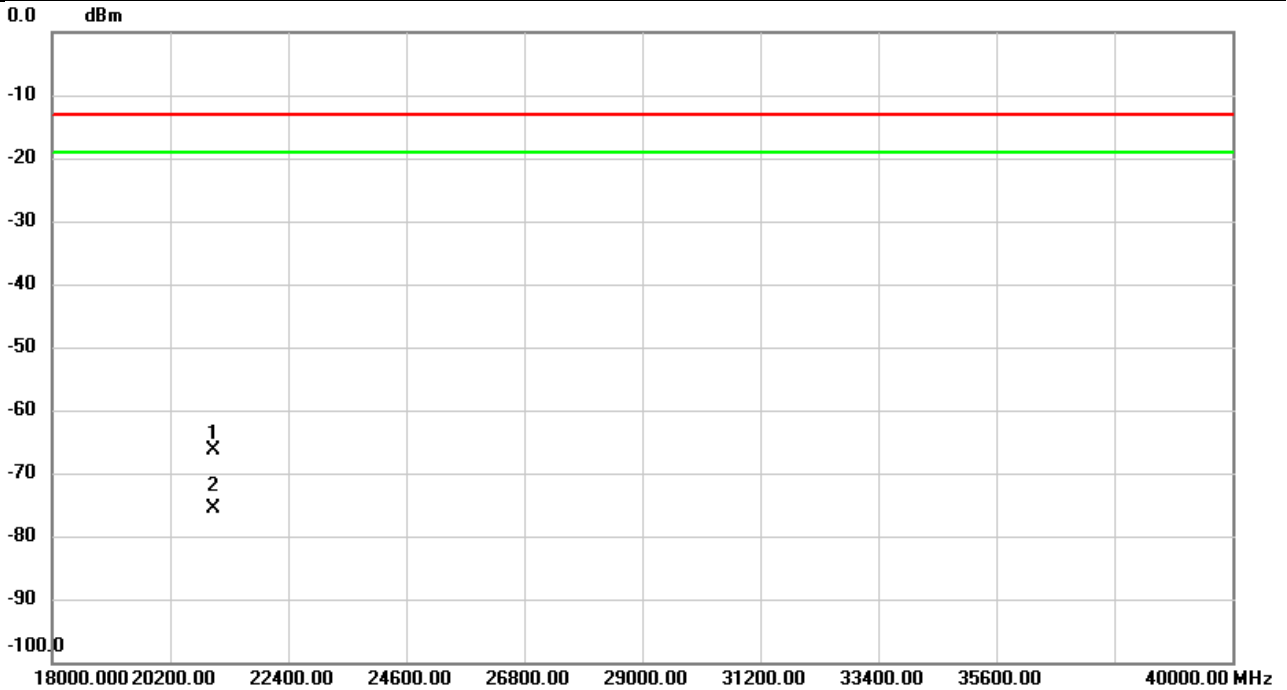

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.06	-60.10	-6.27	-66.37	-13.00	-53.37	peak	
2		21000.06	-69.39	-6.27	-75.66	-13.00	-62.66	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

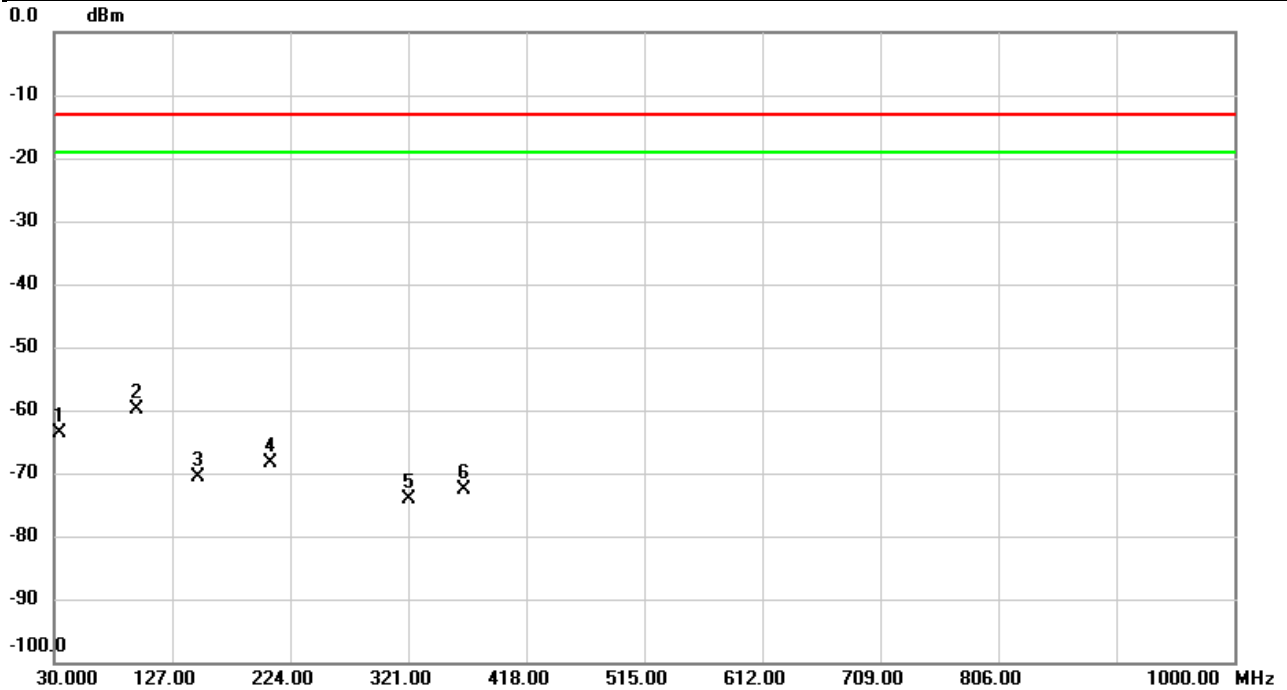


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		34.8500	-54.25	-9.34	-63.59	-13.00	-50.59	peak	
2	*	97.6737	-53.61	-6.15	-59.76	-13.00	-46.76	peak	
3		148.9543	-67.83	-2.81	-70.64	-13.00	-57.64	peak	
4		207.8333	-65.04	-3.43	-68.47	-13.00	-55.47	peak	
5		321.0323	-70.96	-3.09	-74.05	-13.00	-61.05	peak	
6		366.5577	-70.00	-2.61	-72.61	-13.00	-59.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

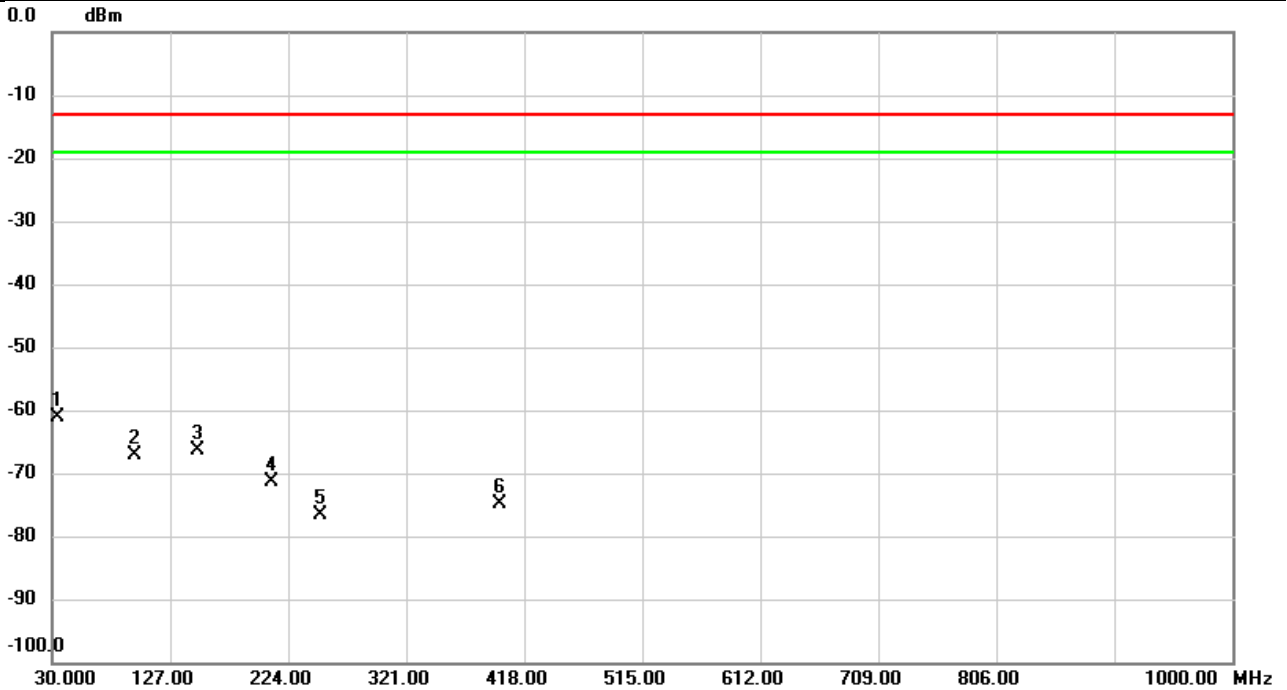


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	34.2033	-63.43	2.41	-61.02	-13.00	-48.02	peak	
2		97.7060	-59.21	-7.94	-67.15	-13.00	-54.15	peak	
3		149.8597	-60.77	-5.63	-66.40	-13.00	-53.40	peak	
4		210.4523	-61.91	-9.41	-71.32	-13.00	-58.32	peak	
5		249.9960	-68.67	-8.00	-76.67	-13.00	-63.67	peak	
6		397.4360	-72.40	-2.44	-74.84	-13.00	-61.84	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

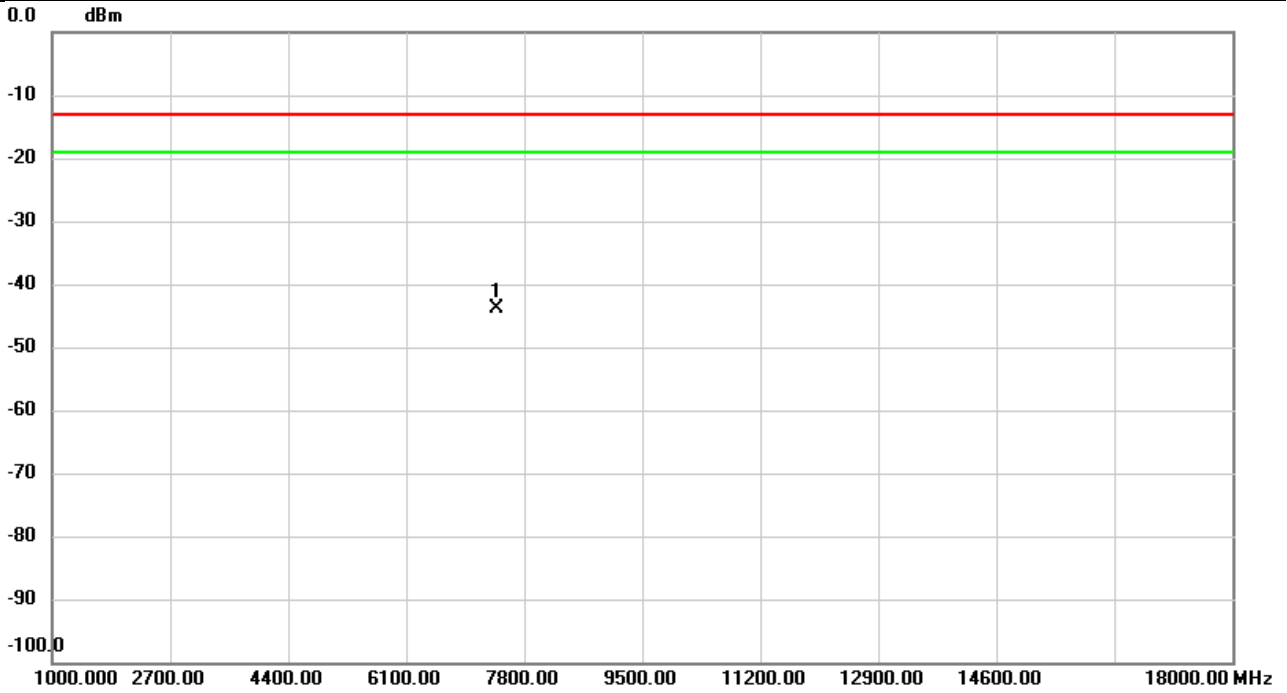


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-61.91	18.12	-43.79	-13.00	-30.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

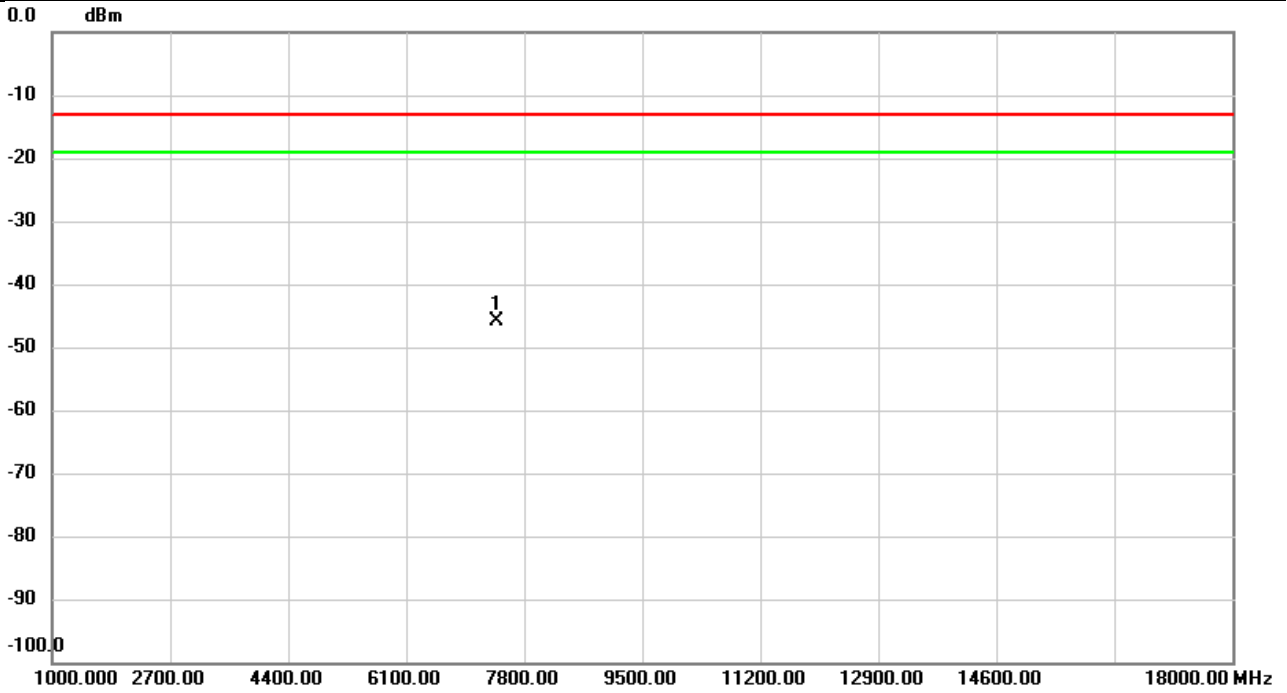


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.91	18.07	-45.84	-13.00	-32.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	56%

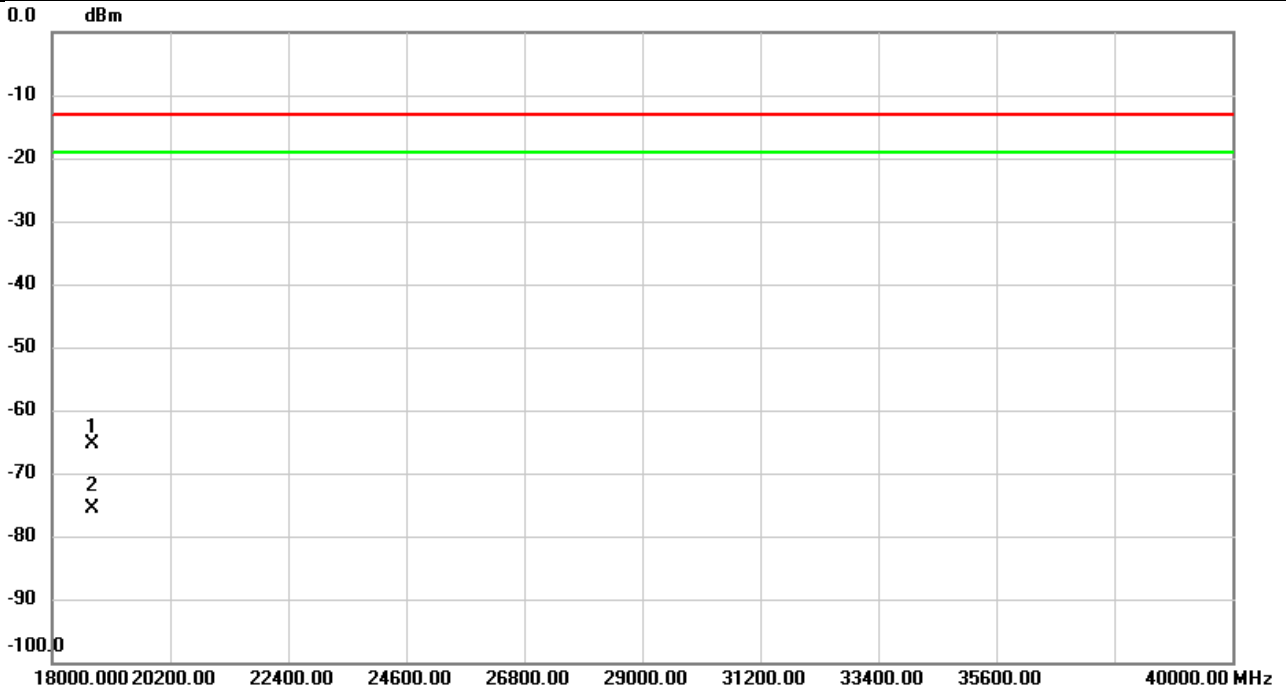


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-58.95	-6.32	-65.27	-13.00	-52.27	peak	
2		18750.00	-69.35	-6.32	-75.67	-13.00	-62.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78 HPUE	Test Date	2023/12/20
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	56%

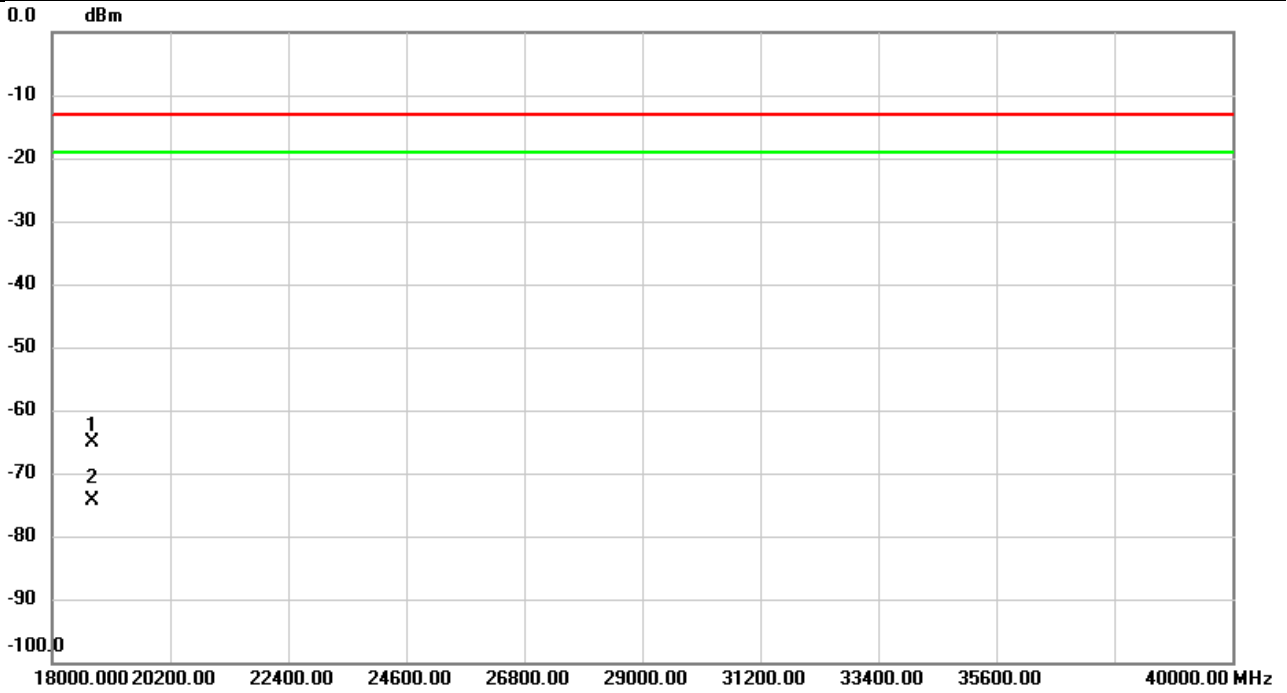


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-58.68	-6.32	-65.00	-13.00	-52.00	peak	
2		18750.00	-68.13	-6.32	-74.45	-13.00	-61.45	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**For SRS:**

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Vertical
Temp	21°C	Hum.	58%

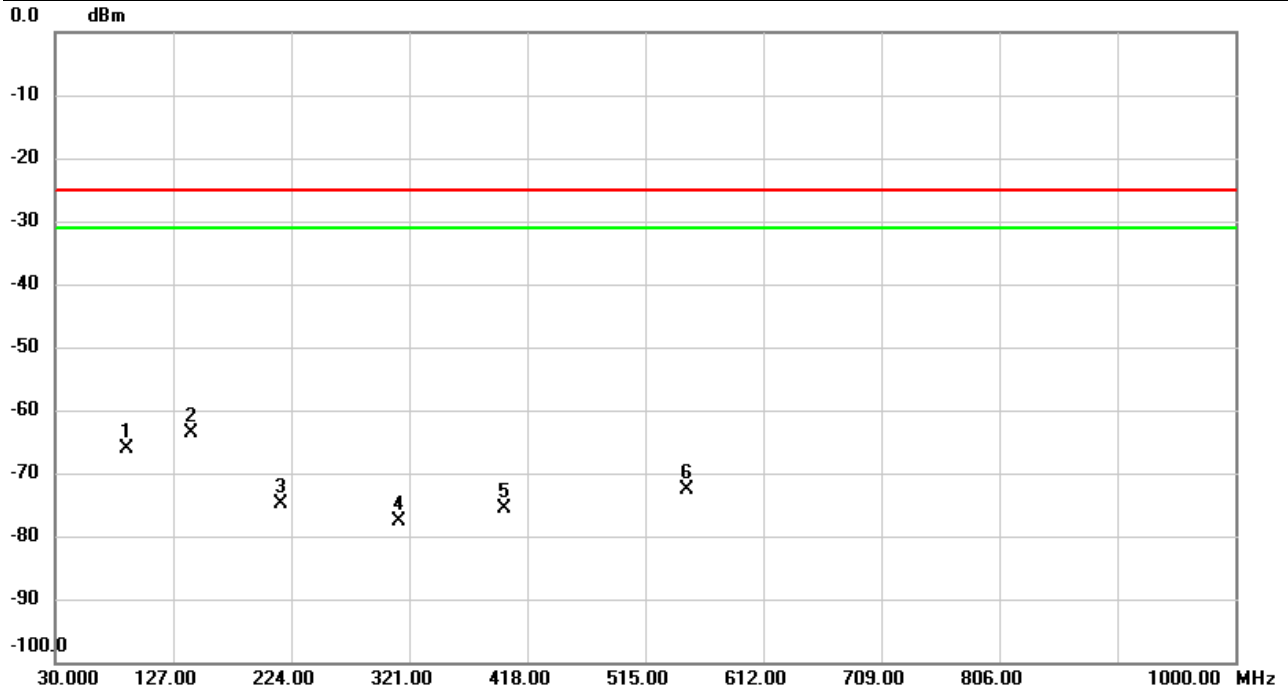


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		88.5880	-60.60	-5.64	-66.24	-25.00	-41.24	peak	
2	*	142.3582	-60.52	-3.16	-63.68	-25.00	-38.68	peak	
3		215.9813	-71.16	-3.75	-74.91	-25.00	-49.91	peak	
4		312.9813	-74.44	-3.17	-77.61	-25.00	-52.61	peak	
5		399.4407	-73.45	-2.25	-75.70	-25.00	-50.70	peak	
6		548.9823	-75.33	2.73	-72.60	-25.00	-47.60	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Horizontal
Temp	21°C	Hum.	58%

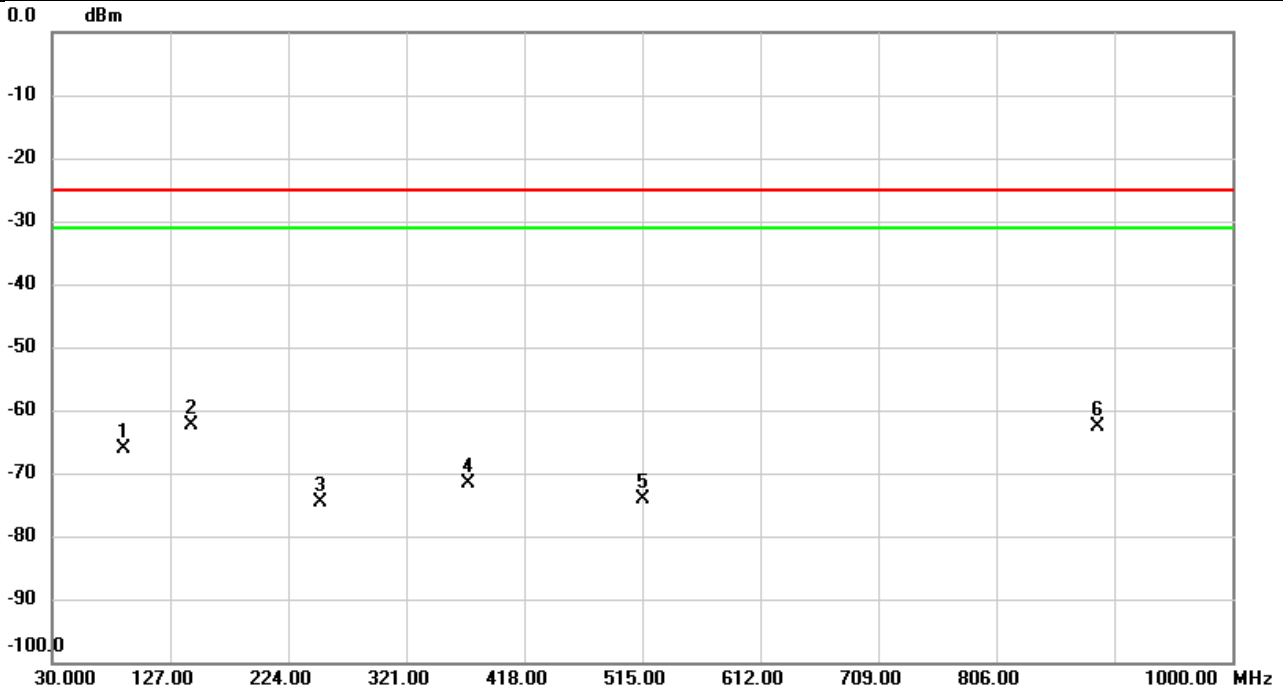


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.6527	-57.77	-8.28	-66.05	-25.00	-41.05	peak	
2	*	144.2983	-56.73	-5.60	-62.33	-25.00	-37.33	peak	
3		249.9960	-66.58	-8.00	-74.58	-25.00	-49.58	peak	
4		372.4747	-69.15	-2.55	-71.70	-25.00	-46.70	peak	
5		515.1293	-72.91	-1.29	-74.20	-25.00	-49.20	peak	
6		889.9050	-67.30	4.61	-62.69	-25.00	-37.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Vertical
Temp	21°C	Hum.	58%

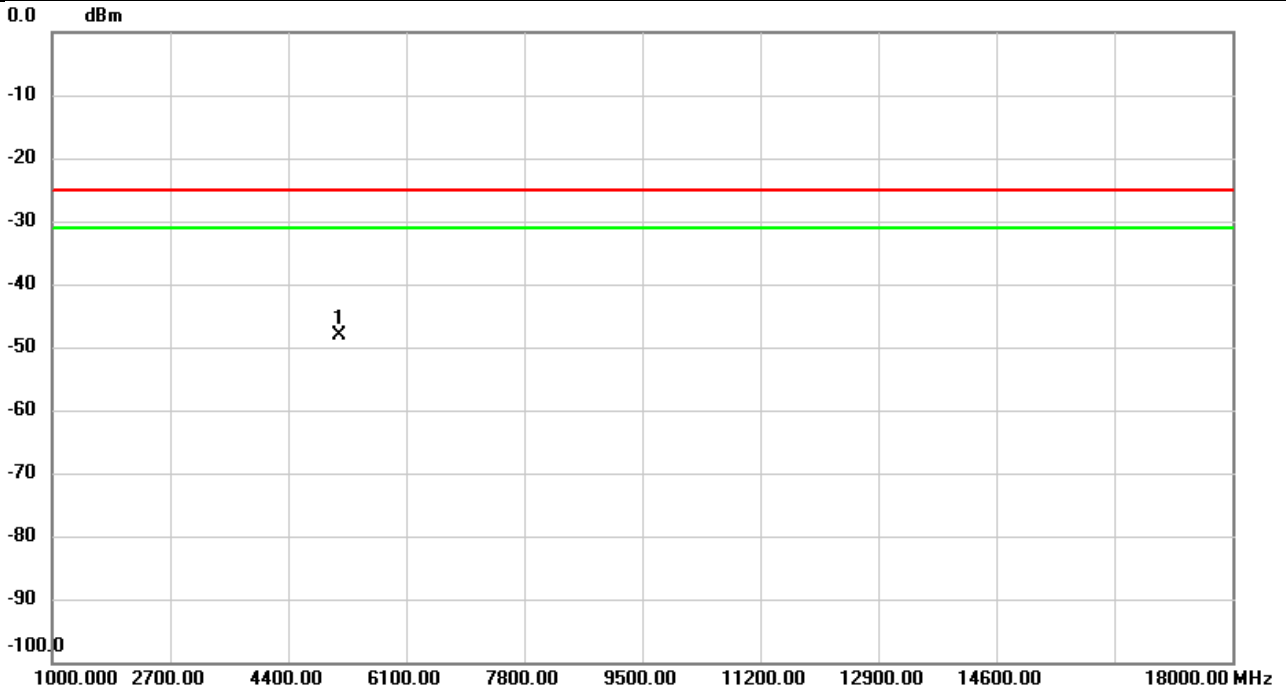


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-61.84	13.77	-48.07	-25.00	-23.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Horizontal
Temp	21°C	Hum.	58%

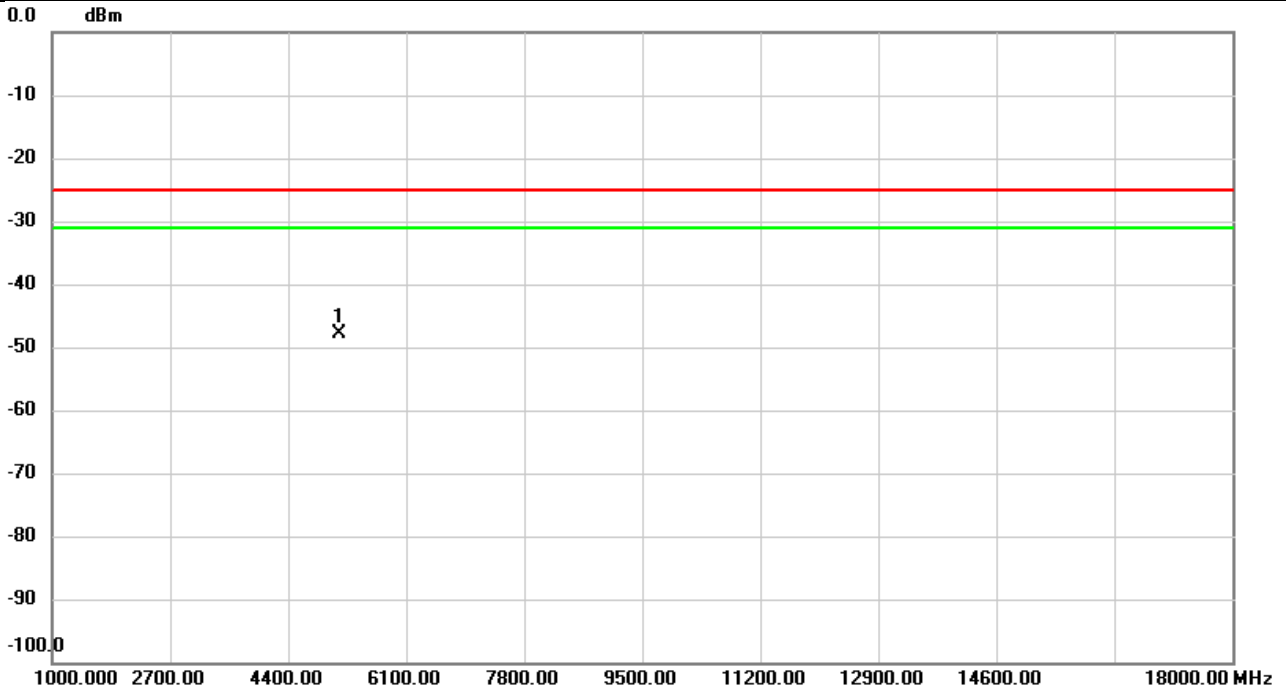


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-61.93	13.97	-47.96	-25.00	-22.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH519000	Polarization	Vertical
Temp	21°C	Hum.	58%

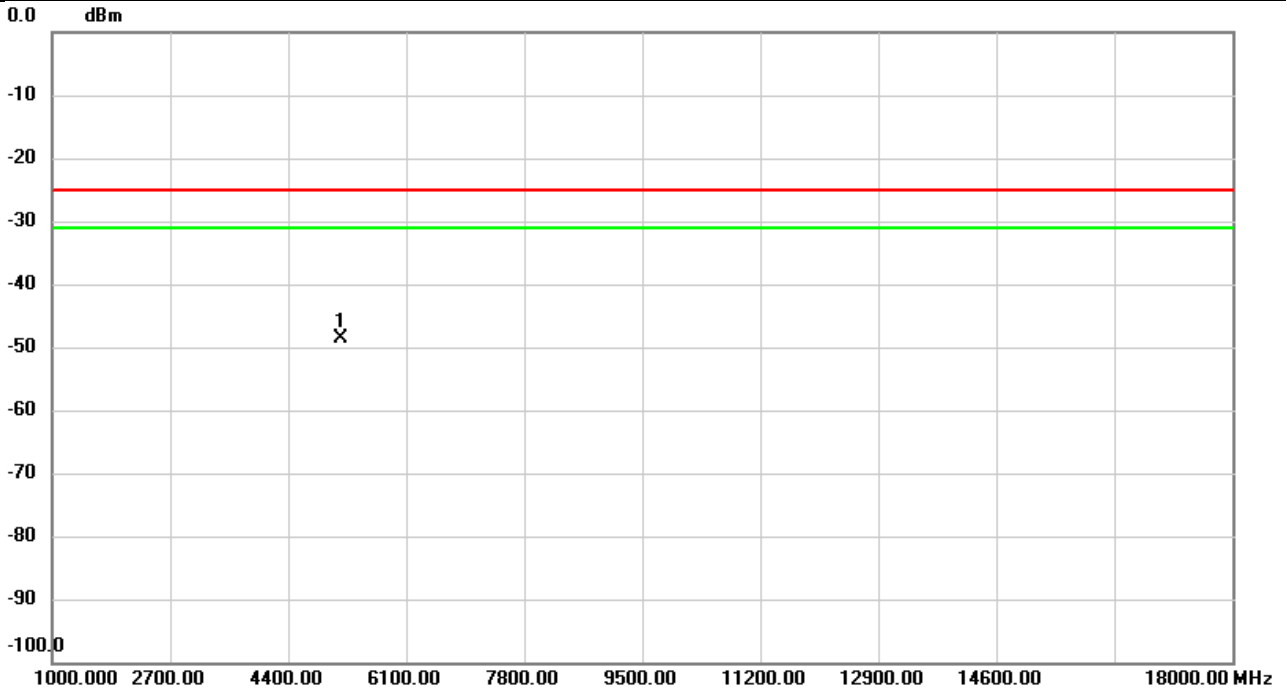


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-62.45	13.75	-48.70	-25.00	-23.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH519000	Polarization	Horizontal
Temp	21°C	Hum.	58%

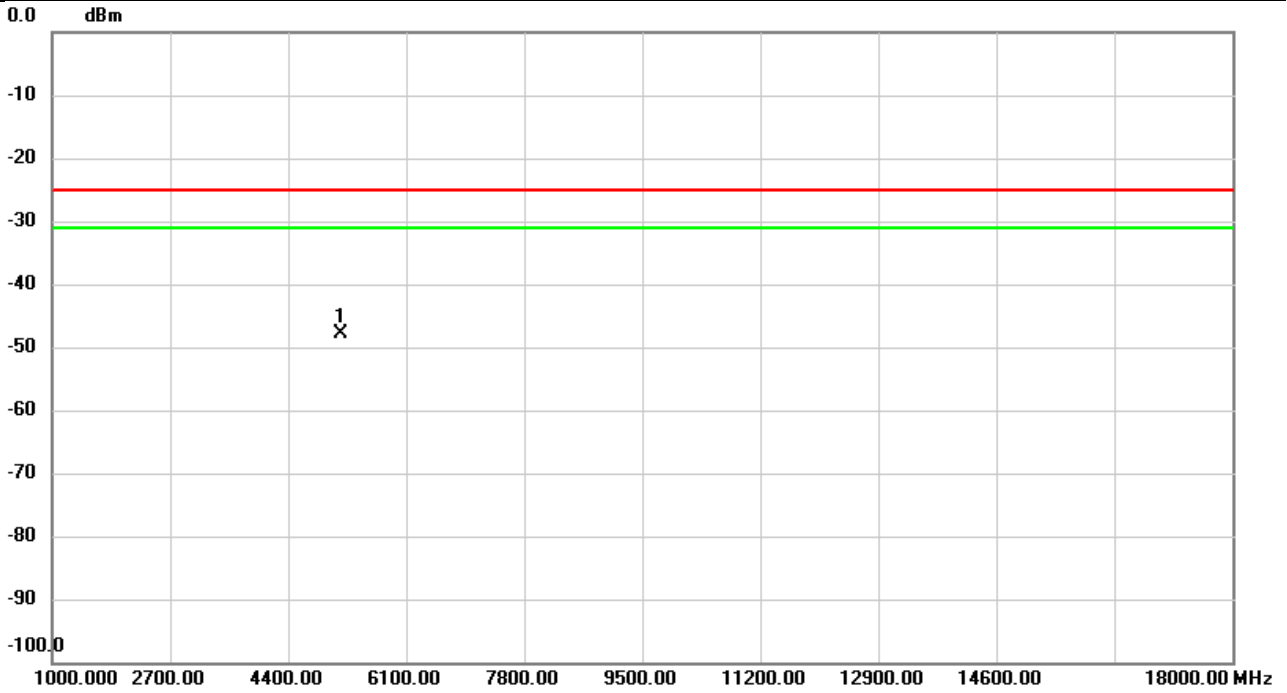


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-61.89	14.00	-47.89	-25.00	-22.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Vertical
Temp	21°C	Hum.	58%

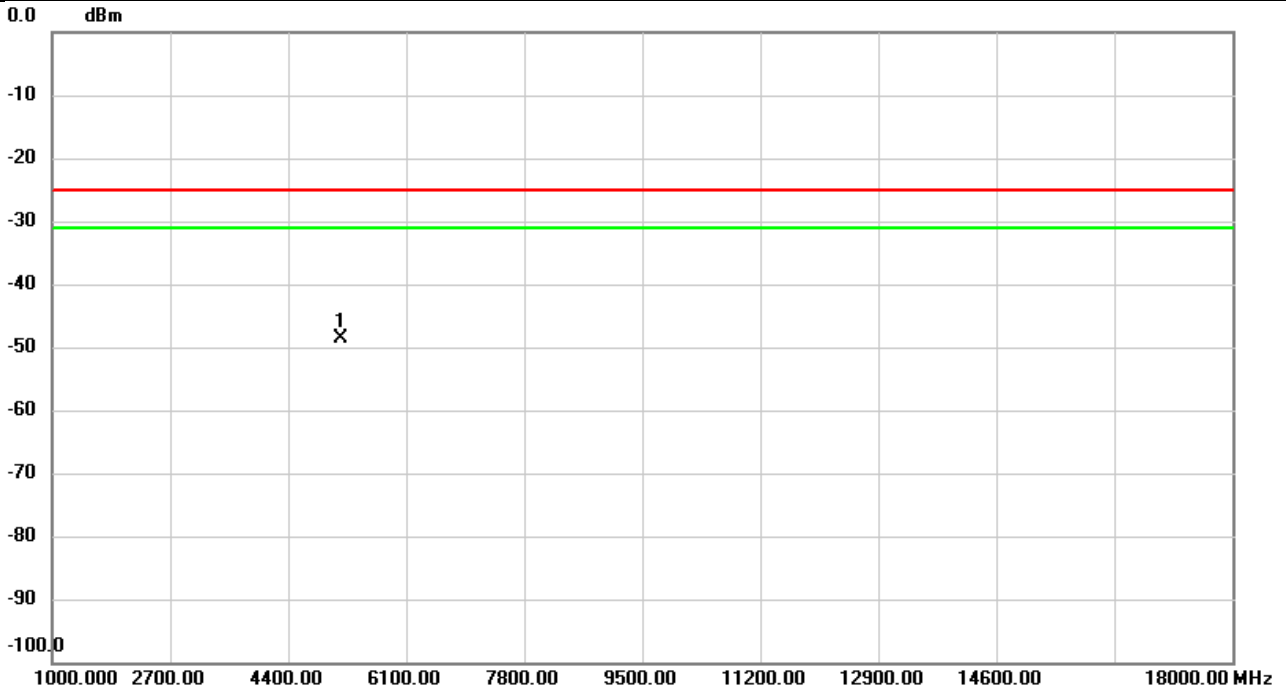


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-62.33	13.66	-48.67	-25.00	-23.67	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Horizontal
Temp	21°C	Hum.	58%

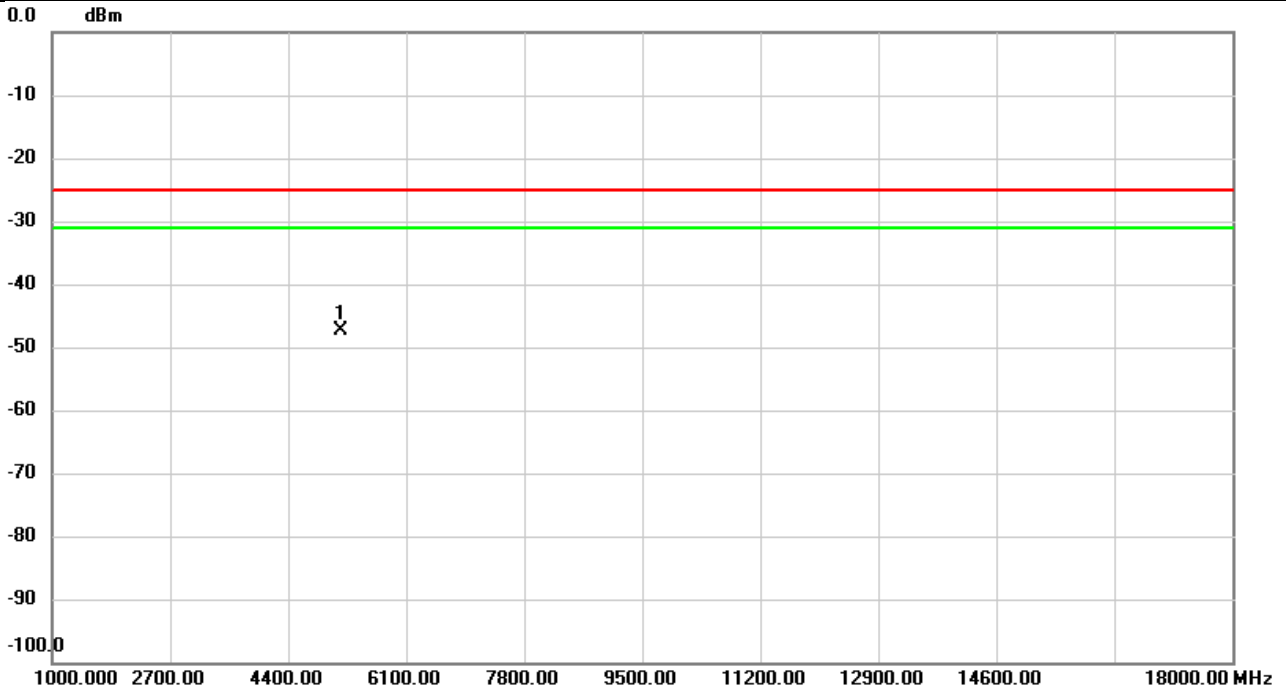


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-61.31	13.90	-47.41	-25.00	-22.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Vertical
Temp	21°C	Hum.	58%

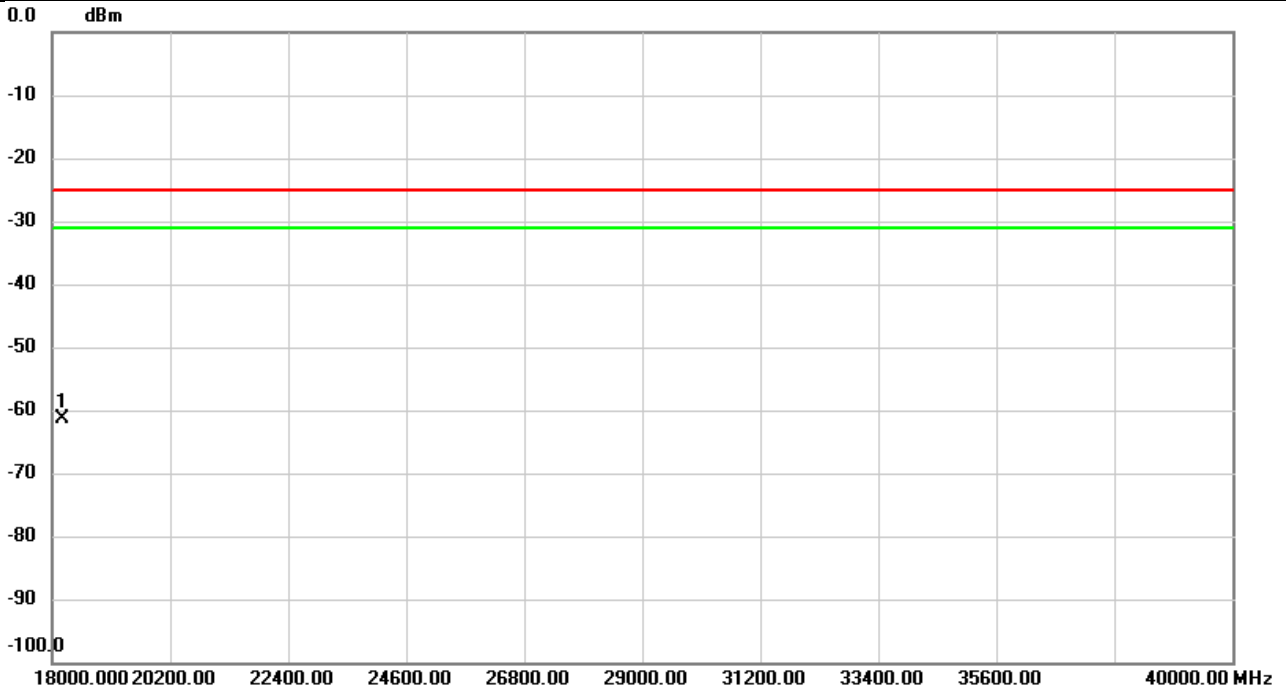


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18200.00	-54.91	-6.52	-61.43	-25.00	-36.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Horizontal
Temp	21°C	Hum.	58%

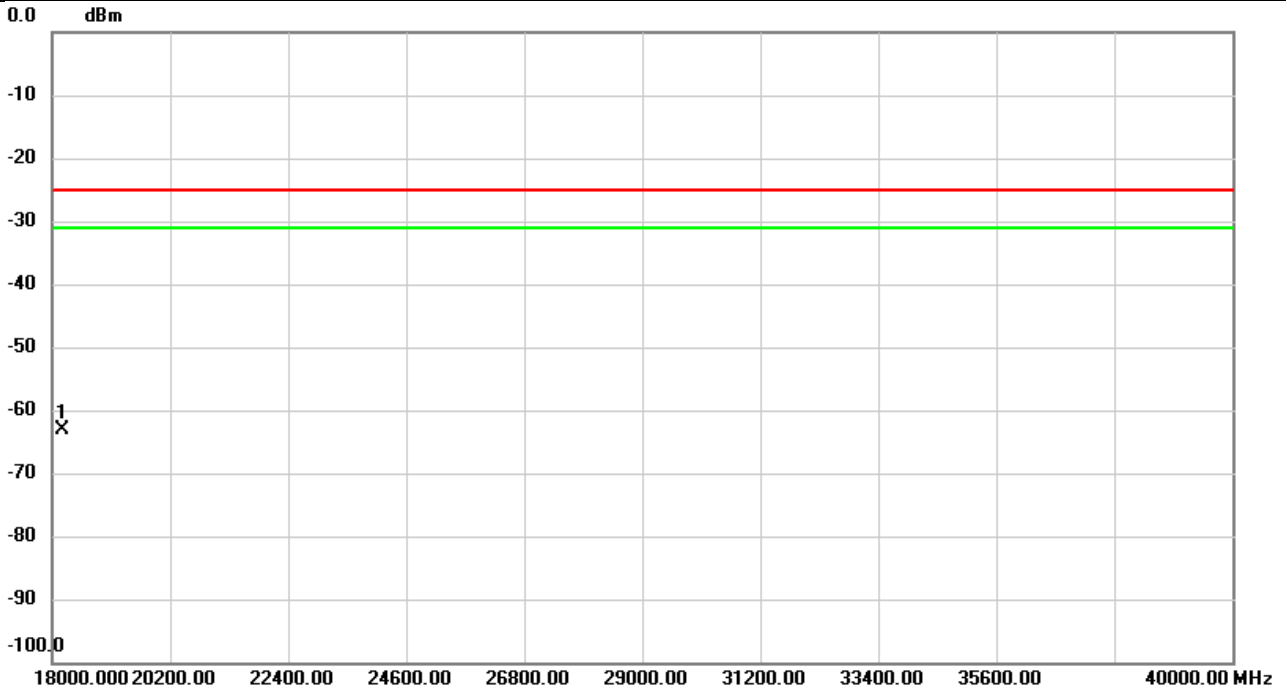


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18200.00	-56.62	-6.52	-63.14	-25.00	-38.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	58%

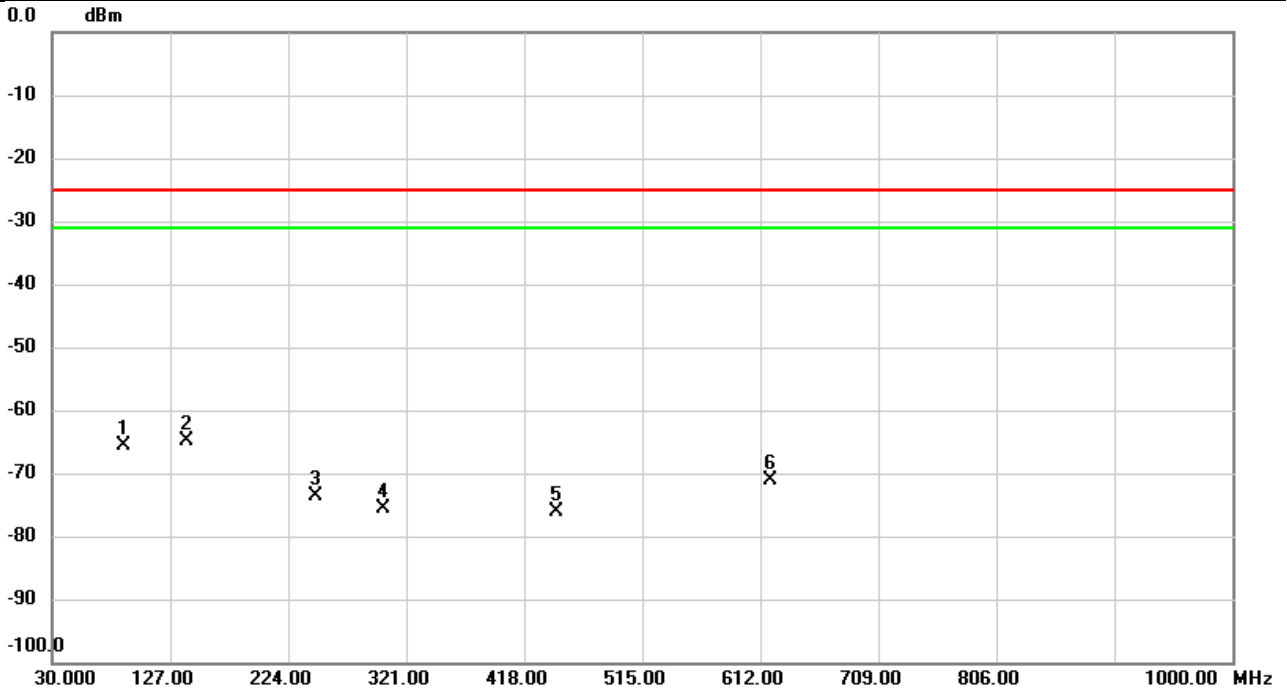


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.1700	-59.95	-5.61	-65.56	-25.00	-40.56	peak	
2	*	141.1620	-61.69	-3.22	-64.91	-25.00	-39.91	peak	
3		247.1507	-70.89	-2.79	-73.68	-25.00	-48.68	peak	
4		301.6647	-72.24	-3.28	-75.52	-25.00	-50.52	peak	
5		444.2223	-74.62	-1.48	-76.10	-25.00	-51.10	peak	
6		619.7600	-74.26	3.20	-71.06	-25.00	-46.06	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	58%

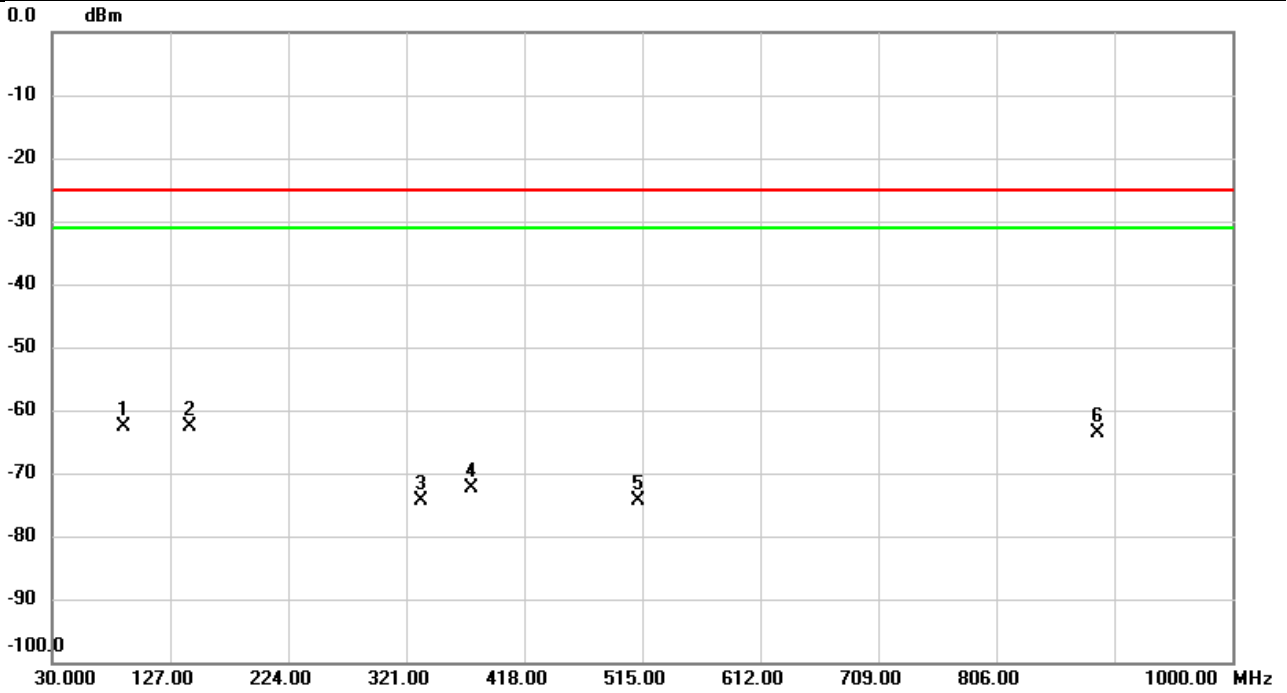


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.2347	-54.20	-8.31	-62.51	-25.00	-37.51	peak	
2		143.5870	-57.11	-5.60	-62.71	-25.00	-37.71	peak	
3		333.2543	-70.64	-3.80	-74.44	-25.00	-49.44	peak	
4		374.0590	-69.75	-2.54	-72.29	-25.00	-47.29	peak	
5		512.3810	-73.14	-1.34	-74.48	-25.00	-49.48	peak	
6		889.9050	-68.25	4.61	-63.64	-25.00	-38.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	58%

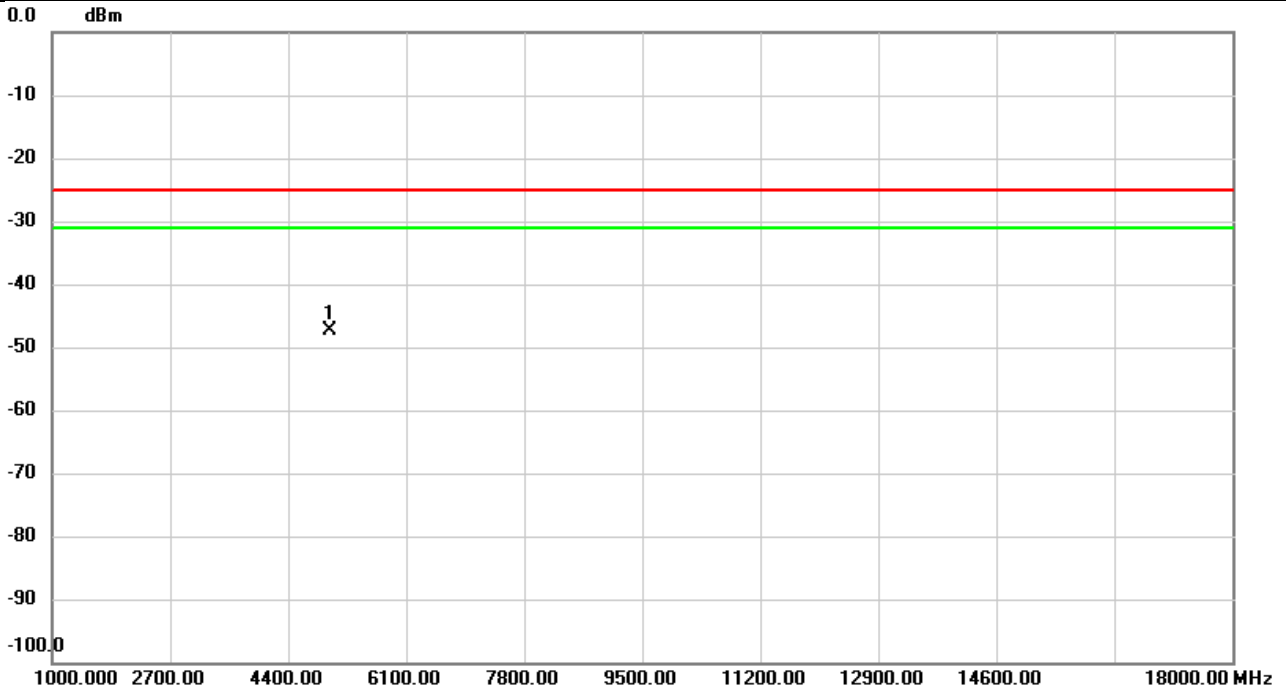


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-60.69	13.43	-47.26	-25.00	-22.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	58%

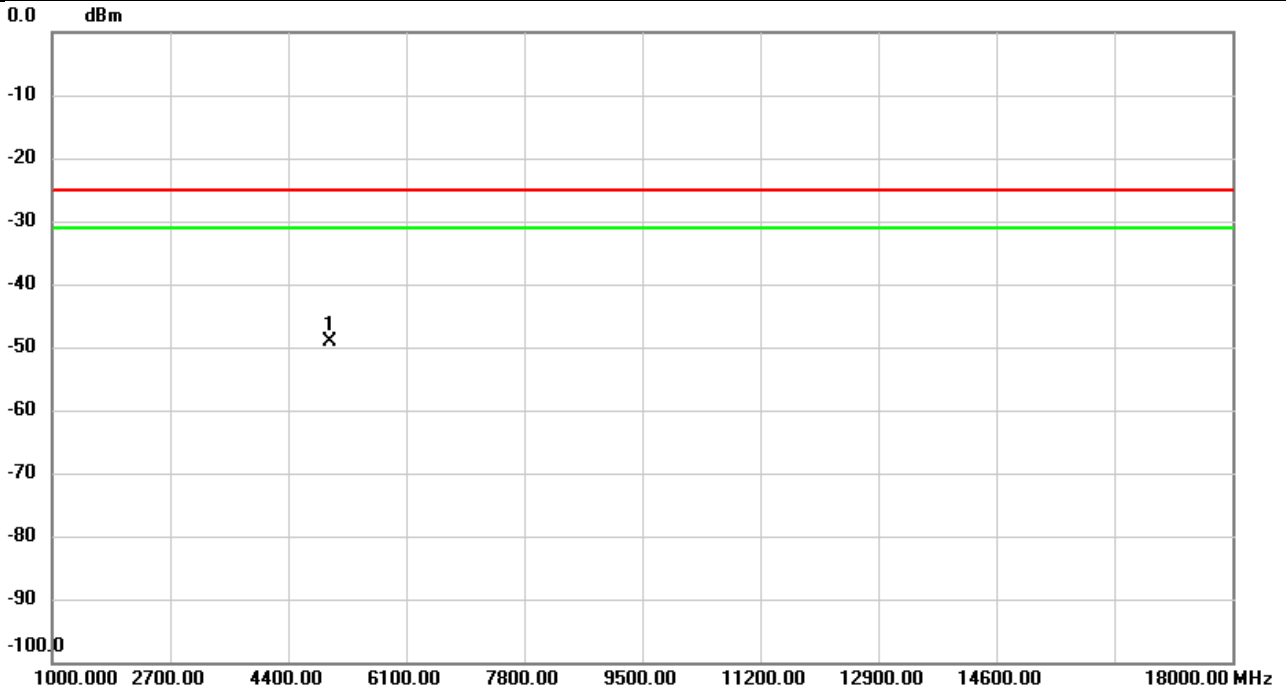


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-62.63	13.39	-49.24	-25.00	-24.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH518598	Polarization	Vertical
Temp	21°C	Hum.	58%

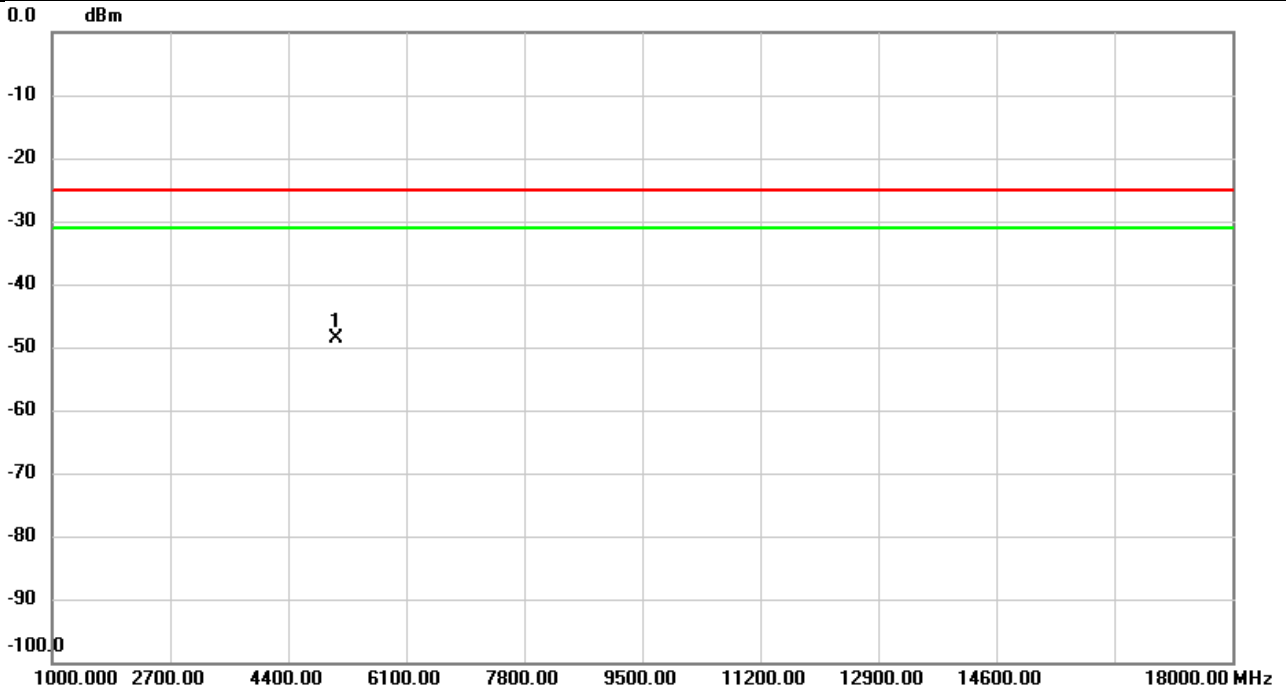


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.54	13.93	-48.61	-25.00	-23.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH518598	Polarization	Horizontal
Temp	21°C	Hum.	58%

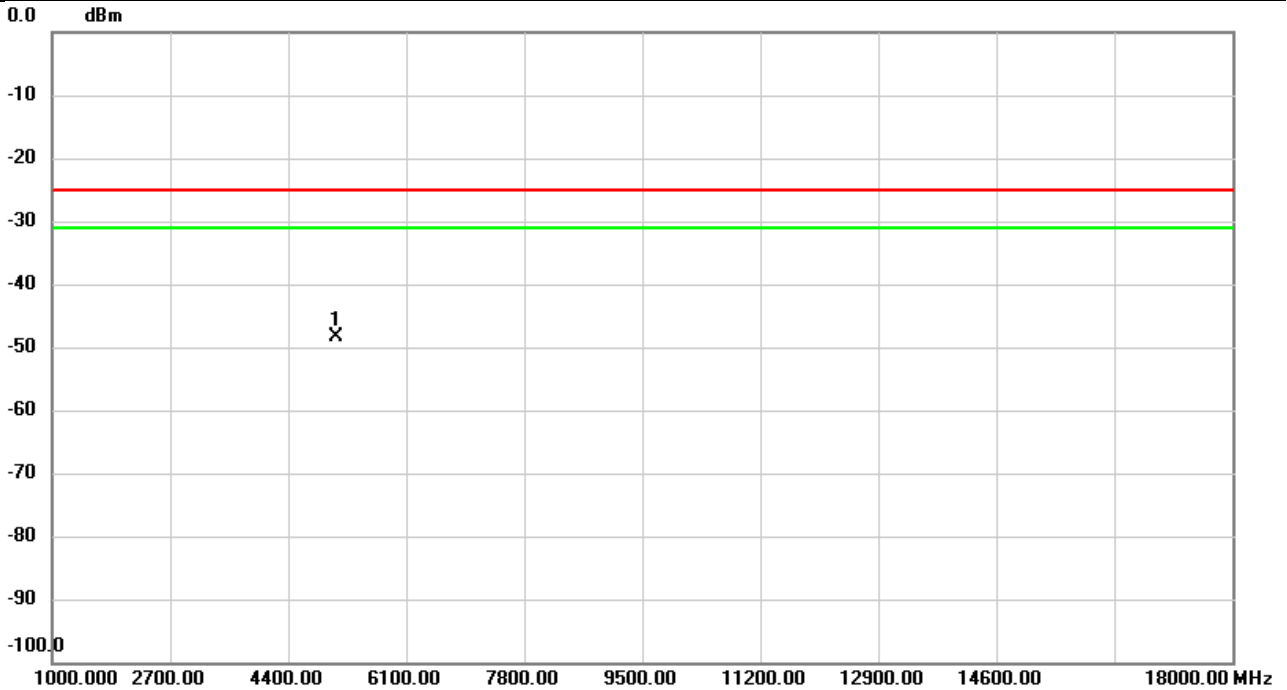


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.20	13.95	-48.25	-25.00	-23.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	58%

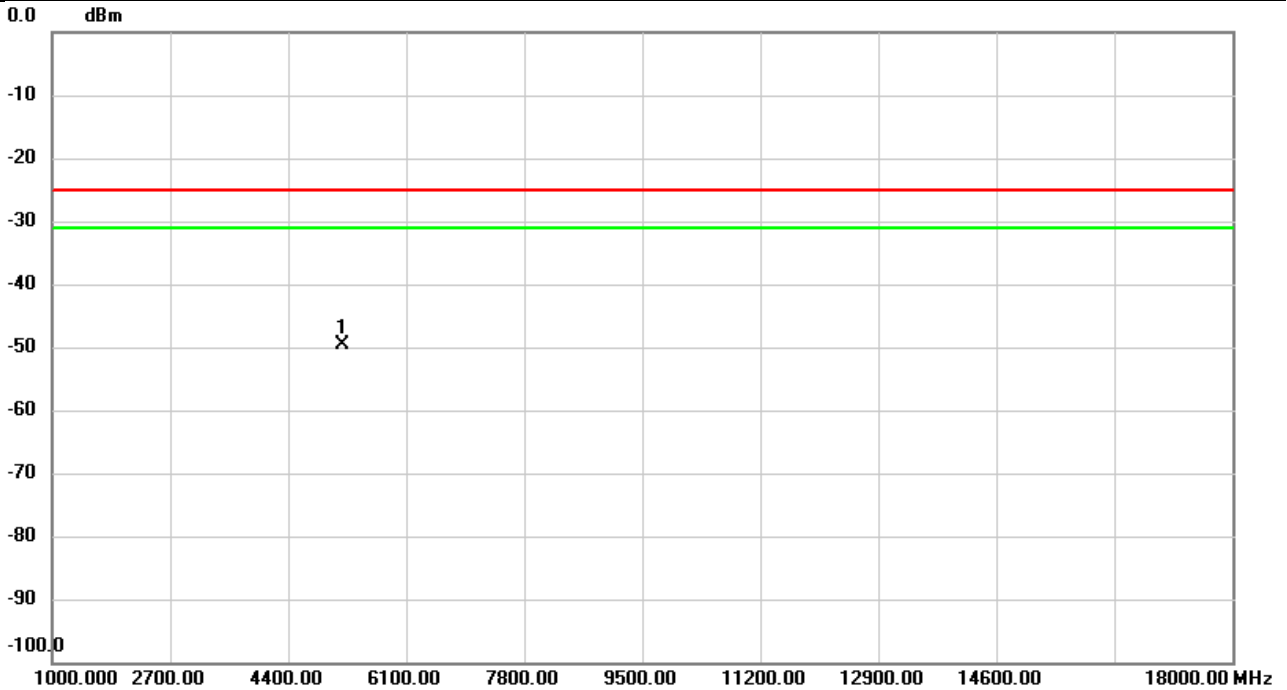


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-63.14	13.49	-49.65	-25.00	-24.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	58%

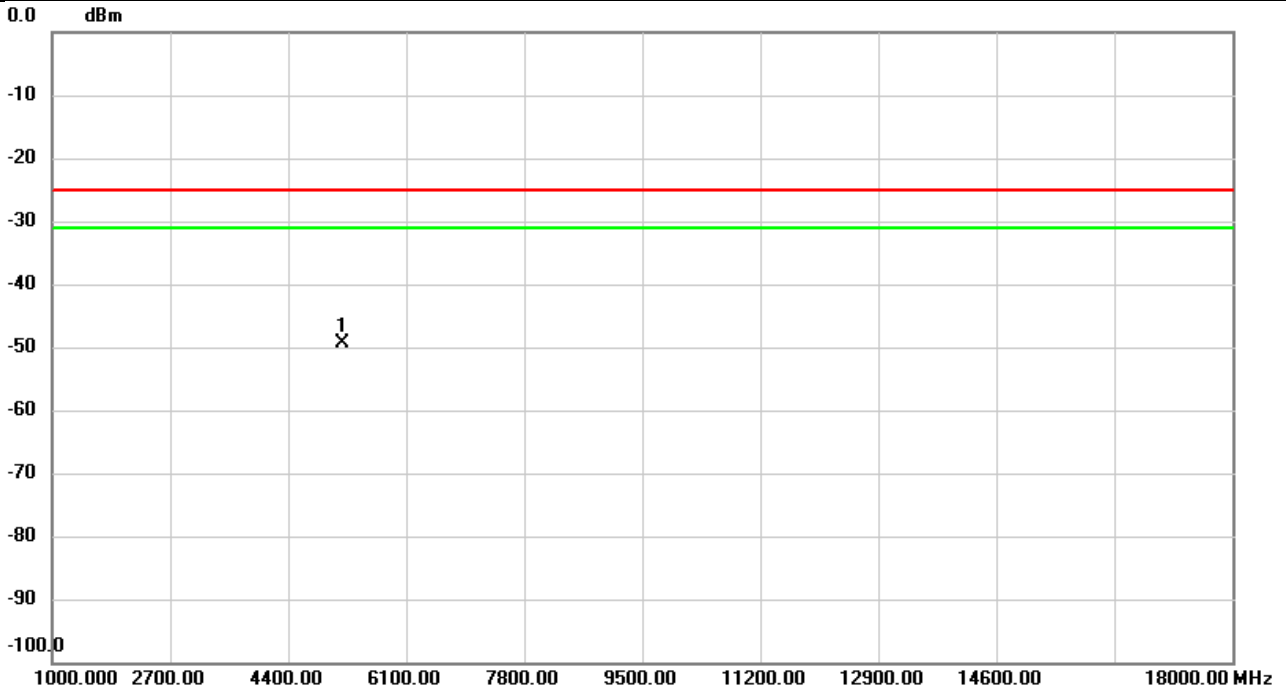


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-63.01	13.69	-49.32	-25.00	-24.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	58%

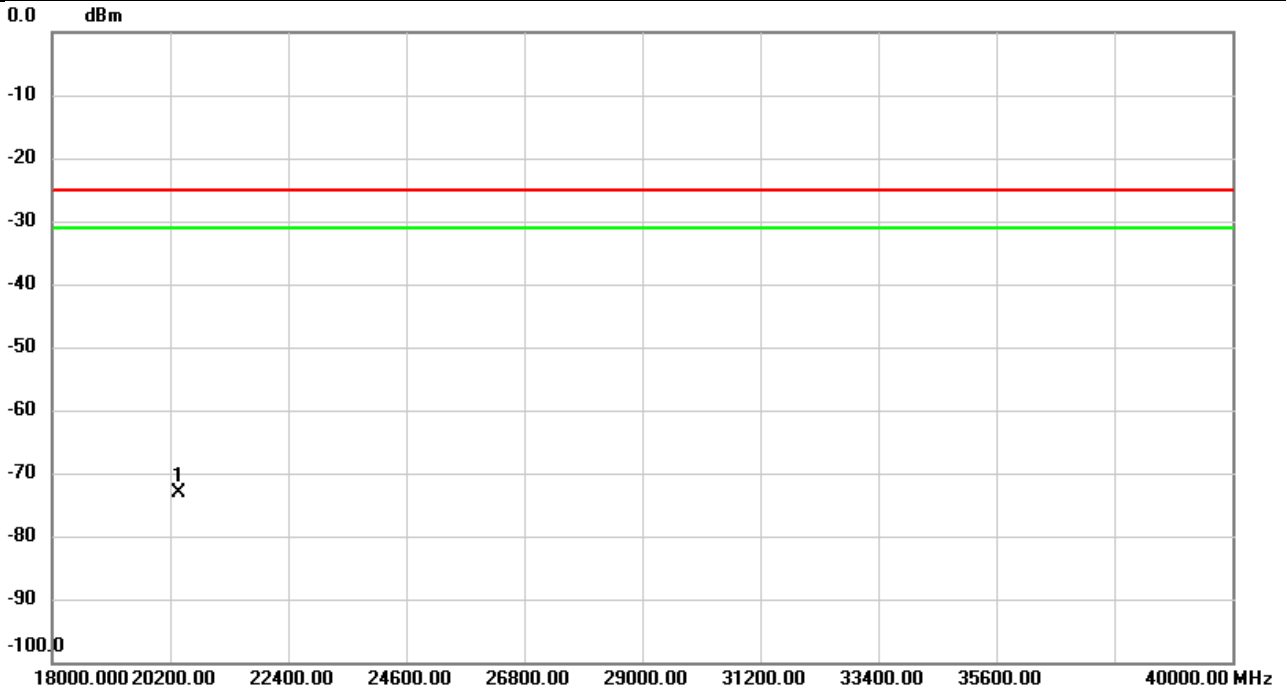


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20368.00	-66.00	-7.01	-73.01	-25.00	-48.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	58%

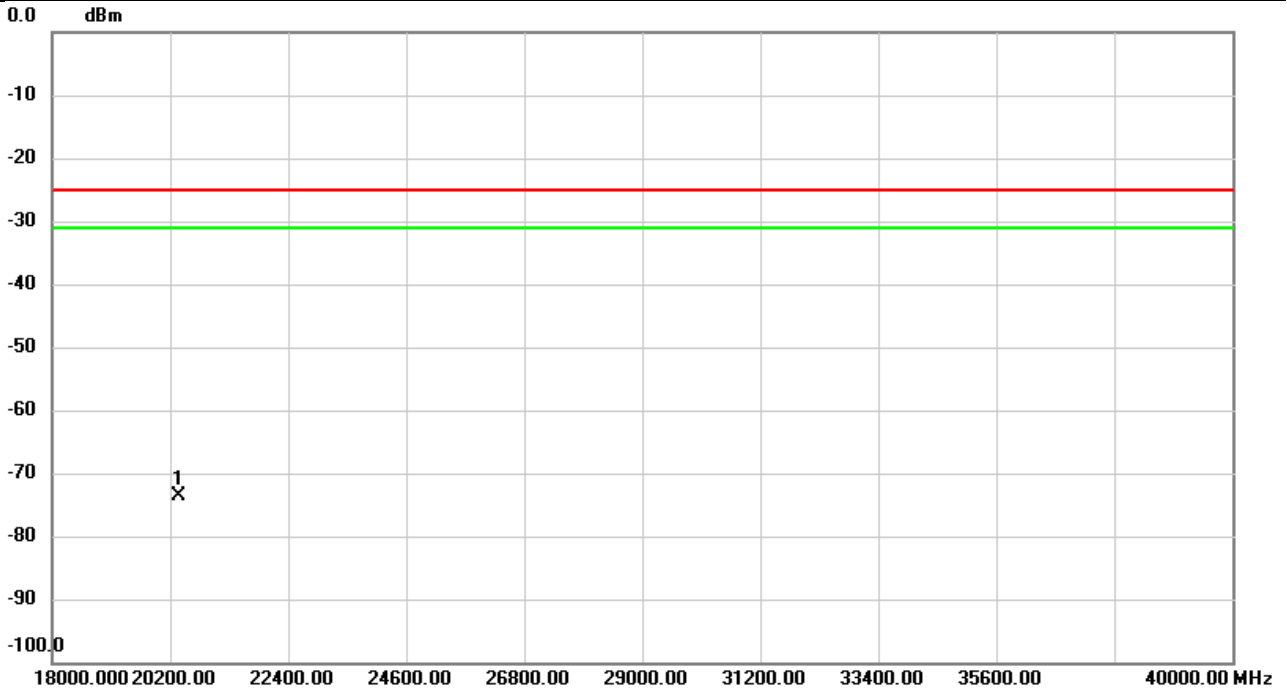


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20368.00	-66.67	-7.01	-73.68	-25.00	-48.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

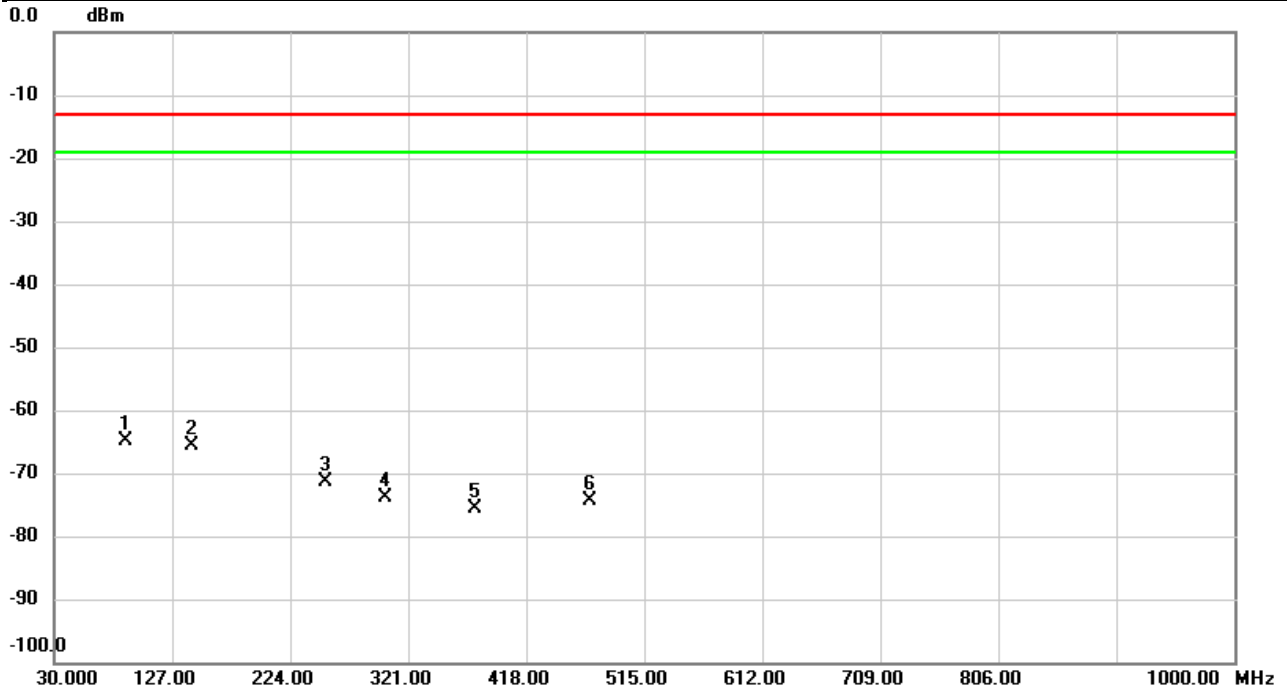


No.	Mk.	Freq. (MHz)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	Limit (dBm)	Over (dB)	Detector	Comment
1	*	89.0730	-59.23	-5.62	-64.85	-13.00	-51.85	peak	
2		143.6193	-62.58	-3.09	-65.67	-13.00	-52.67	peak	
3		252.8413	-68.47	-2.99	-71.46	-13.00	-58.46	peak	
4		301.8263	-70.67	-3.28	-73.95	-13.00	-60.95	peak	
5		376.2253	-73.21	-2.51	-75.72	-13.00	-62.72	peak	
6		469.9920	-73.46	-0.83	-74.29	-13.00	-61.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

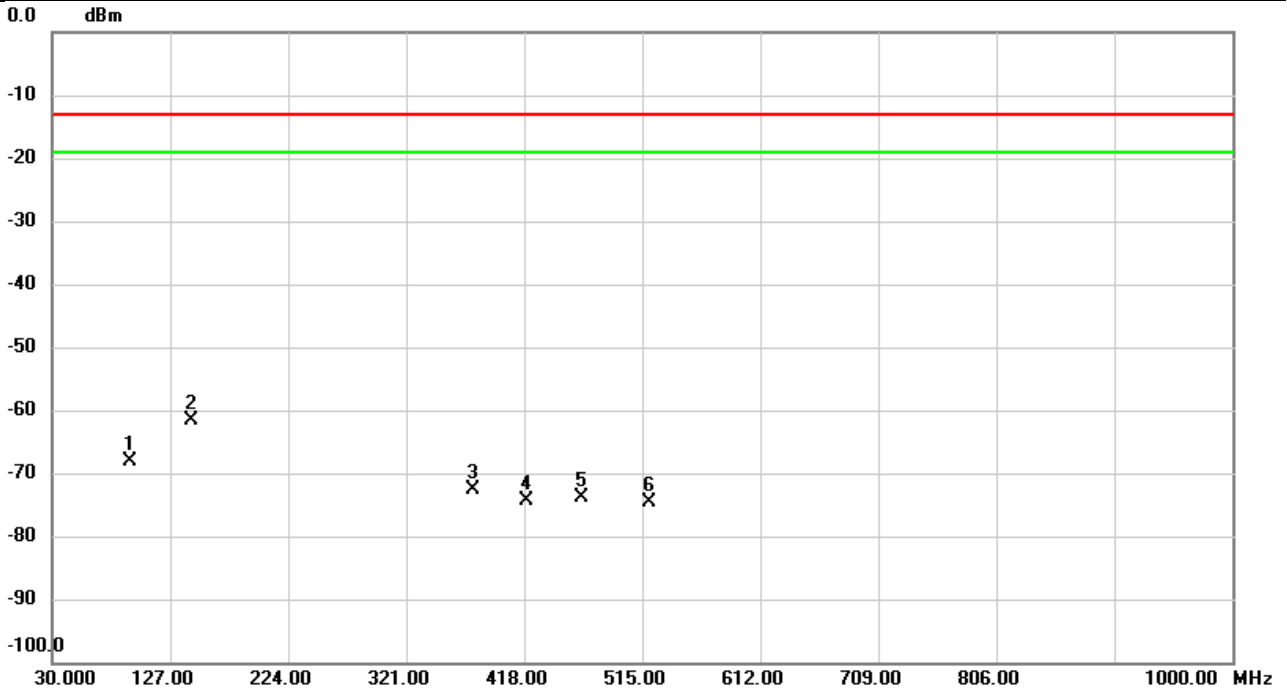


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		93.4380	-59.98	-8.16	-68.14	-13.00	-55.14	peak	
2	*	144.6217	-56.10	-5.60	-61.70	-13.00	-48.70	peak	
3		375.3523	-70.12	-2.53	-72.65	-13.00	-59.65	peak	
4		419.5520	-72.19	-2.27	-74.46	-13.00	-61.46	peak	
5		464.9803	-72.06	-1.88	-73.94	-13.00	-60.94	peak	
6		521.2727	-73.39	-1.18	-74.57	-13.00	-61.57	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

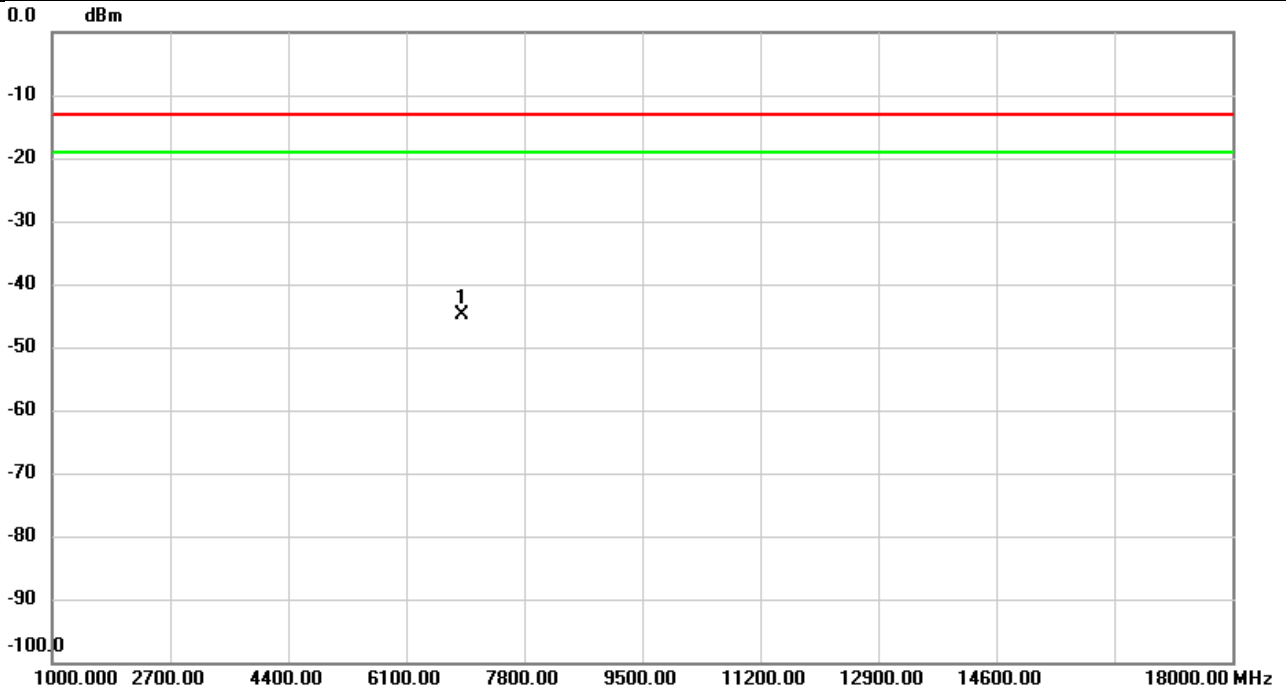


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.97	18.00	-44.97	-13.00	-31.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

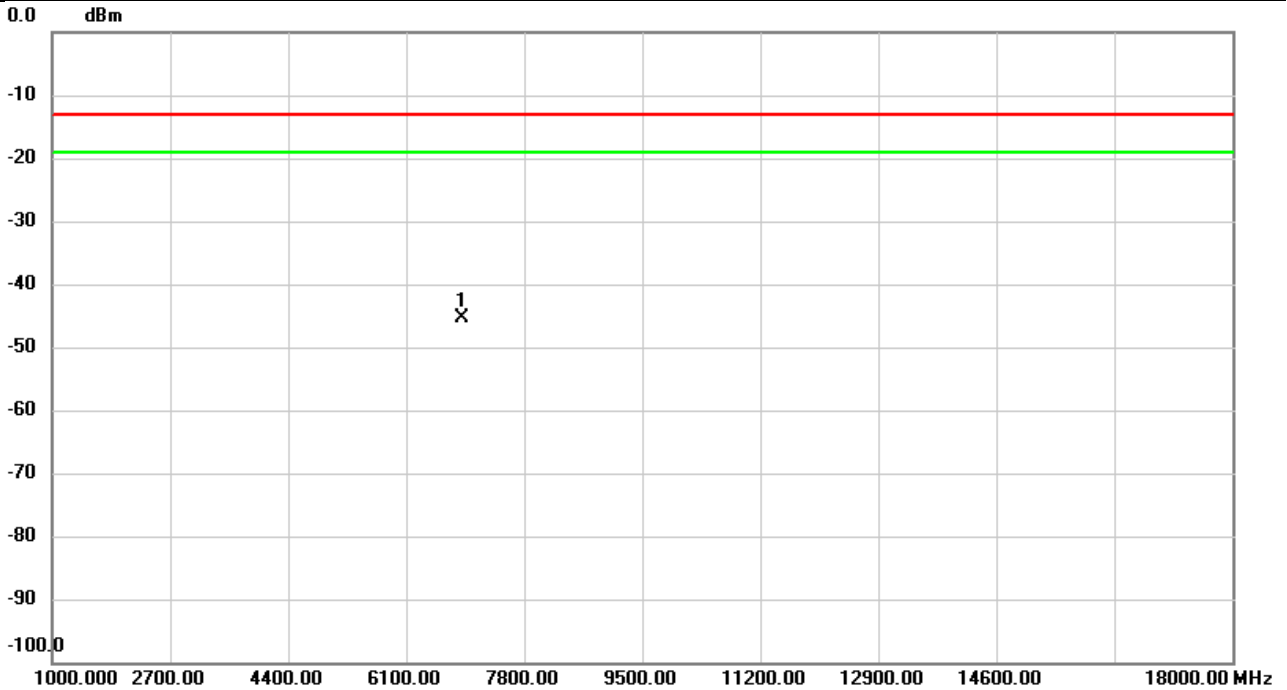


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.01	17.74	-45.27	-13.00	-32.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

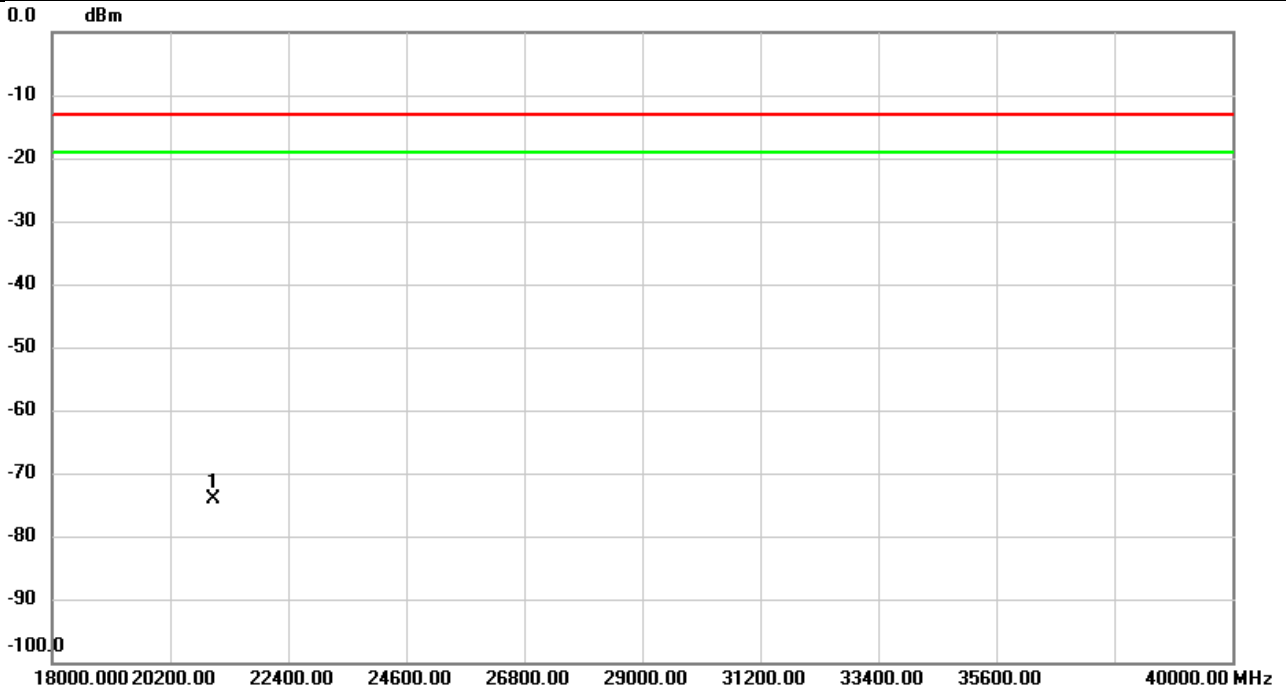


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-67.91	-6.27	-74.18	-13.00	-61.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

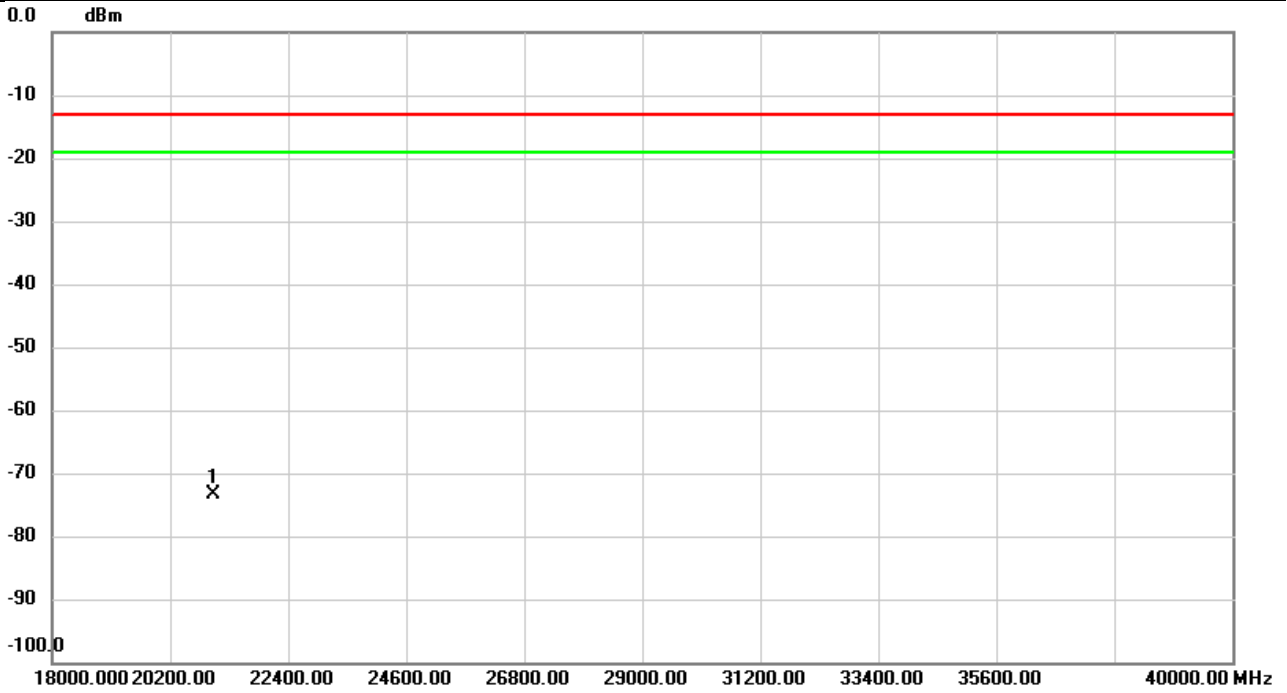

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-67.22	-6.27	-73.49	-13.00	-60.49	peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

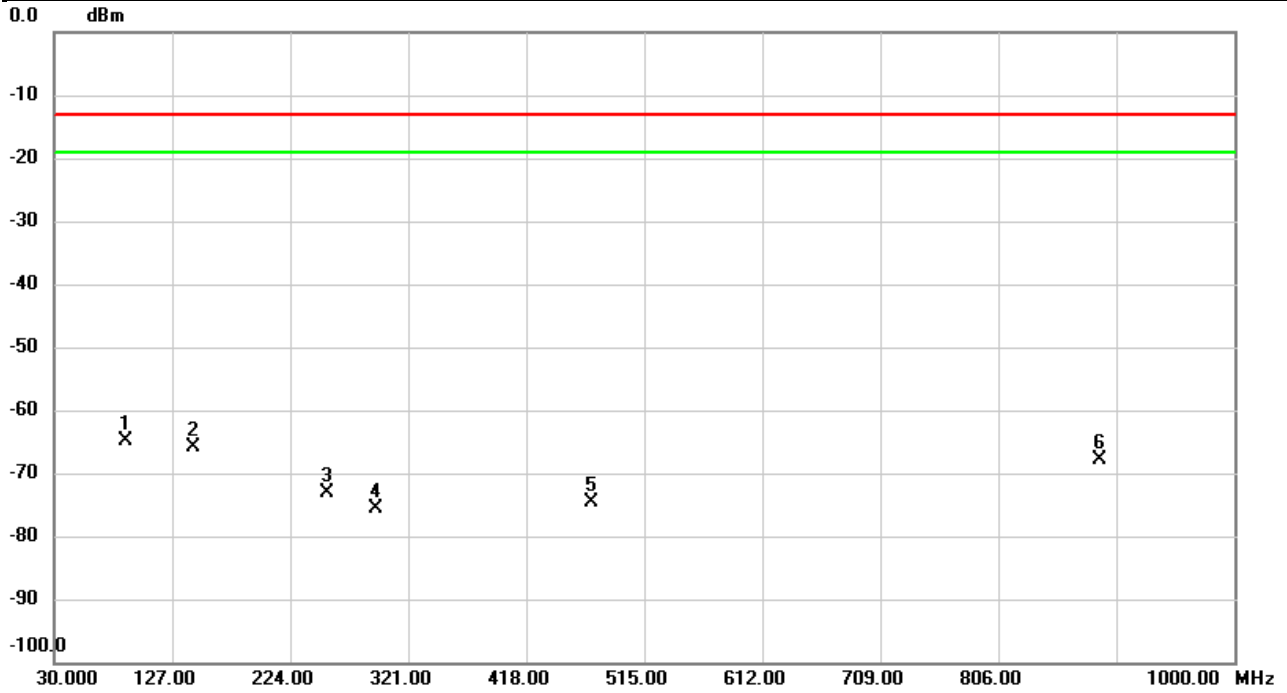


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.0407	-59.30	-5.62	-64.92	-13.00	-51.92	peak	
2		144.2660	-62.73	-3.06	-65.79	-13.00	-52.79	peak	
3		254.4903	-70.06	-3.00	-73.06	-13.00	-60.06	peak	
4		293.9693	-72.41	-3.26	-75.67	-13.00	-62.67	peak	
5		471.6410	-73.85	-0.79	-74.64	-13.00	-61.64	peak	
6		889.7433	-74.27	6.39	-67.88	-13.00	-54.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

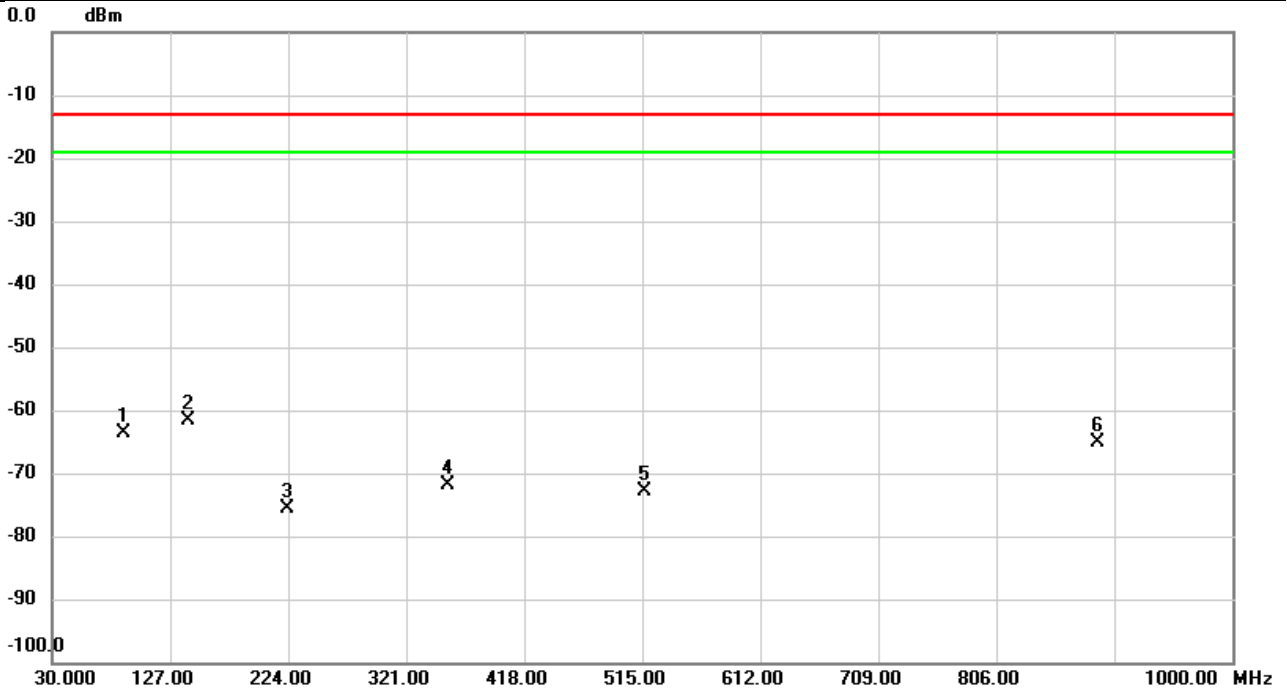


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.2670	-55.26	-8.31	-63.57	-13.00	-50.57	peak	
2	*	141.5176	-56.01	-5.59	-61.60	-13.00	-48.60	peak	
3		223.4180	-67.07	-8.67	-75.74	-13.00	-62.74	peak	
4		355.3057	-69.34	-2.62	-71.96	-13.00	-58.96	peak	
5		517.5543	-71.60	-1.25	-72.85	-13.00	-59.85	peak	
6		889.6787	-69.74	4.61	-65.13	-13.00	-52.13	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

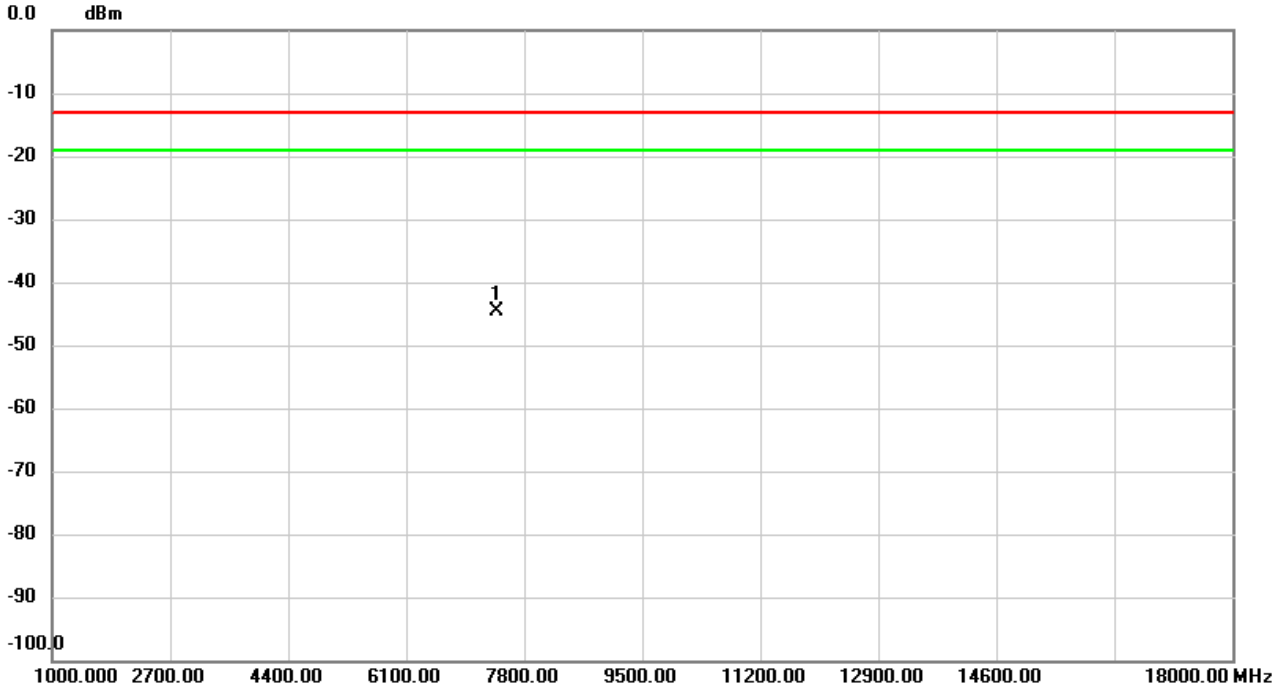


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.78	18.12	-44.66	-13.00	-31.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

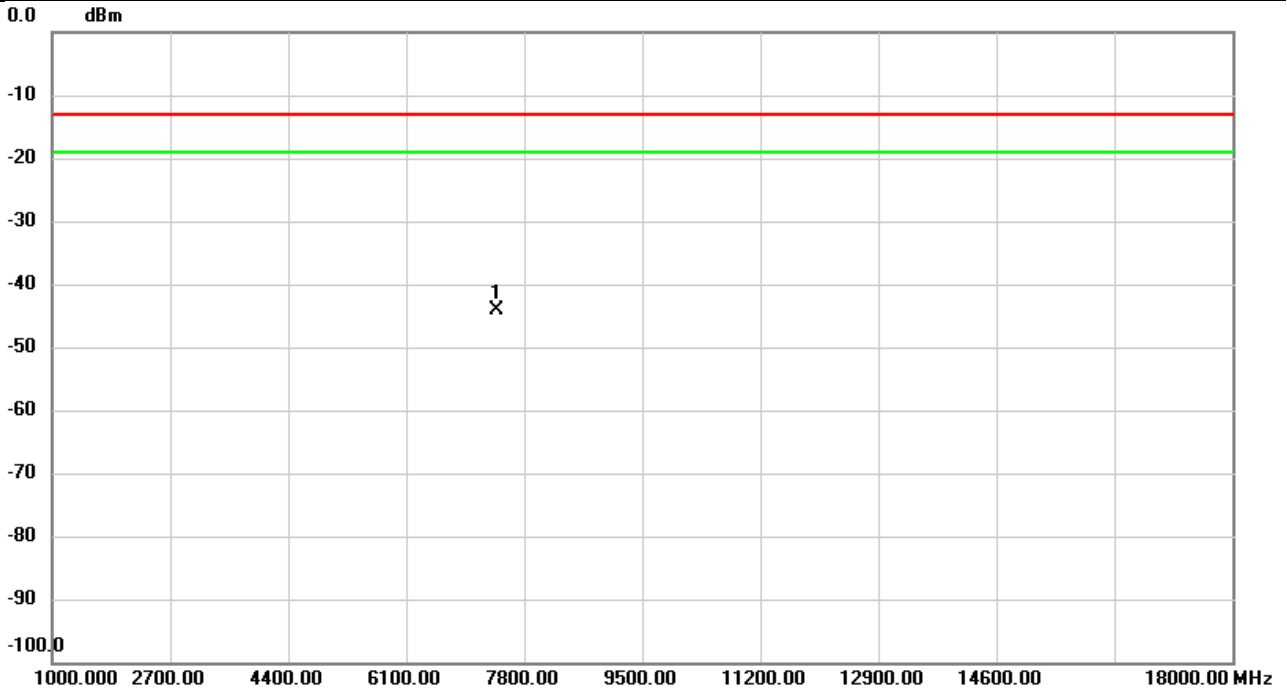


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.24	18.07	-44.17	-13.00	-31.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH656000	Polarization	Vertical
Temp	21°C	Hum.	58%

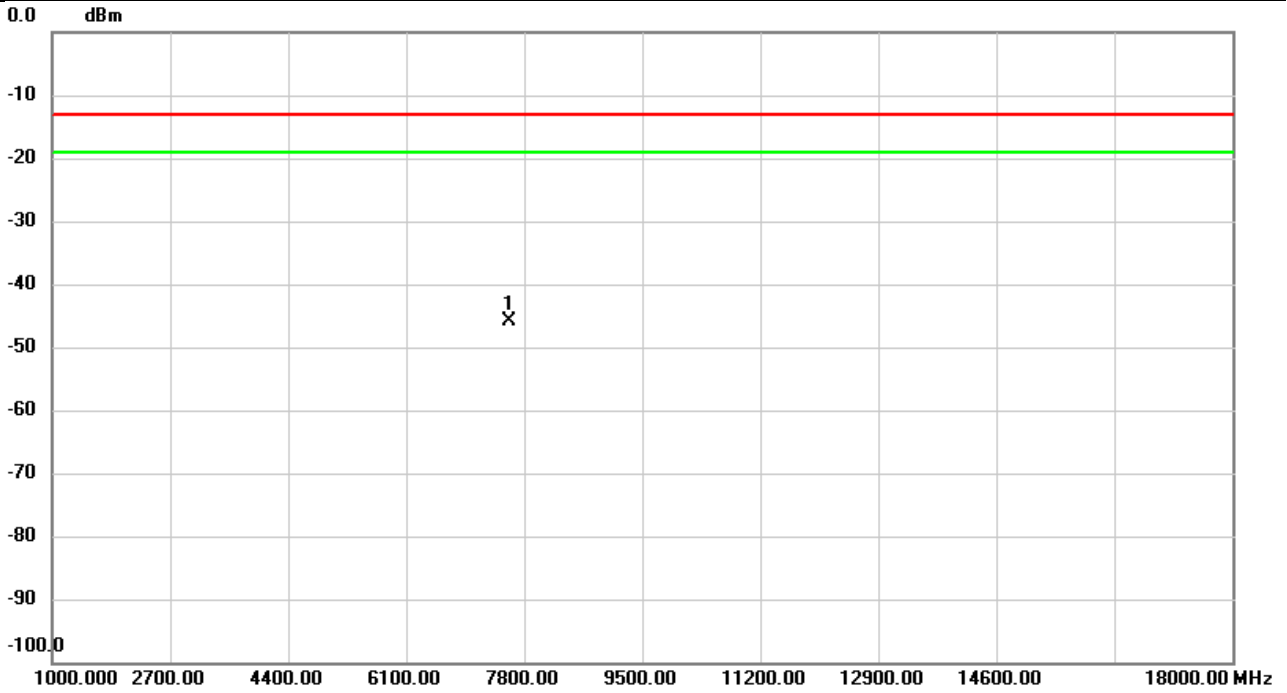


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-63.21	17.29	-45.92	-13.00	-32.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH656000	Polarization	Horizontal
Temp	21°C	Hum.	58%

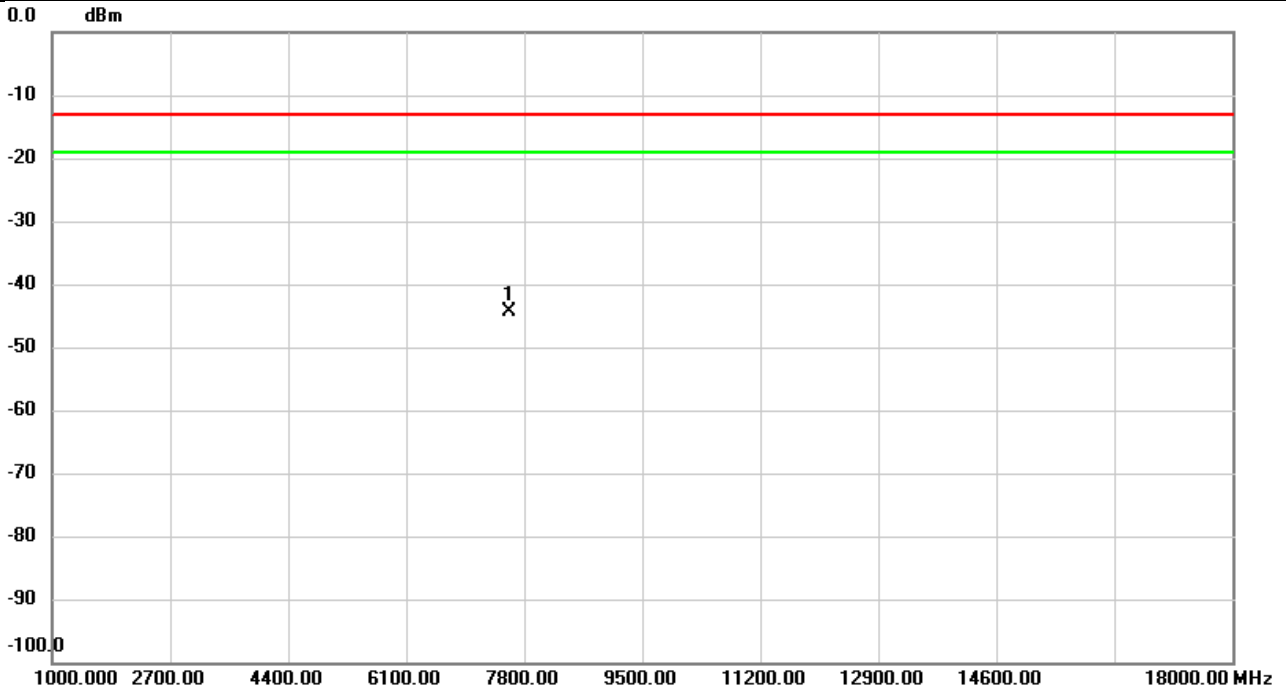


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-61.69	17.22	-44.47	-13.00	-31.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH662000	Polarization	Vertical
Temp	21°C	Hum.	58%

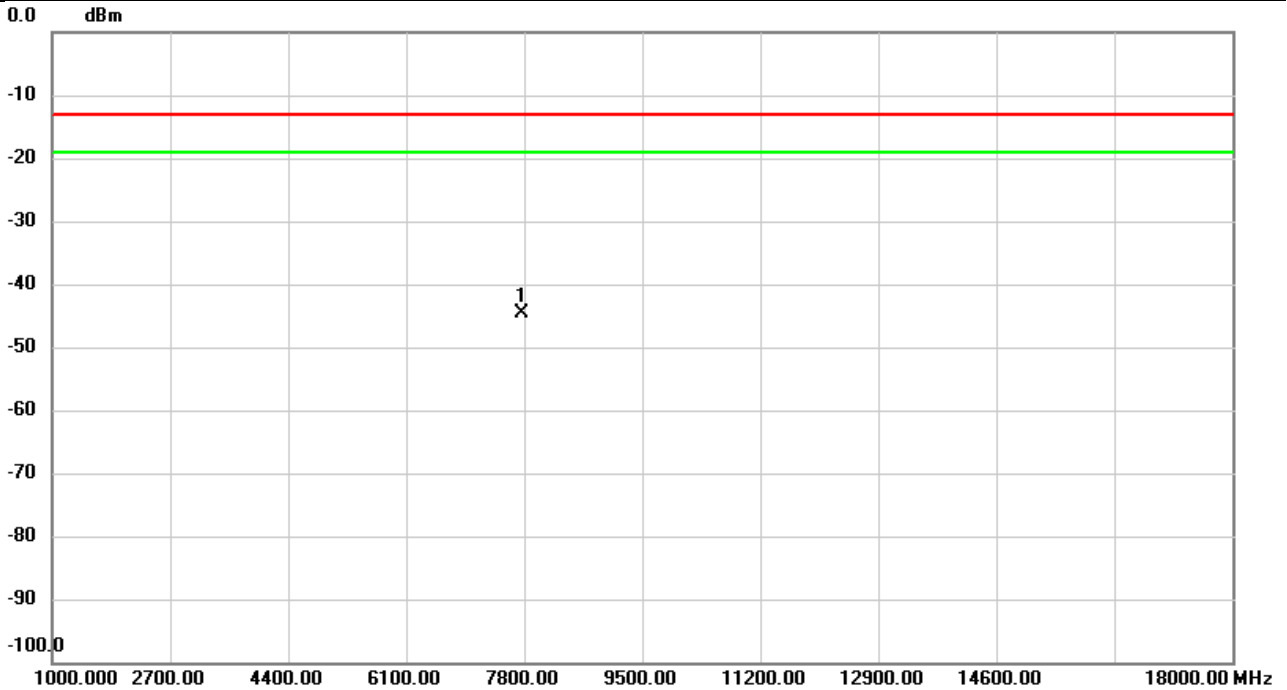


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-62.03	17.41	-44.62	-13.00	-31.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH662000	Polarization	Horizontal
Temp	21°C	Hum.	58%

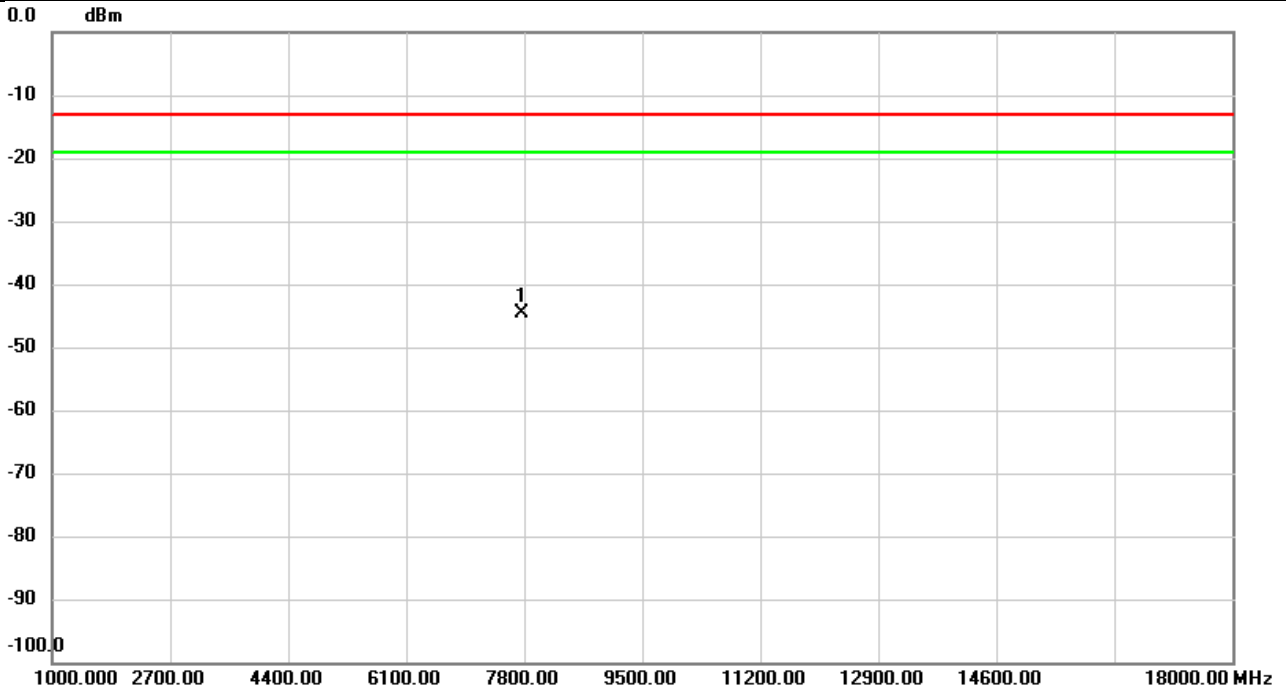


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-62.06	17.37	-44.69	-13.00	-31.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

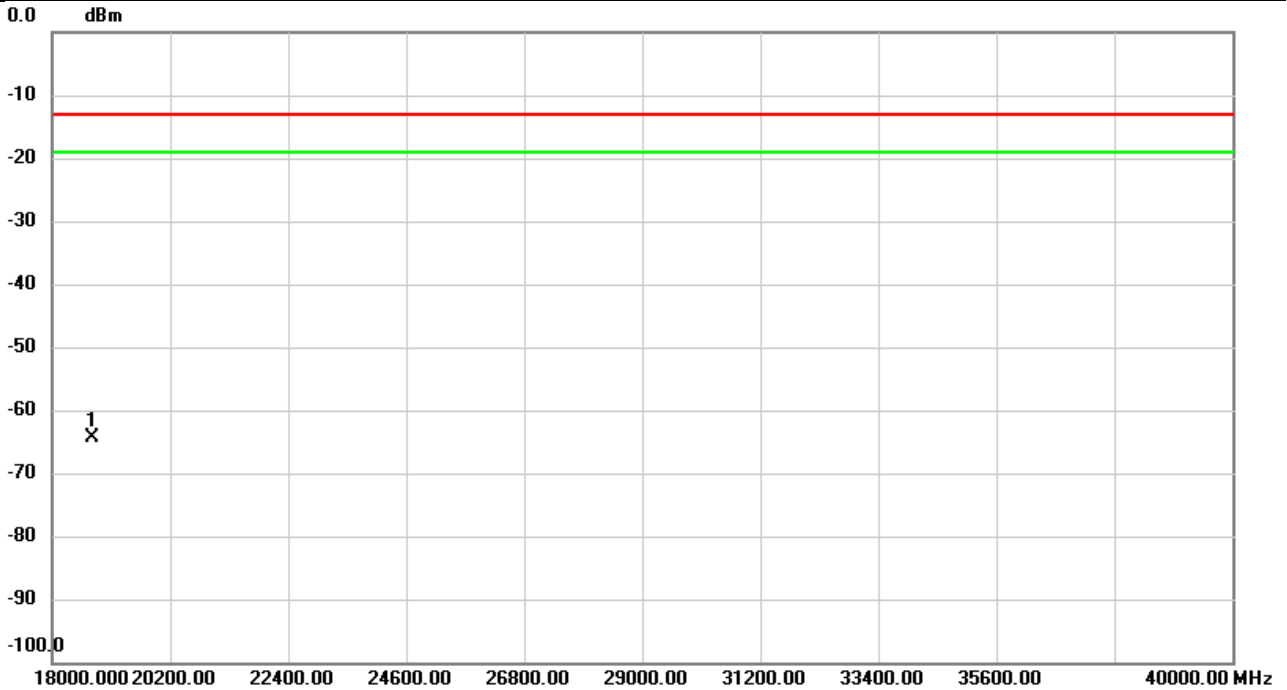


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-58.12	-6.32	-64.44	-13.00	-51.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

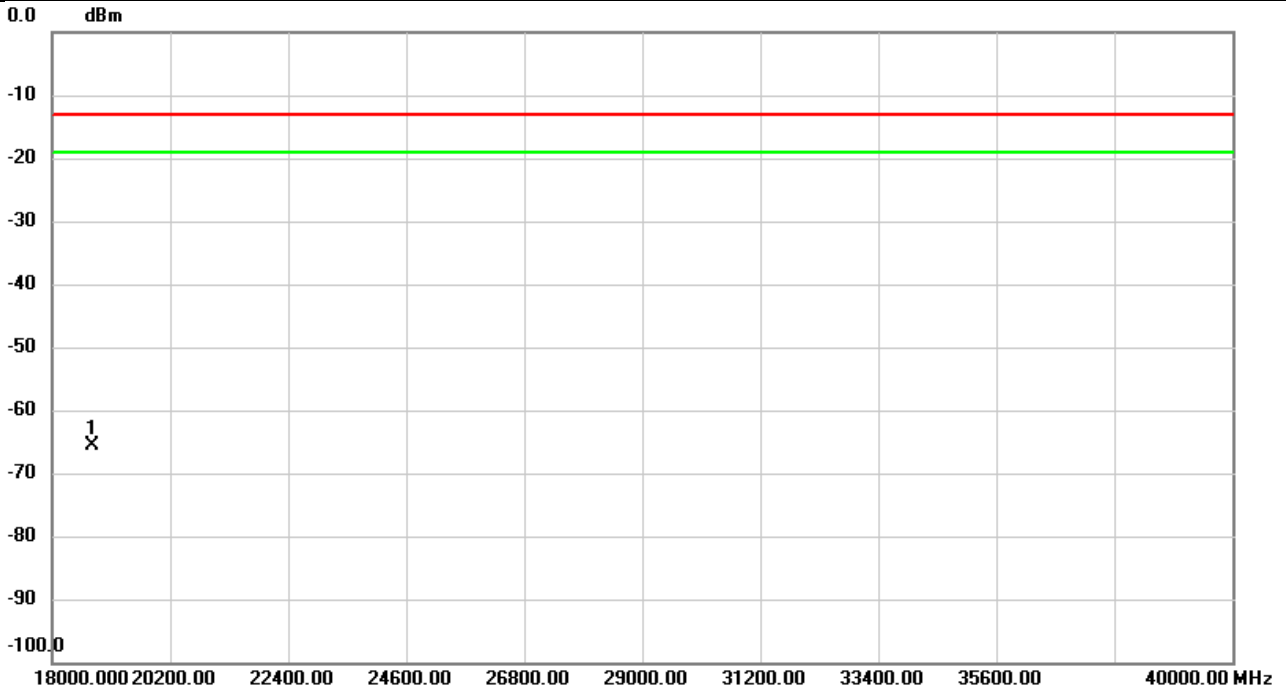


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.31	-6.32	-65.63	-13.00	-52.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

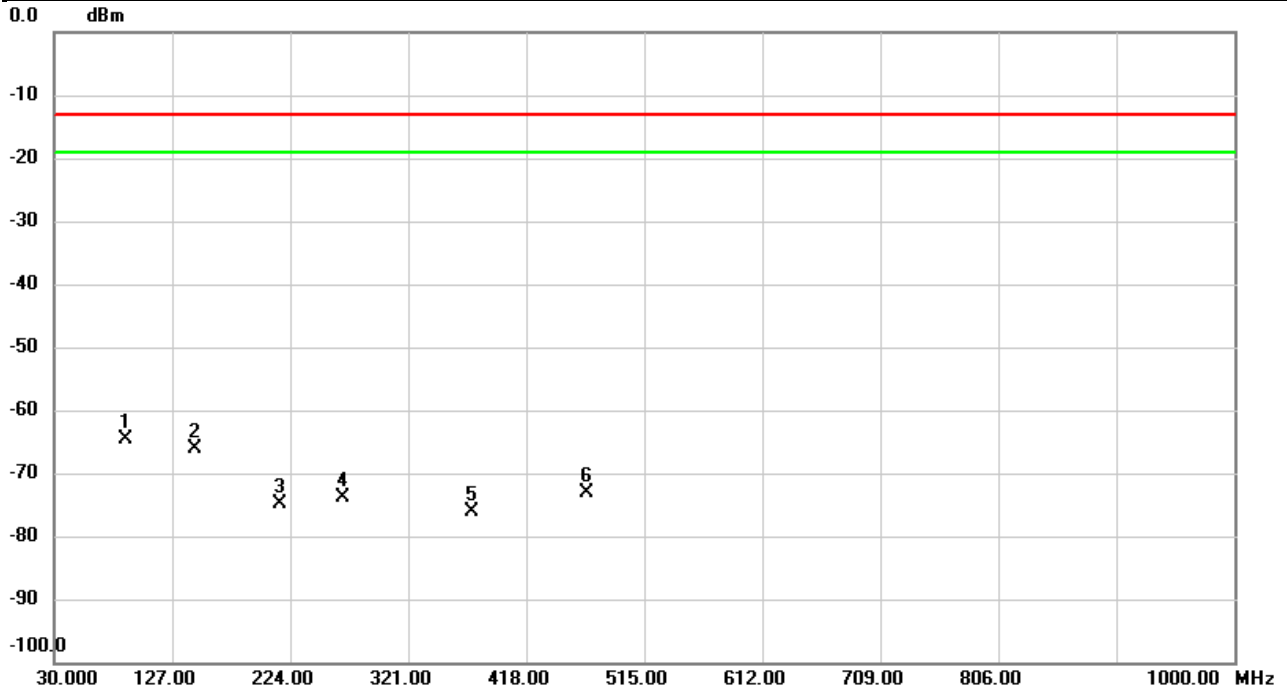


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.1700	-59.08	-5.61	-64.69	-13.00	-51.69	peak	
2		145.3330	-63.18	-3.00	-66.18	-13.00	-53.18	peak	
3		216.0137	-71.24	-3.75	-74.99	-13.00	-61.99	peak	
4		267.7147	-70.75	-3.09	-73.84	-13.00	-60.84	peak	
5		372.9920	-73.66	-2.54	-76.20	-13.00	-63.20	peak	
6		467.8257	-72.22	-0.89	-73.11	-13.00	-60.11	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

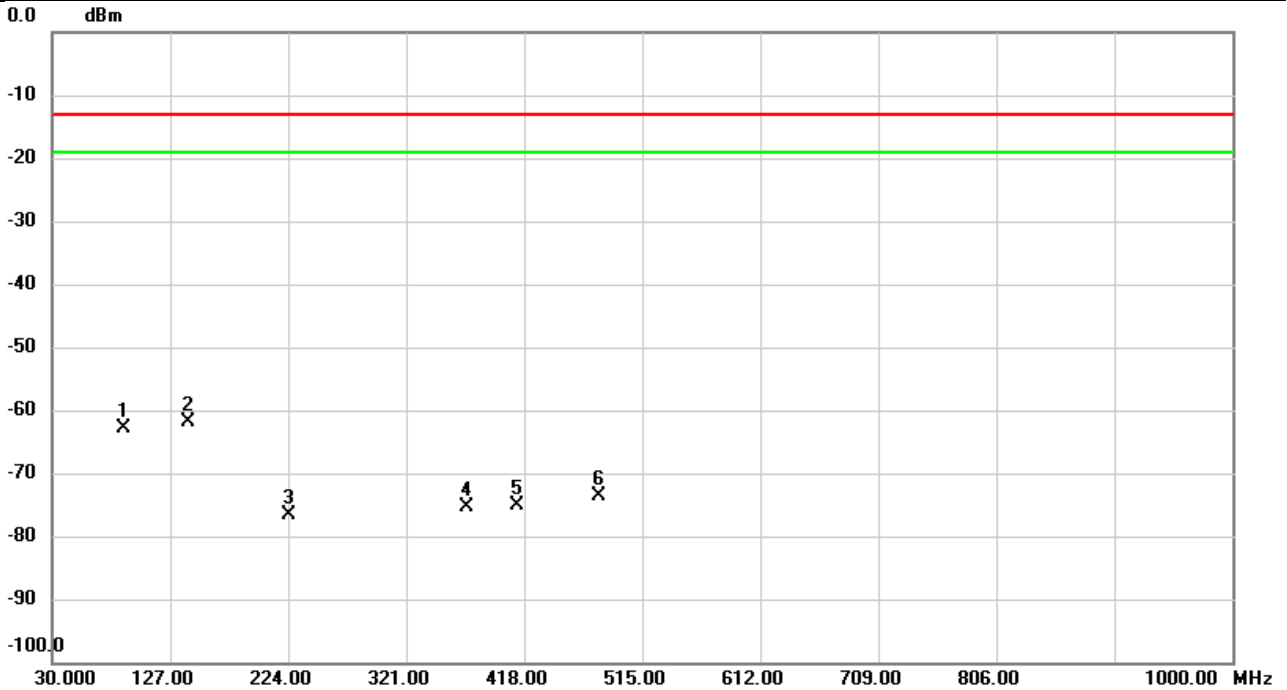


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.0083	-54.63	-8.30	-62.93	-13.00	-49.93	peak	
2	*	142.1967	-56.29	-5.59	-61.88	-13.00	-48.88	peak	
3		224.9377	-68.23	-8.49	-76.72	-13.00	-63.72	peak	
4		371.3107	-72.77	-2.55	-75.32	-13.00	-62.32	peak	
5		412.5357	-72.77	-2.33	-75.10	-13.00	-62.10	peak	
6		479.9507	-71.80	-1.74	-73.54	-13.00	-60.54	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

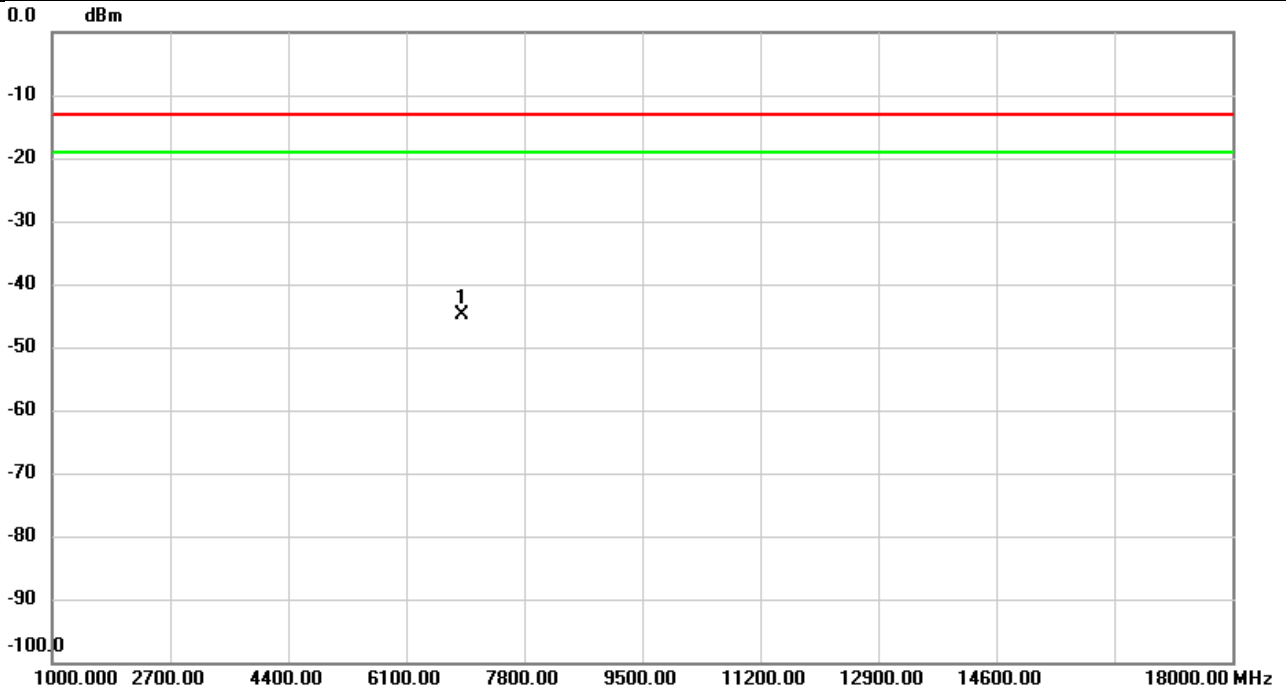


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.87	18.00	-44.87	-13.00	-31.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

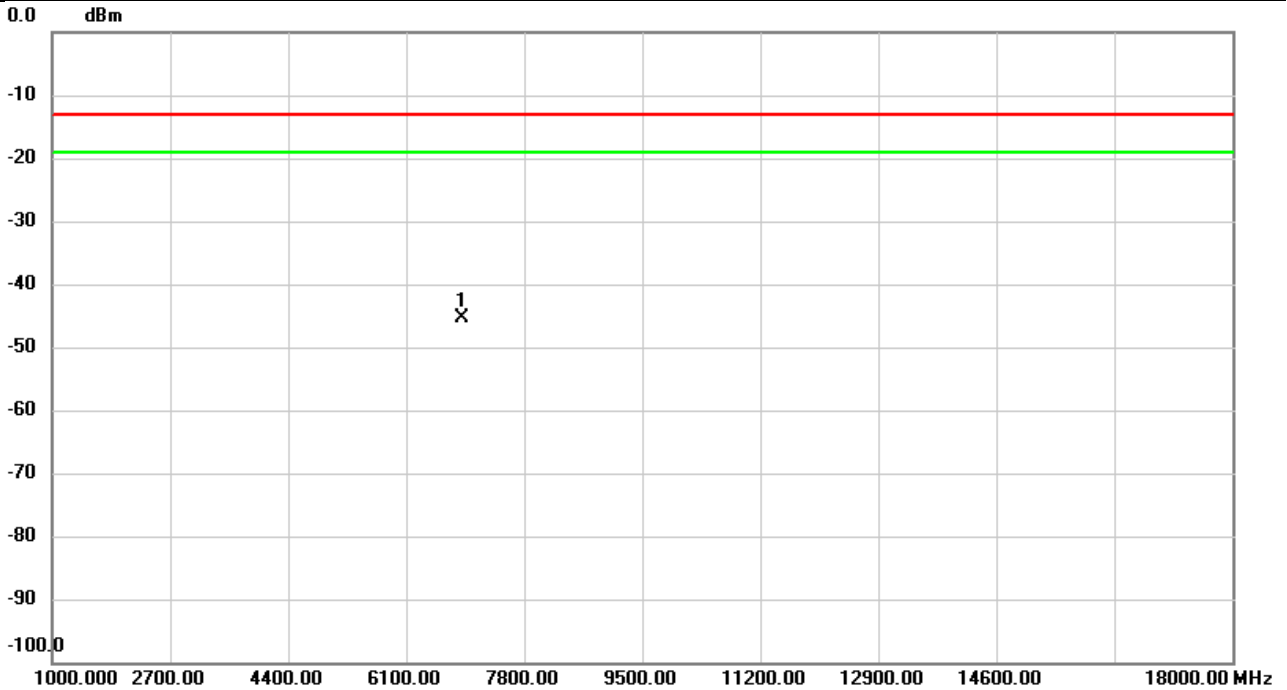


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	6900.020	-63.18	17.74	-45.44	-13.00	-32.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

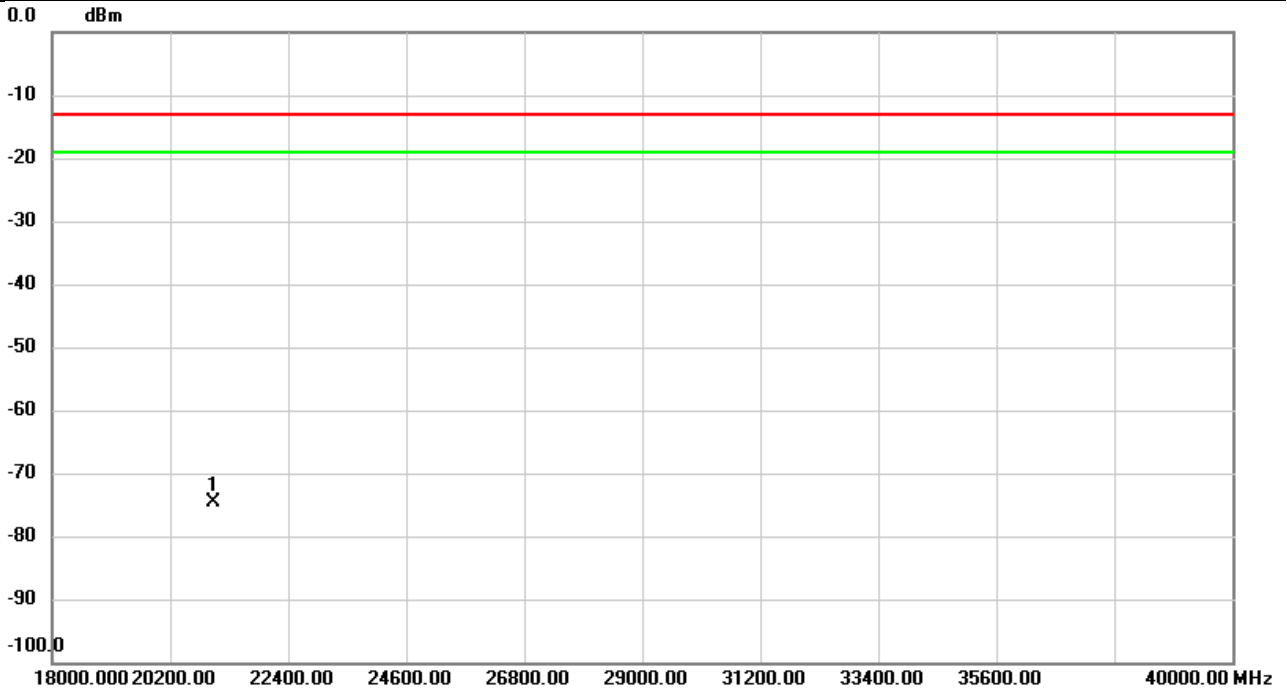


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-68.43	-6.27	-74.70	-13.00	-61.70	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

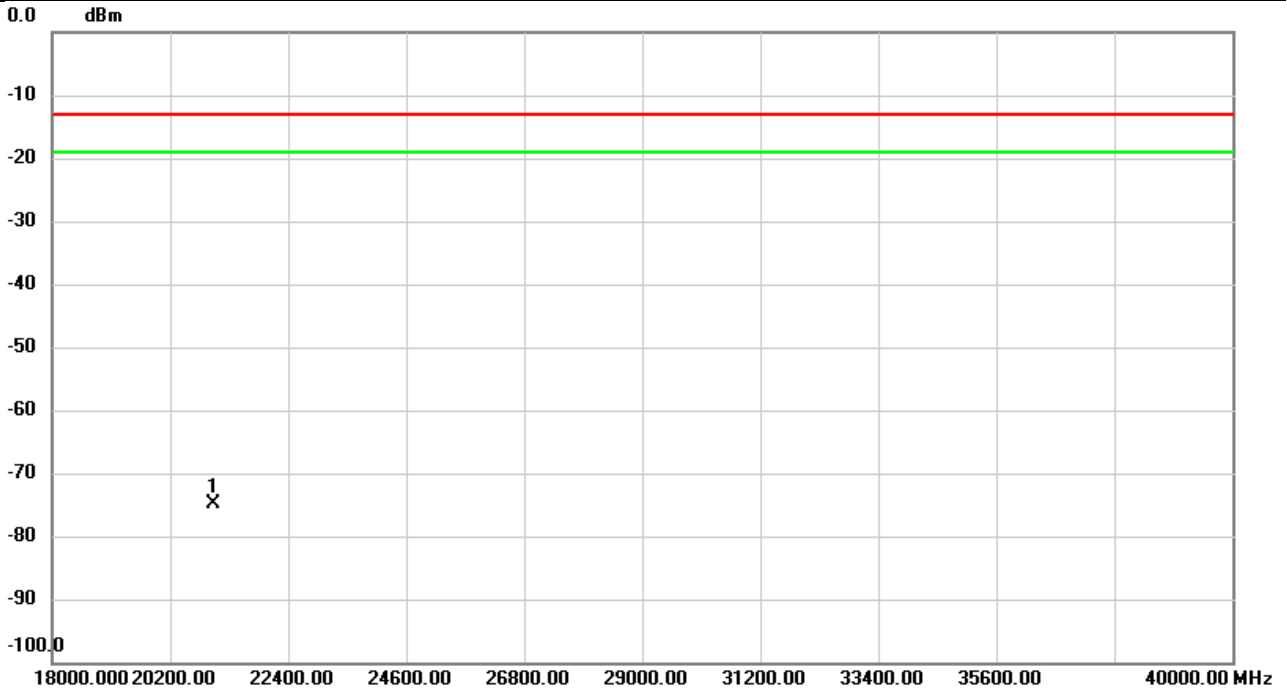

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-68.65	-6.27	-74.92	-13.00	-61.92	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

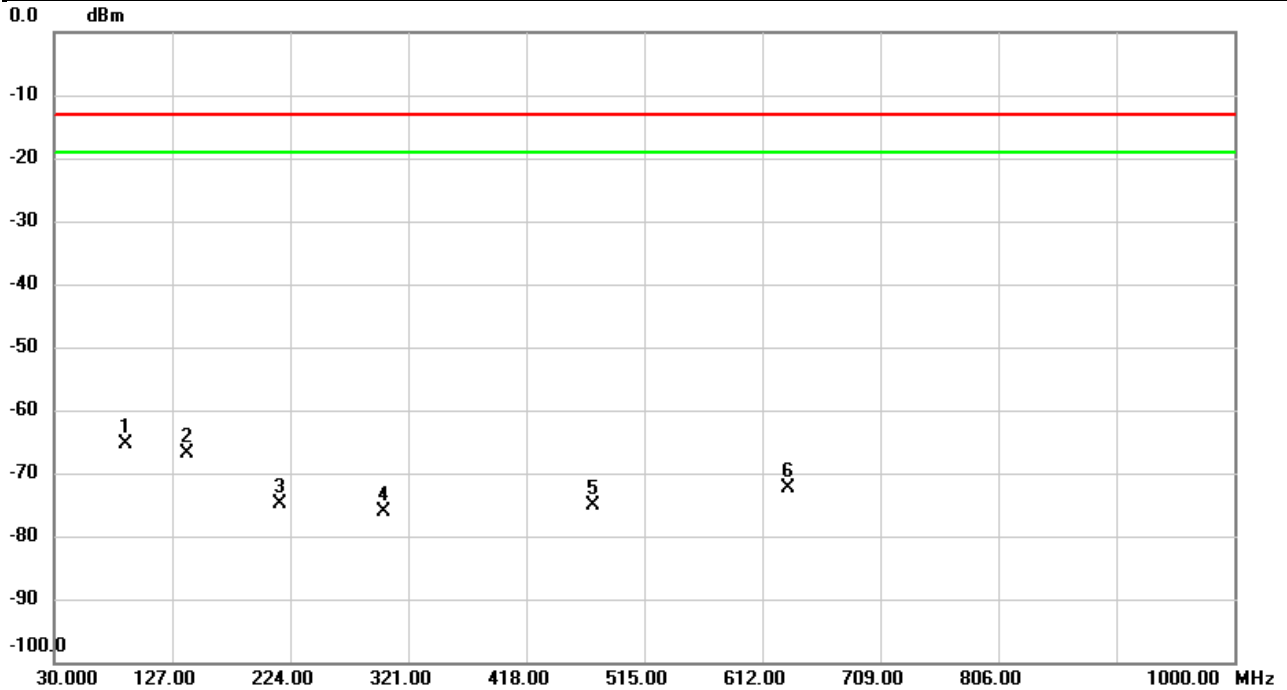


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.4933	-59.65	-5.60	-65.25	-13.00	-52.25	peak	
2		139.0603	-63.35	-3.49	-66.84	-13.00	-53.84	peak	
3		215.9490	-71.03	-3.74	-74.77	-13.00	-61.77	peak	
4		300.7593	-72.74	-3.29	-76.03	-13.00	-63.03	peak	
5		473.4516	-74.28	-0.74	-75.02	-13.00	-62.02	peak	
6		633.2753	-75.68	3.21	-72.47	-13.00	-59.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

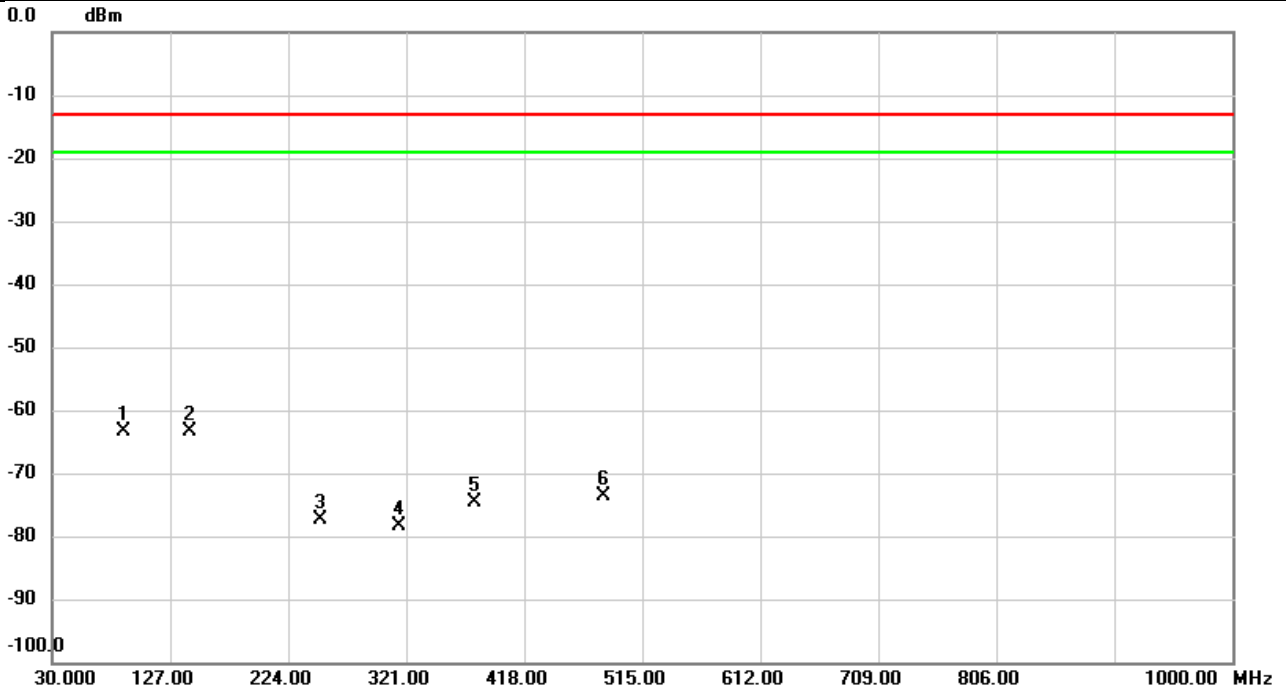


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.1377	-55.11	-8.30	-63.41	-13.00	-50.41	peak	
2	*	143.5223	-57.72	-5.60	-63.32	-13.00	-50.32	peak	
3		250.0283	-69.41	-8.00	-77.41	-13.00	-64.41	peak	
4		314.5657	-73.36	-5.09	-78.45	-13.00	-65.45	peak	
5		377.0660	-72.17	-2.53	-74.70	-13.00	-61.70	peak	
6		483.1517	-71.89	-1.72	-73.61	-13.00	-60.61	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

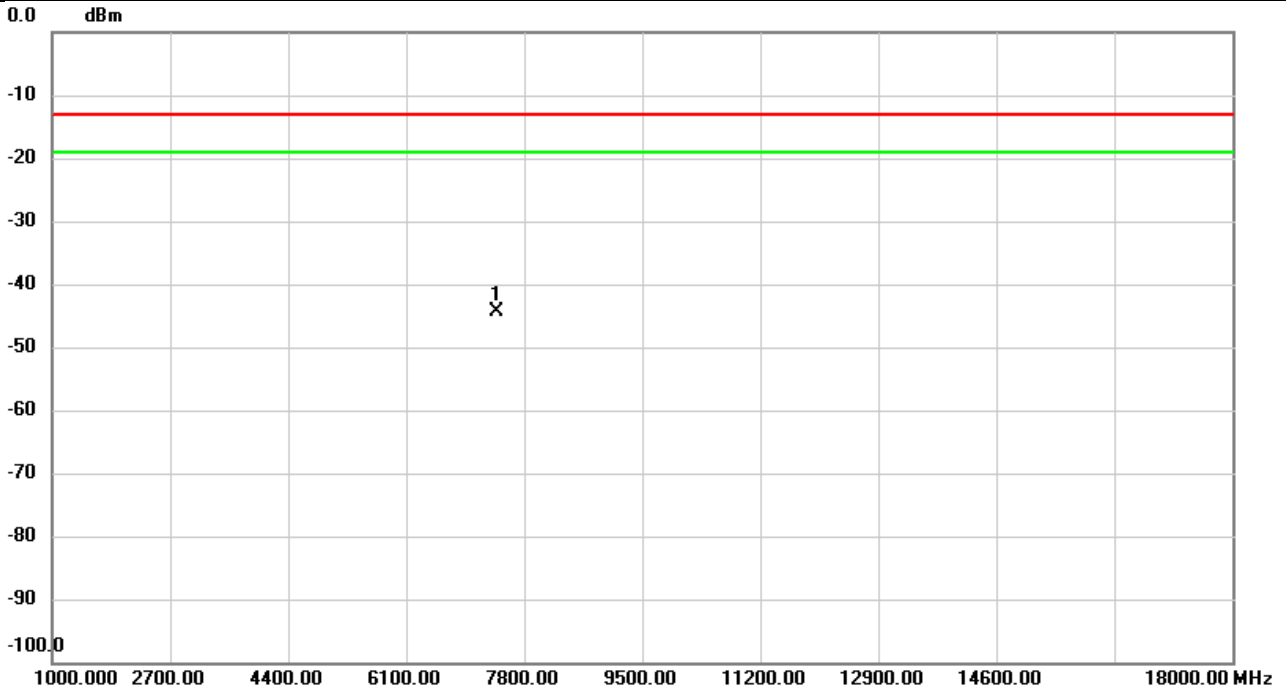


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.57	18.12	-44.45	-13.00	-31.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

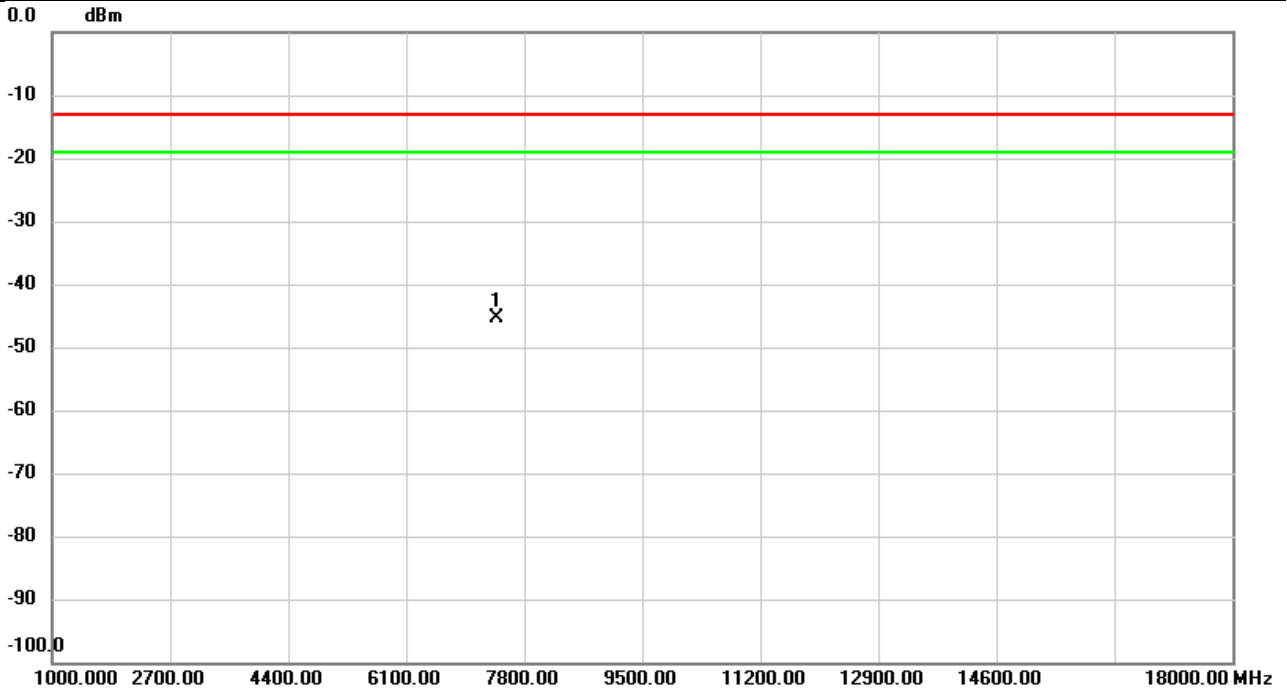


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.42	18.07	-45.35	-13.00	-32.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

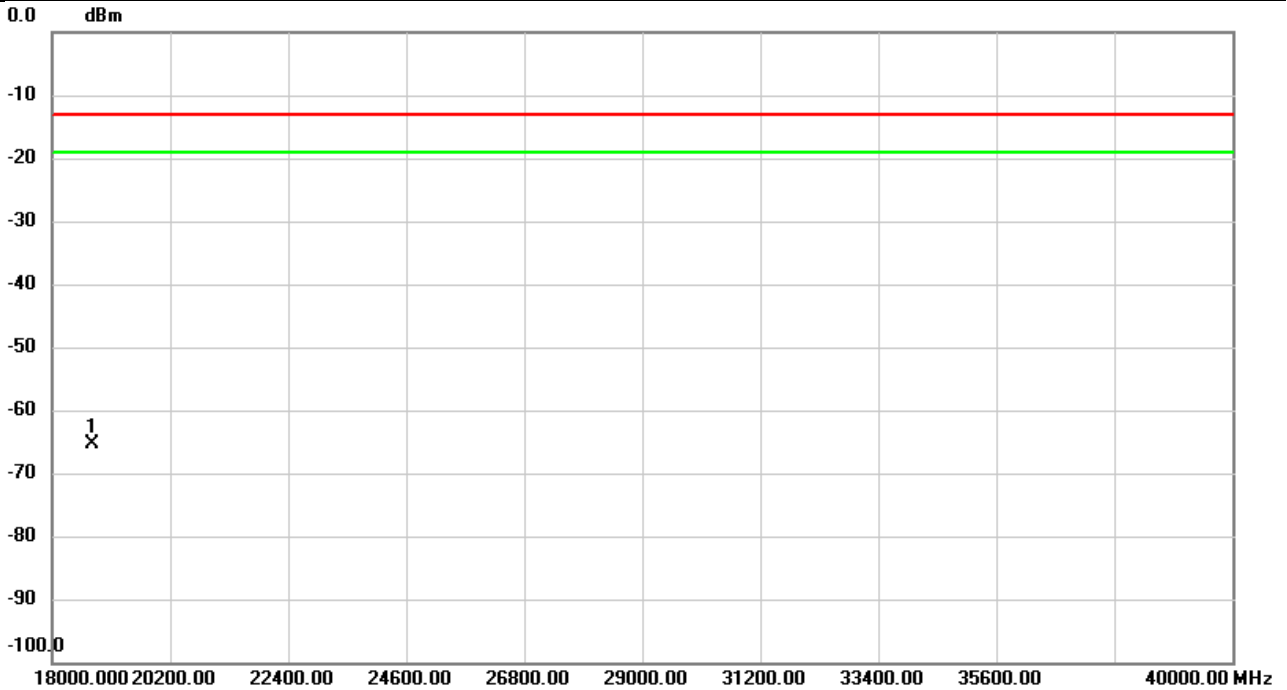


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.00	-6.32	-65.32	-13.00	-52.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

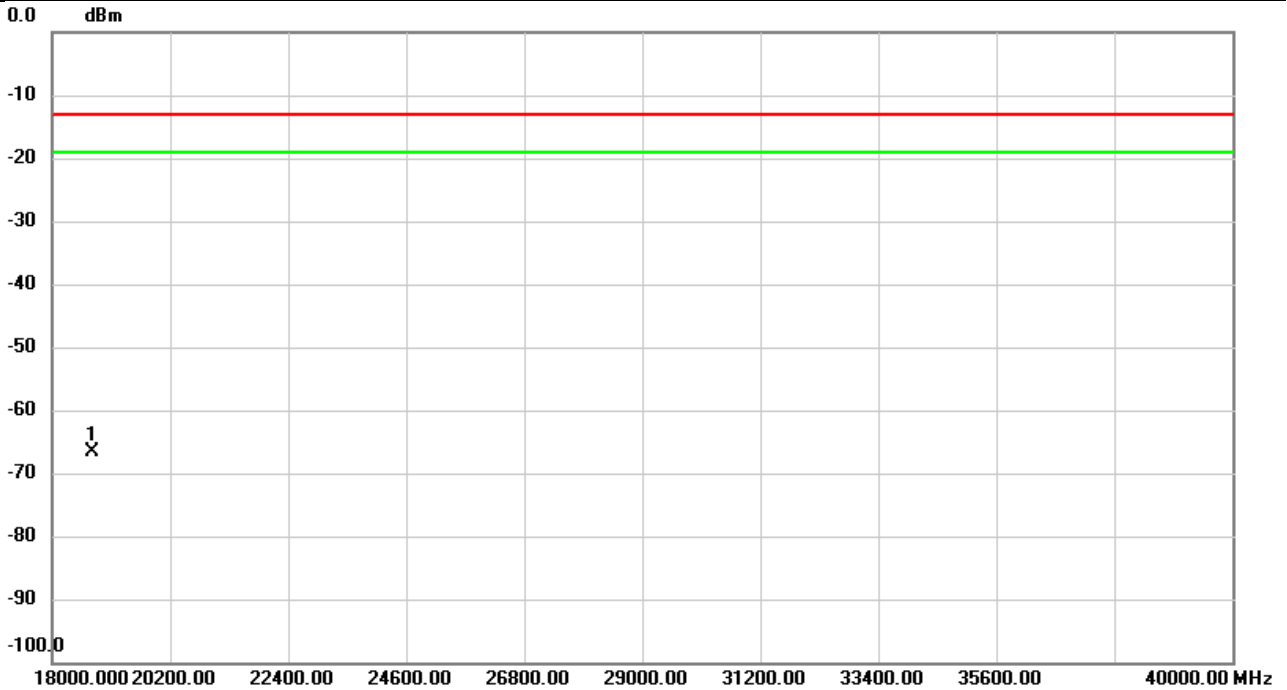


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-60.21	-6.32	-66.53	-13.00	-53.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Vertical
Temp	21°C	Hum.	58%

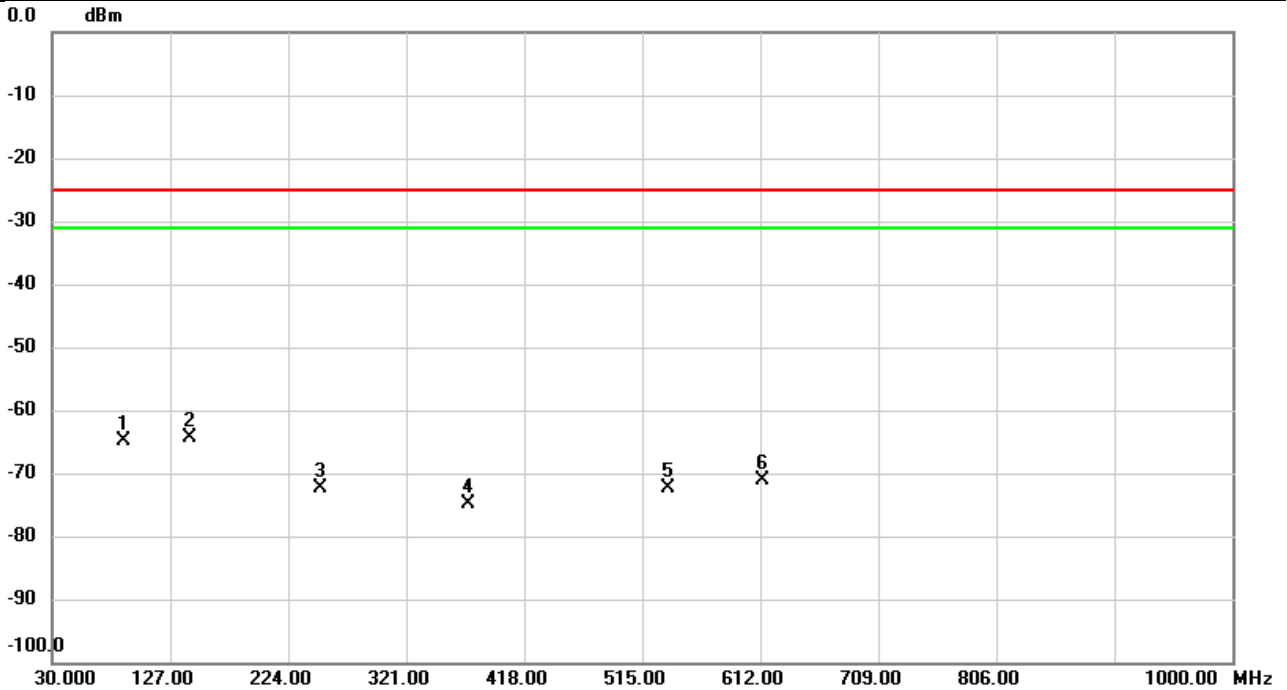


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		89.3317	-59.26	-5.60	-64.86	-25.00	-39.86	peak	
2	*	143.7163	-61.33	-3.09	-64.42	-25.00	-39.42	peak	
3		250.7397	-69.47	-2.97	-72.44	-25.00	-47.44	peak	
4		372.5393	-72.26	-2.55	-74.81	-25.00	-49.81	peak	
5		536.6957	-74.43	2.04	-72.39	-25.00	-47.39	peak	
6		613.9077	-74.21	3.20	-71.01	-25.00	-46.01	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Horizontal
Temp	21°C	Hum.	58%

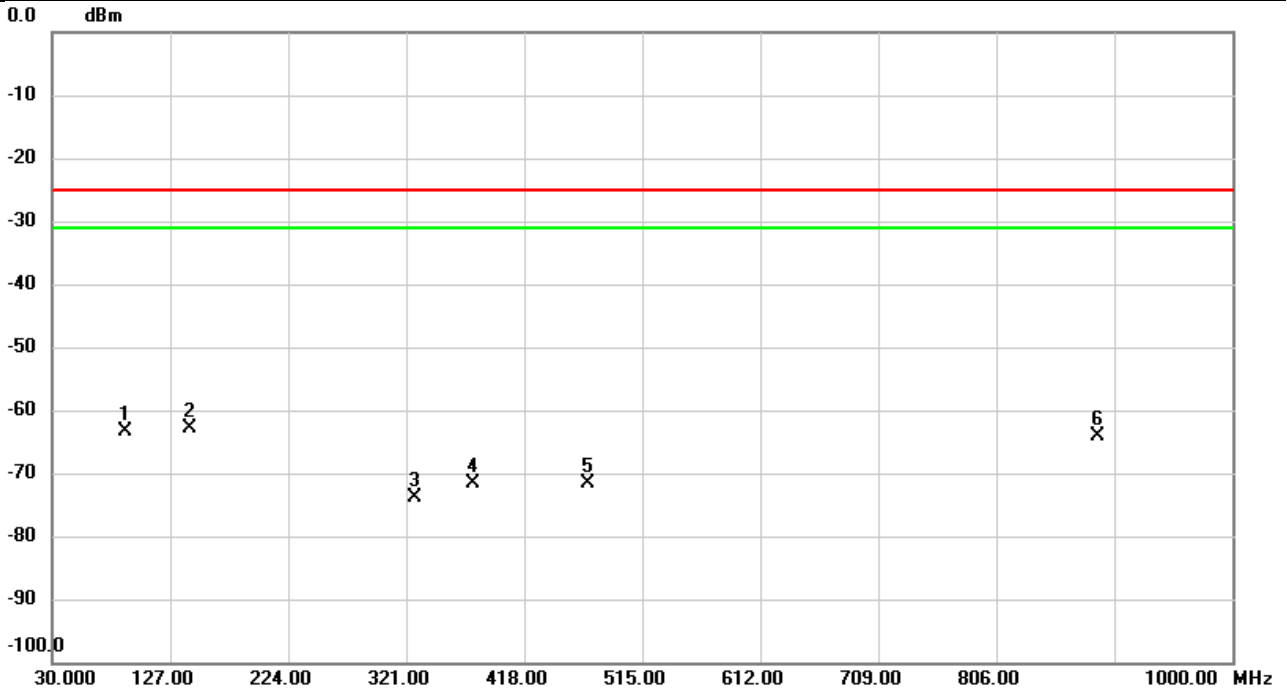


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.5580	-55.06	-8.32	-63.38	-25.00	-38.38	peak	
2	*	142.7463	-57.38	-5.59	-62.97	-25.00	-37.97	peak	
3		328.0810	-69.73	-4.16	-73.89	-25.00	-48.89	peak	
4		375.5140	-69.02	-2.53	-71.55	-25.00	-46.55	peak	
5		470.6710	-69.81	-1.83	-71.64	-25.00	-46.64	peak	
6		889.9050	-68.68	4.61	-64.07	-25.00	-39.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Vertical
Temp	21°C	Hum.	58%

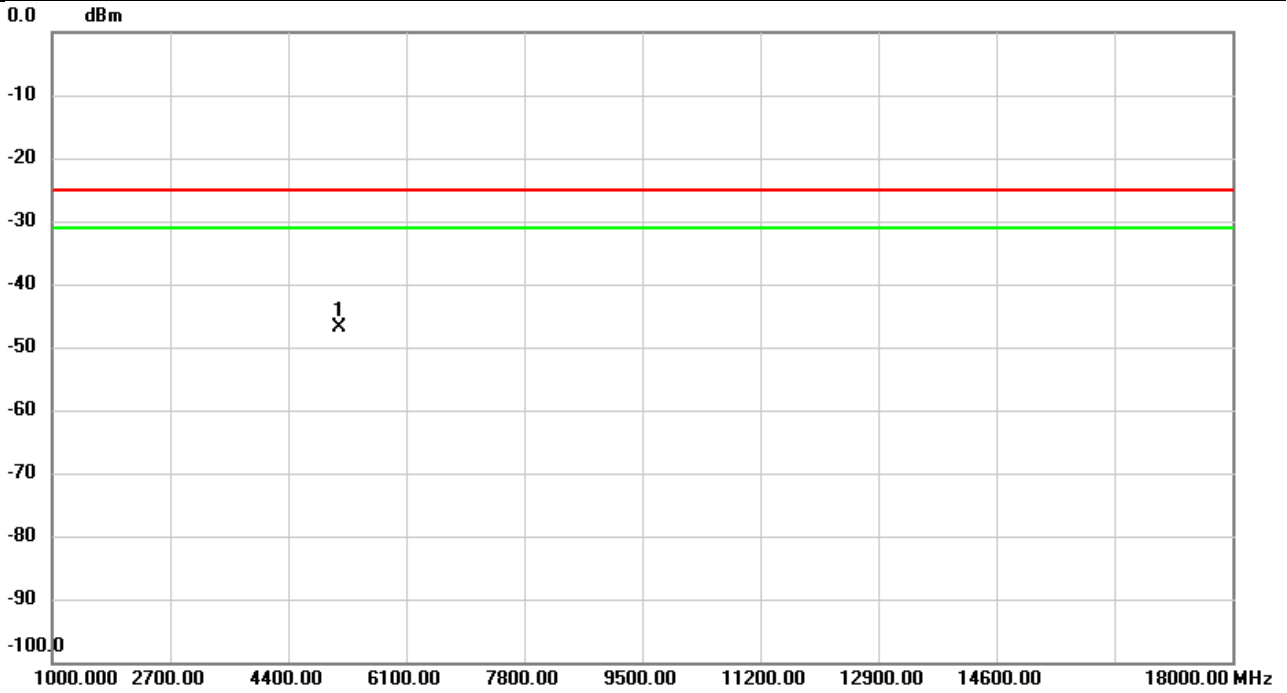


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-60.66	13.77	-46.89	-25.00	-21.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Horizontal
Temp	21°C	Hum.	58%

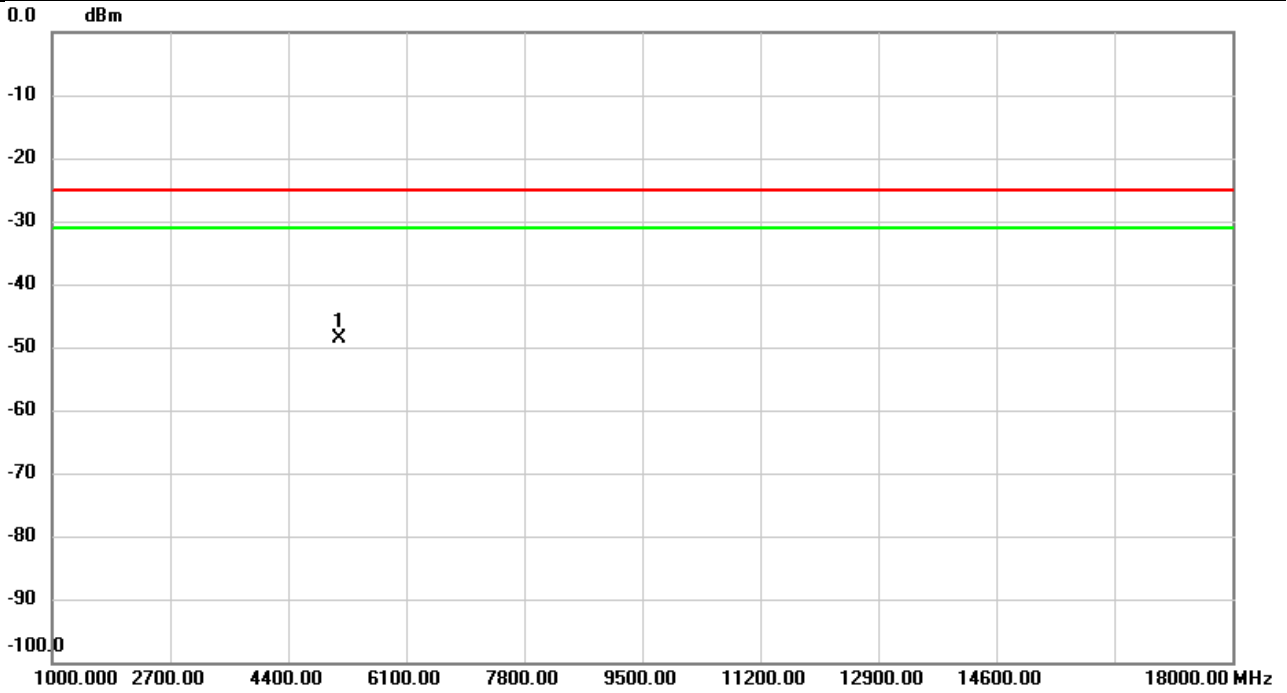


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5140.000	-62.53	13.97	-48.56	-25.00	-23.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH519000	Polarization	Vertical
Temp	21°C	Hum.	58%

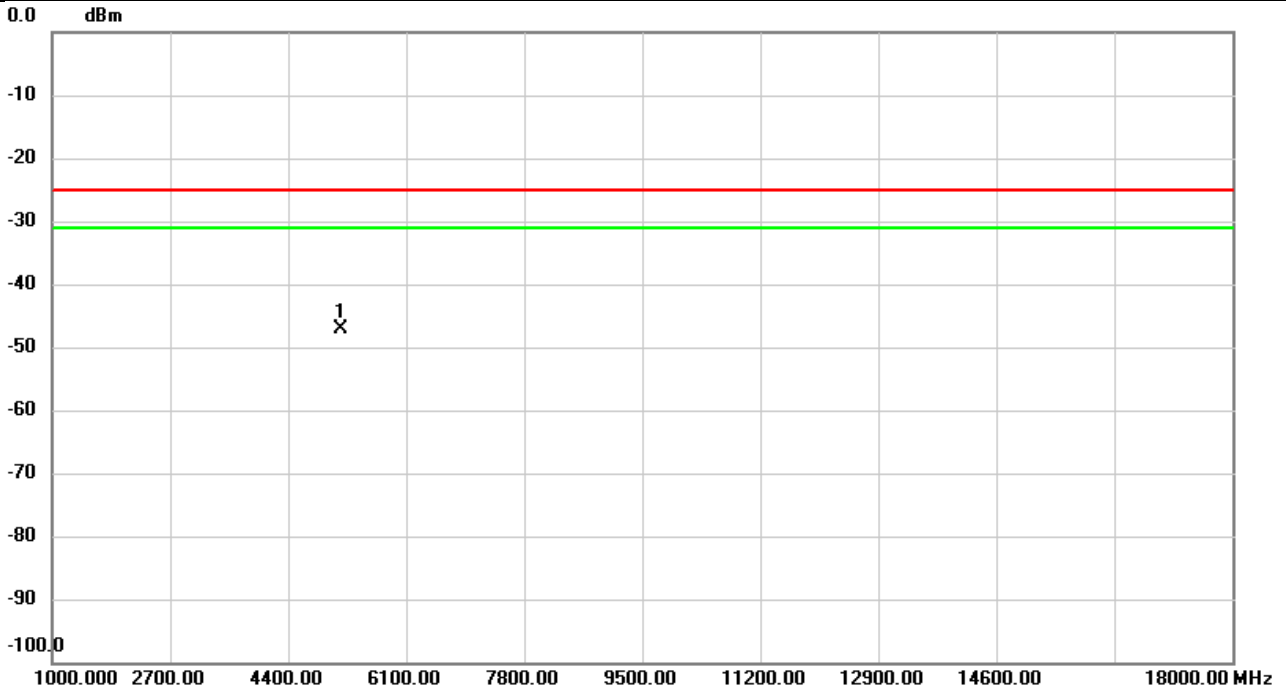


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-60.80	13.75	-47.05	-25.00	-22.05	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH519000	Polarization	Horizontal
Temp	21°C	Hum.	58%

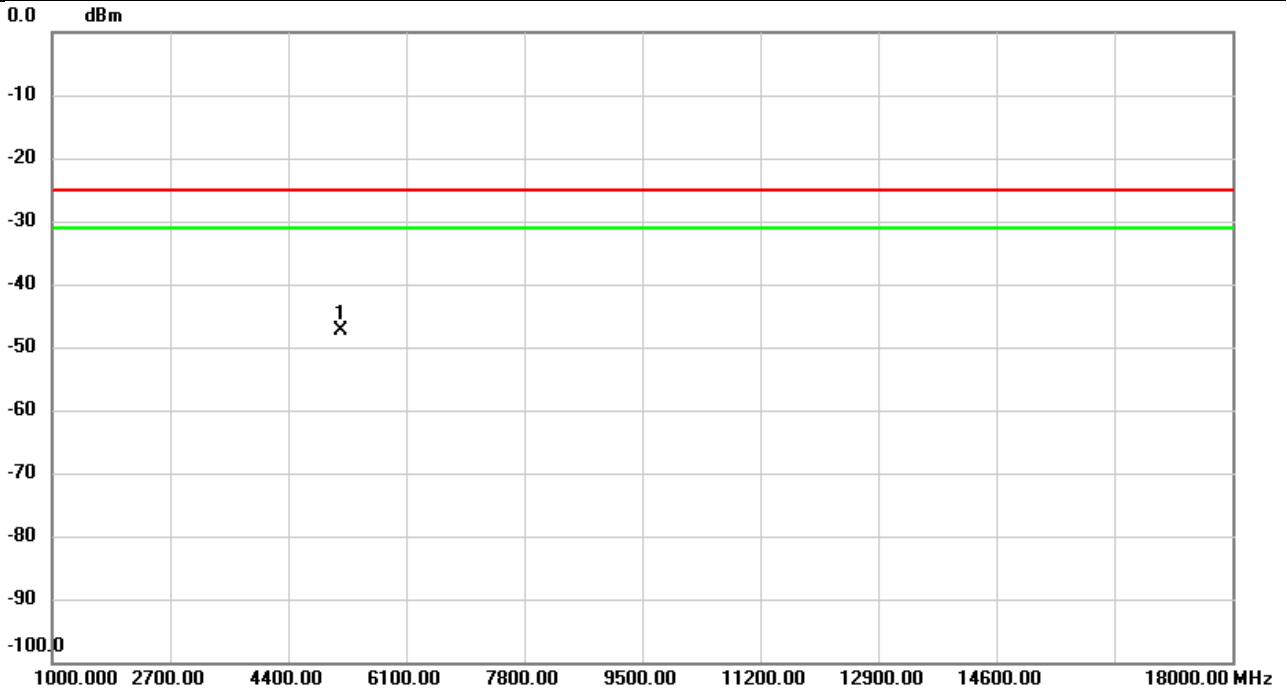


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5150.000	-61.42	14.00	-47.42	-25.00	-22.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Vertical
Temp	21°C	Hum.	58%

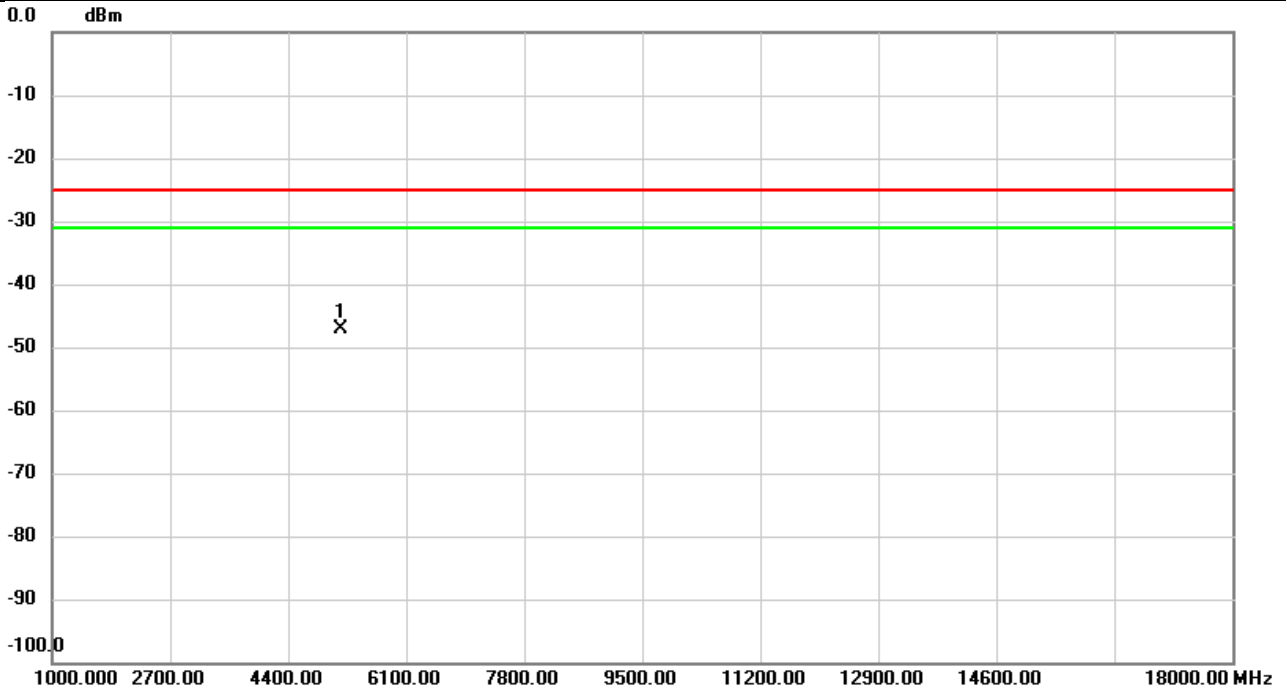


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-60.67	13.66	-47.01	-25.00	-22.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH520000	Polarization	Horizontal
Temp	21°C	Hum.	58%

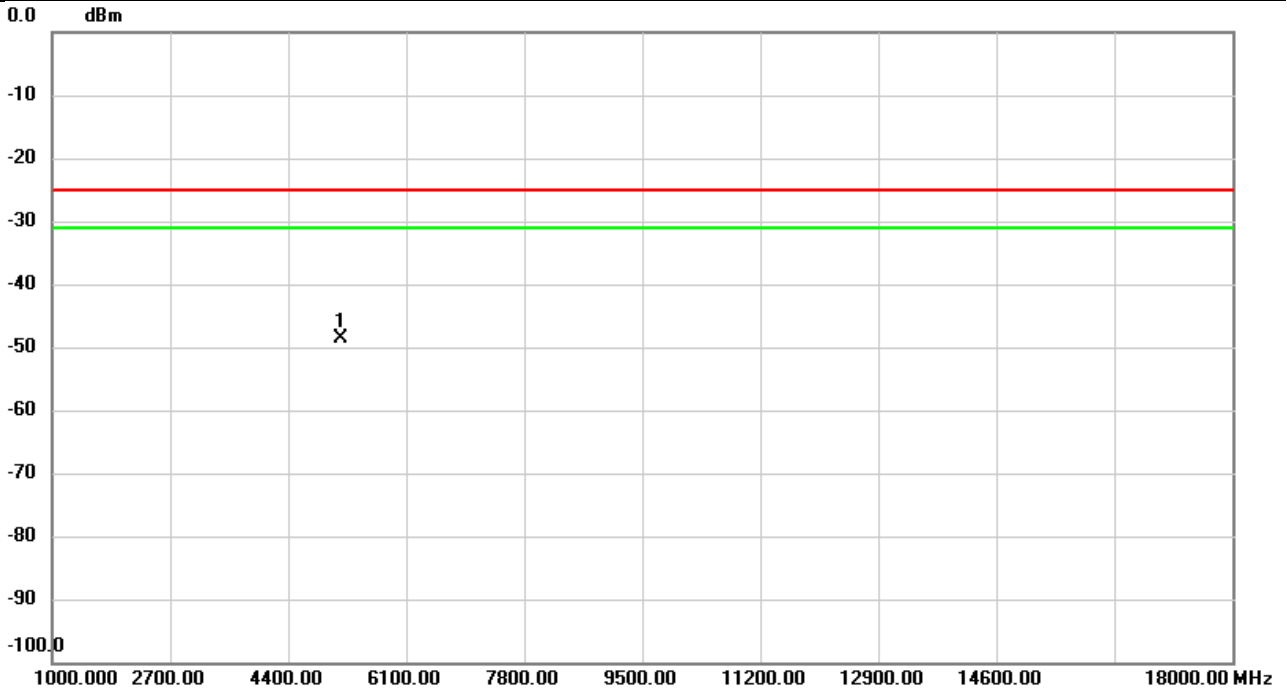


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5160.000	-62.43	13.90	-48.53	-25.00	-23.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Vertical
Temp	21°C	Hum.	58%

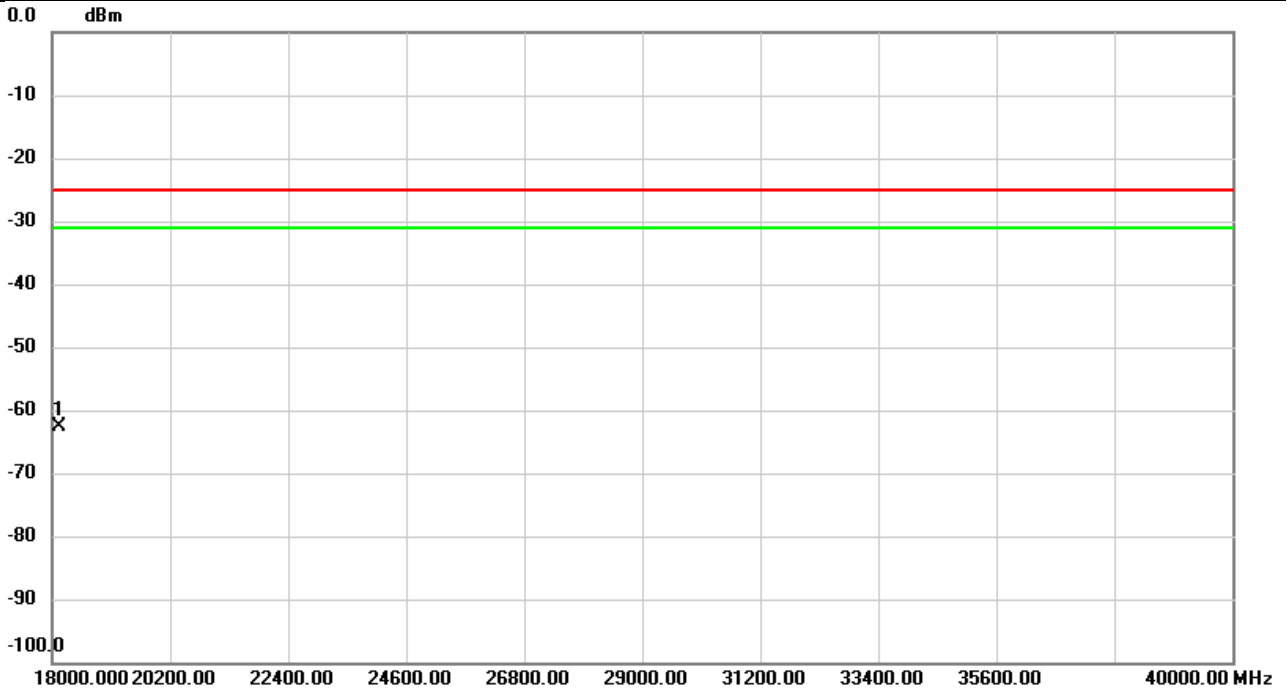


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18130.00	-55.99	-6.70	-62.69	-25.00	-37.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2024/1/11
Test Channel	CH518000	Polarization	Horizontal
Temp	21°C	Hum.	58%

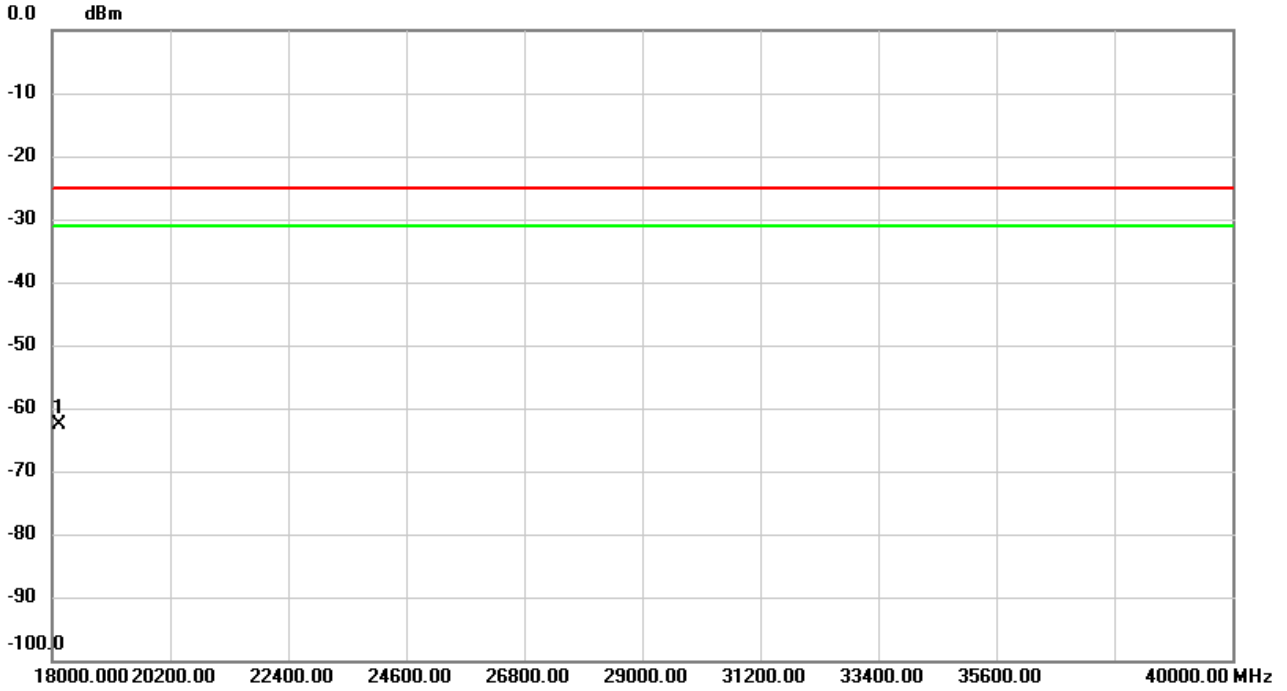


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18130.00	-55.85	-6.70	-62.55	-25.00	-37.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	58%

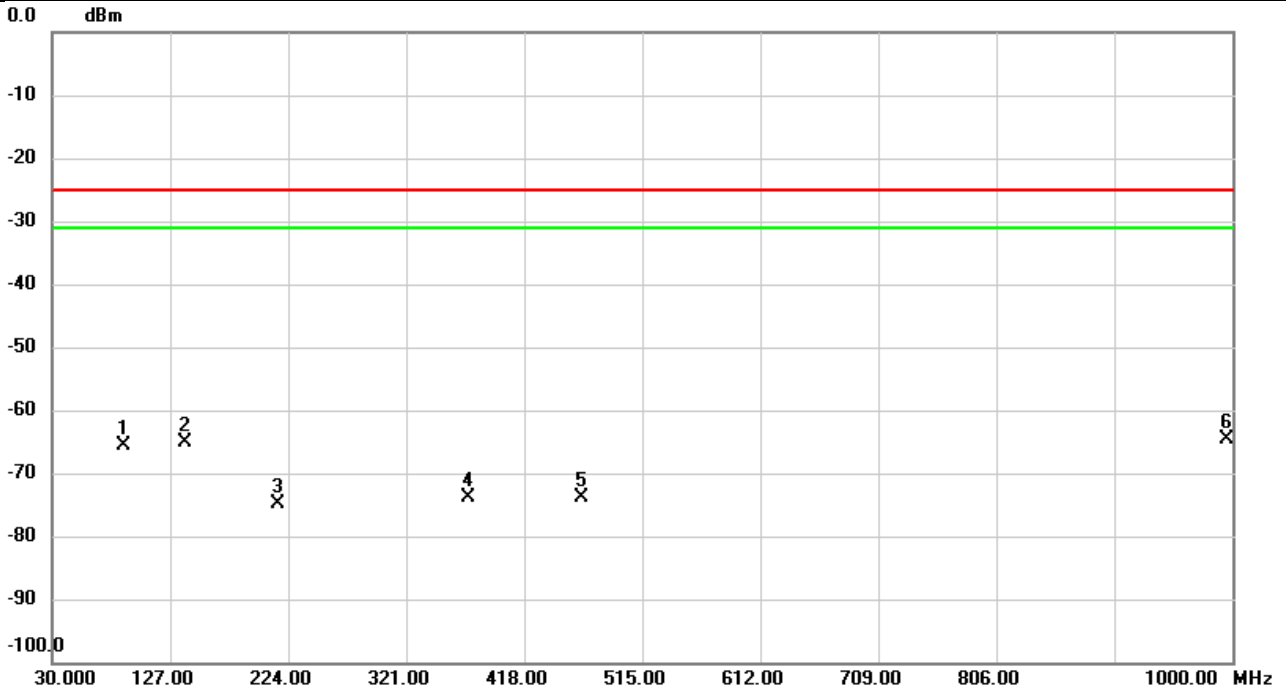


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		89.1053	-59.96	-5.61	-65.57	-25.00	-40.57	peak	
2		139.6423	-61.84	-3.36	-65.20	-25.00	-40.20	peak	
3		215.9813	-71.16	-3.75	-74.91	-25.00	-49.91	peak	
4		371.6340	-71.19	-2.56	-73.75	-25.00	-48.75	peak	
5		464.9803	-72.85	-0.97	-73.82	-25.00	-48.82	peak	
6	*	995.9260	-72.04	7.43	-64.61	-25.00	-39.61	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	58%

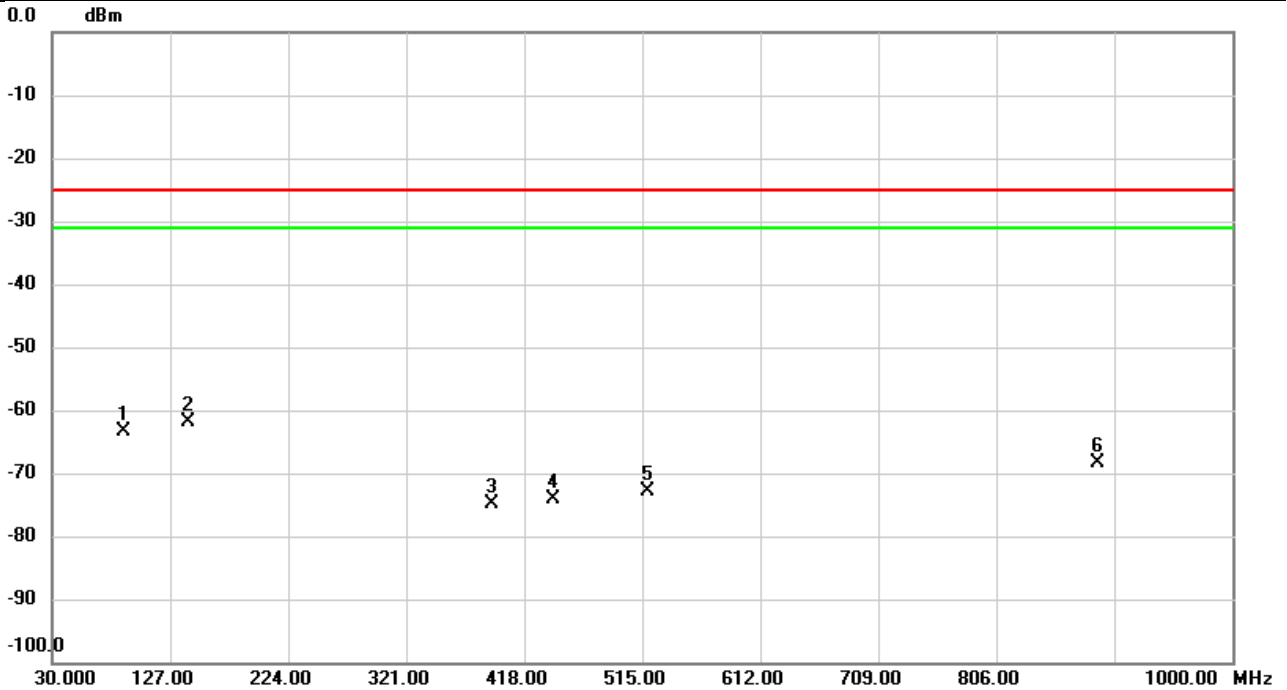


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		89.0083	-55.18	-8.30	-63.48	-25.00	-38.48	peak	
2	*	142.2290	-56.20	-5.59	-61.79	-25.00	-36.79	peak	
3		390.8400	-72.43	-2.47	-74.90	-25.00	-49.90	peak	
4		442.1853	-71.94	-2.08	-74.02	-25.00	-49.02	peak	
5		519.9147	-71.75	-1.21	-72.96	-25.00	-47.96	peak	
6		889.7110	-73.02	4.61	-68.41	-25.00	-43.41	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Vertical
Temp	21°C	Hum.	58%

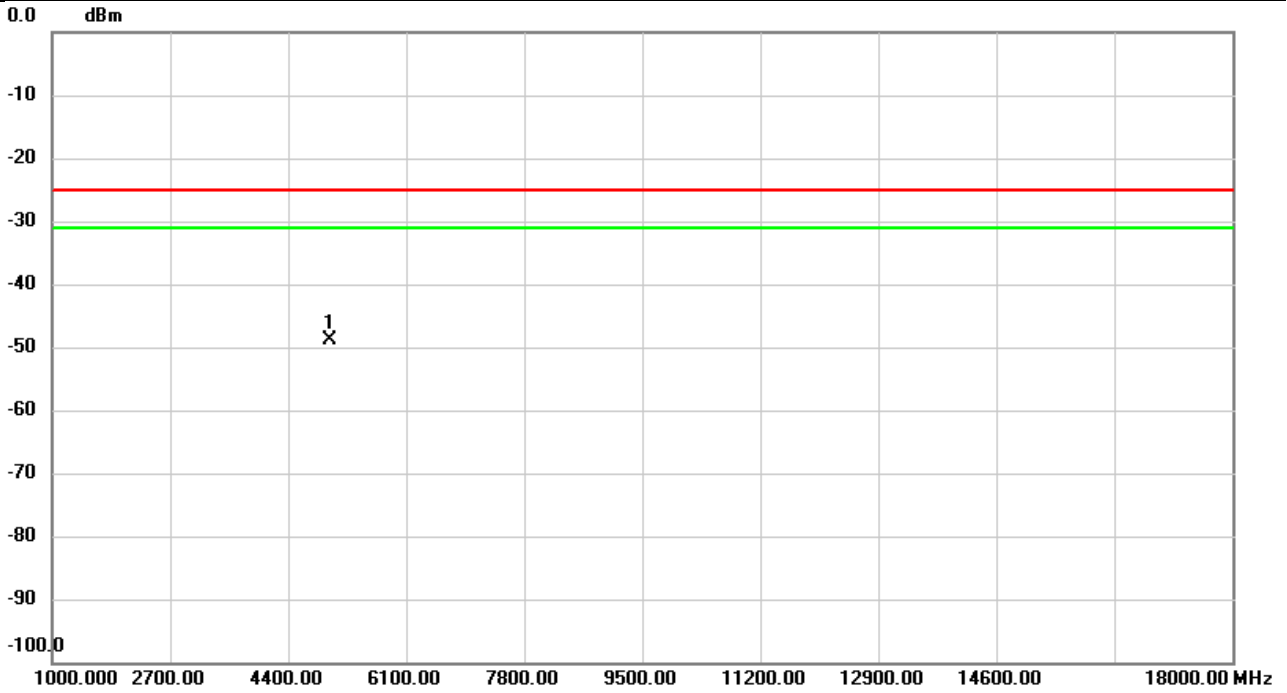


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-62.25	13.43	-48.82	-25.00	-23.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH509202	Polarization	Horizontal
Temp	21°C	Hum.	58%

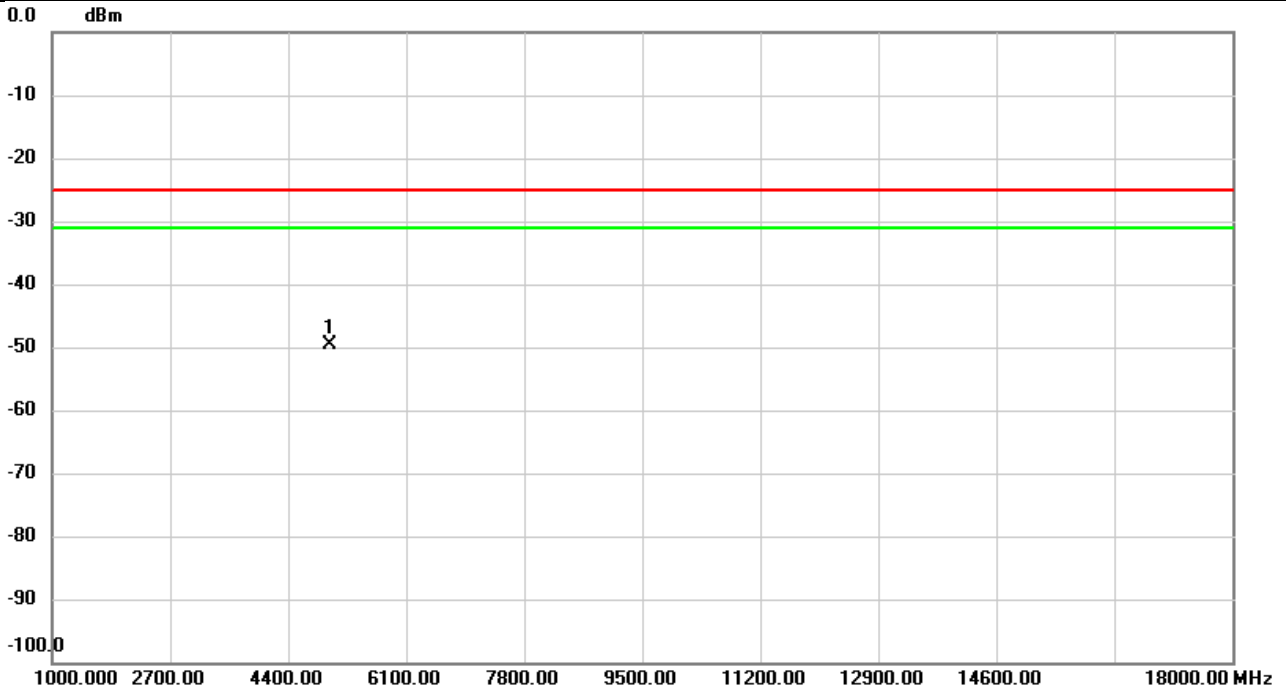


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4992.020	-62.89	13.39	-49.50	-25.00	-24.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH518598	Polarization	Vertical
Temp	21°C	Hum.	58%

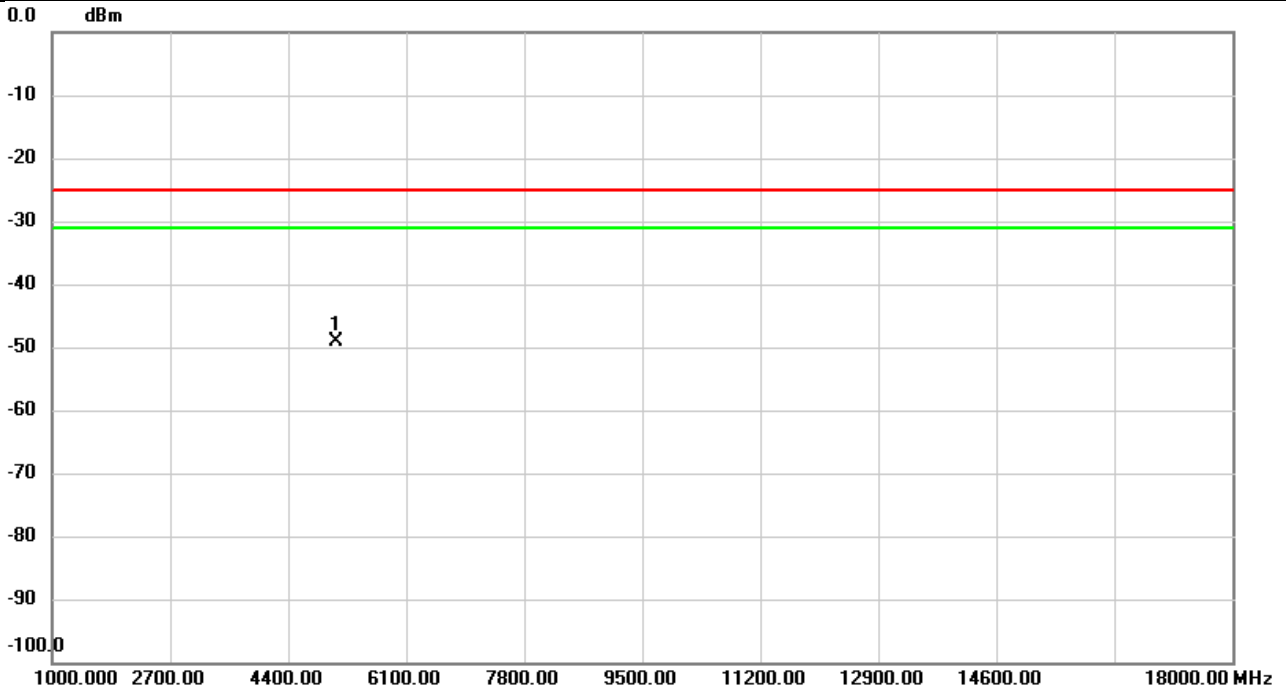


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-63.03	13.93	-49.10	-25.00	-24.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH518598	Polarization	Horizontal
Temp	21°C	Hum.	58%

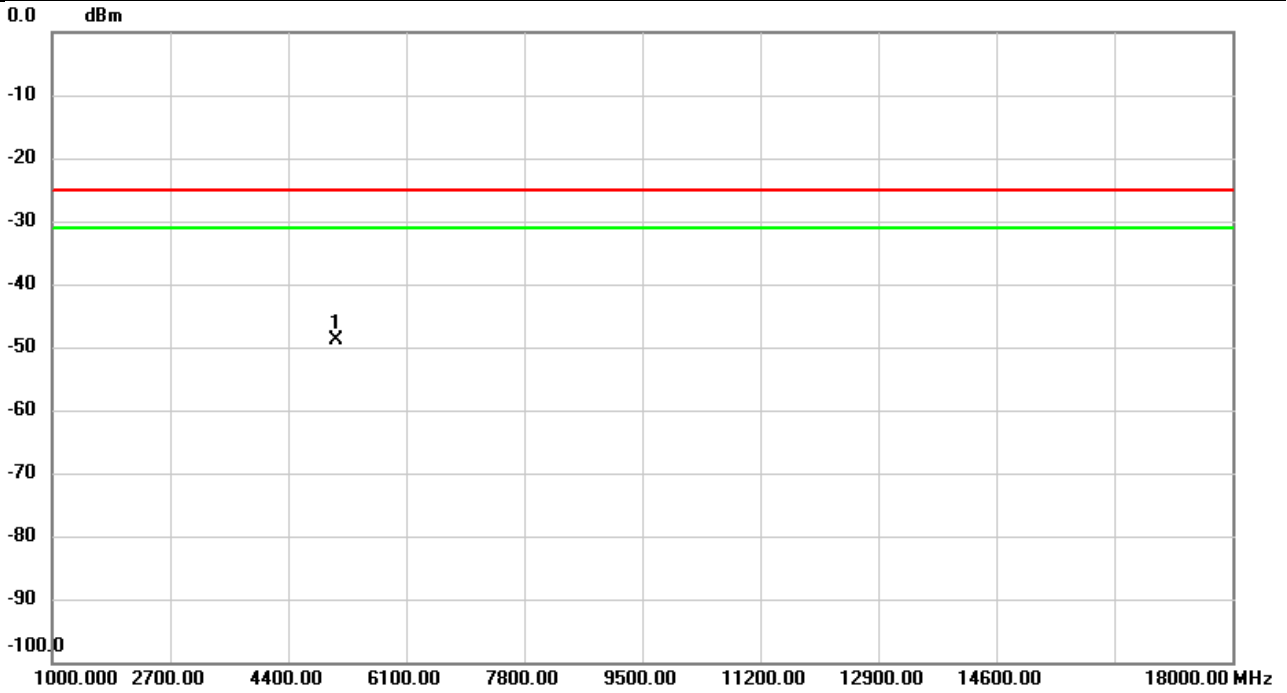


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5085.980	-62.86	13.95	-48.91	-25.00	-23.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	58%

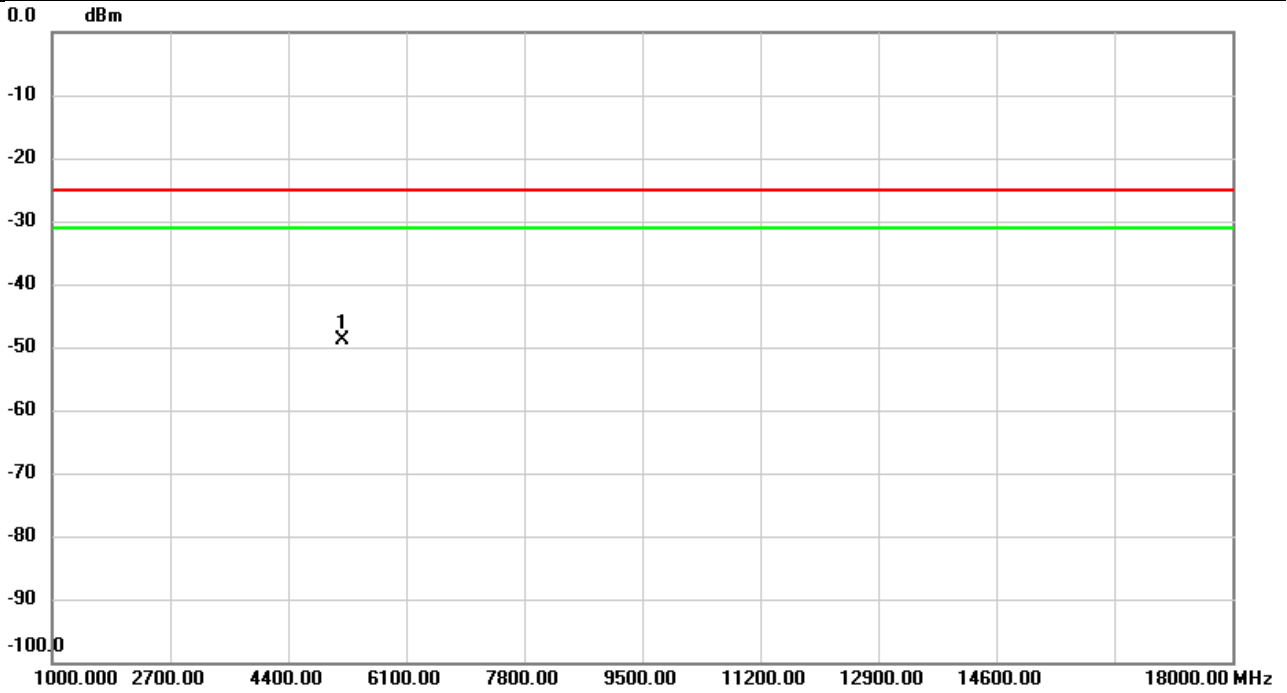


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.24	13.49	-48.75	-25.00	-23.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	58%

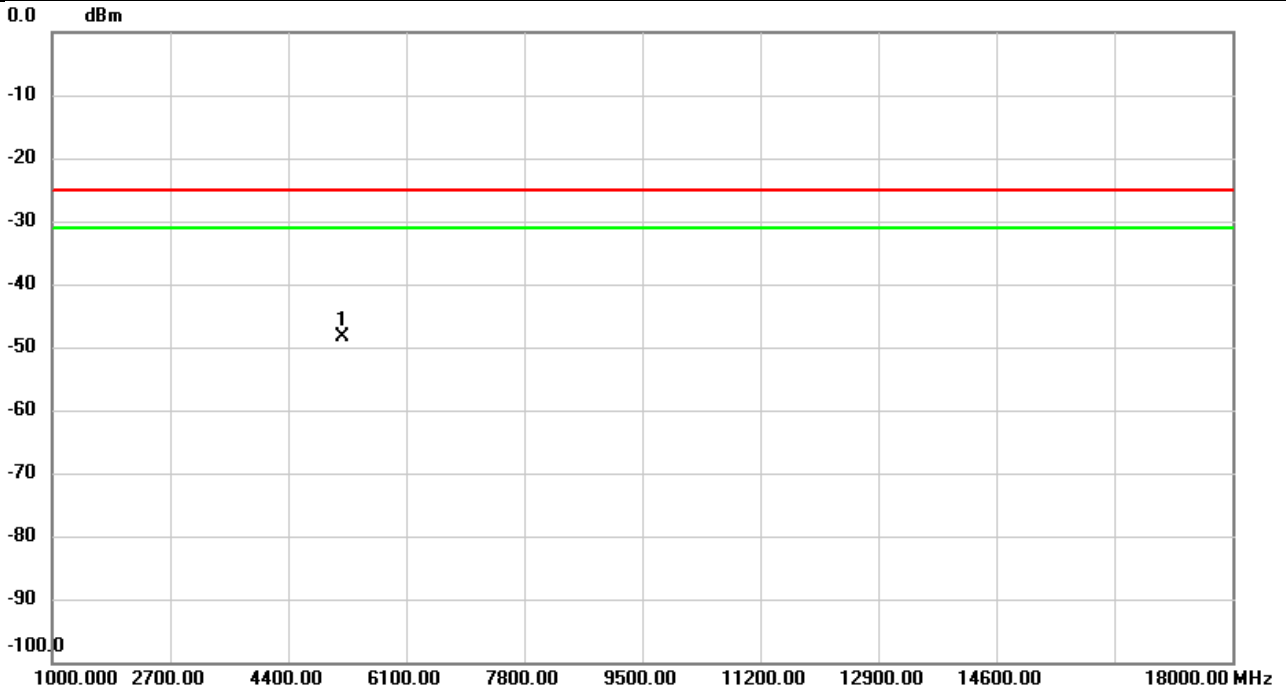


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5180.000	-62.05	13.69	-48.36	-25.00	-23.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Vertical
Temp	21°C	Hum.	58%

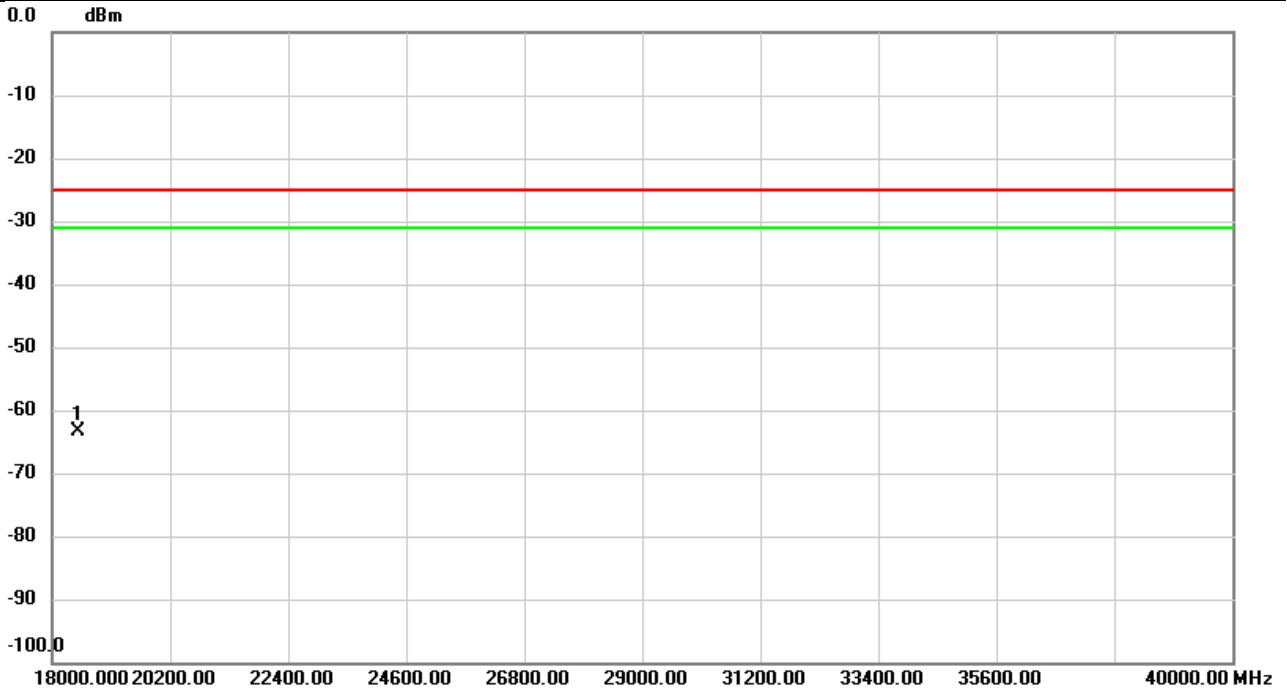


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18480.00	-57.59	-5.79	-63.38	-25.00	-38.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2024/1/11
Test Channel	CH528000	Polarization	Horizontal
Temp	21°C	Hum.	58%

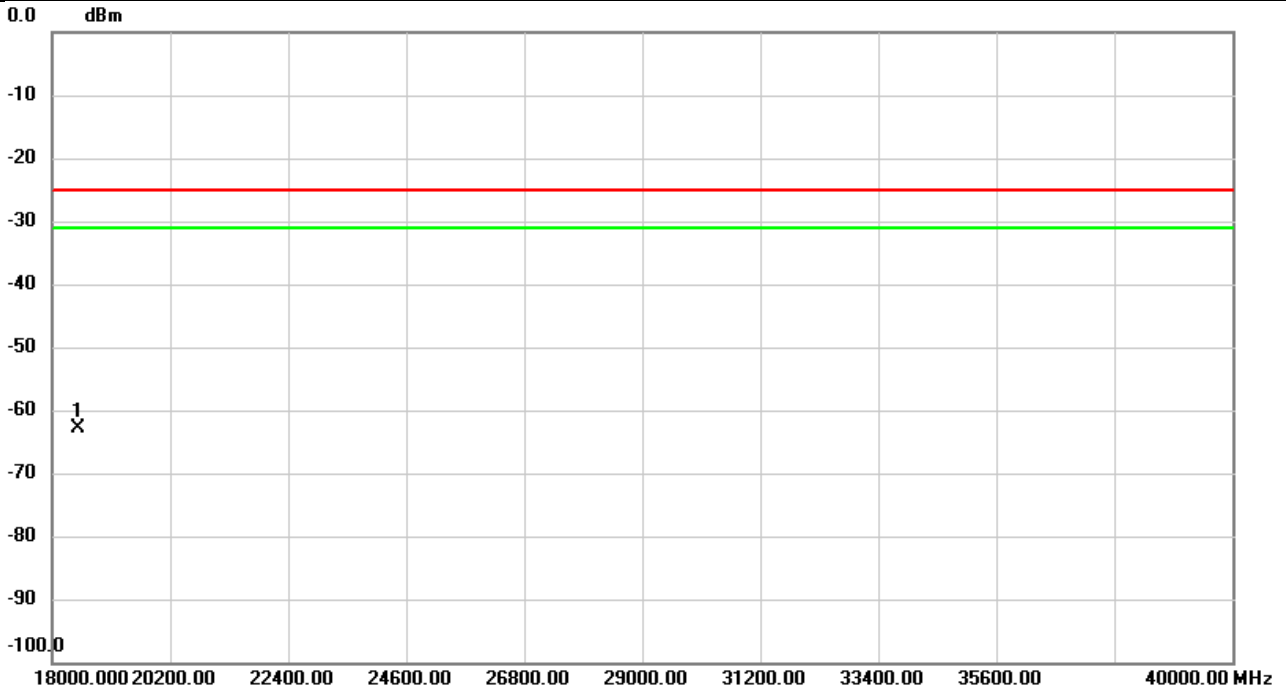


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18480.00	-57.08	-5.79	-62.87	-25.00	-37.87	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

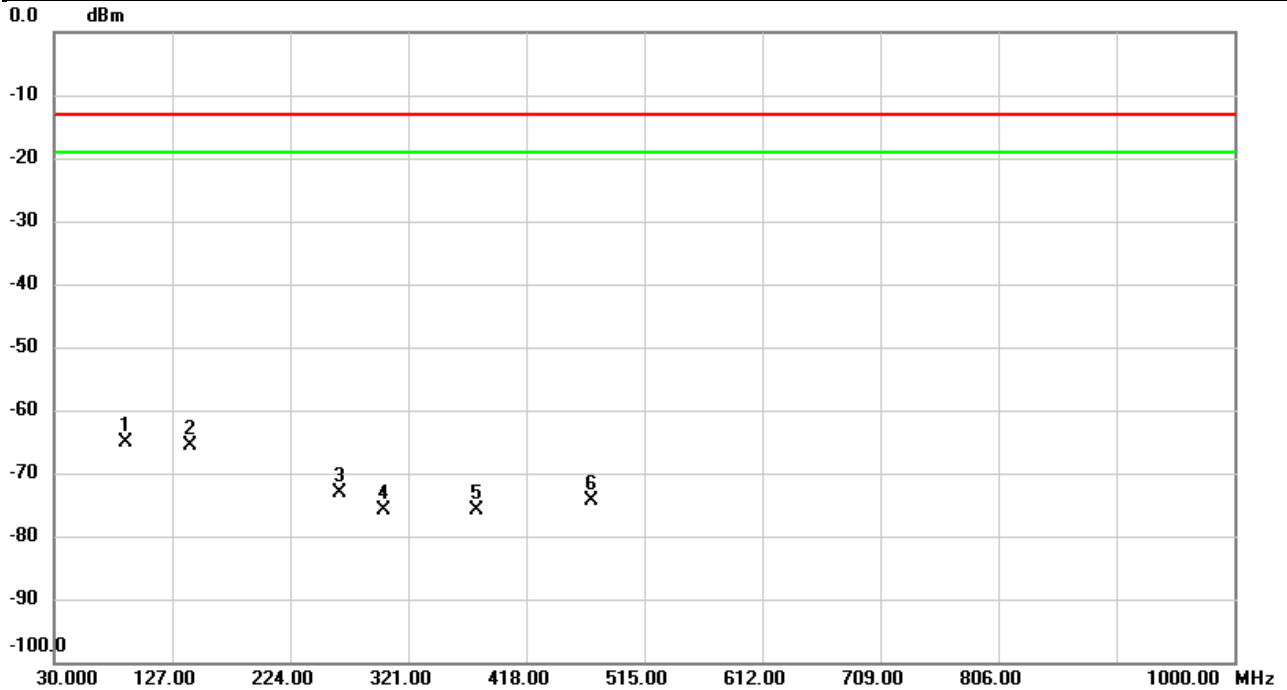


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	88.8790	-59.52	-5.63	-65.15	-13.00	-52.15	peak	
2		142.0350	-62.52	-3.17	-65.69	-13.00	-52.69	peak	
3		264.1257	-70.15	-3.06	-73.21	-13.00	-60.21	peak	
4		301.1472	-72.63	-3.29	-75.92	-13.00	-62.92	peak	
5		377.7450	-73.33	-2.49	-75.82	-13.00	-62.82	peak	
6		471.6087	-73.48	-0.79	-74.27	-13.00	-61.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

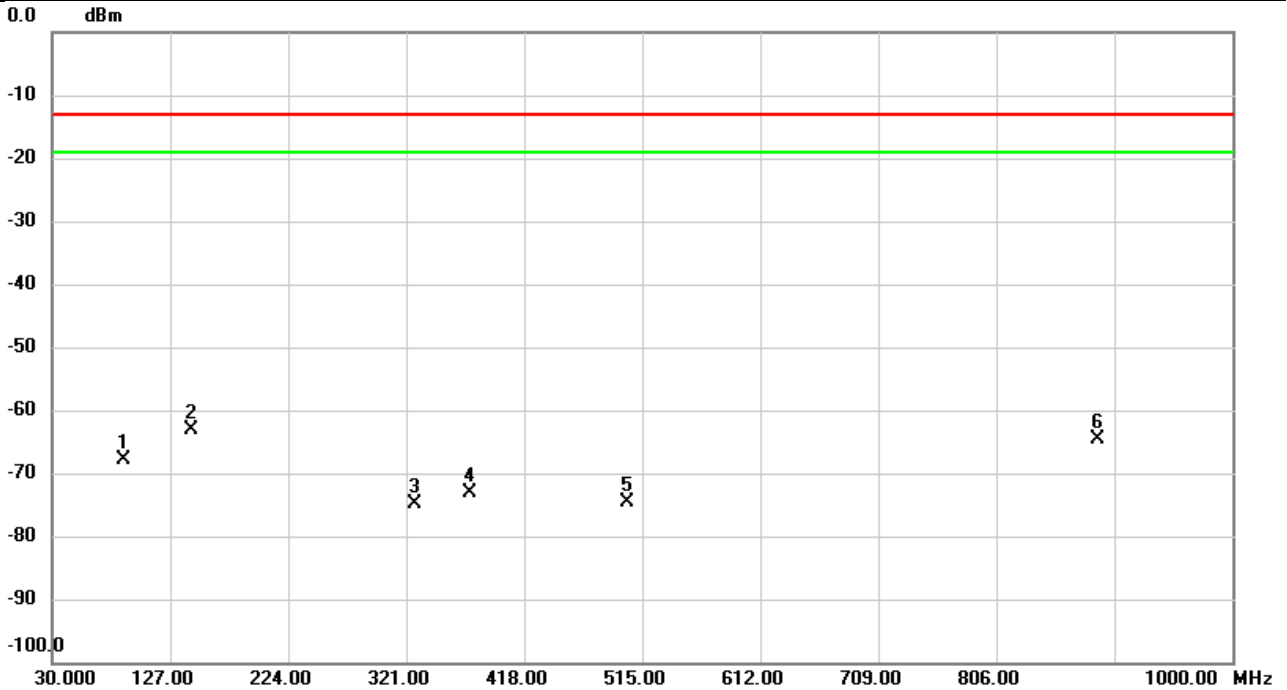


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.9437	-59.70	-8.29	-67.99	-13.00	-54.99	peak	
2	*	144.8480	-57.62	-5.60	-63.22	-13.00	-50.22	peak	
3		327.5313	-70.78	-4.19	-74.97	-13.00	-61.97	peak	
4		373.0890	-70.52	-2.54	-73.06	-13.00	-60.06	peak	
5		503.2953	-73.04	-1.50	-74.54	-13.00	-61.54	peak	
6		889.7433	-69.20	4.61	-64.59	-13.00	-51.59	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

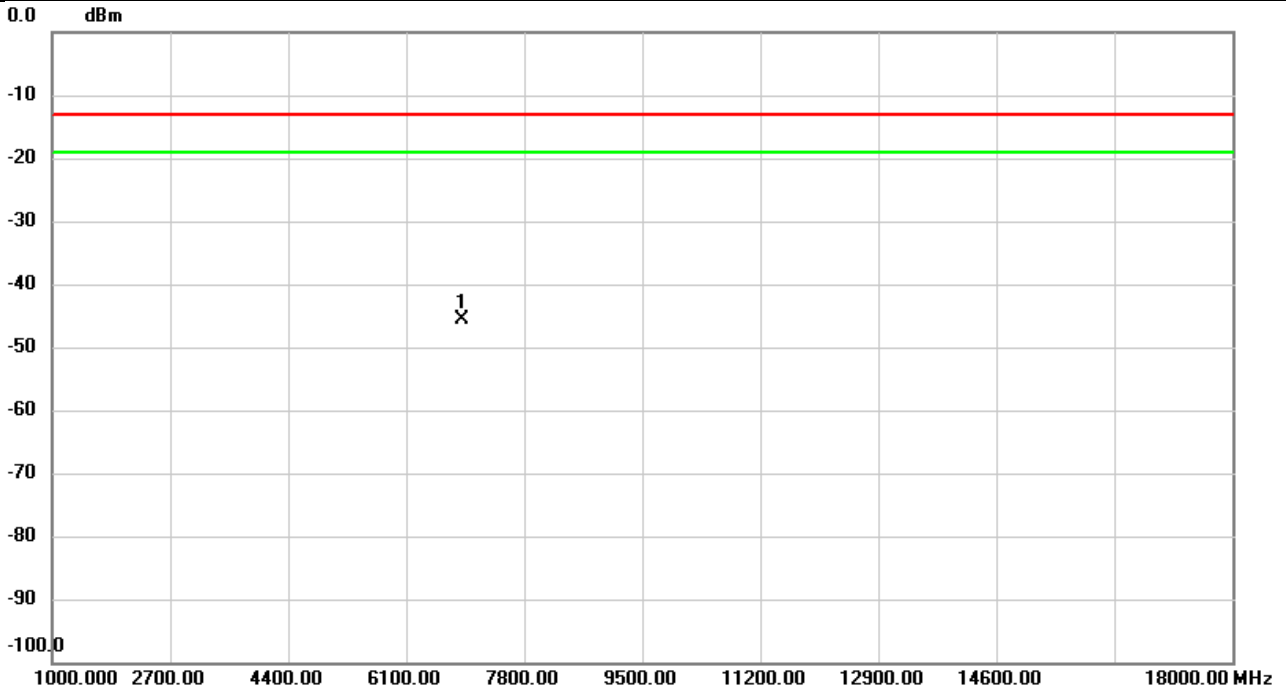


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-63.71	18.00	-45.71	-13.00	-32.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

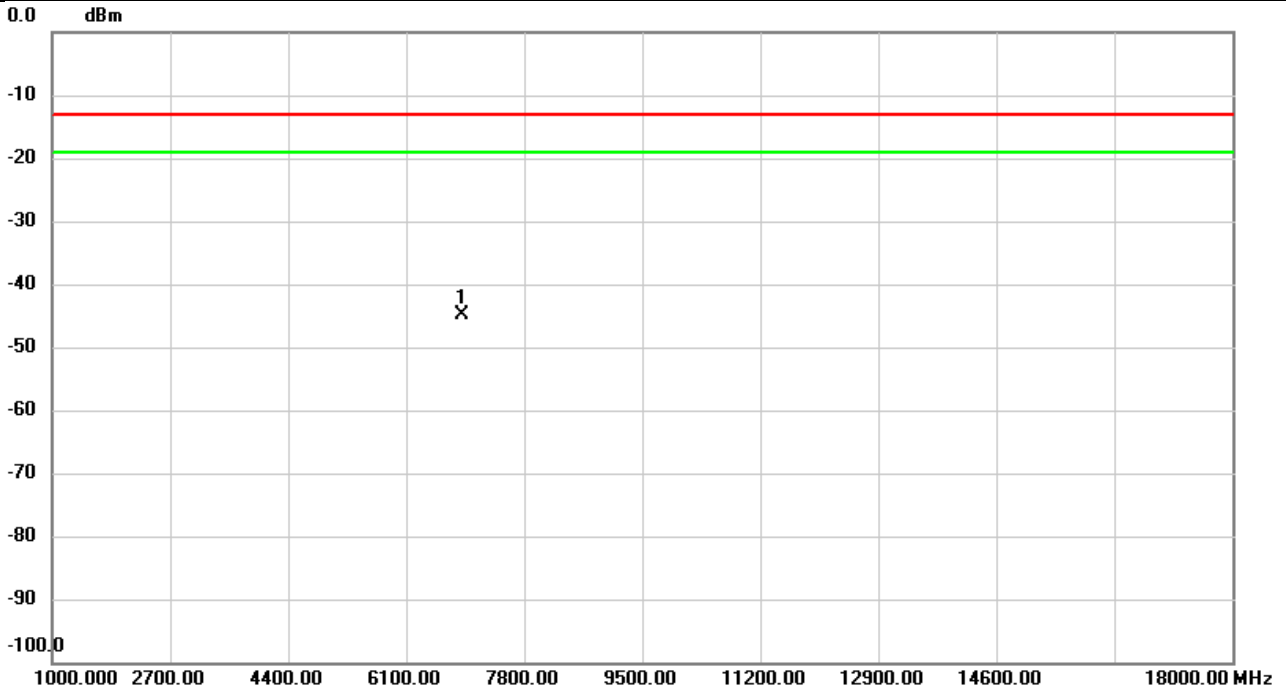


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.49	17.74	-44.75	-13.00	-31.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

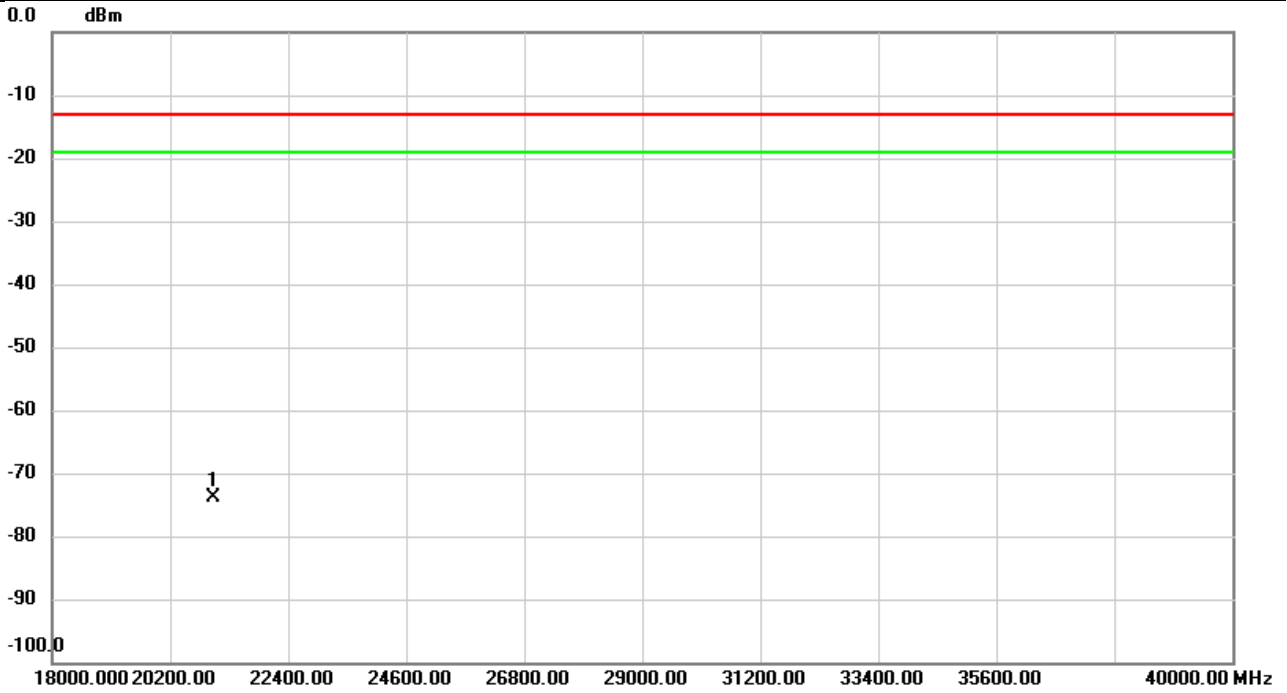


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-67.55	-6.27	-73.82	-13.00	-60.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

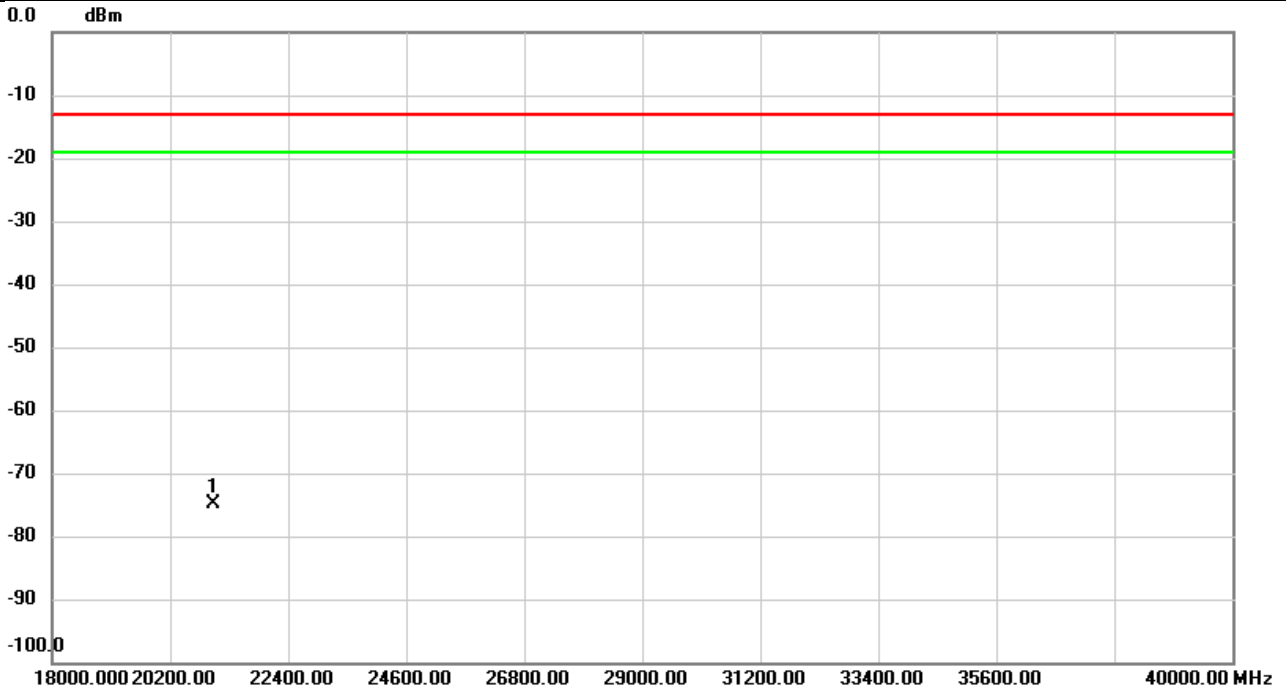

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-68.67	-6.27	-74.94	-13.00	-61.94	peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

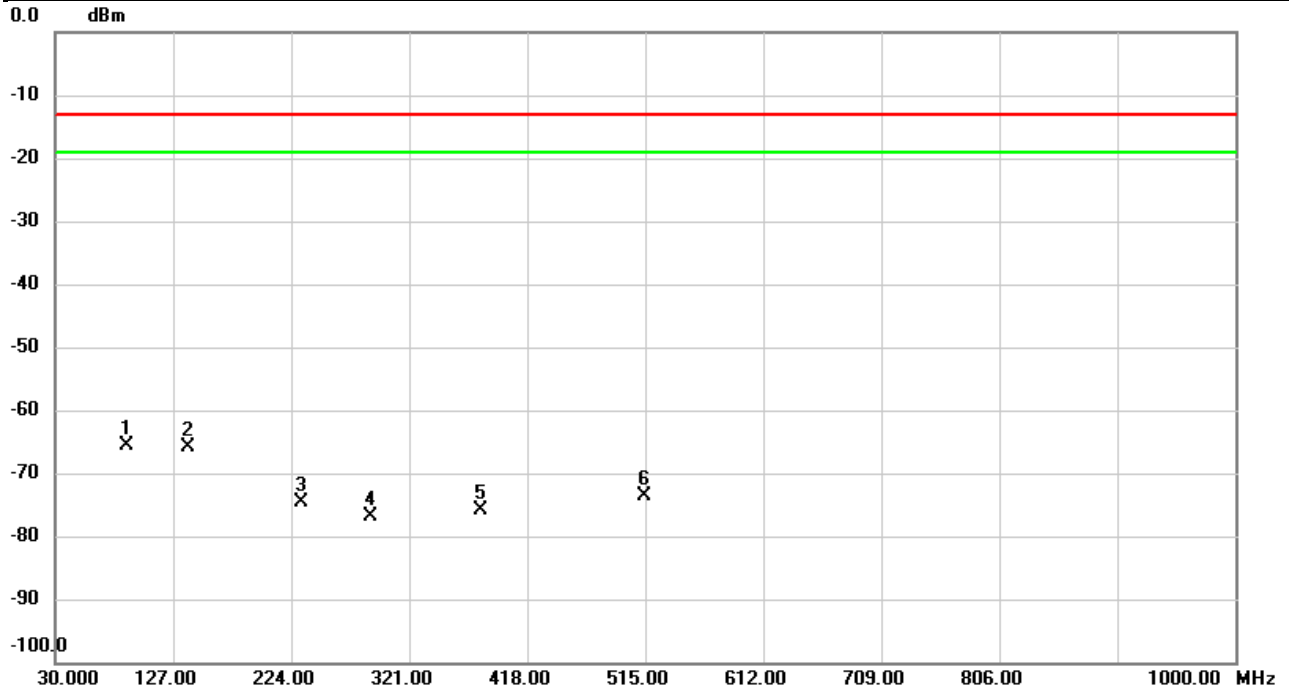


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.0730	-60.02	-5.62	-65.64	-13.00	-52.64	peak	
2		139.5777	-62.50	-3.37	-65.87	-13.00	-52.87	peak	
3		232.5683	-72.05	-2.66	-74.71	-13.00	-61.71	peak	
4		289.5397	-73.63	-3.23	-76.86	-13.00	-63.86	peak	
5		379.7820	-73.32	-2.47	-75.79	-13.00	-62.79	peak	
6		514.8706	-74.48	0.82	-73.66	-13.00	-60.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

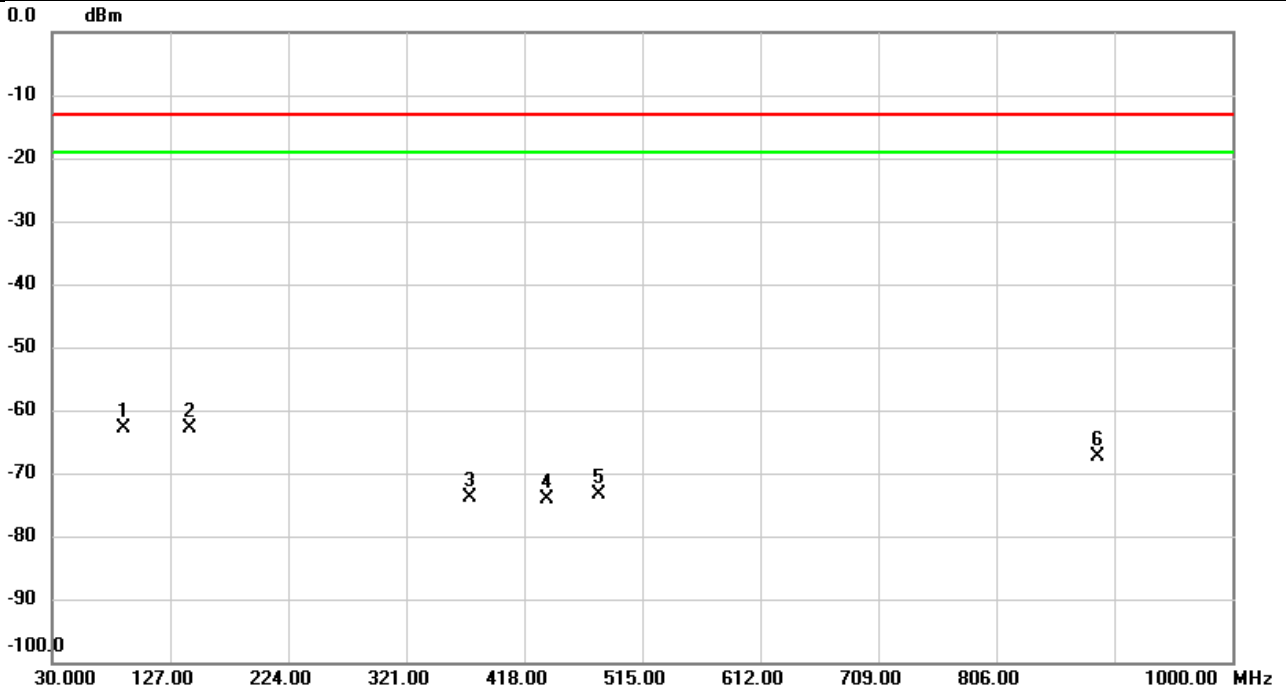


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		89.0407	-54.68	-8.30	-62.98	-13.00	-49.98	peak	
2	*	143.2960	-57.32	-5.60	-62.92	-13.00	-49.92	peak	
3		373.0242	-71.36	-2.54	-73.90	-13.00	-60.90	peak	
4		437.3677	-71.98	-2.12	-74.10	-13.00	-61.10	peak	
5		479.3040	-71.53	-1.75	-73.28	-13.00	-60.28	peak	
6		889.8080	-71.95	4.61	-67.34	-13.00	-54.34	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

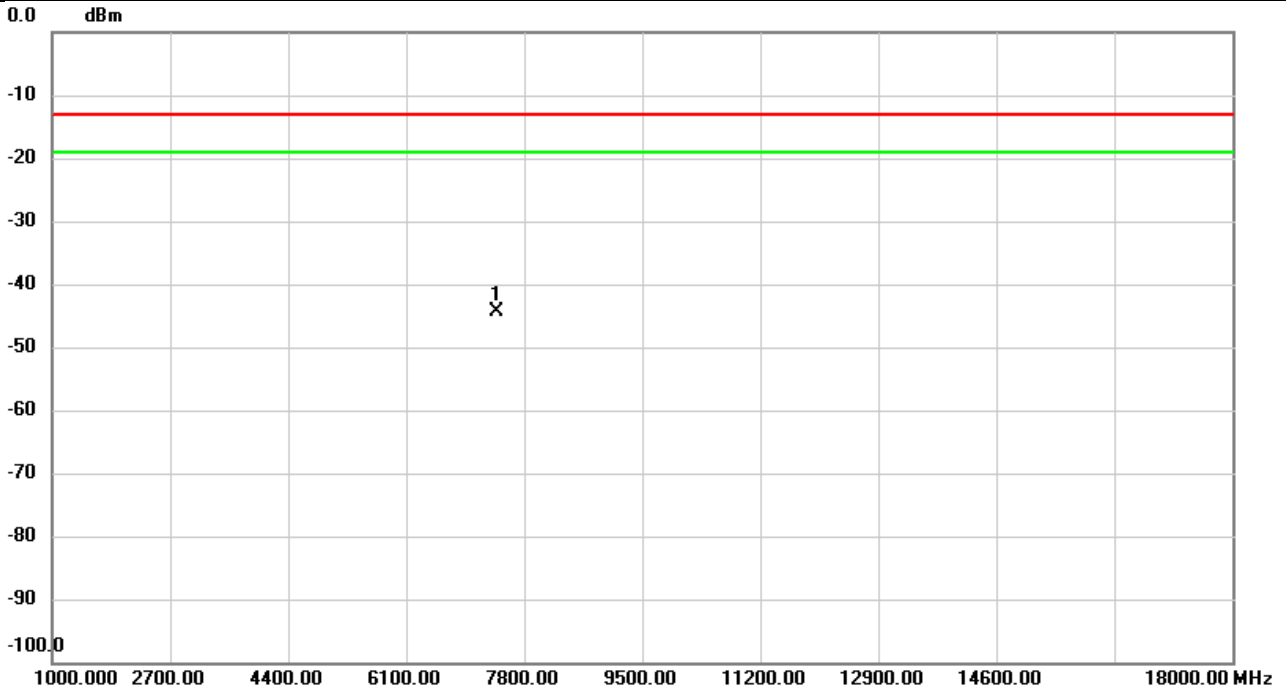


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.56	18.12	-44.44	-13.00	-31.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

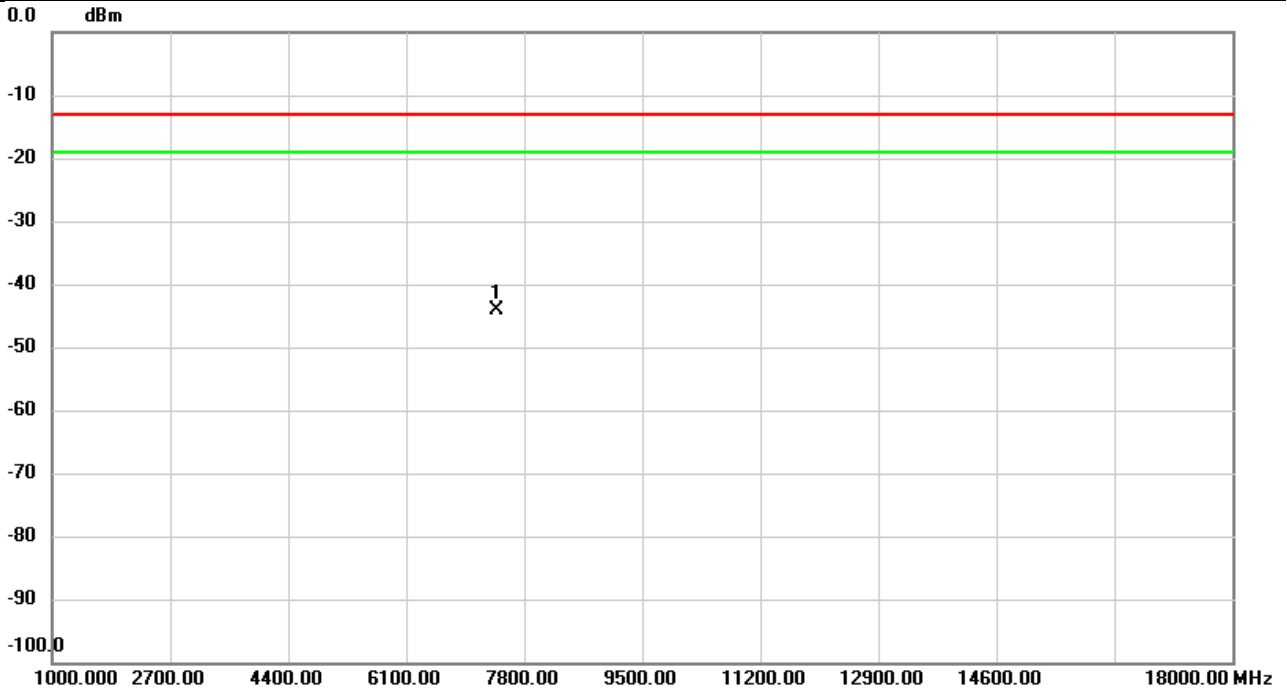


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-62.08	18.07	-44.01	-13.00	-31.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH656000	Polarization	Vertical
Temp	21°C	Hum.	58%

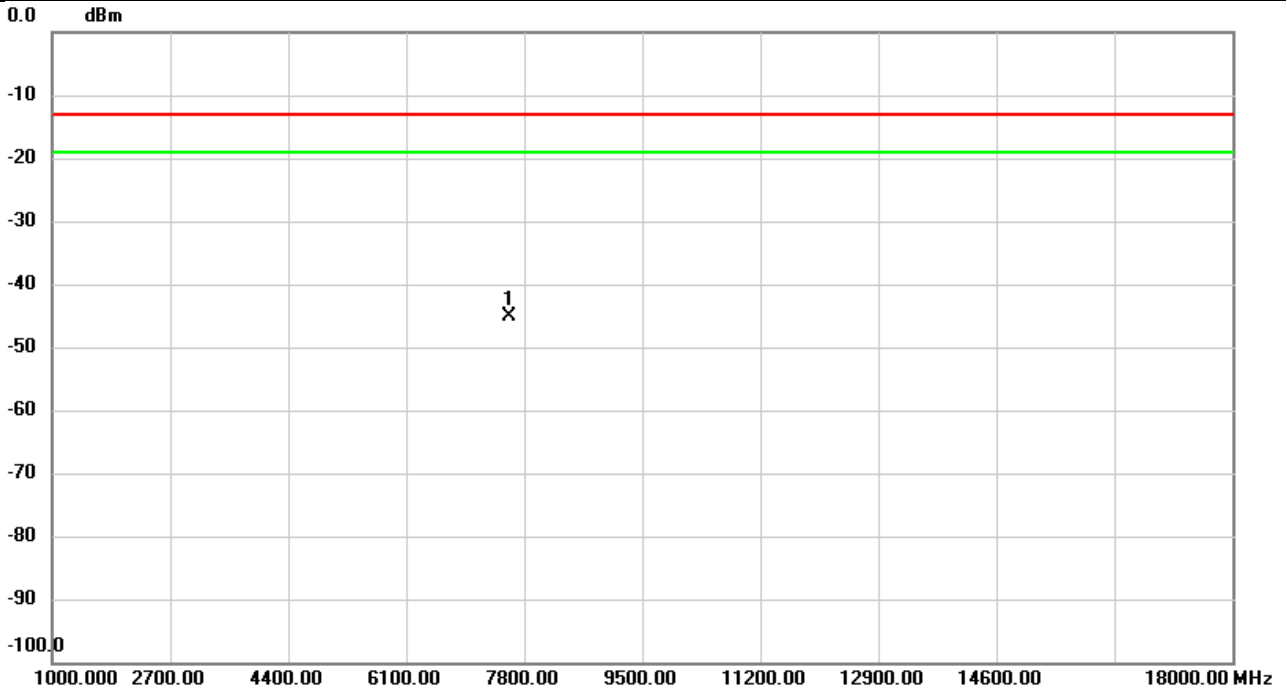


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-62.42	17.29	-45.13	-13.00	-32.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH656000	Polarization	Horizontal
Temp	21°C	Hum.	58%

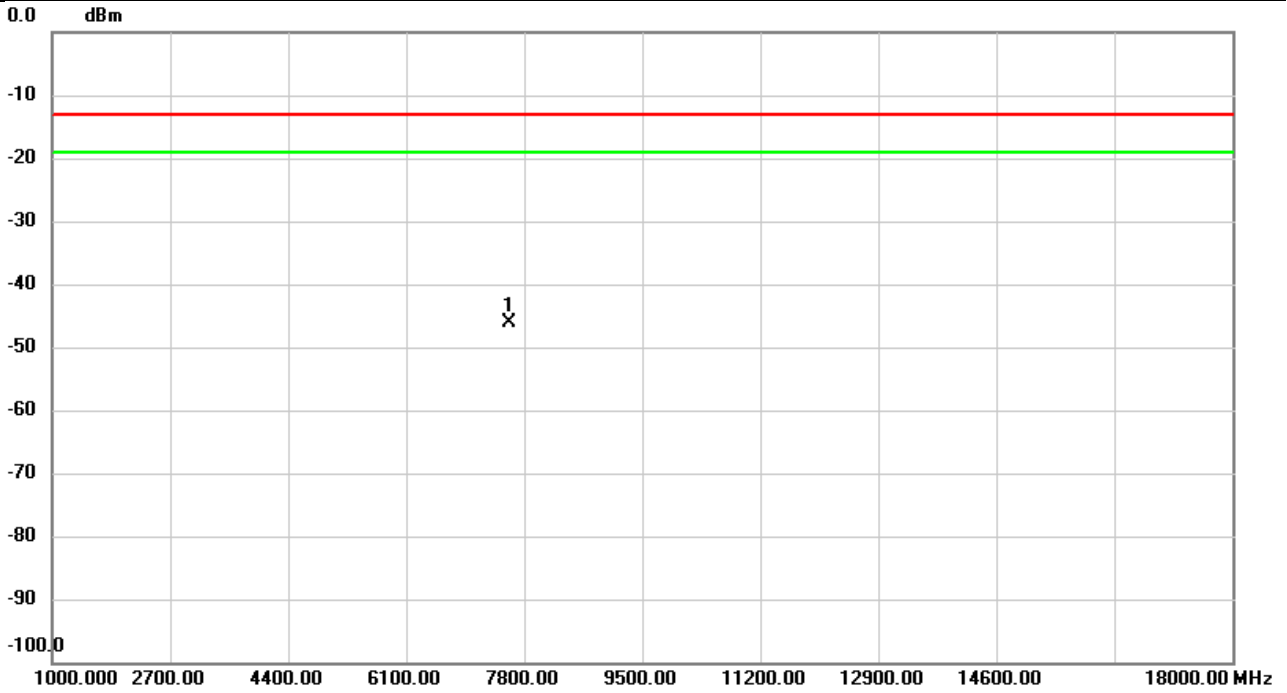


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7580.000	-63.33	17.22	-46.11	-13.00	-33.11	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH662000	Polarization	Vertical
Temp	21°C	Hum.	58%

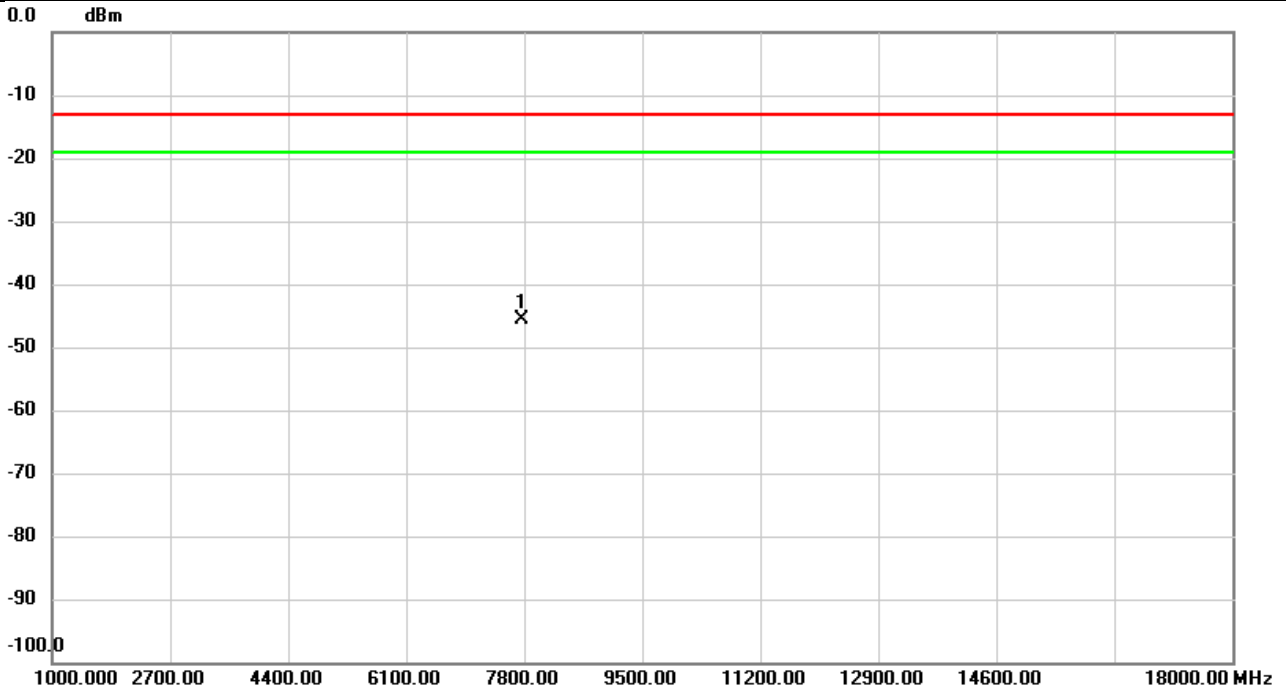


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-62.95	17.41	-45.54	-13.00	-32.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH662000	Polarization	Horizontal
Temp	21°C	Hum.	58%

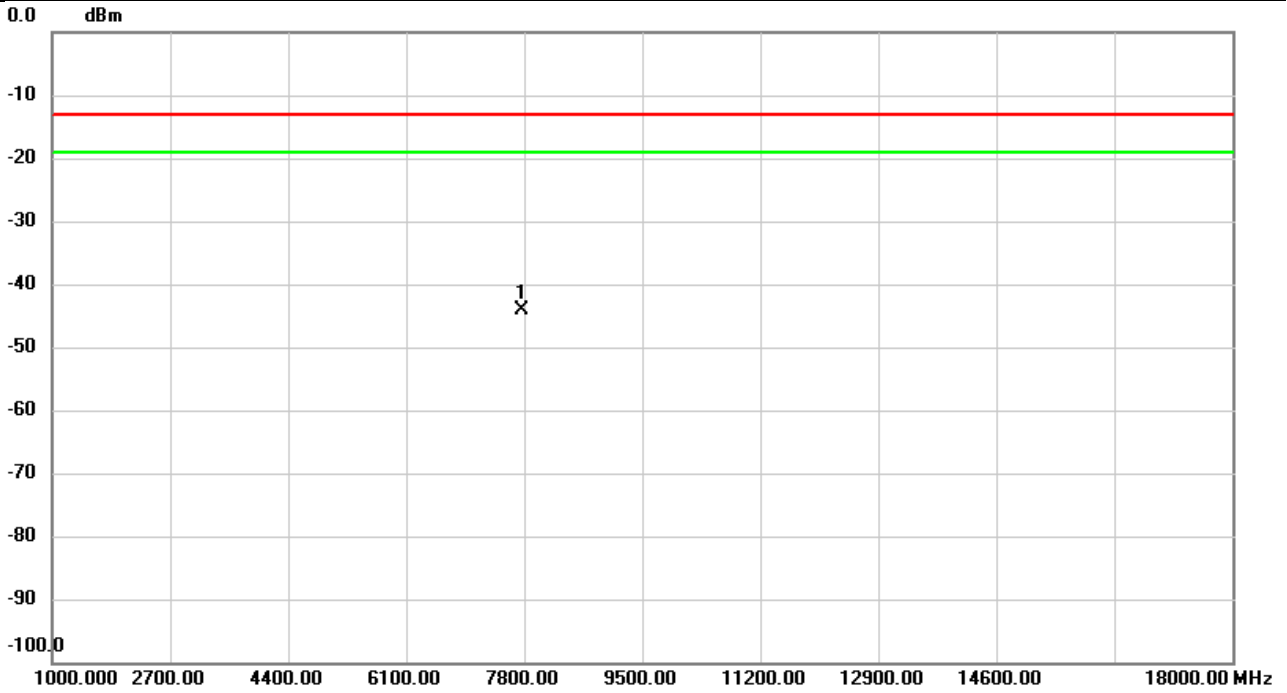


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7760.000	-61.49	17.37	-44.12	-13.00	-31.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

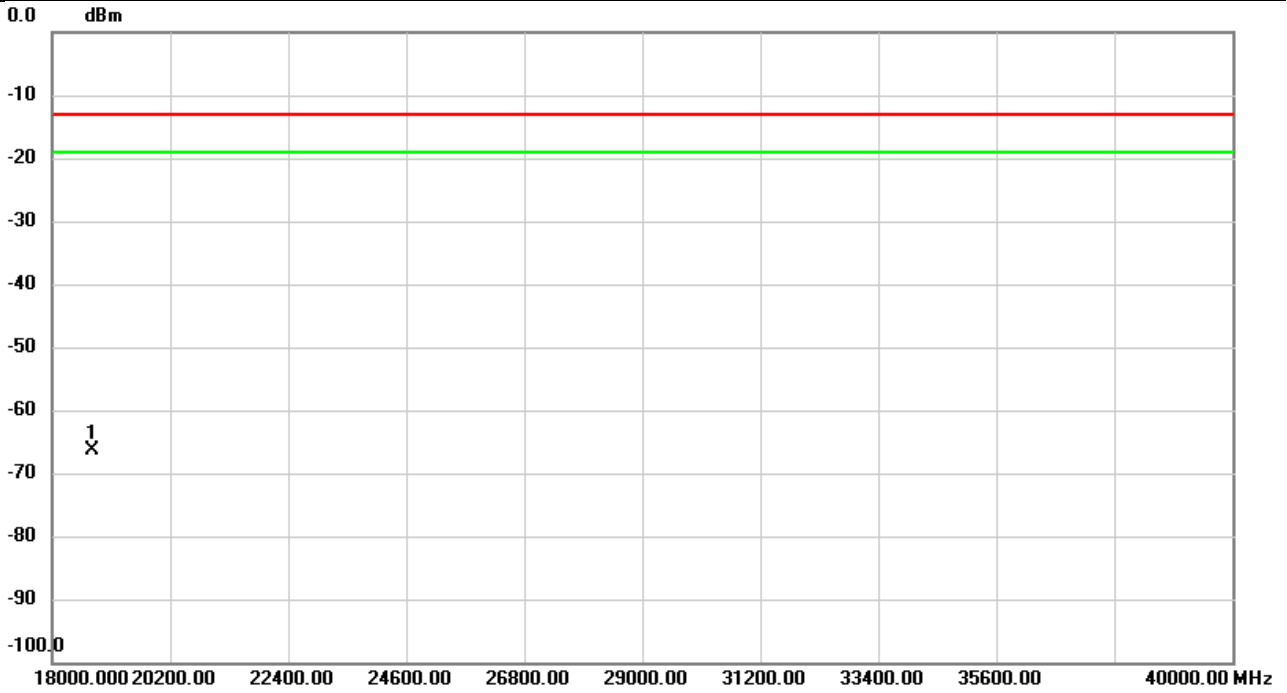


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.96	-6.32	-66.28	-13.00	-53.28	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

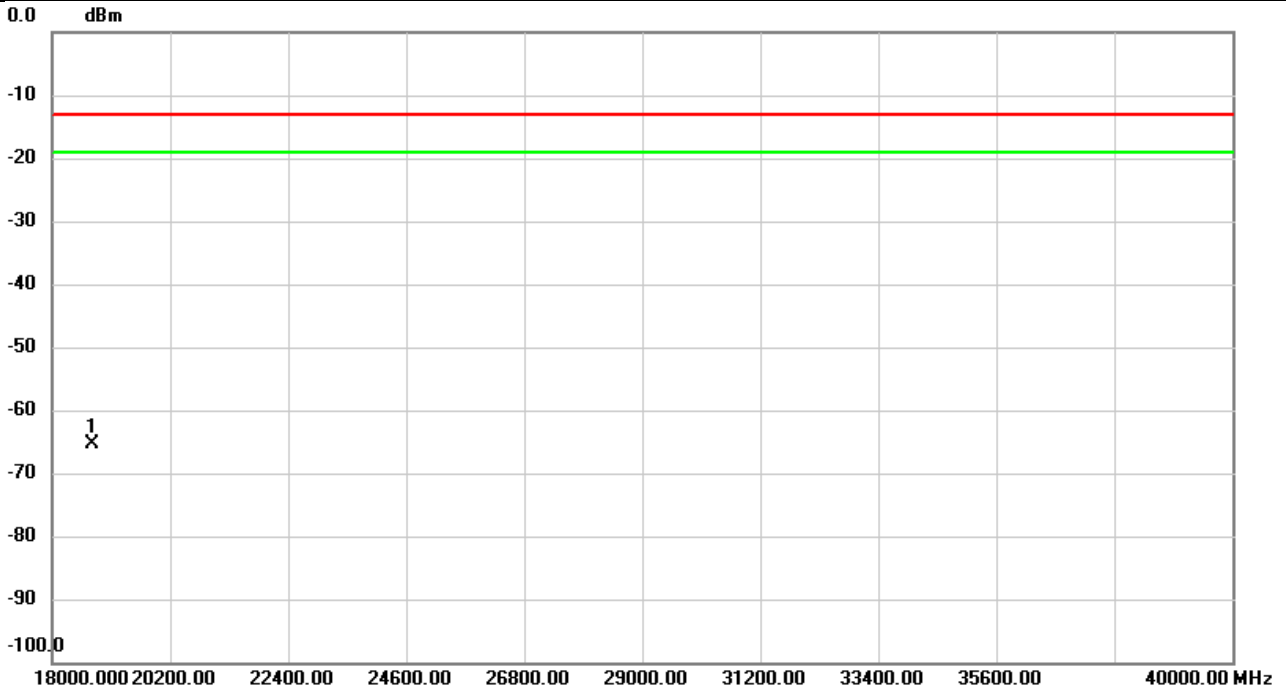


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.06	-6.32	-65.38	-13.00	-52.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

3450 ~ 3550 MHz:

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

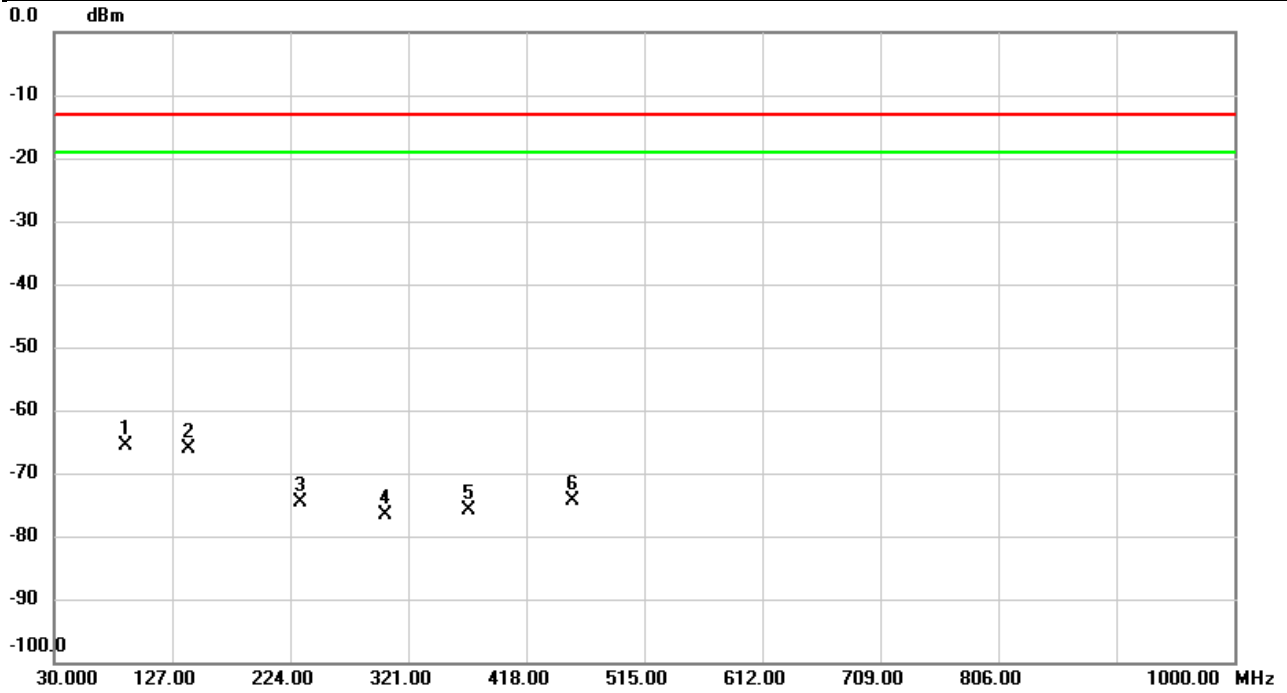


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	89.1053	-60.05	-5.61	-65.66	-13.00	-52.66	peak	
2		141.0973	-62.90	-3.22	-66.12	-13.00	-53.12	peak	
3		232.5360	-72.05	-2.66	-74.71	-13.00	-61.71	peak	
4		301.7616	-73.32	-3.28	-76.60	-13.00	-63.60	peak	
5		370.8580	-73.32	-2.57	-75.89	-13.00	-62.89	peak	
6		455.5390	-73.02	-1.23	-74.25	-13.00	-61.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

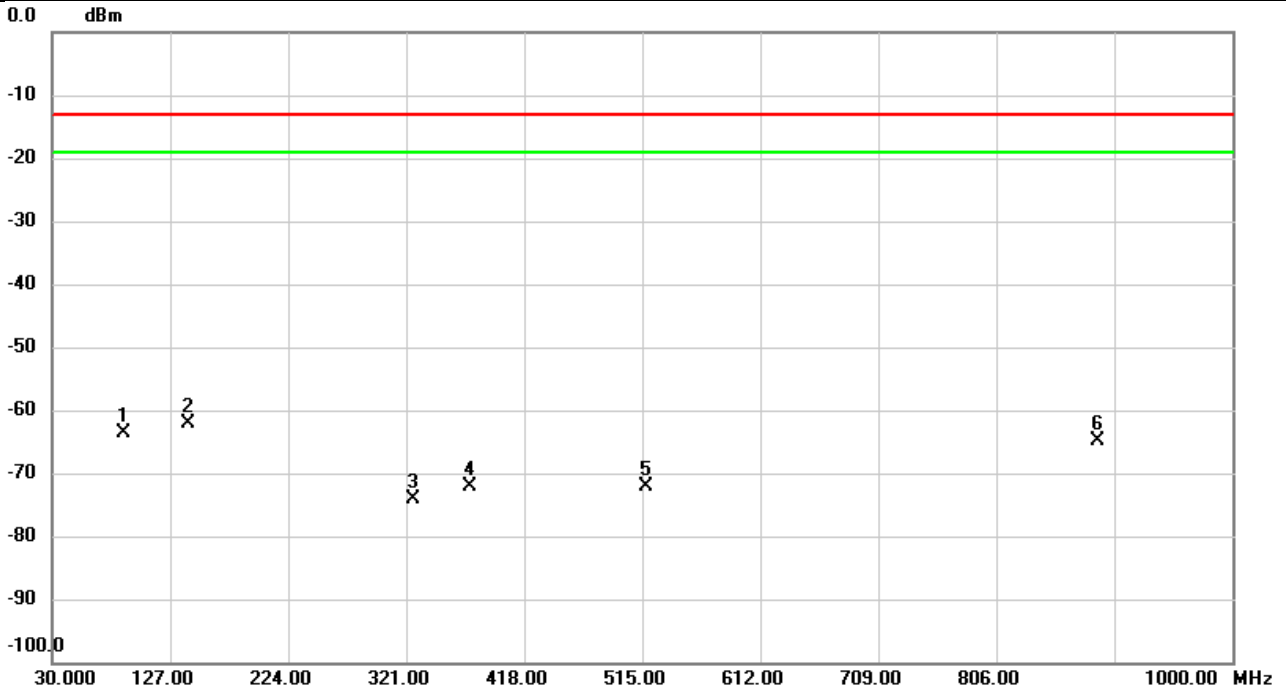


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		89.3317	-55.20	-8.31	-63.51	-13.00	-50.51	peak	
2	*	142.0350	-56.47	-5.59	-62.06	-13.00	-49.06	peak	
3		326.8846	-69.77	-4.24	-74.01	-13.00	-61.01	peak	
4		373.1860	-69.56	-2.54	-72.10	-13.00	-59.10	peak	
5		517.7483	-70.92	-1.24	-72.16	-13.00	-59.16	peak	
6		889.8080	-69.60	4.61	-64.99	-13.00	-51.99	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

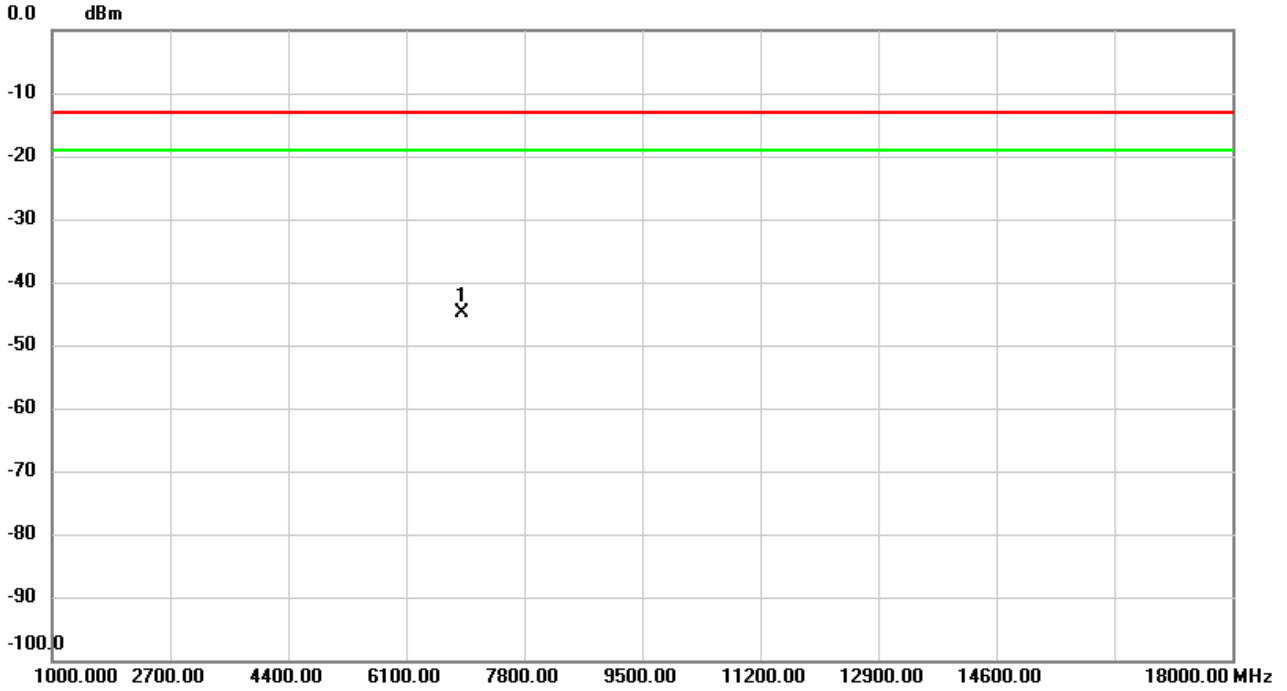


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-62.86	18.00	-44.86	-13.00	-31.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

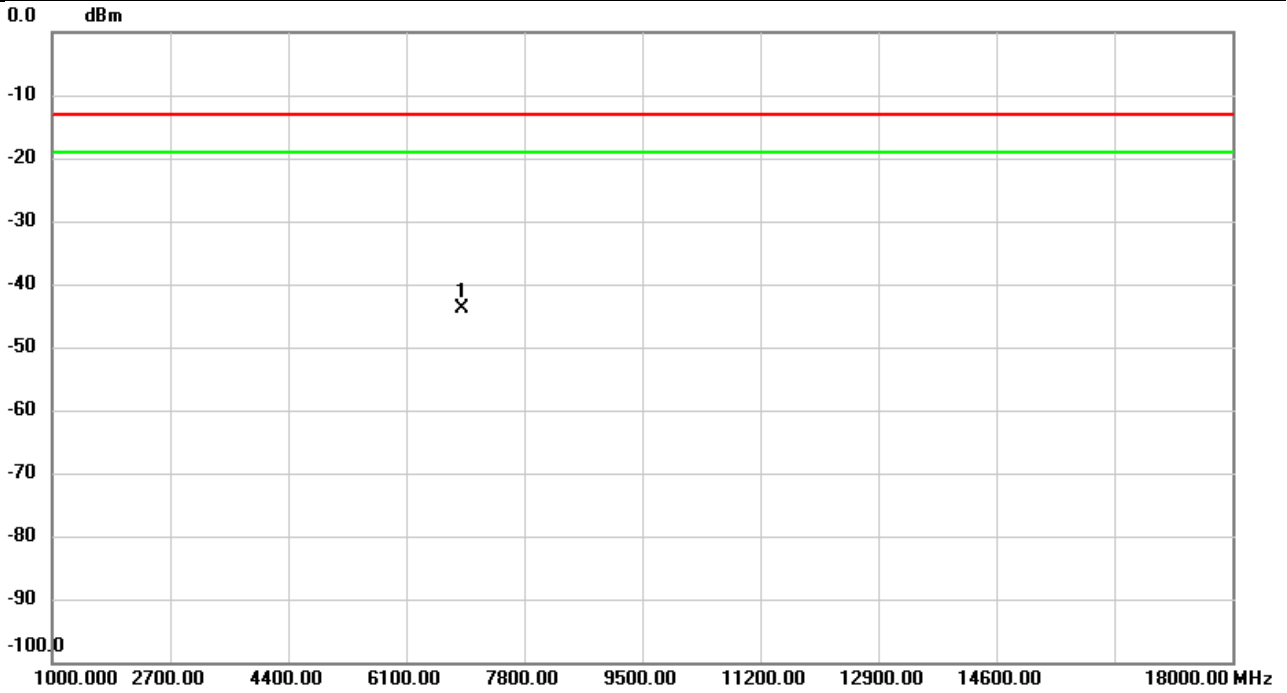


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6900.020	-61.63	17.74	-43.89	-13.00	-30.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Vertical
Temp	21°C	Hum.	58%

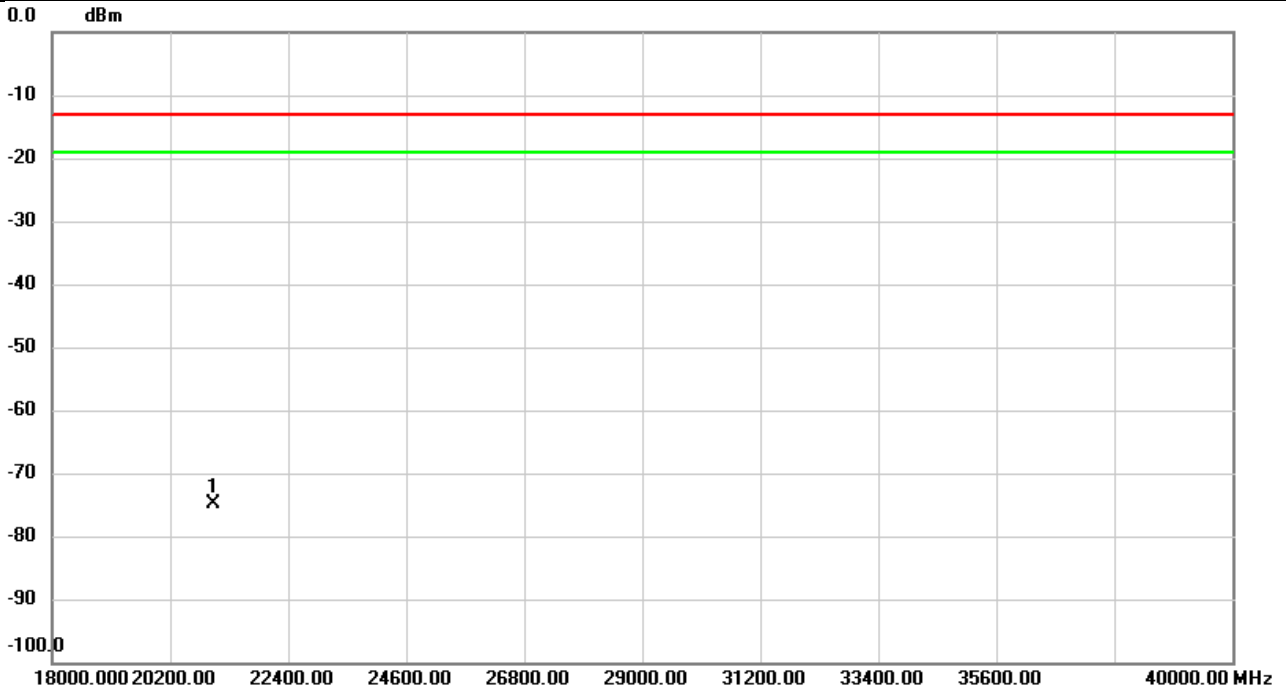


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	21000.00	-68.62	-6.27	-74.89	-13.00	-61.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH633334	Polarization	Horizontal
Temp	21°C	Hum.	58%

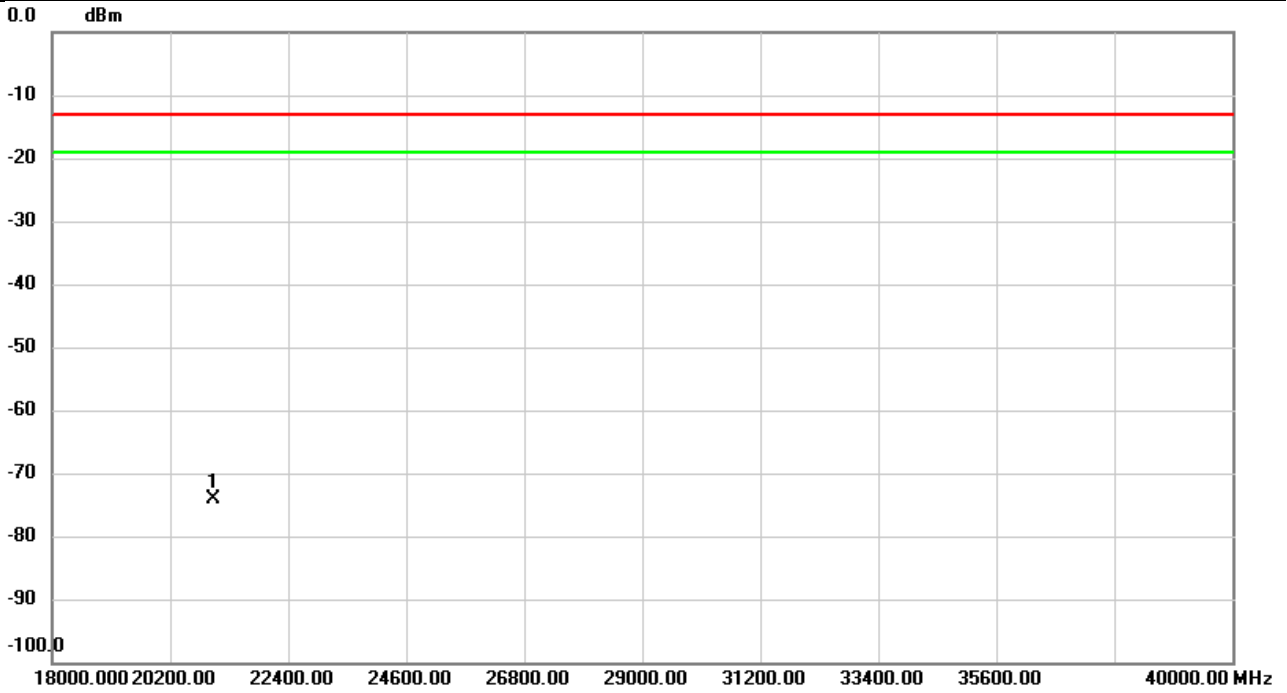

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-67.90	-6.27	-74.17	-13.00	-61.17	peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



3700 ~ 3980 MHz:

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

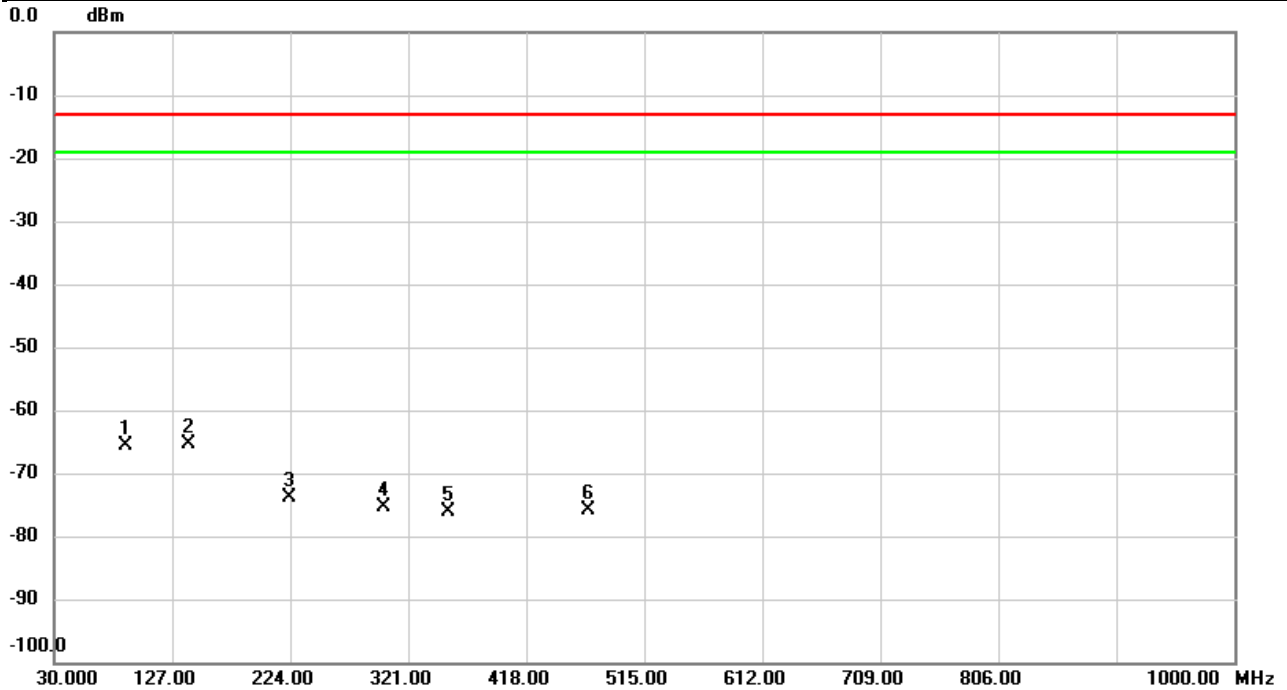


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.9760	-59.88	-5.62	-65.50	-13.00	-52.50	peak	
2	*	139.9980	-62.07	-3.28	-65.35	-13.00	-52.35	peak	
3		223.2563	-70.29	-3.55	-73.84	-13.00	-60.84	peak	
4		300.7592	-72.18	-3.29	-75.47	-13.00	-62.47	peak	
5		354.4325	-73.45	-2.75	-76.20	-13.00	-63.20	peak	
6		468.8602	-74.94	-0.86	-75.80	-13.00	-62.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

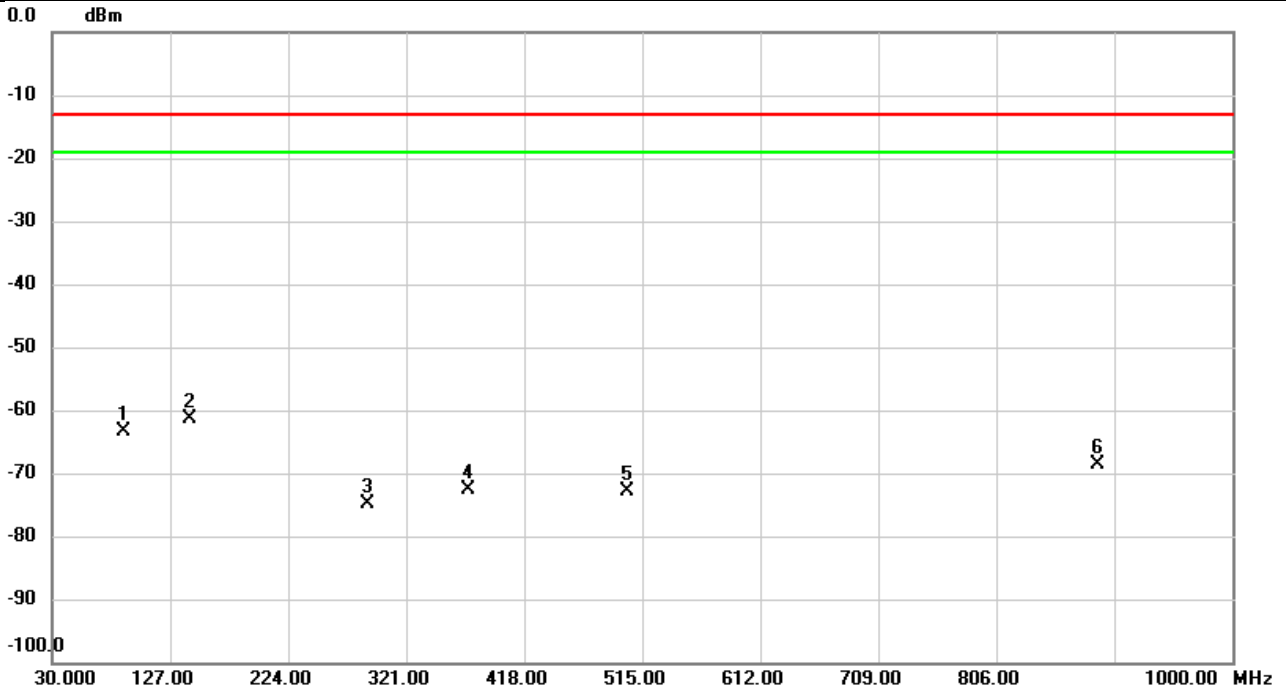


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		88.9437	-55.14	-8.29	-63.43	-13.00	-50.43	peak	
2	*	143.7163	-55.82	-5.60	-61.42	-13.00	-48.42	peak	
3		289.5397	-68.33	-6.50	-74.83	-13.00	-61.83	peak	
4		372.3130	-70.06	-2.55	-72.61	-13.00	-59.61	peak	
5		503.1983	-71.33	-1.50	-72.83	-13.00	-59.83	peak	
6		889.8403	-73.32	4.61	-68.71	-13.00	-55.71	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

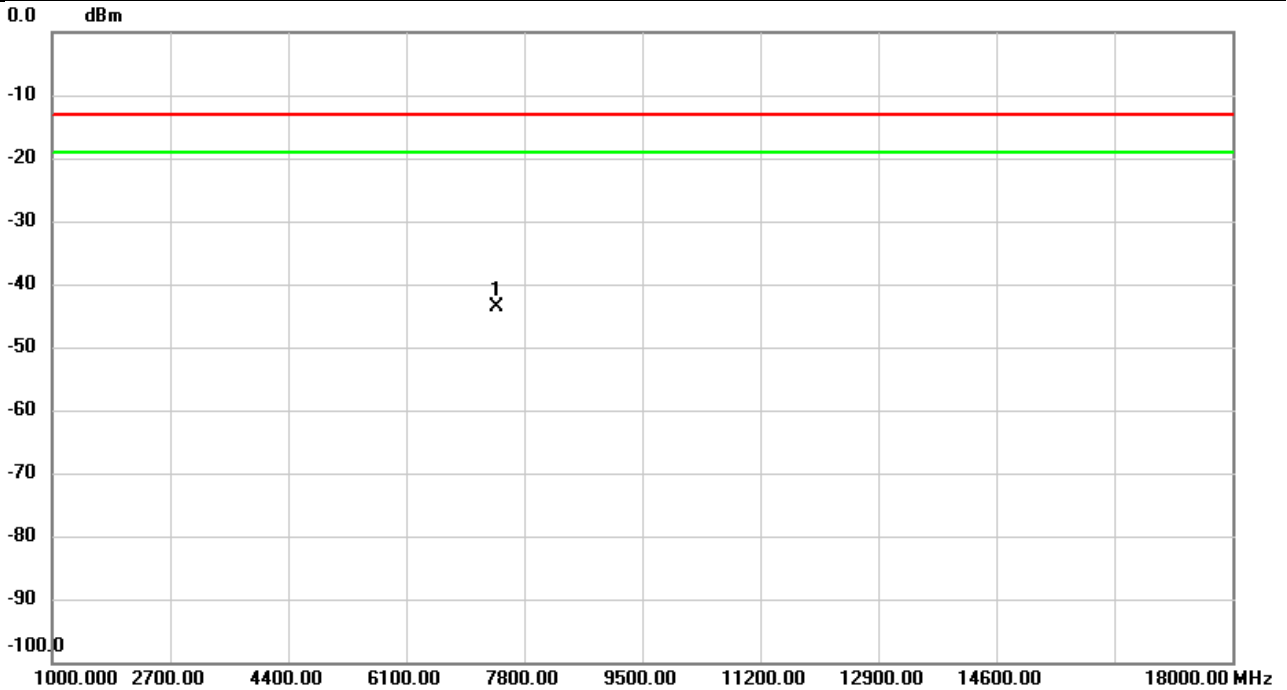


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-61.66	18.12	-43.54	-13.00	-30.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

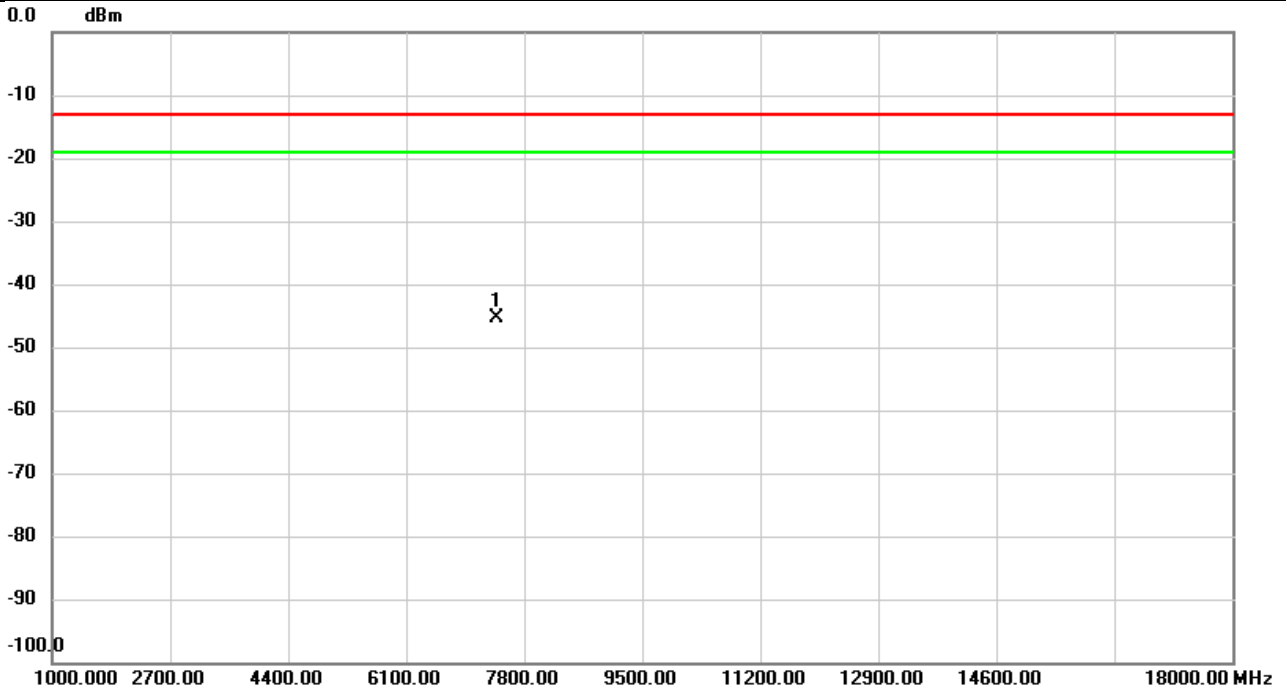


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7400.000	-63.35	18.07	-45.28	-13.00	-32.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Vertical
Temp	21°C	Hum.	58%

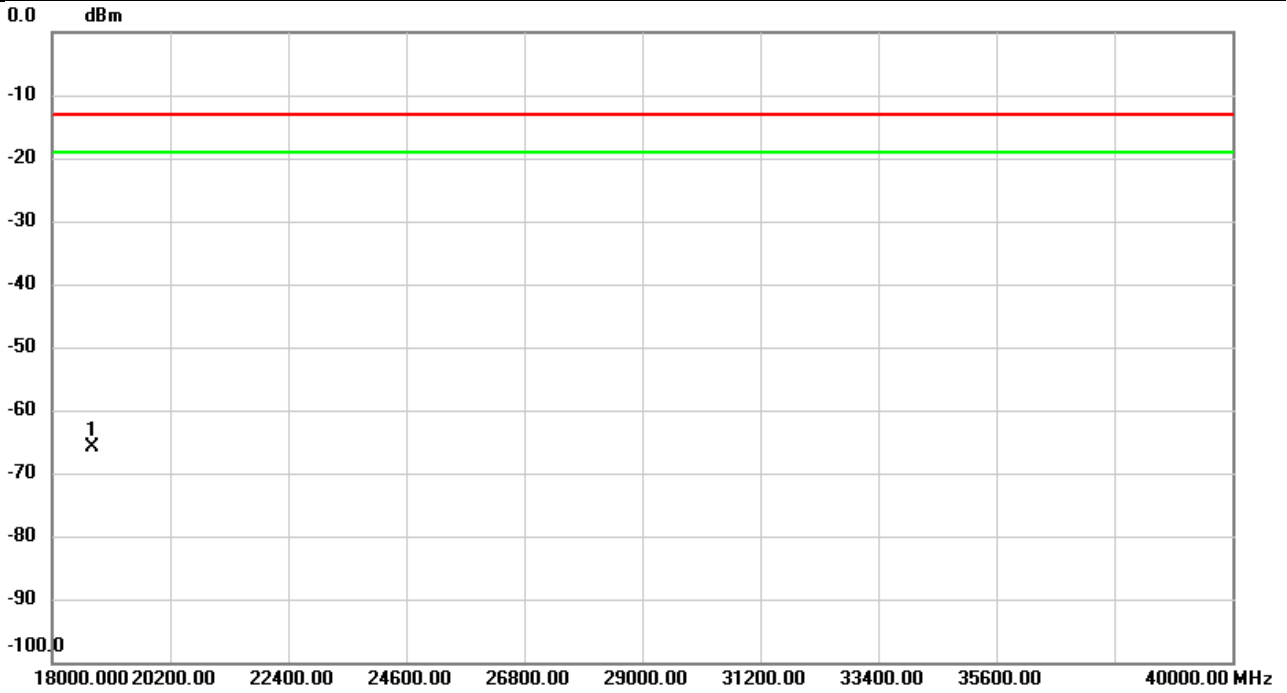


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-59.58	-6.32	-65.90	-13.00	-52.90	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2024/1/11
Test Channel	CH650000	Polarization	Horizontal
Temp	21°C	Hum.	58%

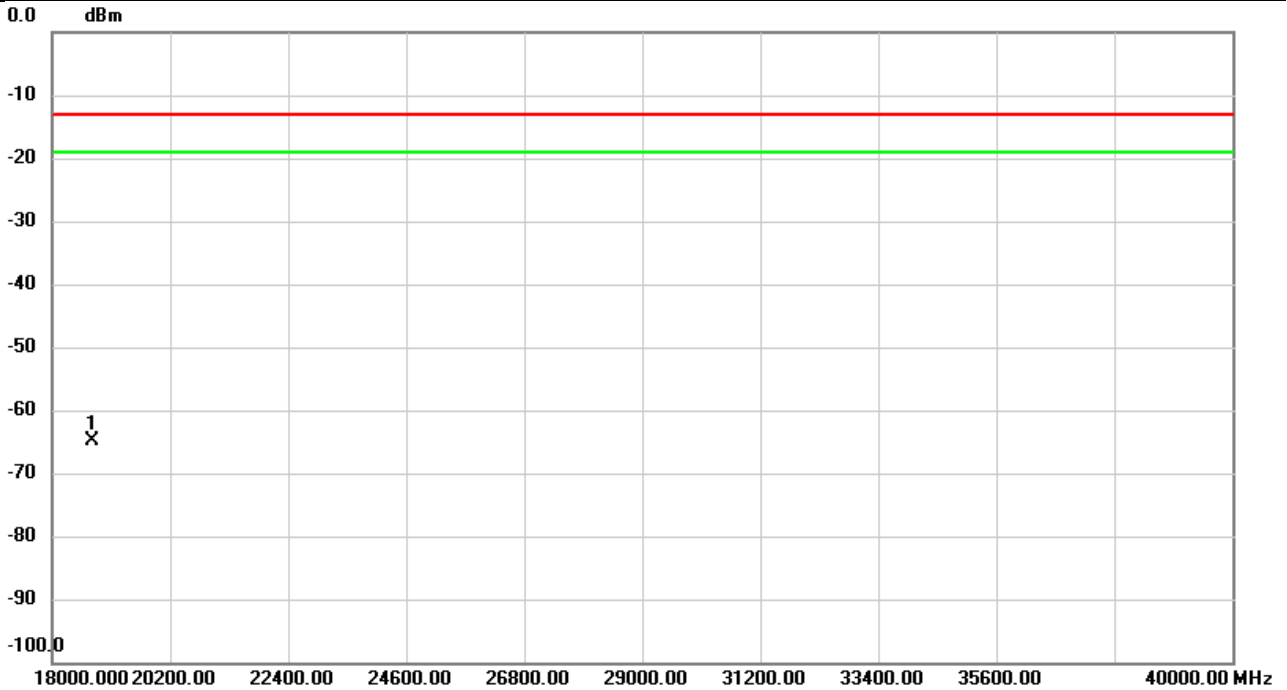

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	18750.00	-58.65	-6.32	-64.97	-13.00	-51.97	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**End of Test Report**