



# FCC RADIO TEST REPORT

**FCC ID** : XMR2023RM520NGLT  
**Equipment** : 5G Sub-6 GHz M.2 Module  
**Brand Name** : Quectel  
**Model Name** : RM520N-GL  
**Applicant** : Quectel Wireless Solutions Co., Ltd.  
Building 5, Shanghai Business Park Phase III (Area B), No.1016  
Tianlin Road, Minhang District, Shanghai, China, 200233  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei  
Economics & Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 96

Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

The product was received on Sep. 18, 2023 and testing was performed from Oct. 09, 2023 to Nov. 23, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	6
1.5 Applied Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Frequency List of Low/Middle/High Channels.....	9
<b>3 Conducted Test Items.....</b>	<b>11</b>
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power .....	12
3.3 EIRP .....	13
<b>4 Radiated Test Items .....</b>	<b>14</b>
4.1 Measuring Instruments.....	14
4.2 Test Setup .....	14
4.3 Test Result of Radiated Test.....	15
4.4 Radiated Spurious Emission .....	16
<b>5 List of Measuring Equipment.....</b>	<b>17</b>
<b>6 Measurement Uncertainty .....</b>	<b>18</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	-	Peak-to-Average Ratio	-	See Note
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
-	§2.1049 RSS-197 3.1	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	13.47 dB under the limit at 14724.00 MHz

**Remark:**

- For host device, Radiated Spurious Emission and Equivalent Isotropic Radiated Power are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: RM520N-GL)

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sheng Kuo**

**Report Producer: Michelle Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Sub-6 GHz M.2 Module
Brand Name	Quectel
Model Name	RM520N-GL
FCC ID	XMR2023RM520NGLT
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

The product was installed into Notebook Computer (Brand Name: Lenovo, Model Name: TP00150A) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with Amphenol Antenna
Host 2	Host with AWAN Antenna

Support band and evaluated information	
Supported band	B48
Evaluated and Tested band	B48
MIMO 2 Antenna	B48

TDD band Power Class			
	PC3	PC2	
B48	V	-	

WWAN Antenna Information for Host				
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	LTE Band 48 : -0.17
	Part number	TKF437-16-000-R	Type	PIFA
	Manufacturer	AWAN	Peak gain (dBi)	LTE Band 48 : -0.07
	Part number	AYL6Y-200007	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.



## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	3552.5 MHz ~ 3697.5 MHz
Rx Frequency	3552.5 MHz ~ 3697.5 MHz
Bandwidth	5 MHz / 10 MHz / 15 MHz / 20 MHz
Maximum Output Power to Antenna	LTE Band 48: 20.30 dBm LTE Band 48C: 21.31 dBm
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.

## 1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY
Test Engineer	Diego Huang
Temperature (°C)	22.6~23.5
Relative Humidity (%)	50.4~51.7

Test Site	Sporton International Inc. Wensan Laboratory.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	<b>Sporton Site No.</b>
	03CH16HY (TAF Code: 3786)
Test Engineer	Jack Tsai, Gary Guo and Steven Wu
Temperature (°C)	19.1~22.3
Relative Humidity (%)	62.5~68.3
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



## 1.5 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Modulation Type	Modulation
A	QPSK
B	16QAM
C	64QAM
D	256QAM


Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D	All	1, Half, Full	L, M, H
EIRP	A, B, C, D	All	1, Half, Full	L, M, H
RSE	A	20 MHz or less	1RB	L, M, H

**Remark:**

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. During the RSE preliminary test, the standalone mode and charging modes were verified. It is determined that the charging modes is the worst case for the official test.
4. All the radiated test cases were performed with Sample 2.



## 2.2 Connection Diagram of Test System

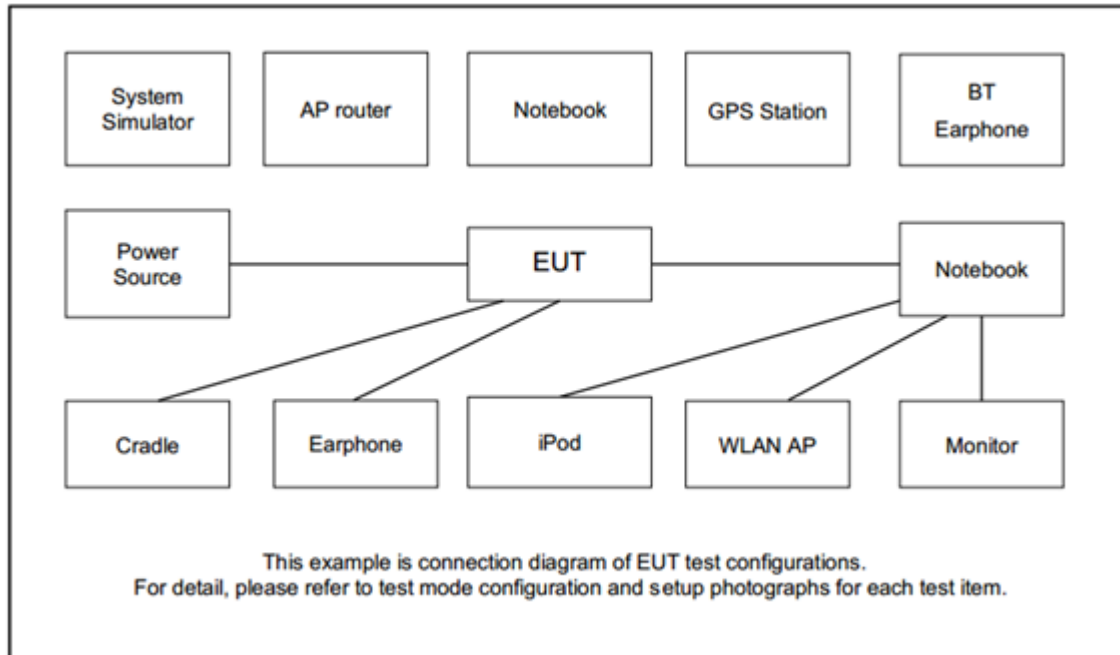

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Lenovo	N/A	N/A	N/A	Unshielded, 1.5m

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625	3690
15	Channel	55315	55990	56665
	Frequency	3557.5	3625	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625	3695
5	Channel	55265	55990	56715
	Frequency	3552.5	3625	3697.5



LTE Band 48C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	55340	55641	55942
		Frequency	3560	3590.1	3620.2
	SCC	Channel	55538	55839	56140
		Frequency	3579.8	3609.9	3640
20 + 15	PCC	Channel	55340	55667	55994
		Frequency	3560	3592.7	3625.4
	SCC	Channel	55511	55838	56165
		Frequency	3577.1	3609.8	3642.5
15 + 20	PCC	Channel	55315	55642	55969
		Frequency	3557.5	3590.2	3622.9
	SCC	Channel	55486	55813	56140
		Frequency	3574.6	3607.3	3640
20 + 10	PCC	Channel	55340	55693	56046
		Frequency	3560	3595.3	3630.6
	SCC	Channel	55484	55837	56190
		Frequency	3574.4	3609.7	3645
10 + 20	PCC	Channel	55290	55643	55996
		Frequency	3555	3590.3	3625.6
	SCC	Channel	55434	55787	56140
		Frequency	3569.4	3604.7	3640
20 + 5	PCC	Channel	55340	55719	56098
		Frequency	3560	3597.9	3635.8
	SCC	Channel	55457	55836	56215
		Frequency	3571.7	3609.6	3647.5
5 + 20	PCC	Channel	55265	55644	56023
		Frequency	3552.5	3590.4	3628.3
	SCC	Channel	55382	55761	56140
		Frequency	3564.2	3602.1	3640


### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

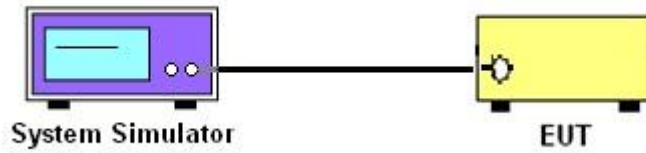

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power**

### **3.2.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 EIRP

#### 3.3.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - LC$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$LC$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

**Remark:** Total channel power is complied with EIRP limit 23dBm/10MHz.

#### 3.3.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated emissions below 30MHz

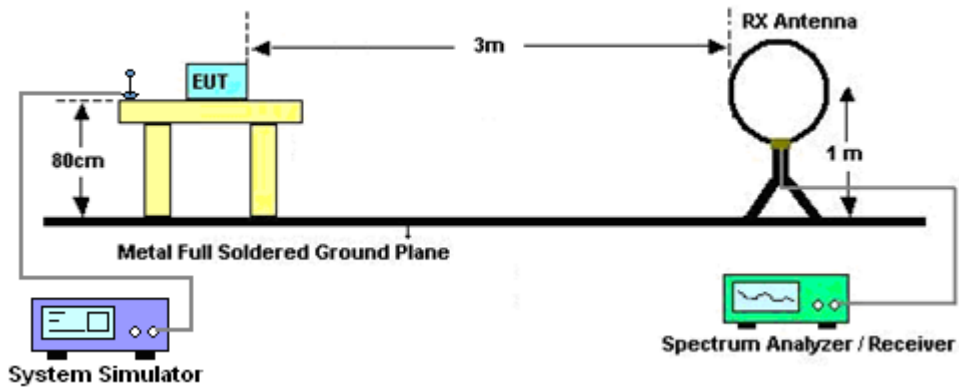


For radiated emissions from 30MHz to 1GHz

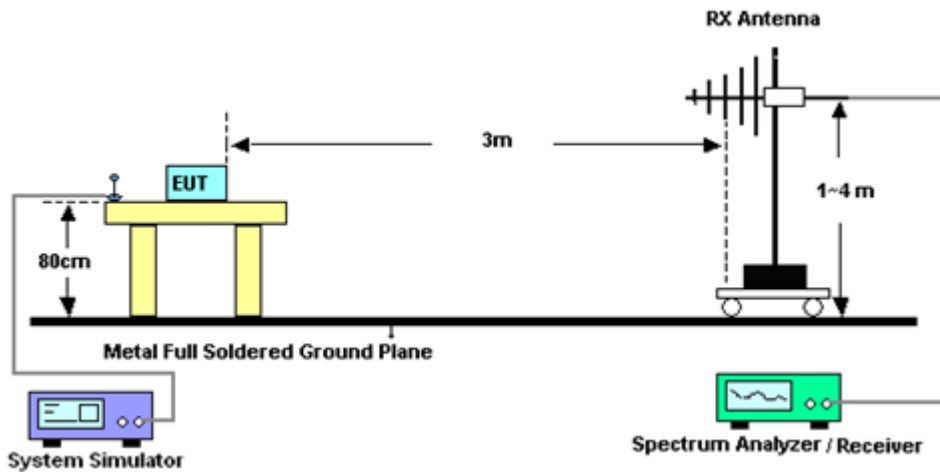

For radiated test from 1GHz to 18GHz

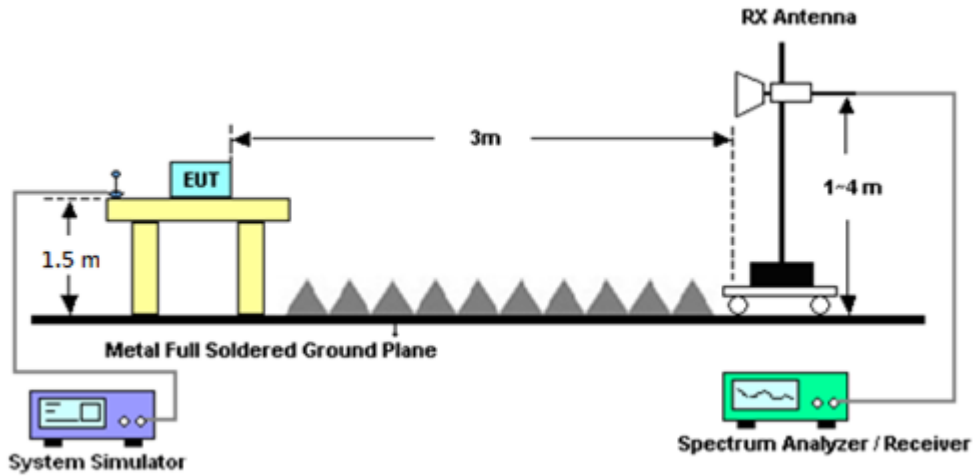

For radiated test above 18GHz

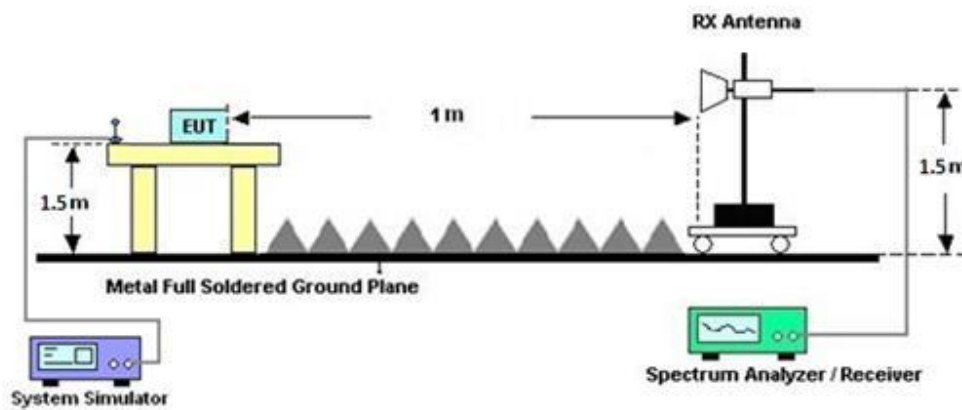

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz .

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4

Radiated measurement using the field strength method

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)  
 $EIRP(dBm) = Level (dBuV/m) + 20\log(d) - 104.77$ , where d is the distance at which field strength limit is specified in the rules.
7.  $Field\ Strength\ Level (dBm) = Spectrum\ Reading (dBm) + Antenna\ Factor + Cable\ Loss + Read\ Level - Preamp\ Factor.$
8.  $ERP (dBm) = EIRP (dBm) - 2.15$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.





## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Nov. 09, 2023~ Nov. 19, 2023	Sep. 11, 2024	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1223	18GHz-40GHz	Jul. 10, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jul. 09, 2024	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 15, 2022	Nov. 09, 2023~ Nov. 19, 2023	Dec. 14, 2023	Radiation (03CH16-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262116733	LTE FDD/TDD DLCA/ULCA	Jul. 19, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jul. 18, 2024	Radiation (03CH16-HY)
Radio Communication Test Station	Anritsu	MT8000A	6262261912	N/A	May 08, 2023	Nov. 09, 2023~ Nov. 19, 2023	May 07, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 07, 2023	Nov. 09, 2023~ Nov. 19, 2023	Oct. 06, 2024	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 23, 2023	Nov. 09, 2023~ Nov. 19, 2023	Mar. 22, 2024	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 03, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jul. 02, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 26, 2022	Nov. 09, 2023~ Nov. 19, 2023	Dec. 25, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jun. 26, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 17, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jan. 16, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 29, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jun. 28, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN27	6.75GHz High Pass Filter	Nov. 14, 2022	Nov. 09, 2023~ Nov. 12, 2023	Nov. 13, 2023	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN27	6.75GHz High Pass Filter	Nov. 13, 2023	Nov. 13, 2023~ Nov. 19, 2023	Nov. 12, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Nov. 09, 2023~ Nov. 19, 2023	Mar. 06, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5757,805935/4,802434/4	30MHz~18GHz	Aug. 08, 2023	Nov. 09, 2023~ Nov. 19, 2023	Aug. 07, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40GHz	Jan. 03, 2023	Nov. 09, 2023~ Nov. 19, 2023	Jan. 02, 2024	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Nov. 09, 2023~ Nov. 19, 2023	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Nov. 09, 2023~ Nov. 19, 2023	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 09, 2023~ Nov. 19, 2023	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 09, 2023~ Nov. 19, 2023	N/A	Radiation (03CH16-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025341	LTE FDD/TDD LTE-2CC DLCA/ULCA	Sep. 23, 2023	Oct. 09, 2023~ Nov. 23, 2023	Sep. 24, 2024	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Oct. 09, 2023~ Nov. 23, 2023	Jan. 05, 2024	Conducted (TH03-HY)



## 6 Measurement Uncertainty

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.09 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.55 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.02 dB
---	---------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & EIRP)

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	20.12	20.09	20.30	20.23	0.1054
20	1	49		20.15	20.14	20.27		
20	1	99		20.19	20.16	20.26		
20	50	0		19.13	19.13	19.38		
20	50	24		19.24	19.14	19.36		
20	50	50		19.24	19.21	19.30		
20	100	0		19.25	19.11	19.38		
20	1	0	16-QAM	19.39	19.34	19.51	19.58	0.0908
20	1	49		19.48	19.52	19.65		
20	1	99		19.48	19.40	19.62		
20	50	0		18.11	18.13	18.27		
20	50	24		18.23	18.13	18.37		
20	50	50		18.28	18.23	18.38		
20	100	0		18.20	18.15	18.35		
20	1	0	64-QAM	18.31	18.35	18.51	18.45	0.0700
20	1	49		18.40	18.38	18.52		
20	1	99		18.38	18.39	18.51		
20	50	0		17.11	17.12	17.26		
20	50	24		17.23	17.14	17.35		
20	50	50		17.23	17.23	17.36		
20	100	0		17.20	17.12	17.33		
20	1	0	256-QAM	15.59	15.47	15.30	15.71	0.0372
20	1	49		15.67	15.49	15.36		
20	1	99		15.78	15.55	15.43		
20	50	0		15.50	15.34	15.21		
20	50	24		15.60	15.45	15.25		
20	50	50		15.50	15.47	15.33		
20	100	0		15.42	15.44	15.24		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	20.02	20.03	20.25	20.18	0.1042
15	1	37		20.09	20.06	20.22		
15	1	74		20.10	20.07	20.23		
15	36	0		19.03	19.05	19.35		
15	36	20		19.14	19.06	19.34		
15	36	39		19.14	19.12	19.26		
15	75	0		19.18	19.01	19.34		
15	1	0	16-QAM	19.32	19.24	19.49	19.57	0.0906
15	1	37		19.38	19.42	19.64		
15	1	74		19.38	19.30	19.61		
15	36	0		18.02	18.04	18.25		
15	36	20		18.15	18.06	18.36		
15	36	39		18.22	18.16	18.36		
15	75	0		18.14	18.09	18.33		
15	1	0	64-QAM	18.23	18.27	18.48	18.41	0.0693
15	1	37		18.34	18.29	18.48		
15	1	74		18.32	18.32	18.48		
15	36	0		17.02	17.02	17.21		
15	36	20		17.17	17.06	17.34		
15	36	39		17.17	17.15	17.34		
15	75	0		17.11	17.02	17.32		
15	1	0	256-QAM	15.53	15.40	15.29	15.64	0.0366
15	1	37		15.59	15.41	15.33		
15	1	74		15.71	15.46	15.40		
15	36	0		15.40	15.28	15.16		
15	36	20		15.52	15.39	15.22		
15	36	39		15.42	15.41	15.28		
15	75	0		15.34	15.37	15.22		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	20.05	20.03	20.29	20.22	0.1052
10	1	25		20.09	20.06	20.22		
10	1	49		20.12	20.08	20.22		
10	25	0		19.05	19.04	19.33		
10	25	12		19.16	19.06	19.35		
10	25	25		19.17	19.15	19.27		
10	50	0		19.19	19.05	19.34		
10	1	0	16-QAM	19.32	19.28	19.47	19.53	0.0897
10	1	25		19.39	19.45	19.60		
10	1	49		19.40	19.34	19.59		
10	25	0		18.04	18.03	18.26		
10	25	12		18.17	18.07	18.36		
10	25	25		18.19	18.17	18.33		
10	50	0		18.12	18.06	18.30		
10	1	0	64-QAM	18.23	18.29	18.50	18.43	0.0697
10	1	25		18.32	18.32	18.49		
10	1	49		18.29	18.33	18.47		
10	25	0		17.01	17.05	17.25		
10	25	12		17.14	17.04	17.33		
10	25	25		17.14	17.14	17.32		
10	50	0		17.13	17.05	17.31		
10	1	0	256-QAM	15.50	15.40	15.29	15.65	0.0367
10	1	25		15.60	15.39	15.33		
10	1	49		15.72	15.49	15.39		
10	25	0		15.42	15.25	15.19		
10	25	12		15.50	15.38	15.23		
10	25	25		15.41	15.37	15.32		
10	50	0		15.34	15.38	15.22		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -0.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	20.06	19.99	20.26	20.19	0.1045
5	1	12		20.09	20.04	20.25		
5	1	24		20.13	20.08	20.22		
5	12	0		19.03	19.07	19.37		
5	12	7		19.16	19.04	19.34		
5	12	13		19.17	19.15	19.25		
5	25	0		19.16	19.04	19.35		
5	1	0	16-QAM	19.30	19.28	19.49	19.57	0.0906
5	1	12		19.39	19.46	19.64		
5	1	24		19.40	19.31	19.57		
5	12	0		18.02	18.07	18.25		
5	12	7		18.16	18.07	18.35		
5	12	13		18.20	18.14	18.33		
5	25	0		18.11	18.05	18.30		
5	1	0	64-QAM	18.25	18.27	18.50	18.43	0.0697
5	1	12		18.30	18.31	18.49		
5	1	24		18.29	18.30	18.50		
5	12	0		17.01	17.06	17.25		
5	12	7		17.17	17.06	17.34		
5	12	13		17.17	17.13	17.32		
5	25	0		17.13	17.06	17.32		
5	1	0	256-QAM	15.52	15.40	15.28	15.63	0.0366
5	1	12		15.57	15.43	15.34		
5	1	24		15.70	15.47	15.41		
5	12	0		15.43	15.28	15.20		
5	12	7		15.54	15.35	15.21		
5	12	13		15.43	15.40	15.31		
5	25	0		15.35	15.38	15.20		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = -0.07 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	1	99	1	0	QPSK	21.31	21.08	20.91	21.24	0.1330
20+20	1	99	1	0	16-QAM	20.72	20.57	20.31	20.65	0.1161
20+20	1	99	1	0	64-QAM	19.87	19.65	19.41	19.80	0.0955
20+20	1	99	1	0	256-QAM	16.45	16.46	16.12	16.39	0.0436
20+15	1	74	1	0	QPSK	21.17	20.99	20.82	21.10	0.1288
20+15	1	74	1	0	16-QAM	20.71	20.52	20.31	20.64	0.1159
20+15	1	74	1	0	64-QAM	19.67	19.44	19.21	19.60	0.0912
20+15	1	74	1	0	256-QAM	16.43	16.31	16.12	16.36	0.0433
15+20	1	74	1	0	QPSK	21.24	21.05	20.81	21.17	0.1309
15+20	1	74	1	0	16-QAM	20.61	20.54	20.32	20.54	0.1132
15+20	1	74	1	0	64-QAM	19.59	19.57	19.25	19.52	0.0895
15+20	1	74	1	0	256-QAM	16.47	16.25	16.12	16.40	0.0437
Limit	EIRP < 23dBm/10MHz					Result			Pass	

LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = -0.07 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	1	99	1	0	QPSK	21.14	21.00	20.81	21.07	0.1279
20+10	1	99	1	0	16-QAM	20.65	20.61	20.41	20.58	0.1143
20+10	1	99	1	0	64-QAM	19.65	19.47	19.25	19.58	0.0908
20+10	1	99	1	0	256-QAM	16.54	16.24	16.12	16.47	0.0444
10+20	1	49	1	0	QPSK	21.19	21.07	20.85	21.12	0.1294
10+20	1	49	1	0	16-QAM	20.88	20.71	20.39	20.81	0.1205
10+20	1	49	1	0	64-QAM	19.72	19.62	19.31	19.65	0.0923
10+20	1	49	1	0	256-QAM	16.44	16.35	16.02	16.37	0.0434
20+5	1	99	1	0	QPSK	21.17	20.95	20.81	21.10	0.1288
20+5	1	99	1	0	16-QAM	20.72	20.51	20.40	20.65	0.1161
20+5	1	99	1	0	64-QAM	19.53	19.48	19.37	19.46	0.0883
20+5	1	99	1	0	256-QAM	16.61	16.38	16.01	16.54	0.0451
Limit	EIRP < 23dBm/10MHz					Result			Pass	

LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = -0.07 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
5+20	1	24	1	0	QPSK	21.24	21.17	20.92	21.17	0.1309
5+20	1	24	1	0	16-QAM	20.91	20.68	20.42	20.84	0.1213
5+20	1	24	1	0	64-QAM	19.71	19.77	19.48	19.70	0.0933
5+20	1	24	1	0	256-QAM	16.66	16.49	16.25	16.59	0.0456
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



## Appendix B. Test Results of Radiated Test

### B1. Summary of each worse mode

Part	Mode	Ch	Freq (MHz)	Level (dBm)	Detector	Ant Factor (dB/m)	Amp\Cbl (dB)	Filter (dB)	EIRP CF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
Part 96	1	H	14724.000	-53.47	RMS	40.40	-46.91	0.27	-95.23	48.00	-40.00	-13.47	H	MIMO2






MIMO2

Part 96 Mode 1


LTE CA B48C M + M LTE CA B48C 20M Ch55340 + 20M Ch55538

L

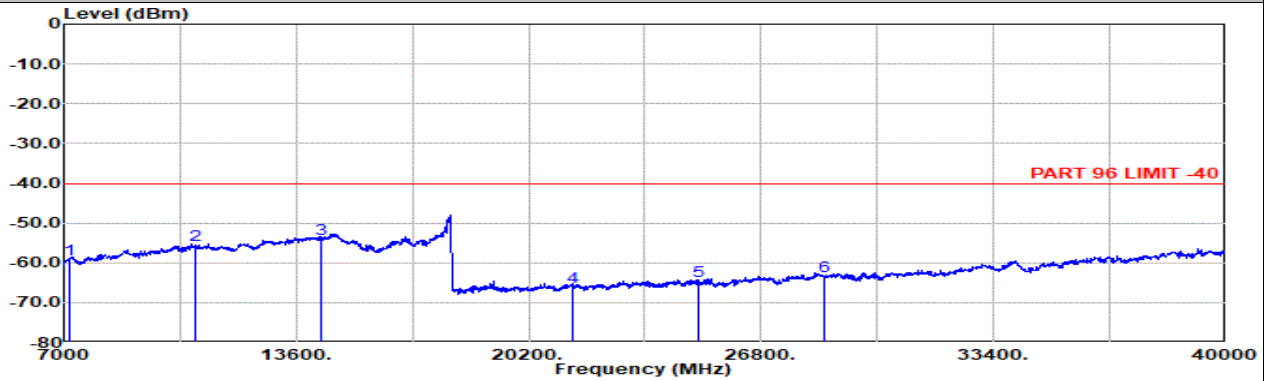

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Horizontal  
 : LTE Band 48 20M Ch55340 1RB99 QPSK  
 : LTE Band 48 20M Ch55538 1RB0 QPSK

1	2	3	4	5	6					
Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7142.00	-59.29 RMS	36.65	-53.10	0.96	-95.23	51.43	-40.00	-19.29	Horizontal
2	10713.00	-55.68 RMS	39.17	-50.28	0.46	-95.23	50.20	-40.00	-15.68	Horizontal
3	14284.00	-53.99 RMS	40.93	-47.22	0.26	-95.23	47.27	-40.00	-13.99	Horizontal
4	21426.00	-66.21 RMS	38.27	-48.50	-9.54	-95.23	48.79	-40.00	-26.21	Horizontal
5	24997.00	-64.52 RMS	39.50	-46.36	-9.54	-95.23	47.11	-40.00	-24.52	Horizontal
6	28568.00	-63.52 RMS	40.08	-46.73	-9.54	-95.23	47.90	-40.00	-23.52	Horizontal

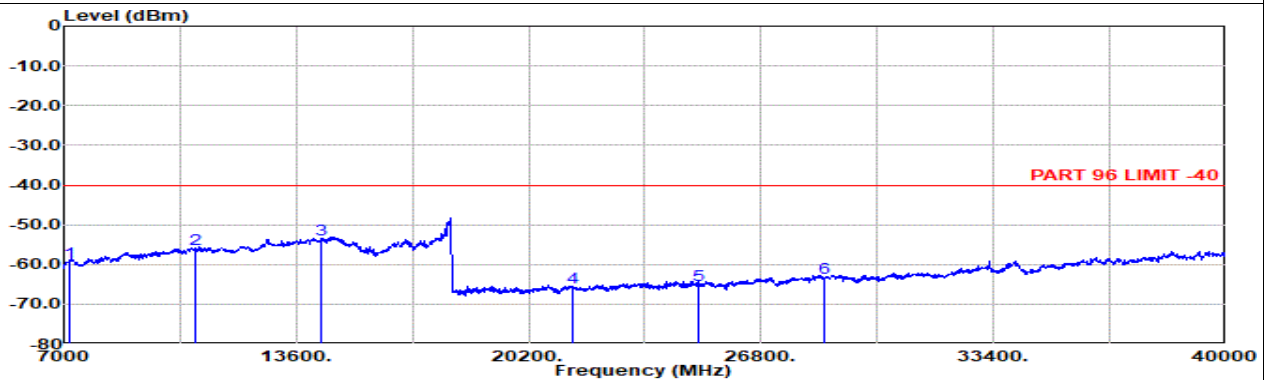

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Vertical  
 : LTE Band 48 20M Ch55340 1RB99 QPSK  
 : LTE Band 48 20M Ch55538 1RB0 QPSK

1	2	3	4	5	6					
Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7142.00	-59.42 RMS	36.65	-53.10	0.96	-95.23	51.30	-40.00	-19.42	Vertical
2	10713.00	-56.13 RMS	39.17	-50.28	0.46	-95.23	49.75	-40.00	-16.13	Vertical
3	14284.00	-53.79 RMS	40.93	-47.22	0.26	-95.23	47.47	-40.00	-13.79	Vertical
4	21426.00	-65.88 RMS	38.27	-48.50	-9.54	-95.23	49.12	-40.00	-25.88	Vertical
5	24997.00	-65.23 RMS	39.50	-46.36	-9.54	-95.23	46.40	-40.00	-25.23	Vertical
6	28568.00	-63.26 RMS	40.08	-46.73	-9.54	-95.23	48.16	-40.00	-23.26	Vertical




MIMO2

Part 96 Mode 1


LTE CA B48C M + M LTE CA B48C 20M Ch55891 + 20M Ch56089

M

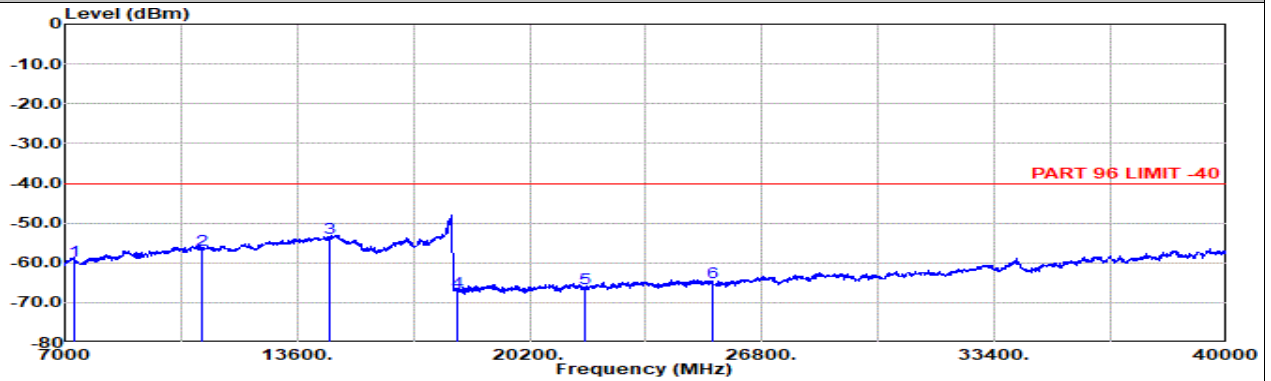

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Horizontal  
 : LTE Band 48 20M Ch55891 1RB99 QPSK  
 : LTE Band 48 20M Ch56089 1RB0 QPSK

1	2	3	4	5	6					
Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
7252.00	-59.40	RMS	37.09	-53.03	0.86	-95.23	50.91	-40.00	-19.40	Horizontal
10878.00	-56.61	RMS	39.04	-49.83	0.45	-95.23	48.96	-40.00	-16.61	Horizontal
14504.00	-53.82	RMS	40.68	-47.05	0.27	-95.23	47.51	-40.00	-13.82	Horizontal
18130.00	-67.18	RMS	37.64	-50.07	-9.54	-95.23	50.02	-40.00	-27.18	Horizontal
21756.00	-66.49	RMS	38.21	-48.51	-9.54	-95.23	48.58	-40.00	-26.49	Horizontal
25382.00	-64.98	RMS	38.99	-46.20	-9.54	-95.23	47.00	-40.00	-24.98	Horizontal

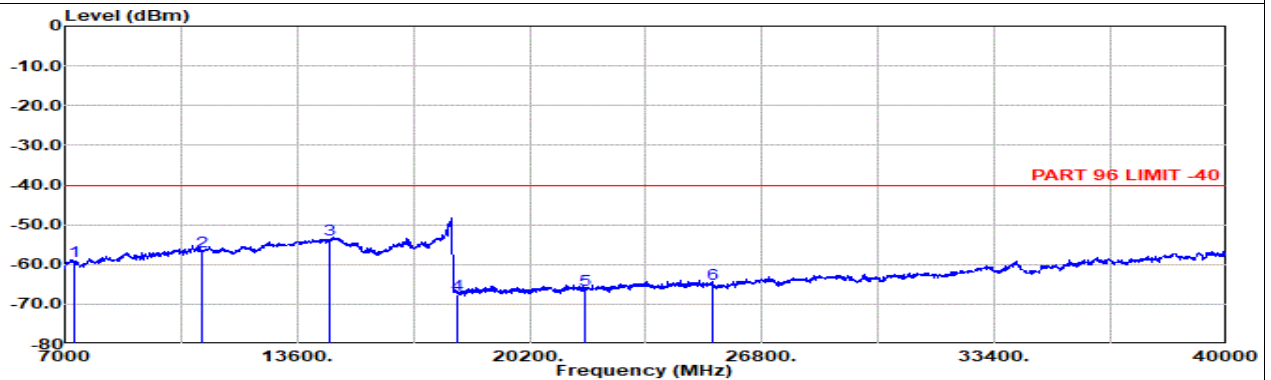

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Vertical  
 : LTE Band 48 20M Ch55891 1RB99 QPSK  
 : LTE Band 48 20M Ch56089 1RB0 QPSK

1	2	3	4	5	6					
Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
7252.00	-59.28	RMS	37.09	-53.03	0.86	-95.23	51.03	-40.00	-19.28	Vertical
10878.00	-56.70	RMS	39.04	-49.83	0.45	-95.23	48.87	-40.00	-16.70	Vertical
14504.00	-53.59	RMS	40.68	-47.05	0.27	-95.23	47.74	-40.00	-13.59	Vertical
18130.00	-67.56	RMS	37.64	-50.07	-9.54	-95.23	49.64	-40.00	-27.56	Vertical
21756.00	-66.49	RMS	38.21	-48.51	-9.54	-95.23	48.58	-40.00	-26.49	Vertical
25382.00	-64.96	RMS	38.99	-46.20	-9.54	-95.23	47.02	-40.00	-24.96	Vertical




MIMO2

Part 96 Mode 1


LTE CA B48C M + M LTE CA B48C 20M Ch56442 + 20M Ch56640

H

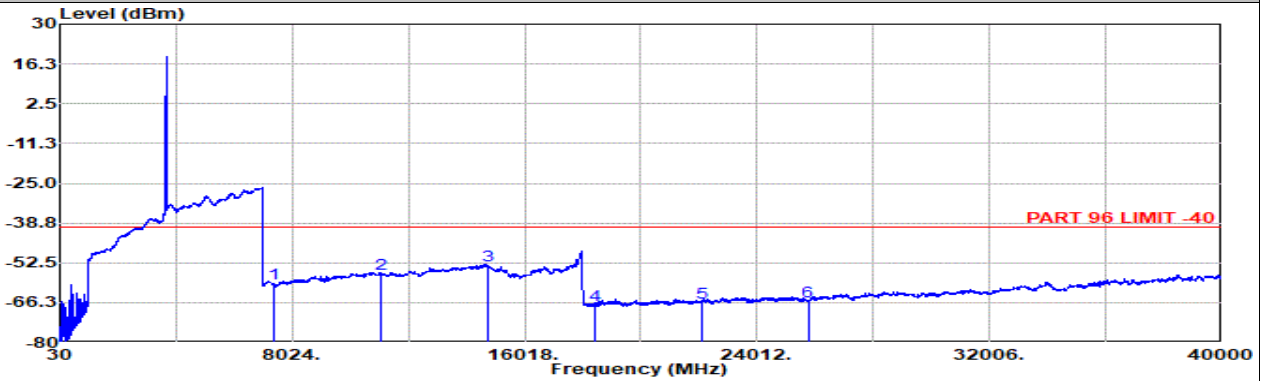

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Horizontal  
 : LTE Band 48 20M Ch56442 1RB99 QPSK  
 : LTE Band 48 20M Ch56640 1RB0 QPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1 7362.00	-59.83	RMS	36.75	-52.94	0.77	-95.23	50.82	-40.00	-19.83	Horizontal
2 11043.00	-56.25	RMS	38.71	-49.49	0.44	-95.23	49.32	-40.00	-16.25	Horizontal
3 14724.00	-53.47	RMS	40.40	-46.91	0.27	-95.23	48.00	-40.00	-13.47	Horizontal
4 18405.00	-67.28	RMS	37.87	-49.78	-9.54	-95.23	49.40	-40.00	-27.28	Horizontal
5 22086.00	-66.10	RMS	38.43	-48.44	-9.54	-95.23	48.68	-40.00	-26.10	Horizontal
6 25764.00	-65.77	RMS	39.01	-46.31	-9.54	-95.23	46.30	-40.00	-25.77	Horizontal

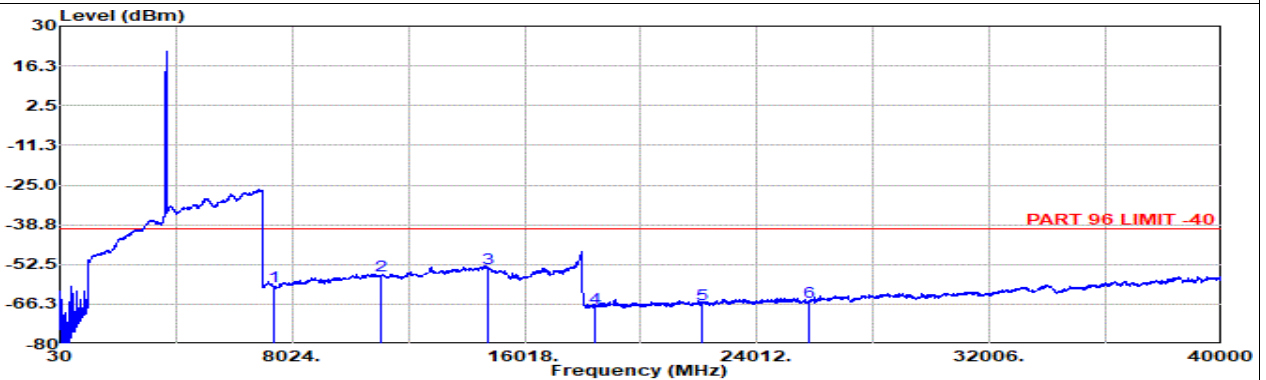

Site : 03CH16-HY  
 Condition: PART 96 LIMIT -40 3m 9120D-1522\_230323 Vertical  
 : LTE Band 48 20M Ch56442 1RB99 QPSK  
 : LTE Band 48 20M Ch56640 1RB0 QPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1 7362.00	-60.08	RMS	36.75	-52.94	0.77	-95.23	50.57	-40.00	-20.08	Vertical
2 11043.00	-56.53	RMS	38.71	-49.49	0.44	-95.23	49.04	-40.00	-16.53	Vertical
3 14724.00	-53.67	RMS	40.40	-46.91	0.27	-95.23	47.80	-40.00	-13.67	Vertical
4 18405.00	-67.35	RMS	37.87	-49.78	-9.54	-95.23	49.33	-40.00	-27.35	Vertical
5 22086.00	-66.25	RMS	38.43	-48.44	-9.54	-95.23	48.53	-40.00	-26.25	Vertical
6 25767.00	-65.64	RMS	39.01	-46.32	-9.54	-95.23	46.44	-40.00	-25.64	Vertical

Remark: The over limit signal before #1 is fundamental signal which can be ignored.