TEST REPORT

Application No.:	SEWA2307000102RG
Applicant:	Quectel Wireless Solutions Co., Ltd.
Address of Applicant:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
EUT Description:	Smart Module
Model No.:	SC200E-GL
Trade Mark:	QUECTEL
FCC ID:	XMR2023SC200EGL
Standards:	FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E
Date of Receipt:	2023/09/02
Date of Test:	2023/09/15 to 2023/10/25
Date of Issue:	2023/10/26
Test Result :	**PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Well Wei
Wireless Laboratory Manager

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

1 Version

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2023/10/26		Original

Prepared By		**(Ives Cheng) / Test Engineer**
Checked By		**(Stone Gu) / Reviewer**

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

2 Test Summary

Test Item	Band[1]	FCC rules No.	Test Requirements	Test Result	Result
Antenna Requirement	--	15.203/15.407(a)	--	Clause 4.1	PASS
26dB Emission Bandwidth	Band I	15.407(a)(1)	No limit.	Clause 4.5	For Report Purpose
	Band II-A	15.407(a)(2)			
	Band II-C	15.407(a)(2)			
6dB Emission Bandwidth	Band III	15.407(e)	≥ 500 kHz.	Clause 4.6	PASS
99% Occupied Bandwidth	Band I	KDB 789033 D02§ D	No limit.	Clause 4.7	For Report Purpose
	Band II-A				
	Band II-C				
	Band III				
Duty Cycle	Band I Band II-A Band II-C Band III	--	No limit.	Clause 4.3	For Report Purpose
Maximum Conducted Output Power	Band I	15.407(a)(iv)	< 250mW	Clause 4.4	PASS
	Band II-A	15.407(a)(2)	<MIN{250mW,11dBm+10*lg(EBW)}		
	Band II-C				
	Band III	15.407(a)(3)	< 1W		
Maximum Power Spectral Density	Band I	15.407(a)(iv)	<11dBm/MHz	Clause 4.8	PASS
	Band II-A	15.407(a)(2)	<11dBm/MHz		
	Band II-C				
	Band III	15.407(a)(3)	<30dBm/500KHz		
Radiated Spurious Emissions	Band I	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).	Clause 4.9	PASS
	Band II-A	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).		PASS
	Band II-	15.407(b)	F<1GHz:		PASS

	C	15.205/15.209	§15.209 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.47-5.725 GHz). F≥1GHz & in-restricted: §15.209 limit (AV&PK).		
	Band III	15.407(b) 15.205/15.209	F<1GHz: §15.209 limit (QP) F≥1GHz &out-restricted:(PK) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. F≥1GHz & in-restricted: §15.209 limit (AV&PK).		PASS
Restricted bands around fundamental frequency	Band I Band II-A Band II-C Band III	15.407(b) 15.205/15.209	---	Clause 4.10	PASS
AC Power Line Conducted Emissions	Band I Band II-A Band II-C Band III	15.207	---	Clause 4.2	PASS
Dynamic Frequency Selection	Band II-A Band II-C	15.407	Channel Move Time:10 Seconds	Clause 4.11	PASS
Frequency Stability	Band I Band II-A Band II-C Band III	15.407(g)	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual	N/A	N/A

Note 1:
Band I: 5150-5250MHz
Band II-A: 5250-5350MHz
Band II-C: 5470-5725MHz
Band III: 5725-5850MHz

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

Contents

3 General Information

3.1 Details of Client

Applicant:	Quectel Wireless Solutions Co., Ltd.
Address of Applicant:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Ives Cheng, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

3.4 General Description of EUT

EUT Description:	Smart Module	
Model No.:	SC200E-GL	
Trade Mark:	QUECTEL	
Hardware Version:	R1.0	
Software Version:	SC200EGLNAR12A03	
IMEI:	865404060026869	
WLAN Mode Supported:	802.11a:	20 MHz channel bandwidth
	802.11n:	20 MHz / 40 MHz channel bandwidth
	802.11ac:	20 MHz / 40 MHz / 80 MHz channel bandwidth
Operation Frequency:	5150MHz to 5250MHz 5250MHz to 5350MHz 5470MHz to 5725MHz 5725MHz to 5850MHz	
Modulation Type:	802.11a:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ac:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	20MHz:	802.11a/n(HT20)/ac(VHT20)
	40MHz:	802.11n(HT40)/ac(VHT40)
	80MHz:	802.11ac(VHT80)
Antenna Type:	☒ External, ☐ Integrated	
Antenna Gain:	5150MHz to 5250MHz: -0.67dBi; 5250MHz to 5350MHz: -0.19dBi; 5470MHz to 5725MHz: 1.28dBi; 5725MHz to 5850MHz: 1.1dBi;	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Smart System:	☒ SISO	802.11a/n/ac
	☐ MIMO	CDD: 802.11a/n/ac: Tx & Rx
		STBC: 802.11n/ac: Tx & Rx
		TXBF: 802.11n/ac: Tx & Rx
	☐ Diversity	802.11a: Tx & Rx
TPC Function:	☒Support, ☐Not Support	
DFS Function:	☐Master	
	☐Slave with radar detection	☒Slave without radar detection
RF Cable:	2dB	

Remark:
As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Remark:
In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency range over which device operates	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre

For UNII Band I:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5180
	The Middle channel	5200
	The Highest channel	5240
IEEE 802.11n/ac 40MHz	The Lowest channel	5190
	The Highest channel	5230
IEEE 802.11ac 80MHz	The Middle channel	5210

For UNII Band II-A:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5260
	The Middle channel	5280
	The Highest channel	5320
IEEE 802.11n/ac 40MHz	The Lowest channel	5270
	The Highest channel	5310
IEEE 802.11ac 80MHz	The Middle channel	5290

For UNII Band II-C:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5500
	The Middle channel	5580
	The Highest channel	5700
IEEE 802.11n/ac 40MHz	The Lowest channel	5510
	The Middle channel	5550
	The Highest channel	5670
IEEE 802.11ac 80MHz	The Middle channel	5530

For UNII Band III:		
Mode	Channel	Frequency(MHz)
IEEE 802.11a/n/ac 20MHz	The Lowest channel	5745
	The Middle channel	5785
	The Highest channel	5825
IEEE 802.11n/ac 40MHz	The Lowest channel	5755
	The Highest channel	5795
IEEE 802.11ac 80MHz	The Middle channel	5775

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
TDWR Channel	120[1]	5600	124[1]	5620
	128[1]	5640	118[2]	5590
	126[2]	5630	122[3]	5610

Note:

1. The above Frequency and Channel were 802.11a, 802.11n HT20 and 802.11ac VHT20.
2. The above Frequency and Channel were 802.11n HT40 and 802.11ac VHT40.
3. The above Frequency and Channel were 802.11ac VHT80.

3.5 Test Environment and Mode

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(℃)	Voltage(V)
NTNV	22~23	3.8
Remark: NV: Normal Voltage NT: Normal Temperature		

3.6 Description of Support Units

Description	Manufacturer	Model No.
Router	TP-LINK	Archer BE800 (FCC ID: 2AXJ4BE800)
Mother board*	QUECTEL	N/A
Remark: the information with"*" are provided by client.		

3.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11a	6 Mbps	/
802.11n (HT 20)	MCS0 (6.5 Mbps)	/
802.11n (HT 40)	MCS0 (13.5 Mbps)	/
802.11ac (VHT 20)	MCS0 (6.5 Mbps)	/
802.11ac (VHT 40)	MCS0 (13.5 Mbps)	/
802.11ac (VHT 80)	MCS0 (29.3 Mbps)	/

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15 Section 15.203

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is
5150MHz to 5250MHz: -0.67dBi;*
5250MHz to 5350MHz: -0.19dBi; *
5470MHz to 5725MHz: 1.28dBi; *
5725MHz to 5850MHz: 1.1dBi; *

**Note:*

The antenna gain are derived from the gain information report provided by the manufacturer.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15 Section 15.207		
Test Method:	ANSI C63.10-2020 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.		

Test Setup:	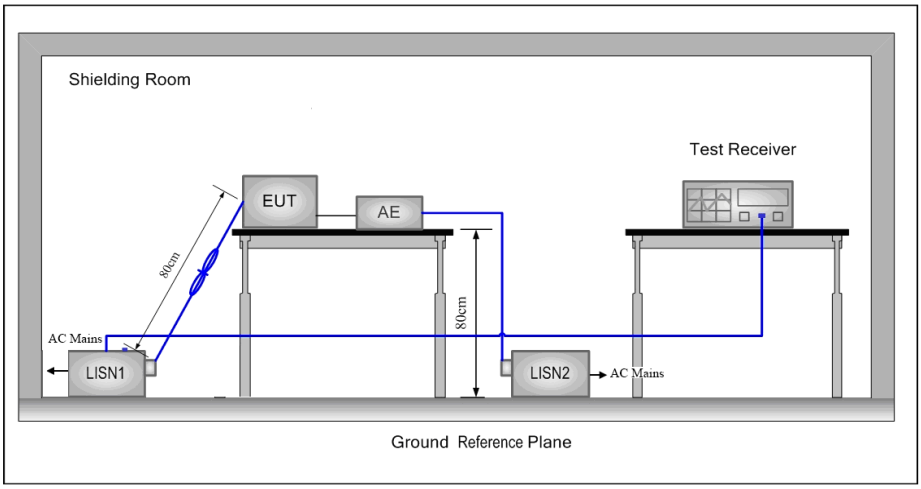
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Refer to section 3.7 for details. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.
Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Phase:	Line

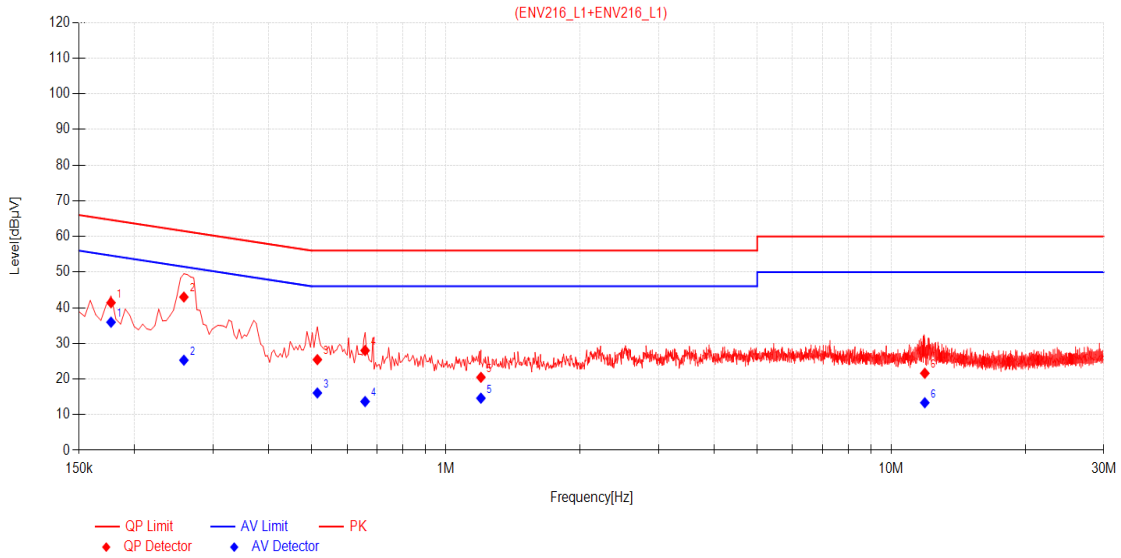

Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.1770	11.73	29.66	41.39	64.63	23.24	24.20	35.93	54.63	18.70	PASS
2	0.2580	11.63	31.36	42.99	61.50	18.51	13.65	25.28	51.50	26.22	PASS
3	0.5145	11.61	13.82	25.43	56.00	30.57	4.48	16.09	46.00	29.91	PASS
4	0.6585	11.66	16.33	27.99	56.00	28.01	2.02	13.68	46.00	32.32	PASS
5	1.1985	11.73	8.74	20.47	56.00	35.53	2.89	14.62	46.00	31.38	PASS
6	11.8950	11.89	9.72	21.61	60.00	38.39	1.46	13.35	50.00	36.65	PASS

Remark:
1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBµV] – Value[dBµV]

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

Phase:	Neutral

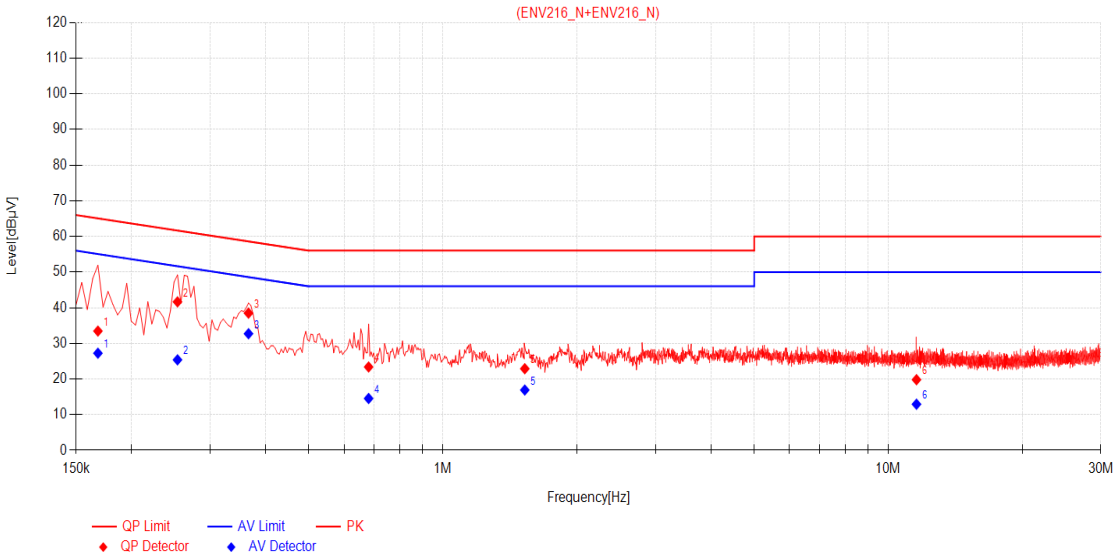

Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.1680	11.77	21.67	33.44	65.06	31.62	15.46	27.23	55.06	27.83	PASS
2	0.2535	11.64	30.00	41.64	61.64	20.00	13.74	25.38	51.64	26.26	PASS
3	0.3660	11.61	26.87	38.48	58.59	20.11	21.10	32.71	48.59	15.88	PASS
4	0.6810	11.67	11.71	23.38	56.00	32.62	2.87	14.54	46.00	31.46	PASS
5	1.5270	11.73	11.16	22.89	56.00	33.11	5.18	16.91	46.00	29.09	PASS
6	11.5710	11.88	7.94	19.82	60.00	40.18	1.05	12.93	50.00	37.07	PASS

Remark:
1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBµV] – Value[dBµV]

4.3 Duty Cycle

Test Requirement:	ANSI C63.10-2020 Section 12.2
Test Method:	ANSI C63.10-2020 Section 12.2
Test Setup:	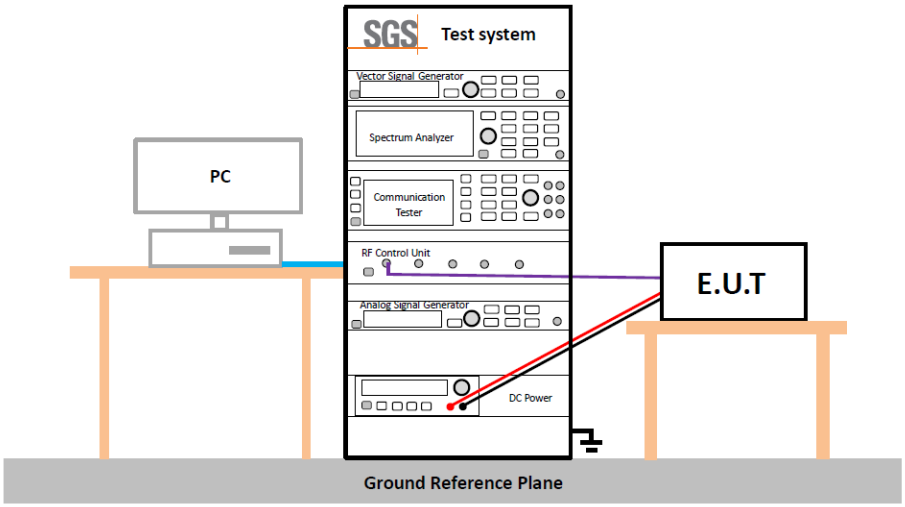
Instruments Used:	Refer to section 6 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For report purpose
The detailed test data see: **Appendix**	

4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10-2020 Section 12.4.3.2	
Test Setup:	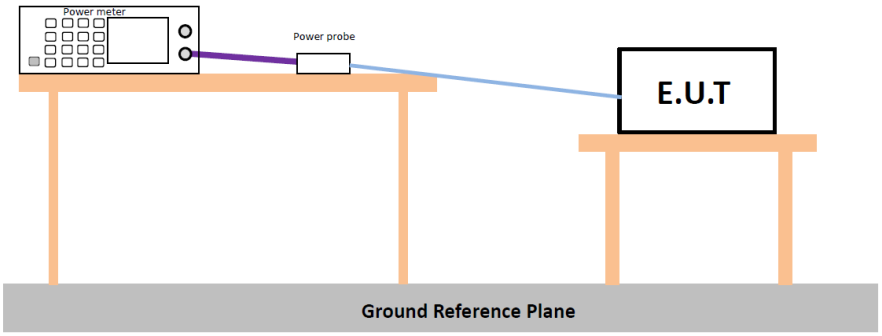 * Test with power meter (Detector function: Average) Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.	
Test Instruments:	Refer to section 6 for details.	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Refer to section 3.7 for details.	
Limit:	Frequency Band	Limit
	5150-5250MHz	Not exceed 250mW(23.98dBm)
	5250-5350MHz	The lesser of 250mW(23.98dBm) or 11+ 10logB
	5470-5725MHz	The lesser of 250mW(23.98dBm) or 11+ 10logB
	5725-5850MHz	Not exceed 1W(30dBm)
	*Where B is the 26dB emission bandwidth in MHz	
Test Results:	Pass	
The detailed test data see: **Appendix**		

4.5 26dB Emission Bandwidth

Test Requirement:	47 CFR Part 15 Section 15.407(a), KDB 789033 D02& C
Test Method:	ANSI C63.10-2020 Section 12.5.2
Test Setup:	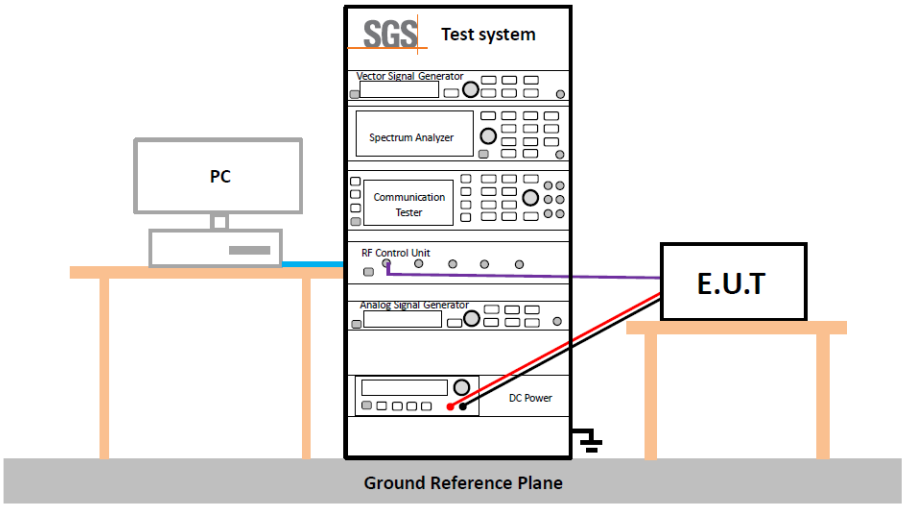
Instruments Used:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For Report Purpose
The detailed test data see: **Appendix**	

4.6 6dB Emission Bandwidth

Test Requirement:	47 CFR Part 15 Section 15.407(e)	
Test Method:	ANSI C63.10-2020 Section 12.5.1	
Test Setup:	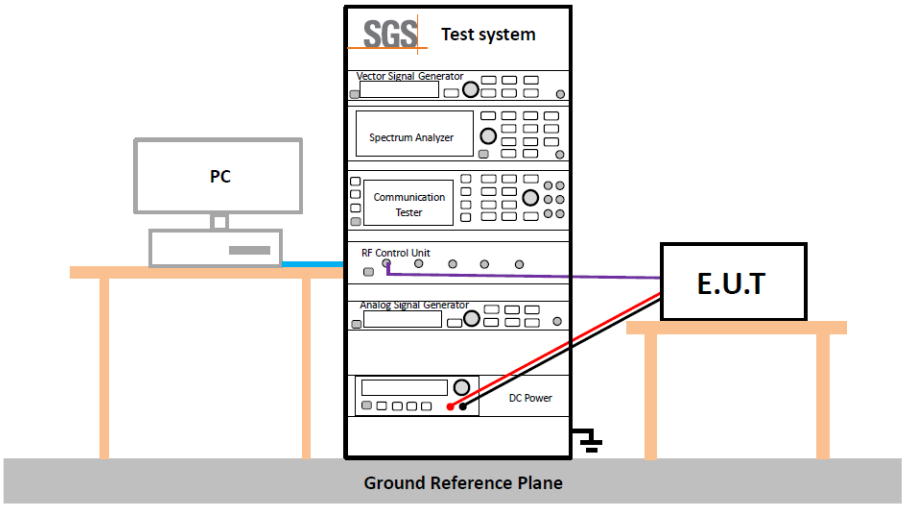	
Test Instruments:	Refer to section 6 for details.	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Refer to section 3.7 for details.	
Limit:	Frequency Band	Limit
	5725-5850MHz	At lease 500kHz
Test Results:	Pass	
The detailed test data see: **Appendix**		

4.7 99% Occupied Bandwidth

Test Requirement:	KDB 789033 D02§ D
Test Method:	ANSI C63.10-2020 Section 12.5.3
Test Setup:	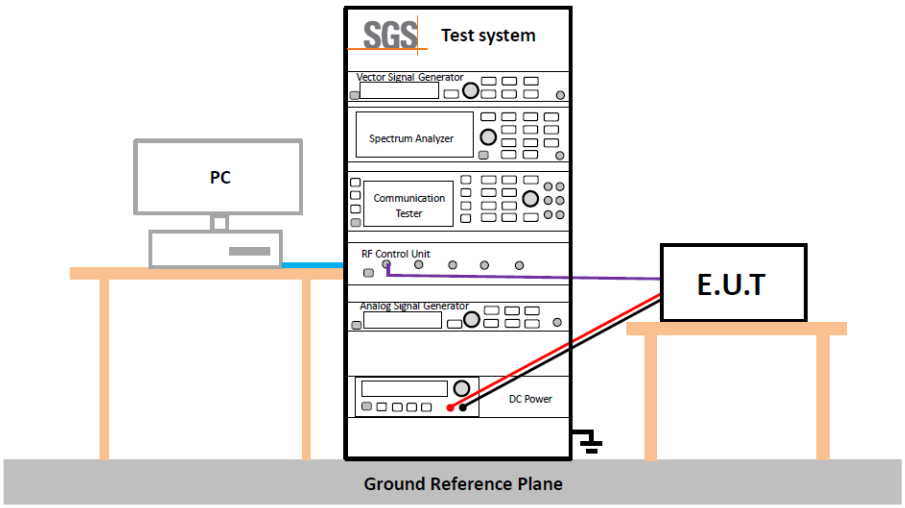
Instruments Used:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For Report Purpose
The detailed test data see: **Appendix**	

4.8 Power Spectral Density

Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10-2020 Section 12.6 KDB 789033 D02 v02r01, Section F.	
Test Setup:	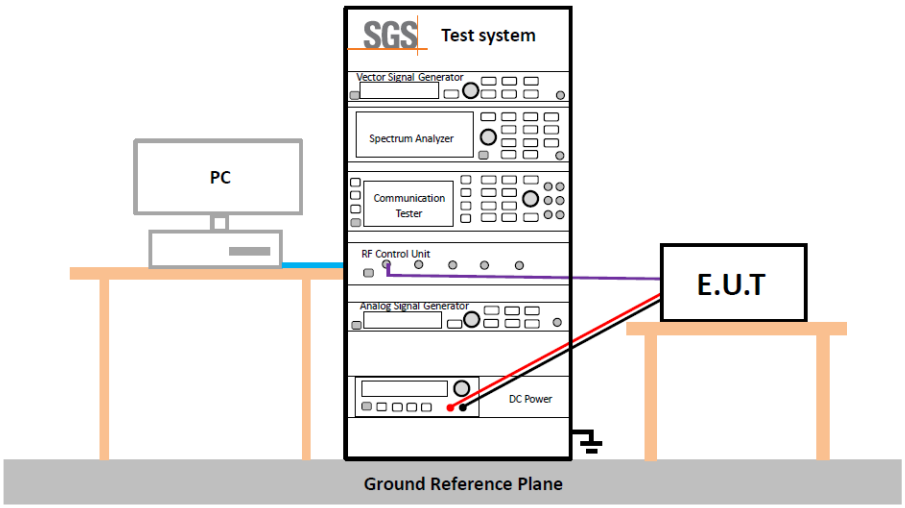	
Instruments Used:	Refer to section 6 for details.	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Refer to section 3.7 for details.	
Limit:	Frequency Band	Limit
	5150-5250MHz	The power spectral density less than 11dBm/1MHz
	5250-5350MHz	The power spectral density less than 11dBm/1MHz
	5470-5725MHz	The power spectral density less than 11dBm/1MHz
	5725-5850MHz	The power spectral density less than <30dBm/500KHz
Test Results:	Pass	
The detailed test data see: **Appendix**		

4.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.205/15.209/15.407(b)
Test Method:	ANSI C63.10-2020 Section 6.4 / 6.5 / 6.6
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)
Test frequency:	9kHz ~ 40GHz(or 10 Harmonic)

Test Setup:

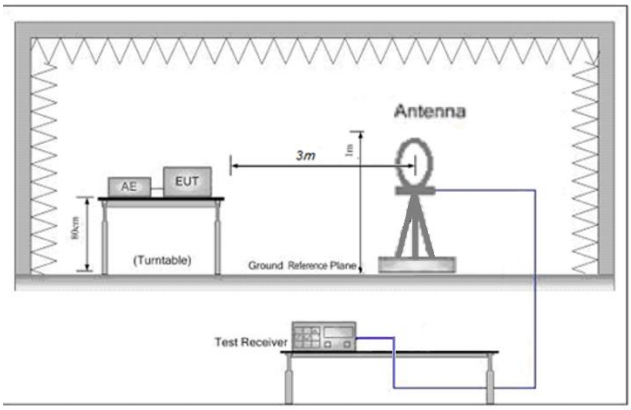

Figure 1. 9kHz to 30MHz

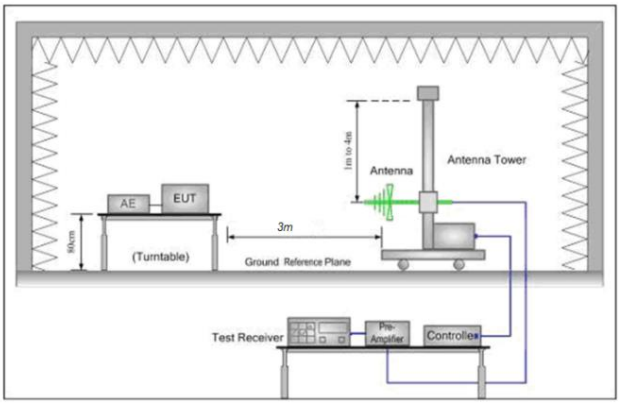

Figure 1. 30MHz to 1GHz

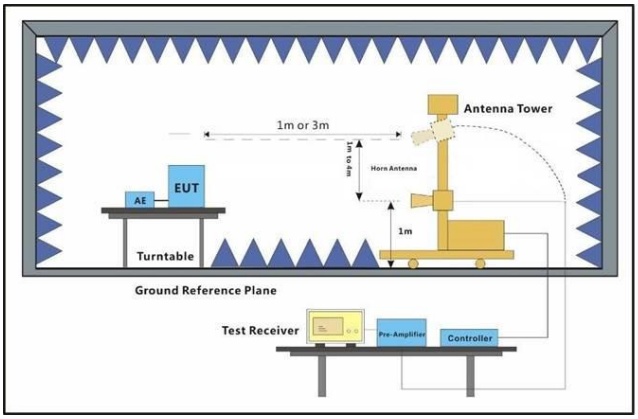

Figure 2. Above 1 GHz

Test Procedure:	a. For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. (Distance from antenna to EUT is 1m for measurements >18GHz). c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. l. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW ≥ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW ≥ 1/T, when duty cycle is less than 98 percent where Tis the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass
The detailed test data see: **Appendix**	

4.10Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.205/15.209/15.407(b)		
Test Method:	ANSI C63.10-2020 Section 12.7		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:	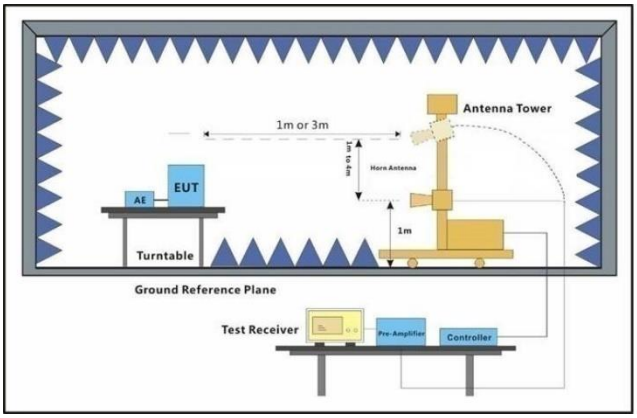		
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel. g. Test the EUT in the outermost channels.		

	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW ≥ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW ≥ 1/T, when duty cycle is less than 98 percent where Tis the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details.
Instruments Used:	Refer to section 6 for details.
Test Results:	Pass
The detailed test data see: **Appendix**	

4.11Dynamic Frequency Selection

4.11.1 DFS Overview

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

4.11.2 DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. **Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. **Note3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

4.11.3 RADAR TEST WAVEFORMS

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^6}{PRI_{\mu sec}}\right)\right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate (82.9% + 60% + 90% + 88%)/4 = 80.2%			

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per *Burst*	Number of *Bursts*	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4.11.4 Response Requirements

Table 4: DFS Response Requirement Values

Parameter	**Value**
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. **Note 2:** The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. **Note 3:** During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

The detailed test data see: **Appendix**

5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
7	Conduction Emission	± 2.90dB (150kHz to 30MHz)
8	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.88dB (30M -1GHz)
		± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

Remark:
The U_{lab} (lab Uncertainty) is less than $U_{cispr/ETSI}$ (CISPR/ETSI Uncertainty), so the test results
– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

6 Equipment List

RF Test Equipment					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. date (yyyy/mm/dd)**	**Cal.Due date (yyyy/mm/dd)**
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2023/05/11	2024/05/10
Measurement Software	Tonscend	JS1120-3 Test System V 3.3.20	SUWI-02-09-09	NCR	NCR
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05
Power meter	Anritsu	ML2495A	SUWI-01-31-01	2022/11/23	2023/11/22
Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	2022/11/23	2023/11/22
MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	2023/02/06	2024/02/05
Signal Generator	ROHDE&SCHWARZ	SMM100A	SZ-WRG-M-011	2023/02/22	2024/02/21

Conduction Test Equipment					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. date (yyyy/mm/dd)**	**Cal.Due date (yyyy/mm/dd)**
Shielding Room	Brilliant-emc	N/A	SUWI-04-03-01	2021/05/08	2024/05/07
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2023/02/07	2024/02/06
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2023/02/08	2024/02/07
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2023/02/08	2024/02/07
Measurement Software	Tonscend	JS32-CE V4.0.0.2	SUWI-02-09-05	NCR	NCR

RSE Test System					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. date (yyyy/mm/dd)**	**Cal.Due date (yyyy/mm/dd)**
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2024/05/11
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2024/05/12
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

7 Photographs - Setup Photos

Refer to Appendix A.2 WLAN Setup Photos.

Appendix

Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11a	Ant1	5180	21.68	5169.44	5191.12	For Report Purpose
11a	Ant1	5220	23.48	5208.44	5231.92	
11a	Ant1	5240	21.64	5229.44	5251.08	
11a	Ant1	5260	22.96	5248.80	5271.76	
11a	Ant1	5300	22.08	5288.84	5310.92	
11a	Ant1	5320	22.80	5309.08	5331.88	
11a	Ant1	5500	23.52	5488.72	5512.24	
11a	Ant1	5580	21.88	5568.88	5590.76	
11a	Ant1	5700	21.96	5689.16	5711.12	
11a	Ant1	5745	22.16	5733.92	5756.08	
11a	Ant1	5785	22.00	5773.80	5795.80	
11a	Ant1	5825	22.16	5813.80	5835.96	
11n20SISO	Ant1	5180	23.60	5168.56	5192.16	
11n20SISO	Ant1	5220	22.96	5208.76	5231.72	
11n20SISO	Ant1	5240	22.60	5228.88	5251.48	
11n20SISO	Ant1	5260	23.20	5248.56	5271.76	
11n20SISO	Ant1	5300	23.12	5288.72	5311.84	
11n20SISO	Ant1	5320	22.92	5308.60	5331.52	
11n20SISO	Ant1	5500	23.00	5488.64	5511.64	
11n20SISO	Ant1	5580	22.44	5568.64	5591.08	
11n20SISO	Ant1	5700	22.40	5688.64	5711.04	
11n20SISO	Ant1	5745	23.04	5733.68	5756.72	
11n20SISO	Ant1	5785	22.40	5773.60	5796.00	
11n20SISO	Ant1	5825	23.04	5813.72	5836.76	
11n40SISO	Ant1	5190	41.04	5169.60	5210.64	
11n40SISO	Ant1	5230	41.12	5209.52	5250.64	
11n40SISO	Ant1	5270	41.04	5249.52	5290.56	
11n40SISO	Ant1	5310	41.04	5289.68	5330.72	
11n40SISO	Ant1	5510	41.52	5489.44	5530.96	
11n40SISO	Ant1	5550	40.64	5529.68	5570.32	
11n40SISO	Ant1	5670	41.52	5648.96	5690.48	
11n40SISO	Ant1	5755	41.52	5734.20	5775.72	
11n40SISO	Ant1	5795	40.80	5774.60	5815.40	
11ac80SISO	Ant1	5210	94.88	5162.96	5257.84	
11ac80SISO	Ant1	5290	94.88	5242.80	5337.68	
11ac80SISO	Ant1	5530	95.52	5483.60	5579.12	
11ac80SISO	Ant1	5775	97.12	5726.04	5823.16	

Note: For 802.11n HT20/ac VHT20,802.11n HT40/ac VHT40 mode, the whole testing have assessed only 802.11 n HT20/40 by referring to their higher output power.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

Test Graphs

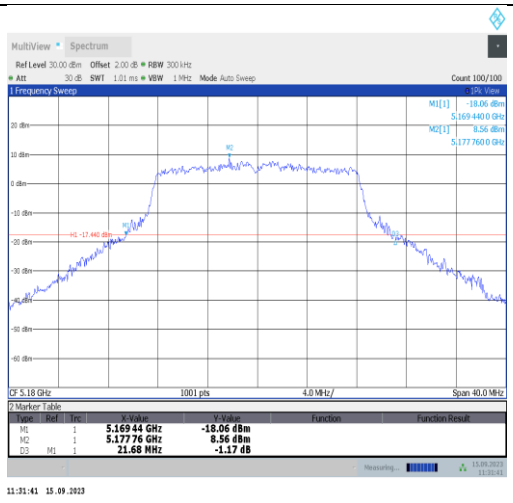

11a-Ant1-5180

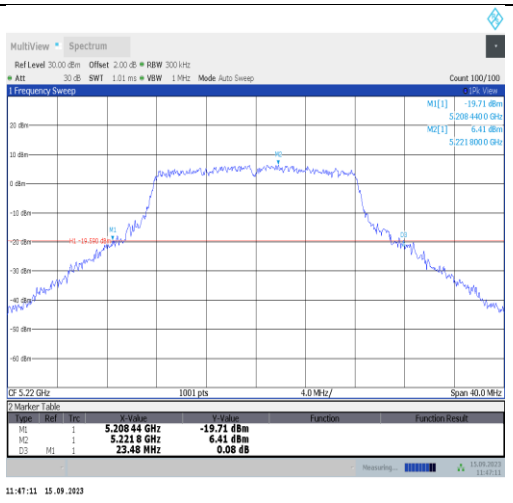

11a-Ant1-5220

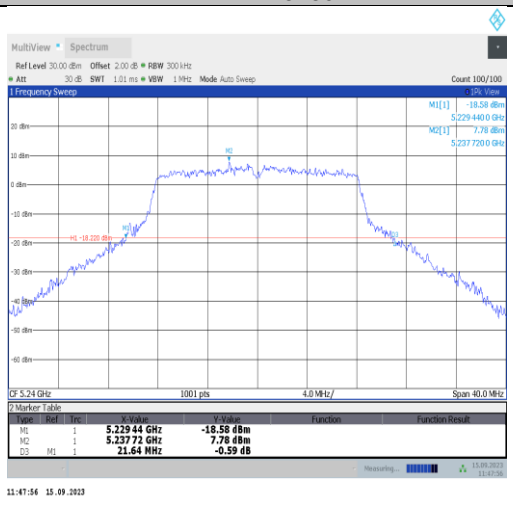

11a-Ant1-5240

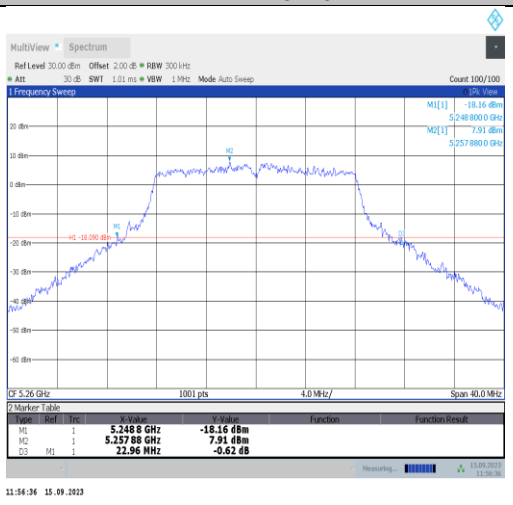

11a-Ant1-5260

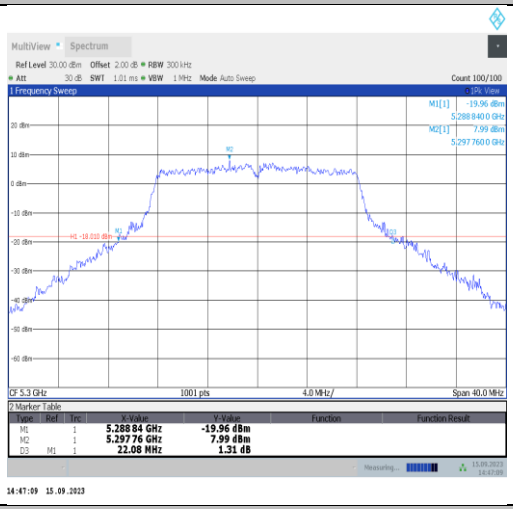

11a-Ant1-5300

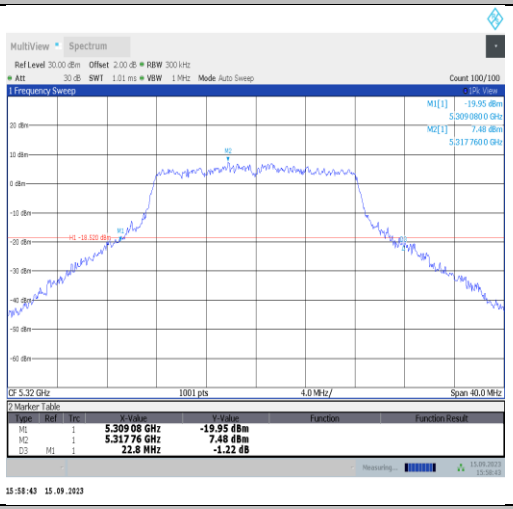

11a-Ant1-5320

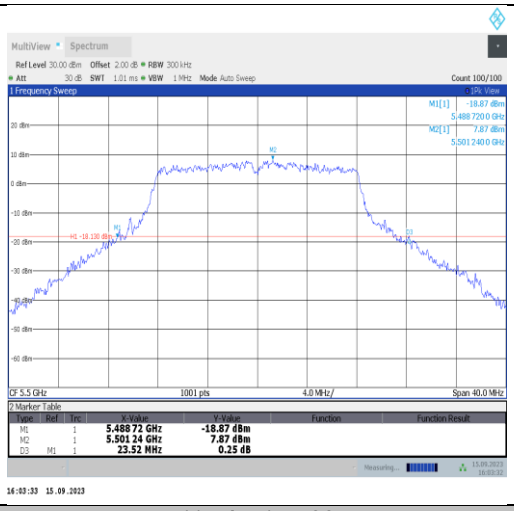

11a-Ant1-5500

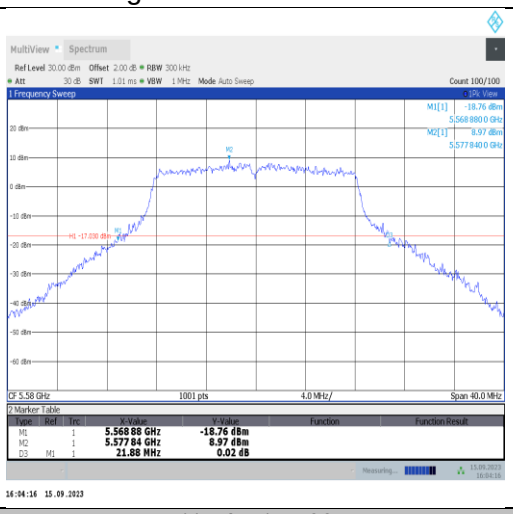

11a-Ant1-5580

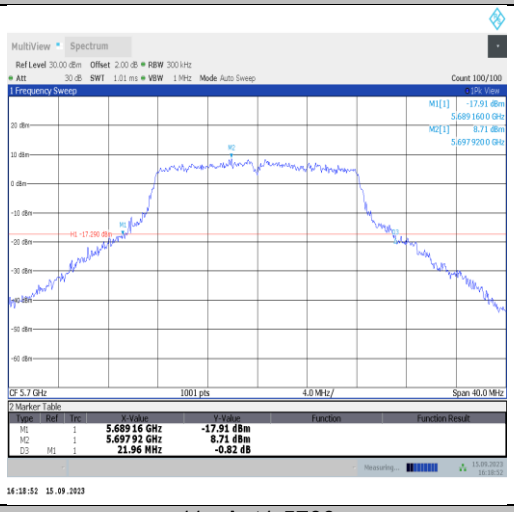

11a-Ant1-5700

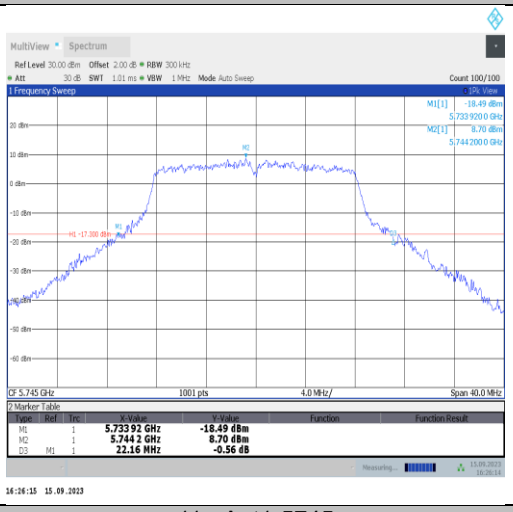

11a-Ant1-5745

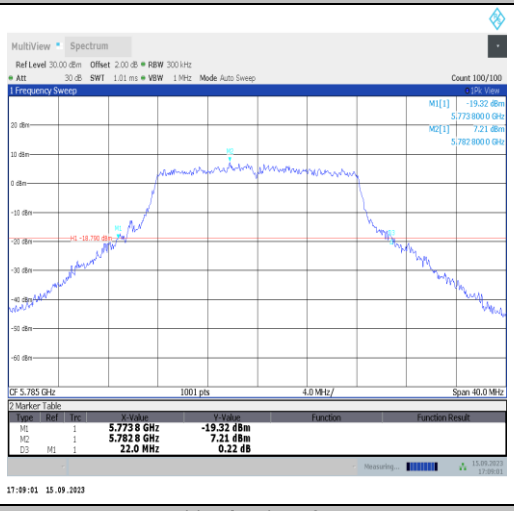

11a-Ant1-5785

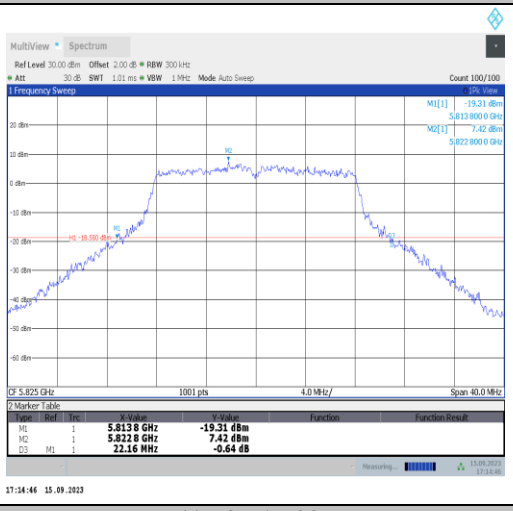

11a-Ant1-5825

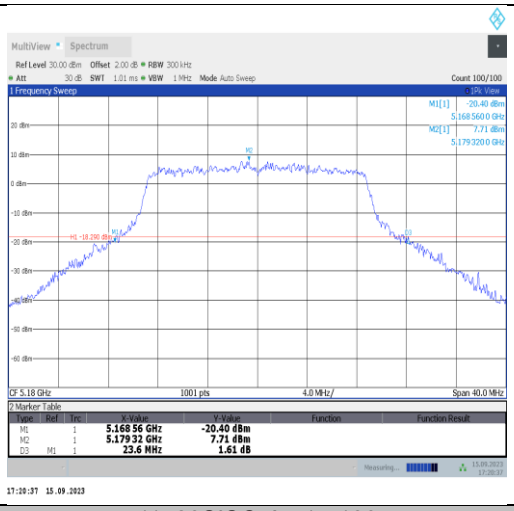

11n20SISO-Ant1-5180

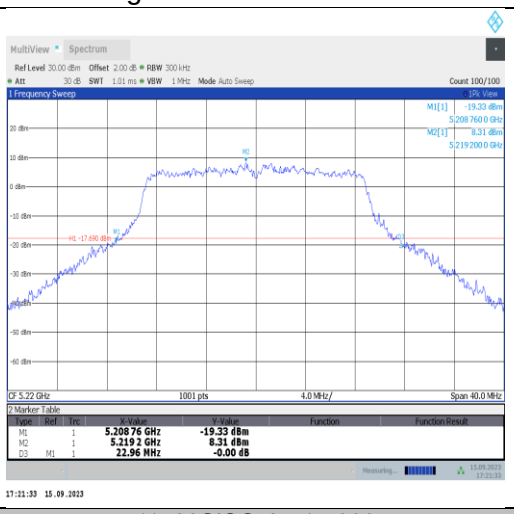

11n20SISO-Ant1-5220

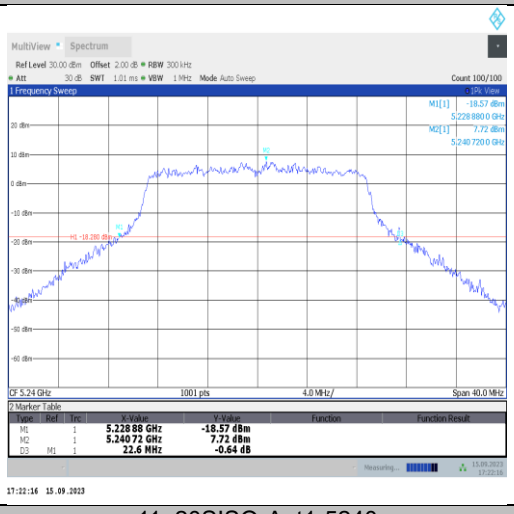

11n20SISO-Ant1-5240

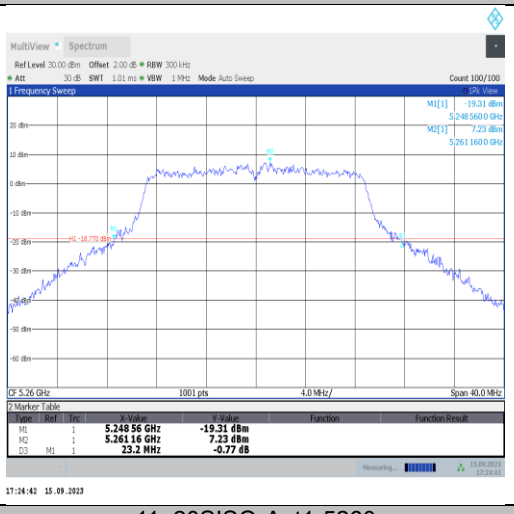

11n20SISO-Ant1-5260

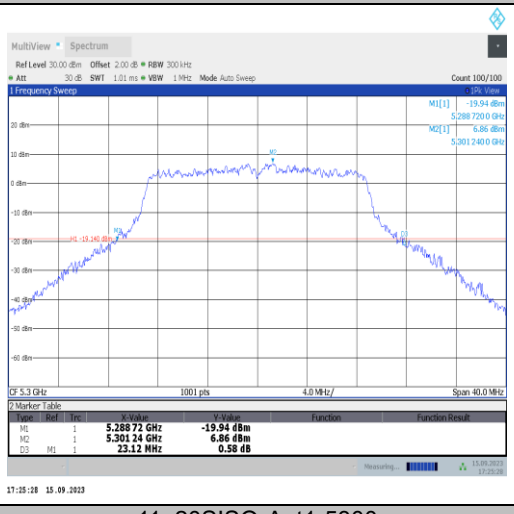

11n20SISO-Ant1-5300

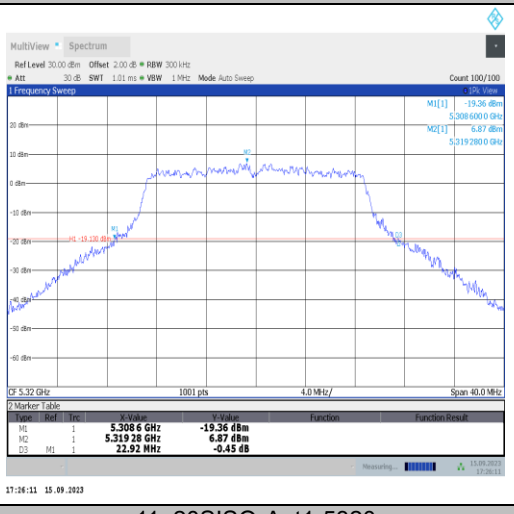

11n20SISO-Ant1-5320

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86–512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86–512) 62992980 sgs.china@sgs.com

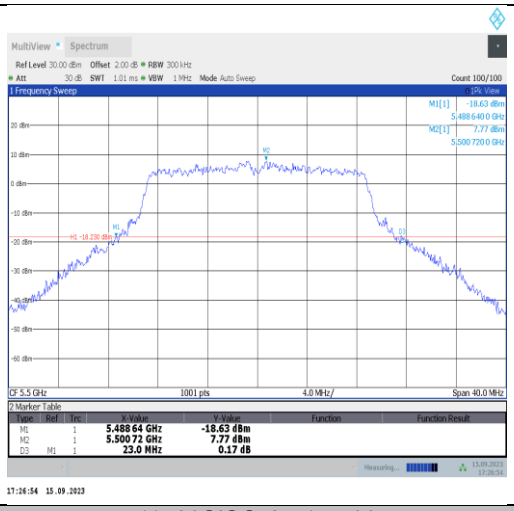

11n20SISO-Ant1-5500

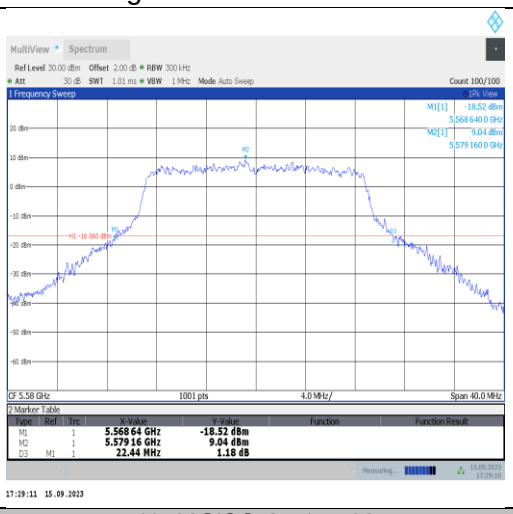

11n20SISO-Ant1-5580

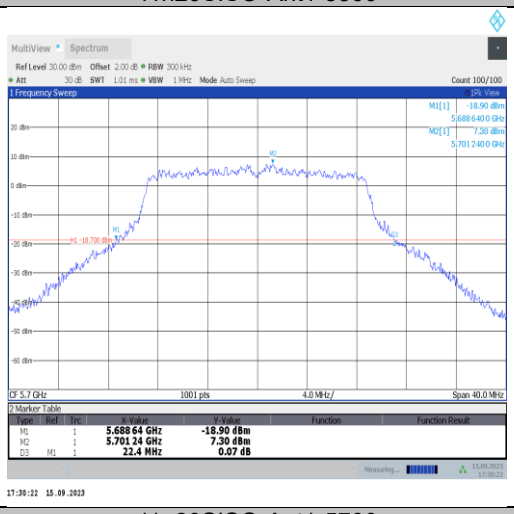

11n20SISO-Ant1-5700

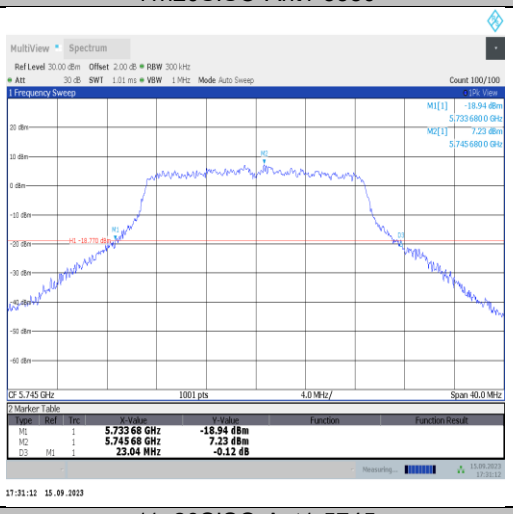

11n20SISO-Ant1-5745

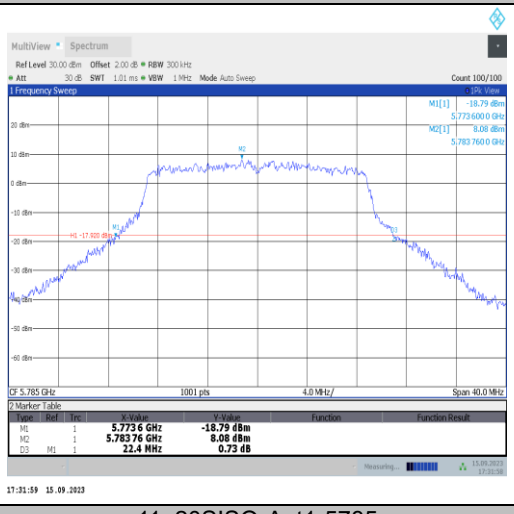

11n20SISO-Ant1-5785

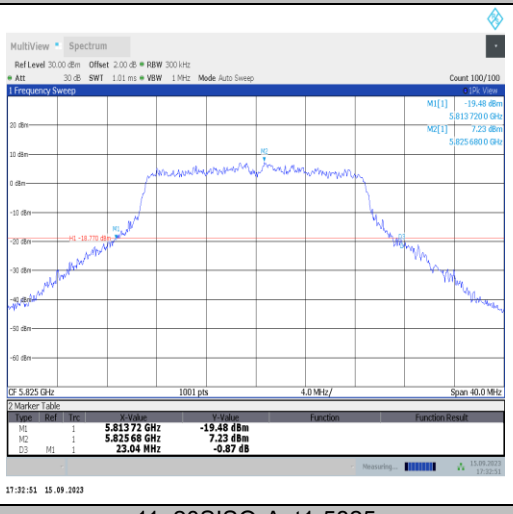

11n20SISO-Ant1-5825

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

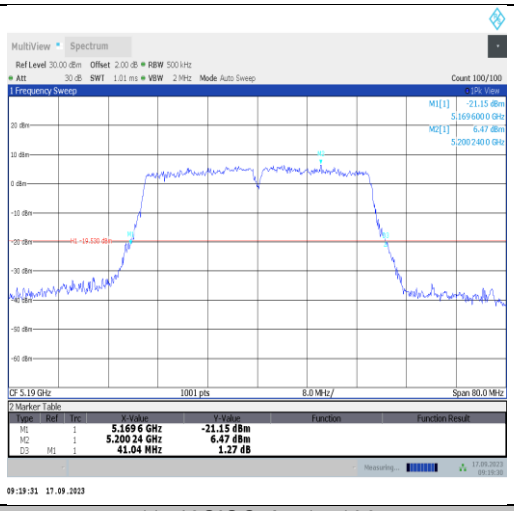

11n40SISO-Ant1-5190

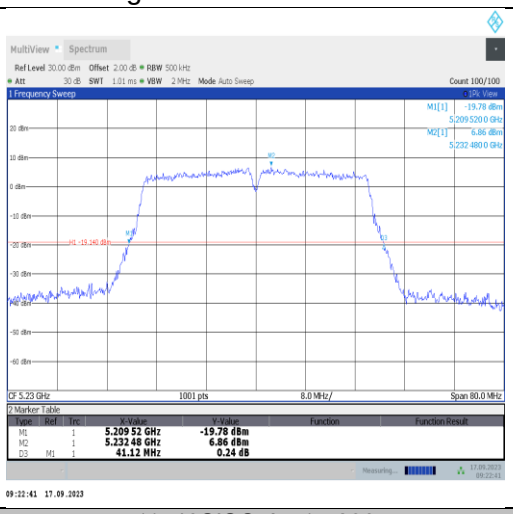

11n40SISO-Ant1-5230

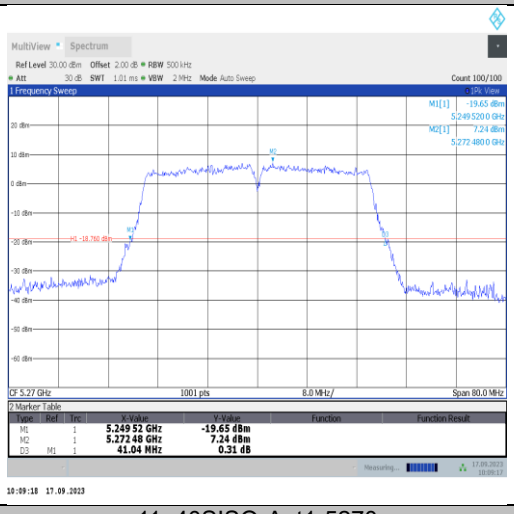

11n40SISO-Ant1-5270

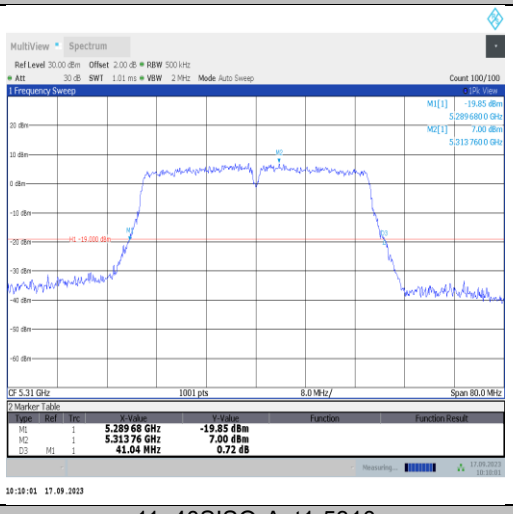

11n40SISO-Ant1-5310

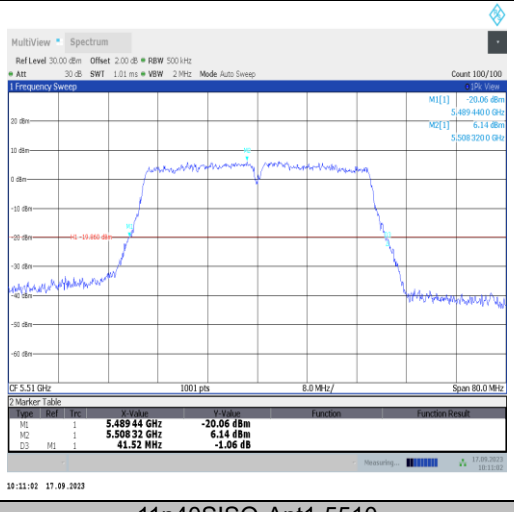

11n40SISO-Ant1-5510

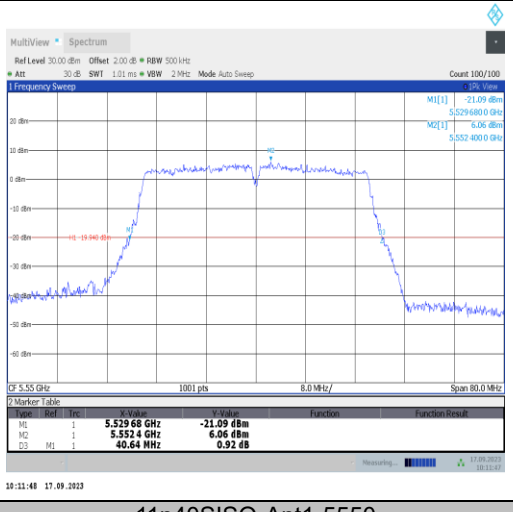

11n40SISO-Ant1-5550

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

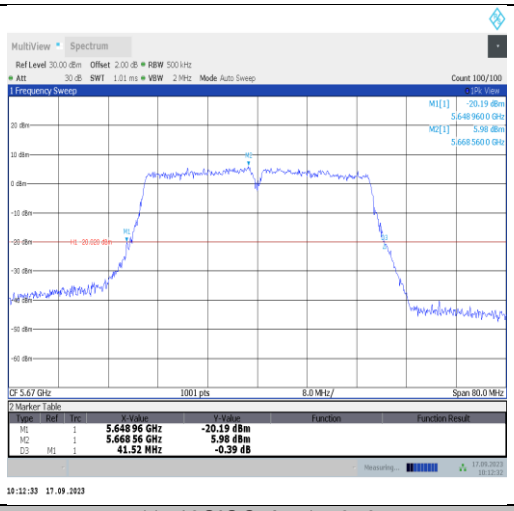

11n40SISO-Ant1-5670

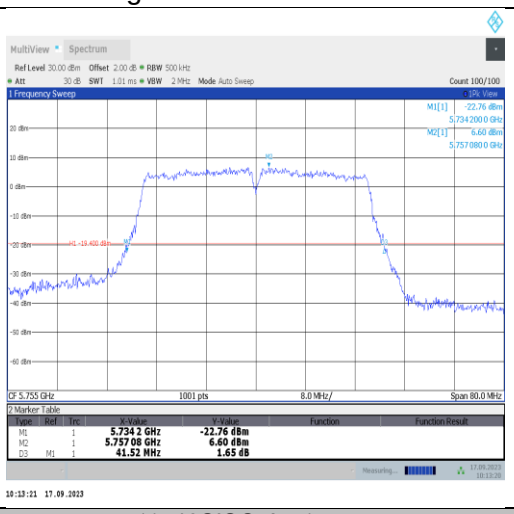

11n40SISO-Ant1-5755

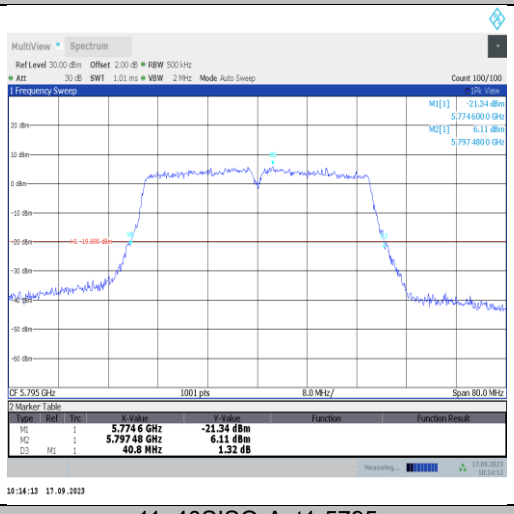

11n40SISO-Ant1-5795

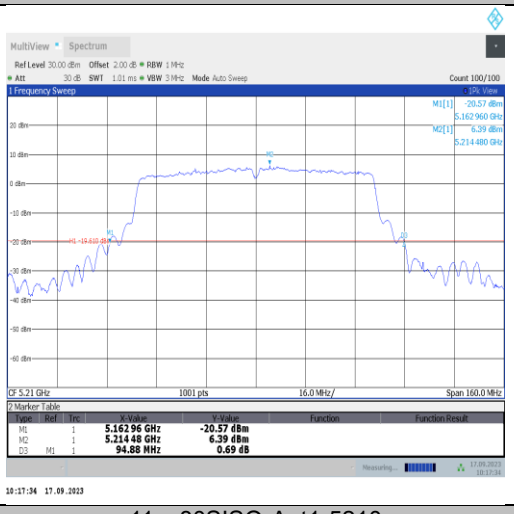

11ac80SISO-Ant1-5210

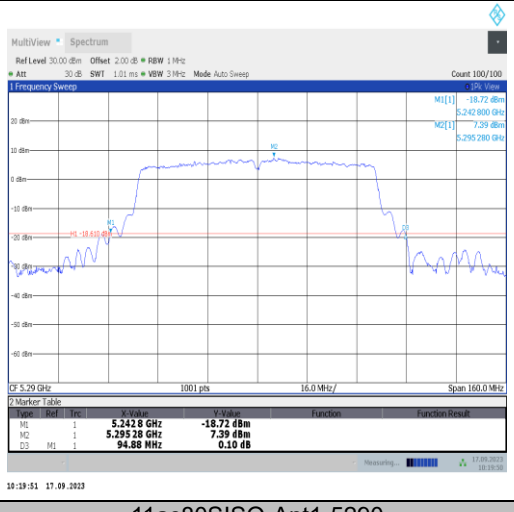

11ac80SISO-Ant1-5290

11ac80SISO-Ant1-5530

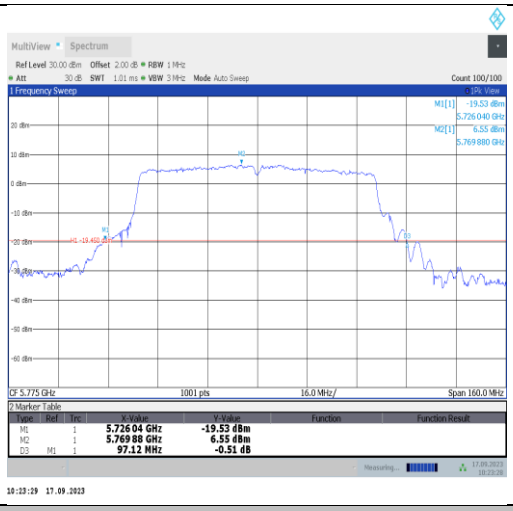	
11ac80SISO-Ant1-5775	

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

Occupied channel bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11a	Ant1	5180	16.916	5171.5305	5188.4461	For Report Purpose
11a	Ant1	5220	16.945	5211.5160	5228.4608	
11a	Ant1	5240	16.933	5231.5398	5248.4732	
11a	Ant1	5260	16.982	5251.4774	5268.4592	
11a	Ant1	5300	16.988	5291.5124	5308.5006	
11a	Ant1	5320	16.945	5311.5318	5328.4764	
11a	Ant1	5500	16.961	5491.5092	5508.4700	
11a	Ant1	5580	16.954	5571.5013	5588.4550	
11a	Ant1	5700	16.939	5691.4551	5708.3940	
11a	Ant1	5745	16.983	5736.4557	5753.4391	
11a	Ant1	5785	16.89	5776.4993	5793.3889	
11a	Ant1	5825	16.889	5816.5249	5833.4134	
11n20SISO	Ant1	5180	18.181	5170.9579	5189.1390	
11n20SISO	Ant1	5220	18.113	5210.9426	5229.0554	
11n20SISO	Ant1	5240	18.111	5230.9470	5249.0581	
11n20SISO	Ant1	5260	18.148	5250.9520	5269.1003	
11n20SISO	Ant1	5300	18.106	5290.9474	5309.0534	
11n20SISO	Ant1	5320	18.105	5310.9528	5329.0578	
11n20SISO	Ant1	5500	18.109	5490.9466	5509.0552	
11n20SISO	Ant1	5580	18.141	5570.9379	5589.0793	
11n20SISO	Ant1	5700	18.102	5690.9334	5709.0353	
11n20SISO	Ant1	5745	18.119	5735.9249	5754.0438	
11n20SISO	Ant1	5785	18.087	5775.9480	5794.0349	
11n20SISO	Ant1	5825	18.117	5815.9310	5834.0479	
11n40SISO	Ant1	5190	36.555	5171.8581	5208.4129	
11n40SISO	Ant1	5230	36.538	5211.8301	5248.3684	
11n40SISO	Ant1	5270	36.495	5251.8306	5288.3251	
11n40SISO	Ant1	5310	36.526	5291.8232	5328.3494	
11n40SISO	Ant1	5510	36.557	5491.7907	5528.3478	
11n40SISO	Ant1	5550	36.498	5531.7936	5568.2912	
11n40SISO	Ant1	5670	36.514	5651.7500	5688.2644	
11n40SISO	Ant1	5755	36.587	5736.7518	5773.3383	
11n40SISO	Ant1	5795	36.544	5776.7784	5813.3227	
11ac80SISO	Ant1	5210	76.179	5172.2493	5248.4286	
11ac80SISO	Ant1	5290	76.085	5252.1874	5328.2725	
11ac80SISO	Ant1	5530	76.225	5492.0654	5568.2902	
11ac80SISO	Ant1	5775	76.995	5736.2525	5813.2480	

Note: For 802.11n HT20/ac VHT20,802.11n HT40/ac VHT40 mode, the whole testing have assessed only 802.11 n HT20/40 by referring to their higher output power.

Test Graphs

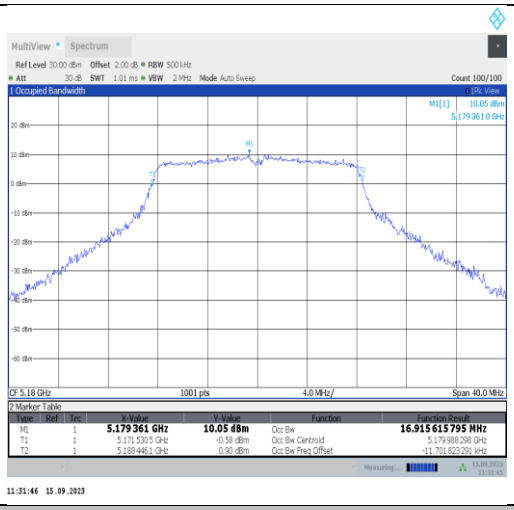

11a-Ant1-5180

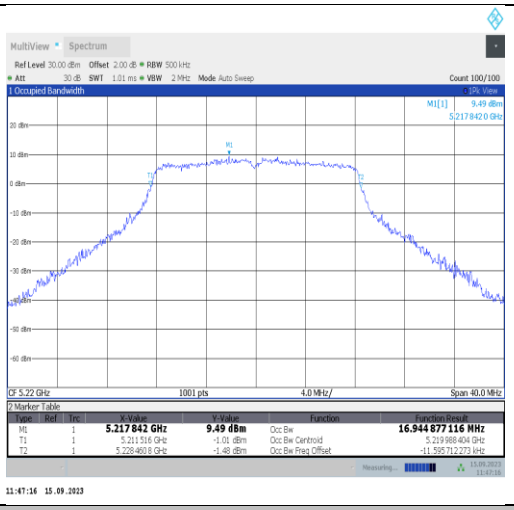

11a-Ant1-5220

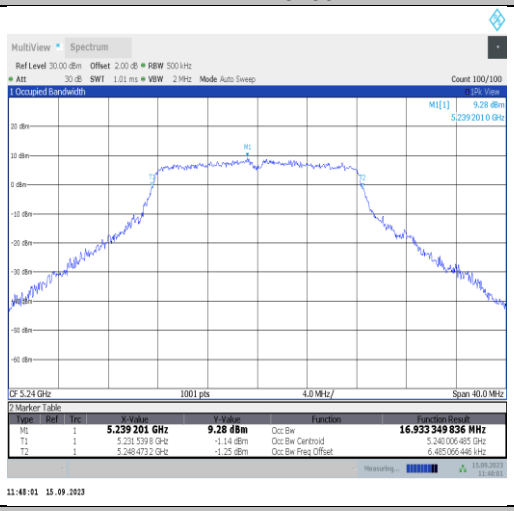

11a-Ant1-5240

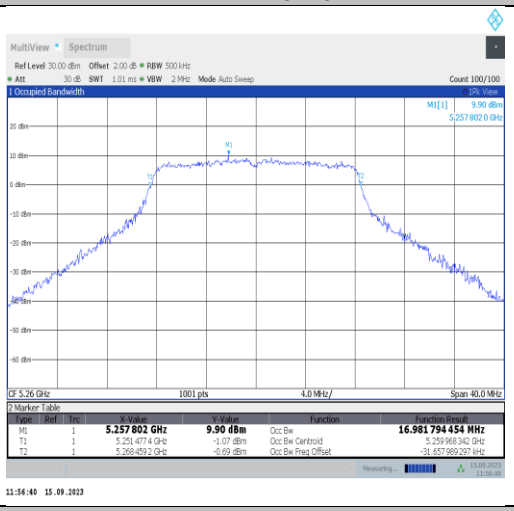

11a-Ant1-5260

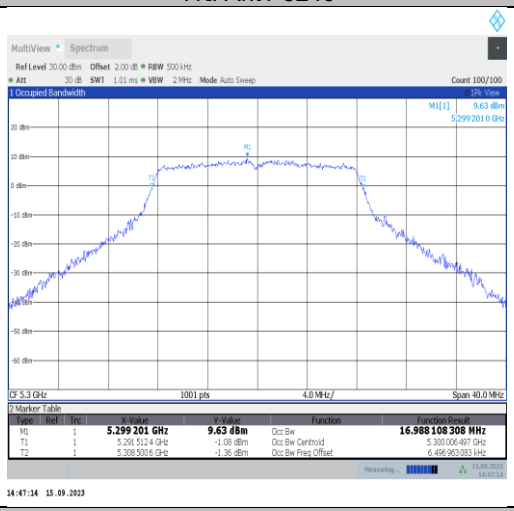

11a-Ant1-5300

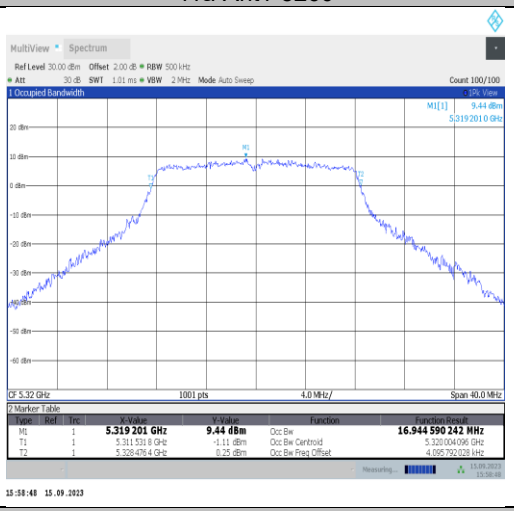

11a-Ant1-5320

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86–512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86–512) 62992980 sgs.china@sgs.com

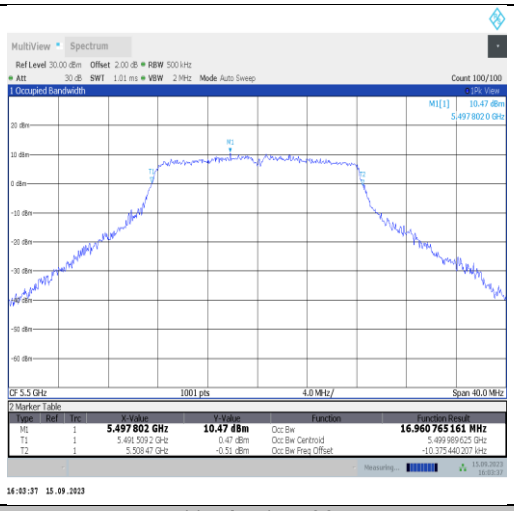

11a-Ant1-5500

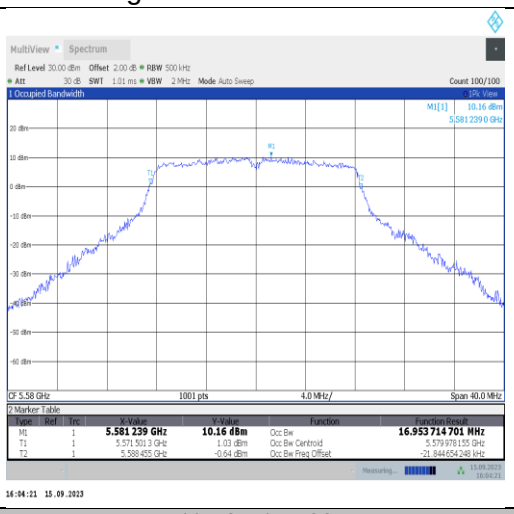

11a-Ant1-5580

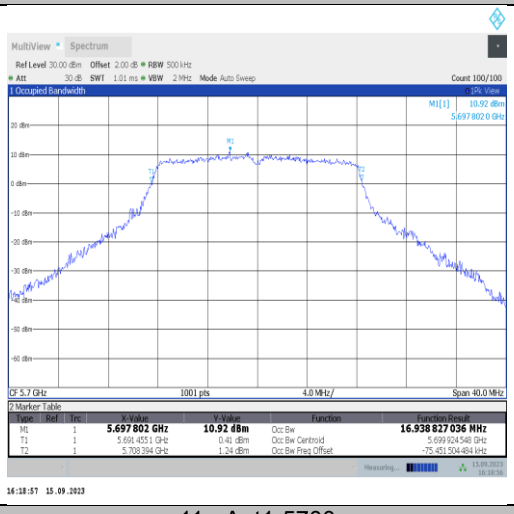

11a-Ant1-5700

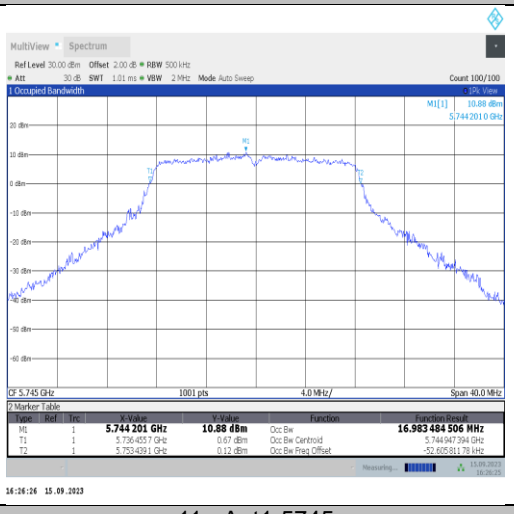

11a-Ant1-5745

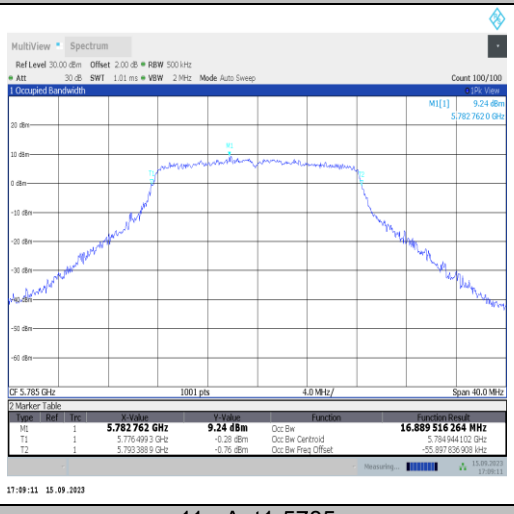

11a-Ant1-5785

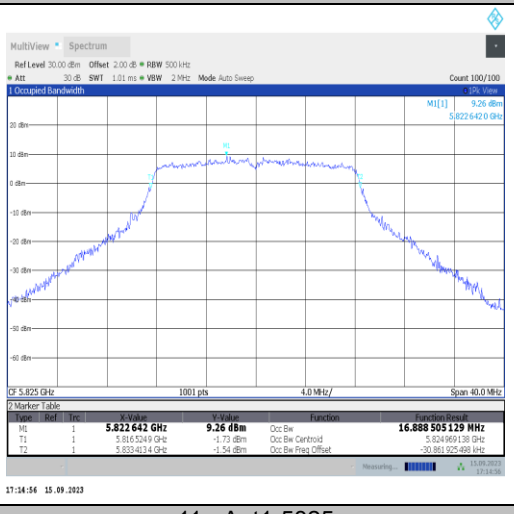

11a-Ant1-5825

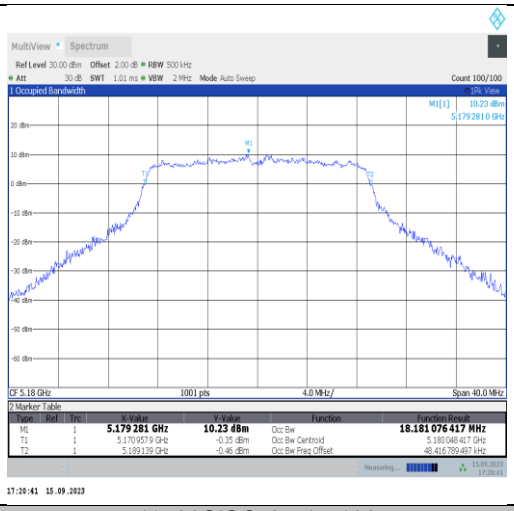

11n20SISO-Ant1-5180

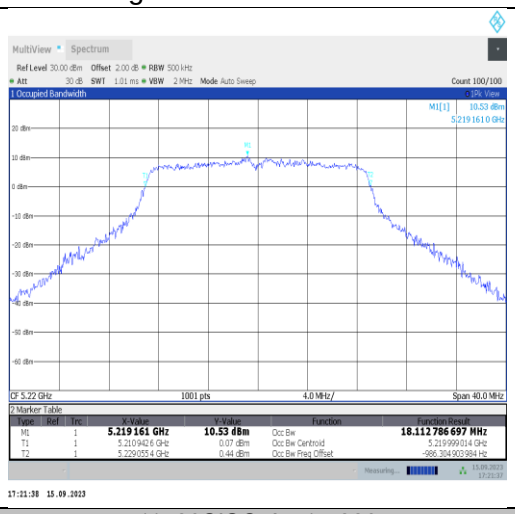

11n20SISO-Ant1-5220

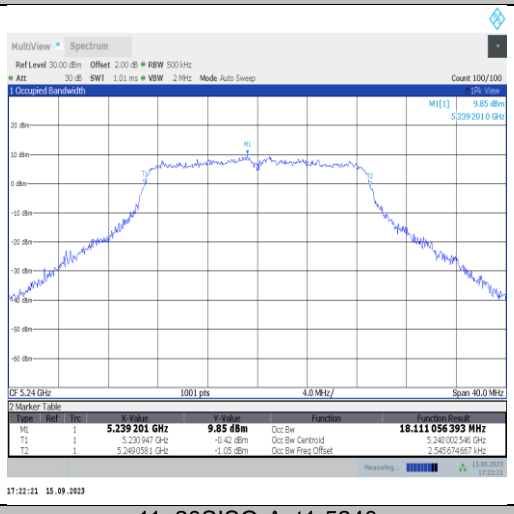

11n20SISO-Ant1-5240

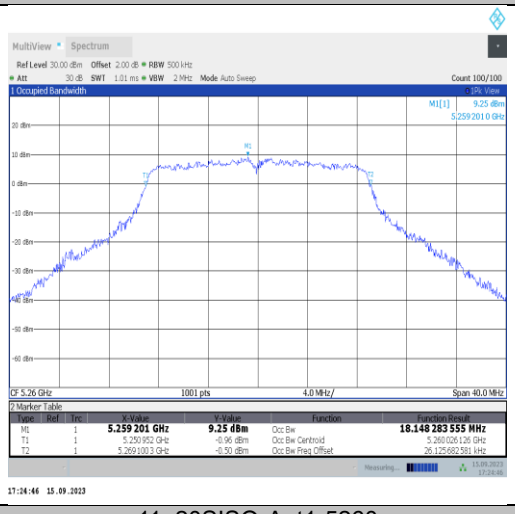

11n20SISO-Ant1-5260

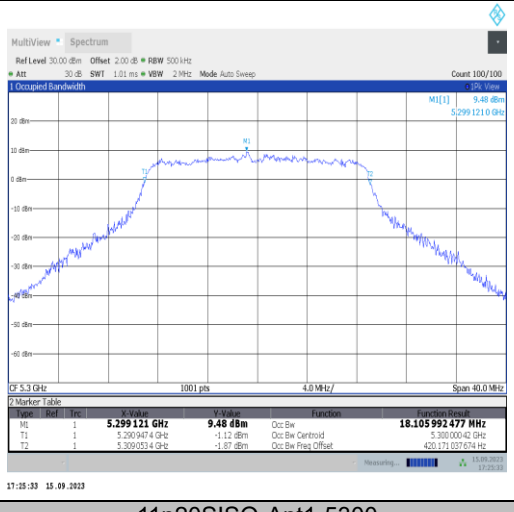

11n20SISO-Ant1-5300

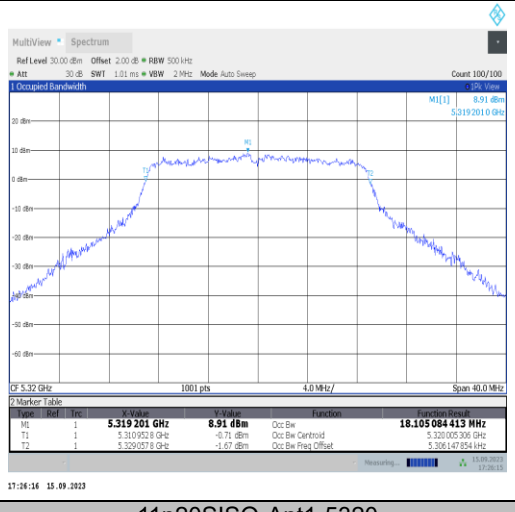

11n20SISO-Ant1-5320

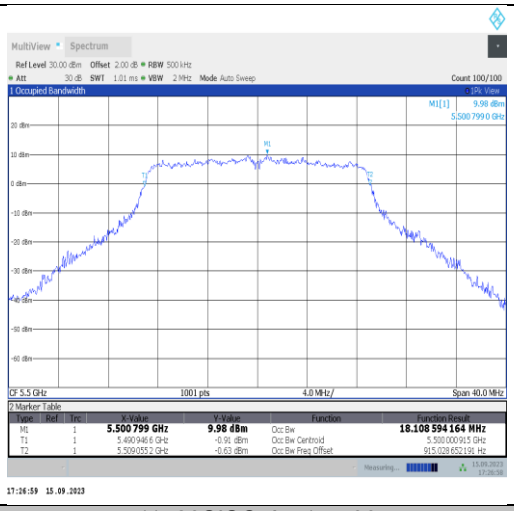

11n20SISO-Ant1-5500

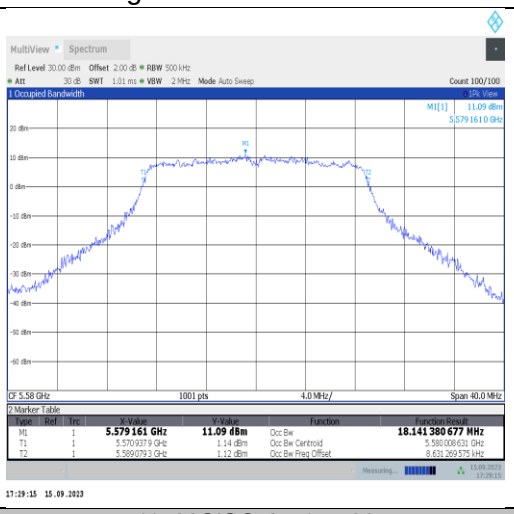

11n20SISO-Ant1-5580

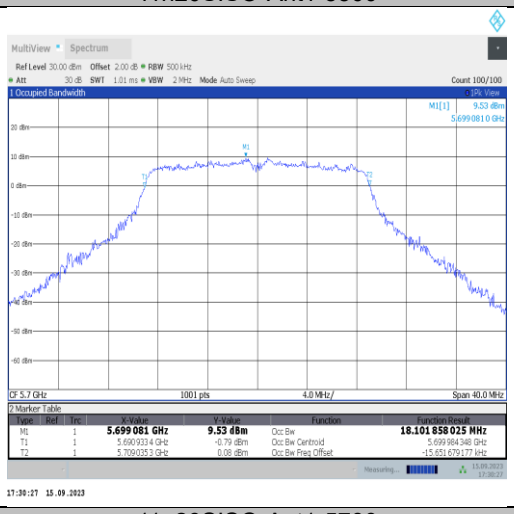

11n20SISO-Ant1-5700

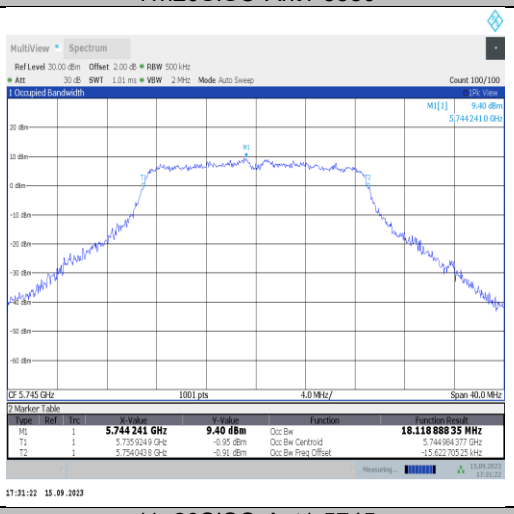

11n20SISO-Ant1-5745

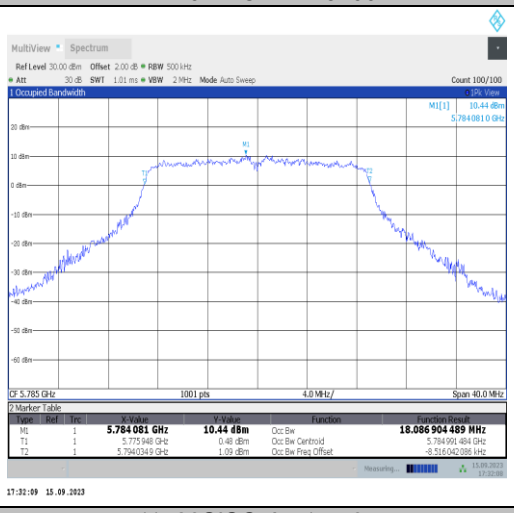

11n20SISO-Ant1-5785

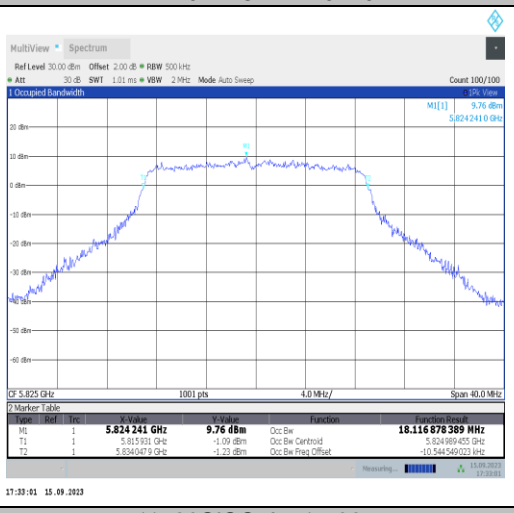

11n20SISO-Ant1-5825

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

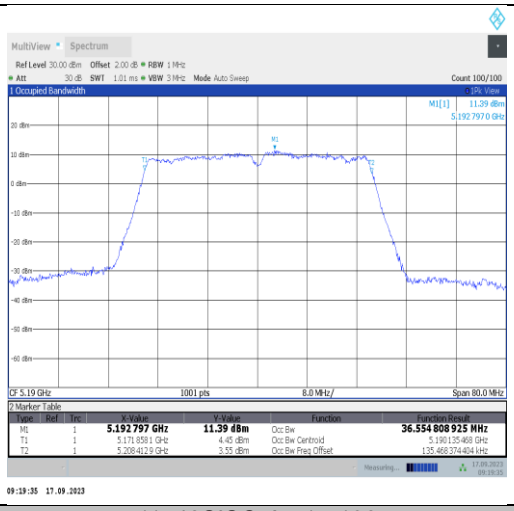

11n40SISO-Ant1-5190

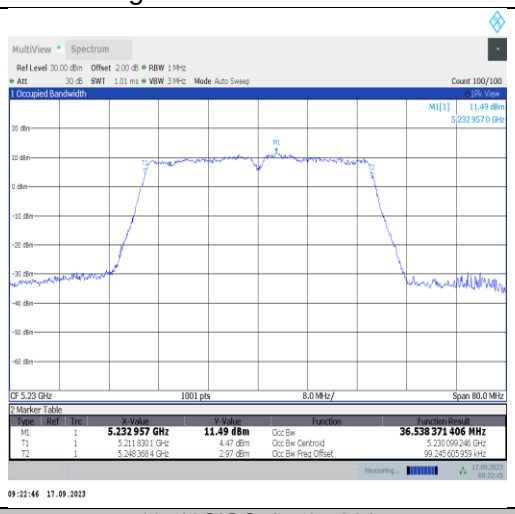

11n40SISO-Ant1-5230

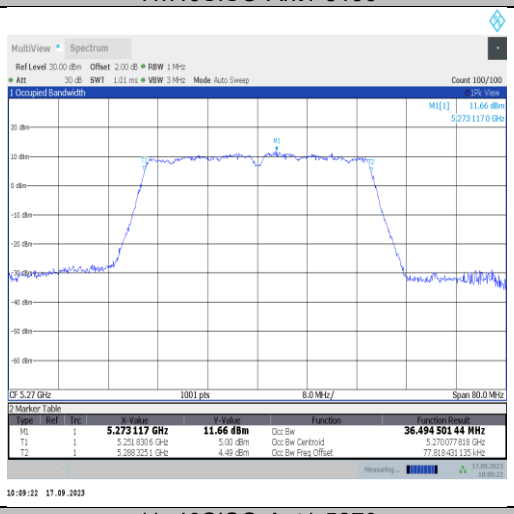

11n40SISO-Ant1-5270

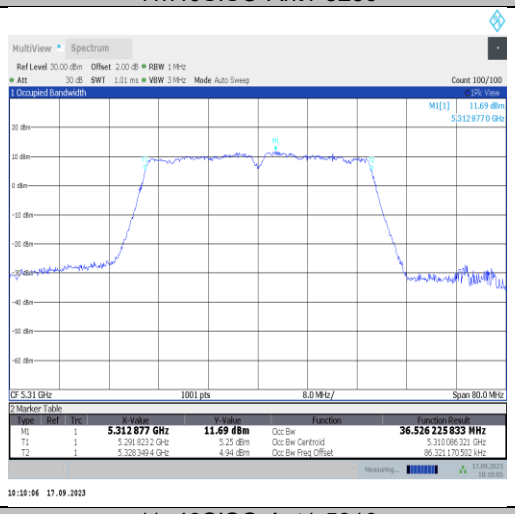

11n40SISO-Ant1-5310

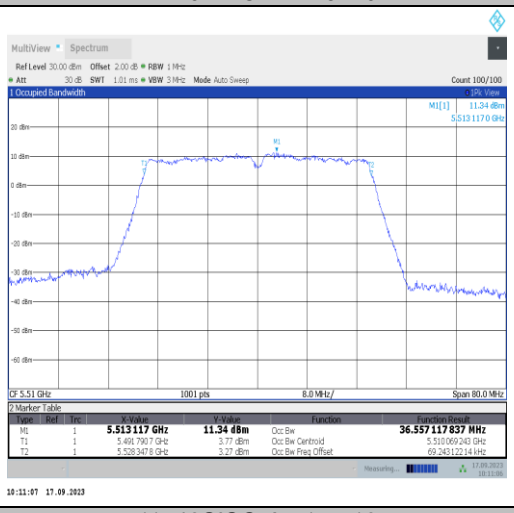

11n40SISO-Ant1-5510

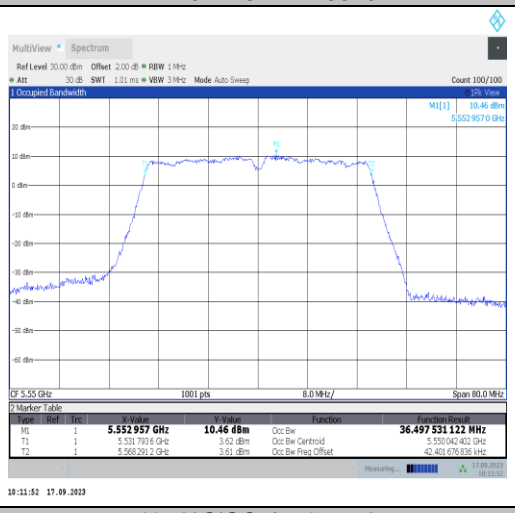

11n40SISO-Ant1-5550

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86-512) 62992980 sgs.china@sgs.com

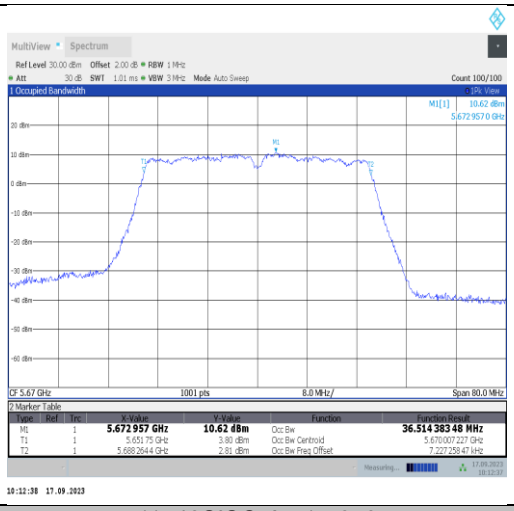

11n40SISO-Ant1-5670

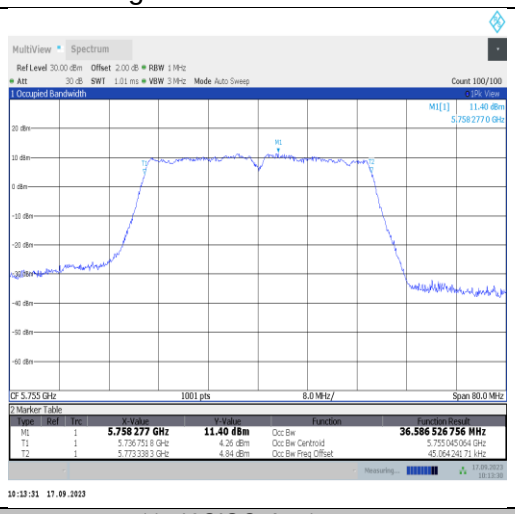

11n40SISO-Ant1-5755

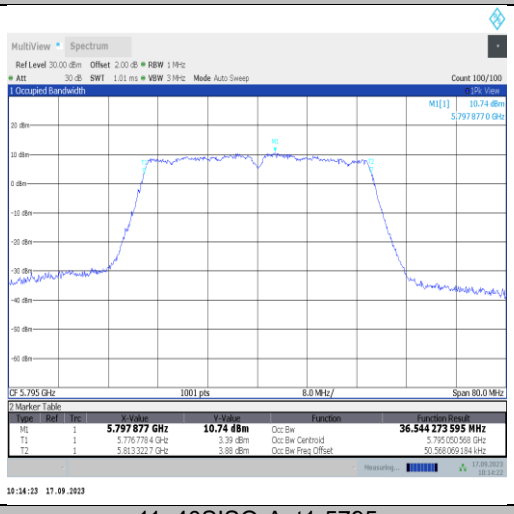

11n40SISO-Ant1-5795

11ac80SISO-Ant1-5210

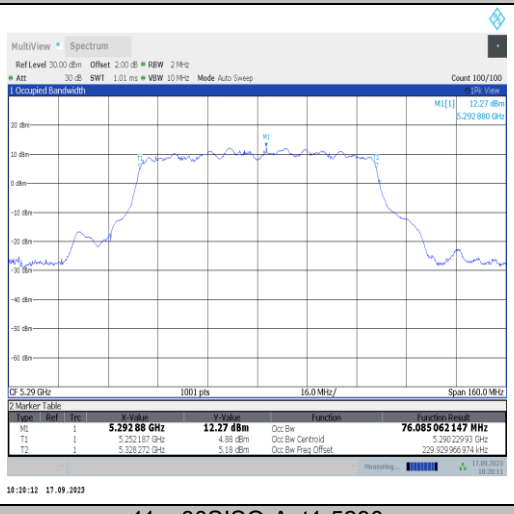

11ac80SISO-Ant1-5290

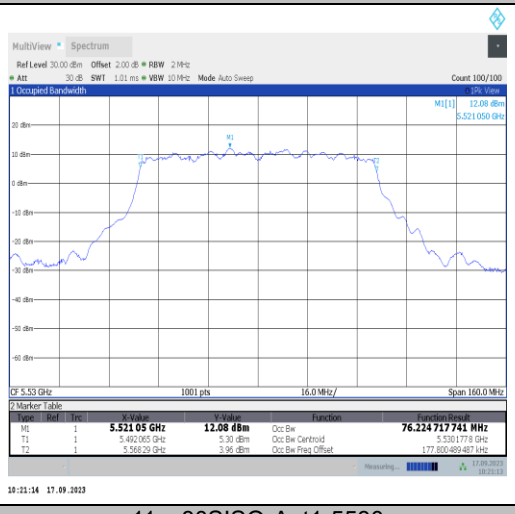

11ac80SISO-Ant1-5530

	
11ac80SISO-Ant1-5775	

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86–512) 62992980 www.sgsgroup.com.cn
中国·苏州·中国（江苏）自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编：215000 t (86–512) 62992980 sgs.china@sgs.com