



<MRU>

Maximum conducted output power E.I.R.P

Test Result

Test Mode	Antenna	Freq (MHz)	MRU Type	MRU Index	Set Power	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict	
11BE20M IMO	Ant1	5845	52+26	-	9.5	8.01	99.62	0.02	8.03	≤34.84	1.16	9.19	≤36.00	PASS	
			106+26	-	11.5	10.11	99.62	0.02	10.13	≤34.84	1.16	11.29	≤36.00	PASS	
	Ant2	5845	52+26	-	9.5	8.46	99.81	0.01	8.47	≤34.84	1.16	9.63	≤36.00	PASS	
			106+26	-	11.5	10.85	99.81	0.01	10.86	≤34.84	1.16	12.02	≤36.00	PASS	
	total	5845	52+26	-	---	---	---	---	---	11.27	≤34.84	1.16	12.43	≤36.00	PASS
			106+26	-	---	---	---	---	---	13.52	≤34.84	1.16	14.68	≤36.00	PASS
	Ant1	5885	52+26	-	9.5	7.95	99.62	0.02	7.97	≤34.84	1.16	9.13	≤36.00	PASS	
			106+26	-	11.5	10.06	99.62	0.02	10.08	≤34.84	1.16	11.24	≤36.00	PASS	
	Ant2	5885	52+26	-	9.5	8.86	99.81	0.01	8.87	≤34.84	1.16	10.03	≤36.00	PASS	
			106+26	-	11.5	11.09	99.81	0.01	11.10	≤34.84	1.16	12.26	≤36.00	PASS	
	total	5885	52+26	-	---	---	---	---	---	11.45	≤34.84	1.16	12.61	≤36.00	PASS
			106+26	-	---	---	---	---	---	13.63	≤34.84	1.16	14.79	≤36.00	PASS
	11BE80M IMO	Ant1	5855	Large RU 484+242	1	12	12.33	99.62	0.02	12.35	≤34.84	1.16	13.51	≤36.00	PASS
					4	12.5	12.83	99.62	0.02	12.85	≤34.84	1.16	14.01	≤36.00	PASS
Puncturing 20M				1	13.5	12.65	99.62	0.02	12.67	≤34.84	1.16	13.83	≤36.00	PASS	
				4	13.5	12.64	99.62	0.02	12.66	≤34.84	1.16	13.82	≤36.00	PASS	
Ant2		5855	Large RU 484+242	1	12	13.32	99.62	0.02	13.34	≤34.84	1.16	14.5	≤36.00	PASS	
				4	12.5	13.65	99.62	0.02	13.67	≤34.84	1.16	14.83	≤36.00	PASS	
			Puncturing 20M	1	13.5	13.51	99.62	0.02	13.53	≤34.84	1.16	14.69	≤36.00	PASS	
				4	13.5	13.38	99.62	0.02	13.40	≤34.84	1.16	14.56	≤36.00	PASS	
total		5855	Large RU 484+242	1	---	---	---	---	---	15.88	≤34.84	1.16	17.04	≤36.00	PASS
				4	---	---	---	---	---	16.29	≤34.84	1.16	17.45	≤36.00	PASS
			Puncturing 20M	1	---	---	---	---	---	16.13	≤34.84	1.16	17.29	≤36.00	PASS
				4	---	---	---	---	---	16.06	≤34.84	1.16	17.22	≤36.00	PASS
11BE160 MIMO		Ant1	5815	Large RU 996+484	1	12.5	12.74	99.55	0.02	12.76	≤34.84	1.16	13.92	≤36.00	PASS
					4	12.5	12.57	99.55	0.02	12.59	≤34.84	1.16	13.75	≤36.00	PASS
	Puncturing 40M			1	13.5	12.56	99.55	0.02	12.58	≤34.84	1.16	13.74	≤36.00	PASS	
				4	13.5	12.48	99.55	0.02	12.50	≤34.84	1.16	13.66	≤36.00	PASS	
	Puncturing 20M			1	14	13.11	99.55	0.02	13.13	≤34.84	1.16	14.29	≤36.00	PASS	
				8	14	13.04	99.55	0.02	13.06	≤34.84	1.16	14.22	≤36.00	PASS	
	Ant2	5815	Large RU 996+484	1	12.5	13.63	99.77	0.01	13.64	≤34.84	1.16	14.8	≤36.00	PASS	
				4	12.5	13.38	99.77	0.01	13.39	≤34.84	1.16	14.55	≤36.00	PASS	
			Puncturing 40M	1	13.5	13.49	99.77	0.01	13.50	≤34.84	1.16	14.66	≤36.00	PASS	
				4	13.5	13.32	99.77	0.01	13.33	≤34.84	1.16	14.49	≤36.00	PASS	
			Puncturing 20M	1	14	13.98	99.77	0.01	13.99	≤34.84	1.16	15.15	≤36.00	PASS	
				8	14	13.87	99.77	0.01	13.88	≤34.84	1.16	15.04	≤36.00	PASS	
	total	5815	Large RU 996+484	1	---	---	---	---	---	16.23	≤34.84	1.16	17.39	≤36.00	PASS
				4	---	---	---	---	---	16.02	≤34.84	1.16	17.18	≤36.00	PASS
Puncturing 40M			1	---	---	---	---	---	16.07	≤34.84	1.16	17.23	≤36.00	PASS	
			4	---	---	---	---	---	15.95	≤34.84	1.16	17.11	≤36.00	PASS	
Puncturing 20M			1	---	---	---	---	---	16.59	≤34.84	1.16	17.75	≤36.00	PASS	
			8	---	---	---	---	---	16.50	≤34.84	1.16	17.66	≤36.00	PASS	





## Maximum power spectral density E.I.R.P



### Test Result



TestMode	Antenna	Freq(MHz)	MRU Type	MRU Index	Result [dBm/MHz]	EIRP [dBm/MHz]	EIRP Limit [dBm/MHz]	Verdict			
11BE20MIMO	Ant1	5845	52+26	-	1.43	2.59	≤20.00	PASS			
			106+26	-	0.56	1.72	≤20.00	PASS			
	Ant2	5845	52+26	-	0.66	1.82	≤20.00	PASS			
			106+26	-	0.81	1.97	≤20.00	PASS			
	total	5845	52+26	-	4.07	8.24	≤20.00	PASS			
			106+26	-	3.70	7.87	≤20.00	PASS			
	Ant1	5885	52+26	-	0.77	1.93	≤20.00	PASS			
			106+26	-	0.69	1.85	≤20.00	PASS			
	Ant2	5885	52+26	-	1.11	2.27	≤20.00	PASS			
			106+26	-	0.87	2.03	≤20.00	PASS			
	total	5885	52+26	-	3.95	8.12	≤20.00	PASS			
			106+26	-	3.79	7.96	≤20.00	PASS			
11BE80MIMO	Ant1	5855	Large RU 484+242	1	-4.39	-3.23	≤20.00	PASS			
				4	-4.17	-3.01	≤20.00	PASS			
			Puncturing 20M	1	-4.24	-3.08	≤20.00	PASS			
				4	-4.31	-3.15	≤20.00	PASS			
	Ant2	5855	Large RU 484+242	1	-4.45	-3.29	≤20.00	PASS			
				4	-4.19	-3.03	≤20.00	PASS			
			Puncturing 20M	1	-4.06	-2.90	≤20.00	PASS			
				4	-4.24	-3.08	≤20.00	PASS			
	total	5855	Large RU 484+242	1	-1.41	2.76	≤20.00	PASS			
				4	-1.17	3.00	≤20.00	PASS			
			Puncturing 20M	1	-1.14	3.03	≤20.00	PASS			
				4	-1.26	2.91	≤20.00	PASS			
11BE160MIMO	Ant1	5815	Large RU 996+484	1	-6.63	-5.47	≤20.00	PASS			
				4	-6.25	-5.09	≤20.00	PASS			
				Puncturing 40M	1	-6.84	-5.68	≤20.00	PASS		
					4	-6.55	-5.39	≤20.00	PASS		
			Puncturing 20M	1	-6.78	-5.62	≤20.00	PASS			
				8	-6.65	-5.49	≤20.00	PASS			
				Ant2	5815	Large RU 996+484	1	-7.11	-5.95	≤20.00	PASS
							4	-6.82	-5.66	≤20.00	PASS
	Puncturing 40M	1	-6.72			-5.56	≤20.00	PASS			
		4	-6.38			-5.22	≤20.00	PASS			
	Puncturing 20M	1	-6.86	-5.70	≤20.00	PASS					
		8	-6.43	-5.27	≤20.00	PASS					
		total	5815	Large RU 996+484	1	-3.85	0.32	≤20.00	PASS		
					4	-3.52	0.65	≤20.00	PASS		
	Puncturing 40M			1	-3.77	0.40	≤20.00	PASS			
				4	-3.45	0.72	≤20.00	PASS			
Puncturing 20M	1			-3.81	0.36	≤20.00	PASS				
	8			-3.53	0.64	≤20.00	PASS				




### Test Graphs

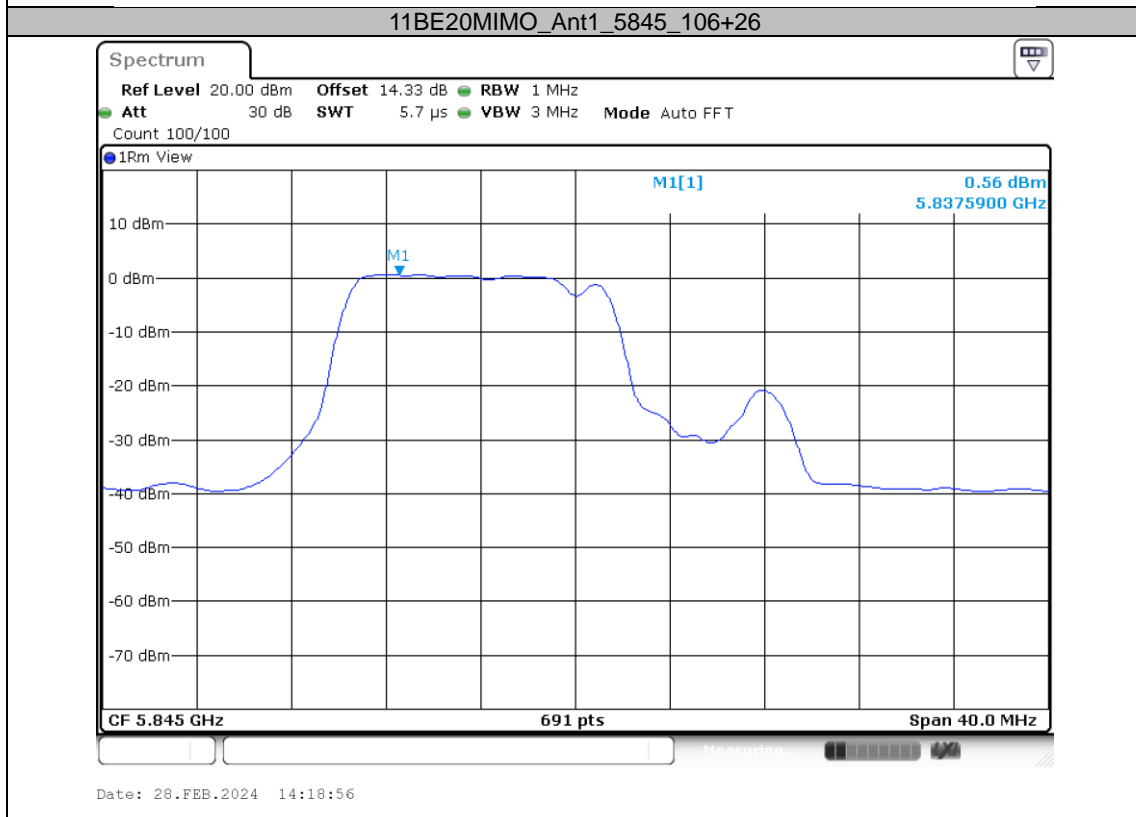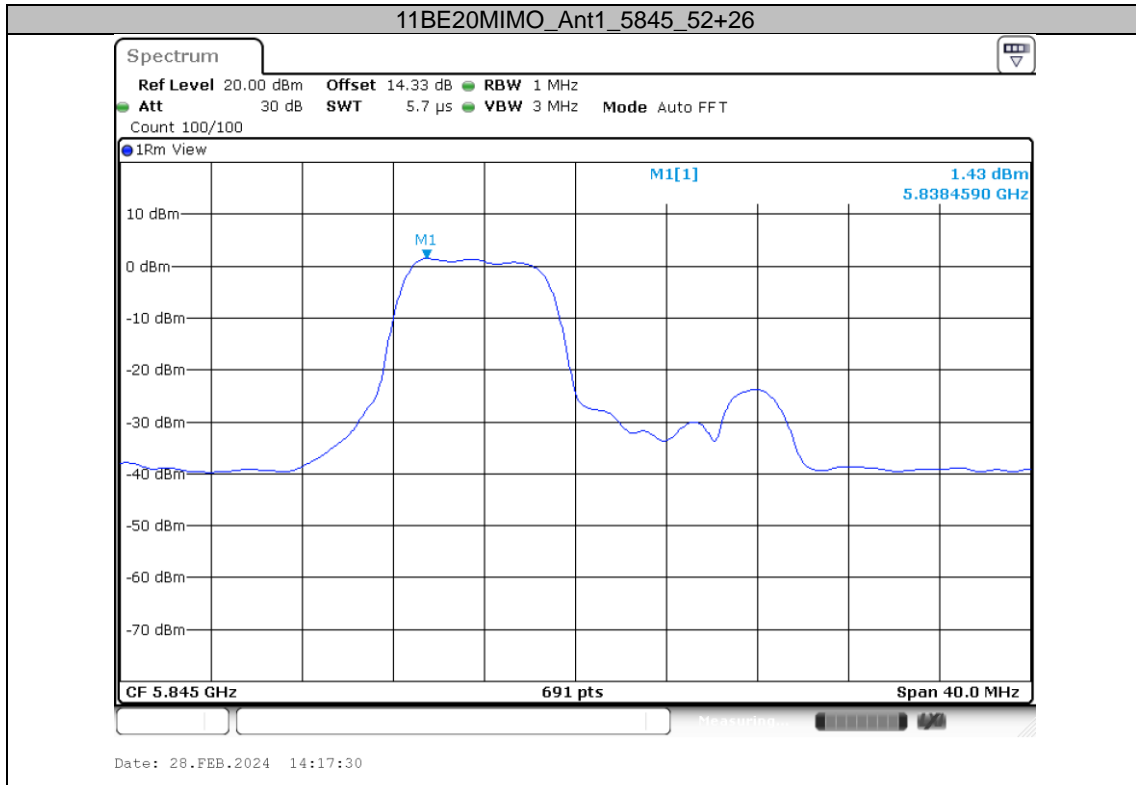


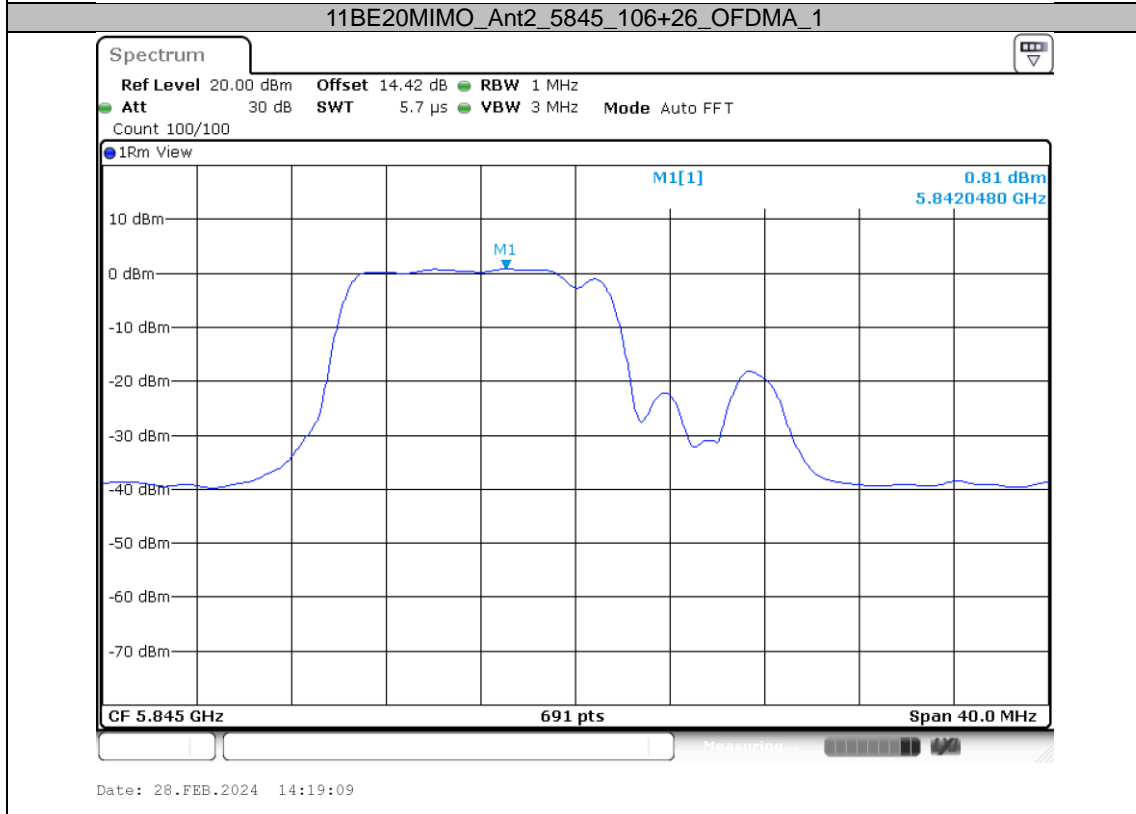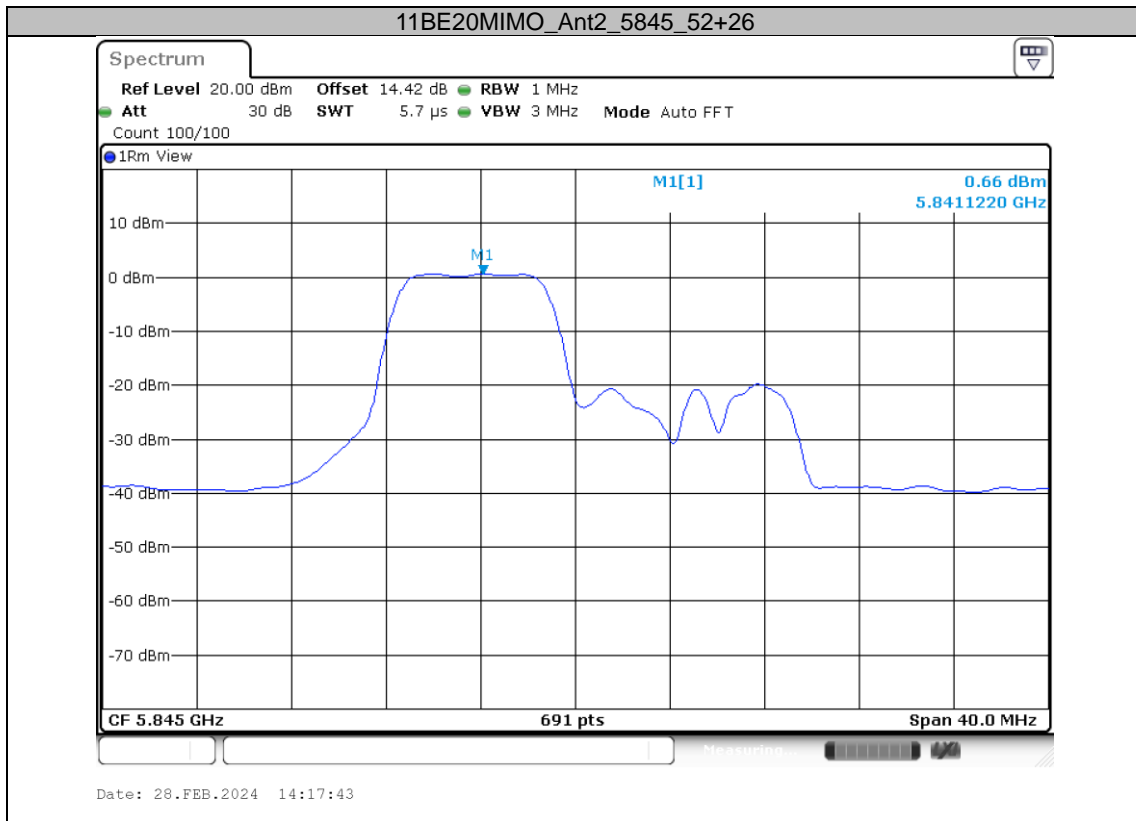

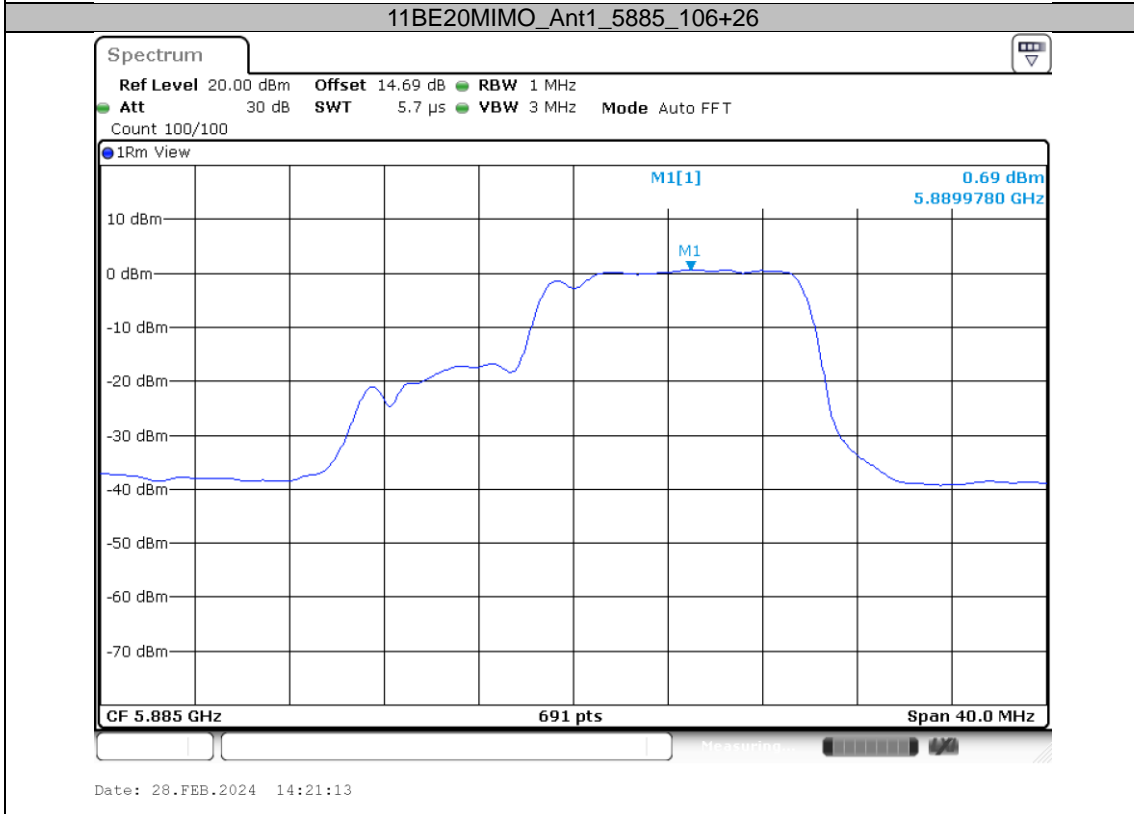
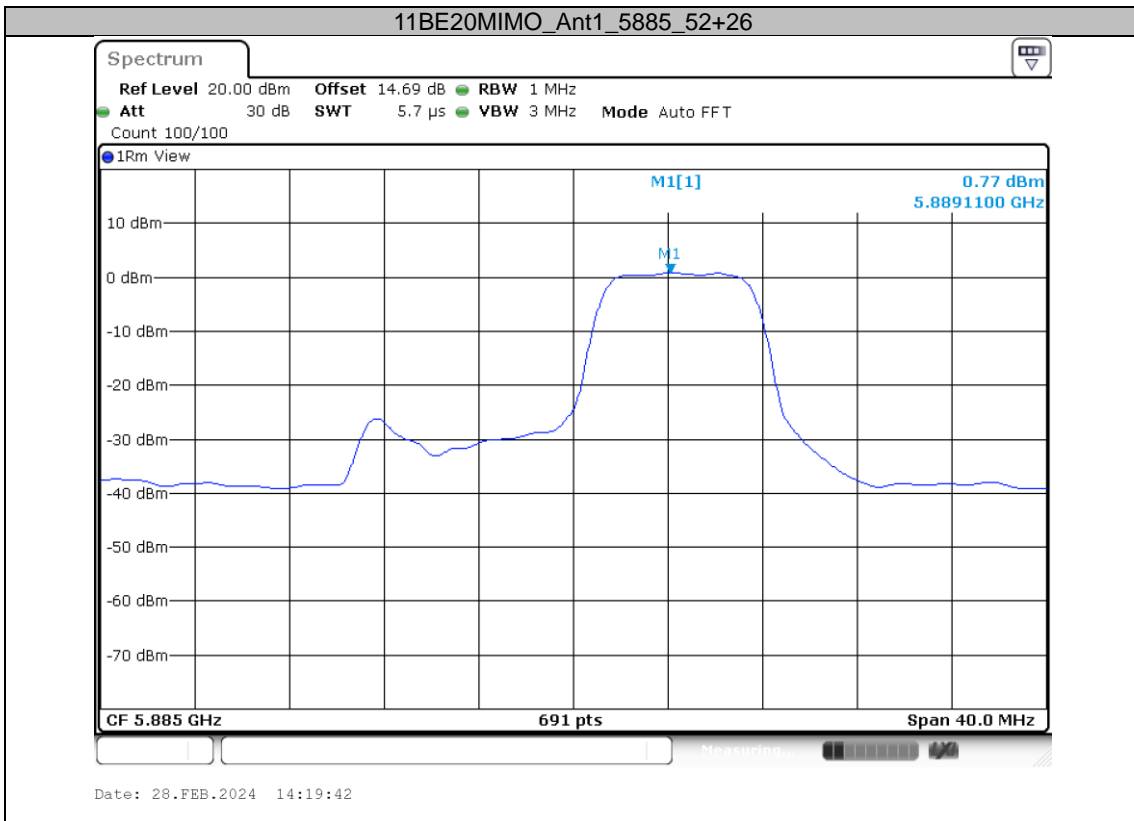


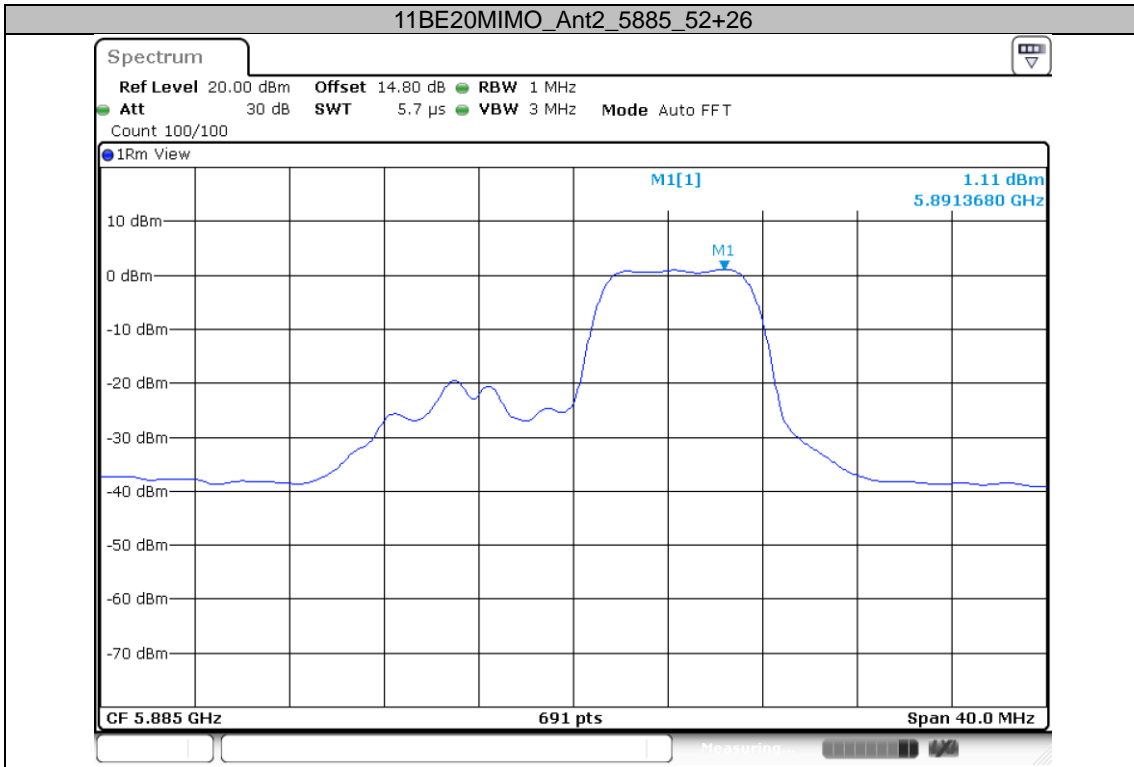



Date: 28.FEB.2024 14:19:55


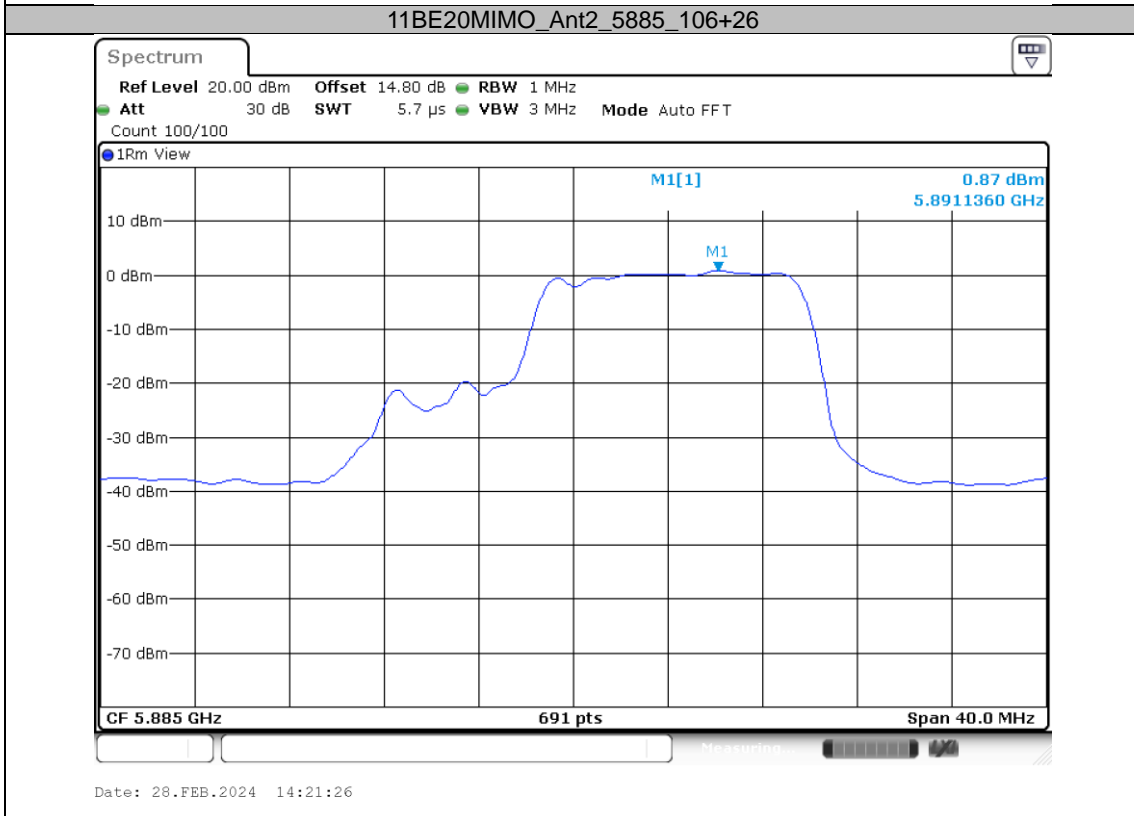



Date: 28.FEB.2024 14:21:26

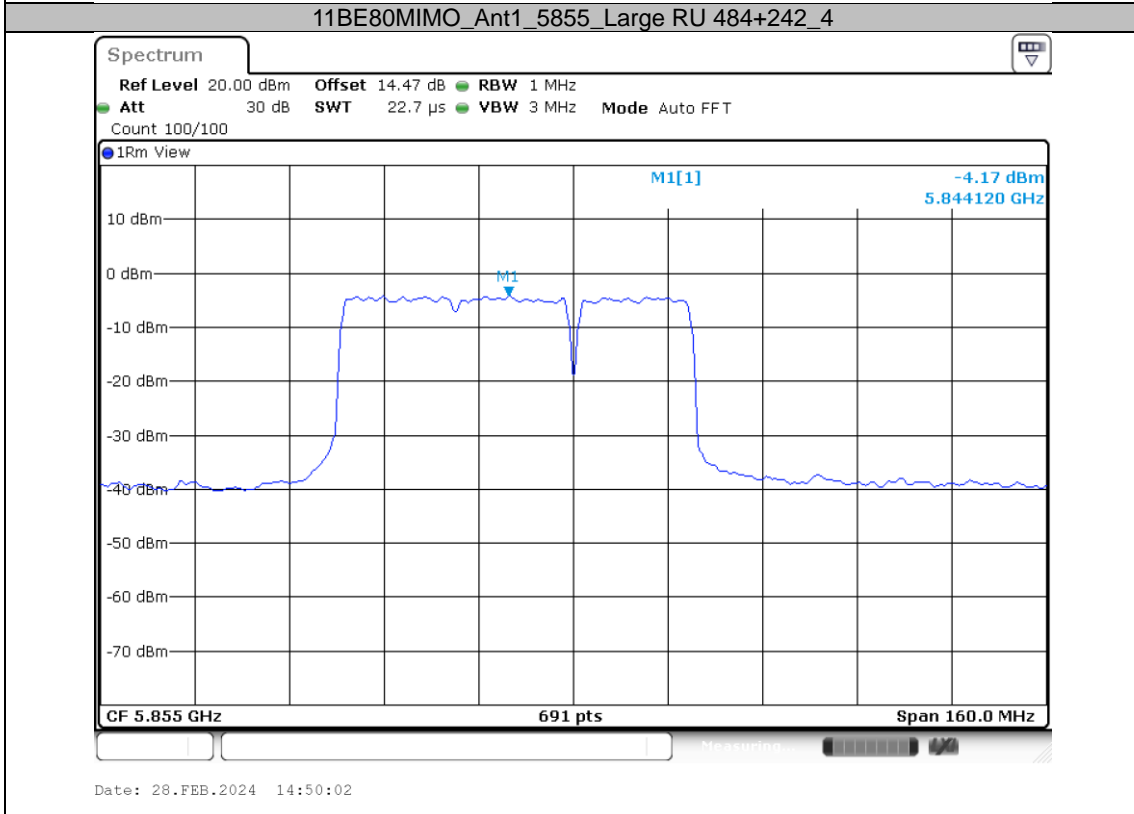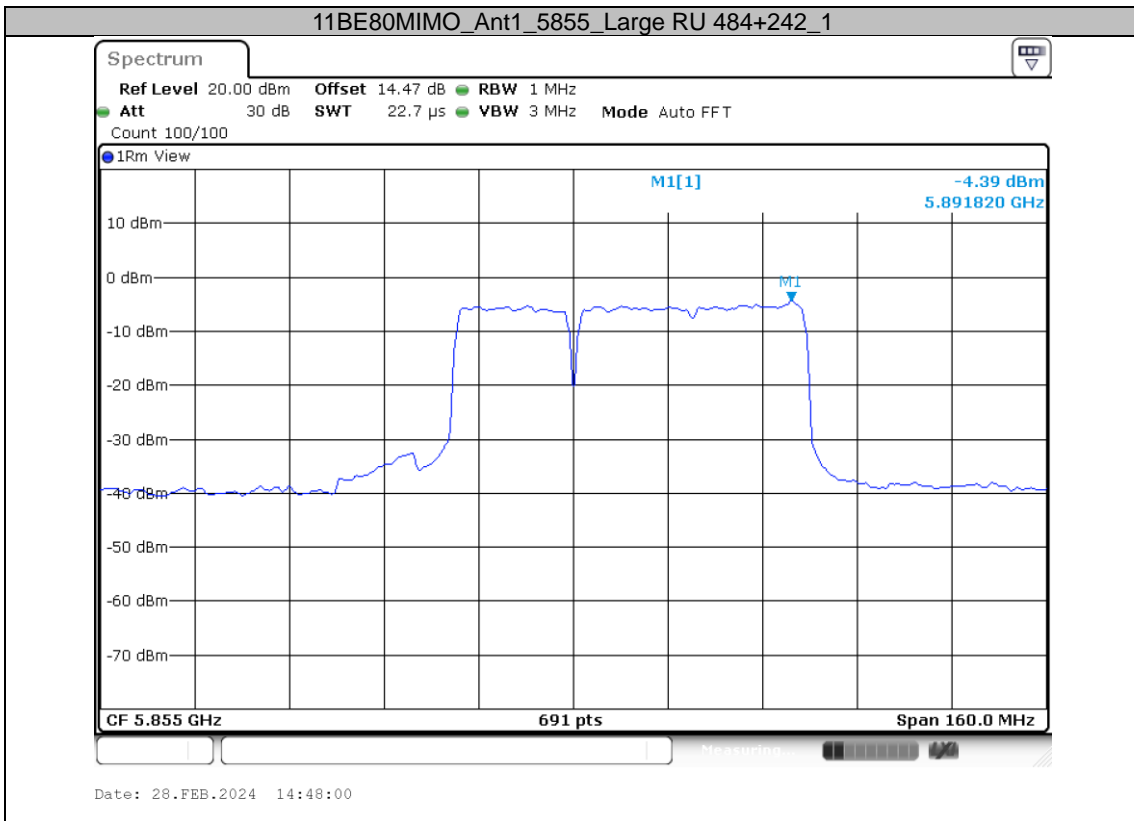




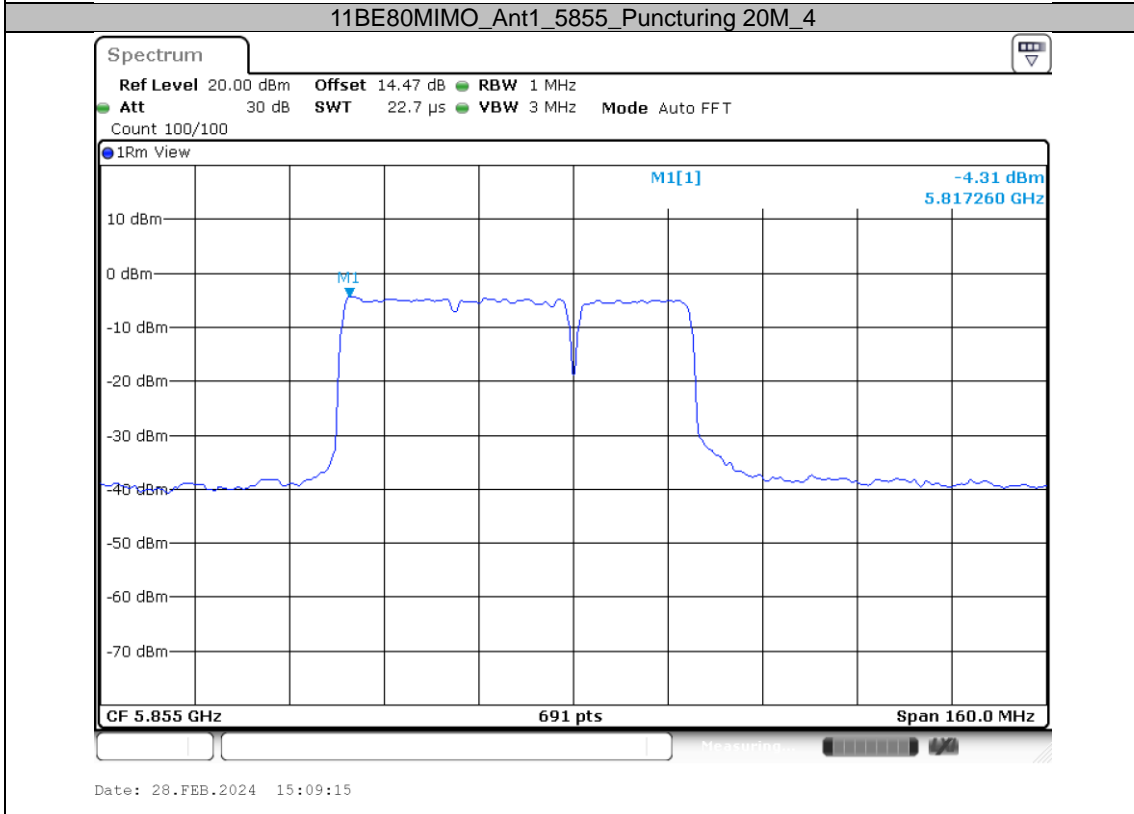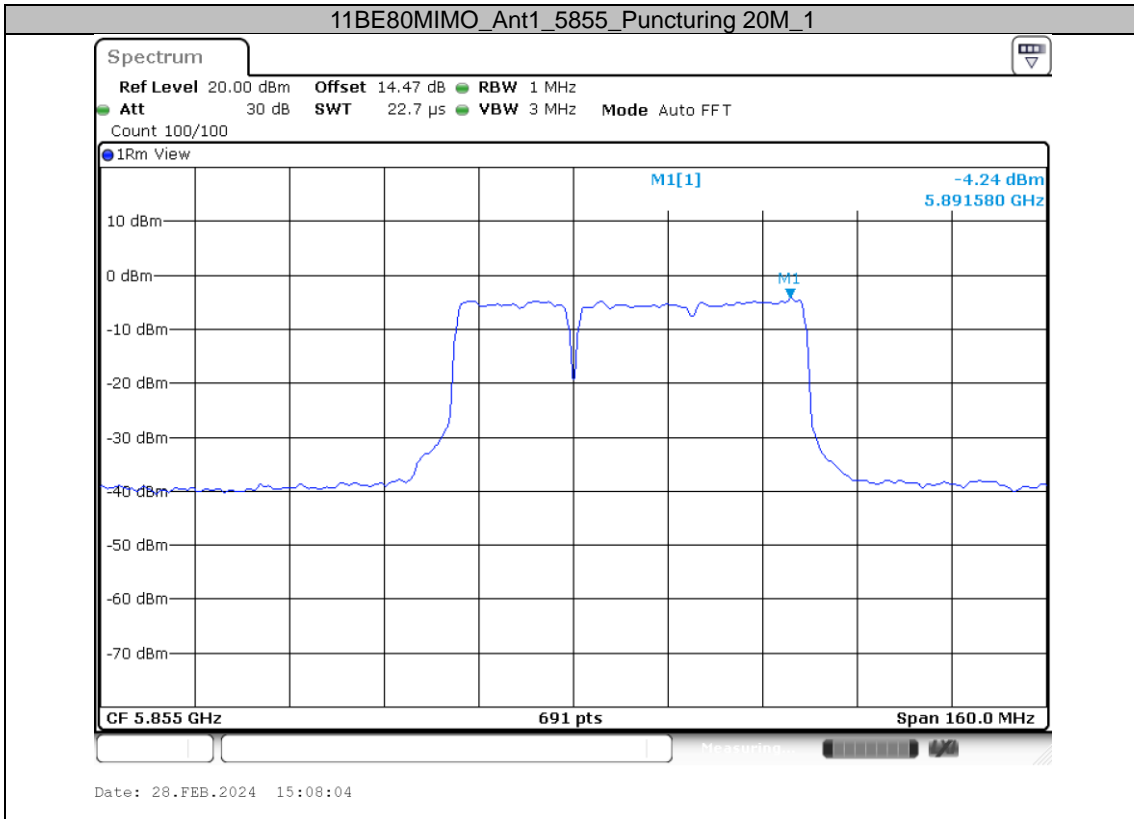

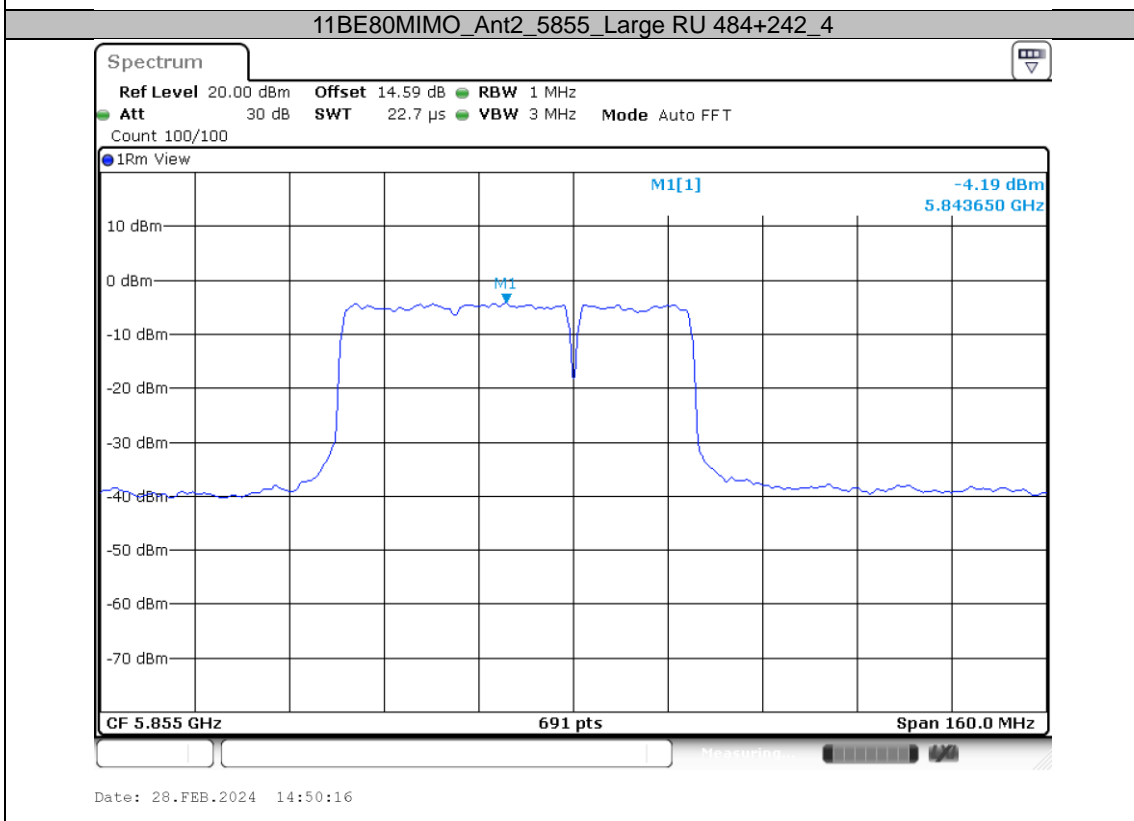
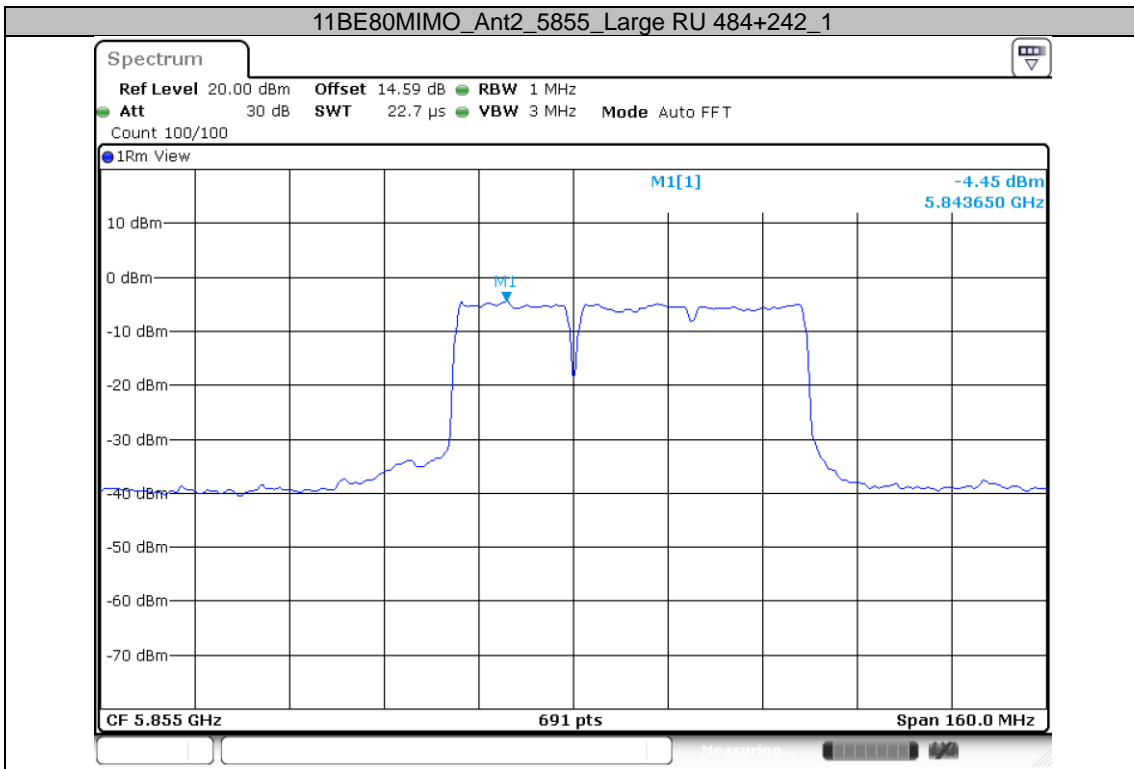



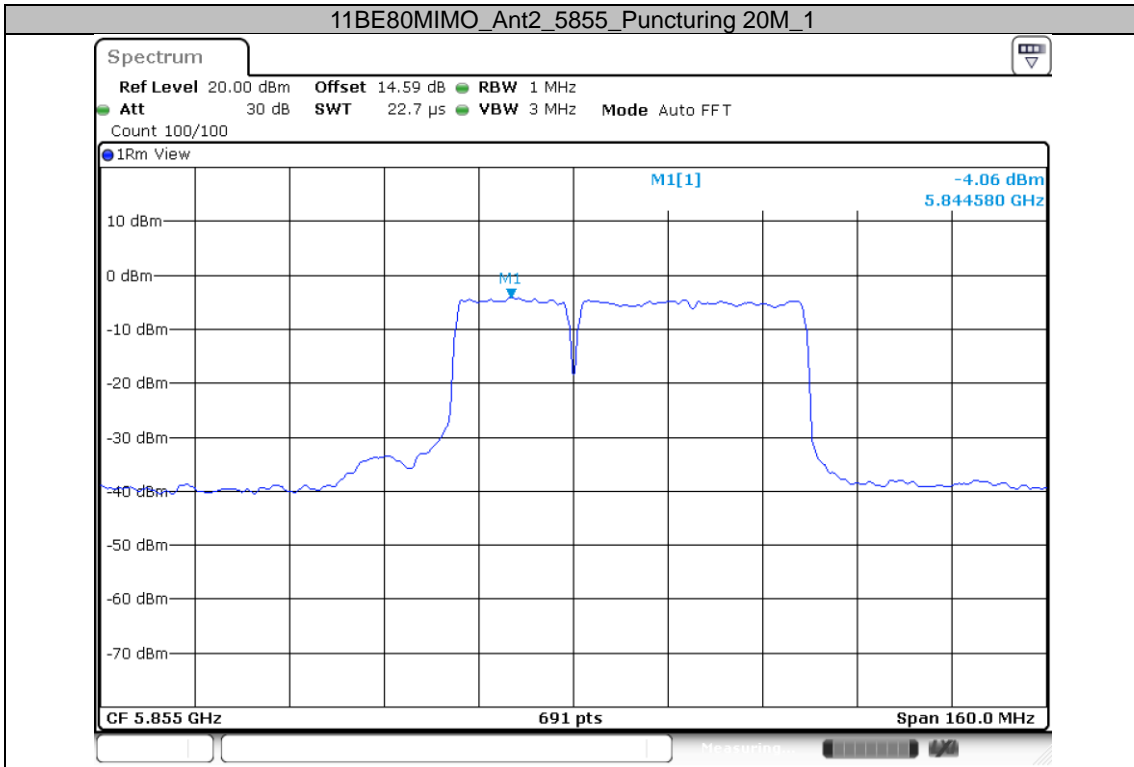




Date: 28.FEB.2024 15:08:17


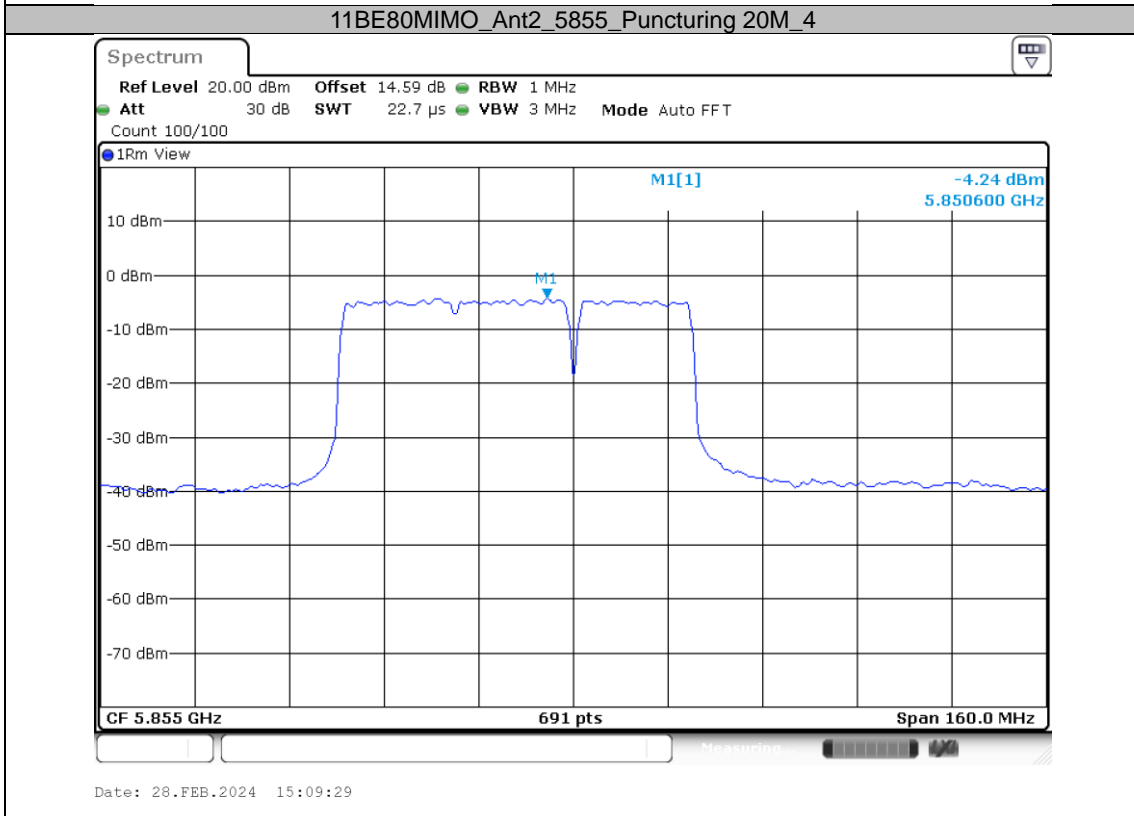




Date: 28.FEB.2024 15:09:29

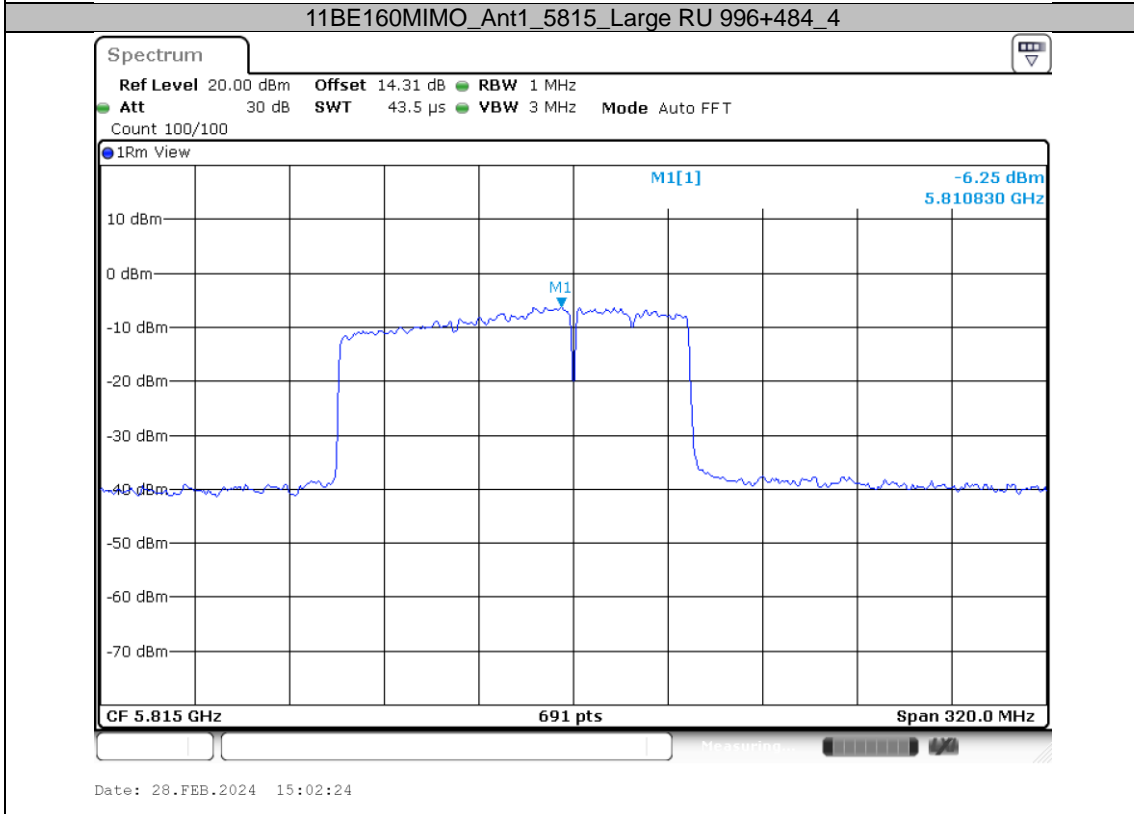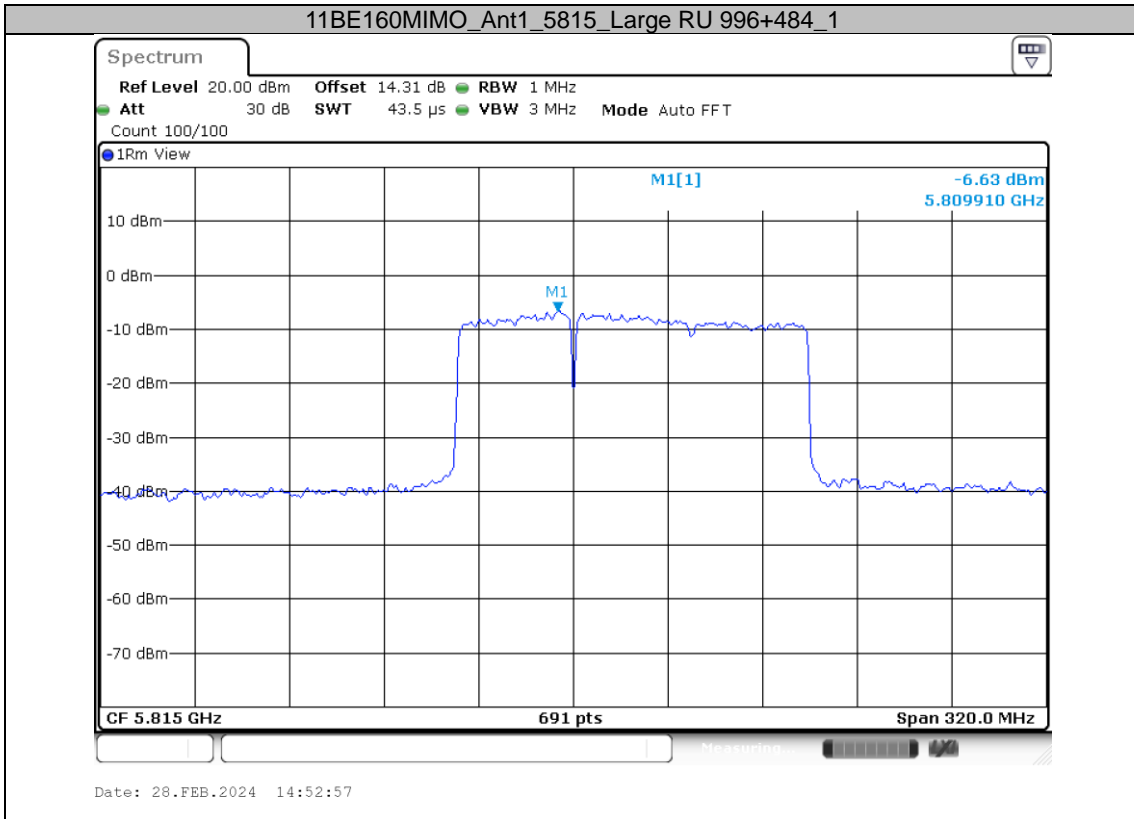

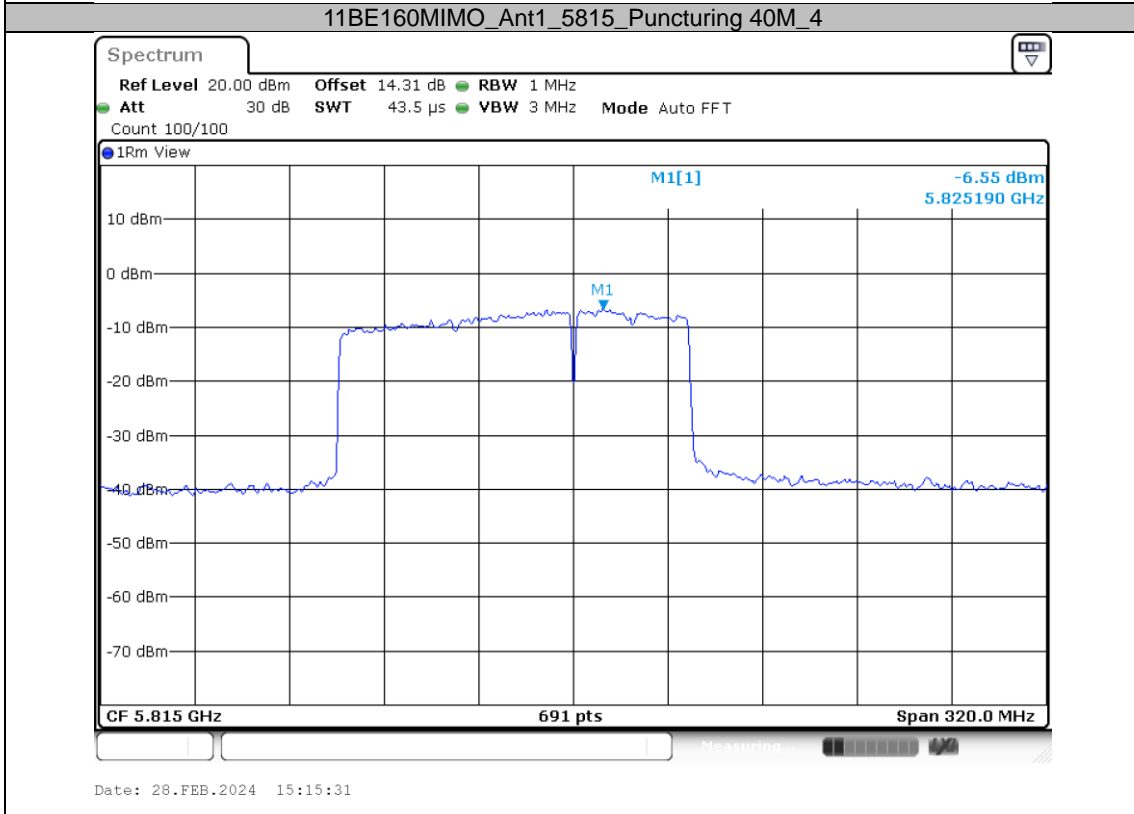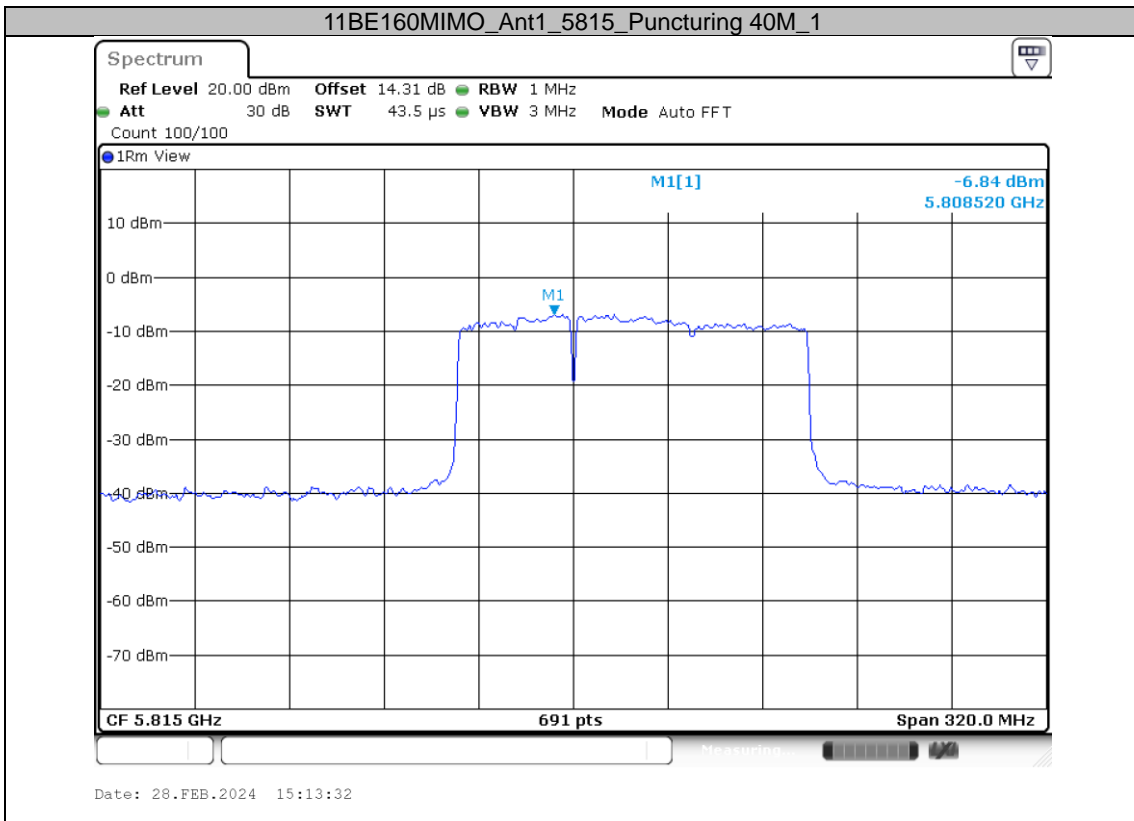


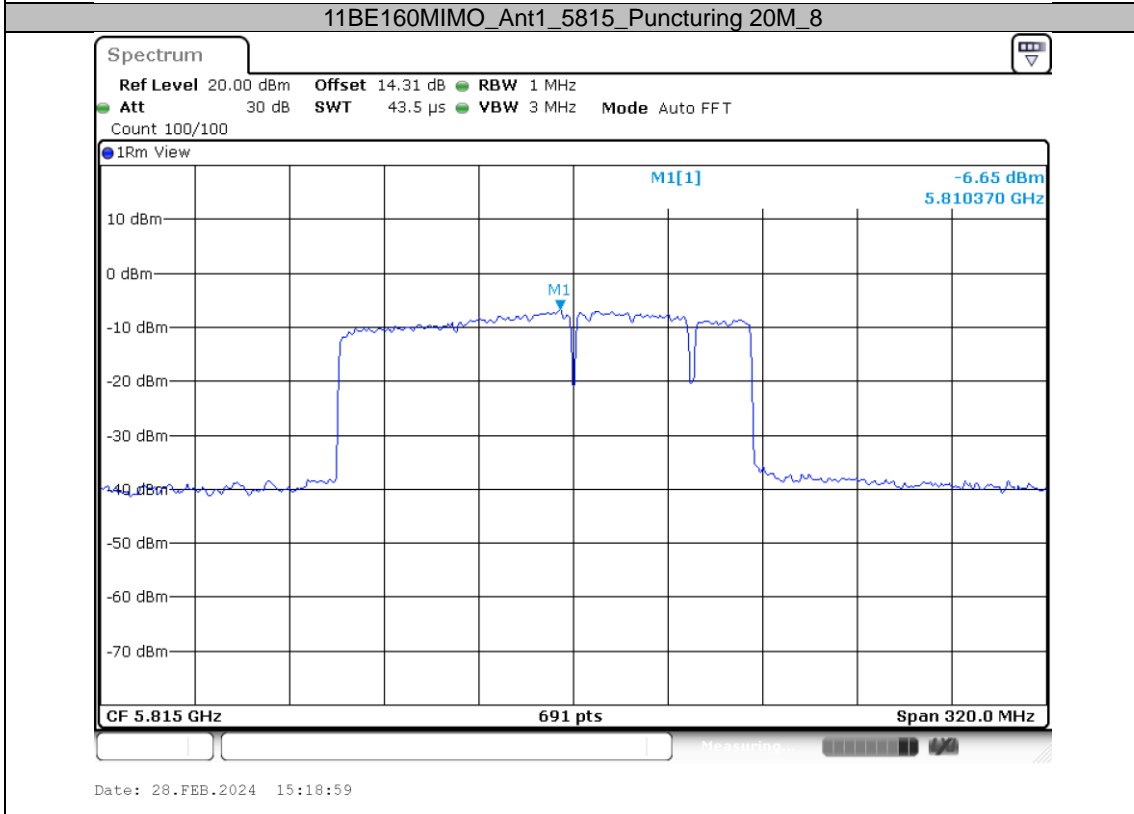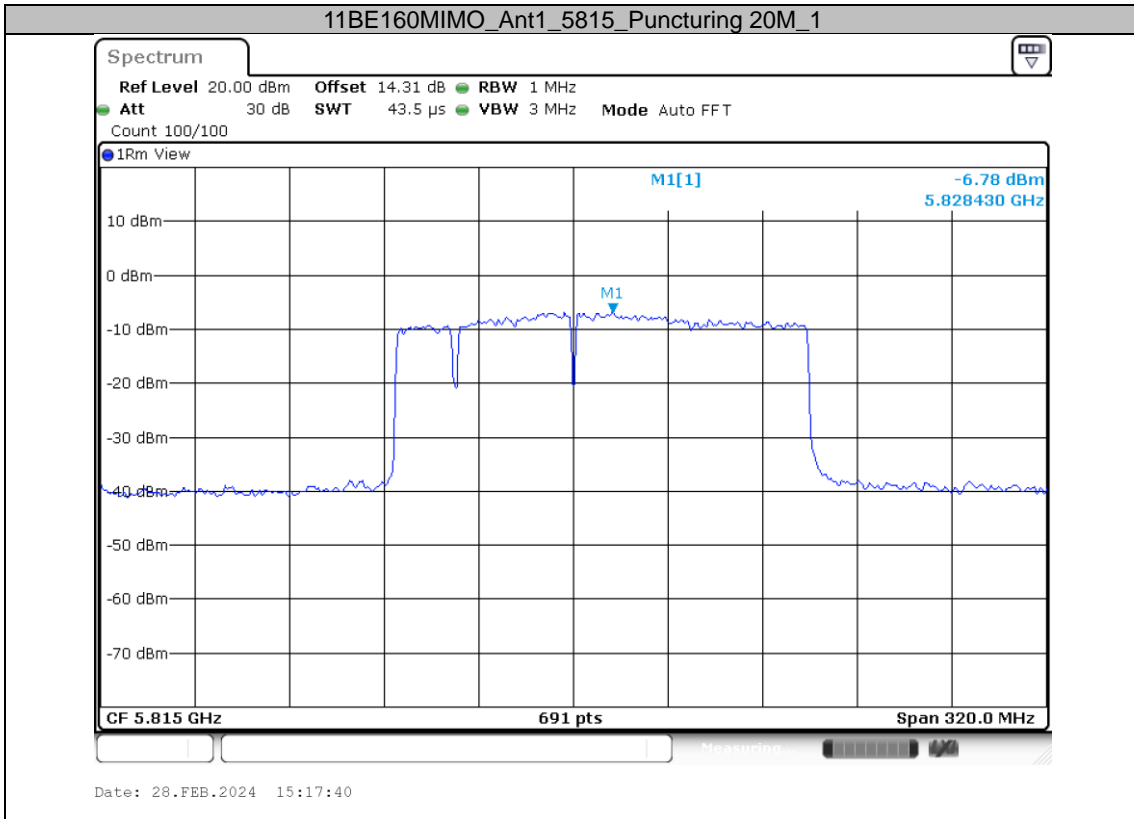

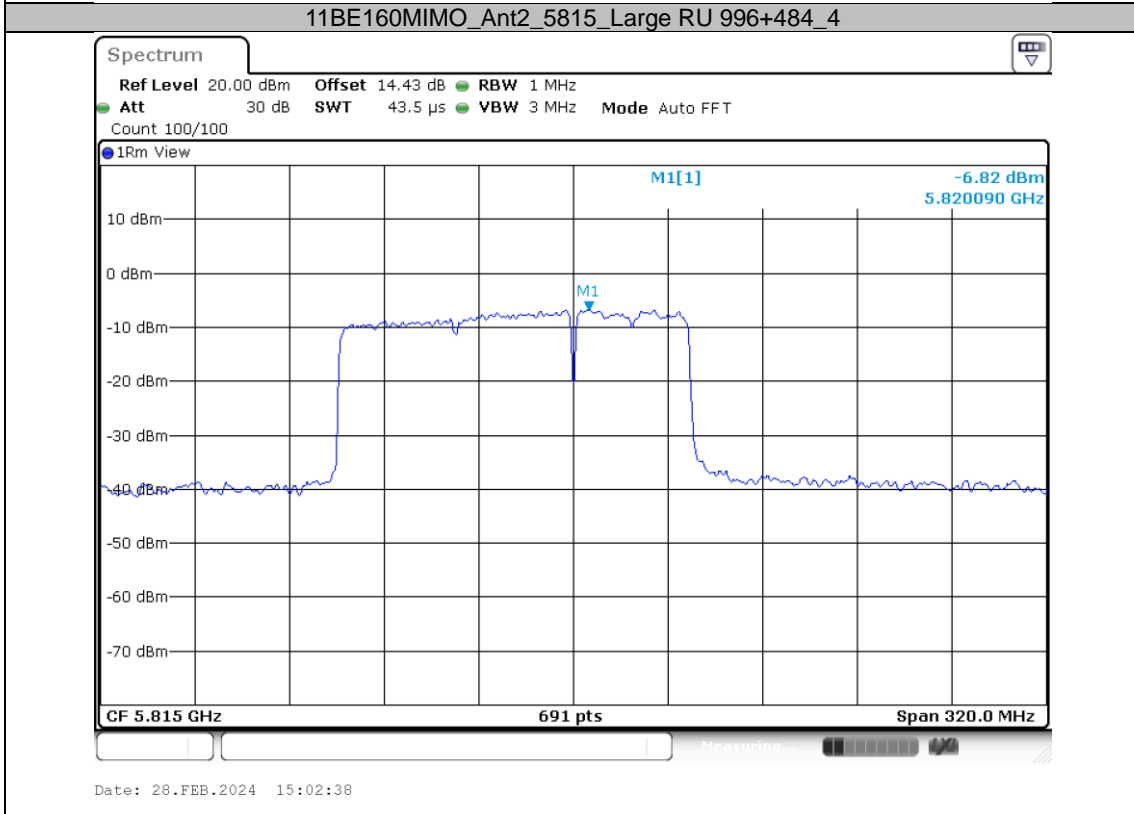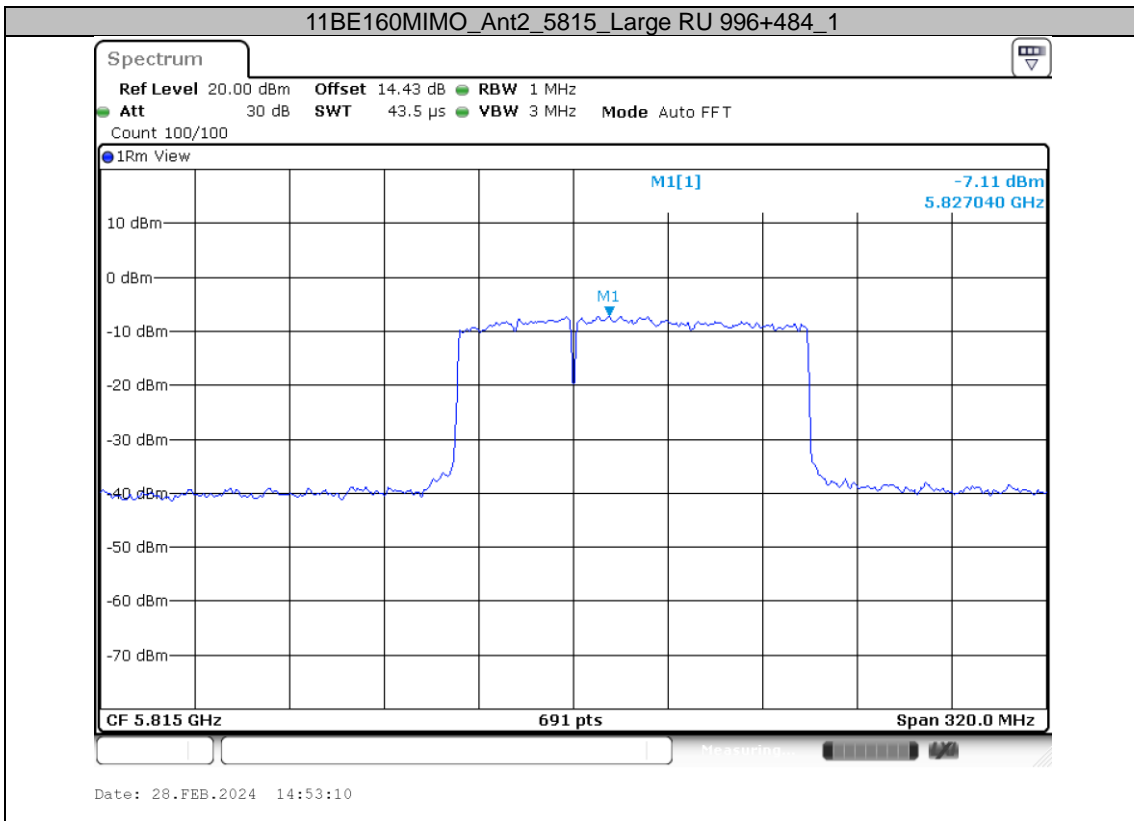


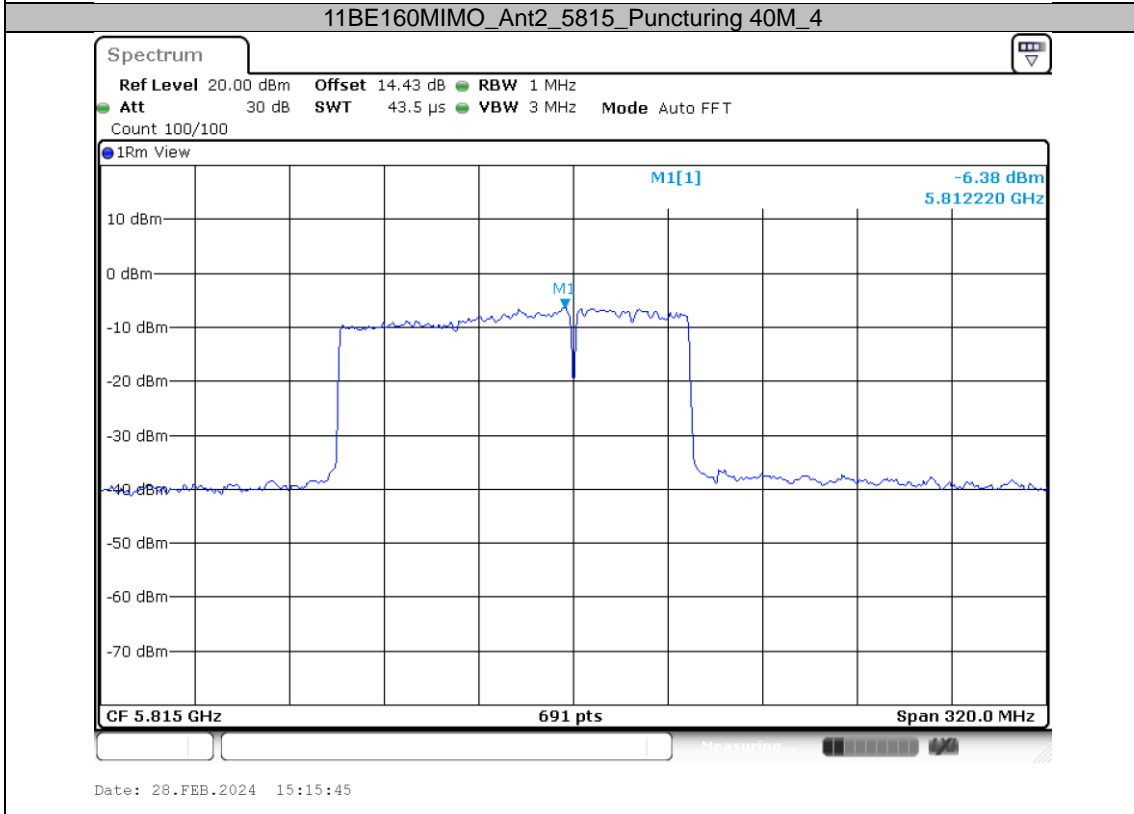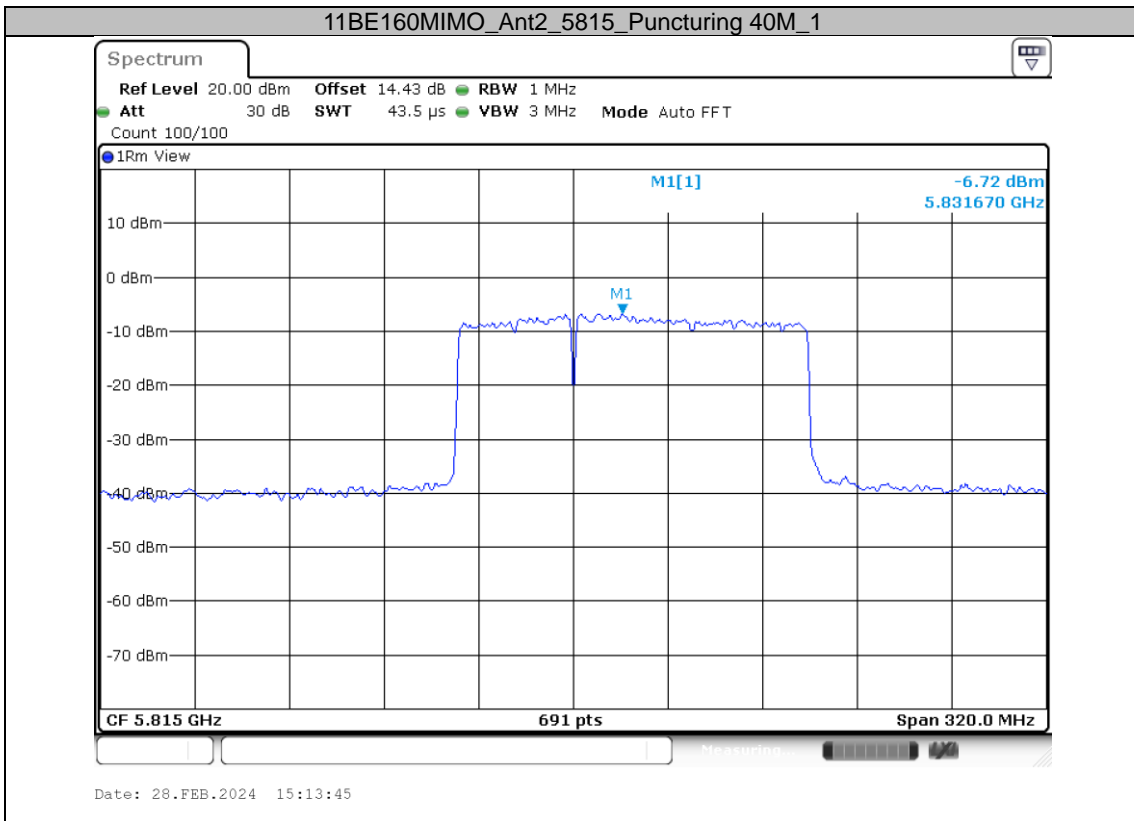



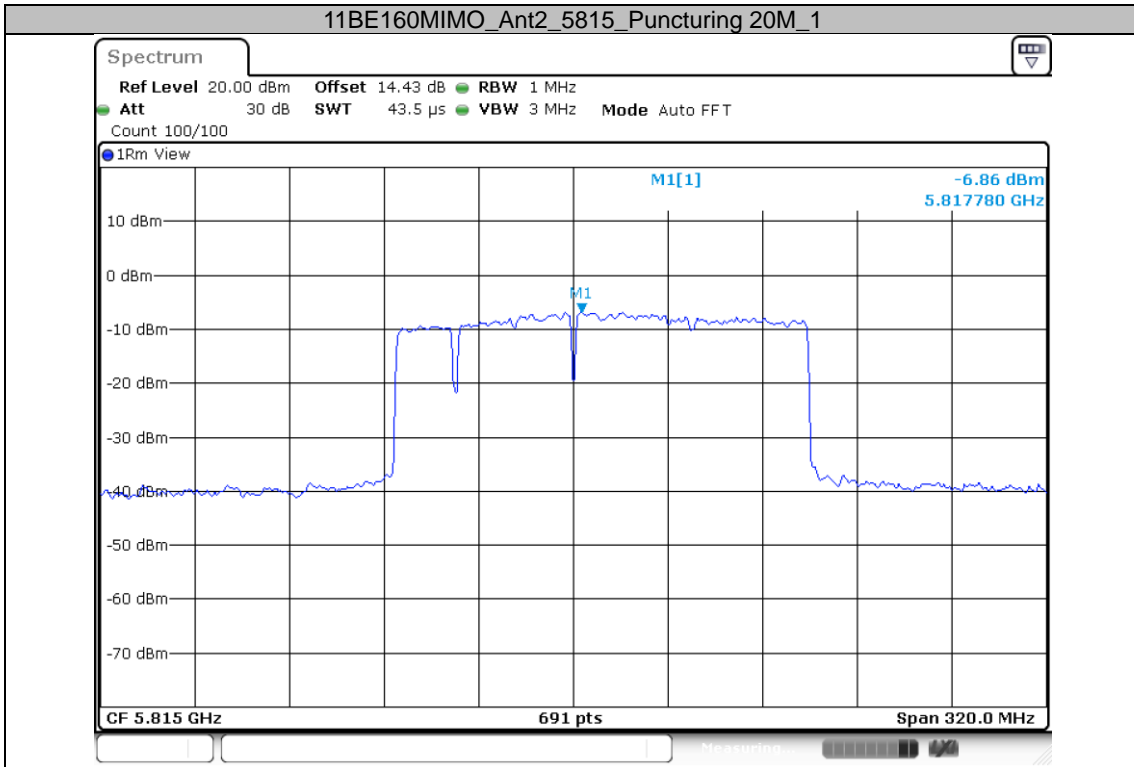

Date: 28.FEB.2024 15:17:54

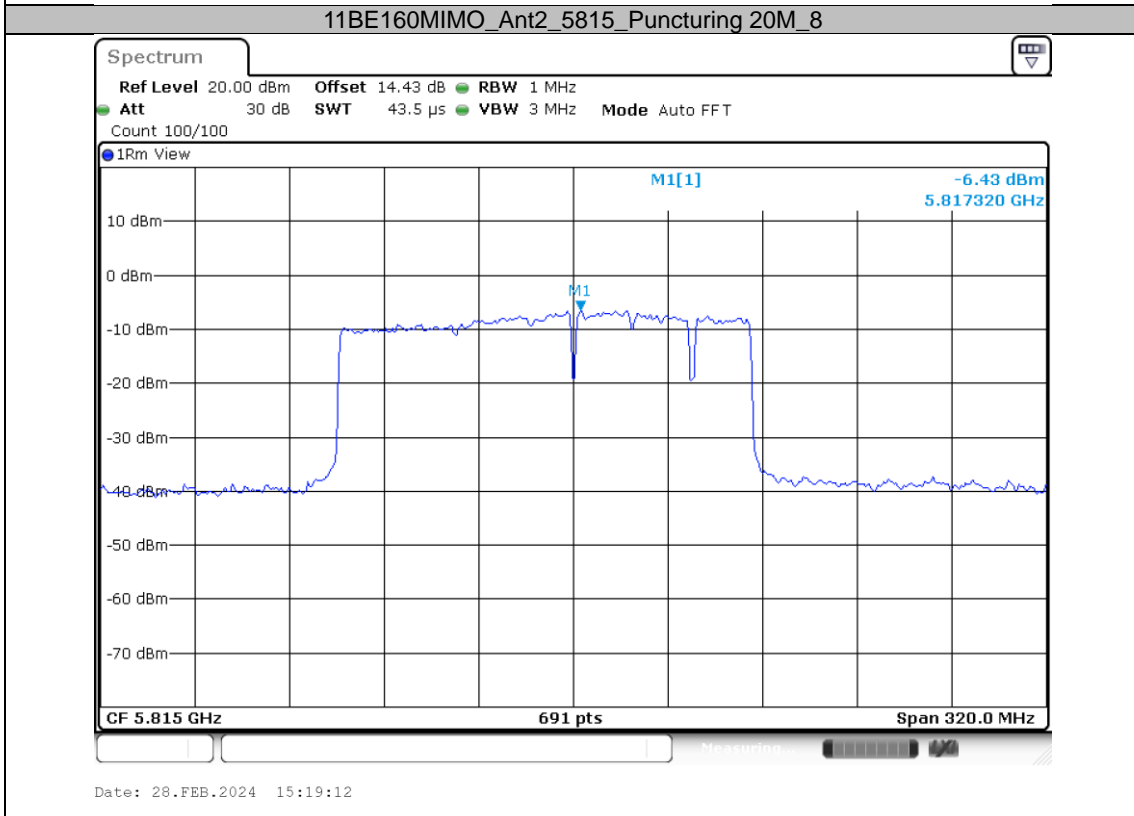


Date: 28.FEB.2024 15:19:12



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

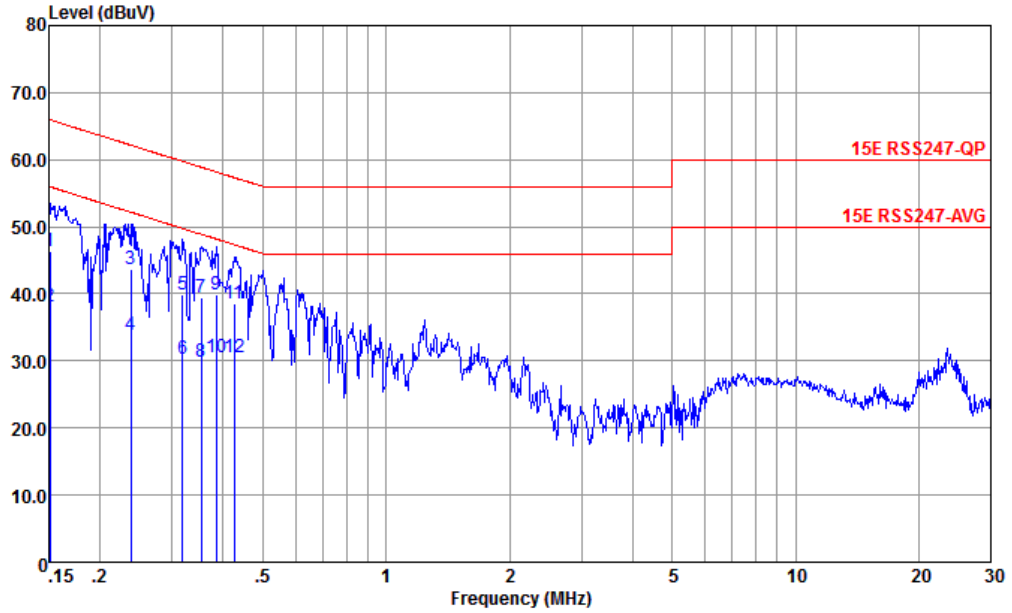


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.151	46.37	-19.59	65.96	35.90	0.05	10.42	QP
2	0.151	38.07	-17.89	55.96	27.60	0.05	10.42	Average
3	0.238	43.71	-18.46	62.17	33.30	0.03	10.38	QP
4	0.238	33.91	-18.26	52.17	23.50	0.03	10.38	Average
5	0.318	39.85	-19.90	59.75	29.50	0.03	10.32	QP
6	0.318	30.25	-19.50	49.75	19.90	0.03	10.32	Average
7	0.354	39.52	-19.35	58.87	29.20	0.02	10.30	QP
8	0.354	29.82	-19.05	48.87	19.50	0.02	10.30	Average
9	0.385	39.89	-18.28	58.17	29.59	0.01	10.29	QP
10	0.385	30.59	-17.58	48.17	20.29	0.01	10.29	Average
11	0.426	38.55	-18.78	57.33	28.30	-0.01	10.26	QP
12 *	0.426	30.55	-16.78	47.33	20.30	-0.01	10.26	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

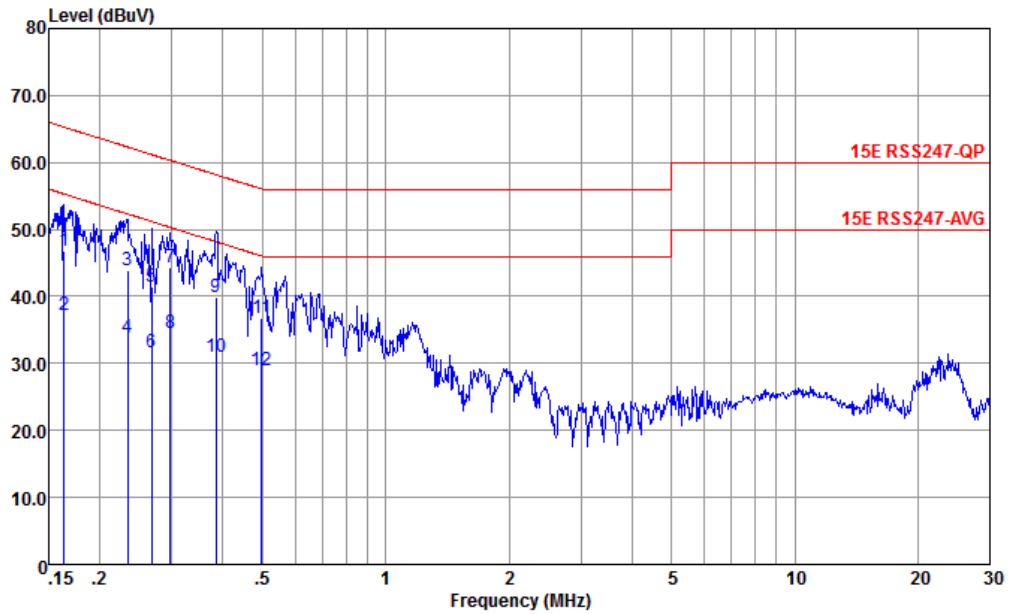

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.163	46.76	-18.54	65.30	36.30	0.04	10.42	QP
2	0.163	37.16	-18.14	55.30	26.70	0.04	10.42	Average
3	0.234	43.99	-18.31	62.30	33.60	0.01	10.38	QP
4	0.234	33.89	-18.41	52.30	23.50	0.01	10.38	Average
5	0.267	41.54	-19.66	61.20	31.19	-0.01	10.36	QP
6	0.267	31.54	-19.66	51.20	21.19	-0.01	10.36	Average
7	0.297	44.40	-15.92	60.32	34.10	-0.04	10.34	QP
8 *	0.297	34.60	-15.72	50.32	24.30	-0.04	10.34	Average
9	0.385	39.83	-18.34	58.17	29.59	-0.05	10.29	QP
10	0.385	30.93	-17.24	48.17	20.69	-0.05	10.29	Average
11	0.497	36.75	-19.30	56.05	26.60	-0.07	10.22	QP
12	0.497	28.95	-17.10	46.05	18.80	-0.07	10.22	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	50%
		Temperature :	20-22°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-4	5.85-5.895	CDD	802.11a	169	5845	6Mbps	-	-
Mode 2	U-NII-4	5.85-5.895	CDD	802.11a	173	5865	6Mbps	-	-
Mode 3	U-NII-4	5.85-5.895	CDD	802.11a	177	5885	6Mbps	-	-
Mode 4	U-NII-4	5.85-5.895	CDD	802.11ac VHT20	169	5845	MCS0	-	-
Mode 5	U-NII-4	5.85-5.895	CDD	802.11ac VHT20	173	5865	MCS0	-	-
Mode 6	U-NII-4	5.85-5.895	CDD	802.11ac VHT20	177	5885	MCS0	-	-
Mode 7	U-NII-4	5.85-5.895	CDD	802.11ac VHT40	167	5835	MCS0	-	-
Mode 8	U-NII-4	5.85-5.895	CDD	802.11ac VHT40	175	5875	MCS0	-	-
Mode 9	U-NII-4	5.85-5.895	CDD	802.11ac VHT80	171	5855	MCS0	-	-
Mode 10	U-NII-4	5.85-5.895	CDD	802.11ac VHT160	163	5815	MCS0	-	-
Mode 11	U-NII-4	5.85-5.895	CDD	802.11ax HE20	169	5845	MCS0	-	-
Mode 12	U-NII-4	5.85-5.895	CDD	802.11ax HE20	173	5865	MCS0	-	-
Mode 13	U-NII-4	5.85-5.895	CDD	802.11ax HE20	177	5885	MCS0	-	-
Mode 14	U-NII-4	5.85-5.895	CDD	802.11ax HE40	167	5835	MCS0	-	-
Mode 15	U-NII-4	5.85-5.895	CDD	802.11ax HE40	175	5875	MCS0	-	-
Mode 16	U-NII-4	5.85-5.895	CDD	802.11ax HE80	171	5855	MCS0	-	-
Mode 17	U-NII-4	5.85-5.895	CDD	802.11ax HE160	163	5815	MCS0	-	-
Mode 18	U-NII-4	5.85-5.895	CDD	802.11be EHT20	169	5845	MCS0	-	-
Mode 19	U-NII-4	5.85-5.895	CDD	802.11be EHT20	173	5865	MCS0	-	-
Mode 20	U-NII-4	5.85-5.895	CDD	802.11be EHT20	177	5885	MCS0	-	-
Mode 21	U-NII-4	5.85-5.895	CDD	802.11be EHT40	167	5835	MCS0	-	-
Mode 22	U-NII-4	5.85-5.895	CDD	802.11be EHT40	175	5875	MCS0	-	-
Mode 23	U-NII-4	5.85-5.895	CDD	802.11be EHT80	171	5855	MCS0	-	-
Mode 24	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	-	-
Mode 25	U-NII-4	5.85-5.895	CDD	802.11ax HE20	169	5845	MCS0	106/53	-
Mode 26	U-NII-4	5.85-5.895	CDD	802.11ax HE20	177	5885	MCS0	106/54	-
Mode 27	U-NII-4	5.85-5.895	CDD	802.11be EHT20	169	5845	MCS0	Small RU 52+26	-
Mode 28	U-NII-4	5.85-5.895	CDD	802.11be EHT20	169	5845	MCS0	Small RU 106+26	-
Mode 29	U-NII-4	5.85-5.895	CDD	802.11be EHT20	177	5885	MCS0	Small RU 52+26	-
Mode 30	U-NII-4	5.85-5.895	CDD	802.11be EHT20	177	5885	MCS0	Small RU 106+26	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 31	U-NII-4	5.85-5.895	CDD	802.11be EHT80	171	5855	MCS0	Puncturing 20M ④	-
Mode 32	U-NII-4	5.85-5.895	CDD	802.11be EHT80	171	5855	MCS0	Puncturing 20M ①	-
Mode 33	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Puncturing 20M ①	-
Mode 34	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Puncturing 20M ⑧	-
Mode 35	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Puncturing 40M ④	-
Mode 36	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Puncturing 40M ①	-
Mode 37	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Large RU 996+484 ④	-
Mode 38	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Large RU 996+484 ①	-
Mode 39	U-NII-4	5.85-5.895	CDD	802.11be EHT80	171	5855	MCS0	Large RU 484+242 ④	-
Mode 40	U-NII-4	5.85-5.895	CDD	802.11be EHT80	171	5855	MCS0	Large RU 484+242 ①	-
Mode 41 Co-location	2.4-2.4835	2.4-2.4835	CDD	802.11ax HE40	09	2452	MCS0	-	-
	U-NII-4	5.85-5.895	CDD	802.11be EHT160	163	5815	MCS0	Large RU 996+484	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	169	5626.00	58.10	68.20	-10.10	H	Peak	Pass	Band Edge
1	802.11a	169	11690.00	47.47	74.00	-26.53	V	PEAK	Pass	Harmonic
2	802.11a	173	-	-	-	-	-	-	-	Band Edge
2	802.11a	173	11730.00	50.11	74.00	-23.89	V	PEAK	Pass	Harmonic
3	802.11a	177	5895.00	83.52	90.2	-6.68	H	AVERAGE	Pass	Band Edge
3	802.11a	177	11770.00	44.46	54.00	-9.54	V	AVERAGE	Pass	Harmonic
4	802.11ac VHT20	169	5641.60	58.63	68.20	-9.57	V	Peak	Pass	Band Edge
4	802.11ac VHT20	169	11690.00	43.53	54.00	-10.47	H	AVERAGE	Pass	Harmonic
5	802.11ac VHT20	173	-	-	-	-	-	-	-	Band Edge
5	802.11ac VHT20	173	11730.00	49.19	74.00	-24.81	V	PEAK	Pass	Harmonic
6	802.11ac VHT20	177	5895.00	82.12	90.2	-8.08	H	AVERAGE	Pass	Band Edge
6	802.11ac VHT20	177	11770.33	48.88	74.00	-25.12	V	PEAK	Pass	Harmonic
7	802.11ac VHT40	167	5549.80	58.43	68.20	-9.77	H	Peak	Pass	Band Edge
7	802.11ac VHT40	167	11670.00	47.02	54.00	-6.98	V	AVERAGE	Pass	Harmonic
8	802.11ac VHT40	175	5895.00	83.43	90.2	-6.77	H	AVERAGE	Pass	Band Edge
8	802.11ac VHT40	175	11750.00	46.87	74.00	-27.13	H	PEAK	Pass	Harmonic
9	802.11ac VHT80	171	5589.40	58.84	68.20	-9.36	H	Peak	Pass	Band Edge
9	802.11ac VHT80	171	11710.20	49.56	74.00	-24.44	V	PEAK	Pass	Harmonic
10	802.11ac VHT160	163	5634.40	61.58	68.20	-6.62	H	Peak	Pass	Band Edge
10	802.11ac VHT160	163	11630.27	49.21	74.00	-24.79	V	PEAK	Pass	Harmonic
11	802.11ax HE20	169	5579.20	58.80	68.20	-9.40	H	Peak	Pass	Band Edge
11	802.11ax HE20	169	11689.67	48.33	74.00	-25.67	H	PEAK	Pass	Harmonic
12	802.11ax HE20	173	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	173	11730.00	50.55	74.00	-23.45	V	PEAK	Pass	Harmonic
13	802.11ax HE20	177	5895.00	88.36	90.2	-1.84	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	177	11770.33	49.09	74.00	-24.91	V	PEAK	Pass	Harmonic
14	802.11ax HE40	167	5614.00	58.83	68.20	-9.37	H	Peak	Pass	Band Edge
14	802.11ax HE40	167	11664.73	49.69	74.00	-24.31	V	PEAK	Pass	Harmonic
15	802.11ax HE40	175	5895.00	86.19	90.2	-4.01	H	Average	Pass	Band Edge
15	802.11ax HE40	175	11749.80	47.97	74.00	-26.03	V	PEAK	Pass	Harmonic
16	802.11ax HE80	171	5646.40	58.72	68.20	-9.48	H	Peak	Pass	Band Edge
16	802.11ax HE80	171	11710.00	44.64	74.00	-29.36	V	PEAK	Pass	Harmonic
17	802.11ax HE160	163	5637.40	59.47	68.20	-8.73	H	Peak	Pass	Band Edge
17	802.11ax HE160	163	11630.00	46.86	74.00	-27.14	V	PEAK	Pass	Harmonic
18	802.11be EHT20	169	5631.40	56.83	68.20	-11.37	V	PEAK	Pass	Band Edge
18	802.11be EHT20	169	11690.00	44.28	74.00	-29.72	H	PEAK	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
19	802.11be EHT20	173	-	-	-	-	-	-	-	Band Edge
19	802.11be EHT20	173	11730.00	44.45	74.00	-29.55	V	PEAK	Pass	Harmonic
20	802.11be EHT20	177	5895.00	86.54	90.2	-3.66	H	AVERAGE	Pass	Band Edge
20	802.11be EHT20	177	11770.00	43.85	74.00	-30.15	H	PEAK	Pass	Harmonic
21	802.11be EHT40	167	5651.80	58.68	69.54	-10.86	H	PEAK	Pass	Band Edge
21	802.11be EHT40	167	11670.00	44.53	74.00	-29.47	V	PEAK	Pass	Harmonic
22	802.11be EHT40	175	5587.00	57.31	68.20	-10.89	V	PEAK	Pass	Band Edge
22	802.11be EHT40	175	11750.00	43.21	74.00	-30.79	V	PEAK	Pass	Harmonic
23	802.11be EHT80	171	5895.00	83.09	90.2	-7.11	H	AVERAGE	Pass	Band Edge
23	802.11be EHT80	171	11710.00	44.74	74.00	-29.26	H	PEAK	Pass	Harmonic
24	802.11be EHT160	163	5941.60	65.26	88.20	-22.94	H	PEAK	Pass	Band Edge
24	802.11be EHT160	163	11630.00	44.11	74.00	-29.89	V	PEAK	Pass	Harmonic
25	802.11ax HE20	169	5555.80	57.54	68.20	-10.66	V	PEAK	Pass	Band Edge
25	802.11ax HE20	169	11690.00	46.03	54.00	-7.97	V	AVERAGE	Pass	Harmonic
26	802.11ax HE20	177	5895.00	80.61	90.2	-9.59	V	AVERAGE	Pass	Band Edge
26	802.11ax HE20	177	11770.00	44.01	54.00	-9.99	V	AVERAGE	Pass	Harmonic
27	802.11be EHT20	169	5621.80	57.31	68.20	-10.89	H	PEAK	Pass	Band Edge
27	802.11be EHT20	169	11690.00	45.98	54.00	-8.02	V	AVERAGE	Pass	Harmonic
28	802.11be EHT20	169	5612.80	56.48	68.20	-11.72	H	PEAK	Pass	Band Edge
28	802.11be EHT20	169	11690.00	46.48	54.00	-7.52	V	AVERAGE	Pass	Harmonic
29	802.11be EHT20	177	5623.60	56.97	68.20	-11.23	H	PEAK	Pass	Band Edge
29	802.11be EHT20	177	11770.00	46.11	74.00	-27.89	V	PEAK	Pass	Harmonic
30	802.11be EHT20	177	5895.00	85.43	90.2	-4.77	H	PEAK	Pass	Band Edge
30	802.11be EHT20	177	11770.00	45.39	74.00	-28.61	V	PEAK	Pass	Harmonic
31	802.11be EHT80	171	-	-	-	-	-	-	-	Band Edge
31	802.11be EHT80	171	11710.20	49.83	74.00	-24.17	V	PEAK	Pass	Harmonic
32	802.11be EHT80	171	-	-	-	-	-	-	-	Band Edge
32	802.11be EHT80	171	7492.80	48.39	74.00	-25.61	H	PEAK	Pass	Harmonic
33	802.11be EHT160	163	-	-	-	-	-	-	-	Band Edge
33	802.11be EHT160	163	7475.93	49.28	74.00	-24.72	H	PEAK	Pass	Harmonic
34	802.11be EHT160	163	-	-	-	-	-	-	-	Band Edge
34	802.11be EHT160	163	11630.00	47.65	54.00	-6.35	V	AVERAGE	Pass	Harmonic
35	802.11be EHT160	163	5639.80	57.81	68.20	-10.39	H	PEAK	Pass	Band Edge
35	802.11be EHT160	163	11630.00	47.50	54.00	-6.50	V	AVERAGE	Pass	Harmonic
36	802.11be EHT160	163	5645.80	57.70	68.20	-10.50	H	PEAK	Pass	Band Edge
36	802.11be EHT160	163	11630.00	47.64	54.00	-6.36	V	AVERAGE	Pass	Harmonic
37	802.11be EHT160	163	-	-	-	-	-	-	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
37	802.11be EHT160	163	11630.00	47.52	54.00	-6.48	V	AVERAGE	Pass	Harmonic
38	802.11be EHT160	163	5895.00	88.49	90.20	-1.71	H	AVERAGE	Pass	Band Edge
38	802.11be EHT160	163	11630.00	47.66	54.00	-6.34	V	AVERAGE	Pass	Harmonic
39	802.11be EHT80	171	5637.40	57.84	68.20	-10.36	H	PEAK	Pass	Band Edge
39	802.11be EHT80	171	-	-	-	-	-	-	-	Harmonic
40	802.11be EHT80	171	5636.80	56.91	68.20	-11.29	H	PEAK	Pass	Band Edge
40	802.11be EHT80	171	-	-	-	-	-	-	-	Harmonic
41 Co-location	802.11ax HE40	09	2483.50	53.06	54.00	-0.94	V	AVERAGE	Pass	Band Edge
	802.11ax HE40	09	7356.00	45.15	74.00	-28.85	V	PEAK	Pass	Harmonic
	802.11be EHT160	163	5959.00	66.57	87.63	-21.06	V	PEAK	Pass	Band Edge
	802.11be EHT160	163	11630.00	47.55	54.00	-6.45	V	AVERAGE	Pass	Harmonic





Mode	1																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.00</td> <td>58.10</td> <td>68.20</td> <td>-10.10</td> <td>39.83</td> <td>34.50</td> <td>13.08</td> <td>29.31</td> <td>0.00</td> <td>376</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5945.20</td> <td>58.85</td> <td>88.20</td> <td>-29.35</td> <td>40.42</td> <td>35.19</td> <td>13.66</td> <td>30.42</td> <td>0.00</td> <td>376</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5626.00	58.10	68.20	-10.10	39.83	34.50	13.08	29.31	0.00	376	360	Peak	2	5945.20	58.85	88.20	-29.35	40.42	35.19	13.66	30.42	0.00	376	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>112.48</td> <td>-----</td> <td>93.97</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>376</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>101.12</td> <td>-----</td> <td>82.61</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>376</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	112.48	-----	93.97	34.89	13.94	30.32	0.00	376	360	Peak	2	5845.00	101.12	-----	82.61	34.89	13.94	30.32	0.00	376	360	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5626.00	58.10	68.20	-10.10	39.83	34.50	13.08	29.31	0.00	376	360	Peak																																																																																												
2	5945.20	58.85	88.20	-29.35	40.42	35.19	13.66	30.42	0.00	376	360	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	112.48	-----	93.97	34.89	13.94	30.32	0.00	376	360	Peak																																																																																													
2	5845.00	101.12	-----	82.61	34.89	13.94	30.32	0.00	376	360	Average																																																																																													



	1																																																																																																							
Mode	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5617.60</td> <td>57.99</td> <td>68.20</td> <td>-10.21</td> <td>39.71</td> <td>34.50</td> <td>13.10</td> <td>29.32</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>6103.00</td> <td>58.09</td> <td>88.20</td> <td>-30.11</td> <td>39.15</td> <td>35.31</td> <td>14.12</td> <td>30.49</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5617.60	57.99	68.20	-10.21	39.71	34.50	13.10	29.32	0.00	363	292	Peak	2	6103.00	58.09	88.20	-30.11	39.15	35.31	14.12	30.49	0.00	363	292	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5842.00</td> <td>106.64</td> <td>-----</td> <td>88.10</td> <td>34.88</td> <td>13.97</td> <td>30.31</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5842.00</td> <td>96.23</td> <td>-----</td> <td>77.69</td> <td>34.88</td> <td>13.97</td> <td>30.31</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5842.00	106.64	-----	88.10	34.88	13.97	30.31	0.00	363	292	Peak	2	5842.00	96.23	-----	77.69	34.88	13.97	30.31	0.00	363	292	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5617.60	57.99	68.20	-10.21	39.71	34.50	13.10	29.32	0.00	363	292	Peak																																																																																												
2	6103.00	58.09	88.20	-30.11	39.15	35.31	14.12	30.49	0.00	363	292	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5842.00	106.64	-----	88.10	34.88	13.97	30.31	0.00	363	292	Peak																																																																																													
2	5842.00	96.23	-----	77.69	34.88	13.97	30.31	0.00	363	292	Average																																																																																													



Mode	1																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11690.40</td> <td>46.69</td> <td>74.00</td> <td>-27.31</td> <td>53.82</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11690.40	46.69	74.00	-27.31	53.82	38.50	18.74	64.37	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>47.47</td> <td>74.00</td> <td>-26.53</td> <td>54.60</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11690.00	47.47	74.00	-26.53	54.60	38.50	18.74	64.37	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11690.40	46.69	74.00	-27.31	53.82	38.50	18.74	64.37	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11690.00	47.47	74.00	-26.53	54.60	38.50	18.74	64.37	0.00																																																																																				
								-- PEAK																																																																																				



Mode	2																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>49.15</td> <td>74.00</td> <td>-24.85</td> <td>56.26</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	49.15	74.00	-24.85	56.26	38.53	18.83	64.47	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>50.11</td> <td>74.00</td> <td>-23.89</td> <td>57.22</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	50.11	74.00	-23.89	57.22	38.53	18.83	64.47	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	49.15	74.00	-24.85	56.26	38.53	18.83	64.47	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	50.11	74.00	-23.89	57.22	38.53	18.83	64.47	0.00	--	PEAK																																																																						



<b>3</b>																																																																																																																																																																																																				
<b>Mode</b>	<b>Band Edge</b>																																																																																																																																																																																																			
	<b>U-NII-4_5.85-5.895_802.11a_CH177_5885MHz</b>																																																																																																																																																																																																			
<b>ANT</b>	<b>CDD</b>																																																																																																																																																																																																			
<b>Pol.</b>	<b>Horizontal</b>																																																																																																																																																																																																			
<b>Peak</b>																																																																																																																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1</td><td>5620.60</td><td>58.85</td><td>68.20</td><td>-9.35</td><td>40.58</td><td>34.50</td><td>13.09</td><td>29.32</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>2</td><td>5895.00</td><td>93.50</td><td>110.20</td><td>-16.70</td><td>75.00</td><td>35.08</td><td>13.81</td><td>30.39</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>3</td><td>5895.00</td><td>83.52</td><td>90.20</td><td>-6.68</td><td>65.02</td><td>35.08</td><td>13.81</td><td>30.39</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>4</td><td>5905.60</td><td>82.02</td><td>102.41</td><td>-20.39</td><td>63.53</td><td>35.11</td><td>13.78</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>5</td><td>5905.60</td><td>70.87</td><td>82.41</td><td>-11.54</td><td>52.38</td><td>35.11</td><td>13.78</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>6</td><td>5910.40</td><td>80.93</td><td>98.89</td><td>-17.96</td><td>62.44</td><td>35.12</td><td>13.77</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>7</td><td>5910.40</td><td>68.60</td><td>78.89</td><td>-10.29</td><td>50.11</td><td>35.12</td><td>13.77</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>8</td><td>5915.20</td><td>79.16</td><td>95.37</td><td>-16.21</td><td>60.68</td><td>35.13</td><td>13.75</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>9</td><td>5915.20</td><td>65.15</td><td>75.37</td><td>-10.22</td><td>46.67</td><td>35.13</td><td>13.75</td><td>30.40</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>10</td><td>5926.00</td><td>67.73</td><td>88.20</td><td>-20.47</td><td>49.27</td><td>35.15</td><td>13.72</td><td>30.41</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>11</td><td>5926.00</td><td>56.74</td><td>68.20</td><td>-11.46</td><td>38.28</td><td>35.15</td><td>13.72</td><td>30.41</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> <tr><td>12</td><td>5929.60</td><td>67.58</td><td>88.20</td><td>-20.62</td><td>49.12</td><td>35.16</td><td>13.71</td><td>30.41</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>13</td><td>5929.60</td><td>55.28</td><td>68.20</td><td>-12.92</td><td>36.82</td><td>35.16</td><td>13.71</td><td>30.41</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5620.60	58.85	68.20	-9.35	40.58	34.50	13.09	29.32	0.00	315	360	Peak	2	5895.00	93.50	110.20	-16.70	75.00	35.08	13.81	30.39	0.00	315	360	Peak	3	5895.00	83.52	90.20	-6.68	65.02	35.08	13.81	30.39	0.00	315	360	Average	4	5905.60	82.02	102.41	-20.39	63.53	35.11	13.78	30.40	0.00	315	360	Average	5	5905.60	70.87	82.41	-11.54	52.38	35.11	13.78	30.40	0.00	315	360	Average	6	5910.40	80.93	98.89	-17.96	62.44	35.12	13.77	30.40	0.00	315	360	Peak	7	5910.40	68.60	78.89	-10.29	50.11	35.12	13.77	30.40	0.00	315	360	Average	8	5915.20	79.16	95.37	-16.21	60.68	35.13	13.75	30.40	0.00	315	360	Peak	9	5915.20	65.15	75.37	-10.22	46.67	35.13	13.75	30.40	0.00	315	360	Average	10	5926.00	67.73	88.20	-20.47	49.27	35.15	13.72	30.41	0.00	315	360	Peak	11	5926.00	56.74	68.20	-11.46	38.28	35.15	13.72	30.41	0.00	315	360	Average	12	5929.60	67.58	88.20	-20.62	49.12	35.16	13.71	30.41	0.00	315	360	Peak	13	5929.60	55.28	68.20	-12.92	36.82	35.16	13.71	30.41	0.00	315	360
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																																												
1	5620.60	58.85	68.20	-9.35	40.58	34.50	13.09	29.32	0.00	315	360	Peak																																																																																																																																																																																								
2	5895.00	93.50	110.20	-16.70	75.00	35.08	13.81	30.39	0.00	315	360	Peak																																																																																																																																																																																								
3	5895.00	83.52	90.20	-6.68	65.02	35.08	13.81	30.39	0.00	315	360	Average																																																																																																																																																																																								
4	5905.60	82.02	102.41	-20.39	63.53	35.11	13.78	30.40	0.00	315	360	Average																																																																																																																																																																																								
5	5905.60	70.87	82.41	-11.54	52.38	35.11	13.78	30.40	0.00	315	360	Average																																																																																																																																																																																								
6	5910.40	80.93	98.89	-17.96	62.44	35.12	13.77	30.40	0.00	315	360	Peak																																																																																																																																																																																								
7	5910.40	68.60	78.89	-10.29	50.11	35.12	13.77	30.40	0.00	315	360	Average																																																																																																																																																																																								
8	5915.20	79.16	95.37	-16.21	60.68	35.13	13.75	30.40	0.00	315	360	Peak																																																																																																																																																																																								
9	5915.20	65.15	75.37	-10.22	46.67	35.13	13.75	30.40	0.00	315	360	Average																																																																																																																																																																																								
10	5926.00	67.73	88.20	-20.47	49.27	35.15	13.72	30.41	0.00	315	360	Peak																																																																																																																																																																																								
11	5926.00	56.74	68.20	-11.46	38.28	35.15	13.72	30.41	0.00	315	360	Average																																																																																																																																																																																								
12	5929.60	67.58	88.20	-20.62	49.12	35.16	13.71	30.41	0.00	315	360	Peak																																																																																																																																																																																								
13	5929.60	55.28	68.20	-12.92	36.82	35.16	13.71	30.41	0.00	315	360	Average																																																																																																																																																																																								
	<b>Fundamental</b>																																																																																																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1</td><td>5885.00</td><td>112.40</td><td>-----</td><td>93.92</td><td>35.04</td><td>13.83</td><td>30.39</td><td>0.00</td><td>315</td><td>360</td><td>Peak</td></tr> <tr><td>2</td><td>5885.00</td><td>100.10</td><td>-----</td><td>81.62</td><td>35.04</td><td>13.83</td><td>30.39</td><td>0.00</td><td>315</td><td>360</td><td>Average</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5885.00	112.40	-----	93.92	35.04	13.83	30.39	0.00	315	360	Peak	2	5885.00	100.10	-----	81.62	35.04	13.83	30.39	0.00	315	360	Average																																																																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																																												
1	5885.00	112.40	-----	93.92	35.04	13.83	30.39	0.00	315	360	Peak																																																																																																																																																																																									
2	5885.00	100.10	-----	81.62	35.04	13.83	30.39	0.00	315	360	Average																																																																																																																																																																																									



Mode	3																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5619.40</td> <td>57.39</td> <td>68.20</td> <td>-10.81</td> <td>39.11</td> <td>34.50</td> <td>13.10</td> <td>29.32</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>88.07</td> <td>110.20</td> <td>-22.13</td> <td>69.57</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>79.44</td> <td>90.20</td> <td>-10.76</td> <td>60.94</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5925.40</td> <td>62.27</td> <td>88.20</td> <td>-25.93</td> <td>43.81</td> <td>35.15</td> <td>13.72</td> <td>30.41</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5619.40	57.39	68.20	-10.81	39.11	34.50	13.10	29.32	0.00	310	298	Peak	2	5895.00	88.07	110.20	-22.13	69.57	35.08	13.81	30.39	0.00	310	298	Peak	3	5895.00	79.44	90.20	-10.76	60.94	35.08	13.81	30.39	0.00	310	298	Average	4	5925.40	62.27	88.20	-25.93	43.81	35.15	13.72	30.41	0.00	310	298	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>106.79</td> <td>-----</td> <td>-----</td> <td>88.31</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>95.66</td> <td>-----</td> <td>-----</td> <td>77.18</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5885.00	106.79	-----	-----	88.31	35.04	13.83	30.39	0.00	310	298	Peak	2	5885.00	95.66	-----	-----	77.18	35.04	13.83	30.39	0.00	310	298	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5619.40	57.39	68.20	-10.81	39.11	34.50	13.10	29.32	0.00	310	298	Peak																																																																																																																										
2	5895.00	88.07	110.20	-22.13	69.57	35.08	13.81	30.39	0.00	310	298	Peak																																																																																																																										
3	5895.00	79.44	90.20	-10.76	60.94	35.08	13.81	30.39	0.00	310	298	Average																																																																																																																										
4	5925.40	62.27	88.20	-25.93	43.81	35.15	13.72	30.41	0.00	310	298	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5885.00	106.79	-----	-----	88.31	35.04	13.83	30.39	0.00	310	298	Peak																																																																																																																										
2	5885.00	95.66	-----	-----	77.18	35.04	13.83	30.39	0.00	310	298	Average																																																																																																																										



Mode	3																																																																																										
	Harmonic																																																																																										
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																										
ANT	CDD																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>55.04</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	47.97	74.00	-26.03	55.04	38.57	18.94	64.58	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>51.04</td> <td>74.00</td> <td>-22.96</td> <td>58.11</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>300</td> <td>218 PEAK</td> </tr> <tr> <td>2 11770.00</td> <td>44.46</td> <td>54.00</td> <td>-9.54</td> <td>51.53</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>300</td> <td>218 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	51.04	74.00	-22.96	58.11	38.57	18.94	64.58	0.00	300	218 PEAK	2 11770.00	44.46	54.00	-9.54	51.53	38.57	18.94	64.58	0.00	300	218 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1 11770.00	47.97	74.00	-26.03	55.04	38.57	18.94	64.58	0.00	--	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1 11770.00	51.04	74.00	-22.96	58.11	38.57	18.94	64.58	0.00	300	218 PEAK																																																																																	
2 11770.00	44.46	54.00	-9.54	51.53	38.57	18.94	64.58	0.00	300	218 AVERAGE																																																																																	



Mode	4																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT20_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5560.00</td> <td>57.90</td> <td>68.20</td> <td>-10.30</td> <td>39.52</td> <td>34.74</td> <td>13.05</td> <td>29.41</td> <td>0.00</td> <td>375</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5997.40</td> <td>58.28</td> <td>88.20</td> <td>-29.92</td> <td>39.87</td> <td>35.29</td> <td>13.56</td> <td>30.44</td> <td>0.00</td> <td>375</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5560.00	57.90	68.20	-10.30	39.52	34.74	13.05	29.41	0.00	375	360	Peak	2	5997.40	58.28	88.20	-29.92	39.87	35.29	13.56	30.44	0.00	375	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>112.88</td> <td>-----</td> <td>94.37</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>375</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>101.85</td> <td>-----</td> <td>83.34</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>375</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	112.88	-----	94.37	34.89	13.94	30.32	0.00	375	360	Peak	2	5845.00	101.85	-----	83.34	34.89	13.94	30.32	0.00	375	360	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5560.00	57.90	68.20	-10.30	39.52	34.74	13.05	29.41	0.00	375	360	Peak																																																																																												
2	5997.40	58.28	88.20	-29.92	39.87	35.29	13.56	30.44	0.00	375	360	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	112.88	-----	94.37	34.89	13.94	30.32	0.00	375	360	Peak																																																																																													
2	5845.00	101.85	-----	83.34	34.89	13.94	30.32	0.00	375	360	Average																																																																																													





Mode	4																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT20_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5641.60</td> <td>58.63</td> <td>68.20</td> <td>-9.57</td> <td>40.40</td> <td>34.50</td> <td>13.03</td> <td>29.30</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5953.00</td> <td>59.01</td> <td>88.20</td> <td>-29.19</td> <td>40.50</td> <td>35.21</td> <td>13.64</td> <td>30.42</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.60	58.63	68.20	-9.57	40.40	34.50	13.03	29.30	0.00	363	292	Peak	2	5953.00	59.01	88.20	-29.19	40.50	35.21	13.64	30.42	0.00	363	292	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>108.72</td> <td>-----</td> <td>90.21</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>98.35</td> <td>-----</td> <td>79.84</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>363</td> <td>292</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	108.72	-----	90.21	34.89	13.94	30.32	0.00	363	292	Peak	2	5845.00	98.35	-----	79.84	34.89	13.94	30.32	0.00	363	292	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5641.60	58.63	68.20	-9.57	40.40	34.50	13.03	29.30	0.00	363	292	Peak																																																																																												
2	5953.00	59.01	88.20	-29.19	40.50	35.21	13.64	30.42	0.00	363	292	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	108.72	-----	90.21	34.89	13.94	30.32	0.00	363	292	Peak																																																																																													
2	5845.00	98.35	-----	79.84	34.89	13.94	30.32	0.00	363	292	Average																																																																																													



Mode	4																																																																																												
	Harmonic																																																																																												
	U-NII-4_5.85-5.895_802.11ac VHT20_CH169_5845MHz																																																																																												
ANT	CDD																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11690.00</td> <td>50.55</td> <td>74.00</td> <td>-23.45</td> <td>57.68</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>300</td> <td>132</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11690.00</td> <td>43.53</td> <td>54.00</td> <td>-10.47</td> <td>50.66</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>300</td> <td>132</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	50.55	74.00	-23.45	57.68	38.50	18.74	64.37	0.00	300	132	PEAK	2	11690.00	43.53	54.00	-10.47	50.66	38.50	18.74	64.37	0.00	300	132	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11690.40</td> <td>49.23</td> <td>74.00</td> <td>-24.77</td> <td>56.36</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.40	49.23	74.00	-24.77	56.36	38.50	18.74	64.37	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	11690.00	50.55	74.00	-23.45	57.68	38.50	18.74	64.37	0.00	300	132	PEAK																																																																																	
2	11690.00	43.53	54.00	-10.47	50.66	38.50	18.74	64.37	0.00	300	132	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	11690.40	49.23	74.00	-24.77	56.36	38.50	18.74	64.37	0.00	--	--	PEAK																																																																																	



Mode	5																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT20_CH173_5865MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>47.00</td> <td>74.00</td> <td>-26.92</td> <td>54.19</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	47.00	74.00	-26.92	54.19	38.53	18.83	64.47	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>49.19</td> <td>74.00</td> <td>-24.81</td> <td>56.30</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	49.19	74.00	-24.81	56.30	38.53	18.83	64.47	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	47.00	74.00	-26.92	54.19	38.53	18.83	64.47	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	49.19	74.00	-24.81	56.30	38.53	18.83	64.47	0.00	--	PEAK																																																																						



Mode	6																																																																																																																																							
	Band Edge																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																																																																																							
ANT	CDD																																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5615.00</td> <td>58.81</td> <td>68.20</td> <td>-9.39</td> <td>40.53</td> <td>34.50</td> <td>13.11</td> <td>29.33</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>99.30</td> <td>110.20</td> <td>-10.90</td> <td>80.80</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>82.12</td> <td>90.20</td> <td>-8.08</td> <td>63.62</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5929.00</td> <td>58.85</td> <td>88.20</td> <td>-29.35</td> <td>40.39</td> <td>35.16</td> <td>13.71</td> <td>30.41</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5615.00	58.81	68.20	-9.39	40.53	34.50	13.11	29.33	0.00	316	360	Peak	2	5895.00	99.30	110.20	-10.90	80.80	35.08	13.81	30.39	0.00	316	360	Peak	3	5895.00	82.12	90.20	-8.08	63.62	35.08	13.81	30.39	0.00	316	360	Average	4	5929.00	58.85	88.20	-29.35	40.39	35.16	13.71	30.41	0.00	316	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>113.03</td> <td>-----</td> <td>-----</td> <td>94.55</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>101.76</td> <td>-----</td> <td>-----</td> <td>83.28</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>316</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	113.03	-----	-----	94.55	35.04	13.83	30.39	0.00	316	360	Peak	2	5885.00	101.76	-----	-----	83.28	35.04	13.83	30.39	0.00	316	360	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5615.00	58.81	68.20	-9.39	40.53	34.50	13.11	29.33	0.00	316	360	Peak																																																																																																																												
2	5895.00	99.30	110.20	-10.90	80.80	35.08	13.81	30.39	0.00	316	360	Peak																																																																																																																												
3	5895.00	82.12	90.20	-8.08	63.62	35.08	13.81	30.39	0.00	316	360	Average																																																																																																																												
4	5929.00	58.85	88.20	-29.35	40.39	35.16	13.71	30.41	0.00	316	360	Peak																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5885.00	113.03	-----	-----	94.55	35.04	13.83	30.39	0.00	316	360	Peak																																																																																																																												
2	5885.00	101.76	-----	-----	83.28	35.04	13.83	30.39	0.00	316	360	Average																																																																																																																												



Mode	6																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5619.40</td> <td>57.74</td> <td>68.20</td> <td>-10.46</td> <td>39.46</td> <td>34.50</td> <td>13.10</td> <td>29.32</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>91.72</td> <td>110.20</td> <td>-18.48</td> <td>73.22</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>78.63</td> <td>90.20</td> <td>-11.57</td> <td>60.13</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5984.20</td> <td>58.13</td> <td>88.20</td> <td>-30.07</td> <td>39.71</td> <td>35.27</td> <td>13.58</td> <td>30.43</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5619.40	57.74	68.20	-10.46	39.46	34.50	13.10	29.32	0.00	340	293	Peak	2	5895.00	91.72	110.20	-18.48	73.22	35.08	13.81	30.39	0.00	340	293	Peak	3	5895.00	78.63	90.20	-11.57	60.13	35.08	13.81	30.39	0.00	340	293	Average	4	5984.20	58.13	88.20	-30.07	39.71	35.27	13.58	30.43	0.00	340	293	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>108.30</td> <td>-----</td> <td>-----</td> <td>89.82</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>96.62</td> <td>-----</td> <td>-----</td> <td>78.14</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>340</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5885.00	108.30	-----	-----	89.82	35.04	13.83	30.39	0.00	340	293	Peak	2	5885.00	96.62	-----	-----	78.14	35.04	13.83	30.39	0.00	340	293	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5619.40	57.74	68.20	-10.46	39.46	34.50	13.10	29.32	0.00	340	293	Peak																																																																																																																										
2	5895.00	91.72	110.20	-18.48	73.22	35.08	13.81	30.39	0.00	340	293	Peak																																																																																																																										
3	5895.00	78.63	90.20	-11.57	60.13	35.08	13.81	30.39	0.00	340	293	Average																																																																																																																										
4	5984.20	58.13	88.20	-30.07	39.71	35.27	13.58	30.43	0.00	340	293	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5885.00	108.30	-----	-----	89.82	35.04	13.83	30.39	0.00	340	293	Peak																																																																																																																										
2	5885.00	96.62	-----	-----	78.14	35.04	13.83	30.39	0.00	340	293	Average																																																																																																																										



Mode	6																																																																											
	Harmonic																																																																											
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																											
ANT	CDD																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11770.33</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>53.32</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11770.33	46.25	74.00	-27.75	53.32	38.57	18.94	64.58	0.00	-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11770.33</td> <td>48.88</td> <td>74.00</td> <td>-25.12</td> <td>55.95</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11770.33	48.88	74.00	-25.12	55.95	38.57	18.94	64.58	0.00	-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11770.33	46.25	74.00	-27.75	53.32	38.57	18.94	64.58	0.00	-- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11770.33	48.88	74.00	-25.12	55.95	38.57	18.94	64.58	0.00	-- PEAK																																																																			



Mode	7																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5549.80</td> <td>58.43</td> <td>68.20</td> <td>-9.77</td> <td>40.04</td> <td>34.80</td> <td>13.02</td> <td>29.43</td> <td>0.00</td> <td>100</td> <td>204</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5978.20</td> <td>58.06</td> <td>88.20</td> <td>-30.14</td> <td>39.64</td> <td>35.26</td> <td>13.59</td> <td>30.43</td> <td>0.00</td> <td>100</td> <td>204</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5549.80	58.43	68.20	-9.77	40.04	34.80	13.02	29.43	0.00	100	204	Peak	2	5978.20	58.06	88.20	-30.14	39.64	35.26	13.59	30.43	0.00	100	204	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>109.25</td> <td>-----</td> <td>90.62</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>100</td> <td>204</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>98.06</td> <td>-----</td> <td>79.43</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>100</td> <td>204</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	109.25	-----	90.62	34.87	14.03	30.27	0.00	100	204	Peak	2	5835.00	98.06	-----	79.43	34.87	14.03	30.27	0.00	100	204	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5549.80	58.43	68.20	-9.77	40.04	34.80	13.02	29.43	0.00	100	204	Peak																																																																																												
2	5978.20	58.06	88.20	-30.14	39.64	35.26	13.59	30.43	0.00	100	204	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	109.25	-----	90.62	34.87	14.03	30.27	0.00	100	204	Peak																																																																																													
2	5835.00	98.06	-----	79.43	34.87	14.03	30.27	0.00	100	204	Average																																																																																													



Mode	7																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5563.60</td> <td>57.95</td> <td>68.20</td> <td>-10.25</td> <td>39.58</td> <td>34.72</td> <td>13.06</td> <td>29.41</td> <td>0.00</td> <td>364</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5938.60</td> <td>58.73</td> <td>88.20</td> <td>-29.47</td> <td>40.28</td> <td>35.18</td> <td>13.60</td> <td>30.41</td> <td>0.00</td> <td>364</td> <td>292</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5563.60	57.95	68.20	-10.25	39.58	34.72	13.06	29.41	0.00	364	292	Peak	2	5938.60	58.73	88.20	-29.47	40.28	35.18	13.60	30.41	0.00	364	292	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>104.37</td> <td>-----</td> <td>85.74</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>364</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>92.48</td> <td>-----</td> <td>73.85</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>364</td> <td>292</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	104.37	-----	85.74	34.87	14.03	30.27	0.00	364	292	Peak	2	5835.00	92.48	-----	73.85	34.87	14.03	30.27	0.00	364	292	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5563.60	57.95	68.20	-10.25	39.58	34.72	13.06	29.41	0.00	364	292	Peak																																																																																												
2	5938.60	58.73	88.20	-29.47	40.28	35.18	13.60	30.41	0.00	364	292	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	104.37	-----	85.74	34.87	14.03	30.27	0.00	364	292	Peak																																																																																													
2	5835.00	92.48	-----	73.85	34.87	14.03	30.27	0.00	364	292	Average																																																																																													





Mode	7																																																																																												
	Harmonic																																																																																												
	U-NII-4_5.85-5.895_802.11ac VHT40_CH167_5835MHz																																																																																												
ANT	CDD																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11669.87</td> <td>48.27</td> <td>74.00</td> <td>-25.73</td> <td>55.38</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11669.87	48.27	74.00	-25.73	55.38	38.50	18.71	64.32	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11670.00</td> <td>51.47</td> <td>74.00</td> <td>-22.53</td> <td>58.58</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> <td>300</td> <td>217</td> <td>PEAK</td> </tr> <tr> <td>2 11670.00</td> <td>47.02</td> <td>54.00</td> <td>-6.98</td> <td>54.13</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> <td>300</td> <td>217</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11670.00	51.47	74.00	-22.53	58.58	38.50	18.71	64.32	0.00	300	217	PEAK	2 11670.00	47.02	54.00	-6.98	54.13	38.50	18.71	64.32	0.00	300	217	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11669.87	48.27	74.00	-25.73	55.38	38.50	18.71	64.32	0.00	--	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11670.00	51.47	74.00	-22.53	58.58	38.50	18.71	64.32	0.00	300	217	PEAK																																																																																		
2 11670.00	47.02	54.00	-6.98	54.13	38.50	18.71	64.32	0.00	300	217	AVERAGE																																																																																		



Mode	8																																																																																																																																					
Mode	Band Edge																																																																																																																																					
Mode	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5600.00</td> <td>57.73</td> <td>68.20</td> <td>-10.47</td> <td>39.43</td> <td>34.50</td> <td>13.15</td> <td>29.35</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>93.72</td> <td>110.20</td> <td>-16.48</td> <td>75.22</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>83.43</td> <td>90.20</td> <td>-6.77</td> <td>64.93</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5939.00</td> <td>61.37</td> <td>88.20</td> <td>-26.83</td> <td>42.92</td> <td>35.18</td> <td>13.68</td> <td>30.41</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5600.00	57.73	68.20	-10.47	39.43	34.50	13.15	29.35	0.00	306	0	Peak	2	5895.00	93.72	110.20	-16.48	75.22	35.00	13.81	30.39	0.00	306	0	Peak	3	5895.00	83.43	90.20	-6.77	64.93	35.00	13.81	30.39	0.00	306	0	Average	4	5939.00	61.37	88.20	-26.83	42.92	35.18	13.68	30.41	0.00	306	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>110.39</td> <td>-----</td> <td>-----</td> <td>91.92</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>98.93</td> <td>-----</td> <td>-----</td> <td>80.46</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>306</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5875.00	110.39	-----	-----	91.92	35.00	13.85	30.38	0.00	306	0	Peak	2	5875.00	98.93	-----	-----	80.46	35.00	13.85	30.38	0.00	306	0	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5600.00	57.73	68.20	-10.47	39.43	34.50	13.15	29.35	0.00	306	0	Peak																																																																																																																										
2	5895.00	93.72	110.20	-16.48	75.22	35.00	13.81	30.39	0.00	306	0	Peak																																																																																																																										
3	5895.00	83.43	90.20	-6.77	64.93	35.00	13.81	30.39	0.00	306	0	Average																																																																																																																										
4	5939.00	61.37	88.20	-26.83	42.92	35.18	13.68	30.41	0.00	306	0	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5875.00	110.39	-----	-----	91.92	35.00	13.85	30.38	0.00	306	0	Peak																																																																																																																										
2	5875.00	98.93	-----	-----	80.46	35.00	13.85	30.38	0.00	306	0	Average																																																																																																																										



Mode	8																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.40</td> <td>57.65</td> <td>68.20</td> <td>-10.55</td> <td>39.39</td> <td>34.50</td> <td>13.06</td> <td>29.30</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>91.62</td> <td>110.20</td> <td>-18.58</td> <td>73.12</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>80.04</td> <td>90.20</td> <td>-10.16</td> <td>61.54</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5976.40</td> <td>58.61</td> <td>88.20</td> <td>-29.59</td> <td>40.19</td> <td>35.25</td> <td>13.60</td> <td>30.43</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5631.40	57.65	68.20	-10.55	39.39	34.50	13.06	29.30	0.00	359	293	Peak	2	5895.00	91.62	110.20	-18.58	73.12	35.00	13.81	30.39	0.00	359	293	Peak	3	5895.00	80.04	90.20	-10.16	61.54	35.00	13.81	30.39	0.00	359	293	Average	4	5976.40	58.61	88.20	-29.59	40.19	35.25	13.60	30.43	0.00	359	293	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>105.61</td> <td>-----</td> <td>-----</td> <td>87.14</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>95.31</td> <td>-----</td> <td>-----</td> <td>76.84</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>359</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5875.00	105.61	-----	-----	87.14	35.00	13.85	30.38	0.00	359	293	Peak	2	5875.00	95.31	-----	-----	76.84	35.00	13.85	30.38	0.00	359	293	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5631.40	57.65	68.20	-10.55	39.39	34.50	13.06	29.30	0.00	359	293	Peak																																																																																																																										
2	5895.00	91.62	110.20	-18.58	73.12	35.00	13.81	30.39	0.00	359	293	Peak																																																																																																																										
3	5895.00	80.04	90.20	-10.16	61.54	35.00	13.81	30.39	0.00	359	293	Average																																																																																																																										
4	5976.40	58.61	88.20	-29.59	40.19	35.25	13.60	30.43	0.00	359	293	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5875.00	105.61	-----	-----	87.14	35.00	13.85	30.38	0.00	359	293	Peak																																																																																																																										
2	5875.00	95.31	-----	-----	76.84	35.00	13.85	30.38	0.00	359	293	Average																																																																																																																										



Mode	8																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11750.00</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>53.97</td> <td>38.55</td> <td>18.88</td> <td>64.53</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11750.00	46.87	74.00	-27.13	53.97	38.55	18.88	64.53	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11750.00</td> <td>46.19</td> <td>74.00</td> <td>-27.81</td> <td>53.29</td> <td>38.55</td> <td>18.88</td> <td>64.53</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11750.00	46.19	74.00	-27.81	53.29	38.55	18.88	64.53	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11750.00	46.87	74.00	-27.13	53.97	38.55	18.88	64.53	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11750.00	46.19	74.00	-27.81	53.29	38.55	18.88	64.53	0.00																																																																																				
								-- PEAK																																																																																				



Mode	9																																																																																																																															
	Band Edge																																																																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																															
ANT	CDD																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5589.40</td> <td>58.84</td> <td>68.20</td> <td>-9.36</td> <td>40.53</td> <td>34.56</td> <td>13.12</td> <td>29.37</td> <td>0.00</td> <td>134</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>91.53</td> <td>110.20</td> <td>-18.67</td> <td>73.03</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>134</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>69.18</td> <td>90.20</td> <td>-21.02</td> <td>50.68</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>134</td> <td>0 Average</td> </tr> <tr> <td>4</td> <td>5936.80</td> <td>65.40</td> <td>88.20</td> <td>-22.80</td> <td>46.95</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>134</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5589.40	58.84	68.20	-9.36	40.53	34.56	13.12	29.37	0.00	134	0 Peak	2	5895.00	91.53	110.20	-18.67	73.03	35.08	13.81	30.39	0.00	134	0 Peak	3	5895.00	69.18	90.20	-21.02	50.68	35.08	13.81	30.39	0.00	134	0 Average	4	5936.80	65.40	88.20	-22.80	46.95	35.17	13.69	30.41	0.00	134	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>107.85</td> <td>-----</td> <td>-----</td> <td>89.42</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>134</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>96.55</td> <td>-----</td> <td>-----</td> <td>78.12</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>134</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5855.00	107.85	-----	-----	89.42	34.92	13.88	30.37	0.00	134	0 Peak	2	5855.00	96.55	-----	-----	78.12	34.92	13.88	30.37	0.00	134	0 Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1	5589.40	58.84	68.20	-9.36	40.53	34.56	13.12	29.37	0.00	134	0 Peak																																																																																																																					
2	5895.00	91.53	110.20	-18.67	73.03	35.08	13.81	30.39	0.00	134	0 Peak																																																																																																																					
3	5895.00	69.18	90.20	-21.02	50.68	35.08	13.81	30.39	0.00	134	0 Average																																																																																																																					
4	5936.80	65.40	88.20	-22.80	46.95	35.17	13.69	30.41	0.00	134	0 Peak																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1	5855.00	107.85	-----	-----	89.42	34.92	13.88	30.37	0.00	134	0 Peak																																																																																																																					
2	5855.00	96.55	-----	-----	78.12	34.92	13.88	30.37	0.00	134	0 Average																																																																																																																					



Mode	9																																																																																																																										
	Band Edge																																																																																																																										
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																										
ANT	CDD																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5638.60</td> <td>58.68</td> <td>68.20</td> <td>-9.52</td> <td>40.43</td> <td>34.50</td> <td>13.04</td> <td>29.29</td> <td>0.00</td> <td>324</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>87.48</td> <td>110.20</td> <td>-22.72</td> <td>68.98</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>324</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5935.60</td> <td>62.70</td> <td>88.20</td> <td>-25.50</td> <td>44.25</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>324</td> <td>296</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5638.60	58.68	68.20	-9.52	40.43	34.50	13.04	29.29	0.00	324	296	Peak	2	5895.00	87.48	110.20	-22.72	68.98	35.08	13.81	30.39	0.00	324	296	Peak	3	5935.60	62.70	88.20	-25.50	44.25	35.17	13.69	30.41	0.00	324	296	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>101.83</td> <td>-----</td> <td>-----</td> <td>83.40</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>324</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>90.63</td> <td>-----</td> <td>-----</td> <td>72.20</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>324</td> <td>296</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	101.83	-----	-----	83.40	34.92	13.88	30.37	0.00	324	296	Peak	2	5855.00	90.63	-----	-----	72.20	34.92	13.88	30.37	0.00	324	296	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5638.60	58.68	68.20	-9.52	40.43	34.50	13.04	29.29	0.00	324	296	Peak																																																																																																															
2	5895.00	87.48	110.20	-22.72	68.98	35.08	13.81	30.39	0.00	324	296	Peak																																																																																																															
3	5935.60	62.70	88.20	-25.50	44.25	35.17	13.69	30.41	0.00	324	296	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5855.00	101.83	-----	-----	83.40	34.92	13.88	30.37	0.00	324	296	Peak																																																																																																															
2	5855.00	90.63	-----	-----	72.20	34.92	13.88	30.37	0.00	324	296	Average																																																																																																															



Mode	9																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11710.20</td> <td>48.22</td> <td>74.00</td> <td>-25.78</td> <td>55.35</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11710.20	48.22	74.00	-25.78	55.35	38.51	18.78	64.42	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11710.20</td> <td>49.56</td> <td>74.00</td> <td>-24.44</td> <td>56.69</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11710.20	49.56	74.00	-24.44	56.69	38.51	18.78	64.42	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11710.20	48.22	74.00	-25.78	55.35	38.51	18.78	64.42	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11710.20	49.56	74.00	-24.44	56.69	38.51	18.78	64.42	0.00	--	PEAK																																																																						



Mode	10																																																																																																	
	Band Edge																																																																																																	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz																																																																																																	
ANT	CDD																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5634.40</td> <td>61.58</td> <td>68.20</td> <td>-6.62</td> <td>43.33</td> <td>34.50</td> <td>13.05</td> <td>29.30</td> <td>0.00</td> <td>381</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2 5895.00</td> <td>88.86</td> <td>110.20</td> <td>-21.34</td> <td>70.36</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>381</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>3 5956.60</td> <td>65.09</td> <td>88.20</td> <td>-23.11</td> <td>46.66</td> <td>35.21</td> <td>13.64</td> <td>30.42</td> <td>0.00</td> <td>381</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5634.40	61.58	68.20	-6.62	43.33	34.50	13.05	29.30	0.00	381	360	Peak	2 5895.00	88.86	110.20	-21.34	70.36	35.08	13.81	30.39	0.00	381	360	Peak	3 5956.60	65.09	88.20	-23.11	46.66	35.21	13.64	30.42	0.00	381	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5815.00</td> <td>105.29</td> <td>-----</td> <td>-----</td> <td>86.40</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>381</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2 5815.00</td> <td>94.03</td> <td>-----</td> <td>-----</td> <td>75.14</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>381</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5815.00	105.29	-----	-----	86.40	34.83	14.23	30.17	0.00	381	360	Peak	2 5815.00	94.03	-----	-----	75.14	34.83	14.23	30.17	0.00	381	360	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																										
1 5634.40	61.58	68.20	-6.62	43.33	34.50	13.05	29.30	0.00	381	360	Peak																																																																																							
2 5895.00	88.86	110.20	-21.34	70.36	35.08	13.81	30.39	0.00	381	360	Peak																																																																																							
3 5956.60	65.09	88.20	-23.11	46.66	35.21	13.64	30.42	0.00	381	360	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																										
1 5815.00	105.29	-----	-----	86.40	34.83	14.23	30.17	0.00	381	360	Peak																																																																																							
2 5815.00	94.03	-----	-----	75.14	34.83	14.23	30.17	0.00	381	360	Average																																																																																							





Mode	10																																																																																																						
	Band Edge																																																																																																						
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz																																																																																																						
ANT	CDD																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5579.80</td> <td>58.48</td> <td>68.20</td> <td>-9.72</td> <td>40.14</td> <td>34.62</td> <td>13.10</td> <td>29.38</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>87.20</td> <td>110.20</td> <td>-23.00</td> <td>68.70</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5978.20</td> <td>62.66</td> <td>88.20</td> <td>-25.54</td> <td>44.24</td> <td>35.26</td> <td>13.59</td> <td>30.43</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5579.80	58.48	68.20	-9.72	40.14	34.62	13.10	29.38	0.00	361	291	Peak	2	5895.00	87.20	110.20	-23.00	68.70	35.08	13.81	30.39	0.00	361	291	Peak	3	5978.20	62.66	88.20	-25.54	44.24	35.26	13.59	30.43	0.00	361	291	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5815.00</td> <td>99.87</td> <td>-----</td> <td>-----</td> <td>80.98</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5815.00</td> <td>89.00</td> <td>-----</td> <td>-----</td> <td>70.11</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5815.00	99.87	-----	-----	80.98	34.83	14.23	30.17	0.00	361	291	Peak	2	5815.00	89.00	-----	-----	70.11	34.83	14.23	30.17	0.00	361	291	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																															
1	5579.80	58.48	68.20	-9.72	40.14	34.62	13.10	29.38	0.00	361	291	Peak																																																																																											
2	5895.00	87.20	110.20	-23.00	68.70	35.08	13.81	30.39	0.00	361	291	Peak																																																																																											
3	5978.20	62.66	88.20	-25.54	44.24	35.26	13.59	30.43	0.00	361	291	Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																															
1	5815.00	99.87	-----	-----	80.98	34.83	14.23	30.17	0.00	361	291	Peak																																																																																											
2	5815.00	89.00	-----	-----	70.11	34.83	14.23	30.17	0.00	361	291	Average																																																																																											



Mode	10																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11630.27</td> <td>47.43</td> <td>74.00</td> <td>-26.57</td> <td>54.52</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11630.27	47.43	74.00	-26.57	54.52	38.50	18.63	64.22	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11630.27</td> <td>49.21</td> <td>74.00</td> <td>-24.79</td> <td>56.30</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11630.27	49.21	74.00	-24.79	56.30	38.50	18.63	64.22	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11630.27	47.43	74.00	-26.57	54.52	38.50	18.63	64.22	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11630.27	49.21	74.00	-24.79	56.30	38.50	18.63	64.22	0.00	--	PEAK																																																																						



Mode	11																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5579.20</td> <td>58.80</td> <td>68.20</td> <td>-9.40</td> <td>40.46</td> <td>34.62</td> <td>13.10</td> <td>29.38</td> <td>0.00</td> <td>323</td> <td>14</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5955.40</td> <td>58.86</td> <td>88.20</td> <td>-29.34</td> <td>40.43</td> <td>35.21</td> <td>13.64</td> <td>30.42</td> <td>0.00</td> <td>323</td> <td>14</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5579.20	58.80	68.20	-9.40	40.46	34.62	13.10	29.38	0.00	323	14	Peak	2	5955.40	58.86	88.20	-29.34	40.43	35.21	13.64	30.42	0.00	323	14	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>114.31</td> <td>-----</td> <td>95.80</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>323</td> <td>14</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>102.46</td> <td>-----</td> <td>83.95</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>323</td> <td>14</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	114.31	-----	95.80	34.89	13.94	30.32	0.00	323	14	Peak	2	5845.00	102.46	-----	83.95	34.89	13.94	30.32	0.00	323	14	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5579.20	58.80	68.20	-9.40	40.46	34.62	13.10	29.38	0.00	323	14	Peak																																																																																												
2	5955.40	58.86	88.20	-29.34	40.43	35.21	13.64	30.42	0.00	323	14	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	114.31	-----	95.80	34.89	13.94	30.32	0.00	323	14	Peak																																																																																													
2	5845.00	102.46	-----	83.95	34.89	13.94	30.32	0.00	323	14	Average																																																																																													



Mode	11																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.40</td> <td>58.68</td> <td>68.20</td> <td>-9.52</td> <td>40.43</td> <td>34.50</td> <td>13.05</td> <td>29.30</td> <td>0.00</td> <td>313</td> <td>295</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5999.20</td> <td>58.04</td> <td>88.20</td> <td>-30.16</td> <td>39.63</td> <td>35.30</td> <td>13.55</td> <td>30.44</td> <td>0.00</td> <td>313</td> <td>295</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5634.40	58.68	68.20	-9.52	40.43	34.50	13.05	29.30	0.00	313	295	Peak	2	5999.20	58.04	88.20	-30.16	39.63	35.30	13.55	30.44	0.00	313	295	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>107.30</td> <td>-----</td> <td>88.87</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>313</td> <td>295</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>95.96</td> <td>-----</td> <td>77.45</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>313</td> <td>295</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	107.30	-----	88.87	34.89	13.94	30.32	0.00	313	295	Peak	2	5845.00	95.96	-----	77.45	34.89	13.94	30.32	0.00	313	295	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5634.40	58.68	68.20	-9.52	40.43	34.50	13.05	29.30	0.00	313	295	Peak																																																																																												
2	5999.20	58.04	88.20	-30.16	39.63	35.30	13.55	30.44	0.00	313	295	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	107.30	-----	88.87	34.89	13.94	30.32	0.00	313	295	Peak																																																																																													
2	5845.00	95.96	-----	77.45	34.89	13.94	30.32	0.00	313	295	Average																																																																																													



Mode	11																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_5845MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11689.67</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>55.46</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11689.67	48.33	74.00	-25.67	55.46	38.50	18.74	64.37	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11689.67</td> <td>47.04</td> <td>74.00</td> <td>-26.96</td> <td>54.17</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11689.67	47.04	74.00	-26.96	54.17	38.50	18.74	64.37	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11689.67	48.33	74.00	-25.67	55.46	38.50	18.74	64.37	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11689.67	47.04	74.00	-26.96	54.17	38.50	18.74	64.37	0.00																																																																																				
								-- PEAK																																																																																				



Mode	12																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_5865MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>46.73</td> <td>74.00</td> <td>-27.27</td> <td>53.84</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11730.00	46.73	74.00	-27.27	53.84	38.53	18.83	64.47	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>50.55</td> <td>74.00</td> <td>-23.45</td> <td>57.66</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11730.00	50.55	74.00	-23.45	57.66	38.53	18.83	64.47	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11730.00	46.73	74.00	-27.27	53.84	38.53	18.83	64.47	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11730.00	50.55	74.00	-23.45	57.66	38.53	18.83	64.47	0.00																																																																																				
								-- PEAK																																																																																				



Mode	13																																																																																																																																							
	Band Edge																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_5885MHz																																																																																																																																							
ANT	CDD																																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.80</td> <td>58.18</td> <td>68.20</td> <td>-10.02</td> <td>39.95</td> <td>34.50</td> <td>13.03</td> <td>29.30</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>96.01</td> <td>110.20</td> <td>-14.19</td> <td>77.51</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>88.36</td> <td>90.20</td> <td>-1.84</td> <td>69.86</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5925.40</td> <td>58.23</td> <td>88.20</td> <td>-29.97</td> <td>39.77</td> <td>35.15</td> <td>13.72</td> <td>30.41</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.80	58.18	68.20	-10.02	39.95	34.50	13.03	29.30	0.00	318	0	Peak	2	5895.00	96.01	110.20	-14.19	77.51	35.08	13.81	30.39	0.00	318	0	Peak	3	5895.00	88.36	90.20	-1.84	69.86	35.08	13.81	30.39	0.00	318	0	Average	4	5925.40	58.23	88.20	-29.97	39.77	35.15	13.72	30.41	0.00	318	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>113.94</td> <td>-----</td> <td>-----</td> <td>95.46</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>102.30</td> <td>-----</td> <td>-----</td> <td>83.82</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>318</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	113.94	-----	-----	95.46	35.04	13.83	30.39	0.00	318	0	Peak	2	5885.00	102.30	-----	-----	83.82	35.04	13.83	30.39	0.00	318	0	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5642.80	58.18	68.20	-10.02	39.95	34.50	13.03	29.30	0.00	318	0	Peak																																																																																																																												
2	5895.00	96.01	110.20	-14.19	77.51	35.08	13.81	30.39	0.00	318	0	Peak																																																																																																																												
3	5895.00	88.36	90.20	-1.84	69.86	35.08	13.81	30.39	0.00	318	0	Average																																																																																																																												
4	5925.40	58.23	88.20	-29.97	39.77	35.15	13.72	30.41	0.00	318	0	Peak																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5885.00	113.94	-----	-----	95.46	35.04	13.83	30.39	0.00	318	0	Peak																																																																																																																												
2	5885.00	102.30	-----	-----	83.82	35.04	13.83	30.39	0.00	318	0	Average																																																																																																																												



Mode	13																																																																																																																																							
	Band Edge																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_5885MHz																																																																																																																																							
ANT	CDD																																																																																																																																							
Pol.	Vertical	Fundamental																																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.60</td> <td>57.90</td> <td>68.20</td> <td>-10.30</td> <td>39.63</td> <td>34.50</td> <td>13.00</td> <td>29.31</td> <td>0.00</td> <td>358</td> <td>292 Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>94.24</td> <td>110.20</td> <td>-15.96</td> <td>75.74</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>358</td> <td>292 Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>87.19</td> <td>90.20</td> <td>-3.01</td> <td>68.69</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>358</td> <td>292 Average</td> </tr> <tr> <td>4</td> <td>5942.20</td> <td>58.29</td> <td>88.20</td> <td>-29.91</td> <td>39.85</td> <td>35.18</td> <td>13.67</td> <td>30.41</td> <td>0.00</td> <td>358</td> <td>292 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5626.60	57.90	68.20	-10.30	39.63	34.50	13.00	29.31	0.00	358	292 Peak	2	5895.00	94.24	110.20	-15.96	75.74	35.00	13.81	30.39	0.00	358	292 Peak	3	5895.00	87.19	90.20	-3.01	68.69	35.00	13.81	30.39	0.00	358	292 Average	4	5942.20	58.29	88.20	-29.91	39.85	35.18	13.67	30.41	0.00	358	292 Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>108.88</td> <td>-----</td> <td>-----</td> <td>90.40</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>358</td> <td>292 Peak</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>98.13</td> <td>-----</td> <td>-----</td> <td>79.65</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>358</td> <td>292 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	108.88	-----	-----	90.40	35.04	13.83	30.39	0.00	358	292 Peak	2	5885.00	98.13	-----	-----	79.65	35.04	13.83	30.39	0.00	358	292 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5626.60	57.90	68.20	-10.30	39.63	34.50	13.00	29.31	0.00	358	292 Peak																																																																																																																													
2	5895.00	94.24	110.20	-15.96	75.74	35.00	13.81	30.39	0.00	358	292 Peak																																																																																																																													
3	5895.00	87.19	90.20	-3.01	68.69	35.00	13.81	30.39	0.00	358	292 Average																																																																																																																													
4	5942.20	58.29	88.20	-29.91	39.85	35.18	13.67	30.41	0.00	358	292 Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5885.00	108.88	-----	-----	90.40	35.04	13.83	30.39	0.00	358	292 Peak																																																																																																																													
2	5885.00	98.13	-----	-----	79.65	35.04	13.83	30.39	0.00	358	292 Average																																																																																																																													





Mode	13																																																																																	
	Harmonic																																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_5885MHz																																																																																	
ANT	CDD																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.33</td> <td>46.69</td> <td>74.00</td> <td>-27.31</td> <td>53.76</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11770.33	46.69	74.00	-27.31	53.76	38.57	18.94	64.58	0.00	--	-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.33</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>56.16</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11770.33	49.09	74.00	-24.91	56.16	38.57	18.94	64.58	0.00	--	-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11770.33	46.69	74.00	-27.31	53.76	38.57	18.94	64.58	0.00	--	-- PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11770.33	49.09	74.00	-24.91	56.16	38.57	18.94	64.58	0.00	--	-- PEAK																																																																								



Mode	14																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5614.00</td> <td>58.83</td> <td>68.20</td> <td>-9.37</td> <td>40.55</td> <td>34.50</td> <td>13.11</td> <td>29.33</td> <td>0.00</td> <td>326</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5932.00</td> <td>58.48</td> <td>88.20</td> <td>-29.72</td> <td>40.03</td> <td>35.16</td> <td>13.70</td> <td>30.41</td> <td>0.00</td> <td>326</td> <td>13</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5614.00	58.83	68.20	-9.37	40.55	34.50	13.11	29.33	0.00	326	13	Peak	2	5932.00	58.48	88.20	-29.72	40.03	35.16	13.70	30.41	0.00	326	13	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>111.96</td> <td>-----</td> <td>93.33</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>326</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>100.77</td> <td>-----</td> <td>82.14</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>326</td> <td>13</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	111.96	-----	93.33	34.87	14.03	30.27	0.00	326	13	Peak	2	5835.00	100.77	-----	82.14	34.87	14.03	30.27	0.00	326	13	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5614.00	58.83	68.20	-9.37	40.55	34.50	13.11	29.33	0.00	326	13	Peak																																																																																												
2	5932.00	58.48	88.20	-29.72	40.03	35.16	13.70	30.41	0.00	326	13	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	111.96	-----	93.33	34.87	14.03	30.27	0.00	326	13	Peak																																																																																													
2	5835.00	100.77	-----	82.14	34.87	14.03	30.27	0.00	326	13	Average																																																																																													



Mode	14																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.20</td> <td>58.41</td> <td>68.20</td> <td>-9.79</td> <td>40.06</td> <td>34.68</td> <td>13.07</td> <td>29.40</td> <td>0.00</td> <td>364</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5949.40</td> <td>58.03</td> <td>88.20</td> <td>-30.17</td> <td>39.60</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>364</td> <td>293</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.20	58.41	68.20	-9.79	40.06	34.68	13.07	29.40	0.00	364	293	Peak	2	5949.40	58.03	88.20	-30.17	39.60	35.20	13.65	30.42	0.00	364	293	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>106.45</td> <td>-----</td> <td>87.82</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>364</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>94.82</td> <td>-----</td> <td>76.19</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>364</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	106.45	-----	87.82	34.87	14.03	30.27	0.00	364	293	Peak	2	5835.00	94.82	-----	76.19	34.87	14.03	30.27	0.00	364	293	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5570.20	58.41	68.20	-9.79	40.06	34.68	13.07	29.40	0.00	364	293	Peak																																																																																												
2	5949.40	58.03	88.20	-30.17	39.60	35.20	13.65	30.42	0.00	364	293	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	106.45	-----	87.82	34.87	14.03	30.27	0.00	364	293	Peak																																																																																													
2	5835.00	94.82	-----	76.19	34.87	14.03	30.27	0.00	364	293	Average																																																																																													



Mode	14																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_5835MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11669.87</td> <td>47.40</td> <td>74.00</td> <td>-26.60</td> <td>54.51</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11669.87	47.40	74.00	-26.60	54.51	38.50	18.71	64.32	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11664.73</td> <td>49.69</td> <td>74.00</td> <td>-24.31</td> <td>56.80</td> <td>38.50</td> <td>18.70</td> <td>64.31</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11664.73	49.69	74.00	-24.31	56.80	38.50	18.70	64.31	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11669.87	47.40	74.00	-26.60	54.51	38.50	18.71	64.32	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11664.73	49.69	74.00	-24.31	56.80	38.50	18.70	64.31	0.00																																																																																				
								-- PEAK																																																																																				



Mode	15																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_5875MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5585.00</td> <td>58.63</td> <td>68.20</td> <td>-9.57</td> <td>40.30</td> <td>34.59</td> <td>13.11</td> <td>29.37</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>93.00</td> <td>110.20</td> <td>-17.20</td> <td>74.50</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>86.19</td> <td>90.20</td> <td>-4.01</td> <td>67.69</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5935.00</td> <td>63.64</td> <td>88.20</td> <td>-24.56</td> <td>45.19</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5585.00	58.63	68.20	-9.57	40.30	34.59	13.11	29.37	0.00	135	0	Peak	2	5895.00	93.00	110.20	-17.20	74.50	35.00	13.81	30.39	0.00	135	0	Peak	3	5895.00	86.19	90.20	-4.01	67.69	35.00	13.81	30.39	0.00	135	0	Average	4	5935.00	63.64	88.20	-24.56	45.19	35.17	13.69	30.41	0.00	135	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>114.05</td> <td>-----</td> <td>-----</td> <td>95.58</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>102.59</td> <td>-----</td> <td>-----</td> <td>84.12</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>135</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5875.00	114.05	-----	-----	95.58	35.00	13.85	30.38	0.00	135	0	Peak	2	5875.00	102.59	-----	-----	84.12	35.00	13.85	30.38	0.00	135	0	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5585.00	58.63	68.20	-9.57	40.30	34.59	13.11	29.37	0.00	135	0	Peak																																																																																																																										
2	5895.00	93.00	110.20	-17.20	74.50	35.00	13.81	30.39	0.00	135	0	Peak																																																																																																																										
3	5895.00	86.19	90.20	-4.01	67.69	35.00	13.81	30.39	0.00	135	0	Average																																																																																																																										
4	5935.00	63.64	88.20	-24.56	45.19	35.17	13.69	30.41	0.00	135	0	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5875.00	114.05	-----	-----	95.58	35.00	13.85	30.38	0.00	135	0	Peak																																																																																																																										
2	5875.00	102.59	-----	-----	84.12	35.00	13.85	30.38	0.00	135	0	Average																																																																																																																										



Mode	15																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_5875MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5582.00</td> <td>58.67</td> <td>68.20</td> <td>-9.53</td> <td>40.34</td> <td>34.60</td> <td>13.11</td> <td>29.38</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>93.40</td> <td>110.20</td> <td>-16.80</td> <td>74.90</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>81.90</td> <td>90.20</td> <td>-8.30</td> <td>63.40</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5935.00</td> <td>59.84</td> <td>88.20</td> <td>-28.36</td> <td>41.39</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5582.00	58.67	68.20	-9.53	40.34	34.60	13.11	29.38	0.00	310	298	Peak	2	5895.00	93.40	110.20	-16.80	74.90	35.08	13.81	30.39	0.00	310	298	Peak	3	5895.00	81.90	90.20	-8.30	63.40	35.08	13.81	30.39	0.00	310	298	Average	4	5935.00	59.84	88.20	-28.36	41.39	35.17	13.69	30.41	0.00	310	298	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>105.51</td> <td>-----</td> <td>-----</td> <td>87.04</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>95.33</td> <td>-----</td> <td>-----</td> <td>76.86</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>310</td> <td>298</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5875.00	105.51	-----	-----	87.04	35.00	13.85	30.38	0.00	310	298	Peak	2	5875.00	95.33	-----	-----	76.86	35.00	13.85	30.38	0.00	310	298	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5582.00	58.67	68.20	-9.53	40.34	34.60	13.11	29.38	0.00	310	298	Peak																																																																																																																										
2	5895.00	93.40	110.20	-16.80	74.90	35.08	13.81	30.39	0.00	310	298	Peak																																																																																																																										
3	5895.00	81.90	90.20	-8.30	63.40	35.08	13.81	30.39	0.00	310	298	Average																																																																																																																										
4	5935.00	59.84	88.20	-28.36	41.39	35.17	13.69	30.41	0.00	310	298	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	5875.00	105.51	-----	-----	87.04	35.00	13.85	30.38	0.00	310	298	Peak																																																																																																																										
2	5875.00	95.33	-----	-----	76.86	35.00	13.85	30.38	0.00	310	298	Average																																																																																																																										



Mode	15																																																																																	
	Harmonic																																																																																	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_5875MHz																																																																																	
ANT	CDD																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11749.80</td> <td>45.72</td> <td>74.00</td> <td>-28.28</td> <td>52.81</td> <td>38.55</td> <td>18.88</td> <td>64.52</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11749.80	45.72	74.00	-28.28	52.81	38.55	18.88	64.52	0.00	--	-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11749.80</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>55.06</td> <td>38.55</td> <td>18.88</td> <td>64.52</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11749.80	47.97	74.00	-26.03	55.06	38.55	18.88	64.52	0.00	--	-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11749.80	45.72	74.00	-28.28	52.81	38.55	18.88	64.52	0.00	--	-- PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11749.80	47.97	74.00	-26.03	55.06	38.55	18.88	64.52	0.00	--	-- PEAK																																																																								



Mode	16																																																																																																																																																																										
	Band Edge																																																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_5855MHz																																																																																																																																																																										
ANT	CDD																																																																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.40</td> <td>58.72</td> <td>68.20</td> <td>-9.48</td> <td>40.52</td> <td>34.50</td> <td>13.02</td> <td>29.32</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>93.15</td> <td>110.20</td> <td>-17.05</td> <td>74.65</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>83.38</td> <td>90.20</td> <td>-6.82</td> <td>64.88</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Average</td> </tr> <tr> <td>4</td> <td>5936.80</td> <td>68.97</td> <td>88.20</td> <td>-19.23</td> <td>50.52</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>5936.80</td> <td>52.48</td> <td>68.20</td> <td>-15.72</td> <td>34.03</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Average</td> </tr> <tr> <td>6</td> <td>5953.60</td> <td>68.62</td> <td>88.20</td> <td>-19.58</td> <td>50.19</td> <td>35.21</td> <td>13.64</td> <td>30.42</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>5953.60</td> <td>51.73</td> <td>68.20</td> <td>-16.47</td> <td>33.30</td> <td>35.21</td> <td>13.64</td> <td>30.42</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5646.40	58.72	68.20	-9.48	40.52	34.50	13.02	29.32	0.00	131	0	Peak	2	5895.00	93.15	110.20	-17.05	74.65	35.00	13.81	30.39	0.00	131	0	Peak	3	5895.00	83.38	90.20	-6.82	64.88	35.00	13.81	30.39	0.00	131	0	Average	4	5936.80	68.97	88.20	-19.23	50.52	35.17	13.69	30.41	0.00	131	0	Peak	5	5936.80	52.48	68.20	-15.72	34.03	35.17	13.69	30.41	0.00	131	0	Average	6	5953.60	68.62	88.20	-19.58	50.19	35.21	13.64	30.42	0.00	131	0	Peak	7	5953.60	51.73	68.20	-16.47	33.30	35.21	13.64	30.42	0.00	131	0	Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>108.00</td> <td>-----</td> <td>-----</td> <td>90.37</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>98.28</td> <td>-----</td> <td>-----</td> <td>79.85</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>131</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5855.00	108.00	-----	-----	90.37	34.92	13.88	30.37	0.00	131	0	Peak	2	5855.00	98.28	-----	-----	79.85	34.92	13.88	30.37	0.00	131	0	Average
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																
1	5646.40	58.72	68.20	-9.48	40.52	34.50	13.02	29.32	0.00	131	0	Peak																																																																																																																																																															
2	5895.00	93.15	110.20	-17.05	74.65	35.00	13.81	30.39	0.00	131	0	Peak																																																																																																																																																															
3	5895.00	83.38	90.20	-6.82	64.88	35.00	13.81	30.39	0.00	131	0	Average																																																																																																																																																															
4	5936.80	68.97	88.20	-19.23	50.52	35.17	13.69	30.41	0.00	131	0	Peak																																																																																																																																																															
5	5936.80	52.48	68.20	-15.72	34.03	35.17	13.69	30.41	0.00	131	0	Average																																																																																																																																																															
6	5953.60	68.62	88.20	-19.58	50.19	35.21	13.64	30.42	0.00	131	0	Peak																																																																																																																																																															
7	5953.60	51.73	68.20	-16.47	33.30	35.21	13.64	30.42	0.00	131	0	Average																																																																																																																																																															
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																
1	5855.00	108.00	-----	-----	90.37	34.92	13.88	30.37	0.00	131	0	Peak																																																																																																																																																															
2	5855.00	98.28	-----	-----	79.85	34.92	13.88	30.37	0.00	131	0	Average																																																																																																																																																															





Mode	16																																																																																																														
	Band Edge																																																																																																														
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_5855MHz																																																																																																														
ANT	CDD																																																																																																														
Pol.	Vertical	Fundamental																																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5596.00</td> <td>57.51</td> <td>68.20</td> <td>-10.69</td> <td>39.21</td> <td>34.52</td> <td>13.14</td> <td>29.36</td> <td>0.00</td> <td>342</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>88.59</td> <td>110.20</td> <td>-21.61</td> <td>70.09</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>342</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5932.60</td> <td>65.10</td> <td>88.20</td> <td>-23.10</td> <td>46.64</td> <td>35.17</td> <td>13.70</td> <td>30.41</td> <td>0.00</td> <td>342</td> <td>293</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5596.00	57.51	68.20	-10.69	39.21	34.52	13.14	29.36	0.00	342	293	Peak	2	5895.00	88.59	110.20	-21.61	70.09	35.08	13.81	30.39	0.00	342	293	Peak	3	5932.60	65.10	88.20	-23.10	46.64	35.17	13.70	30.41	0.00	342	293	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>104.76</td> <td>-----</td> <td>-----</td> <td>86.33</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>342</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>93.54</td> <td>-----</td> <td>-----</td> <td>75.11</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>342</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	104.76	-----	-----	86.33	34.92	13.88	30.37	0.00	342	293	Peak	2	5855.00	93.54	-----	-----	75.11	34.92	13.88	30.37	0.00	342	293	Average
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5596.00	57.51	68.20	-10.69	39.21	34.52	13.14	29.36	0.00	342	293	Peak																																																																																																			
2	5895.00	88.59	110.20	-21.61	70.09	35.08	13.81	30.39	0.00	342	293	Peak																																																																																																			
3	5932.60	65.10	88.20	-23.10	46.64	35.17	13.70	30.41	0.00	342	293	Peak																																																																																																			
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5855.00	104.76	-----	-----	86.33	34.92	13.88	30.37	0.00	342	293	Peak																																																																																																			
2	5855.00	93.54	-----	-----	75.11	34.92	13.88	30.37	0.00	342	293	Average																																																																																																			



Mode	16																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_5855MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11710.00</td> <td>44.07</td> <td>74.00</td> <td>-29.93</td> <td>51.20</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11710.00	44.07	74.00	-29.93	51.20	38.51	18.78	64.42	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11710.00</td> <td>44.64</td> <td>74.00</td> <td>-29.36</td> <td>51.77</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11710.00	44.64	74.00	-29.36	51.77	38.51	18.78	64.42	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11710.00	44.07	74.00	-29.93	51.20	38.51	18.78	64.42	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11710.00	44.64	74.00	-29.36	51.77	38.51	18.78	64.42	0.00																																																																																				
								-- PEAK																																																																																				



<b>17</b>																																																																				
<b>Mode</b>	<b>Band Edge</b>																																																																			
	<b>U-NII-4_5.85-5.895_802.11ax HE160_CH163_5815MHz</b>																																																																			
<b>ANT</b>	<b>CDD</b>																																																																			
<b>Pol.</b>	<b>Horizontal</b>																																																																			
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.40</td> <td>59.47</td> <td>68.20</td> <td>-8.73</td> <td>41.21</td> <td>34.50</td> <td>13.05</td> <td>29.29</td> <td>0.00</td> <td>381</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>88.17</td> <td>110.20</td> <td>-22.03</td> <td>69.67</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>381</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5933.80</td> <td>60.83</td> <td>88.20</td> <td>-27.37</td> <td>42.37</td> <td>35.17</td> <td>13.70</td> <td>30.41</td> <td>0.00</td> <td>381</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.40	59.47	68.20	-8.73	41.21	34.50	13.05	29.29	0.00	381	359	Peak	2	5895.00	88.17	110.20	-22.03	69.67	35.00	13.81	30.39	0.00	381	359	Peak	3	5933.80	60.83	88.20	-27.37	42.37	35.17	13.70	30.41	0.00	381	359	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5637.40	59.47	68.20	-8.73	41.21	34.50	13.05	29.29	0.00	381	359	Peak																																																								
2	5895.00	88.17	110.20	-22.03	69.67	35.00	13.81	30.39	0.00	381	359	Peak																																																								
3	5933.80	60.83	88.20	-27.37	42.37	35.17	13.70	30.41	0.00	381	359	Peak																																																								
<b>Fundamental</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5815.00</td> <td>105.33</td> <td>-----</td> <td>-----</td> <td>86.44</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>381</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5815.00</td> <td>93.56</td> <td>-----</td> <td>-----</td> <td>74.67</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>381</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	105.33	-----	-----	86.44	34.83	14.23	30.17	0.00	381	359	Peak	2	5815.00	93.56	-----	-----	74.67	34.83	14.23	30.17	0.00	381	359	Average													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5815.00	105.33	-----	-----	86.44	34.83	14.23	30.17	0.00	381	359	Peak																																																								
2	5815.00	93.56	-----	-----	74.67	34.83	14.23	30.17	0.00	381	359	Average																																																								



Mode	17																																																																																																																								
	Band Edge																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_5815MHz																																																																																																																								
ANT	CDD																																																																																																																								
Pol.	Vertical	Fundamental																																																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5632.60</td> <td>58.09</td> <td>68.20</td> <td>-10.11</td> <td>39.83</td> <td>34.50</td> <td>13.06</td> <td>29.30</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>83.90</td> <td>110.20</td> <td>-26.30</td> <td>65.40</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>6000.40</td> <td>60.36</td> <td>88.20</td> <td>-27.84</td> <td>41.95</td> <td>35.30</td> <td>13.55</td> <td>30.44</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5632.60	58.09	68.20	-10.11	39.83	34.50	13.06	29.30	0.00	361	291	Peak	2	5895.00	83.90	110.20	-26.30	65.40	35.08	13.81	30.39	0.00	361	291	Peak	3	6000.40	60.36	88.20	-27.84	41.95	35.30	13.55	30.44	0.00	361	291	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5815.00</td> <td>100.75</td> <td>-----</td> <td>-----</td> <td>81.06</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5815.00</td> <td>89.27</td> <td>-----</td> <td>-----</td> <td>70.38</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>361</td> <td>291</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5815.00	100.75	-----	-----	81.06	34.83	14.23	30.17	0.00	361	291	Peak	2	5815.00	89.27	-----	-----	70.38	34.83	14.23	30.17	0.00	361	291	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5632.60	58.09	68.20	-10.11	39.83	34.50	13.06	29.30	0.00	361	291	Peak																																																																																																													
2	5895.00	83.90	110.20	-26.30	65.40	35.08	13.81	30.39	0.00	361	291	Peak																																																																																																													
3	6000.40	60.36	88.20	-27.84	41.95	35.30	13.55	30.44	0.00	361	291	Peak																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5815.00	100.75	-----	-----	81.06	34.83	14.23	30.17	0.00	361	291	Peak																																																																																																													
2	5815.00	89.27	-----	-----	70.38	34.83	14.23	30.17	0.00	361	291	Average																																																																																																													



Mode	17																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_5815MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11630.00</td> <td>43.67</td> <td>74.00</td> <td>-30.33</td> <td>50.76</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11630.00	43.67	74.00	-30.33	50.76	38.50	18.63	64.22	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11630.00</td> <td>46.86</td> <td>74.00</td> <td>-27.14</td> <td>53.95</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11630.00	46.86	74.00	-27.14	53.95	38.50	18.63	64.22	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11630.00	43.67	74.00	-30.33	50.76	38.50	18.63	64.22	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11630.00	46.86	74.00	-27.14	53.95	38.50	18.63	64.22	0.00	--	PEAK																																																																						



Mode	18																																																																																																																	
	Band Edge																																																																																																																	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_5845MHz																																																																																																																	
ANT	CDD																																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																																
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5641.00</td> <td>55.62</td> <td>68.20</td> <td>-12.58</td> <td>37.38</td> <td>34.50</td> <td>13.04</td> <td>29.30</td> <td>0.00</td> <td>325</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5929.60</td> <td>57.61</td> <td>88.20</td> <td>-30.59</td> <td>39.15</td> <td>35.16</td> <td>13.71</td> <td>30.41</td> <td>0.00</td> <td>325</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.00	55.62	68.20	-12.58	37.38	34.50	13.04	29.30	0.00	325	14	PEAK	2	5929.60	57.61	88.20	-30.59	39.15	35.16	13.71	30.41	0.00	325	14	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>113.70</td> <td>-----</td> <td>95.19</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>325</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>102.27</td> <td>-----</td> <td>83.76</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>325</td> <td>14</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	113.70	-----	95.19	34.89	13.94	30.32	0.00	325	14	PEAK	2	5845.00	102.27	-----	83.76	34.89	13.94	30.32	0.00	325	14	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5641.00	55.62	68.20	-12.58	37.38	34.50	13.04	29.30	0.00	325	14	PEAK																																																																																																						
2	5929.60	57.61	88.20	-30.59	39.15	35.16	13.71	30.41	0.00	325	14	PEAK																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5845.00	113.70	-----	95.19	34.89	13.94	30.32	0.00	325	14	PEAK																																																																																																							
2	5845.00	102.27	-----	83.76	34.89	13.94	30.32	0.00	325	14	AVERAGE																																																																																																							



Mode	18																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.40</td> <td>56.83</td> <td>68.20</td> <td>-11.37</td> <td>38.57</td> <td>34.50</td> <td>13.06</td> <td>29.30</td> <td>0.00</td> <td>362</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5973.40</td> <td>58.34</td> <td>88.20</td> <td>-29.86</td> <td>39.92</td> <td>35.25</td> <td>13.60</td> <td>30.43</td> <td>0.00</td> <td>362</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5631.40	56.83	68.20	-11.37	38.57	34.50	13.06	29.30	0.00	362	293	PEAK	2	5973.40	58.34	88.20	-29.86	39.92	35.25	13.60	30.43	0.00	362	293	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>108.14</td> <td>-----</td> <td>89.63</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>362</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>96.74</td> <td>-----</td> <td>78.23</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>362</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	108.14	-----	89.63	34.89	13.94	30.32	0.00	362	293	PEAK	2	5845.00	96.74	-----	78.23	34.89	13.94	30.32	0.00	362	293	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5631.40	56.83	68.20	-11.37	38.57	34.50	13.06	29.30	0.00	362	293	PEAK																																																																																												
2	5973.40	58.34	88.20	-29.86	39.92	35.25	13.60	30.43	0.00	362	293	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	108.14	-----	89.63	34.89	13.94	30.32	0.00	362	293	PEAK																																																																																													
2	5845.00	96.74	-----	78.23	34.89	13.94	30.32	0.00	362	293	AVERAGE																																																																																													



Mode	18																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_5845MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>44.28</td> <td>74.00</td> <td>-29.72</td> <td>51.41</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	44.28	74.00	-29.72	51.41	38.50	18.74	64.37	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>43.99</td> <td>74.00</td> <td>-30.01</td> <td>51.12</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	43.99	74.00	-30.01	51.12	38.50	18.74	64.37	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11690.00	44.28	74.00	-29.72	51.41	38.50	18.74	64.37	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11690.00	43.99	74.00	-30.01	51.12	38.50	18.74	64.37	0.00	--	PEAK																																																																						





Mode	19																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_5865MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>43.62</td> <td>74.00</td> <td>-30.38</td> <td>50.73</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	43.62	74.00	-30.38	50.73	38.53	18.83	64.47	0.00	--	PEAK	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11730.00</td> <td>44.45</td> <td>74.00</td> <td>-29.55</td> <td>51.56</td> <td>38.53</td> <td>18.83</td> <td>64.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11730.00	44.45	74.00	-29.55	51.56	38.53	18.83	64.47	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	43.62	74.00	-30.38	50.73	38.53	18.83	64.47	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11730.00	44.45	74.00	-29.55	51.56	38.53	18.83	64.47	0.00	--	PEAK																																																																						



Mode	20																																																																																																																																													
	Band Edge																																																																																																																																													
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_5885MHz																																																																																																																																													
ANT	CDD																																																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																																																												
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5695.00</td> <td>57.95</td> <td>101.60</td> <td>-43.65</td> <td>39.85</td> <td>34.59</td> <td>13.00</td> <td>29.57</td> <td>0.00</td> <td>317</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>96.47</td> <td>110.20</td> <td>-13.73</td> <td>77.97</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>317</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>86.54</td> <td>90.20</td> <td>-3.66</td> <td>68.04</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>317</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>5951.00</td> <td>59.85</td> <td>88.20</td> <td>-28.35</td> <td>41.42</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>317</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5695.00	57.95	101.60	-43.65	39.85	34.59	13.00	29.57	0.00	317	360	PEAK	2	5895.00	96.47	110.20	-13.73	77.97	35.00	13.81	30.39	0.00	317	360	PEAK	3	5895.00	86.54	90.20	-3.66	68.04	35.00	13.81	30.39	0.00	317	360	AVERAGE	4	5951.00	59.85	88.20	-28.35	41.42	35.20	13.65	30.42	0.00	317	360	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>112.44</td> <td>-----</td> <td>-----</td> <td>93.96</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>317</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>100.97</td> <td>-----</td> <td>-----</td> <td>82.49</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>317</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	112.44	-----	-----	93.96	35.04	13.83	30.39	0.00	317	360	PEAK	2	5885.00	100.97	-----	-----	82.49	35.04	13.83	30.39	0.00	317	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	5695.00	57.95	101.60	-43.65	39.85	34.59	13.00	29.57	0.00	317	360	PEAK																																																																																																																																		
2	5895.00	96.47	110.20	-13.73	77.97	35.00	13.81	30.39	0.00	317	360	PEAK																																																																																																																																		
3	5895.00	86.54	90.20	-3.66	68.04	35.00	13.81	30.39	0.00	317	360	AVERAGE																																																																																																																																		
4	5951.00	59.85	88.20	-28.35	41.42	35.20	13.65	30.42	0.00	317	360	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	5885.00	112.44	-----	-----	93.96	35.04	13.83	30.39	0.00	317	360	PEAK																																																																																																																																		
2	5885.00	100.97	-----	-----	82.49	35.04	13.83	30.39	0.00	317	360	AVERAGE																																																																																																																																		



Mode	20																																																																																																																																													
	Band Edge																																																																																																																																													
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_5885MHz																																																																																																																																													
ANT	CDD																																																																																																																																													
Pol.	Vertical	Fundamental																																																																																																																																												
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.40</td> <td>56.70</td> <td>68.20</td> <td>-11.50</td> <td>38.44</td> <td>34.50</td> <td>13.07</td> <td>29.31</td> <td>0.00</td> <td>359</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>91.82</td> <td>110.20</td> <td>-18.38</td> <td>73.32</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>82.04</td> <td>90.20</td> <td>-8.16</td> <td>63.54</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>292</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>5926.60</td> <td>57.99</td> <td>88.20</td> <td>-30.21</td> <td>39.53</td> <td>35.15</td> <td>13.72</td> <td>30.41</td> <td>0.00</td> <td>359</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5628.40	56.70	68.20	-11.50	38.44	34.50	13.07	29.31	0.00	359	292	PEAK	2	5895.00	91.82	110.20	-18.38	73.32	35.08	13.81	30.39	0.00	359	292	PEAK	3	5895.00	82.04	90.20	-8.16	63.54	35.08	13.81	30.39	0.00	359	292	AVERAGE	4	5926.60	57.99	88.20	-30.21	39.53	35.15	13.72	30.41	0.00	359	292	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>109.09</td> <td>-----</td> <td>-----</td> <td>90.61</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>97.69</td> <td>-----</td> <td>-----</td> <td>79.21</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>359</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	109.09	-----	-----	90.61	35.04	13.83	30.39	0.00	359	292	PEAK	2	5885.00	97.69	-----	-----	79.21	35.04	13.83	30.39	0.00	359	292	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5628.40	56.70	68.20	-11.50	38.44	34.50	13.07	29.31	0.00	359	292	PEAK																																																																																																																																		
2	5895.00	91.82	110.20	-18.38	73.32	35.08	13.81	30.39	0.00	359	292	PEAK																																																																																																																																		
3	5895.00	82.04	90.20	-8.16	63.54	35.08	13.81	30.39	0.00	359	292	AVERAGE																																																																																																																																		
4	5926.60	57.99	88.20	-30.21	39.53	35.15	13.72	30.41	0.00	359	292	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5885.00	109.09	-----	-----	90.61	35.04	13.83	30.39	0.00	359	292	PEAK																																																																																																																																		
2	5885.00	97.69	-----	-----	79.21	35.04	13.83	30.39	0.00	359	292	AVERAGE																																																																																																																																		



Mode	20																																																																																	
	Harmonic																																																																																	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_5885MHz																																																																																	
ANT	CDD																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>43.85</td> <td>74.00</td> <td>-30.15</td> <td>50.92</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11770.00	43.85	74.00	-30.15	50.92	38.57	18.94	64.58	0.00	--	-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>43.55</td> <td>74.00</td> <td>-30.45</td> <td>50.62</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11770.00	43.55	74.00	-30.45	50.62	38.57	18.94	64.58	0.00	--	-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11770.00	43.85	74.00	-30.15	50.92	38.57	18.94	64.58	0.00	--	-- PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 11770.00	43.55	74.00	-30.45	50.62	38.57	18.94	64.58	0.00	--	-- PEAK																																																																								



Mode	21																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5651.80</td> <td>58.68</td> <td>69.54</td> <td>-10.86</td> <td>40.52</td> <td>34.50</td> <td>13.01</td> <td>29.35</td> <td>0.00</td> <td>379</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5933.00</td> <td>59.57</td> <td>88.20</td> <td>-28.63</td> <td>41.11</td> <td>35.17</td> <td>13.70</td> <td>30.41</td> <td>0.00</td> <td>379</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5651.80	58.68	69.54	-10.86	40.52	34.50	13.01	29.35	0.00	379	1	PEAK	2	5933.00	59.57	88.20	-28.63	41.11	35.17	13.70	30.41	0.00	379	1	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>111.38</td> <td>-----</td> <td>92.75</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>379</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>99.98</td> <td>-----</td> <td>81.35</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>379</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	111.38	-----	92.75	34.87	14.03	30.27	0.00	379	1	PEAK	2	5835.00	99.98	-----	81.35	34.87	14.03	30.27	0.00	379	1	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5651.80	58.68	69.54	-10.86	40.52	34.50	13.01	29.35	0.00	379	1	PEAK																																																																																												
2	5933.00	59.57	88.20	-28.63	41.11	35.17	13.70	30.41	0.00	379	1	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	111.38	-----	92.75	34.87	14.03	30.27	0.00	379	1	PEAK																																																																																													
2	5835.00	99.98	-----	81.35	34.87	14.03	30.27	0.00	379	1	AVERAGE																																																																																													



Mode	21																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_5835MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5677.60</td> <td>56.87</td> <td>88.72</td> <td>-31.85</td> <td>38.74</td> <td>34.56</td> <td>13.05</td> <td>29.48</td> <td>0.00</td> <td>363</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5974.00</td> <td>58.23</td> <td>88.20</td> <td>-29.97</td> <td>39.81</td> <td>35.25</td> <td>13.60</td> <td>30.43</td> <td>0.00</td> <td>363</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5677.60	56.87	88.72	-31.85	38.74	34.56	13.05	29.48	0.00	363	292	PEAK	2	5974.00	58.23	88.20	-29.97	39.81	35.25	13.60	30.43	0.00	363	292	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5835.00</td> <td>105.92</td> <td>-----</td> <td>87.29</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>363</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5835.00</td> <td>94.52</td> <td>-----</td> <td>75.89</td> <td>34.87</td> <td>14.03</td> <td>30.27</td> <td>0.00</td> <td>363</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	105.92	-----	87.29	34.87	14.03	30.27	0.00	363	292	PEAK	2	5835.00	94.52	-----	75.89	34.87	14.03	30.27	0.00	363	292	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5677.60	56.87	88.72	-31.85	38.74	34.56	13.05	29.48	0.00	363	292	PEAK																																																																																												
2	5974.00	58.23	88.20	-29.97	39.81	35.25	13.60	30.43	0.00	363	292	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5835.00	105.92	-----	87.29	34.87	14.03	30.27	0.00	363	292	PEAK																																																																																													
2	5835.00	94.52	-----	75.89	34.87	14.03	30.27	0.00	363	292	AVERAGE																																																																																													



Mode	21																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_5835MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11670.00</td> <td>43.78</td> <td>74.00</td> <td>-30.22</td> <td>50.89</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11670.00	43.78	74.00	-30.22	50.89	38.50	18.71	64.32	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11670.00</td> <td>44.53</td> <td>74.00</td> <td>-29.47</td> <td>51.64</td> <td>38.50</td> <td>18.71</td> <td>64.32</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11670.00	44.53	74.00	-29.47	51.64	38.50	18.71	64.32	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11670.00	43.78	74.00	-30.22	50.89	38.50	18.71	64.32	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11670.00	44.53	74.00	-29.47	51.64	38.50	18.71	64.32	0.00	--	PEAK																																																																						



Mode	22																																																																																																																								
	Band Edge																																																																																																																								
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_5875MHz																																																																																																																								
ANT	CDD																																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5683.00</td> <td>56.65</td> <td>92.72</td> <td>-36.07</td> <td>38.53</td> <td>34.57</td> <td>13.06</td> <td>29.51</td> <td>0.00</td> <td>321</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>87.25</td> <td>110.20</td> <td>-22.95</td> <td>68.75</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>321</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5952.40</td> <td>58.60</td> <td>88.20</td> <td>-29.60</td> <td>40.17</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>321</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5683.00	56.65	92.72	-36.07	38.53	34.57	13.06	29.51	0.00	321	0	PEAK	2	5895.00	87.25	110.20	-22.95	68.75	35.08	13.81	30.39	0.00	321	0	PEAK	3	5952.40	58.60	88.20	-29.60	40.17	35.20	13.65	30.42	0.00	321	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>110.20</td> <td>-----</td> <td>-----</td> <td>91.73</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>321</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>98.00</td> <td>-----</td> <td>-----</td> <td>80.33</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>321</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5875.00	110.20	-----	-----	91.73	35.00	13.85	30.38	0.00	321	0	PEAK	2	5875.00	98.00	-----	-----	80.33	35.00	13.85	30.38	0.00	321	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5683.00	56.65	92.72	-36.07	38.53	34.57	13.06	29.51	0.00	321	0	PEAK																																																																																																													
2	5895.00	87.25	110.20	-22.95	68.75	35.08	13.81	30.39	0.00	321	0	PEAK																																																																																																													
3	5952.40	58.60	88.20	-29.60	40.17	35.20	13.65	30.42	0.00	321	0	PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5875.00	110.20	-----	-----	91.73	35.00	13.85	30.38	0.00	321	0	PEAK																																																																																																													
2	5875.00	98.00	-----	-----	80.33	35.00	13.85	30.38	0.00	321	0	AVERAGE																																																																																																													





Mode	22																																																																																																			
	Band Edge																																																																																																			
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_5875MHz																																																																																																			
ANT	CDD																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5587.00</td> <td>57.31</td> <td>68.20</td> <td>-10.89</td> <td>38.98</td> <td>34.58</td> <td>13.12</td> <td>29.37</td> <td>0.00</td> <td>326</td> <td>297</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5912.00</td> <td>58.53</td> <td>97.13</td> <td>-38.60</td> <td>40.04</td> <td>35.13</td> <td>13.76</td> <td>30.40</td> <td>0.00</td> <td>326</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5587.00	57.31	68.20	-10.89	38.98	34.58	13.12	29.37	0.00	326	297	PEAK	2	5912.00	58.53	97.13	-38.60	40.04	35.13	13.76	30.40	0.00	326	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.00</td> <td>103.99</td> <td>-----</td> <td>85.52</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>326</td> <td>297</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5875.00</td> <td>92.52</td> <td>-----</td> <td>74.05</td> <td>35.00</td> <td>13.85</td> <td>30.38</td> <td>0.00</td> <td>326</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5875.00	103.99	-----	85.52	35.00	13.85	30.38	0.00	326	297	PEAK	2	5875.00	92.52	-----	74.05	35.00	13.85	30.38	0.00	326	297	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																													
1	5587.00	57.31	68.20	-10.89	38.98	34.58	13.12	29.37	0.00	326	297	PEAK																																																																																								
2	5912.00	58.53	97.13	-38.60	40.04	35.13	13.76	30.40	0.00	326	297	PEAK																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																													
1	5875.00	103.99	-----	85.52	35.00	13.85	30.38	0.00	326	297	PEAK																																																																																									
2	5875.00	92.52	-----	74.05	35.00	13.85	30.38	0.00	326	297	AVERAGE																																																																																									



Mode	22																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_5875MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11750.00</td> <td>41.98</td> <td>74.00</td> <td>-32.02</td> <td>49.08</td> <td>38.55</td> <td>18.88</td> <td>64.53</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11750.00	41.98	74.00	-32.02	49.08	38.55	18.88	64.53	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11750.00</td> <td>43.21</td> <td>74.00</td> <td>-30.79</td> <td>50.31</td> <td>38.55</td> <td>18.88</td> <td>64.53</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11750.00	43.21	74.00	-30.79	50.31	38.55	18.88	64.53	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11750.00	41.98	74.00	-32.02	49.08	38.55	18.88	64.53	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11750.00	43.21	74.00	-30.79	50.31	38.55	18.88	64.53	0.00	--	PEAK																																																																						



Mode	23																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_5855MHz																																																																																																																																					
ANT	CDD																																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Ant Level (dBuV)</th> <th>Cable Factor (dB/m)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>5697.40</td><td>60.66</td><td>103.38</td><td>-42.72</td><td>42.56</td><td>34.59</td><td>13.09</td><td>29.58</td><td>0.00</td><td>378</td><td>1 PEAK</td></tr> <tr><td>2</td><td>5895.00</td><td>96.26</td><td>110.20</td><td>-13.94</td><td>77.76</td><td>35.08</td><td>13.81</td><td>30.39</td><td>0.00</td><td>378</td><td>1 PEAK</td></tr> <tr><td>3</td><td>5895.00</td><td>83.09</td><td>90.20</td><td>-7.11</td><td>64.59</td><td>35.08</td><td>13.81</td><td>30.39</td><td>0.00</td><td>378</td><td>1 AVERAGE</td></tr> <tr><td>4</td><td>5936.80</td><td>73.84</td><td>88.20</td><td>-14.36</td><td>55.39</td><td>35.17</td><td>13.69</td><td>30.41</td><td>0.00</td><td>378</td><td>1 PEAK</td></tr> <tr><td>5</td><td>5936.80</td><td>51.59</td><td>68.20</td><td>-16.61</td><td>33.14</td><td>35.17</td><td>13.69</td><td>30.41</td><td>0.00</td><td>378</td><td>1 AVERAGE</td></tr> <tr><td>6</td><td>5956.00</td><td>73.96</td><td>88.20</td><td>-14.24</td><td>55.53</td><td>35.21</td><td>13.64</td><td>30.42</td><td>0.00</td><td>378</td><td>1 PEAK</td></tr> <tr><td>7</td><td>5956.00</td><td>51.08</td><td>68.20</td><td>-17.12</td><td>32.65</td><td>35.21</td><td>13.64</td><td>30.42</td><td>0.00</td><td>378</td><td>1 AVERAGE</td></tr> </tbody> </table>	Peak #	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Line Margin (dB)	Ant Level (dBuV)	Cable Factor (dB/m)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5697.40	60.66	103.38	-42.72	42.56	34.59	13.09	29.58	0.00	378	1 PEAK	2	5895.00	96.26	110.20	-13.94	77.76	35.08	13.81	30.39	0.00	378	1 PEAK	3	5895.00	83.09	90.20	-7.11	64.59	35.08	13.81	30.39	0.00	378	1 AVERAGE	4	5936.80	73.84	88.20	-14.36	55.39	35.17	13.69	30.41	0.00	378	1 PEAK	5	5936.80	51.59	68.20	-16.61	33.14	35.17	13.69	30.41	0.00	378	1 AVERAGE	6	5956.00	73.96	88.20	-14.24	55.53	35.21	13.64	30.42	0.00	378	1 PEAK	7	5956.00	51.08	68.20	-17.12	32.65	35.21	13.64	30.42	0.00	378	1 AVERAGE	<table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Ant Level (dBuV)</th> <th>Cable Factor (dB/m)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>5855.00</td><td>108.68</td><td>-----</td><td>-----</td><td>90.25</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>378</td><td>1 PEAK</td></tr> <tr><td>2</td><td>5855.00</td><td>97.28</td><td>-----</td><td>-----</td><td>78.85</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>378</td><td>1 AVERAGE</td></tr> </tbody> </table>	Peak #	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Line Margin (dB)	Ant Level (dBuV)	Cable Factor (dB/m)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5855.00	108.68	-----	-----	90.25	34.92	13.88	30.37	0.00	378	1 PEAK	2	5855.00	97.28	-----	-----	78.85	34.92	13.88	30.37	0.00	378	1 AVERAGE
Peak #	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Line Margin (dB)	Ant Level (dBuV)	Cable Factor (dB/m)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																											
1	5697.40	60.66	103.38	-42.72	42.56	34.59	13.09	29.58	0.00	378	1 PEAK																																																																																																																											
2	5895.00	96.26	110.20	-13.94	77.76	35.08	13.81	30.39	0.00	378	1 PEAK																																																																																																																											
3	5895.00	83.09	90.20	-7.11	64.59	35.08	13.81	30.39	0.00	378	1 AVERAGE																																																																																																																											
4	5936.80	73.84	88.20	-14.36	55.39	35.17	13.69	30.41	0.00	378	1 PEAK																																																																																																																											
5	5936.80	51.59	68.20	-16.61	33.14	35.17	13.69	30.41	0.00	378	1 AVERAGE																																																																																																																											
6	5956.00	73.96	88.20	-14.24	55.53	35.21	13.64	30.42	0.00	378	1 PEAK																																																																																																																											
7	5956.00	51.08	68.20	-17.12	32.65	35.21	13.64	30.42	0.00	378	1 AVERAGE																																																																																																																											
Peak #	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Line Margin (dB)	Ant Level (dBuV)	Cable Factor (dB/m)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																											
1	5855.00	108.68	-----	-----	90.25	34.92	13.88	30.37	0.00	378	1 PEAK																																																																																																																											
2	5855.00	97.28	-----	-----	78.85	34.92	13.88	30.37	0.00	378	1 AVERAGE																																																																																																																											



Mode	23																																																																																																																																																										
	Band Edge																																																																																																																																																										
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_5855MHz																																																																																																																																																										
ANT	CDD																																																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5635.00</td> <td>57.09</td> <td>68.20</td> <td>-11.11</td> <td>38.84</td> <td>34.50</td> <td>13.05</td> <td>29.30</td> <td>0.00</td> <td>360</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>93.25</td> <td>110.20</td> <td>-16.95</td> <td>74.75</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>360</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>78.83</td> <td>90.20</td> <td>-11.37</td> <td>60.33</td> <td>35.00</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>360</td> <td>293</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>5931.40</td> <td>70.58</td> <td>88.20</td> <td>-17.62</td> <td>52.12</td> <td>35.16</td> <td>13.71</td> <td>30.41</td> <td>0.00</td> <td>360</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>5931.40</td> <td>48.04</td> <td>68.20</td> <td>-20.16</td> <td>29.58</td> <td>35.16</td> <td>13.71</td> <td>30.41</td> <td>0.00</td> <td>360</td> <td>293</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>5949.40</td> <td>69.08</td> <td>88.20</td> <td>-19.12</td> <td>50.65</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>360</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>7</td> <td>5949.40</td> <td>49.23</td> <td>68.20</td> <td>-18.97</td> <td>30.80</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>360</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			1	5635.00	57.09	68.20	-11.11	38.84	34.50	13.05	29.30	0.00	360	293	PEAK	2	5895.00	93.25	110.20	-16.95	74.75	35.00	13.81	30.39	0.00	360	293	PEAK	3	5895.00	78.83	90.20	-11.37	60.33	35.00	13.81	30.39	0.00	360	293	AVERAGE	4	5931.40	70.58	88.20	-17.62	52.12	35.16	13.71	30.41	0.00	360	293	PEAK	5	5931.40	48.04	68.20	-20.16	29.58	35.16	13.71	30.41	0.00	360	293	AVERAGE	6	5949.40	69.08	88.20	-19.12	50.65	35.20	13.65	30.42	0.00	360	293	PEAK	7	5949.40	49.23	68.20	-18.97	30.80	35.20	13.65	30.42	0.00	360	293	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>104.00</td> <td>-----</td> <td>-----</td> <td>85.57</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>360</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>92.60</td> <td>-----</td> <td>-----</td> <td>74.17</td> <td>34.92</td> <td>13.88</td> <td>30.37</td> <td>0.00</td> <td>360</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			1	5855.00	104.00	-----	-----	85.57	34.92	13.88	30.37	0.00	360	293	PEAK	2	5855.00	92.60	-----	-----	74.17	34.92	13.88	30.37	0.00	360	293	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																					
1	5635.00	57.09	68.20	-11.11	38.84	34.50	13.05	29.30	0.00	360	293	PEAK																																																																																																																																															
2	5895.00	93.25	110.20	-16.95	74.75	35.00	13.81	30.39	0.00	360	293	PEAK																																																																																																																																															
3	5895.00	78.83	90.20	-11.37	60.33	35.00	13.81	30.39	0.00	360	293	AVERAGE																																																																																																																																															
4	5931.40	70.58	88.20	-17.62	52.12	35.16	13.71	30.41	0.00	360	293	PEAK																																																																																																																																															
5	5931.40	48.04	68.20	-20.16	29.58	35.16	13.71	30.41	0.00	360	293	AVERAGE																																																																																																																																															
6	5949.40	69.08	88.20	-19.12	50.65	35.20	13.65	30.42	0.00	360	293	PEAK																																																																																																																																															
7	5949.40	49.23	68.20	-18.97	30.80	35.20	13.65	30.42	0.00	360	293	AVERAGE																																																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																					
1	5855.00	104.00	-----	-----	85.57	34.92	13.88	30.37	0.00	360	293	PEAK																																																																																																																																															
2	5855.00	92.60	-----	-----	74.17	34.92	13.88	30.37	0.00	360	293	AVERAGE																																																																																																																																															



Mode	23																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_5855MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11710.00</td> <td>44.74</td> <td>74.00</td> <td>-29.26</td> <td>51.87</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11710.00	44.74	74.00	-29.26	51.87	38.51	18.78	64.42	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11710.00</td> <td>44.05</td> <td>74.00</td> <td>-29.95</td> <td>51.18</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11710.00	44.05	74.00	-29.95	51.18	38.51	18.78	64.42	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11710.00	44.74	74.00	-29.26	51.87	38.51	18.78	64.42	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11710.00	44.05	74.00	-29.95	51.18	38.51	18.78	64.42	0.00	--	PEAK																																																																						



Mode	24																																																																																																														
	Band Edge																																																																																																														
	U-NII-4_5.85-5.895_802.11be EHT160_CH163_5815MHz																																																																																																														
ANT	CDD																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5686.60</td> <td>71.41</td> <td>95.39</td> <td>-23.98</td> <td>53.29</td> <td>34.57</td> <td>13.07</td> <td>29.52</td> <td>0.00</td> <td>379</td> <td>1 PEAK</td> </tr> <tr> <td>2 5895.00</td> <td>81.07</td> <td>110.20</td> <td>-29.13</td> <td>62.57</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>379</td> <td>1 PEAK</td> </tr> <tr> <td>3 5941.60</td> <td>65.26</td> <td>88.20</td> <td>-22.94</td> <td>46.81</td> <td>35.18</td> <td>13.68</td> <td>30.41</td> <td>0.00</td> <td>379</td> <td>1 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5686.60	71.41	95.39	-23.98	53.29	34.57	13.07	29.52	0.00	379	1 PEAK	2 5895.00	81.07	110.20	-29.13	62.57	35.08	13.81	30.39	0.00	379	1 PEAK	3 5941.60	65.26	88.20	-22.94	46.81	35.18	13.68	30.41	0.00	379	1 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5815.00</td> <td>107.69</td> <td>-----</td> <td>-----</td> <td>88.80</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>379</td> <td>1 PEAK</td> </tr> <tr> <td>2 5815.00</td> <td>96.29</td> <td>-----</td> <td>-----</td> <td>77.40</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>379</td> <td>1 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5815.00	107.69	-----	-----	88.80	34.83	14.23	30.17	0.00	379	1 PEAK	2 5815.00	96.29	-----	-----	77.40	34.83	14.23	30.17	0.00	379	1 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																							
1 5686.60	71.41	95.39	-23.98	53.29	34.57	13.07	29.52	0.00	379	1 PEAK																																																																																																					
2 5895.00	81.07	110.20	-29.13	62.57	35.08	13.81	30.39	0.00	379	1 PEAK																																																																																																					
3 5941.60	65.26	88.20	-22.94	46.81	35.18	13.68	30.41	0.00	379	1 PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																							
1 5815.00	107.69	-----	-----	88.80	34.83	14.23	30.17	0.00	379	1 PEAK																																																																																																					
2 5815.00	96.29	-----	-----	77.40	34.83	14.23	30.17	0.00	379	1 AVERAGE																																																																																																					



Mode	24																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-4_5.85-5.895_802.11be EHT160_CH163_5815MHz																																																																																																																			
ANT	CDD																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5681.80</td> <td>64.00</td> <td>91.83</td> <td>-27.83</td> <td>45.88</td> <td>34.56</td> <td>13.06</td> <td>29.50</td> <td>0.00</td> <td>348</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2 5895.00</td> <td>78.41</td> <td>110.20</td> <td>-31.79</td> <td>59.91</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>348</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>3 5960.20</td> <td>64.65</td> <td>88.20</td> <td>-23.55</td> <td>46.22</td> <td>35.22</td> <td>13.63</td> <td>30.42</td> <td>0.00</td> <td>348</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5681.80	64.00	91.83	-27.83	45.88	34.56	13.06	29.50	0.00	348	293	PEAK	2 5895.00	78.41	110.20	-31.79	59.91	35.08	13.81	30.39	0.00	348	293	PEAK	3 5960.20	64.65	88.20	-23.55	46.22	35.22	13.63	30.42	0.00	348	293	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5815.00</td> <td>100.57</td> <td>-----</td> <td>-----</td> <td>81.68</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>348</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2 5815.00</td> <td>89.17</td> <td>-----</td> <td>-----</td> <td>70.28</td> <td>34.83</td> <td>14.23</td> <td>30.17</td> <td>0.00</td> <td>348</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5815.00	100.57	-----	-----	81.68	34.83	14.23	30.17	0.00	348	293	PEAK	2 5815.00	89.17	-----	-----	70.28	34.83	14.23	30.17	0.00	348	293	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1 5681.80	64.00	91.83	-27.83	45.88	34.56	13.06	29.50	0.00	348	293	PEAK																																																																																																									
2 5895.00	78.41	110.20	-31.79	59.91	35.08	13.81	30.39	0.00	348	293	PEAK																																																																																																									
3 5960.20	64.65	88.20	-23.55	46.22	35.22	13.63	30.42	0.00	348	293	PEAK																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1 5815.00	100.57	-----	-----	81.68	34.83	14.23	30.17	0.00	348	293	PEAK																																																																																																									
2 5815.00	89.17	-----	-----	70.28	34.83	14.23	30.17	0.00	348	293	AVERAGE																																																																																																									



Mode	24																																																																																					
	Harmonic																																																																																					
	U-NII-4_5.85-5.895_802.11be EHT160_CH163_5815MHz																																																																																					
ANT	CDD																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11630.00</td> <td>43.45</td> <td>74.00</td> <td>-30.55</td> <td>50.54</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11630.00	43.45	74.00	-30.55	50.54	38.50	18.63	64.22	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11630.00</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>51.20</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11630.00	44.11	74.00	-29.89	51.20	38.50	18.63	64.22	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 11630.00	43.45	74.00	-30.55	50.54	38.50	18.63	64.22	0.00	--	--	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 11630.00	44.11	74.00	-29.89	51.20	38.50	18.63	64.22	0.00	--	--	PEAK																																																																											





Mode	25																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.40</td> <td>56.80</td> <td>68.20</td> <td>-11.40</td> <td>38.54</td> <td>34.50</td> <td>13.07</td> <td>29.31</td> <td>0.00</td> <td>101</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5971.60</td> <td>57.83</td> <td>88.20</td> <td>-30.37</td> <td>39.41</td> <td>35.24</td> <td>13.61</td> <td>30.43</td> <td>0.00</td> <td>101</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5628.40	56.80	68.20	-11.40	38.54	34.50	13.07	29.31	0.00	101	174	PEAK	2	5971.60	57.83	88.20	-30.37	39.41	35.24	13.61	30.43	0.00	101	174	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>110.56</td> <td>-----</td> <td>92.05</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>101</td> <td>174</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>99.16</td> <td>-----</td> <td>80.65</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>101</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	110.56	-----	92.05	34.89	13.94	30.32	0.00	101	174	PEAK	2	5845.00	99.16	-----	80.65	34.89	13.94	30.32	0.00	101	174	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5628.40	56.80	68.20	-11.40	38.54	34.50	13.07	29.31	0.00	101	174	PEAK																																																																																												
2	5971.60	57.83	88.20	-30.37	39.41	35.24	13.61	30.43	0.00	101	174	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	110.56	-----	92.05	34.89	13.94	30.32	0.00	101	174	PEAK																																																																																													
2	5845.00	99.16	-----	80.65	34.89	13.94	30.32	0.00	101	174	AVERAGE																																																																																													



Mode	25																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5555.80</td> <td>57.54</td> <td>68.20</td> <td>-10.66</td> <td>39.15</td> <td>34.77</td> <td>13.04</td> <td>29.42</td> <td>0.00</td> <td>331</td> <td>74</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5932.60</td> <td>58.49</td> <td>88.20</td> <td>-29.71</td> <td>40.03</td> <td>35.17</td> <td>13.70</td> <td>30.41</td> <td>0.00</td> <td>331</td> <td>74</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5555.80	57.54	68.20	-10.66	39.15	34.77	13.04	29.42	0.00	331	74	PEAK	2	5932.60	58.49	88.20	-29.71	40.03	35.17	13.70	30.41	0.00	331	74	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>103.07</td> <td>-----</td> <td>84.56</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>331</td> <td>74</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>91.60</td> <td>-----</td> <td>73.09</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>331</td> <td>74</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	103.07	-----	84.56	34.89	13.94	30.32	0.00	331	74	PEAK	2	5845.00	91.60	-----	73.09	34.89	13.94	30.32	0.00	331	74	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5555.80	57.54	68.20	-10.66	39.15	34.77	13.04	29.42	0.00	331	74	PEAK																																																																																												
2	5932.60	58.49	88.20	-29.71	40.03	35.17	13.70	30.41	0.00	331	74	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	103.07	-----	84.56	34.89	13.94	30.32	0.00	331	74	PEAK																																																																																													
2	5845.00	91.60	-----	73.09	34.89	13.94	30.32	0.00	331	74	AVERAGE																																																																																													



Mode	25																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53_5845MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg																																																																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>46.32</td> <td>74.00</td> <td>-27.68</td> <td>53.45</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	46.32	74.00	-27.68	53.45	38.50	18.74	64.37	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>51.59</td> <td>74.00</td> <td>-22.41</td> <td>58.72</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>319</td> <td>218</td> <td>PEAK</td> </tr> <tr> <td>2 11690.00</td> <td>46.03</td> <td>54.00</td> <td>-7.97</td> <td>53.16</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>319</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	51.59	74.00	-22.41	58.72	38.50	18.74	64.37	0.00	319	218	PEAK	2 11690.00	46.03	54.00	-7.97	53.16	38.50	18.74	64.37	0.00	319	218
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 11690.00	46.32	74.00	-27.68	53.45	38.50	18.74	64.37	0.00	--	PEAK																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 11690.00	51.59	74.00	-22.41	58.72	38.50	18.74	64.37	0.00	319	218	PEAK																																																																																	
2 11690.00	46.03	54.00	-7.97	53.16	38.50	18.74	64.37	0.00	319	218	AVERAGE																																																																																	



Mode	26																																																																																																																																							
	Band Edge																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54_5885MHz																																																																																																																																							
ANT	CDD																																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5554.60</td> <td>56.18</td> <td>68.20</td> <td>-12.02</td> <td>37.80</td> <td>34.77</td> <td>13.03</td> <td>29.42</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2 5895.00</td> <td>90.35</td> <td>110.20</td> <td>-19.85</td> <td>71.85</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>3 5895.00</td> <td>77.98</td> <td>90.20</td> <td>-12.22</td> <td>59.48</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>AVERAGE</td> </tr> <tr> <td>4 5947.00</td> <td>57.79</td> <td>88.20</td> <td>-30.41</td> <td>39.36</td> <td>35.19</td> <td>13.66</td> <td>30.42</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5554.60	56.18	68.20	-12.02	37.80	34.77	13.03	29.42	0.00	309	344	PEAK	2 5895.00	90.35	110.20	-19.85	71.85	35.08	13.81	30.39	0.00	309	344	PEAK	3 5895.00	77.98	90.20	-12.22	59.48	35.08	13.81	30.39	0.00	309	344	AVERAGE	4 5947.00	57.79	88.20	-30.41	39.36	35.19	13.66	30.42	0.00	309	344	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5885.00</td> <td>110.52</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2 5885.00</td> <td>99.12</td> <td>-----</td> <td>-----</td> <td>80.64</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	110.52	-----	-----	92.04	35.04	13.83	30.39	0.00	309	344	PEAK	2 5885.00	99.12	-----	-----	80.64	35.04	13.83	30.39	0.00	309	344	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 5554.60	56.18	68.20	-12.02	37.80	34.77	13.03	29.42	0.00	309	344	PEAK																																																																																																																													
2 5895.00	90.35	110.20	-19.85	71.85	35.08	13.81	30.39	0.00	309	344	PEAK																																																																																																																													
3 5895.00	77.98	90.20	-12.22	59.48	35.08	13.81	30.39	0.00	309	344	AVERAGE																																																																																																																													
4 5947.00	57.79	88.20	-30.41	39.36	35.19	13.66	30.42	0.00	309	344	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 5885.00	110.52	-----	-----	92.04	35.04	13.83	30.39	0.00	309	344	PEAK																																																																																																																													
2 5885.00	99.12	-----	-----	80.64	35.04	13.83	30.39	0.00	309	344	AVERAGE																																																																																																																													



Mode	26																																																																																													
	Band Edge																																																																																													
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54_5885MHz																																																																																													
ANT	CDD																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV/m)</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>Aux Loss Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5587.00</td> <td>56.59</td> <td>68.20</td> <td>-11.61</td> <td>38.26</td> <td>34.58</td> <td>13.12</td> <td>29.37</td> <td>0.00</td> <td>389</td> <td>118 PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>94.50</td> <td>110.20</td> <td>-15.70</td> <td>76.00</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>389</td> <td>118 PEAK</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>80.61</td> <td>90.20</td> <td>-9.59</td> <td>62.11</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>389</td> <td>118 AVERAGE</td> </tr> <tr> <td>4</td> <td>5959.60</td> <td>57.68</td> <td>88.20</td> <td>-30.52</td> <td>39.25</td> <td>35.22</td> <td>13.63</td> <td>30.42</td> <td>0.00</td> <td>389</td> <td>118 PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Loss Factor	APos (dB)	TPos (deg)	Remark	1	5587.00	56.59	68.20	-11.61	38.26	34.58	13.12	29.37	0.00	389	118 PEAK	2	5895.00	94.50	110.20	-15.70	76.00	35.08	13.81	30.39	0.00	389	118 PEAK	3	5895.00	80.61	90.20	-9.59	62.11	35.08	13.81	30.39	0.00	389	118 AVERAGE	4	5959.60	57.68	88.20	-30.52	39.25	35.22	13.63	30.42	0.00	389	118 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV/m)</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>Aux Loss Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>104.80</td> <td>86.32</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>389</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>93.40</td> <td>74.92</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>389</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Loss Factor	APos (dB)	TPos (deg)	Remark	1	5885.00	104.80	86.32	35.04	13.83	30.39	0.00	389	118	PEAK	2	5885.00	93.40	74.92	35.04	13.83	30.39	0.00	389	118	AVERAGE
	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Loss Factor	APos (dB)	TPos (deg)	Remark																																																																																			
1	5587.00	56.59	68.20	-11.61	38.26	34.58	13.12	29.37	0.00	389	118 PEAK																																																																																			
2	5895.00	94.50	110.20	-15.70	76.00	35.08	13.81	30.39	0.00	389	118 PEAK																																																																																			
3	5895.00	80.61	90.20	-9.59	62.11	35.08	13.81	30.39	0.00	389	118 AVERAGE																																																																																			
4	5959.60	57.68	88.20	-30.52	39.25	35.22	13.63	30.42	0.00	389	118 PEAK																																																																																			
Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV/m)	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Loss Factor	APos (dB)	TPos (deg)	Remark																																																																																				
1	5885.00	104.80	86.32	35.04	13.83	30.39	0.00	389	118	PEAK																																																																																				
2	5885.00	93.40	74.92	35.04	13.83	30.39	0.00	389	118	AVERAGE																																																																																				



Mode	26																																																																																												
	Harmonic																																																																																												
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54_5885MHz																																																																																												
ANT	CDD																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>45.39</td> <td>74.00</td> <td>-28.61</td> <td>52.46</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	45.39	74.00	-28.61	52.46	38.57	18.94	64.58	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>49.12</td> <td>74.00</td> <td>-24.88</td> <td>56.19</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>276</td> <td>217</td> <td>PEAK</td> </tr> <tr> <td>2 11770.00</td> <td>44.01</td> <td>54.00</td> <td>-9.99</td> <td>51.08</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>276</td> <td>217</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	49.12	74.00	-24.88	56.19	38.57	18.94	64.58	0.00	276	217	PEAK	2 11770.00	44.01	54.00	-9.99	51.08	38.57	18.94	64.58	0.00	276	217	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11770.00	45.39	74.00	-28.61	52.46	38.57	18.94	64.58	0.00	--	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11770.00	49.12	74.00	-24.88	56.19	38.57	18.94	64.58	0.00	276	217	PEAK																																																																																		
2 11770.00	44.01	54.00	-9.99	51.08	38.57	18.94	64.58	0.00	276	217	AVERAGE																																																																																		



Mode	27																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 52+26_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5621.80</td> <td>57.31</td> <td>68.20</td> <td>-10.89</td> <td>39.04</td> <td>34.50</td> <td>13.09</td> <td>29.32</td> <td>0.00</td> <td>102</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5926.60</td> <td>58.41</td> <td>88.20</td> <td>-29.79</td> <td>39.95</td> <td>35.15</td> <td>13.72</td> <td>30.41</td> <td>0.00</td> <td>102</td> <td>172</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5621.80	57.31	68.20	-10.89	39.04	34.50	13.09	29.32	0.00	102	172	PEAK	2	5926.60	58.41	88.20	-29.79	39.95	35.15	13.72	30.41	0.00	102	172	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>110.13</td> <td>-----</td> <td>91.62</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>102</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>90.73</td> <td>-----</td> <td>80.22</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>102</td> <td>172</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	110.13	-----	91.62	34.89	13.94	30.32	0.00	102	172	PEAK	2	5845.00	90.73	-----	80.22	34.89	13.94	30.32	0.00	102	172	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5621.80	57.31	68.20	-10.89	39.04	34.50	13.09	29.32	0.00	102	172	PEAK																																																																																												
2	5926.60	58.41	88.20	-29.79	39.95	35.15	13.72	30.41	0.00	102	172	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	110.13	-----	91.62	34.89	13.94	30.32	0.00	102	172	PEAK																																																																																													
2	5845.00	90.73	-----	80.22	34.89	13.94	30.32	0.00	102	172	AVERAGE																																																																																													



Mode	27																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 52+26_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5614.60</td> <td>56.78</td> <td>68.20</td> <td>-11.42</td> <td>38.50</td> <td>34.50</td> <td>13.11</td> <td>29.33</td> <td>0.00</td> <td>285</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5959.00</td> <td>57.95</td> <td>88.20</td> <td>-30.25</td> <td>39.52</td> <td>35.22</td> <td>13.63</td> <td>30.42</td> <td>0.00</td> <td>285</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5614.60	56.78	68.20	-11.42	38.50	34.50	13.11	29.33	0.00	285	143	PEAK	2	5959.00	57.95	88.20	-30.25	39.52	35.22	13.63	30.42	0.00	285	143	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>100.73</td> <td>-----</td> <td>82.22</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>285</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>89.43</td> <td>-----</td> <td>70.92</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>285</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	100.73	-----	82.22	34.89	13.94	30.32	0.00	285	143	PEAK	2	5845.00	89.43	-----	70.92	34.89	13.94	30.32	0.00	285	143	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5614.60	56.78	68.20	-11.42	38.50	34.50	13.11	29.33	0.00	285	143	PEAK																																																																																												
2	5959.00	57.95	88.20	-30.25	39.52	35.22	13.63	30.42	0.00	285	143	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	100.73	-----	82.22	34.89	13.94	30.32	0.00	285	143	PEAK																																																																																													
2	5845.00	89.43	-----	70.92	34.89	13.94	30.32	0.00	285	143	AVERAGE																																																																																													





Mode	27																																																																																										
	Harmonic																																																																																										
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 52+26_5845MHz																																																																																										
ANT	CDD																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>45.70</td> <td>74.00</td> <td>-28.30</td> <td>52.83</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	45.70	74.00	-28.30	52.83	38.50	18.74	64.37	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11690.00</td> <td>49.20</td> <td>74.00</td> <td>-24.80</td> <td>56.33</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>300</td> <td>219 PEAK</td> </tr> <tr> <td>2 11690.00</td> <td>45.90</td> <td>54.00</td> <td>-8.02</td> <td>53.11</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>300</td> <td>219 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11690.00	49.20	74.00	-24.80	56.33	38.50	18.74	64.37	0.00	300	219 PEAK	2 11690.00	45.90	54.00	-8.02	53.11	38.50	18.74	64.37	0.00	300	219 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1 11690.00	45.70	74.00	-28.30	52.83	38.50	18.74	64.37	0.00	--	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1 11690.00	49.20	74.00	-24.80	56.33	38.50	18.74	64.37	0.00	300	219 PEAK																																																																																	
2 11690.00	45.90	54.00	-8.02	53.11	38.50	18.74	64.37	0.00	300	219 AVERAGE																																																																																	



Mode	28																																																																																																							
	Band Edge																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 106+26_5845MHz																																																																																																							
ANT	CDD																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5612.80</td> <td>56.48</td> <td>68.20</td> <td>-11.72</td> <td>38.20</td> <td>34.50</td> <td>13.11</td> <td>29.33</td> <td>0.00</td> <td>103</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>6051.40</td> <td>58.64</td> <td>88.20</td> <td>-29.56</td> <td>39.88</td> <td>35.40</td> <td>13.83</td> <td>30.47</td> <td>0.00</td> <td>103</td> <td>172</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5612.80	56.48	68.20	-11.72	38.20	34.50	13.11	29.33	0.00	103	172	PEAK	2	6051.40	58.64	88.20	-29.56	39.88	35.40	13.83	30.47	0.00	103	172	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>109.14</td> <td>-----</td> <td>90.63</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>103</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>97.84</td> <td>-----</td> <td>79.33</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>103</td> <td>172</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	109.14	-----	90.63	34.89	13.94	30.32	0.00	103	172	PEAK	2	5845.00	97.84	-----	79.33	34.89	13.94	30.32	0.00	103	172	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5612.80	56.48	68.20	-11.72	38.20	34.50	13.11	29.33	0.00	103	172	PEAK																																																																																												
2	6051.40	58.64	88.20	-29.56	39.88	35.40	13.83	30.47	0.00	103	172	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5845.00	109.14	-----	90.63	34.89	13.94	30.32	0.00	103	172	PEAK																																																																																													
2	5845.00	97.84	-----	79.33	34.89	13.94	30.32	0.00	103	172	AVERAGE																																																																																													



Mode	28																																																									
	Band Edge																																																									
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 106+26_5845MHz																																																									
ANT	CDD																																																									
Pol.	Vertical	Fundamental																																																								
Peak																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5621.20</td> <td>56.24</td> <td>68.20</td> <td>-11.96</td> <td>37.97</td> <td>34.50</td> <td>13.09</td> <td>29.32</td> <td>0.00</td> <td>330</td> <td>74</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>57.51</td> <td>88.20</td> <td>-30.69</td> <td>39.00</td> <td>35.20</td> <td>13.65</td> <td>30.42</td> <td>0.00</td> <td>330</td> <td>74</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5621.20	56.24	68.20	-11.96	37.97	34.50	13.09	29.32	0.00	330	74	PEAK	2	5950.00	57.51	88.20	-30.69	39.00	35.20	13.65	30.42	0.00	330	74	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5621.20	56.24	68.20	-11.96	37.97	34.50	13.09	29.32	0.00	330	74	PEAK																																														
2	5950.00	57.51	88.20	-30.69	39.00	35.20	13.65	30.42	0.00	330	74	PEAK																																														
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5845.00</td> <td>100.96</td> <td>-----</td> <td>82.45</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>330</td> <td>74</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5845.00</td> <td>89.66</td> <td>-----</td> <td>71.15</td> <td>34.89</td> <td>13.94</td> <td>30.32</td> <td>0.00</td> <td>330</td> <td>74</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	100.96	-----	82.45	34.89	13.94	30.32	0.00	330	74	PEAK	2	5845.00	89.66	-----	71.15	34.89	13.94	30.32	0.00	330	74	AVERAGE			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5845.00	100.96	-----	82.45	34.89	13.94	30.32	0.00	330	74	PEAK																																															
2	5845.00	89.66	-----	71.15	34.89	13.94	30.32	0.00	330	74	AVERAGE																																															



Mode	28																																																																																																									
	Harmonic																																																																																																									
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Small RU 106+26_5845MHz																																																																																																									
ANT	CDD																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11690.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>54.95</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>375</td> <td>112</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11690.00</td> <td>44.17</td> <td>54.00</td> <td>-9.83</td> <td>51.30</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>375</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	47.82	74.00	-26.18	54.95	38.50	18.74	64.37	0.00	375	112	PEAK	2	11690.00	44.17	54.00	-9.83	51.30	38.50	18.74	64.37	0.00	375	112	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11690.00</td> <td>49.36</td> <td>74.00</td> <td>-24.64</td> <td>56.49</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>272</td> <td>216</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11690.00</td> <td>46.48</td> <td>54.00</td> <td>-7.52</td> <td>53.61</td> <td>38.50</td> <td>18.74</td> <td>64.37</td> <td>0.00</td> <td>272</td> <td>216</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	49.36	74.00	-24.64	56.49	38.50	18.74	64.37	0.00	272	216	PEAK	2	11690.00	46.48	54.00	-7.52	53.61	38.50	18.74	64.37	0.00	272	216	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11690.00	47.82	74.00	-26.18	54.95	38.50	18.74	64.37	0.00	375	112	PEAK																																																																																														
2	11690.00	44.17	54.00	-9.83	51.30	38.50	18.74	64.37	0.00	375	112	AVERAGE																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11690.00	49.36	74.00	-24.64	56.49	38.50	18.74	64.37	0.00	272	216	PEAK																																																																																														
2	11690.00	46.48	54.00	-7.52	53.61	38.50	18.74	64.37	0.00	272	216	AVERAGE																																																																																														



Mode	29																																																																																																																								
	Band Edge																																																																																																																								
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 52+26_5885MHz																																																																																																																								
ANT	CDD																																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.60</td> <td>56.97</td> <td>68.20</td> <td>-11.23</td> <td>38.71</td> <td>34.50</td> <td>13.08</td> <td>29.32</td> <td>0.00</td> <td>310</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>81.16</td> <td>110.20</td> <td>-29.04</td> <td>62.66</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5936.00</td> <td>57.21</td> <td>88.20</td> <td>-30.99</td> <td>38.76</td> <td>35.17</td> <td>13.69</td> <td>30.41</td> <td>0.00</td> <td>310</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.60	56.97	68.20	-11.23	38.71	34.50	13.08	29.32	0.00	310	344	PEAK	2	5895.00	81.16	110.20	-29.04	62.66	35.08	13.81	30.39	0.00	310	344	PEAK	3	5936.00	57.21	88.20	-30.99	38.76	35.17	13.69	30.41	0.00	310	344	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>108.00</td> <td>-----</td> <td>89.60</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>96.78</td> <td>-----</td> <td>78.30</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>310</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	108.00	-----	89.60	35.04	13.83	30.39	0.00	310	344	PEAK	2	5885.00	96.78	-----	78.30	35.04	13.83	30.39	0.00	310	344	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5623.60	56.97	68.20	-11.23	38.71	34.50	13.08	29.32	0.00	310	344	PEAK																																																																																																													
2	5895.00	81.16	110.20	-29.04	62.66	35.08	13.81	30.39	0.00	310	344	PEAK																																																																																																													
3	5936.00	57.21	88.20	-30.99	38.76	35.17	13.69	30.41	0.00	310	344	PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5885.00	108.00	-----	89.60	35.04	13.83	30.39	0.00	310	344	PEAK																																																																																																														
2	5885.00	96.78	-----	78.30	35.04	13.83	30.39	0.00	310	344	AVERAGE																																																																																																														



Mode	29																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 52+26_5885MHz																																																																																																																			
ANT	CDD																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5621.20</td> <td>56.85</td> <td>68.20</td> <td>-11.35</td> <td>38.58</td> <td>34.50</td> <td>13.09</td> <td>29.32</td> <td>0.00</td> <td>371</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>2 5895.00</td> <td>72.28</td> <td>110.20</td> <td>-37.92</td> <td>53.78</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>371</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>3 5966.00</td> <td>57.64</td> <td>88.20</td> <td>-30.56</td> <td>39.22</td> <td>35.23</td> <td>13.62</td> <td>30.43</td> <td>0.00</td> <td>371</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5621.20	56.85	68.20	-11.35	38.58	34.50	13.09	29.32	0.00	371	340	PEAK	2 5895.00	72.28	110.20	-37.92	53.78	35.08	13.81	30.39	0.00	371	340	PEAK	3 5966.00	57.64	88.20	-30.56	39.22	35.23	13.62	30.43	0.00	371	340	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5885.00</td> <td>101.40</td> <td>-----</td> <td>-----</td> <td>82.92</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>371</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>2 5885.00</td> <td>90.10</td> <td>-----</td> <td>-----</td> <td>71.62</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>371</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5885.00	101.40	-----	-----	82.92	35.04	13.83	30.39	0.00	371	340	PEAK	2 5885.00	90.10	-----	-----	71.62	35.04	13.83	30.39	0.00	371	340	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1 5621.20	56.85	68.20	-11.35	38.58	34.50	13.09	29.32	0.00	371	340	PEAK																																																																																																									
2 5895.00	72.28	110.20	-37.92	53.78	35.08	13.81	30.39	0.00	371	340	PEAK																																																																																																									
3 5966.00	57.64	88.20	-30.56	39.22	35.23	13.62	30.43	0.00	371	340	PEAK																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1 5885.00	101.40	-----	-----	82.92	35.04	13.83	30.39	0.00	371	340	PEAK																																																																																																									
2 5885.00	90.10	-----	-----	71.62	35.04	13.83	30.39	0.00	371	340	AVERAGE																																																																																																									



Mode	29																																																																																											
	Harmonic																																																																																											
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 52+26_5885MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>51.63</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11770.00	44.56	74.00	-29.44	51.63	38.57	18.94	64.58	0.00									-- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>46.11</td> <td>74.00</td> <td>-27.89</td> <td>53.18</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11770.00	46.11	74.00	-27.89	53.18	38.57	18.94	64.58	0.00									-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11770.00	44.56	74.00	-29.44	51.63	38.57	18.94	64.58	0.00																																																																																				
								-- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11770.00	46.11	74.00	-27.89	53.18	38.57	18.94	64.58	0.00																																																																																				
								-- PEAK																																																																																				



Mode	30																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 106+26_5885MHz																																																																																																																							
ANT	CDD																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.40</td> <td>56.86</td> <td>68.20</td> <td>-11.34</td> <td>38.60</td> <td>34.50</td> <td>13.05</td> <td>29.29</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>90.44</td> <td>110.20</td> <td>-19.76</td> <td>71.94</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5895.00</td> <td>85.43</td> <td>90.20</td> <td>-4.77</td> <td>66.93</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>6027.40</td> <td>57.74</td> <td>88.20</td> <td>-30.46</td> <td>39.15</td> <td>35.35</td> <td>13.70</td> <td>30.46</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5637.40	56.86	68.20	-11.34	38.60	34.50	13.05	29.29	0.00	309	344	PEAK	2	5895.00	90.44	110.20	-19.76	71.94	35.08	13.81	30.39	0.00	309	344	PEAK	3	5895.00	85.43	90.20	-4.77	66.93	35.08	13.81	30.39	0.00	309	344	AVERAGE	4	6027.40	57.74	88.20	-30.46	39.15	35.35	13.70	30.46	0.00	309	344	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>107.64</td> <td>-----</td> <td>-----</td> <td>89.16</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>96.24</td> <td>-----</td> <td>-----</td> <td>77.76</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>309</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5885.00	107.64	-----	-----	89.16	35.04	13.83	30.39	0.00	309	344	PEAK	2	5885.00	96.24	-----	-----	77.76	35.04	13.83	30.39	0.00	309	344	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
1	5637.40	56.86	68.20	-11.34	38.60	34.50	13.05	29.29	0.00	309	344	PEAK																																																																																																												
2	5895.00	90.44	110.20	-19.76	71.94	35.08	13.81	30.39	0.00	309	344	PEAK																																																																																																												
3	5895.00	85.43	90.20	-4.77	66.93	35.08	13.81	30.39	0.00	309	344	AVERAGE																																																																																																												
4	6027.40	57.74	88.20	-30.46	39.15	35.35	13.70	30.46	0.00	309	344	PEAK																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
1	5885.00	107.64	-----	-----	89.16	35.04	13.83	30.39	0.00	309	344	PEAK																																																																																																												
2	5885.00	96.24	-----	-----	77.76	35.04	13.83	30.39	0.00	309	344	AVERAGE																																																																																																												





Mode	30																																																																																																						
	Band Edge																																																																																																						
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 106+26_5885MHz																																																																																																						
ANT	CDD																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.80</td> <td>56.23</td> <td>68.20</td> <td>-11.97</td> <td>38.03</td> <td>34.50</td> <td>13.02</td> <td>29.32</td> <td>0.00</td> <td>388</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5895.00</td> <td>90.07</td> <td>110.20</td> <td>-20.13</td> <td>71.57</td> <td>35.08</td> <td>13.81</td> <td>30.39</td> <td>0.00</td> <td>388</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5939.20</td> <td>57.71</td> <td>88.20</td> <td>-30.49</td> <td>39.26</td> <td>35.18</td> <td>13.68</td> <td>30.41</td> <td>0.00</td> <td>388</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5645.80	56.23	68.20	-11.97	38.03	34.50	13.02	29.32	0.00	388	118	PEAK	2	5895.00	90.07	110.20	-20.13	71.57	35.08	13.81	30.39	0.00	388	118	PEAK	3	5939.20	57.71	88.20	-30.49	39.26	35.18	13.68	30.41	0.00	388	118	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5885.00</td> <td>101.49</td> <td>-----</td> <td>-----</td> <td>83.01</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>388</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5885.00</td> <td>90.09</td> <td>-----</td> <td>-----</td> <td>71.61</td> <td>35.04</td> <td>13.83</td> <td>30.39</td> <td>0.00</td> <td>388</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5885.00	101.49	-----	-----	83.01	35.04	13.83	30.39	0.00	388	118	PEAK	2	5885.00	90.09	-----	-----	71.61	35.04	13.83	30.39	0.00	388	118	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																															
1	5645.80	56.23	68.20	-11.97	38.03	34.50	13.02	29.32	0.00	388	118	PEAK																																																																																											
2	5895.00	90.07	110.20	-20.13	71.57	35.08	13.81	30.39	0.00	388	118	PEAK																																																																																											
3	5939.20	57.71	88.20	-30.49	39.26	35.18	13.68	30.41	0.00	388	118	PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																															
1	5885.00	101.49	-----	-----	83.01	35.04	13.83	30.39	0.00	388	118	PEAK																																																																																											
2	5885.00	90.09	-----	-----	71.61	35.04	13.83	30.39	0.00	388	118	AVERAGE																																																																																											



Mode	30																																																																															
	Harmonic																																																																															
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Small RU 106+26_5885MHz																																																																															
ANT	CDD																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>52.33</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	45.26	74.00	-28.74	52.33	38.57	18.94	64.58	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11770.00</td> <td>45.39</td> <td>74.00</td> <td>-28.61</td> <td>52.46</td> <td>38.57</td> <td>18.94</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11770.00	45.39	74.00	-28.61	52.46	38.57	18.94	64.58	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11770.00	45.26	74.00	-28.74	52.33	38.57	18.94	64.58	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11770.00	45.39	74.00	-28.61	52.46	38.57	18.94	64.58	0.00	--	PEAK																																																																						



Mode	31																																																																																												
	Harmonic																																																																																												
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Puncturing 20M_5855MHz																																																																																												
ANT	CDD																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7468.60</td> <td>48.06</td> <td>74.00</td> <td>-25.94</td> <td>62.20</td> <td>35.80</td> <td>15.33</td> <td>65.27</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11710.20</td> <td>46.70</td> <td>74.00</td> <td>-27.30</td> <td>53.83</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7468.60	48.06	74.00	-25.94	62.20	35.80	15.33	65.27	0.00	--	--	PEAK	2	11710.20	46.70	74.00	-27.30	53.83	38.51	18.78	64.42	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11710.20</td> <td>49.83</td> <td>74.00</td> <td>-24.17</td> <td>56.96</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.20	49.83	74.00	-24.17	56.96	38.51	18.78	64.42	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7468.60	48.06	74.00	-25.94	62.20	35.80	15.33	65.27	0.00	--	--	PEAK																																																																																	
2	11710.20	46.70	74.00	-27.30	53.83	38.51	18.78	64.42	0.00	--	--	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	11710.20	49.83	74.00	-24.17	56.96	38.51	18.78	64.42	0.00	--	--	PEAK																																																																																	



Mode	32																																																																																								
	Harmonic																																																																																								
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Puncturing 20M_5855MHz																																																																																								
ANT	CDD																																																																																								
Pol.	Horizontal	Vertical																																																																																							
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7492.80</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>62.59</td> <td>35.80</td> <td>15.34</td> <td>65.34</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11710.00</td> <td>46.93</td> <td>74.00</td> <td>-27.07</td> <td>54.06</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7492.80	48.39	74.00	-25.61	62.59	35.80	15.34	65.34	0.00	--	--	PEAK	2	11710.00	46.93	74.00	-27.07	54.06	38.51	18.78	64.42	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11710.20</td> <td>48.29</td> <td>74.00</td> <td>-25.71</td> <td>55.42</td> <td>38.51</td> <td>18.78</td> <td>64.42</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11710.20	48.29	74.00	-25.71	55.42	38.51	18.78	64.42	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	7492.80	48.39	74.00	-25.61	62.59	35.80	15.34	65.34	0.00	--	--	PEAK																																																																													
2	11710.00	46.93	74.00	-27.07	54.06	38.51	18.78	64.42	0.00	--	--	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	11710.20	48.29	74.00	-25.71	55.42	38.51	18.78	64.42	0.00	--	--	PEAK																																																																													



Mode	33																																																																																												
	Harmonic																																																																																												
	U-NII-4_5.85-5.895_802.11be EHT160_CH163_Puncturing 20M_5815MHz																																																																																												
ANT	CDD																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7475.93</td> <td>49.28</td> <td>74.00</td> <td>-24.72</td> <td>63.44</td> <td>35.80</td> <td>15.33</td> <td>65.29</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11630.00</td> <td>47.41</td> <td>74.00</td> <td>-26.59</td> <td>54.50</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7475.93	49.28	74.00	-24.72	63.44	35.80	15.33	65.29	0.00	--	--	PEAK	2	11630.00	47.41	74.00	-26.59	54.50	38.50	18.63	64.22	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11630.27</td> <td>46.65</td> <td>74.00</td> <td>-27.35</td> <td>53.74</td> <td>38.50</td> <td>18.63</td> <td>64.22</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11630.27	46.65	74.00	-27.35	53.74	38.50	18.63	64.22	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7475.93	49.28	74.00	-24.72	63.44	35.80	15.33	65.29	0.00	--	--	PEAK																																																																																	
2	11630.00	47.41	74.00	-26.59	54.50	38.50	18.63	64.22	0.00	--	--	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	11630.27	46.65	74.00	-27.35	53.74	38.50	18.63	64.22	0.00	--	--	PEAK																																																																																	