



# RF Test Report

**Applicant:** Quectel Wireless Solutions Co., Ltd.  
**Address:** Building 5, Shanghai Business Park Phase III (Area B), No.1016  
Tianlin Road, Minhang District, Shanghai, 200233 China  
**Product:** Wi-Fi & Bluetooth Module  
**Model No.:** FC906A  
**Brand Name:** QUECTEL  
**FCC ID:** XMR202403FC906A  
**Standards:** FCC CFR47 Part 15C  
**Report No.:** PD20240030RF10  
**Issue Date:** 2024/05/14  
**Test Result:** PASS \*

\* The above equipment has been tested and compliance with the requirement of the relative standards by Hefei Panwin Technology Co., Ltd.

*Charlie Wang*

*Alec Yang*

**Reviewed By:** Charlie Wang

**Approved By:** Alec Yang

## Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin  
Avenue, High-tech Zone, Hefei City, Anhui Province, China  
TEL: +86-0551-63811775

## Revision History

| Report No.     | Version | Description    | Issue Date | Note  |
|----------------|---------|----------------|------------|-------|
| PD20240030RF10 | 1       | Initial Report | 2024/05/14 | Valid |

## CONTENTS

|  |           |
|--|-----------|
| <b>1 General Information</b> .....                               | <b>5</b>  |
| 1.1 Notes of the Test Report .....                               | 5         |
| 1.2 Test Facility .....  | 5         |
| 1.3 Testing Laboratory .....                                     | 5         |
| <b>2 General Description of Equipment under Test</b> .....       | <b>6</b>  |
| 2.1 Details of Application .....                                 | 6         |
| 2.2 General Information .....                                    | 6         |
| 2.3 Applicable Standard(s) .....                                 | 7         |
| <b>3 Test Condition</b> .....                                    | <b>8</b>  |
| 3.1 Test Configuration .....                                     | 8         |
| 3.2 Carrier Frequency and Channel .....                          | 9         |
| 3.3 Equipment List .....   | 9         |
| 3.4 Support Equipment List .....                                 | 10        |
| 3.5 Test Uncertainty .....                                       | 10        |
| <b>4 Test Items Description</b> .....                            | <b>10</b> |
| 4.1 Output Power Measurement .....                               | 11        |
| 4.2 6dB and 99% Bandwidth Measurement .....                      | 13        |
| 4.3 Power Spectral Density Measurement .....                     | 14        |
| 4.4 Conducted Band Edges and Spurious Emission Measurement ..... | 15        |
| 4.5 Radiated Band Edges and Spurious Emission Measurement .....  | 16        |
| 4.6 AC Conducted Emission Measurement .....                      | 20        |
| 4.7 Antenna Requirements .....                                   | 22        |
| <b>Appendix A – Test Results of Conducted Test</b> .....         | <b>23</b> |
| <b>Appendix B – Test Results of Radiated Test</b> .....          | <b>38</b> |
| <b>Appendix C – The EUT Appearance</b> .....                     | <b>45</b> |
| <b>Appendix D – Test Setup Photograph</b> .....                  | <b>45</b> |

## Test Summary

| No. | Test Case  | FCC Rules          | Verdict |
|-----|--|--------------------|---------|
| 1   | Output Power Measurement                               | 15.247(b)          | PASS    |
| 2   | 6dB and 99% Bandwidth Measurement                      | 15.247(a)(2)       | PASS    |
| 3   | Power Spectral Density Measurement                     | 15.247(e)          | PASS    |
| 4   | Conducted Band Edges and Spurious Emission Measurement | 15.247(d)          | PASS    |
| 5   | Radiated Band Edges and Spurious Emission Measurement  | 15.247(d)          | PASS    |
| 6   | AC Conducted Emission Measurement                      | 15.207             | NA      |
| 7   | Antenna Requirements                                   | 15.203 & 15.247(b) | PASS    |

Date of Testing: 2024/04/02 to 2024/05/13

Date of Sample Received: 2024/04/02

- We, Hefei Panwin Technology Co., Ltd., would like to declare that the tested sample has been evaluated in accordance with the procedures given in applied standard(s) in **Section 2.3** of this report and shown compliance with the applicable technical standards.

- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results.

Measurement Uncertainties were not taken into account and are published for informational purposes only.

## 1 General Information

### 1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

### 1.2 Test Facility

#### **FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)**

Hefei Panwin Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 6849.01)**

Hefei Panwin Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3 Testing Laboratory

|                     |  |
|---------------------|--|
| <b>Company Name</b> | Hefei Panwin Technology Co., Ltd.  |
| <b>Address</b>      | Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China |
| <b>Telephone</b>    | +86-0551-63811775  |
| <b>Post Code</b>    | 230031   |

## 2 General Description of Equipment under Test

### 2.1 Details of Application

|                             |   |
|-----------------------------|---|
| <b>Applicant</b>            | Quectel Wireless Solutions Co., Ltd.  |
| <b>Applicant Address</b>    | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China |
| <b>Manufacturer</b>         | Quectel Wireless Solutions Co., Ltd.  |
| <b>Manufacturer Address</b> | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China |

### 2.2 General Information

|                                      |   |
|--------------------------------------|---|
| <b>Product</b>                       | Wi-Fi & Bluetooth Module  |
| <b>Model</b>                         | FC906A  |
| <b>SN</b>                            | 1. E1N24AH09000079<br>2. E1N24AH09000044  |
| <b>Hardware Version</b>              | R1.0  |
| <b>Software Version</b>              | /   |
| <b>Directional Gain</b>              | NA  |
| <b>Antenna Type</b>                  | External Antenna  |
| <b>Antenna Gain</b>                  | 0.20dBi   |
| <b>Additional Beamforming Gain</b>   | NA  |
| <b>Max. Conducted Power</b>          | Wi-Fi 2.4G: 18.64dBm  |
| <b>Operating voltage</b>             | Typical 3.6Vdc  |
| <b>Type of Modulation</b>            | WLAN 802.11b/g/n HT20/n HT40: DSSS, CCK, BPSK, QPSK, DBPSK, DQPSK, 16QAM, 64QAM, 256QAM |
| <b>Operating Frequency Range(s)</b>  | 802.11b/g/n HT20: 2412 to 2462MHz<br>802.11n HT40: 2422 to 2452MHz                      |
| <b>Fixed frequency software name</b> | ADB Command   |

**Note:** The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 2.3 Applicable Standard(s)

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 3 Test Condition

### 3.1 Test Configuration

#### Test mode

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in Z position and the worst case was recorded. This report presents the data for the worst polarity.

| Test Mode         | Data Rate(Mbps) | Power Setting |
|-------------------|-----------------|---------------|
| 802.11b_SISO      | 1               | 20            |
| 802.11g_SISO      | 6               | 15            |
| 802.11n HT20_SISO | MCS0            | 14            |
| 802.11n HT40_SISO | MCS0            | 15            |



## 3.2 Carrier Frequency and Channel

| Frequency Band  | Channel | Freq.(MHz) | Channel | Freq.(MHz) |
|-----------------|---------|------------|---------|------------|
| 2400-2483.5 MHz | 1       | 2412       | 7       | 2442       |
|                 | 2       | 2417       | 8       | 2447       |
|                 | 3       | 2422       | 9       | 2452       |
|                 | 4       | 2427       | 10      | 2457       |
|                 | 5       | 2432       | 11      | 2462       |
|                 | 6       | 2437       | /       | /          |

## 3.3 Equipment List

### Conducted

| Instrument        | Manufacturer | Model               | Asset No. | Cal. Interval | Cal. Due Date |
|-------------------|--------------|---------------------|-----------|---------------|---------------|
| Spectrum Analyzer | KEYSIGHT     | N9020B              | PWC0048   | 1 Year        | 2024/10/10    |
| RF Control Unit   | Tonsecod     | JS0806-2            | PWC0055   | /             | /             |
| Shielded Chamber  | Maorui       | MR543               | PWC0041   | 3 Years       | 2026/08/26    |
| Test Software     | Tonsecod     | JS1120-3<br>V3.2.22 | /         | /             | /             |

### Radiated

| Instrument                  | Manufacturer      | Model     | Asset No. | Cal. Interval | Cal. Due Date |
|-----------------------------|-------------------|-----------|-----------|---------------|---------------|
| EMI Test Receiver           | R&S               | ESR7      | PWB0023   | 1 Year        | 2024/10/11    |
| Spectrum Analyzer           | R&S               | FSV3044   | PWB0024   | 1 Year        | 2024/10/11    |
| Loop Antenna                | R&S               | HFH2-Z2E  | PWB0026   | 1 Year        | 2024/10/21    |
| TRILOG Broadband Antenna    | Schwarzbeck       | VULB9162  | PWB0029   | 1 Year        | 2024/10/14    |
| Double-Ridged Guide Antenna | ETS-Lindgren      | 3117      | PWB0031   | 1 Year        | 2024/10/12    |
| k Type Horn Antenna         | Steatite Antennas | QMS-00880 | PWB0035   | 1 Year        | 2024/10/17    |
| Anechoic Chamber            | ETS.LINDGREN      | Fact 3-2m | PWB0003   | 3 Years       | 2026/06/05    |
| Pre-Amplifier               | R&S               | SCU18F    | PWB0034   | 1 Year        | 2024/10/11    |
| Pre-Amplifier               | R&S               | SCU40F1   | PWB0036   | 1 Year        | 2024/10/11    |
| Pre-Amplifier               | COM-MW            | DLNA8     | PWB0094   | 1 Year        | 2024/11/08    |

|               |     |                |   |   |   |
|---------------|-----|----------------|---|---|---|
| Test Software | R&S | ELEKTRA 4.20.2 | / | / | / |
|---------------|-----|----------------|---|---|---|

### 3.4 Support Equipment List

| Equipment        | Manufacturer                          | Description    | Model       | Serial Number |
|------------------|---------------------------------------|----------------|-------------|---------------|
| External Antenna | QUECTEL                               | Wi-Fi Antenna  | YEBT038WFA  | /             |
| EVB              | QUECTEL                               | /              | /           | /             |
| USB Cable        | /                                     | 1m             | /           | /             |
| Adapter          | Xiamen Xinsenhai Electronics Co., Ltd | Output:12V 60W | P60EB120500 | /             |

### 3.5 Test Uncertainty

| No. | Parameter  | Uncertainty                                |
|-----|--|--|
| 1   | DTS Bandwidth  | 1.9 %                                      |
| 2   | Occupied channel bandwidth                           | 1.9 %                                      |
| 3   | Duty Cycle   | 0.11 %                                     |
| 4   | Maximum Conducted Output Power                       | 1.18 dB                                    |
| 5   | Maximum Power Spectral Density Level                 | 0.98 dB                                    |
| 6   | Band-edge Compliance                                 | 1.21dB                                     |
| 7   | Unwanted Emissions In Non-restricted Frequency Bands | 9kHz-7GHz: 1.21 dB<br>7GHz-40GHz: 3.31 dB  |
| 8   | Radiated Band Edges and Spurious Emission            | Below 1GHz: 4.88 dB<br>Above 1GHz: 5.06 dB |
| 9   | Temperature  | 3 °C                                       |
| 10  | Humidity   | 1.3 %                                      |
| 11  | Supply Voltages                                      | 0.006 V                                    |

## 4 Test Items Description

### Ambient condition

Shielded Chamber

|                  |                |
|------------------|----------------|
| Temperature [°C] | 21.4 to 23.2   |
| Humidity [%RH]   | 33 to 51       |
| Pressure [kPa]   | 100.3 to 102.4 |

Anechoic Chamber

|                  |                |
|------------------|----------------|
| Temperature [°C] | 20.6 to 22.9   |
| Humidity [%RH]   | 45 to 59       |
| Pressure [kPa]   | 100.9 to 101.8 |

## 4.1 Output Power Measurement

### 4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.1.2 Measuring Instruments

The section 2.3 of List of Measuring Equipment of this test report is used for test.

### 4.1.3 Test Procedures

The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.2.2.4 Method AVGSA-2. Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:


1. Measure the duty cycle D of the transmitter output signal as described in 11.6.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
4. Set VBW  $\geq [3 \times \text{RBW}]$ .
5. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
8. Do not use sweep triggering. Allow the sweep to “free run.”
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces

to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.

10. Compute power by integrating the spectrum across the OBW of the signal using the Instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

11. Add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is 25%.

**4.1.4 Test Setup**

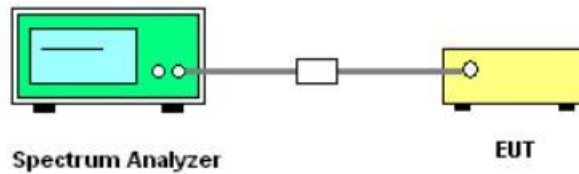

**4.1.5 Test Results**

See Appendix A.1.

## 4.2 6dB and 99% Bandwidth Measurement

### 4.2.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz


### 4.2.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

### 4.2.4 Test Setup

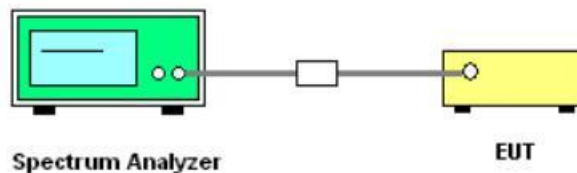

### 4.2.5 Test Results

See Appendix A.2.

## 4.3 Power Spectral Density Measurement

### 4.3.1 Limit of Power Spectral Density

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.3.2 Measuring Instruments


The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.3.3 Test Procedures

#### 4.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz  
Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

### 4.3.4 Test Setup

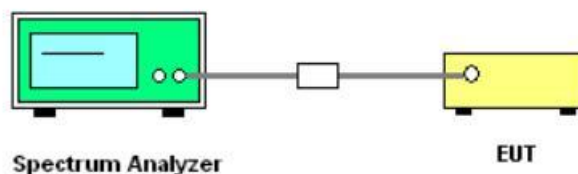

### 4.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.3.

## 4.4 Conducted Band Edges and Spurious Emission Measurement

### 4.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band. In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 4.4.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test

### 4.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 4.4.4 Test Setup

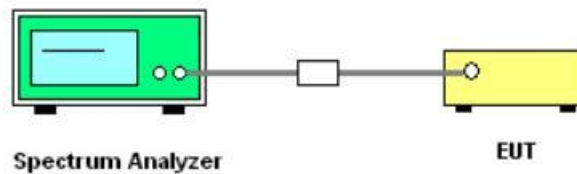

### 4.4.5 Test Result

Please refer to Appendix A.4.

## 4.5 Radiated Band Edges and Spurious Emission Measurement

### 4.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 - 30.0    | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88 -216         | 150                               | 3                             |
| 216 - 960       | 200                               | 8                             |
| Above 960       | 500                               | 3                             |

### 4.5.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.




#### 4.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level -Pre-amp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured.
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $\geq 1$  GHz for peak measurement  
For average measurement:  
VBW= 10 Hz, when duty cycle is no less than 98 percent.  
 $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.5.4 Test Setup


For radiated emissions below 30MHz

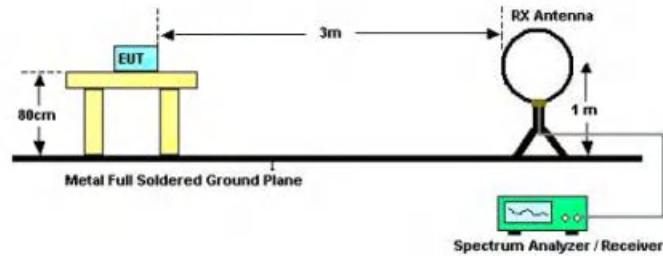

For radiated emissions from 30MHz to 1GHz

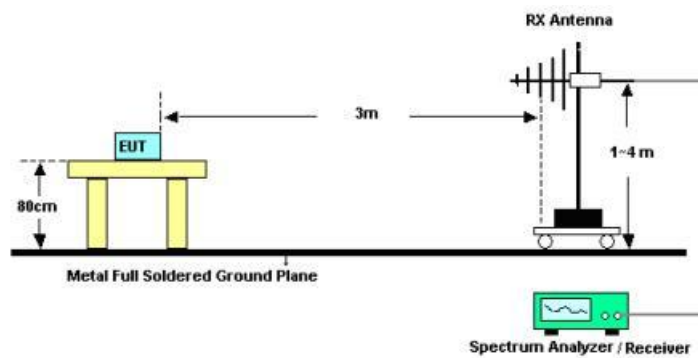

For radiated emissions above 1GHz

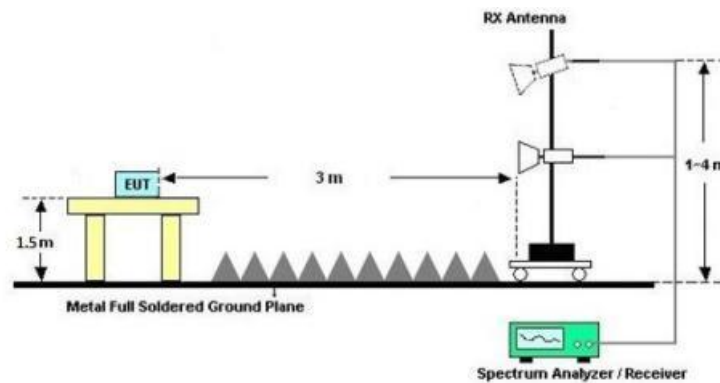

4.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

#### **4.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B.1.

#### **4.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHzwhichever is lower)**

Please refer to Appendix B.1.

#### **4.5.8 Duty Cycle**

Please refer to Appendix A.5.

## 4.6 AC Conducted Emission Measurement

### 4.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

Decreases with the logarithm of the frequency.


### 4.6.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth =9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.4 Test Setup

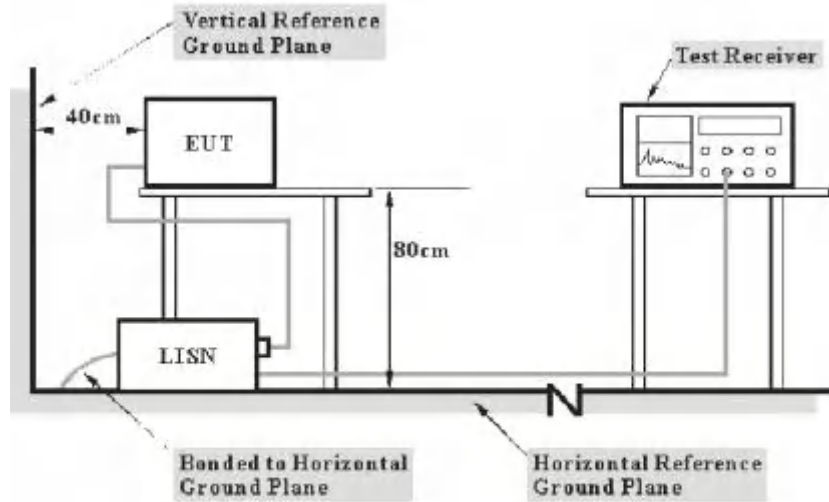

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

4.6.5 Uncertainty Measurement

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT. The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| CASE                          | Uncertainty |
|-------------------------------|-------------|
| Continuous Emission (AC port) | 2.92 dB     |

4.6.6 Test Result

Remark: The product is DC powered, this test item is not applicable.

## 4.7 Antenna Requirements

### 4.7.1 Standard Applicable

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.7.2 Antenna Anti-Replacement Construction

The antenna is External on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.20dBi.


## Appendix A – Test Results of Conducted Test

### A.1 Conducted Output Power

#### Test Result

| Test Mode | Antenna | Frequency [MHz] | Average power [dBm] | Duty Cycle [%] | DC Factor [dBm] | Result [dBm] | Limit [dBm] | Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Verdict |
|-----------|---------|-----------------|---------------------|----------------|-----------------|--------------|-------------|------------|------------|------------------|---------|
| 11B       | Ant1    | 2412            | 17.79               | 93.63          | 0.29            | 18.08        | ≤30.00      | 0.20       | 18.28      | ≤36.00           | PASS    |
| 11B       | Ant1    | 2437            | 18.06               | 93.84          | 0.28            | 18.34        | ≤30.00      | 0.20       | 18.54      | ≤36.00           | PASS    |
| 11B       | Ant1    | 2462            | 18.36               | 93.84          | 0.28            | 18.64        | ≤30.00      | 0.20       | 18.84      | ≤36.00           | PASS    |
| 11G       | Ant1    | 2412            | 16.25               | 95.39          | 0.20            | 16.45        | ≤30.00      | 0.20       | 16.65      | ≤36.00           | PASS    |
| 11G       | Ant1    | 2437            | 16.30               | 95.37          | 0.21            | 16.51        | ≤30.00      | 0.20       | 16.71      | ≤36.00           | PASS    |
| 11G       | Ant1    | 2462            | 16.37               | 95.37          | 0.21            | 16.58        | ≤30.00      | 0.20       | 16.78      | ≤36.00           | PASS    |
| 11N20SISO | Ant1    | 2412            | 15.35               | 95.07          | 0.22            | 15.57        | ≤30.00      | 0.20       | 15.77      | ≤36.00           | PASS    |
| 11N20SISO | Ant1    | 2437            | 15.26               | 79.42          | 1.00            | 16.26        | ≤30.00      | 0.20       | 16.46      | ≤36.00           | PASS    |
| 11N20SISO | Ant1    | 2462            | 15.25               | 79.42          | 1.00            | 16.25        | ≤30.00      | 0.20       | 16.45      | ≤36.00           | PASS    |
| 11N40SISO | Ant1    | 2422            | 14.17               | 88.57          | 0.53            | 14.70        | ≤30.00      | 0.20       | 14.90      | ≤36.00           | PASS    |
| 11N40SISO | Ant1    | 2437            | 14.27               | 90.48          | 0.43            | 14.70        | ≤30.00      | 0.20       | 14.90      | ≤36.00           | PASS    |
| 11N40SISO | Ant1    | 2452            | 14.10               | 86.24          | 0.64            | 14.74        | ≤30.00      | 0.20       | 14.94      | ≤36.00           | PASS    |

#### Test Graphs

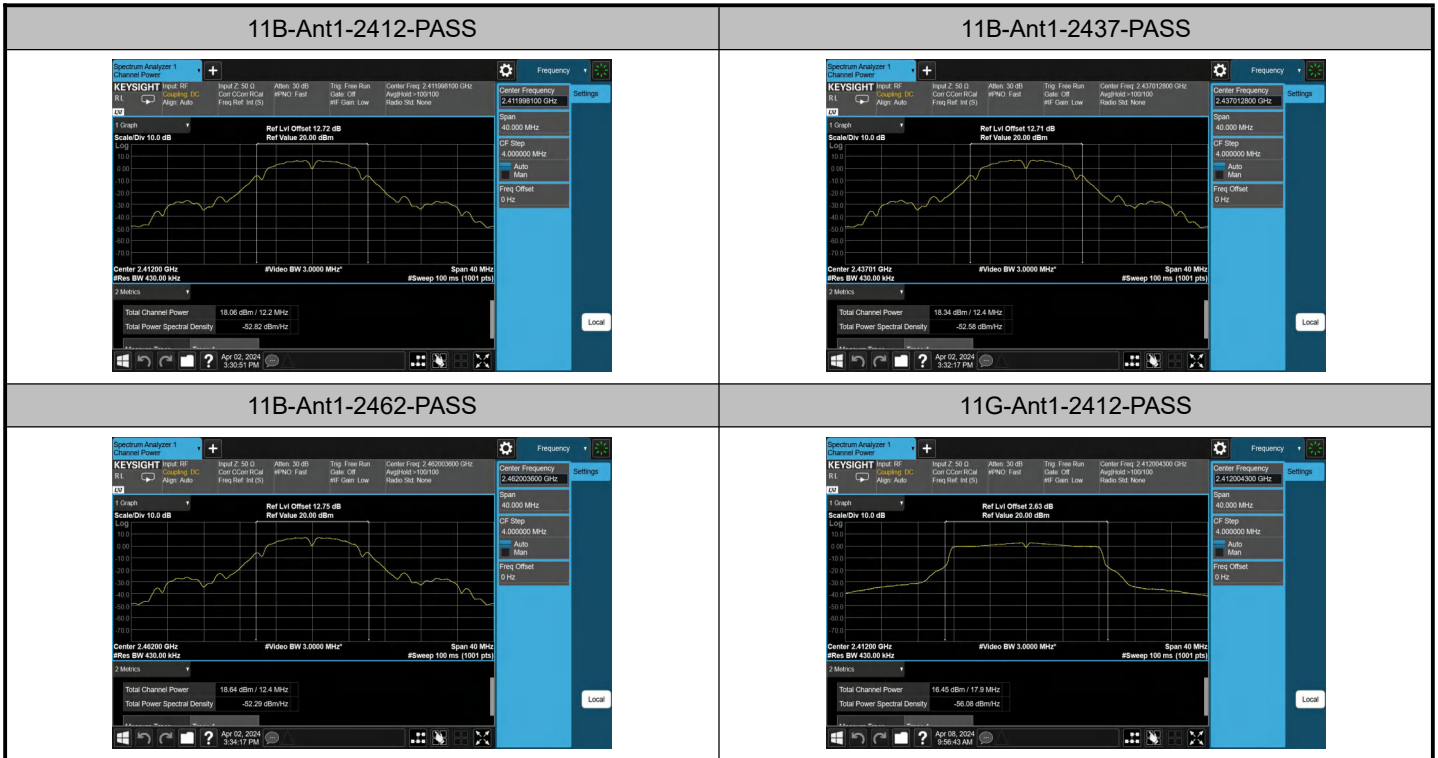

|  |  |
|--|--|
| <p style="text-align: center;"><b>11G-Ant1-2437-PASS</b></p>       | <p style="text-align: center;"><b>11G-Ant1-2462-PASS</b></p>       |
| <p style="text-align: center;"><b>11N20SISO-Ant1-2412-PASS</b></p> | <p style="text-align: center;"><b>11N20SISO-Ant1-2437-PASS</b></p> |
| <p style="text-align: center;"><b>11N20SISO-Ant1-2462-PASS</b></p> | <p style="text-align: center;"><b>11N40SISO-Ant1-2422-PASS</b></p> |
| <p style="text-align: center;"><b>11N40SISO-Ant1-2437-PASS</b></p> | <p style="text-align: center;"><b>11N40SISO-Ant1-2452-PASS</b></p> |



## A.2 6dB and 99% Bandwidth


### Test Result 6dB Bandwidth

| Test Mode | Antenna | Frequency[MHz] | DTS BW[MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|-----------|---------|----------------|-------------|----------|----------|------------|---------|
| 11B       | Ant1    | 2412           | 9.040       | 2407.440 | 2416.480 | 0.5        | PASS    |
| 11B       | Ant1    | 2437           | 9.040       | 2432.440 | 2441.480 | 0.5        | PASS    |
| 11B       | Ant1    | 2462           | 9.040       | 2457.440 | 2466.480 | 0.5        | PASS    |
| 11G       | Ant1    | 2412           | 16.040      | 2403.840 | 2419.880 | 0.5        | PASS    |
| 11G       | Ant1    | 2437           | 16.040      | 2428.840 | 2444.880 | 0.5        | PASS    |
| 11G       | Ant1    | 2462           | 16.320      | 2453.800 | 2470.120 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2412           | 17.520      | 2403.200 | 2420.720 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2437           | 17.280      | 2428.240 | 2445.520 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2462           | 17.320      | 2453.200 | 2470.520 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2422           | 36.320      | 2403.840 | 2440.160 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2437           | 36.320      | 2418.840 | 2455.160 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2452           | 36.320      | 2433.840 | 2470.160 | 0.5        | PASS    |

### Test Result 99% Bandwidth

| Test Mode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|-----------|-----------|------------|---------|
| 11B       | Ant1    | 2412           | 12.235    | 2405.8806 | 2418.1156 | ---        | ---     |
| 11B       | Ant1    | 2437           | 12.368    | 2430.8288 | 2443.1968 | ---        | ---     |
| 11B       | Ant1    | 2462           | 12.380    | 2455.8136 | 2468.1936 | ---        | ---     |
| 11G       | Ant1    | 2412           | 17.935    | 2403.0368 | 2420.9718 | ---        | ---     |
| 11G       | Ant1    | 2437           | 18.119    | 2428.1221 | 2446.2411 | ---        | ---     |
| 11G       | Ant1    | 2462           | 18.149    | 2453.0127 | 2471.1617 | ---        | ---     |
| 11N20SISO | Ant1    | 2412           | 18.803    | 2402.6699 | 2421.4729 | ---        | ---     |
| 11N20SISO | Ant1    | 2437           | 18.551    | 2427.7313 | 2446.2823 | ---        | ---     |
| 11N20SISO | Ant1    | 2462           | 18.537    | 2452.7185 | 2471.2555 | ---        | ---     |
| 11N40SISO | Ant1    | 2422           | 36.935    | 2403.5830 | 2440.5180 | ---        | ---     |
| 11N40SISO | Ant1    | 2437           | 37.174    | 2418.4751 | 2455.6491 | ---        | ---     |
| 11N40SISO | Ant1    | 2452           | 37.126    | 2433.5144 | 2470.6404 | ---        | ---     |

## Test Graphs\_6dB Bandwidth

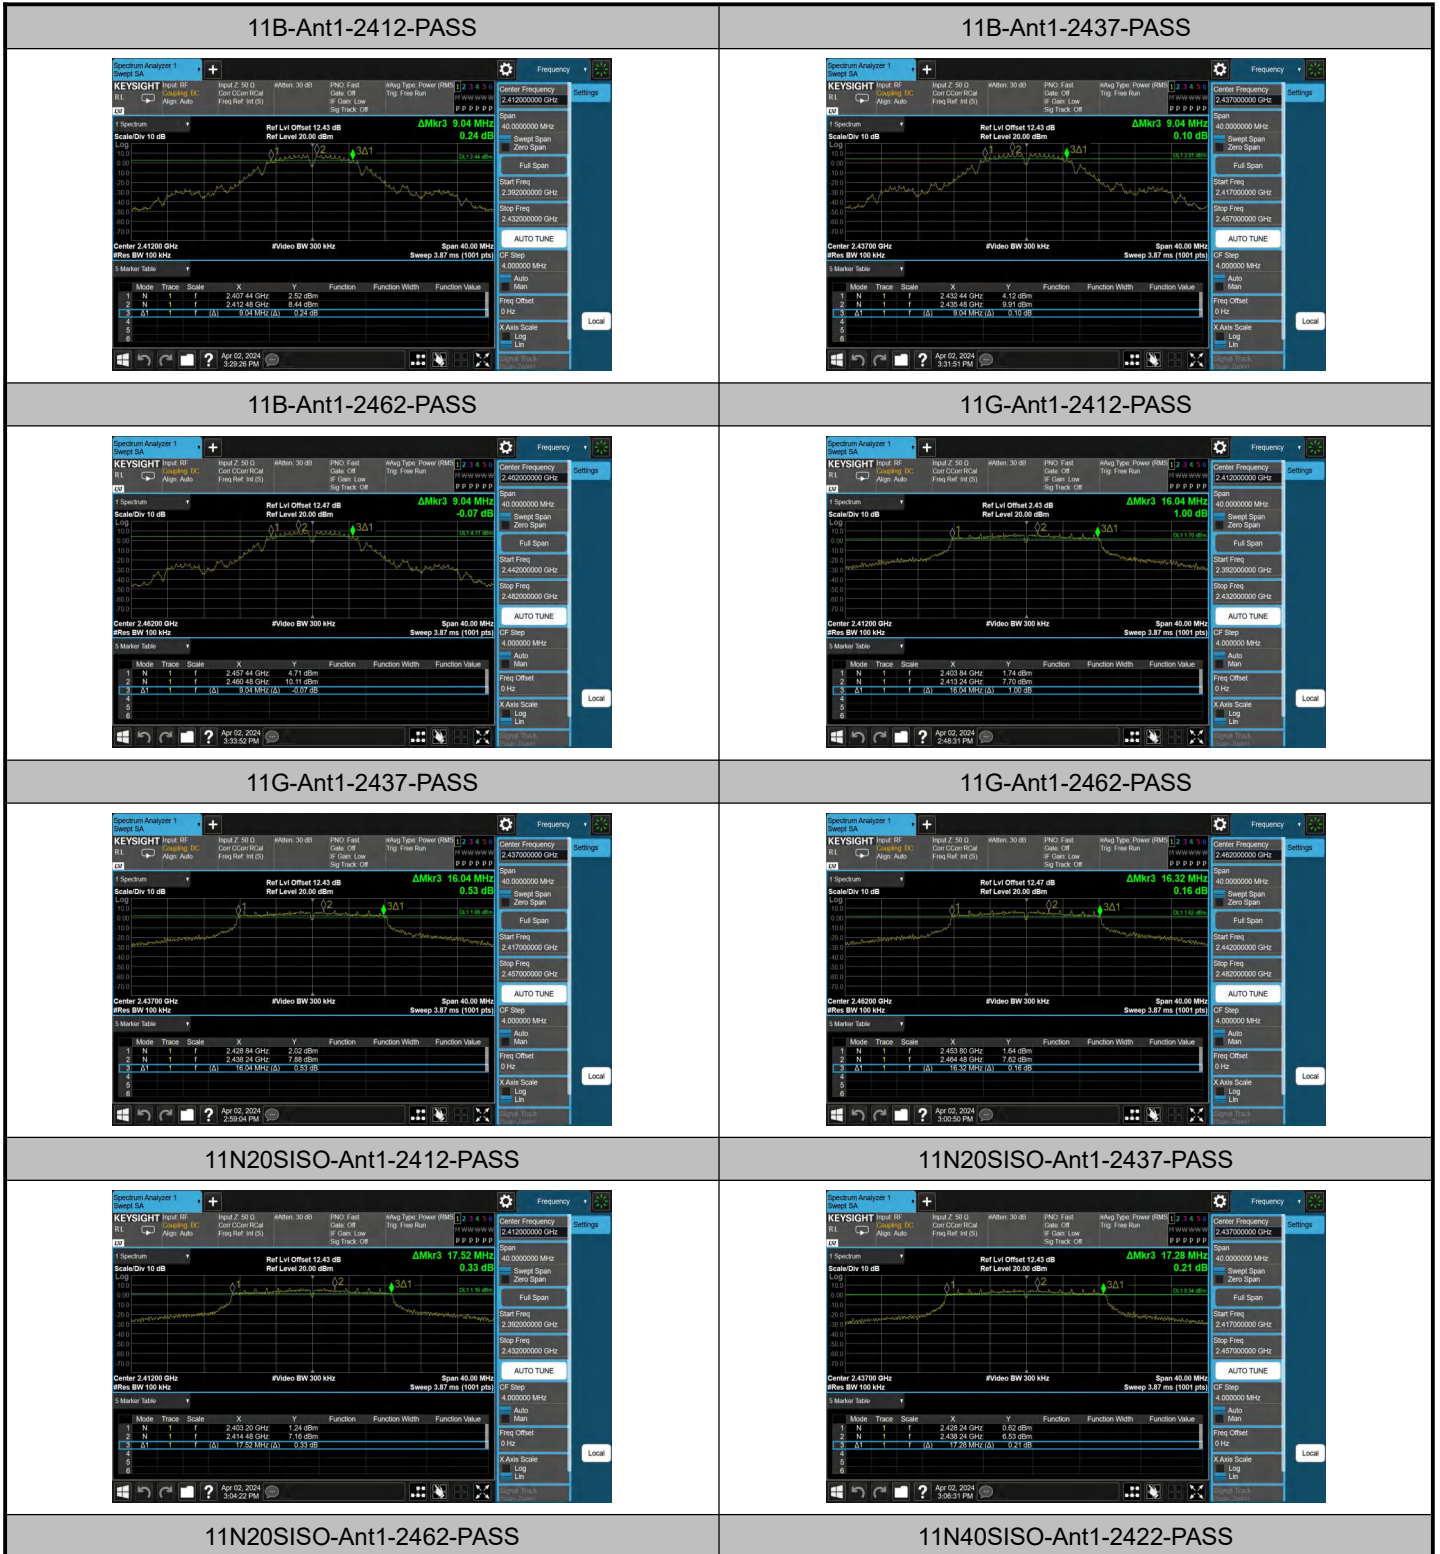



11N40SISO-Ant1-2437-PASS



11N40SISO-Ant1-2452-PASS



## Test Graphs\_99% Bandwidth

11B-Ant1-2412



11B-Ant1-2437



11B-Ant1-2462



11G-Ant1-2412



11G-Ant1-2437


11G-Ant1-2462




11N20SISO-Ant1-2412




11N20SISO-Ant1-2437

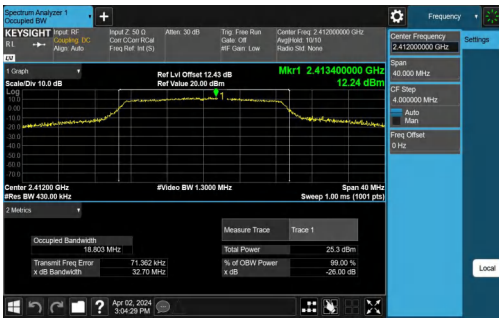


11N20SISO-Ant1-2462

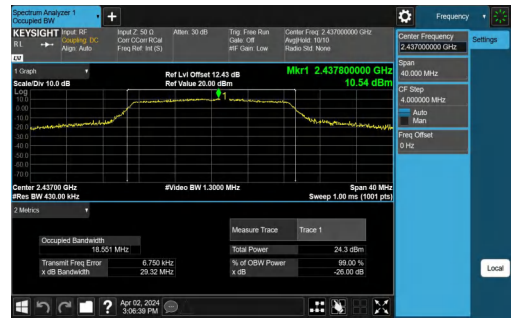


11N40SISO-Ant1-2422

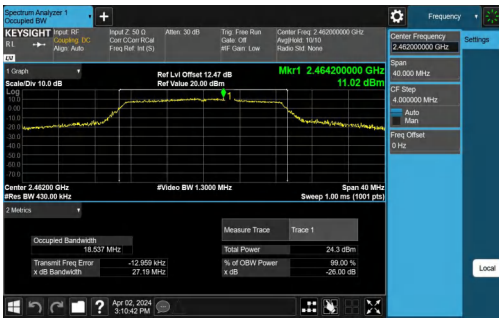


11N40SISO-Ant1-2437

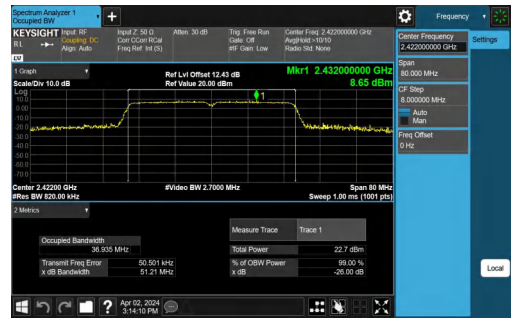

11N40SISO-Ant1-2452

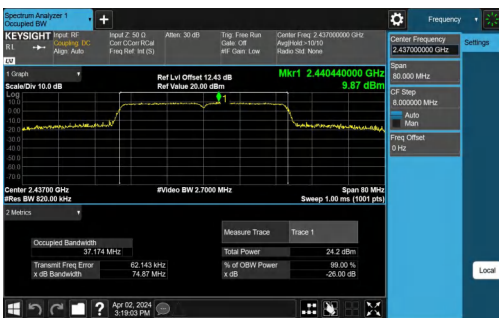

11N40SISO-Ant1-2437

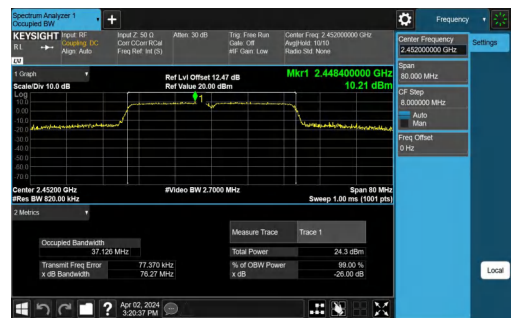


11N40SISO-Ant1-2452

## A.3 Power Spectral Density

### Test Result

| Test Mode | Antenna | Frequency[MHz] | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|----------------|----------------------|-----------------|---------|
| 11B       | Ant1    | 2412           | -13.27               | ≤8.00           | PASS    |
| 11B       | Ant1    | 2437           | -13.27               | ≤8.00           | PASS    |
| 11B       | Ant1    | 2462           | -13.11               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2412           | -16.09               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2437           | -16.18               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2462           | -16.75               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2412           | -17.86               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2437           | -17.30               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2462           | -17.18               | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2422           | -22.86               | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2437           | -22.24               | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2452           | -22.96               | ≤8.00           | PASS    |

### Test Graphs

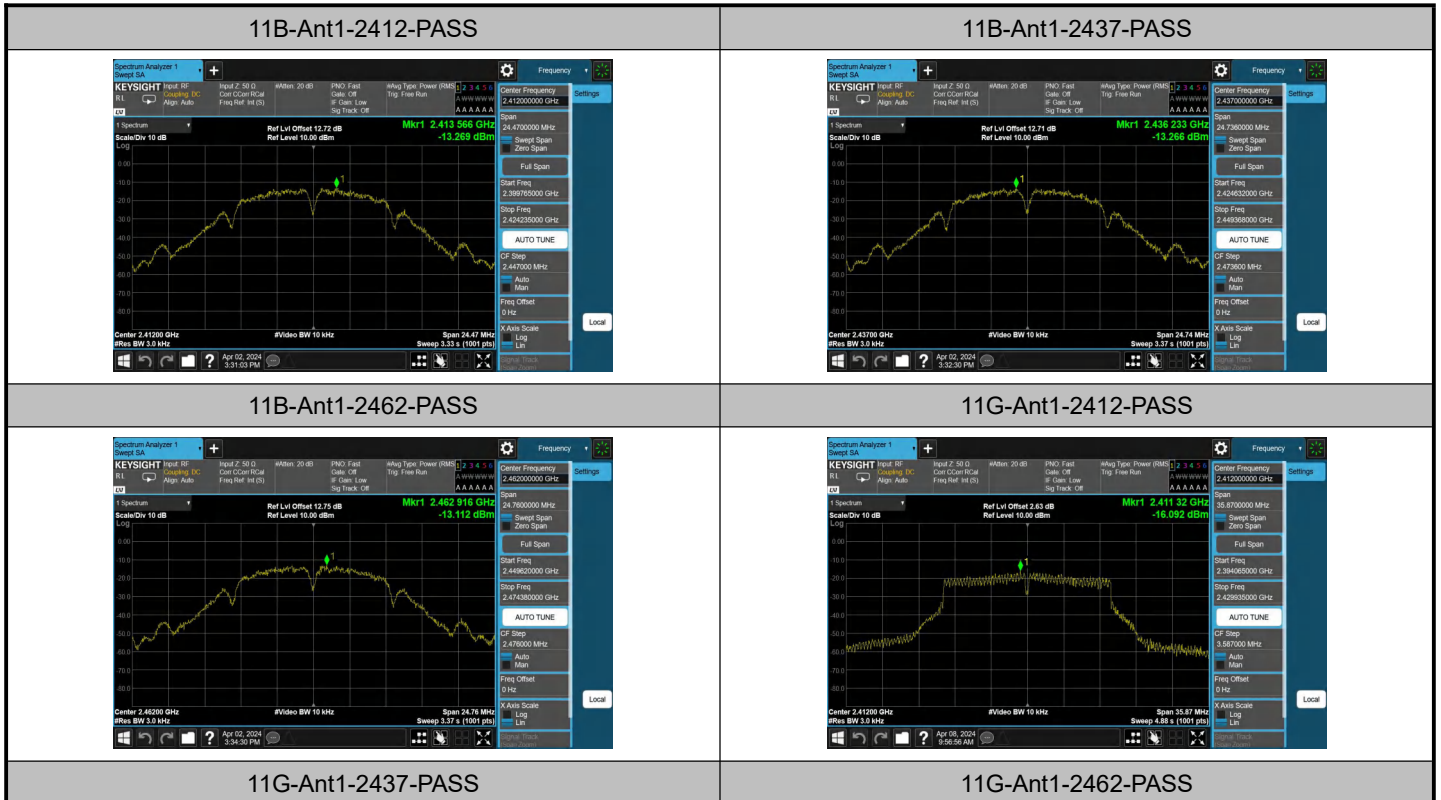





11N20SISO-Ant1-2412-PASS




11N20SISO-Ant1-2437-PASS

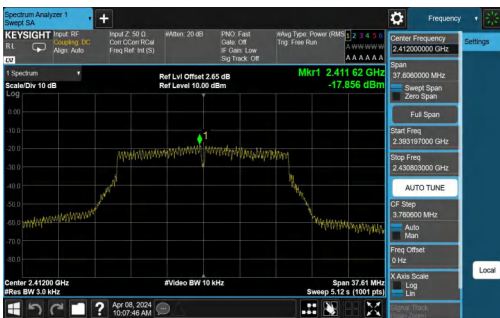


11N20SISO-Ant1-2462-PASS

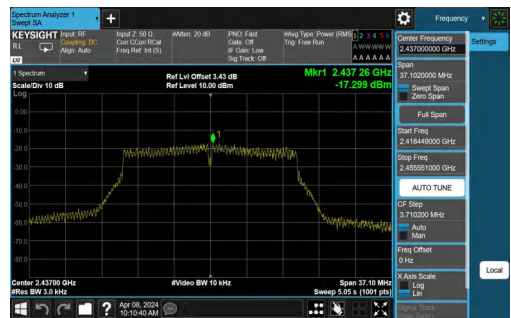


11N40SISO-Ant1-2422-PASS

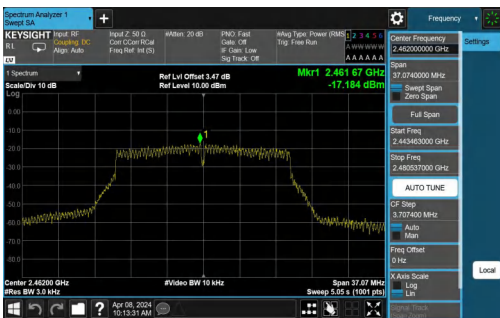


11N40SISO-Ant1-2437-PASS

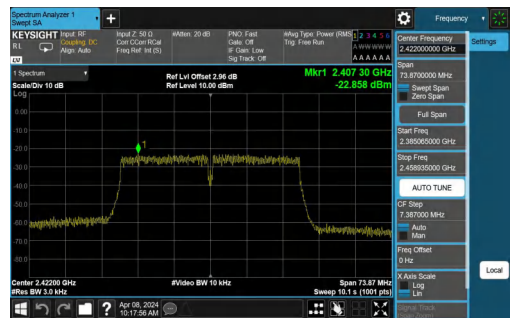

11N40SISO-Ant1-2452-PASS

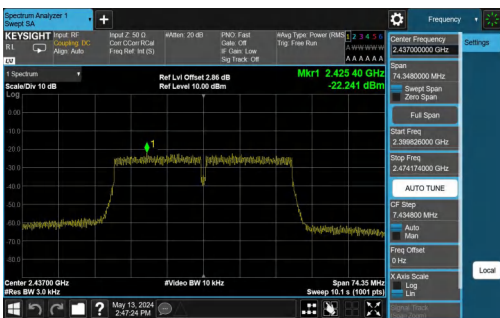

11N40SISO-Ant1-2437-PASS

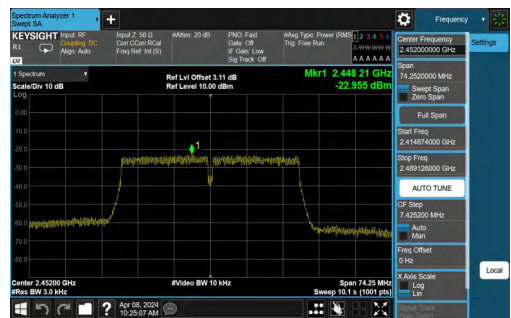

11N40SISO-Ant1-2452-PASS

## A.4 Conducted Band Edges and Spurious Emission

### Test Result

#### Band Edges

| Test Mode | Antenna | Ch Name | Frequency [MHz] | Ref Level[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-----------------|----------------|-------------|------------|---------|
| 11B       | Ant1    | Low     | 2412            | 10.19          | -23.27      | ≤-19.81    | PASS    |
| 11B       | Ant1    | High    | 2462            | 10.01          | -39.06      | ≤-19.99    | PASS    |
| 11G       | Ant1    | Low     | 2412            | 4.81           | -25.28      | ≤-25.19    | PASS    |
| 11G       | Ant1    | High    | 2462            | 5.13           | -36.45      | ≤-24.87    | PASS    |
| 11N20SISO | Ant1    | Low     | 2412            | 4.55           | -27.76      | ≤-25.45    | PASS    |
| 11N20SISO | Ant1    | High    | 2462            | 4.24           | -38.58      | ≤-25.76    | PASS    |
| 11N40SISO | Ant1    | Low     | 2422            | 0.42           | -30.46      | ≤-29.58    | PASS    |
| 11N40SISO | Ant1    | High    | 2452            | 0.38           | -35.85      | ≤-29.62    | PASS    |

#### Spurious Emission

| Test Mode | Antenna | Frequency[MHz] | Freq Range[MHz] | Ref Level[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|----------------|-----------------|----------------|-------------|------------|---------|
| 11B       | Ant1    | 2412           | 30~1000         | 10.19          | -56.98      | ≤-19.81    | PASS    |
| 11B       | Ant1    | 2412           | 1000~26500      | 10.19          | -45.72      | ≤-19.81    | PASS    |
| 11B       | Ant1    | 2437           | 30~1000         | 10.08          | -58.36      | ≤-19.92    | PASS    |
| 11B       | Ant1    | 2437           | 1000~26500      | 10.08          | -44.7       | ≤-19.92    | PASS    |
| 11B       | Ant1    | 2462           | 30~1000         | 10.01          | -68.32      | ≤-19.99    | PASS    |
| 11B       | Ant1    | 2462           | 1000~26500      | 10.01          | -44.89      | ≤-19.99    | PASS    |
| 11G       | Ant1    | 2412           | 30~1000         | 4.81           | -68.2       | ≤-25.19    | PASS    |
| 11G       | Ant1    | 2412           | 1000~26500      | 4.81           | -55.96      | ≤-25.19    | PASS    |
| 11G       | Ant1    | 2437           | 30~1000         | 5.03           | -67.64      | ≤-24.97    | PASS    |
| 11G       | Ant1    | 2437           | 1000~26500      | 5.03           | -55.43      | ≤-24.97    | PASS    |
| 11G       | Ant1    | 2462           | 30~1000         | 5.13           | -68.03      | ≤-24.87    | PASS    |
| 11G       | Ant1    | 2462           | 1000~26500      | 5.13           | -54.24      | ≤-24.87    | PASS    |
| 11N20SISO | Ant1    | 2412           | 30~1000         | 4.55           | -66.45      | ≤-25.45    | PASS    |
| 11N20SISO | Ant1    | 2412           | 1000~26500      | 4.55           | -54.76      | ≤-25.45    | PASS    |
| 11N20SISO | Ant1    | 2437           | 30~1000         | 4.27           | -67.26      | ≤-25.73    | PASS    |
| 11N20SISO | Ant1    | 2437           | 1000~26500      | 4.27           | -54.72      | ≤-25.73    | PASS    |
| 11N20SISO | Ant1    | 2462           | 30~1000         | 4.24           | -68.28      | ≤-25.76    | PASS    |
| 11N20SISO | Ant1    | 2462           | 1000~26500      | 4.24           | -55.07      | ≤-25.76    | PASS    |
| 11N40SISO | Ant1    | 2422           | 30~1000         | 0.42           | -67.84      | ≤-29.58    | PASS    |
| 11N40SISO | Ant1    | 2422           | 1000~26500      | 0.42           | -54.92      | ≤-29.58    | PASS    |
| 11N40SISO | Ant1    | 2437           | 30~1000         | 0.58           | -67.1       | ≤-29.42    | PASS    |
| 11N40SISO | Ant1    | 2437           | 1000~26500      | 0.58           | -55.43      | ≤-29.42    | PASS    |
| 11N40SISO | Ant1    | 2452           | 30~1000         | 0.38           | -67.9       | ≤-29.62    | PASS    |

|           |      |      |            |      |        |         |      |
|-----------|------|------|------------|------|--------|---------|------|
| 11N40SISO | Ant1 | 2452 | 1000~26500 | 0.38 | -55.33 | ≤-29.62 | PASS |
|-----------|------|------|------------|------|--------|---------|------|


## Test Graphs Band Edges





## Spurious Emission


|   |  |
|---|--|
| <p align="center"><b>11B-Ant1-2412-30~1000-PASS</b></p> | <p align="center"><b>11B-Ant1-2412-1000~26500-PASS</b></p> |
| <p align="center"><b>11B-Ant1-2437-30~1000-PASS</b></p> | <p align="center"><b>11B-Ant1-2437-1000~26500-PASS</b></p> |
| <p align="center"><b>11B-Ant1-2462-30~1000-PASS</b></p> | <p align="center"><b>11B-Ant1-2462-1000~26500-PASS</b></p> |
| <p align="center"><b>11G-Ant1-2412-30~1000-PASS</b></p> | <p align="center"><b>11G-Ant1-2412-1000~26500-PASS</b></p> |
| <p align="center"><b>11G-Ant1-2437-30~1000-PASS</b></p> | <p align="center"><b>11G-Ant1-2437-1000~26500-PASS</b></p> |

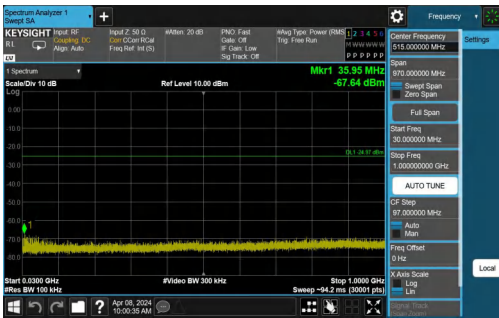

11G-Ant1-2462-30~1000-PASS




11G-Ant1-2462-1000~26500-PASS

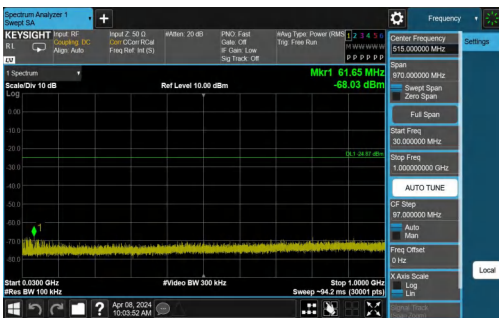

11N20SISO-Ant1-2412-30~1000-PASS




11N20SISO-Ant1-2412-1000~26500-PASS

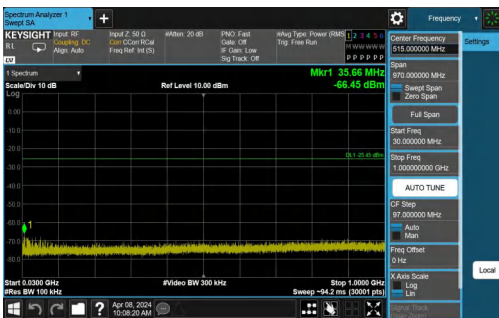

11N20SISO-Ant1-2437-30~1000-PASS




11N20SISO-Ant1-2437-1000~26500-PASS

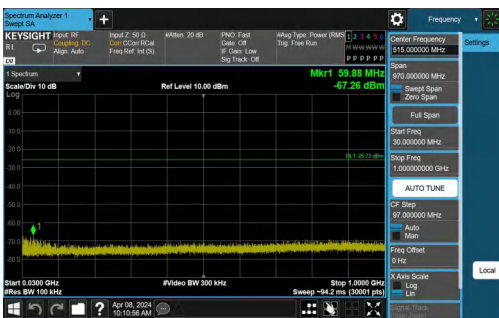

11N20SISO-Ant1-2462-30~1000-PASS




11N20SISO-Ant1-2462-1000~26500-PASS

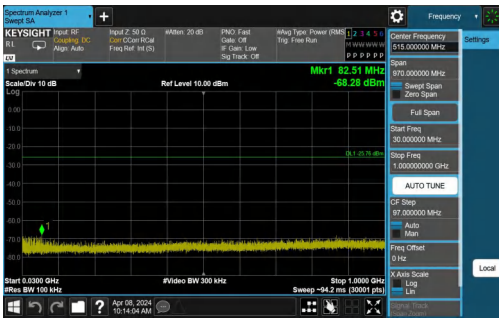

11N40SISO-Ant1-2422-30~1000-PASS




11N40SISO-Ant1-2422-1000~26500-PASS

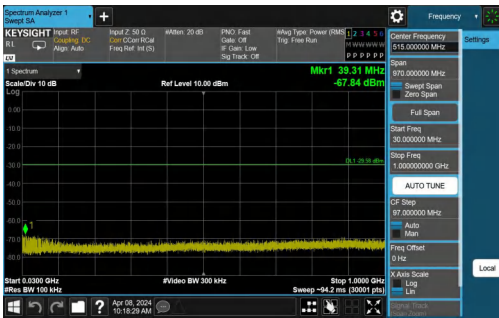

11N40SISO-Ant1-2437-30~1000-PASS




11N40SISO-Ant1-2437-1000~26500-PASS

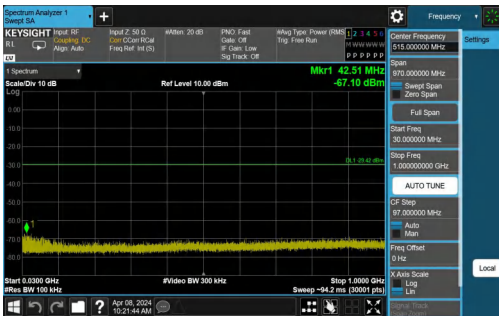

11N40SISO-Ant1-2452-30~1000-PASS



11N40SISO-Ant1-2452-1000~26500-PASS

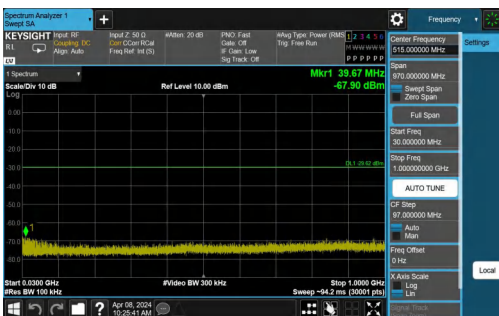

11N40SISO-Ant1-2452-30~1000-PASS



11N40SISO-Ant1-2452-1000~26500-PASS


## A.5 Duty Cycle

### Test Result


| Test Mode | Antenna | Frequency[MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | Factor |
|-----------|---------|----------------|----------------------------|--------------------------|----------------|--------|
| 11B       | Ant1    | 2412           | 4.41                       | 4.71                     | 93.63          | 0.29   |
| 11B       | Ant1    | 2437           | 4.42                       | 4.71                     | 93.84          | 0.28   |
| 11B       | Ant1    | 2462           | 4.42                       | 4.71                     | 93.84          | 0.28   |
| 11G       | Ant1    | 2412           | 2.07                       | 2.17                     | 95.39          | 0.20   |
| 11G       | Ant1    | 2437           | 2.06                       | 2.16                     | 95.37          | 0.21   |
| 11G       | Ant1    | 2462           | 2.06                       | 2.16                     | 95.37          | 0.21   |
| 11N20SISO | Ant1    | 2412           | 1.93                       | 2.03                     | 95.07          | 0.22   |
| 11N20SISO | Ant1    | 2437           | 1.93                       | 2.43                     | 79.42          | 1.00   |
| 11N20SISO | Ant1    | 2462           | 1.93                       | 2.43                     | 79.42          | 1.00   |
| 11N40SISO | Ant1    | 2422           | 0.93                       | 1.05                     | 88.57          | 0.53   |
| 11N40SISO | Ant1    | 2437           | 0.95                       | 1.05                     | 90.48          | 0.43   |
| 11N40SISO | Ant1    | 2452           | 0.94                       | 1.09                     | 86.24          | 0.64   |

### Test Graphs




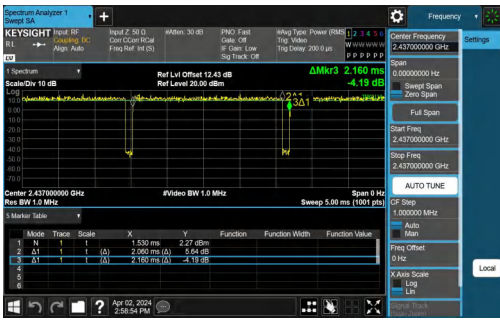

NTNV-11N20SISO-Ant1-2412

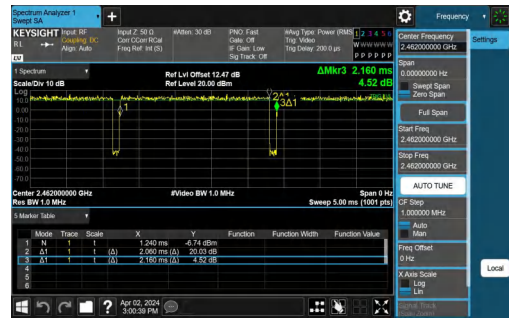


NTNV-11N20SISO-Ant1-2437

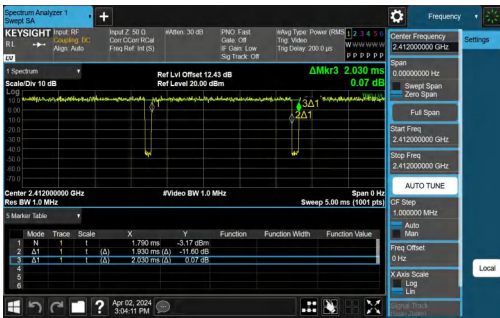


NTNV-11N20SISO-Ant1-2462




NTNV-11N40SISO-Ant1-2422

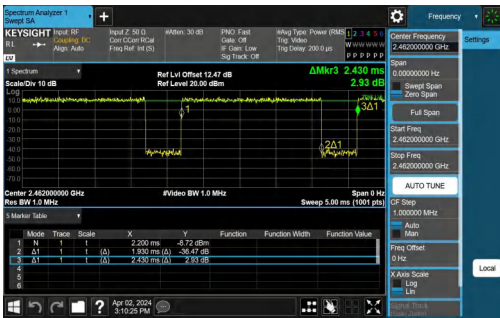


NTNV-11N40SISO-Ant1-2437

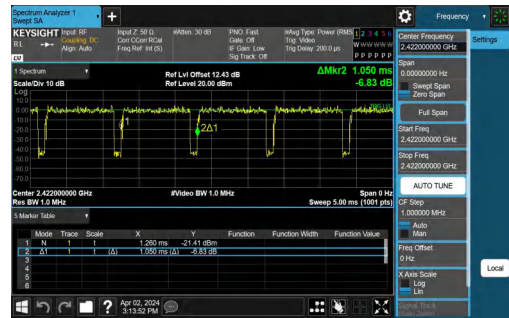

NTNV-11N40SISO-Ant1-2452

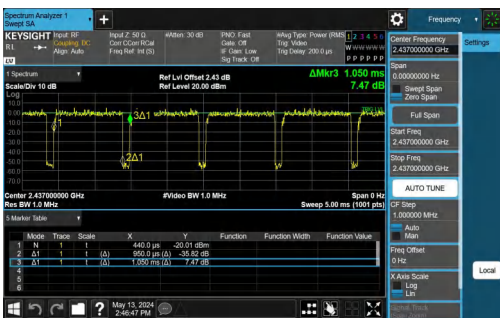

NTNV-11N40SISO-Ant1-2437

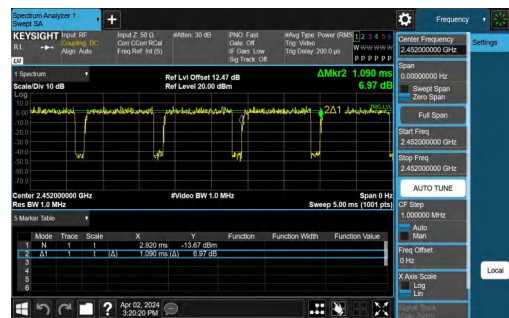

NTNV-11N40SISO-Ant1-2452


## Appendix B – Test Results of Radiated Test


### B.1 Radiated Band Edges and Spurious Emission

#### Test Result\_Band Edges

| Test Mode & Test Freq.[MHz] | Frequency [MHz] | PK+ Level [dBμV/m] | PK+ Limit [dBμV/m] | PK+ Margin [dB] | AVG Level [dBμV/m] | AVG Limit [dBμV/m] | AVG Margin [dB] | Polarization | Azimuth [deg] |
|-----------------------------|-----------------|--------------------|--------------------|-----------------|--------------------|--------------------|-----------------|--------------|---------------|
| Wi-Fi 2.4G_11B_2412         | 2,389.950       | 59.40              | 74.00              | 14.60           | 45.98              | 54.00              | 8.02            | H            | 27.1          |
| Wi-Fi 2.4G_11B_2462         | 2,483.000       | 59.31              | 74.00              | 14.69           | 46.25              | 54.00              | 7.75            | V            | 1             |
| Wi-Fi 2.4G_11G_2412         | 2,389.300       | 59.45              | 74.00              | 14.55           | 45.94              | 54.00              | 8.06            | V            | 231.4         |
| Wi-Fi 2.4G_11G_2462         | 2,483.000       | 60.32              | 74.00              | 13.68           | 46.15              | 54.00              | 7.85            | H            | 139.2         |
| Wi-Fi 2.4G_11N20_2412       | 2,390.275       | 59.53              | 74.00              | 14.47           | 45.93              | 54.00              | 8.07            | H            | 294.3         |
| Wi-Fi 2.4G_11N20_2462       | 2,483.000       | 59.70              | 74.00              | 14.30           | 46.16              | 54.00              | 7.84            | H            | 0.4           |
| Wi-Fi 2.4G_11N40_2422       | 2,390.275       | 59.70              | 74.00              | 14.30           | 45.97              | 54.00              | 8.03            | H            | 287.2         |
| Wi-Fi 2.4G_11N40_2452       | 2,483.000       | 60.57              | 74.00              | 13.43           | 46.17              | 54.00              | 7.83            | H            | 92.6          |

#### Test Graphs\_Band Edges

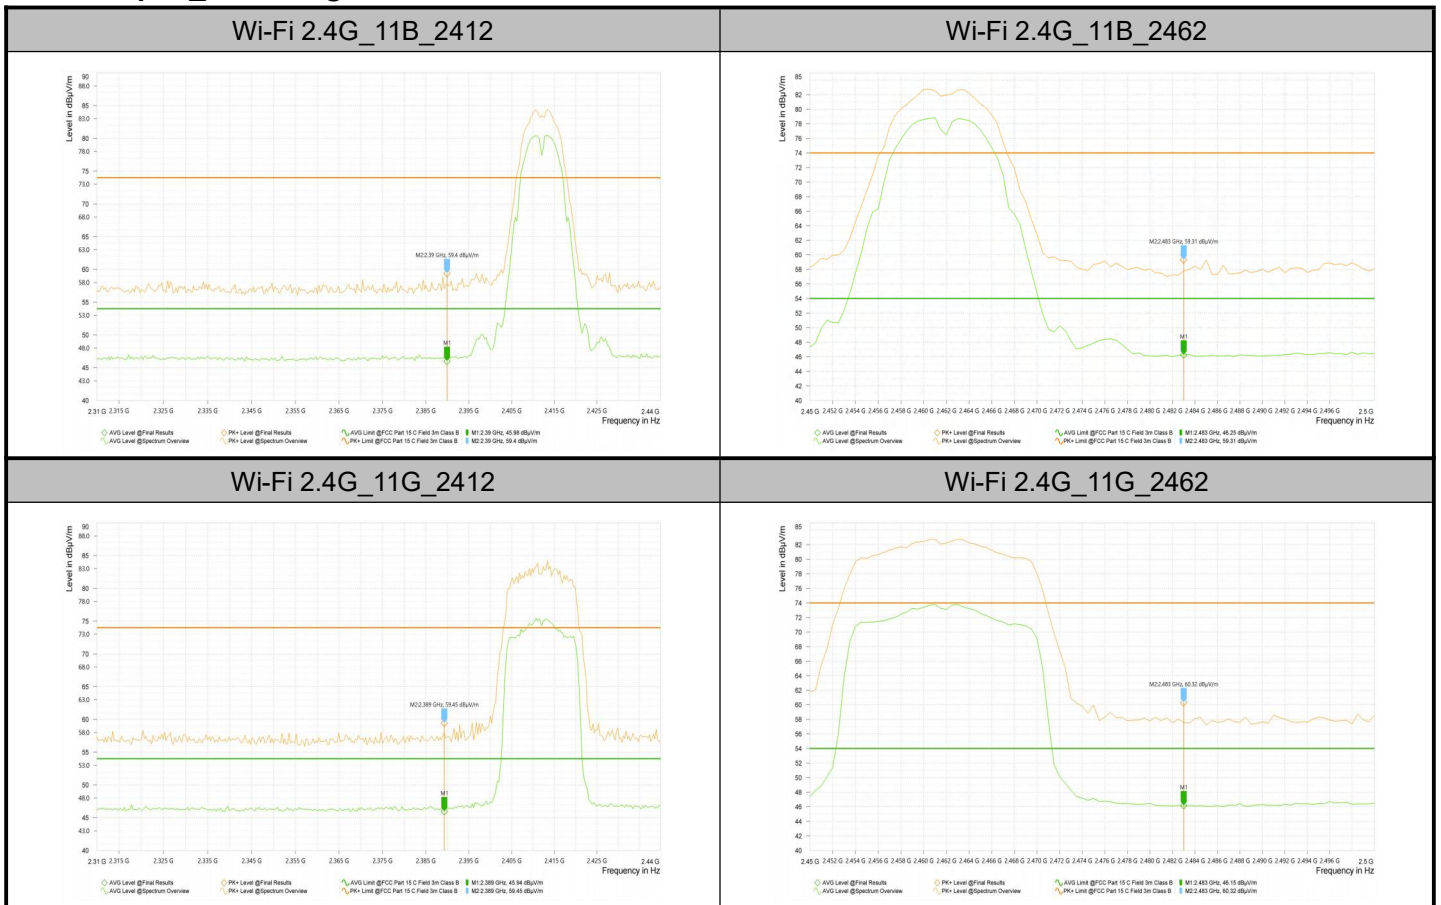

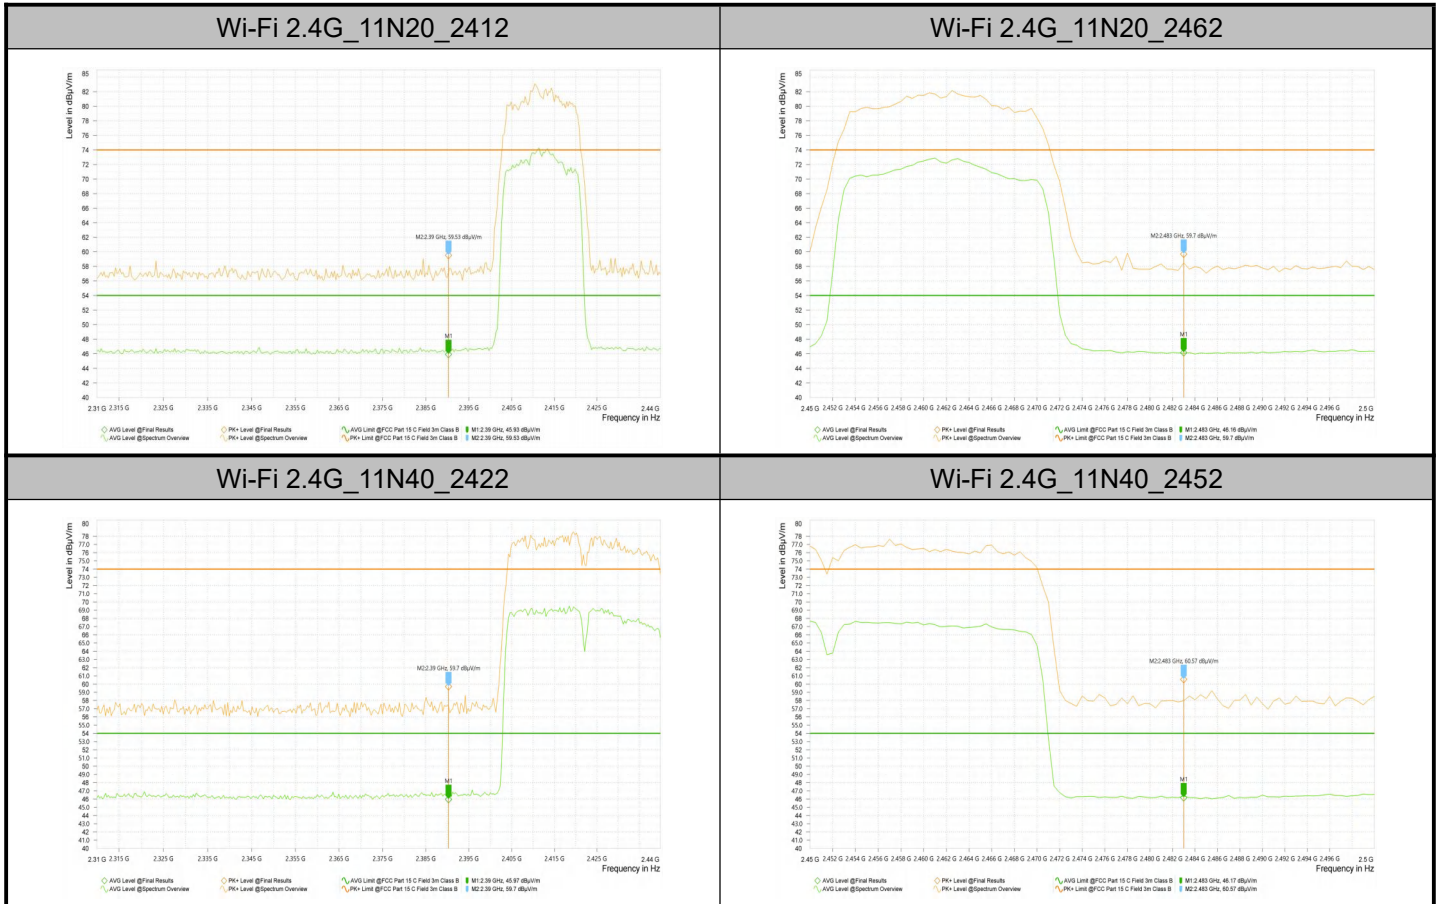

## Test Result\_Spurious Emission

Note1: Test result Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

Note2: 'Low' indicates a frequency range below 1GHz, and 'High' indicates a frequency range above 1GHz.

| Test Mode & Test Freq.[MHz] | Frequency [MHz] | PK+ Level [dBµV/m] | PK+ Limit [dBµV/m] | PK+ Margin [dB] | AVG Level [dBµV/m] | AVG Limit [dBµV/m] | AVG Margin [dB] | Polarization | Azimuth [deg] |
|-----------------------------|-----------------|--------------------|--------------------|-----------------|--------------------|--------------------|-----------------|--------------|---------------|
| Wi-Fi 2.4G_11B_2412_High    | 4,824.000       | 52.35              | 74.00              | 21.65           | 39.34              | 54.00              | 14.66           | H            | 193           |
|                             | 7,236.000       | 52.84              | 74.00              | 21.16           | 40.29              | 54.00              | 13.71           | H            | 0.6           |
|                             | 9,648.000       | 46.94              | 74.00              | 27.06           | 33.79              | 54.00              | 20.21           | H            | 291           |
|                             | 12,060.000      | 48.76              | 74.00              | 25.24           | 35.89              | 54.00              | 18.11           | H            | 159.6         |
|                             | 14,472.000      | 49.02              | 74.00              | 24.98           | 36.34              | 54.00              | 17.66           | V            | 298.2         |
| Wi-Fi 2.4G_11B_2437_High    | 16,884.000      | 53.99              | 74.00              | 20.01           | 41.36              | 54.00              | 12.64           | H            | 360           |
|                             | 4,874.000       | 52.42              | 74.00              | 21.58           | 39.40              | 54.00              | 14.60           | H            | 358.4         |
|                             | 7,311.000       | 53.14              | 74.00              | 20.86           | 40.30              | 54.00              | 13.70           | H            | 156.2         |
|                             | 9,748.000       | 47.16              | 74.00              | 26.84           | 34.46              | 54.00              | 19.54           | H            | 201.8         |


|                               |            |       |       |       |       |       |       |   |       |
|-------------------------------|------------|-------|-------|-------|-------|-------|-------|---|-------|
|                               | 12,185.000 | 47.73 | 74.00 | 26.27 | 35.54 | 54.00 | 18.46 | H | 0     |
|                               | 14,622.000 | 50.17 | 74.00 | 23.83 | 36.87 | 54.00 | 17.13 | H | 360   |
|                               | 17,059.000 | 53.27 | 74.00 | 20.73 | 40.56 | 54.00 | 13.44 | H | 215.7 |
| Wi-Fi<br>2.4G_11B_2462_High   | 4,924.000  | 51.68 | 74.00 | 22.32 | 39.46 | 54.00 | 14.54 | H | 316.6 |
|                               | 7,386.000  | 53.18 | 74.00 | 20.82 | 40.35 | 54.00 | 13.65 | H | 154.5 |
|                               | 9,848.000  | 47.57 | 74.00 | 26.43 | 34.86 | 54.00 | 19.14 | H | 144.5 |
|                               | 12,310.000 | 48.23 | 74.00 | 25.77 | 35.72 | 54.00 | 18.28 | H | 360   |
|                               | 14,772.000 | 49.99 | 74.00 | 24.01 | 37.29 | 54.00 | 16.71 | H | 216.3 |
|                               | 17,234.000 | 52.78 | 74.00 | 21.22 | 40.28 | 54.00 | 13.72 | H | 0     |
| Wi-Fi<br>2.4G_11G_2412_High   | 4,824.000  | 51.86 | 74.00 | 22.14 | 39.28 | 54.00 | 14.72 | H | 192.3 |
|                               | 7,236.000  | 53.04 | 74.00 | 20.96 | 40.14 | 54.00 | 13.86 | H | 360   |
|                               | 9,648.000  | 46.99 | 74.00 | 27.01 | 33.68 | 54.00 | 20.32 | H | 120.6 |
|                               | 12,060.000 | 49.31 | 74.00 | 24.69 | 36.01 | 54.00 | 17.99 | H | 213.8 |
|                               | 14,472.000 | 49.18 | 74.00 | 24.82 | 36.38 | 54.00 | 17.62 | H | 146.2 |
|                               | 16,884.000 | 53.90 | 74.00 | 20.10 | 41.14 | 54.00 | 12.86 | H | 195.6 |
| Wi-Fi<br>2.4G_11G_2437_High   | 4,874.000  | 51.83 | 74.00 | 22.17 | 39.14 | 54.00 | 14.86 | V | 0.1   |
|                               | 7,311.000  | 53.02 | 74.00 | 20.98 | 40.35 | 54.00 | 13.65 | V | 0     |
|                               | 9,748.000  | 47.77 | 74.00 | 26.23 | 34.36 | 54.00 | 19.64 | H | 360   |
|                               | 12,185.000 | 47.84 | 74.00 | 26.16 | 35.47 | 54.00 | 18.53 | H | 238.6 |
|                               | 14,622.000 | 49.78 | 74.00 | 24.22 | 37.06 | 54.00 | 16.94 | V | 238.6 |
|                               | 17,059.000 | 53.07 | 74.00 | 20.93 | 40.60 | 54.00 | 13.40 | H | 0     |
| Wi-Fi<br>2.4G_11G_2462_High   | 4,924.000  | 51.90 | 74.00 | 22.10 | 39.46 | 54.00 | 14.54 | V | 118.6 |
|                               | 7,386.000  | 52.85 | 74.00 | 21.15 | 40.34 | 54.00 | 13.66 | V | 202.2 |
|                               | 9,848.000  | 47.27 | 74.00 | 26.73 | 34.93 | 54.00 | 19.07 | H | 264.9 |
|                               | 12,310.000 | 48.46 | 74.00 | 25.54 | 35.59 | 54.00 | 18.41 | H | 360   |
|                               | 14,772.000 | 49.79 | 74.00 | 24.21 | 37.28 | 54.00 | 16.72 | H | 360   |
|                               | 17,234.000 | 53.94 | 74.00 | 20.06 | 40.08 | 54.00 | 13.92 | H | 95.2  |
| Wi-Fi<br>2.4G_11N20_2412_High | 4,824.000  | 52.24 | 74.00 | 21.76 | 39.26 | 54.00 | 14.74 | H | 119.4 |
|                               | 7,236.000  | 52.62 | 74.00 | 21.38 | 40.04 | 54.00 | 13.96 | H | 348   |
|                               | 9,648.000  | 46.13 | 74.00 | 27.87 | 33.57 | 54.00 | 20.43 | H | 360   |
|                               | 12,060.000 | 48.76 | 74.00 | 25.24 | 35.72 | 54.00 | 18.28 | H | 0     |
|                               | 14,472.000 | 49.11 | 74.00 | 24.89 | 36.08 | 54.00 | 17.92 | V | 0     |
|                               | 16,884.000 | 53.98 | 74.00 | 20.02 | 41.11 | 54.00 | 12.89 | H | 146.3 |
| Wi-Fi<br>2.4G_11N20_2437_High | 4,874.000  | 51.76 | 74.00 | 22.24 | 39.01 | 54.00 | 14.99 | V | 360   |
|                               | 7,311.000  | 52.61 | 74.00 | 21.39 | 40.16 | 54.00 | 13.84 | H | 360   |
|                               | 9,748.000  | 46.67 | 74.00 | 27.33 | 34.27 | 54.00 | 19.73 | H | 143.6 |
|                               | 12,185.000 | 47.91 | 74.00 | 26.09 | 35.63 | 54.00 | 18.37 | H | 95.2  |
|                               | 14,622.000 | 49.15 | 74.00 | 24.85 | 36.85 | 54.00 | 17.15 | H | 217.2 |
|                               | 17,059.000 | 53.22 | 74.00 | 20.78 | 40.47 | 54.00 | 13.53 | H | 217.2 |




|                               |            |       |       |       |       |       |       |   |       |
|-------------------------------|------------|-------|-------|-------|-------|-------|-------|---|-------|
| Wi-Fi<br>2.4G_11N20_2462_High | 4,924.000  | 51.99 | 74.00 | 22.01 | 39.47 | 54.00 | 14.53 | H | 217.1 |
|                               | 7,386.000  | 52.82 | 74.00 | 21.18 | 40.28 | 54.00 | 13.72 | V | 156.3 |
|                               | 9,848.000  | 47.72 | 74.00 | 26.28 | 34.83 | 54.00 | 19.17 | V | 0     |
|                               | 12,310.000 | 48.23 | 74.00 | 25.77 | 35.62 | 54.00 | 18.38 | V | 195.7 |
|                               | 14,772.000 | 49.37 | 74.00 | 24.63 | 37.00 | 54.00 | 17.00 | H | 360   |
|                               | 17,234.000 | 52.90 | 74.00 | 21.10 | 40.16 | 54.00 | 13.84 | V | 360   |
| Wi-Fi<br>2.4G_11N40_2422_High | 4,844.000  | 51.83 | 74.00 | 22.17 | 39.17 | 54.00 | 14.83 | H | 0.2   |
|                               | 7,266.000  | 53.22 | 74.00 | 20.78 | 40.17 | 54.00 | 13.83 | H | 255   |
|                               | 9,688.000  | 46.04 | 74.00 | 27.96 | 33.72 | 54.00 | 20.28 | H | 265.7 |
|                               | 12,110.000 | 48.66 | 74.00 | 25.34 | 35.89 | 54.00 | 18.11 | H | 145.4 |
|                               | 14,532.000 | 48.80 | 74.00 | 25.20 | 36.26 | 54.00 | 17.74 | H | 315.8 |
|                               | 16,954.000 | 52.87 | 74.00 | 21.13 | 40.34 | 54.00 | 13.66 | V | 360   |
| Wi-Fi<br>2.4G_11N40_2437_High | 4,873.500  | 51.78 | 74.00 | 22.22 | 39.22 | 54.00 | 14.78 | H | 169.5 |
|                               | 5,277.500  | 58.15 | 74.00 | 15.85 | 45.04 | 54.00 | 8.96  | V | 360   |
|                               | 7,311.000  | 52.74 | 74.00 | 21.26 | 40.29 | 54.00 | 13.71 | H | 60.2  |
|                               | 9,748.000  | 46.81 | 74.00 | 27.19 | 34.53 | 54.00 | 19.47 | H | 0     |
|                               | 12,185.000 | 48.01 | 74.00 | 25.99 | 35.51 | 54.00 | 18.49 | V | 6.9   |
|                               | 14,621.500 | 49.66 | 74.00 | 24.34 | 36.95 | 54.00 | 17.05 | V | 6.9   |
|                               | 17,060.000 | 53.50 | 74.00 | 20.50 | 40.66 | 54.00 | 13.34 | V | 6.9   |
| Wi-Fi<br>2.4G_11N40_2452_High | 4,904.500  | 51.81 | 74.00 | 22.19 | 39.41 | 54.00 | 14.59 | H | 167.8 |
|                               | 5,283.500  | 52.87 | 74.00 | 21.13 | 40.92 | 54.00 | 13.08 | V | 195.8 |
|                               | 7,355.500  | 52.70 | 74.00 | 21.30 | 40.54 | 54.00 | 13.46 | H | 278.1 |
|                               | 9,808.000  | 47.65 | 74.00 | 26.35 | 34.88 | 54.00 | 19.12 | H | 95.2  |
|                               | 12,260.000 | 48.58 | 74.00 | 25.42 | 35.80 | 54.00 | 18.20 | H | 164.3 |
|                               | 14,712.000 | 49.57 | 74.00 | 24.43 | 37.02 | 54.00 | 16.98 | H | 145.4 |
|                               | 17,164.000 | 53.28 | 74.00 | 20.72 | 40.05 | 54.00 | 13.95 | H | 213.6 |

| Test Mode &<br>Test Freq.[MHz] | Frequency<br>[MHz] | QPK Level<br>[dB $\mu$ V/m] | QPK Limit<br>[dB $\mu$ V/m] | QPK Margin<br>[dB] | Polarization | Azimuth<br>[deg] |
|--------------------------------|--------------------|-----------------------------|-----------------------------|--------------------|--------------|------------------|
| Wi-Fi 2.4G_11G_2437_Low        | 35.928             | 24.02                       | 40.00                       | 15.98              | V            | 311.3            |
|                                | 59.154             | 27.42                       | 40.00                       | 12.58              | V            | 184.6            |


## Test Graphs\_Spurious Emission

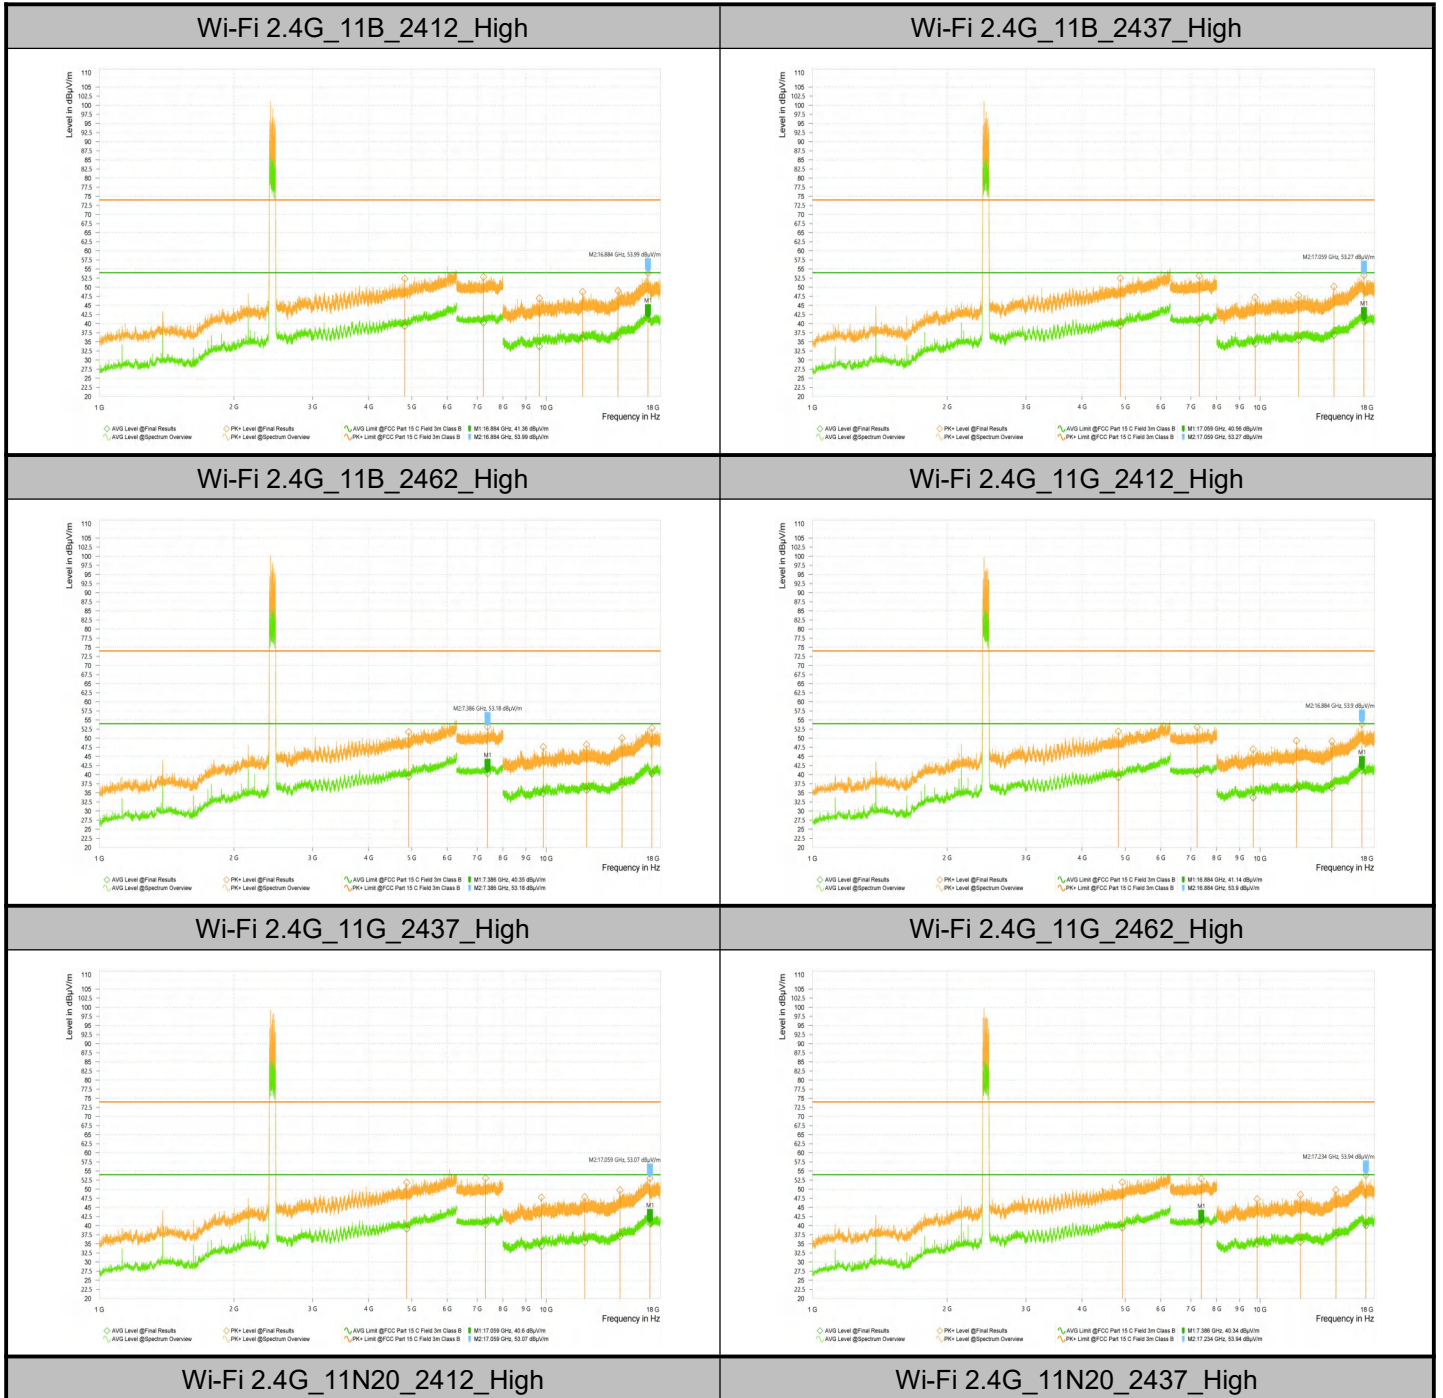

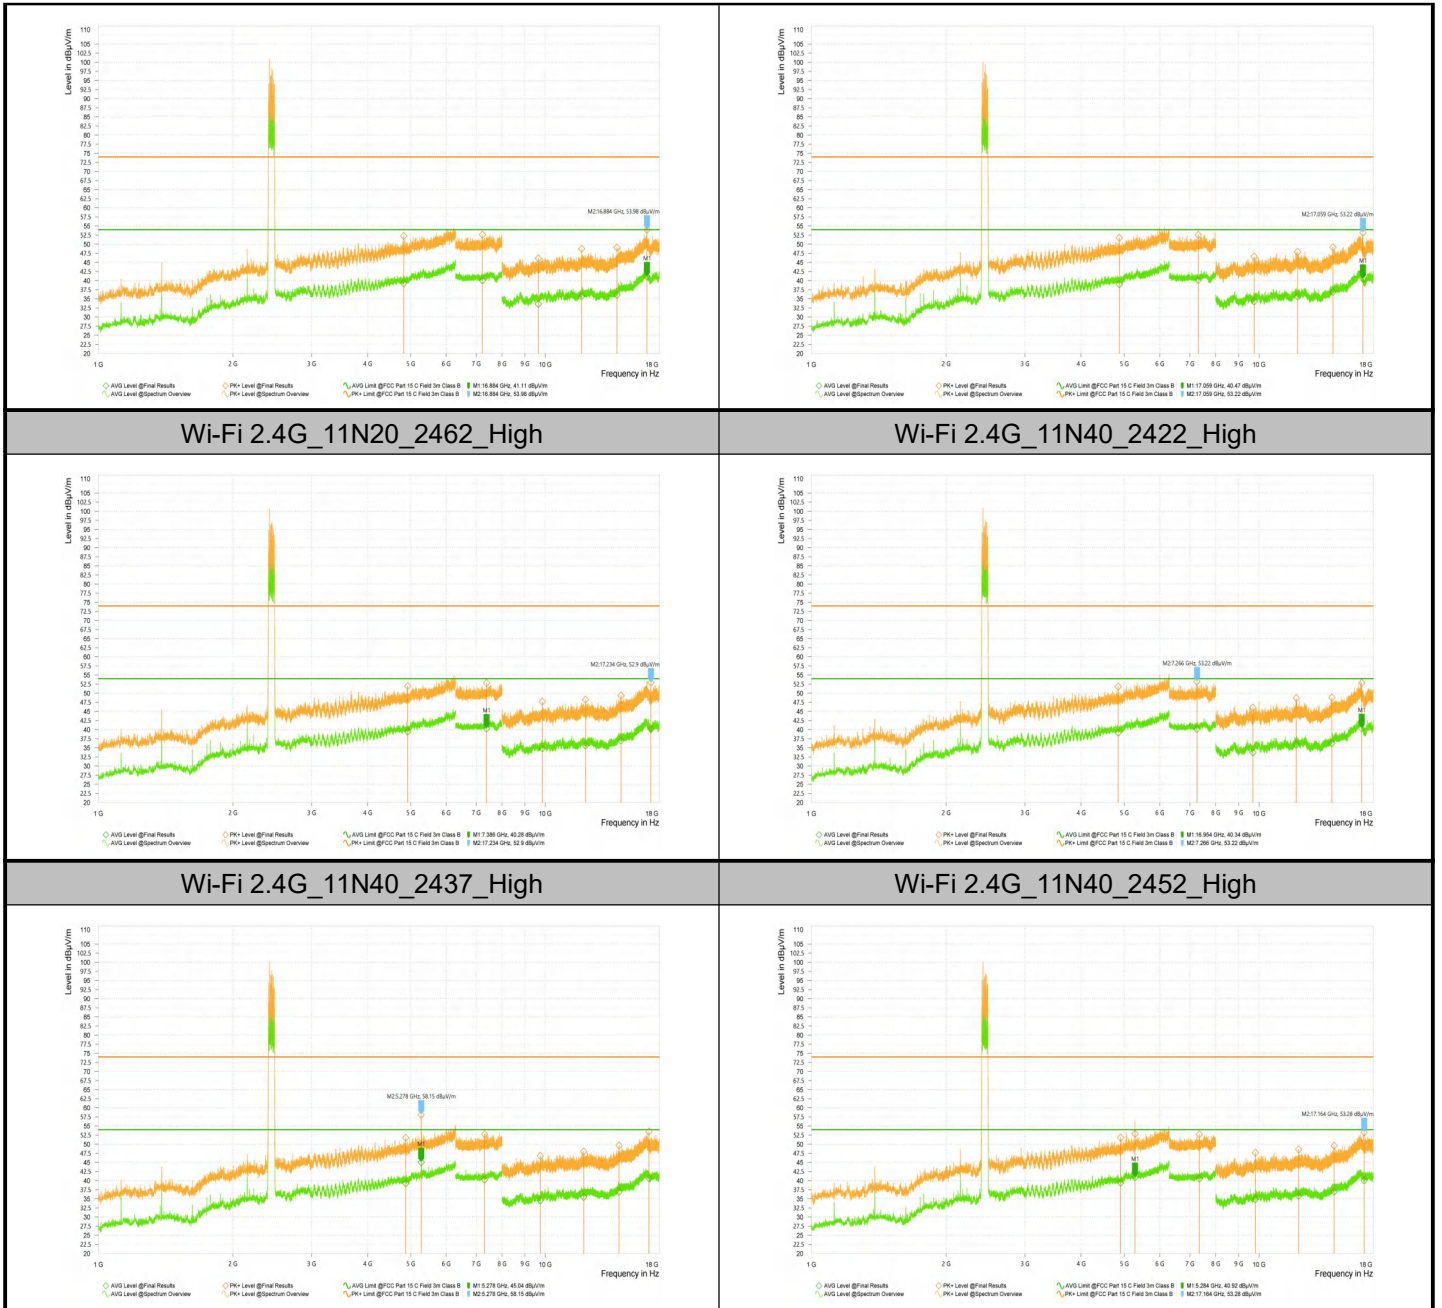

## Wi-Fi 2.4G\_11G\_2437\_Low

/

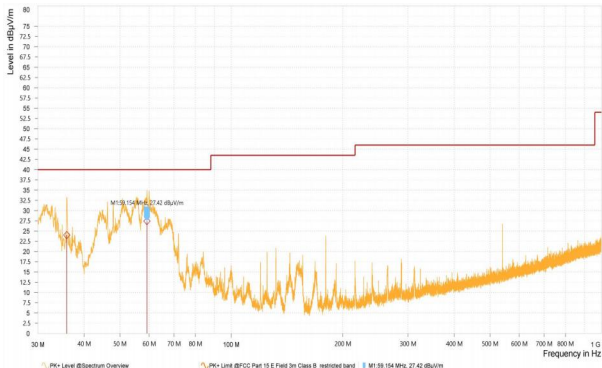

/

## Appendix C – The EUT Appearance

Refer to “Attachment 1: External Photograph” and “ Attachment 2: Internal Photograph” file.

## Appendix D – Test Setup Photograph

Refer to “Attachment 5: RF Test Setup Photograph” file.

\*\*\*\*\*End of the Report\*\*\*\*\*