



# RF Test Report

**Applicant:** Quectel Wireless Solutions Company Limited  
**Address:** Building 5, Shanghai Business Park Phase III (Area B), No.1016  
Tianlin Road, Minhang District, Shanghai, China, 200233  
**Product:** Wi-Fi & Bluetooth Module  
**Model No.:** FCMA62N  
**Brand Name:** QUECTEL  
**FCC ID:** XMR2024FCMA62N  
**Standards:** FCC CFR47 Part 15C  
**Report No.:** PD20240077RF09  
**Issue Date:** 2024/08/15  
**Test Result:** PASS \*

\* Testing performed at Hefei Panwin Technology Co., Ltd. on the above equipment indicates the product meets the requirements of the relevant standards.

**Reviewed By:** Jerry Zhang

**Approved By:** Alec Yang

## Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin  
Avenue, High-tech Zone, Hefei City, Anhui Province, China  
TEL: +86-0551-63811775

## Revision History

Report No.	Version	Description	Issue Date	Note
PD20240077RF09	1	Initial Report	2024/08/15	Valid

## CONTENTS

<b>1 General Information</b>	<b>5</b>
1.1 Notes of the Test Report	5
1.2 Test Facility	5
1.3 Testing Laboratory	5
<b>2 General Description of Equipment under Test</b>	<b>6</b>
2.1 Details of Application	6
2.2 General Information	6
2.3 Application Standards	7
<b>3 Test Condition</b>	<b>8</b>
3.1 Test Configuration	8
3.2 Carrier Frequency and Channel	8
3.3 Equipment List	9
3.4 Support Equipment List	10
3.5 Test Uncertainty	10
<b>4 Test Items Description</b>	<b>11</b>
4.1 Output Power Measurement	11
4.2 6dB and 99% Bandwidth Measurement	13
4.3 Power Spectral Density Measurement	14
4.4 Conducted Band Edges and Spurious Emission Measurement	16
4.5 Radiated Band Edges and Spurious Emission Measurement	17
4.6 AC Conducted Emission Measurement	21
4.7 Antenna Requirements	23
<b>Appendix A – Test Results of Conducted Test</b>	<b>24</b>
<b>Appendix B – Test Results of Radiated Test</b>	<b>47</b>
<b>Appendix C – The EUT Appearance</b>	<b>54</b>
<b>Appendix D – Test Setup Photograph</b>	<b>54</b>

## Test Summary

No.	Test Case	FCC Rules	Verdict
1	Output Power Measurement	15.247(b)	PASS
2	6dB and 99% Bandwidth Measurement	15.247(a)(2)	PASS
3	Power Spectral Density Measurement	15.247(e)	PASS
4	Conducted Band Edges and Spurious Emission Measurement	15.247(d)	PASS
5	Radiated Band Edges and Spurious Emission Measurement	15.247(d)	PASS
6	AC Conducted Emission Measurement	15.207	NA
7	Antenna Requirements	15.203 & 15.247(b)	PASS

Date of Testing: 2024/06/14 to 2024/08/15

Date of Sample Received: 2024/06/12

- The samples tested have been evaluated in accordance with the procedures given in the application standards in **Section 2.3** of this report and have been shown to comply with the applicable technical standards.
- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

## 1 General Information

### 1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

### 1.2 Test Facility

#### **A2LA (Certificate Number: 6849.01)**

Hefei Panwin Technology Co., Ltd. has been accredited by American Association for Laboratory Accreditation to perform measurement.

#### **FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)**

Hefei Panwin Technology Co., Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform measurements.

### 1.3 Testing Laboratory

<b>Company Name</b>	Hefei Panwin Technology Co., Ltd.
<b>Address</b>	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
<b>Telephone</b>	+86-0551-63811775
<b>Post Code</b>	230031

## 2 General Description of Equipment under Test

### 2.1 Details of Application

<b>Applicant</b>	Quectel Wireless Solutions Company Limited
<b>Applicant Address</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233
<b>Manufacturer</b>	Quectel Wireless Solutions Company Limited
<b>Manufacturer Address</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233

### 2.2 General Information

<b>Product</b>	Wi-Fi & Bluetooth Module	
<b>Model</b>	FCMA62N	
<b>SN</b>	Conducted	E1Y24E64X000025 E1Y24E64X000061
	Radiated	E1Y24E64X000047 E1Y24E64X000060
<b>Hardware Version</b>	R1.0	
<b>Software Version</b>	/	
<b>Directional Gain</b>	NA	
<b>Antenna Type</b>	PCB Antenna	
<b>Antenna Gain</b>	-1.20dBi	
<b>Additional Beamforming Gain</b>	NA	
<b>Max. Conducted Power</b>	Wi-Fi 2.4G: 19.63dBm	
<b>Operating voltage</b>	Typical 5.0Vdc	
<b>Type of Modulation</b>	802.11b/g/n/ax: DSSS,OFDM,DBPSK,DQPSK,CCK, BPSK, QPSK, 16QAM, 64QAM, 256QAM	
<b>Operating Frequency Range(s)</b>	802.11b/g/n HT20/ax HE20: 2412 to 2462MHz	

**Note:** The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 2.3 Application Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 3 Test Condition

### 3.1 Test Configuration

#### Test mode

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in Z position and the worst case was recorded. This report presents the data for the worst polarity.

Test Mode	Data Rate(Mbps)
802.11b_SISO	1
802.11g_SISO	6
802.11n HT20_SISO	MCS0
802.11ax HT20_SISO	MCS0

### 3.2 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	/	/



## 3.3 Equipment List

### Conducted

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	KEYSIGHT	N9020B	PWC0048	1 Year	2024/10/10
RF Control Unit	Tonseced	JS0806-2	PWC0055	/	/
Shielded Chamber	Maorui	MR543	PWC0041	3 Years	2026/08/26
Test Software	Tonseced	JS1120-3 V3.2.22	/	/	/

### Radiated

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
EMI Test Receiver	R&S	ESR7	PWB0023	1 Year	2024/10/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2024/10/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2024/10/21
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2024/10/13
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2024/10/11
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2024/10/17
Pre-Amplifier	R&S	OSP220 (OSP-B155G)	PWB0042	1 Year	2024/10/13
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2024/10/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2024/10/11
Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2024/11/08
Anechoic Chamber	ETS.LINDGREN	Fact 3-2m	PWB0003	3 Years	2026/06/05
Test Software	R&S	ELEKTRA 4.20.2	/	/	/

### 3.4 Support Equipment List

Equipment	Manufacturer	Description	Model	Serial Number
EVB	QUECTEL	/	/	/
Laptop	Lenovo	/	/	/

### 3.5 Test Uncertainty

No.	Parameter	Uncertainty
1	DTS Bandwidth	1.9 %
2	Occupied channel bandwidth	1.9 %
3	Duty Cycle	0.11 %
4	Maximum Conducted Output Power	1.18 dB
5	Maximum Power Spectral Density Level	0.98 dB
6	Band-edge Compliance	1.21dB
7	Unwanted Emissions In Non-restricted Frequency Bands	9kHz-7GHz: 1.21 dB 7GHz-40GHz: 3.31 dB
8	Radiated Band Edges and Spurious Emission	Below 1GHz: 4.88 dB Above 1GHz: 5.06 dB
9	Temperature	3 °C
10	Humidity	1.3 %
11	Supply Voltages	0.006 V

## 4 Test Items Description

### Ambient condition

Shielded Chamber

Temperature [°C]	21.4 to 27.2
Humidity [%RH]	47 to 58
Pressure [kPa]	100.2 to 101.4

Anechoic Chamber

Temperature [°C]	20.1 to 27.1
Humidity [%RH]	42 to 62
Pressure [kPa]	99.4 to 100.9

## 4.1 Output Power Measurement

### 4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.1.2 Measuring Instruments

The section 2.3 of List of Measuring Equipment of this test report is used for test.

### 4.1.3 Test Procedures

The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.2.2.4 Method AVGSA-2. Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:


1. Measure the duty cycle D of the transmitter output signal as described in 11.6.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
4. Set VBW  $\geq [3 \times \text{RBW}]$ .
5. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
8. Do not use sweep triggering. Allow the sweep to “free run.”
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces

to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.

10. Compute power by integrating the spectrum across the OBW of the signal using the Instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

11. Add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is 25%.

#### 4.1.4 Test Setup



#### 4.1.5 Test Results

See Appendix A.1.

## 4.2 6dB and 99% Bandwidth Measurement

### 4.2.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz


### 4.2.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

### 4.2.4 Test Setup



### 4.2.5 Test Results

See Appendix A.2.

## 4.3 Power Spectral Density Measurement

### 4.3.1 Limit of Power Spectral Density

Rule Part 15.247(e) specifies that " For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.3.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.3.3 Test Procedures

#### 4.3.3 Test Procedures


The testing follows ANSI C63.10-2013 clause 11.10.5.

Method AVGPS-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.,  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2\%$ ):

1. Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
5. Set VBW  $\geq [3 \times \text{RBW}]$ .
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
8. Sweep time = auto couple.
9. Do not use sweep triggering; allow sweep to "free run."
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $[10 \log (1 / D)]$ , where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

## 4.3.4 Test Setup

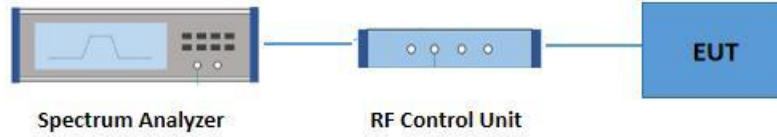

## 4.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.3.

## 4.4 Conducted Band Edges and Spurious Emission Measurement

### 4.4.1 Limit of Conducted Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 4.4.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test

### 4.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 4.4.4 Test Setup



### 4.4.5 Test Result

Please refer to Appendix A.4.



## 4.5 Radiated Band Edges and Spurious Emission Measurement

### 4.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30-88	100	3
88 -216	150	3
216 - 960	200	8
Above 960	500	3

### 4.5.2 Measuring Instruments


The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level -Pre-amp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured.
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $\geq 1$  GHz for peak measurement  
 For average measurement:  
 $VBW = 10$  Hz, when duty cycle is no less than 98 percent.  
 $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.5.4 Test Setup


For radiated emissions below 30MHz

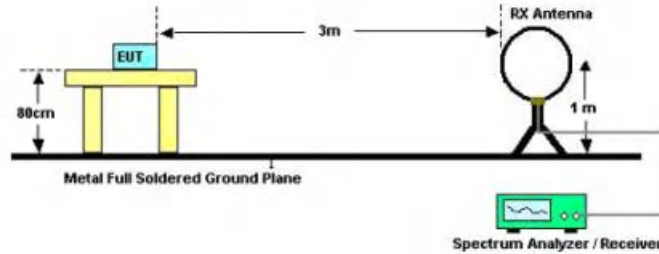

For radiated emissions from 30MHz to 1GHz

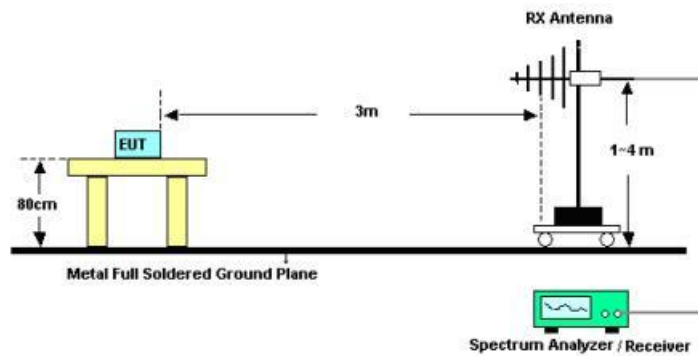

For radiated emissions above 1GHz

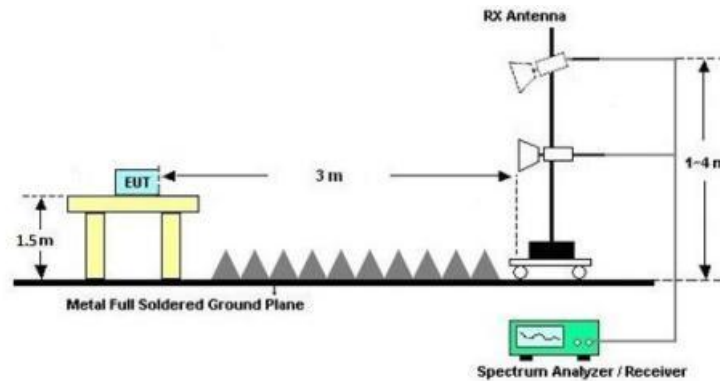

4.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

#### **4.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B.1.

#### **4.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHzwhichever is lower)**

Please refer to Appendix B.1.

#### **4.5.8 Duty Cycle**

Please refer to Appendix A.5.

## 4.6 AC Conducted Emission Measurement

### 4.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Decreases with the logarithm of the frequency.


### 4.6.2 Measuring Instruments

The section 3.3 of List of Measuring Equipment of this test report is used for test.

### 4.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth =9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.4 Test Setup

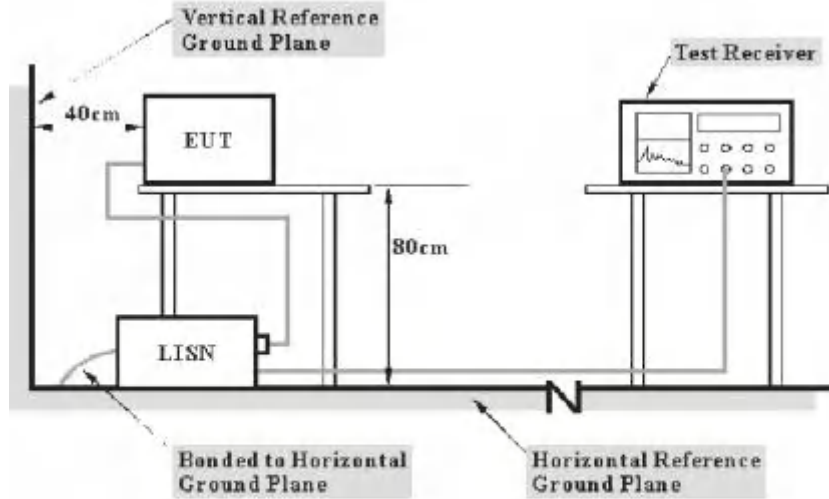

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

4.6.5 Uncertainty Measurement

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT. The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

CASE	Uncertainty
Continuous Emission (AC port)	2.92 dB

4.6.6 Test Result

Remark: The product is DC powered, this test item is not applicable.

## 4.7 Antenna Requirements

### 4.7.1 Standard Applicable

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.7.2 Antenna Anti-Replacement Construction

The antenna is Internal on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.20dBi.

## Appendix A – Test Results of Conducted Test

### A.1 Conducted Output Power

#### Test Result

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	19.49	100.00	0.00	19.49	≤30.00	-1.20	18.29	≤36.00	PASS
11B	Ant1	2437	19.63	100.00	0.00	19.63	≤30.00	-1.20	18.43	≤36.00	PASS
11B	Ant1	2462	18.34	100.00	0.00	18.34	≤30.00	-1.20	17.14	≤36.00	PASS
11G	Ant1	2412	18.07	98.62	0.06	18.13	≤30.00	-1.20	16.93	≤36.00	PASS
11G	Ant1	2437	18.26	99.31	0.03	18.29	≤30.00	-1.20	17.09	≤36.00	PASS
11G	Ant1	2462	16.49	99.31	0.03	16.52	≤30.00	-1.20	15.32	≤36.00	PASS
11N20SISO	Ant1	2412	18.08	99.26	0.03	18.11	≤30.00	-1.20	16.91	≤36.00	PASS
11N20SISO	Ant1	2437	18.25	98.53	0.06	18.31	≤30.00	-1.20	17.11	≤36.00	PASS
11N20SISO	Ant1	2462	18.09	99.26	0.03	18.12	≤30.00	-1.20	16.92	≤36.00	PASS
11AX20SISO	Ant1	2412	18.16	98.11	0.08	18.24	≤30.00	-1.20	17.04	≤36.00	PASS
11AX20SISO	Ant1	2437	18.34	98.11	0.08	18.42	≤30.00	-1.20	17.22	≤36.00	PASS
11AX20SISO	Ant1	2462	16.74	94.59	0.24	16.98	≤30.00	-1.20	15.78	≤36.00	PASS


#### Test Result for AX Part RU

Test Mode	Antenna	Frequency [MHz]	Ru Size	Ru Index	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	16.32	≤30.00	-1.20	15.12	≤36.00	PASS
11AX20SISO	Ant1	2412	52Tone	RU37	17.06	≤30.00	-1.20	15.86	≤36.00	PASS
11AX20SISO	Ant1	2412	106Tone	RU53	16.74	≤30.00	-1.20	15.54	≤36.00	PASS
11AX20SISO	Ant1	2437	26Tone	RU4	17.28	≤30.00	-1.20	16.08	≤36.00	PASS
11AX20SISO	Ant1	2437	52Tone	RU39	16.41	≤30.00	-1.20	15.21	≤36.00	PASS
11AX20SISO	Ant1	2437	106Tone	RU53	17.49	≤30.00	-1.20	16.29	≤36.00	PASS
11AX20SISO	Ant1	2462	26Tone	RU8	17.20	≤30.00	-1.20	16.00	≤36.00	PASS
11AX20SISO	Ant1	2462	52Tone	RU40	16.85	≤30.00	-1.20	15.65	≤36.00	PASS
11AX20SISO	Ant1	2462	106Tone	RU54	17.21	≤30.00	-1.20	16.01	≤36.00	PASS




## Test Graphs

<p style="text-align: center;"><b>11B-Ant1-2412-PASS</b></p>	<p style="text-align: center;"><b>11B-Ant1-2437-PASS</b></p>
<p style="text-align: center;"><b>11B-Ant1-2462-PASS</b></p>	<p style="text-align: center;"><b>11G-Ant1-2412-PASS</b></p>
<p style="text-align: center;"><b>11G-Ant1-2437-PASS</b></p>	<p style="text-align: center;"><b>11G-Ant1-2462-PASS</b></p>
<p style="text-align: center;"><b>11N20SISO-Ant1-2412-PASS</b></p>	<p style="text-align: center;"><b>11N20SISO-Ant1-2437-PASS</b></p>
<p style="text-align: center;"><b>11N20SISO-Ant1-2462-PASS</b></p>	<p style="text-align: center;"><b>11AX20SISO-Ant1-2412-PASS</b></p>

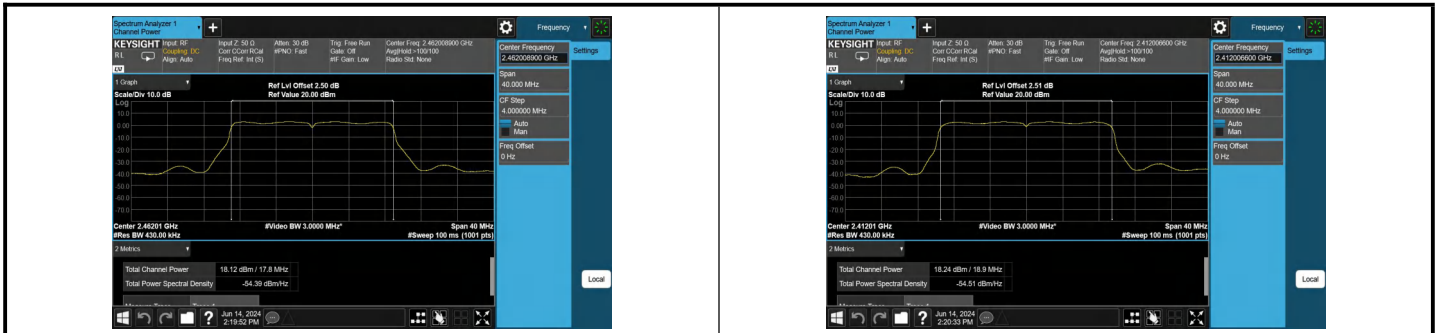


11AX20SISO-Ant1-2437-PASS

11AX20SISO-Ant1-2462-PASS

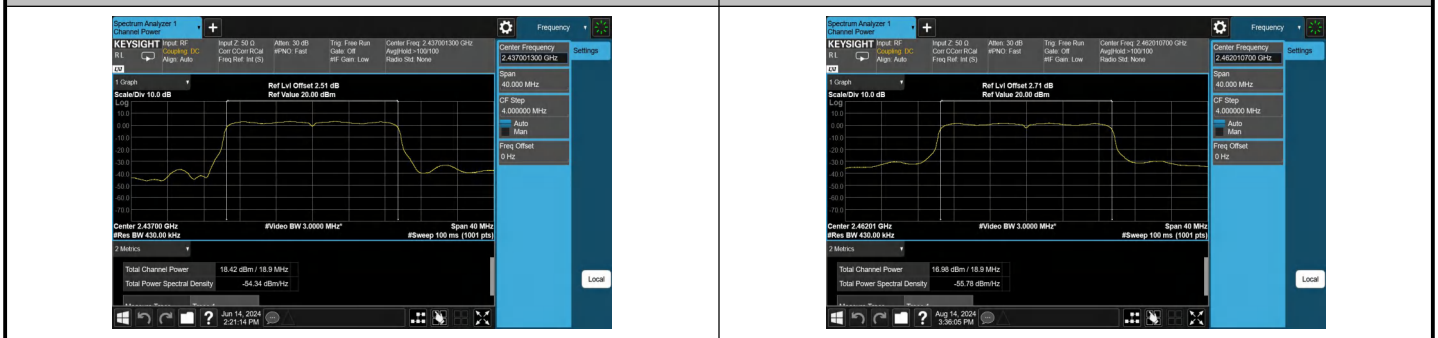


## Test Graphs for AX Part RU

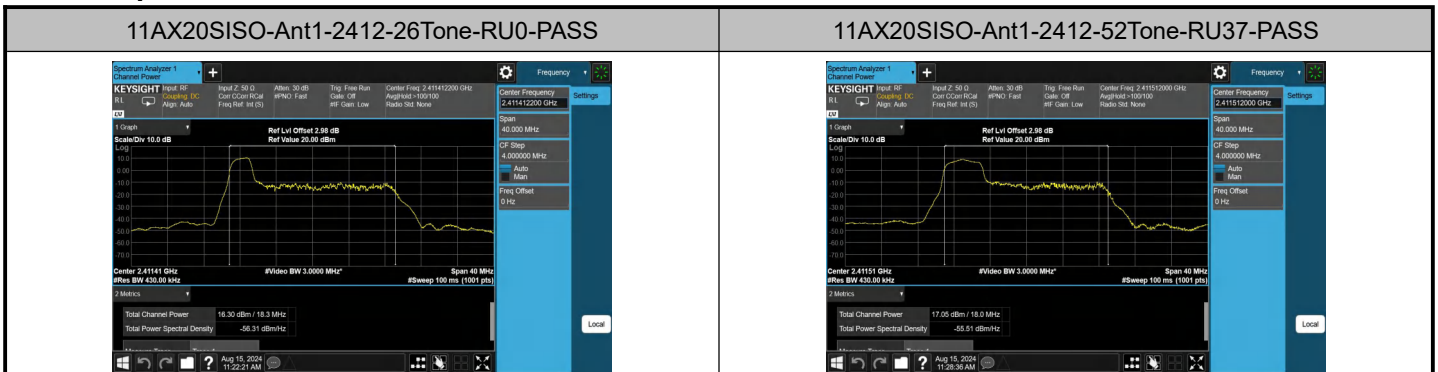


11AX20SISO-Ant1-2412-106Tone-RU53-PASS

11AX20SISO-Ant1-2437-26Tone-RU4-PASS

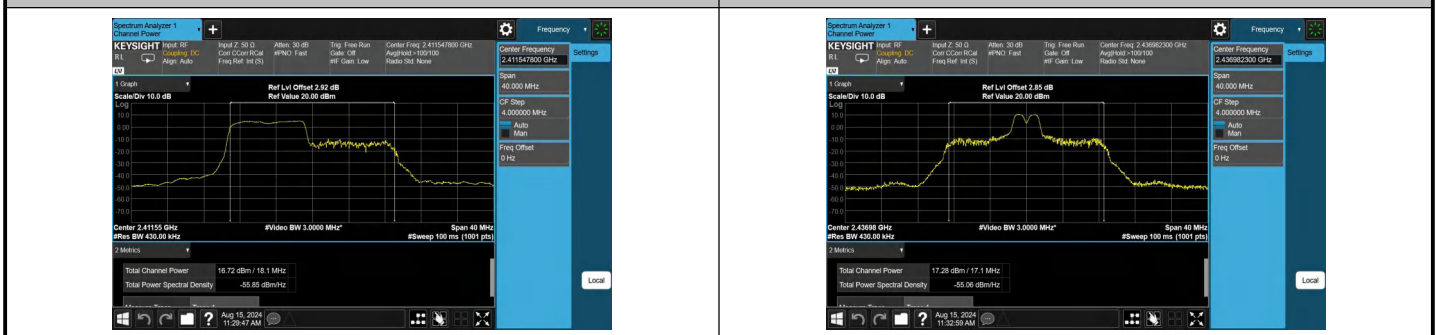


11AX20SISO-Ant1-2437-52Tone-RU39-PASS

11AX20SISO-Ant1-2437-106Tone-RU53-PASS

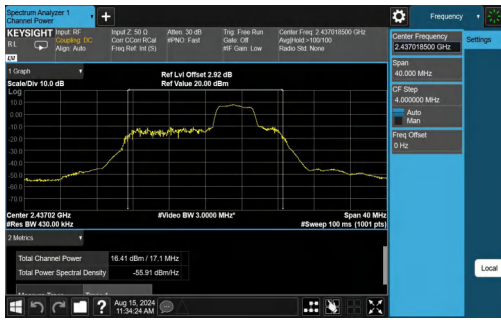

11AX20SISO-Ant1-2462-26Tone-RU8-PASS

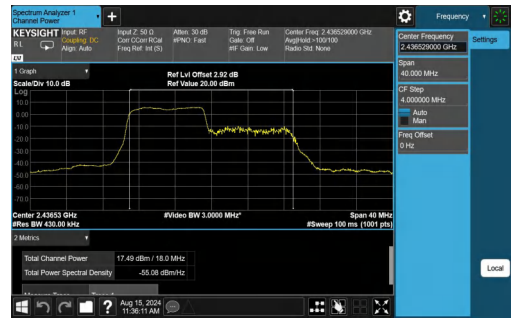

11AX20SISO-Ant1-2462-52Tone-RU40-PASS



11AX20SISO-Ant1-2462-106Tone-RU54-PASS



/



/

## A.2 6dB and 99% Bandwidth

### Test Result 6dB Bandwidth

Test Mode	Antenna	Frequency[MHz]	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.080	2406.960	2417.040	0.5	PASS
11B	Ant1	2437	10.080	2431.960	2442.040	0.5	PASS
11B	Ant1	2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
11G	Ant1	2437	16.320	2428.840	2445.160	0.5	PASS
11G	Ant1	2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.520	2403.240	2420.760	0.5	PASS
11N20SISO	Ant1	2437	17.520	2428.240	2445.760	0.5	PASS
11N20SISO	Ant1	2462	17.560	2453.200	2470.760	0.5	PASS
11AX20SISO	Ant1	2412	18.160	2402.800	2420.960	0.5	PASS
11AX20SISO	Ant1	2437	18.280	2427.800	2446.080	0.5	PASS
11AX20SISO	Ant1	2462	18.160	2452.920	2471.080	0.5	PASS

### Test Result 99% Bandwidth

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.636	2405.2038	2418.8398	---	---
11B	Ant1	2437	13.579	2430.2190	2443.7980	---	---
11B	Ant1	2462	13.453	2455.2742	2468.7272	---	---
11G	Ant1	2412	17.043	2403.4911	2420.5341	---	---
11G	Ant1	2437	17.002	2428.5213	2445.5233	---	---
11G	Ant1	2462	17.021	2453.4734	2470.4944	---	---
11N20SISO	Ant1	2412	17.853	2403.0957	2420.9487	---	---
11N20SISO	Ant1	2437	17.837	2428.0874	2445.9244	---	---
11N20SISO	Ant1	2462	17.826	2453.0959	2470.9219	---	---
11AX20SISO	Ant1	2412	18.854	2402.5796	2421.4336	---	---
11AX20SISO	Ant1	2437	18.876	2427.5633	2446.4393	---	---
11AX20SISO	Ant1	2462	18.882	2452.5697	2471.4517	---	---

### Test Result\_99% Bandwidth for AX Part RU

Test Mode	Antenna	Frequency [MHz]	Ru Size	Ru Index	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11AX20SISO	Ant1	2412	26Tone	RU0	18.257	2402.2837	2420.5407	---	---
11AX20SISO	Ant1	2412	52Tone	RU37	18.039	2402.4925	2420.5315	---	---
11AX20SISO	Ant1	2412	106Tone	RU53	18.071	2402.5123	2420.5833	---	---
11AX20SISO	Ant1	2437	26Tone	RU4	17.108	2428.4283	2445.5363	---	---

11AX20SISO	Ant1	2437	52Tone	RU39	17.067	2428.4850	2445.5520	---	---
11AX20SISO	Ant1	2437	106Tone	RU53	18.042	2427.5080	2445.5500	---	---
11AX20SISO	Ant1	2462	26Tone	RU8	18.253	2453.4577	2471.7107	---	---
11AX20SISO	Ant1	2462	52Tone	RU40	18.203	2453.3961	2471.5991	---	---
11AX20SISO	Ant1	2462	106Tone	RU54	17.968	2453.4668	2471.4348	---	---

## Test Graphs\_6dB Bandwidth





11N20SISO-Ant1-2462-PASS



11AX20SISO-Ant1-2412-PASS



11N20SISO-Ant1-2462-PASS




11AX20SISO-Ant1-2412-PASS



Test Graphs\_99% Bandwidth



Test Graphs\_99% Bandwidth

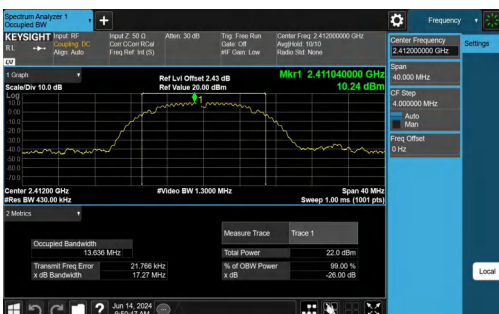

11B-Ant1-2412



11B-Ant1-2437

11B-Ant1-2462

11G-Ant1-2412