



Mode	32																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																			
ANT	1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.96</td> <td>51.05</td> <td>110.90</td> <td>-59.85</td> <td>36.72</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.24</td> <td>51.76</td> <td>105.41</td> <td>-53.65</td> <td>37.45</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.99</td> <td>51.10</td> <td>68.95</td> <td>-17.85</td> <td>36.84</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.03</td> <td>52.17</td> <td>68.30</td> <td>-16.13</td> <td>37.93</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5854.96	51.05	110.90	-59.85	36.72	35.30	11.52	32.49	368	0	PEAK	2	5874.24	51.76	105.41	-53.65	37.45	35.32	11.49	32.50	368	0	PEAK	3	5923.99	51.10	68.95	-17.85	36.84	35.39	11.41	32.54	368	0	PEAK	4	5930.03	52.17	68.30	-16.13	37.93	35.40	11.39	32.55	368	0	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																												
1	5854.96	51.05	110.90	-59.85	36.72	35.30	11.52	32.49	368	0	PEAK																																																									
2	5874.24	51.76	105.41	-53.65	37.45	35.32	11.49	32.50	368	0	PEAK																																																									
3	5923.99	51.10	68.95	-17.85	36.84	35.39	11.41	32.54	368	0	PEAK																																																									
4	5930.03	52.17	68.30	-16.13	37.93	35.40	11.39	32.55	368	0	PEAK																																																									



Mode	33																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5612.58</td> <td>53.34</td> <td>68.30</td> <td>-14.96</td> <td>38.97</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.62</td> <td>52.02</td> <td>68.76</td> <td>-16.74</td> <td>37.65</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.33</td> <td>51.42</td> <td>105.29</td> <td>-53.87</td> <td>37.05</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>52.37</td> <td>110.81</td> <td>-58.44</td> <td>37.98</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5612.58	53.34	68.30	-14.96	38.97	34.96	11.71	32.30	104	29	PEAK	2	5650.62	52.02	68.76	-16.74	37.65	35.01	11.69	32.33	104	29	PEAK	3	5700.33	51.42	105.29	-53.87	37.05	35.08	11.66	32.37	104	29	PEAK	4	5720.00	52.37	110.81	-58.44	37.98	35.11	11.66	32.38	104	29	PEAK	<table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>102.85</td> <td>-----</td> <td>-----</td> <td>88.45</td> <td>35.20</td> <td>11.63</td> <td>32.43</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	102.85	-----	-----	88.45	35.20	11.63	32.43	104	29	PEAK
	Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																										
1	5612.58	53.34	68.30	-14.96	38.97	34.96	11.71	32.30	104	29	PEAK																																																																											
2	5650.62	52.02	68.76	-16.74	37.65	35.01	11.69	32.33	104	29	PEAK																																																																											
3	5700.33	51.42	105.29	-53.87	37.05	35.08	11.66	32.37	104	29	PEAK																																																																											
4	5720.00	52.37	110.81	-58.44	37.98	35.11	11.66	32.38	104	29	PEAK																																																																											
Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	102.85	-----	-----	88.45	35.20	11.63	32.43	104	29	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>96.29</td> <td>-----</td> <td>-----</td> <td>81.90</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>104</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	96.29	-----	-----	81.90	35.21	11.62	32.44	104	29	AVERAGE																																																												
Peak #	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	96.29	-----	-----	81.90	35.21	11.62	32.44	104	29	AVERAGE																																																																											



Mode	33																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal	Fundamental																																																																			
Peak	<p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.61</td> <td>57.03</td> <td>111.68</td> <td>-54.65</td> <td>42.70</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.44</td> <td>54.70</td> <td>105.92</td> <td>-51.22</td> <td>40.39</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.66</td> <td>51.68</td> <td>68.45</td> <td>-16.77</td> <td>37.43</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.58</td> <td>52.56</td> <td>68.30</td> <td>-15.74</td> <td>38.31</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>104</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5854.61	57.03	111.68	-54.65	42.70	35.30	11.52	32.49	104	29	PEAK	2	5872.44	54.70	105.92	-51.22	40.39	35.32	11.49	32.50	104	29	PEAK	3	5924.66	51.68	68.45	-16.77	37.43	35.39	11.40	32.54	104	29	PEAK	4	5934.58	52.56	68.30	-15.74	38.31	35.41	11.39	32.55	104	29	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg																																																												
1	5854.61	57.03	111.68	-54.65	42.70	35.30	11.52	32.49	104	29	PEAK																																																										
2	5872.44	54.70	105.92	-51.22	40.39	35.32	11.49	32.50	104	29	PEAK																																																										
3	5924.66	51.68	68.45	-16.77	37.43	35.39	11.40	32.54	104	29	PEAK																																																										
4	5934.58	52.56	68.30	-15.74	38.31	35.41	11.39	32.55	104	29	PEAK																																																										



Mode	33																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5608.87</td> <td>52.75</td> <td>68.30</td> <td>-15.55</td> <td>38.38</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.02</td> <td>52.39</td> <td>68.31</td> <td>-15.92</td> <td>38.02</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.33</td> <td>51.93</td> <td>105.29</td> <td>-53.36</td> <td>37.56</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>52.86</td> <td>110.85</td> <td>-57.99</td> <td>38.47</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5608.87	52.75	68.30	-15.55	38.38	34.95	11.71	32.29	360	0	PEAK	2	5650.02	52.39	68.31	-15.92	38.02	35.01	11.69	32.33	360	0	PEAK	3	5700.33	51.93	105.29	-53.36	37.56	35.08	11.66	32.37	360	0	PEAK	4	5720.02	52.86	110.85	-57.99	38.47	35.11	11.66	32.38	360	0	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>102.77</td> <td>70.00</td> <td>32.77</td> <td>88.37</td> <td>35.22</td> <td>11.62</td> <td>32.44</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	102.77	70.00	32.77	88.37	35.22	11.62	32.44	360	0	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5608.87	52.75	68.30	-15.55	38.38	34.95	11.71	32.29	360	0	PEAK																																																																											
2	5650.02	52.39	68.31	-15.92	38.02	35.01	11.69	32.33	360	0	PEAK																																																																											
3	5700.33	51.93	105.29	-53.36	37.56	35.08	11.66	32.37	360	0	PEAK																																																																											
4	5720.02	52.86	110.85	-57.99	38.47	35.11	11.66	32.38	360	0	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	102.77	70.00	32.77	88.37	35.22	11.62	32.44	360	0	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>95.61</td> <td>70.00</td> <td>25.61</td> <td>81.22</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>360</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	95.61	70.00	25.61	81.22	35.21	11.62	32.44	360	0	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	95.61	70.00	25.61	81.22	35.21	11.62	32.44	360	0	AVERAGE																																																																											



Mode	33																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																			
ANT	1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.44</td> <td>55.82</td> <td>112.07</td> <td>-56.25</td> <td>41.49</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 5867.00</td> <td>54.12</td> <td>107.44</td> <td>-53.32</td> <td>39.81</td> <td>35.31</td> <td>11.50</td> <td>32.50</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3 5924.81</td> <td>51.36</td> <td>68.34</td> <td>-16.98</td> <td>37.11</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4 5937.69</td> <td>52.31</td> <td>68.30</td> <td>-15.99</td> <td>38.07</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>360</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5854.44	55.82	112.07	-56.25	41.49	35.30	11.52	32.49	360	0	PEAK	2 5867.00	54.12	107.44	-53.32	39.81	35.31	11.50	32.50	360	0	PEAK	3 5924.81	51.36	68.34	-16.98	37.11	35.39	11.40	32.54	360	0	PEAK	4 5937.69	52.31	68.30	-15.99	38.07	35.41	11.38	32.55	360	0	PEAK	Blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5854.44	55.82	112.07	-56.25	41.49	35.30	11.52	32.49	360	0	PEAK																																																										
2 5867.00	54.12	107.44	-53.32	39.81	35.31	11.50	32.50	360	0	PEAK																																																										
3 5924.81	51.36	68.34	-16.98	37.11	35.39	11.40	32.54	360	0	PEAK																																																										
4 5937.69	52.31	68.30	-15.99	38.07	35.41	11.38	32.55	360	0	PEAK																																																										



Mode	34																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_LF_CH38_5190MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>52.31</td><td>17.57</td><td>40.00</td><td>-22.43</td><td>33.53</td><td>13.94</td><td>1.32</td><td>31.22</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>180.35</td><td>17.72</td><td>43.50</td><td>-25.78</td><td>30.96</td><td>15.30</td><td>2.44</td><td>30.98</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>279.29</td><td>24.30</td><td>46.00</td><td>-21.70</td><td>32.97</td><td>19.22</td><td>3.01</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>403.45</td><td>23.76</td><td>46.00</td><td>-22.24</td><td>28.86</td><td>21.98</td><td>3.62</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>490.75</td><td>24.49</td><td>46.00</td><td>-21.51</td><td>27.63</td><td>23.57</td><td>3.99</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>836.07</td><td>30.94</td><td>46.00</td><td>-15.06</td><td>30.42</td><td>26.39</td><td>5.19</td><td>31.06</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	52.31	17.57	40.00	-22.43	33.53	13.94	1.32	31.22	--	--	Peak	2	180.35	17.72	43.50	-25.78	30.96	15.30	2.44	30.98	--	--	Peak	3	279.29	24.30	46.00	-21.70	32.97	19.22	3.01	30.90	--	--	Peak	4	403.45	23.76	46.00	-22.24	28.86	21.98	3.62	30.70	--	--	Peak	5	490.75	24.49	46.00	-21.51	27.63	23.57	3.99	30.70	--	--	Peak	6	836.07	30.94	46.00	-15.06	30.42	26.39	5.19	31.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>51.34</td><td>17.16</td><td>40.00</td><td>-22.84</td><td>32.94</td><td>14.12</td><td>1.31</td><td>31.21</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>158.04</td><td>17.53</td><td>43.50</td><td>-25.97</td><td>29.98</td><td>16.34</td><td>2.28</td><td>31.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>278.32</td><td>20.57</td><td>46.00</td><td>-25.43</td><td>29.22</td><td>19.24</td><td>3.01</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>418.00</td><td>22.67</td><td>46.00</td><td>-23.33</td><td>27.39</td><td>22.30</td><td>3.68</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>557.68</td><td>27.78</td><td>46.00</td><td>-18.22</td><td>29.55</td><td>24.98</td><td>4.25</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>944.71</td><td>31.06</td><td>46.00</td><td>-14.94</td><td>29.44</td><td>27.07</td><td>5.55</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	51.34	17.16	40.00	-22.84	32.94	14.12	1.31	31.21	--	--	Peak	2	158.04	17.53	43.50	-25.97	29.98	16.34	2.28	31.07	--	--	Peak	3	278.32	20.57	46.00	-25.43	29.22	19.24	3.01	30.90	--	--	Peak	4	418.00	22.67	46.00	-23.33	27.39	22.30	3.68	30.70	--	--	Peak	5	557.68	27.78	46.00	-18.22	29.55	24.98	4.25	31.00	--	--	Peak	6	944.71	31.06	46.00	-14.94	29.44	27.07	5.55	31.00	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	52.31	17.57	40.00	-22.43	33.53	13.94	1.32	31.22	--	--	Peak																																																																																																																																																															
2	180.35	17.72	43.50	-25.78	30.96	15.30	2.44	30.98	--	--	Peak																																																																																																																																																															
3	279.29	24.30	46.00	-21.70	32.97	19.22	3.01	30.90	--	--	Peak																																																																																																																																																															
4	403.45	23.76	46.00	-22.24	28.86	21.98	3.62	30.70	--	--	Peak																																																																																																																																																															
5	490.75	24.49	46.00	-21.51	27.63	23.57	3.99	30.70	--	--	Peak																																																																																																																																																															
6	836.07	30.94	46.00	-15.06	30.42	26.39	5.19	31.06	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	51.34	17.16	40.00	-22.84	32.94	14.12	1.31	31.21	--	--	Peak																																																																																																																																																															
2	158.04	17.53	43.50	-25.97	29.98	16.34	2.28	31.07	--	--	Peak																																																																																																																																																															
3	278.32	20.57	46.00	-25.43	29.22	19.24	3.01	30.90	--	--	Peak																																																																																																																																																															
4	418.00	22.67	46.00	-23.33	27.39	22.30	3.68	30.70	--	--	Peak																																																																																																																																																															
5	557.68	27.78	46.00	-18.22	29.55	24.98	4.25	31.00	--	--	Peak																																																																																																																																																															
6	944.71	31.06	46.00	-14.94	29.44	27.07	5.55	31.00	--	--	Peak																																																																																																																																																															




Mode	35																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_LF_CH149_5745MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>56.19</td><td>17.35</td><td>40.00</td><td>-22.65</td><td>34.00</td><td>13.22</td><td>1.37</td><td>31.24</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>147.37</td><td>17.35</td><td>43.50</td><td>-26.15</td><td>29.51</td><td>16.75</td><td>2.20</td><td>31.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>279.29</td><td>22.58</td><td>46.00</td><td>-23.42</td><td>31.25</td><td>19.22</td><td>3.01</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>412.18</td><td>24.92</td><td>46.00</td><td>-21.08</td><td>29.79</td><td>22.17</td><td>3.66</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>507.24</td><td>24.75</td><td>46.00</td><td>-21.25</td><td>27.55</td><td>23.88</td><td>4.06</td><td>30.74</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>837.04</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>30.80</td><td>26.40</td><td>5.19</td><td>31.06</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	56.19	17.35	40.00	-22.65	34.00	13.22	1.37	31.24	--	--	Peak	2	147.37	17.35	43.50	-26.15	29.51	16.75	2.20	31.11	--	--	Peak	3	279.29	22.58	46.00	-23.42	31.25	19.22	3.01	30.90	--	--	Peak	4	412.18	24.92	46.00	-21.08	29.79	22.17	3.66	30.70	--	--	Peak	5	507.24	24.75	46.00	-21.25	27.55	23.88	4.06	30.74	--	--	Peak	6	837.04	31.33	46.00	-14.67	30.80	26.40	5.19	31.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>46.49</td><td>17.95</td><td>40.00</td><td>-22.05</td><td>32.13</td><td>15.77</td><td>1.25</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>158.04</td><td>17.13</td><td>43.50</td><td>-26.37</td><td>29.58</td><td>16.34</td><td>2.28</td><td>31.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>279.29</td><td>19.89</td><td>46.00</td><td>-26.11</td><td>28.56</td><td>19.22</td><td>3.01</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>558.65</td><td>28.71</td><td>46.00</td><td>-17.29</td><td>30.47</td><td>24.98</td><td>4.26</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>823.46</td><td>29.78</td><td>46.00</td><td>-16.22</td><td>29.42</td><td>26.29</td><td>5.15</td><td>31.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>941.80</td><td>31.32</td><td>46.00</td><td>-14.68</td><td>29.73</td><td>27.05</td><td>5.54</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	46.49	17.95	40.00	-22.05	32.13	15.77	1.25	31.20	--	--	Peak	2	158.04	17.13	43.50	-26.37	29.58	16.34	2.28	31.07	--	--	Peak	3	279.29	19.89	46.00	-26.11	28.56	19.22	3.01	30.90	--	--	Peak	4	558.65	28.71	46.00	-17.29	30.47	24.98	4.26	31.00	--	--	Peak	5	823.46	29.78	46.00	-16.22	29.42	26.29	5.15	31.08	--	--	Peak	6	941.80	31.32	46.00	-14.68	29.73	27.05	5.54	31.00	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	56.19	17.35	40.00	-22.65	34.00	13.22	1.37	31.24	--	--	Peak																																																																																																																																																															
2	147.37	17.35	43.50	-26.15	29.51	16.75	2.20	31.11	--	--	Peak																																																																																																																																																															
3	279.29	22.58	46.00	-23.42	31.25	19.22	3.01	30.90	--	--	Peak																																																																																																																																																															
4	412.18	24.92	46.00	-21.08	29.79	22.17	3.66	30.70	--	--	Peak																																																																																																																																																															
5	507.24	24.75	46.00	-21.25	27.55	23.88	4.06	30.74	--	--	Peak																																																																																																																																																															
6	837.04	31.33	46.00	-14.67	30.80	26.40	5.19	31.06	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	46.49	17.95	40.00	-22.05	32.13	15.77	1.25	31.20	--	--	Peak																																																																																																																																																															
2	158.04	17.13	43.50	-26.37	29.58	16.34	2.28	31.07	--	--	Peak																																																																																																																																																															
3	279.29	19.89	46.00	-26.11	28.56	19.22	3.01	30.90	--	--	Peak																																																																																																																																																															
4	558.65	28.71	46.00	-17.29	30.47	24.98	4.26	31.00	--	--	Peak																																																																																																																																																															
5	823.46	29.78	46.00	-16.22	29.42	26.29	5.15	31.08	--	--	Peak																																																																																																																																																															
6	941.80	31.32	46.00	-14.68	29.73	27.05	5.54	31.00	--	--	Peak																																																																																																																																																															



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	73.10	1.355	0.738	1KHz
802.11n HT20	71.29	1.259	0.794	1KHz
802.11n HT40	55.07	0.622	1.608	3KHz


802.11a

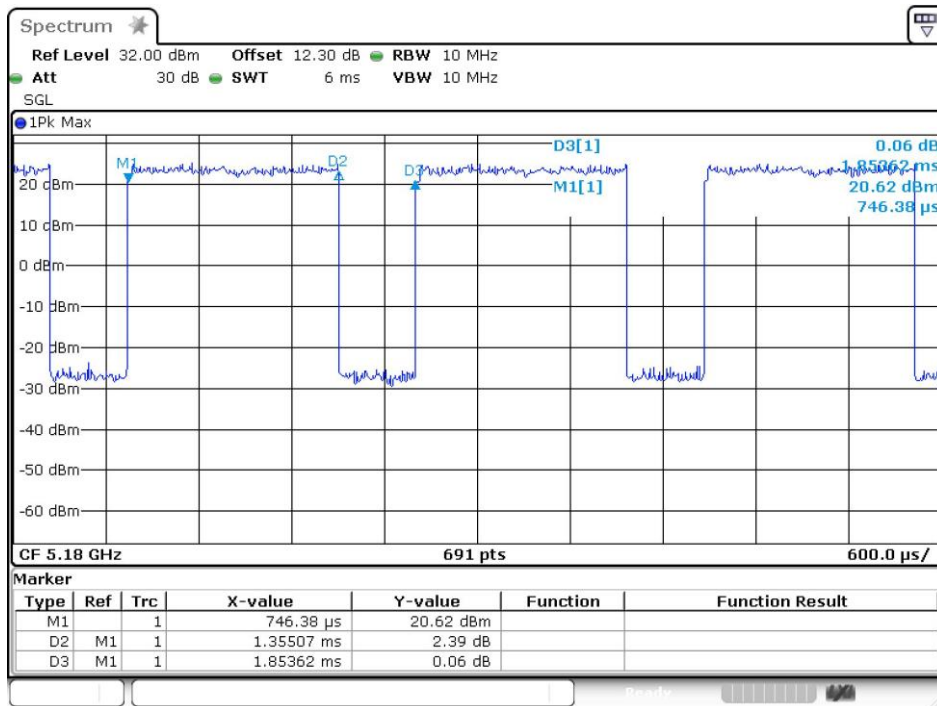

Date: 19.JUN.2024 09:04:27




802.11n HT20

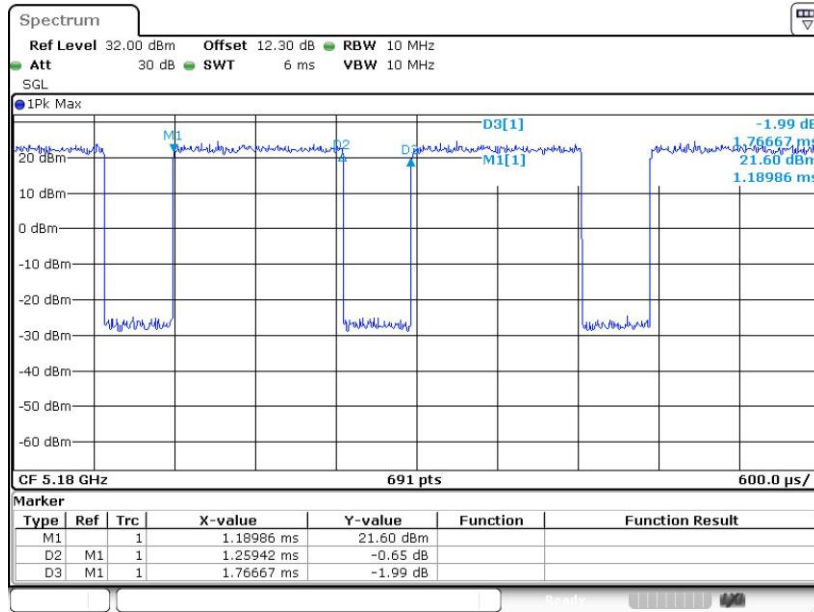

Date: 19.JUN.2024 09:06:09

802.11n HT40

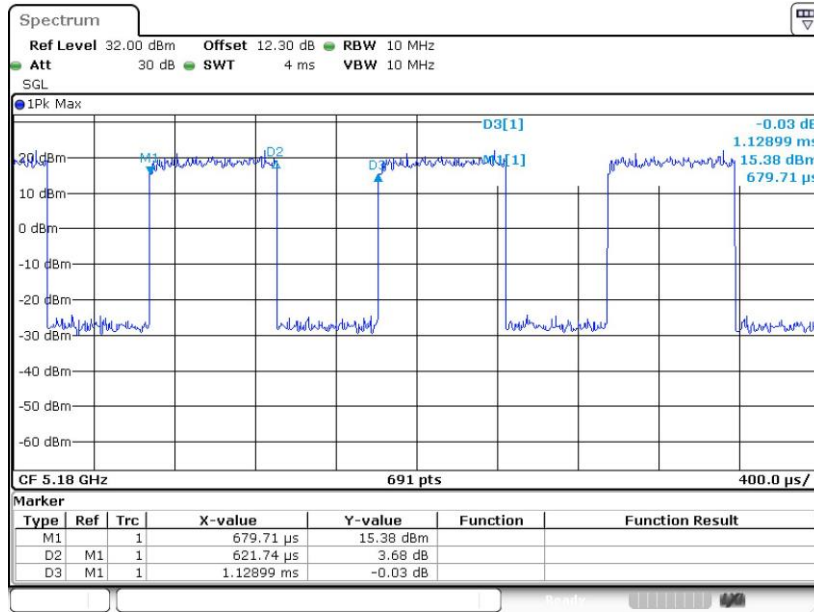

Date: 19.JUN.2024 09:07:48