



# FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.  
EQUIPMENT : LoRa Module  
BRAND NAME : Quectel  
MODEL NAME : KG200Z  
FCC ID : XMR2024KG200Z  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter  
TEST DATE(S) : Mar. 06, 2024 ~ Jun. 04, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software..... 6

    1.8 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 Number of Channel Measurement ..... 12

    3.2 Hopping Channel Separation Measurement ..... 15

    3.3 Dwell Time Measurement..... 21

    3.4 20dB and 99% Bandwidth Measurement ..... 24

    3.5 Output Power Measurement..... 35

    3.6 Conducted Band Edges Measurement..... 36

    3.7 Conducted Spurious Emission Measurement ..... 43

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 53

    3.9 AC Conducted Emission Measurement..... 57

    3.10 Antenna Requirements ..... 59

**4 LIST OF MEASURING EQUIPMENT..... 60**

**5 UNCERTAINTY OF EVALUATION..... 61**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**

**APPENDIX F. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)(i)	Number of Channels	15.247(a)(1)(i)	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	20dB Bandwidth	Pass	-
3.3	15.247(a)(1)(i)	Dwell Time of Each Channel	15.247(a)(1)(i)	Pass	-
3.4	15.247(a)(1)(i)	20dB Bandwidth	≤ 500 kHz	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(2)	Peak Output Power	15.247(b)(2)	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.48 dB at 32.91 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.32 dB at 0.168 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

## 1.2 Manufacturer

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LoRa Module
Brand Name	Quectel
Model Name	KG200Z
FCC ID	XMR2024KG200Z
SN Code	E1N24AG0E000028
HW Version	R1.0
SW Version	KG200ZAAR01A01
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	902.2 MHz ~ 927.6 MHz
Number of Channels / Data Rate	128 chs for 50kbps 64 chs for 150kbps 51 chs for 250kbps
Maximum Output Power to Antenna	Data Rate 50kbps : 20.58 dBm (0.1143 W) Data Rate 150kbps : 20.63 dBm (0.1156 W) Data Rate 250kbps : 20.61 dBm (0.1151 W)
99% Occupied Bandwidth	Data Rate 50kbps : 0.109 MHz Data Rate 150kbps : 0.161 MHz Data Rate 250kbps : 0.188 MHz
Antenna Type / Gain	Dipole Antenna with gain 2.50 dBi
Type of Modulation	FSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (50Kbps)	1	902.2	44	910.8	87	919.4
	2	902.4	45	911	88	919.6
	3	902.6	46	911.2	89	919.8
	4	902.8	47	911.4	90	920
	5	903	48	911.6	91	920.2
	6	903.2	49	911.8	92	920.4
	7	903.4	50	912	93	920.6
	8	903.6	51	912.2	94	920.8
	9	903.8	52	912.4	95	921
	10	904	53	912.6	96	921.2
	11	904.2	54	912.8	97	921.4
	12	904.4	55	913	98	921.6
	13	904.6	56	913.2	99	921.8
	14	904.8	57	913.4	100	922
	15	905	58	913.6	101	922.2
	16	905.2	59	913.8	102	922.4
	17	905.4	60	914	103	922.6
	18	905.6	61	914.2	104	922.8
	19	905.8	62	914.4	105	923
	20	906	63	914.6	106	923.2
	21	906.2	64	914.8	107	923.4
	22	906.4	65	915	108	923.6
	23	906.6	66	915.2	109	923.8
	24	906.8	67	915.4	110	924
	25	907	68	915.6	111	924.2
	26	907.2	69	915.8	112	924.4
	27	907.4	70	916	113	924.6
	28	907.6	71	916.2	114	924.8
	29	907.8	72	916.4	115	925
	30	908	73	916.6	116	925.2
	31	908.2	74	916.8	117	925.4
	32	908.4	75	917	118	925.6
	33	908.6	76	917.2	119	925.8
	34	908.8	77	917.4	120	926
	35	909	78	917.6	121	926.2
	36	909.2	79	917.8	122	926.4
	37	909.4	80	918	123	926.6
	38	909.6	81	918.2	124	926.8
	39	909.8	82	918.4	125	927
	40	910	83	918.6	126	927.2
	41	910.2	84	918.8	127	927.4
	42	910.4	85	919	128	927.6
	43	910.6	86	919.2		

Note: The above EUT's information was declared by manufacturer.



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (150Kbps)	1	902.4	23	911.2	45	920
	2	902.8	24	911.6	46	920.4
	3	903.2	25	912	47	920.8
	4	903.6	26	912.4	48	921.2
	5	904	27	912.8	49	921.6
	6	904.4	28	913.2	50	922
	7	904.8	29	913.6	51	922.4
	8	905.2	30	914	52	922.8
	9	905.6	31	914.4	53	923.2
	10	906	32	914.8	54	923.6
	11	906.4	33	915.2	55	924
	12	906.8	34	915.6	56	924.4
	13	907.2	35	916	57	924.8
	14	907.6	36	916.4	58	925.2
	15	908	37	916.8	59	925.6
	16	908.4	38	917.2	60	926
	17	908.8	39	917.6	61	926.4
	18	909.2	40	918	62	926.8
	19	909.6	41	918.4	63	927.2
	20	910	42	918.8	64	927.6
	21	910.4	43	919.2		
	22	910.8	44	919.6		

Note: The above EUT's information was declared by manufacturer.

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (250Kbps)	1	902.5	18	911.0	35	919.5
	2	903.0	19	911.5	36	920.0
	3	903.5	20	912.0	37	920.5
	4	904.0	21	912.5	38	921.0
	5	904.5	22	913.0	39	921.5
	6	905.0	23	913.5	40	922.0
	7	905.5	24	914.0	41	922.5
	8	906.0	25	914.5	42	923.0
	9	906.5	26	915.0	43	923.5
	10	907.0	27	915.5	44	924.0
	11	907.5	28	916.0	45	924.5
	12	908.0	29	916.5	46	925.0
	13	908.5	30	917.0	47	925.5
	14	909.0	31	917.5	48	926.0
	15	909.5	32	918.0	49	926.5
	16	910.0	33	918.5	50	927.0
	17	910.5	34	919.0	51	927.5

Note: The above EUT's information was declared by manufacturer.





## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower) For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report,
- b. AC power line Conducted Emission was tested under maximum output power.

The following RF summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Modulation / Data Rate		
	FSK FHSS / 50kbps	FSK FHSS / 150kbps	FSK FHSS / 250kbps
<b>Conducted Test Cases</b>	Low: 902.2 MHz Mid: 915 MHz High: 927.6 MHz	Low: 902.4 MHz Mid: 914.8 MHz High: 927.6 MHz	Low: 902.5 MHz Mid: 915 MHz High: 927.5 MHz
<b>Radiated Test Cases</b>	Low: 902.2 MHz Mid: 915 MHz High: 927.6 MHz	Low: 902.4 MHz Mid: 914.8 MHz High: 927.6 MHz	Low: 902.5 MHz Mid: 915 MHz High: 927.5 MHz
<b>AC Conducted Emission</b>	Mode 1: Lora TX+ power from Test Jig		

### 2.3 Connection Diagram of Test System

For AC Conducted Emission:

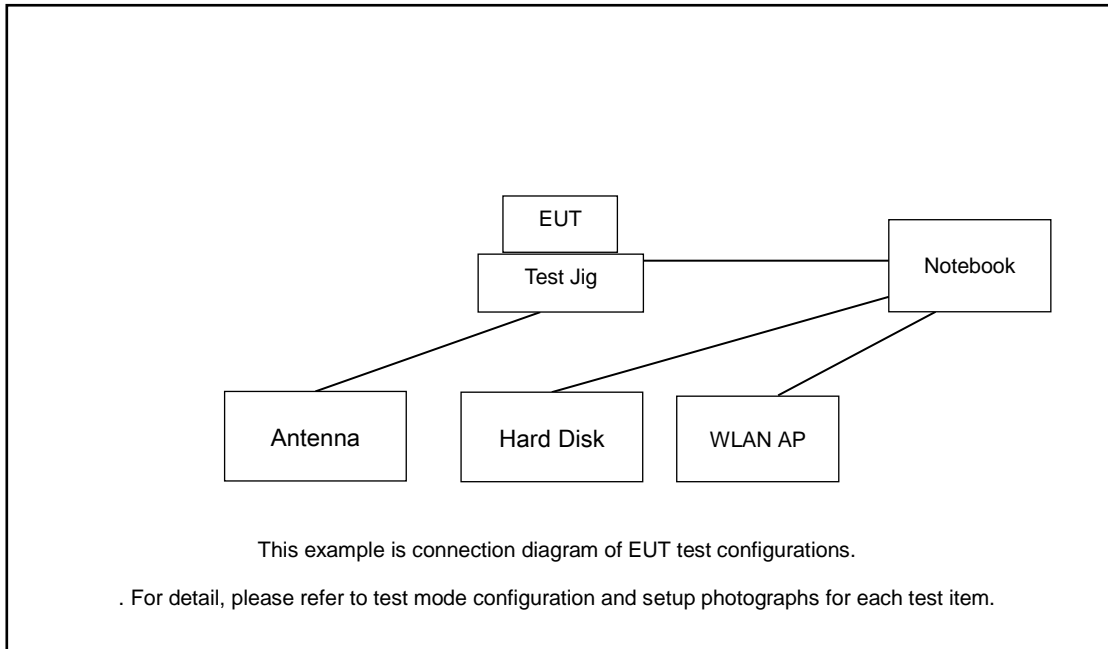

For Radiated Emission:

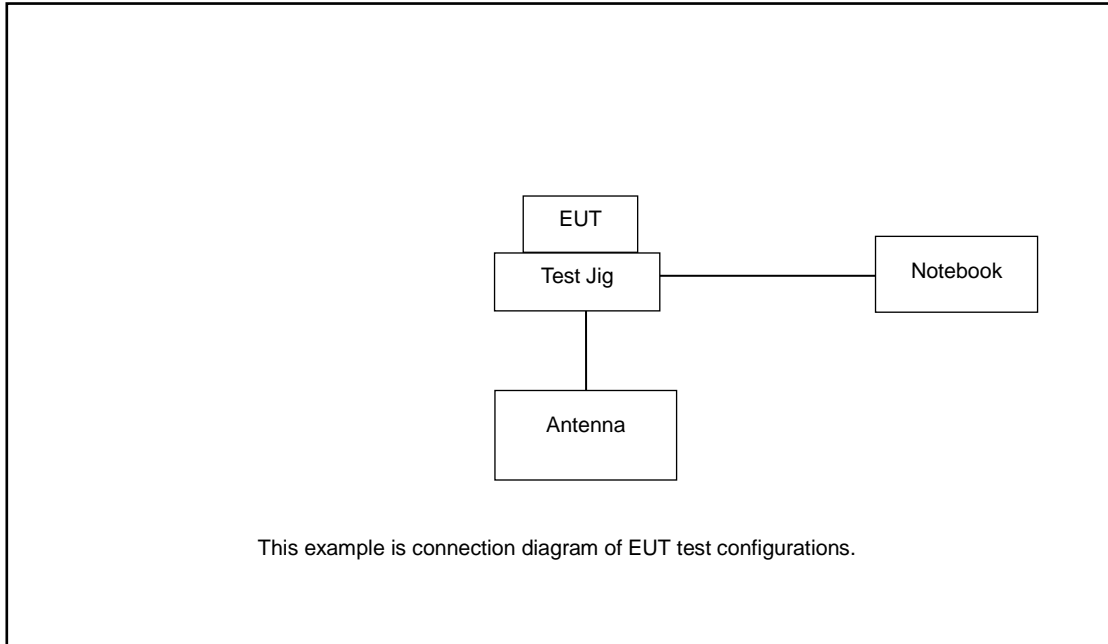



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Test jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For FSK FHSS function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 0.22 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 0.22 + 10 = 10.22 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;  
RBW = 50kHz, VBW = 200kHz (for 50kbps);  
RBW = 100kHz, VBW = 300kHz (for 150kbps);  
RBW = 100kHz, VBW = 300kHz (for 250kbps);  
Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup


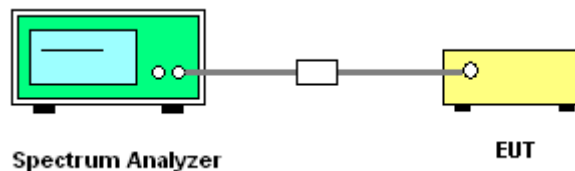




### 3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.

Number of Hopping Channel Plot (Data Rate 50kbps)

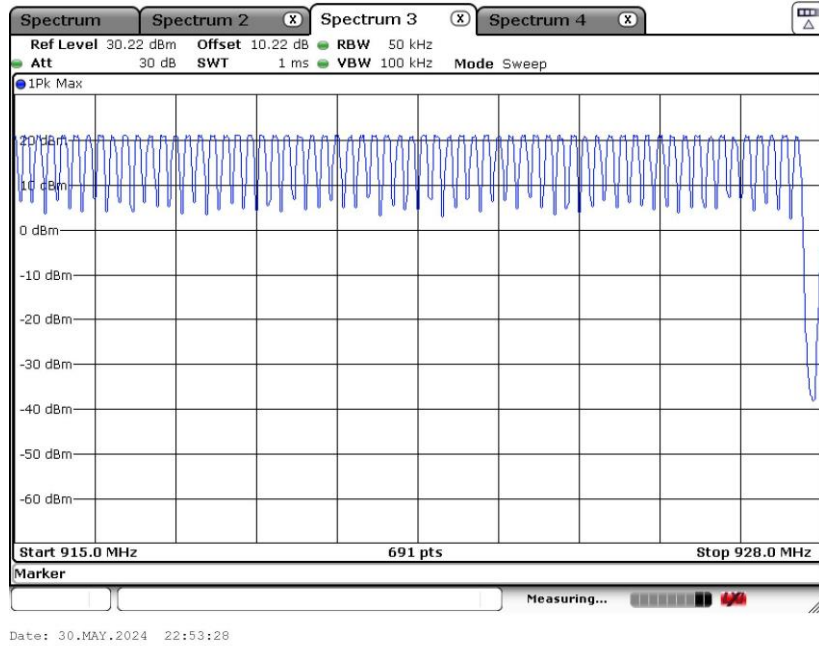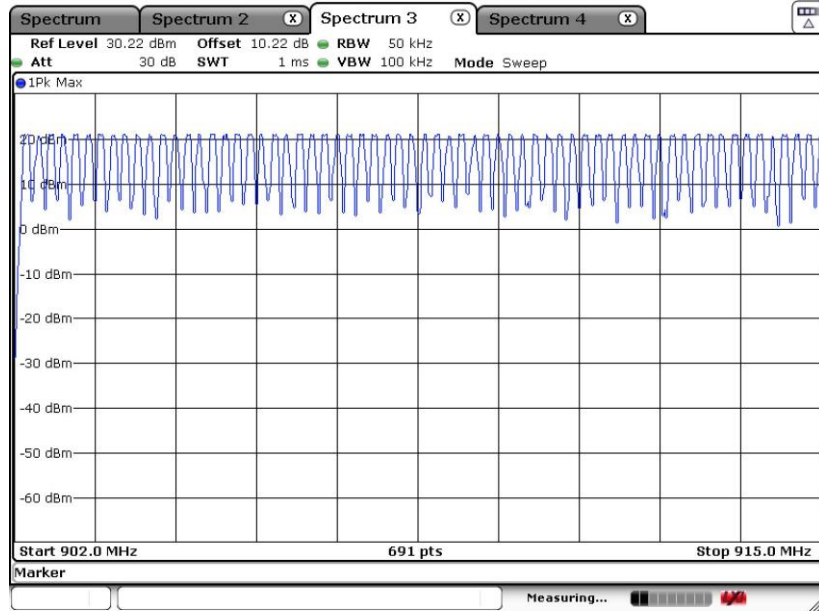




Number of Hopping Channel Plot (Data Rate 150kbps)

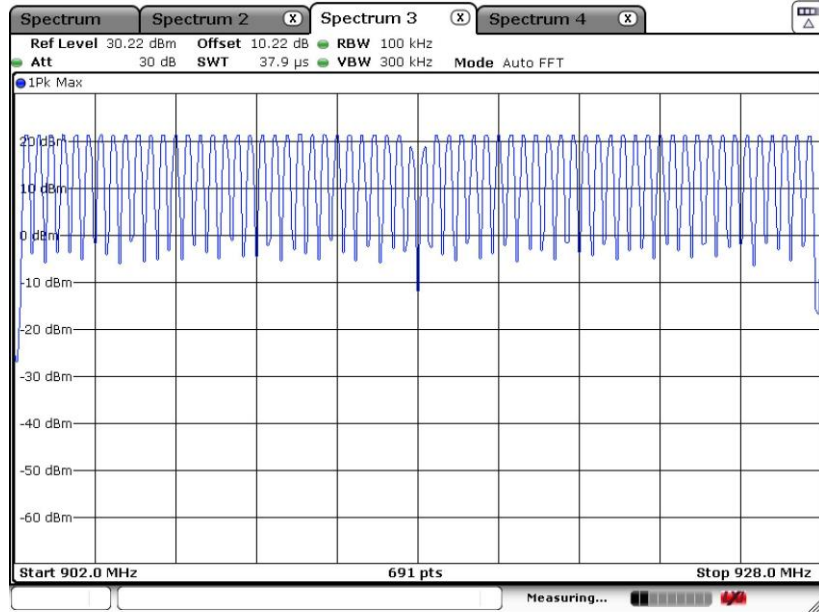

Date: 1.APR.2024 16:25:39

Number of Hopping Channel Plot (Data Rate 250kbps)

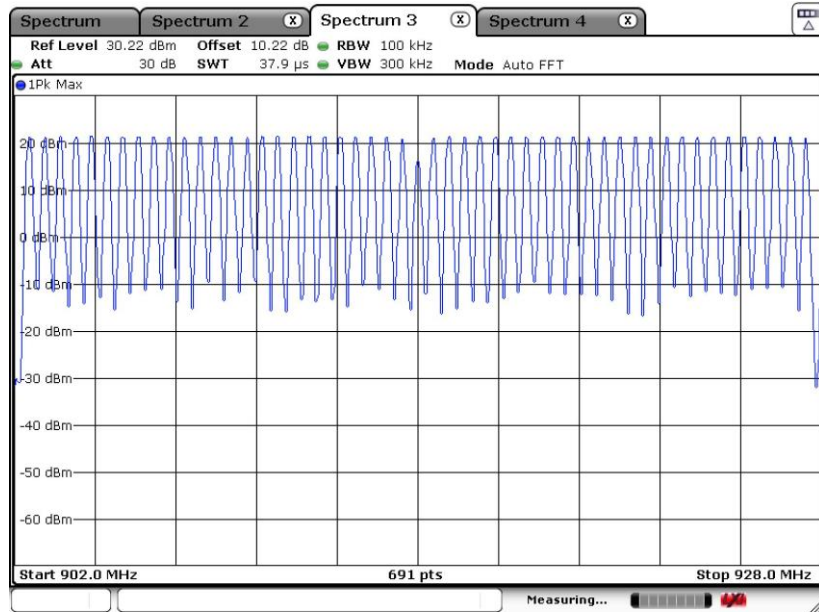

Date: 1.APR.2024 16:40:11

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peaks of two adjacent channels;
  - RBW = 50kHz, VBW = 200kHz (for 50kbps);
  - RBW = 100kHz, VBW = 300kHz (for 150kbps);
  - RBW = 200kHz, VBW = 500kHz (for 250kbps);
  - Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

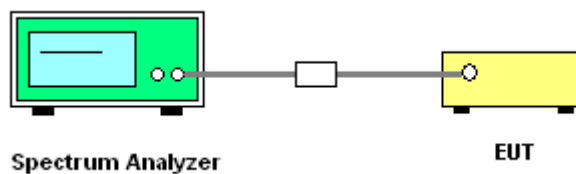


### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<Data Rate 50kbps>

Channel Separation Plot on Low CH

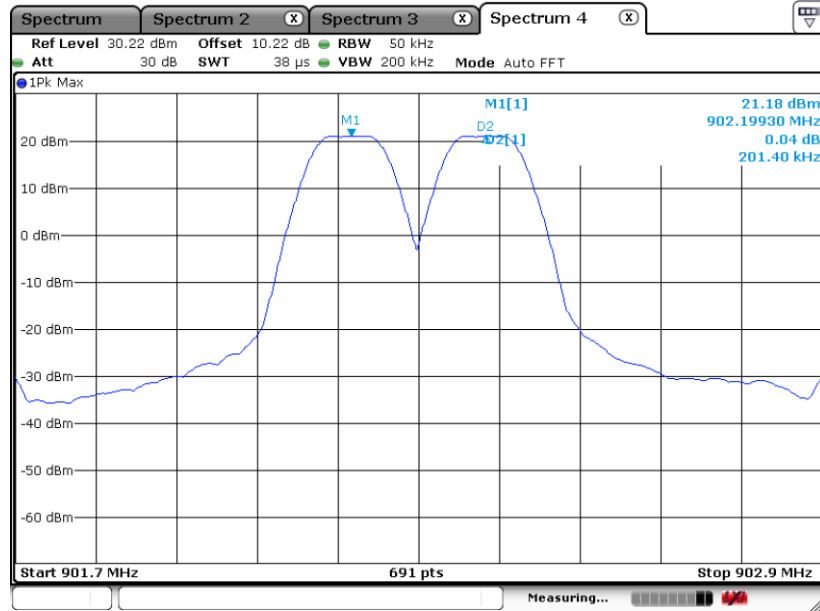

Date: 1.APR.2024 01:23:06

Channel Separation Plot on Mid CH

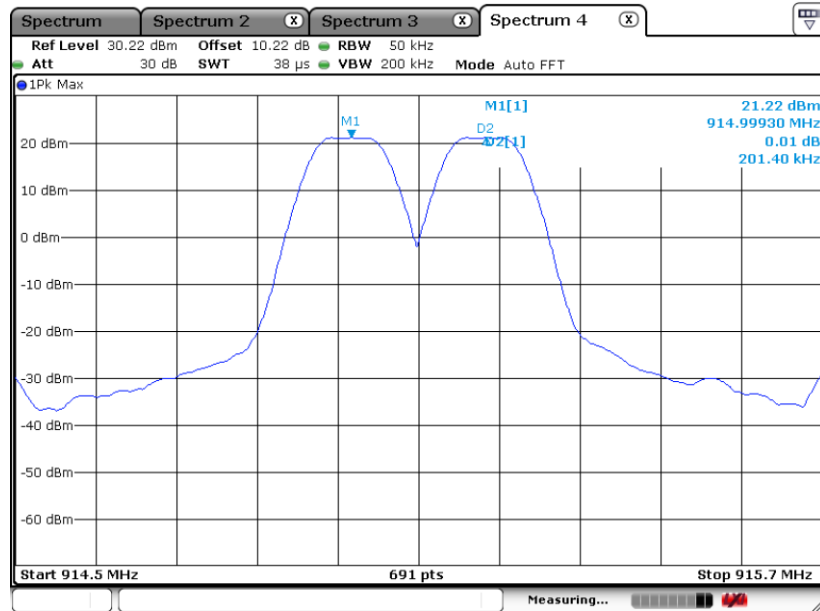


Date: 1.APR.2024 01:20:55






Channel Separation Plot on High CH

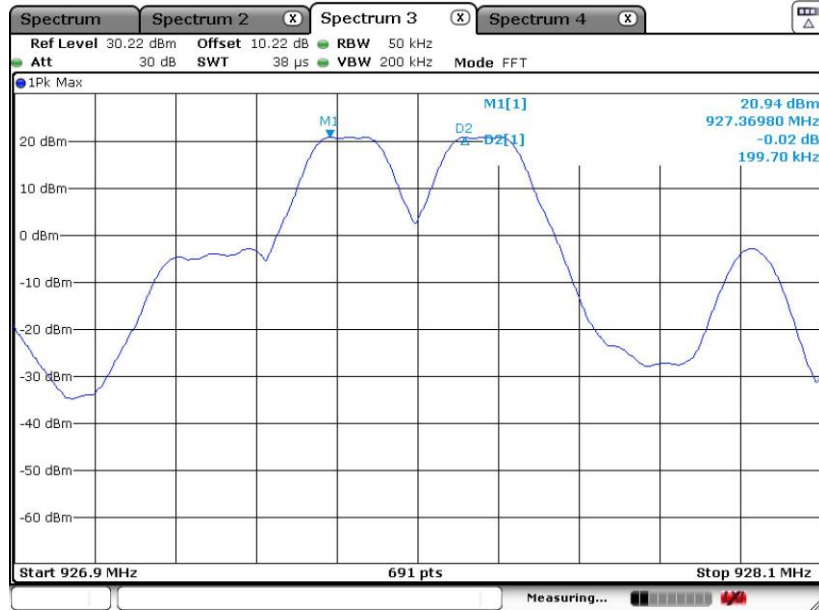

Date: 30.MAY.2024 22:39:22

<Data Rate 150kbps>


Channel Separation Plot on Low CH

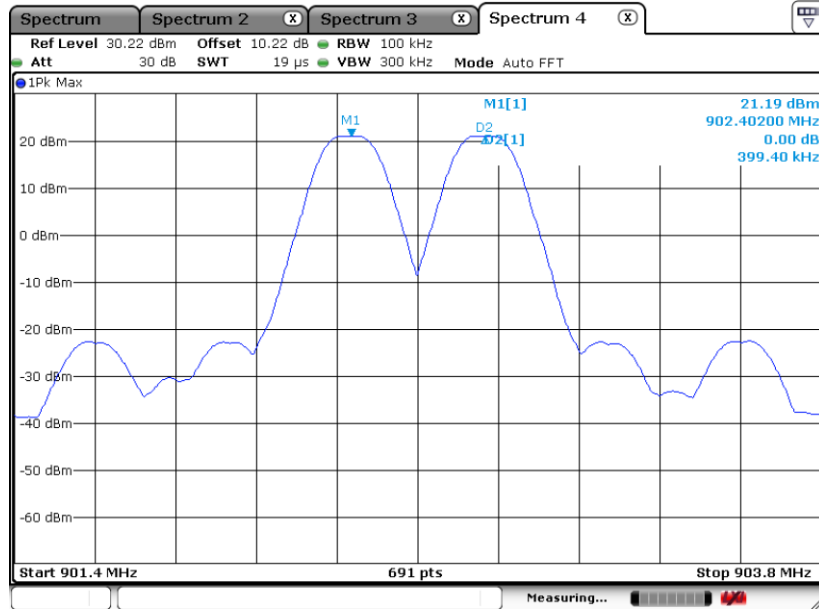


Date: 1.APR.2024 02:09:17



Channel Separation Plot on Mid CH

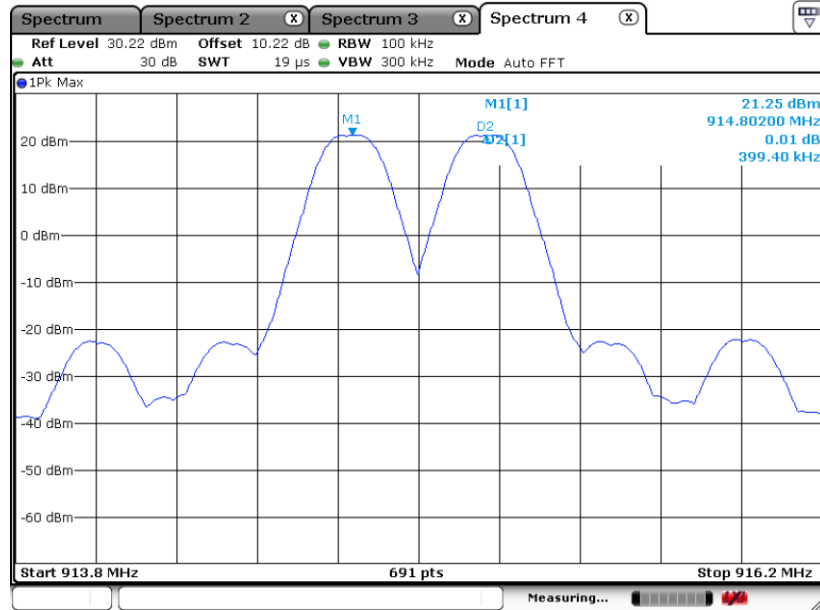


Channel Separation Plot on High CH

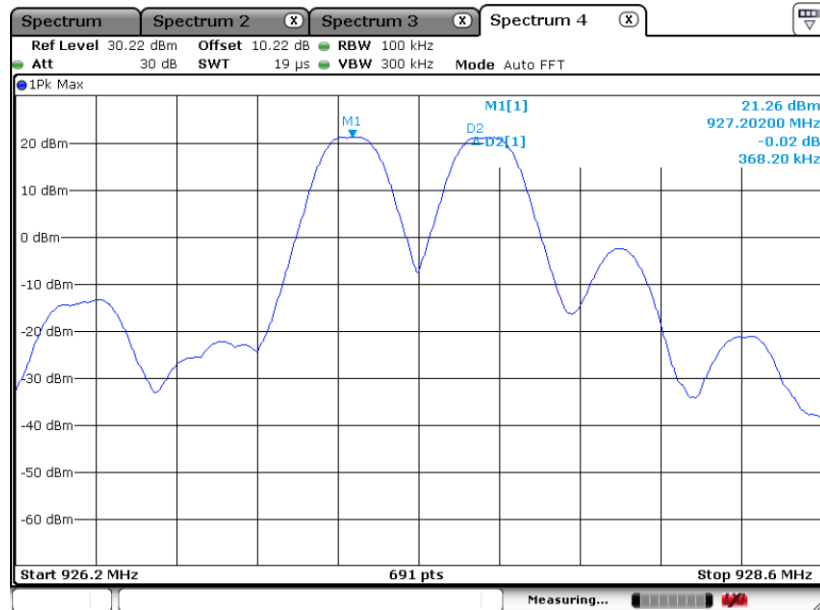




<Data Rate 250kbps>

Channel Separation Plot on Low CH

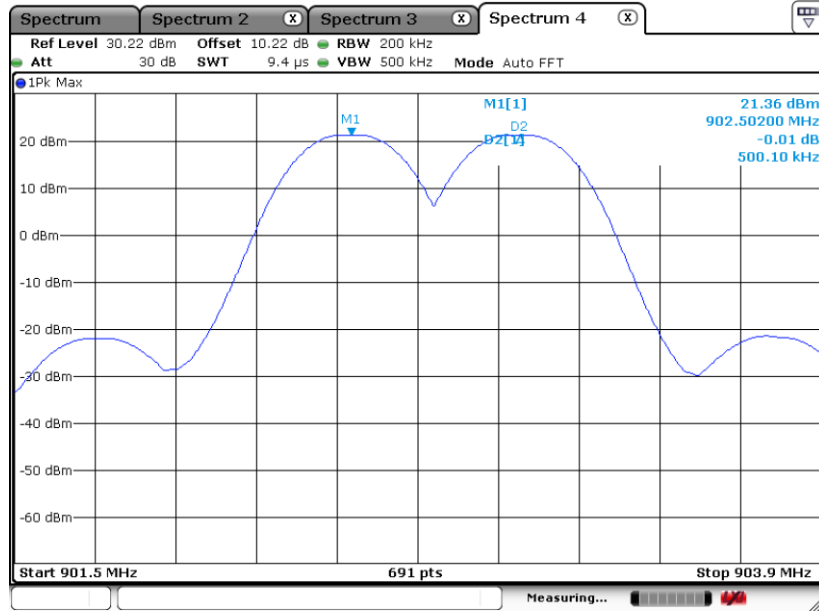

Date: 1.APR.2024 02:46:48


Channel Separation Plot on Mid CH

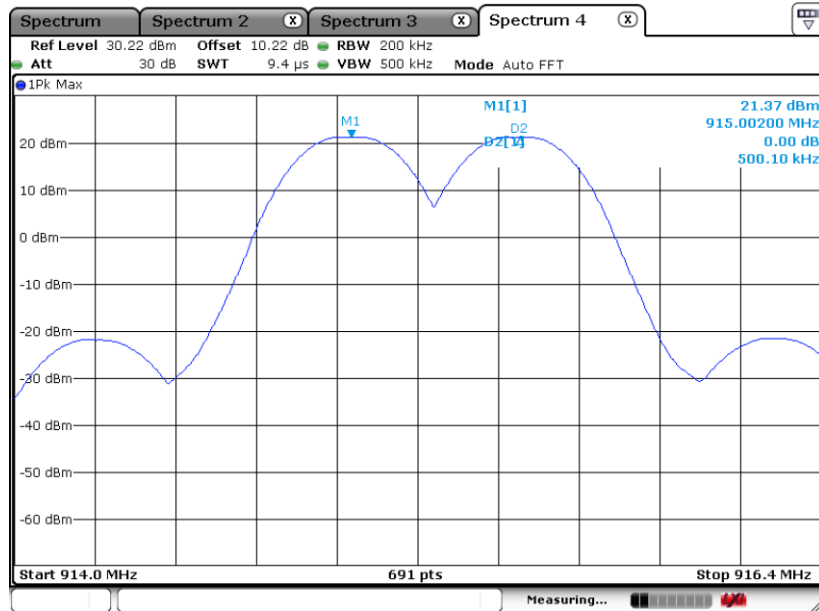

Date: 1.APR.2024 02:48:43



Channel Separation Plot on High CH

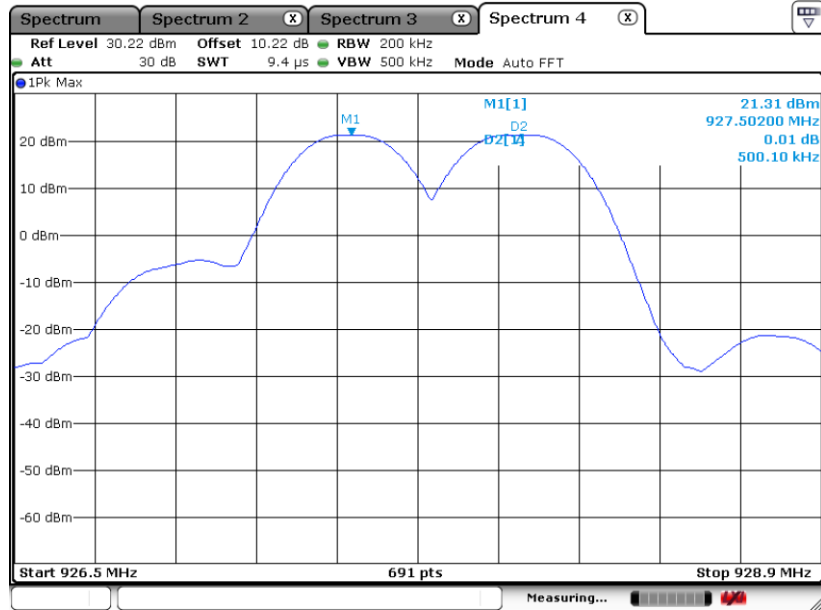

Date: 1.APR.2024 02:58:05

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 20 KHz; VBW = 20 KHz; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

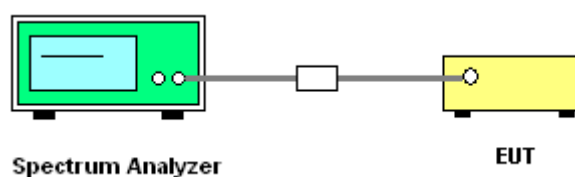




### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

DT on-time and Hops over 20 sec period for Data Rate 50kbps

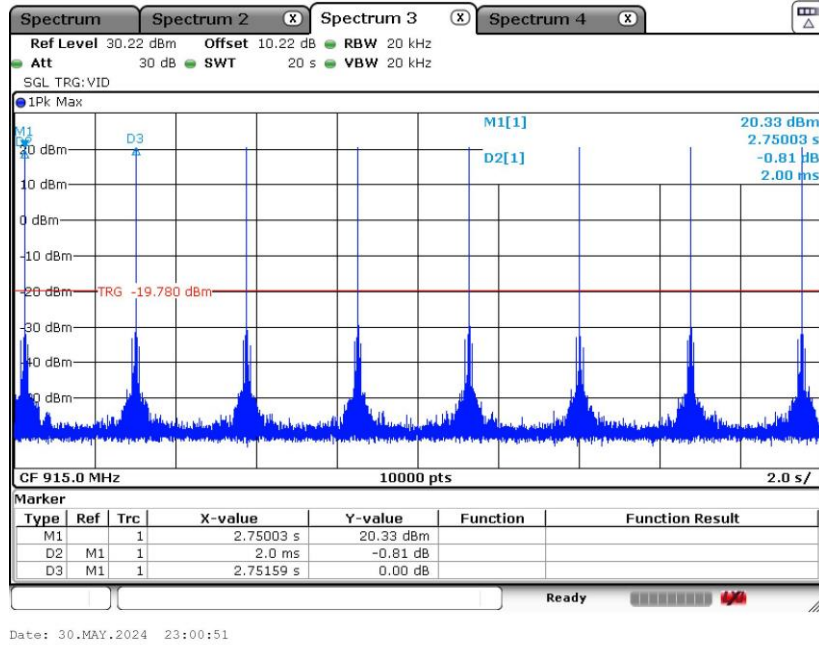


**Remark:**

$$\begin{aligned}
 \text{Dwell Time(s)} &= \text{Hops Over Occupancy Time (hops)} \times \text{Package Transfer Time} \\
 &= 2 \text{ (hop)} \times 8.0 \text{ (ms)} \\
 &= 0.016 \text{ (sec)}
 \end{aligned}$$



DT on-time and Hops over 20 sec period for Data Rate 150kbps

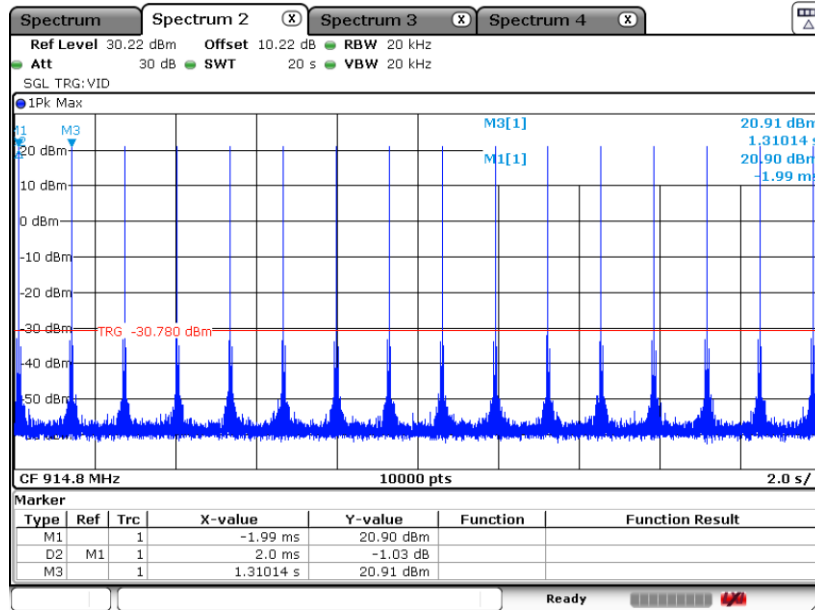


Date: 10.APR.2024 20:30:46

Remark:

$$\begin{aligned} \text{Dwell Time(s)} &= \text{Hops Over Occupancy Time (hops)} \times \text{Package Transfer Time} \\ &= 16 \text{ (hop)} \times 2.0 \text{ (ms)} \\ &= 0.032 \text{ (sec)} \end{aligned}$$

DT on-time and Hops over 20 sec period for Data Rate 250kbps

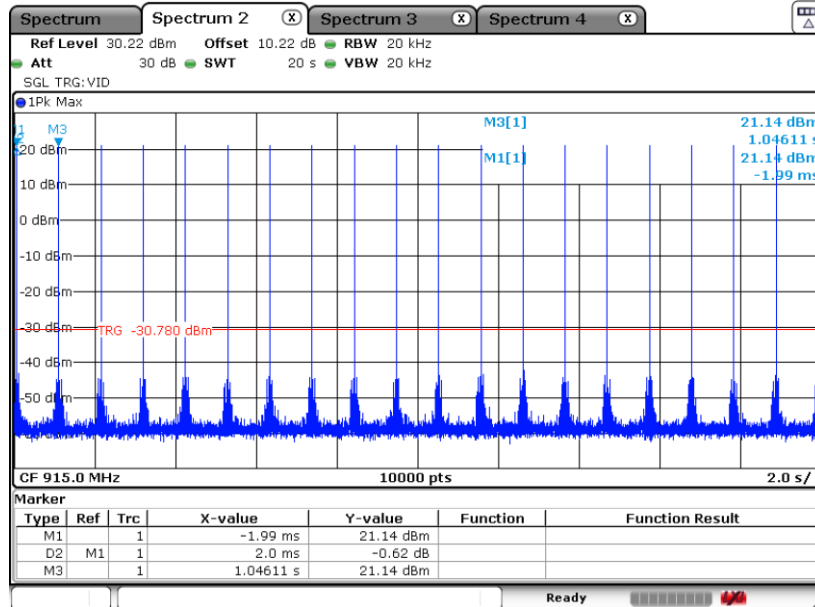

Date: 10.APR.2024 20:33:10

Remark:

$$\begin{aligned} \text{Dwell Time(s)} &= \text{Hops Over Occupancy Time (hops)} \times \text{Package Transfer Time} \\ &= 20 \text{ (hop)} \times 2.0 \text{ (ms)} \\ &= 0.040 \text{ (sec)} \end{aligned}$$

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = sample;  
Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

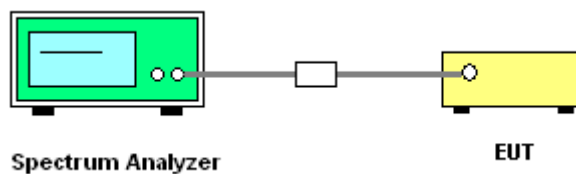

#### 3.4.5 Test Result of 20dB Bandwidth


Please refer to Appendix A.






<Data Rate 50kbps>

20 dB Bandwidth Plot on Low Channel

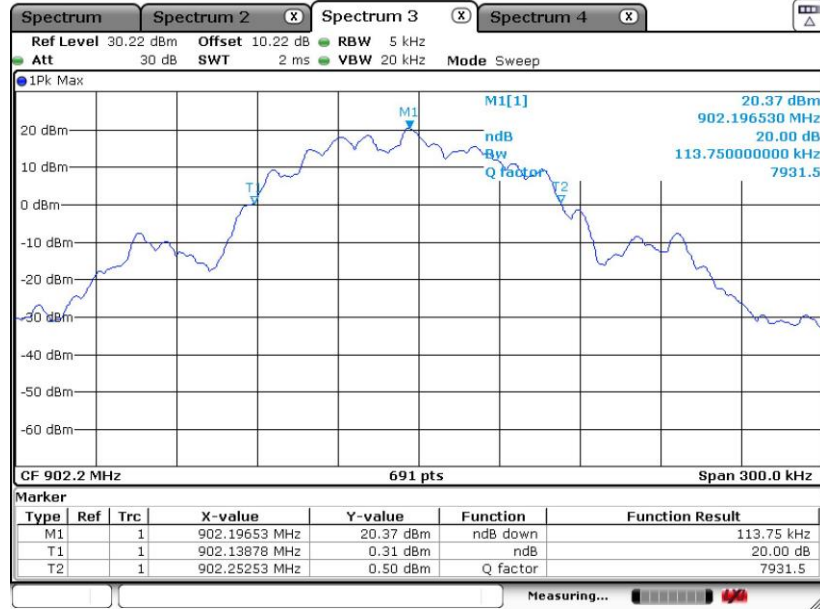

Date: 30.MAY.2024 22:35:48


20 dB Bandwidth Plot on Mid Channel

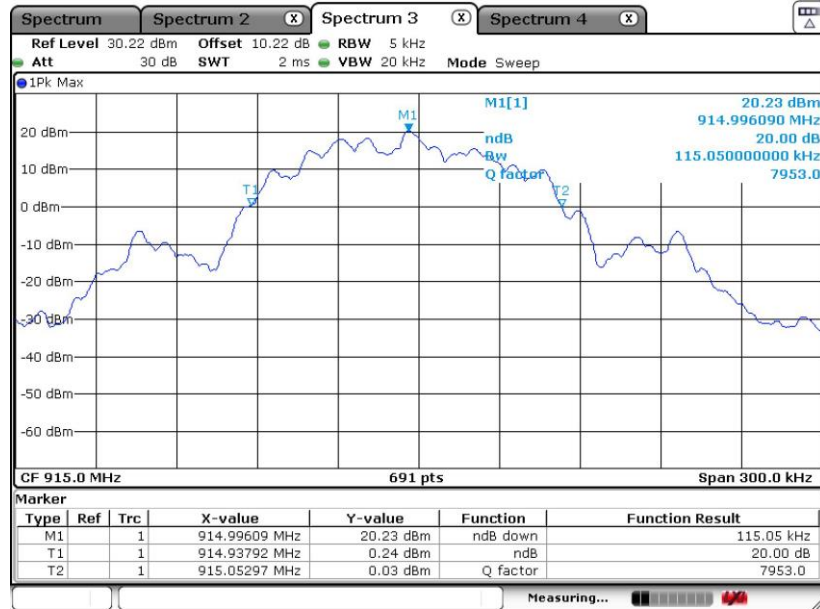

Date: 30.MAY.2024 22:37:46




20 dB Bandwidth Plot on High Channel

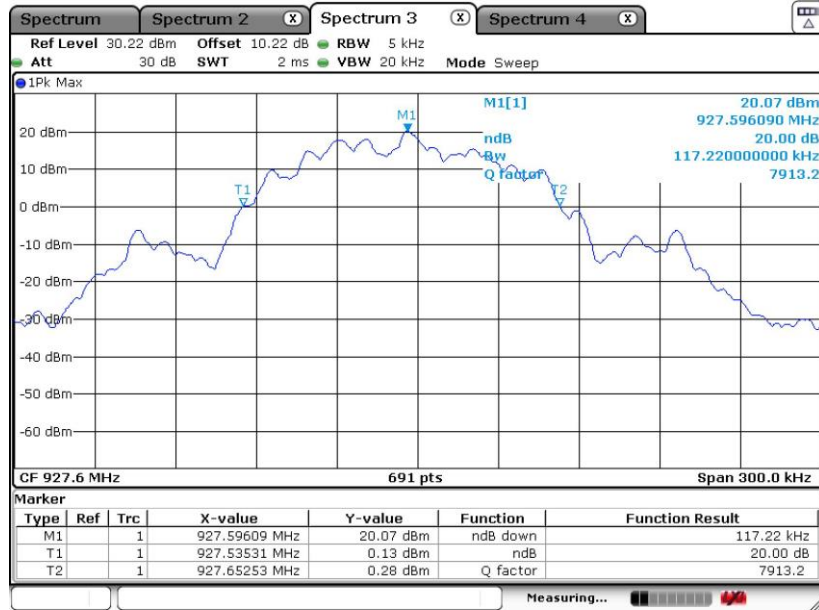

Date: 30.MAY.2024 22:33:26

<Data Rate 150kbps>


20 dB Bandwidth Plot on Low Channel

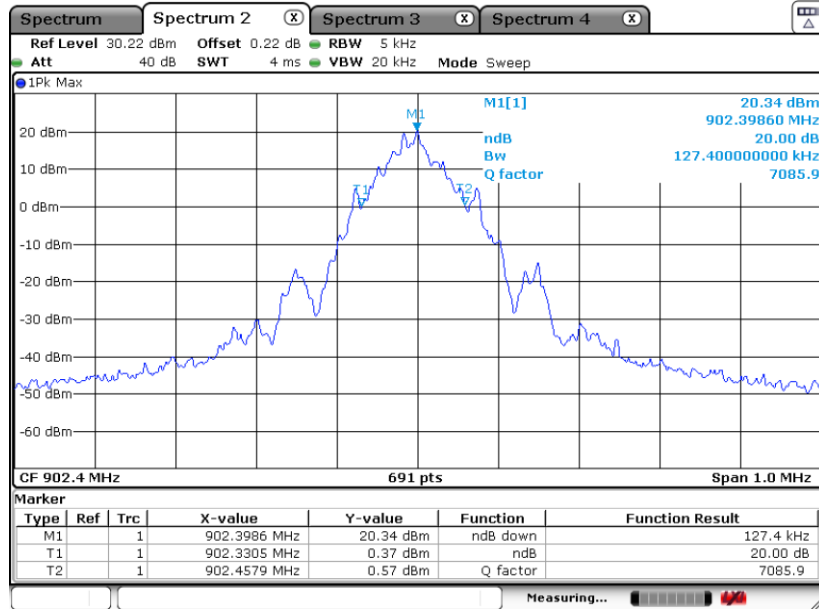

Date: 21.MAR.2024 16:50:20




### 20 dB Bandwidth Plot on Mid Channel

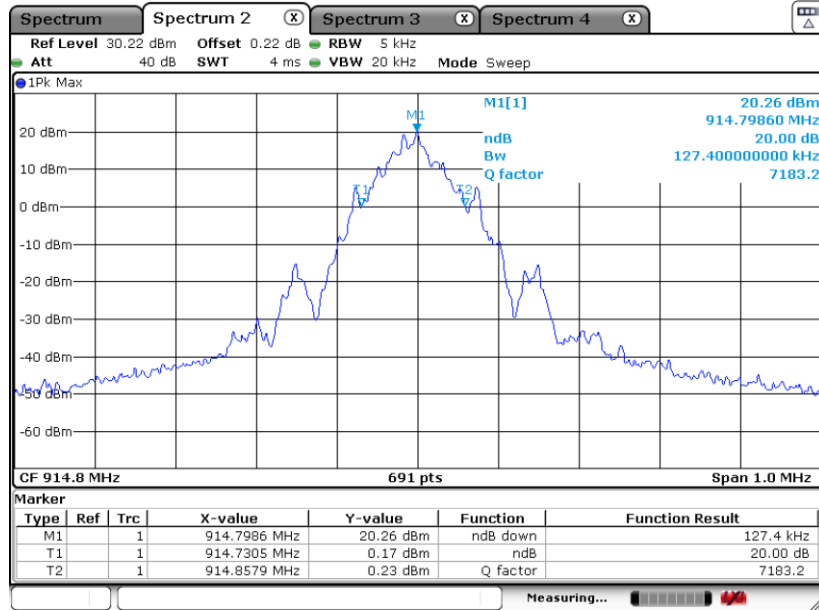

Date: 21.MAR.2024 16:48:35

### 20 dB Bandwidth Plot on High Channel

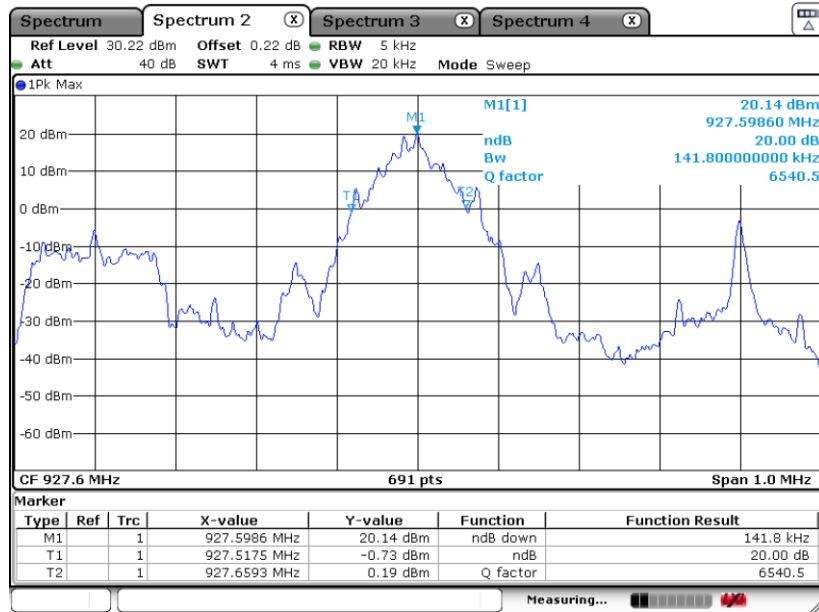


Date: 21.MAR.2024 16:53:11




<Data Rate 250kbps>

20 dB Bandwidth Plot on Low Channel

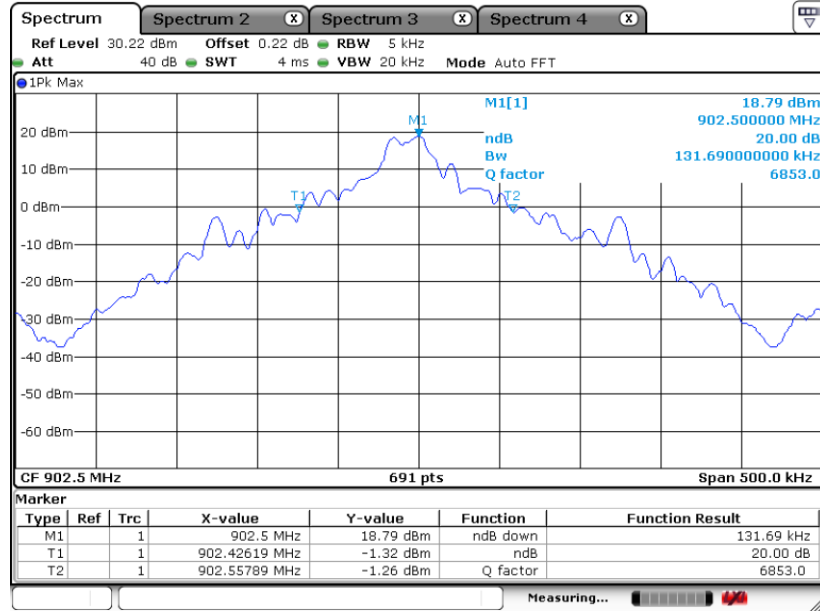

Date: 1.APR.2024 03:15:15


20 dB Bandwidth Plot on Mid Channel

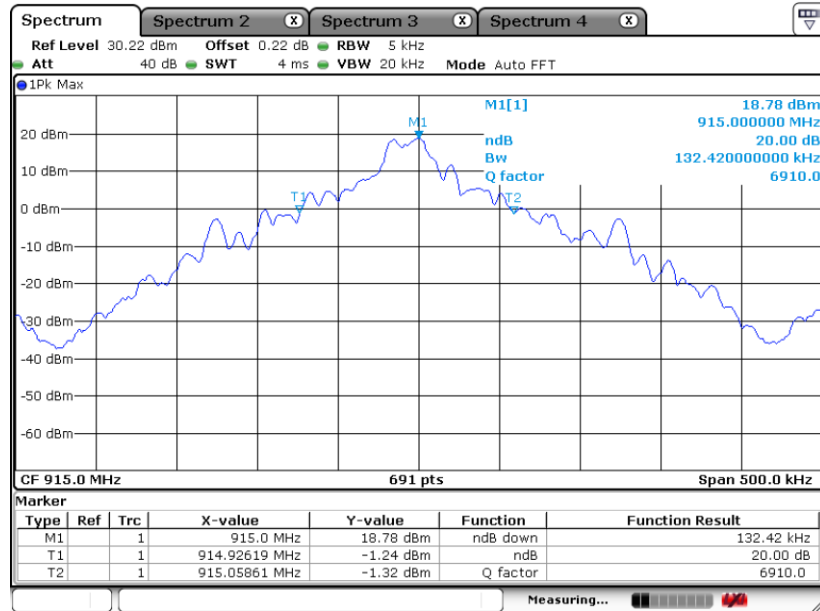

Date: 1.APR.2024 03:18:56



20 dB Bandwidth Plot on High Channel

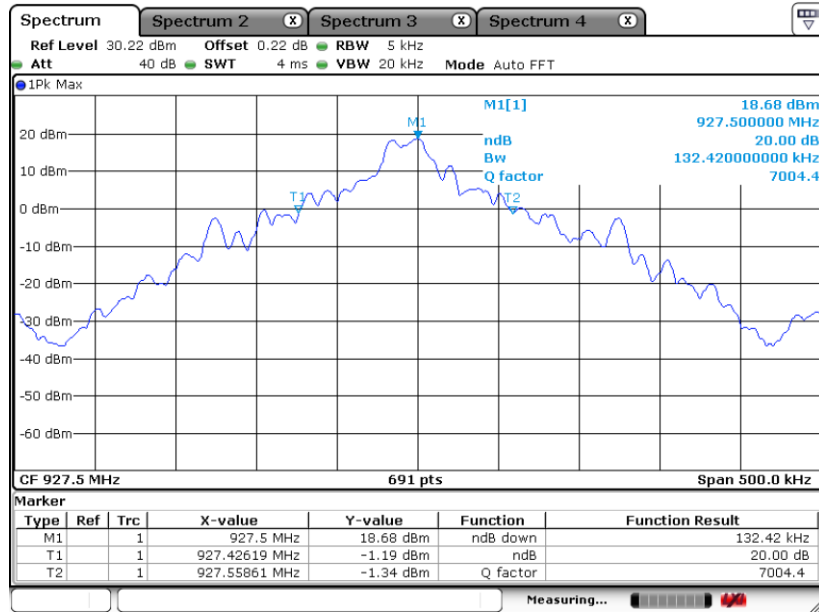

Date: 1.APR.2024 03:20:09




### 3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<Data Rate 50kbps>

#### 99% Occupied Bandwidth Plot on Low Channel

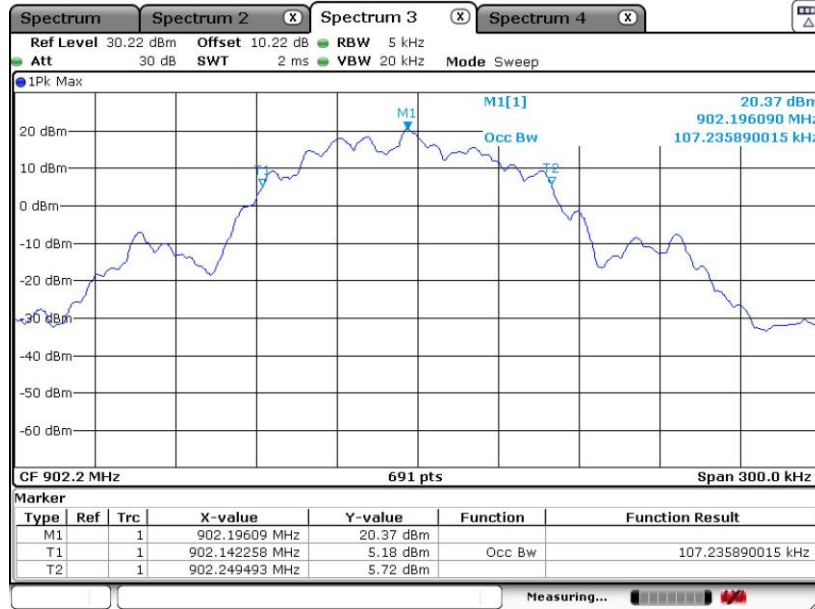

Date: 30.MAY.2024 22:36:10


#### 99% Occupied Bandwidth Plot on Mid Channel

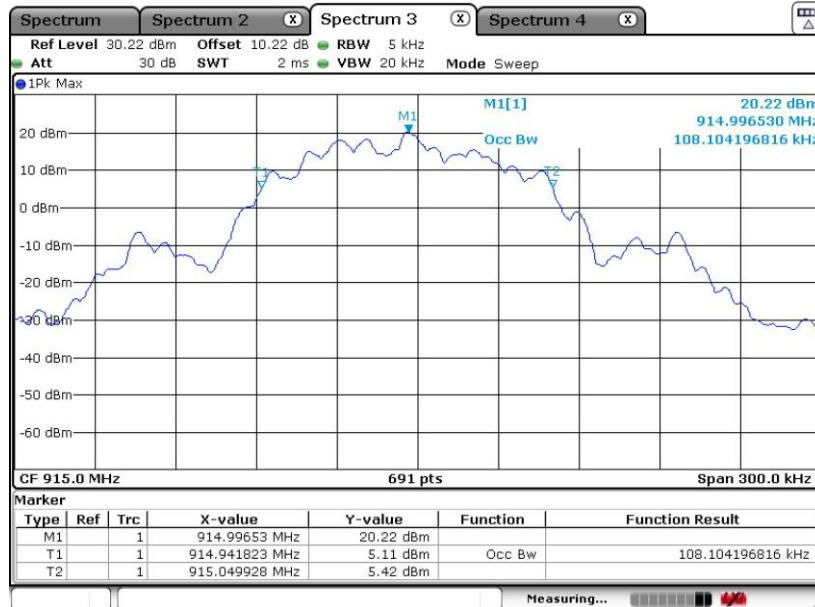

Date: 30.MAY.2024 22:37:06




99% Occupied Bandwidth Plot on High Channel

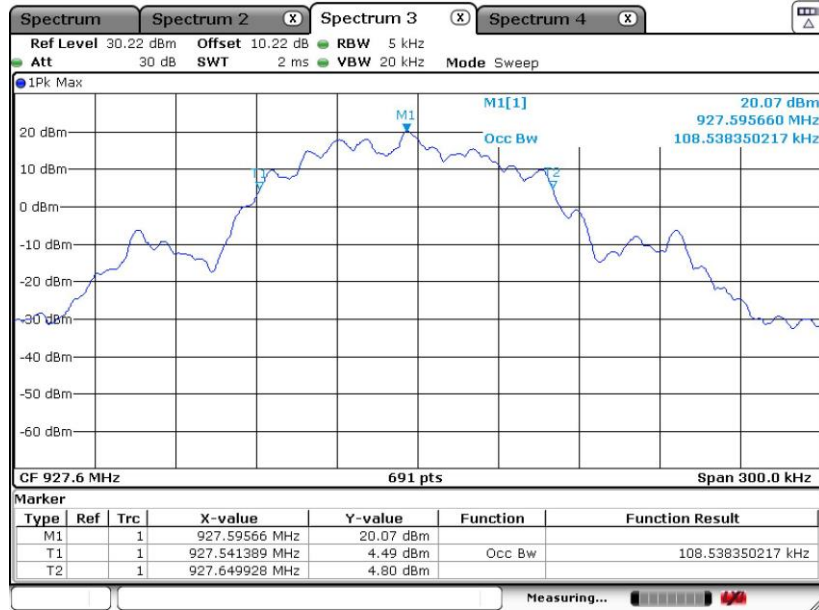

Date: 30.MAY.2024 22:32:51

<Data Rate 150kbps>


99% Occupied Bandwidth Plot on Low Channel

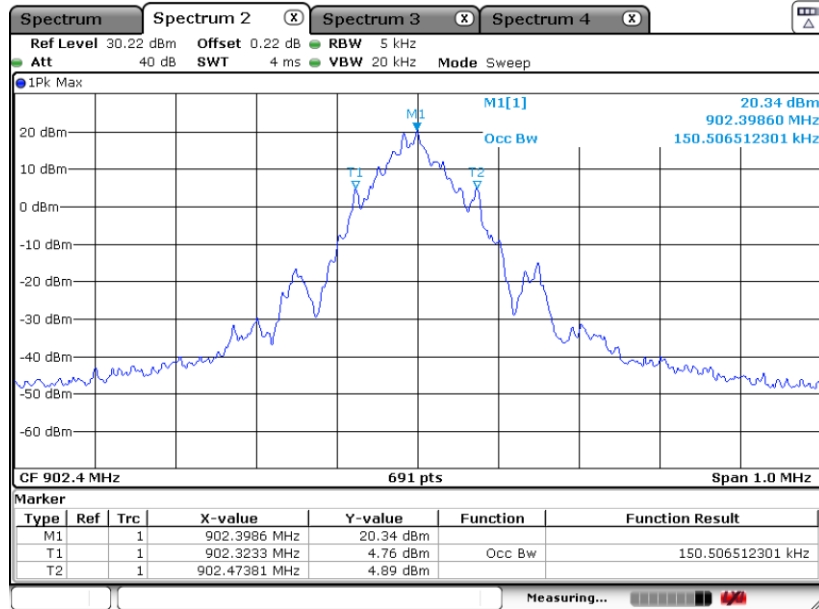

Date: 21.MAR.2024 16:49:49




### 99% Occupied Bandwidth Plot on Mid Channel

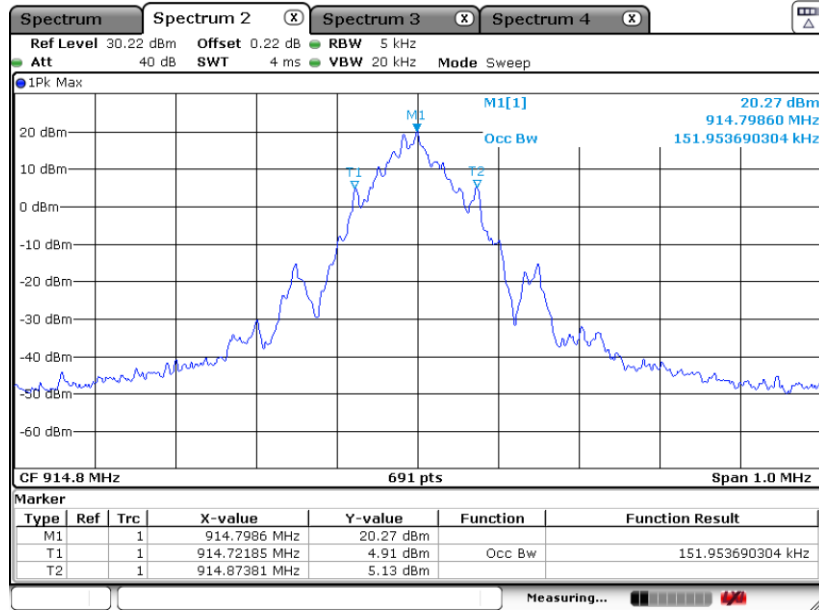

Date: 21.MAR.2024 16:48:59

### 99% Occupied Bandwidth Plot on High Channel

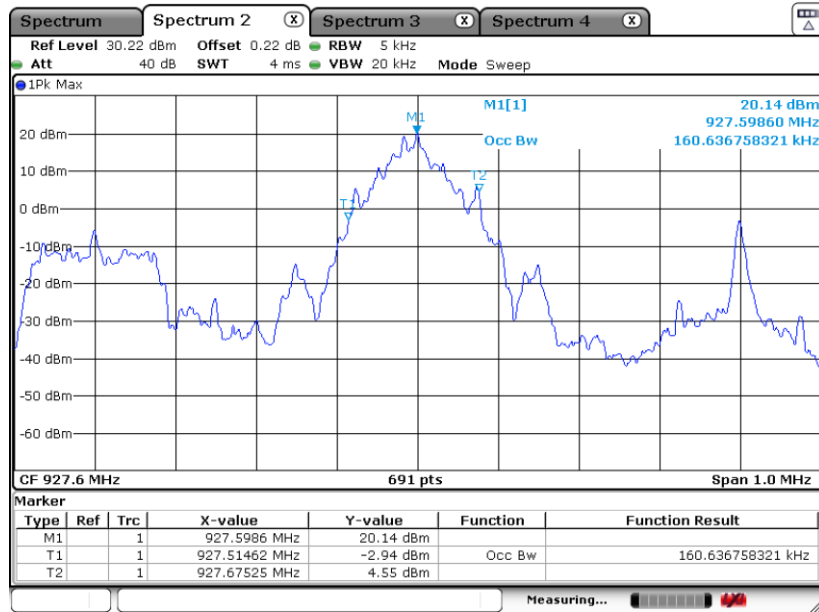


Date: 21.MAR.2024 16:53:39






<Data Rate 250kbps>

99% Occupied Bandwidth Plot on Low Channel

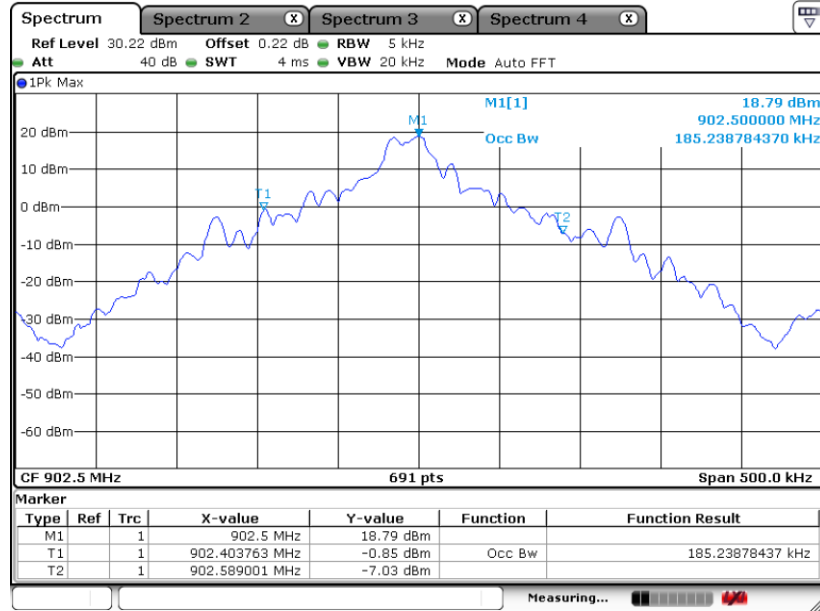

Date: 1.APR.2024 03:16:10


99% Occupied Bandwidth Plot on Mid Channel

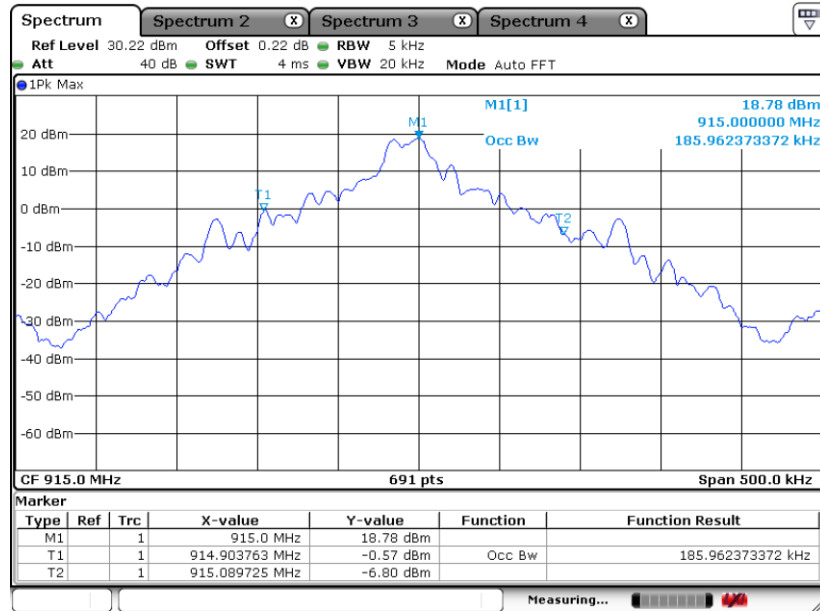

Date: 1.APR.2024 03:18:15



99% Occupied Bandwidth Plot on High Channel

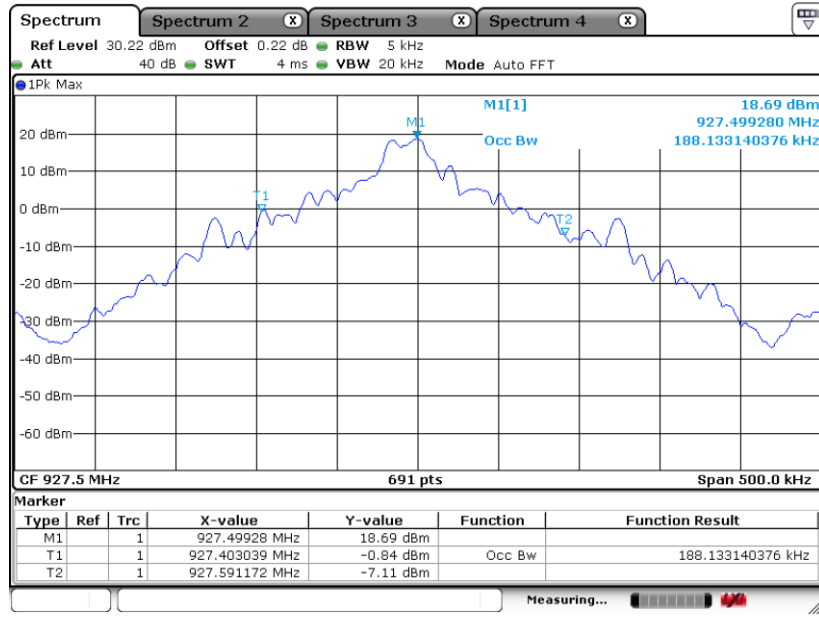

Date: 1.APR.2024 03:20:45

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels;


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

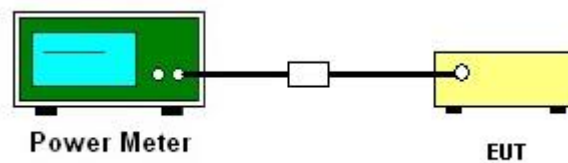

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

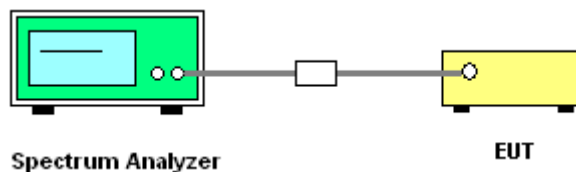




### 3.6.5 Test Result of Conducted Band Edges


<Data Rate 50kbps>

#### Low Band Edge Plot

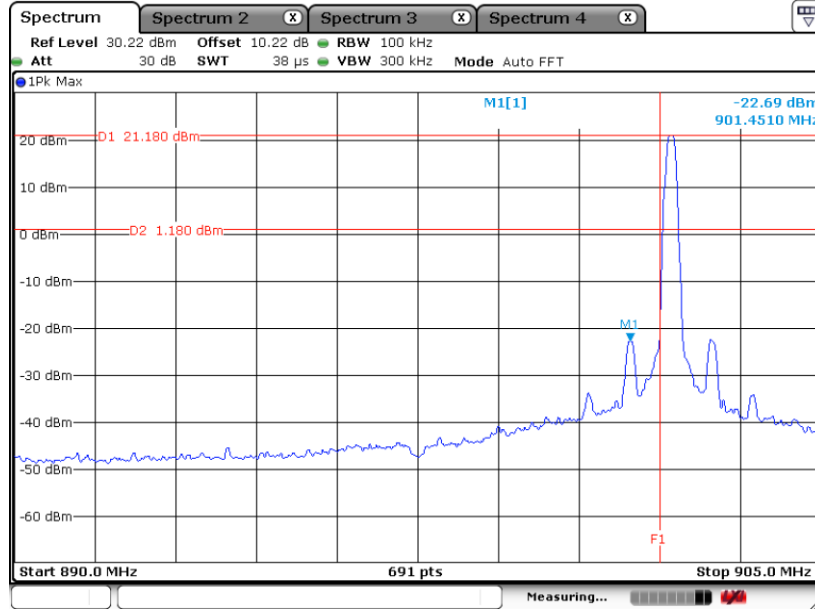

Date: 31.MAR.2024 23:51:12

#### High Band Edge Plot

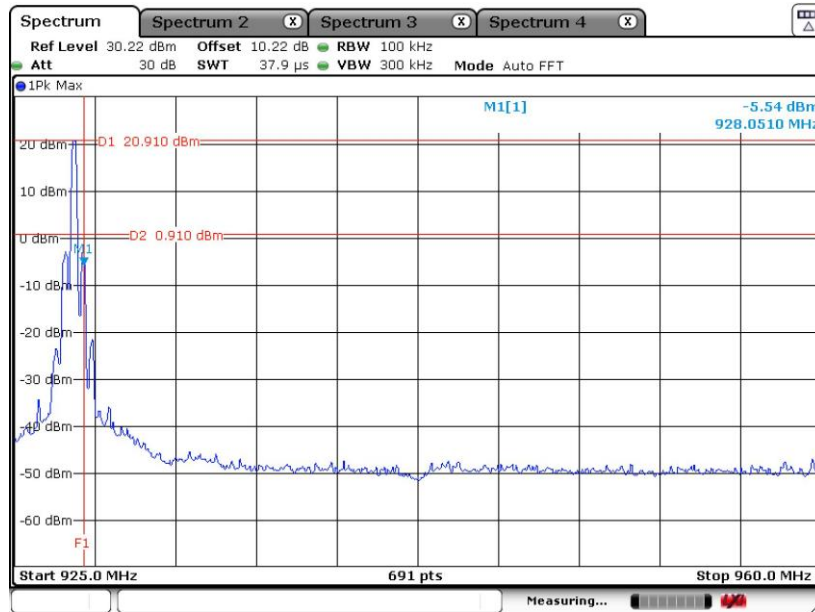


Date: 30.MAY.2024 22:31:17




<Data Rate 150kbps>

Low Band Edge Plot

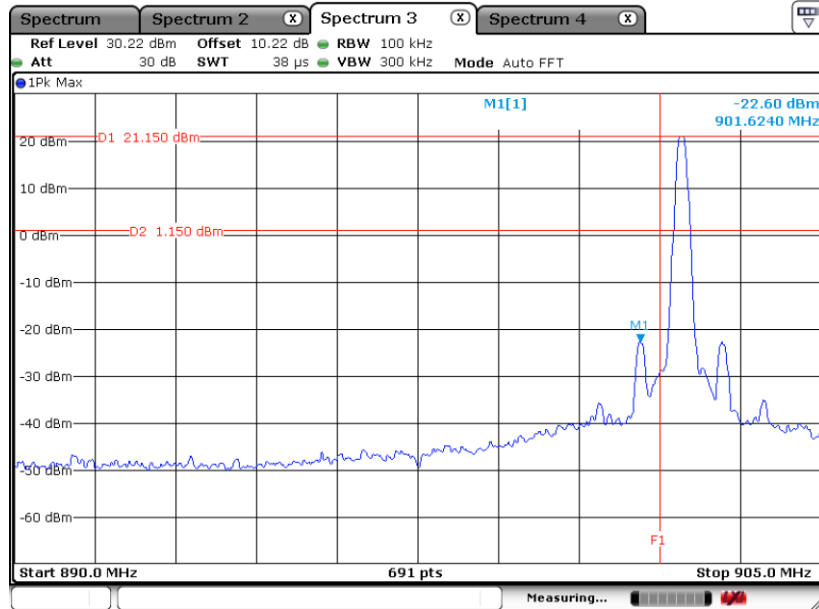

Date: 1.APR.2024 01:58:45

High Band Edge Plot

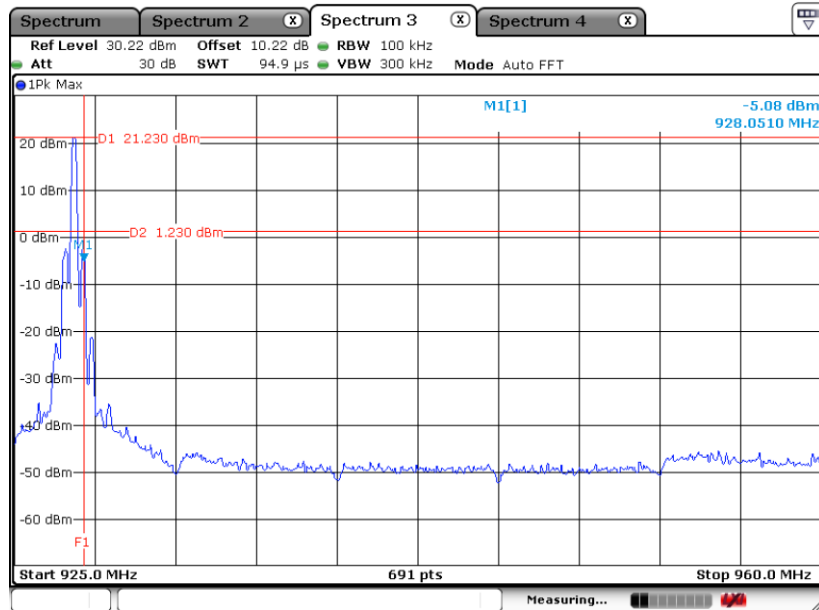


Date: 1.APR.2024 02:23:26




<Data Rate 250kbps>

Low Band Edge Plot

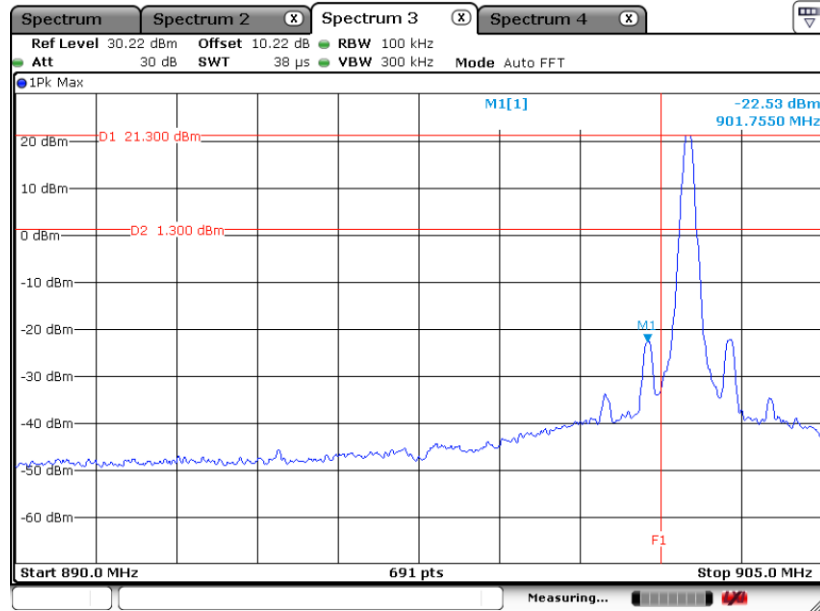

High Band Edge Plot

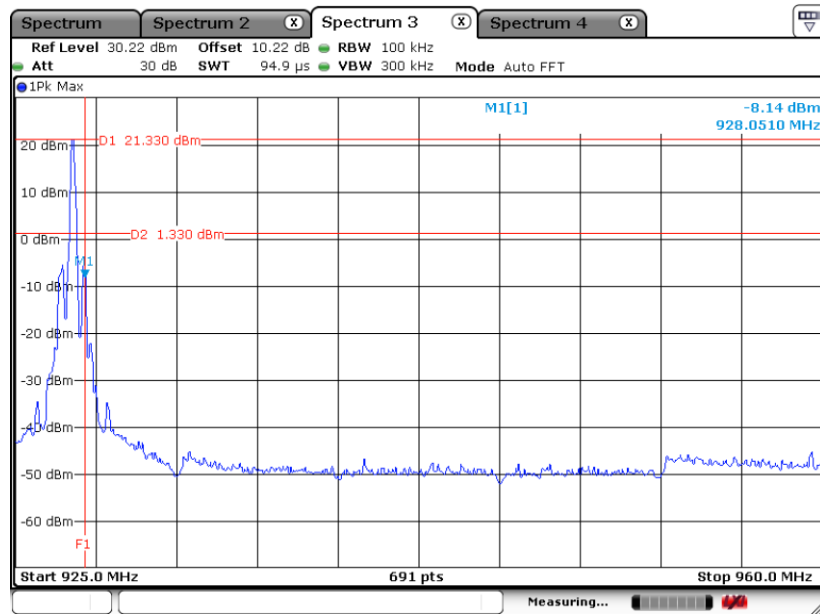





### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

<Data Rate 50kbps>

#### Hopping Mode Low Band Edge Plot

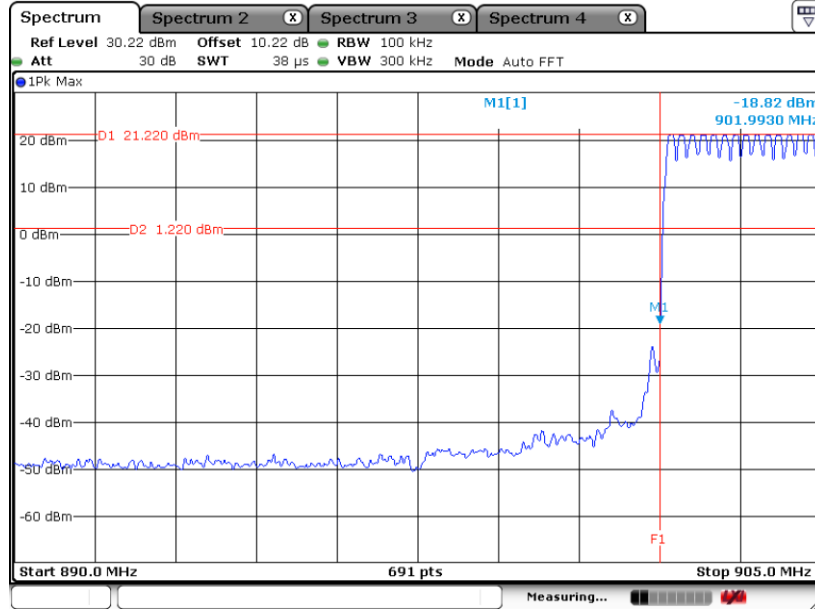

#### Hopping Mode High Band Edge Plot

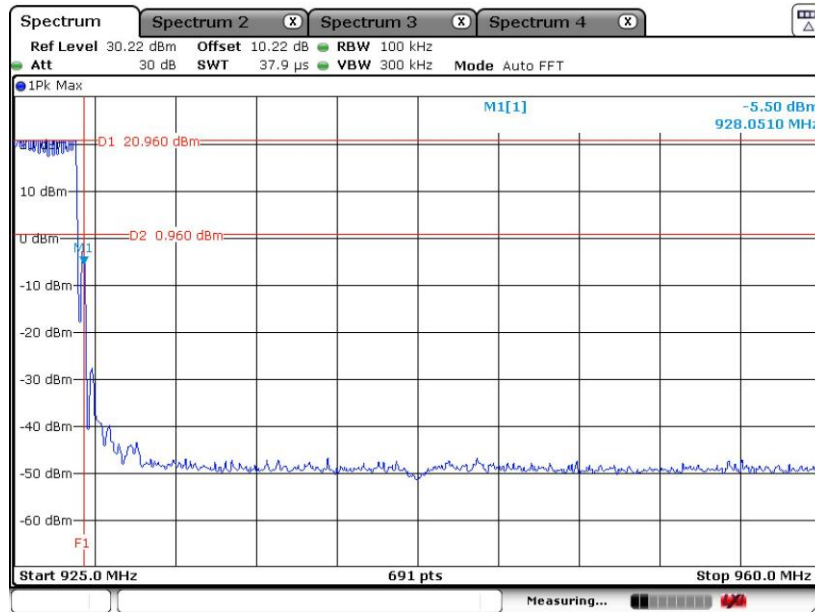







<Data Rate 150kbps>

Hopping Mode Low Band Edge Plot

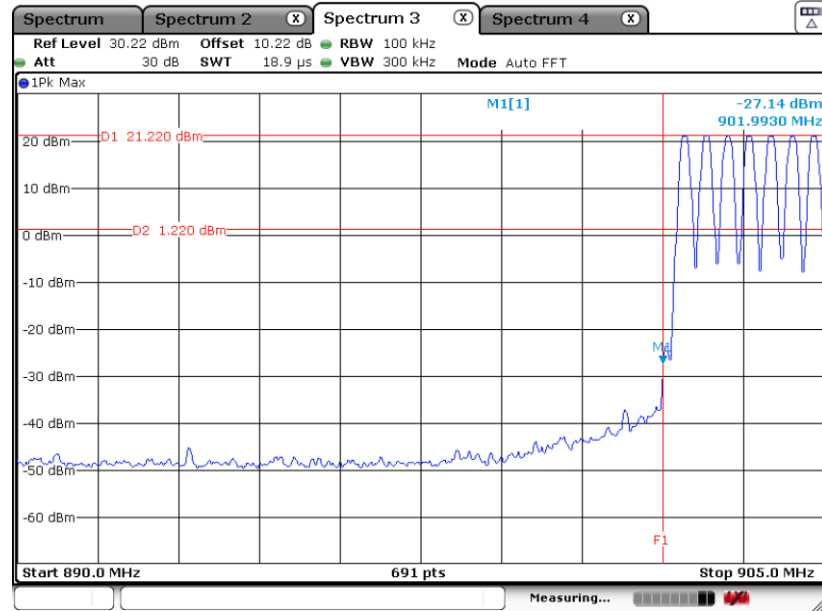

Date: 10.APR.2024 20:43:44

Hopping Mode High Band Edge Plot

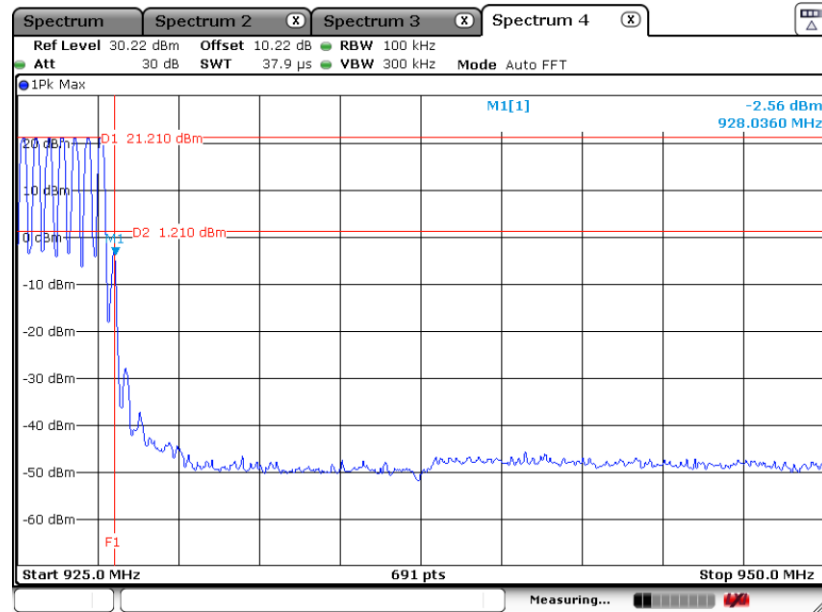

Date: 10.APR.2024 20:42:57



## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

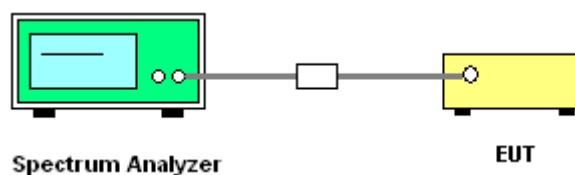





### 3.7.5 Test Result of Conducted Spurious Emission

<Data Rate 50kbps>

#### Low CH CSE Plot

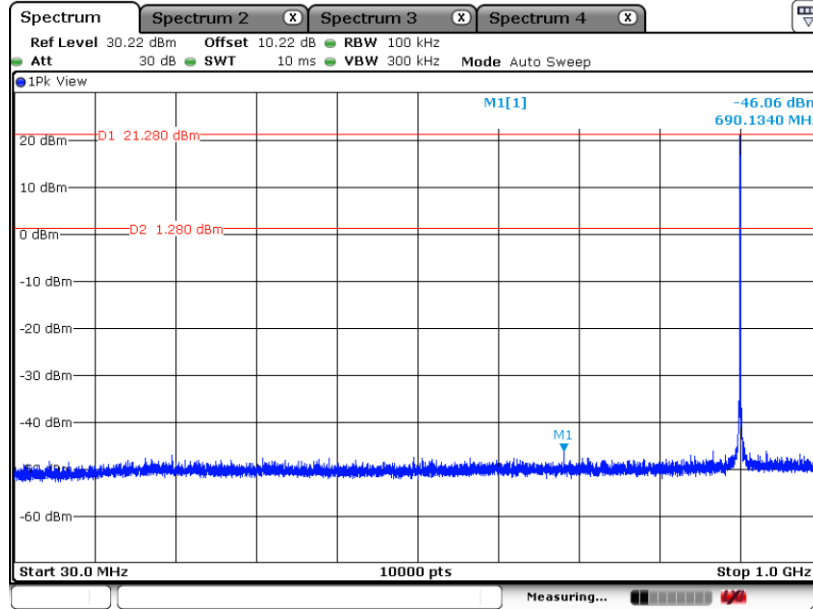


#### Low CH CSE Plot

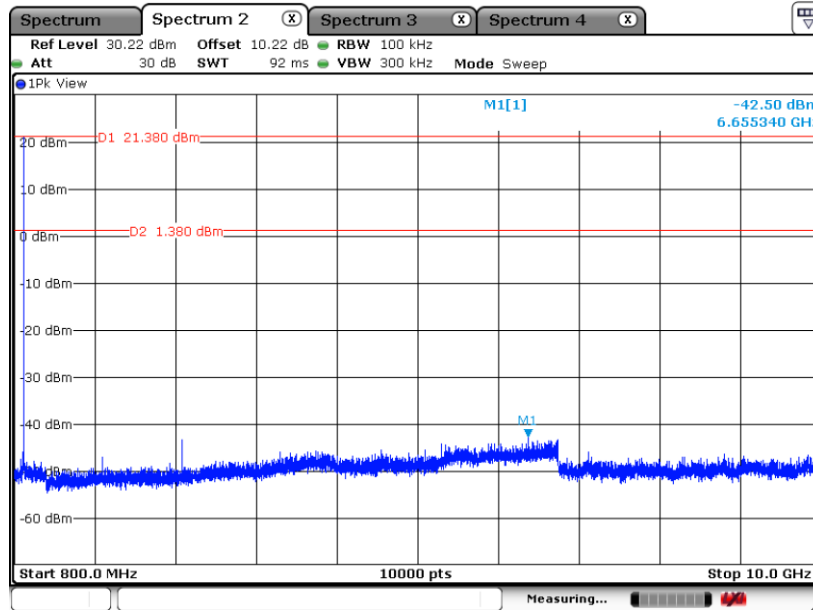




Mid CH CSE Plot

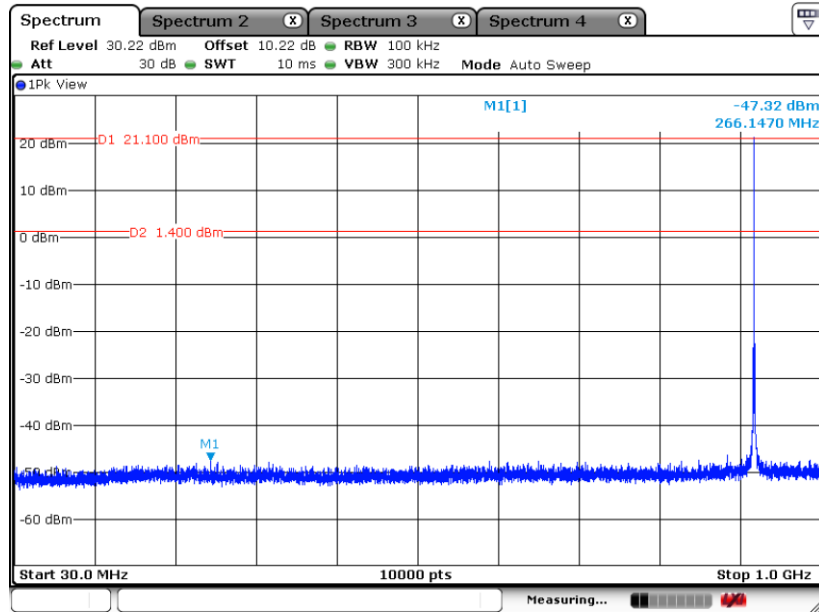

Date: 1.APR.2024 01:02:47


Mid CH CSE Plot

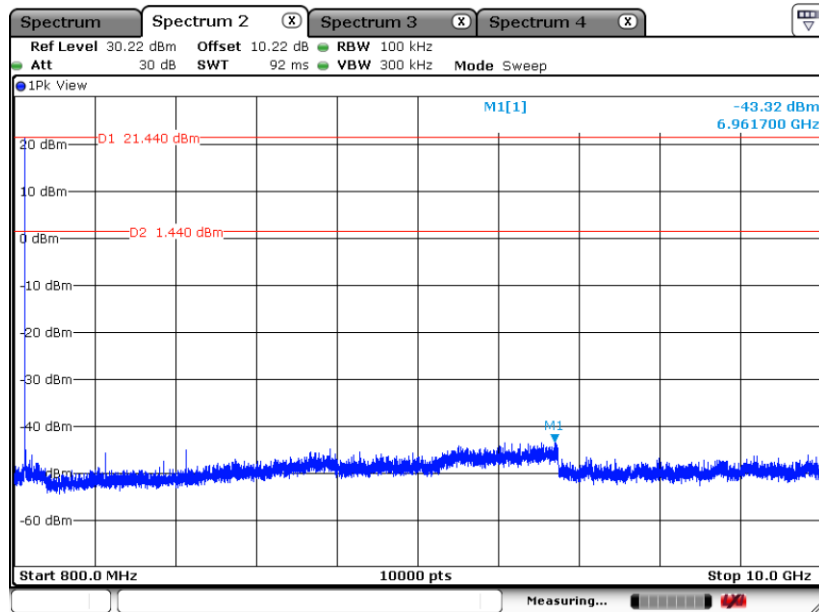

Date: 1.APR.2024 01:03:37




### High CH CSE Plot

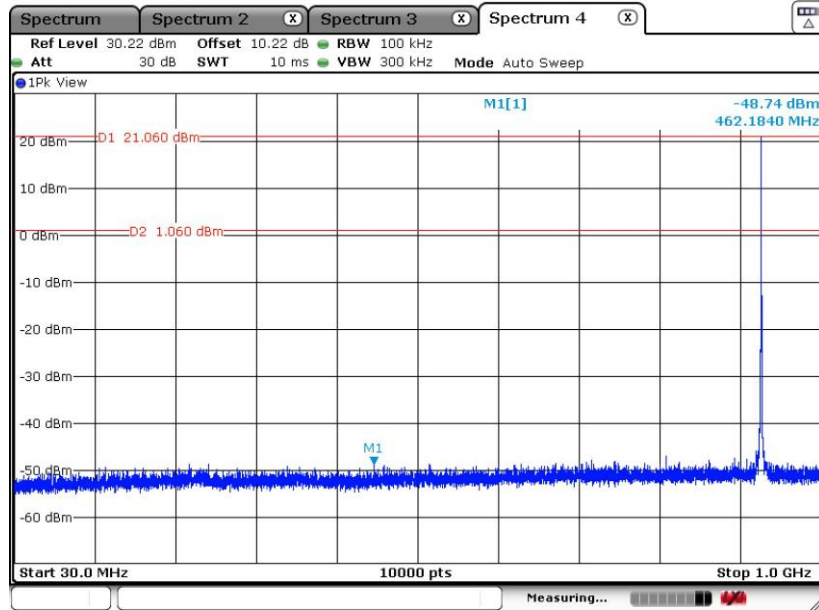

Date: 30.MAY.2024 22:34:43

### High CH CSE Plot

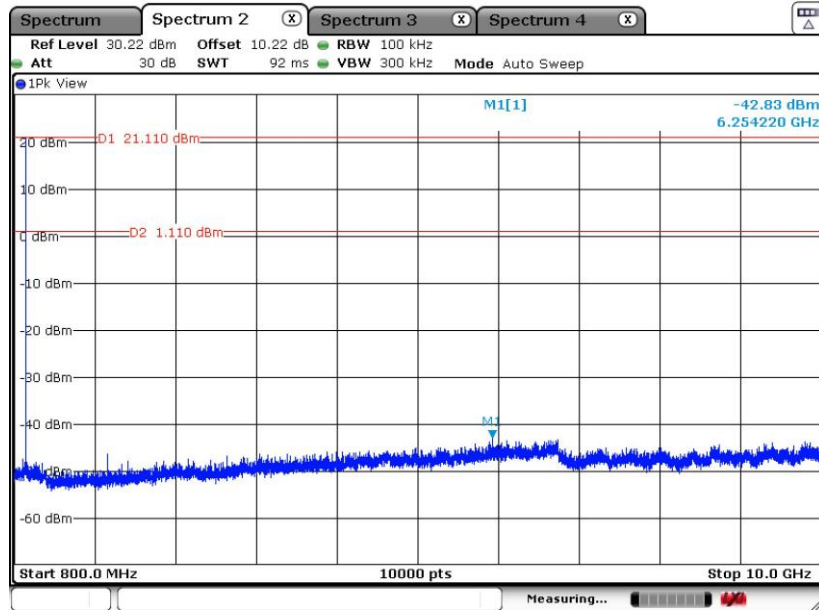


Date: 30.MAY.2024 22:32:10




<Data Rate 150kbps>

Low CH CSE Plot

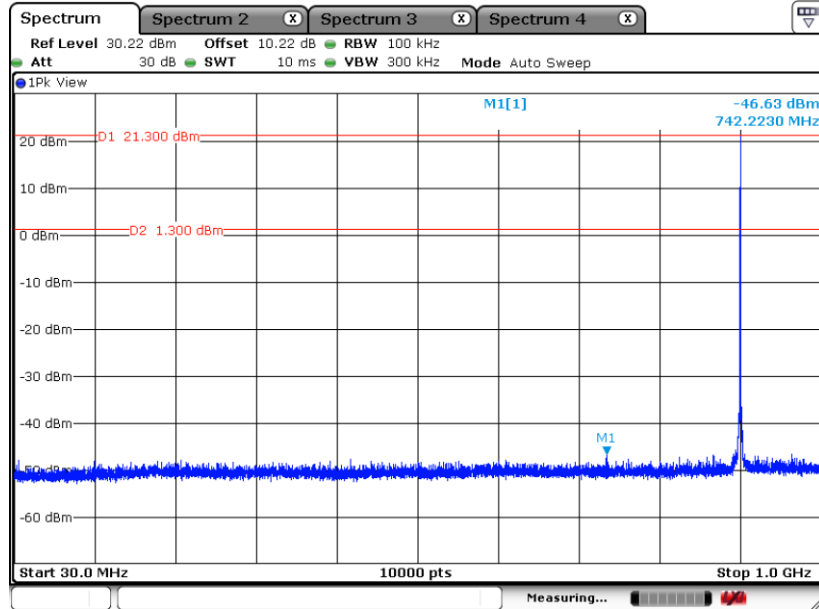

Date: 1.APR.2024 02:00:41


Low CH CSE Plot

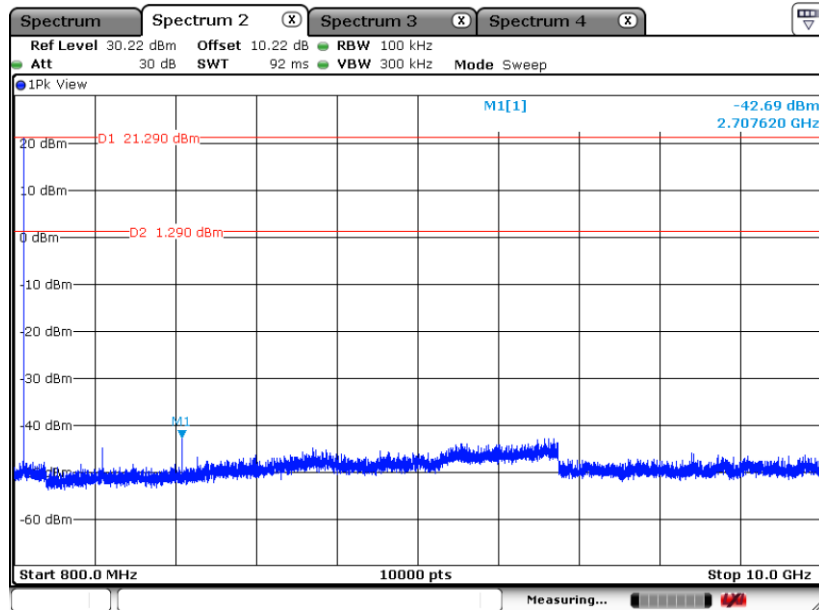

Date: 1.APR.2024 02:01:40




Mid CH CSE Plot

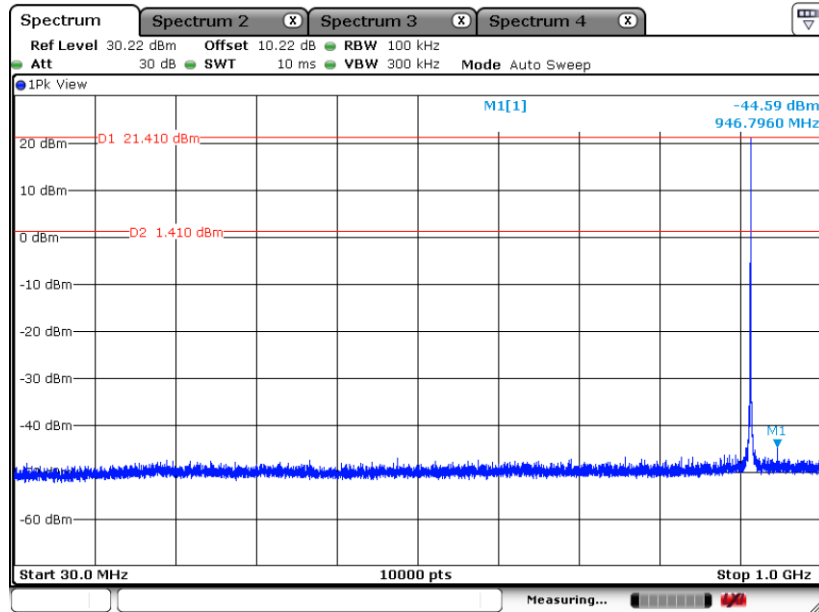

Date: 1.APR.2024 02:14:26

Mid CH CSE Plot

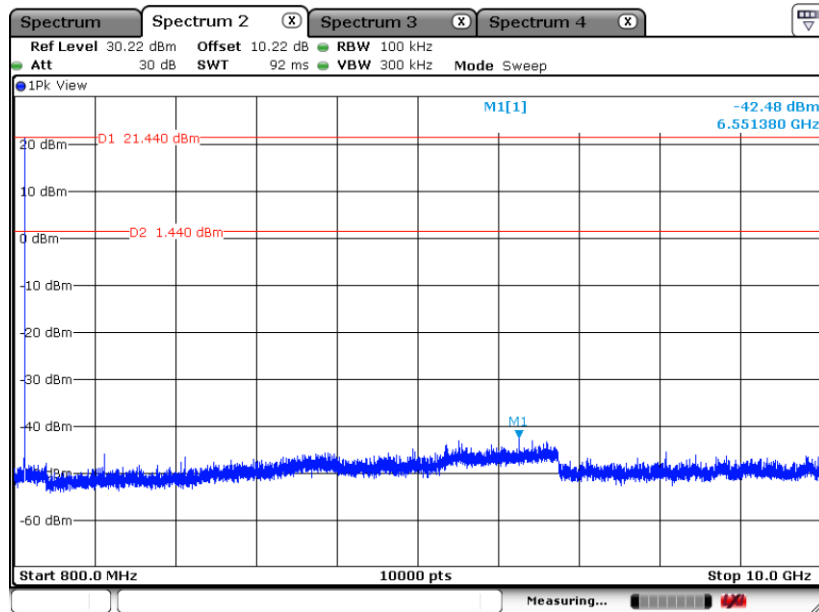


Date: 1.APR.2024 02:15:14






High CH CSE Plot

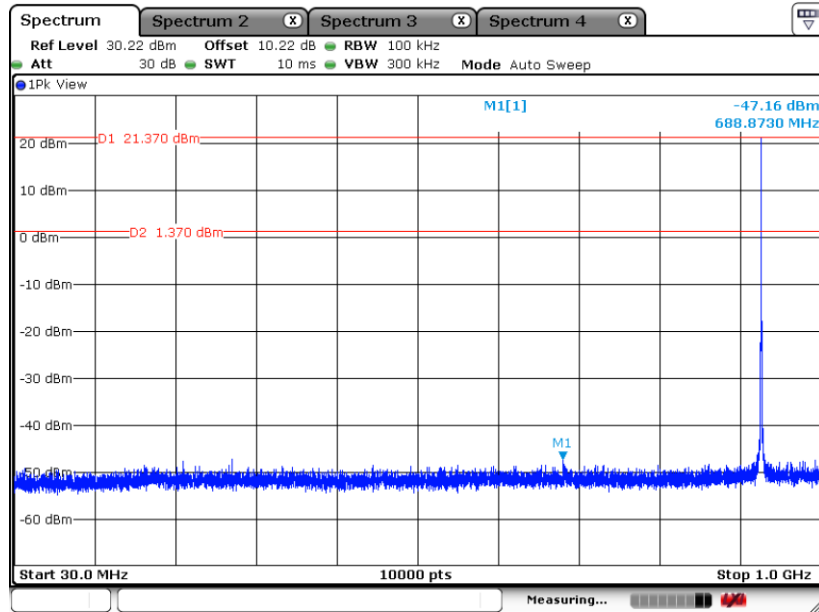


High CH CSE Plot

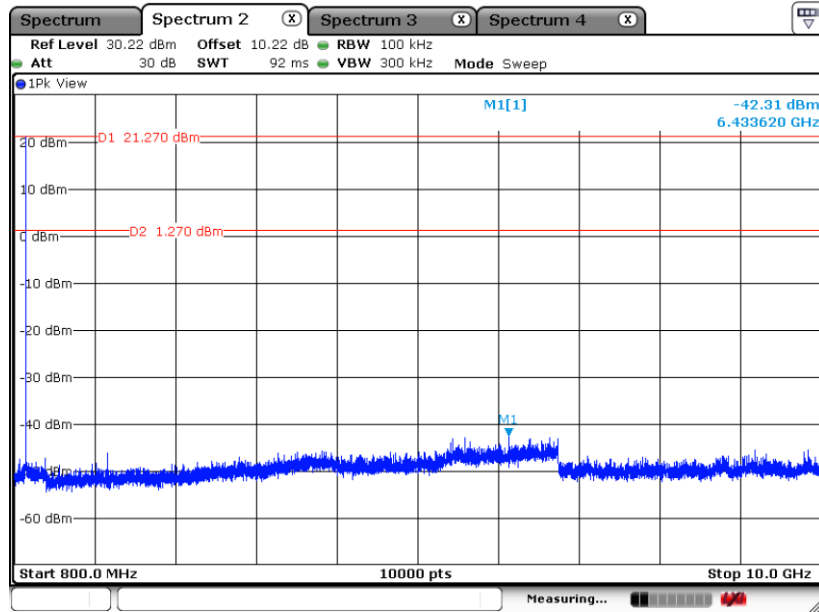




<Data Rate 250kbps>

Low CH CSE Plot

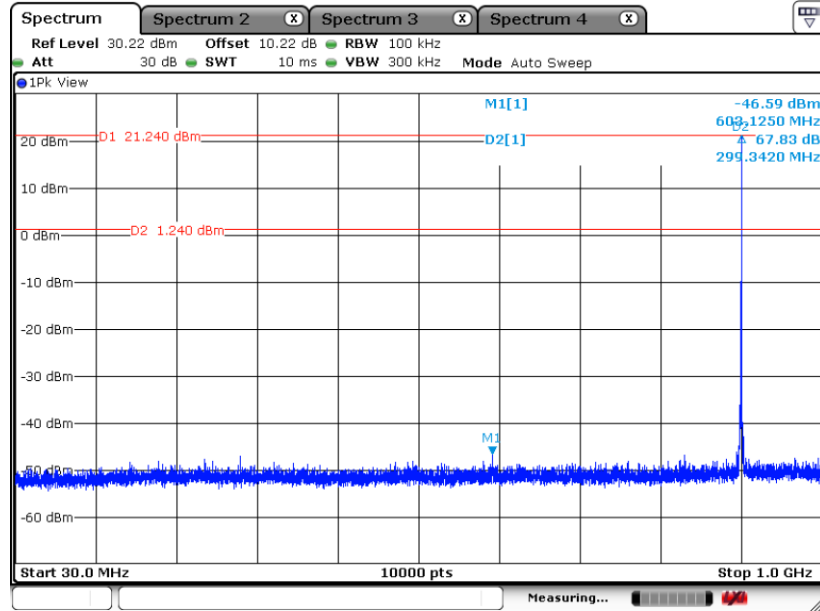


Low CH CSE Plot

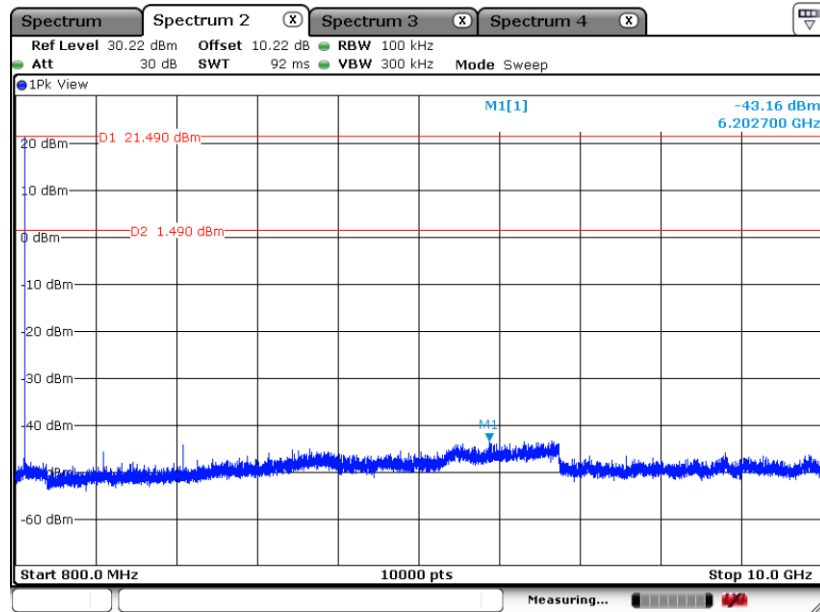




Mid CH CSE Plot

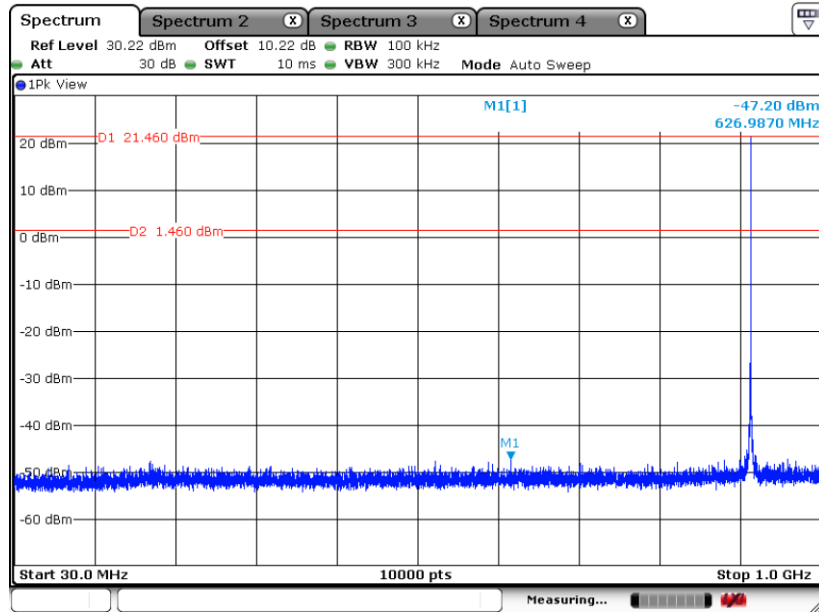

Date: 1.APR.2024 02:52:03


Mid CH CSE Plot

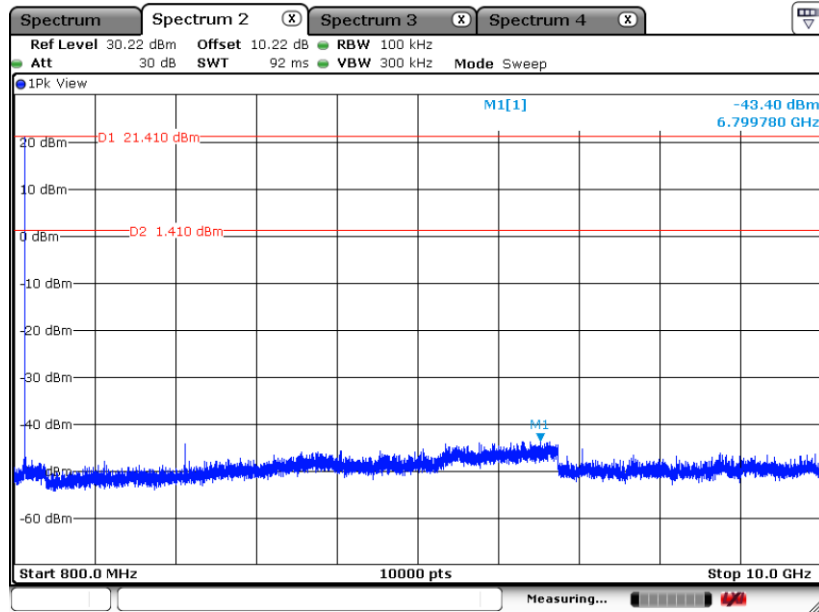


Date: 1.APR.2024 02:52:55



High CH CSE Plot

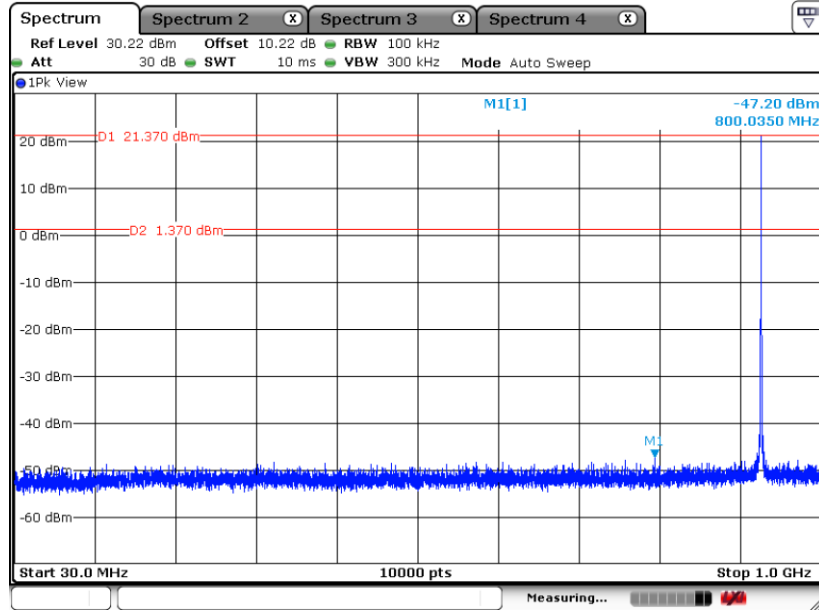

High CH CSE Plot

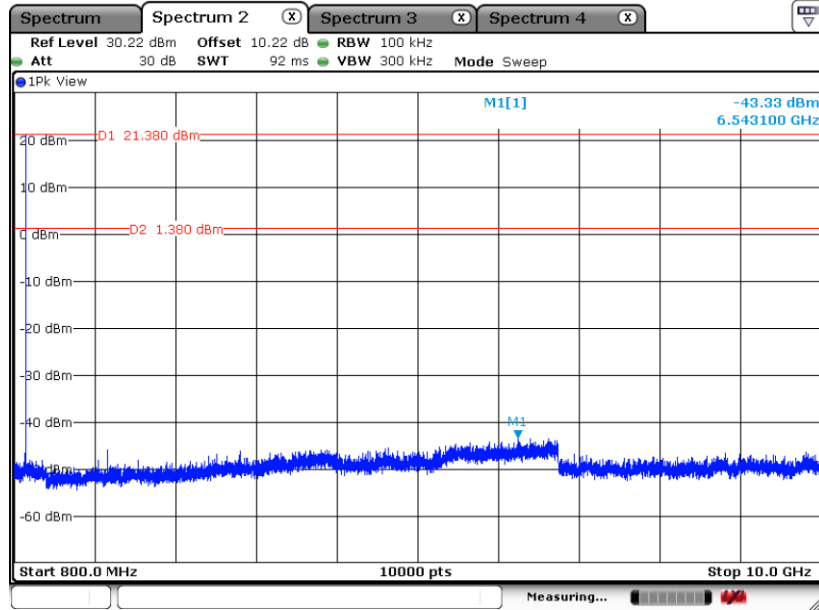



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

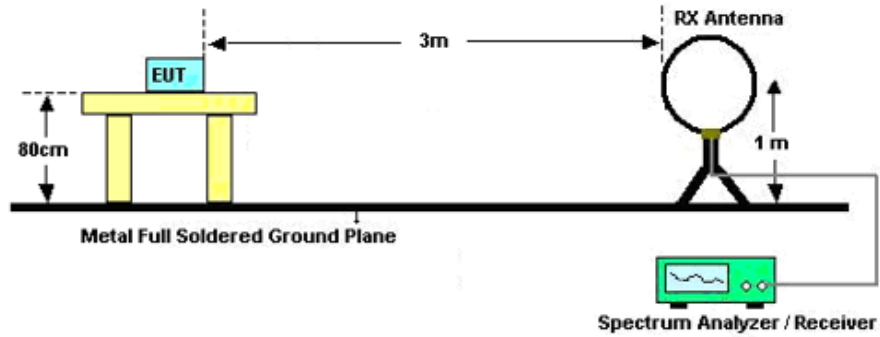

For radiated emissions from 30MHz to 1GHz

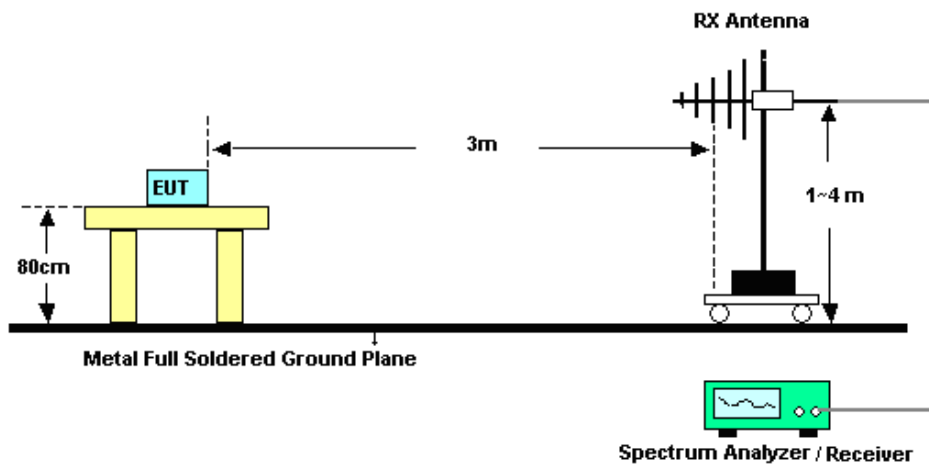

For radiated emissions above 1GHz

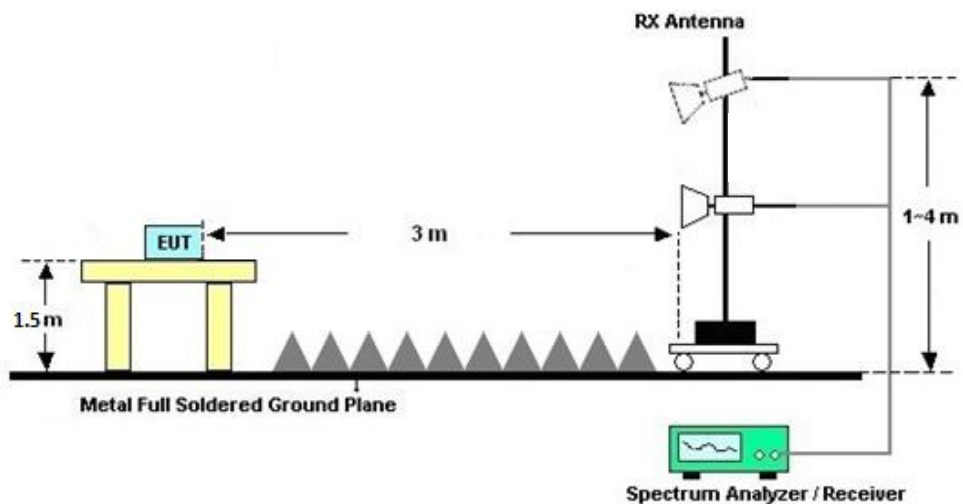



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C&D.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix C%D.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix E.





### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

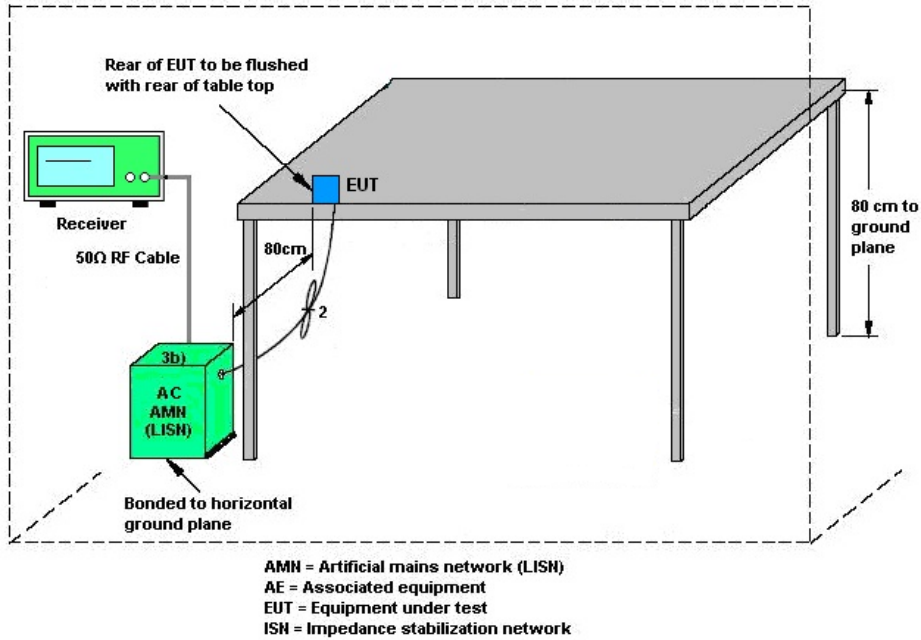

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Mar. 21, 2024~ May 30, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Mar. 21, 2024~ May 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Mar. 21, 2024~ May 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Ma x 30dBm	Oct. 10, 2023	Mar. 30, 2024~ Jun. 04, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz-44G,MAX 30dB	Mar. 23, 2024	Mar. 30, 2024~ Jun. 04, 2024	Mar. 22, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Mar. 30, 2024~ Jun. 04, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Mar. 30, 2024~ Jun. 04, 2024	Apr. 08, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 08, 2024		Apr. 07, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Mar. 30, 2024~ Jun. 04, 2024	Apr. 05, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 05, 2024		Apr. 04, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Mar. 30, 2024~ Jun. 04, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 06, 2023	Mar. 30, 2024~ Jun. 04, 2024	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2024	Mar. 30, 2024~ Jun. 04, 2024	Jan. 04, 2025	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz-18Ghz	Oct. 10, 2023	Mar. 30, 2024~ Jun. 04, 2024	Oct. 09, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz-18Ghz	Jan. 03, 2024	Mar. 30, 2024~ Jun. 04, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F10409000 4	N/A	NCR	Mar. 30, 2024~ Jun. 04, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 30, 2024~ Jun. 04, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 30, 2024~ Jun. 04, 2024	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Mar. 06, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Mar. 06, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Mar. 06, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Mar. 06, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required.



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



## Appendix A. Conducted Test Results

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

**FSK-FHSS-50Kbps**

Test Engineer:	Smile Wang	Temperature:	20~26	°C
Test Date:	2024/3/21~2024/5/30	Relative Humidity:	40~51	%

<b><u>TEST RESULTS DATA</u></b>									
<b><u>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</u></b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	50Kbps	1	1	902.2	0.114	0.107	0.201	0.114	Pass
FSK	50Kbps	1	65	915	0.115	0.108	0.201	0.115	Pass
FSK	50Kbps	1	128	927.6	0.117	0.109	0.200	0.117	Pass

<b><u>TEST RESULTS DATA</u></b>						
<b><u>Dwell Time</u></b>						
Mod.	CH.	DT On-time per hop (ms)	Total hops over 20sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK50	hopping	2	8.00	0.02	0.4	Pass

<b><u>TEST RESULTS DATA</u></b>						
<b><u>Peak Power Table</u></b>						
mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	Power Setting
FSK50	902.2	1	<b>20.58</b>	30.00	Pass	20
	915	1	20.57	30.00	Pass	20
	927.6	1	20.35	30.00	Pass	20

<b><u>TEST RESULTS DATA</u></b>		
<b><u>Number of Hopping Frequency</u></b>		
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
128	> 50	Pass