

#### 4.0 Spurious Emissions at Antenna Terminals

FCC 2.1051, 90.1323

##### 4.1 Requirement

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

Note: That corresponds to the level of -13 dBm for any out-of-band and spurious emissions.

##### 4.3 Test Equipment

Rohde & Schwarz FSP40 Spectrum Analyzer



##### 4.4 Test Results

<b>Complies</b>	Refer to the following Graphs
-----------------	-------------------------------

Measurements were made on the low, middle and high channels for all modulations.



Graph 4.1  
5 MHz

QPSK, LOW CHANNEL

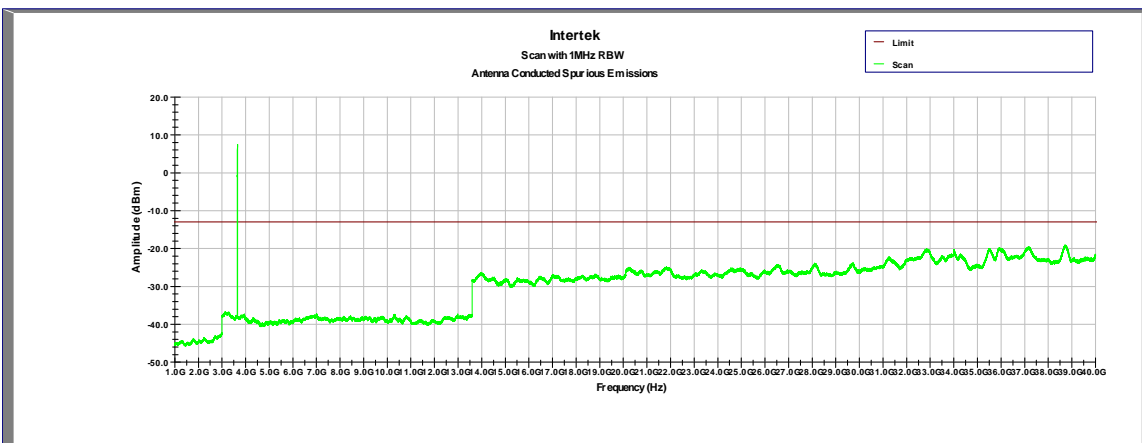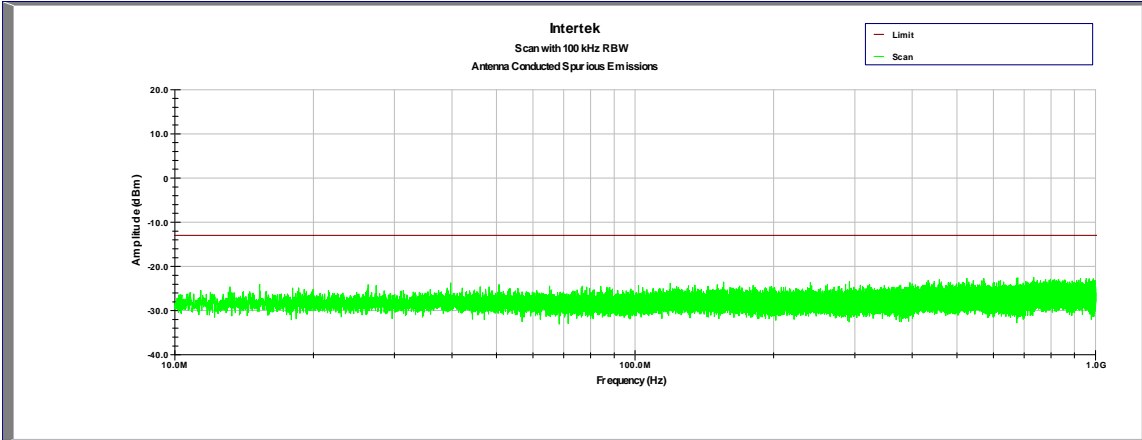



Graph 4.2  
5 MHz

16QAM, LOW CHANNEL

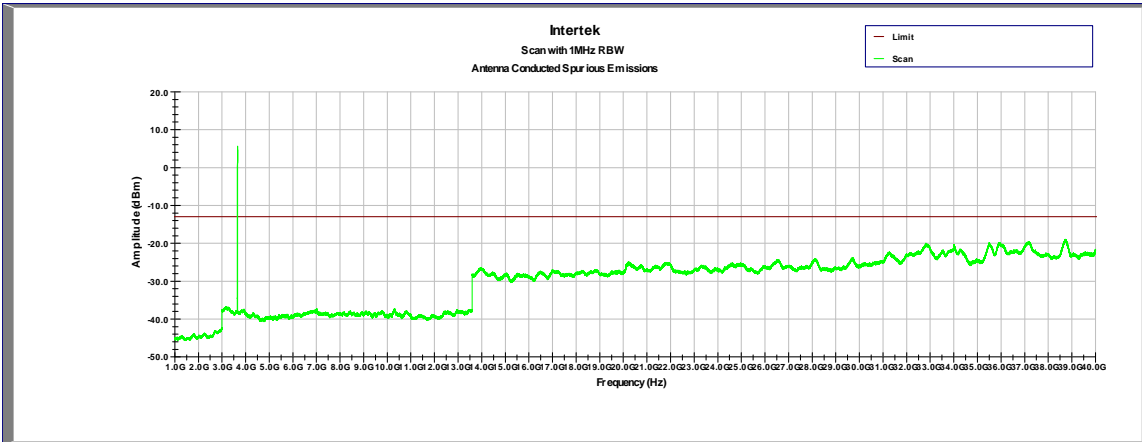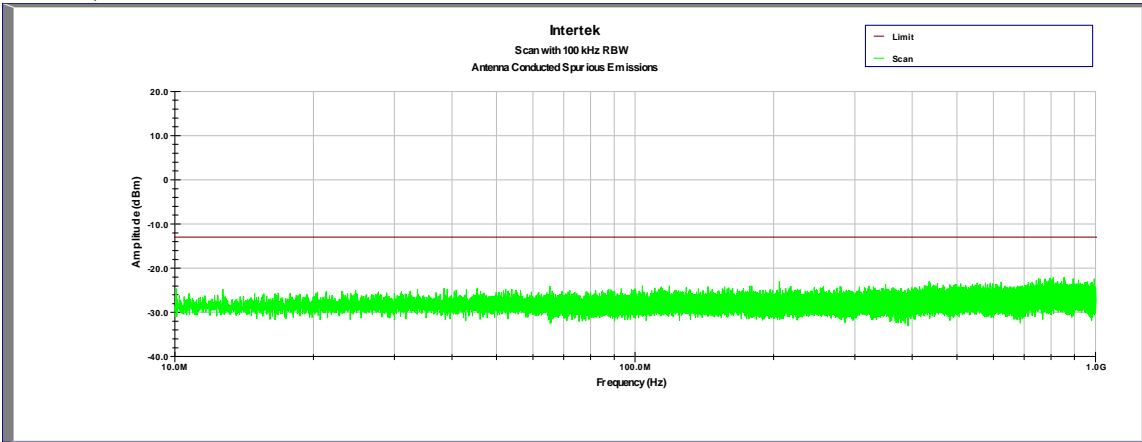



Graph 4.3  
5 MHz

64QAM, LOW CHANNEL

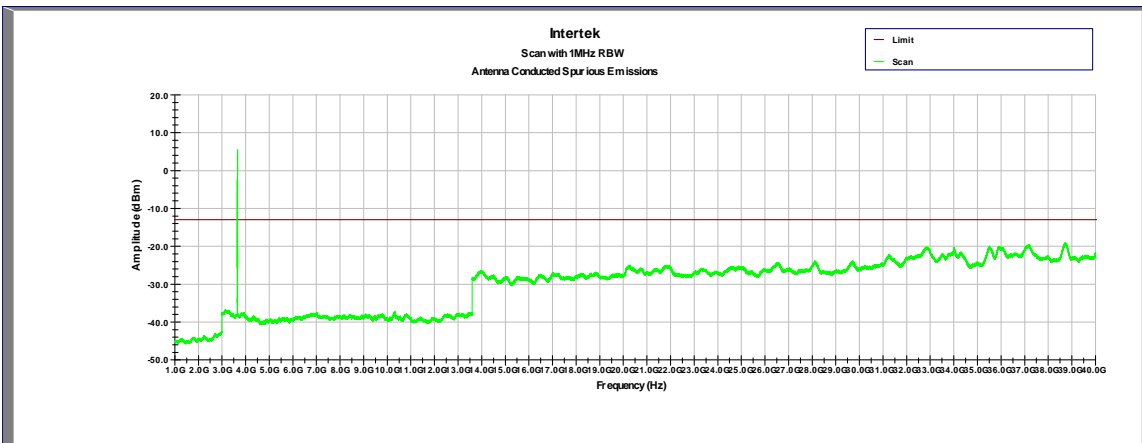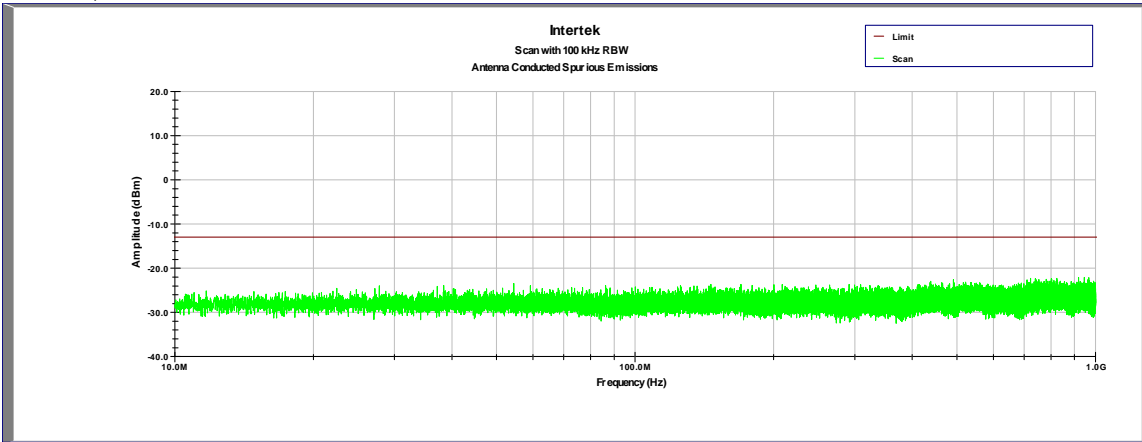



Graph 4.4  
5 MHz

QPSK, MID CHANNEL

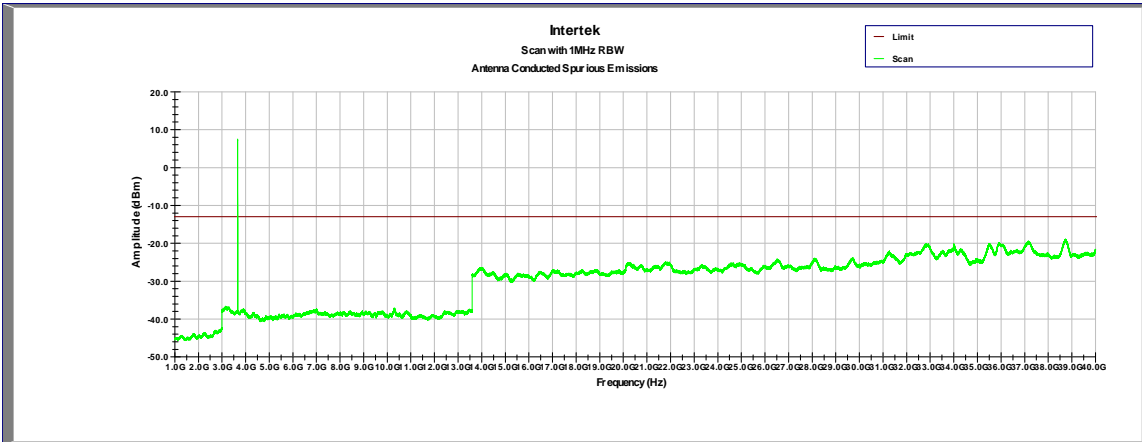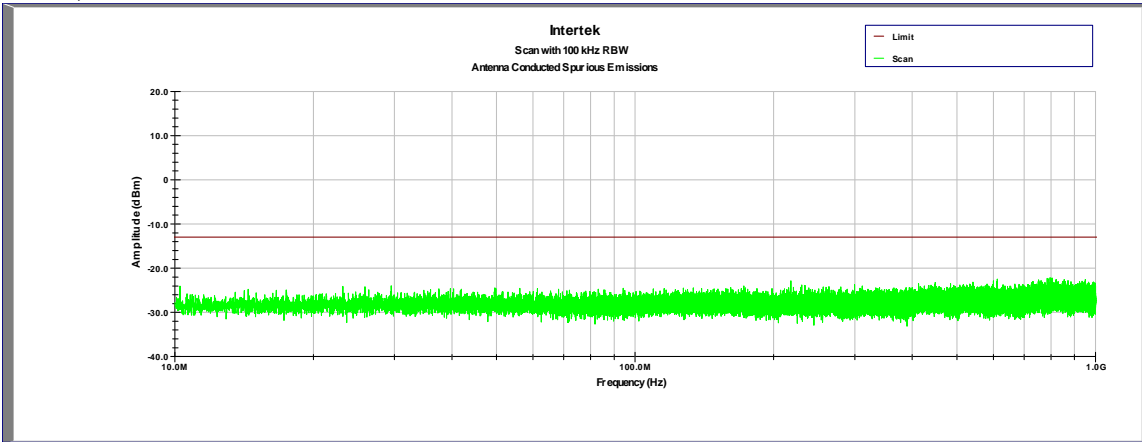



Graph 4.5  
5 MHz

16QAM, MID CHANNEL

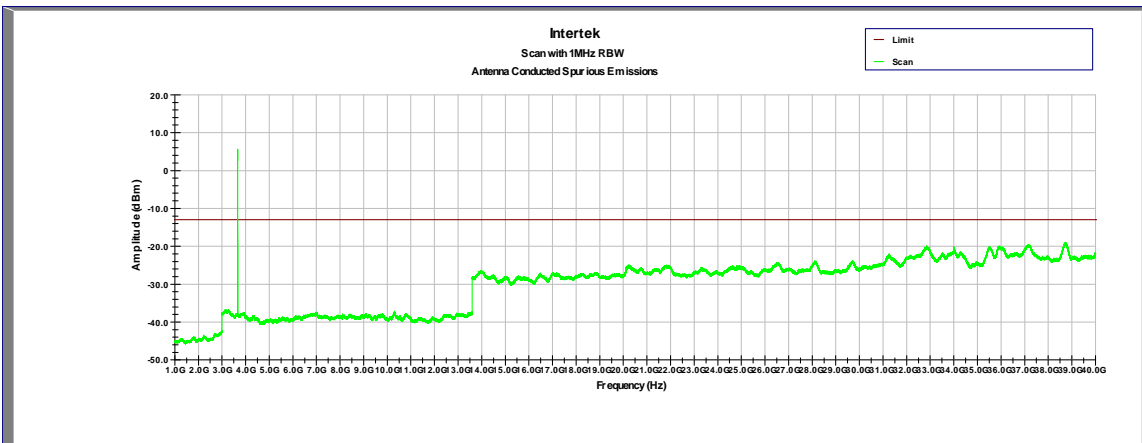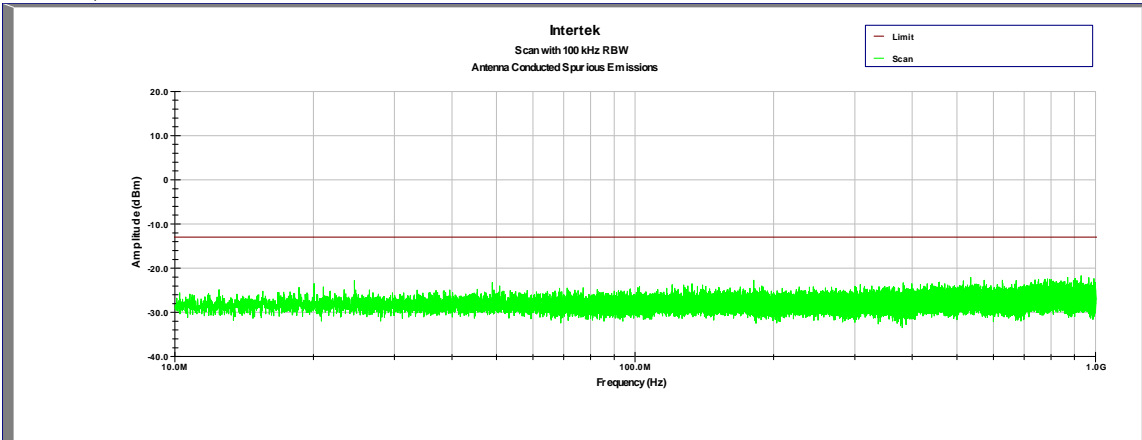



Graph 4.6  
5 MHz

64QAM, MID CHANNEL

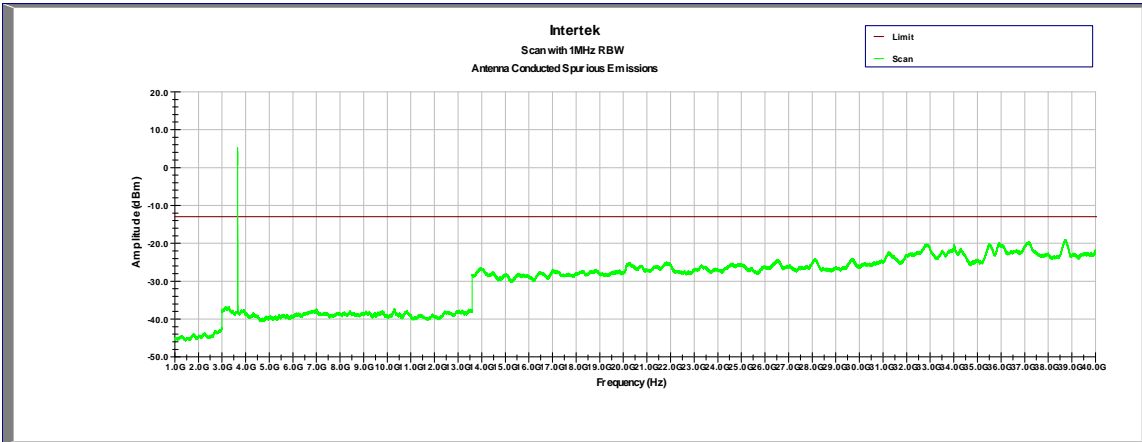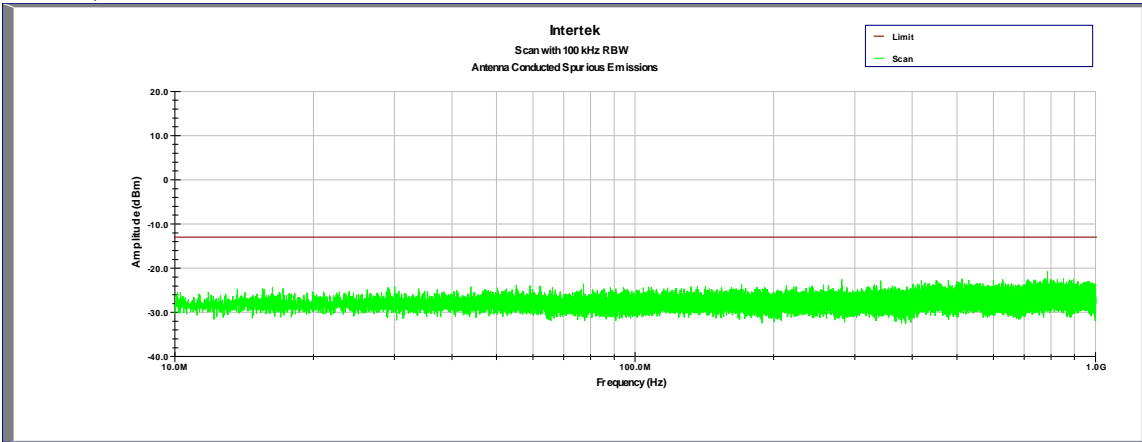

Graph 4.7  
5 MHz



QPSK, HIGH CHANNEL

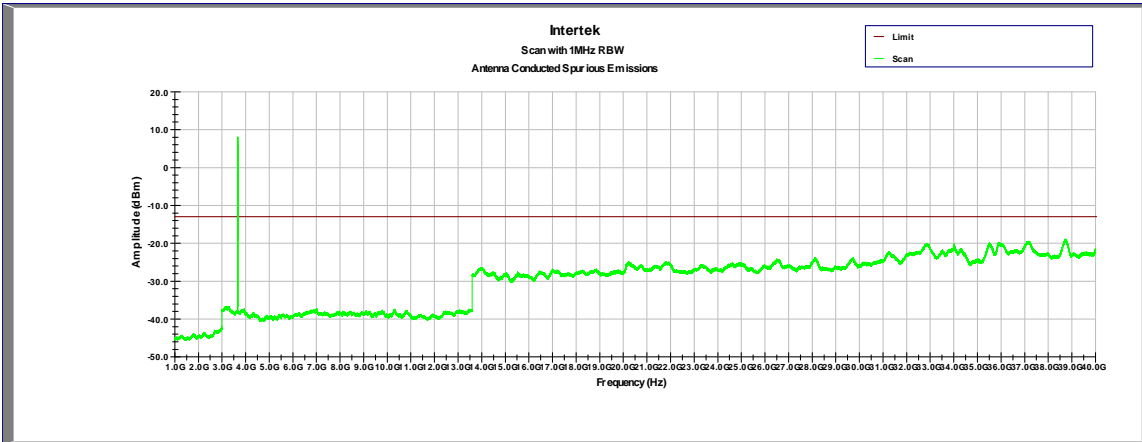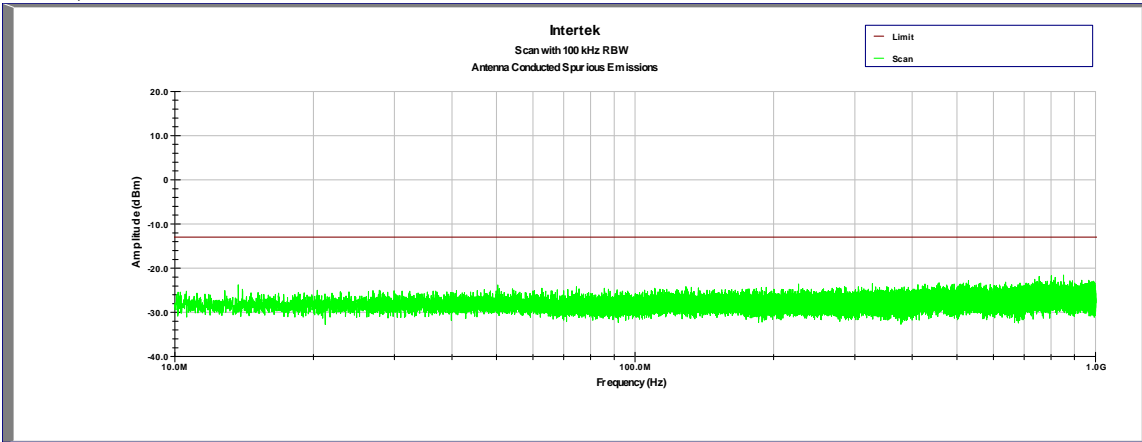





Graph 4.8  
5 MHz

16QAM, HIGH CHANNEL

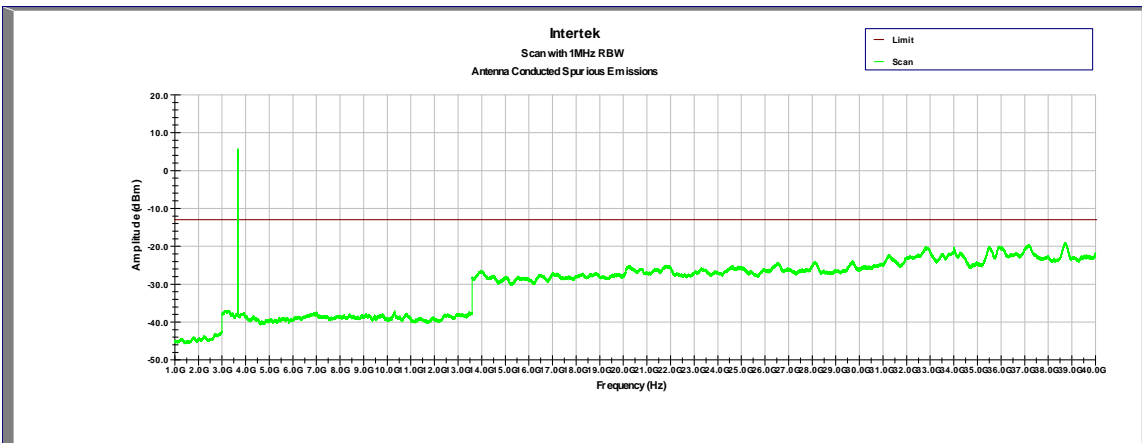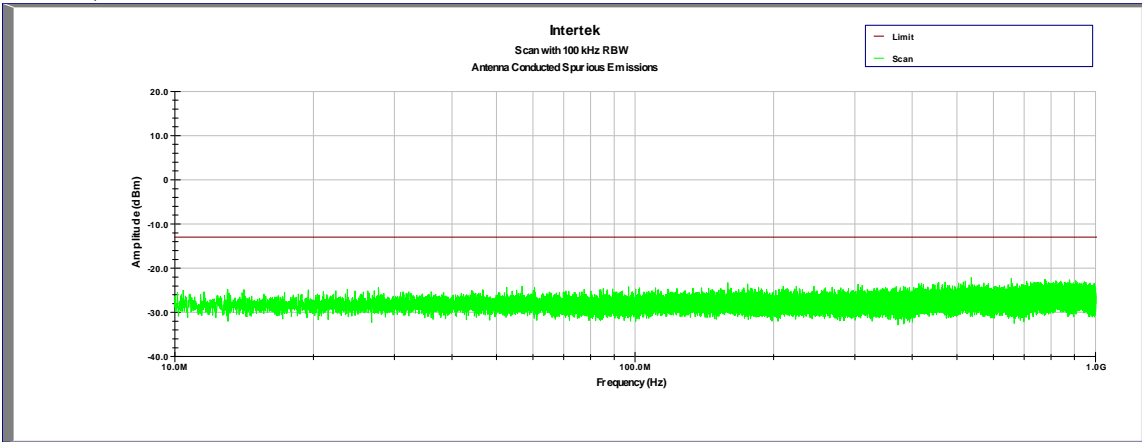


Graph 4.9  
5 MHz

64QAM, HIGH CHANNEL

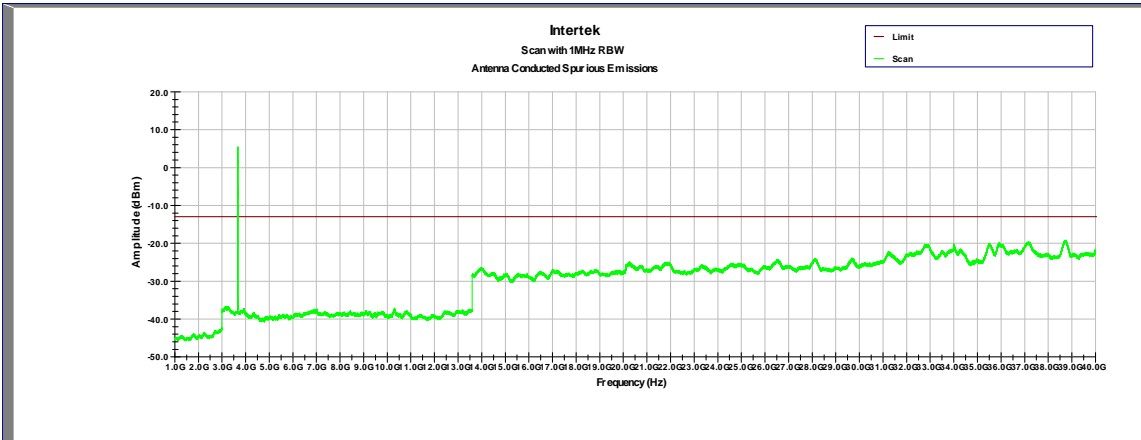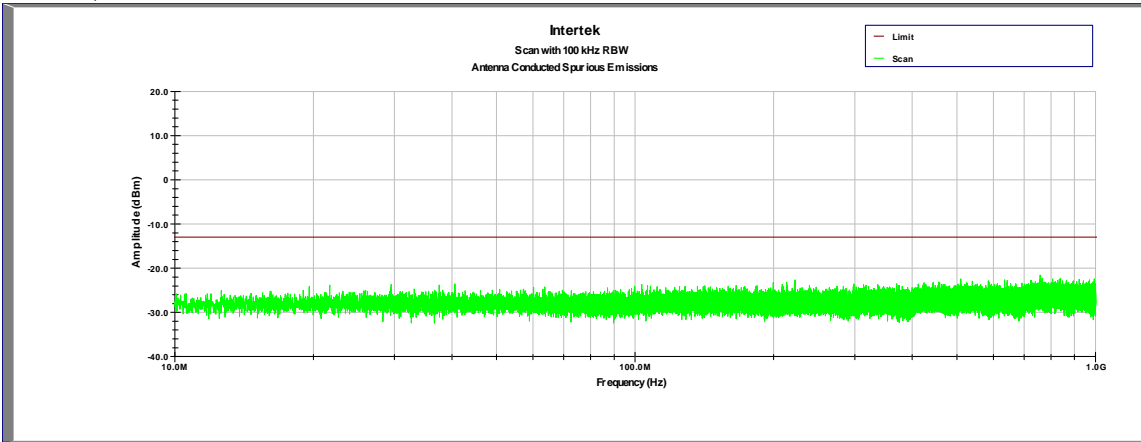

## Lower Bandedge Graph 4.10 5 MHz

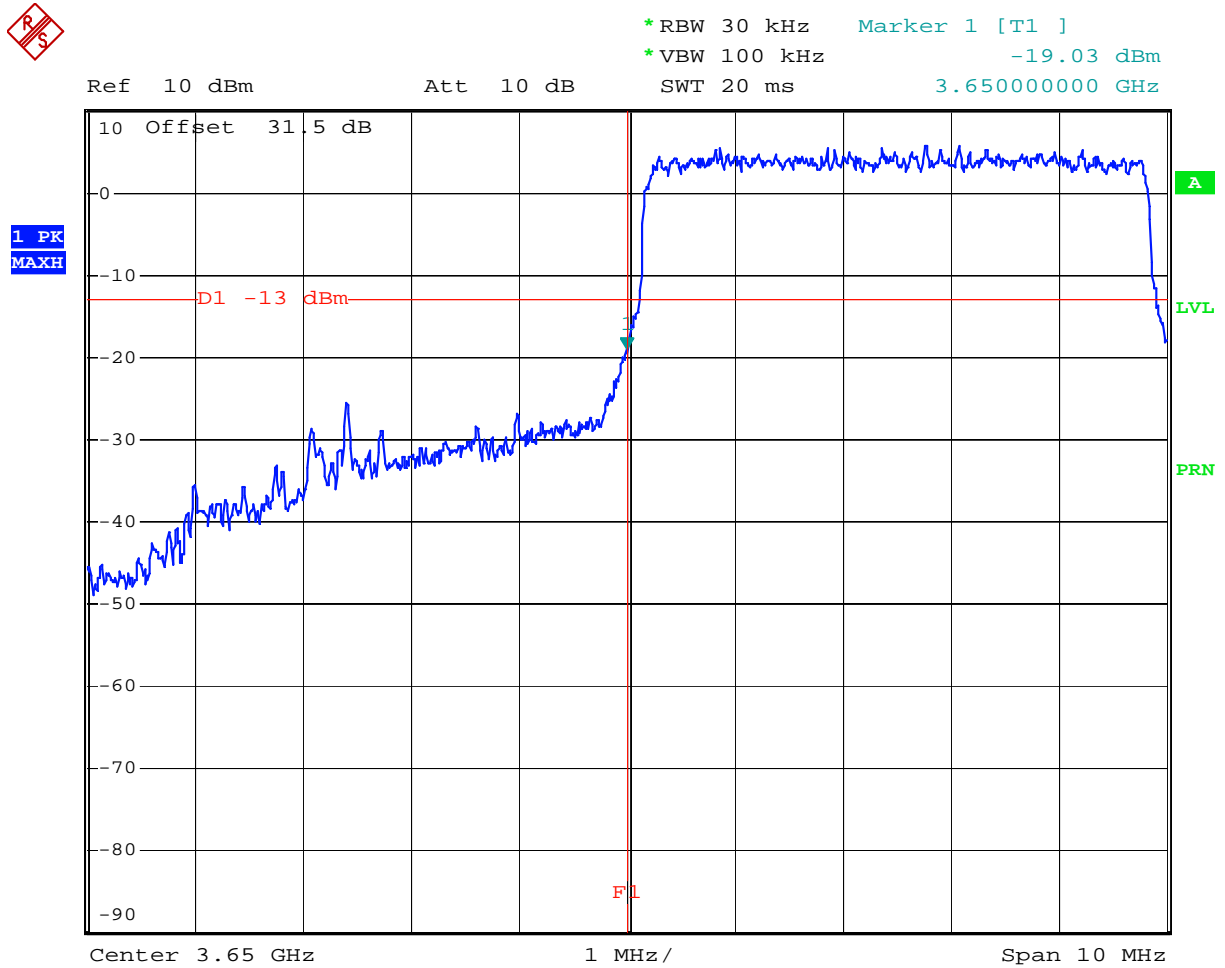


Comment: QPSK, LOW CHANNEL  
Date: 23.FEB.2010 13:33:11

## Upper Bandedge Graph 4.11 5 MHz



\*RBW 30 kHz    Marker 1 [T1 ]  
\*VBW 100 kHz    -17.24 dBm  
SWT 20 ms    3.675000000 GHz


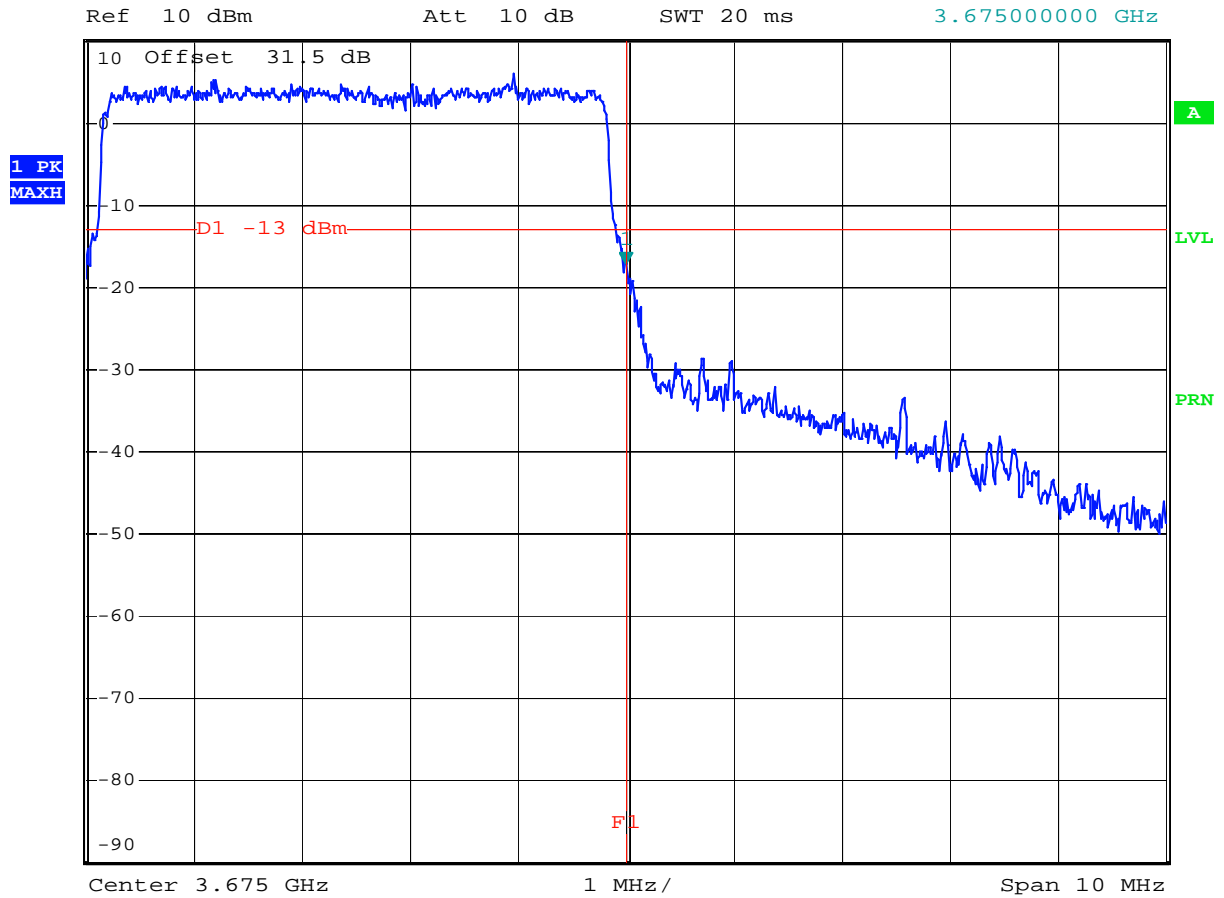


Comment: QPSK, HIGH CHANNEL

Date: 23.FEB.2010 13:35:05



Graph 4.12  
10 MHz

QPSK, LOW CHANNEL

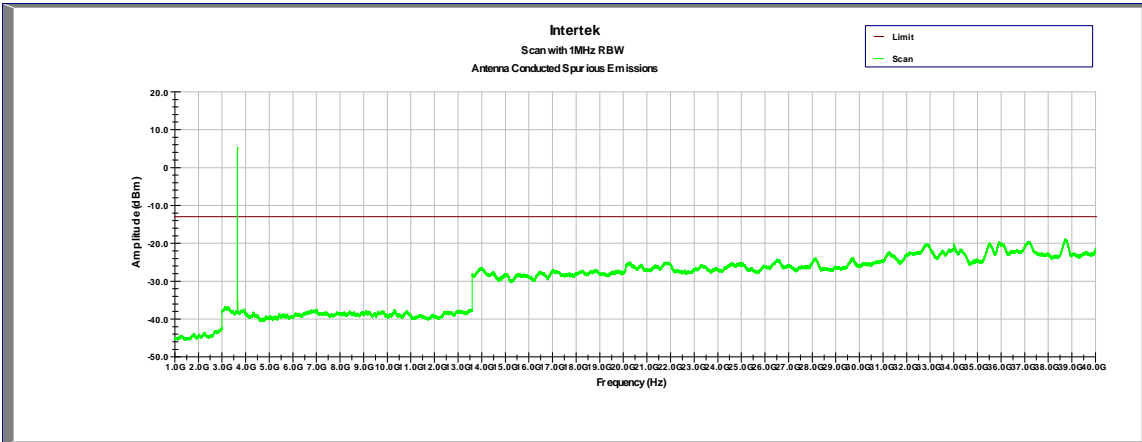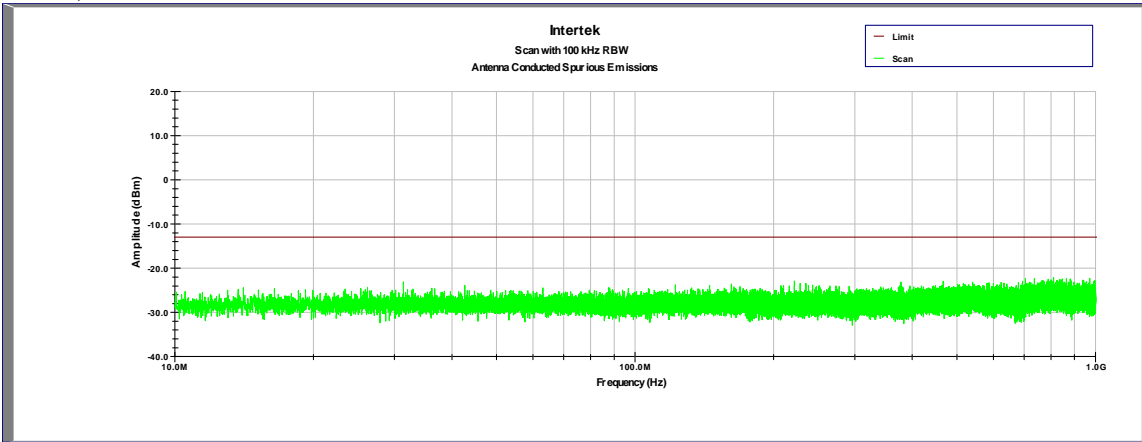



Graph 4.13  
10 MHz

16QAM, LOW CHANNEL

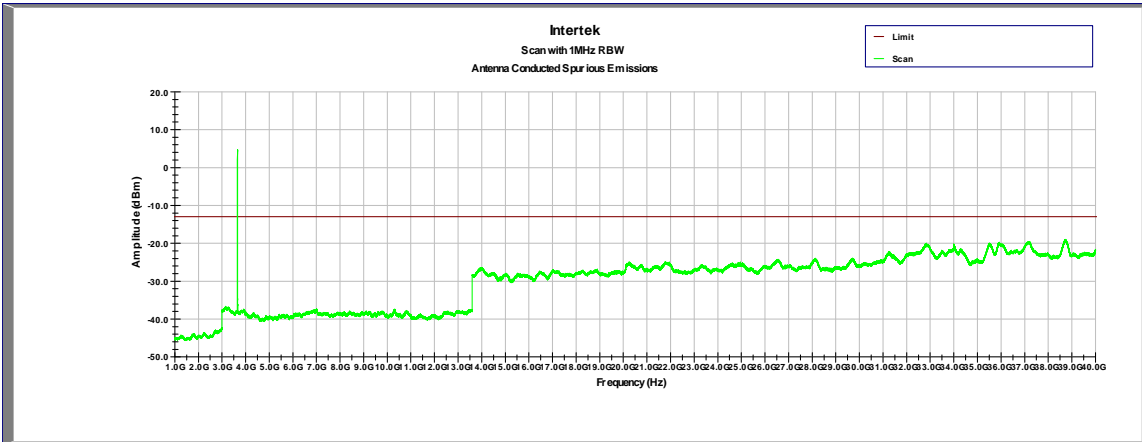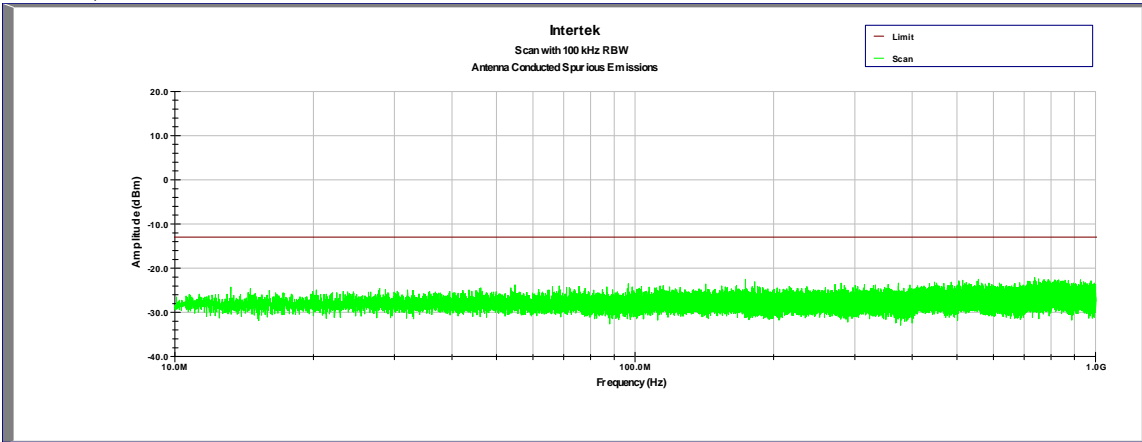



Graph 4.14  
10 MHz

64QAM, LOW CHANNEL

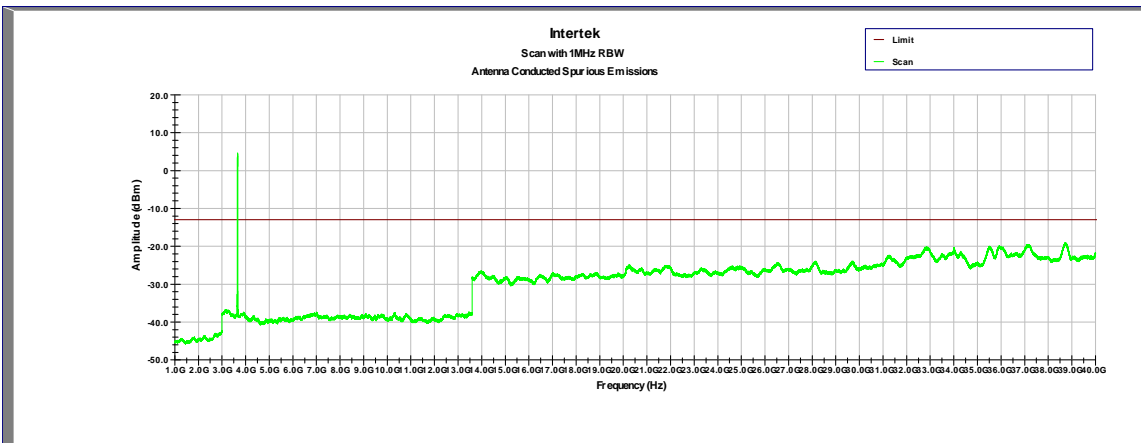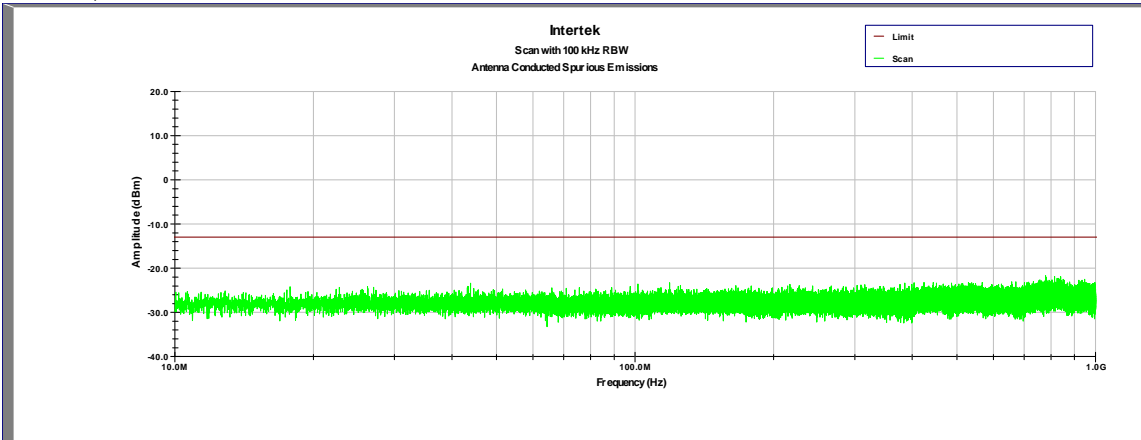

Graph 4.15  
10 MHz



QPSK, MID CHANNEL

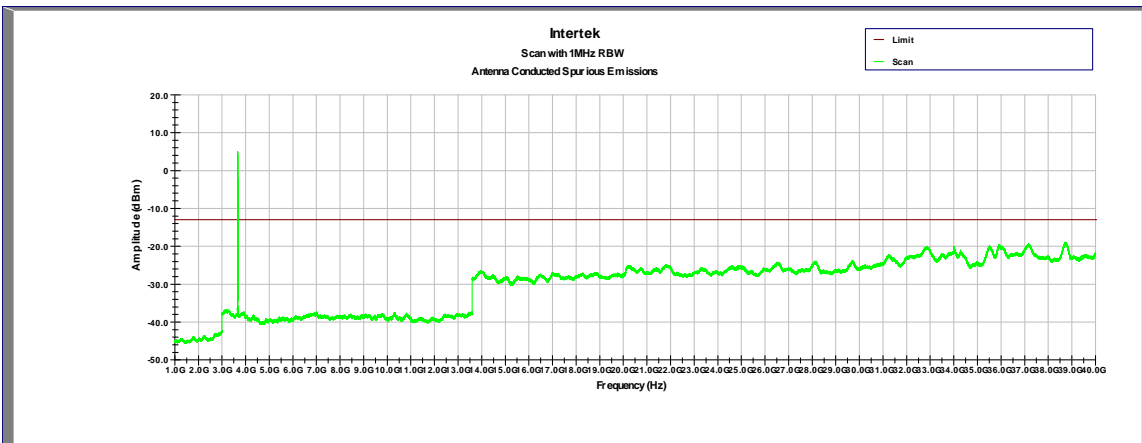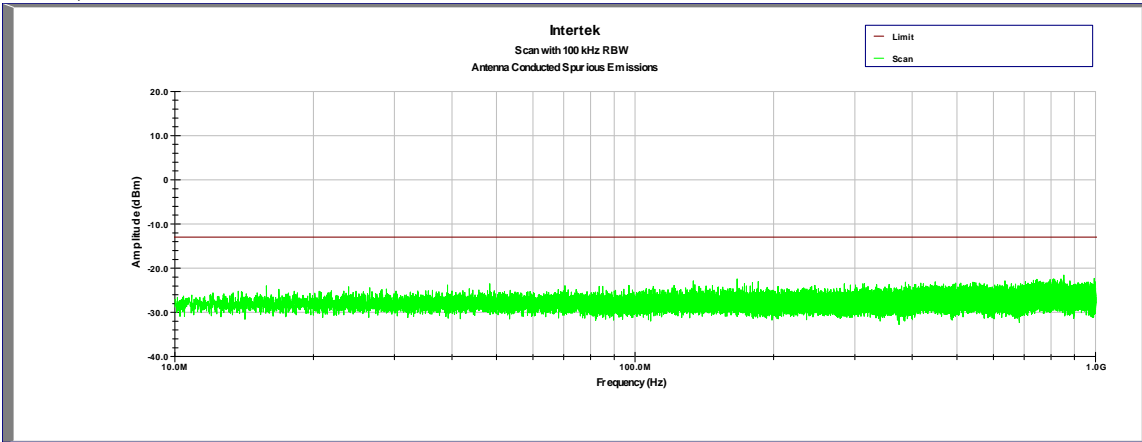





Graph 4.16  
10 MHz

16QAM, MID CHANNEL

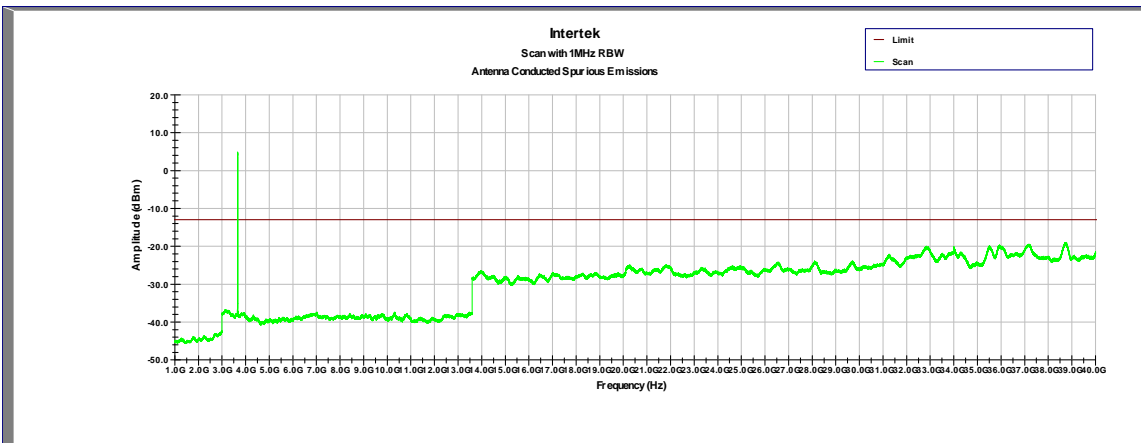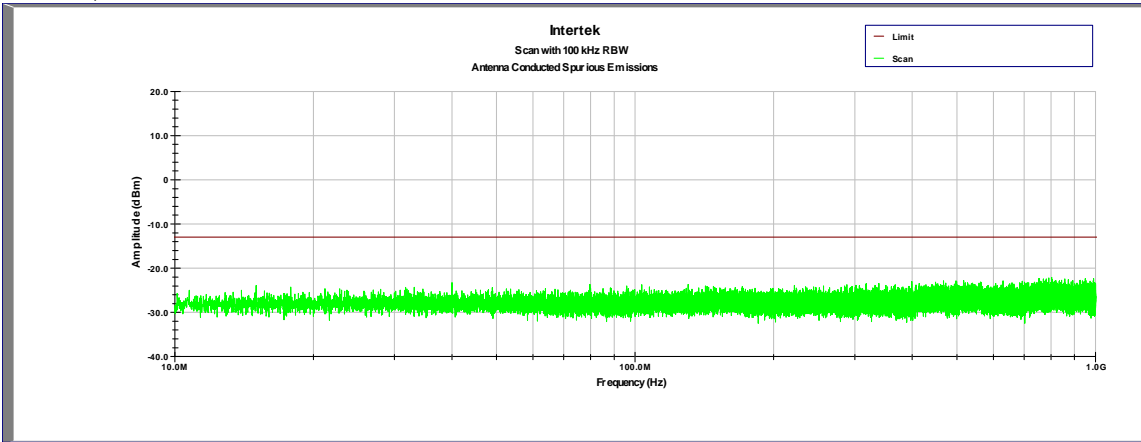



Graph 4.17  
10 MHz

64QAM, MID CHANNEL

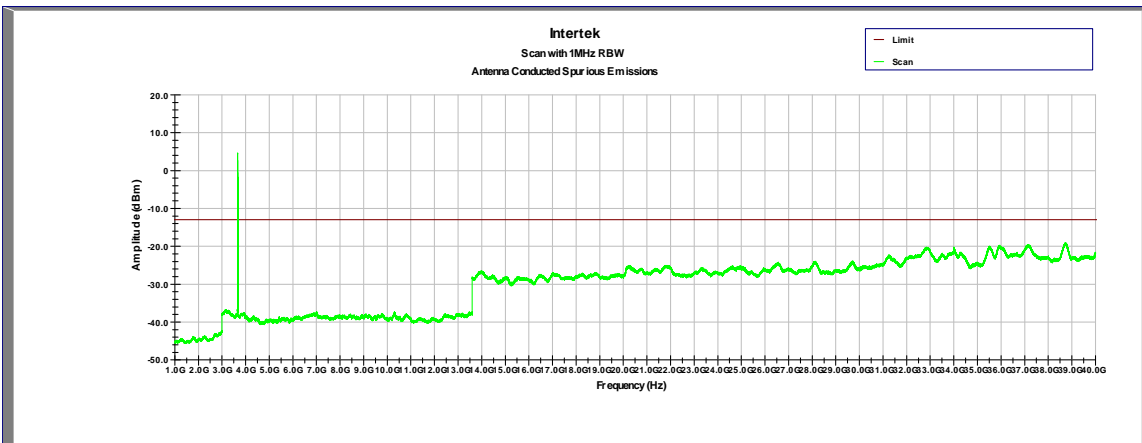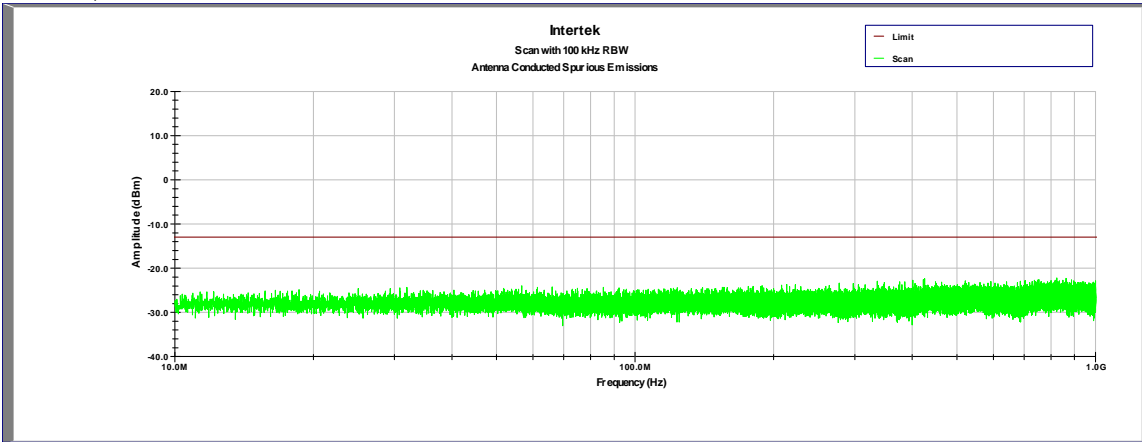



Graph 4.18  
10 MHz

QPSK, HIGH CHANNEL

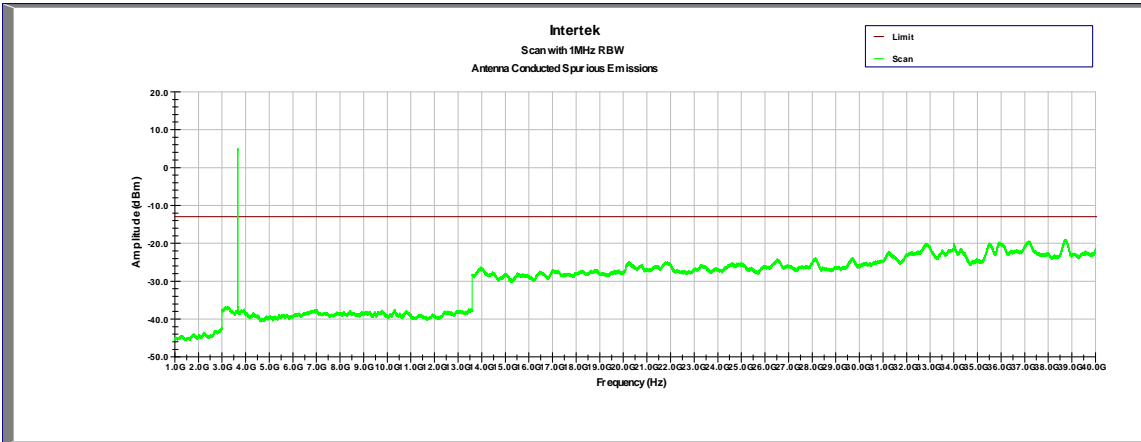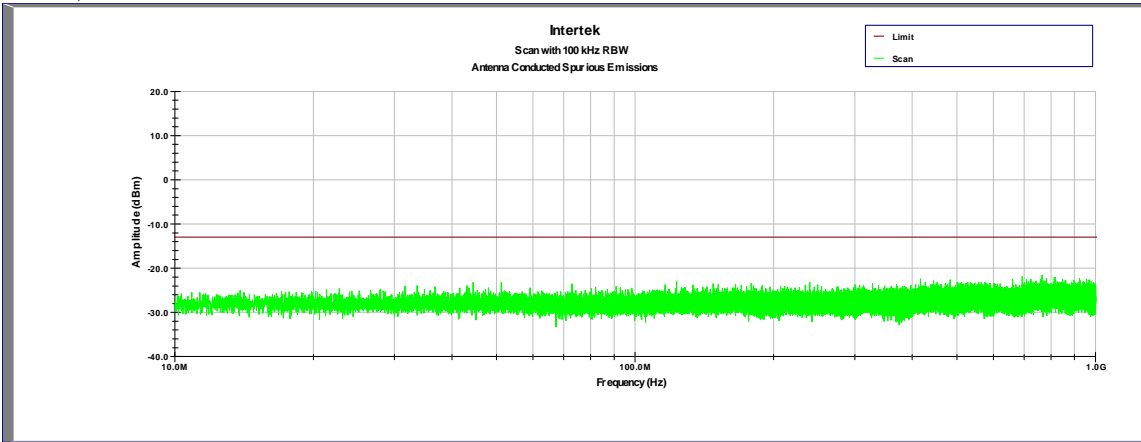



Graph 4.19  
10 MHz

16QAM, HIGH CHANNEL

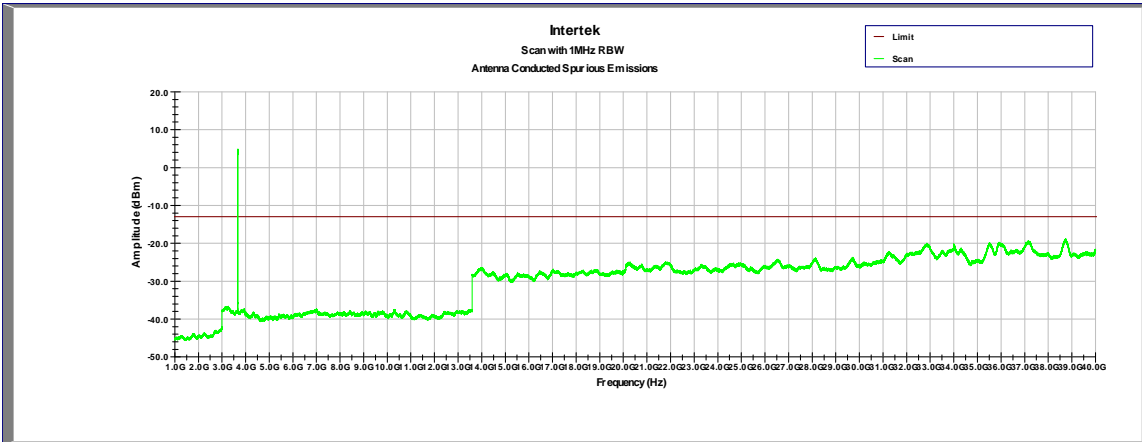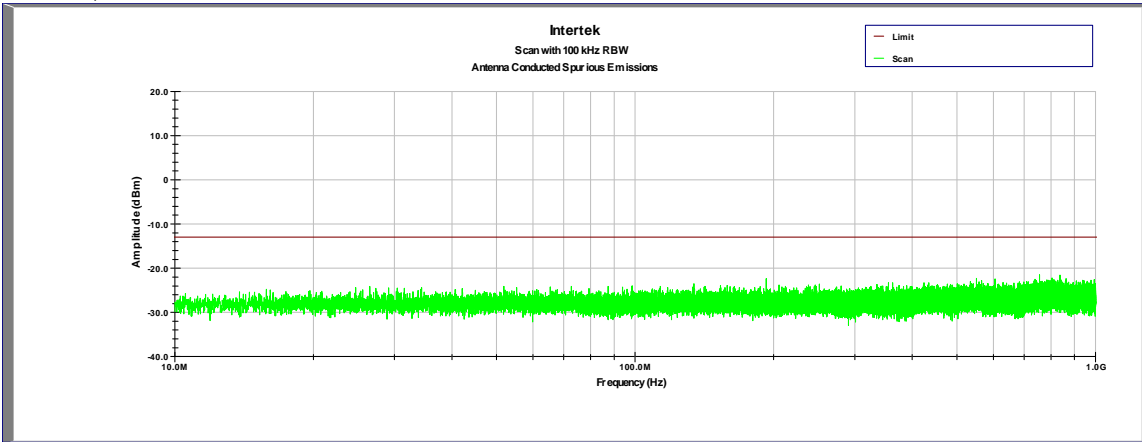

Graph 4.20  
10 MHz


64QAM, HIGH CHANNEL

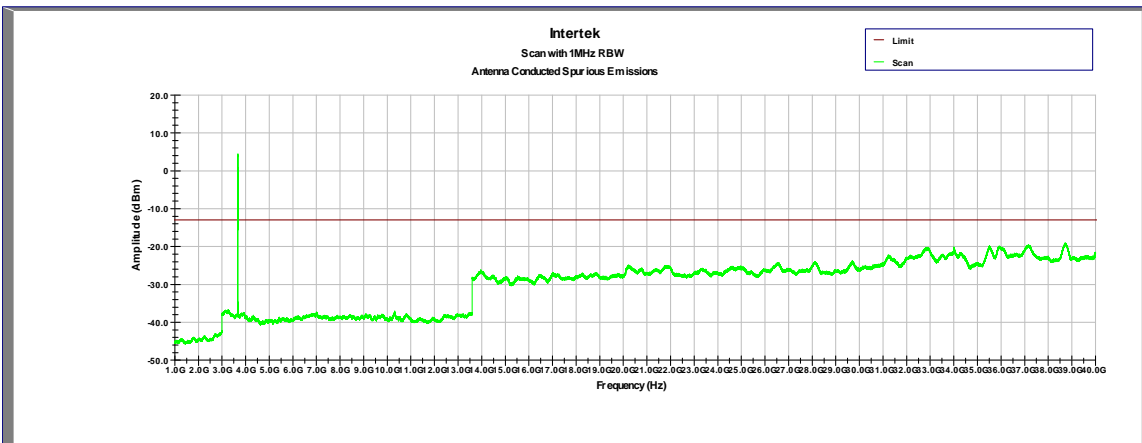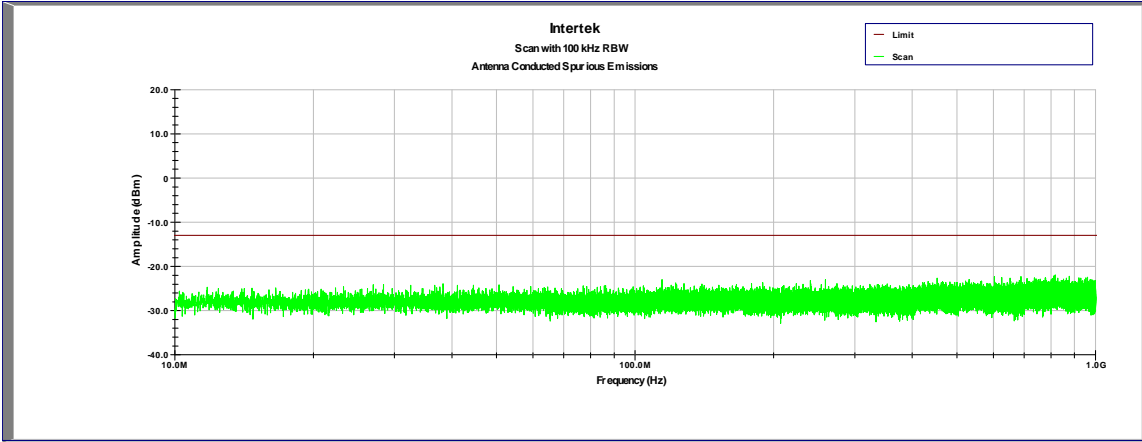

## Lower Bandedge Graph 4.21 10 MHz



1 PK  
MAXH

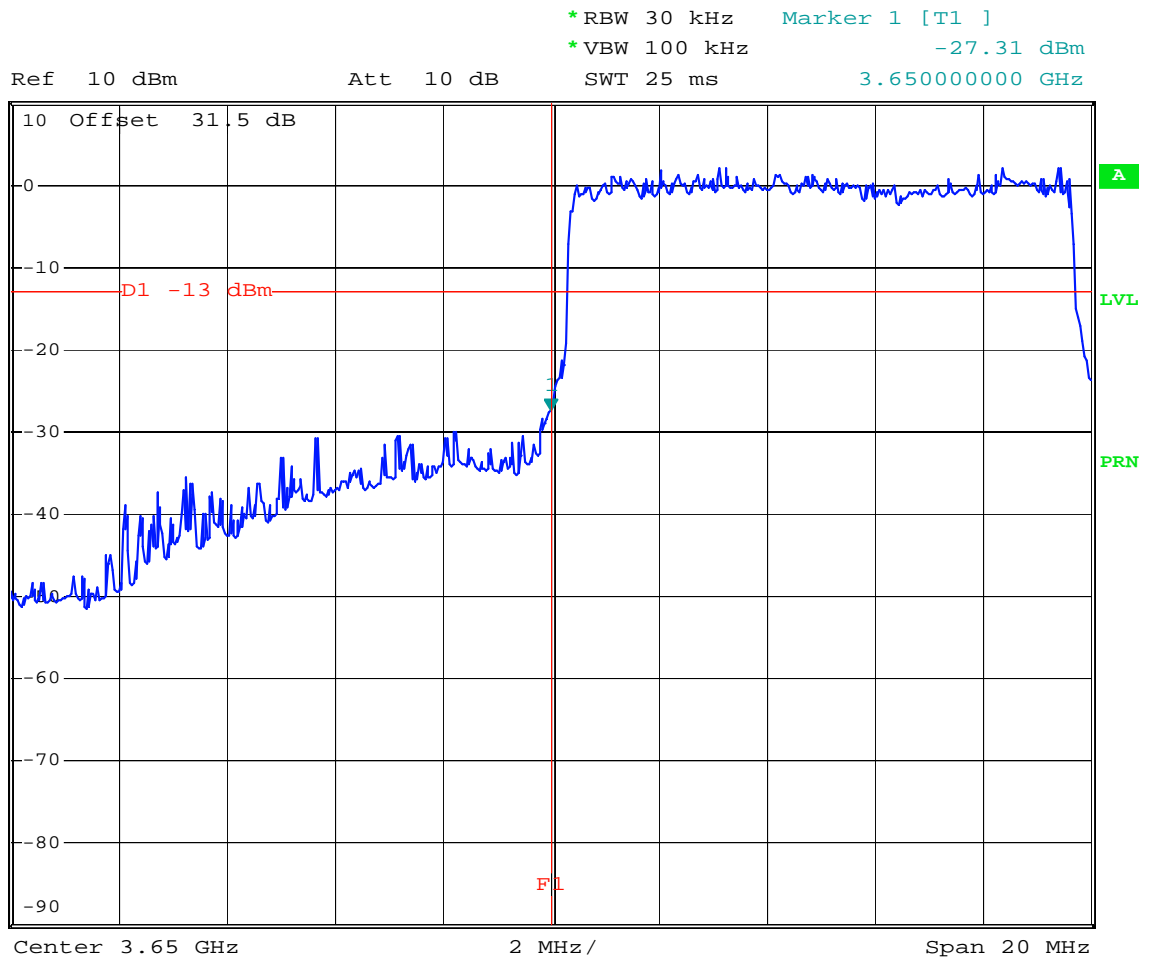


Comment: QPSK, LOW CHANNEL  
Date: 23.FEB.2010 16:34:08

## Upper Bandedge Graph 4.22 10 MHz



1 PK  
MAXH

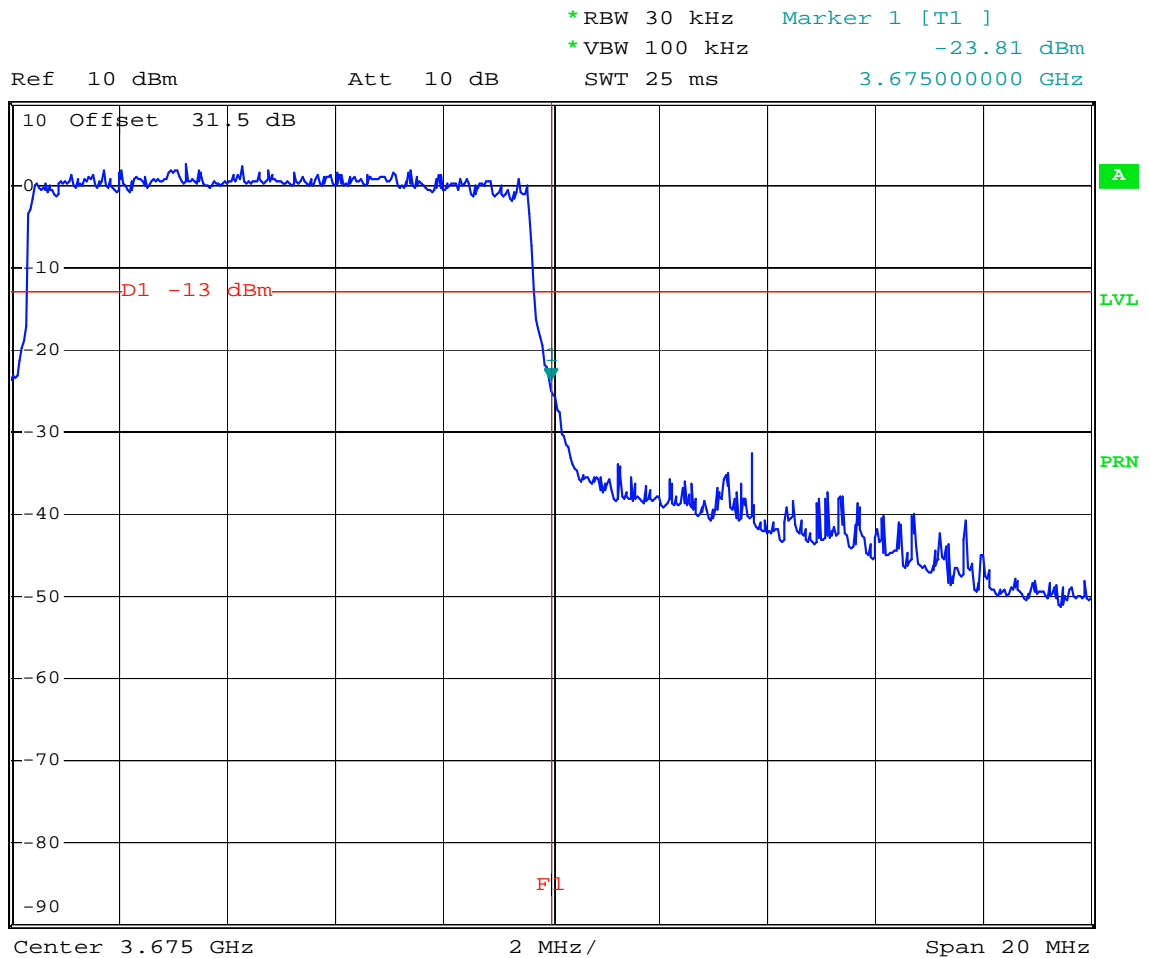

Comment: QPSK, HIGH CHANNEL  
Date: 23.FEB.2010 16:30:09

## **5.0 Spurious Radiation**

FCC 2.1053, 90.1323

### **5.1 Requirement**

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

### **5.2 Test Procedure**

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to 10th harmonic of each of the three fundamental frequency (low, middle, and high channels) was investigated. The worst case of emissions was reported.



### **5.3 Test Equipment**

Roberts Antenna  
EMCO 3115 Horn Antennas  
Rohde & Schwarz FSP40 Spectrum Analyzer  
Low Pass Filter  
Preamplifiers





## 5.4 Test Results

### Spurious Radiated Emissions

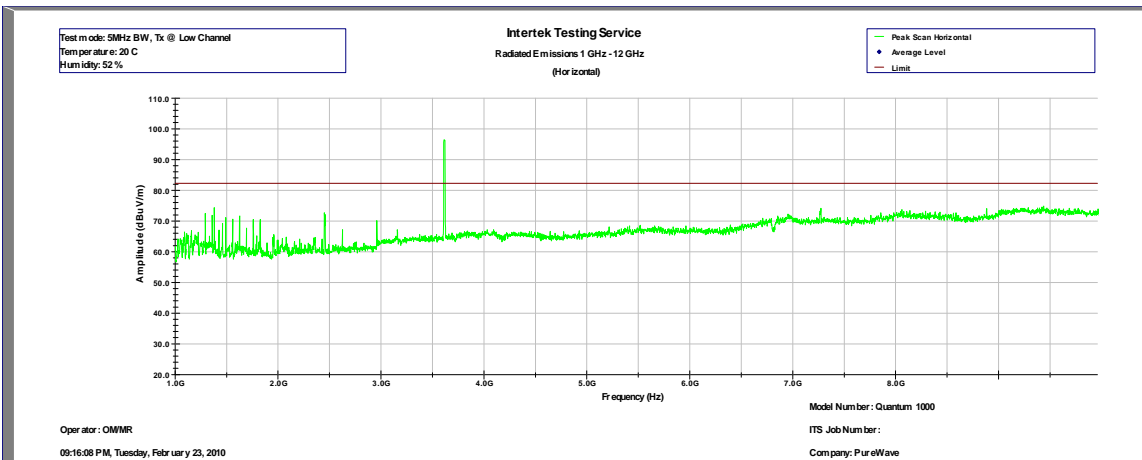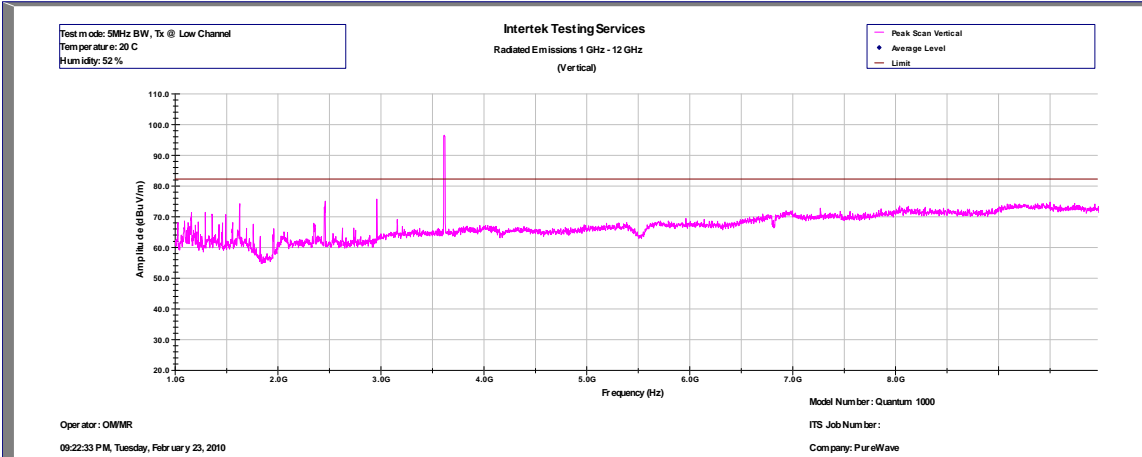



All other emission are at least 10dB below the limit.

## Spurious Radiated Emissions

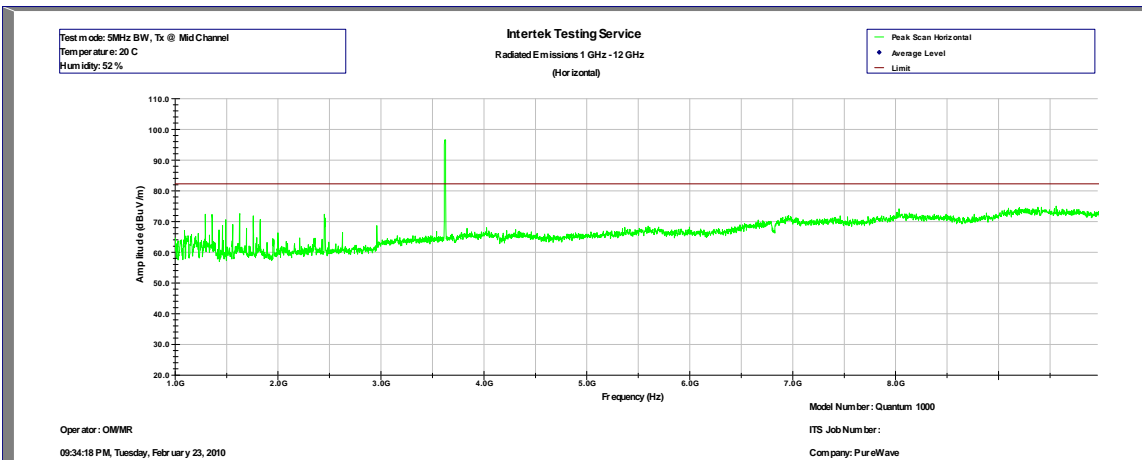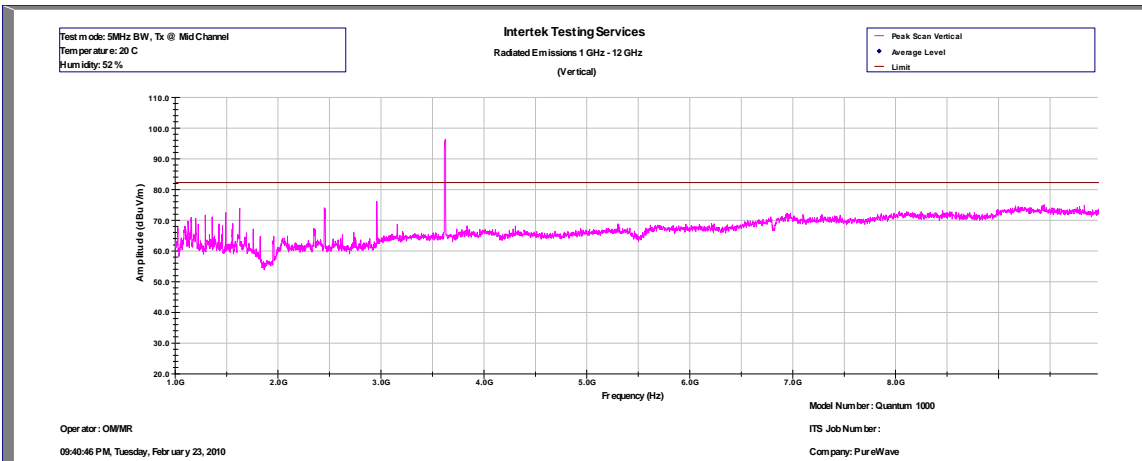



All other emission are at least 10dB below the limit.

## Spurious Radiated Emissions

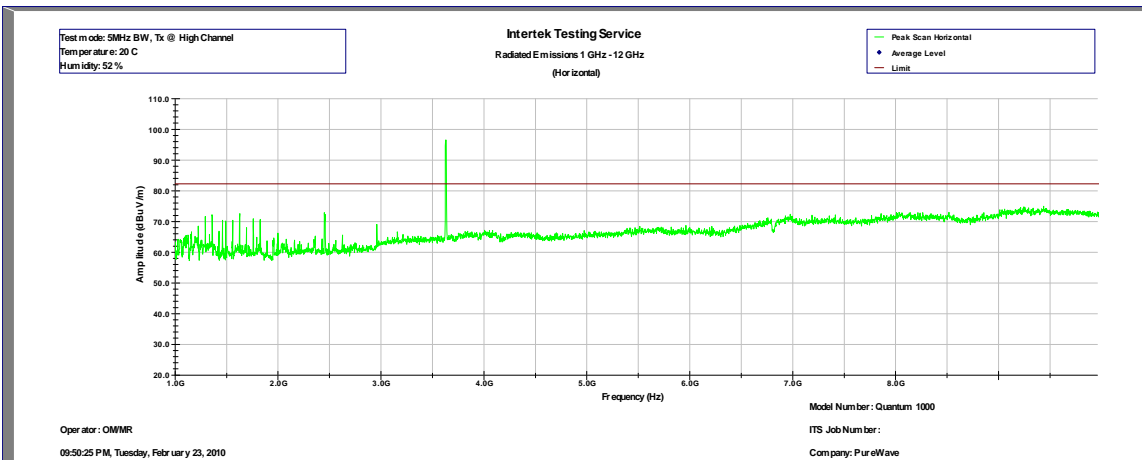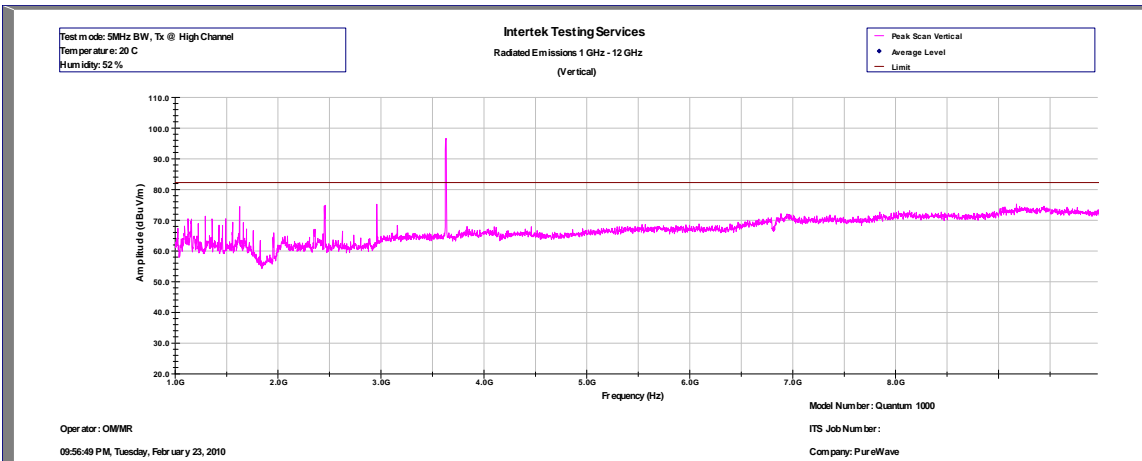



All other emission are at least 10dB below the limit.

## Spurious Radiated Emissions

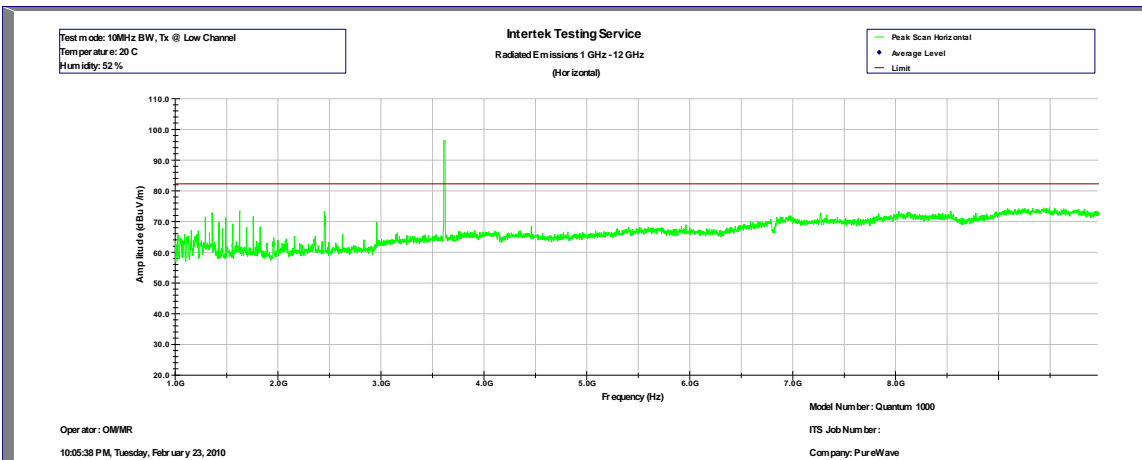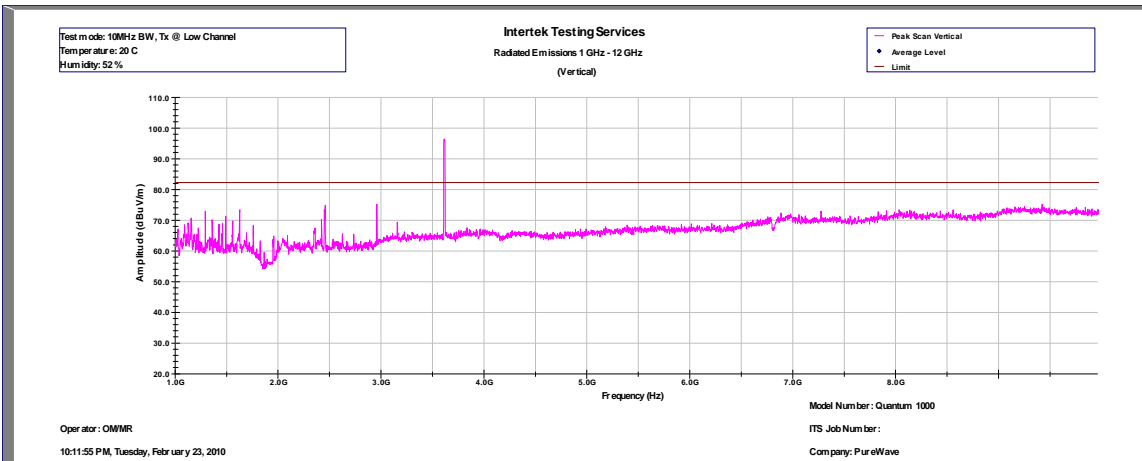



All other emission are at least 10dB below the limit.

## Spurious Radiated Emissions

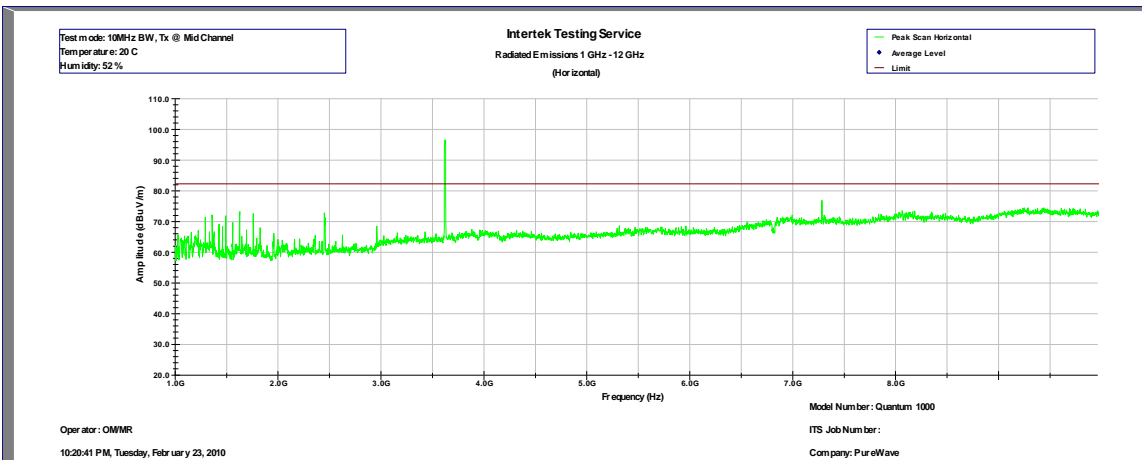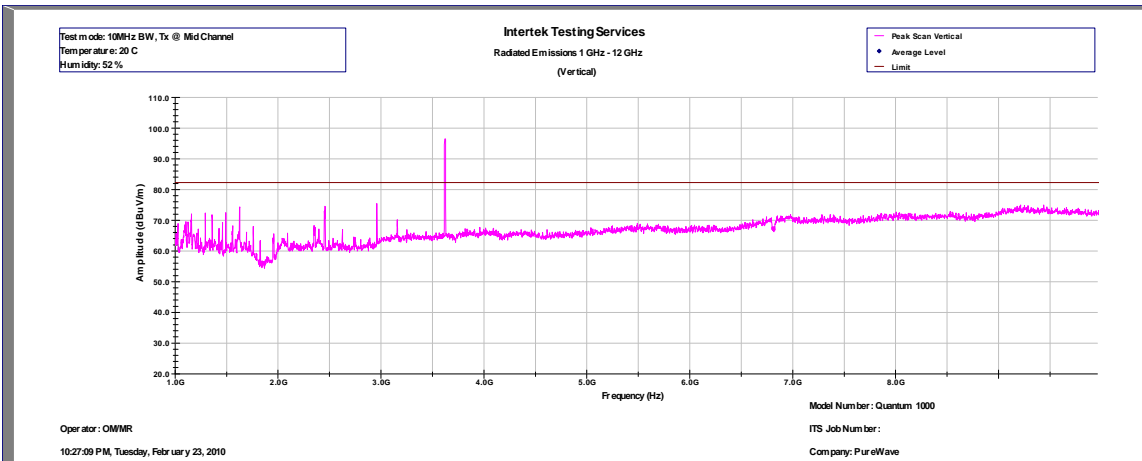

All other emission are at least 10dB below the limit.

## Spurious Radiated Emissions

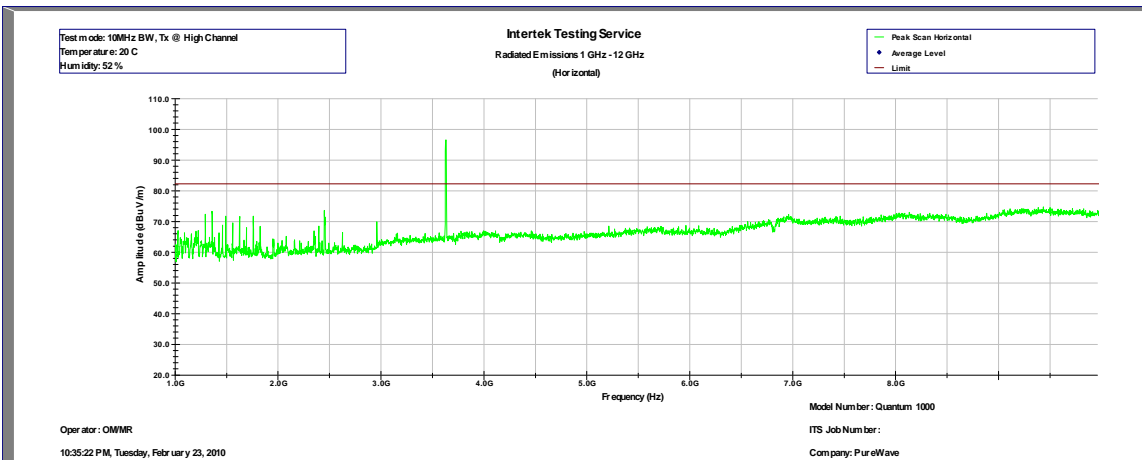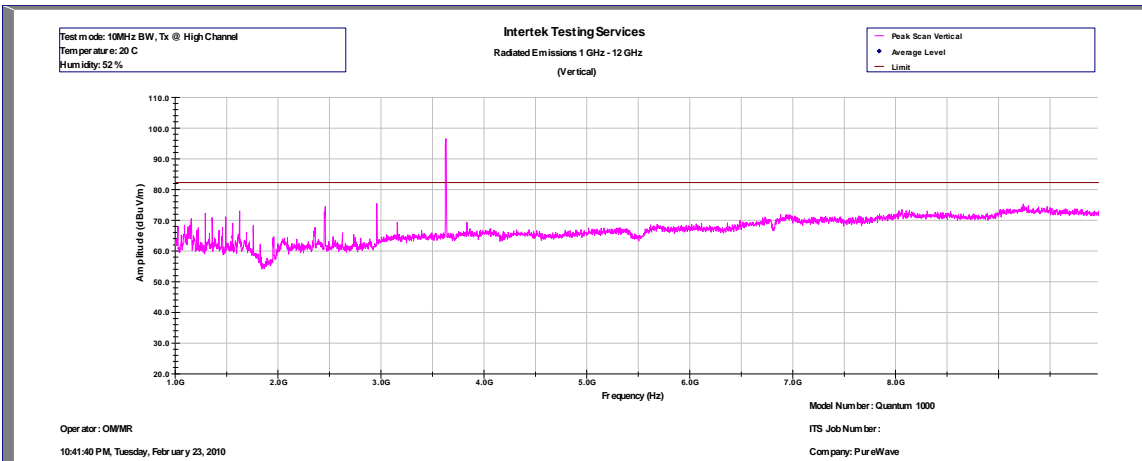

All other emission are at least 10dB below the limit.

Result

Complies

## **6.0 Frequency Stability vs Temperature and Voltage**

FCC 2.1055, 90.213

### **6.1 Requirement**

The frequency stability shall be measured with variation of ambient temperature as follows:

From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade. Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}$  centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.

The frequency stability shall be measured with variation of primary supply voltage as follows:

Vary primary supply voltage from 85 to 115 percent of the nominal value.

### **6.2 Test Procedure**

The EUT was placed inside the temperature chamber. The RF power output was connected to frequency counter. The EUT was setup to transmit the maximum power.

After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured by the frequency counter and recorded.

At the room temperature, the frequency was measured when the EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

### **6.3 Test Equipment**

Temperature Chamber  
Frequency counter

#### 6.4 Test Results

Nominal frequency: 3,662,500,240 Hz

Temperature (°C)	Measured Frequency Hz	Maximum deviation from nominal at 20°C Hz
-30	3,662,500,280	+40
-20	3,662,500,318	+78
-10	3,662,500,484	+244
0	3,662,500,051	-189
10	3,662,500,802	+562
20	<b>3,662,500,240</b>	<b>0</b>
30	3,662,500,670	+430
40	3,662,500,339	+99
50	3,662,500,446	+206

DC Voltage	Measured Frequency Hz	Maximum deviation from nominal at 20°C Hz
-48V Nominal	<b>3,662,500,650</b>	-
85%	3,662,500,242	+2
115%	3,662,500,243	+3

Result	Complies
--------	----------



## 7.0 RF Exposure evaluation

### FCC 2.1091

The maximum calculated EIRP is 10W.

Using the formula for the Power Density

,  $S = \text{EIRP} / 4\pi D^2$ ,  $D$  = distance, where the Maximum Permissible Exposure (MPE) satisfies the FCC 1.1310 limit for General Population/Uncontrolled Exposure, can be calculated as:

$$D \geq \sqrt{(\text{EIRP} / 4\pi S)}$$

The MPE Limit for General Population/Uncontrolled Exposure is  $1 \text{ mW/cm}^2$ , therefore  $D \geq 28 \text{ cm}$

The Statement that a minimum separation distance of 28 cm between the antenna and persons must be maintained is included in the User's manual.

## 8.0 Emissions from Digital Parts, Receiver and Transmitter spurious from 30 MHz - 1GHz

### 8.1 Radiated emissions FCC 15.109, FCC 15.209

#### 8.1.1 Test Limit

Radiated Emission Limits for Class A at 10 meters	
Frequency (MHz)	Quasi-Peak limits, dB (μV/m)
30 to 88	39.1
88 to 216	43.5
216 to 960	46.4
960 and up	49.5

#### 8.1.2 Test Procedure

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material.

Equipment setup for radiated emission tests followed the guidelines of ANSI C63.4 (2003).

### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB( $\mu$ V/m)


RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

## 8.1.3 Test Results

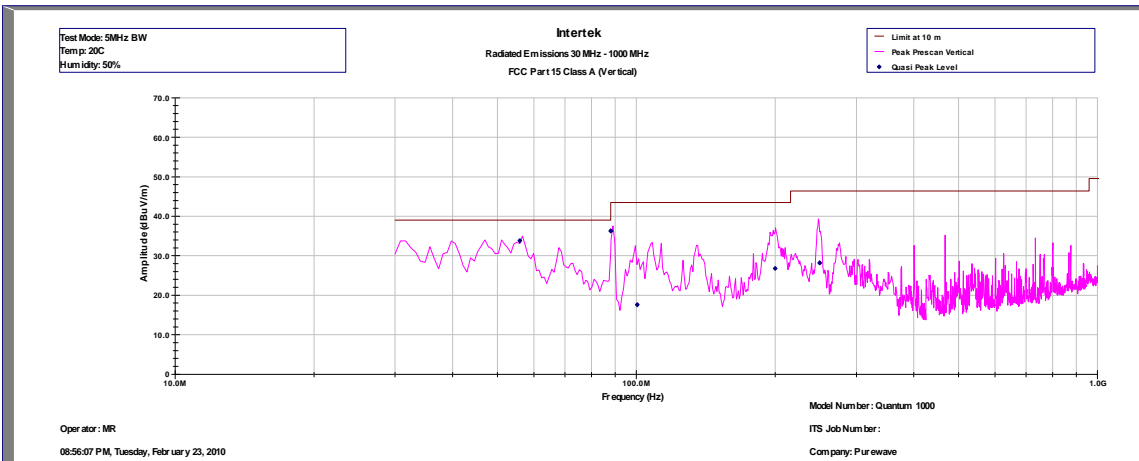

Intertek Testing Services  
Radiated Emissions 30 MHz - 1000 MHz  
FCC Part 15 Class A (QP-Vertical)

Operator: MR


Model Number: Quantum 1000

08:56:05 PM, Tuesday, February 23, 2010

Company: Purewave

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	CF	AG	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB	dB	dB	dB(1/m)
5.589E+07	33.8	39	-5.2	53.2	0.9	32.1	11.8
8.809E+07	36.3	43.5	-7.2	58.1	1.1	32	9.1
1.005E+08	17.6	43.5	-25.9	37.8	1.2	32	10.7
2.002E+08	26.8	43.5	-16.7	47	1.7	32	10.2
2.500E+08	28.2	46.4	-18.2	45.8	1.9	32	12.5

Test Mode: 5MHz BW  
Temp: 20C  
Humidity: 50%

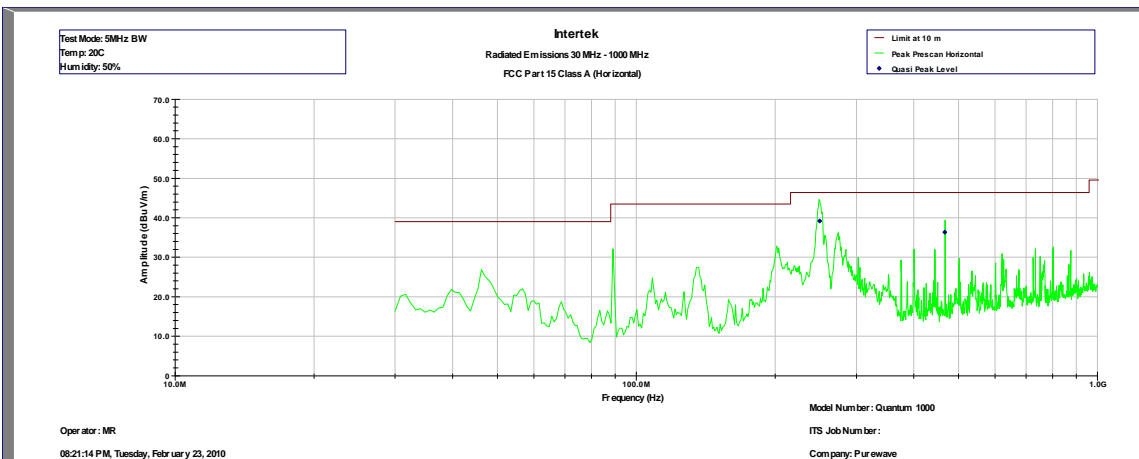


Intertek Testing Services  
Radiated Emissions 30 MHz - 1000 MHz  
FCC Part 15 Class A (QP-Horizontal)

Operator: MR  
Model Number: Quantum 1000

08:21:12 PM, Tuesday, February 23, 2010  
Company: Purewave

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	CF	AG	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB(1/m)
2.500E+08	39.1	46.4	-7.3	56.7	1.9	32	12.6
4.667E+08	36.3	46.4	-10.1	48.8	2.6	32.1	17

Test Mode: 5MHz BW  
Temp: 20C  
Humidity: 50%

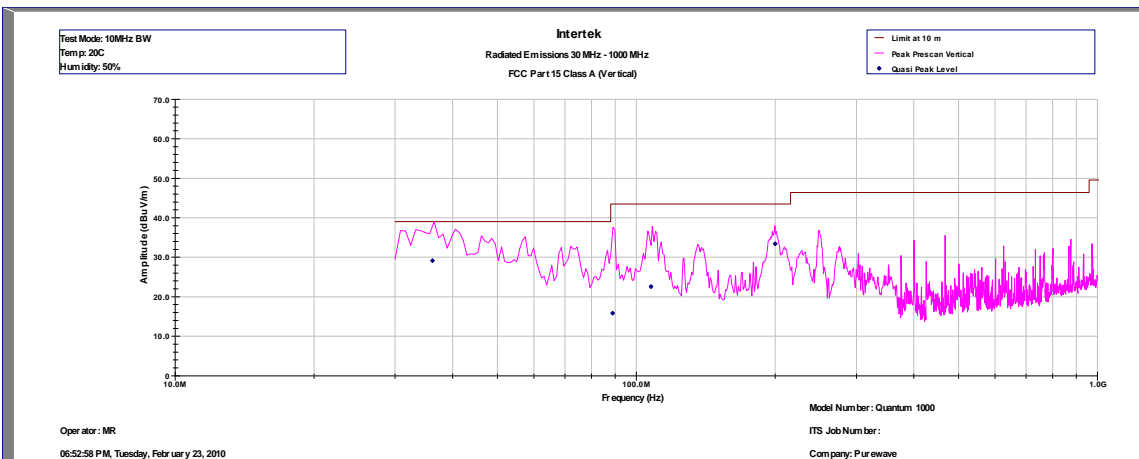

Intertek Testing Services  
Radiated Emissions 30 MHz - 1000 MHz  
FCC Part 15 Class A (QP-Vertical)

Operator: MR


Model Number: Quantum 1000

06:52:58 PM, Tuesday, February 23, 2010

Company: Purewave

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	CF	AG	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB	dB	dB	dB(1/m)
3.614E+07	29.1	39.0	-9.9	43.3	0.7	32.1	17.2
8.887E+07	15.8	43.5	-27.7	37.6	1.1	32.0	9.2
1.076E+08	22.5	43.5	-21.0	42.8	1.2	32.0	10.5
2.000E+08	33.4	43.5	-10.1	53.6	1.7	32.0	10.2

Test Mode: 10MHz BW  
Temp: 20C  
Humidity: 50%

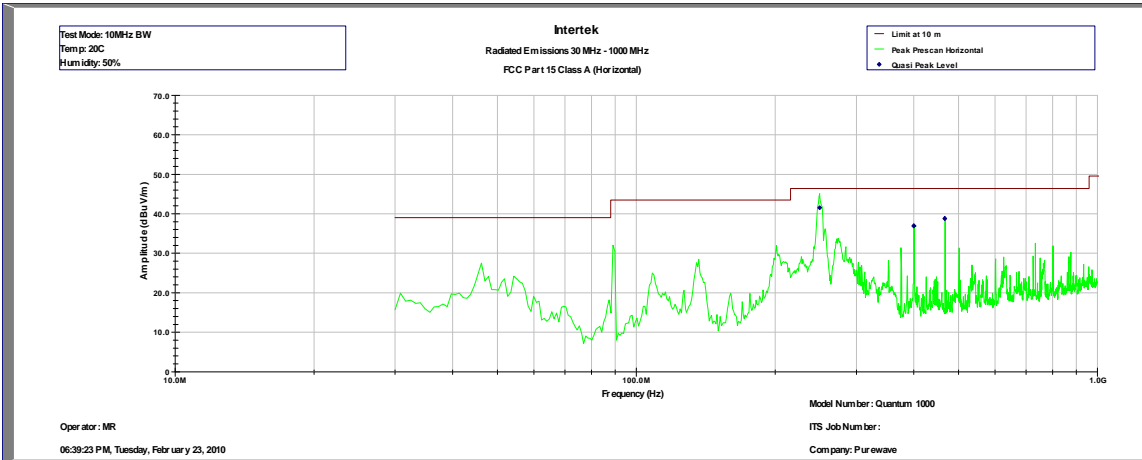

Intertek Testing Services  
Radiated Emissions 30 MHz - 1000 MHz  
FCC Part 15 Class A (QP-Horizontal)

Operator: MR  
Model Number: Quantum 1000

06:39:23 PM, Tuesday, February 23, 2010  
Company: Purewave

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	CF	AG	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB(1/m)
2.500E+08	41.5	46.4	-4.9	59.1	1.9	32.0	12.6
4.000E+08	36.9	46.4	-9.5	50.9	2.4	32.0	15.7
4.667E+08	38.8	46.4	-7.6	51.3	2.6	32.1	17.0

Test Mode: 10MHz BW  
Temp: 20C  
Humidity: 50%

Result	Complies
--------	----------

## 9.0 List of Test Equipment

Measurement equipment used for compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	12/04/10
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	12/04/10
Spectrum Analyzer	Rohde&Schwarz	FSP40	036612004	12	10/16/10
BI-Log Antenna	Antenna Research	LPB-2513/A	1154	12	06/23/10
Pre-Amplifier	Sonoma	310N	185634	12	11/19/10
Pre-Amplifier	Miteq	AMF-4D-001180-24-10P	799159	12	07/28/10
Horn Antenna	EMCO	3115	9107-3712	12	11/03/10



## 10.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / 3183595	OM	February 25, 2010	Original document