



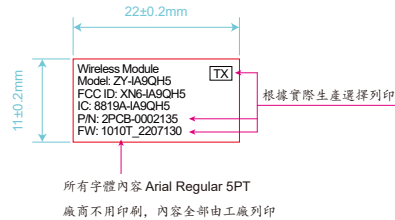

TOLERANCES	A	B	C	D	ANGLE
-16	±0.05	±0.1	±0.2	±0.4	±10'
16-63	±0.1	±0.2	±0.4	±0.6	±15'
63-150	±0.15	±0.25	±0.5	±0.8	±30'
150-250	±0.2	±0.3	±0.6	±1	±'
250-500	±0.4	±0.6	±0.8	±1.5	±'



根據實際生產選擇列印

Type	P/N	FW
TX	2PCB-0002135	1010T_2207130
RX	2PCB-0002136	1020R_2207250

- NOTE:
1. IF TOLERANCE FOR EACH DIMENSIONS NOT SHOWN, REFER TO TABLE «B» TABLE FOR TOLERANCE.
  2. USE R=1.0MM FOR ALL RADI NOT SPECIFIED.
  3. UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, AND/OR SPOTS.
  4. REPRESENTS REVISIONS OR NEW DIMENSIONS.
  5. REPRESENTS CRITICAL AREAS TO BE MEASURED. ALL OTHER DIMENSIONS ARE FOR REFERENCE.
  6. THE MOULD NUMBER: NO
  7. TEXTURE NUMBER: NO
  8. ALL SUBSTANCE NEED TO MEET THE ROHS 2.0 / REACH REQUIREMENTS. DETAILS REFER TO ZYLUX'S PROCEDURE "QMI-P40-01"
  9. WILL USE ±0.05MM INNER DIAMETER FOR THE SCREW WHICH NOT SPECIFIED THE DETAILED DIMENSION.

☐			
☐			
☐			
☐			
☐	PROTOTYPE-A4	2022/08/25	MAOKAI
ISS	CHANGE RECORDS	DATE	REVISER

TITLE: Zylux IA9QH5 RX&TX 標識組件	REV	SHEET	MODEL:AD-000011AA	DATE: 2022/08/25
	A	1/1	P/NO.:	SCALE: 1:1
MATERIAL: 50#合成紙 壓克力膠	NO. K2S1E-0003458	APPROVAL	CHECKED	DESIGN
COLOR: 單黑印刷	DRAWER: MAOKAI	POBBY	YONG	MAOKAI
Zylux Acoustic Corporation				

A

B

C

D

E