

TEST REPORT

Reference No...... : WTS19S12087396W
FCC ID..... : XN6-SB2020NG6
Applicant : Zylux Acoustic Corporation
Address : 7F, 70, Rui Guang Road, Neihu District, Taipei, Taiwan
Manufacturer : Vizio Inc.
Address : 39 Tesla Irvine, CA 92618 USA
Product : 20" SoundBar 2.0 System
Model(s)..... : SB2020n-G6, SB2020n-G6M, SB2020n-H6, SB2020n-H6M
Standards : FCC CFR47 Part 15 Section 15.247:2019
Date of Receipt sample : 2019-12-16
Date of Test : 2019-12-17 to 2019-12-24
Date of Issue : 2019-12-25
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Test site/Test location:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Frank Yin

Frank Yin / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

1 Contents

	Page
1 CONTENTS	2
2 REVISION HISTORY	4
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF E.U.T	5
3.2 MODEL DIFFERENCE.....	6
3.3 DETAILS OF E.U.T.....	6
3.4 CHANNEL LIST.....	6
3.5 TEST MODE	6
4 EQUIPMENT USED DURING TEST	7
4.1 EQUIPMENTS LIST	7
4.2 MEASUREMENT UNCERTAINTY	8
4.3 SUBCONTRACTED.....	8
5 TEST FACILITY	8
6 TEST SUMMARY	9
7 CONDUCTED EMISSION	10
7.1 E.U.T. OPERATION	10
7.2 EUT SETUP.....	10
7.3 MEASUREMENT DESCRIPTION.....	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP	16
8.3 SPECTRUM ANALYZER SETUP	17
8.4 TEST PROCEDURE	18
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
8.6 SUMMARY OF TEST RESULTS.....	19
9 BAND EDGE MEASUREMENT	25
9.1 TEST PROCEDURE	25
9.2 TEST SETUP	25
9.3 TEST RESULT	26
10 BANDWIDTH MEASUREMENT.....	32
10.1 TEST PROCEDURE.....	32
10.2 TEST SETUP	32
10.3 TEST RESULT	32
11 MAXIMUM PEAK OUTPUT POWER	38
11.1 TEST PROCEDURE.....	38
11.2 TEST SETUP	38
11.3 TEST RESULT	38
12 HOPPING CHANNEL SEPARATION	44
12.1 TEST PROCEDURE.....	44
12.2 TEST SETUP	44
12.3 TEST RESULT	45
13 NUMBER OF HOPPING FREQUENCY.....	50
13.1 TEST PROCEDURE.....	50

13.2	TEST SETUP	50
13.3	TEST RESULT	51
14	DWELL TIME	53
14.1	TEST PROCEDURE.....	53
14.2	TEST SETUP	53
14.3	TEST RESULT	54
15	ANTENNA REQUIREMENT	60
16	FCC ID: XN6-SB2020NG6 RF EXPOSURE REPORT	61
16.1	REQUIREMENTS.....	61
16.2	THE PROCEDURES / LIMIT.....	61
16.3	MPE CALCULATION METHOD	62
17	PHOTOGRAPHS –TEST SETUP PHOTOS	63
18	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	63
18.1	EXTERNAL PHOTOS.....	63
18.2	INTERNAL PHOTOS.....	63

2 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S12087396W	2019-12-16	2019-12-17 to 2019-12-24	2019-12-25	original	-	Valid

3 General Information

3.1 General Description of E.U.T

Product:	20" SoundBar 2.0 System
Model(s):	SB2020n-G6, SB2020n-G6M, SB2020n-H6, SB2020n-H6M
Model difference:	Only the model name is different. The model SB2020n-G6 is the tested sample.
Remark:	The Model SB2020n-G6 work with power board 1 or power board 2. The difference test was performed between the model working with power board 1 and power board 2. The detail of model difference refer to section 3.2
Operation Frequency:	2402-2480MHz, 79(EDR) Channels in total
Antenna installation:	Integral antenna
Antenna Gain:	4.1dBi
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Frequency hopping systems (FHS):	

This transmitter device is frequency hopping device, and complies with FCC Part15.247 Requirements.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. The average time of occupancy on any channel is less than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels (79 channels) employed.

All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for FCC Part15.247.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 59, 17, 44, 03, 00, 25, 64, 55, 19, 58, 28, 10, 70, 63, 02, 29, 15, 74, 49, 40, 65, 50, 13, 23, 26, 35, 69, 24, 14, 54, 47, 51, 76, 53, 78, 01, 27, 04, 66, 07, 05, 73, 68, 20, 36, 43, 09, 16, 62, 57, 34, 75, 08, 06, 46, 11, 60, 18, 72, 45, 33, 41, 12, 37, 31, 38, 21, 52, 61, 67, 56, 77, 32, 48, 39, 22, 42, 30, 71 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.2 Model difference

Product Name	Difference
SB2020n-G6	Power board 1: Manufacturer: Dongguan Dongsong Electronic Co., Ltd. Model: DSP120-120100W
	Power board 2: Manufacturer: CHOU SEN ELECTRONICS(SHENZHEN) CO.,LTD Model: CS12J120100F0

3.3 Details of E.U.T

Ratings: Input: AC 120V~, 60Hz 10W

3.4 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

3.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Note: The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

4 Equipment Used during Test

4.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	100947	2019-09-17	2020-09-16
2	LISN	R&S	ENV216	100115	2019-09-17	2020-09-16
3	Cable	Top	TYPE16(3.5M)	-	2019-09-17	2020-09-16
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2019-04-19	2020-04-18
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2019-04-19	2020-04-18
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-04-19	2020-04-18
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2019-04-19	2020-04-18
5	Spectrum Analyzer	R&S	FSP40	100501	2019-09-17	2020-09-16
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	335	2019-09-17	2020-09-16
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2019-09-17	2020-09-16
8	Cable	Top	18-40GHz	-	2019-09-17	2020-09-16
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2019-04-20	2020-04-19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-05-24	2020-05-23
3	Active Loop Antenna	Com-power	AL-130R	10160007	2019-04-28	2020-04-27
4	Amplifier	ANRITSU	MH648A	M43381	2019-04-19	2020-04-18
5	Cable	HUBER+SUHNER	CBL2	525178	2019-04-20	2020-04-19
6	Coaxial Cable (below 1GHz)	Top	TYPE16 (13M)	-	2019-09-17	2020-09-16

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSP30	100091	2019-04-19	2020-04-18
2	Coaxial Cable	Top	10Hz-30GHz	-	2019-09-17	2020-09-16
3	Antenna Connector*	Realacc	45RSm	-	2019-09-17	2020-09-16
4	DC Block	Gwave	GDCB-3G-N-SMA	140307001	2019-09-17	2020-09-16

“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

4.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

4.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

5 Test Facility

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	Pass
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	Pass
Band edge	15.247(d) 15.205(a)	Pass
Bandwidth	15.247(a)(1)	Pass
Maximum Peak Output Power	15.247(b)(1)	Pass
Frequency Separation	15.247(a)(1)	Pass
Number of Hopping Frequency	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.4 °C

Humidity: 53.9 % RH

Atmospheric Pressure: 101.5kPa


Test Voltage: AC 120V, 60Hz

EUT Operation:

The test was performed in Transmitting mode, the worst test data (GFSK modulation Low channel) were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

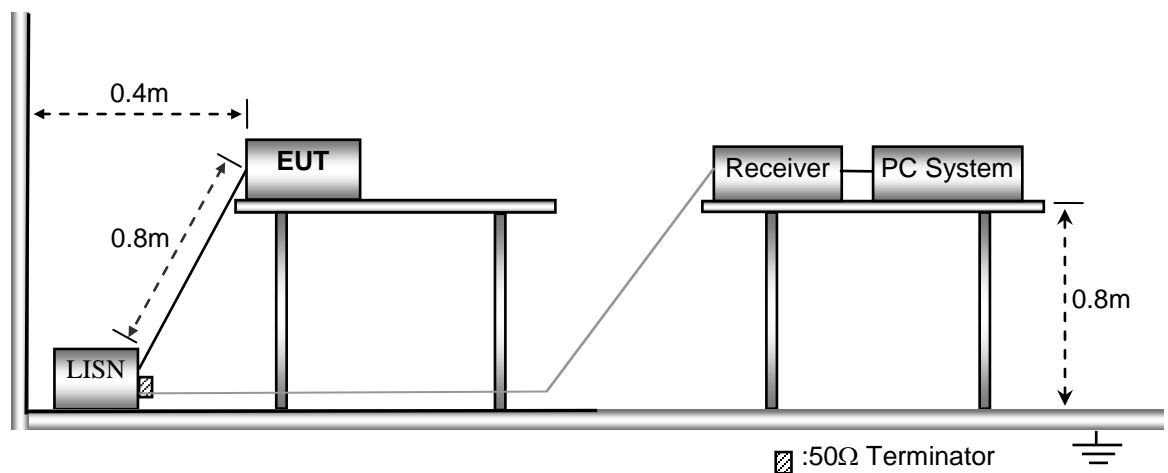

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

Remark: only the worst data (GFSK modulation Low channel mode) were reported


Power board 1

Live line:

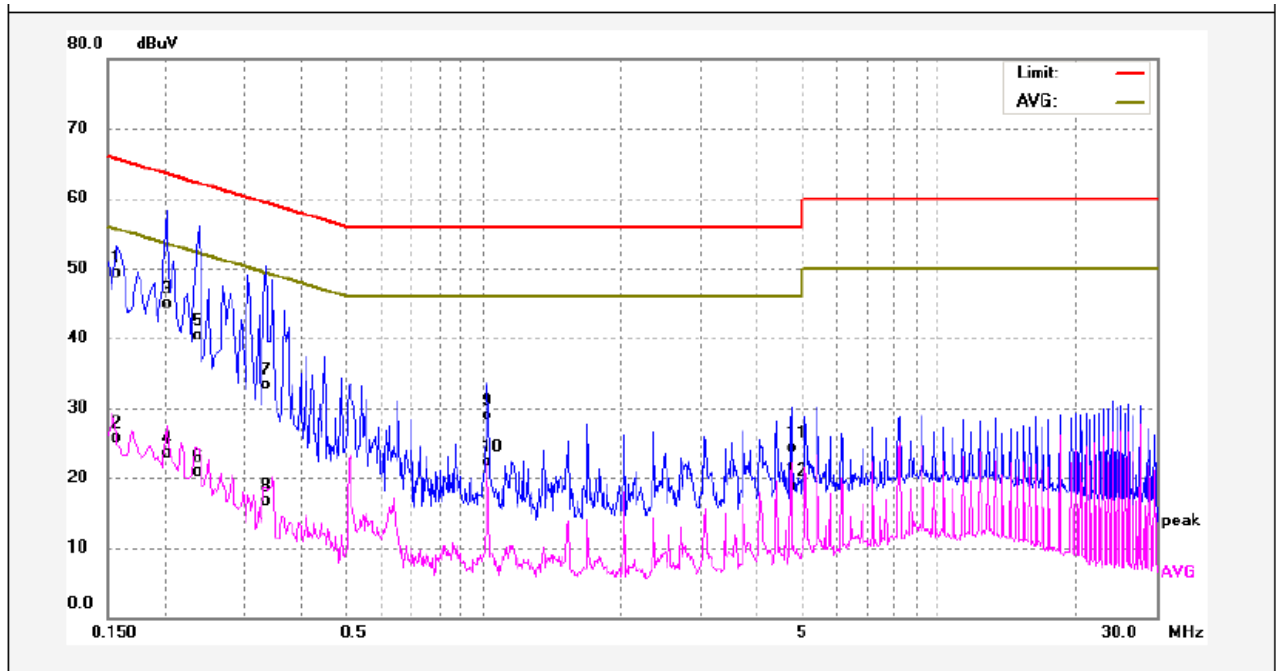

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	39.48	9.76	49.24	65.56	-16.32	QP	
2	0.1580	15.95	9.76	25.71	55.56	-29.85	AVG	
3	0.2020	35.19	9.77	44.96	63.52	-18.56	QP	
4	0.2020	13.82	9.77	23.59	53.52	-29.93	AVG	
5	0.2380	30.49	9.76	40.25	62.16	-21.91	QP	
6	0.2380	11.21	9.76	20.97	52.16	-31.19	AVG	
7	0.3339	23.54	9.81	33.35	59.35	-26.00	QP	
8	0.3339	6.99	9.81	16.80	49.35	-32.55	AVG	
9	1.0220	19.06	9.86	28.92	56.00	-27.08	QP	
10	1.0220	12.53	9.86	22.39	46.00	-23.61	AVG	
11	4.7500	14.22	10.04	24.26	56.00	-31.74	QP	
12	4.7500	8.84	10.04	18.88	46.00	-27.12	AVG	


Neutral line:

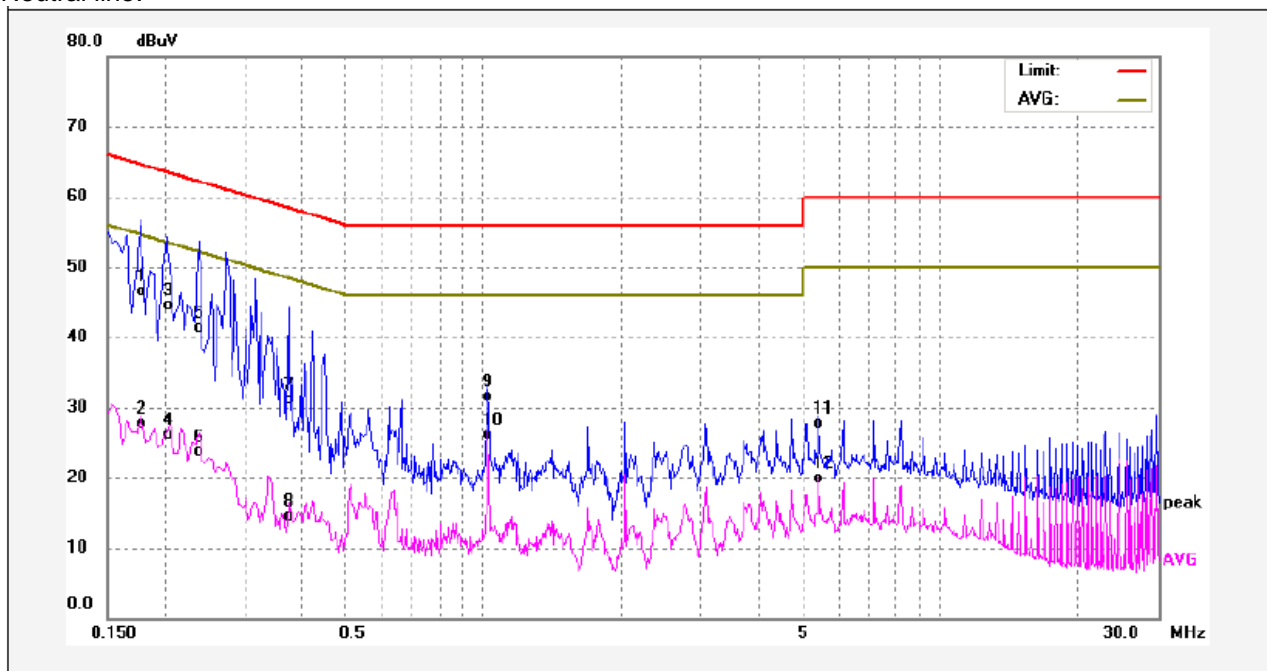

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	36.65	9.78	46.43	64.57	-18.14	QP	
2	0.1780	17.92	9.78	27.70	54.57	-26.87	AVG	
3	0.2020	34.83	9.77	44.60	63.52	-18.92	QP	
4	0.2020	16.42	9.77	26.19	53.52	-27.33	AVG	
5	0.2380	31.46	9.76	41.22	62.16	-20.94	QP	
6	0.2380	13.91	9.76	23.67	52.16	-28.49	AVG	
7	0.3740	21.38	9.81	31.19	58.41	-27.22	QP	
8	0.3740	4.68	9.81	14.49	48.41	-33.92	AVG	
9	1.0260	21.60	9.87	31.47	56.00	-24.53	QP	
10	1.0260	16.23	9.87	26.10	46.00	-19.90	AVG	
11	5.4220	17.57	10.08	27.65	60.00	-32.35	QP	
12	5.4220	9.84	10.08	19.92	50.00	-30.08	AVG	


Power board 2

Live line:

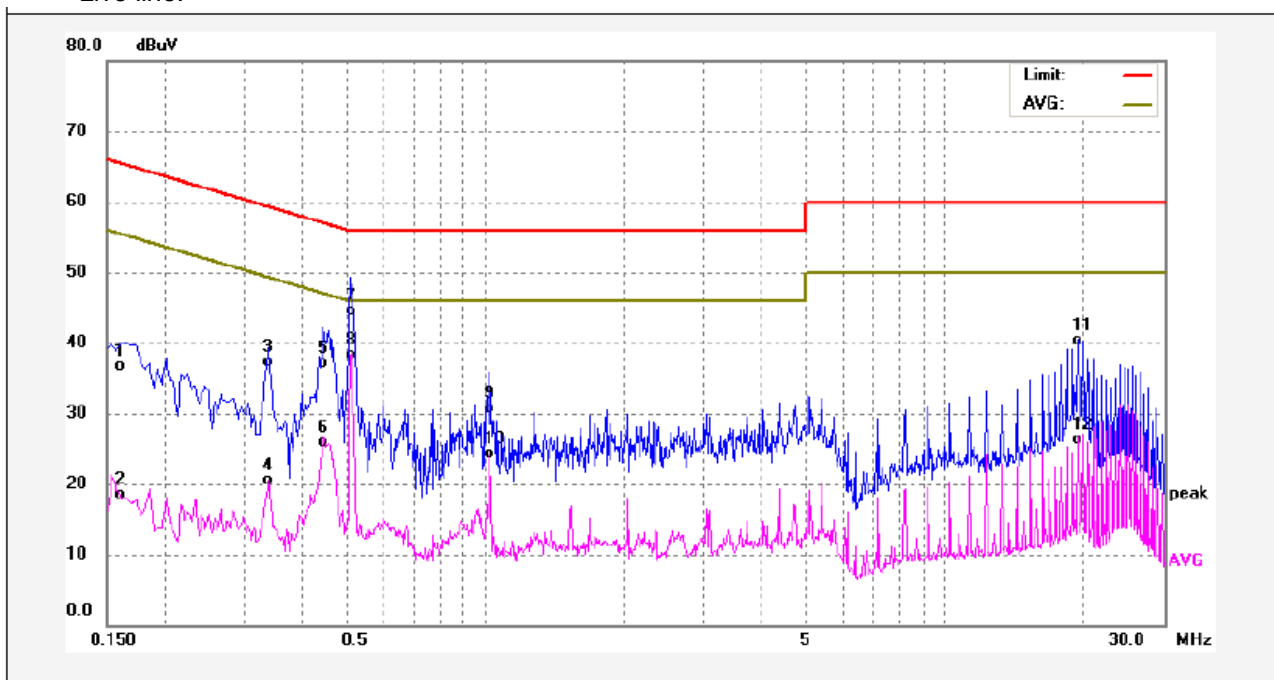

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	26.92	9.77	36.69	65.36	-28.67	QP	
2	0.1620	8.65	9.77	18.42	55.36	-36.94	AVG	
3	0.3379	27.56	9.80	37.36	59.25	-21.89	QP	
4	0.3379	10.74	9.80	20.54	49.25	-28.71	AVG	
5	0.4460	27.31	9.82	37.13	56.95	-19.82	QP	
6	0.4460	16.12	9.82	25.94	46.95	-21.01	AVG	
7	0.5100	34.76	9.81	44.57	56.00	-11.43	QP	
8	0.5100	28.42	9.81	38.23	46.00	-7.77	AVG	
9	1.0260	20.77	9.86	30.63	56.00	-25.37	QP	
10	1.0260	14.46	9.86	24.32	46.00	-21.68	AVG	
11	19.4580	30.12	10.27	40.39	60.00	-19.61	QP	
12	19.4580	16.12	10.27	26.39	50.00	-23.61	AVG	

Neutral line:

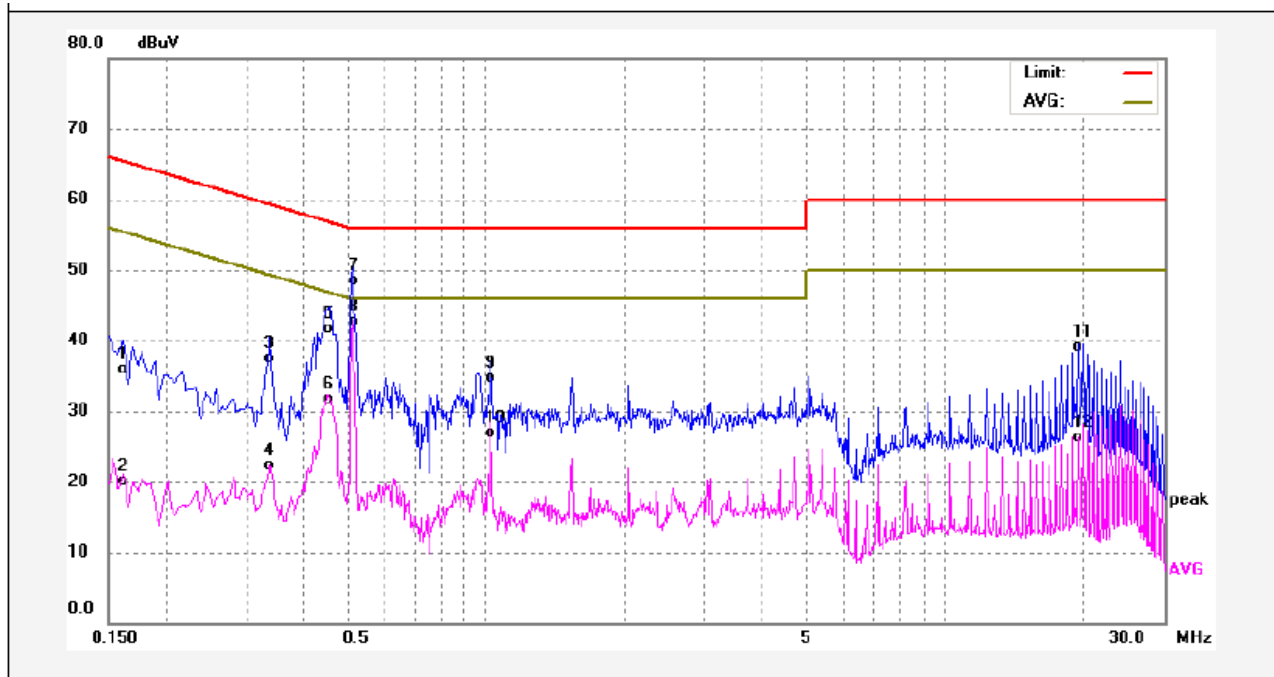

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	26.04	9.77	35.81	65.36	-29.55	QP	
2	0.1620	10.43	9.77	20.20	55.36	-35.16	AVG	
3	0.3379	27.77	9.80	37.57	59.25	-21.68	QP	
4	0.3379	12.57	9.80	22.37	49.25	-26.88	AVG	
5	0.4580	31.98	9.82	41.80	56.73	-14.93	QP	
6	0.4580	21.88	9.82	31.70	46.73	-15.03	AVG	
7	0.5140	38.73	9.81	48.54	56.00	-7.46	QP	
8	0.5140	32.99	9.81	42.80	46.00	-3.20	AVG	
9	1.0260	24.81	9.86	34.67	56.00	-21.33	QP	
10	1.0260	17.01	9.86	26.87	46.00	-19.13	AVG	
11	19.4580	28.87	10.27	39.14	60.00	-20.86	QP	
12	19.4580	16.13	10.27	26.40	50.00	-23.60	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment:

Temperature: 22.8 °C

Humidity: 54.5 % RH


Atmospheric Pressure: 101.7kPa

EUT Operation: The test was performed in Transmitting mode, the worst test data (GFSK modulation) were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

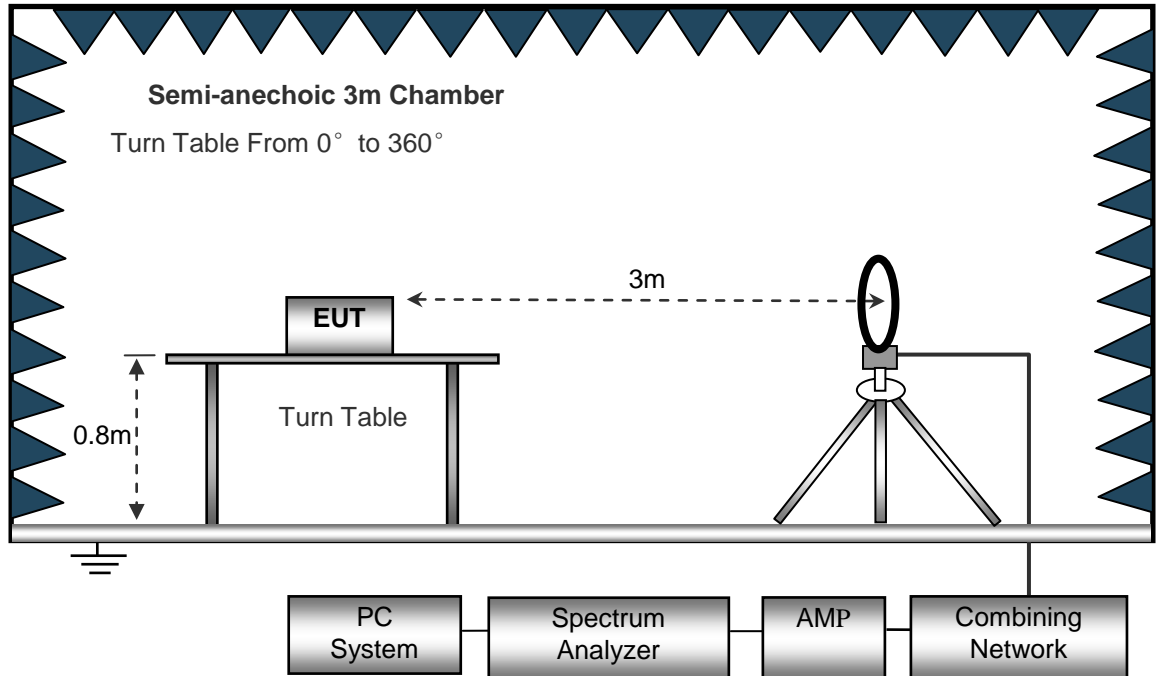

The test setup for emission measurement from 30 MHz to 1 GHz.

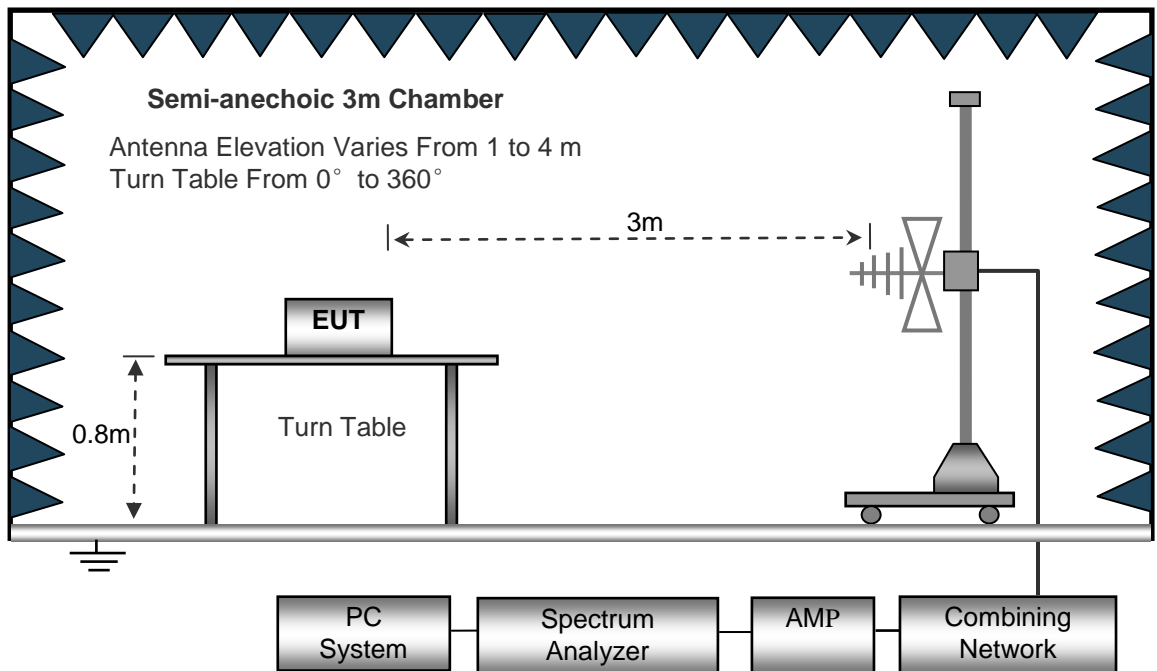

The test setup for emission measurement above 1 GHz.

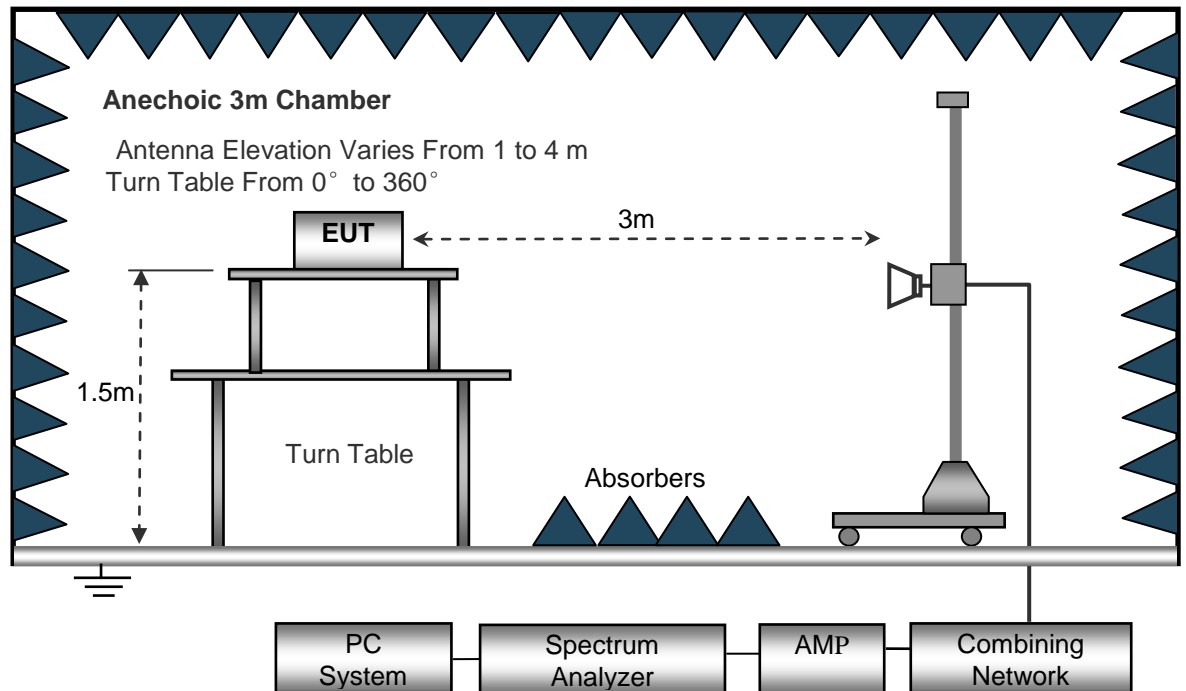

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9 kHz ~ 30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz (working with power board 1)

Only the worst case GFSK mode were record in the report.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
195.14	49.36	QP	157	1.8	H	-17.71	31.65	43.50	-11.85
195.14	40.35	QP	199	1.7	V	-17.71	22.64	43.50	-20.86
4804.00	54.27	PK	196	1.1	V	-1.06	53.21	74.00	-20.79
4804.00	43.66	Ave	196	1.1	V	-1.06	42.60	54.00	-11.40
7206.00	53.10	PK	340	1.4	H	1.33	54.43	74.00	-19.57
7206.00	43.65	Ave	340	1.4	H	1.33	44.98	54.00	-9.02
2348.20	46.40	PK	48	1.7	V	-13.19	33.21	74.00	-40.79
2348.20	38.25	Ave	48	1.7	V	-13.19	25.06	54.00	-28.94
2384.74	44.60	PK	190	1.9	H	-13.14	31.46	74.00	-42.54
2384.74	38.54	Ave	190	1.9	H	-13.14	25.40	54.00	-28.60
2489.54	44.78	PK	241	1.8	V	-13.08	31.70	74.00	-42.30
2489.54	37.39	Ave	241	1.8	V	-13.08	24.31	54.00	-29.69

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2441MHz									
195.14	50.61	QP	266	1.5	H	-17.71	32.90	43.50	-10.60
195.14	41.61	QP	31	1.1	V	-17.71	23.90	43.50	-19.60
4882.00	54.85	PK	66	1.5	V	-0.62	54.23	74.00	-19.77
4882.00	43.57	Ave	66	1.5	V	-0.62	42.95	54.00	-11.05
7323.00	52.49	PK	11	1.6	H	2.21	54.70	74.00	-19.30
7323.00	44.87	Ave	11	1.6	H	2.21	47.08	54.00	-6.92
2347.30	45.93	PK	84	1.7	V	-13.19	32.74	74.00	-41.26
2347.30	39.88	Ave	84	1.7	V	-13.19	26.69	54.00	-27.31
2363.26	43.07	PK	77	1.3	H	-13.14	29.93	74.00	-44.07
2363.26	38.05	Ave	77	1.3	H	-13.14	24.91	54.00	-29.09
2497.49	43.05	PK	101	1.9	V	-13.08	29.97	74.00	-44.03
2497.49	38.16	Ave	101	1.9	V	-13.08	25.08	54.00	-28.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
195.14	47.89	QP	56	1.7	H	-17.71	30.18	43.50	-13.32
195.14	40.22	QP	150	1.4	V	-17.71	22.51	43.50	-20.99
4960.00	52.08	PK	228	1.0	V	-0.24	51.84	74.00	-22.16
4960.00	44.28	Ave	228	1.0	V	-0.24	44.04	54.00	-9.96
7440.00	54.41	PK	165	1.0	H	2.84	57.25	74.00	-16.75
7440.00	42.73	Ave	165	1.0	H	2.84	45.57	54.00	-8.43
2319.04	46.49	PK	254	1.5	V	-13.19	33.30	74.00	-40.70
2319.04	38.38	Ave	254	1.5	V	-13.19	25.19	54.00	-28.81
2374.61	44.46	PK	126	1.6	H	-13.14	31.32	74.00	-42.68
2374.61	36.28	Ave	126	1.6	H	-13.14	23.14	54.00	-30.86
2487.64	42.21	PK	177	1.9	V	-13.08	29.13	74.00	-44.87
2487.64	37.28	Ave	177	1.9	V	-13.08	24.20	54.00	-29.80

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz (working with power board 2)

Only the worst case GFSK mode were record in the report.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
180.02	52.37	QP	331	1.5	H	-15.92	36.25	43.50	-7.25
180.02	45.97	QP	69	1.6	V	-15.92	31.23	43.50	-12.27
4804.00	55.39	PK	12	1.6	V	-1.06	54.33	74.00	-19.67
4804.00	44.24	Ave	12	1.6	V	-1.06	43.18	54.00	-10.82
7206.00	53.50	PK	159	1.2	H	1.33	54.83	74.00	-19.17
7206.00	45.51	Ave	159	1.2	H	1.33	46.84	54.00	-7.16
2326.66	46.21	PK	127	1.5	V	-13.19	33.02	74.00	-40.98
2326.66	38.58	Ave	127	1.5	V	-13.19	25.39	54.00	-28.61
2351.14	44.61	PK	351	1.1	H	-13.14	31.47	74.00	-42.53
2351.14	38.26	Ave	351	1.1	H	-13.14	25.12	54.00	-28.88
2490.10	42.15	PK	137	1.6	V	-13.08	29.07	74.00	-44.93
2490.10	37.87	Ave	137	1.6	V	-13.08	24.79	54.00	-29.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2441MHz									
180.02	53.34	QP	169	1.4	H	-15.92	37.42	43.50	-6.08
180.02	46.42	QP	290	1.9	V	-15.92	30.50	43.50	-13.00
4882.00	56.75	PK	102	1.6	V	-0.62	56.13	74.00	-17.87
4882.00	45.08	Ave	102	1.6	V	-0.62	44.46	54.00	-9.54
7323.00	52.35	PK	52	1.2	H	2.21	54.56	74.00	-19.44
7323.00	45.82	Ave	52	1.2	H	2.21	48.03	54.00	-5.97
2330.42	45.70	PK	138	1.9	V	-13.19	32.51	74.00	-41.49
2330.42	37.81	Ave	138	1.9	V	-13.19	24.62	54.00	-29.38
2387.02	44.16	PK	128	1.4	H	-13.14	31.02	74.00	-42.98
2387.02	38.03	Ave	128	1.4	H	-13.14	24.89	54.00	-29.11
2491.28	43.55	PK	100	1.8	V	-13.08	30.47	74.00	-43.53
2491.28	36.76	Ave	100	1.8	V	-13.08	23.68	54.00	-30.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
180.02	52.05	QP	308	2.0	H	-15.92	36.13	43.50	-7.37
180.02	45.26	QP	102	1.1	V	-15.92	29.34	43.50	-14.16
4960.00	56.62	PK	144	1.2	V	-0.24	56.38	74.00	-17.62
4960.00	44.22	Ave	144	1.2	V	-0.24	43.98	54.00	-10.02
7440.00	53.39	PK	182	1.9	H	2.84	56.23	74.00	-17.77
7440.00	45.68	Ave	182	1.9	H	2.84	48.52	54.00	-5.48
2333.32	45.76	PK	340	1.8	V	-13.19	32.57	74.00	-41.43
2333.32	39.01	Ave	340	1.8	V	-13.19	25.82	54.00	-28.18
2387.07	44.33	PK	213	1.8	H	-13.14	31.19	74.00	-42.81
2387.07	37.90	Ave	213	1.8	H	-13.14	24.76	54.00	-29.24
2487.63	43.78	PK	250	1.5	V	-13.08	30.70	74.00	-43.30
2487.63	38.59	Ave	250	1.5	V	-13.08	25.51	54.00	-28.49

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Band Edge Measurement

Test Requirement: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: ANSI C63.10


Test Limit: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


9.2 Test Setup

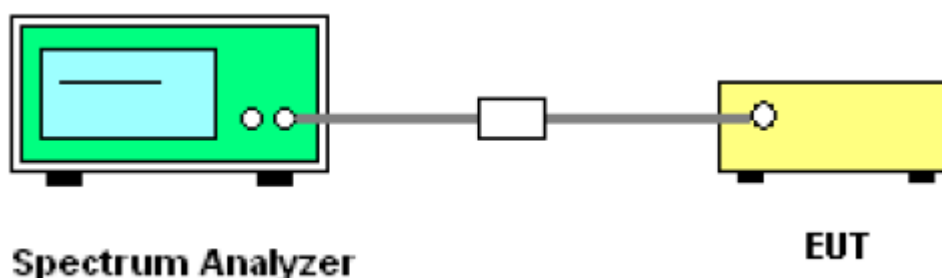


9.3 Test Result

Test plots


GFSK Transmitting Band edge-left side

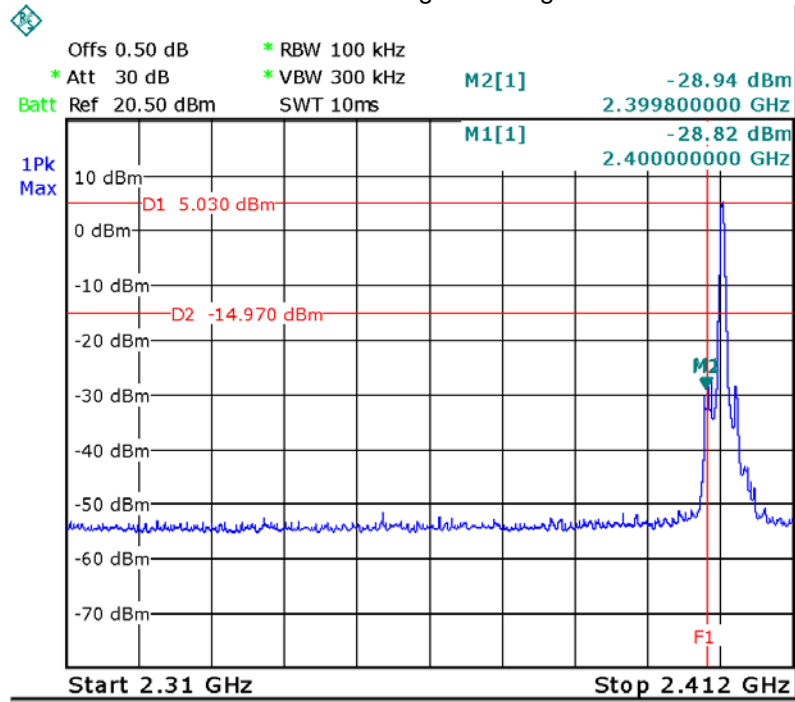


GFSK Hopping Band edge-left side

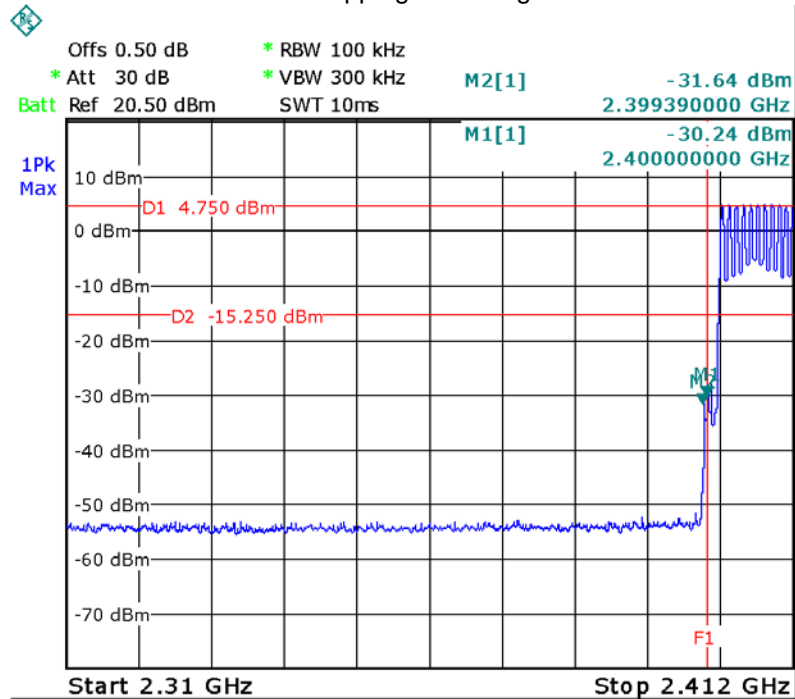


GFSK Transmitting Band edge-right side

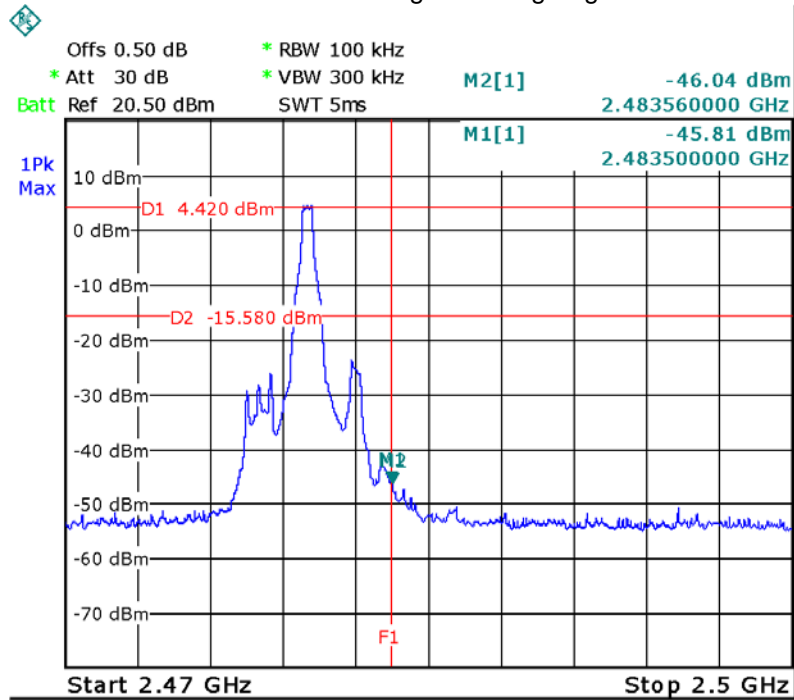


GFSK Hopping Band edge-right side

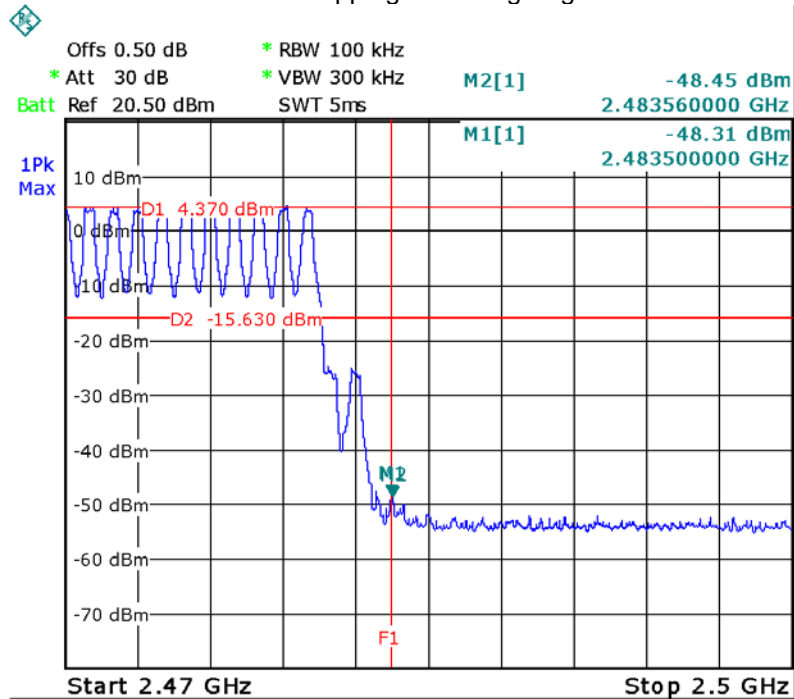


$\pi/4$ DQPSK Transmitting Band edge-left side

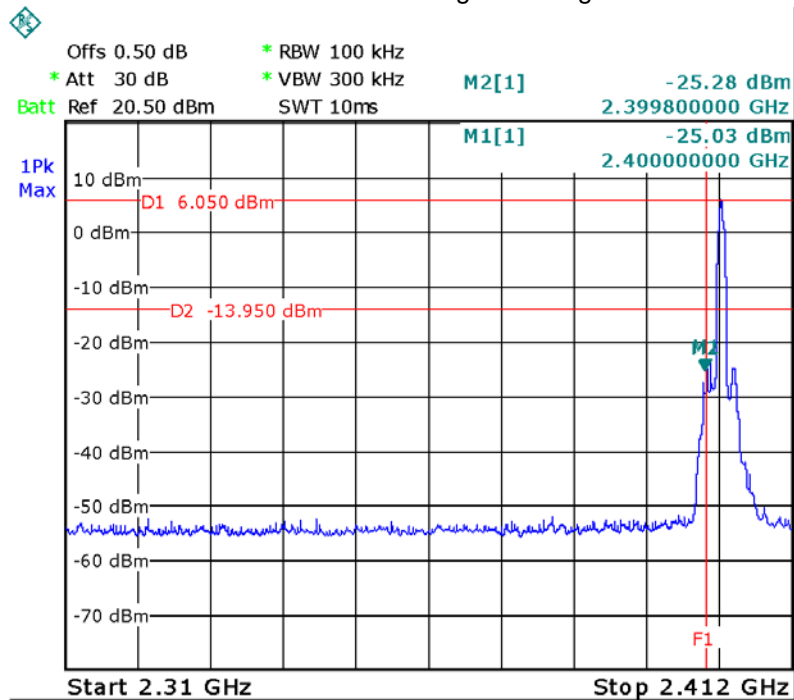


$\pi/4$ DQPSK Hopping Band edge-left side

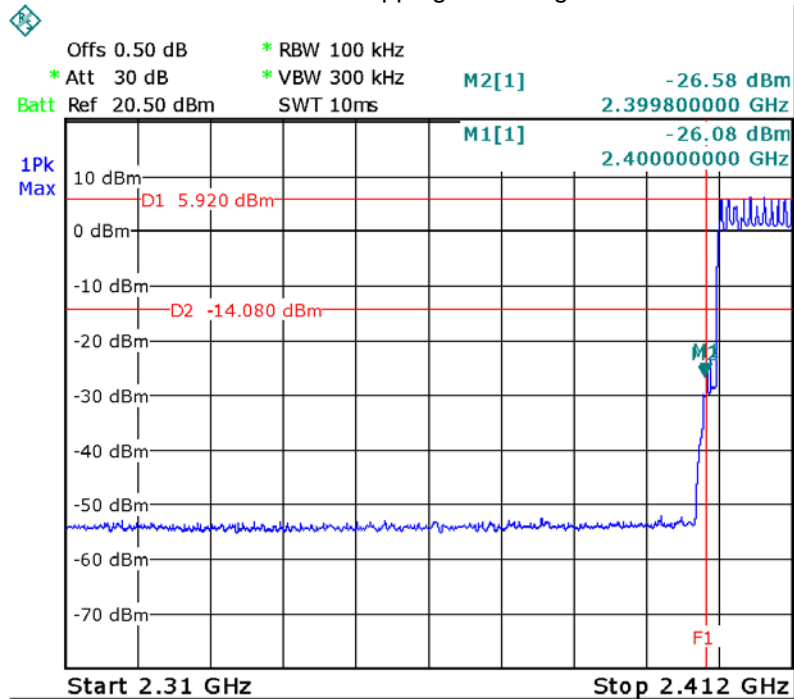


$\pi/4$ DQPSK Transmitting Band edge-right side

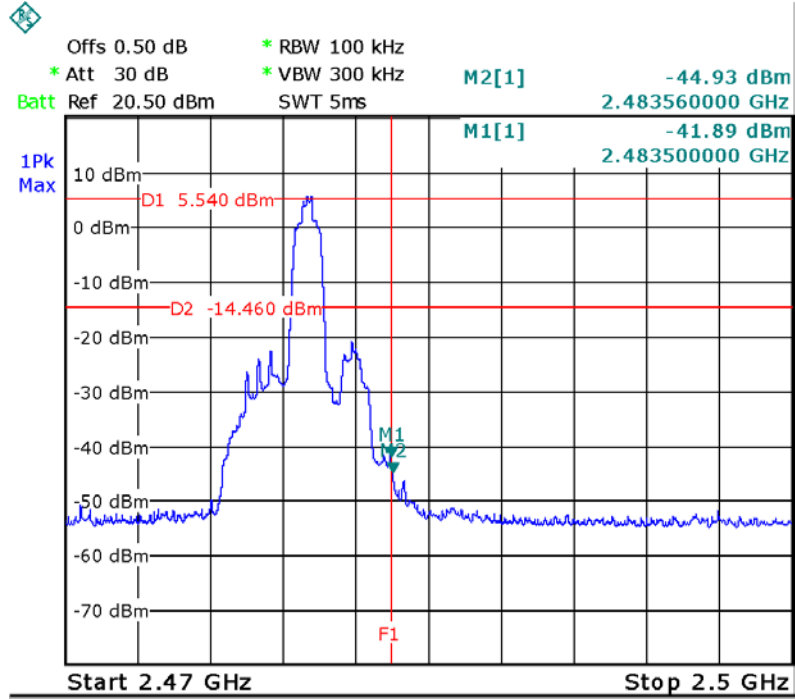


$\pi/4$ DQPSK Hopping Band edge-right side

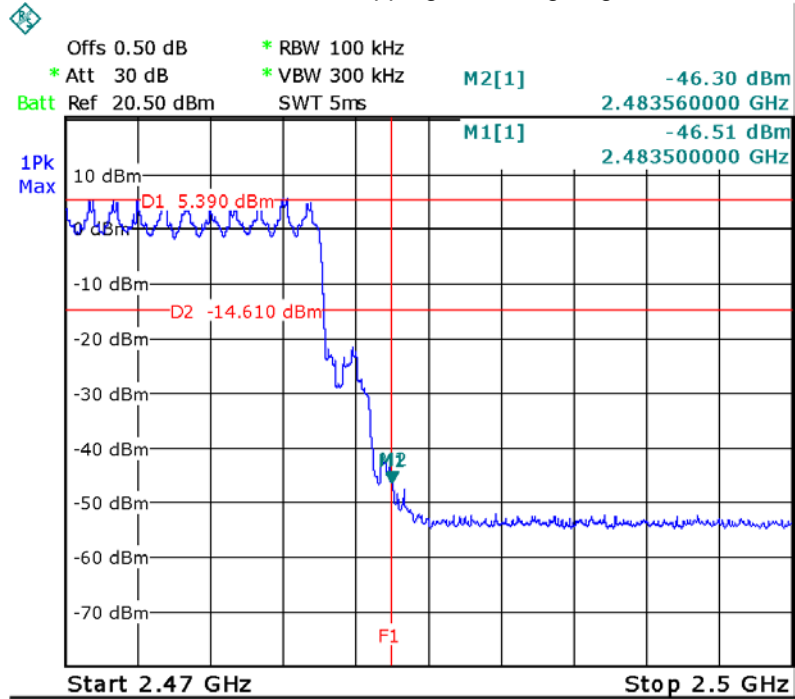


8DPSK Transmitting Band edge-left side

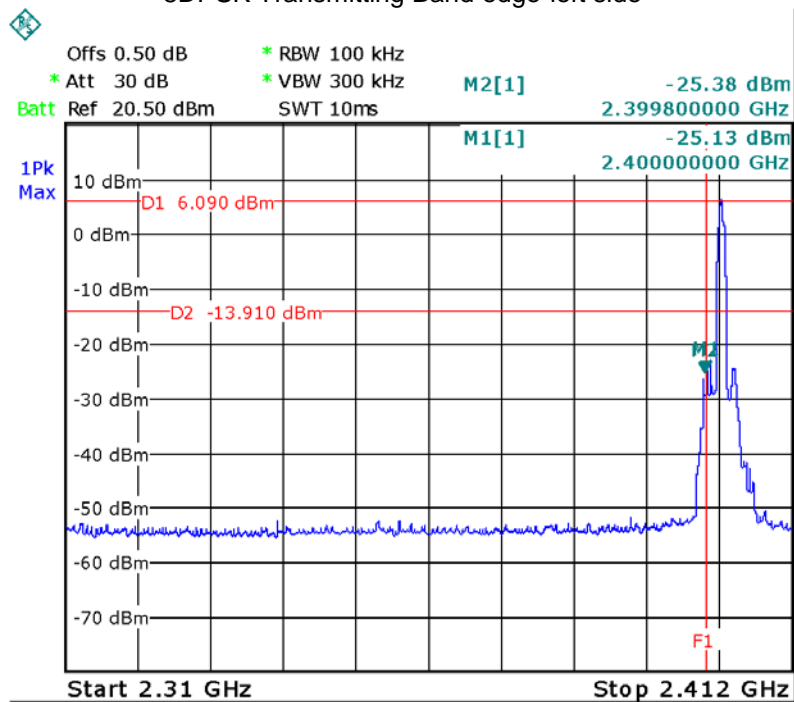


8DPSK Hopping Band edge-left side

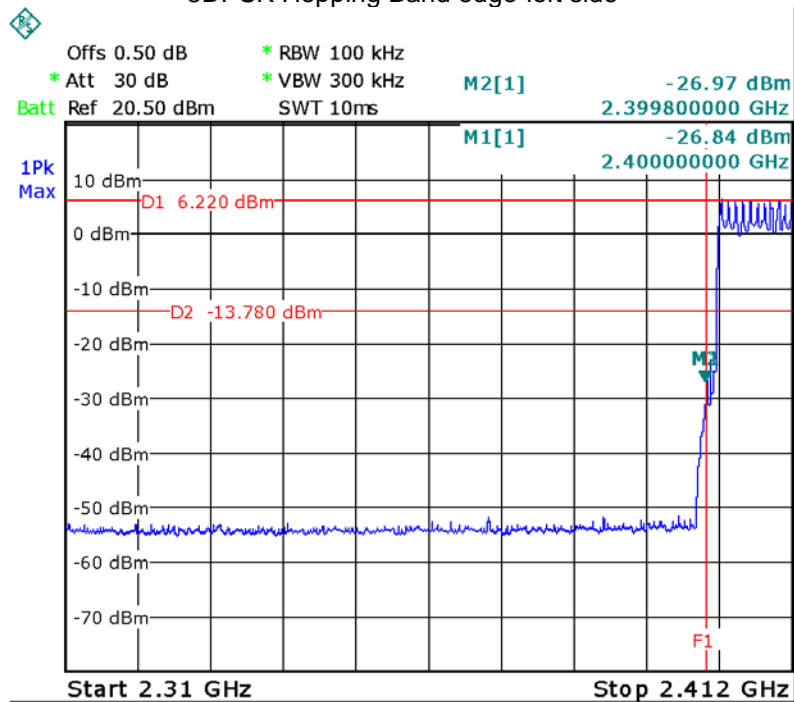

8DPSK Transmitting Band edge-right side

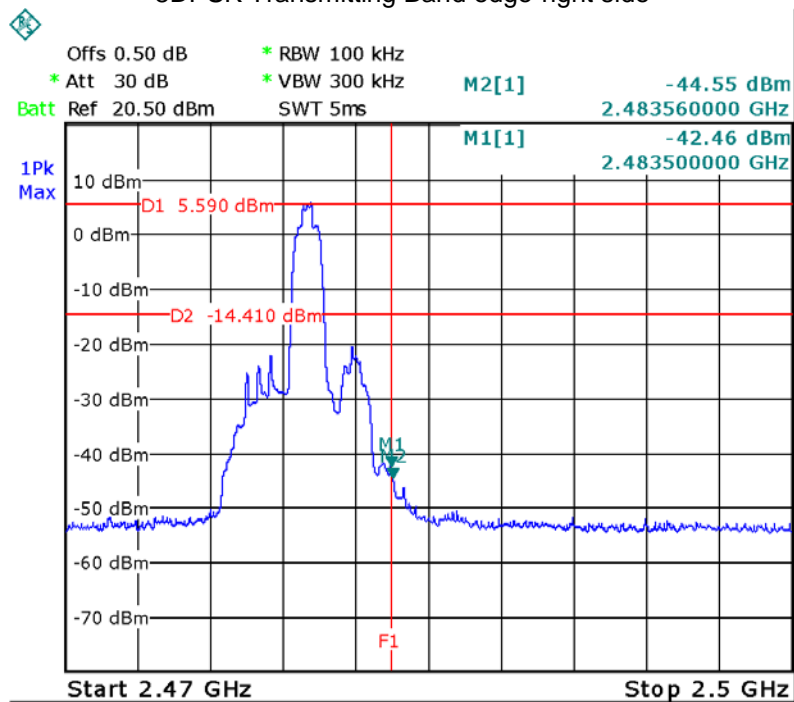

8DPSK Hopping Band edge-right side

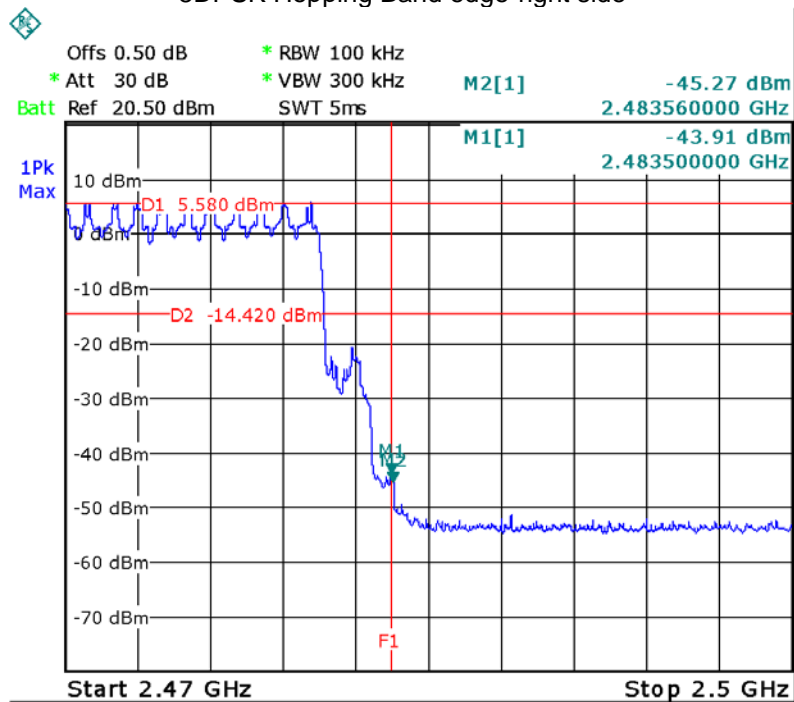


10 Bandwidth Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10: 2013
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

10.2 Test Setup

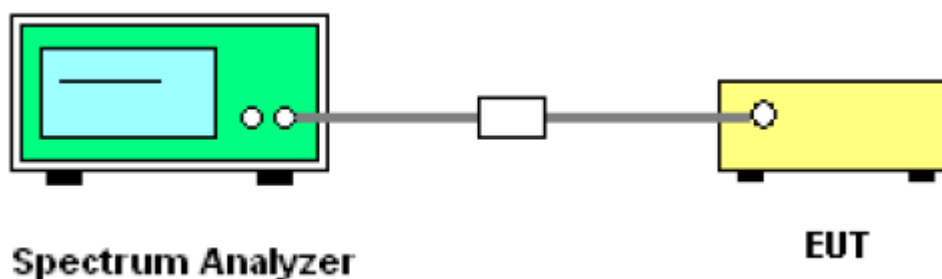


10.3 Test Result

Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	0.928MHz	0.868MHz
GFSK	Middle	0.934MHz	0.880MHz
GFSK	High	0.916MHz	0.886MHz
$\pi/4$ DQPSK	Low	1.240MHz	1.174MHz
$\pi/4$ DQPSK	Middle	1.258MHz	1.174MHz
$\pi/4$ DQPSK	High	1.252MHz	1.186MHz
8DPSK	Low	1.270MHz	1.168MHz
8DPSK	Middle	1.270MHz	1.168MHz
8DPSK	High	1.270MHz	1.168MHz


Test result plot as follows:


Modulation: GFSK

Low Channel

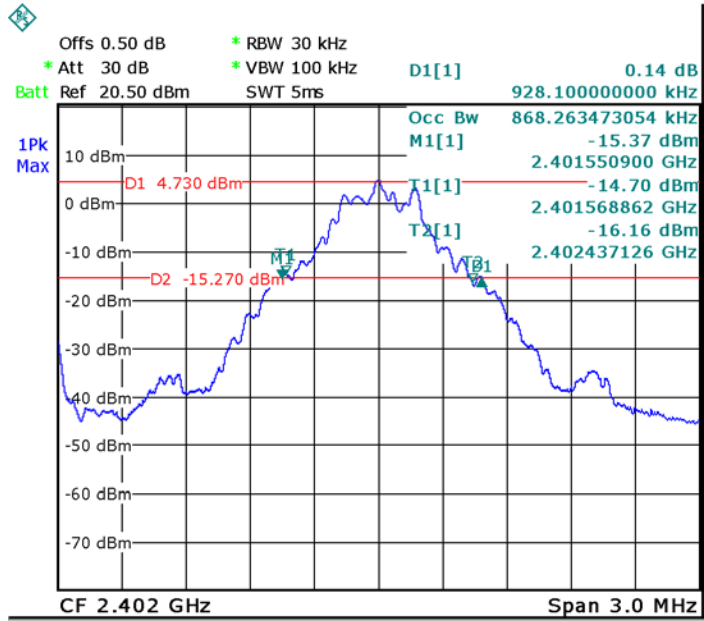




Middle Channel

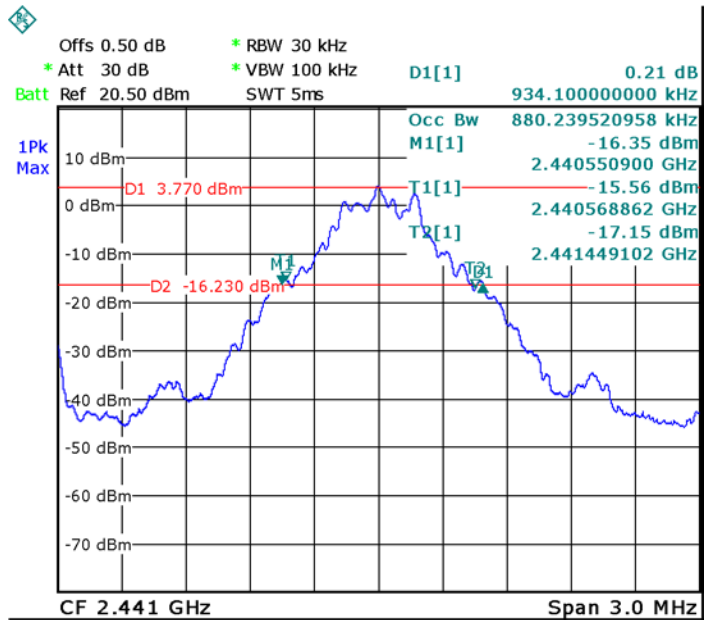

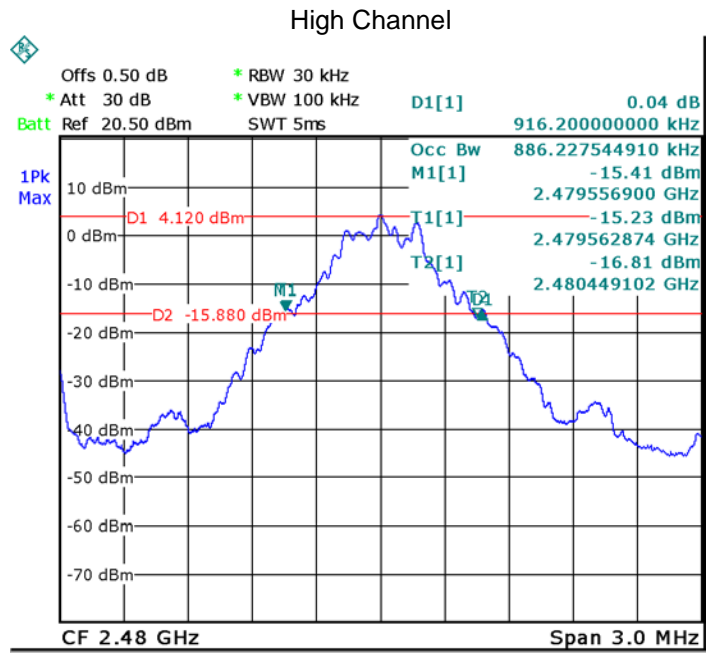


Modulation: $\pi/4$ DQPSK

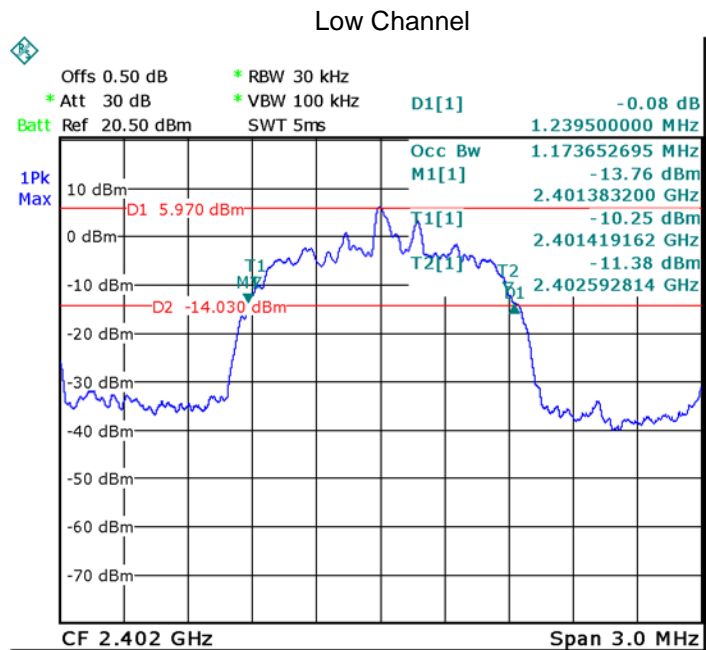

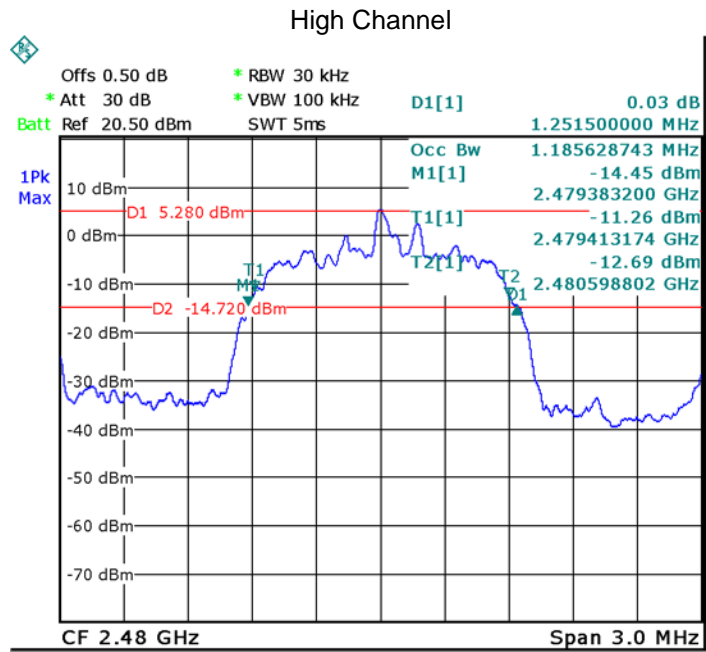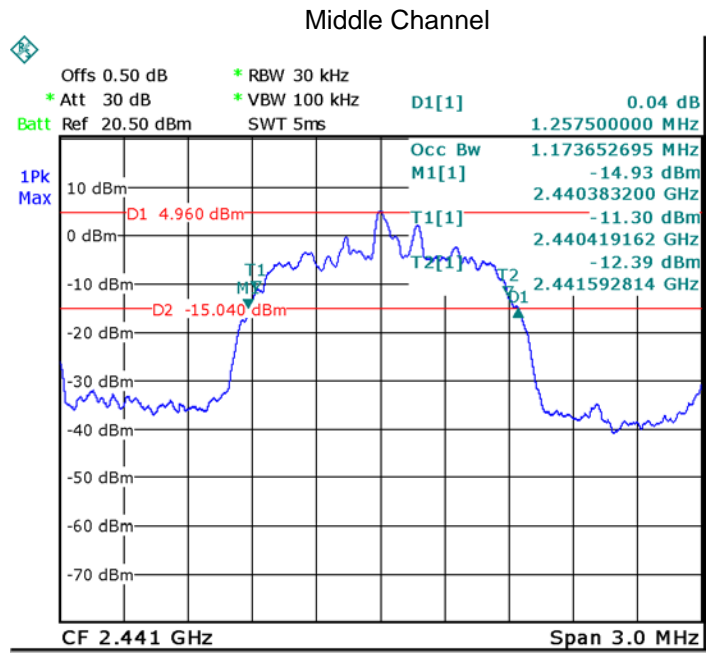



Modulation: 8DPSK

Low Channel

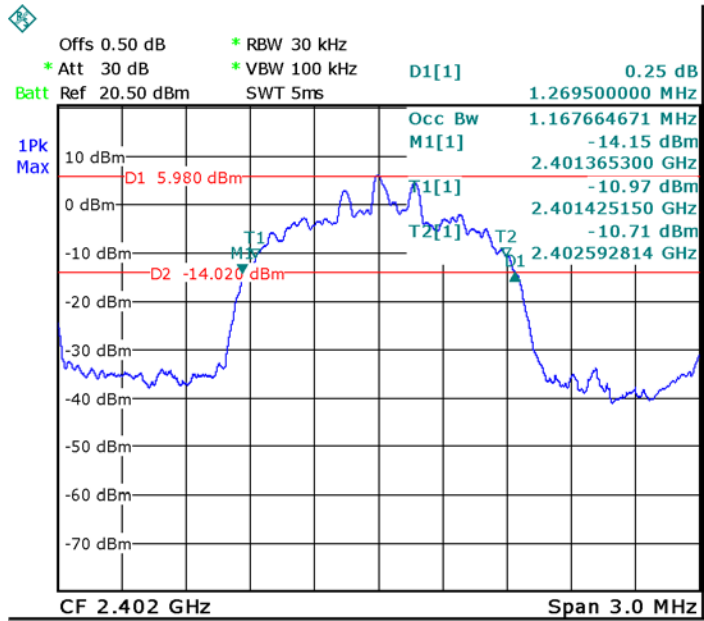

Middle Channel

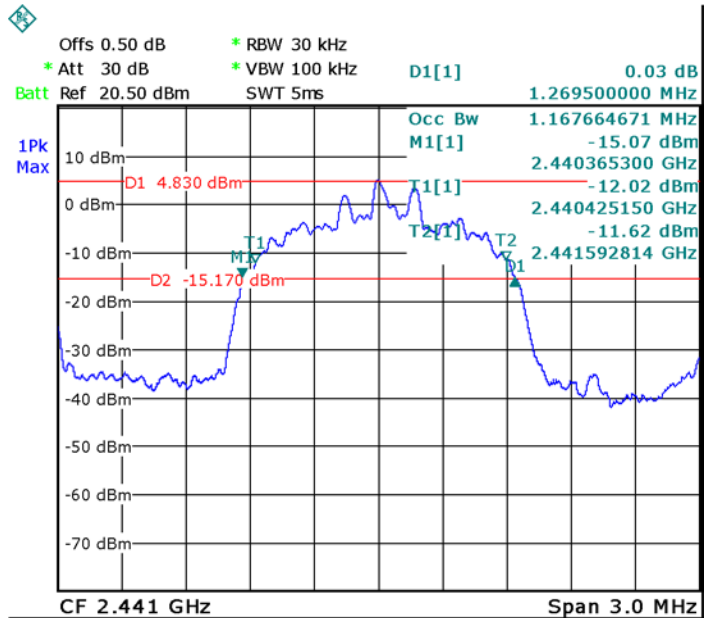

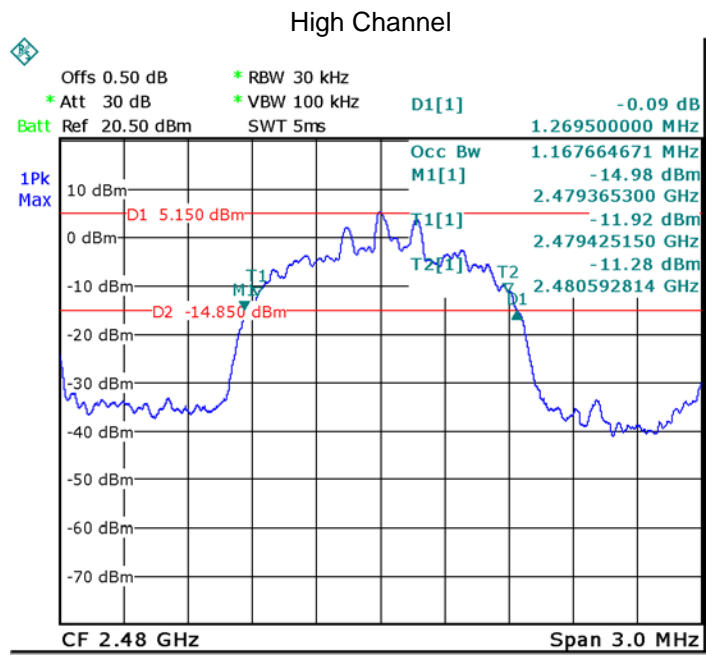


11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document..
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Setup

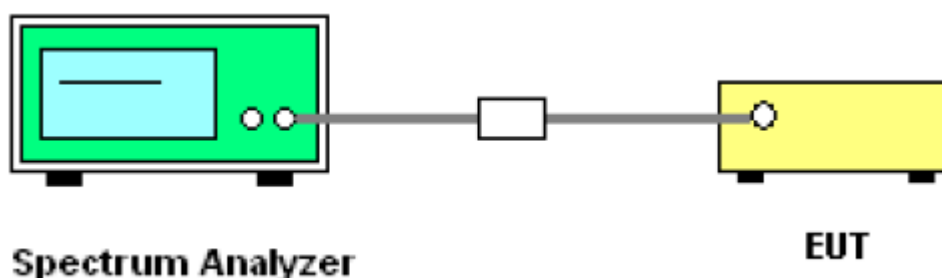


11.3 Test Result

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	4.95	4.35	4.54	30.00
$\pi/4$ DQPSK	2Mbps	6.94	6.29	6.62	20.97
8DPSK	3Mbps	7.12	6.49	6.78	20.97


Test result plot as follows:


Modulation: GFSK

Low Channel

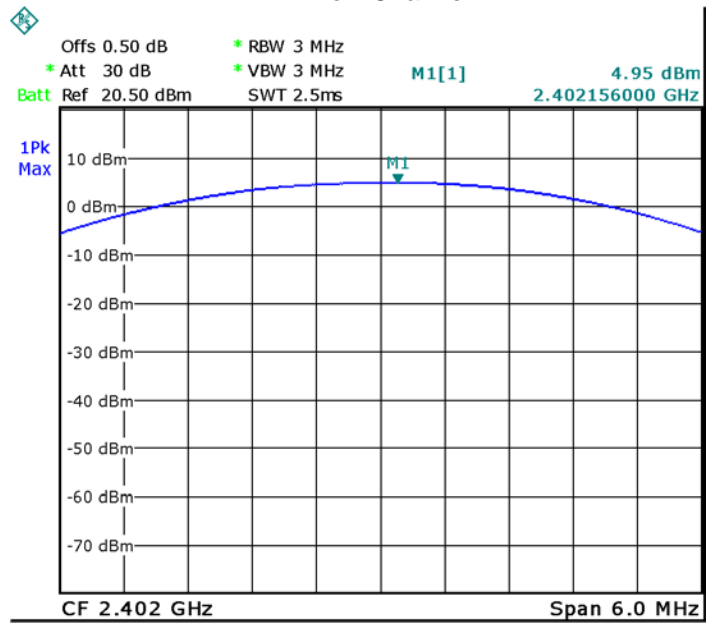


Middle Channel

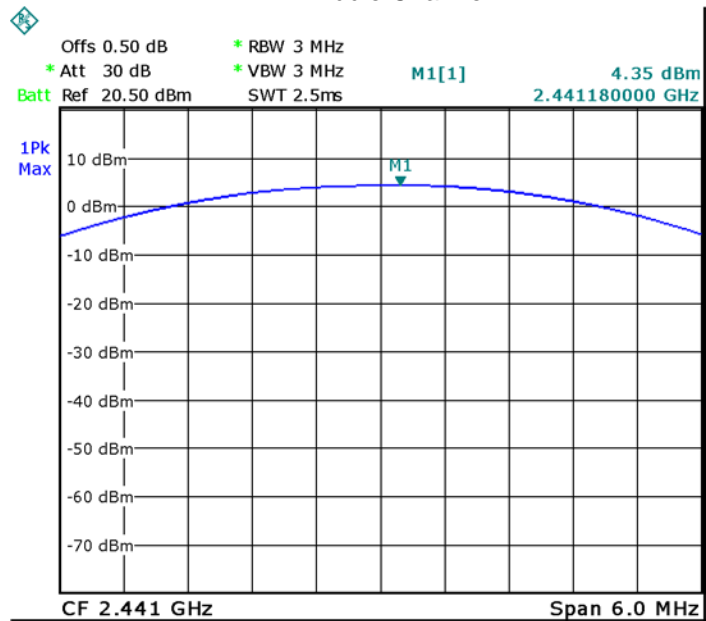


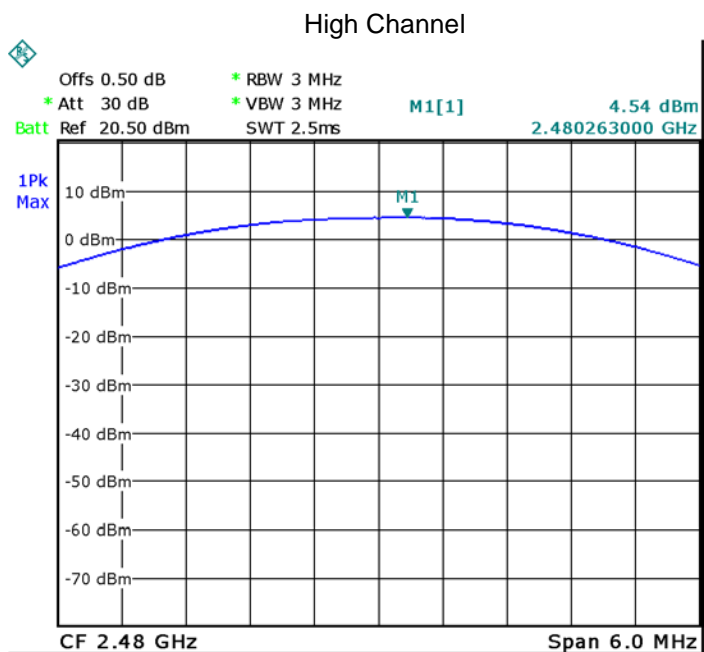


Modulation: $\pi/4$ DQPSK

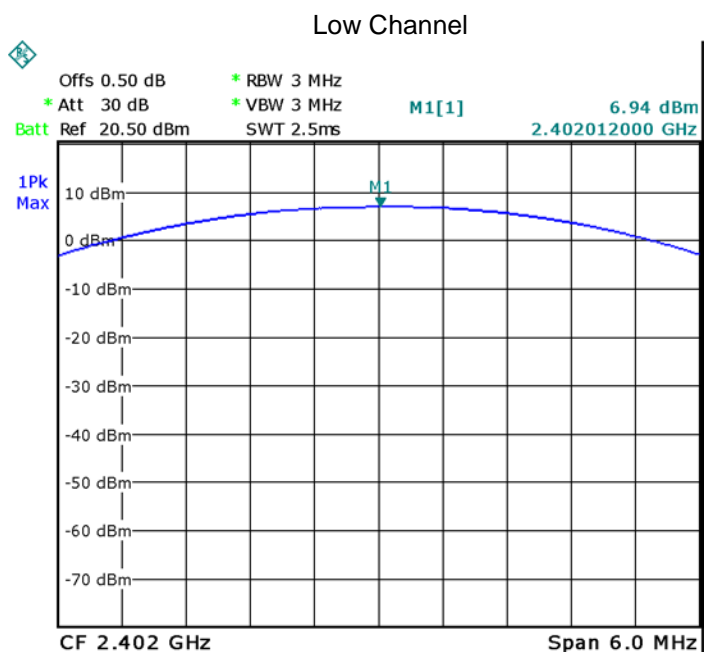

Middle Channel

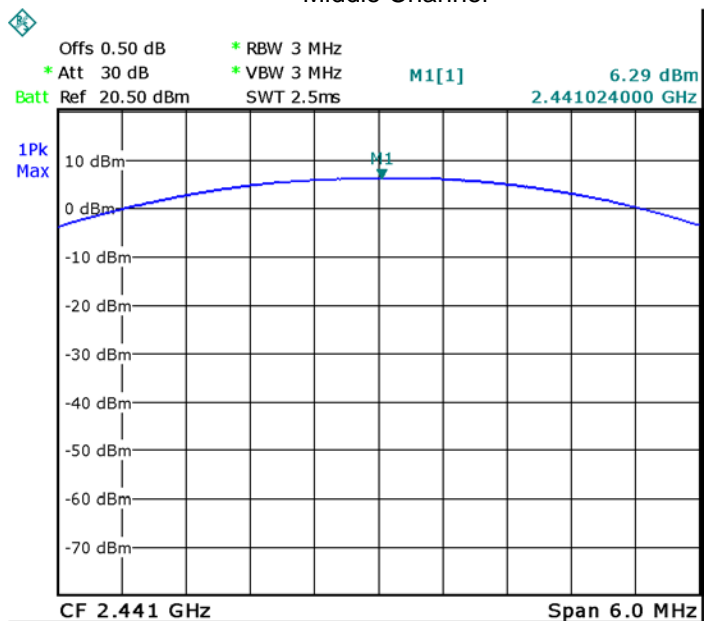


High Channel

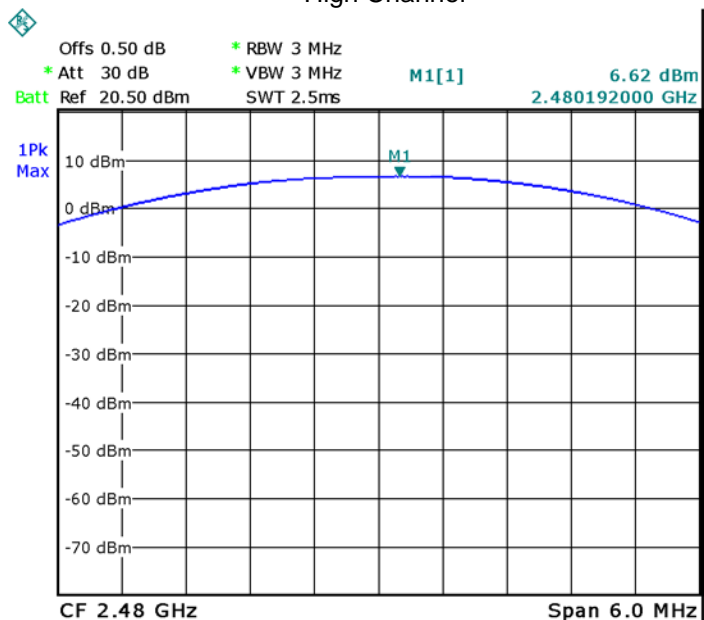



Modulation: 8DPSK

Low Channel

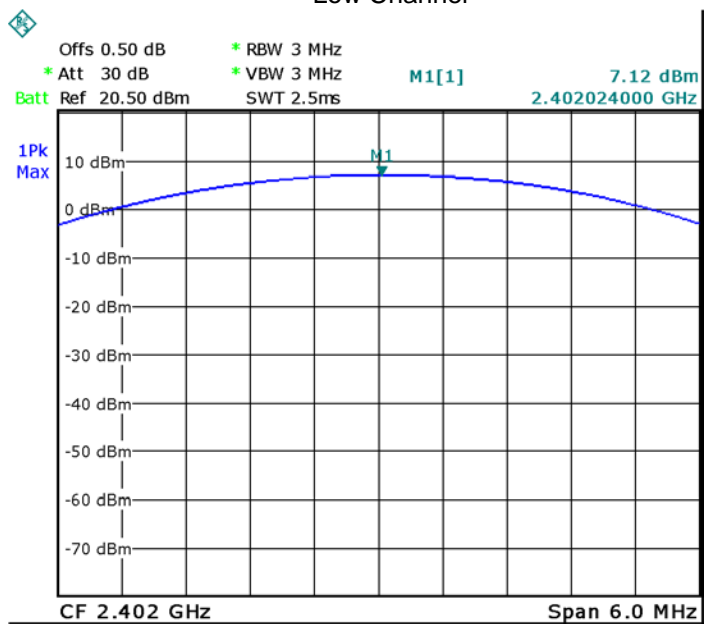

Middle Channel

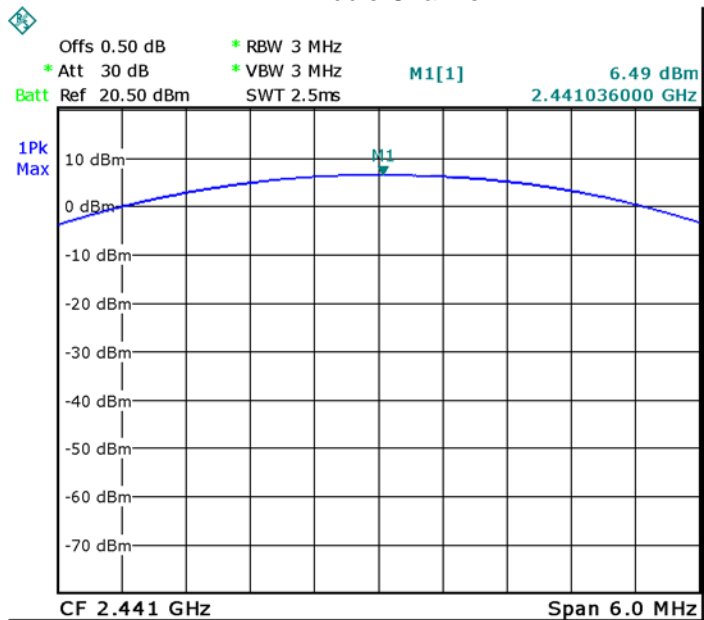

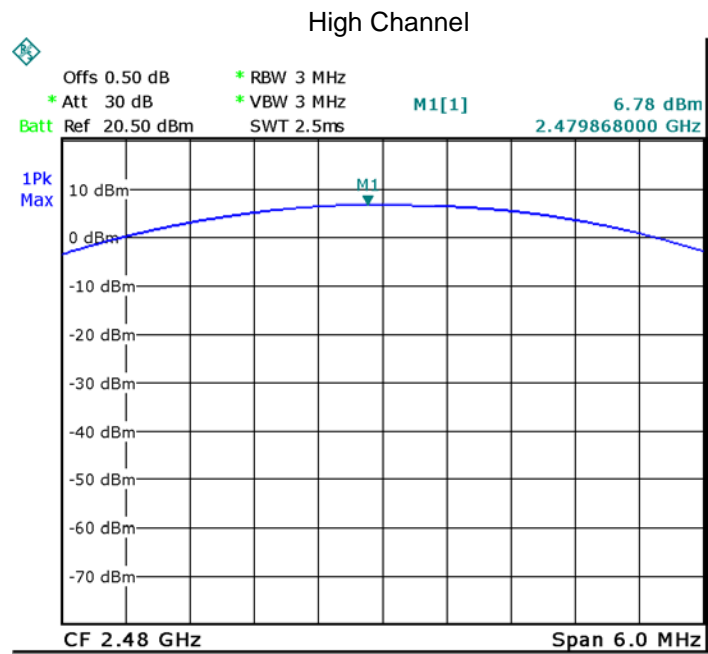


12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Setup

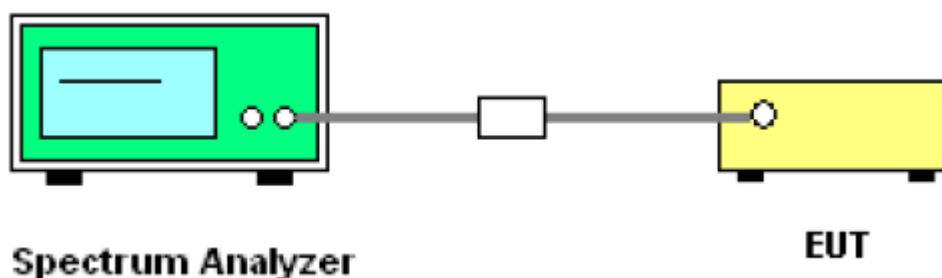


12.3 Test Result

Test result plot as follows:


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1 MHz	0.928	PASS
GFSK	Middle	1 MHz	0.934	PASS
GFSK	High	1 MHz	0.916	PASS
$\pi/4$ DQPSK	Low	1 MHz	0.827	PASS
$\pi/4$ DQPSK	Middle	1 MHz	0.839	PASS
$\pi/4$ DQPSK	High	1 MHz	0.835	PASS
8DPSK	Low	1 MHz	0.845	PASS
8DPSK	Middle	1 MHz	0.845	PASS
8DPSK	High	1 MHz	0.845	PASS

Test plots


GFSK Low Channel


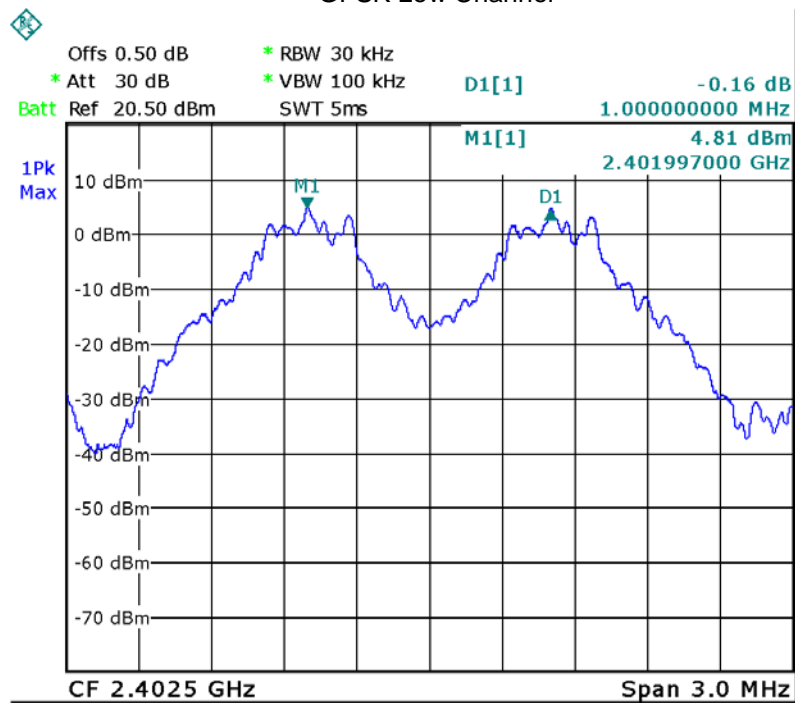




GFSK Middle Channel

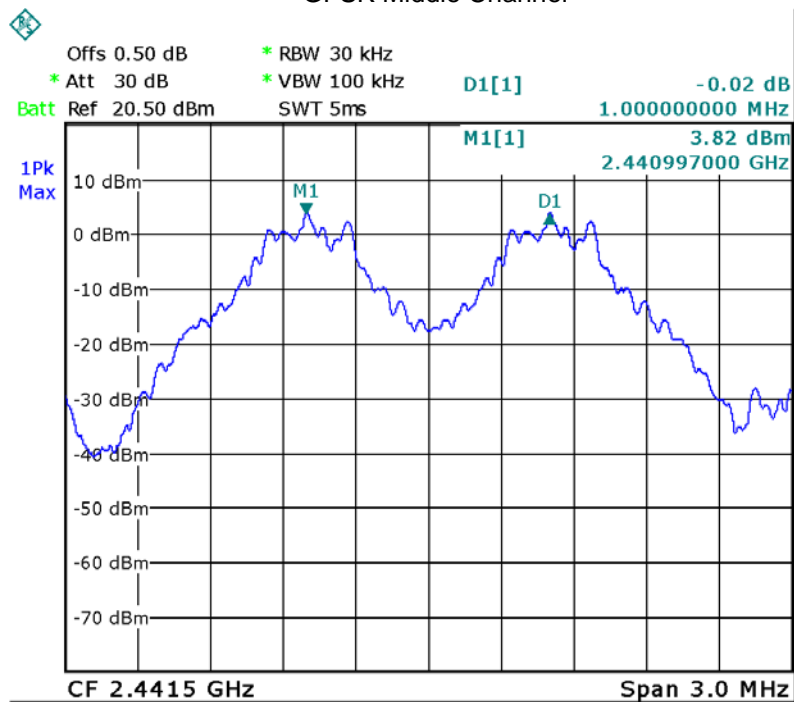


GFSK High Channel

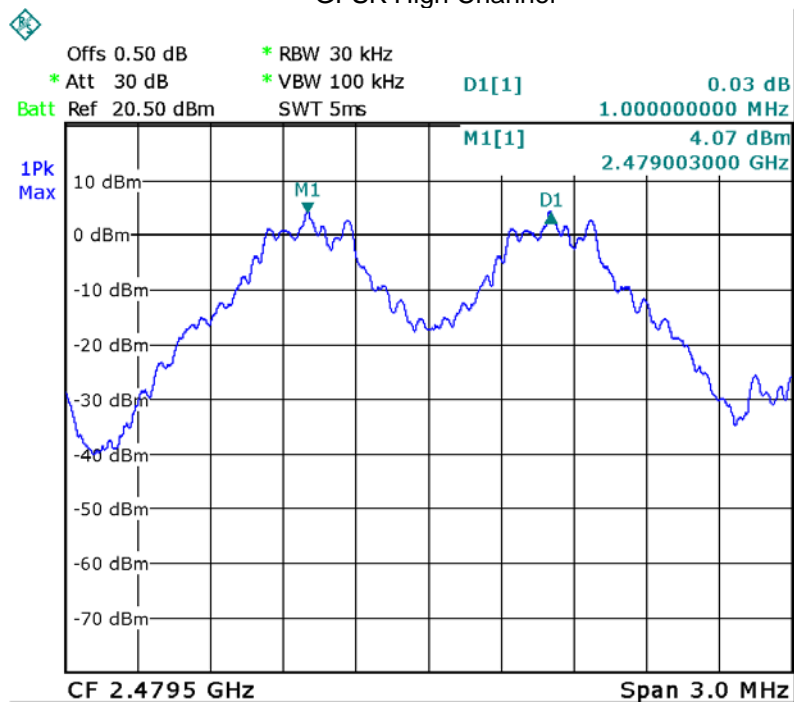

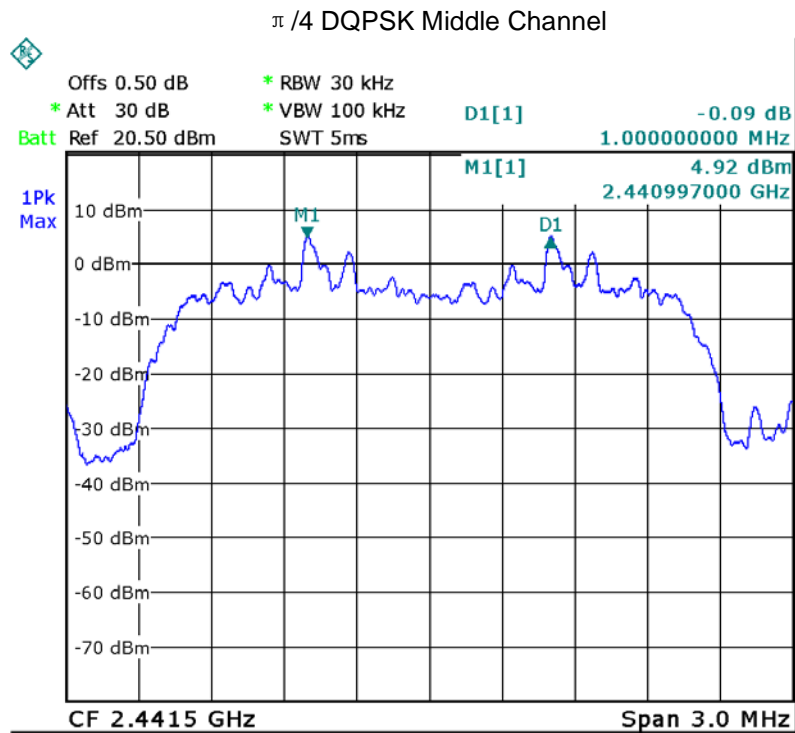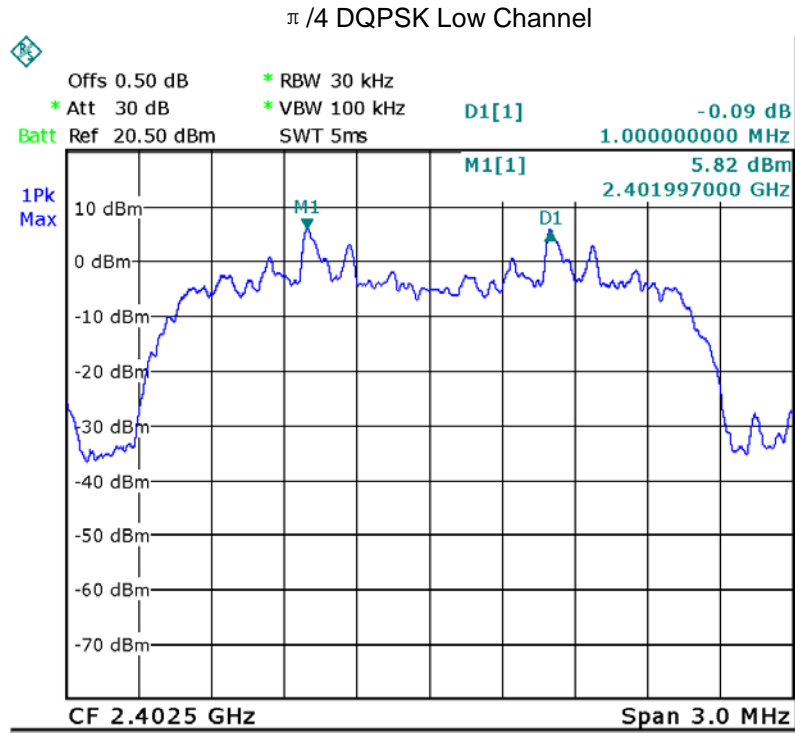


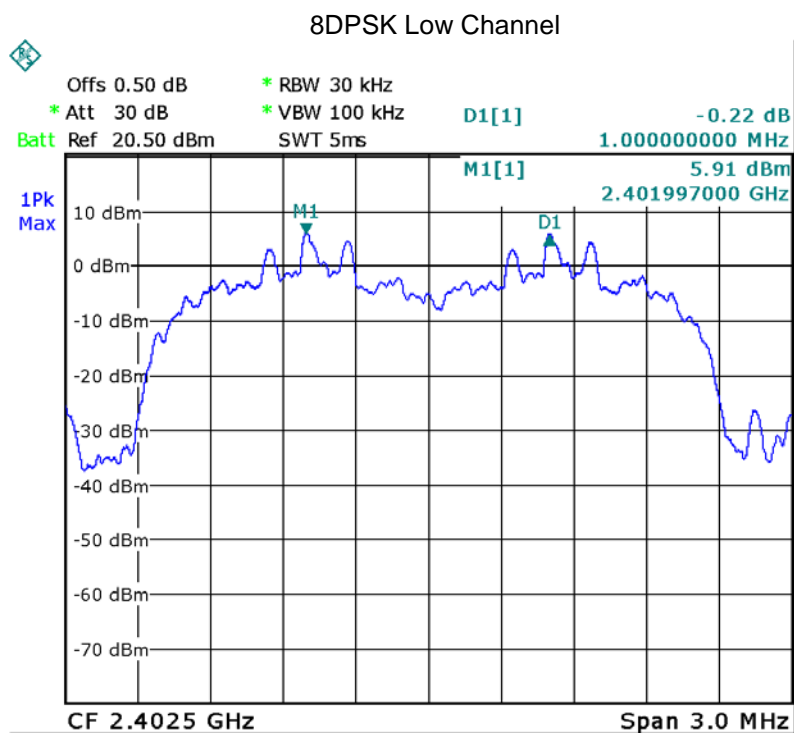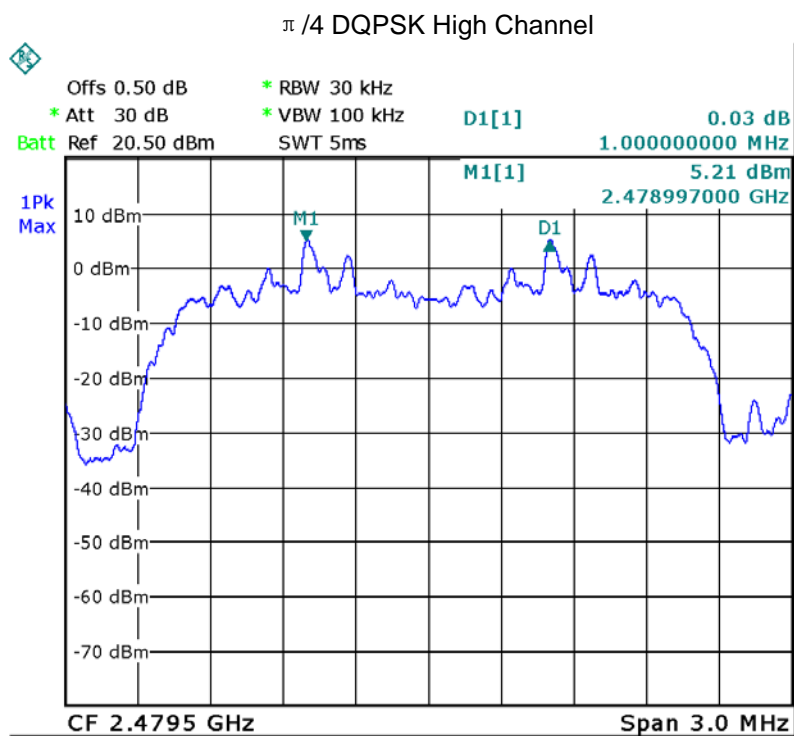

8DPSK Middle Channel

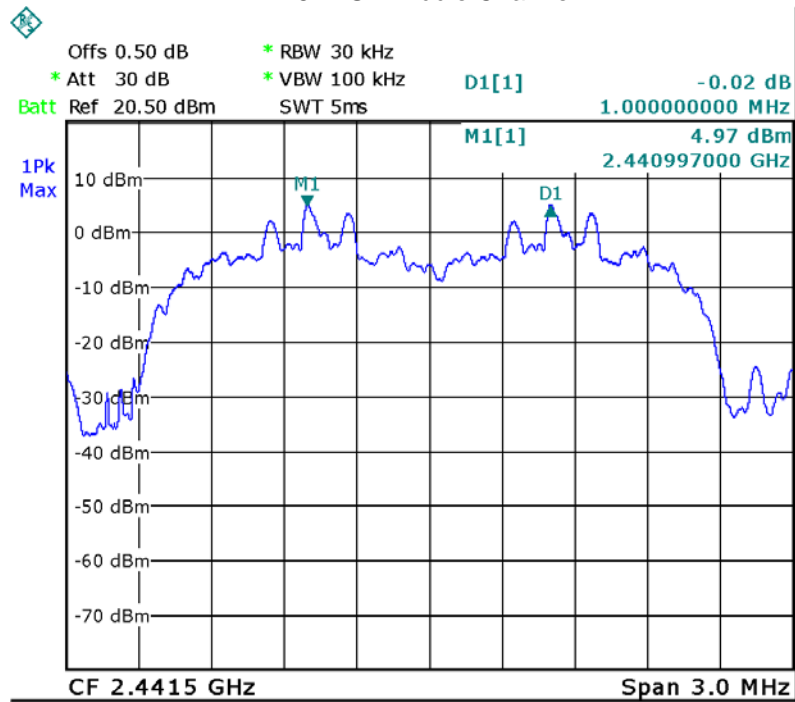

8DPSK High Channel

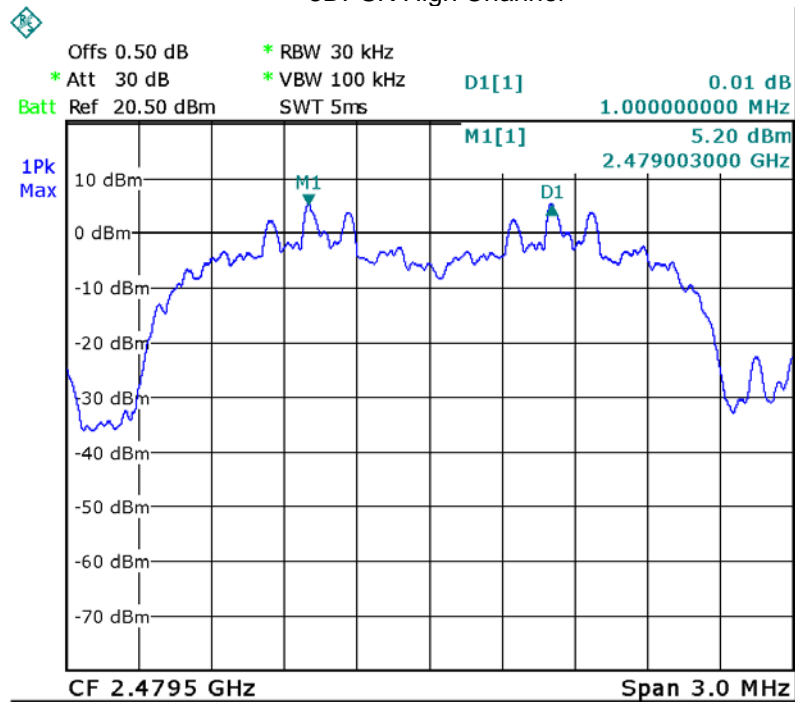


13 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


13.2 Test Setup

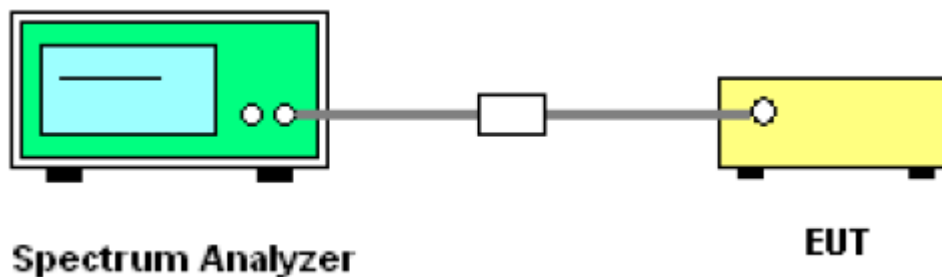


13.3 Test Result

Total Channels are 79 Channels.


Modulation: GFSK

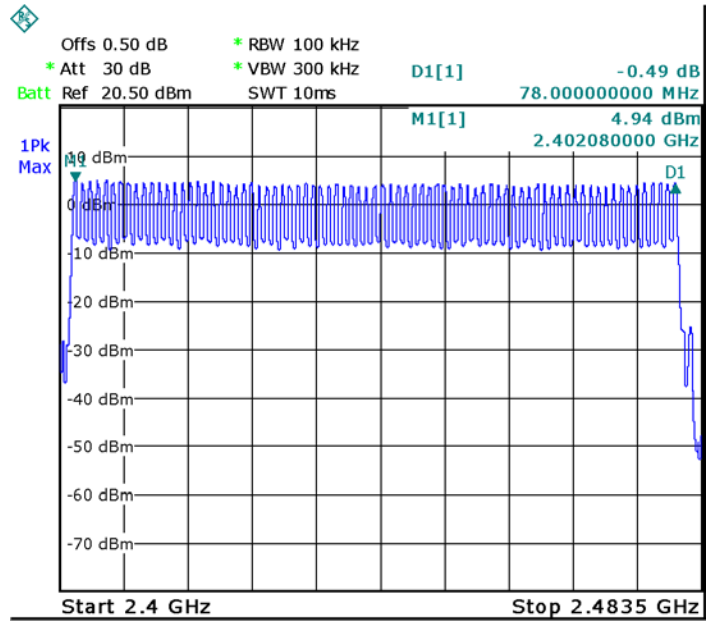

Modulation: $\pi/4$ DQPSK

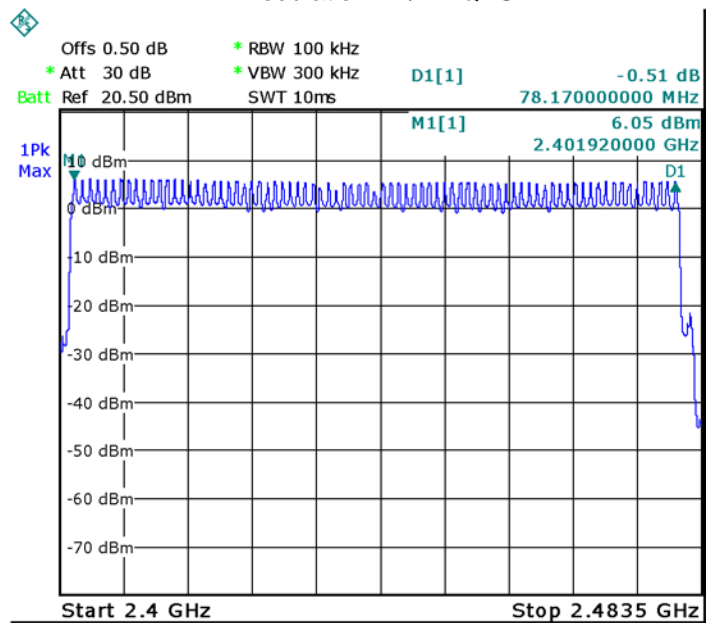

Modulation: 8DPSK

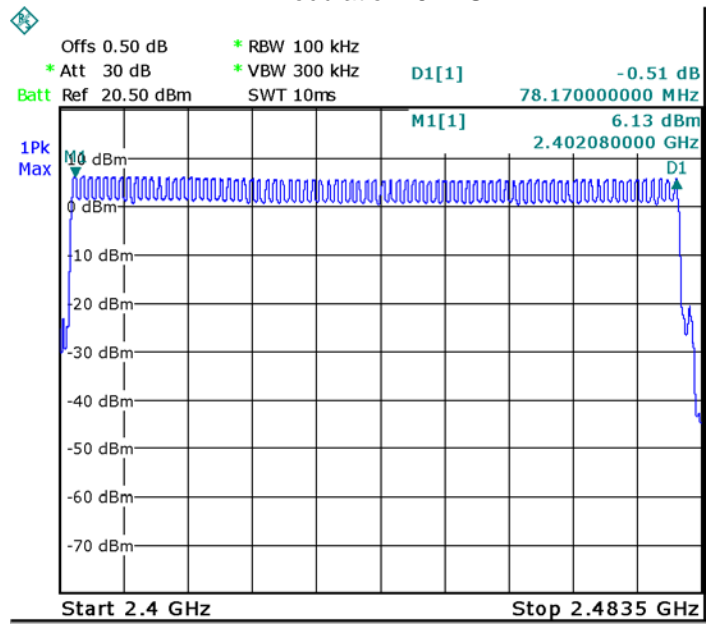


14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Setup

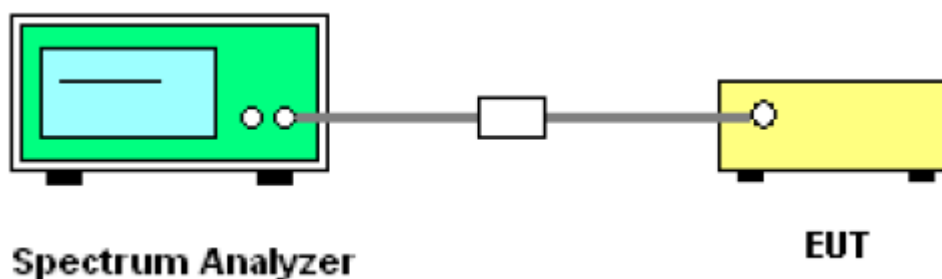

14.3 Test Result

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX).

So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.936	0.313	0.4
		Middle	2.936	0.313	0.4
		High	2.936	0.313	0.4
$\pi/4$ DQPSK	DH5	Low	2.936	0.313	0.4
		Middle	2.936	0.313	0.4
		High	2.936	0.313	0.4
8DPSK	DH5	Low	2.928	0.312	0.4
		Middle	2.928	0.312	0.4
		High	2.928	0.312	0.4

Modulation: GFSK


Data Packet:

DH5 Low channel

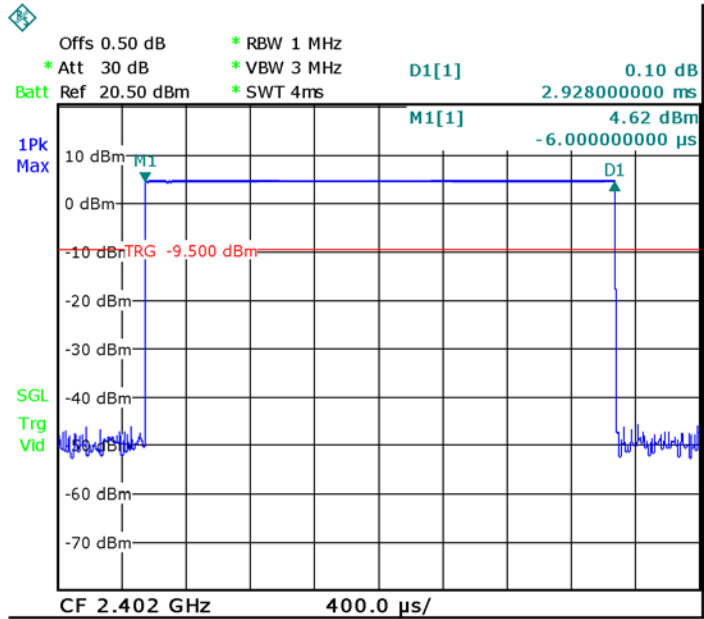


Data Packet:

DH5 Middle channel

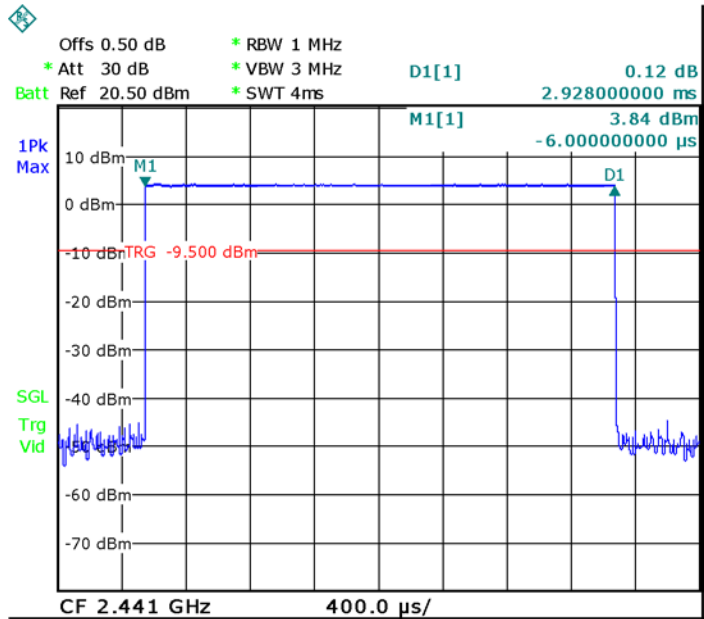

Data Packet:


DH5 High channel

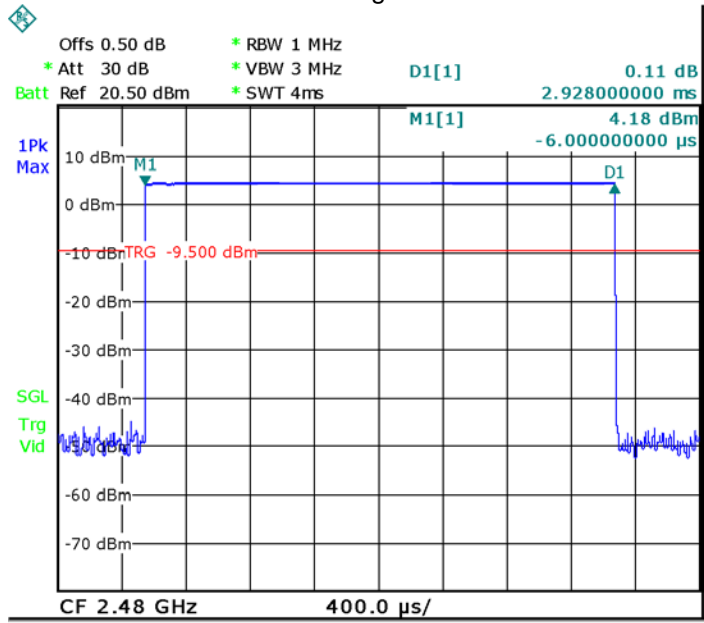


Modulation: $\pi/4$ DQPSK

Data Packet:


2DH5 Low channel

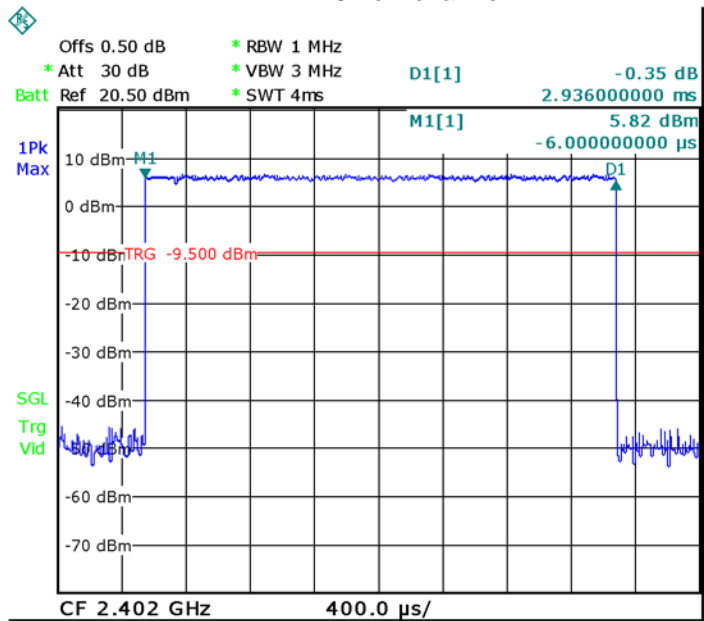

Data Packet:
2DH5 Middle channel

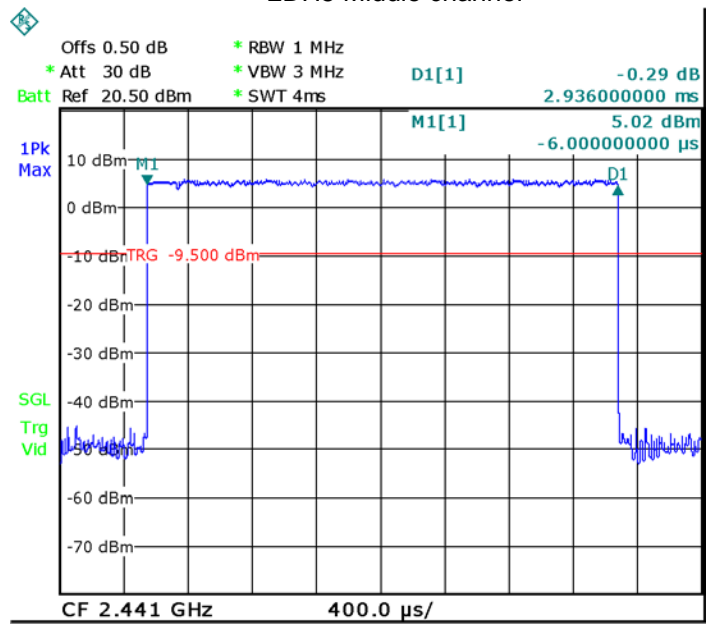


Data Packet:
2DH5 High channel

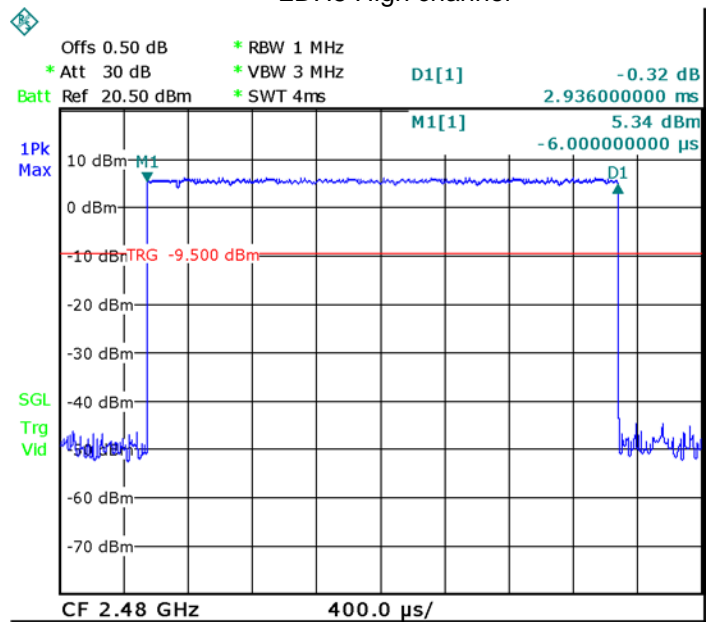

Modulation: 8DPSK


Data Packet:

3DH5 Low channel

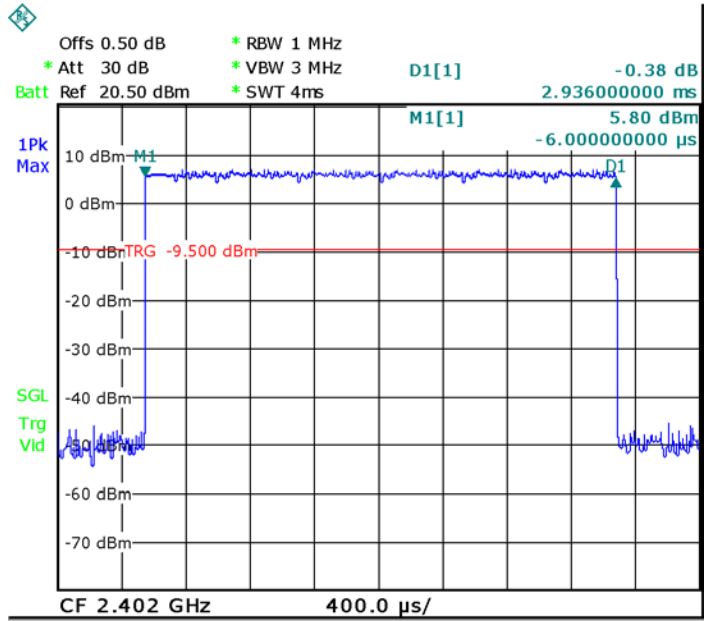


Data Packet:

3DH5 Middle channel

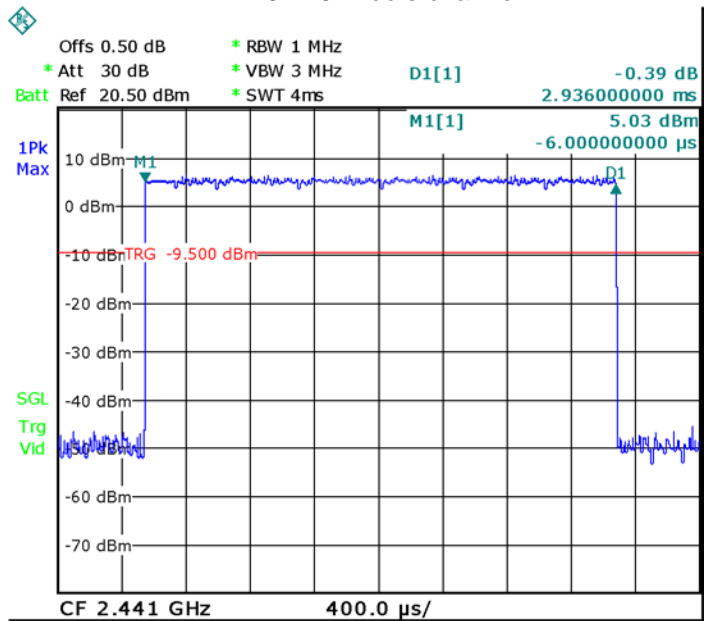

Data Packet:
3DH5 High channel

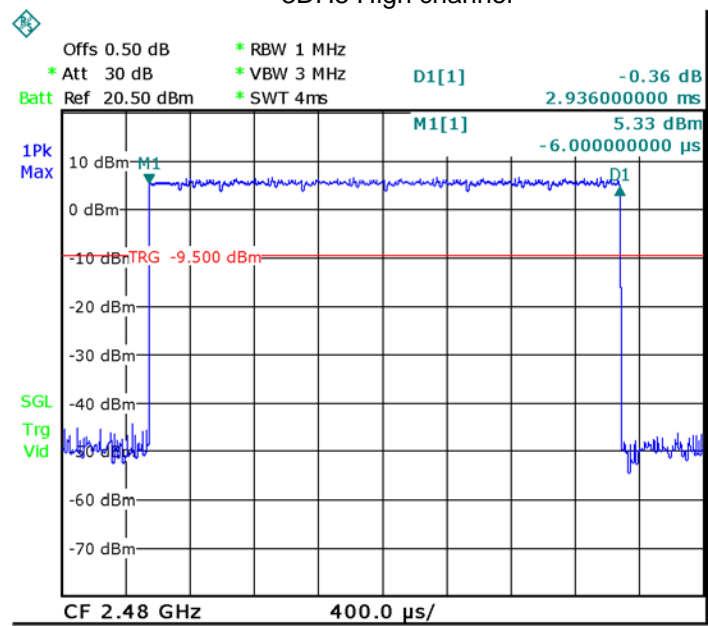


15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Integral antenna for Bluetooth Antenna, meets the requirements of FCC 15.203.

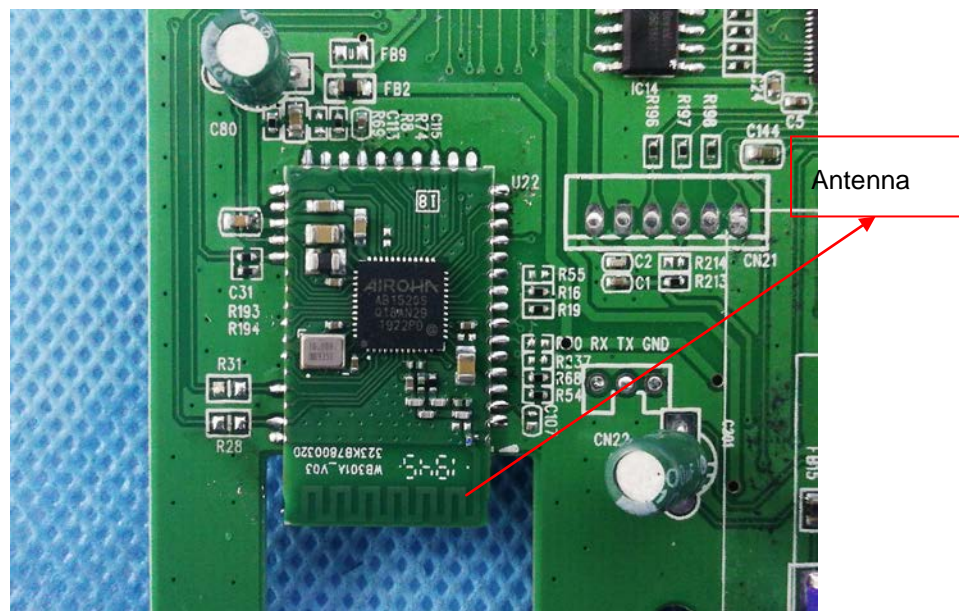

16 FCC ID: XN6-SB2020NG6 RF Exposure Report

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

16.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

16.3 MPE Calculation Method

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)=0.2m

The formula can be changed to

$$Pd = P_{out} * G / (4 * \pi * R^2)$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
4.10	2.57	7.12	5.15	0.0026	1

Result: Compliance.

No SAR measurement is required.

17 Photographs –Test Setup Photos

Note: Please refer to file: SB2020n-G6_Test Setup Photos.

18 Photographs - Constructional Details

18.1 External Photos

Note: Please refer to file: SB2020n-G6_External Photos.

18.2 Internal Photos

Note: Please refer to file: SB2020n-G6_Internal Photos.

=====**End of Report**=====