




TOLERANCES	A	B	C	D	ANGLE
~16	±0.05	±0.1	±0.2	±0.4	±10'
16~63	±0.1	±0.2	±0.4	±0.6	±15'
63~150	±0.15	±0.25	±0.5	±0.8	±30'
150~250	±0.2	±0.3	±0.6	±1	± 1'
250~500	±0.4	±0.6	±0.8	±1.5	± '

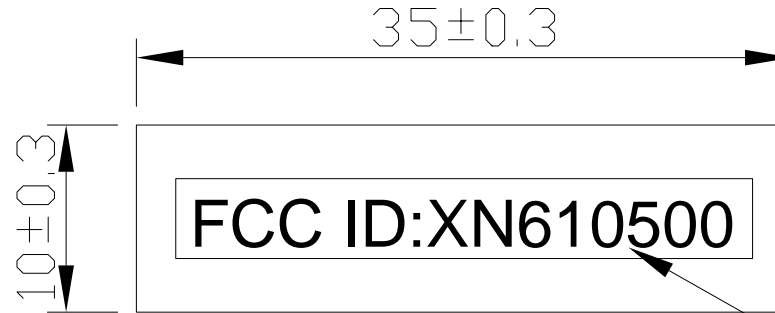

白色印刷

NOTE :

1. IF TOLERANCE FOR EACH DIMENSIONS NOT SHOWN, REFER TO TABLE <C> TABLE FOR TOLERANCE.
2. USE R=1.0MM FOR ALL RADII NOT SPECIFIED.
3. UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, AND/OR SPOTS.
4. □ REPRESENTS REVISIONS OR NEW DIMENSIONS.
5. ○ REPRESENTS CRITICAL AREAS TO BE MEASURED. ALL OTHER DIMENSIONS ARE FOR REFERENCE.
6. ✖ REPRESENTS CRITICAL DIMENSIONS THAT CAN'T BE CHANGED FROM CLIENTS.
7. ALL THE MATERIAL NEED CONFORM FOR 'ZYLUX' (PART, ASSEMBLY, THE ENVIRONMENT CONTROL IN THE MATERIAL AND THE SUBSTANCE CONTROL PROCEDURE) STANDARD. (REFERENCE FILE 'QMI-P40-01')

E			
D			
C			
B			
A	PROTOTYPE-A4	09.09.16	JIANJUN
ISS	CHANGE RECORDS	DATE	REVISER

TITLE. PRODUCT LABEL	REV	SHEET	MODEL, XS-0000038AA	DATE, 09.09.16	
	A	1/1	UNIT, MM	SCALE: FIT	
MATERIAL, 透明龍	NO. K1203-0002837		APPROVAL,	CHECKED,	DESIGN,
COLOR, N/A	DRAWER, JIANJUN		DAVEYLEE	YONG	JIANJUN
Zylux Acoustic Corporation					