

FCC Report

Applicant: Zylux Acoustic Corporation

Address of Applicant: 3F, 22 Lane 35, Jihu Road, Taipei NeiHu Technolony Park,
Taipei 11492, Taiwan

Equipment Under Test (EUT)

Product Name: Mood Media Transport

Model No.: MUZ-TX

Trade Mark: Mood Media

FCC ID: XN6TX

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010

Date of sample receipt: July 06, 2012

Date of Test: July 06-July 19, 2012

Date of report issued: July 23, 2012

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	July 23, 2012	Original

Prepared By:

hank. yan.

Date:

July 23, 2012

Project Engineer

Check By:

Hans. Hu

Date:

July 23, 2012

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
5.7 DESCRIPTION OF SUPPORT UNITS.....	7
5.8 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT:.....	9
6.2 CONDUCTED EMISSIONS.....	10
6.3 CONDUCTED PEAK OUTPUT POWER.....	13
6.4 EMISSION BANDWIDTH.....	15
6.5 CARRIER FREQUENCIES SEPARATION.....	17
6.6 HOPPING CHANNEL NUMBER.....	19
6.7 DWELL TIME.....	20
6.8 BAND EDGE.....	22
6.8.1 Conducted Emission Method.....	22
6.8.2 Radiated Emission Method.....	24
6.9 SPURIOUS EMISSION.....	26
6.9.1 Conducted Emission Method.....	26
6.9.2 Radiated Emission Method.....	29
7 TEST SETUP PHOTO.....	34
8 EUT CONSTRUCTIONAL DETAILS.....	36

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
Emission Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Zylux Acoustic Corporation
Address of Applicant:	3F, 22 Lane 35, Jihu Road, Taipei NeiHu Technolongy Park, Taipei 11492, Taiwan
Manufacturer/Factory:	ZHAO YANG ELEC.(SHENZHEN) CO., LTD.
Address of Manufacturer/Factory:	Section A, 4th Floor, Building 1 & Building 2, De Yong Jia Industrial Park, Guang Qiao Road, Yu Lv Community, Gong Ming Street, Guang Ming New District, Shenzhen

5.2 General Description of E.U.T.

Product Name:	Mood Media Transport
Model No.:	MUZ-TX
Operation Frequency:	2403.330MHz~2479.106MHz
Channel numbers:	38
Modulation type:	FSK
Antenna Type:	Integral
Antenna gain:	2dBi
Power supply:	Model No.: S004YM0500050 Input: 100V-240VAC, 50/60Hz, 150mA Output: 5.0VDC, 500mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2403.330MHz	11	2423.810MHz	21	2444.290MHz	31	2464.770MHz
2	2405.378MHz	12	2425.858MHz	22	2446.338MHz	32	2466.818MHz
3	2407.426MHz	13	2427.906MHz	23	2448.386MHz	33	2468.866MHz
4	2409.474MHz	14	2429.954MHz	24	2450.434MHz	34	2470.914MHz
5	2411.522MHz	15	2432.002MHz	25	2452.482MHz	35	2472.962MHz
6	2413.570MHz	16	2434.050MHz	26	2454.530MHz	36	2475.010MHz
7	2415.618MHz	17	2436.098MHz	27	2456.578MHz	37	2477.058MHz
8	2417.666MHz	18	2438.146MHz	28	2458.626MHz	38	2479.106MHz
9	2419.714MHz	19	2440.194MHz	29	2460.674MHz		
10	2421.762MHz	20	2442.242MHz	30	2462.722MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2403.330MHz
The middle channel	2442.242MHz
The Highest channel	2479.106MHz

5.3 Test mode

Transmitting mode	Keep transmitting mode
-------------------	------------------------

5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 600491, July 20, 2010. Industry Canada (IC) The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.
--

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
Pioneer	DVD Player	DV-420V-K	090502-11	Pioneer


5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 25 2012	Feb. 24 2013
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2011	Mar. 29 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Mar. 31 2012	Mar. 30 2013
9	Coaxial Cable	GTS	N/A	GTS211	Mar. 31 2012	Mar. 30 2013
10	Coaxial cable	GTS	N/A	GTS210	Mar. 31 2012	Mar. 30 2013
11	Coaxial Cable	GTS	N/A	GTS212	Mar. 31 2012	Mar. 30 2013
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2012	June 28 2013
15	Band filter	Amindeon	82346	GTS219	Mar. 31 2012	Mar. 30 2013

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:

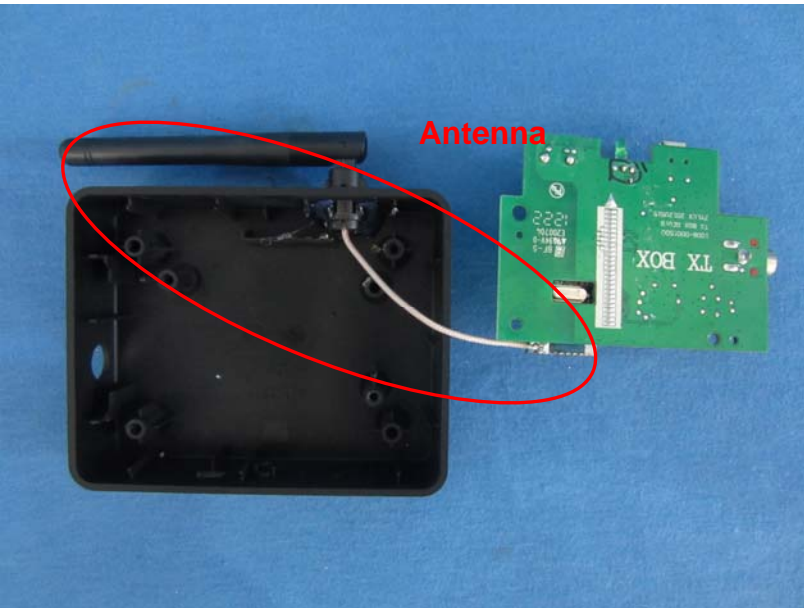
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p>E.U.T Antenna:</p>	
<p><i>The antenna is integral antenna, the best case gain of the antenna is 2dBi</i></p> 	

6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4:2003														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 														
Test Instruments:	Refer to section 5.8 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														

Measurement data:

Line:

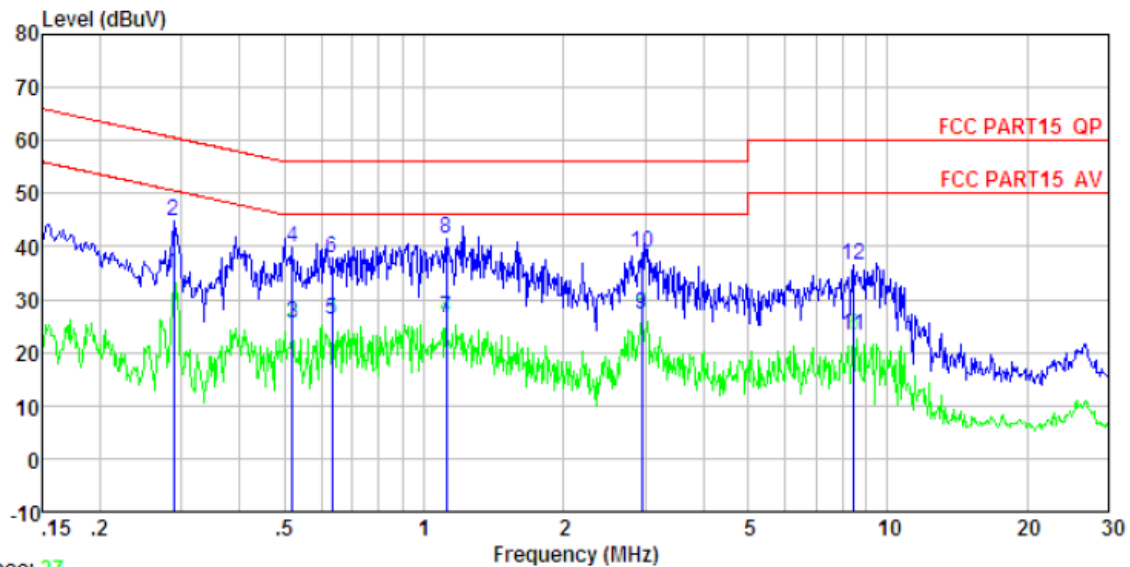


Trace: 27

Condition : FCC PART15 QP LISN(2011) LINE
 Job No. : 738RF
 Test Mode : Operation mode
 Test Engineer: Blue
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.288	34.15	0.62	0.10	34.87	50.59	-15.72	Average
2	0.288	43.94	0.62	0.10	44.66	60.59	-15.93	QP
3	0.521	24.93	0.55	0.10	25.58	46.00	-20.42	Average
4	0.521	39.16	0.55	0.10	39.81	56.00	-16.19	QP
5	0.634	25.45	0.53	0.10	26.08	46.00	-19.92	Average
6	0.634	37.34	0.53	0.10	37.97	56.00	-18.03	QP
7	1.117	25.90	0.47	0.10	26.47	46.00	-19.53	Average
8	1.117	41.06	0.47	0.10	41.63	56.00	-14.37	QP
9	2.946	26.71	0.36	0.10	27.17	46.00	-18.83	Average
10	2.946	38.21	0.36	0.10	38.67	56.00	-17.33	QP
11	8.456	22.74	0.24	0.18	23.16	50.00	-26.84	Average
12	8.456	36.09	0.24	0.18	36.51	60.00	-23.49	QP

Neutral:

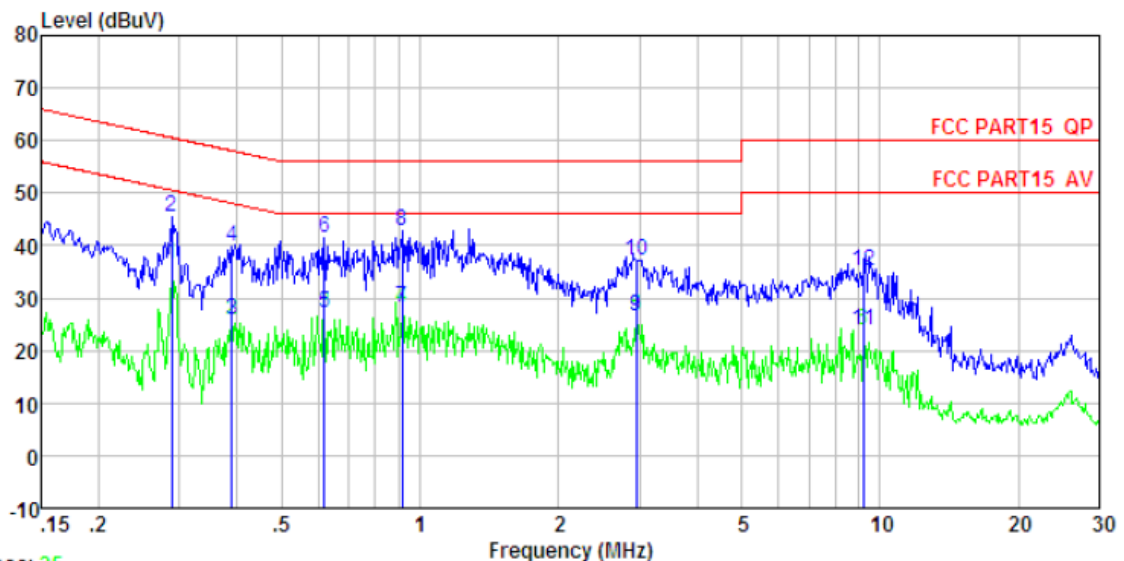


Trace: 25
 Condition : FCC PART15 QP LISN(2011) NEUTRAL
 Job No. : 738RF
 Test Mode : Operation mode
 Test Engineer: Blue
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.288	35.76	0.62	0.10	36.48	50.59	-14.11	Average
2	0.288	44.86	0.62	0.10	45.58	60.59	-15.01	QP
3	0.389	25.33	0.58	0.10	26.01	48.08	-22.07	Average
4	0.389	39.25	0.58	0.10	39.93	58.08	-18.15	QP
5	0.621	26.67	0.53	0.10	27.30	46.00	-18.70	Average
6	0.621	40.85	0.53	0.10	41.48	56.00	-14.52	QP
7	0.914	27.45	0.49	0.10	28.04	46.00	-17.96	Average
8	0.914	42.14	0.49	0.10	42.73	56.00	-13.27	QP
9	2.946	25.93	0.36	0.10	26.39	46.00	-19.61	Average
10	2.946	36.85	0.36	0.10	37.31	56.00	-18.69	QP
11	9.204	23.39	0.23	0.19	23.81	50.00	-26.19	Average
12	9.204	34.78	0.23	0.19	35.20	60.00	-24.80	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss


6.3 Conducted Peak Output Power

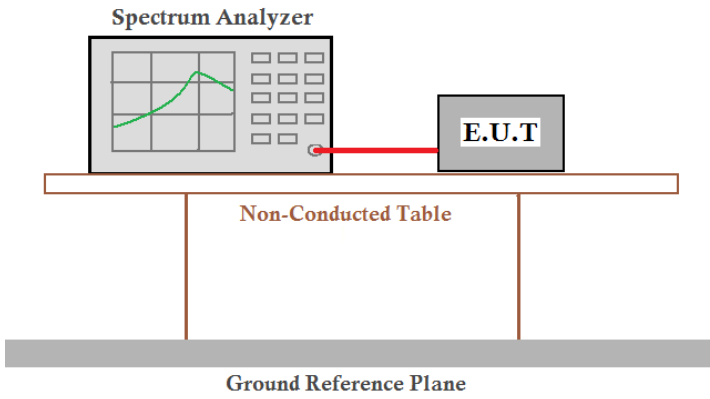Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	10.89	30.00	Pass
Middle	11.58		
Highest	11.17		


Test plot as follows:

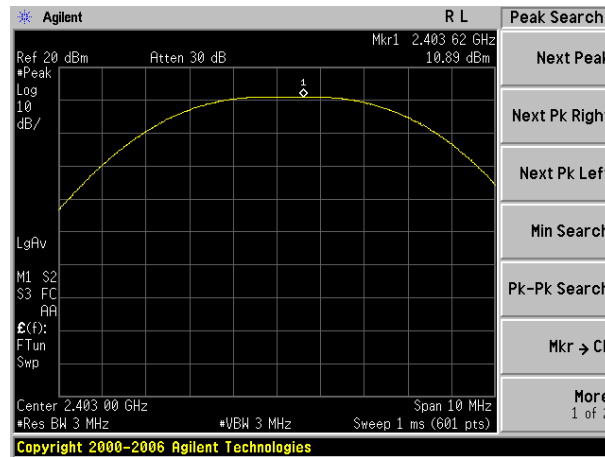

Lowest channel

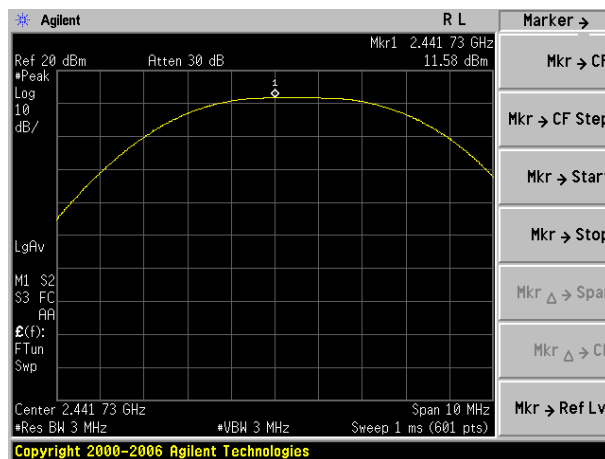


Middle channel

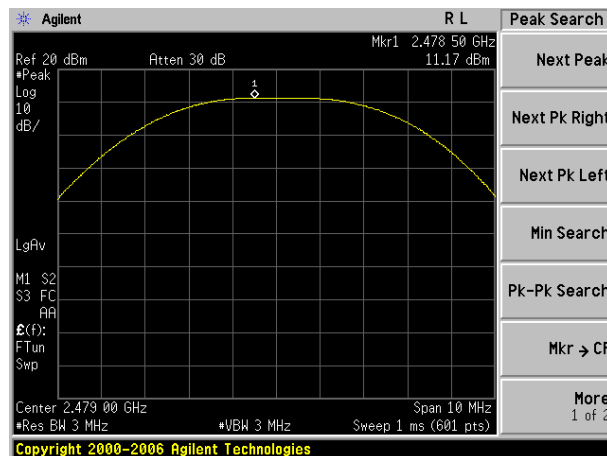

Highest channel


6.4 Emission Bandwidth

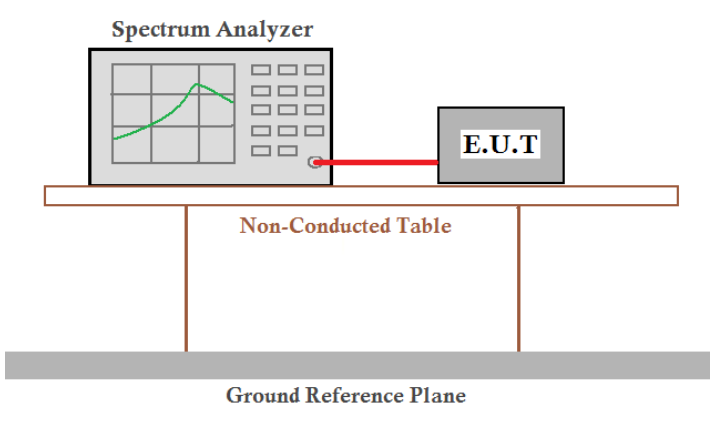Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Emission Bandwidth (MHz)	Result
Lowest	1.945	Pass
Middle	1.928	
Highest	1.932	


Test plot as follows:

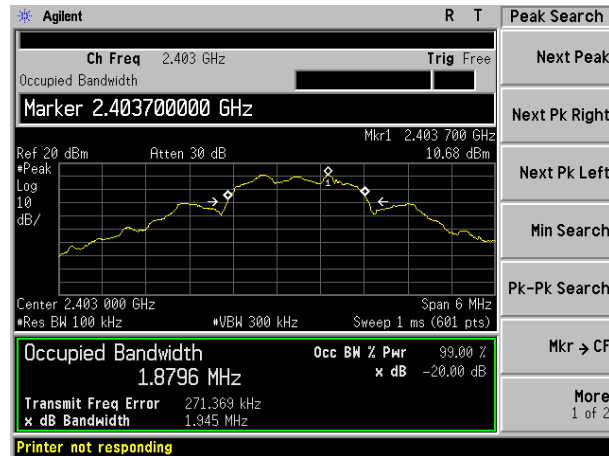

Lowest channel

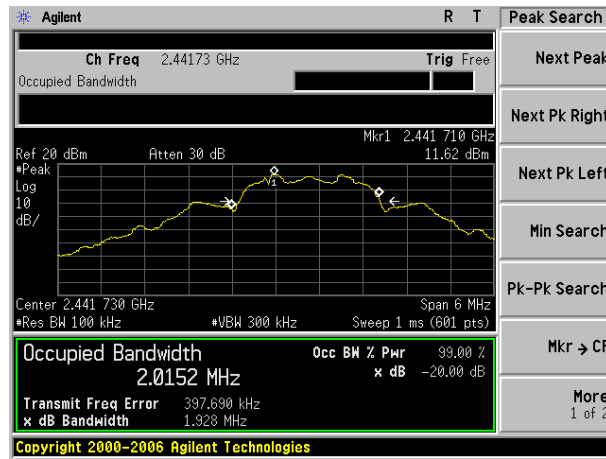


Middle channel

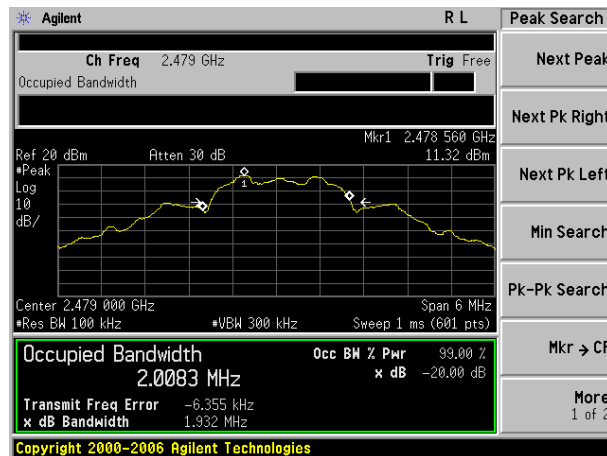

Highest channel

6.5 Carrier Frequencies Separation

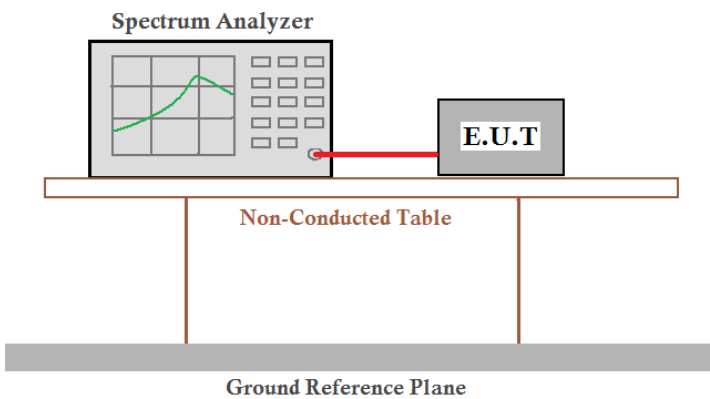Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	4293	1297	Pass
Middle	6140	1297	Pass
Highest	4147	1297	Pass


Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
FSK	1945	1297


Test plot as follows:

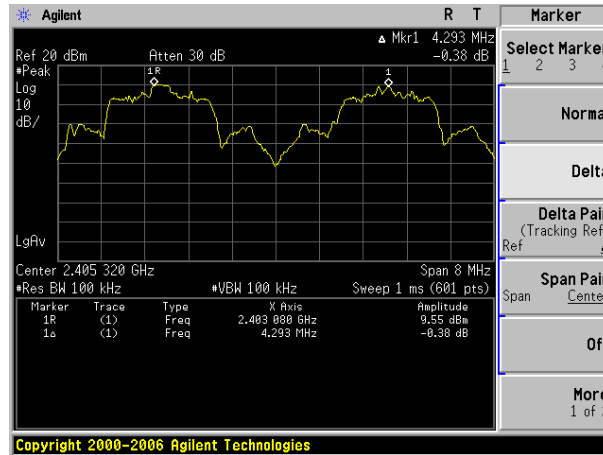

Lowest channel

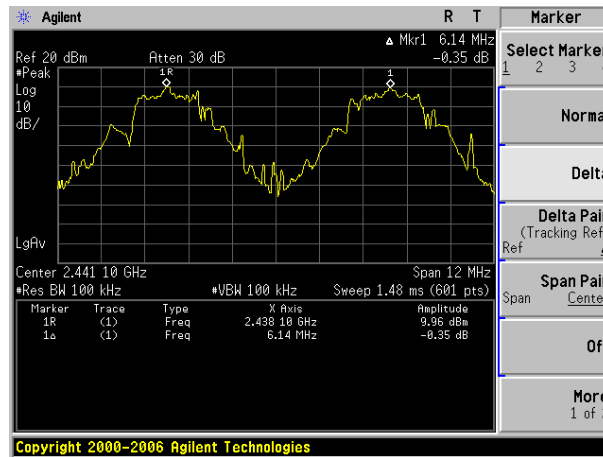


Middle channel

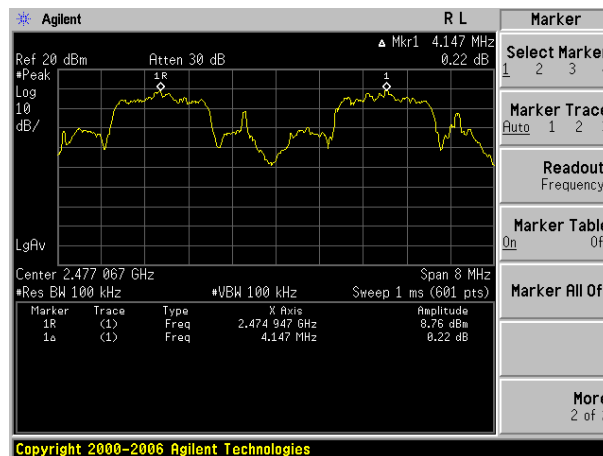


Highest channel

6.6 Hopping Channel Number

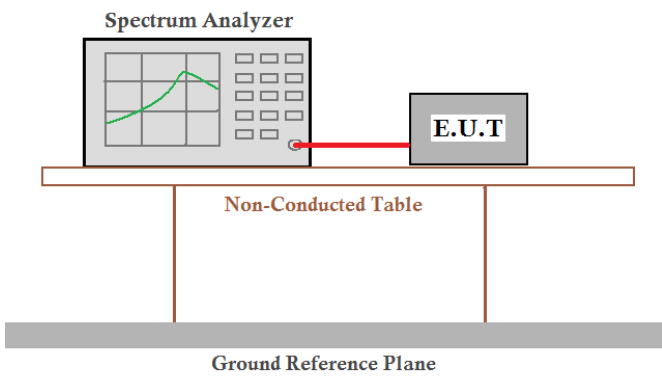Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:


Mode	Hopping channel numbers	Limit	Result
FSK	20	15	Pass

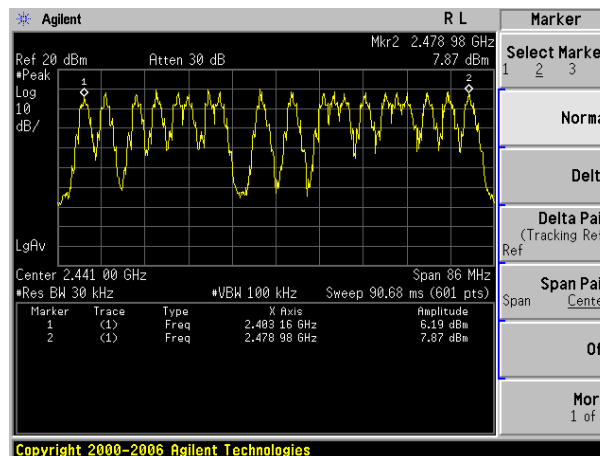

Remark: The RF Module has channel palette of 38 channels starting at 2403.33MHz. From this palette, 20 channels are used by the system at any given moment.

Please refer to operational description for more information

6.7 Dwell Time

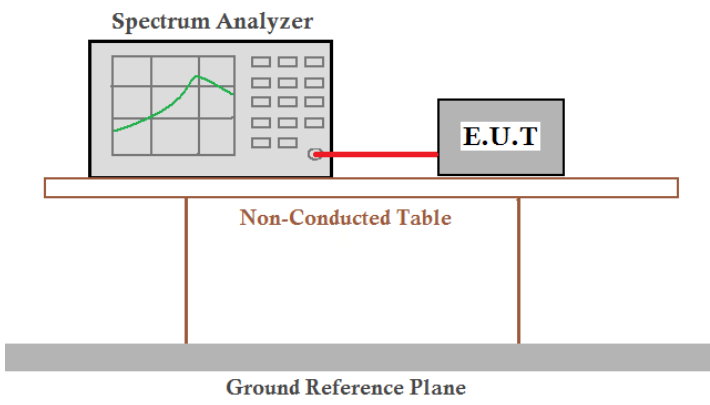Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Channel	Dwell time (second)	Limit (second)	Result
lowest	0.34968	0.4	Pass
middle	0.34968		
highest	0.34968		

The lowest channel (2403.33MHz), middle channel (2442.242MHz), highest channel (2479.106MHz) as blow

Lowest channel time slot= $4.65(\text{ms}) \times 188 \times 0.4 = 349.68\text{ms}$


Middle channel time slot= $4.65(\text{ms}) \times 188 \times 0.4 = 349.68\text{ms}$

Highest channel time slot= $4.65(\text{ms}) \times 188 \times 0.4 = 349.68\text{ms}$

Test plot as follows:


6.8 Band Edge

6.8.1 Conducted Emission Method

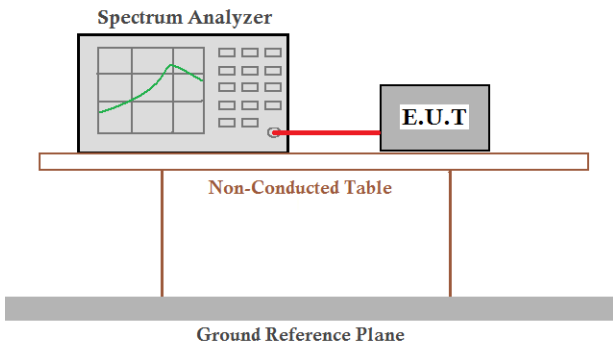
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test plot as follows:

Test channel: Lowest channel

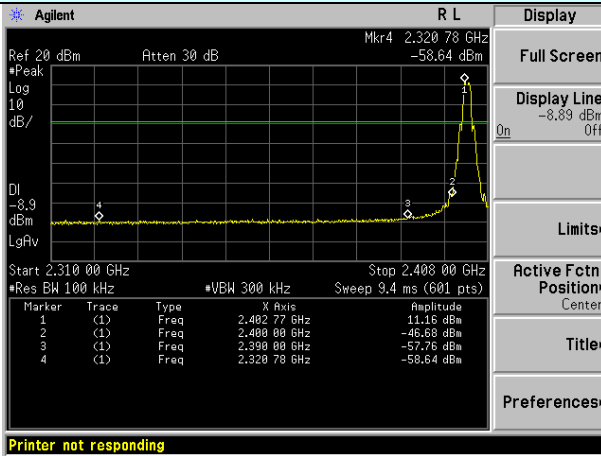


No-hopping mode

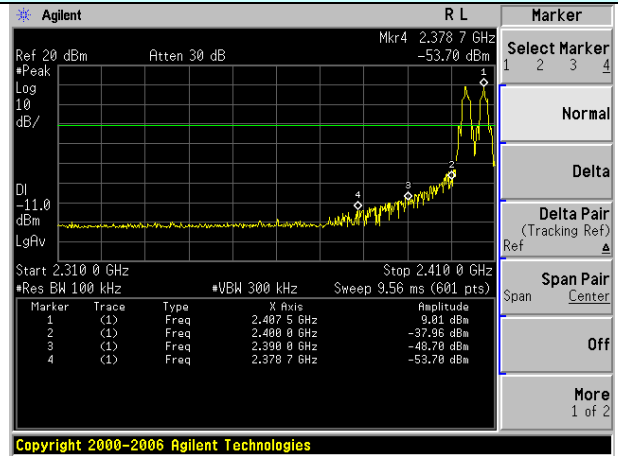


Hopping mode

Test channel: Highest channel

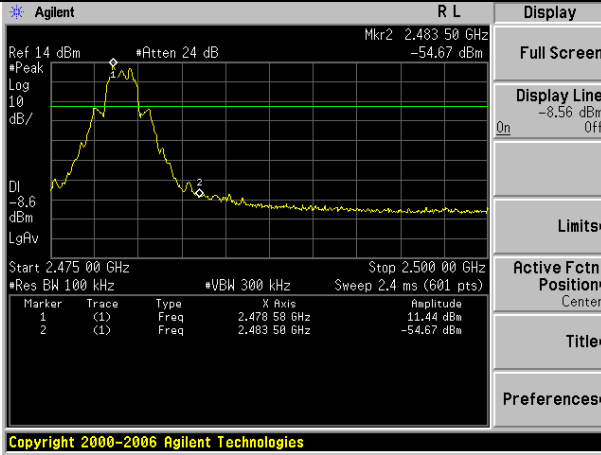

No-hopping mode

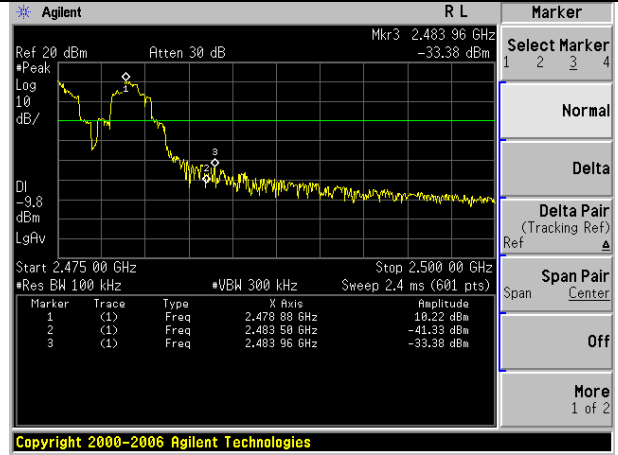

Hopping mode

6.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	46.18	27.59	5.38	30.18	48.97	74.00	-25.03	Horizontal
2400.00	60.96	27.58	5.39	30.18	63.75	74.00	-10.25	Horizontal
2390.00	47.04	27.59	5.38	30.18	49.83	74.00	-24.17	Vertical
2400.00	66.53	27.58	5.39	30.18	69.32	74.00	-4.68	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	34.52	27.59	5.38	30.18	37.31	54.00	-16.69	Horizontal
2400.00	34.97	27.58	5.39	30.18	37.76	54.00	-16.24	Horizontal
2390.00	34.59	27.59	5.38	30.18	37.38	54.00	-16.62	Vertical
2400.00	35.62	27.58	5.39	30.18	38.41	54.00	-15.59	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	54.57	27.53	5.47	29.93	57.64	74.00	-16.36	Horizontal
2500.00	46.31	27.55	5.49	29.93	49.42	74.00	-24.58	Horizontal
2483.50	56.77	27.53	5.47	29.93	59.84	74.00	-14.16	Vertical
2500.00	45.21	27.55	5.49	29.93	48.32	74.00	-25.68	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.34	27.53	5.47	29.93	50.41	54.00	-3.59	Horizontal
2500.00	33.79	27.55	5.49	29.93	36.90	54.00	-17.10	Horizontal
2483.50	49.15	27.53	5.47	29.93	52.22	54.00	-1.78	Vertical
2500.00	33.77	27.55	5.49	29.93	36.88	54.00	-17.12	Vertical

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.9 Spurious Emission


6.9.1 Conducted Emission Method

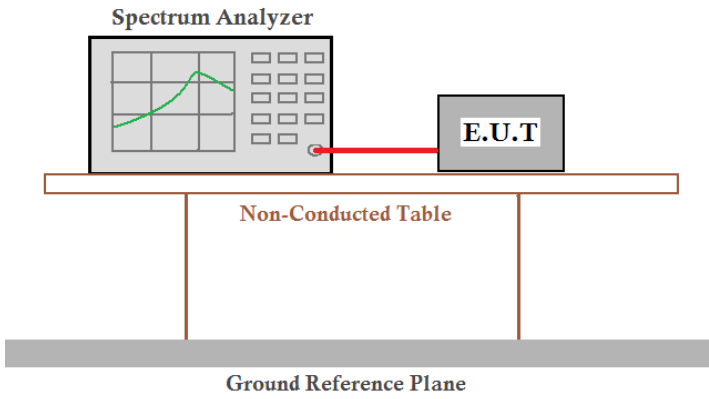Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 Meas Guidance
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test channel: Lowest channel

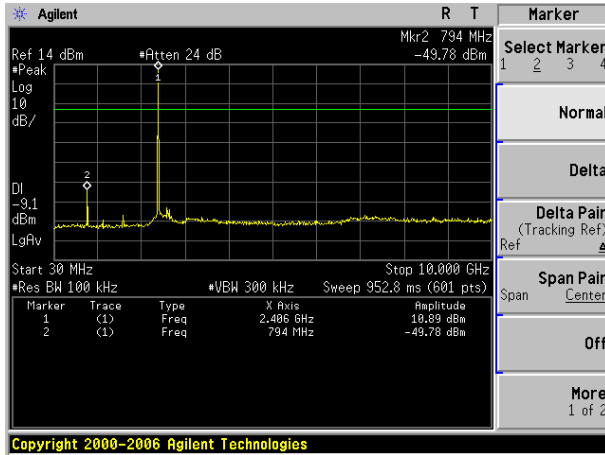


30MHz~10GHz

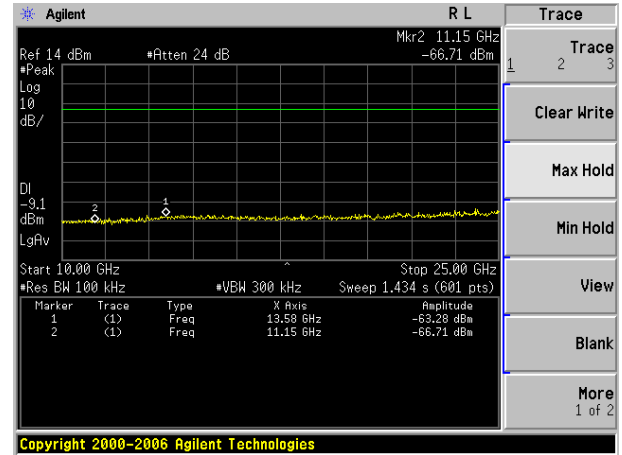


10GHz~25GHz

Test channel: Middle channel

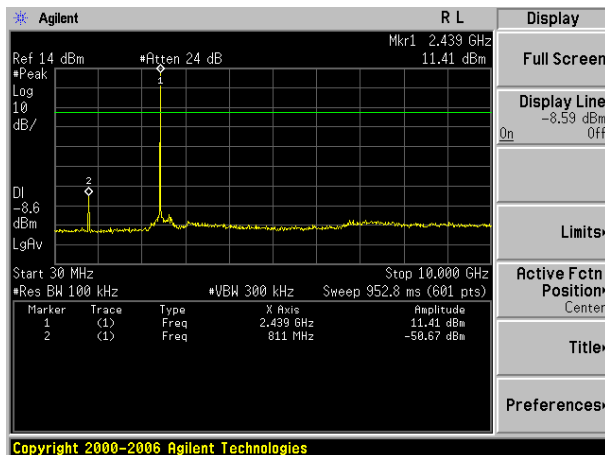


30MHz~10GHz

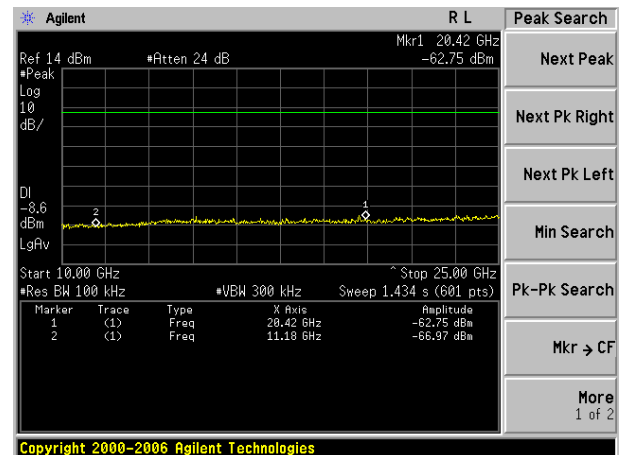


10GHz~25GHz

Test channel:	Highest channel
---------------	-----------------

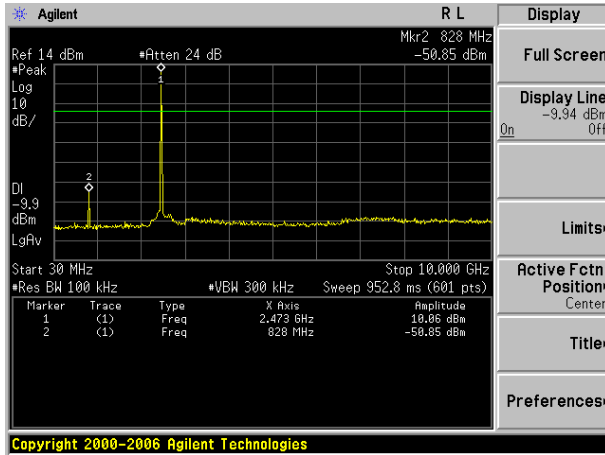

30MHz~10GHz

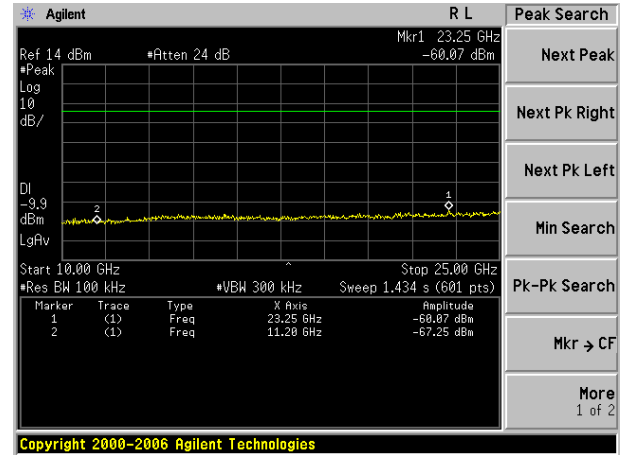

10GHz~25GHz

6.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Av		1MHz	10Hz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:

■ **Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
37.16	44.22	16.24	0.63	32.06	29.03	40.00	-10.97	Vertical
51.12	45.13	16.29	0.78	31.96	30.24	40.00	-9.76	Vertical
96.10	38.57	15.99	1.16	31.75	23.97	43.50	-19.53	Vertical
148.96	42.31	11.31	1.56	31.98	23.20	43.50	-20.30	Vertical
310.00	38.90	16.22	2.42	32.15	25.39	46.00	-20.61	Vertical
810.27	38.42	23.15	4.49	31.30	34.76	46.00	-11.24	Vertical
48.67	38.50	16.44	0.76	31.97	23.73	40.00	-16.27	Horizontal
102.72	37.58	15.98	1.22	31.77	23.01	43.50	-20.49	Horizontal
195.14	38.37	13.57	1.81	32.13	21.62	43.50	-21.88	Horizontal
393.47	40.98	16.97	2.82	31.91	28.86	46.00	-17.14	Horizontal
566.62	39.77	19.90	3.59	31.20	32.06	46.00	-13.94	Horizontal
801.79	38.78	23.06	4.46	31.31	34.99	46.00	-11.01	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	29.01	31.78	8.60	24.17	45.22	74.00	-28.78	Vertical
7209.00	33.75	36.15	11.65	26.46	55.09	74.00	-18.91	Vertical
9612.00	31.13	38.01	14.14	25.45	57.83	74.00	-16.17	Vertical
12015.00	*					74.00		Vertical
14418.00	*					74.00		Vertical
4806.00	30.05	31.78	8.60	24.17	46.26	74.00	-27.74	Horizontal
7209.00	33.89	36.15	11.65	26.46	55.23	74.00	-18.77	Horizontal
9612.00	30.73	38.01	14.14	25.45	57.43	74.00	-16.57	Horizontal
12015.00	*					74.00		Horizontal
14418.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4806.00	18.95	31.78	8.60	24.17	35.16	54.00	-18.84	Vertical
7209.00	23.92	36.15	11.65	26.46	45.26	54.00	-8.74	Vertical
9612.00	20.92	38.01	14.14	25.45	47.62	54.00	-6.38	Vertical
12015.00	*					54.00		Vertical
14418.00	*					54.00		Vertical
4806.00	19.77	31.78	8.60	24.17	35.98	54.00	-18.02	Horizontal
7209.00	23.62	36.15	11.65	26.46	44.96	54.00	-9.04	Horizontal
9612.00	20.32	38.01	14.14	25.45	47.02	54.00	-6.98	Horizontal
12015.00	*					54.00		Horizontal
14418.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	29.75	31.85	8.66	24.10	46.16	74.00	-27.84	Vertical
7323.00	33.96	36.37	11.72	26.78	55.27	74.00	-18.73	Vertical
9764.00	30.47	38.35	14.27	25.35	57.74	74.00	-16.26	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	30.63	31.85	8.66	24.10	47.04	74.00	-26.96	Horizontal
7323.00	33.36	36.37	11.72	26.78	54.67	74.00	-19.33	Horizontal
9764.00	31.06	38.35	14.27	25.35	58.33	74.00	-15.67	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	19.58	31.85	8.66	24.10	35.99	54.00	-18.01	Vertical
7323.00	23.84	36.37	11.72	26.78	45.15	54.00	-8.85	Vertical
9764.00	20.15	38.35	14.27	25.35	47.42	54.00	-6.58	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	20.50	31.85	8.66	24.10	36.91	54.00	-17.09	Horizontal
7323.00	23.05	36.37	11.72	26.78	44.36	54.00	-9.64	Horizontal
9764.00	20.77	38.35	14.27	25.35	48.04	54.00	-5.96	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“**”, means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4958.00	30.05	31.93	8.73	24.03	46.68	74.00	-27.32	Vertical
7437.00	32.95	36.59	11.79	27.03	54.30	74.00	-19.70	Vertical
9916.00	28.67	38.81	14.35	25.27	56.56	74.00	-17.44	Vertical
12395.00	*					74.00		Vertical
14874.00	*					74.00		Vertical
4958.00	30.65	31.93	8.73	24.03	47.28	74.00	-26.72	Horizontal
7437.00	32.26	36.59	11.79	27.03	53.61	74.00	-20.39	Horizontal
9916.00	29.20	38.81	14.35	25.27	57.09	74.00	-16.91	Horizontal
12395.00	*					74.00		Horizontal
14874.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4958.00	20.03	31.93	8.73	24.03	36.66	54.00	-17.34	Vertical
7437.00	22.79	36.59	11.79	27.03	44.14	54.00	-9.86	Vertical
9916.00	18.47	38.81	14.35	25.27	46.36	54.00	-7.64	Vertical
12395.00	*					54.00		Vertical
14874.00	*					54.00		Vertical
4958.00	20.48	31.93	8.73	24.03	37.11	54.00	-16.89	Horizontal
7437.00	22.28	36.59	11.79	27.03	43.63	54.00	-10.37	Horizontal
9916.00	18.90	38.81	14.35	25.27	46.79	54.00	-7.21	Horizontal
12395.00	*					54.00		Horizontal
14874.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“**”, means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7 Test Setup Photo

Radiated Emission

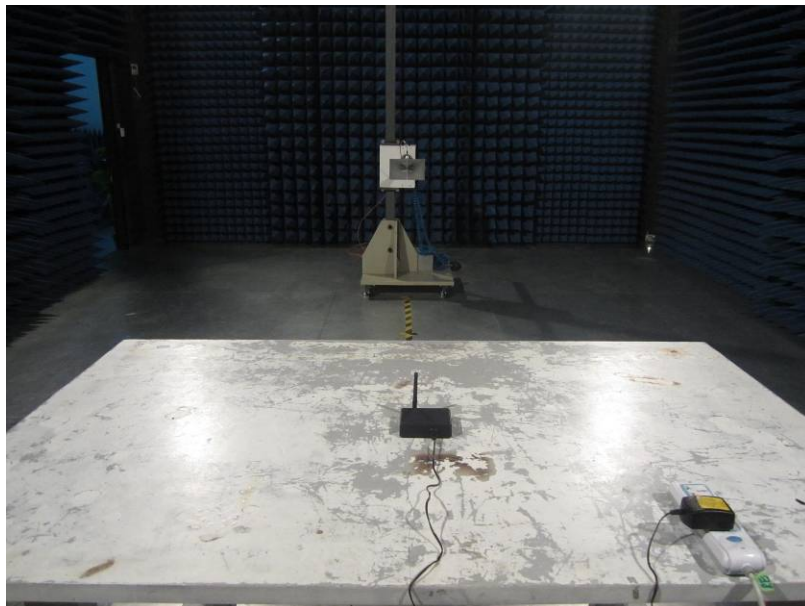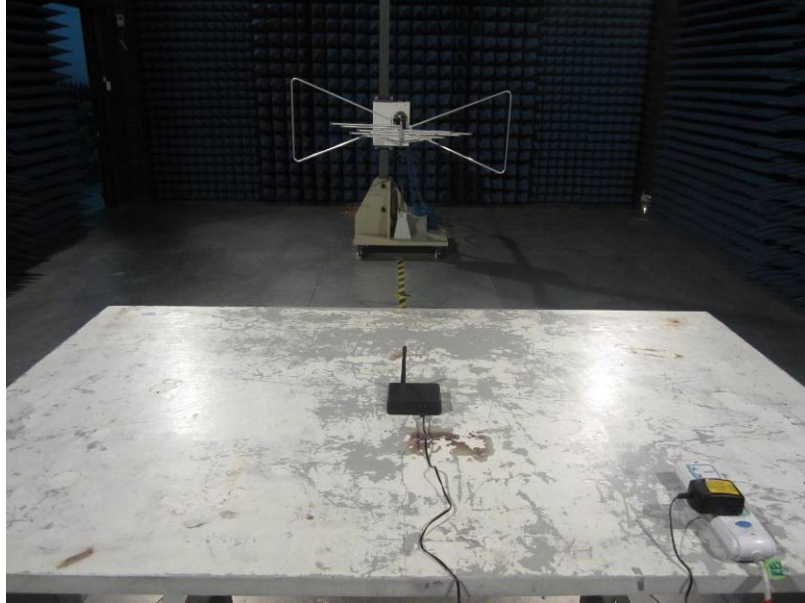


Conducted Emission







8 EUT Constructional Details







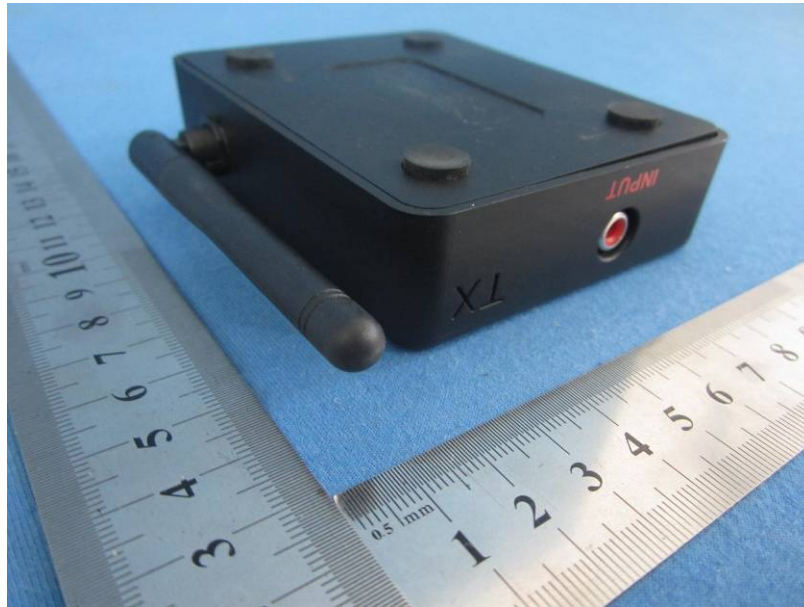

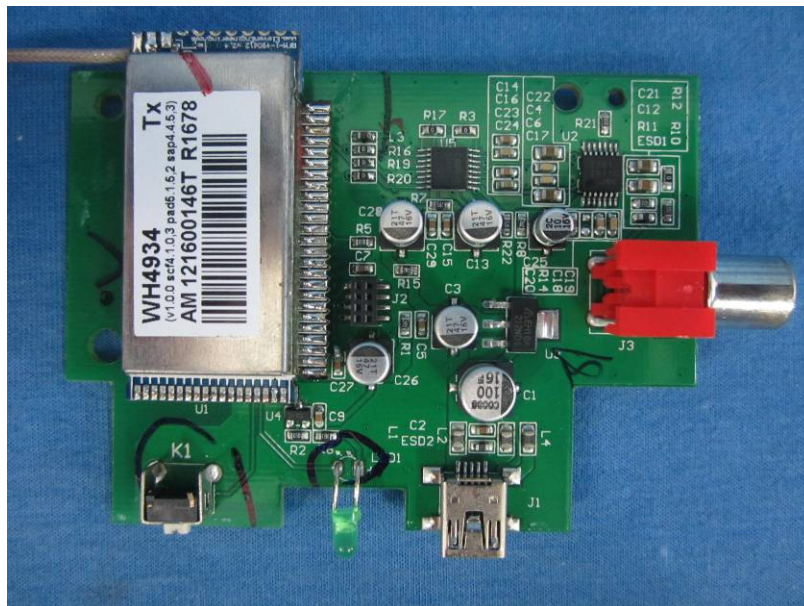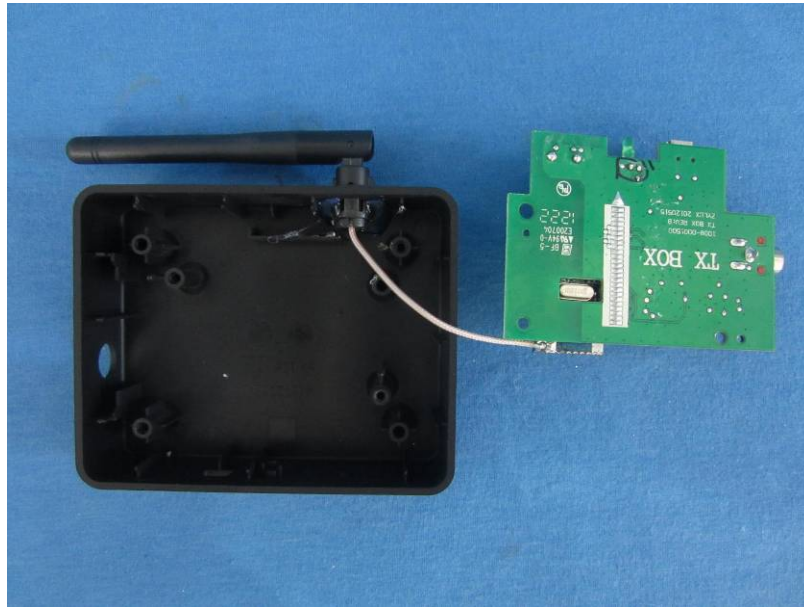

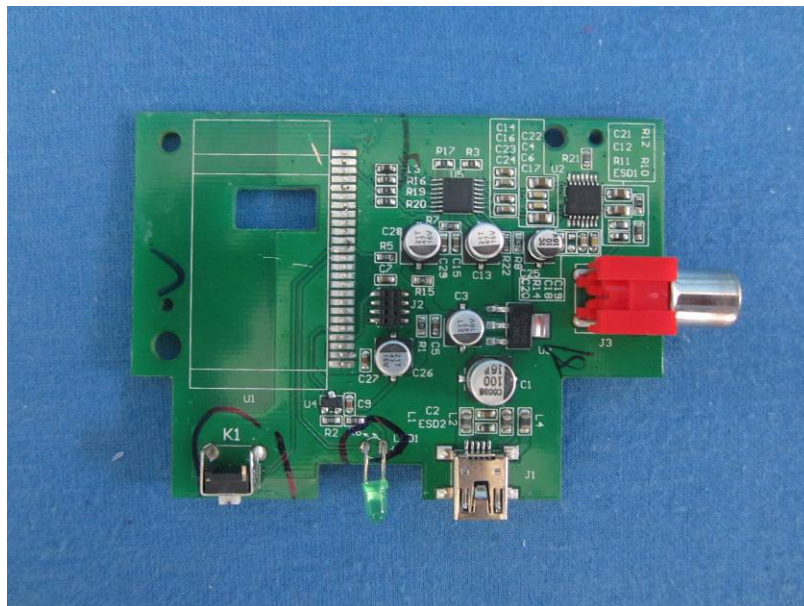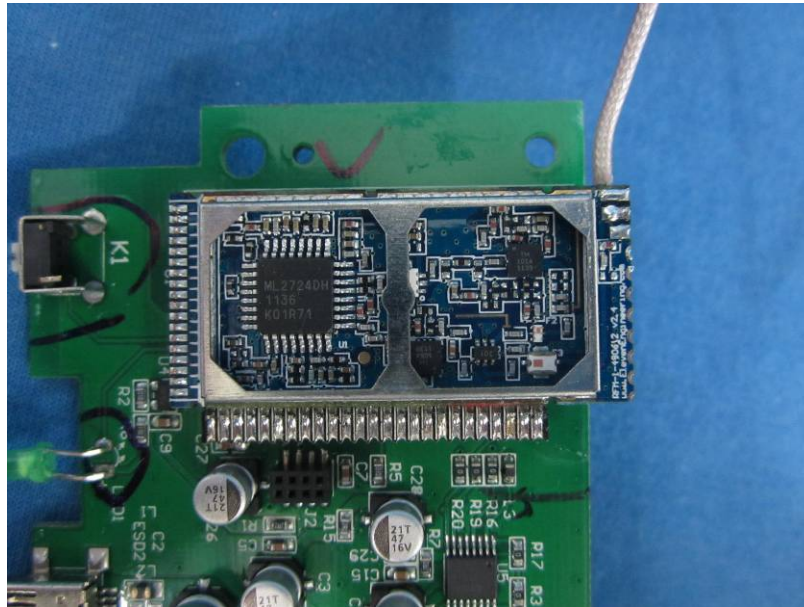

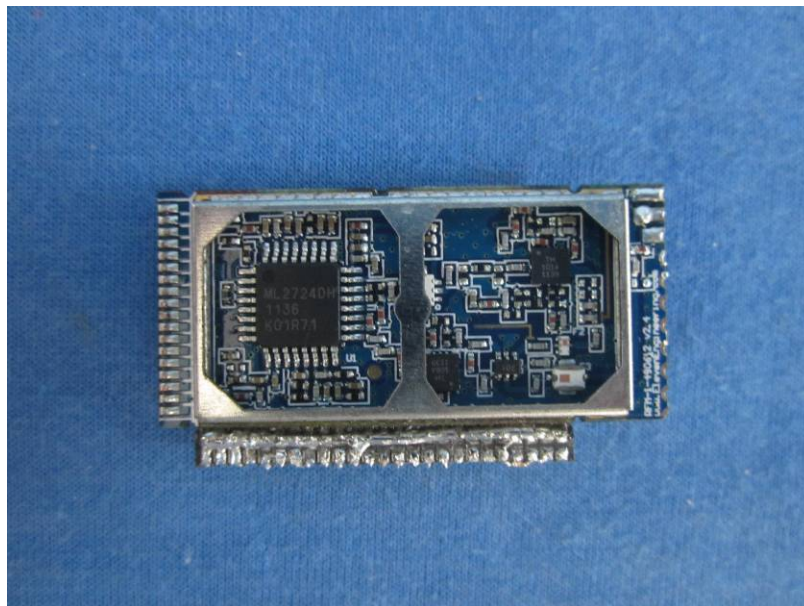

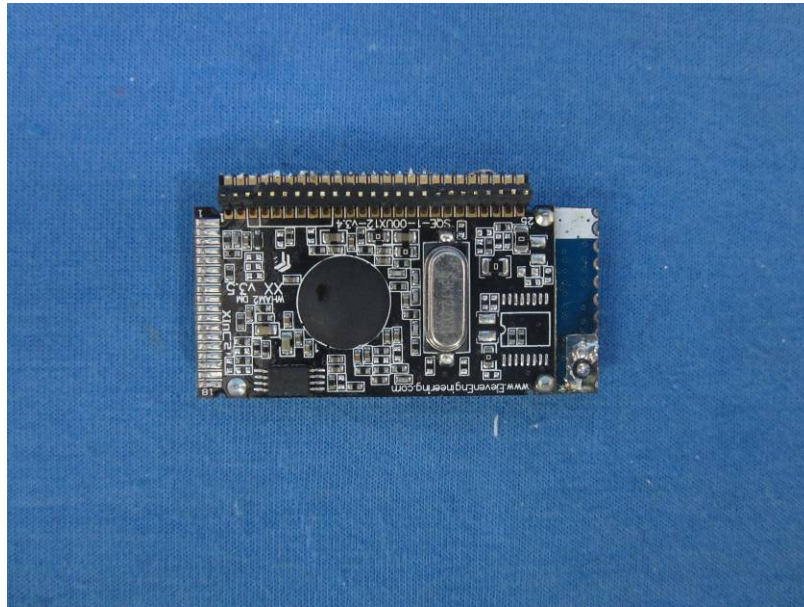

-----End-----