


# FCC Test Report

**FCC ID** : XNAWBS14  
**Equipment** : WITHINGS BODY PRO 2  
**Model No.** : WBS14  
**Brand Name** : Withings  
**Applicant** : Withings  
**Address** : 2 rue Maurice Hartmann  
92130 Issy-Les-Moulineaux  
France  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Oct. 02, 2023  
**Tested Date** : Oct. 27 ~ Nov. 08, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager

---

## Table of Contents

|   |   |           |
|---|---|-----------|
| <b>1</b>  | <b>GENERAL DESCRIPTION .....</b>                            | <b>5</b>  |
| 1.1   | Information.....  | 5         |
| 1.2   | Local Support Equipment List .....                          | 7         |
| 1.3   | Test Setup Chart .....                                      | 7         |
| 1.4   | Test Equipment List and Calibration Data.....               | 8         |
| 1.5   | Test Standards .....  | 9         |
| 1.6   | Reference Guidance .....                                    | 9         |
| 1.7   | Deviation from Test Standard and Measurement Procedure..... | 9         |
| 1.8   | Measurement Uncertainty .....                               | 9         |
| <b>2</b>  | <b>TEST CONFIGURATION.....</b>                              | <b>10</b> |
| 2.1   | Testing Facility .....                                      | 10        |
| 2.2   | The Worst Test Modes and Channel Details .....              | 10        |
| <b>3</b>  | <b>TRANSMITTER TEST RESULTS .....</b>                       | <b>11</b> |
| 3.1   | 6dB and Occupied Bandwidth .....                            | 11        |
| 3.2   | Conducted Output Power .....                                | 12        |
| 3.3   | Power Spectral Density .....                                | 13        |
| 3.4   | Unwanted Emissions in Restricted Frequency Bands .....      | 14        |
| 3.5   | Emissions in non-restricted Frequency Bands.....            | 16        |
| <b>4</b>  | <b>TEST LABORATORY INFORMATION .....</b>                    | <b>17</b> |
| <br>  |   |           |
| <b>Appendix A. 6dB and Occupied Bandwidth</b>                         |   |           |
| <b>Appendix B. Conducted Output Power</b>                             |   |           |
| <b>Appendix C. Power Spectral Density</b>                             |   |           |
| <b>Appendix D. Unwanted Emissions into Restricted Frequency Bands</b> |   |           |
| <b>Appendix E. Emissions in Non-Restricted Frequency Bands</b>        |   |           |

---

## Release Record

| Report No.    | Version | Description   | Issued Date   |
|---------------|---------|---------------|---------------|
| FR280405-05AE | Rev. 01 | Initial issue | Jan. 10, 2024 |

## Summary of Test Results

| FCC Rules           | Test Items                        | Measured   | Result |
|---------------------|-----------------------------------|--|--------|
| 15.207              | AC Power Line Conducted Emissions | Note <sup>1</sup>                                      | N/A    |
| 15.247(d)<br>15.209 | Unwanted Emissions                | [dBuV/m at 3m]: 7.32GHz<br>51.40 (Margin -2.60dB) - AV | Pass   |
| 15.247(b)(3)        | Conducted Output Power            | Power [dBm]: 3.95                                      | Pass   |
| 15.247(a)(2)        | 6dB Bandwidth                     | Meet the requirement of limit                          | Pass   |
| 15.247(e)           | Power Spectral Density            | Meet the requirement of limit                          | Pass   |
| 15.203              | Antenna Requirement               | Meet the requirement of limit                          | Pass   |

N/A means Not Applicable.

Note<sup>1</sup>: The EUT consumes DC power from battery, so the test is not required.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

| RF General Information |                |                 |                |           |
|------------------------|----------------|-----------------|----------------|-----------|
| Frequency Range (MHz)  | Bluetooth Mode | Ch. Freq. (MHz) | Channel Number | Data Rate |
| 2400-2483.5            | LE             | 2402-2480       | 0-39 [40]      | 1 Mbps    |

Note: Bluetooth LE (Low energy) uses GFSK modulation.

### 1.1.2 Antenna Details

| Ant. No. | Brand | Model      | Type                       | Connector       | Gain (dBi) |
|----------|-------|------------|----------------------------|-----------------|------------|
| 1        | DBT   | W1P35X8W04 | PCB antenna(External type) | u.FI compatible | 2.24       |

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

|                   |                     |
|-------------------|---------------------|
| Power Supply Type | 4x 1.5V AAA battery |
|-------------------|---------------------|

### 1.1.4 Accessories

N/A

### 1.1.5 Test Sample Information

|                    |   |
|--------------------|---|
| MAC of Test Sample | Radiated Emission: A47EFA1EC264<br>Antenna Port Conducted: A47EFA1EBF98 |
|--------------------|---|

### 1.1.6 Channel List

| Frequency band (MHz) |                 |         |                 | 2400~2483.5 |                 |         |                 |
|----------------------|-----------------|---------|-----------------|-------------|-----------------|---------|-----------------|
| Channel              | Frequency (MHz) | Channel | Frequency (MHz) | Channel     | Frequency (MHz) | Channel | Frequency (MHz) |
| 37                   | 2402            | 9       | 2422            | 18          | 2442            | 28      | 2462            |
| 0                    | 2404            | 10      | 2424            | 19          | 2444            | 29      | 2464            |
| 1                    | 2406            | 38      | 2426            | 20          | 2446            | 30      | 2466            |
| 2                    | 2408            | 11      | 2428            | 21          | 2448            | 31      | 2468            |
| 3                    | 2410            | 12      | 2430            | 22          | 2450            | 32      | 2470            |
| 4                    | 2412            | 13      | 2432            | 23          | 2452            | 33      | 2472            |
| 5                    | 2414            | 14      | 2434            | 24          | 2454            | 34      | 2474            |
| 6                    | 2416            | 15      | 2436            | 25          | 2456            | 35      | 2476            |
| 7                    | 2418            | 16      | 2438            | 26          | 2458            | 36      | 2478            |
| 8                    | 2420            | 17      | 2440            | 27          | 2460            | 39      | 2480            |

### 1.1.7 Test Tool and Duty Cycle

|                        |                                      |                         |
|------------------------|--------------------------------------|-------------------------|
| <b>Test Tool</b>       | Tera Term, V4.8                      |                         |
| <b>Modulation Mode</b> | <b>Duty Cycle Of Test Signal (%)</b> | <b>Duty Factor (dB)</b> |
| BT-LE(1Mbps)           | 67.74%                               | 1.69                    |

### 1.1.8 Power Index of Test Tool


| Modulation Mode | Test Frequency (MHz) |         |         |
|-----------------|----------------------|---------|---------|
|                 | 2402                 | 2440    | 2480    |
| BT-LE(1Mbps)    | default              | default | default |

## 1.2 Local Support Equipment List

| Support Equipment List |           |       |               |        |                        |
|------------------------|-----------|-------|---------------|--------|------------------------|
| No.                    | Equipment | Brand | Model         | FCC ID | Remarks                |
| 1                      | Notebook  | DELL  | Latitude 5400 | DoC    | ---                    |
| 2                      | Fixture   | ---   | ---           | ---    | Provided by applicant. |

Note: The support notebook and fixture are disconnected from EUT and removed from test table after sending command to EUT to control EUT to transmit continuously.

## 1.3 Test Setup Chart

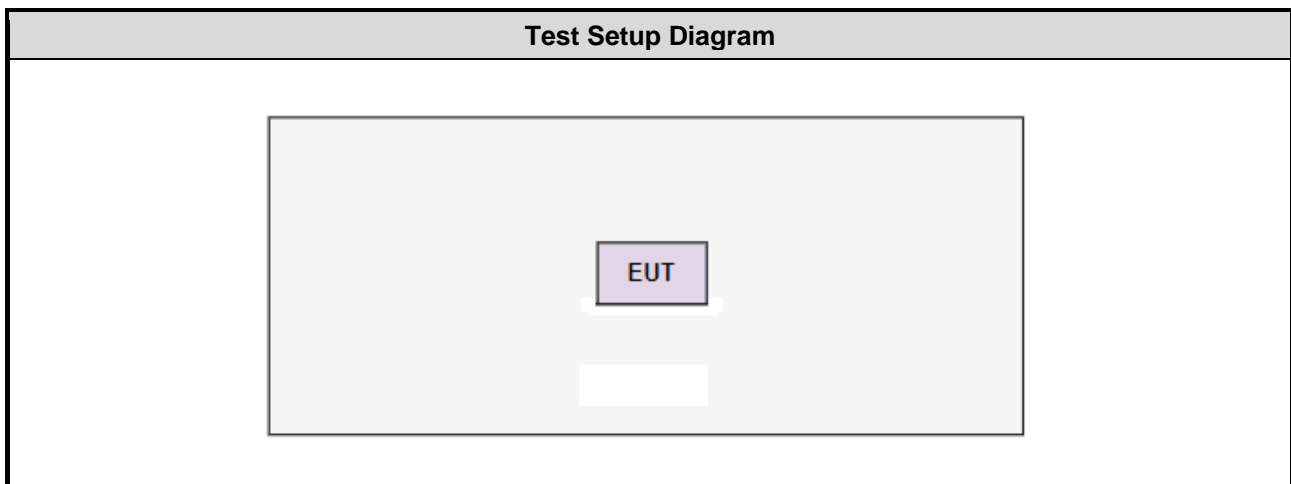

## 1.4 Test Equipment List and Calibration Data

| Test Item                  | Radiated Emission          |                           |                  |                  |                   |
|----------------------------|----------------------------|---------------------------|------------------|------------------|-------------------|
| Test Site                  | 966 chamber1 / (03CH01-WS) |                           |                  |                  |                   |
| Tested Date                | Oct. 27, 2023              |                           |                  |                  |                   |
| Instrument                 | Brand                      | Model No.                 | Serial No.       | Calibration Date | Calibration Until |
| Receiver                   | R&S                        | ESR3                      | 101657           | Mar. 03, 2023    | Mar. 02, 2024     |
| Spectrum Analyzer          | R&S                        | FSV40                     | 101498           | Nov. 21, 2022    | Nov. 20, 2023     |
| Loop Antenna               | R&S                        | HFH2-Z2                   | 100330           | Nov. 01, 2022    | Oct. 31, 2023     |
| Bilog Antenna              | SCHWARZBECK                | VULB9168                  | VULB9168-522     | Jul. 31, 2023    | Jul. 30, 2024     |
| Horn Antenna<br>1G-18G     | SCHWARZBECK                | BBHA 9120 D               | BBHA 9120 D 1096 | Nov. 25, 2022    | Nov. 24, 2023     |
| Horn Antenna<br>18G-40G    | SCHWARZBECK                | BBHA 9170                 | BBHA 9170508     | Dec. 30, 2022    | Dec. 29, 2023     |
| Preamplifier               | EMC                        | EMC02325                  | 980225           | Jun. 28, 2023    | Jun. 27, 2024     |
| Preamplifier               | EMC                        | EMC118A45SE               | 980898           | Jul. 14, 2023    | Jul. 13, 2024     |
| Preamplifier               | EMC                        | EMC184045SE               | 980903           | Jul. 17, 2023    | Jul. 16, 2024     |
| Loop Antenna Cable         | KOAX KABEL                 | 101354-BW                 | 101354-BW        | Oct. 03, 2023    | Oct. 02, 2024     |
| LF cable 3M                | Woken                      | CFD400NL-LW               | CFD400NL-001     | Oct. 03, 2023    | Oct. 02, 2024     |
| LF cable 11M               | EMC                        | EMCCFD400-NW-NW-1<br>1000 | 200801           | Oct. 03, 2023    | Oct. 02, 2024     |
| LF cable 1M                | EMC                        | EMCCFD400-NM-NM-10<br>00  | 160502           | Oct. 03, 2023    | Oct. 02, 2024     |
| RF Cable                   | EMC                        | EMC104-35M-35M-8000       | 210920           | Oct. 03, 2023    | Oct. 02, 2024     |
| RF Cable                   | EMC                        | EMC104-35M-35M-3000       | 210922           | Oct. 03, 2023    | Oct. 02, 2024     |
| Attenuator                 | Pasternack                 | PE7005-10                 | 10-1             | Oct. 05, 2023    | Oct. 04, 2024     |
| HIGHPASS FILTER<br>3.1-18G | WHK                        | WHK3.1/18G-10SS           | 39               | Oct. 05, 2023    | Oct. 04, 2024     |
| Measurement<br>Software    | Sporton                    | SENSE-15247_FS            | V5.10.8          | NA               | NA                |
| Measurement<br>Software    | Sporton                    | SENSE-EMI                 | V5.10.8          | NA               | NA                |

Note: Calibration Interval of instruments listed above is one year.

| Test Item               | RF Conducted  |                |            |                  |                   |
|-------------------------|---------------|----------------|------------|------------------|-------------------|
| Test Site               | (TH01-WS)     |                |            |                  |                   |
| Tested Date             | Nov. 08, 2023 |                |            |                  |                   |
| Instrument              | Brand         | Model No.      | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer       | R&S           | FSV40          | 101910     | Apr. 14, 2023    | Apr. 13, 2024     |
| Power Meter             | Anritsu       | ML2495A        | 1241002    | Nov. 23, 2022    | Nov. 22, 2023     |
| Power Sensor            | Anritsu       | MA2411B        | 1207366    | Nov. 23, 2022    | Nov. 22, 2023     |
| Attenuator              | Pasternack    | PE7005-10      | 10-2       | Oct. 05, 2023    | Oct. 04, 2024     |
| Measurement<br>Software | Sporton       | SENSE-15247_FS | V5.10.8    | NA               | NA                |

Note: Calibration Interval of instruments listed above is one year.



## 1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

| Measurement Uncertainty        |                 |
|--------------------------------|-----------------|
| Parameters                     | Uncertainty     |
| Bandwidth                      | $\pm 34.130$ Hz |
| Conducted power                | $\pm 0.808$ dB  |
| Power density                  | $\pm 0.583$ dB  |
| Conducted emission             | $\pm 2.715$ dB  |
| AC conducted emission          | $\pm 2.92$ dB   |
| Unwanted Emission $\leq 1$ GHz | $\pm 3.41$ dB   |
| Unwanted Emission $> 1$ GHz    | $\pm 4.59$ dB   |

## 2 Test Configuration

### 2.1 Testing Facility

|                             |  |
|-----------------------------|--|
| <b>Test Laboratory</b>      | International Certification Corporation  |
| <b>Test Site</b>            | CO01-WS, 03CH01-WS, TH01-WS  |
| <b>Address of Test Site</b> | No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) |

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

| Test item  | Modulation Mode | Test Frequency (MHz) | Test Configuration |
|--|-----------------|----------------------|--------------------|
| Unwanted Emissions ≤ 1GHz  | BT-LE(1Mbps)    | 2480                 | ---                |
| Unwanted Emissions > 1GHz<br>Conducted Output Power<br>6dB bandwidth<br>Power spectral density | BT-LE(1Mbps)    | 2402, 2440, 2480     | ---                |

### 3 Transmitter Test Results

#### 3.1 6dB and Occupied Bandwidth

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Test Procedures


###### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

###### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

##### 3.1.3 Test Setup



##### 3.1.4 Test Results

|                          |            |                  |            |
|--------------------------|------------|------------------|------------|
| <b>Ambient Condition</b> | 22°C / 64% | <b>Tested By</b> | Akun Chung |
|--------------------------|------------|------------------|------------|

Refer to Appendix A.

## 3.2 Conducted Output Power

### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup



### 3.2.4 Test Results

|                          |            |                  |            |
|--------------------------|------------|------------------|------------|
| <b>Ambient Condition</b> | 22°C / 64% | <b>Tested By</b> | Akun Chung |
|--------------------------|------------|------------------|------------|

Refer to Appendix B.

### 3.3 Power Spectral Density


#### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.3.3 Test Setup



#### 3.3.4 Test Results

|                          |            |                  |            |
|--------------------------|------------|------------------|------------|
| <b>Ambient Condition</b> | 22°C / 64% | <b>Tested By</b> | Akun Chung |
|--------------------------|------------|------------------|------------|

Refer to Appendix C.

### 3.4 Unwanted Emissions in Restricted Frequency Bands

#### 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

| Restricted Band Emissions Limit |                       |                         |                      |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)           | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                     | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                     | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                      | 30                    | 29                      | 30                   |
| 30~88                           | 100                   | 40                      | 3                    |
| 88~216                          | 150                   | 43.5                    | 3                    |
| 216~960                         | 200                   | 46                      | 3                    |
| Above 960                       | 500                   | 54                      | 3                    |

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


#### 3.4.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.4.3 Test Setup

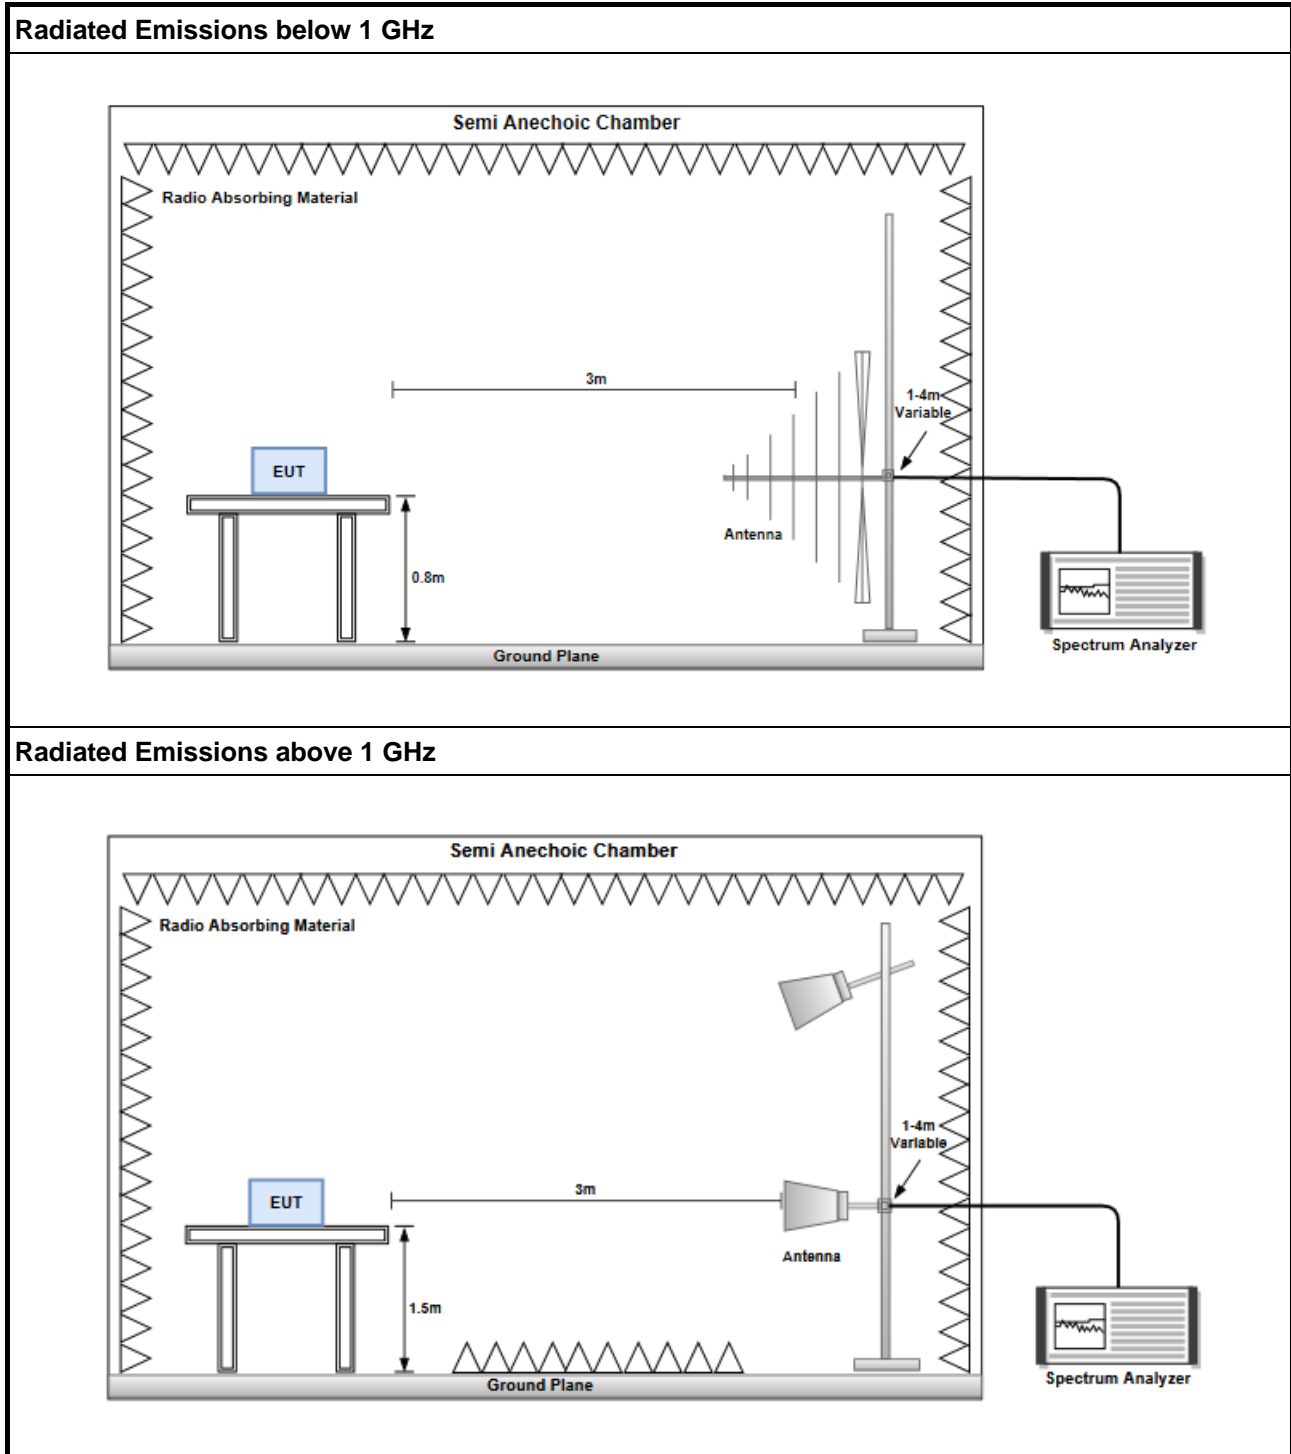

### 3.4.4 Test Results

|                          |            |                  |                    |
|--------------------------|------------|------------------|--------------------|
| <b>Ambient Condition</b> | 25°C / 64% | <b>Tested By</b> | Sean Yu / Paul Lin |
|--------------------------|------------|------------------|--------------------|

Refer to Appendix D.

## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.5.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



### 3.5.4 Test Results

|                          |            |                  |            |
|--------------------------|------------|------------------|------------|
| <b>Ambient Condition</b> | 22°C / 64% | <b>Tested By</b> | Akun Chung |
|--------------------------|------------|------------------|------------|

Refer to Appendix E.



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==



Summary

| Mode          | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------|---------------|--------------|----------|---------------|--------------|
| 2.4-2.4835GHz | -             | -            | -        | -             | -            |
| BT-LE(1Mbps)  | 760k          | 1.166M       | 1M17F1D  | 705k          | 1.028M       |

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

| Mode         | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|--------------|--------|------------|------------------|-----------------|
| BT-LE(1Mbps) | -      | -          | -                | -               |
| 2402MHz      | Pass   | 500k       | 760k             | 1.166M          |
| 2440MHz      | Pass   | 500k       | 716.25k          | 1.059M          |
| 2480MHz      | Pass   | 500k       | 705k             | 1.028M          |



Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth



2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS



2402MHz

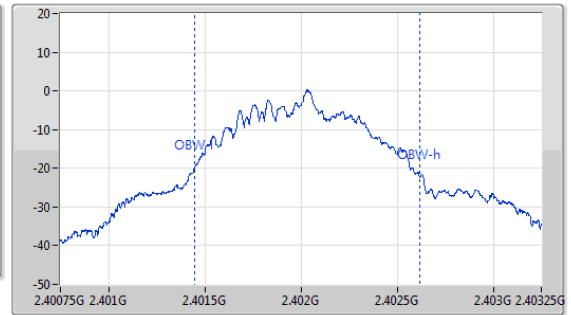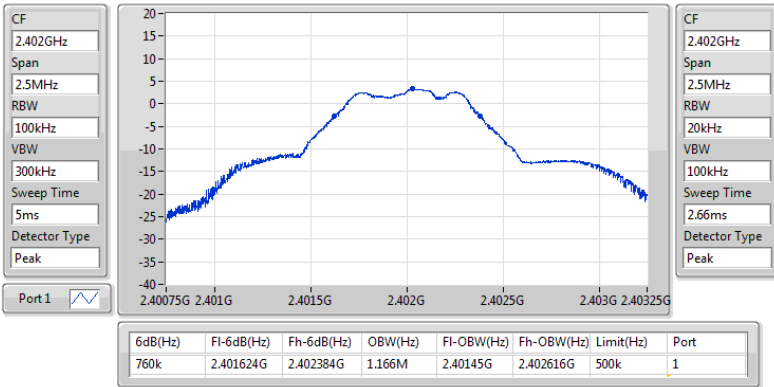


2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS

2440MHz

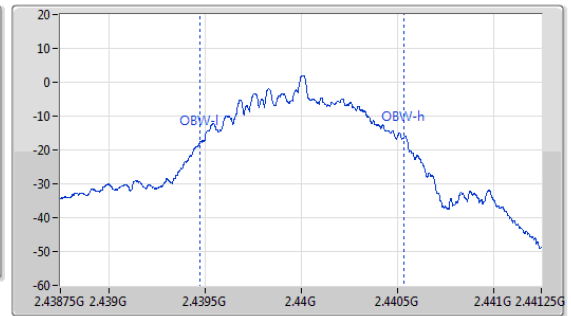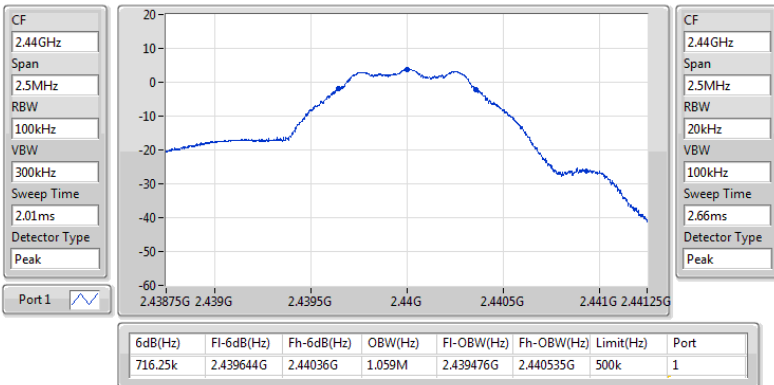

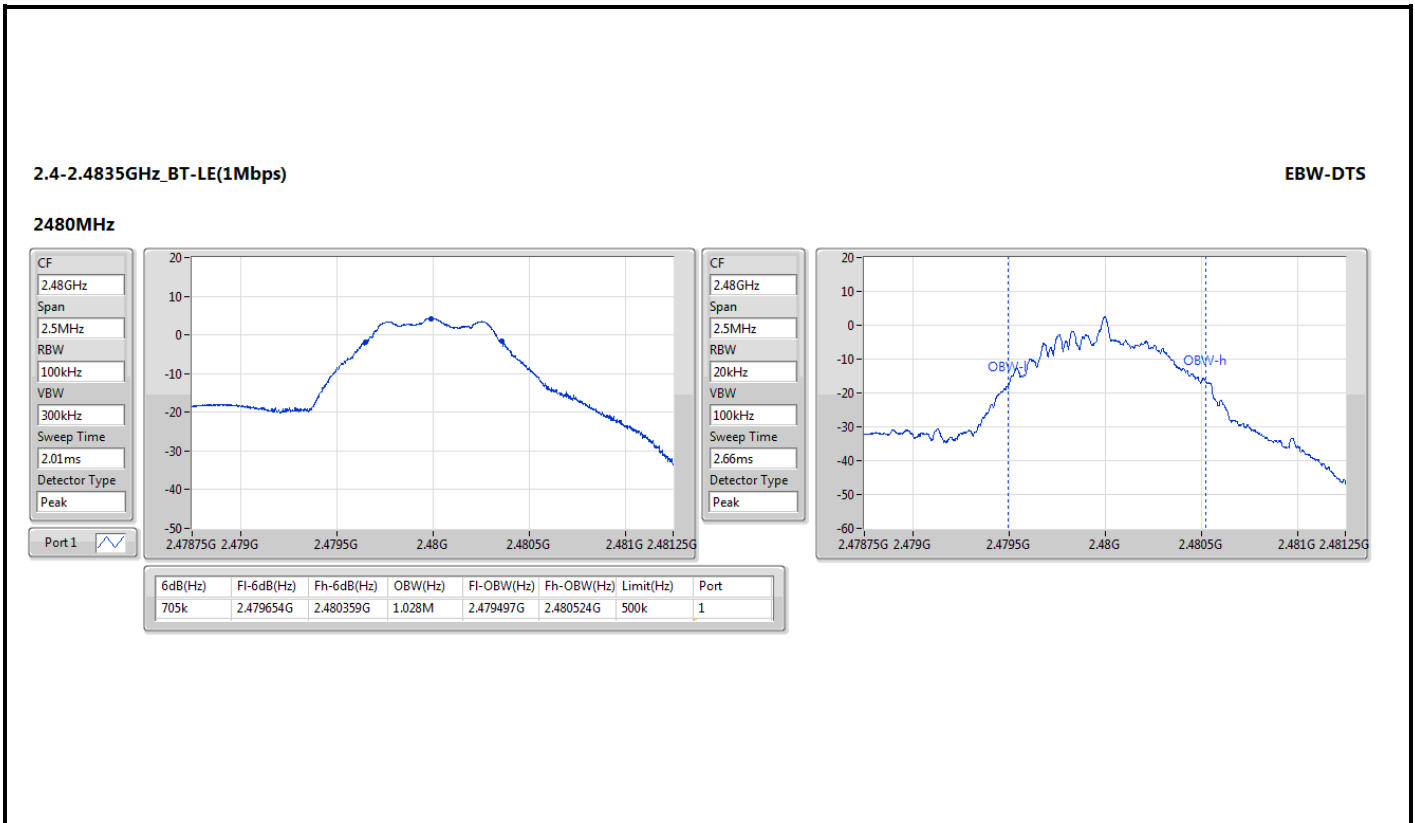



## Conducted Output Power (Peak)

Appendix B.1

### Summary

| Mode          | Total Power (dBm) | Power (W) |
|---------------|-------------------|-----------|
| 2.4-2.4835GHz | -                 | -         |
| BT-LE(1Mbps)  | 3.95              | 0.00248   |

### Result

| Mode         | Result | Antenna Gain (dBi) | Total Power (dBm) | Power Limit (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|--------------|--------|--------------------|-------------------|-------------------|------------|------------------|
| BT-LE(1Mbps) | -      | -                  | -                 | -                 | -          | -                |
| 2402MHz      | Pass   | 2.24               | 3.46              | 30.00             | 5.70       | 36.00            |
| 2440MHz      | Pass   | 2.24               | 3.71              | 30.00             | 5.95       | 36.00            |
| 2480MHz      | Pass   | 2.24               | 3.95              | 30.00             | 6.19       | 36.00            |



## Conducted Output Power (Average)

Appendix B.2

### Summary

| Mode          | Total Power (dBm) | Power (W) |
|---------------|-------------------|-----------|
| 2.4-2.4835GHz | -                 | -         |
| BT-LE(1Mbps)  | 3.92              | 0.00247   |

### Result

| Mode         | Result | Antenna Gain (dBi) | Total Power (dBm) | Power Limit (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|--------------|--------|--------------------|-------------------|-------------------|------------|------------------|
| BT-LE(1Mbps) | -      | -                  | -                 | -                 | -          | -                |
| 2402MHz      | Pass   | 2.24               | 3.42              | -                 | 5.66       | -                |
| 2440MHz      | Pass   | 2.24               | 3.67              | -                 | 5.91       | -                |
| 2480MHz      | Pass   | 2.24               | 3.92              | -                 | 6.16       | -                |

Note: Average power is for reference only.




**Summary**


| Mode          | PD<br>(dBm/3kHz) |
|---------------|------------------|
| 2.4-2.4835GHz | -                |
| BT-LE(1Mbps)  | -9.09            |

**Result**

| Mode         | Result | Antenna Gain<br>(dBi) | Power Density<br>(dBm/3kHz) | Power Density Limit<br>(dBm/3kHz) |
|--------------|--------|-----------------------|-----------------------------|-----------------------------------|
| BT-LE(1Mbps) | -      | -                     | -                           | -                                 |
| 2402MHz      | Pass   | 2.24                  | -12.03                      | 8.00                              |
| 2440MHz      | Pass   | 2.24                  | -10.87                      | 8.00                              |
| 2480MHz      | Pass   | 2.24                  | -9.09                       | 8.00                              |

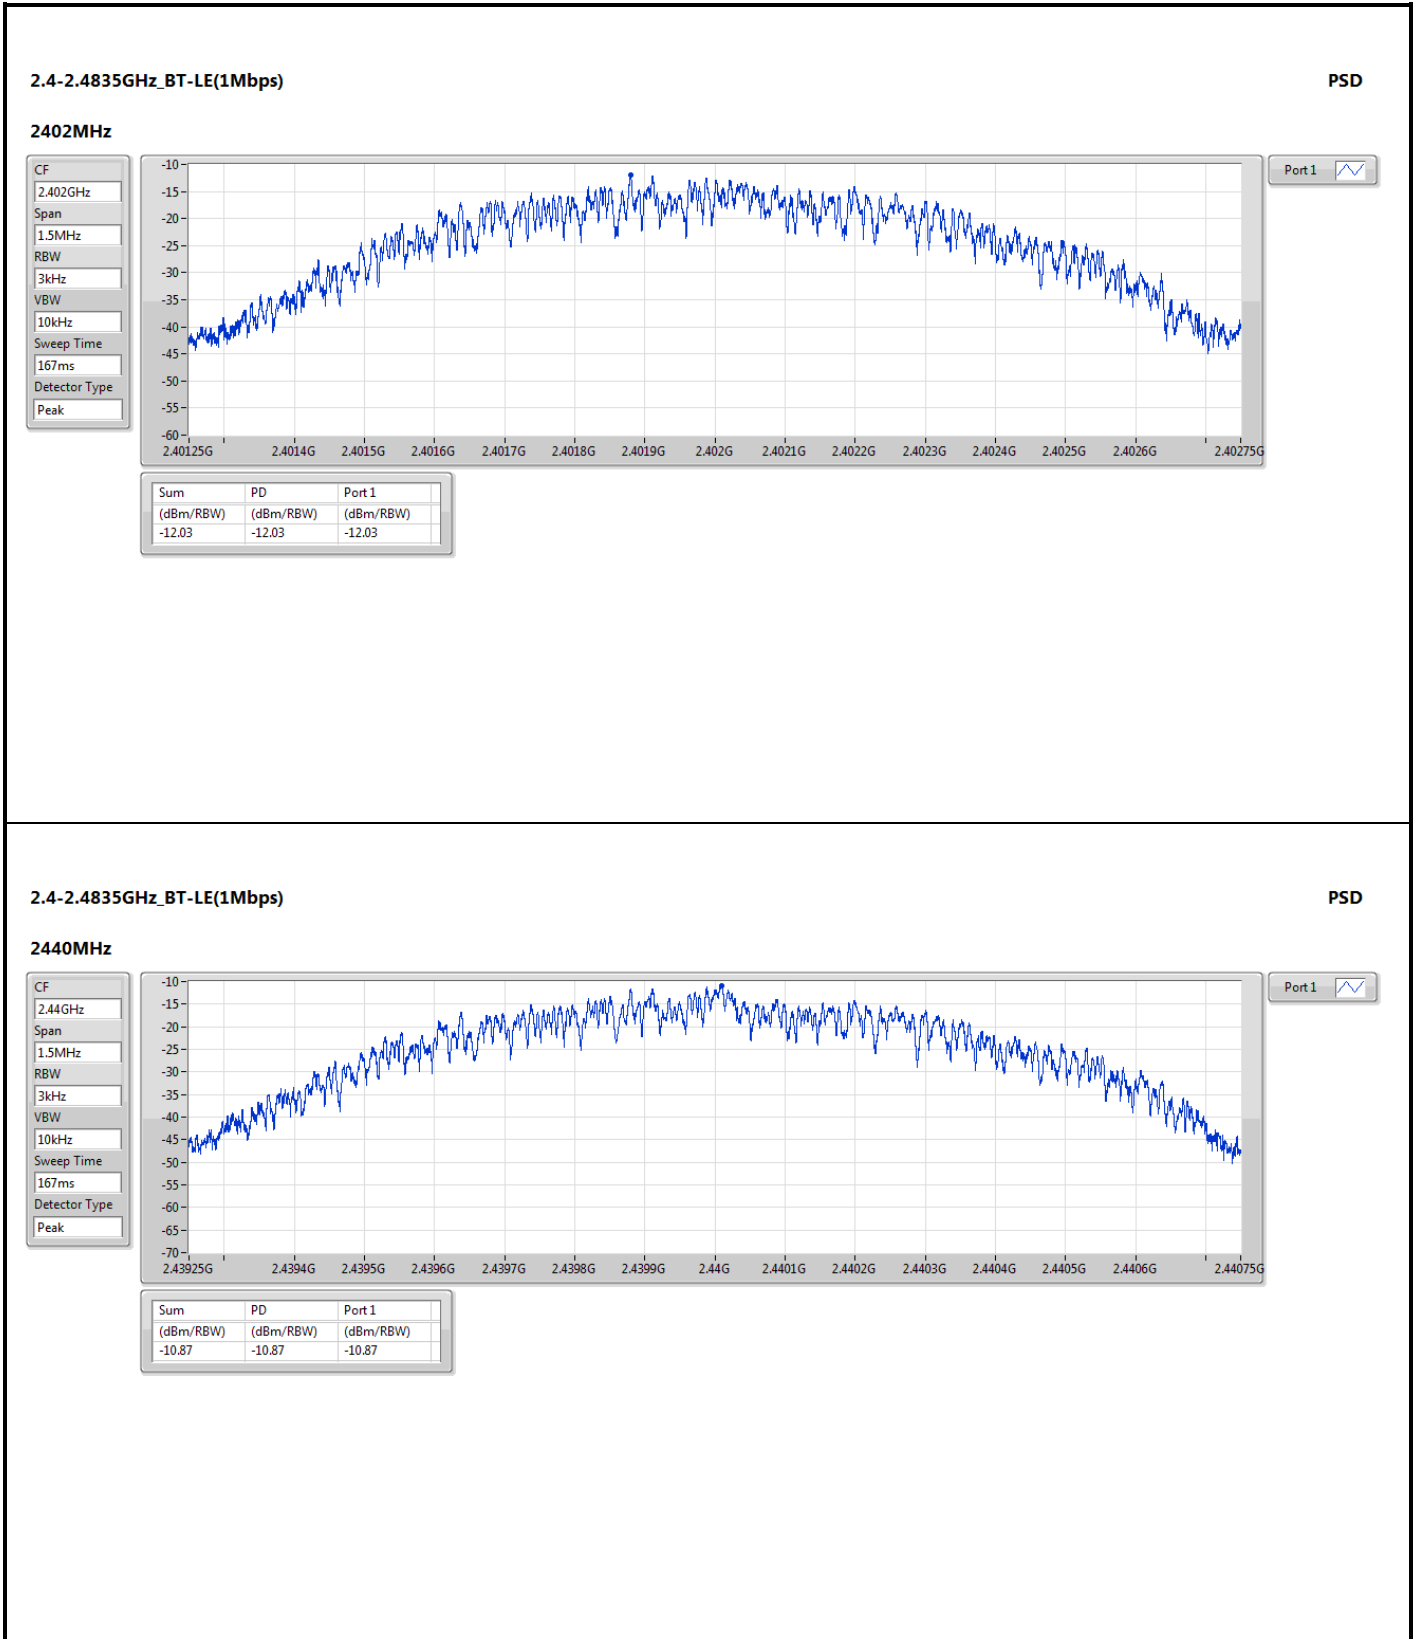



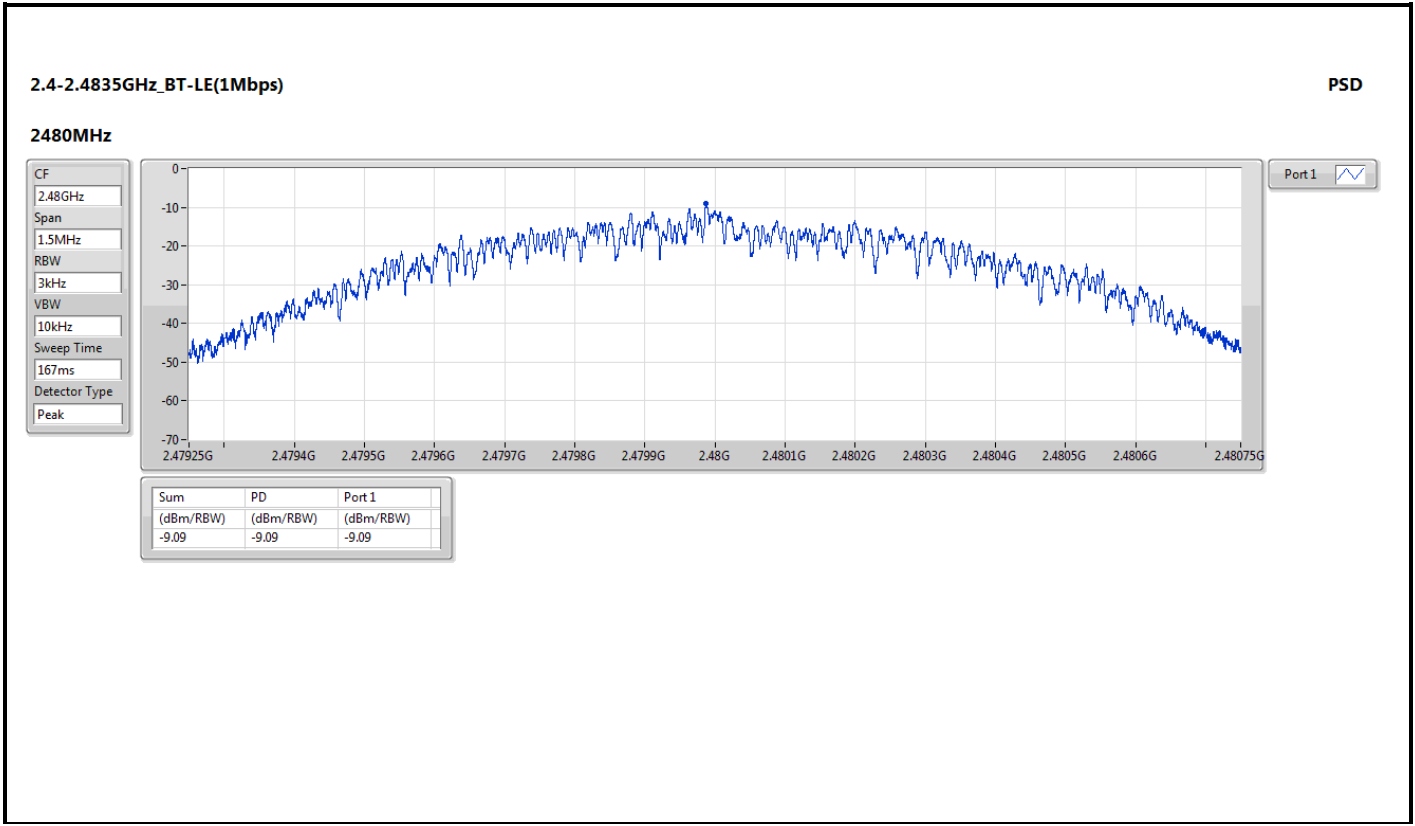




**Summary**

| <b>Mode</b> | <b>Result</b> | <b>Type</b> | <b>Freq (Hz)</b> | <b>Level (dBuV/m)</b> | <b>Limit (dBuV/m)</b> | <b>Margin (dB)</b> | <b>Condition</b> |
|-------------|---------------|-------------|------------------|-----------------------|-----------------------|--------------------|------------------|
| Mode 1      | Pass          | PK          | 46.49M           | 21.50                 | 40.00                 | -18.50             | Vertical         |




Mode 1

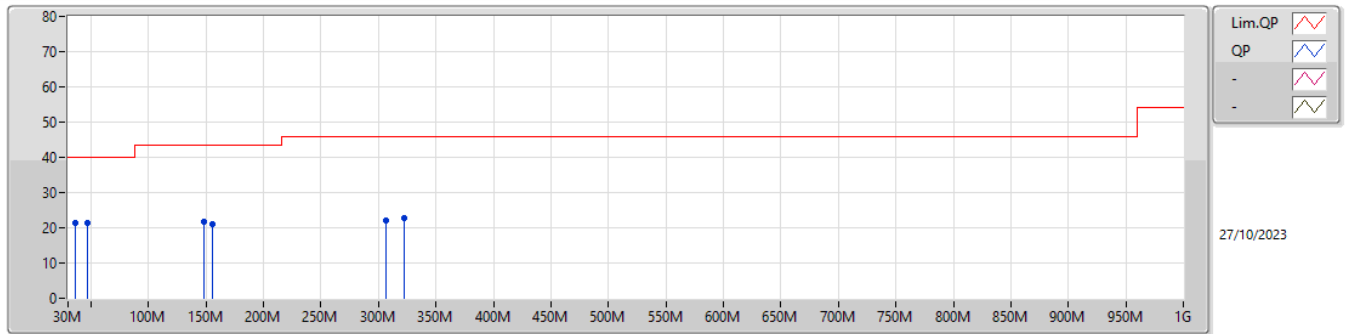

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB/m) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV/m) | AF (dB/m) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|---------------|----------|-----------|-------------|------------|---------|--------------|-----------|---------|---------|
| PK   | 35.82M    | 21.39          | 40.00          | -18.61      | -9.53         | 3        | Vertical  | -           | -          | -       | 30.92        | 17.92     | 0.55    | 28.00   |
| PK   | 46.49M    | 21.50          | 40.00          | -18.50      | -8.00         | 3        | Vertical  | -           | -          | -       | 29.50        | 19.45     | 0.61    | 28.06   |
| PK   | 148.34M   | 21.83          | 43.50          | -21.67      | -8.87         | 3        | Vertical  | -           | -          | -       | 30.70        | 18.40     | 1.14    | 28.41   |
| PK   | 156.1M    | 21.18          | 43.50          | -22.32      | -8.65         | 3        | Vertical  | -           | -          | -       | 29.83        | 18.59     | 1.17    | 28.41   |
| PK   | 306.45M   | 21.96          | 46.00          | -24.04      | -7.88         | 3        | Vertical  | -           | -          | -       | 29.84        | 18.86     | 1.67    | 28.41   |
| PK   | 321.97M   | 22.82          | 46.00          | -23.18      | -7.36         | 3        | Vertical  | -           | -          | -       | 30.18        | 19.34     | 1.70    | 28.40   |



Mode 1

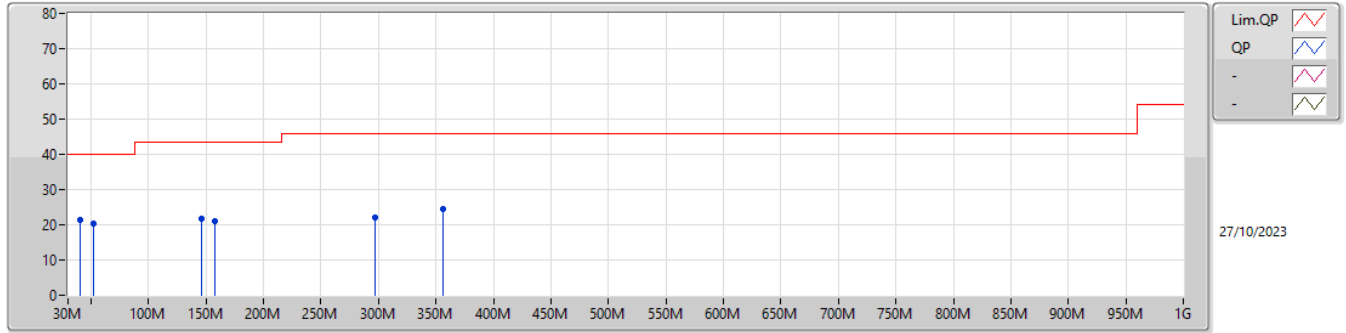

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|------------|----------------|---------------|---------|-----------------|--------------|------------|------------|
| PK   | 40.67M       | 21.32             | 40.00             | -18.68         | -8.78            | 3           | Horizontal | -              | -             | -       | 30.10           | 18.67        | 0.58       | 28.03      |
| PK   | 52.31M       | 20.51             | 40.00             | -19.49         | -7.94            | 3           | Horizontal | -              | -             | -       | 28.45           | 19.50        | 0.65       | 28.09      |
| PK   | 146.4M       | 21.64             | 43.50             | -21.86         | -8.80            | 3           | Horizontal | -              | -             | -       | 30.44           | 18.48        | 1.13       | 28.41      |
| PK   | 158.04M      | 21.12             | 43.50             | -22.38         | -8.64            | 3           | Horizontal | -              | -             | -       | 29.76           | 18.60        | 1.17       | 28.41      |
| PK   | 296.75M      | 22.05             | 46.00             | -23.95         | -8.20            | 3           | Horizontal | -              | -             | -       | 30.25           | 18.57        | 1.65       | 28.42      |
| PK   | 355.92M      | 24.55             | 46.00             | -21.45         | -6.79            | 3           | Horizontal | -              | -             | -       | 31.34           | 19.82        | 1.76       | 28.37      |




Summary

| Mode          | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|---------------|--------|------|-----------|----------------|----------------|-------------|----------|-----------|-------------|------------|----------|
| 2.4-2.4835GHz | -      | -    | -         | -              | -              | -           | -        | -         | -           | -          | -        |
| BT-LE(1Mbps)  | Pass   | AV   | 7.32G     | 51.40          | 54.00          | -2.60       | 3        | Vertical  | 283         | 3.32       | -        |



2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

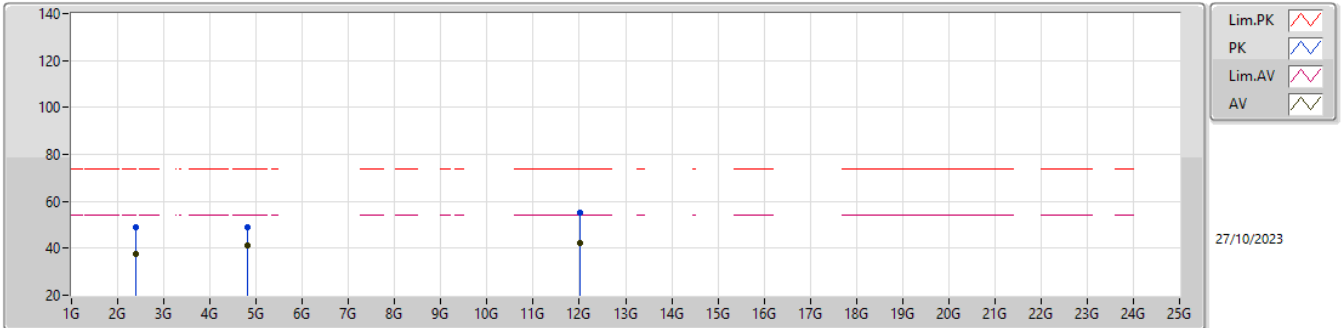


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|-----------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.39G     | 48.99          | 74.00          | -25.01      | 53.25      | 3        | Vertical  | 162         | 3.04       | -       | 27.72   | 4.95    | 36.93   |
| AV   | 2.39G     | 37.61          | 54.00          | -16.39      | 41.87      | 3        | Vertical  | 162         | 3.04       | -       | 27.72   | 4.95    | 36.93   |
| PK   | 4.804G    | 48.79          | 74.00          | -25.21      | 49.06      | 3        | Vertical  | 188         | 1          | -       | 31.40   | 6.85    | 38.52   |
| AV   | 4.804G    | 40.96          | 54.00          | -13.04      | 41.23      | 3        | Vertical  | 188         | 1          | -       | 31.40   | 6.85    | 38.52   |
| PK   | 12.01G    | 55.01          | 74.00          | -18.99      | 48.49      | 3        | Vertical  | 38          | 1          | -       | 39.45   | 10.02   | 42.95   |
| AV   | 12.01G    | 42.46          | 54.00          | -11.54      | 35.94      | 3        | Vertical  | 38          | 1          | -       | 39.45   | 10.02   | 42.95   |



2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

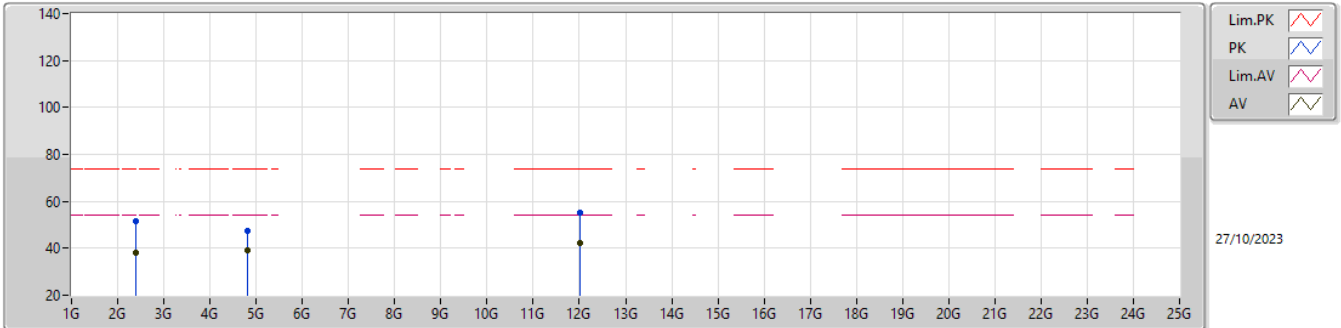


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition  | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|------------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.39G     | 51.39          | 74.00          | -22.61      | 55.65      | 3        | Horizontal | 270         | 2.41       | -       | 27.72   | 4.95    | 36.93   |
| AV   | 2.39G     | 38.01          | 54.00          | -15.99      | 42.27      | 3        | Horizontal | 270         | 2.41       | -       | 27.72   | 4.95    | 36.93   |
| PK   | 4.804G    | 47.44          | 74.00          | -26.56      | 47.71      | 3        | Horizontal | 279         | 1          | -       | 31.40   | 6.85    | 38.52   |
| AV   | 4.804G    | 38.96          | 54.00          | -15.04      | 39.23      | 3        | Horizontal | 279         | 1          | -       | 31.40   | 6.85    | 38.52   |
| PK   | 12.01G    | 55.17          | 74.00          | -18.83      | 48.65      | 3        | Horizontal | 57          | 1          | -       | 39.45   | 10.02   | 42.95   |
| AV   | 12.01G    | 42.42          | 54.00          | -11.58      | 35.90      | 3        | Horizontal | 57          | 1          | -       | 39.45   | 10.02   | 42.95   |



2.4-2.4835GHz\_BT-LE(1Mbps)

2440MHz\_TX

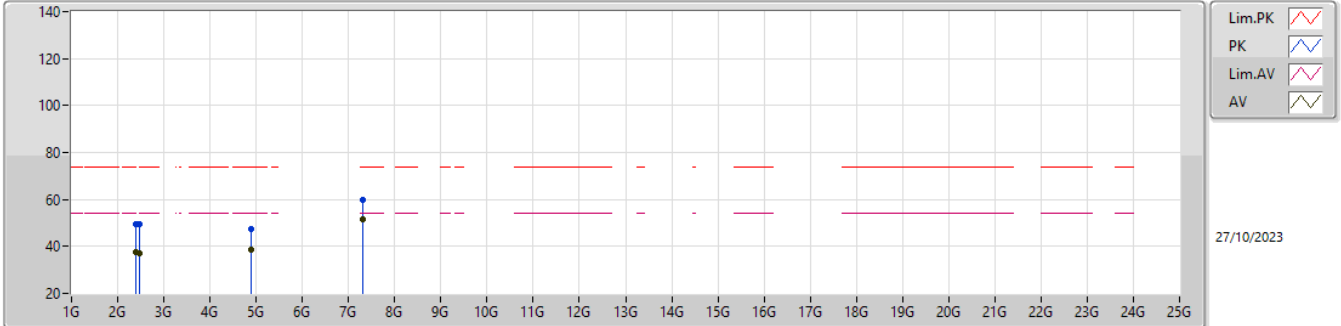


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|-----------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.39G     | 49.36          | 74.00          | -24.64      | 53.62      | 3        | Vertical  | 148         | 3.1        | -       | 27.72   | 4.95    | 36.93   |
| AV   | 2.39G     | 37.56          | 54.00          | -16.44      | 41.82      | 3        | Vertical  | 148         | 3.1        | -       | 27.72   | 4.95    | 36.93   |
| PK   | 2.4835G   | 49.64          | 74.00          | -24.36      | 54.09      | 3        | Vertical  | 148         | 3.1        | -       | 27.50   | 5.06    | 37.01   |
| AV   | 2.4835G   | 37.21          | 54.00          | -16.79      | 41.66      | 3        | Vertical  | 148         | 3.1        | -       | 27.50   | 5.06    | 37.01   |
| PK   | 4.88G     | 47.46          | 74.00          | -26.54      | 47.71      | 3        | Vertical  | 186         | 1          | -       | 31.40   | 6.92    | 38.57   |
| AV   | 4.88G     | 38.37          | 54.00          | -15.63      | 38.62      | 3        | Vertical  | 186         | 1          | -       | 31.40   | 6.92    | 38.57   |
| PK   | 7.32G     | 59.67          | 74.00          | -14.33      | 54.24      | 3        | Vertical  | 283         | 3.32       | -       | 36.46   | 8.43    | 39.46   |
| AV   | 7.32G     | 51.40          | 54.00          | -2.60       | 45.97      | 3        | Vertical  | 283         | 3.32       | -       | 36.46   | 8.43    | 39.46   |





2.4-2.4835GHz\_BT-LE(1Mbps)


2440MHz\_TX

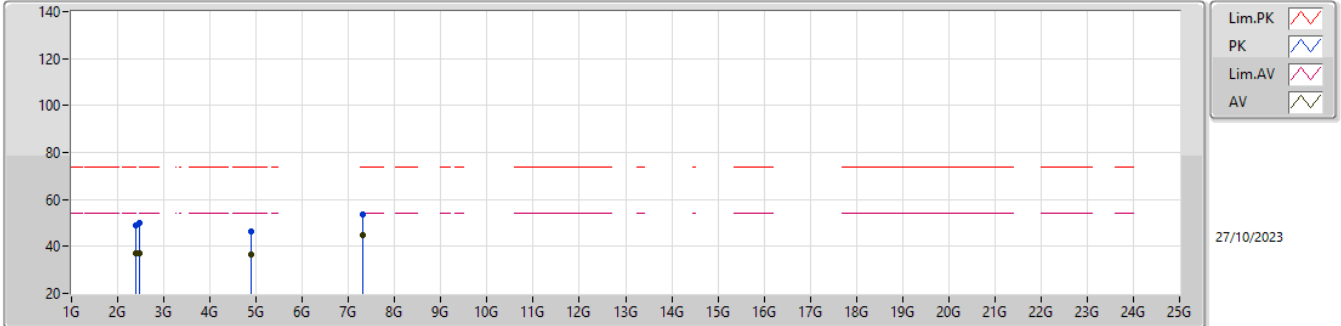

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition  | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|------------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.39G     | 48.93          | 74.00          | -25.07      | 53.19      | 3        | Horizontal | 270         | 2.86       | -       | 27.72   | 4.95    | 36.93   |
| AV   | 2.39G     | 37.03          | 54.00          | -16.97      | 41.29      | 3        | Horizontal | 270         | 2.86       | -       | 27.72   | 4.95    | 36.93   |
| PK   | 2.4835G   | 50.00          | 74.00          | -24.00      | 54.45      | 3        | Horizontal | 270         | 2.86       | -       | 27.50   | 5.06    | 37.01   |
| AV   | 2.4835G   | 36.93          | 54.00          | -17.07      | 41.38      | 3        | Horizontal | 270         | 2.86       | -       | 27.50   | 5.06    | 37.01   |
| PK   | 4.88G     | 46.24          | 74.00          | -27.76      | 46.49      | 3        | Horizontal | 278         | 1.03       | -       | 31.40   | 6.92    | 38.57   |
| AV   | 4.88G     | 36.37          | 54.00          | -17.63      | 36.62      | 3        | Horizontal | 278         | 1.03       | -       | 31.40   | 6.92    | 38.57   |
| PK   | 7.32G     | 53.84          | 74.00          | -20.16      | 48.41      | 3        | Horizontal | 273         | 1.00       | -       | 36.46   | 8.43    | 39.46   |
| AV   | 7.32G     | 44.81          | 54.00          | -9.19       | 39.38      | 3        | Horizontal | 273         | 1.00       | -       | 36.46   | 8.43    | 39.46   |

2.4-2.4835GHz\_BT-LE(1Mbps)


2480MHz\_TX

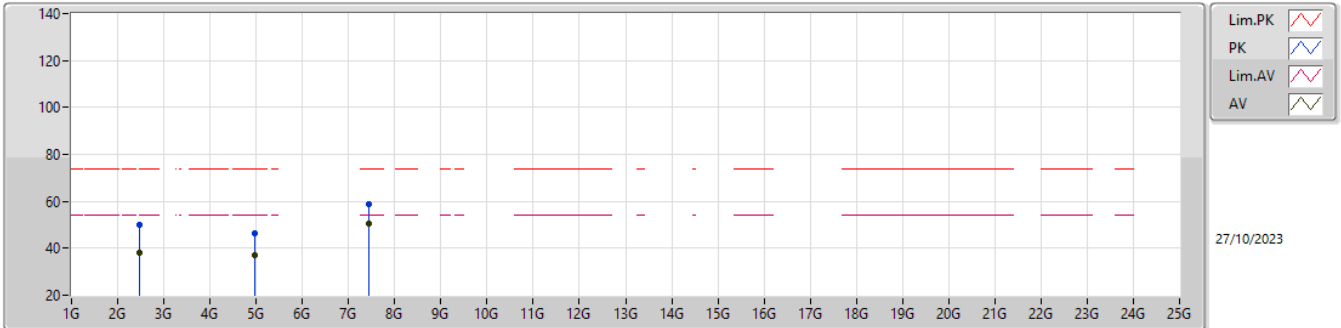

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|-----------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.4835G   | 50.09          | 74.00          | -23.91      | 54.54      | 3        | Vertical  | 183         | 3.13       | -       | 27.50   | 5.06    | 37.01   |
| AV   | 2.4835G   | 37.96          | 54.00          | -16.04      | 42.41      | 3        | Vertical  | 183         | 3.13       | -       | 27.50   | 5.06    | 37.01   |
| PK   | 4.96G     | 46.62          | 74.00          | -27.38      | 46.73      | 3        | Vertical  | 248         | 1          | -       | 31.52   | 6.99    | 38.62   |
| AV   | 4.96G     | 36.90          | 54.00          | -17.10      | 37.01      | 3        | Vertical  | 248         | 1          | -       | 31.52   | 6.99    | 38.62   |
| PK   | 7.44G     | 59.05          | 74.00          | -14.95      | 53.68      | 3        | Vertical  | 282         | 3.16       | -       | 36.48   | 8.50    | 39.61   |
| AV   | 7.44G     | 50.46          | 54.00          | -3.54       | 45.09      | 3        | Vertical  | 282         | 3.16       | -       | 36.48   | 8.50    | 39.61   |

2.4-2.4835GHz\_BT-LE(1Mbps)

2480MHz\_TX

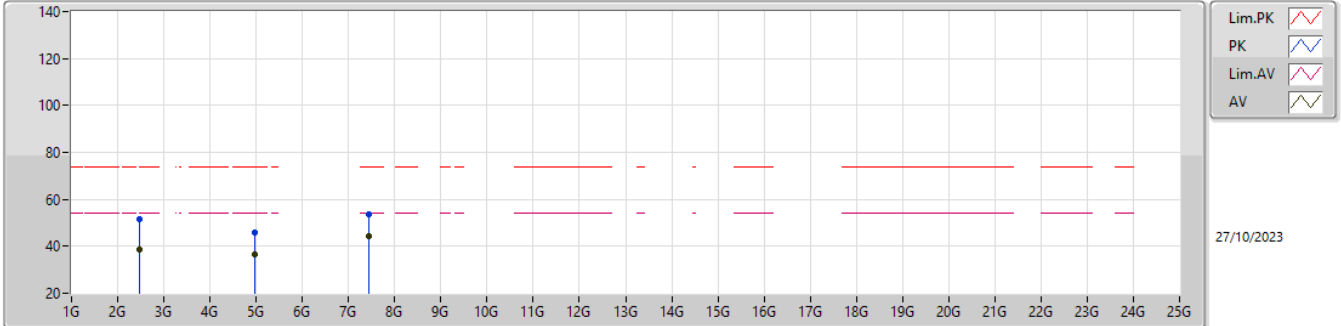

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition  | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|------------|-------------|------------|---------|---------|---------|---------|
| PK   | 2.4835G   | 51.35          | 74.00          | -22.65      | 55.80      | 3        | Horizontal | 274         | 2.52       | -       | 27.50   | 5.06    | 37.01   |
| AV   | 2.4835G   | 38.85          | 54.00          | -15.15      | 43.30      | 3        | Horizontal | 274         | 2.52       | -       | 27.50   | 5.06    | 37.01   |
| PK   | 4.96G     | 45.81          | 74.00          | -28.19      | 45.92      | 3        | Horizontal | 276         | 1          | -       | 31.52   | 6.99    | 38.62   |
| AV   | 4.96G     | 36.52          | 54.00          | -17.48      | 36.63      | 3        | Horizontal | 276         | 1          | -       | 31.52   | 6.99    | 38.62   |
| PK   | 7.44G     | 53.62          | 74.00          | -20.38      | 48.25      | 3        | Horizontal | 283         | 1          | -       | 36.48   | 8.50    | 39.61   |
| AV   | 7.44G     | 44.30          | 54.00          | -9.70       | 38.93      | 3        | Horizontal | 283         | 1          | -       | 36.48   | 8.50    | 39.61   |

