

FCC Test Report

FCC ID : XNAWPM05

Equipment : BPM Connect

Model No. : WPM05

Brand Name : Withings

Applicant : Withings SA

Address : 2 rue Maurice Hartmann

92130 Issy-Les-Moulineaux

France

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 18, 2019

Tested Date : May 07 ~ May 13, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen Assistant Manager Gary Chang / Manager

RA

Page: 1 of 36

Testing Laboratory

Report No.: FR941802AE

Report Version: Rev. 02



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	g
1.6	Deviation from Test Standard and Measurement Procedure	g
1.7	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	17
3.4	Power Spectral Density	19
3.5	Emissions in Restricted Frequency Bands	22
3.6	Emissions in non-restricted Frequency Bands	34
4	TEST LABORATORY INFORMATION	36



Release Record

Report No.	Version	Description	Issued Date
FR941802AE	Rev. 01	Initial issue	May 27, 2019
FR941802AE	Rev. 02	Added ANSI C63.4-2014 on P9.	Jun. 06, 2019

Report No.: FR941802AE Page: 3 of 36



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.183MHz 51.28 (Margin -13.05dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 4804.00MHz	Pass
15.209	Radiated Effissions	49.98 (Margin -4.02dB) - AV	Fd55
15.247(b)(3)	Maximum Output Power	Power [dBm]: 9.43	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Page: 4 of 36

Report No.: FR941802AE

Report Version: Rev. 02



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz) Bluetooth Ch. Freq. (MHz) Channel Number Data Rate						
2400-2483.5 V4.1 LE 2402-2480 0-39 [40] 1 Mbps						
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.						

1.1.2 Antenna Details

Ant. No.	Brand	Model	Туре	Connector	Gain (dBi)
1	BROADCOM	BCM9Fractal	PCB	NA	2.8

1.1.3 EUT Operational Condition

Power Supply Type	3.7Vdc from battery Brand: CEL Model: 652265-1000mAh 5Vdc from host
-------------------	--

Page: 5 of 36

1.1.4 Accessories

N/A

Report No.: FR941802AE



1.1.5 Channel List

	Frequency	band (MHz)			2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	Tera term, V4.101			
Duty Cycle and Duty Factor	Duty Cycle (%) Duty Factor (dB)			
Duty Cycle and Duty Factor	63.59	1.97		

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)			
Wodulation Wode	2402	2440	2480	
GFSK/1Mbps	Default	Default	Default	

Page: 6 of 36


Report No.: FR941802AE




1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Notebook	DELL	Latitude E6440	JPXMD12			

1.3 Test Setup Chart

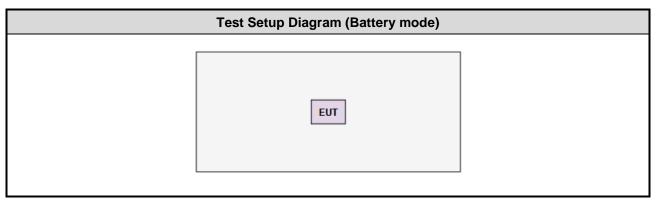

Note: The support notebook is connected to fixture by console cable and is disconnected from EUT and removed from test table after sending command to control the EUT to transmit continuously.

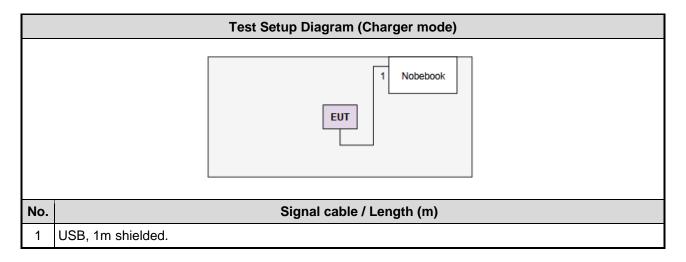

Page: 7 of 36

Report No.: FR941802AE



1.4 Test Equipment List and Calibration Data

Conducted Emission	Conducted Emission						
Conduction room 1 / (Conduction room 1 / (CO01-WS)						
Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until						
R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020			
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 05, 2018	Nov. 04, 2019			
Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 23, 2019			
Measurement Software AUDIX e3 6.120210k NA NA NA							
	Conduction room 1 / (Manufacturer R&S SCHWARZBECK Woken	Conduction room 1 / (CO01-WS) Manufacturer Model No. R&S ESR3 SCHWARZBECK Schwarzbeck 8127 Woken CFD200-NL	Manufacturer Model No. Serial No. R&S ESR3 101657 SCHWARZBECK Schwarzbeck 8127 8127-667 Woken CFD200-NL CFD200-NL-001	Manufacturer Model No. Serial No. Calibration Date R&S ESR3 101657 Jan. 08, 2019 SCHWARZBECK Schwarzbeck 8127 8127-667 Nov. 05, 2018 Woken CFD200-NL CFD200-NL-001 Oct. 23, 2018			

Test Item	Radiated Emission						
Test Site	966 chamber1 / (03Cl	H01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019		
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 18, 2018	Jul. 17, 2019		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019		
Preamplifier	EMC	EMC02325	980225	Jul. 20, 2018	Jul. 19, 2019		
Preamplifier	Agilent	83017A	MY39501308	Oct. 04, 2018	Oct. 03, 2019		
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019		
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 08, 2018	Oct. 07, 2019		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 08, 2018	Oct. 07, 2019		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 08, 2018	Oct. 07, 2019		
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 08, 2018	Oct. 07, 2019		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 08, 2018	Oct. 07, 2019		
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 08, 2018	Oct. 07, 2019		
Measurement Software	SENSE-15247_DTS	V5.10	NA	NA	NA		
Note: Calibration Inter	val of instruments liste	d above is one year.					

Report No.: FR941802AE Report Version: Rev. 02



Test Item	RF Conducted						
Test Site	(TH01-WS)	(TH01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020		
Power Meter	Anritsu	ML2495A	1241002	Oct. 09, 2018	Oct. 08, 2019		
Power Sensor	Anritsu	MA2411B	1207366	Oct. 09, 2018	Oct. 08, 2019		
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 25, 2018	Oct. 24, 2019		
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA		
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.						

1.5 **Test Standards**

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013

ANSI C63.4-2014

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.6 **Deviation from Test Standard and Measurement Procedure**

None

Measurement Uncertainty 1.7

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Radiated emission ≤ 1GHz	±3.41 dB			
Radiated emission > 1GHz	±4.59 dB			

Page: 9 of 36

Report No.: FR941802AE

Report Version: Rev. 02



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 62%	Alex Tsai
Radiated Emissions	03CH01-WS	22°C / 62%	Akun Chung
RF Conducted	TH01-WS	20°C / 66%	Aska Huang

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

> CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2480	1Mbps	2
Radiated Emissions ≤ 1GHz	BT LE	2480	1Mbps	1, 2
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1

NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
- 2. Test configurations are listed as below:
 - 1) Test Configuration 1: Battery mode
 - 2) Test Configuration 2: Charger mode

Report No.: FR941802AE Page: 10 of 36

Report Version: Rev. 02



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5 66 - 56 * 56 - 46 *						
0.5-5 56 46						
5-30 60 50						
Note 1: * Decreases with the logarithm of the frequency.						

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

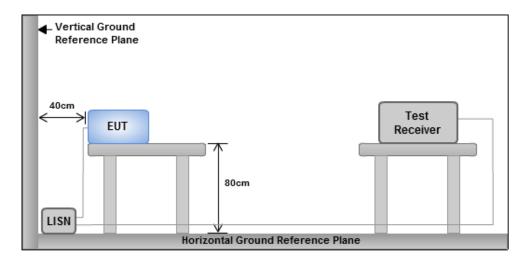


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR941802AE Page: 11 of 36




3.1.4 Test Result of Conducted Emissions

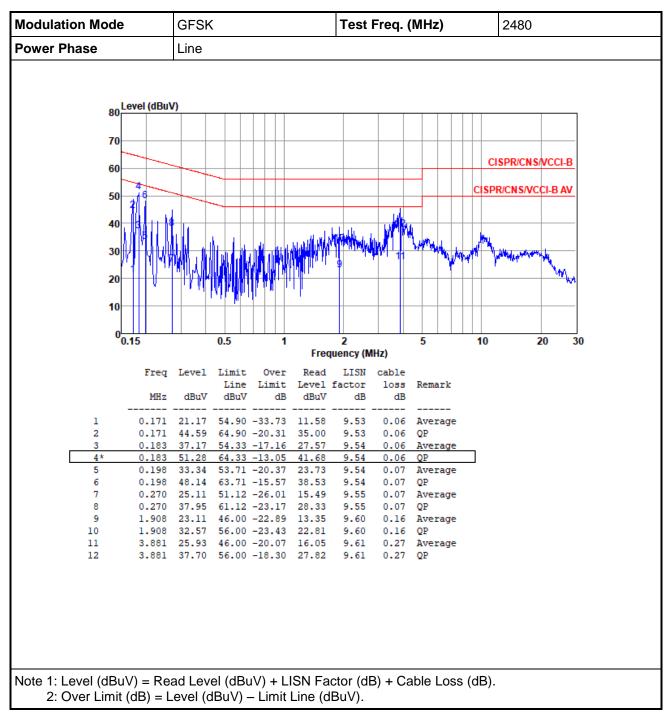

Report No.: FR941802AE Report Version: Rev. 02



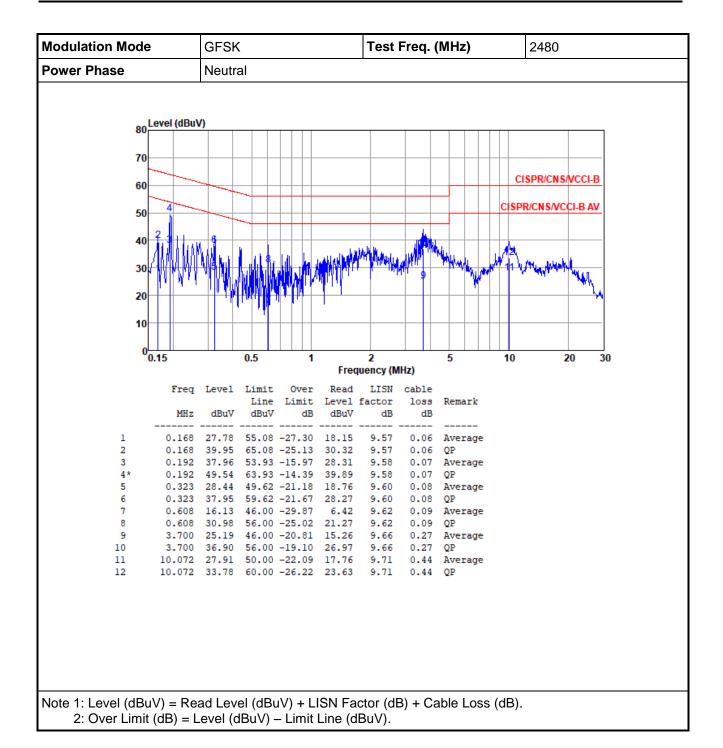

Report No.: FR941802AE Page: 13 of 36



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



Report No.: FR941802AE Page: 14 of 36



3.2.4 Test Result of 6dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB	Min-OBW
2.4-2.4835GHz	(nz) -	(nz) -	_	(Hz)	(Hz) -
BT-LE(1Mbps)	699.275k	1.049M	1M05F1D	692.029k	1.046M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth; **Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

rtoourt				
Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	695.652k	1.046M
2440MHz	Pass	500k	692.029k	1.049M
2480MHz	Pass	500k	699.275k	1.046M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

Report No.: FR941802AE Report Version: Rev. 02 Page: 15 of 36



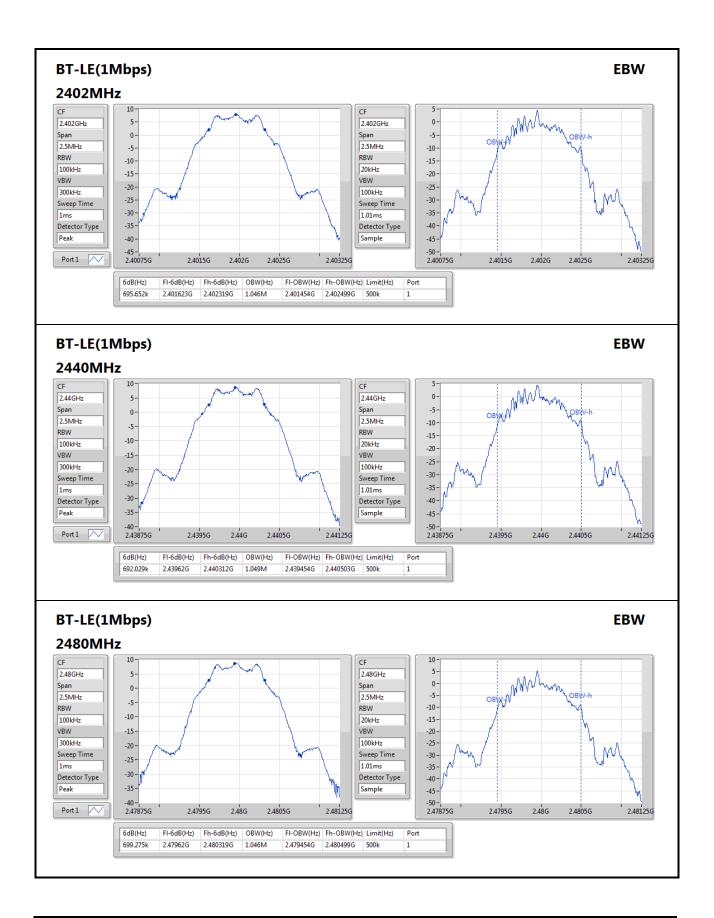

Report No.: FR941802AE Report Version: Rev. 02



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR941802AE Page: 17 of 36



3.3.4 Test Result of Maximum Output Power

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.43	0.00877

Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.80	8.55	30.00
2440MHz	Pass	2.80	9.04	30.00
2480MHz	Pass	2.80	9.43	30.00

Summary of Conducted (Average) Output Power

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.37	0.00865

Result

Nesuit				
Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.80	8.44	-
2440MHz	Pass	2.80	8.96	-
2480MHz	Pass	2.80	9.37	-

Note: Average power is for reference only.

Report No.: FR941802AE
Report Version: Rev. 02

Report No.: FR941802AE Page: 18 of 36



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



Report No.: FR941802AE

Page: 19 of 36



3.4.4 Test Result of Power Spectral Density

Summary


Mode	PD	
	(dBm/RBW)	
2.4-2.4835GHz	-	
BT-LE(1Mbps)	-4.72	

Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.80	-5.39	8.00
2440MHz	Pass	2.80	-4.82	8.00
2480MHz	Pass	2.80	-4.72	8.00

Report No.: FR941802AE Page: 20 of 36



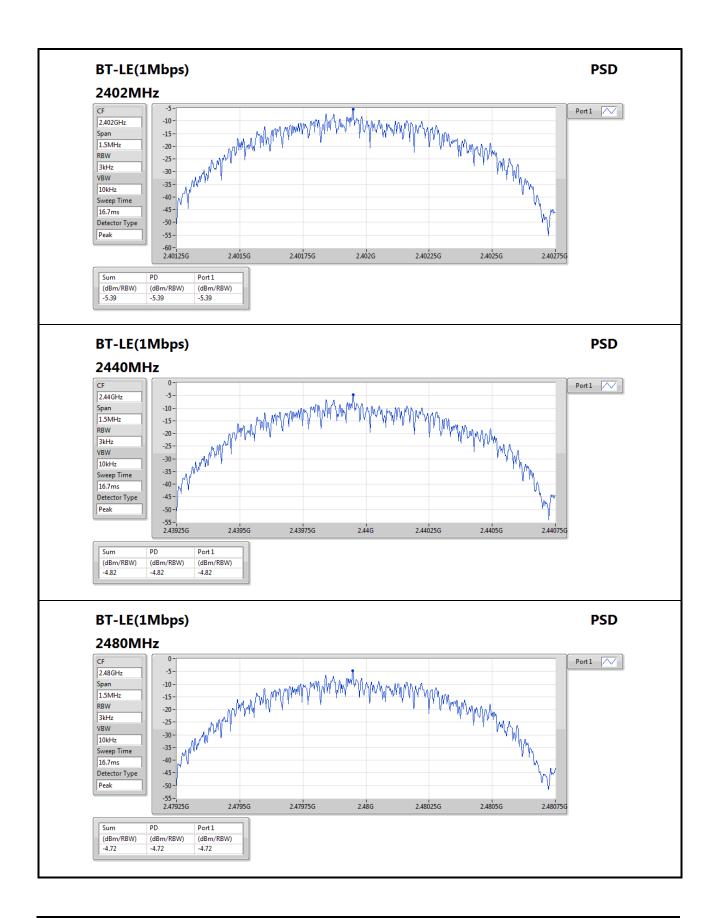

Report No.: FR941802AE Report Version: Rev. 02



3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR941802AE Page: 22 of 36




3.5.3 Test Setup

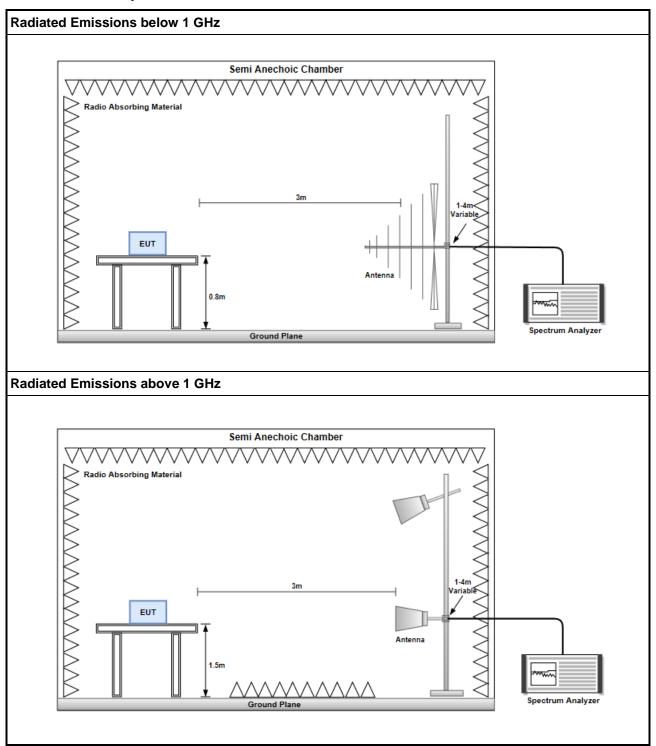



Test Configuration 1: Battery mode

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

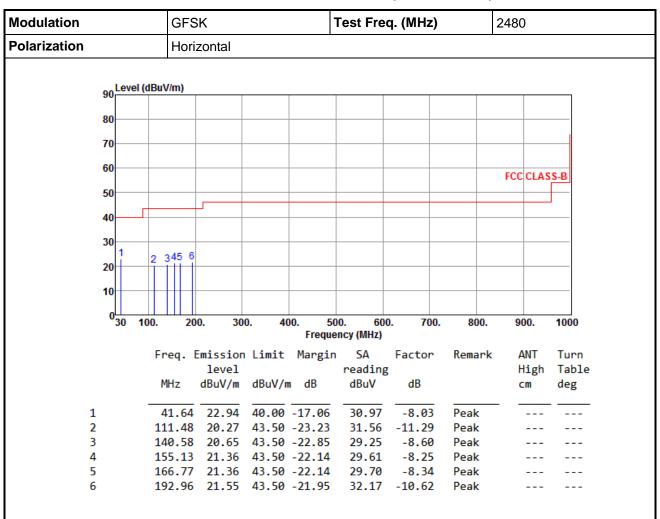

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page: 24 of 36

Report No.: FR941802AE

Report Version: Rev. 02



Modulation				GFS	K			-	Test Fre	q. (MHz)	2480	0	
Polarization				Verti	cal									
	80 70 60 50 40	-		uV/m)			6					FCC	CLAS	S-B
	30 20 10		3		5									
		30	100.	20	0. 30	0 4	00.	FO	00. 600	0. 700	0. 800		00.	1000
		30	100.	20	U. 3U	U. 41			ency (MHz)	U. 700	J. 800	. 9	00.	1000
				req. E	mission level dBuV/m				SA reading dBuV	Factor dB	Remar	I	ANT High cm	Turn Table deg
1 2				30.97 54.25	29.29 27.33	40.00			38.13 35.37	-8.84 -8.04				
3				74.62		40.00	-16.	99	34.75	-11.74	Peak			
5			2	232.73	25.32		-20.	68		-10.10	Peak			
6)		4	161.65	35.68	46.00	-10.	32	39.34	-3.66	Peak			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


Page: 25 of 36

Report No.: FR941802AE

Report Version: Rev. 02



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

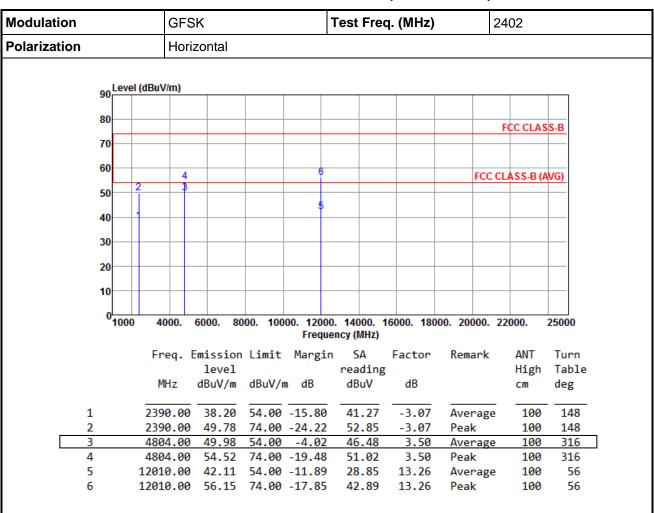


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

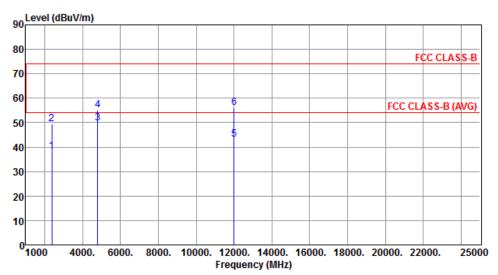

	Freq.	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
4	2200 00	20.24	<u></u> -	15 76	44 24		A		450
1	2390.00	38.24	54.00	-15./6	41.31	-3.07	Average	308	159
2	2390.00	49.62	74.00	-24.38	52.69	-3.07	Peak	308	159
3	4804.00	49.80	54.00	-4.20	46.30	3.50	Average	100	84
4	4804.00	55.20	74.00	-18.80	51.70	3.50	Peak	100	84
5	12010.00	43.10	54.00	-10.90	29.84	13.26	Average	100	53
6	12010.00	56.22	74.00	-17.78	42.96	13.26	Peak	100	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

The previous version of the test report has been cancelled and replaced by new version.

Report No.: FR941802AE Report Version: Rev. 02



Modulation			GFS	SK		-	Test Fred	q. (MHz)		2440	
Polarization			Hori	zontal		•					
	90	Level ((dBuV/m)								
	80									FCC CLAS	S-B
	70										
	60		6						FCC	CLASS-B (A	VG)
	50	2		- i							
	40										
	30										
	20										
	10										
	0	1000	4000.	6000. 80	000. 100	00. 12000	. 14000. 1	16000. 180	00. 20000.	22000.	25000
						Freque	ncy (MHz)				
			Freq. I	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			•	level			reading			High	Tabl
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
	1		2390.00			-15.83	41.24	-3.07	Average		139
	2		2390.00			-24.84	52.23	-3.07	Peak	100	139
	3		2483.50				42.25	-3.22	Average		139
	4 5		2483.50 4880.00				52.17 45.85	-3.22 3.61	Peak	100 100	139 321
	6		4880.00				49.96	3.61	Average Peak	100	321
	U		4000.00	33.37	74.00	-20.43	47.70	5.01	reak	TOO	221

42.92

8.80

Peak

52

100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

7320.00 51.72 74.00 -22.28


*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR941802AE Page: 28 of 36



Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

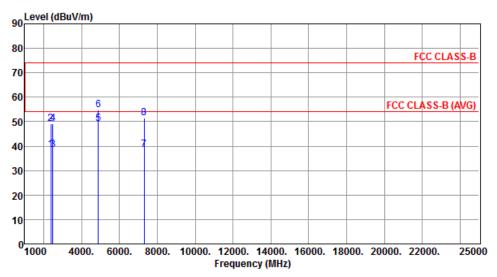

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	38.51	54.00	-15.49	41.58	-3.07	Average	320	174
2	2390.00	49.23	74.00	-24.77	52.30	-3.07	Peak	320	174
3	2483.50	38.63	54.00	-15.37	41.85	-3.22	Average	320	174
4	2483.50	49.16	74.00	-24.84	52.38	-3.22	Peak	320	174
5	4880.00	49.24	54.00	-4.76	45.63	3.61	Average	100	92
6	4880.00	54.72	74.00	-19.28	51.11	3.61	Peak	100	92
7	7320.00	38.37	54.00	-15.63	29.57	8.80	Average	100	162
8	7320.00	51.33	74.00	-22.67	42.53	8.80	Peak	100	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

The previous version of the test report has been cancelled and replaced by new version.

Report No.: FR941802AE Report Version: Rev. 02

Page: 29 of 36



Modulation			GF	SK				Test	Freq	ı. (MHz)		24	80	
Polarization			Но	rizo	ntal							•		
		Lovel	(dBu\//m)											
	90	Level	(dBuV/m)											
	80												<u> </u>	
	70											F	CC CLAS	S-B
	70													
	60		2	4								FCC CL	ASS-B (A	WG)
	50			3	- 6									
	40	l .												
	40													
	30													
	20													
	40													
	10													
	0	1000	4000.	60	00. 80	000. 10		0. 140 ency (f		6000. 180	000. 200	000. 22	000.	25000
			Frea.	Fmi	ssion	Limit	: Margi		A	Factor	Rema	ark	ANT	Turn
					level		6-		ding				High	Table
			MHz	dE	BuV/m	dBuV/	m dB	dB	uV	dB			cm	deg
1	L		2483.5	0 3	37.15	54.00	-16.85	40	.37	-3.22	Aver	rage	100	142
	2		2483.5				-18.74		.48	-3.22	Peak	_	100	142
	3		4960.0				-4.92		.22	3.86		rage	100	314
4	1 5						-20.38 -15.70	-	.76 .76	3.86 8.54			100 100	314 42
=							-13.70		.80	8.54	Aver Peak	_	100	42

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR941802AE Page: 30 of 36



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

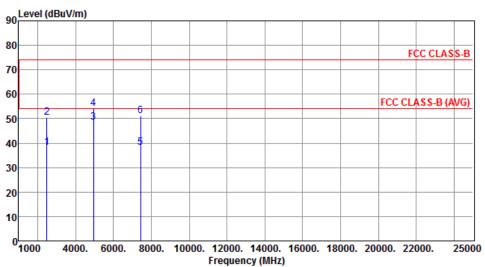

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	38.36	54.00	-15.64	41.58	-3.22	Average	318	164
2	2483.50	50.35	74.00	-23.65	53.57	-3.22	Peak	318	164
3	4960.00	48.58	54.00	-5.42	44.72	3.86	Average	100	88
4	4960.00	54.20	74.00	-19.80	50.34	3.86	Peak	100	88
5	7440.00	38.21	54.00	-15.79	29.67	8.54	Average	100	158
6	7440.00	51.22	74.00	-22.78	42.68	8.54	Peak	100	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


The previous version of the test report has been cancelled and replaced by new version.

Report No.: FR941802AE Report Version: Rev. 02



Test Configuration 2: Charger mode

3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

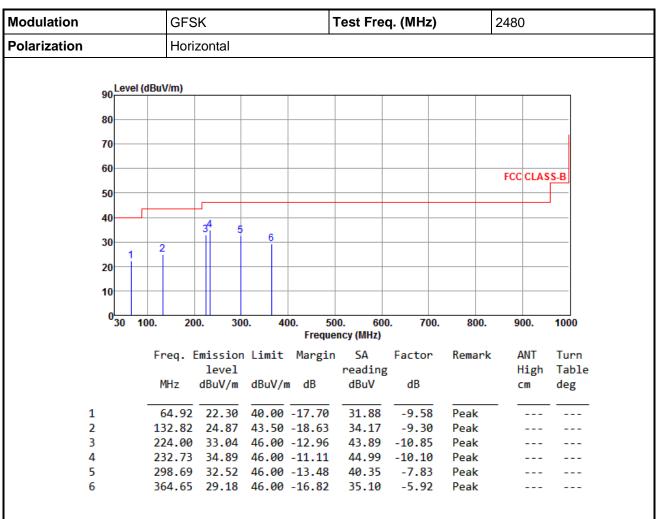

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page: 32 of 36

Report No.: FR941802AE

Report Version: Rev. 02



Modulation			GFS	SK			Test Fre	q. (MHz)		2480		
Polarization			Vert	ical		•			•			
	90 ^L	evel (dBuV/m)									_
	80											
	70											
	60									FCC (CLASS	-В
	50											
		Г										
	40					6						
	30	23	4	5								_
	- 1		l i									
	20											
	10	+										_
	٦											
	0 3	30 10	00. 20	0. 30	0. 40		00. 60(ency (MHz)	0. 700.	800.	900	0.	1000
			F		12			F+	Dl-		IT	т
			Freq.	Emissior level	Limit	margi	n SA reading	Factor	Remark			Turn Table
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		Cn	_	deg
					aza,,.					-		
1			30.97	33.02	40.00	-6.98	41.86	-8.84	Peak			
2			51.34			-13.46	34.33	-7.79	Peak	-		
3			66.86			-12.77	37.36	-10.13	Peak	-		
4			132.82			-17.91		-9.30	Peak	-		
5			232.73			-17.89			Peak	-		
6			449.04	36.07	46.00	-9.93	40.00	-3.93	Peak	-		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page: 33 of 36

Report No.: FR941802AE

Report Version: Rev. 02



3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level


3.6.3 Test Setup



Report No.: FR941802AE Page: 34 of 36



3.6.4 Test Result of Emissions in non-restricted Frequency Bands

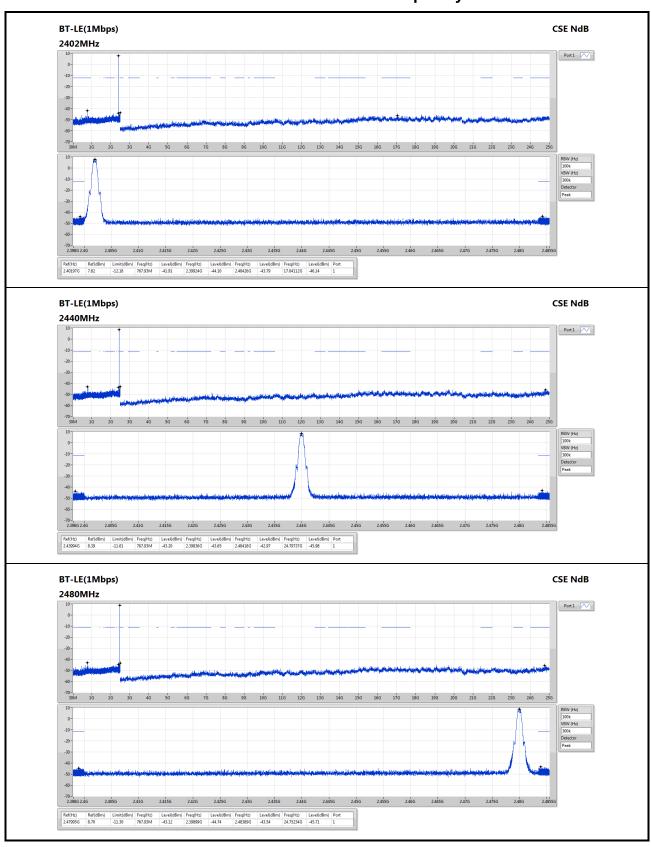

Report No.: FR941802AE Report Version: Rev. 02

Page: 35 of 36



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Page: 36 of 36

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR941802AE Report Version: Rev. 02