

Test Report

FCC ID: XNBRS3312DC3

For

Electromagnetic Interference

Of

Product : Digital Clock

Trade Name : N/A

Model Number : RS3312DC3

Prepared for

FUZHOU RISE ELECTRONIC CO., LTD.

BBldg 15, Zone C, Pushang Industrial Area, No.6, Hongjiang RD, Fuzhou,
Fujian, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang
Road, Dongguan, China

TEST RESULT CERTIFICATION

Applicant's name : FUZHOU RISE ELECTRONIC CO., LTD.

Address : Bldg 15, Zone C, Pushang Industrial Area, No.6, Hongjiang RD,
Fuzhou, Fujian, China

Manufacturer's Name : FUZHOU RISE ELECTRONIC CO., LTD.

Address : Bldg 15, Zone C, Pushang Industrial Area, No.6, Hongjiang RD,
Fuzhou, Fujian, China

Product description

Product name : Digital Clock

Model and/or type reference : RS3312DC3

FCC Part15B, ICES-003

Standards : ANSI C63.4:2003, RSS-GEN

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Date of Test :

Date (s) of performance of tests : Jul. 15, 2014 ~Jul. 25, 2014

Date of Issue..... : Jul. 28, 2014


Test Result..... : **Pass**

Testing Engineer :



Assistant

Technical Manager :



Supervisor

Authorized Signatory :



Jacky Ou / Manager

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF TEST SETUP	8
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.5 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
3.2.2 TEST PROCEDURE	14
3.2.3 TEST SETUP	15
3.2.4 EUT OPERATING CONDITIONS	15
3.2.5 TEST RESULTS	16
3.2.6 TEST RESULTS(Above 1GHz)	18
4 . EUT TEST PHOTO	19
ATTACHMENT PHOTOGRAPHS OF EUT	20

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B ICES-003 ANSI C63.4: 2003 RSS-GEN	Conducted Emission	Class B	N/A	
	Radiated Emission	Class B	PASS	

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
PTSC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
PTSA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~6GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Digital Clock				
Model Name	RS3312DC3				
Additional Model Number(s)	N/A				
Model Difference	N/A				
Product Description	<p>The EUT is a Digital Clock.</p> <table border="1"> <tr> <td>Operating frequency:</td><td>434.027MHz</td></tr> <tr> <td>Connecting I/O port:</td><td>N/A</td></tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operating frequency:	434.027MHz	Connecting I/O port:	N/A
Operating frequency:	434.027MHz				
Connecting I/O port:	N/A				
Power Rating	DC 3V, 0.08mA, 0.24mW				

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	RX

For Conducted Test	
Final Test Mode	Description
/	/

For Radiated Test	
Final Test Mode	Description
Mode 1	RX

2.3 DESCRIPTION OF TEST SETUP

Mode RE:

E-1 EUT

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Digital Clock	N/A	RS3312DC3	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101313	Jul. 06, 2014	Jul. 05, 2015	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129245	Dec. 25, 2013	Dec. 24, 2014	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Dec. 25, 2013	Dec. 24, 2014	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Test Cable	N/A	C01	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
6	Test Cable	N/A	C02	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
7	Test Cable	N/A	C03	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
8	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Triple-Loop Antenna	EVERFINE	LIA-2	11020003	Jul. 06, 2014	Jul. 05, 2015	1 year
11	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2014	Jul. 07, 2015	1 year

2.5.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2014	Jul. 05, 2015	1 year
2	Test Cable	N/A	R-01	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
3	Test Cable	N/A	R-02	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2014	Jul. 05, 2015	1 year
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Amplifier	EM	EM-30180	060538	Jul. 06, 2014	Jul. 05, 2015	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

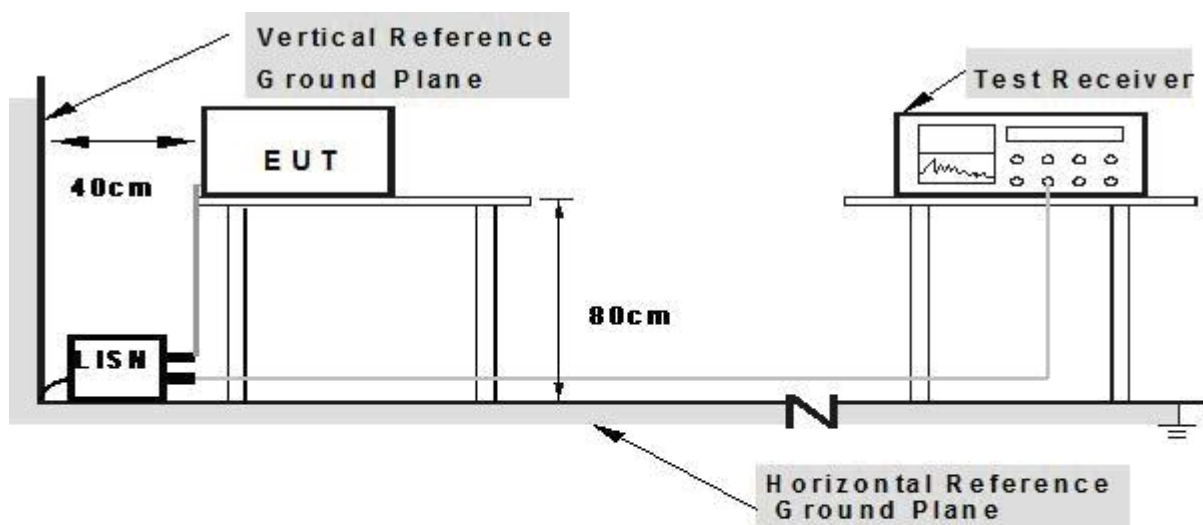

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.5 TEST RESULTS

EUT :	Digital Clock	Model Name. :	RS3312DC3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	N/A
Test Mode :	N/A	Phase :	N/A
Test Voltage :	N/A		

Note: Due to the EUT is powered by batteries, this test item is not applicable

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:


- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

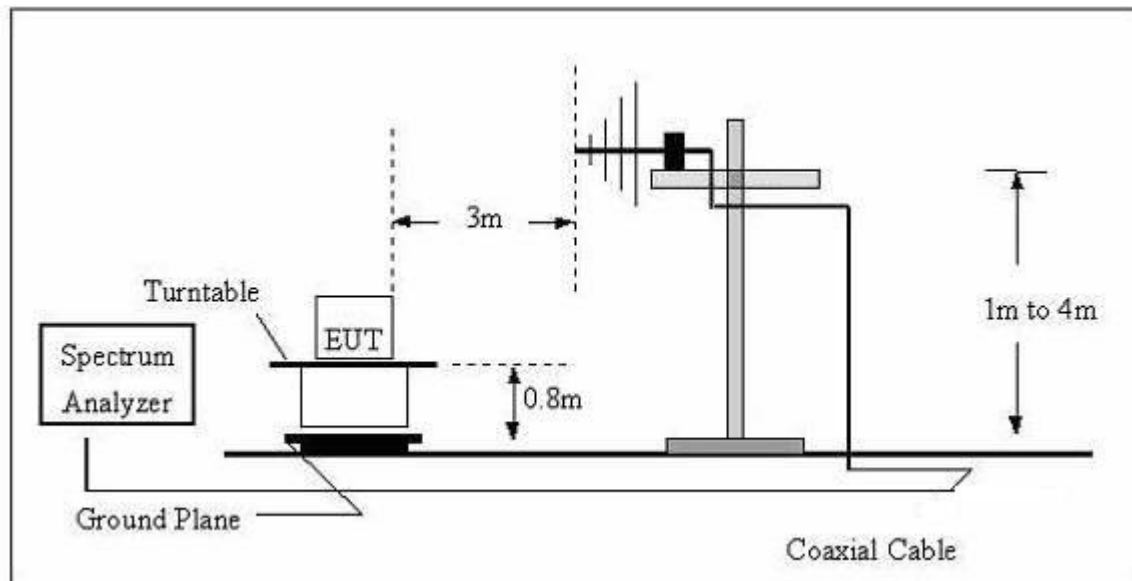

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

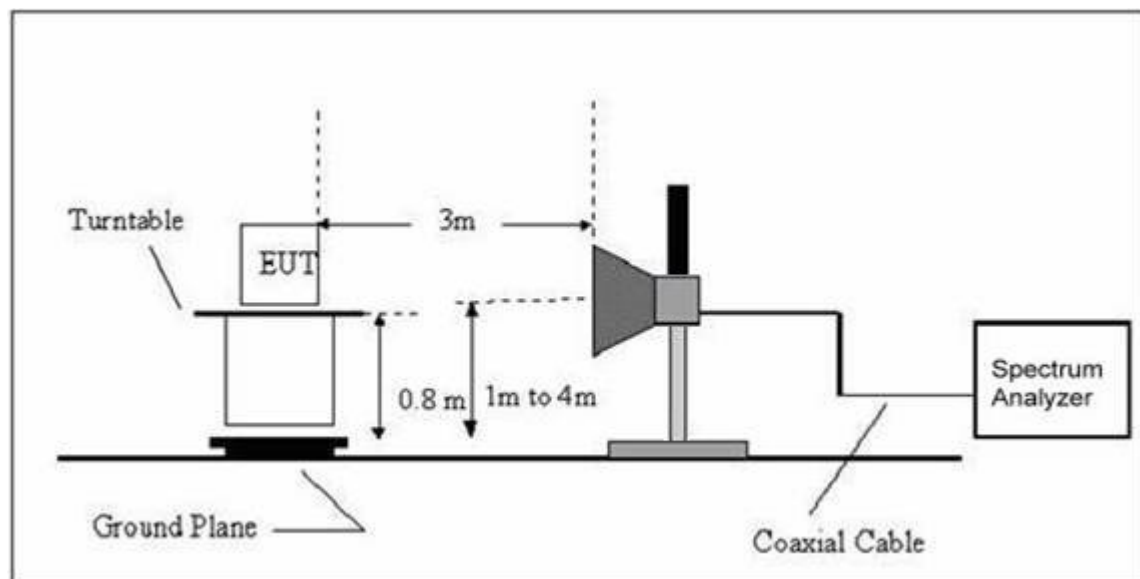


3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 TEST RESULTS


EUT :	Digital Clock	Model Name :	RS3312DC3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2014-07-20
Test Mode :	RX	Polarization :	Horizontal
Test Power :	DC 3V		

Freq MHz	Reading dBuV	C.F dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Polarity
53.28	29.38	-18.64	10.74	40.00	-29.26	Peak	HORIZONTAL
71.71	32.36	-20.77	11.59	40.00	-28.41	Peak	HORIZONTAL
89.17	34.88	-22.19	12.69	43.50	-30.81	Peak	HORIZONTAL
107.60	31.53	-20.49	11.04	43.50	-32.46	Peak	HORIZONTAL

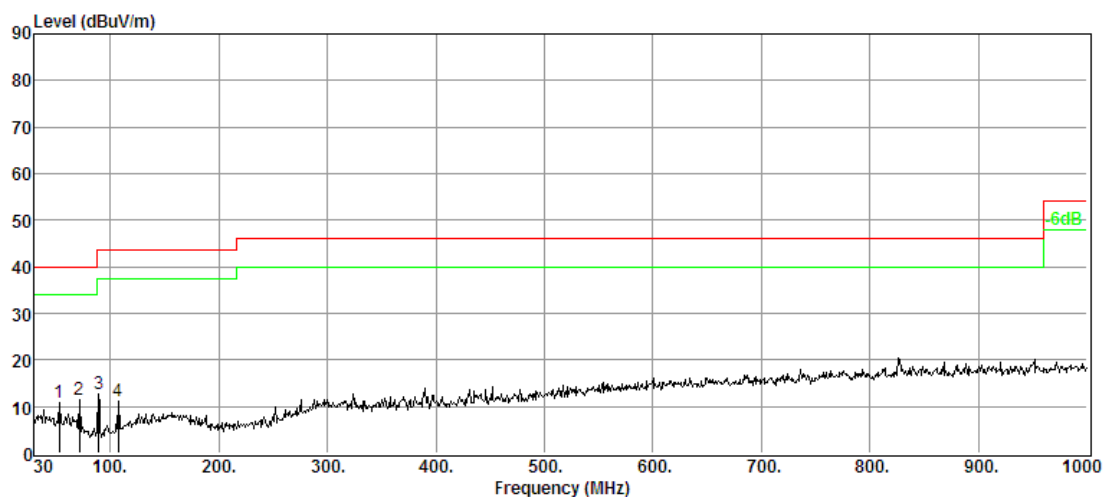

EUT :	Digital Clock	Model Name :	RS3312DC3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2014-07-20
Test Mode :	RX	Polarization :	Vertical
Test Power :	DC 3V		

Freq MHz	Reading dBuV	C.F dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Polarity
35.82	27.51	-18.58	8.93	40.00	-31.07	Peak	VERTICAL
71.71	30.44	-20.77	9.67	40.00	-30.33	Peak	VERTICAL
107.60	29.77	-20.49	9.28	43.50	-34.22	Peak	VERTICAL
323.91	32.18	-17.13	15.05	46.00	-30.95	Peak	VERTICAL

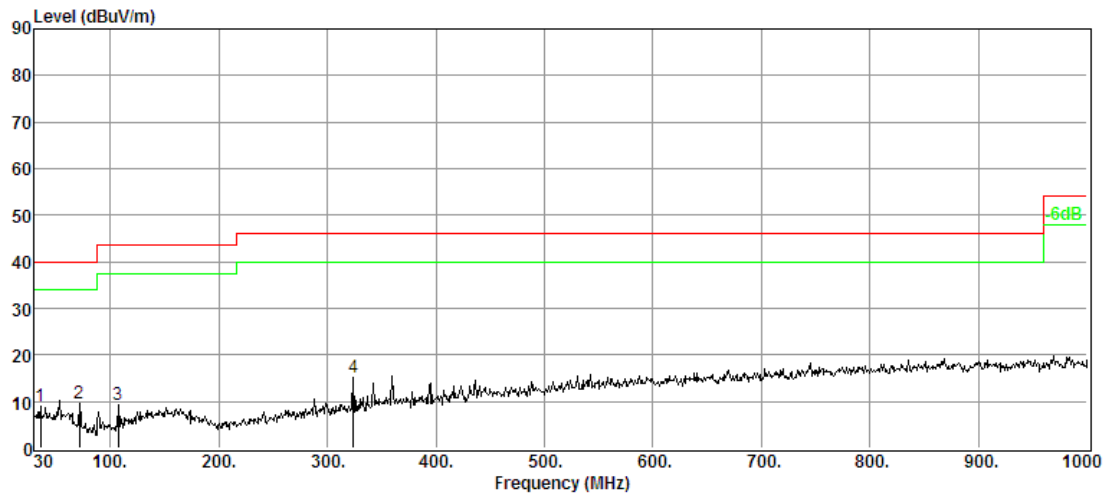

3.2.6 TEST RESULTS(Above 1GHz)

EUT :	Digital Clock	Model Name :	RS3312DC3
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2014-07-20
Test Mode :	RX	Polarization :	H/V
Test Power :	DC 3V		


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1124.23	51.37	9.21	60.58	74	-13.42	PK
V	1124.23	40.85	9.21	50.06	54	-3.94	AVG
V	1478.27	48.9	11.73	60.63	74	-13.37	PK
V	1478.27	37.23	11.73	48.96	54	-5.04	AVG
V	3978.21	34.56	16.36	50.92	74	-23.08	PK
V	3978.21	28.26	16.36	44.62	54	-9.38	AVG
V		74		PK
V		54		AVG
H	1245.55	49.45	10.44	59.89	74	-14.11	PK
H	1245.55	30.78	10.44	41.22	54	-12.78	AVG
H	2754.22	42.58	12.73	55.31	74	-18.69	PK
H	2754.22	31.56	12.73	44.29	54	-9.71	AVG
H	3687.29	33.54	14.68	48.22	74	-25.78	PK
H	3687.29	28.34	14.68	43.02	54	-10.98	AVG
H	74		PK
H	54	...	AVG

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. EUT TEST PHOTO

Radiated Measurement Photos

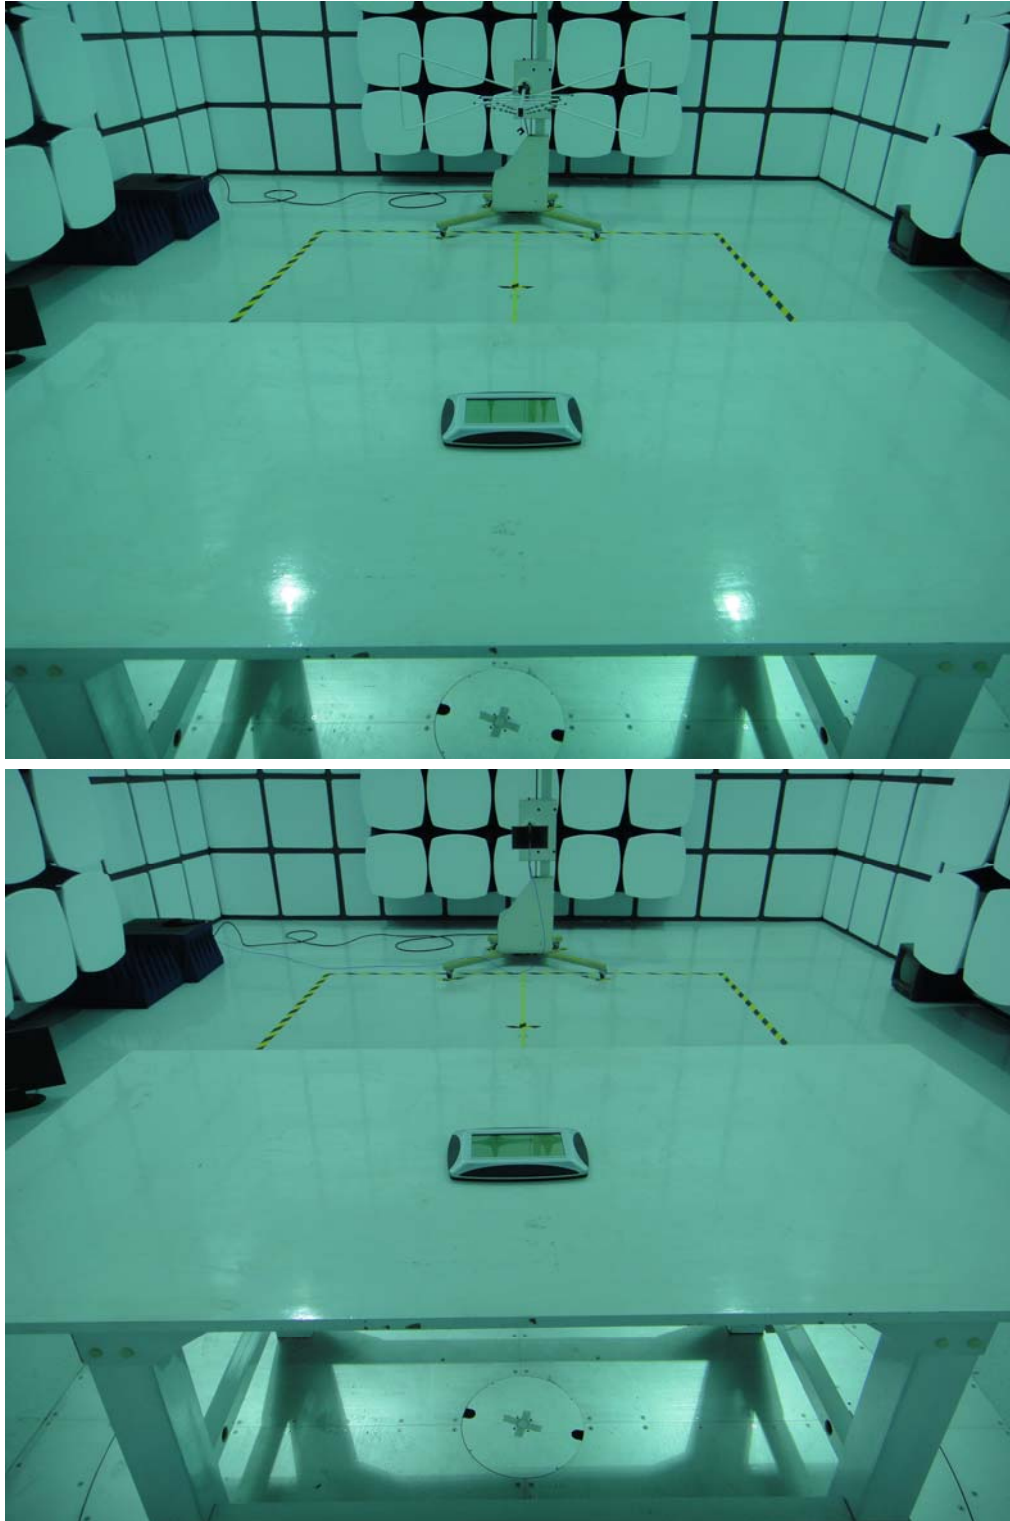

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3

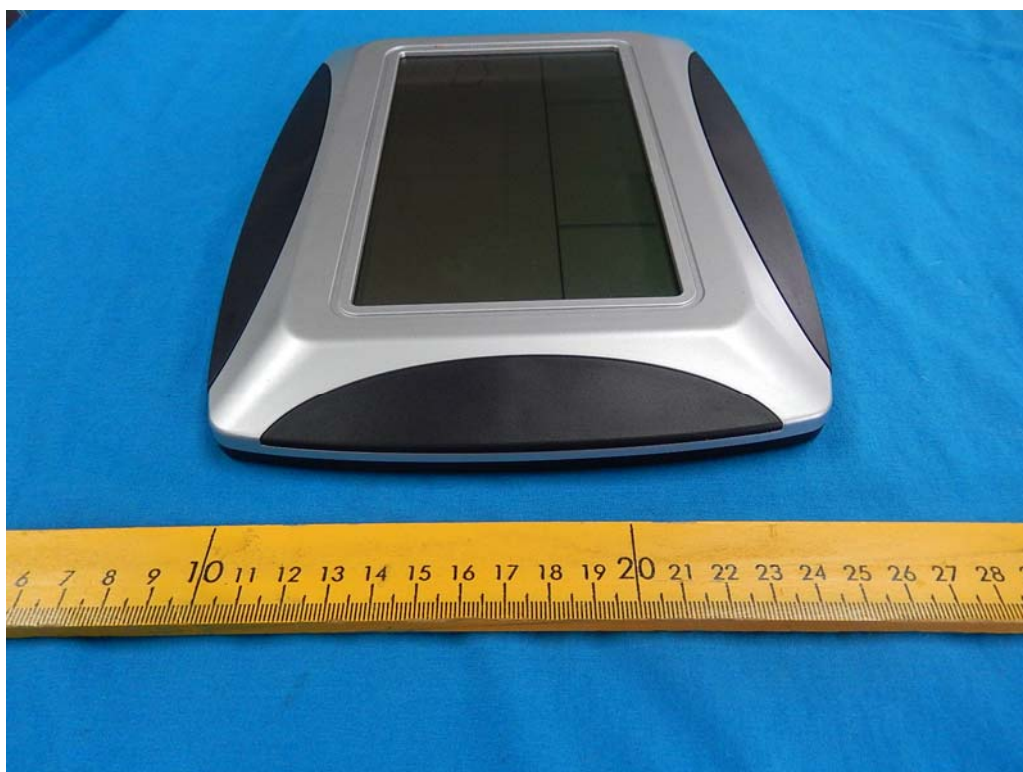


Photo 4



Photo 5



Photo 6

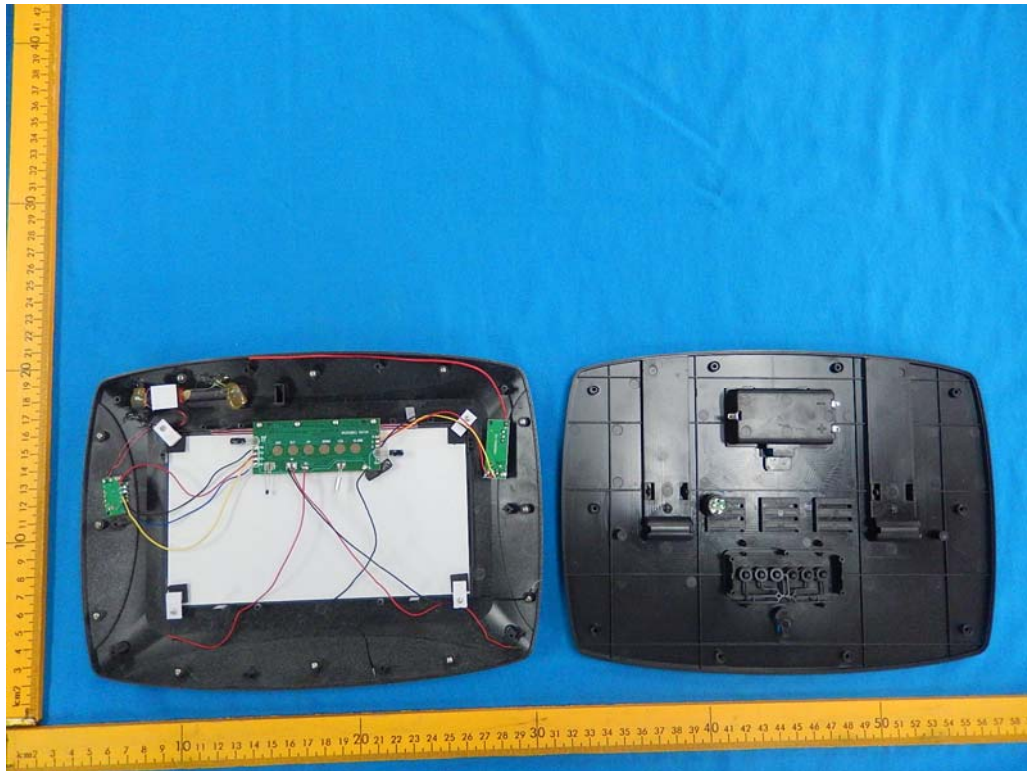


Photo 7



Photo 8

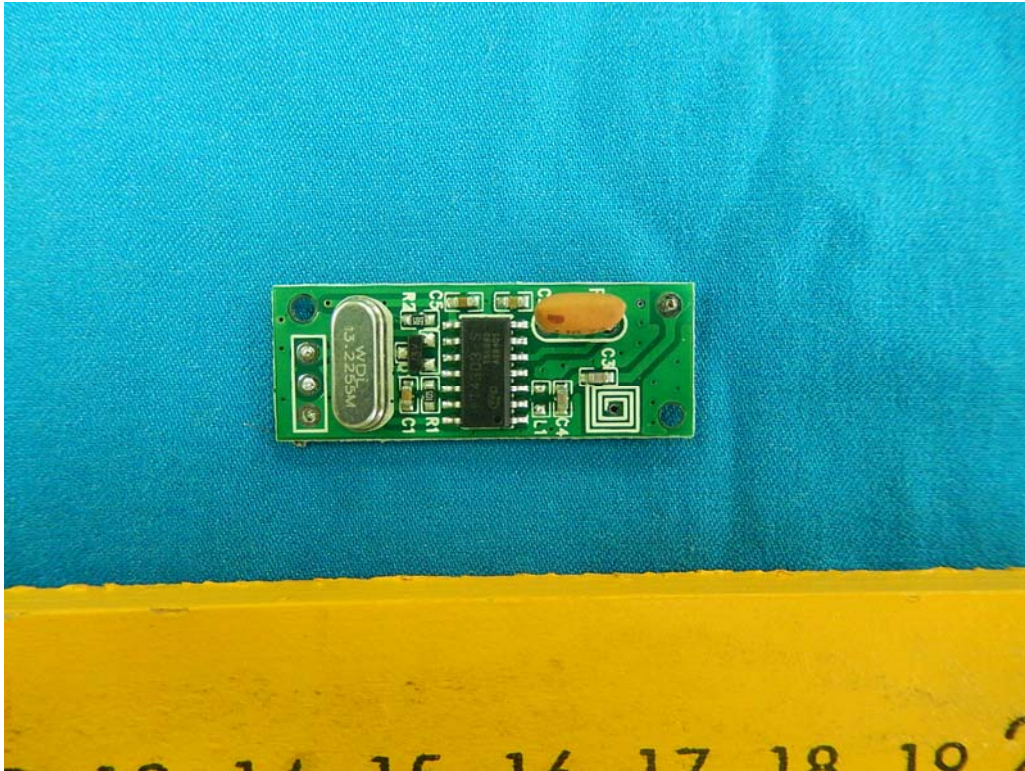


Photo 9



Photo 10

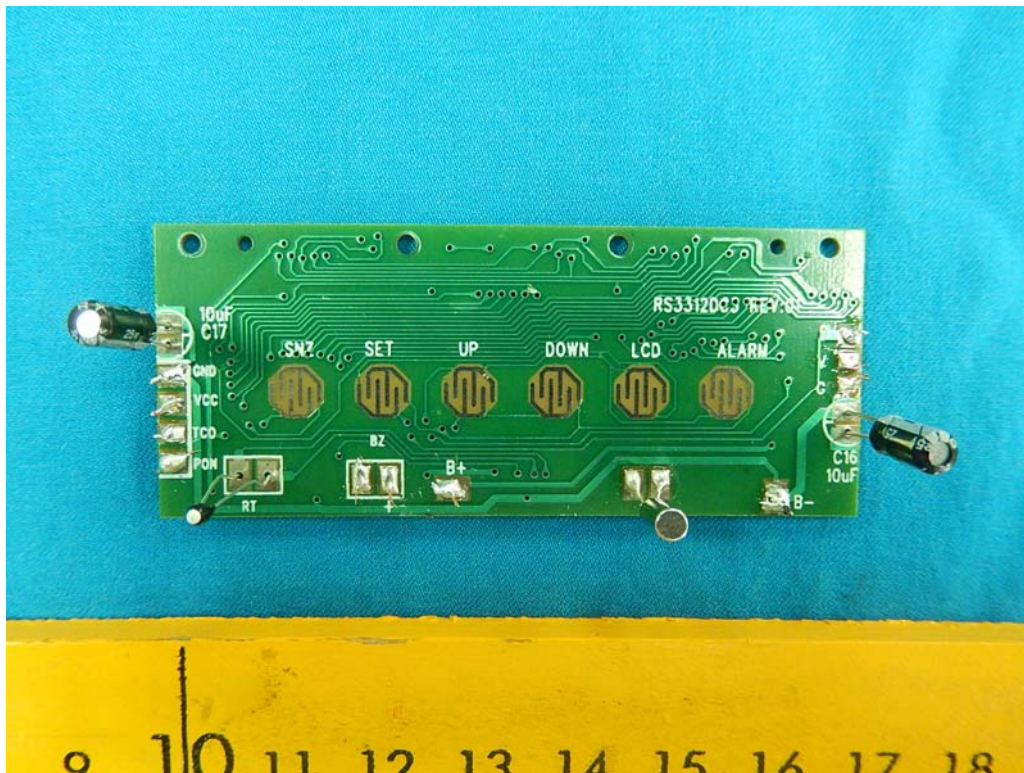


Photo 11

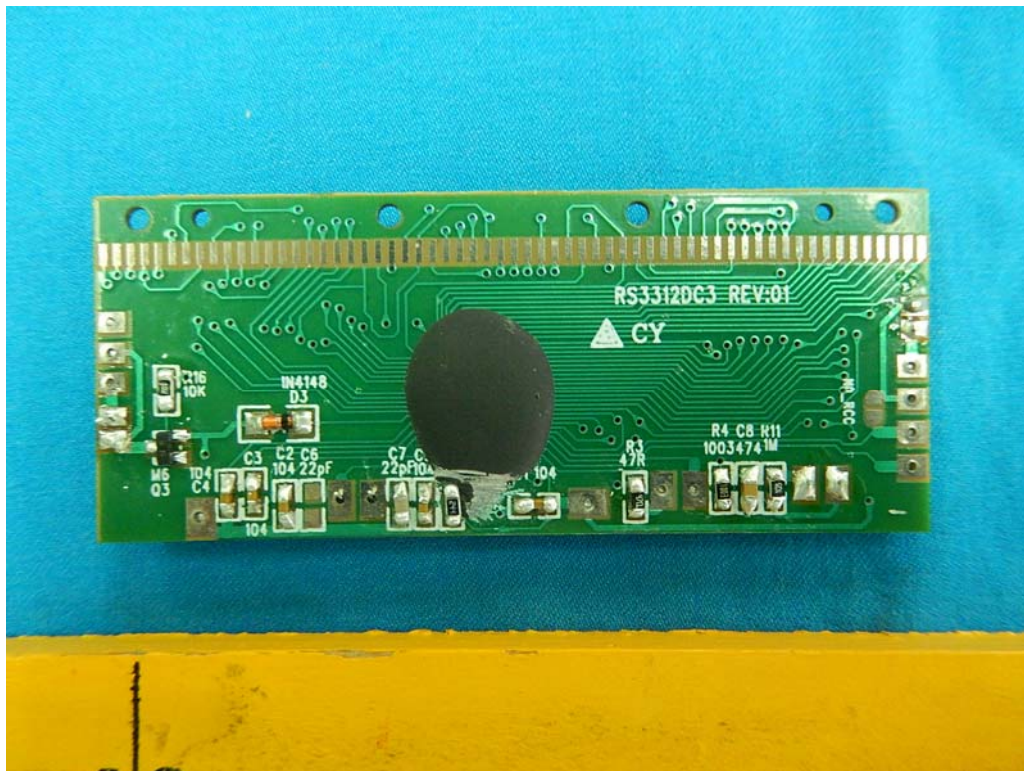


Photo 12



END OF REPORT