
Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Wireless Microphone
MODEL/Serial No. : MG-77 / Proto type
Multi model : NONE
FCC ID : XNKMG-77
APPLICANT : JUNSUNGTECH Co., Ltd.
448-2, Shinwol-dong, Yangchun-gu, Seoul, Korea
Attn.: Young-Hoon Chung / Technical Director
MANUFACTURER : JUNSUNGTECH Co., Ltd.
448-2, Shinwol-dong, Yangchun-gu, Seoul, Korea
TYPE OF MODULATION : FHSS (GFSK)
FREQUENCY CHANNEL : 2 406 MHz to 2 478 MHz and Channel (38 Channels)
ANTENNA TYPE : Integral (FOLDED MONOPOLE Antenna)
ANTENNA GAIN : 3.90 dBi
RULE PART(S) : FCC Part 15 Subpart C
FCC PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE090722.04
DATES OF TEST : August 06, 2009 to August 14, 2009
REPORT ISSUE DATE : September 03, 2009
TEST LABORATORY : ETL Inc. (FCC Designation No. : KR0022)

The Wireless Microphone, Model MG-77 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

ETL Inc.
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

Table of Contents

FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
 - 5.1 Summary of Test Results
 - 5.2 Channel Bandwidth and Frequency Separation
 - 5.3 Maximum peak conducted output power
 - 5.4 Bandwidth of Frequency Band Edges
 - 5.5 Power Spectral Density
 - 5.6 Number of Hopping Channels
 - 5.7 Time of Occupancy (Dwell time)
 - 5.8 Spurious Emissions
 - 5.9 Radio Frequency Exposure
 - 5.10 Power line Conducted Emissions
6. Sample Calculation
7. List of test Equipment used for Measurement

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Circuit Diagram

Appendix G. User Manual

Appendix H. Operational Description

Appendix I. Antenna Requirement

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

| | |
|-----------------------|--|
| Applicant Name | : JUNSUNGTECH Co., Ltd. |
| Address | : 448-2, Shinwol-dong, Yangchun-gu, Seoul, Korea |
| Attention | : Young-Hoon Chung / Technical Director |

- **EUT Type** : Wireless Microphone
- **Model Number** : MG-77
- **S/N** : Proto type
- **Freq. Range** : 2 406 MHz – 2 478 MHz
- **Number of Channels** : 38
- **Modulation Technique** : FHSS (GFSK)
- **Antenna Type** : Integral (FOLDED MONOPOLE Antenna)
- **ANTENNA GAIN** : 3.90 dBi
- **Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : DSS: Part 15 Spread Spectrum Transmitter
- **Place of Tests** : ETL Inc. Testing Lab.
Radiated Emission test;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Conducted Emission test;
ETL Inc. Testing Lab.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the JUNSUNGTECH Co., Ltd. Model: MG-77

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is Wireless Microphone

2.2 General Specification

* Specification

| | |
|------------------------------|------------------------------|
| Model | MG-77 |
| RF Frequency Range | 2.406 GHz – 2.478 GHz |
| Modulation Method | FHSS |
| Operating Temperature | -20 °C - +60 °C |
| Power Source | DC 3.7 V |
| Size | 28 mm x 73 mm x 22 mm |
| Weight | 38 g |

* Frequency and channels (38 CH)

| CH number | Frequency | CH number | Frequency |
|-----------|-----------|-----------|-----------|
| CH0 | 2406 | CH19 | 2442 |
| CH1 | 2407 | CH20 | 2444 |
| CH2 | 2408 | CH21 | 2446 |
| CH3 | 2410 | CH22 | 2448 |
| CH4 | 2412 | CH23 | 2450 |
| CH5 | 2414 | CH24 | 2452 |
| CH6 | 2416 | CH25 | 2454 |
| CH7 | 2418 | CH26 | 2456 |
| CH8 | 2420 | CH27 | 2458 |
| CH9 | 2422 | CH28 | 2460 |
| CH10 | 2424 | CH29 | 2462 |
| CH11 | 2426 | CH30 | 2464 |
| CH12 | 2428 | CH31 | 2466 |
| CH13 | 2430 | CH32 | 2468 |
| CH14 | 2432 | CH33 | 2470 |
| CH15 | 2434 | CH34 | 2472 |
| CH16 | 2436 | CH35 | 2474 |
| CH17 | 2438 | CH36 | 2476 |
| CH18 | 2440 | CH37 | 2478 |

3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2003 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 GHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0,8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 Description of Test modes

The EUT(model: MG-77) has been tested under operating condition.
Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1 GHz's worst case is in normal link mode.
Channel low (2 406 MHz), Mid (2 442 MHz) and High (2 478 MHz) were chosen for full testing.

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| 47 CFR Part 15, Subpart C | Measurement Required | Result |
|---------------------------|---|--------|
| 15.247(a)(1) | Channel Bandwidth, Frequency Separation | Pass |
| 15.247(b)(1) | Maximum peak conducted output power | Pass |
| 15.247(d) | Bandwidth of Frequency Band Edges | Pass |
| 15.247(e) | Power Spectral density | Pass |
| 15.247(a)(1)(iii) | Number of Hopping Channels | Pass |
| 15.247(a) | Time of Occupancy(Dwell time) | Pass |
| 15.247(d) 15.209 | Spurious Emissions | Pass |
| 15.247(i) | Radio Frequency Exposure | Pass |
| 15.207 | Power line Conducted Emissions | Pass |

The data collected shows that the **JUNSUNGTECH Co., Ltd. / Wireless Microphone / MG-77** complied with technical requirements of above rules part 15.209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 Channel Bandwidth and Frequency Separation

| | |
|---------------------|---|
| EUT | Wireless Microphone / MG-77 |
| Limit apply to | FCC Part 15.247(a)(1) |
| Test Date | August 10, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

5.2.1 Channel Bandwidth

| Frequency(MHz) | 20 dB Bandwidth (MHz) | Limit |
|----------------|-----------------------|--------------------------------|
| 2 406 | 0.960 | < Carrier frequency separation |
| 2 442 | 0.960 | |
| 2 478 | 0.980 | |

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.

5.2.2 Frequency Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

| EUT Channel Separation (MHz) | 20 dB bandwidth (MHz) | Limit |
|------------------------------|-----------------------|----------|
| 1.00 (Worst) | 0.98 (Worst) | > 25 kHz |

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee

Plots of 20 dB Bandwidth


[2 406 MHz]



[2 442 MHz]

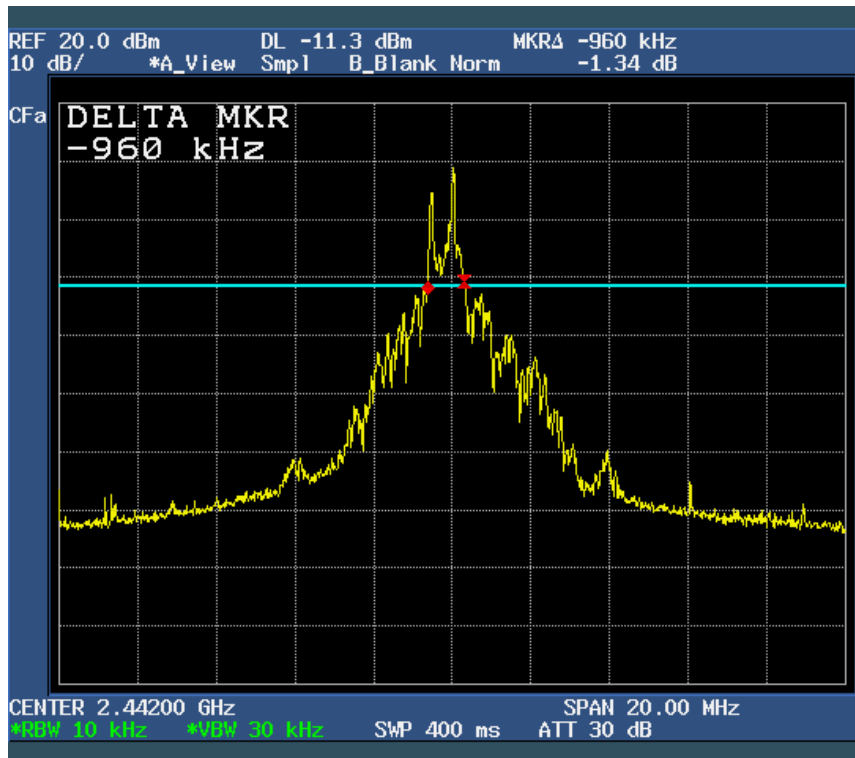


[2 478 MHz]

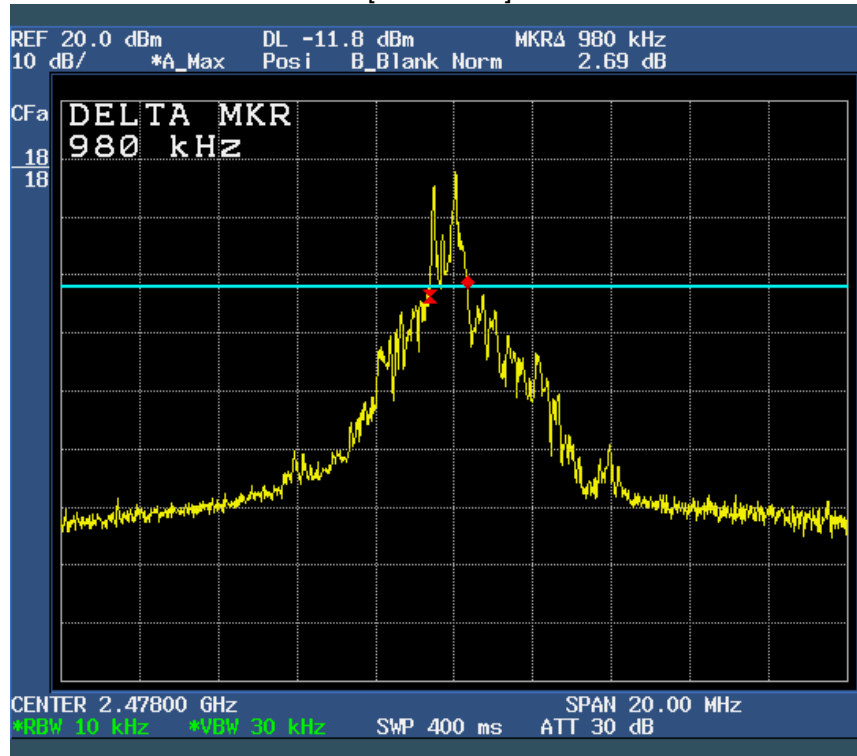

Frequency Separation

[Channel Separation]

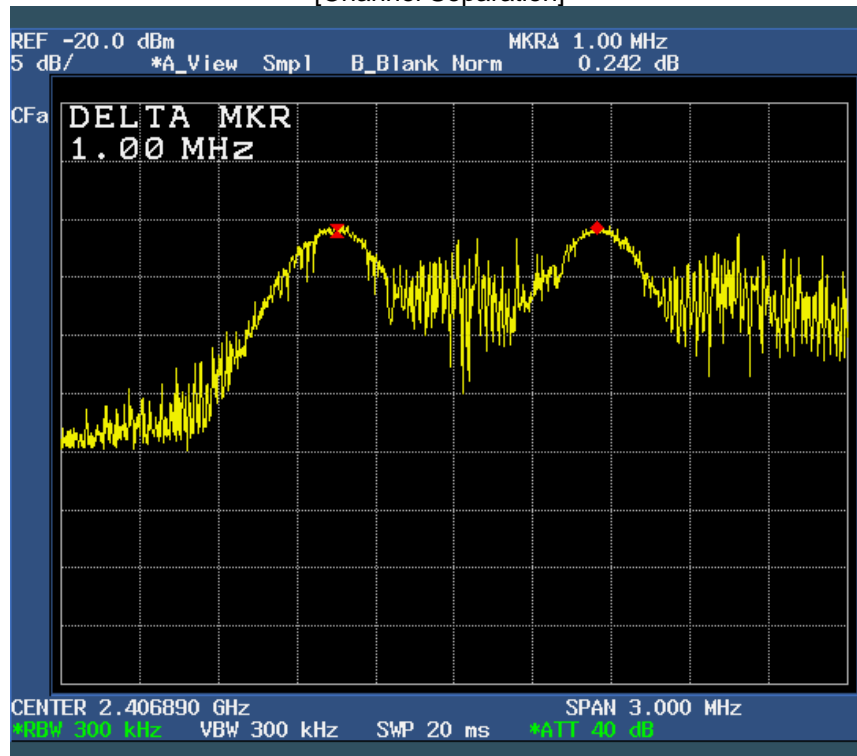

5.3 Maximum peak conducted output power

| | |
|---------------------|---|
| EUT | Wireless Microphone / MG-77 |
| Limit apply to | FCC Part 15.247(b)(1) |
| Test Date | August 11 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- For systems using digital modulation operating in the 2 400 MHz - 2 483.5 MHz band: 125 mW (20.97 dBm)

Test Data

| Frequency(MHz) | Output Power (dBm) | Output Power (mW) | Limit |
|----------------|--------------------|-------------------|---------------------|
| 2 406 | 13.34 | 21.58 | < 20.97 dBm(125 mW) |
| 2 442 | 13.44 | 22.08 | |
| 2 478 | 13.43 | 22.03 | |

NOTES:


1. Measure conducted maximum peak output of relevant channel using spectrum analyzer




Test Engineer: Hoon Pyo, Lee

Plots of Maximum Peak Output Power


[2 406 MHz]

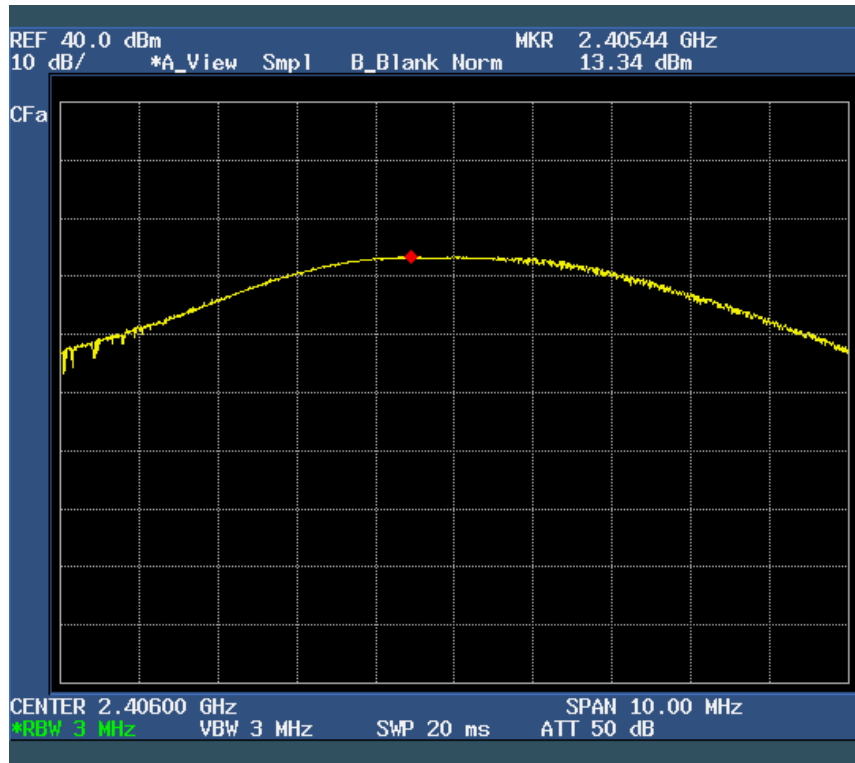

[2 442 MHz]

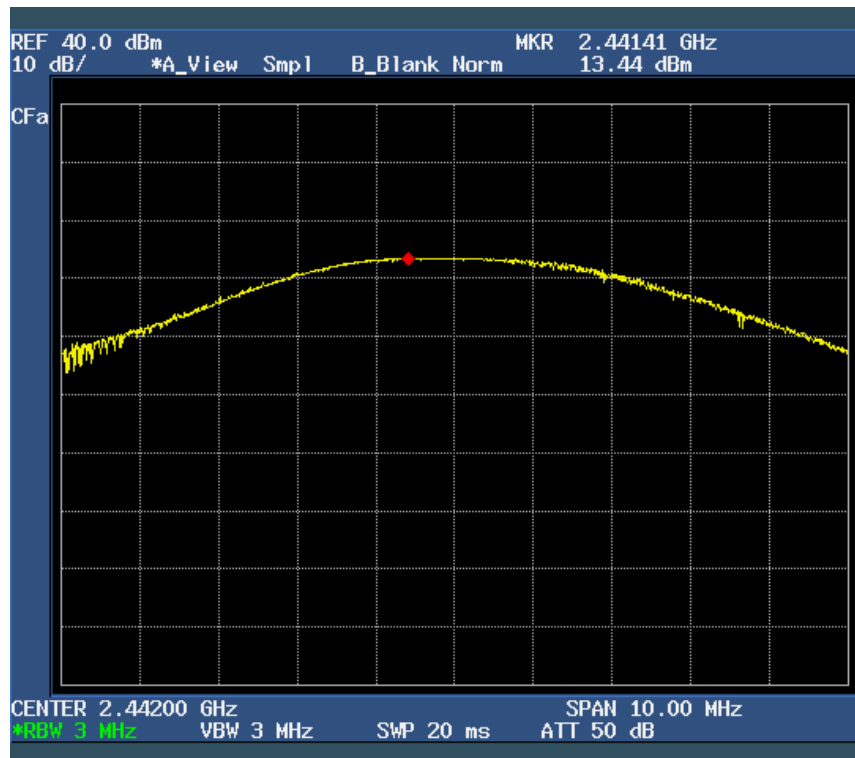

[2 478 MHz]

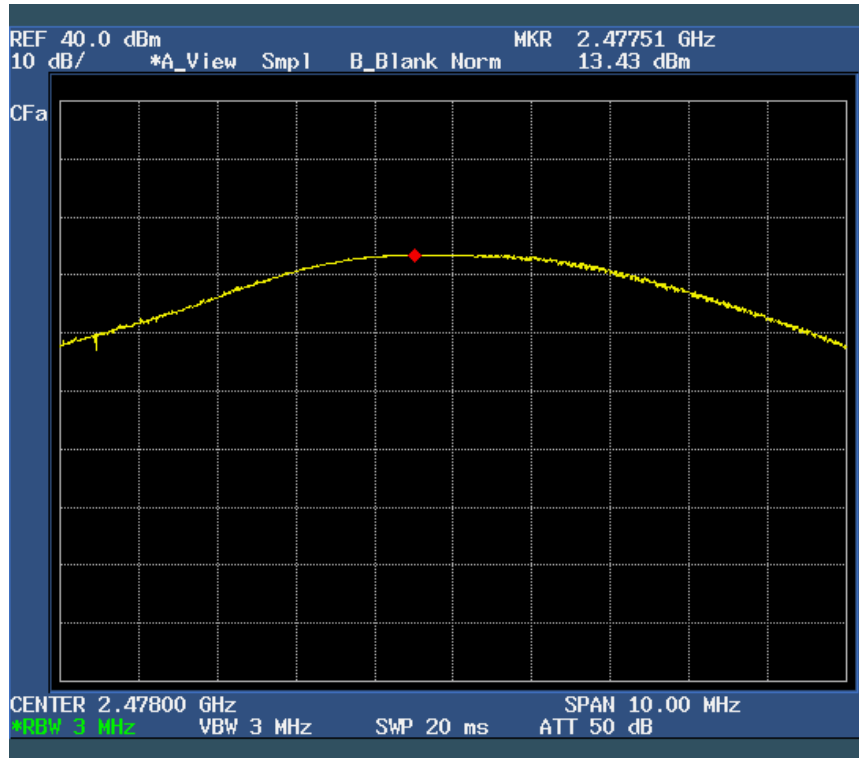

5.4 Bandwidth of Frequency Band Edges

| | |
|---------------------|---|
| EUT | Wireless Microphone / MG-77 |
| Limit apply to | FCC Part 15.247(d) |
| Test Date | August 11, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results

- Refer to see the measured plot in next page.

NOTES:

1. The test was performed to make a direct field strength measurement at the band edge frequencies.




Test Engineer: Hoon Pyo, Lee


5.4.1 Bandwidth of Frequency Band Edges

Conducted

Worst case (0CH)

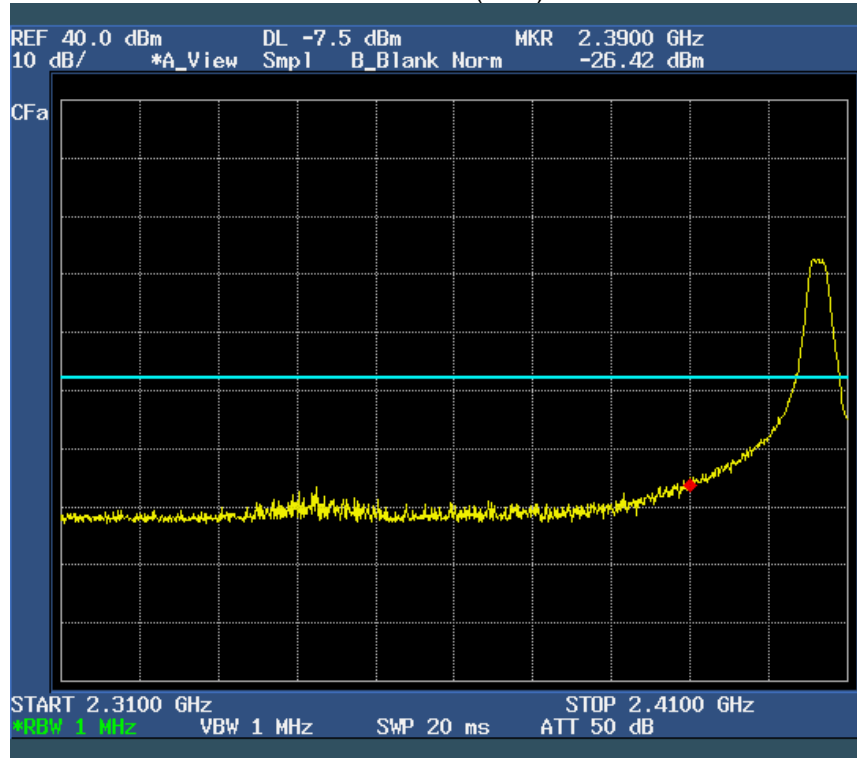


Worst case (37CH)

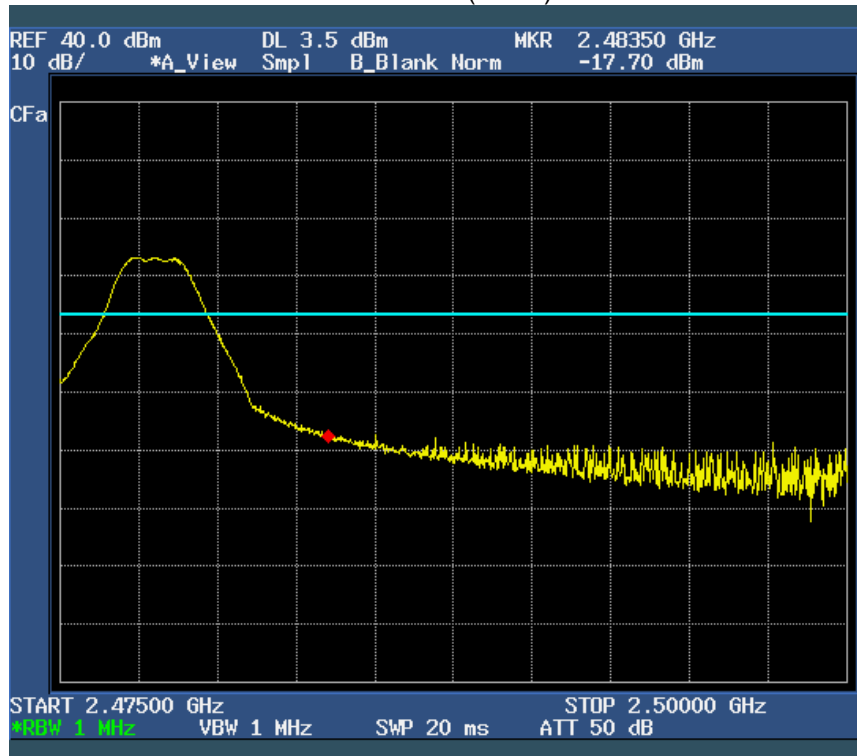


Radiated

Peak Detector: RBW: 1MHz, VBW: 1MHz (2310 MHz – 2390 MHz), Worst case (0CH, Horizontal)


— Peak Limit Line
— AV Limit Line

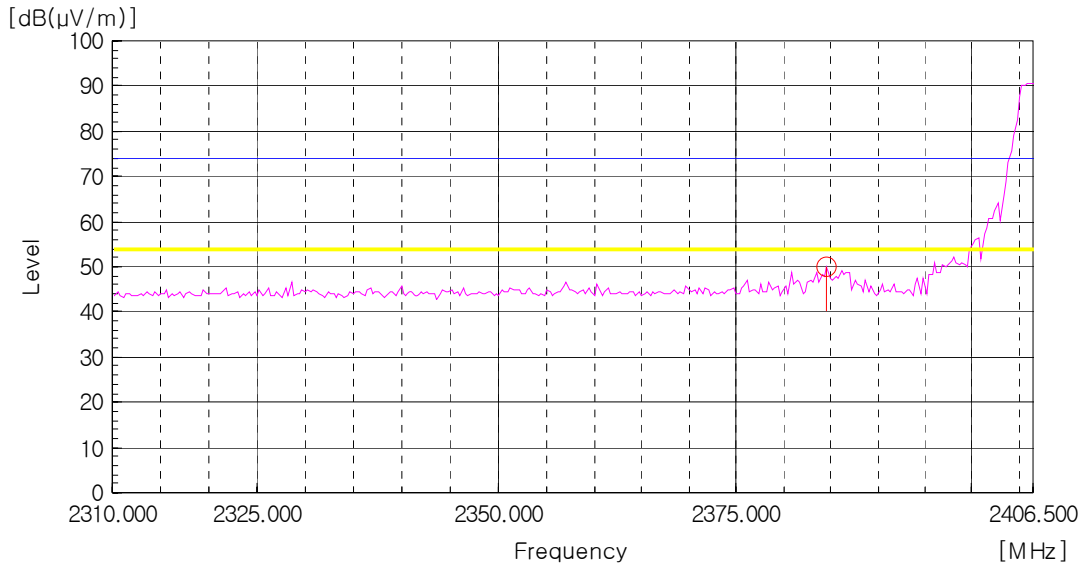


AV Detector: RBW: 1MHz, VBW: 10Hz (2310 MHz – 2390 MHz)

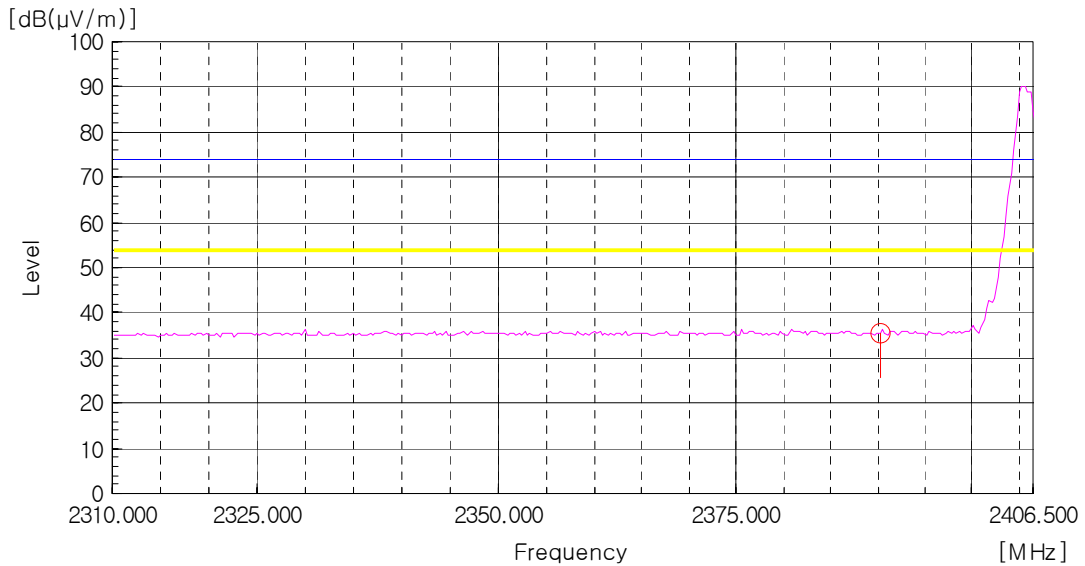

Peak Detector: RBW: 1MHz, VBW: 1MHz (2483.5 MHz – 2500 MHz), Worst case (37CH, Horizontal)

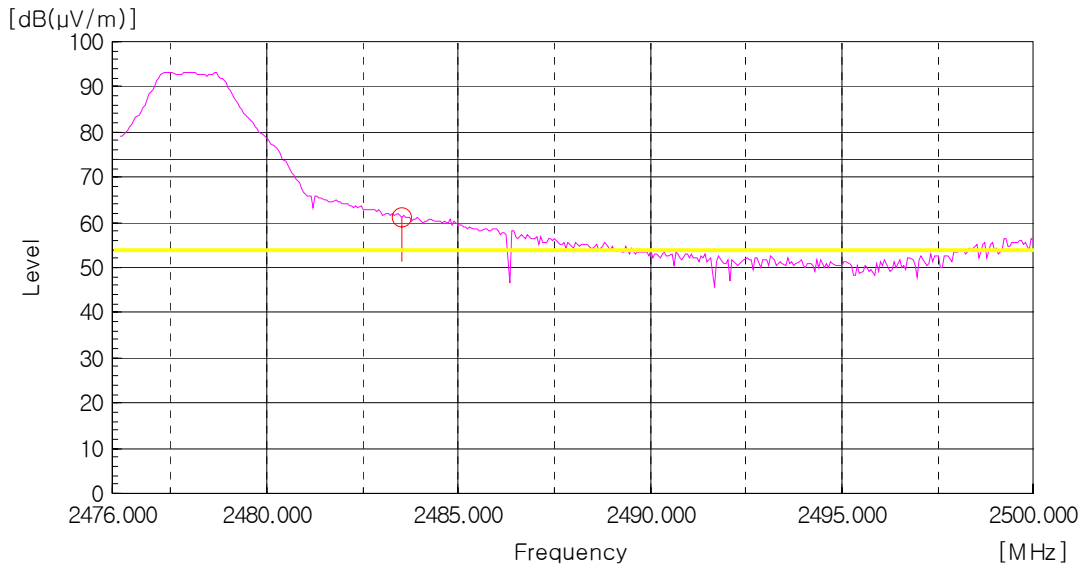

AV Detector: RBW: 1MHz, VBW: 10Hz (2483.5 MHz – 2500 MHz)

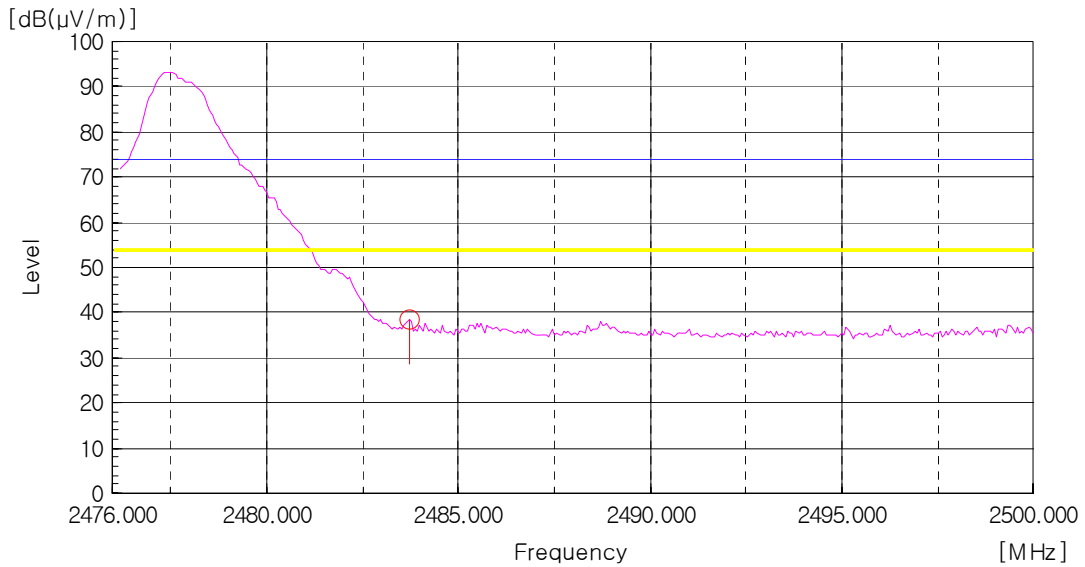

5.5 Power Spectral Density

| | |
|---------------------|---|
| EUT | Wireless Microphone/ MG-77 |
| Limit apply to | FCC Part 15.247(e) |
| Test Date | August 03, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Data

| Channel | Frequency (MHz) | PSD (dBm) | Limit |
|---------|-----------------|-----------|-------|
| Low | 2 406 | -4.965 | 8 dBm |
| Mid | 2 442 | -3.297 | |
| High | 2 478 | -5.480 | |

NOTES:

1. Measure power spectral density of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee

Power Spectral Density


[CH Low]



[CH Mid]

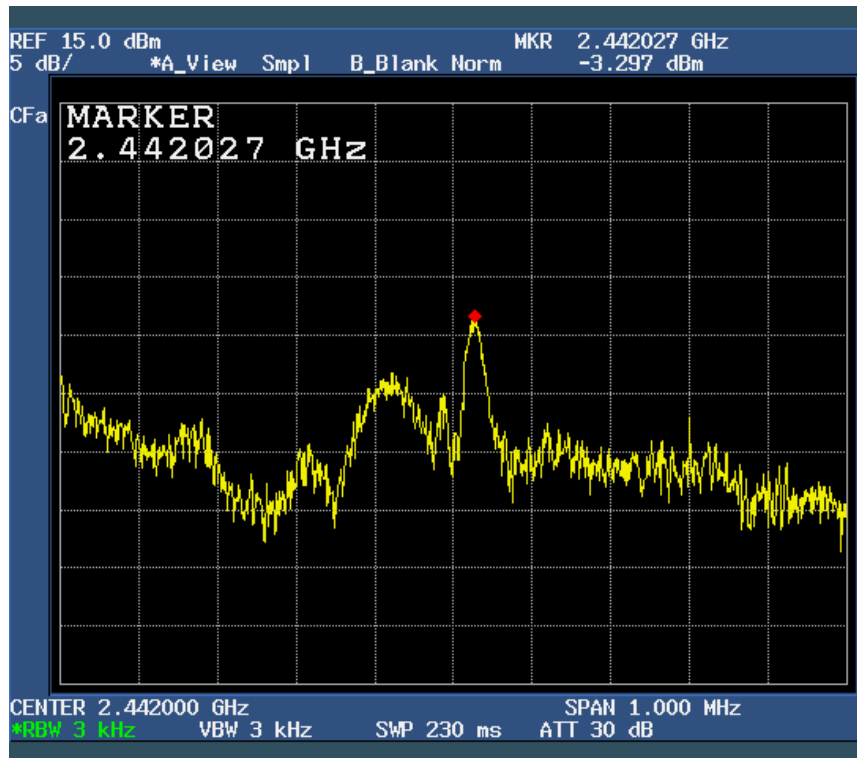

[CH High]

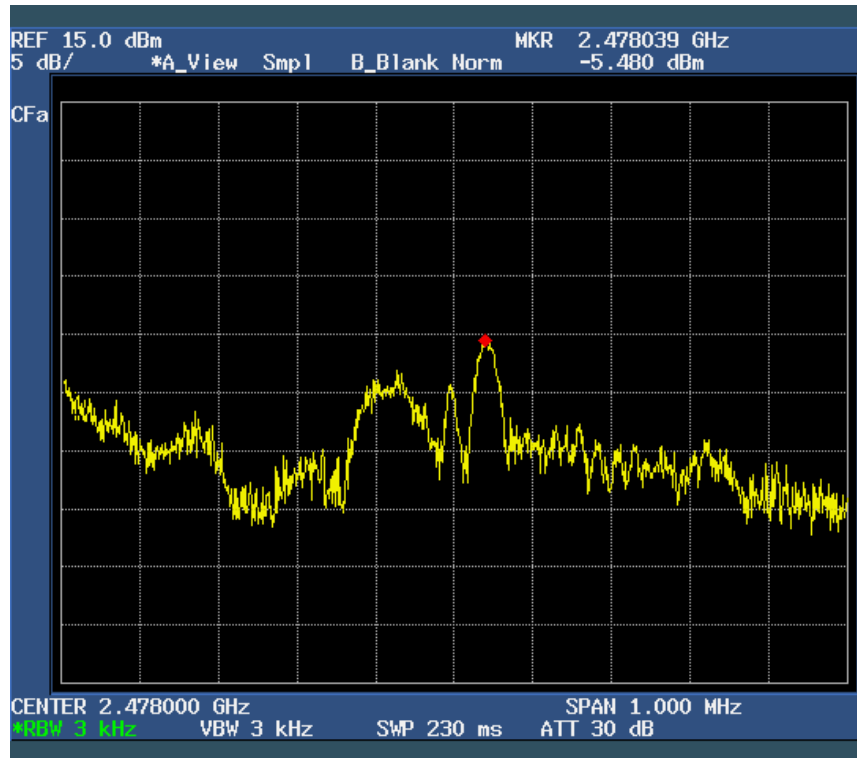

5.6 Number of Hopping Channels

| | |
|---------------------|---|
| EUT | Wireless Microphone/ MG-77 |
| Limit apply to | FCC Part 15.247(a)(1)(iii) |
| Test Date | August 11, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Data

| Result | Limit |
|--------|--------------|
| 38 | > 15 Channel |

NOTES:



1. Measure number of hopping channel of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

Number of Hopping Channels

[Channel Separation]

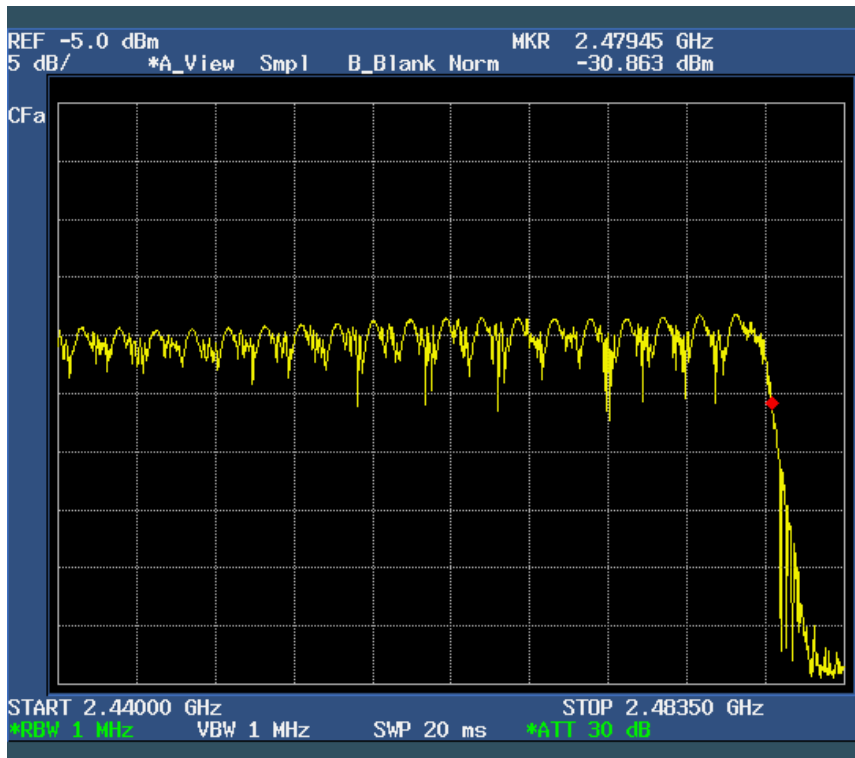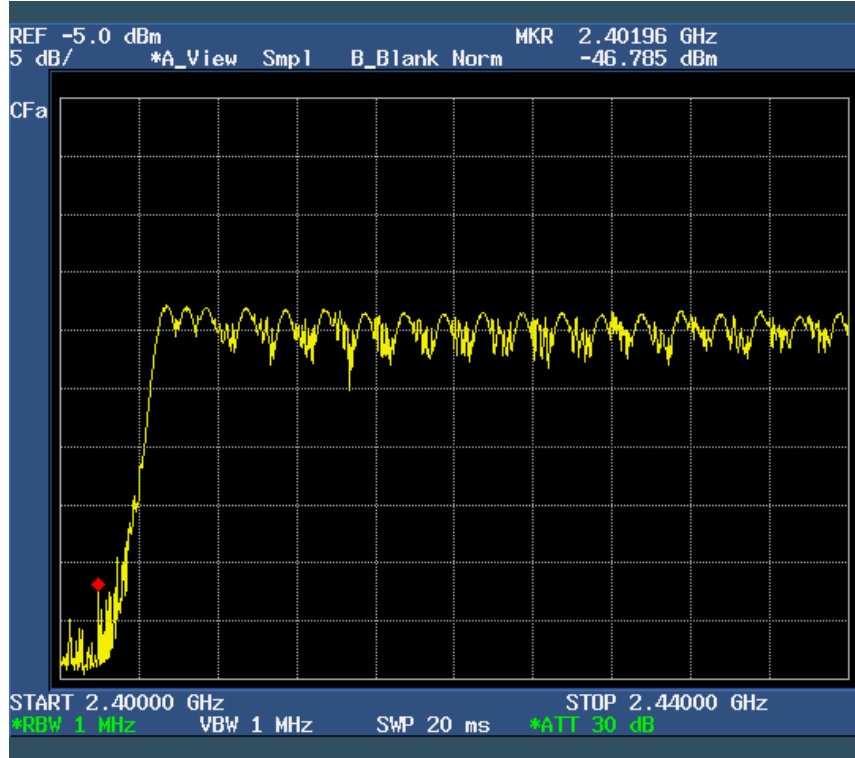

5.7 Time of Occupancy

| | |
|---------------------|---|
| EUT | Wireless Microphone/ MG-77 |
| Limit apply to | FCC Part 15.247(a)(1)(iii) |
| Test Date | August 12, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

Frequency hopping systems in the 2400-2483.5 MHz band. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Data

| Pulse Time (ms) | Total of Dwell (ms) | Limit (ms) |
|-----------------|---------------------|------------|
| 0.083 | 55.89 | 400.000 |

NOTES:

1. Measure time of occupancy of relevant channel using spectrum analyzer.
2. Please see the measured plot in next page.
3. Testing from three channels Low, Mid, High.



Test Engineer: Hoon Pyo, Lee

Time of Occupancy


Test period = 0.4 [seconds / channel] × 38 [channel] = 15.2 [seconds]
Actual = Reading × (Hopping rate / Number of channels) × Test period

$$0.4 \text{ s} \times 38(\text{CH}) = 15.2\text{s}$$


$$0.083\text{ms} \times ((1/0.594 \text{ ms}) / 38) \times 15.2\text{s} = 55.89 \text{ ms}$$

Time of Occupancy


[Continuous Time: 0CH]

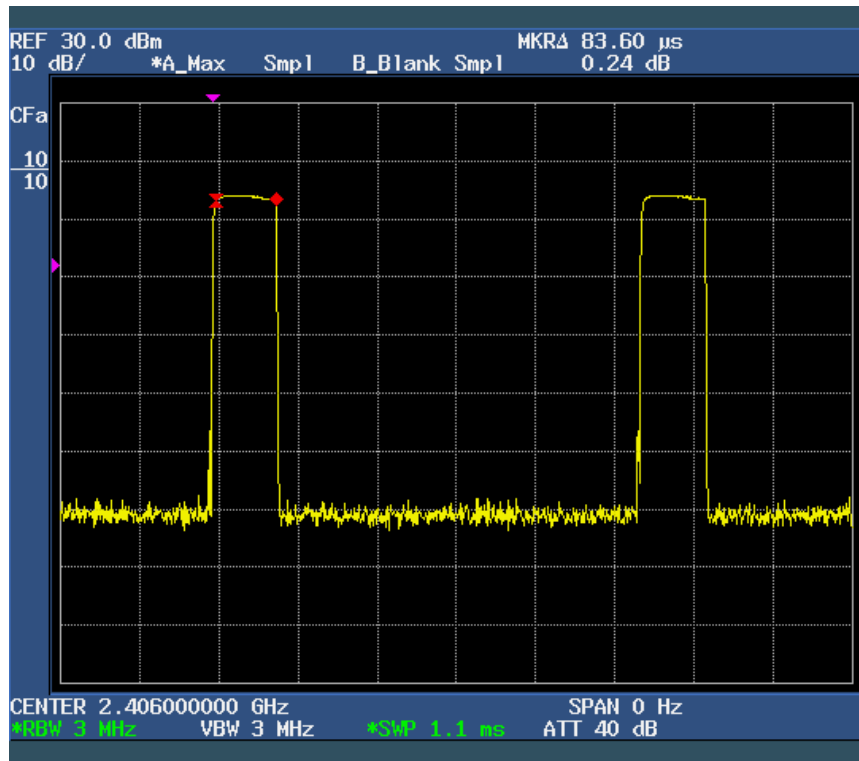


[Hopping Period : 0CH]

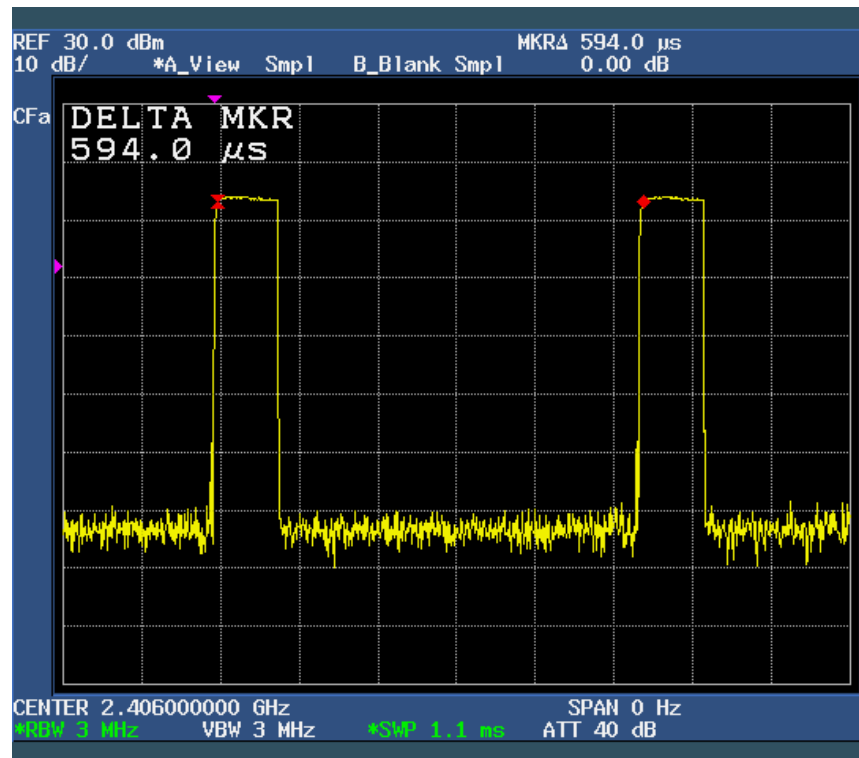


[Continuous Time: 19CH]

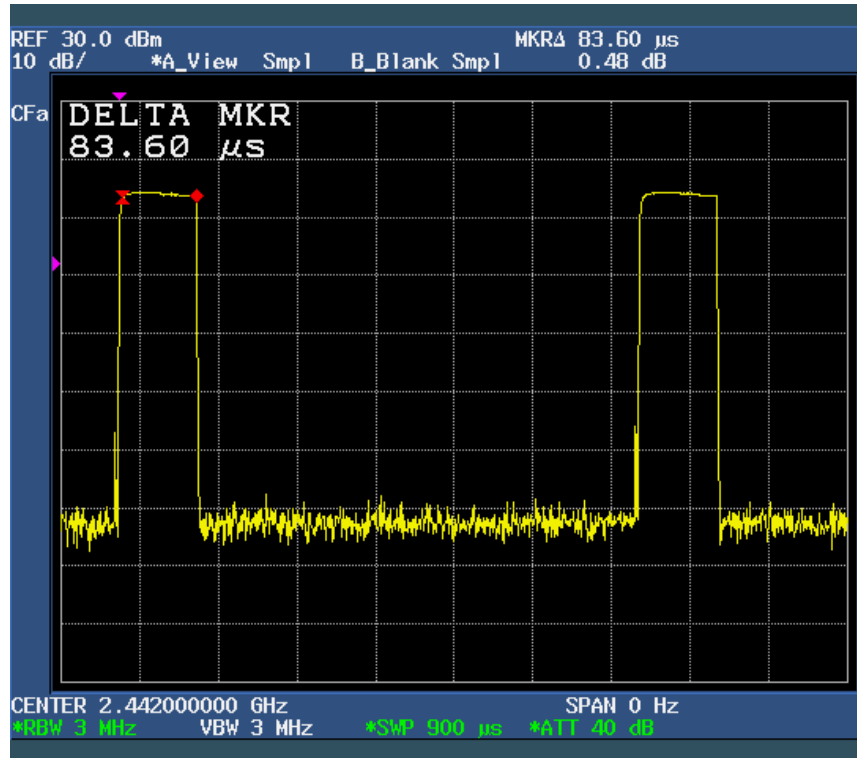


[Hopping Period : 19CH]

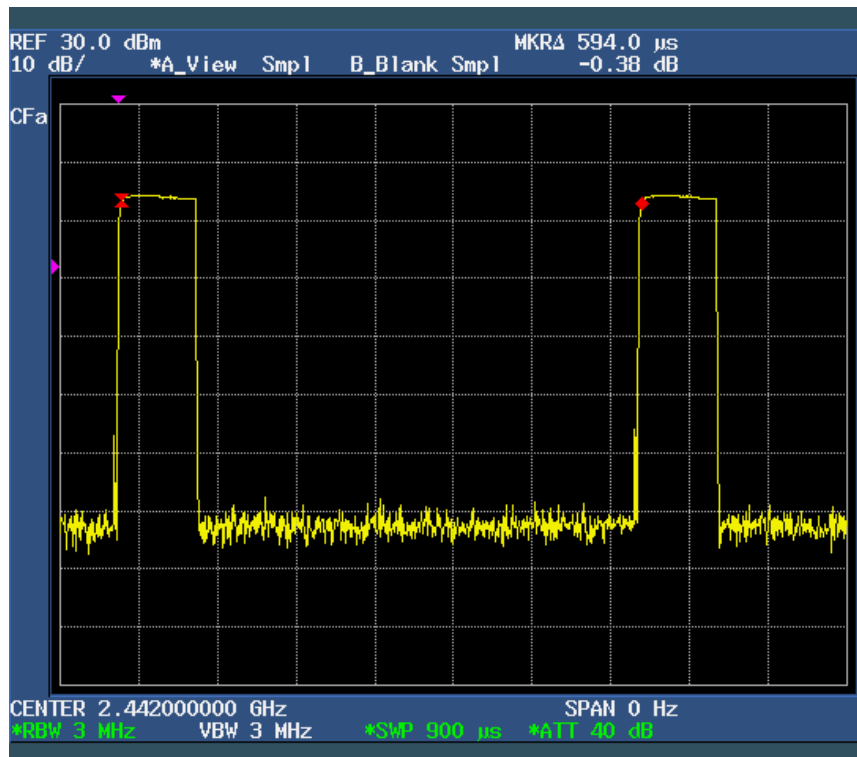

[Continuous Time: 37CH]

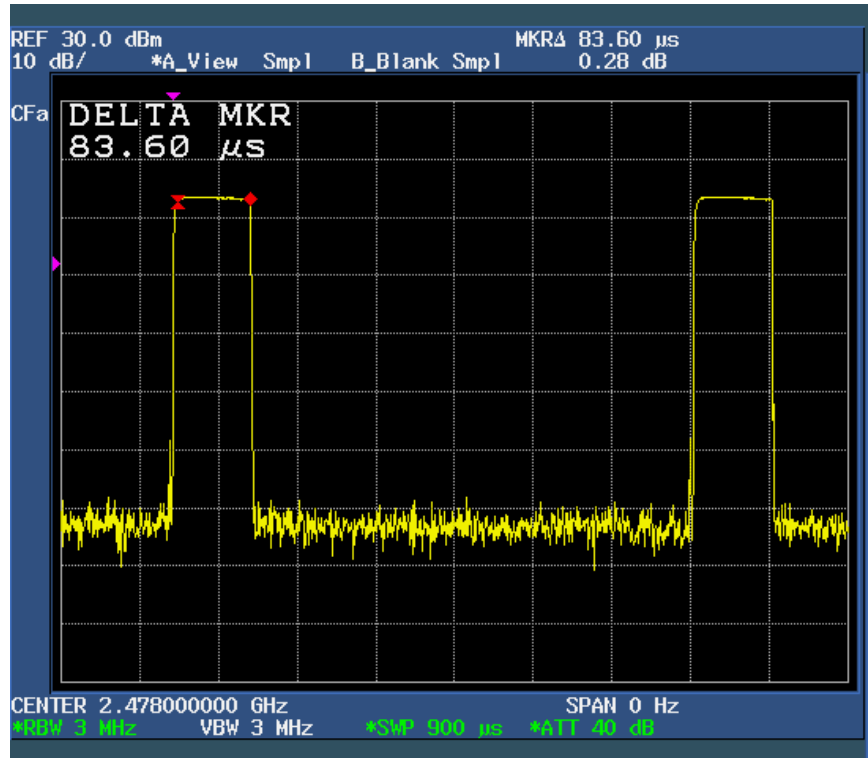

[Hopping Period : 37CH]

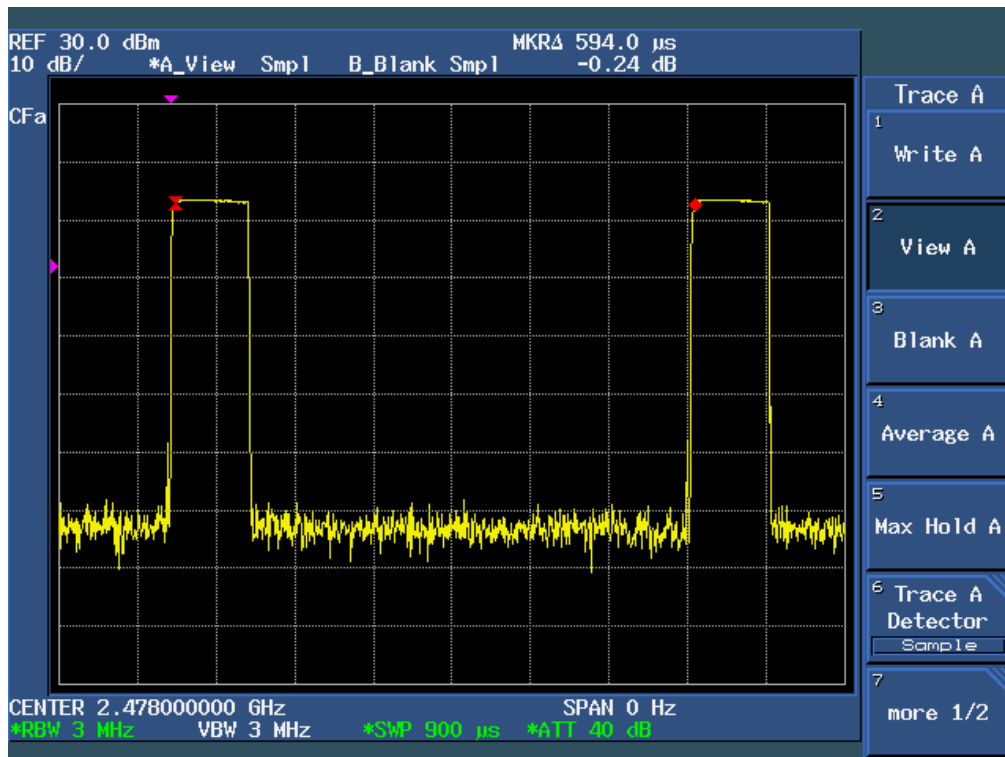

5.8 Spurious Emissions

5.8.1 Radiated Emissions (TX)

| | |
|---------------------|---|
| EUT | Wireless Microphone / MG-77 |
| Limit apply to | FCC Part 15.209 |
| Test Date | August 13, 2009 |
| Operating Condition | Low CH, Middle CH, High CH Transmission |
| Result | Pass |

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequencies (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Field Strength (dB $\mu\text{V}/\text{m}$) | Measurement Distance (m) |
|-------------------|---|---|--------------------------|
| 30 – 88 | 100 | 40 | 3 |
| 88 – 216 | 150 | 43.5 | 3 |
| 216 – 960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

Radiated Emissions Test data

- Below 1 GHz


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-----------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - |

Result: All emissions below noise floor of 20 dB μ V/m

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

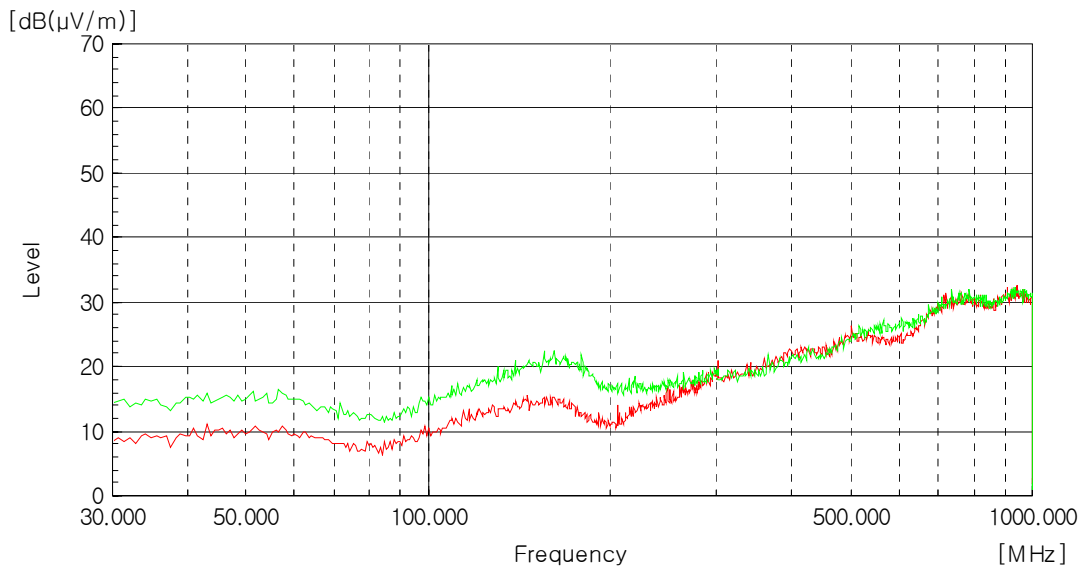


- Above 1 GHz

- Operating mode: TX / CH: Low, Mid, High


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

— Peak Limit Line
— AV Limit Line

Final data Peak

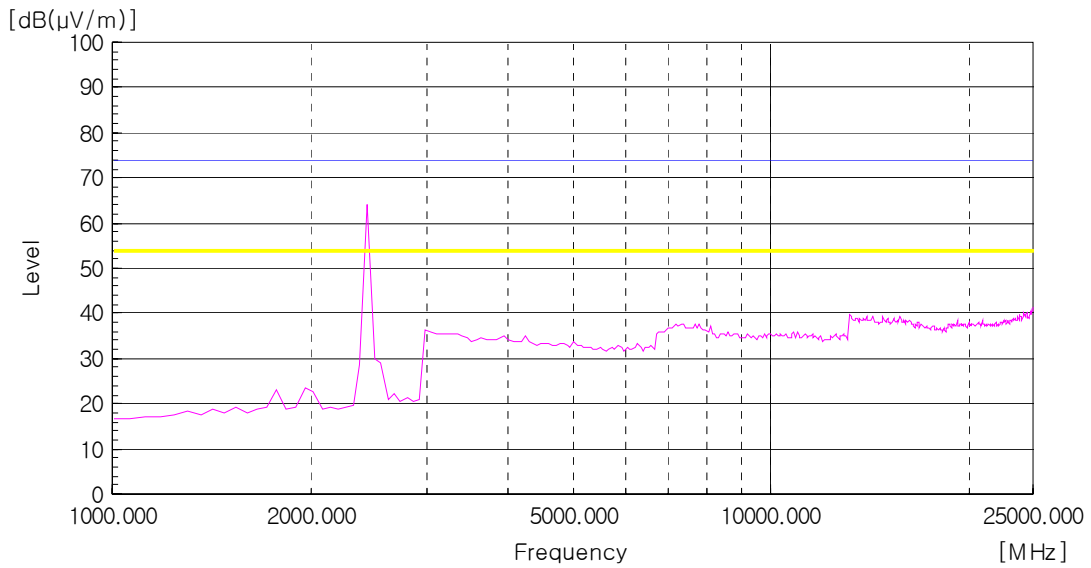

Final data AV

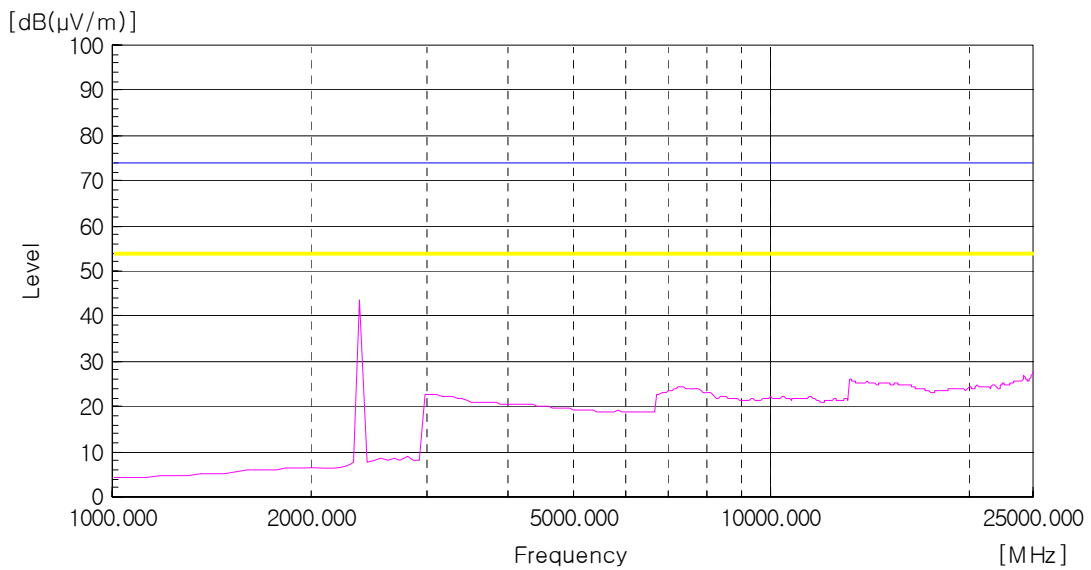

1. Low CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamplifier [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 74.00 | - |
| - | - | - | - | - | - | - | 74.00 | - |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamplifier [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 54.00 | - |
| - | - | - | - | - | - | - | 54.00 | - |

2. Middle CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamplifier [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 74.00 | - |
| - | - | - | - | - | - | - | 74.00 | - |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamplifier [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 54.00 | - |
| - | - | - | - | - | - | - | 54.00 | - |

3. High CH

Detector mode: Peak mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamp [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 74.00 | - |
| - | - | - | - | - | - | - | 74.00 | - |

Detector mode: Average mode

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB μ V] | Preamp [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-------------------------|-------------|-----------------------|----------------------|-------------|
| - | - | - | - | - | - | - | 54.00 | - |
| - | - | - | - | - | - | - | 54.00 | - |

Result: All emissions below noise floor of 20 dB μ V/m

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss - Preamp
3. Margin value = Limit - Result
4. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 30 Hz, Sweep = Auto
7. Considered that's already beyond the background noise floor.

5.8.2 Conducted Measurement

| | |
|---------------------|---|
| EUT | Wireless Microphone / Wireless Microphone |
| Limit apply to | FCC Part 15.247(d) |
| Test Date | August 12, 2009 |
| Operating Condition | Charging mode during the tested. |
| Result | Pass |

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results

- Refer to see the measured plot in next page.

NOTES:

1. Measure conducted measurement channel using spectrum analyzer.




Test Engineer: Hoon Pyo, Lee

Spurious Emissions (Conducted Measurement)


[CH Low]



[CH Mid]

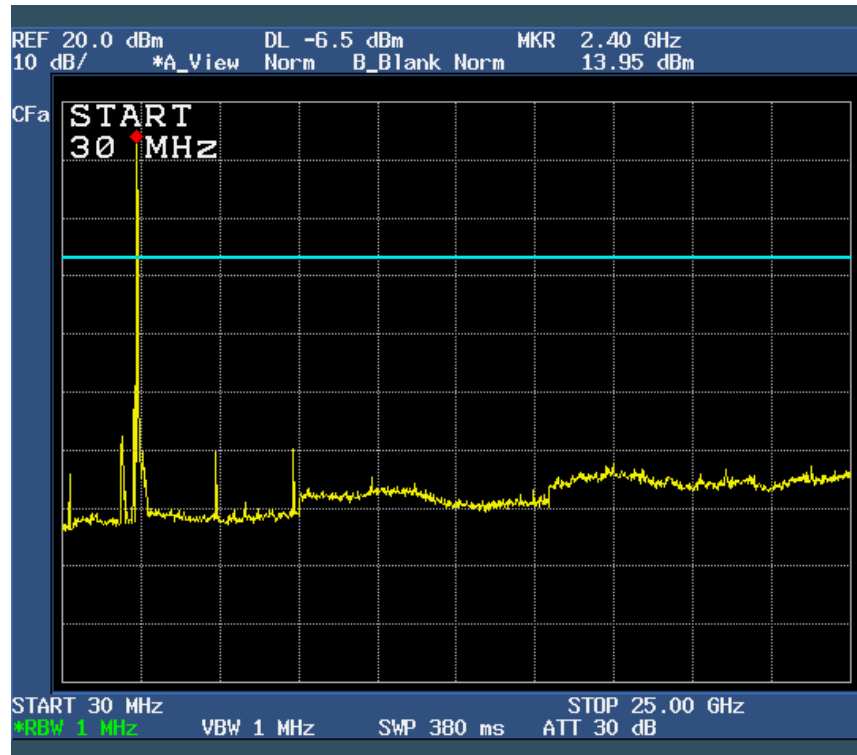

[CH High]

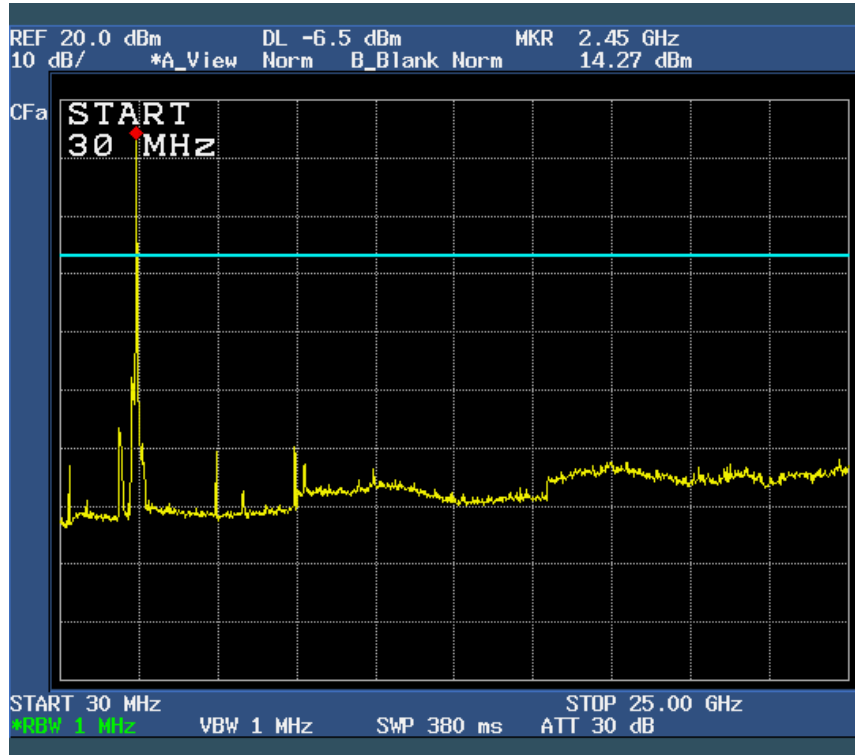

5.9 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limit

Limits for general population/Uncontrolled exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|---|---|
| 0.3-1.34 | 614 | 1.63 | (100) | 30 |
| 1.34-30 | 824/f | 2.19/f | (180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | -- | -- | f/1500 | 30 |
| 1500-100 000 | -- | -- | 1.0 | 30 |

f = frequency in MHz

*Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| | | |
|---|---|-------------------------------|
| Maximum peak output power at antenna input | : | 13.44 dBm (22.08 mW) |
| Prediction distance | : | 20 cm |
| Predication frequency | : | 2 442 MHz |
| Antenna gain(Max) | : | 3.90 dBi (2.455 numeric) |
| Power density at predication frequency at 20 cm | : | 0.01078277 mW/cm ² |
| MPE Limit for | : | 1.0 mW/cm ² |
| Portable Limit for | : | ≤ 60/f(GHz) (25 mW) |

Test Result

The source-based time-averaged output power is **22.08 mW**.

5.10 Power line Conducted Emissions

| | |
|---------------------|---|
| EUT | Wireless Microphone / MG-77 |
| Limit apply to | FCC Part 15.207 |
| Test Date | September 09, 2009 |
| Operating Condition | RF transmitting continuously during the tested. |
| Result | Pass |

Limit

for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dBuV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Results

- Refer to see the measured plot in next page.



Test Engineer : Hoon Pyo, Lee

Power line Conducted Emissions

Test data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth : 9 kHz)

| Frequency [MHz] | Result [dB μ V] | | Phase (*H/**N) | Limit [dB μ V] | | Margin [dB] | |
|-----------------|---------------------|---------|----------------|--------------------|---------|-------------|---------|
| | Quasi-peak | Average | | Quasi-peak | Average | Quasi-peak | Average |
| 0.165 | 52.54 | 34.53 | N | 65.21 | 55.21 | 12.67 | 20.88 |
| 0.200 | 48.85 | 33.92 | N | 63.61 | 53.61 | 14.76 | 19.49 |
| 0.245 | 44.40 | 25.52 | H | 61.92 | 51.92 | 17.52 | 27.40 |
| 0.290 | 41.91 | 25.75 | H | 60.52 | 50.52 | 18.61 | 24.92 |
| 0.325 | 39.80 | 27.77 | N | 59.58 | 49.58 | 19.78 | 21.81 |
| 2.855 | 32.85 | 27.19 | H | 56.00 | 46.00 | 23.15 | 18.81 |
| 14.800 | 37.46 | 28.34 | N | 60.00 | 50.00 | 22.54 | 21.66 |


NOTES: 1. * H: HOT Line, **N: Neutral Line

2. Margin value = Limit – Result


3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.207

Test plots

Hot

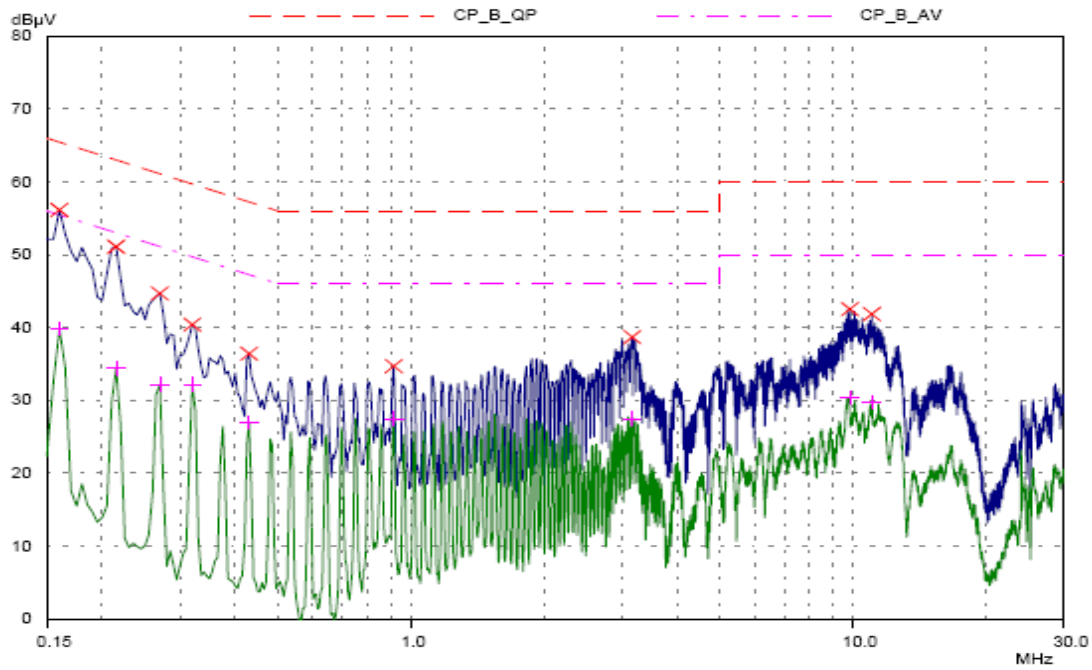

Neutral

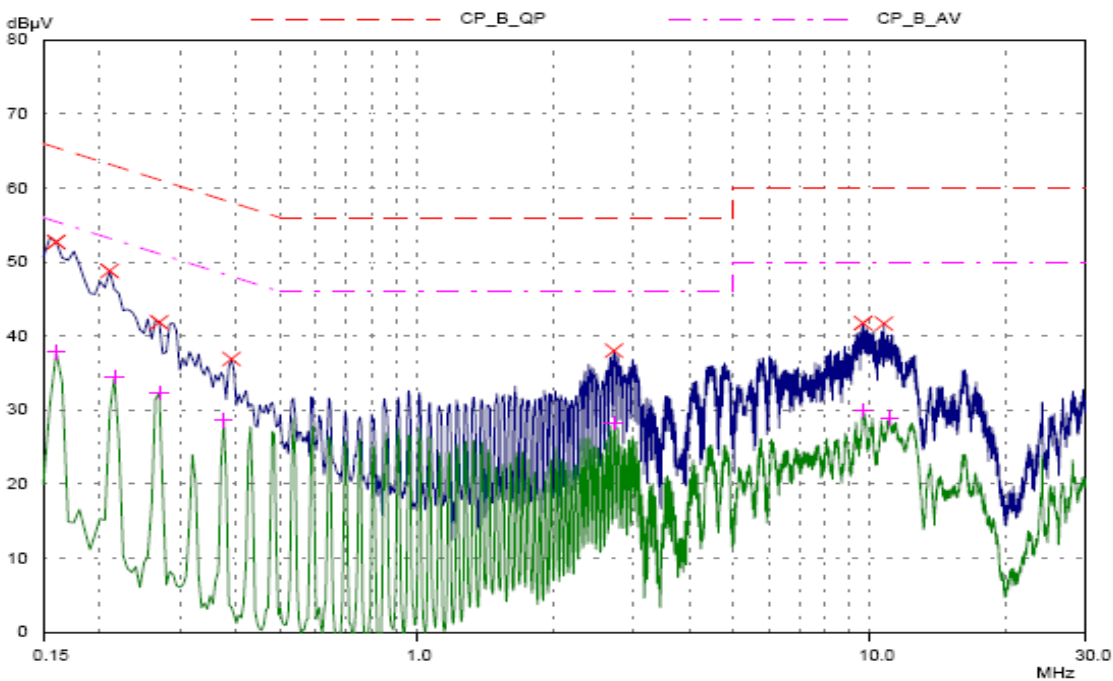

Quasi-peak

Average

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (uV) : \text{Equation}$$

Example : @ 500.25 MHz

| | | |
|-----------------------------|---|-----------------------------|
| Class B Limit | = | 46.00 dBuV/m |
| Reading | = | 20.75 dBuV |
| Antenna Factor + Cable Loss | = | 16.65 + 5.40 = 22.05 dBuV/m |
| Total | = | 42.80 dBuV/m |
| Margin | = | 46.00 – 42.80 = 3.20 dB |
| | = | 3.20 dB below Limit |

7. List of test equipments used for measurements

| | Test Equipment | Model | Mfg. | Serial No. | Cal. Due Date |
|---|-------------------------|------------|-----------------------|------------|---------------|
| ■ | EMI Test Receiver | ESVS 10 | R & S | 835165/001 | 10-04-02 |
| ■ | EMI TEST Receiver | ESPI3 | R & S | 100478 | 09-10-02 |
| ■ | LISN | 3825/2 | EMCO | 9208-1995 | 09-10-01 |
| ■ | LISN | 3816-2 | EMCO | 1002 | 09-10-01 |
| ■ | Spectrum Analyzer | E7405A | H.P | US41160290 | 09-10-02 |
| ■ | LogBicon Antenna | VULB9160 | Schwarzbeck | 3082 | 10-01-25 |
| ■ | Broad band Horn antenna | BBHA 9120D | Schwarz Beck | 227 | 11-03-16 |
| ■ | Broad band Horn antenna | BBHA 9120D | Schwarz Beck | 285 | 11-03-16 |
| ■ | Preamplifier | 8447D | H.P | 3307A02865 | 09-10-02 |
| ■ | System Power Supply | Agilent | 6030A | 1036546 | 10-04-02 |
| ■ | Power Meter | NRVS | R & S | 834053/060 | 09-10-02 |
| ■ | Controller | HD2000 | HD GmbH | C/125 | N/A |
| ■ | Antenna Master | MA2400 | HD GmbH | N/A | N/A |
| ■ | Turn-Table | MFT-120S | Max-Full Antenna Corp | N/A | N/A |
| ■ | Antenna Master | MFA-440E | Max-Full Antenna Corp | N/A | N/A |