

TEST REPORT

Reference No..... : WTH20X08057057W
FCC ID : XOM-D43A114D-U-A
Applicant : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
Address : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,
Shangmeilin, Futian District, Shenzhen , China
Product Name : 43" SMART 4K UHD TV
Test Model. : D43A114d-U-A-I
Standards : FCC Part 15C
Date of Receipt sample : Aug.19, 2020
Date of Test..... : Aug.19, 2020 to Aug.28, 2020
Date of Issue : Aug.28, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS	10
3. RF EXPOSURE	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. ANTENNA REQUIREMENT	12
4.1 STANDARD APPLICABLE.....	12
4.2 EVALUATION INFORMATION.....	12
5. POWER SPECTRAL DENSITY	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST SETUP BLOCK DIAGRAM.....	13
5.3 TEST PROCEDURE.....	13
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
6. DTS BANDWIDTH	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST SETUP BLOCK DIAGRAM.....	23
6.3 TEST PROCEDURE.....	23
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	23
7. RF OUTPUT POWER	33
7.1 STANDARD APPLICABLE.....	33
7.2 TEST SETUP BLOCK DIAGRAM.....	33
7.3 TEST PROCEDURE.....	33
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	33
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	43
8.1 STANDARD APPLICABLE.....	43
8.2 TEST PROCEDURE.....	43
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	45
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	45
9. OUT OF BAND EMISSIONS	60
9.1 STANDARD APPLICABLE.....	60
9.2 TEST PROCEDURE.....	60
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	61
10. CONDUCTED EMISSIONS	94
10.1 TEST PROCEDURE.....	94
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	94
10.3 TEST RECEIVER SETUP.....	94
10.4 SUMMARY OF TEST RESULTS/PLOTS.....	94

Report version

Version No.	Date of issue	Description
Rev.00	Aug.28, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road
 128, Shangmeilin, Futian District, Shenzhen, China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 BRANCH
 Address of manufacturer: SEIYU INDUSTRIAL PARK,DA SAN VILLAGE,DA SHUI
 KENG,GUANLAN TOWN,LONGHUA NEW DISTRICT,
 SHENZHEN,P.R.C

General Description of EUT	
Product Name:	43" SMART 4K UHD TV
Trade Name:	RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA, RCASMA TVIRTUOSO
Model No.:	D43A114d-U-A-I
Adding Model(s):	RNSMU4336, XXXXXXXXXXXX43XXXXXXXXXXXXXXXX, (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model D43A114d-U-A-I, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	16.74dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	4.4dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1091	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information


This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Setup Block Diagram

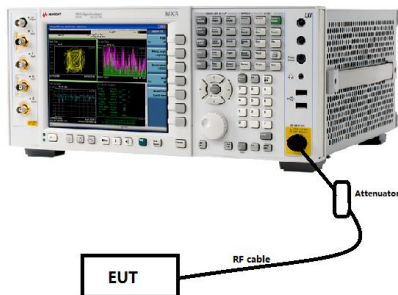

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.4 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 0	Antenna 1		
802.11b_11Mbps	2412	-17.62	-21.42	/	8
	2437	-17.50	-17.40	/	8
	2462	-17.76	-17.91	/	8
802.11g_54Mbps	2412	-19.97	-19.36	/	8
	2437	-18.81	-19.52	/	8
	2462	-19.20	-20.12	/	8
802.11n-HT20_MCS7	2412	-20.36	-19.54	-16.92	8
	2437	-19.30	-19.24	-16.26	8
	2462	-18.52	-19.91	-16.15	8
802.11n-HT40_MCS7	2422	-24.00	-24.22	-21.10	8
	2437	-23.39	-24.42	-20.86	8
	2452	-24.98	-26.20	-22.54	8




Please refer to the following test plots:

➤ Antenna 0
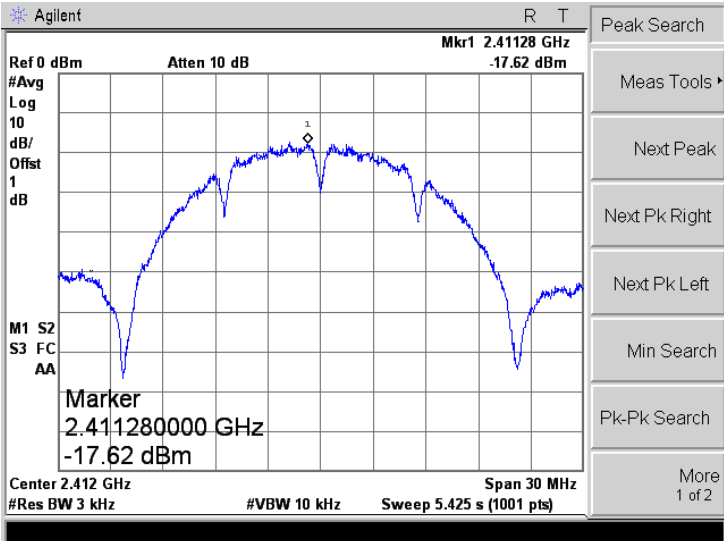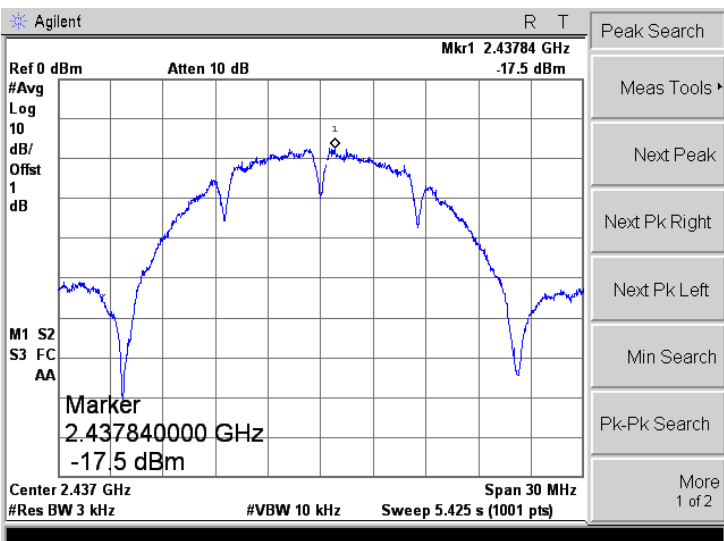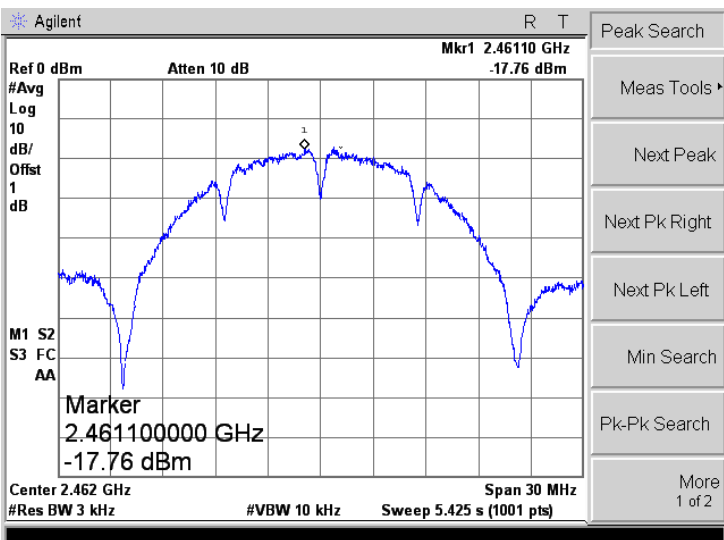
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

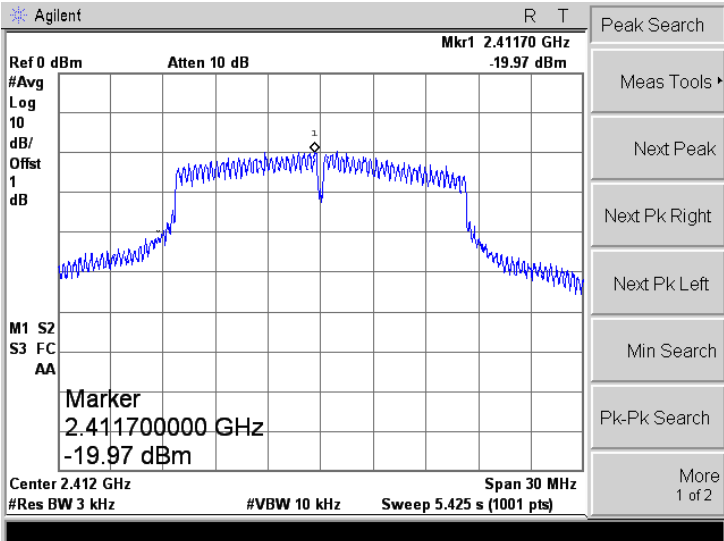
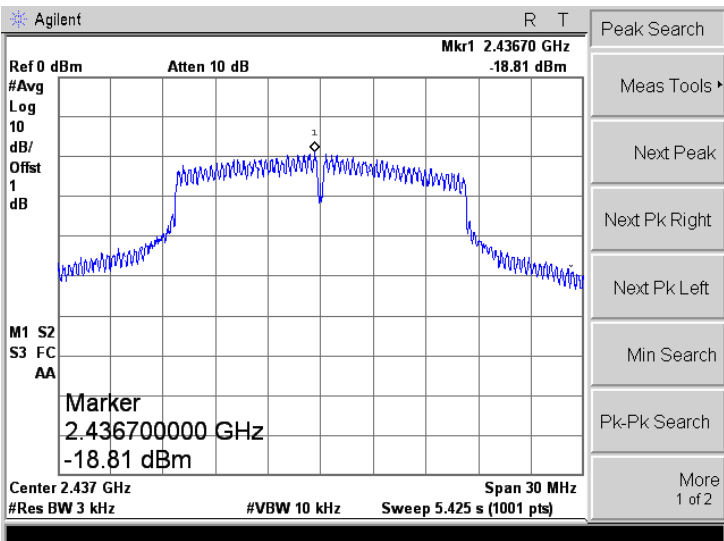
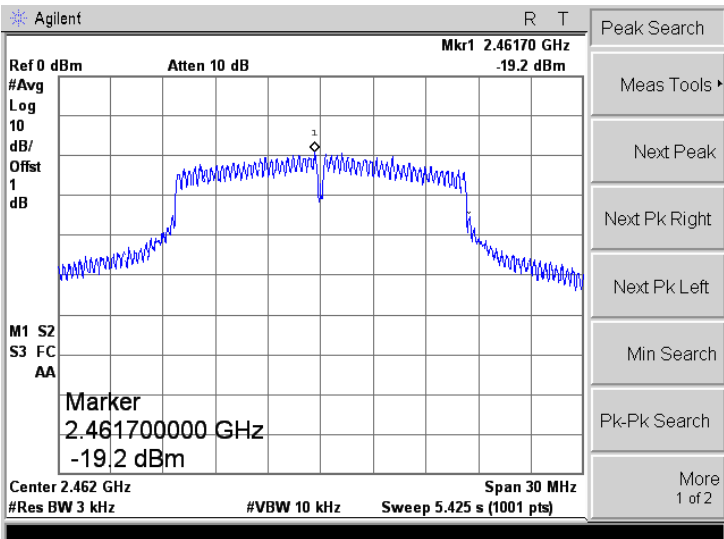
<p>802.11g-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41170 GHz -19.97 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.411700000 GHz -19.97 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43670 GHz -18.81 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.436700000 GHz -18.81 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.46170 GHz -19.2 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.461700000 GHz -19.2 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>

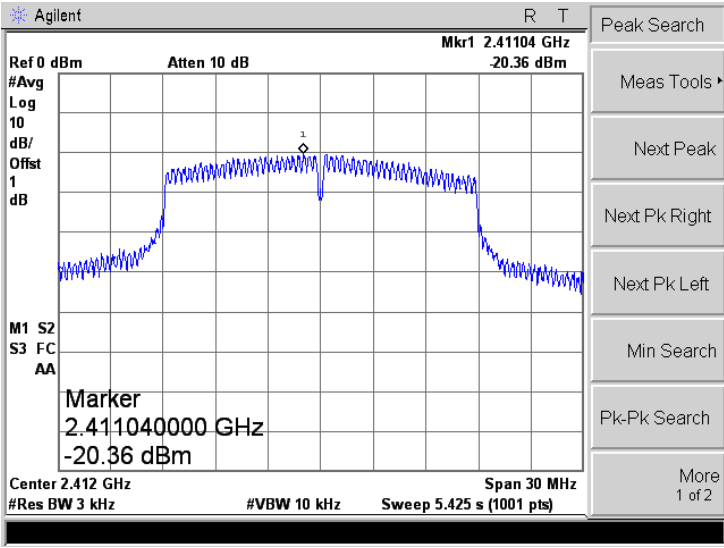
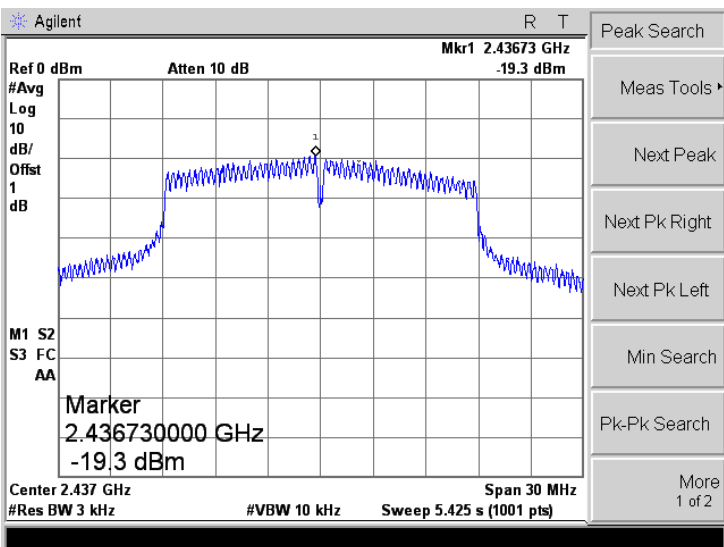
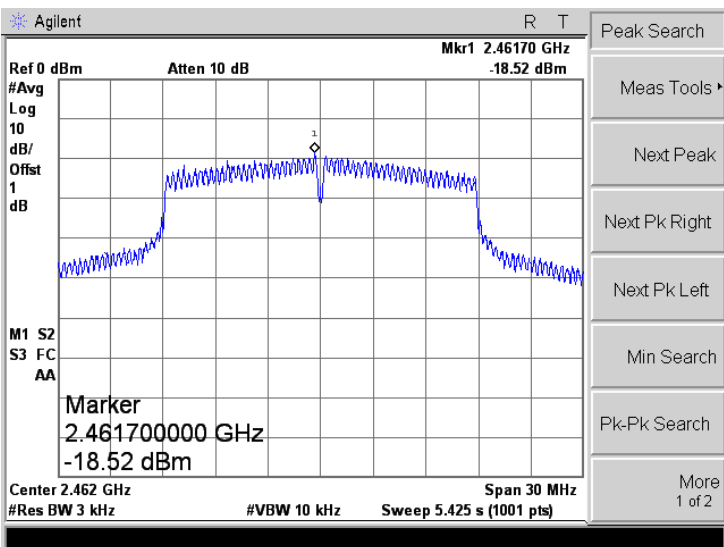
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

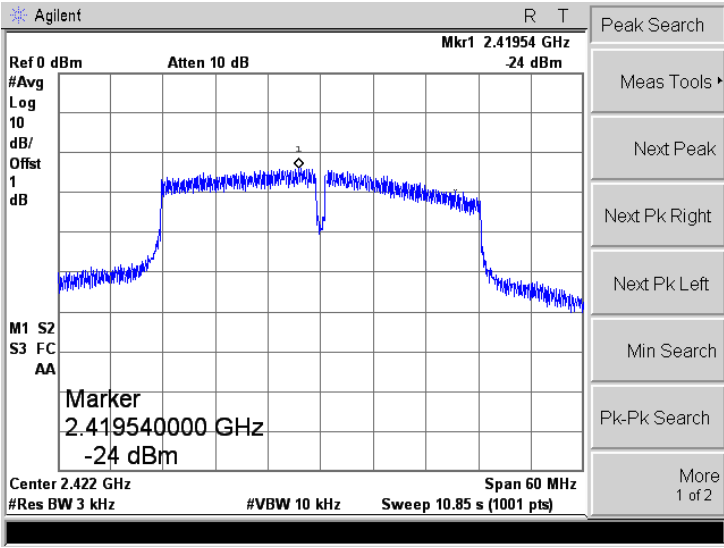
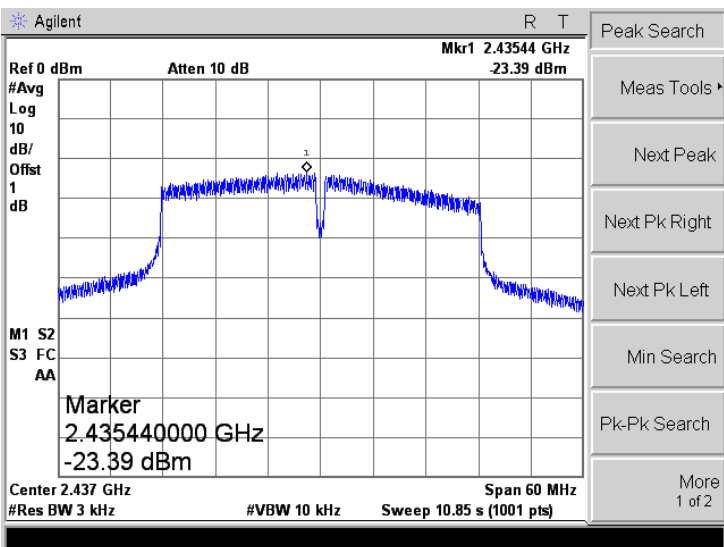
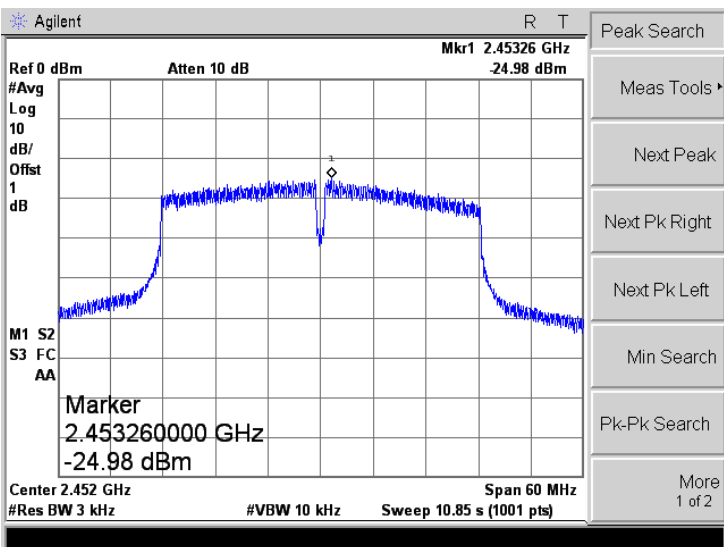
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41954 GHz #Avg Log 10 dB/ Offst 1 dB dB M1 S2 S3 FC AA Marker 2.419540000 GHz -24 dBm Center 2.422 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43544 GHz #Avg Log 10 dB/ Offst 1 dB dB M1 S2 S3 FC AA Marker 2.435440000 GHz -23.39 dBm Center 2.437 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.45326 GHz #Avg Log 10 dB/ Offst 1 dB dB M1 S2 S3 FC AA Marker 2.453260000 GHz -24.98 dBm Center 2.452 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>

➤ Antenna 1

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
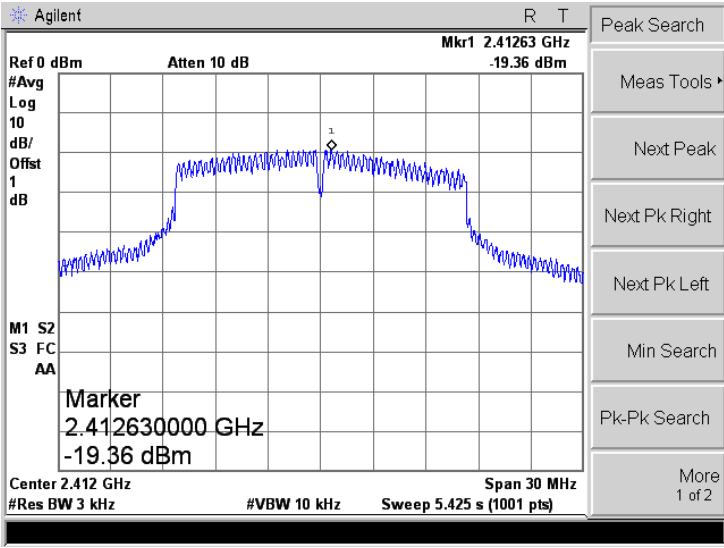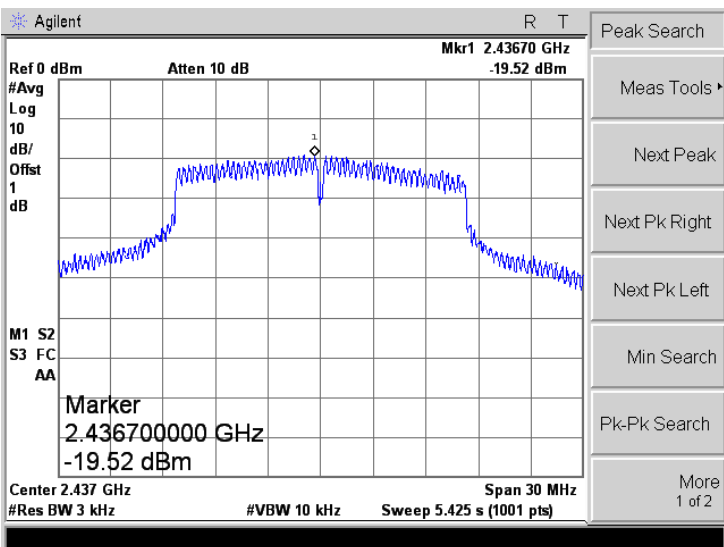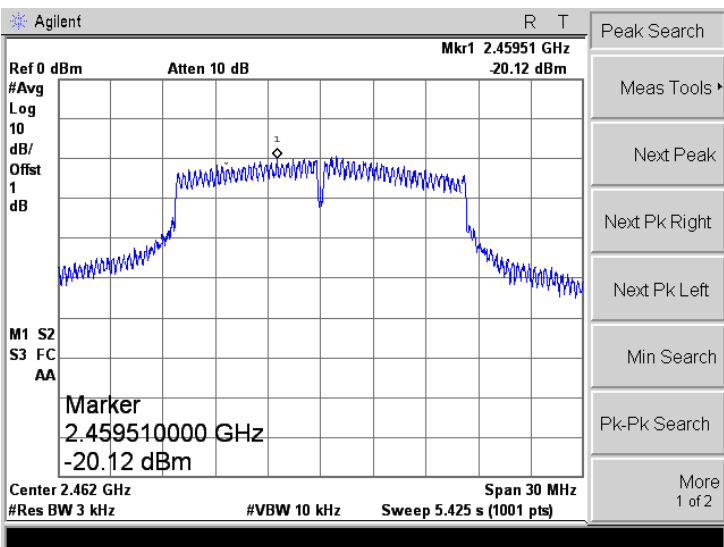
<p>802.11g-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41263 GHz -19.36 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.412630000 GHz -19.36 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43670 GHz -19.52 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.436700000 GHz -19.52 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.45951 GHz -20.12 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.459510000 GHz -20.12 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
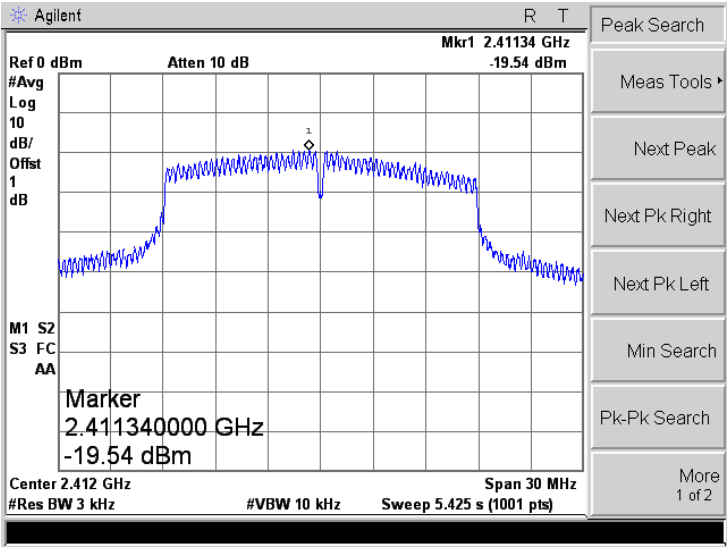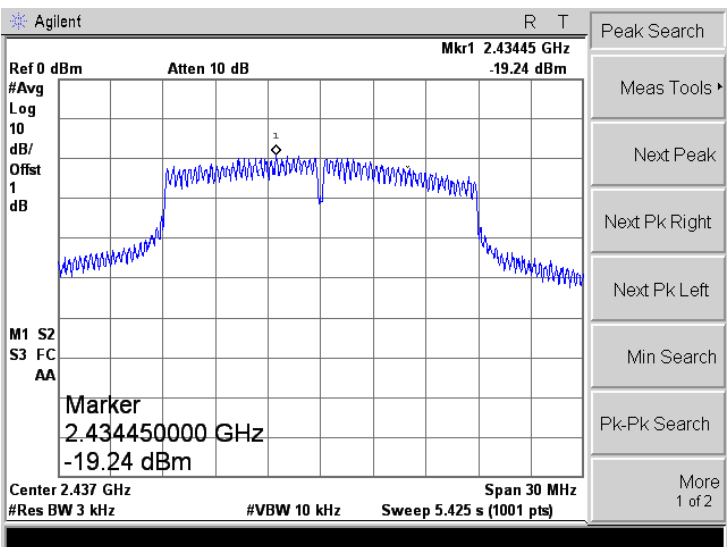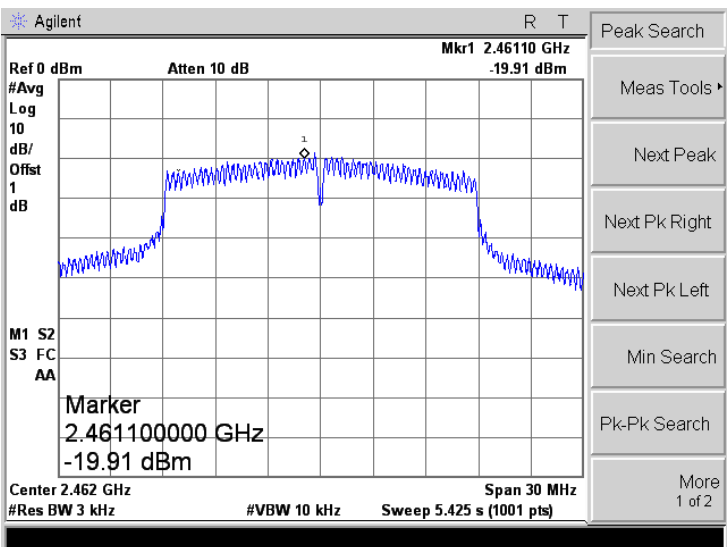
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

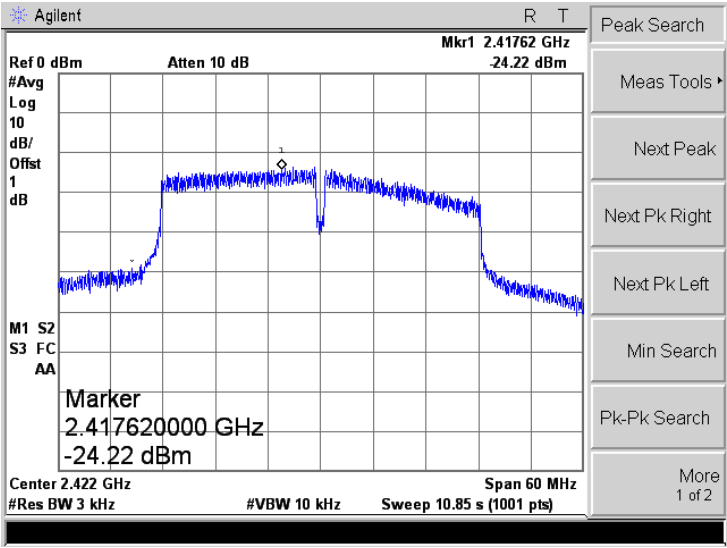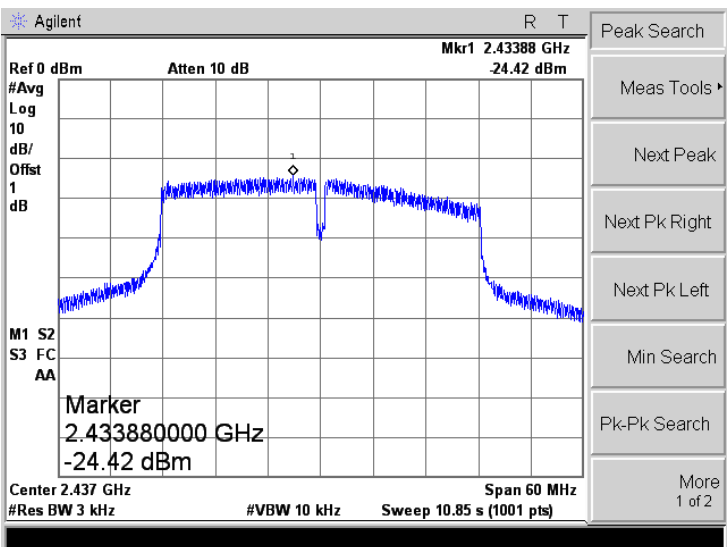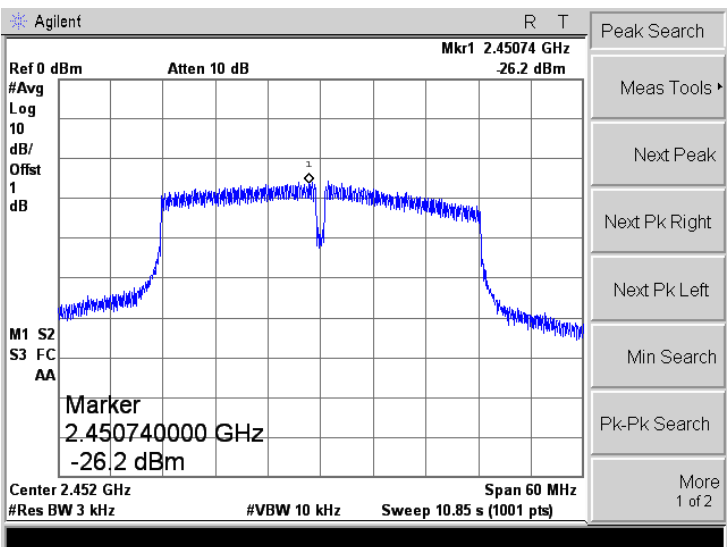
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41762 GHz -24.22 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 2.417620000 GHz -24.22 dBm Center 2.422 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43388 GHz -24.42 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 2.433880000 GHz -24.42 dBm Center 2.437 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.45074 GHz -26.2 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 2.450740000 GHz -26.2 dBm Center 2.452 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>

6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Setup Block Diagram

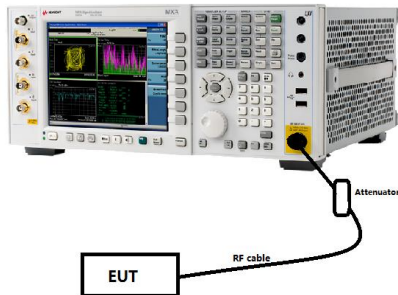

6.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 0	Antenna 1	
802.11b_11Mbps	2412	9.082	9.528	≥ 500
	2437	10.030	9.072	≥ 500
	2462	9.580	9.544	≥ 500
802.11g_54Mbps	2412	16.304	15.867	≥ 500
	2437	15.882	16.322	≥ 500
	2462	16.324	16.285	≥ 500
802.11n-HT20_MCS7	2412	17.536	16.915	≥ 500
	2437	17.538	17.569	≥ 500
	2462	17.554	17.496	≥ 500
802.11n-HT40_MCS7	2422	35.259	34.421	≥ 500
	2437	35.502	33.187	≥ 500
	2452	35.424	35.300	≥ 500

Please refer to the following test plots:

➤ Antenna 0

<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0689 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 16.298 kHz x dB Bandwidth 9.082 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0717 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -33.177 kHz x dB Bandwidth 10.030 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.3182 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -32.527 kHz x dB Bandwidth 9.580 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3315 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 17.286 kHz x dB Bandwidth 16.304 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3209 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 203.093 Hz x dB Bandwidth 15.882 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3233 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 3.635 kHz x dB Bandwidth 16.324 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4954 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 13.791 kHz</p> <p>x dB Bandwidth 17.536 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4860 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 1.302 kHz</p> <p>x dB Bandwidth 17.538 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5045 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 1.964 kHz</p> <p>x dB Bandwidth 17.554 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7327 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -2.674 kHz x dB Bandwidth 35.259 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7921 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -22.789 kHz x dB Bandwidth 35.502 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7405 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -38.944 kHz x dB Bandwidth 35.424 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

➤ Antenna 1

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">16.2922 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>27.741 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.867 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	16.2922 MHz		x dB	-6.00 dB	Transmit Freq Error	27.741 kHz			x dB Bandwidth	15.867 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
16.2922 MHz		x dB	-6.00 dB														
Transmit Freq Error	27.741 kHz																
x dB Bandwidth	15.867 MHz																
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">16.3057 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>452.368 Hz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.322 MHz</td> <td></td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.4370000 GHz</p> <p>Start Freq 2.4220000 GHz</p> <p>Stop Freq 2.4520000 GHz</p> <p>CF Step 3.0000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	16.3057 MHz		x dB	-6.00 dB	Transmit Freq Error	452.368 Hz			x dB Bandwidth	16.322 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
16.3057 MHz		x dB	-6.00 dB														
Transmit Freq Error	452.368 Hz																
x dB Bandwidth	16.322 MHz																
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">16.2833 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>5.049 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.285 MHz</td> <td></td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.4620000 GHz</p> <p>Start Freq 2.4470000 GHz</p> <p>Stop Freq 2.4770000 GHz</p> <p>CF Step 3.0000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	16.2833 MHz		x dB	-6.00 dB	Transmit Freq Error	5.049 kHz			x dB Bandwidth	16.285 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
16.2833 MHz		x dB	-6.00 dB														
Transmit Freq Error	5.049 kHz																
x dB Bandwidth	16.285 MHz																

<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.4974 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>20.752 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.915 MHz</td> <td></td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.4974 MHz		x dB	-6.00 dB	Transmit Freq Error	20.752 kHz			x dB Bandwidth	16.915 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.4974 MHz		x dB	-6.00 dB														
Transmit Freq Error	20.752 kHz																
x dB Bandwidth	16.915 MHz																
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.5112 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-1.353 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.569 MHz</td> <td></td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.5112 MHz		x dB	-6.00 dB	Transmit Freq Error	-1.353 kHz			x dB Bandwidth	17.569 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.5112 MHz		x dB	-6.00 dB														
Transmit Freq Error	-1.353 kHz																
x dB Bandwidth	17.569 MHz																
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.4851 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>1.894 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.496 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.4851 MHz		x dB	-6.00 dB	Transmit Freq Error	1.894 kHz			x dB Bandwidth	17.496 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.4851 MHz		x dB	-6.00 dB														
Transmit Freq Error	1.894 kHz																
x dB Bandwidth	17.496 MHz																


<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7233 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 42.486 kHz</p> <p>x dB Bandwidth 34.421 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7972 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -12.311 kHz</p> <p>x dB Bandwidth 33.187 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.8874 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -36.100 kHz</p> <p>x dB Bandwidth 35.300 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Setup Block Diagram

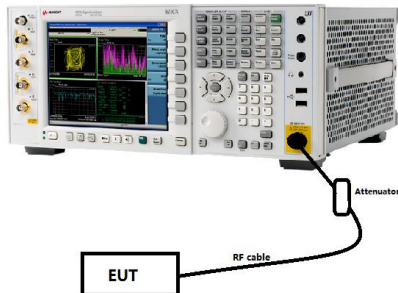

7.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(dBm)		Output Power (MAX Antenna) mW	Limit mW	
		ANT 0	ANT 1			
802.11b	2412	14.50	14.10	28.18	1000	
	2437	14.00	14.40	27.54	1000	
	2462	14.19	14.39	27.48	1000	
802.11g	2412	13.25	13.70	23.44	1000	
	2437	14.03	13.82	25.29	1000	
	2462	13.14	13.67	23.28	1000	
Test Mode	Test Channel MHz	Test Result(dBm)		Total dBm	Output Power mW	Limit mW
		ANT 0	ANT 1			
802.11n HT20	2412	13.22	13.72	16.49	44.54	1000
	2437	13.90	13.55	16.74	47.19	1000
	2462	13.23	13.82	16.55	45.14	1000
802.11n HT40	2422	12.31	12.47	15.40	34.68	1000
	2437	12.20	12.17	15.20	33.08	1000
	2452	12.34	12.02	15.19	33.06	1000




Please refer to the following test plots:

➤ Antenna 0

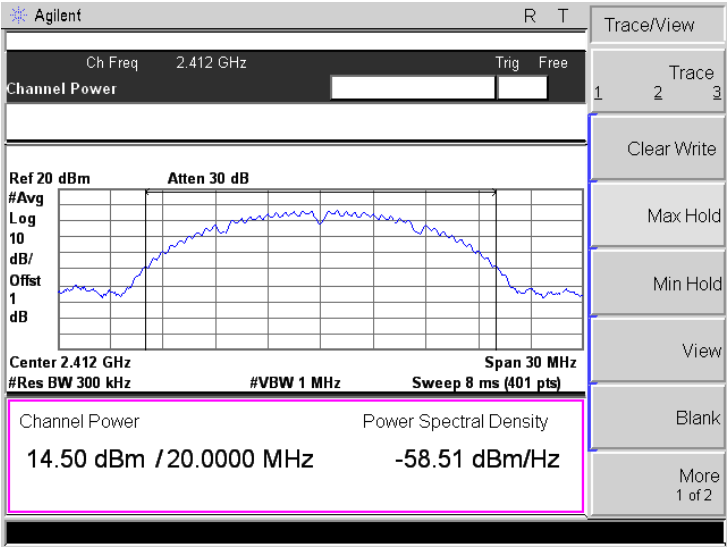
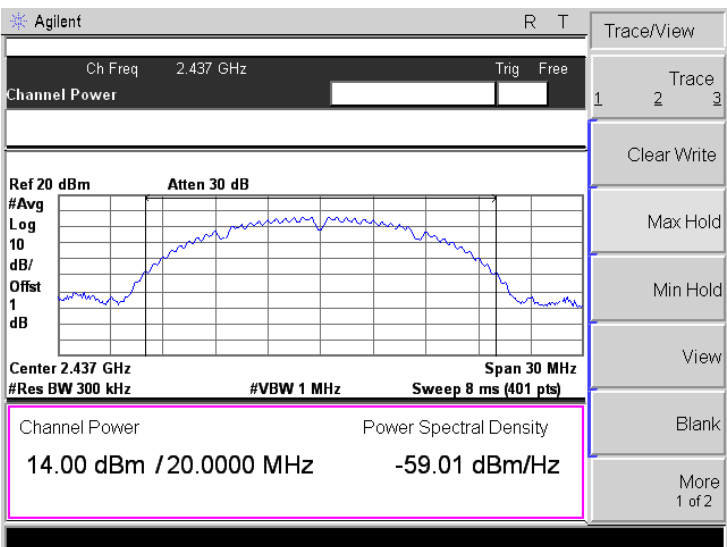
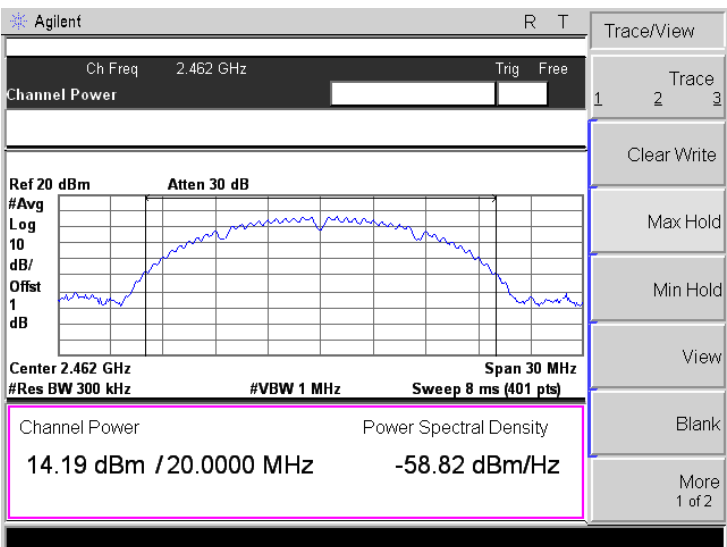
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.50 dBm / 20.0000 MHz -58.51 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.00 dBm / 20.0000 MHz -59.01 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.19 dBm / 20.0000 MHz -58.82 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

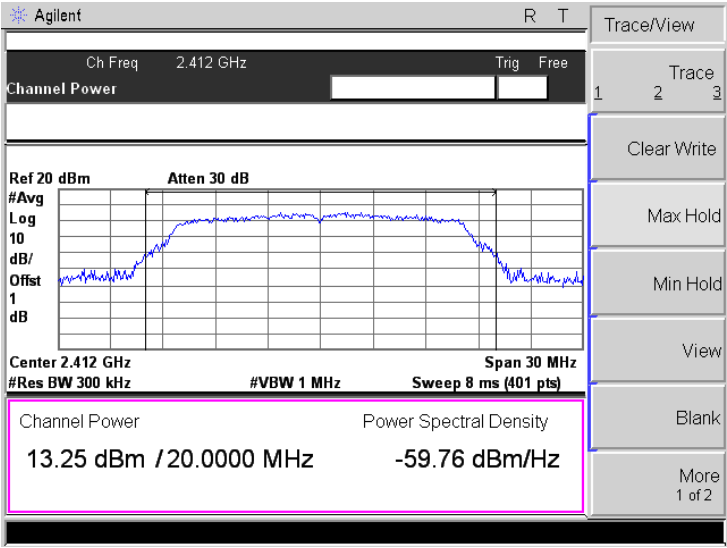
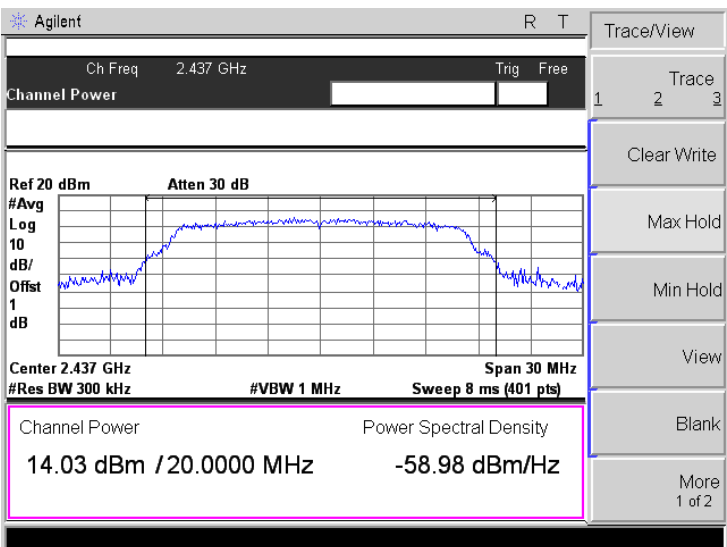
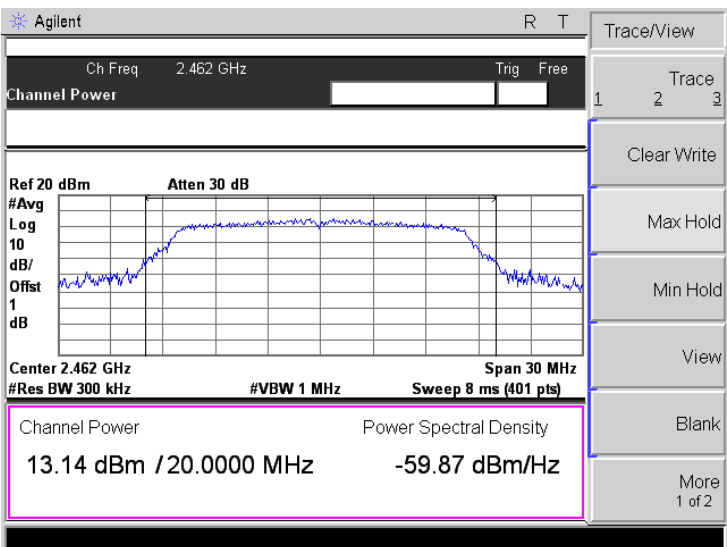
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.25 dBm / 20.0000 MHz -59.76 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.03 dBm / 20.0000 MHz -58.98 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.14 dBm / 20.0000 MHz -59.87 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>




<p>802.11n-HT20-Low MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.22 dBm / 20.0000 MHz -59.79 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.90 dBm / 20.0000 MHz -59.11 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.23 dBm / 20.0000 MHz -59.78 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

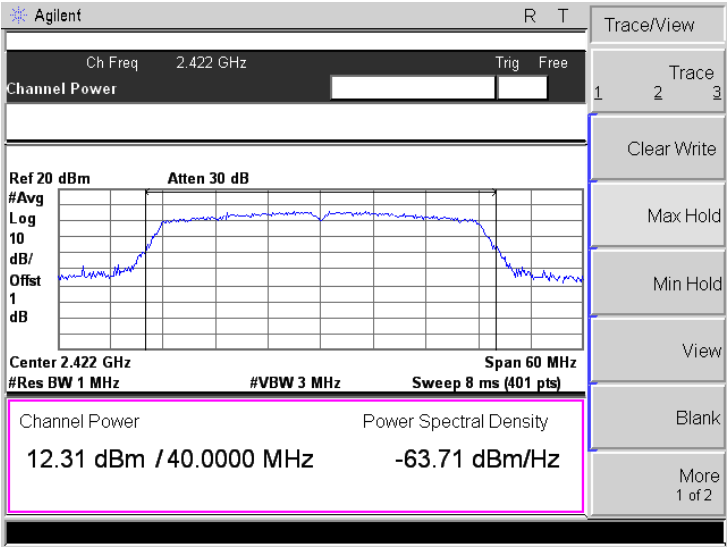
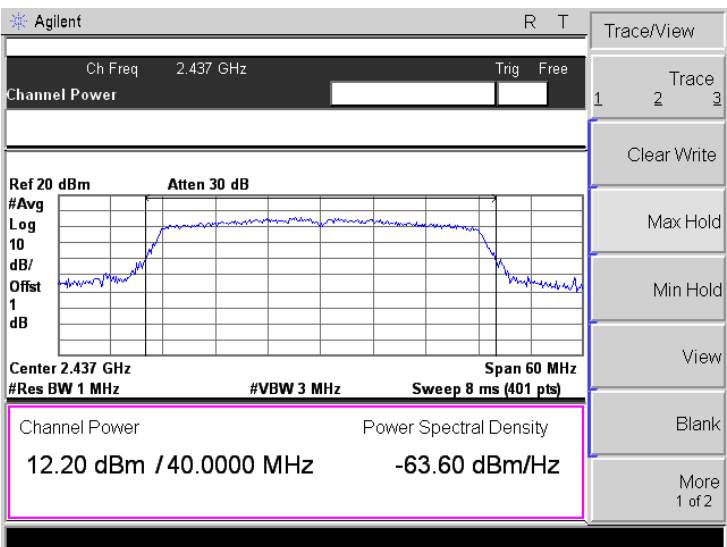
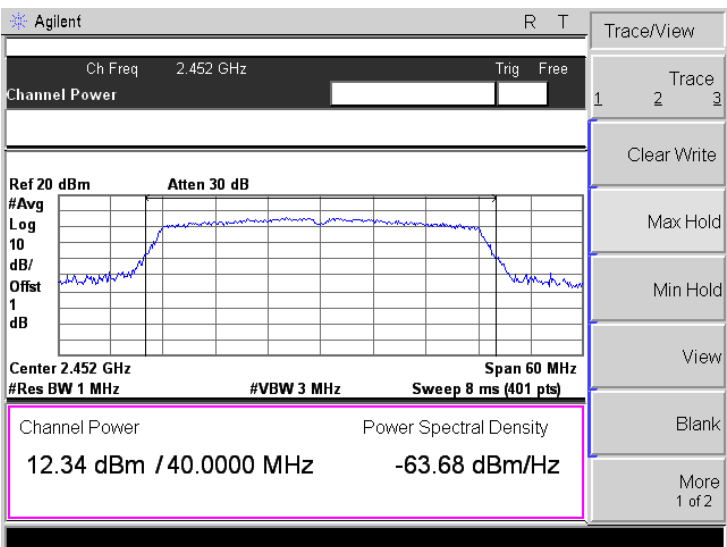
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.31 dBm / 40.0000 MHz -63.71 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.20 dBm / 40.0000 MHz -63.60 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.34 dBm / 40.0000 MHz -63.68 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

➤ Antenna 1
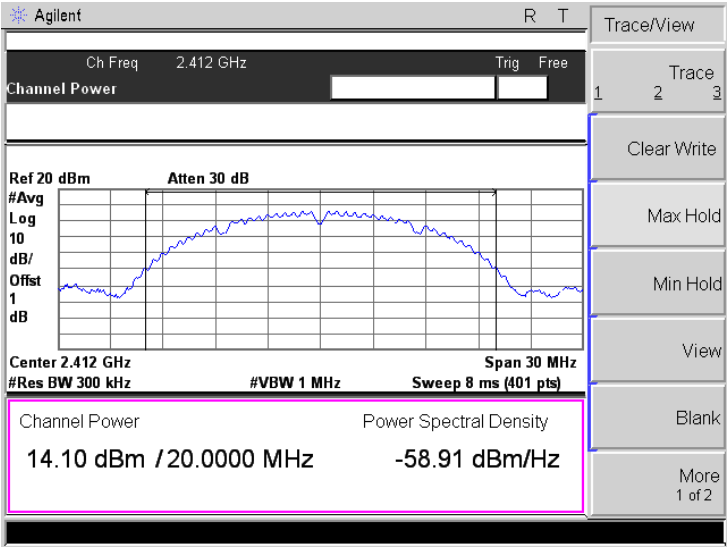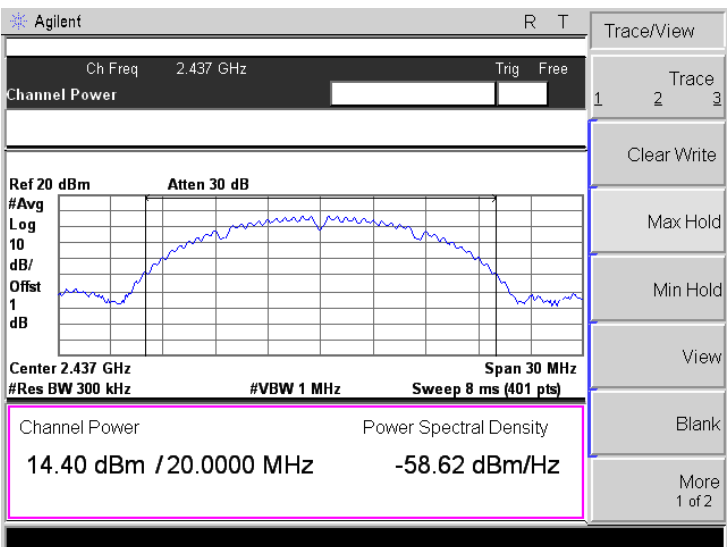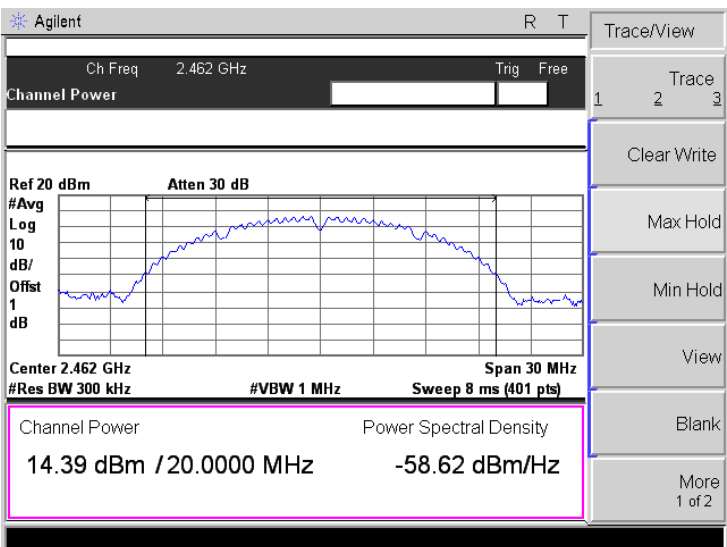
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.10 dBm / 20.0000 MHz -58.91 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.40 dBm / 20.0000 MHz -58.62 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.39 dBm / 20.0000 MHz -58.62 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
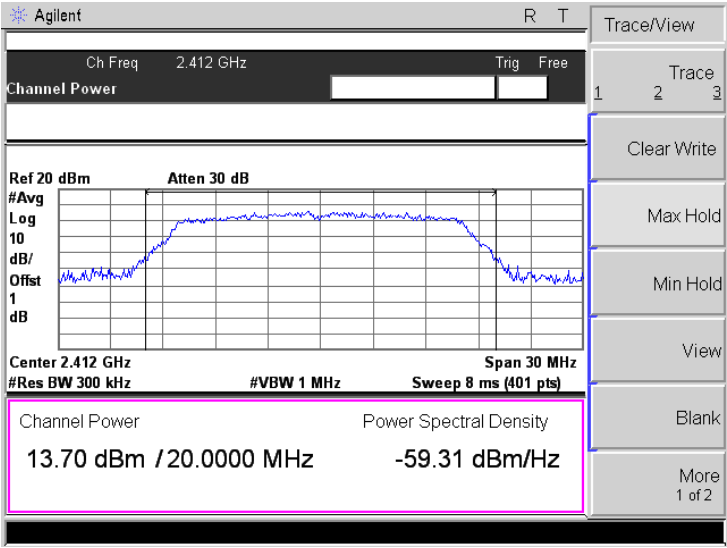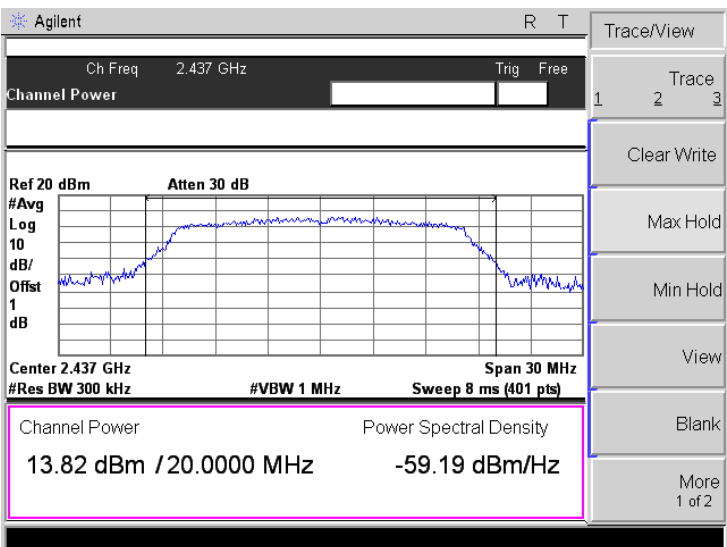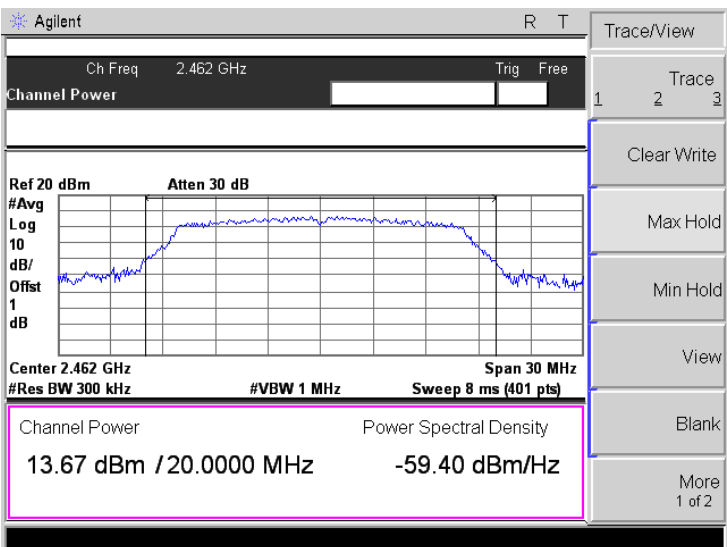
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.70 dBm / 20.0000 MHz -59.31 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.82 dBm / 20.0000 MHz -59.19 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.67 dBm / 20.0000 MHz -59.40 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
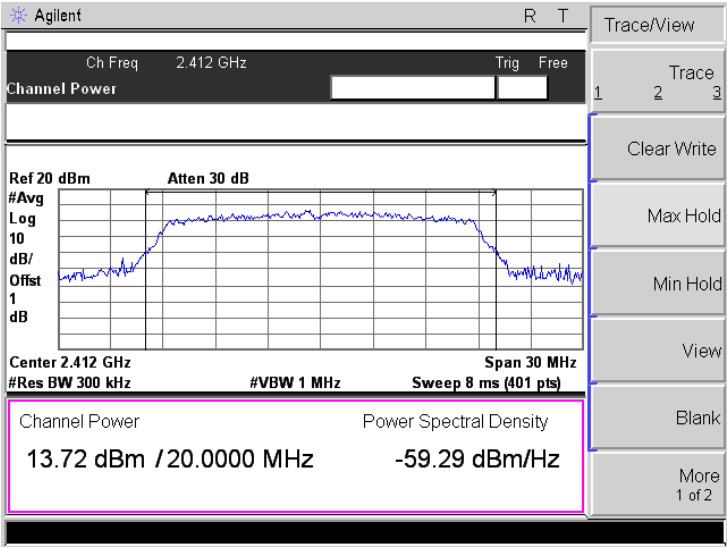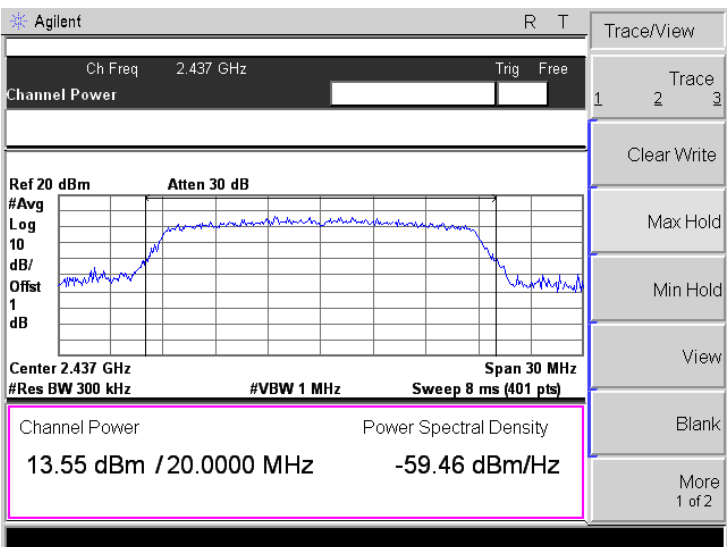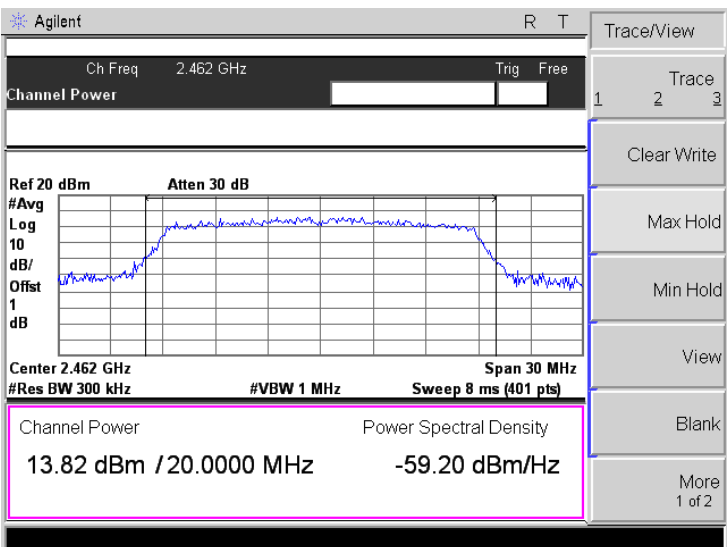
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.72 dBm / 20.0000 MHz -59.29 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.55 dBm / 20.0000 MHz -59.46 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.82 dBm / 20.0000 MHz -59.20 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
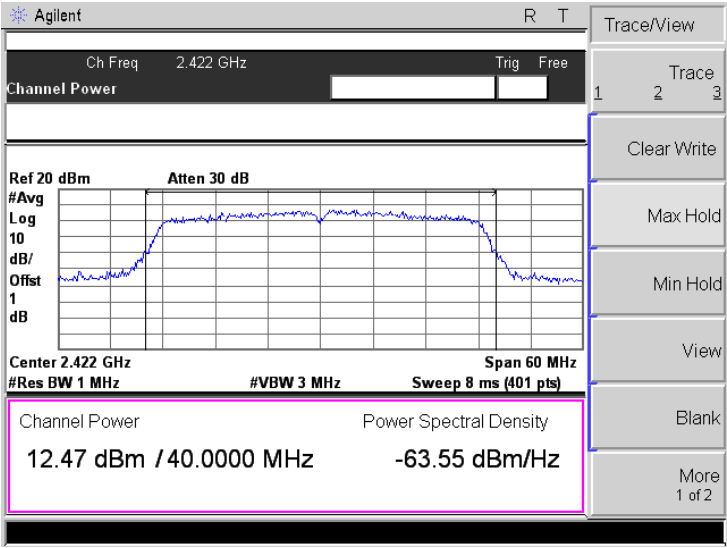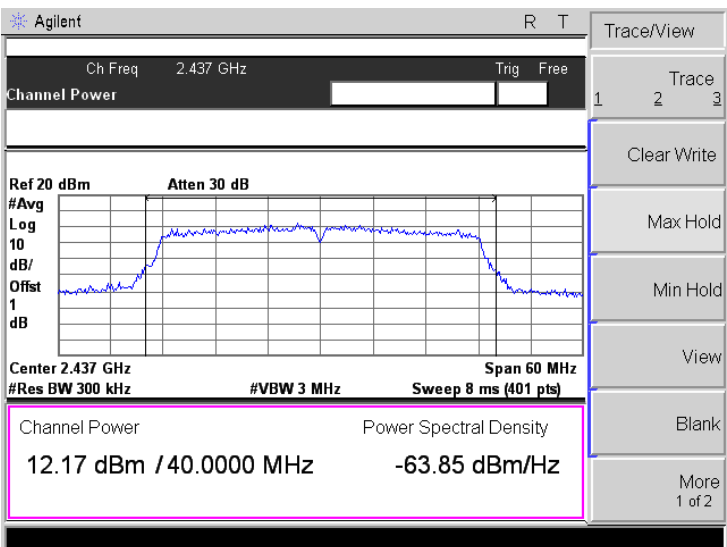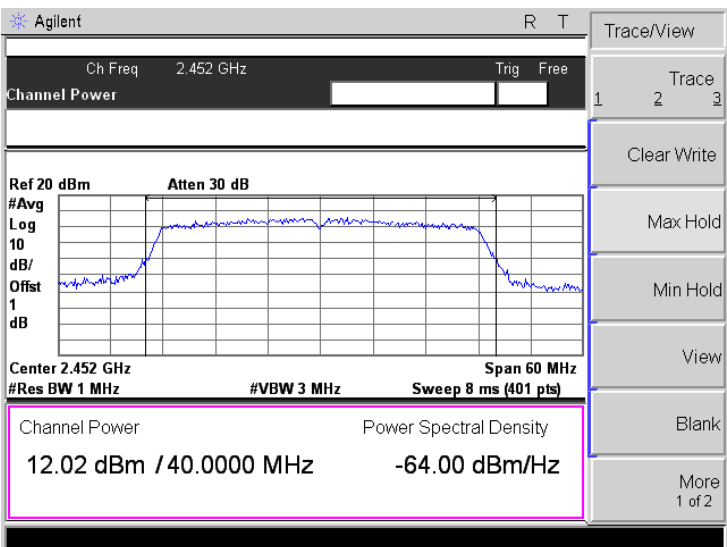
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.47 dBm / 40.0000 MHz -63.55 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 300 kHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.17 dBm / 40.0000 MHz -63.85 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.02 dBm / 40.0000 MHz -64.00 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

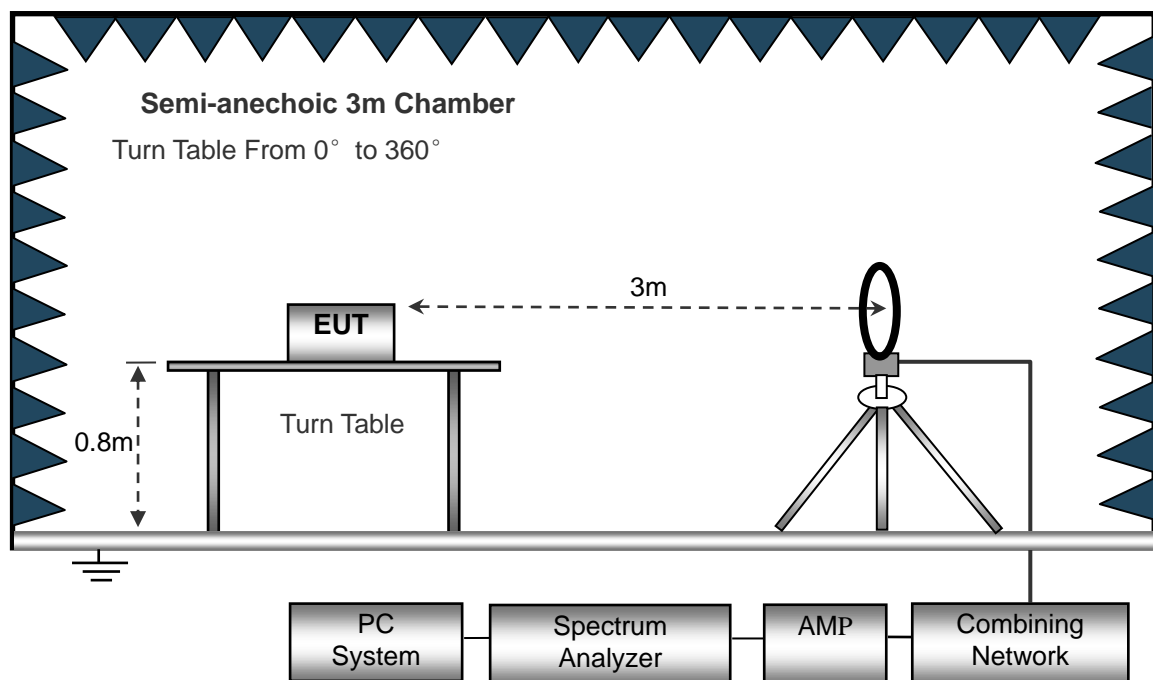

The test setup for emission measurement from 30 MHz to 1 GHz..

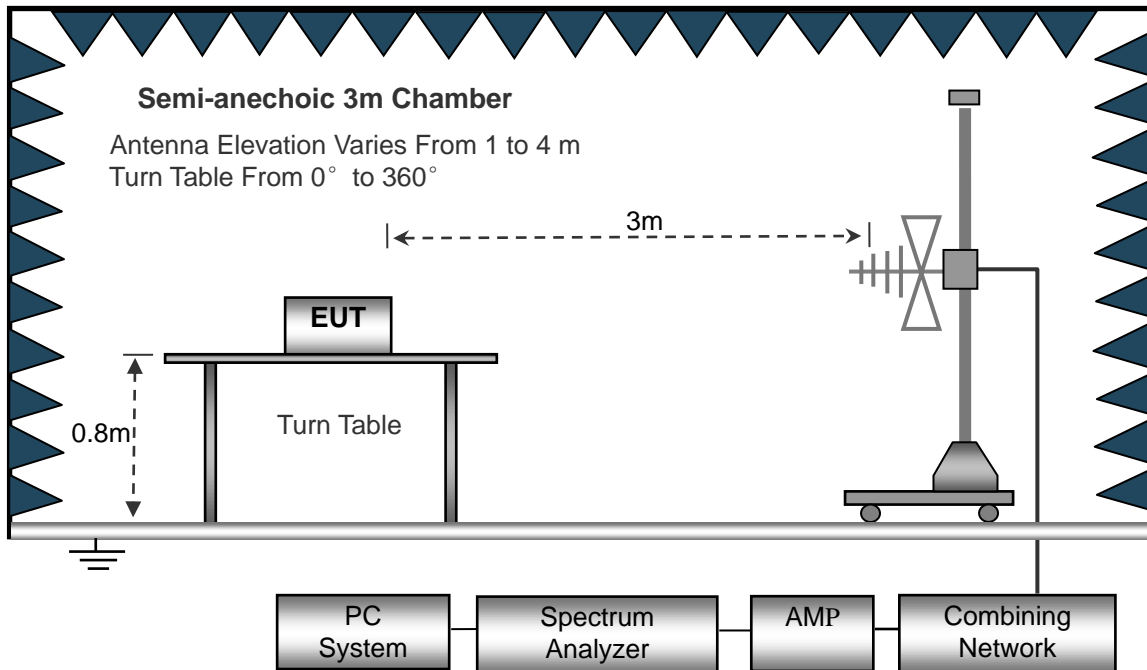

The test setup for emission measurement above 1 GHz..

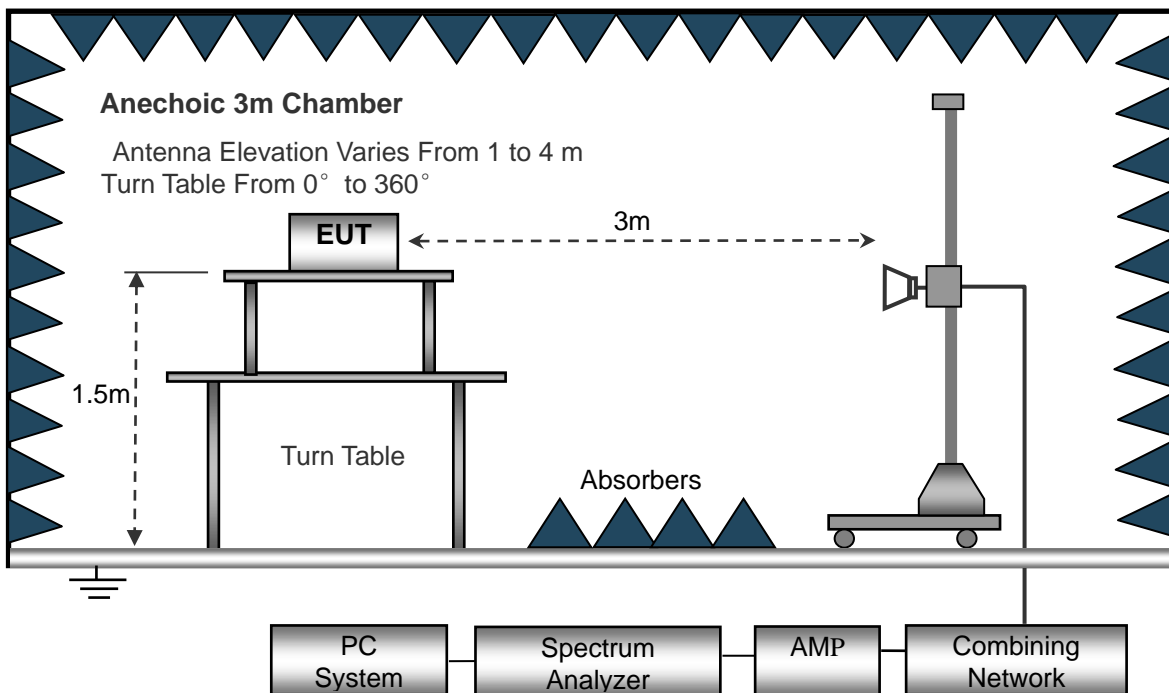

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


- Spurious Emissions Below 1GHz
- Antenna 0

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

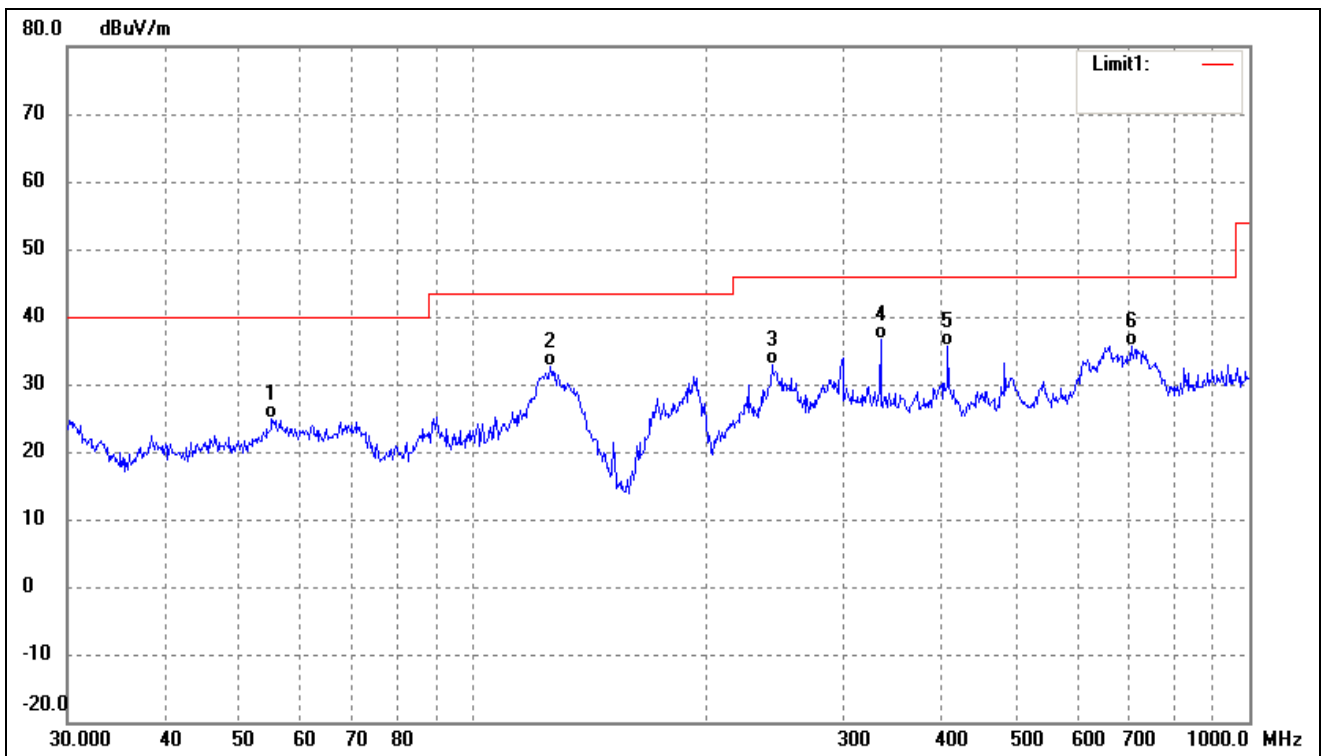


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.0274	37.83	-12.94	24.89	40.00	-15.11	-	-	QP
2	125.8864	48.60	-15.87	32.73	43.50	-10.77	-	-	QP
3	242.5253	44.11	-11.29	32.82	46.00	-13.18	-	-	QP
4	334.8589	45.01	-8.36	36.65	46.00	-9.35	-	-	QP
5	408.9460	41.85	-6.26	35.59	46.00	-10.41	-	-	QP
6	704.2261	37.42	-1.71	35.71	46.00	-10.29	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

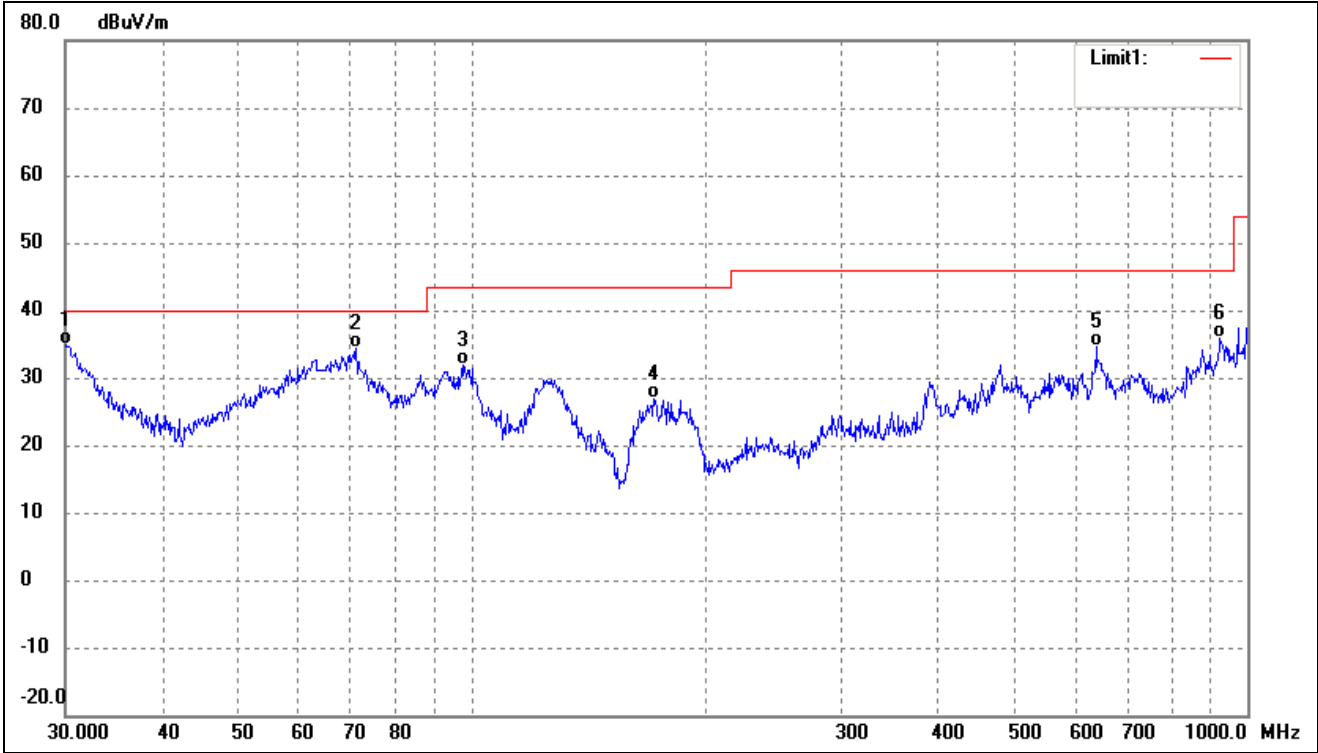


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.1054	49.00	-14.15	34.85	40.00	-5.15	-	-	QP
2	71.0803	49.30	-14.94	34.36	40.00	-5.64	-	-	QP
3	97.4560	45.55	-13.75	31.80	43.50	-11.70	-	-	QP
4	171.9946	41.65	-14.88	26.77	43.50	-16.73	-	-	QP
5	638.3686	37.00	-2.27	34.73	46.00	-11.27	-	-	QP
6	922.5157	33.95	1.83	35.78	46.00	-10.22	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

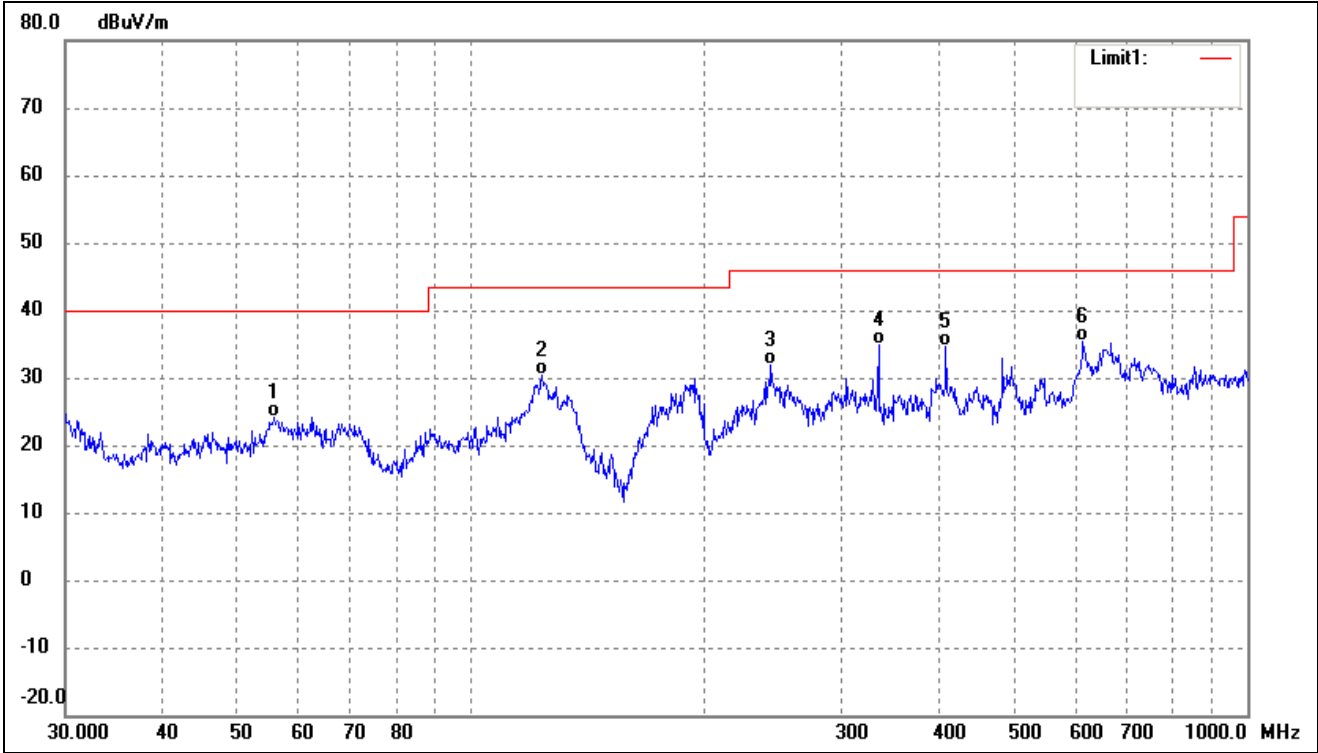


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.8047	37.13	-12.95	24.18	40.00	-15.82	-	-	QP
2	123.2655	45.60	-15.17	30.43	43.50	-13.07	-	-	QP
3	243.3772	43.21	-11.26	31.95	46.00	-14.05	-	-	QP
4	334.8589	43.24	-8.36	34.88	46.00	-11.12	-	-	QP
5	408.9460	41.00	-6.26	34.74	46.00	-11.26	-	-	QP
6	614.2142	37.38	-2.05	35.33	46.00	-10.67	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

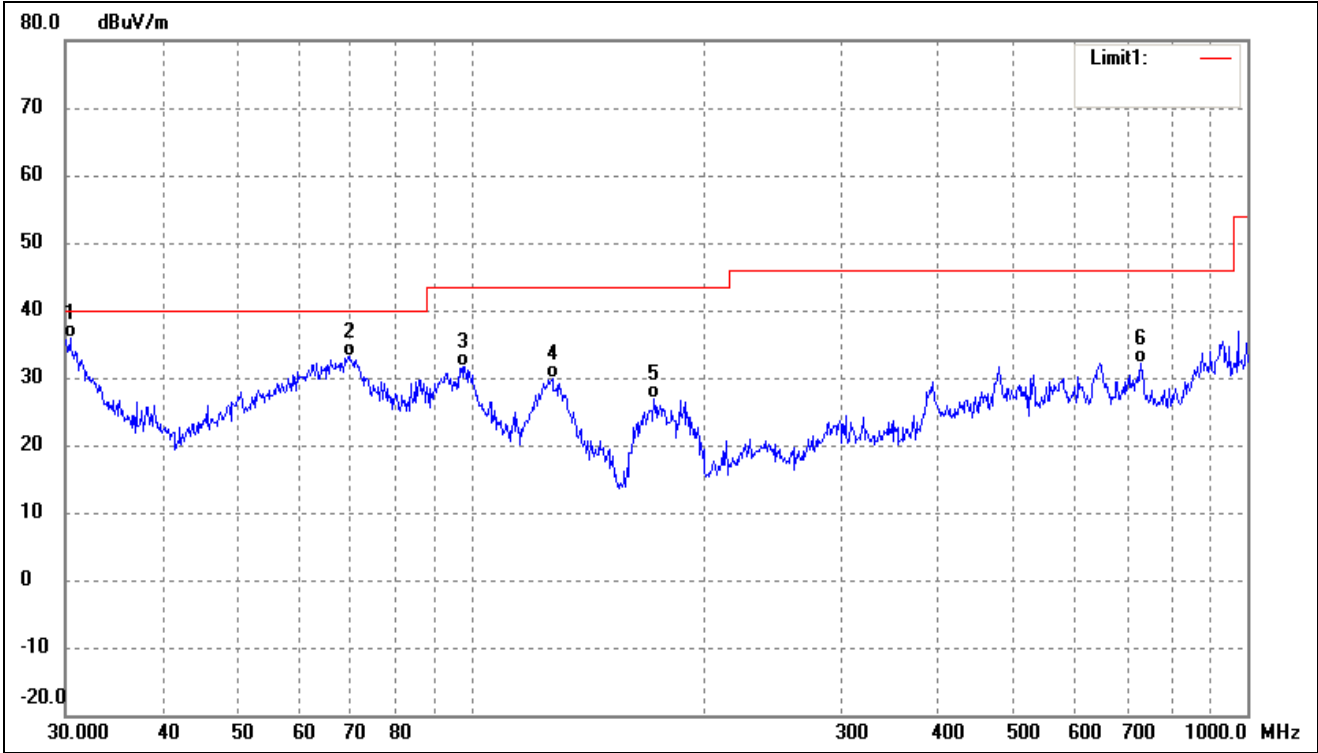


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.4238	49.99	-14.12	35.87	40.00	-4.13	-	-	QP
2	69.8450	47.66	-14.61	33.05	40.00	-6.95	-	-	QP
3	97.7983	45.41	-13.69	31.72	43.50	-11.78	-	-	QP
4	127.2176	46.15	-16.22	29.93	43.50	-13.57	-	-	QP
5	171.9946	41.74	-14.88	26.86	43.50	-16.64	-	-	QP
6	729.3583	33.16	-1.03	32.13	46.00	-13.87	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

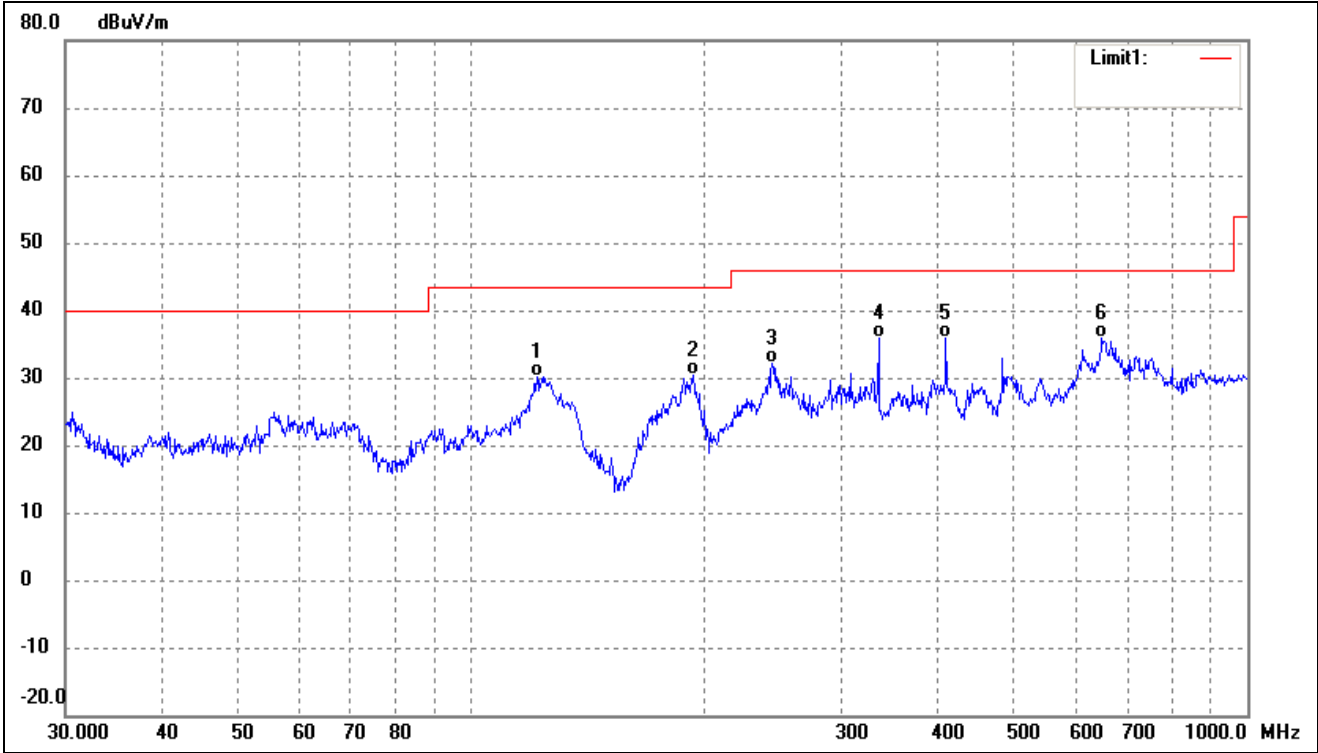

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	121.5486	44.88	-14.71	30.17	43.50	-13.33	-	-	QP
2	193.0945	43.22	-12.89	30.33	43.50	-13.17	-	-	QP
3	244.2321	43.30	-11.21	32.09	46.00	-13.91	-	-	QP
4	334.8589	44.34	-8.36	35.98	46.00	-10.02	-	-	QP
5	408.9460	42.21	-6.26	35.95	46.00	-10.05	-	-	QP
6	649.6597	38.21	-2.37	35.84	46.00	-10.16	-	-	QP


802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

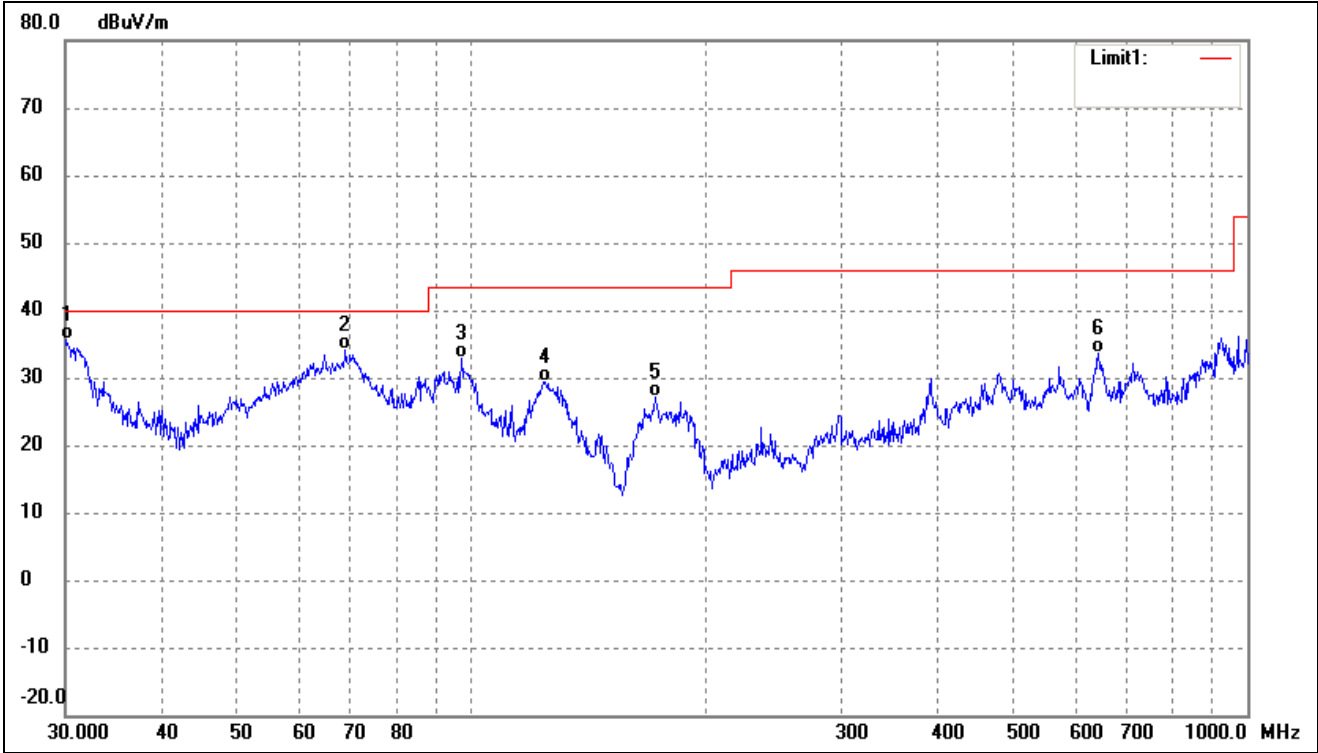

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.0000	49.73	-14.15	35.58	40.00	-4.42	-	-	QP
2	68.8721	48.57	-14.47	34.10	40.00	-5.90	-	-	QP
3	97.1148	46.65	-13.80	32.85	43.50	-10.65	-	-	QP
4	124.5690	44.86	-15.52	29.34	43.50	-14.16	-	-	QP
5	172.5988	41.88	-14.84	27.04	43.50	-16.46	-	-	QP
6	642.8613	35.86	-2.31	33.55	46.00	-12.45	-	-	QP


➤ Worst case Antenna 1

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

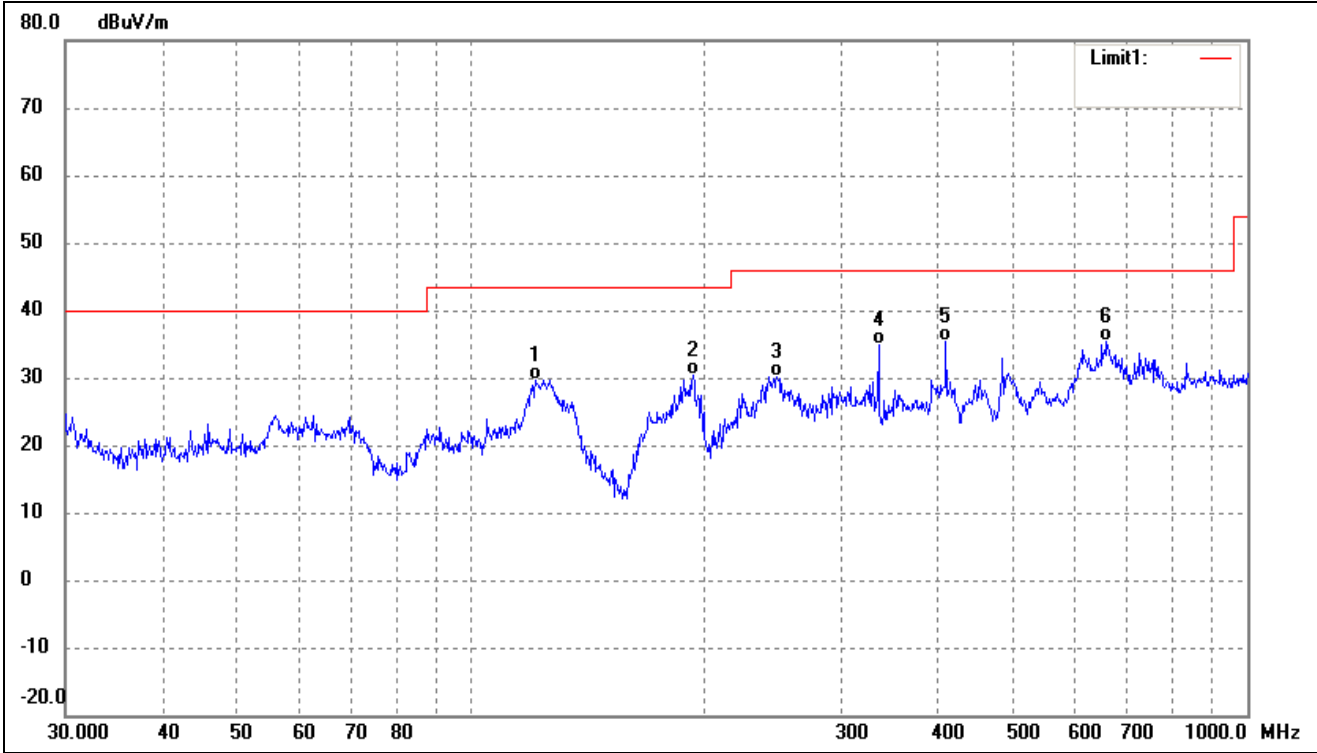


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	121.1231	44.31	-14.59	29.72	43.50	-13.78	-	-	QP
2	193.0945	43.35	-12.89	30.46	43.50	-13.04	-	-	QP
3	247.6819	41.23	-11.04	30.19	46.00	-15.81	-	-	QP
4	334.8589	43.13	-8.36	34.77	46.00	-11.23	-	-	QP
5	408.9460	41.69	-6.26	35.43	46.00	-10.57	-	-	QP
6	658.8362	37.54	-2.19	35.35	46.00	-10.65	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

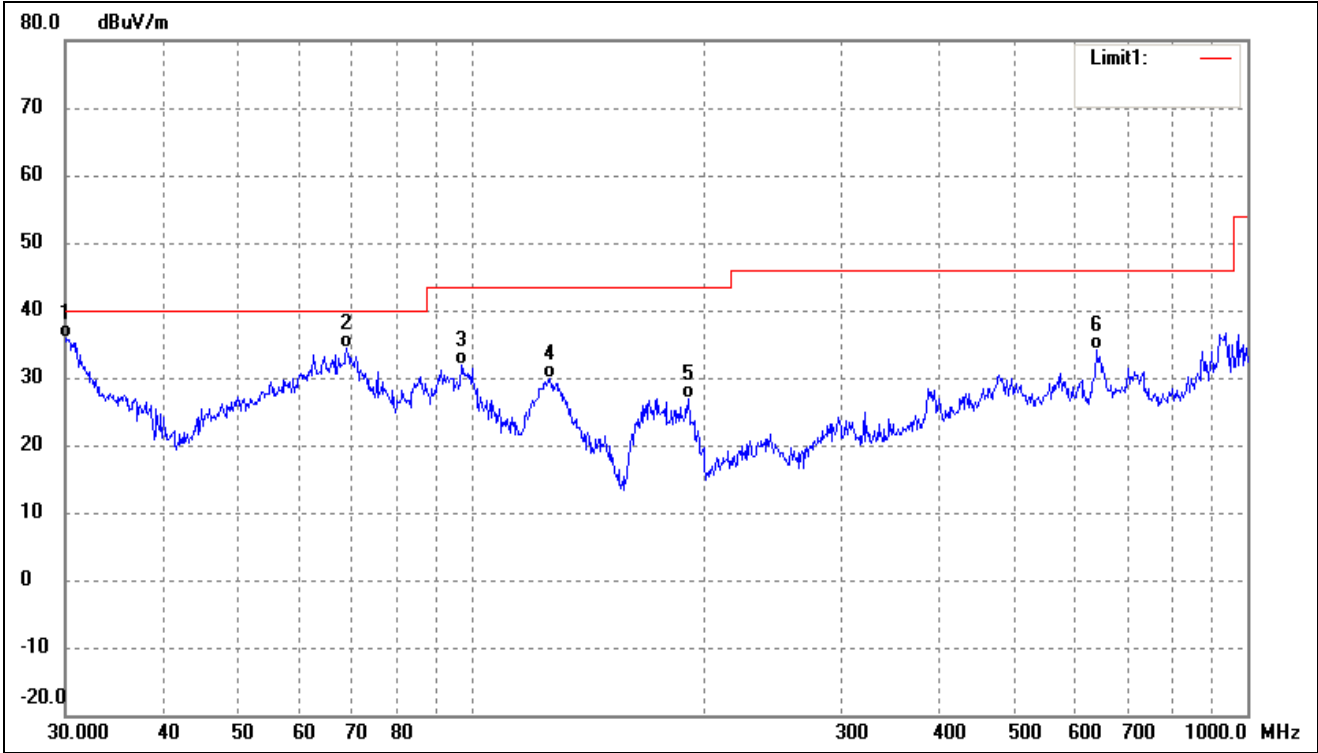


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.1054	50.03	-14.15	35.88	40.00	-4.12	-	-	QP
2	69.1141	48.84	-14.51	34.33	40.00	-5.67	-	-	QP
3	97.1148	45.60	-13.80	31.80	43.50	-11.70	-	-	QP
4	126.3286	45.97	-15.99	29.98	43.50	-13.52	-	-	QP
5	190.4050	40.01	-13.09	26.92	43.50	-16.58	-	-	QP
6	638.3686	36.31	-2.27	34.04	46.00	-11.96	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

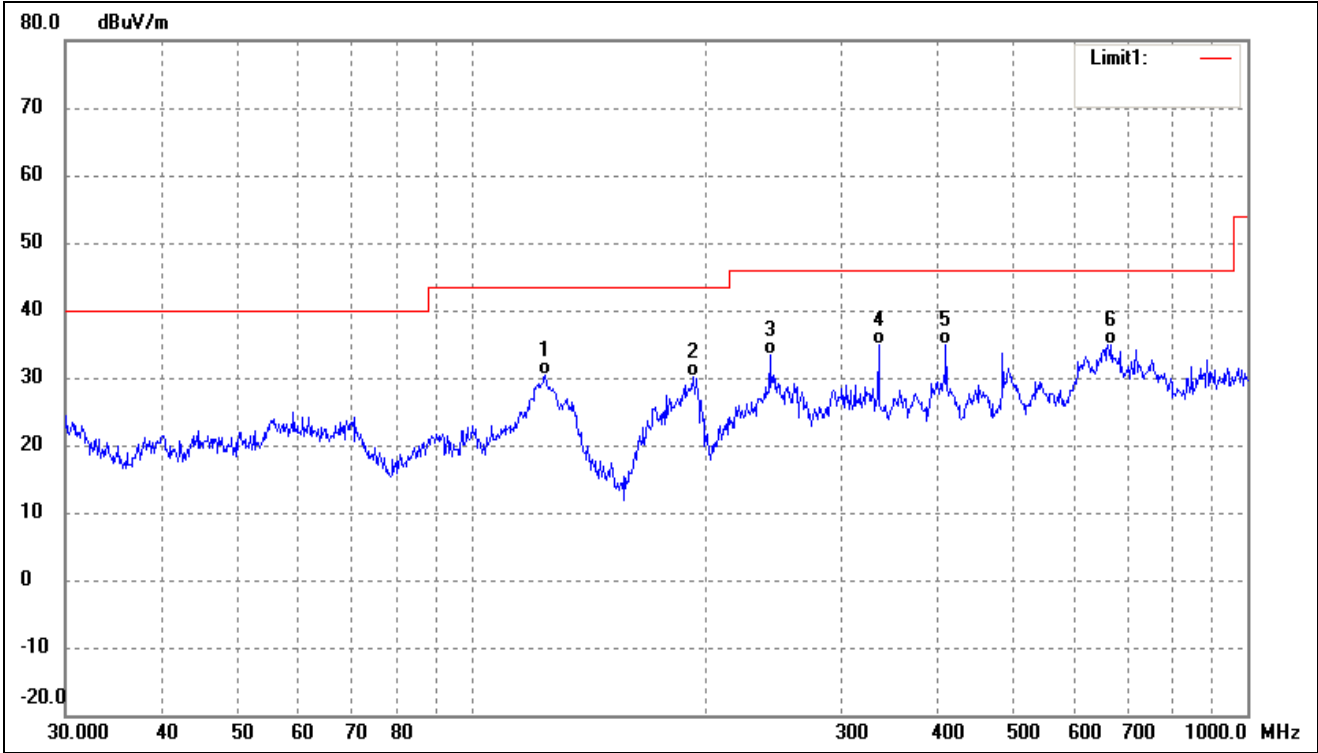


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	124.5690	45.80	-15.52	30.28	43.50	-13.22	-	-	QP
2	193.0945	43.08	-12.89	30.19	43.50	-13.31	-	-	QP
3	242.5253	44.76	-11.29	33.47	46.00	-12.53	-	-	QP
4	334.8589	43.33	-8.36	34.97	46.00	-11.03	-	-	QP
5	408.9460	41.22	-6.26	34.96	46.00	-11.04	-	-	QP
6	668.1423	36.99	-2.01	34.98	46.00	-11.02	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

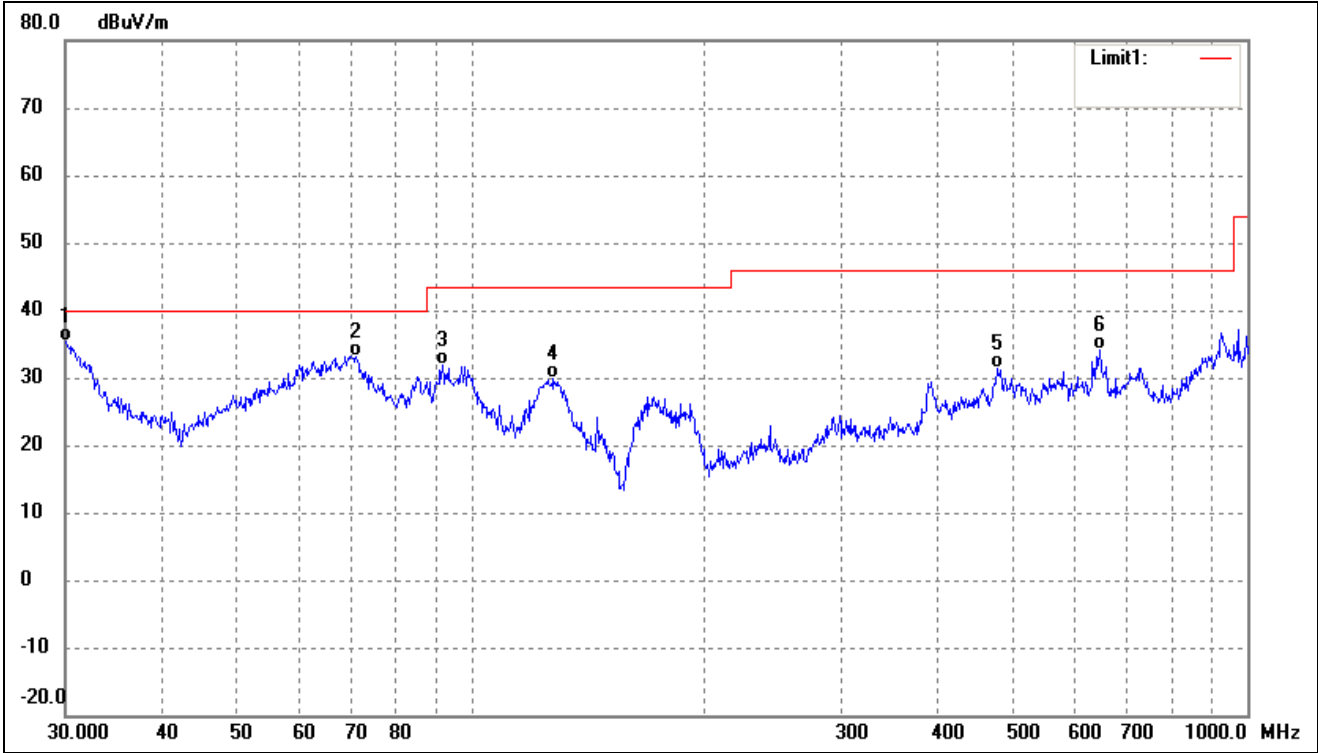


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.1054	49.58	-14.15	35.43	40.00	-4.57	-	-	QP
2	71.0803	48.13	-14.94	33.19	40.00	-6.81	-	-	QP
3	91.8163	46.63	-14.66	31.97	43.50	-11.53	-	-	QP
4	127.6645	46.32	-16.35	29.97	43.50	-13.53	-	-	QP
5	475.4991	36.09	-4.80	31.29	46.00	-14.71	-	-	QP
6	645.1195	36.39	-2.33	34.06	46.00	-11.94	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

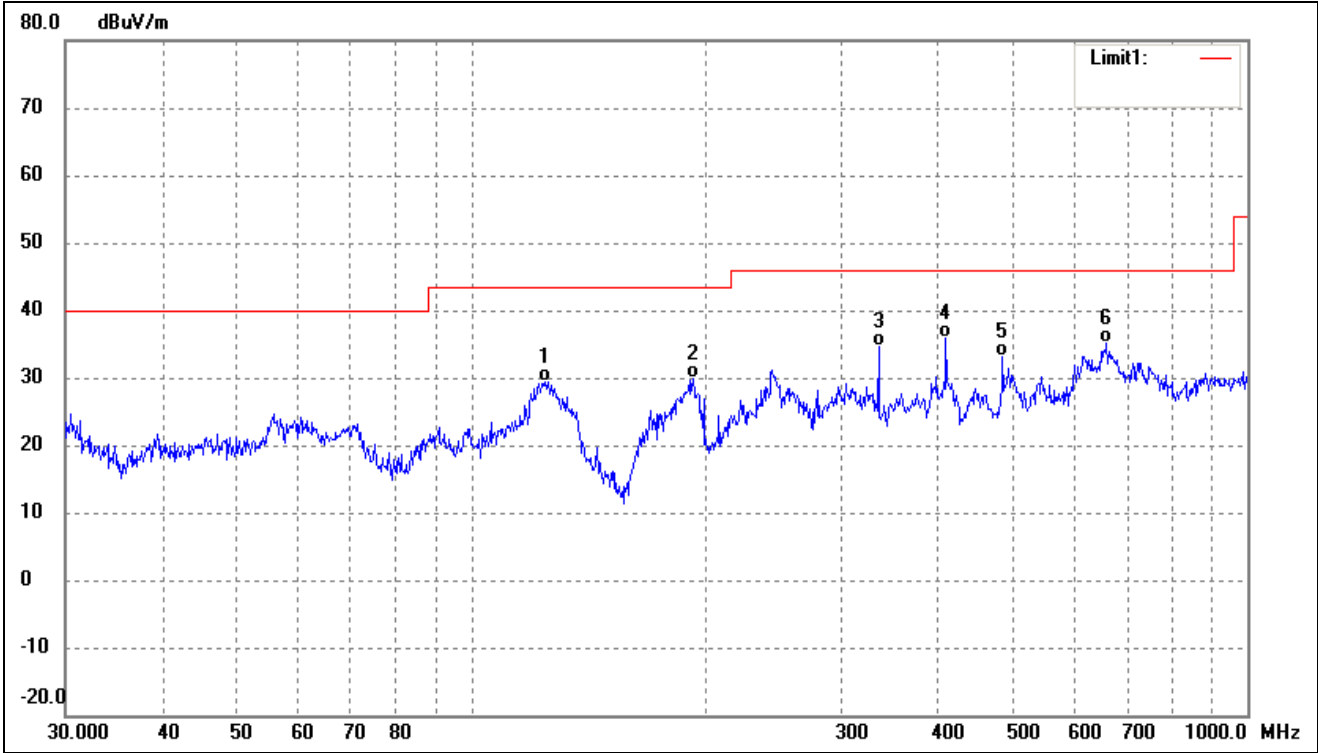

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	124.5690	44.88	-15.52	29.36	43.50	-14.14	-	-	QP
2	193.0945	42.77	-12.89	29.88	43.50	-13.62	-	-	QP
3	334.8589	42.97	-8.36	34.61	46.00	-11.39	-	-	QP
4	408.9460	42.19	-6.26	35.93	46.00	-10.07	-	-	QP
5	483.9094	37.76	-4.53	33.23	46.00	-12.77	-	-	QP
6	658.8362	37.42	-2.19	35.23	46.00	-10.77	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

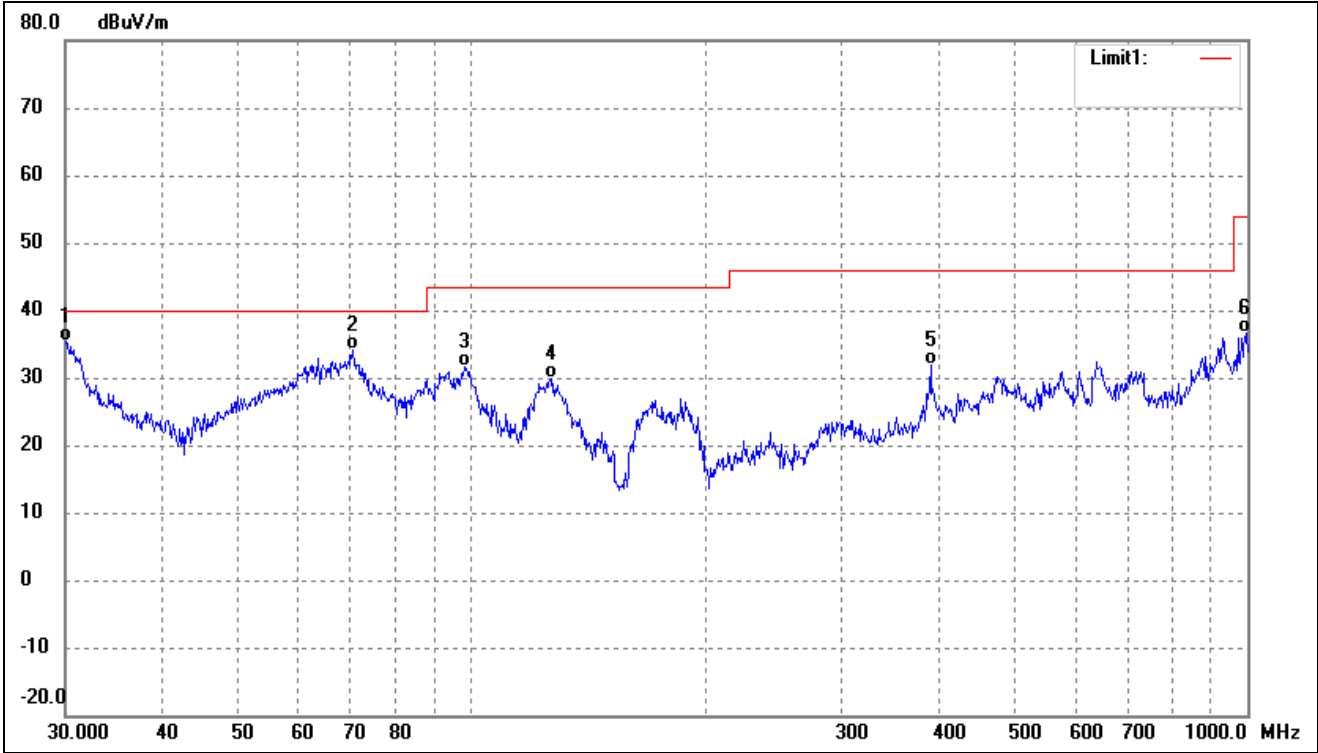

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.1054	49.49	-14.15	35.34	40.00	-4.66	-	-	QP
2	70.3365	48.88	-14.73	34.15	40.00	-5.85	-	-	QP
3	98.1419	45.30	-13.62	31.68	43.50	-11.82	-	-	QP
4	126.7723	45.95	-16.12	29.83	43.50	-13.67	-	-	QP
5	390.7226	38.51	-6.74	31.77	46.00	-14.23	-	-	QP
6	996.4996	34.71	1.83	36.54	54.00	-17.46	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps(Worst mode)
- Antenna 0

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	61.14	-3.86	57.28	74	-16.72	H	PK
4824.000	43.13	-3.86	39.27	54	-14.73	H	AV
7236.000	57.11	1.10	58.21	74	-15.79	H	PK
7236.000	39.73	1.10	40.83	54	-13.17	H	AV
4824.000	60.61	-3.86	56.75	74	-17.25	V	PK
4824.000	45.42	-3.86	41.56	54	-12.44	V	AV
7236.000	55.61	1.10	56.71	74	-17.29	V	PK
7236.000	40.37	1.10	41.47	54	-12.53	V	AV
Middle Channel-2437MHz							
4874.000	62.22	-3.74	58.48	74	-15.52	H	PK
4874.000	42.29	-3.74	38.55	54	-15.45	H	AV
7311.000	54.92	1.47	56.39	74	-17.61	H	PK
7311.000	39.15	1.47	40.62	54	-13.38	H	AV
4874.000	62.25	-3.74	58.51	74	-15.49	V	PK
4874.000	43.10	-3.74	39.36	54	-14.64	V	AV
7311.000	58.80	1.47	60.27	74	-13.73	V	PK
7311.000	38.69	1.47	40.16	54	-13.84	V	AV
High Channel-2462MHz							
4924.000	59.25	-3.63	55.62	74	-18.38	H	PK
4924.000	43.04	-3.63	39.41	54	-14.59	H	AV
7386.000	54.44	1.62	56.06	74	-17.94	H	PK
7386.000	41.45	1.62	43.07	54	-10.93	H	AV
4924.000	60.69	-3.63	57.06	74	-16.94	V	PK
4924.000	42.96	-3.63	39.33	54	-14.67	V	AV
7386.000	56.43	1.62	58.05	74	-15.95	V	PK
7386.000	41.93	1.62	43.55	54	-10.45	V	AV

➤ Antenna 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	61.06	-3.86	57.20	74	-16.80	H	PK
4824.000	44.77	-3.86	40.91	54	-13.09	H	AV
7236.000	55.64	1.10	56.74	74	-17.26	H	PK
7236.000	39.83	1.10	40.93	54	-13.07	H	AV
4824.000	60.31	-3.86	56.45	74	-17.55	V	PK
4824.000	41.77	-3.86	37.91	54	-16.09	V	AV
7236.000	59.25	1.10	60.35	74	-13.65	V	PK
7236.000	40.24	1.10	41.34	54	-12.66	V	AV
Middle Channel-2437MHz							
4874.000	61.78	-3.74	58.04	74	-15.96	H	PK
4874.000	41.66	-3.74	37.92	54	-16.08	H	AV
7311.000	56.06	1.47	57.53	74	-16.47	H	PK
7311.000	41.24	1.47	42.71	54	-11.29	H	AV
4874.000	62.31	-3.74	58.57	74	-15.43	V	PK
4874.000	42.72	-3.74	38.98	54	-15.02	V	AV
7311.000	56.17	1.47	57.64	74	-16.36	V	PK
7311.000	40.40	1.47	41.87	54	-12.13	V	AV
High Channel-2462MHz							
4924.000	61.83	-3.63	58.20	74	-15.80	H	PK
4924.000	41.25	-3.63	37.62	54	-16.38	H	AV
7386.000	55.22	1.62	56.84	74	-17.16	H	PK
7386.000	41.40	1.62	43.02	54	-10.98	H	AV
4924.000	62.26	-3.63	58.63	74	-15.37	V	PK
4924.000	45.53	-3.63	41.90	54	-12.10	V	AV
7386.000	54.86	1.62	56.48	74	-17.52	V	PK
7386.000	39.52	1.62	41.14	54	-12.86	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


- Radiated test
- Antenna 0(Worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

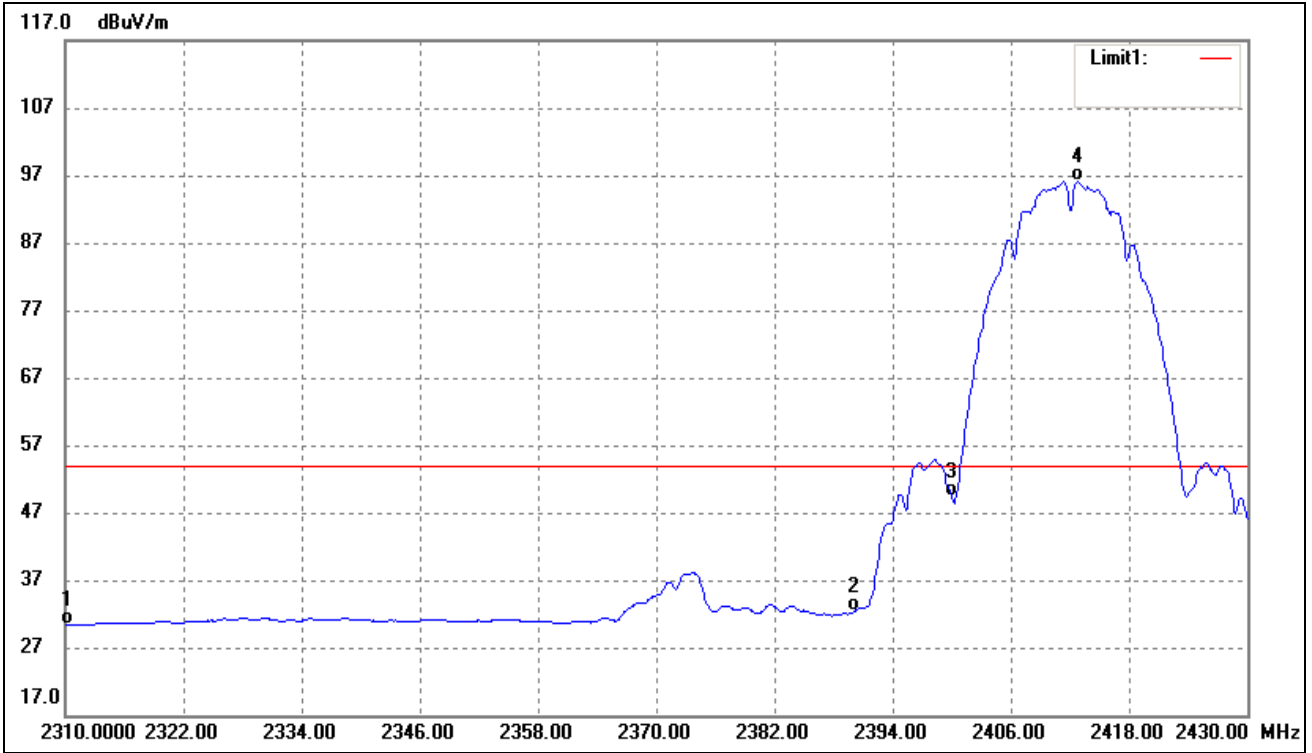


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.94	-9.66	30.28	54.00	-23.72	Average Detector
		53.88		44.22	74.00		Peak Detector
2	2390.000	41.86	-9.50	32.36	54.00	-21.64	Average Detector
		55.24		45.74	74.00		Peak Detector
3	2400.000	58.91	-9.48	49.43	Delta=46.68dBc		Average Detector
4	2412.840	105.57	-9.46	96.11			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

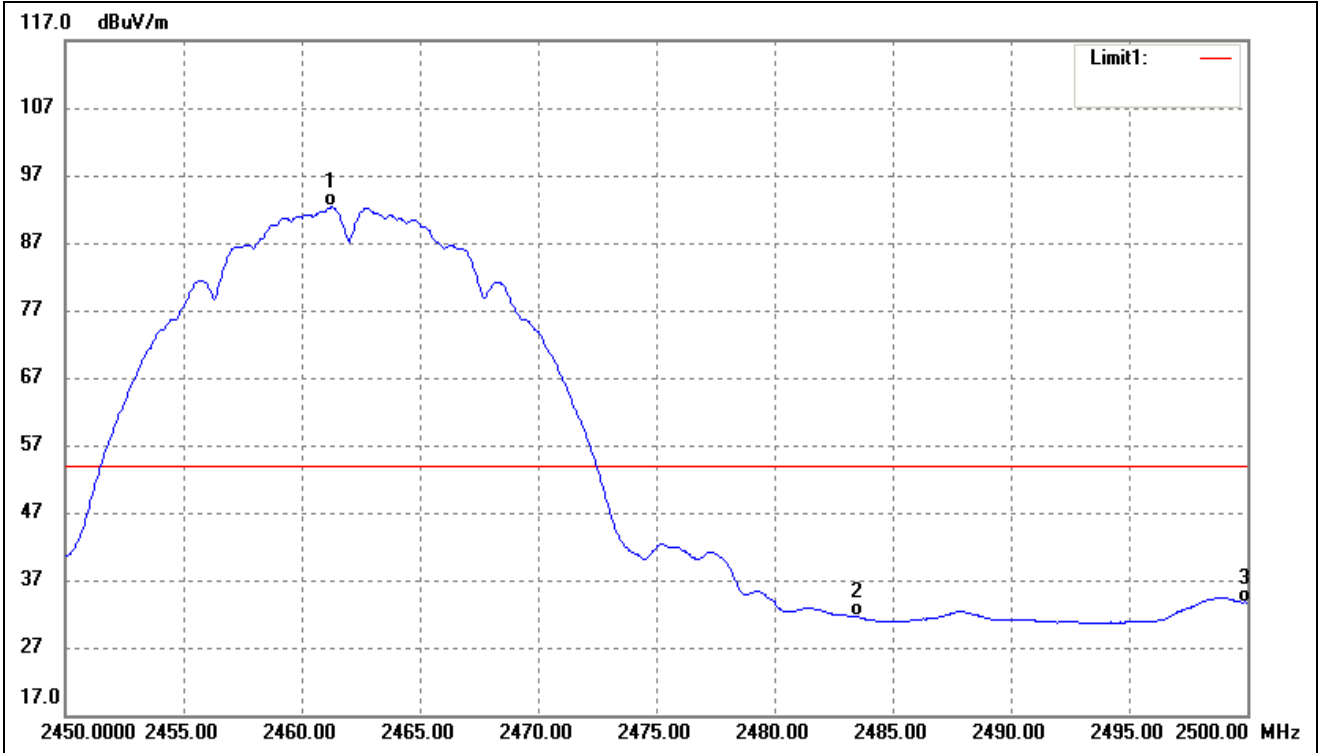


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	101.62	-9.36	92.26	/	/	Average Detector
	2460.900	111.75	-9.36	102.39	/	/	Peak Detector
2	2483.500	40.86	-9.31	31.55	54.00	-22.45	Average Detector
	2483.500	55.74	-9.31	46.43	74.00	-27.57	Peak Detector
3	2500.000	42.94	-9.28	33.66	54.00	-20.34	Average Detector
	2500.000	56.75	-9.28	47.47	74.00	-26.53	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

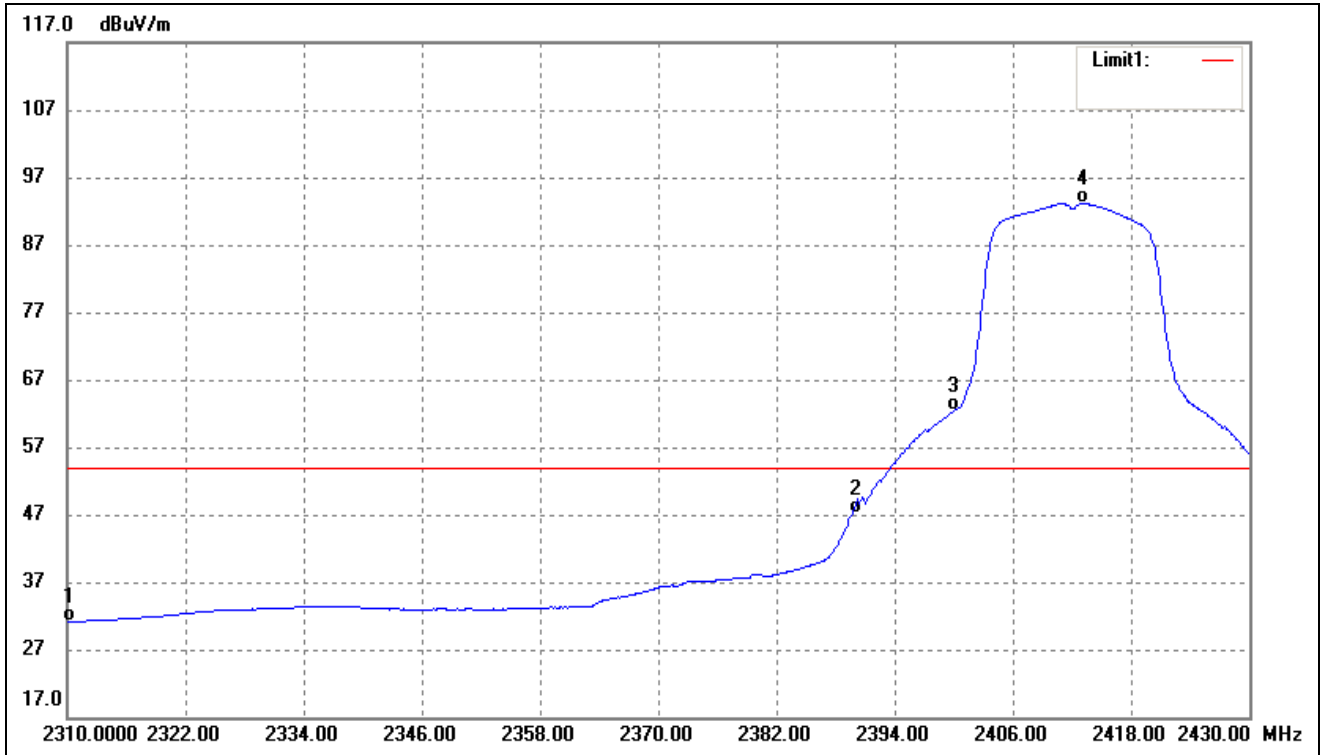


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.74	-9.66	31.08	54.00	-22.92	Average Detector
		53.39	-9.66	43.73	74.00	-30.27	Peak Detector
2	2390.000	56.70	-9.50	47.20	54.00	-6.80	Average Detector
		72.81	-9.50	63.31	74.00	-10.69	Peak Detector
3	2400.000	71.87	-9.48	62.39	Delta=30.79dBc		Average Detector
4	2413.080	102.64	-9.46	93.18			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

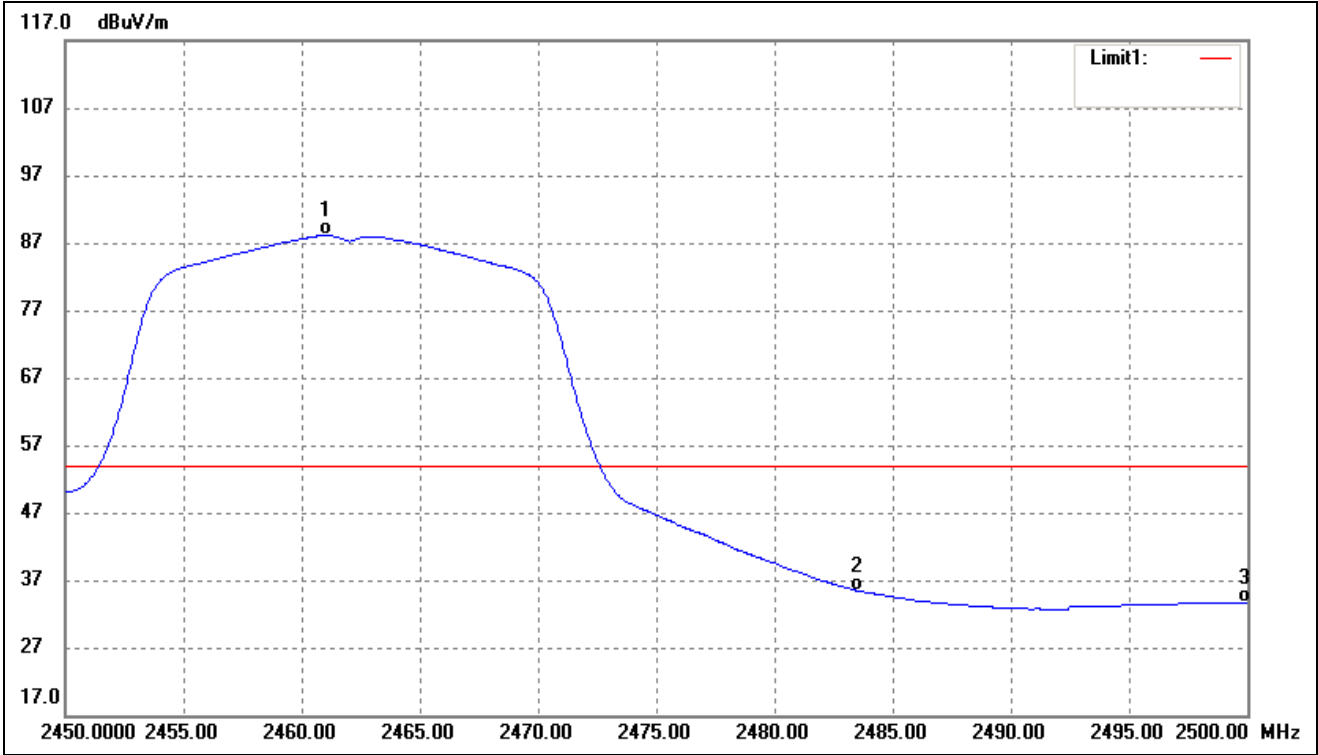


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.000	97.47	-9.36	88.11	/	/	Average Detector
	2462.000	108.15	-9.36	98.79	/	/	Peak Detector
2	2483.500	44.77	-9.31	35.46	54.00	-18.54	Average Detector
	2483.500	60.02	-9.31	50.71	74.00	-23.29	Peak Detector
3	2500.000	42.94	-9.28	33.66	54.00	-20.34	Average Detector
	2500.000	54.91	-9.28	45.63	74.00	-28.37	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

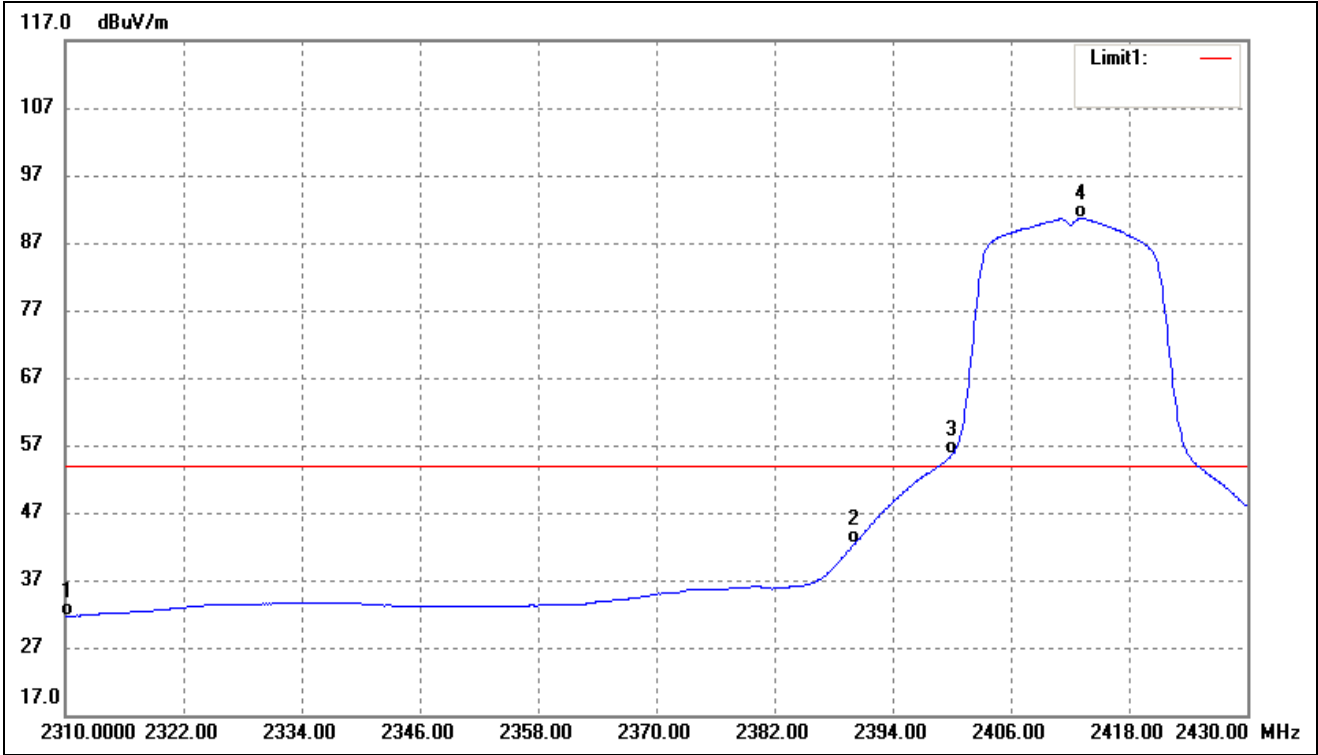


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.25	-9.66	31.59	54.00	-22.41	Average Detector
		54.70	-9.66	45.04	74.00	-28.96	Peak Detector
2	2390.000	51.77	-9.50	42.27	54.00	-11.73	Average Detector
		71.02	-9.50	61.52	74.00	-12.48	Peak Detector
3	2400.000	65.01	-9.48	55.53	Delta=35.04dBc		Average Detector
4	2413.080	100.03	-9.46	90.57			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

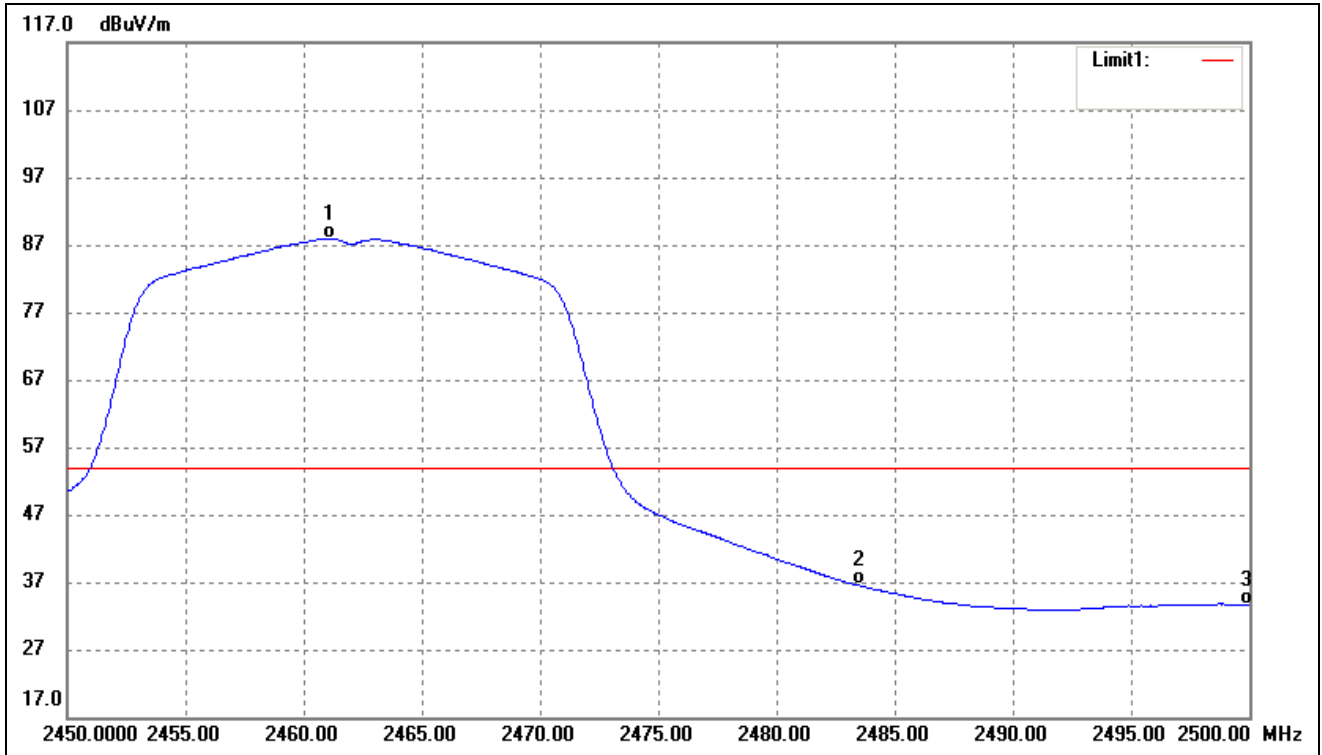


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.100	97.28	-9.36	87.92	/	/	Average Detector
	2460.800	108.10	-9.36	98.74	/	/	Peak Detector
2	2483.500	45.83	-9.31	36.52	54.00	-17.48	Average Detector
	2483.500	62.06	-9.31	52.75	74.00	-21.25	Peak Detector
3	2500.000	42.94	-9.28	33.66	54.00	-20.34	Average Detector
	2500.000	54.81	-9.28	45.53	74.00	-28.47	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

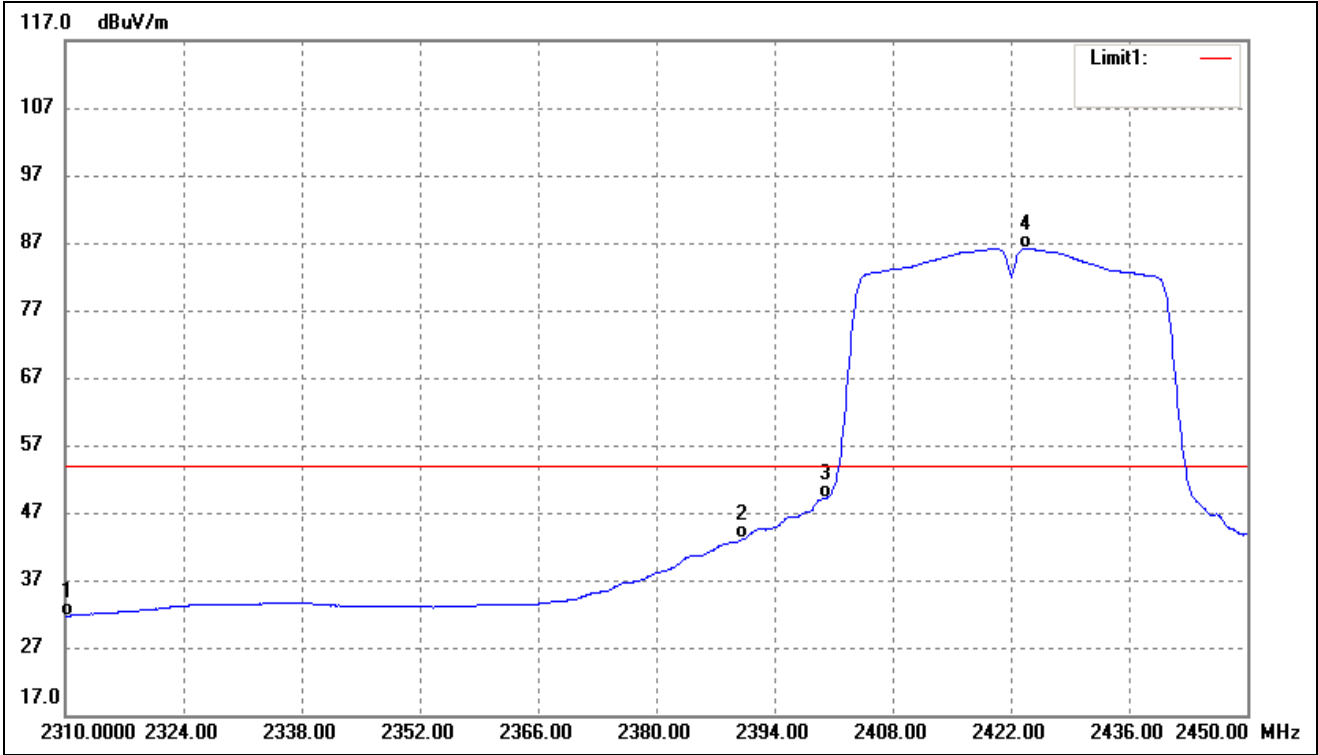

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.32	-9.66	31.66	54.00	-22.34	Average Detector
		53.85	-9.66	44.19	74.00	-29.81	Peak Detector
2	2390.000	52.54	-9.50	43.04	54.00	-10.96	Average Detector
		71.68	-9.50	62.18	74.00	-11.82	Peak Detector
3	2400.000	58.63	-9.48	49.15	Delta=36.97dBc		Average Detector
4	2423.820	95.55	-9.43	86.12			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)


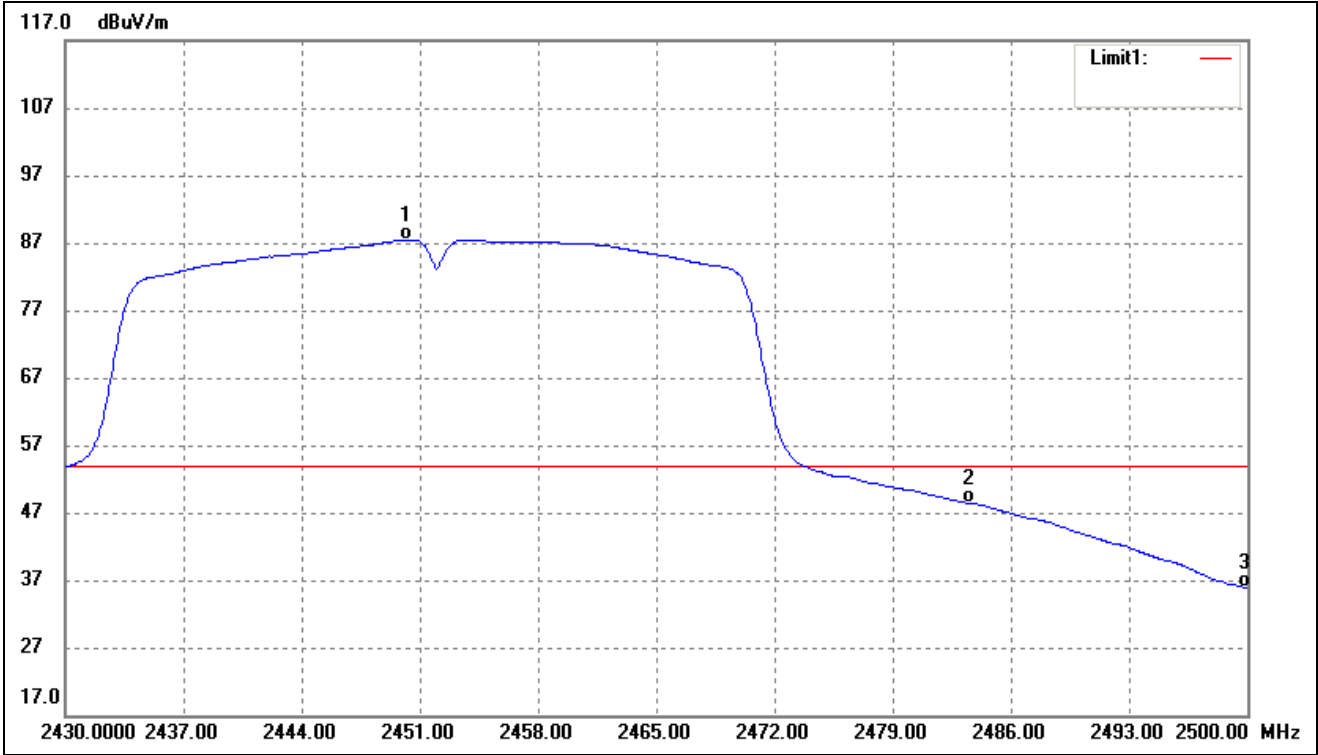


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.160	96.85	-9.38	87.47	/	/	Average Detector
	2454.500	108.03	-9.37	98.66	/	/	Peak Detector
2	2483.500	57.68	-9.31	48.37	54.00	-5.63	Average Detector
	2483.500	74.77	-9.31	65.46	74.00	-8.54	Peak Detector
3	2500.000	45.06	-9.28	35.78	54.00	-18.22	Average Detector
	2500.000	62.67	-9.28	53.39	74.00	-20.61	Peak Detector

➤ Antenna 0



802.11b_11Mbps

Low

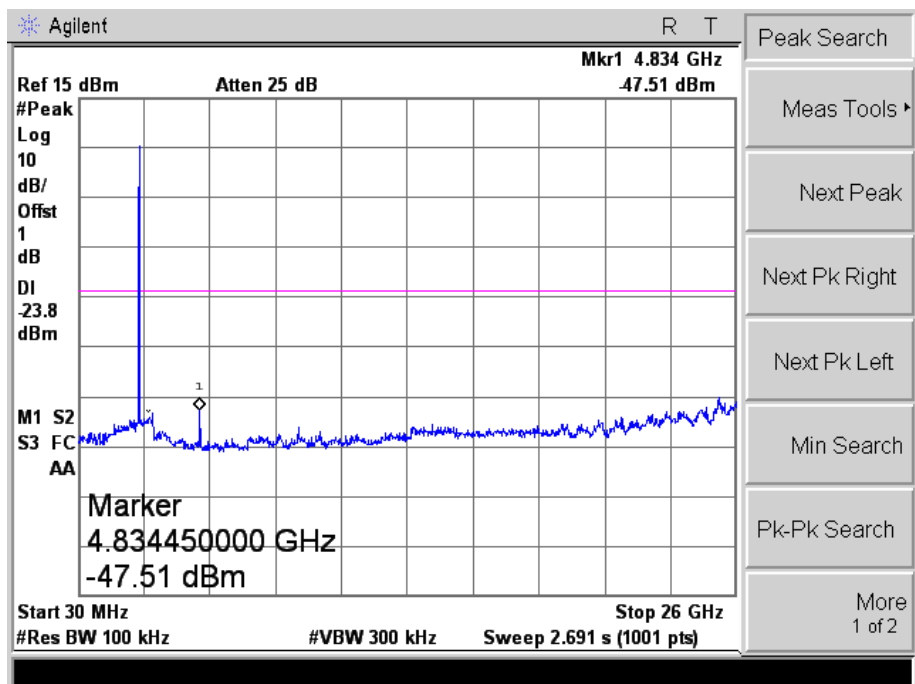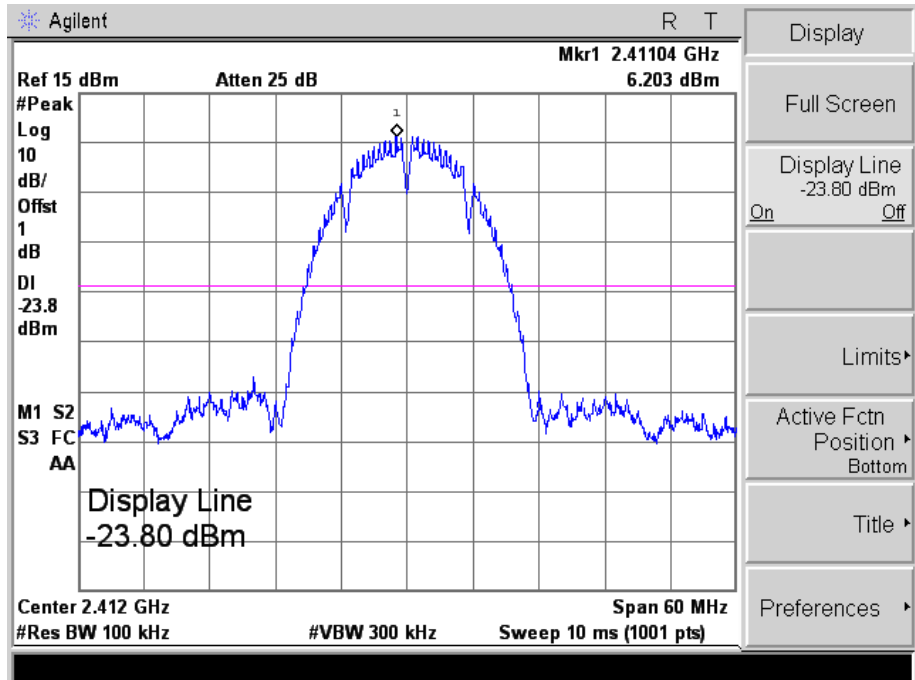



802.11b_11Mbps

Middle

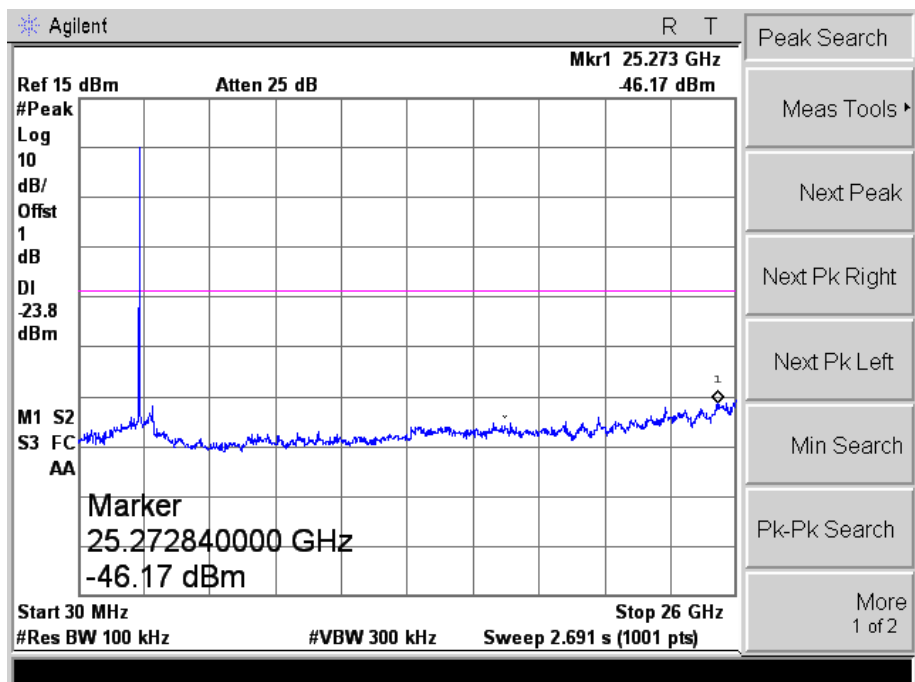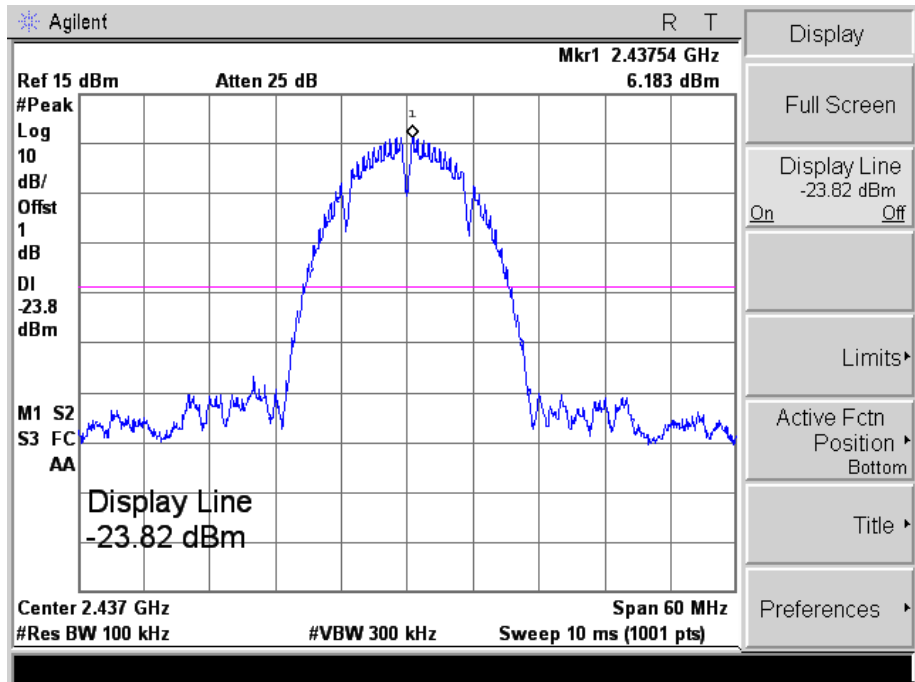



802.11b_11Mbps

High

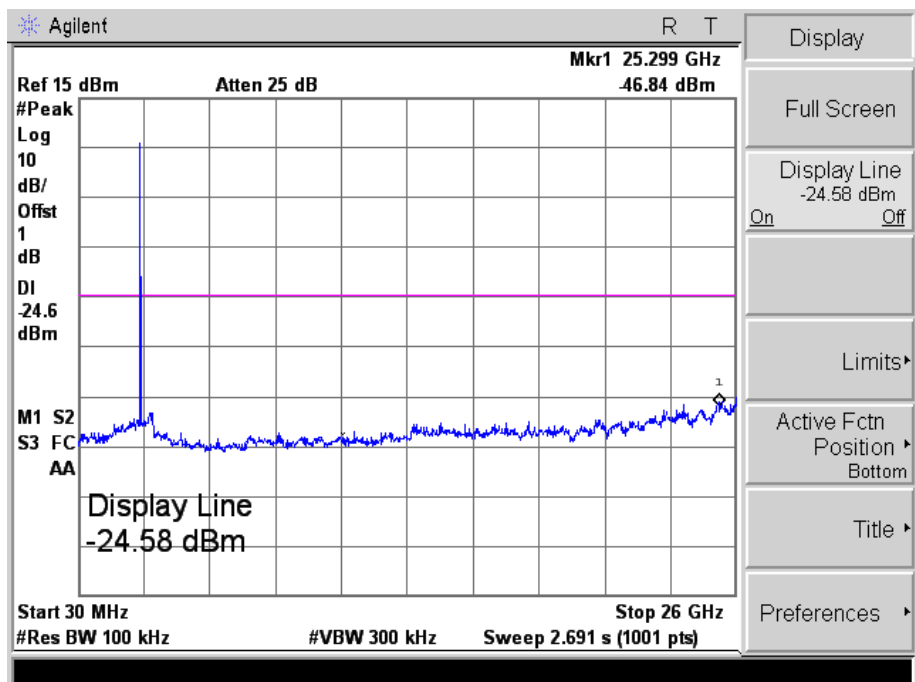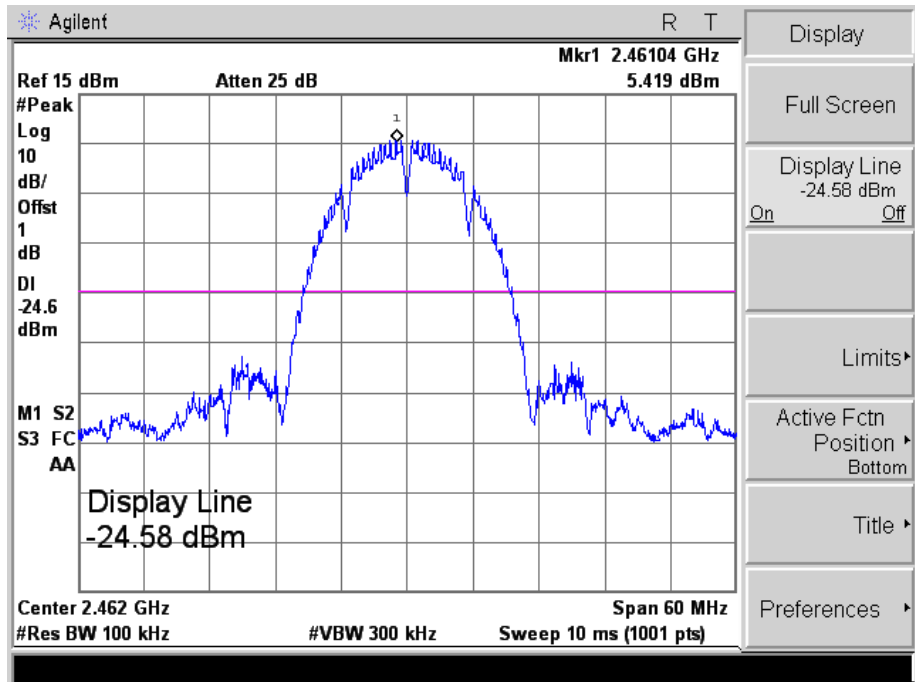



802.11g_54Mbps

Low

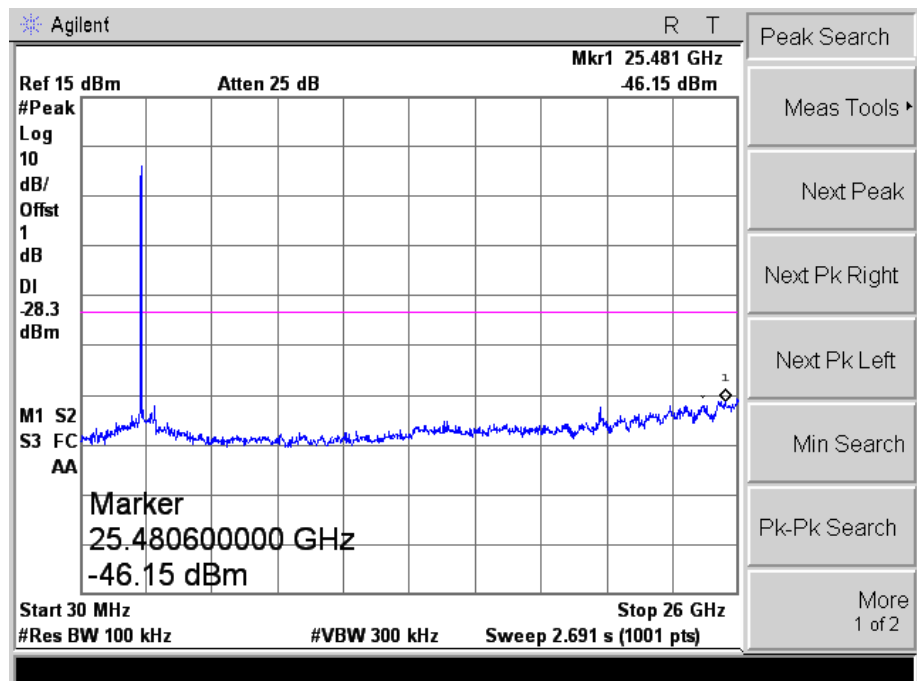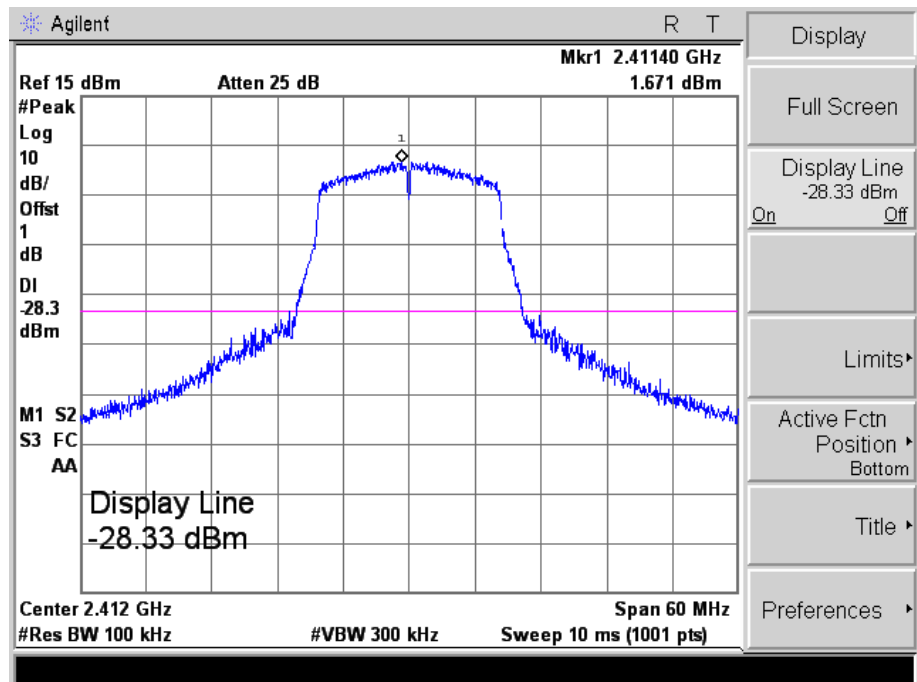



802.11g_54Mbps

Middle

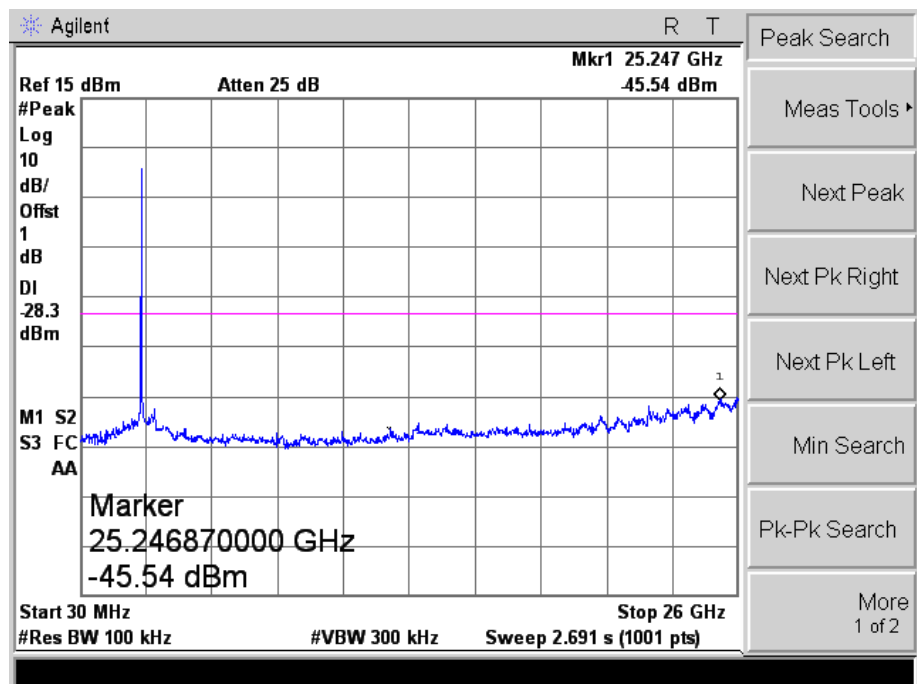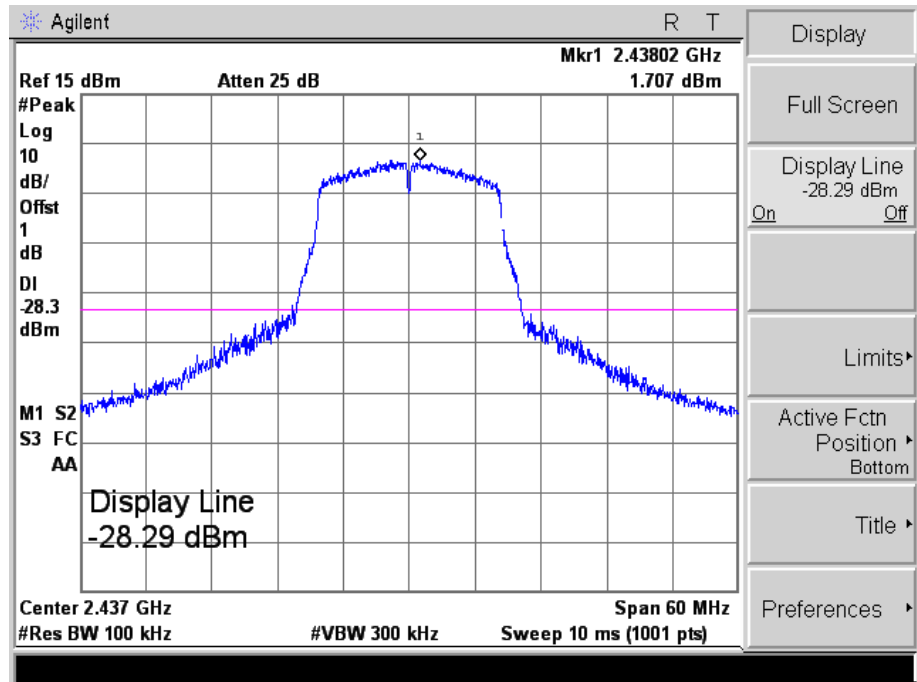



802.11g_54Mbps

High

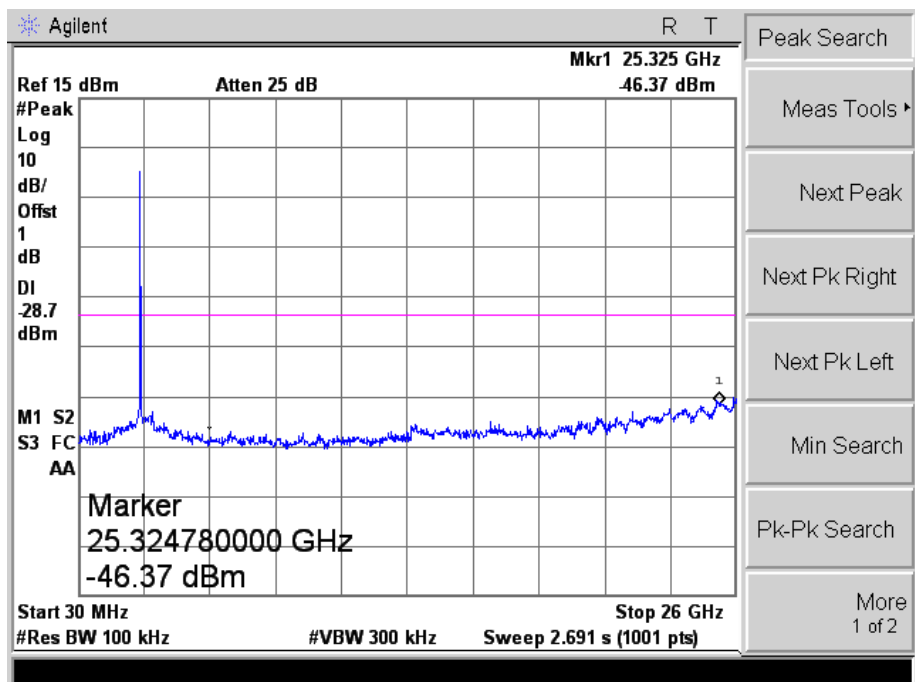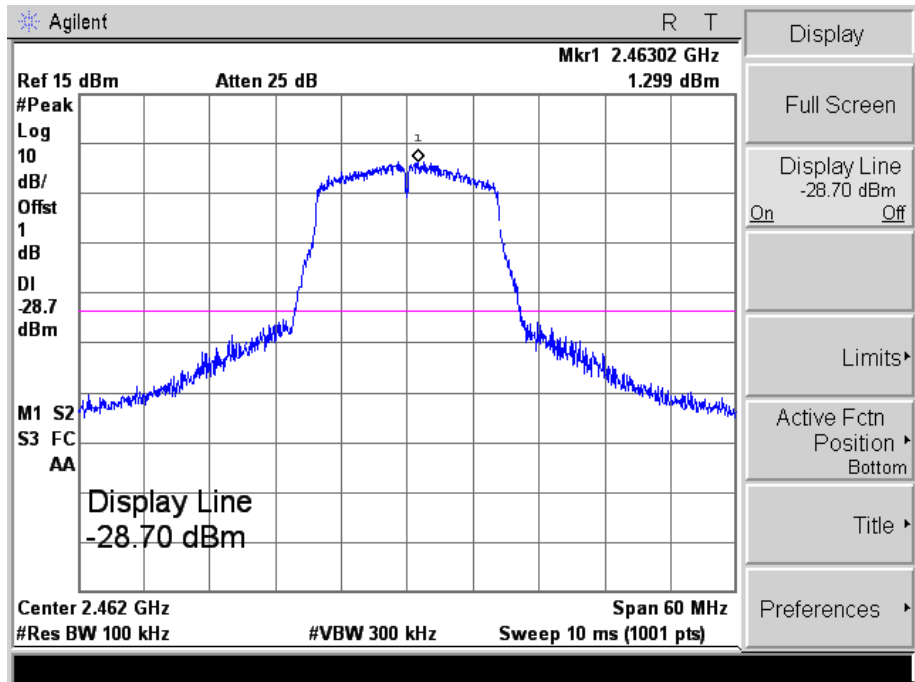



802.11n-HT20_MCS7

Low

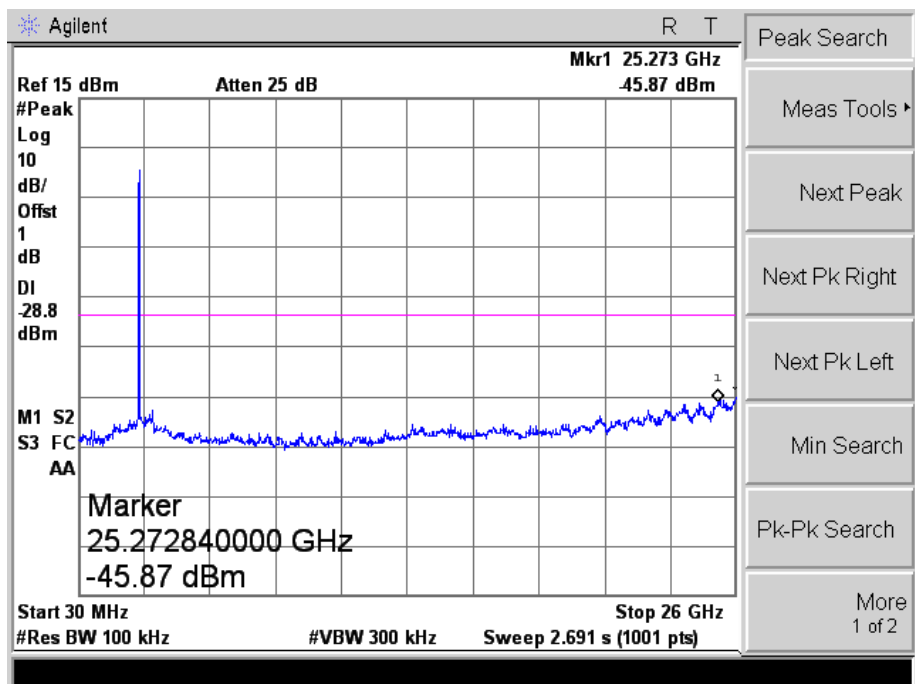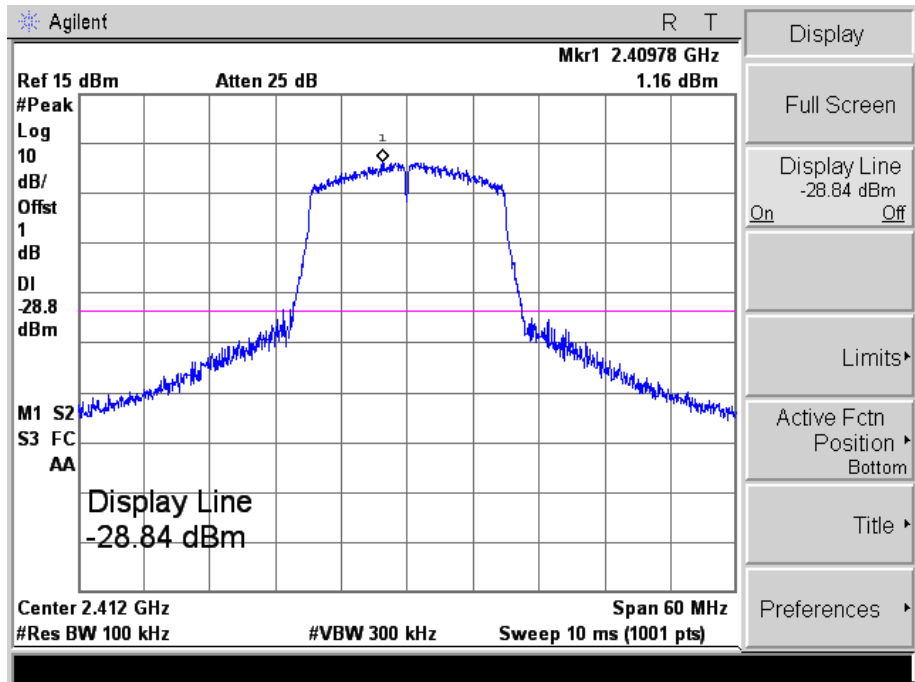



802.11n-HT20_MCS7

Middle

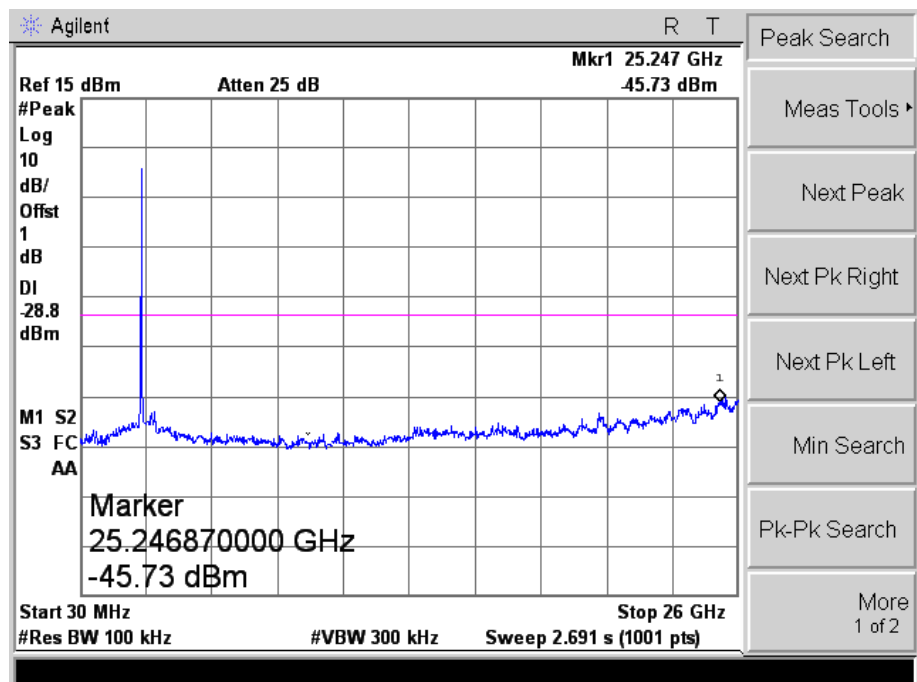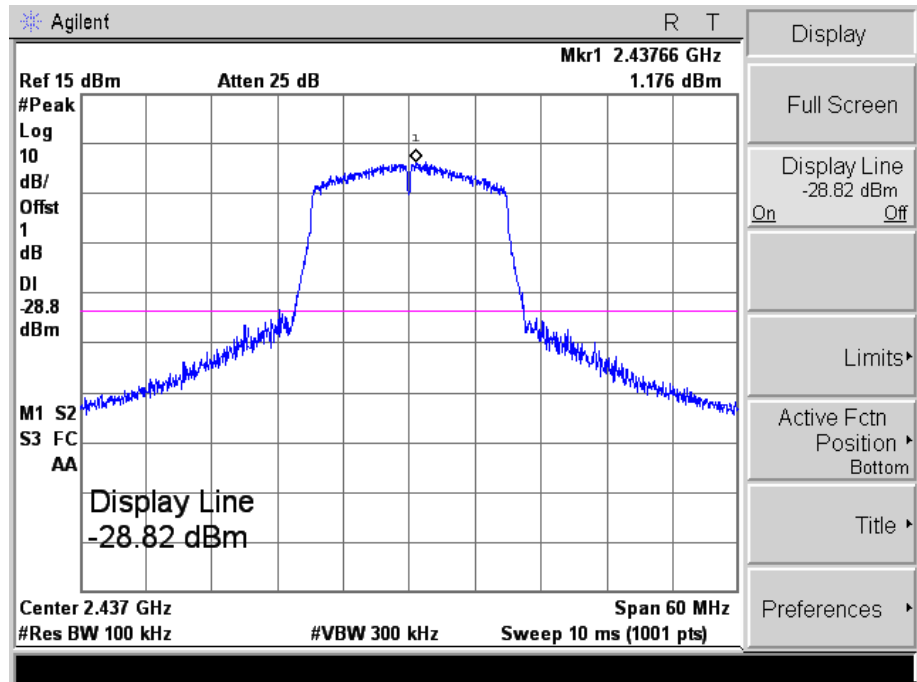



802.11n-HT20_MCS7

High

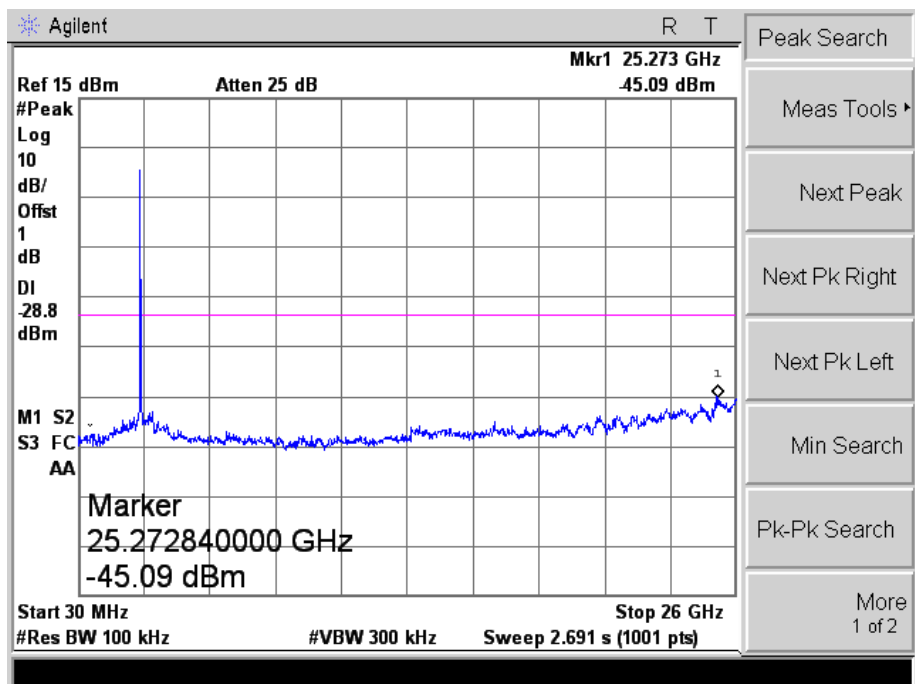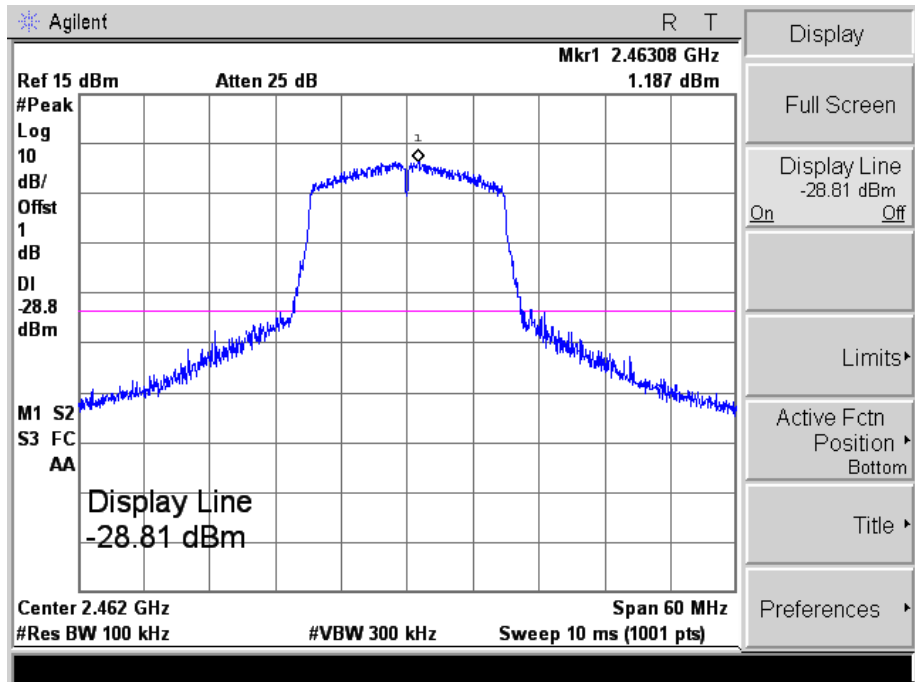



802.11n-HT40_MCS7

Low

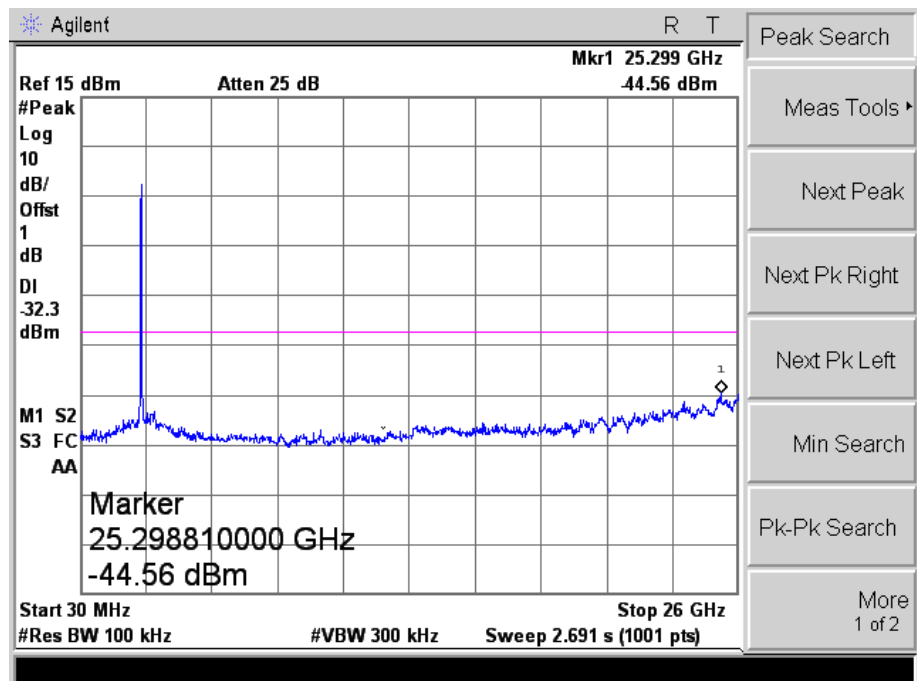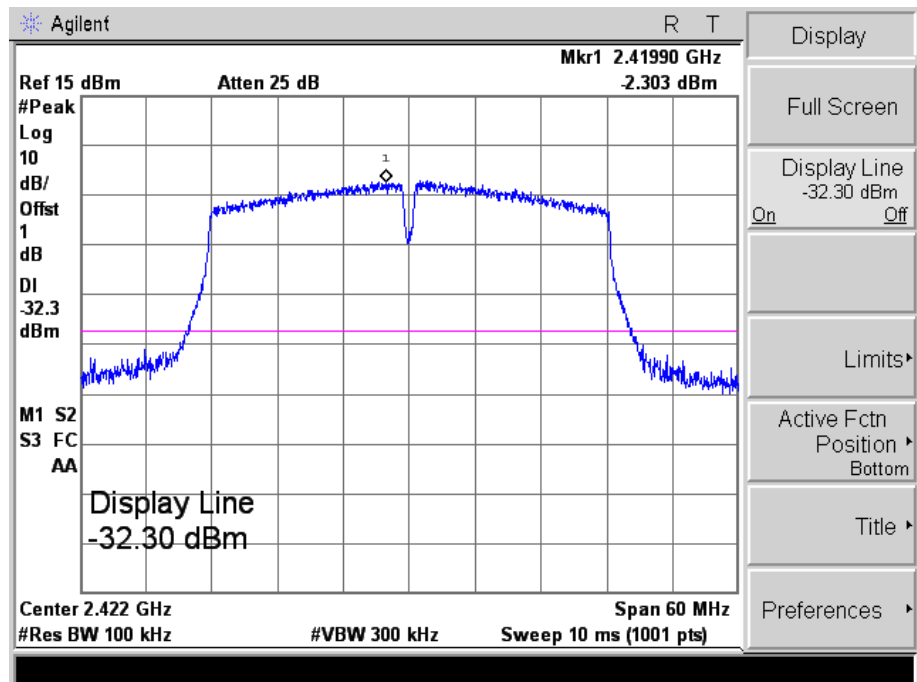



802.11n-HT40_MCS7

Middle

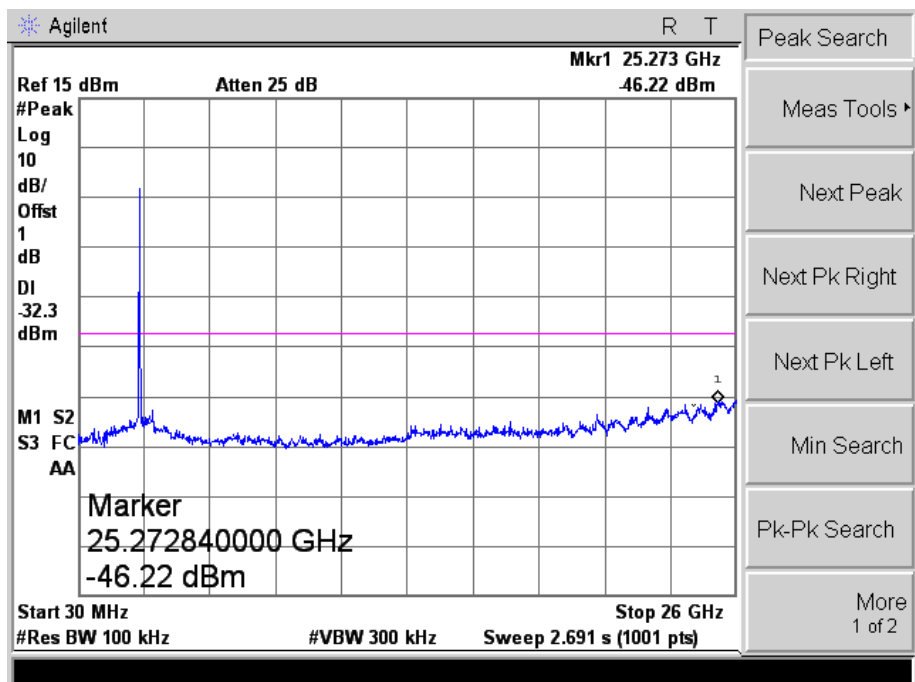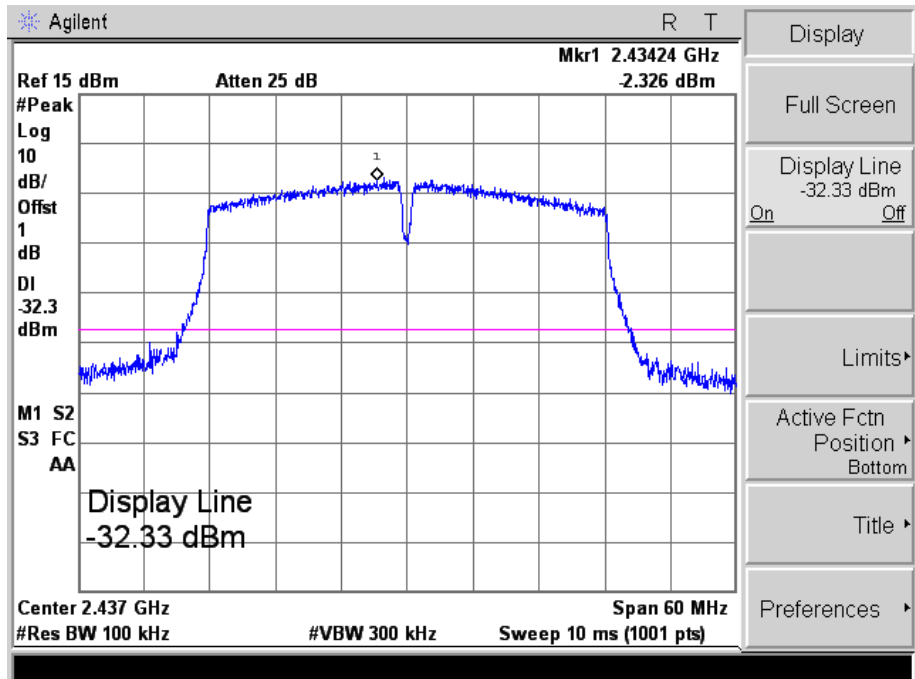

802.11n-HT40_MCS7



High

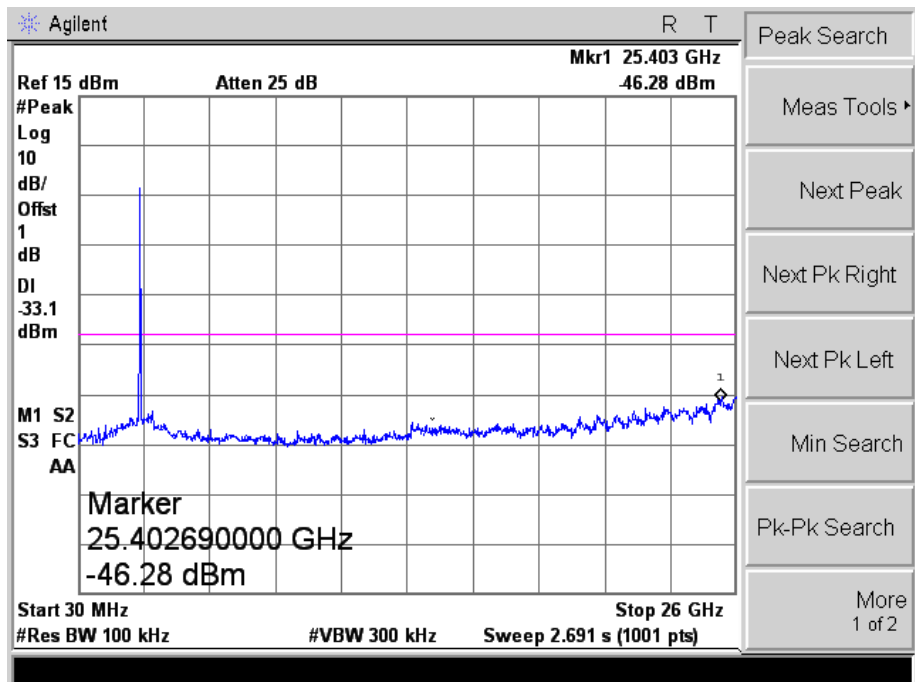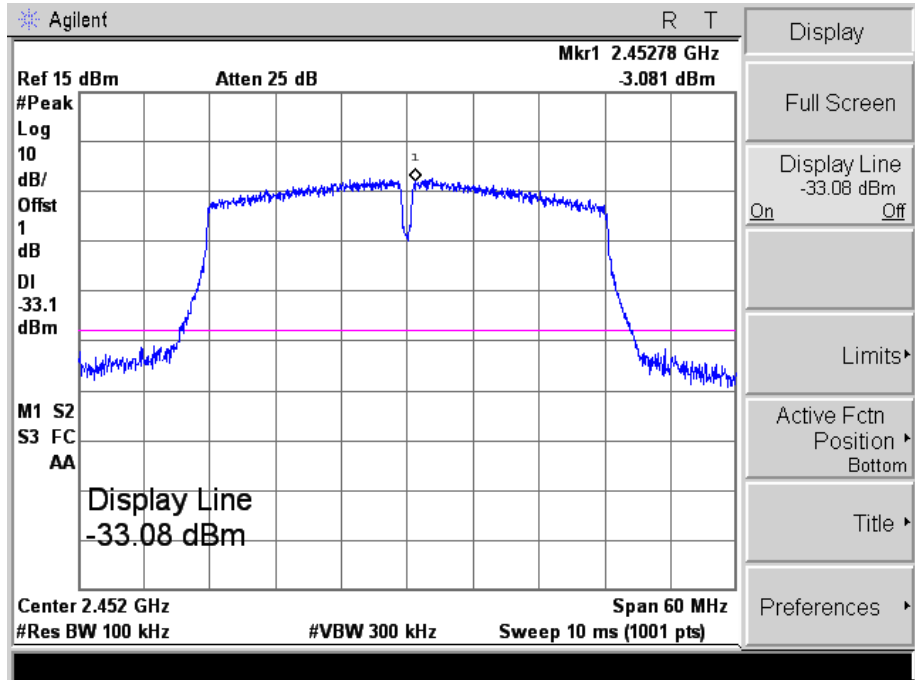

➤ Antenna 1



802.11b_11Mbps

Low

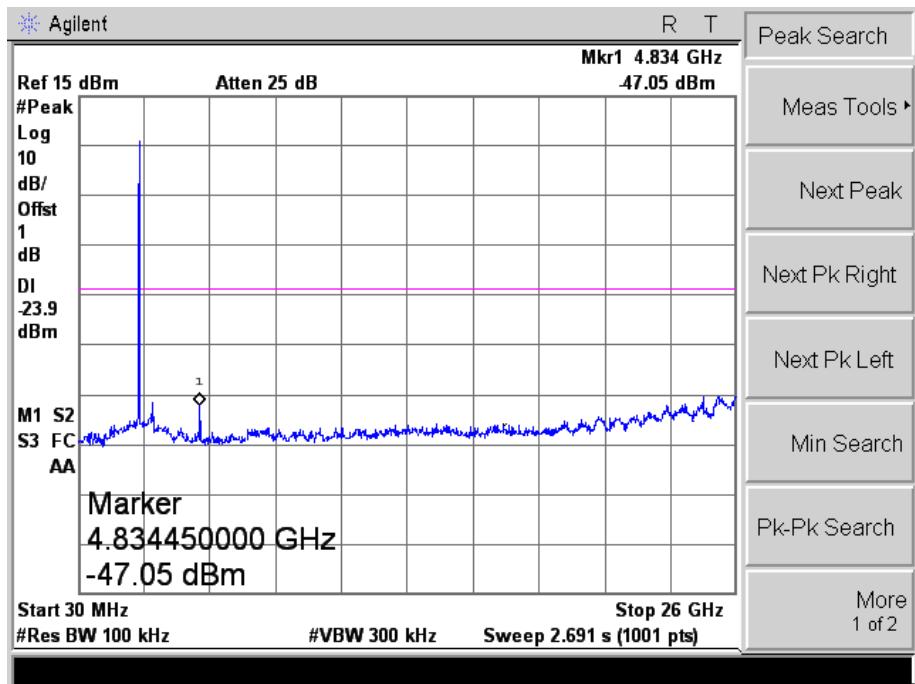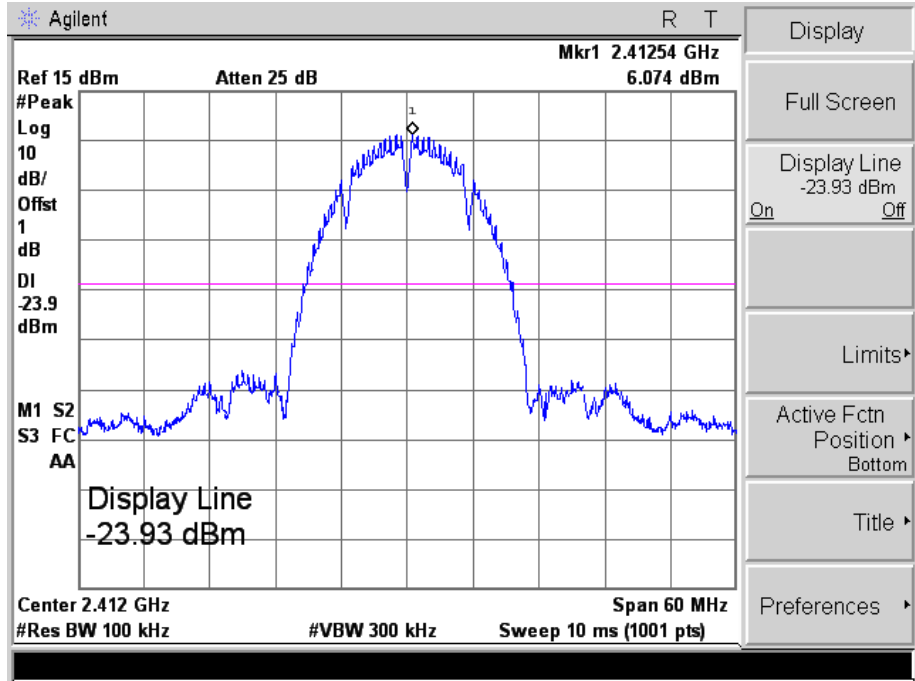



802.11b_11Mbps

Middle

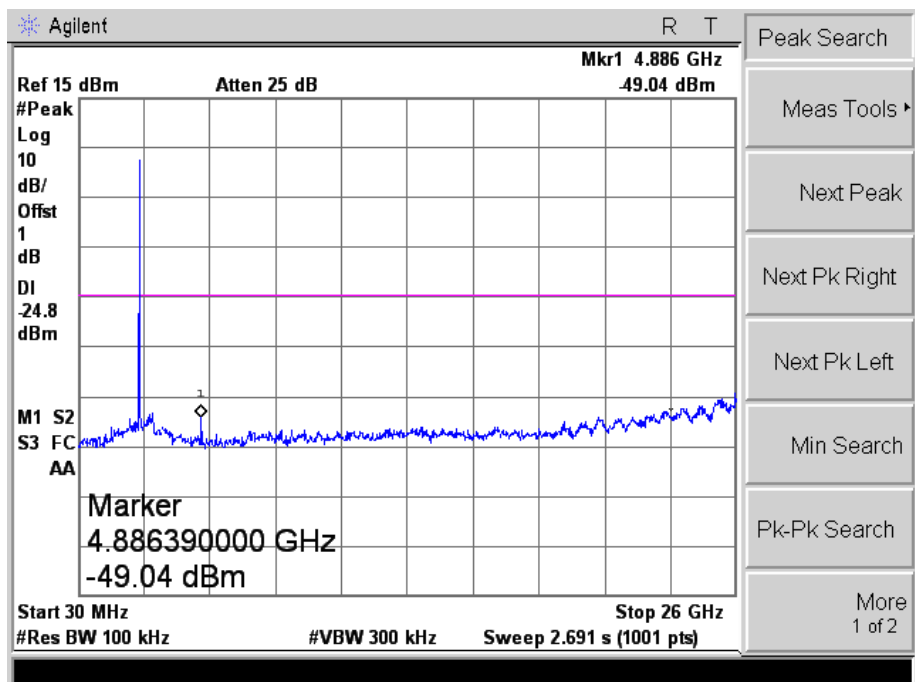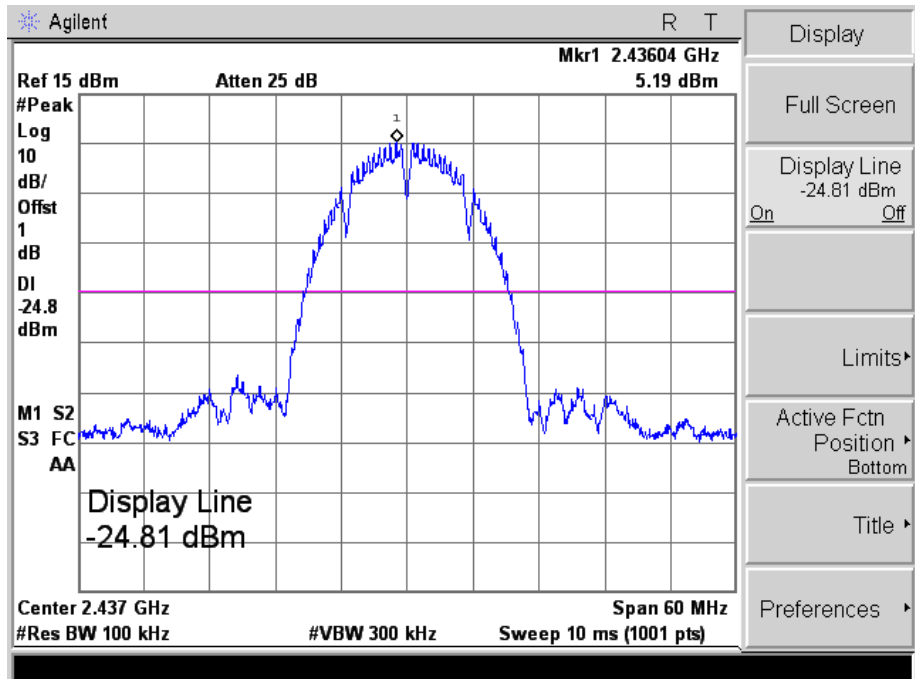



802.11b_11Mbps

High

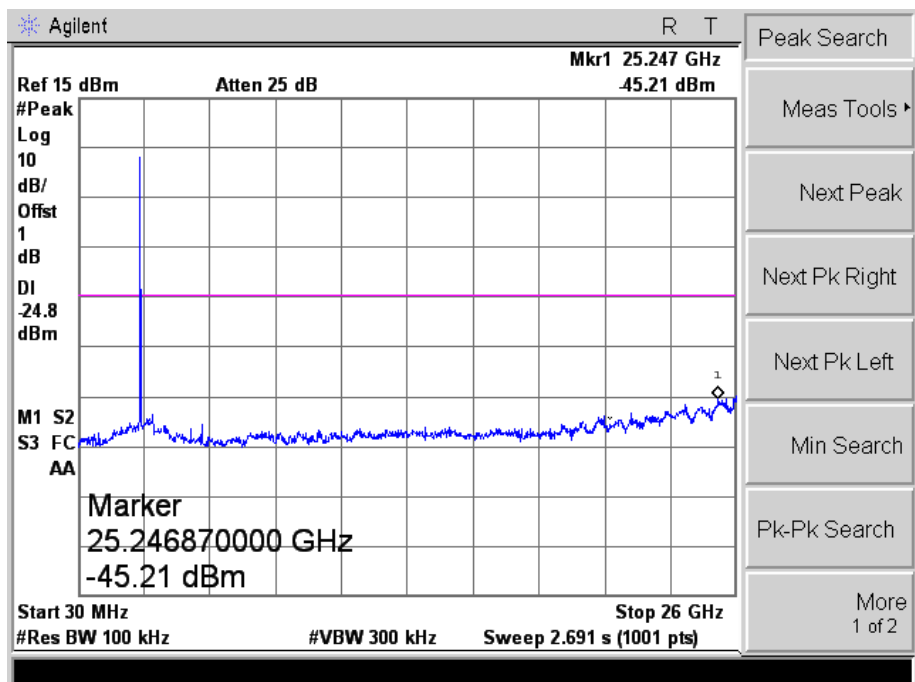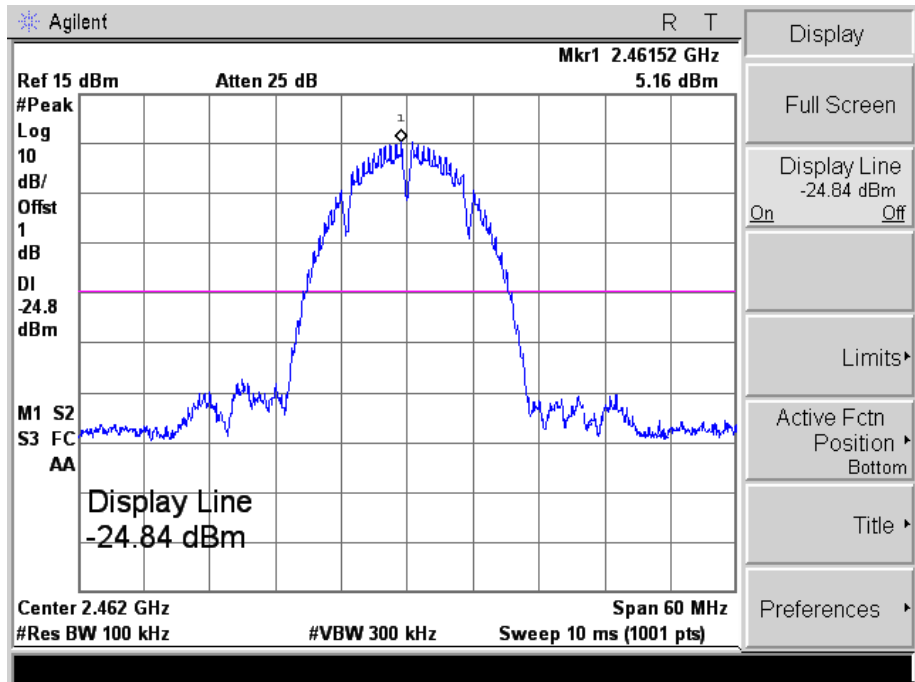



802.11g_54Mbps

Low

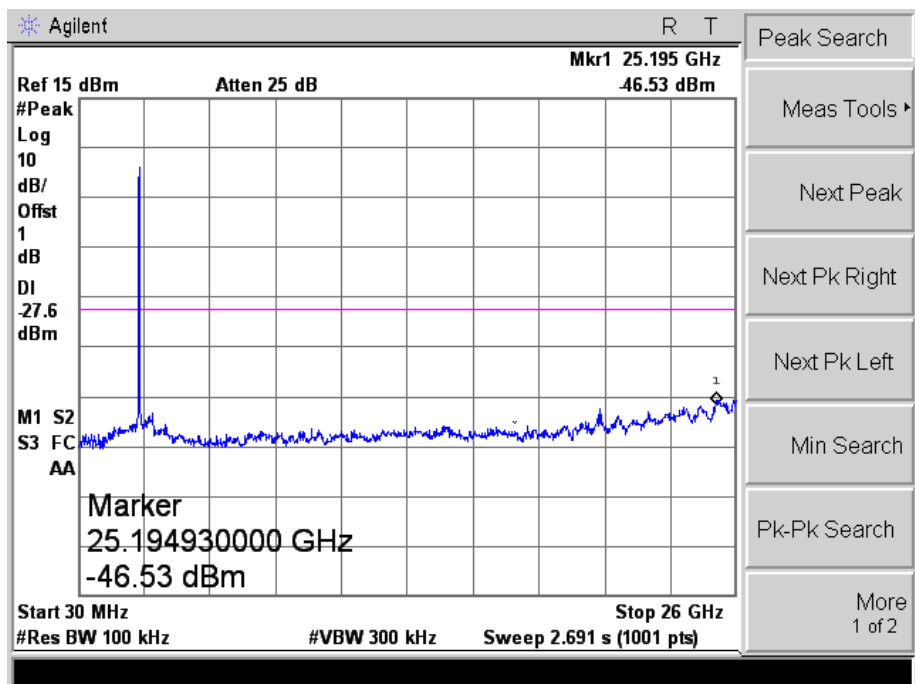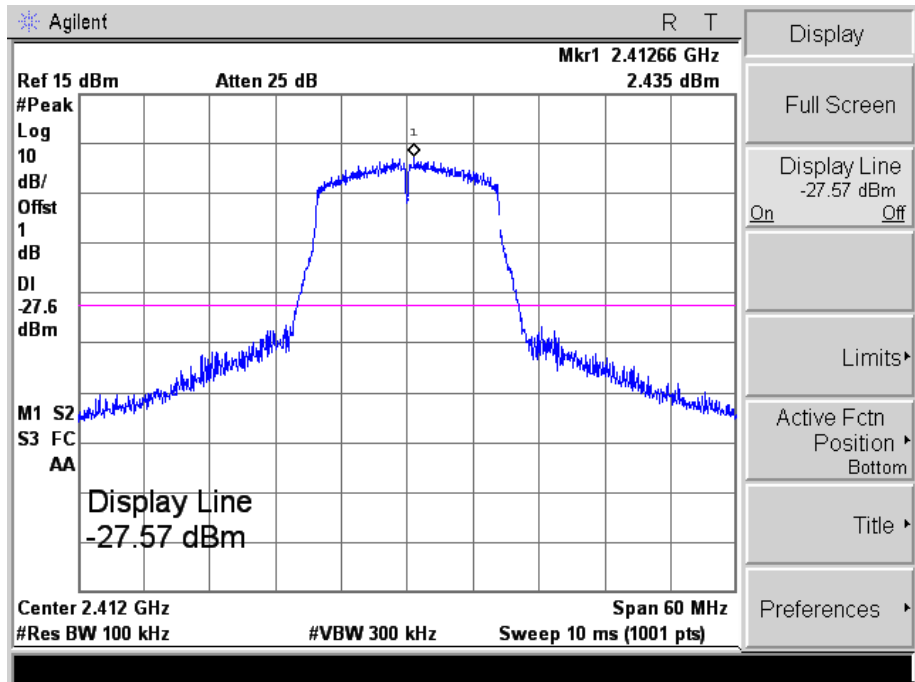



802.11g_54Mbps

Middle

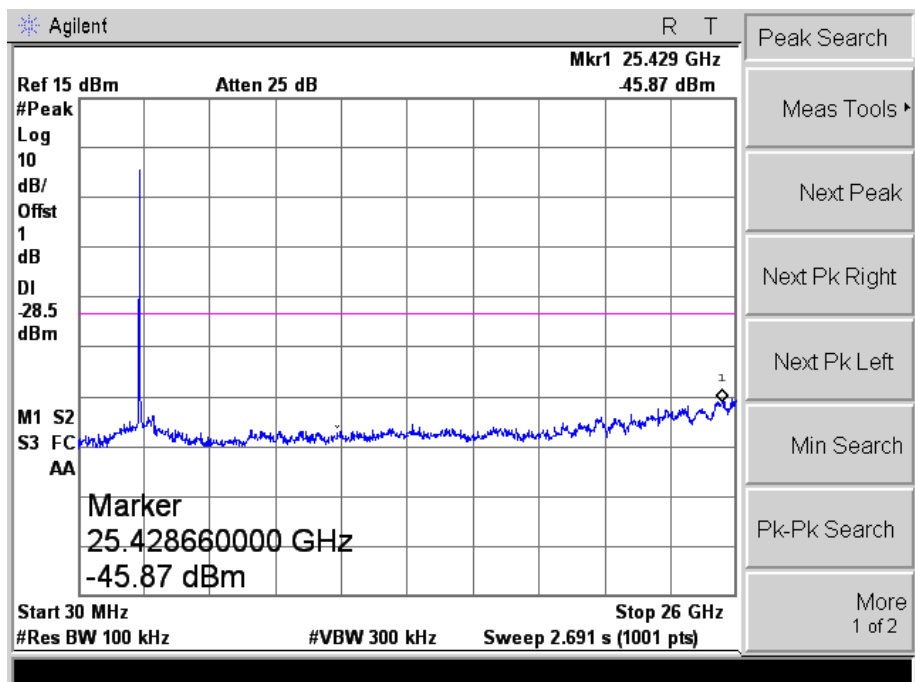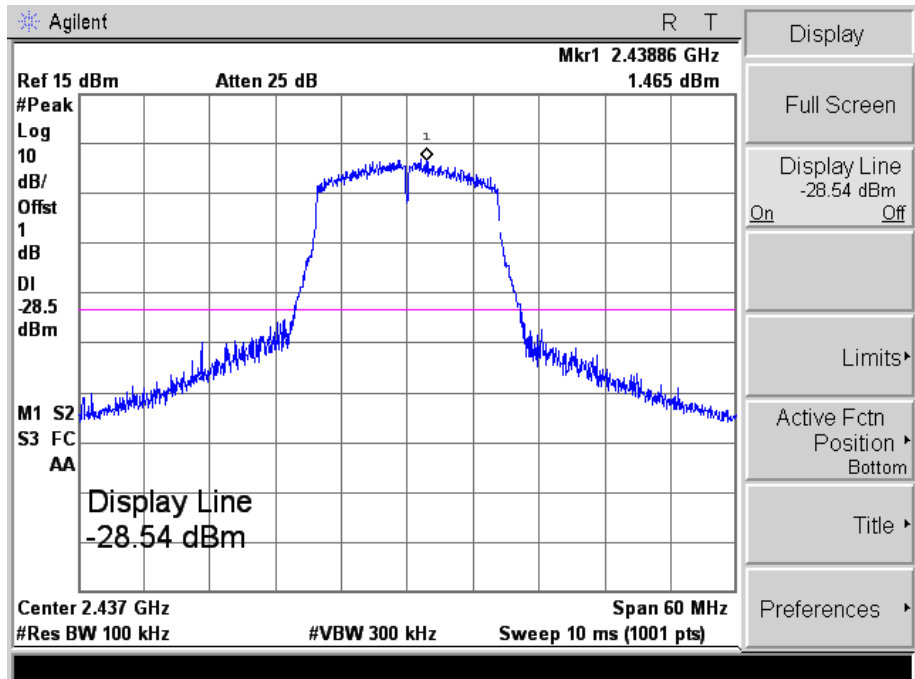



802.11g_54Mbps

High

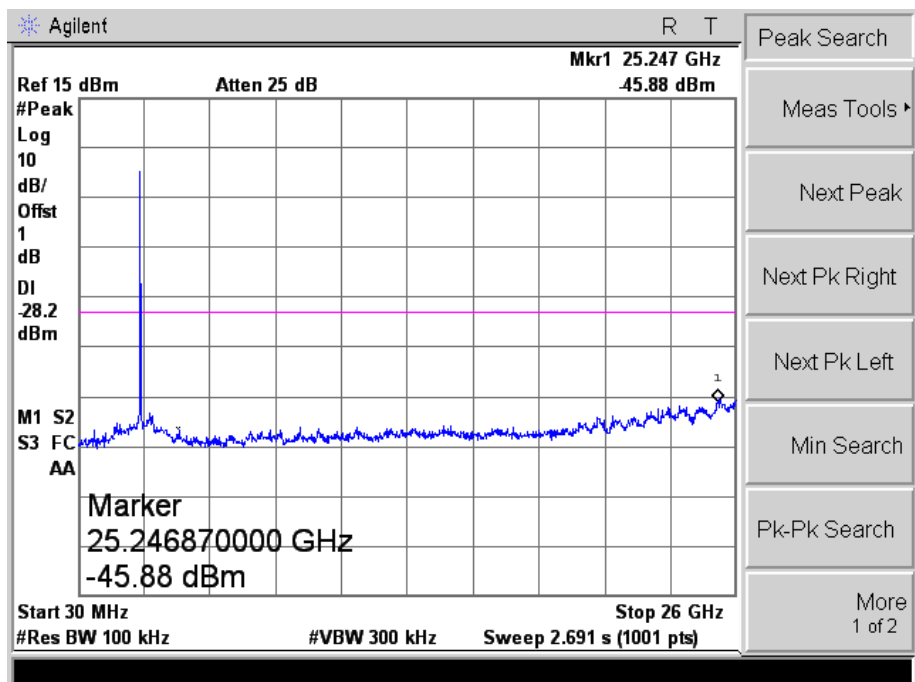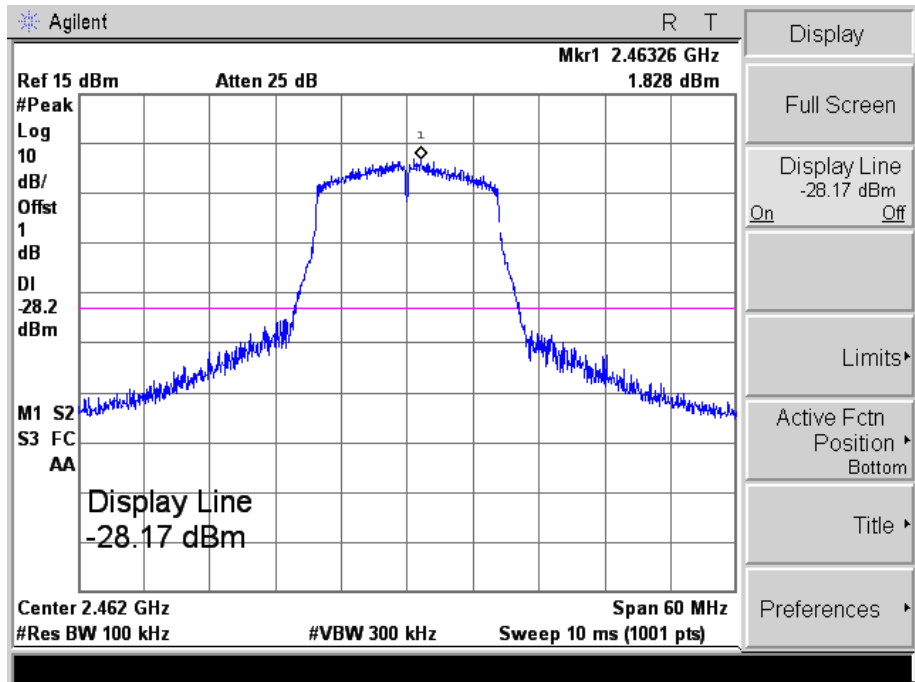



802.11n-HT20_MCS7

Low

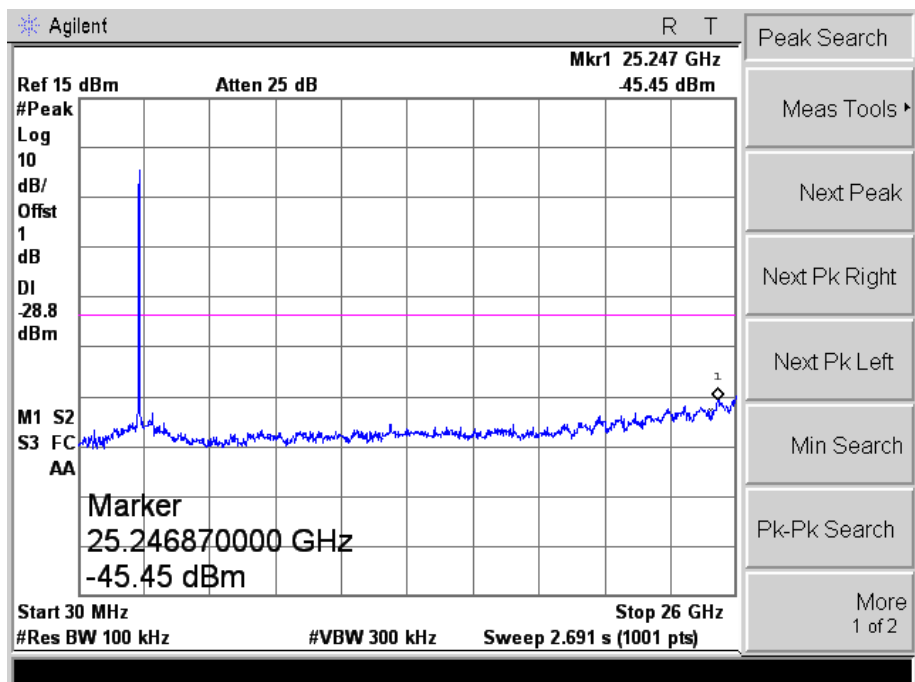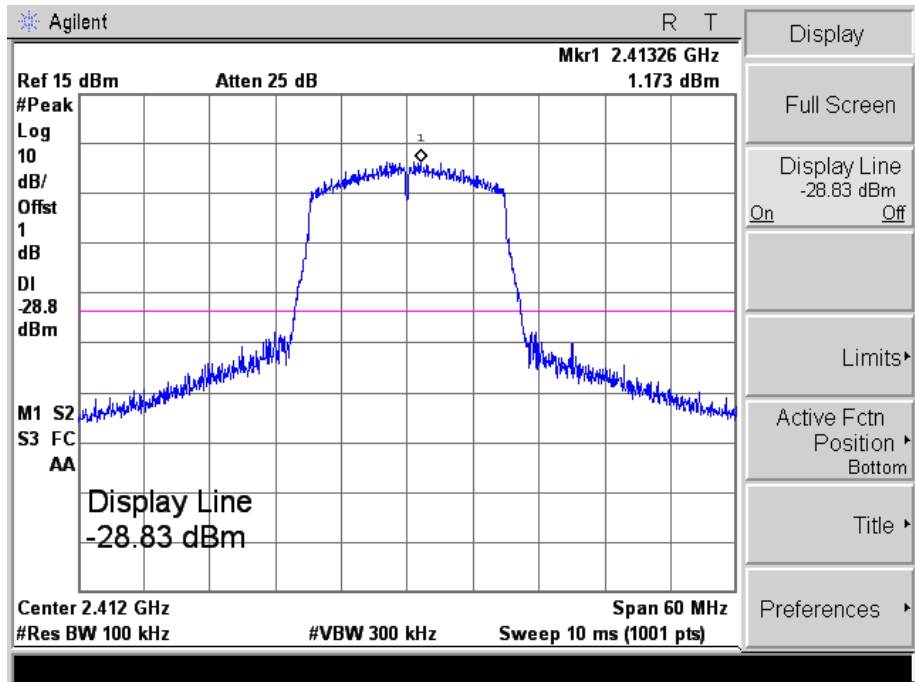



802.11n-HT20_MCS7

Middle

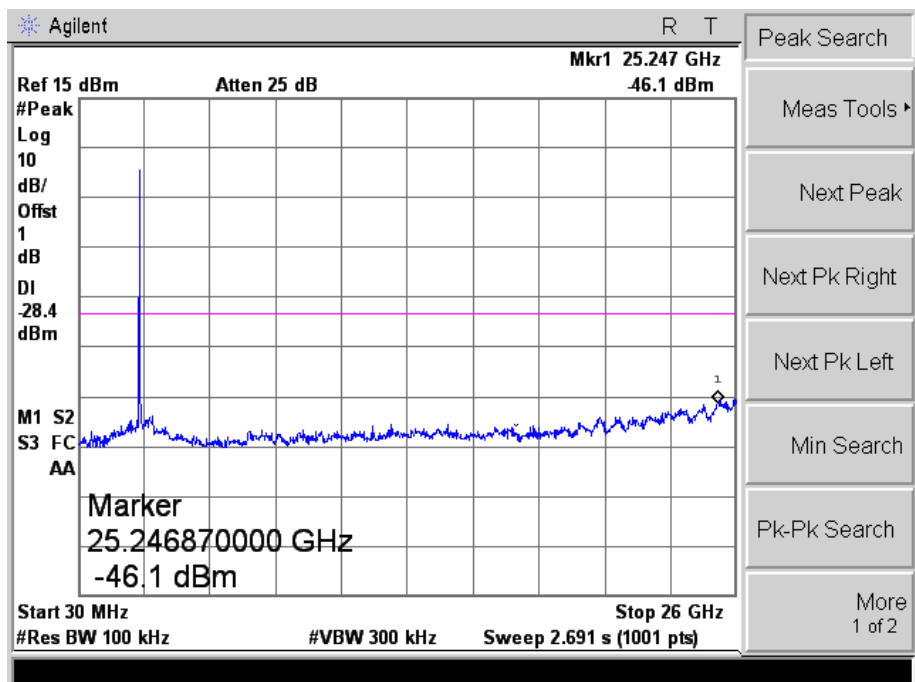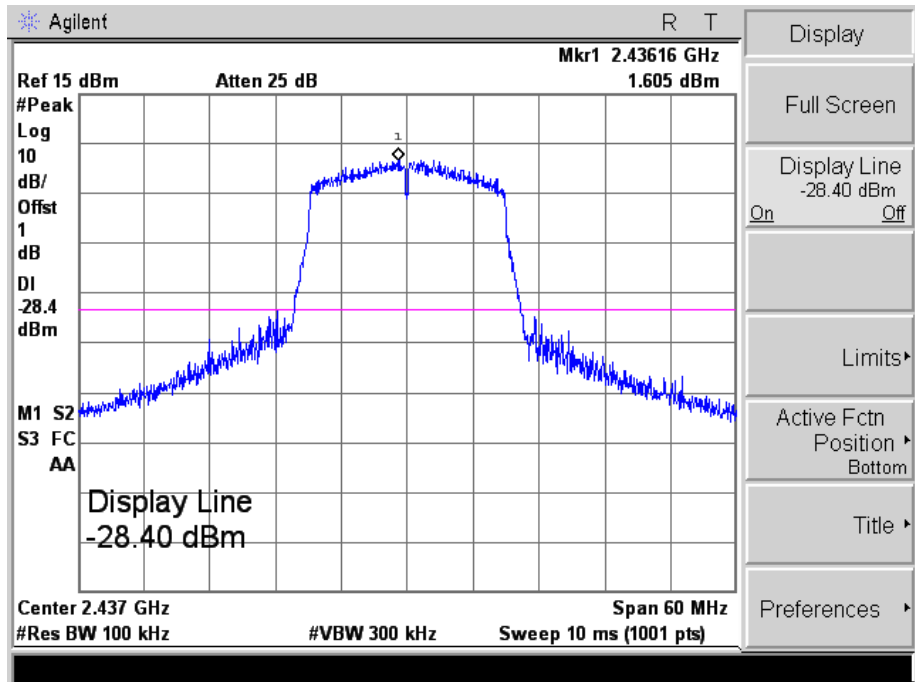



802.11n-HT20_MCS7

High

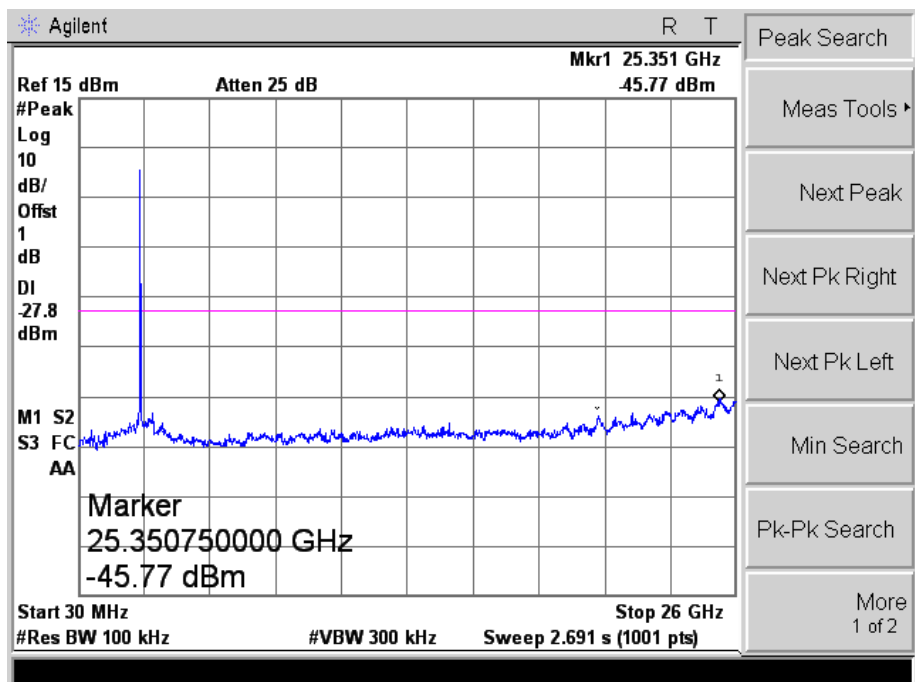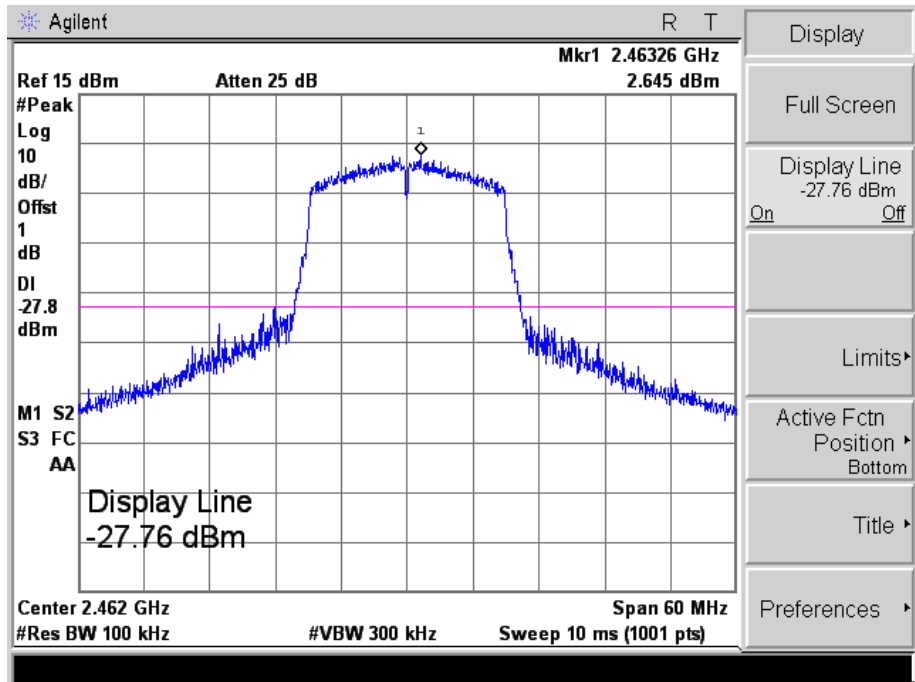



802.11n-HT40_MCS7

Low

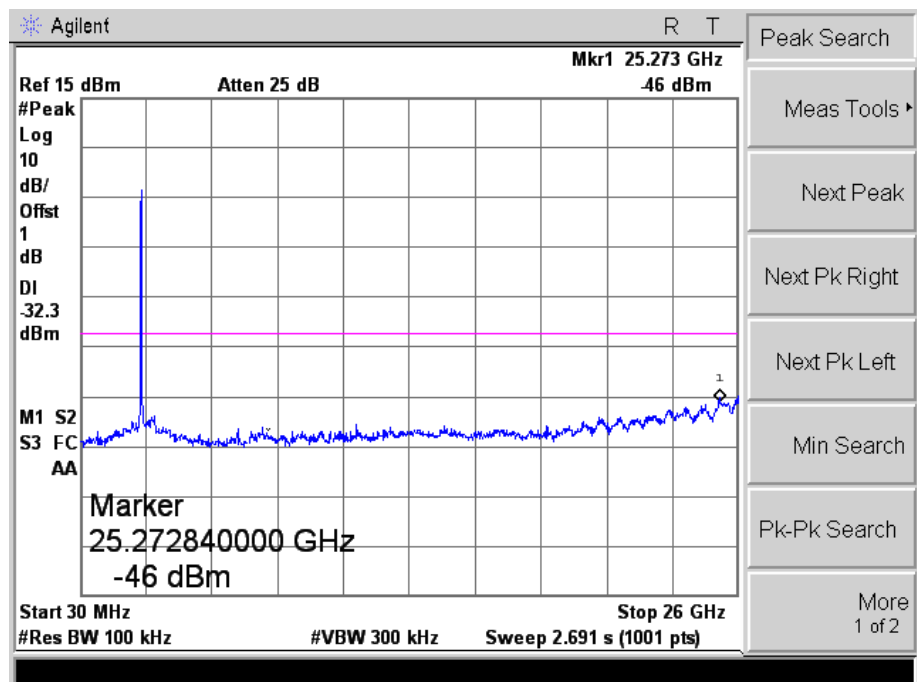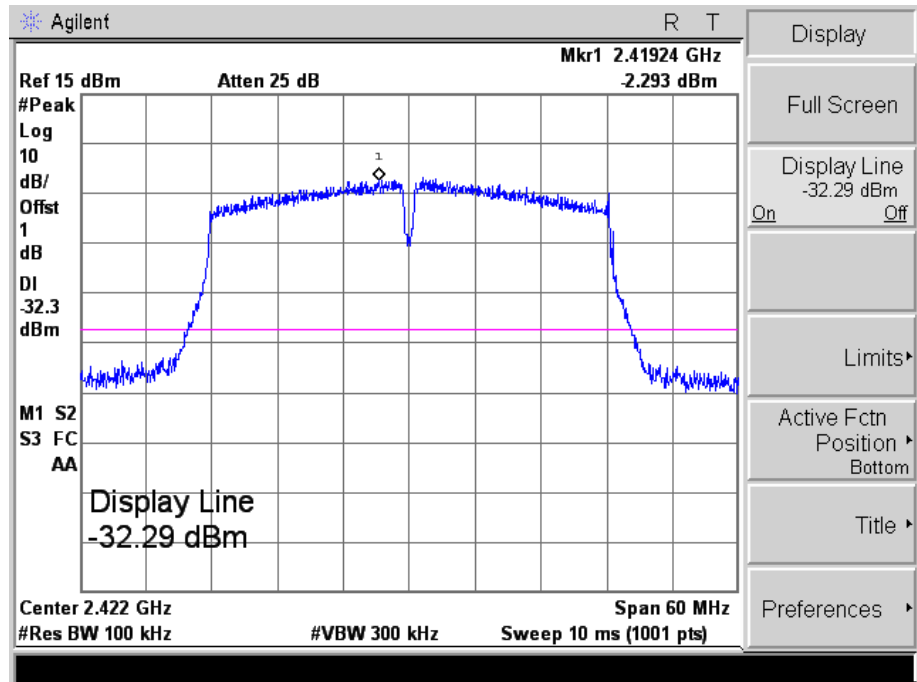



802.11n-HT40_MCS7

Middle

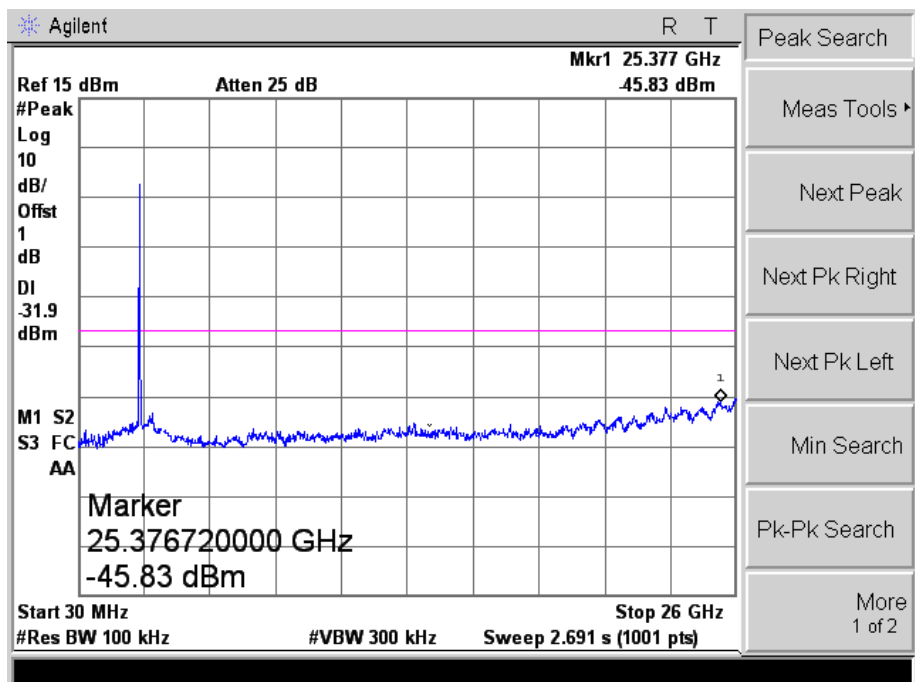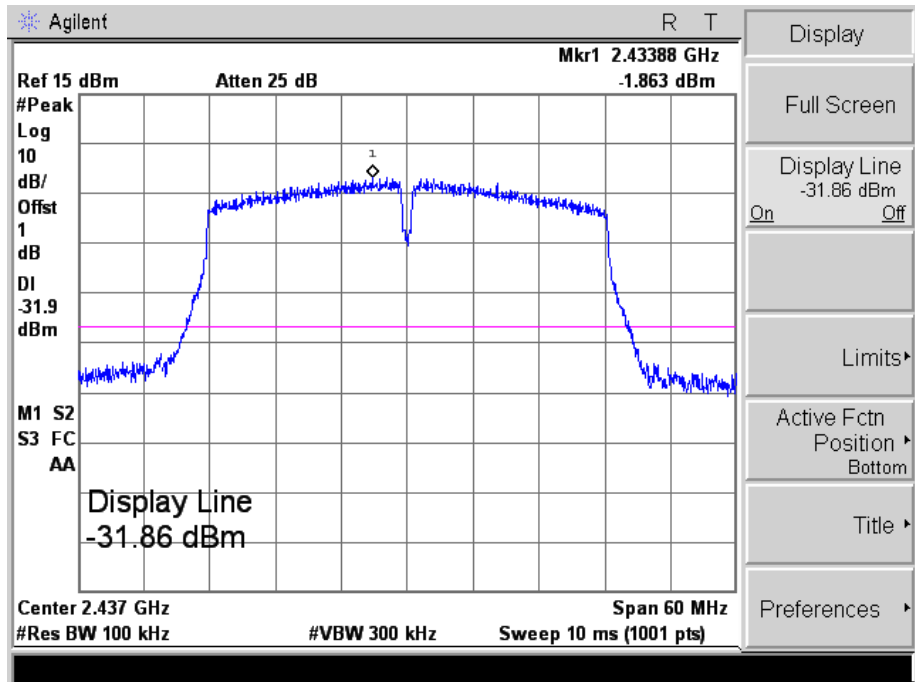

802.11n-HT40_MCS7

High

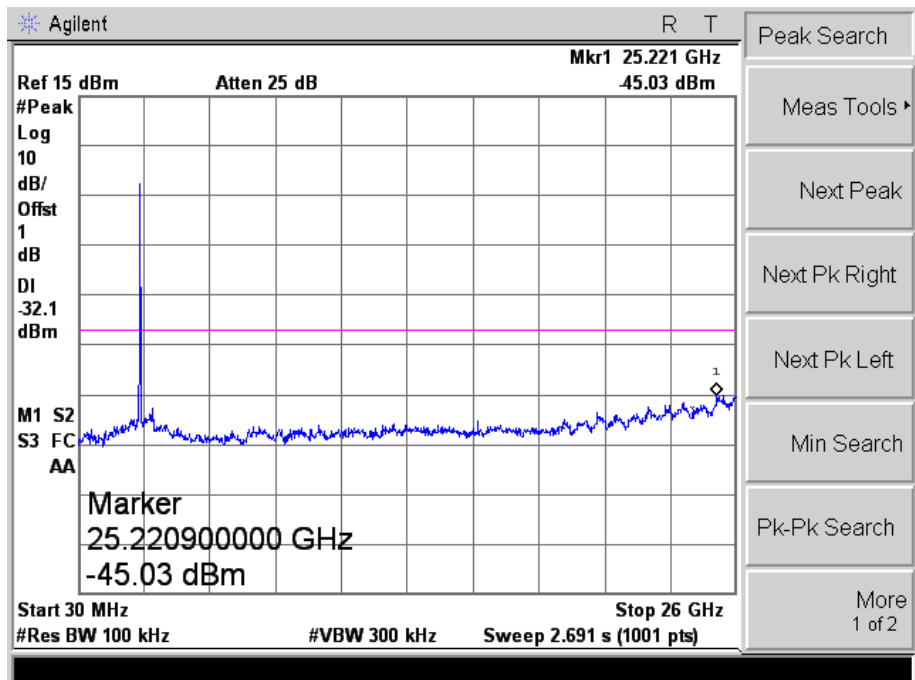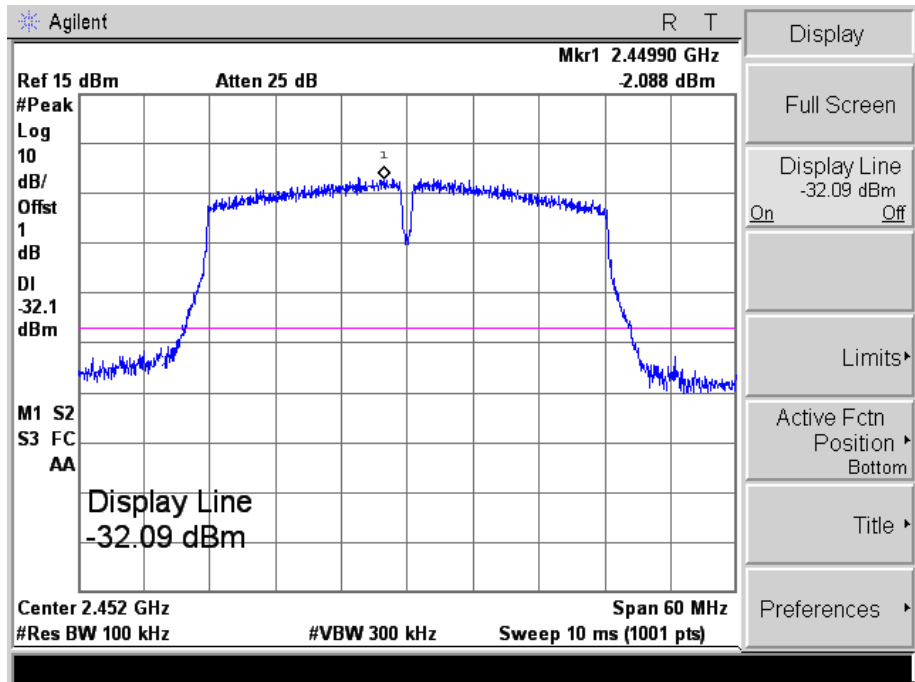


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

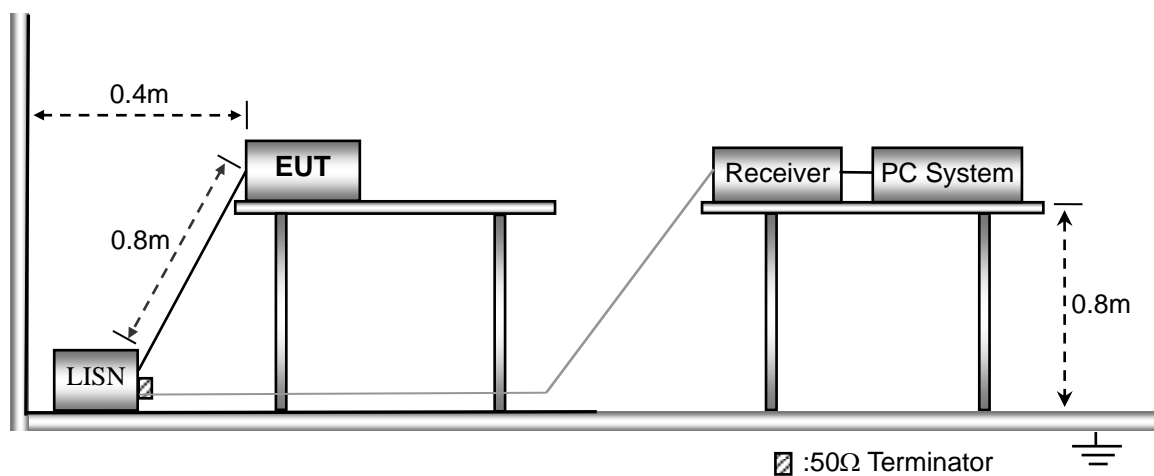


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

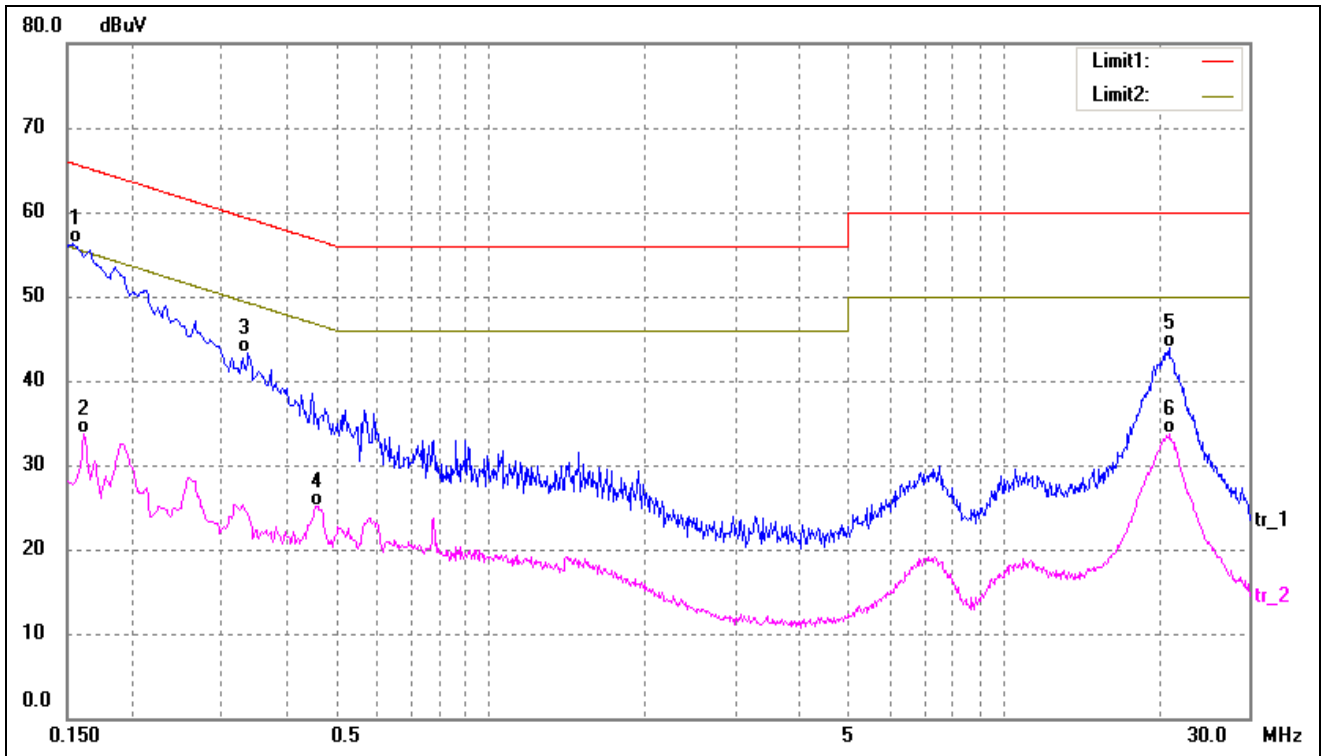

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	45.99	10.25	56.24	65.78	-9.54	QP
2	0.1620	23.42	10.26	33.68	55.36	-21.68	AVG
3	0.3380	32.95	10.26	43.21	59.25	-16.04	QP
4	0.4620	14.86	10.22	25.08	46.66	-21.58	AVG
5	21.0140	33.31	10.59	43.90	60.00	-16.10	QP
6	21.0540	23.04	10.59	33.63	50.00	-16.37	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

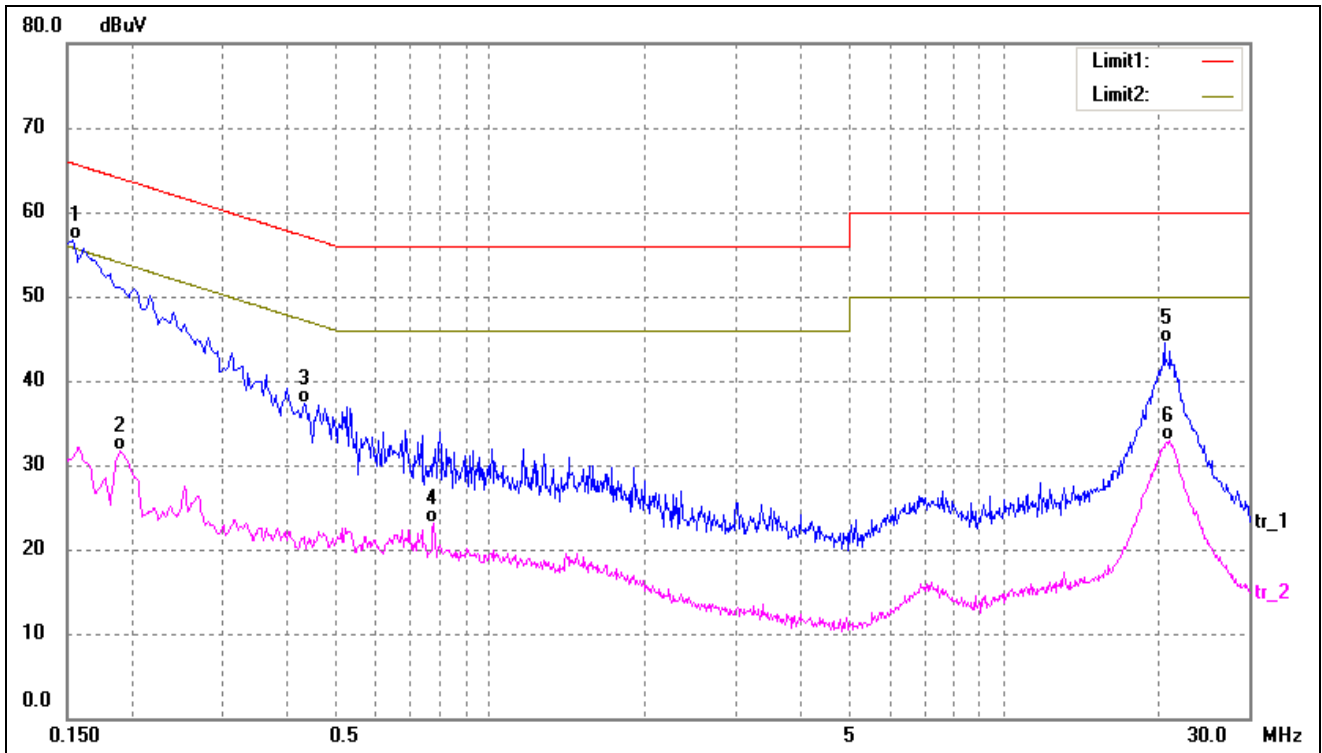

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	46.41	10.25	56.66	65.78	-9.12	QP
2	0.1900	21.45	10.26	31.71	54.04	-22.33	AVG
3	0.4340	27.09	10.22	37.31	57.18	-19.87	QP
4	0.7780	12.92	10.18	23.10	46.00	-22.90	AVG
5	20.5740	33.96	10.59	44.55	60.00	-15.45	QP
6	21.0340	22.34	10.59	32.93	50.00	-17.07	AVG

***** END OF REPORT *****