

TEST REPORT

Reference No..... : WTH20X08058607W
FCC ID : XOM-D50A114D-U-A
Applicant : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
Address : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,
Shangmeilin, Futian District, Shenzhen , China
Product Name : 50" SMART 4K UHD TV
Test Model. : D50A114d-U-A-I
Standards : FCC Part 15C
Date of Receipt sample : Aug.21, 2020
Date of Test..... : Aug.21, 2020 to Aug.28, 2020
Date of Issue : Aug.28, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS	10
3. RF EXPOSURE	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. ANTENNA REQUIREMENT	12
4.1 STANDARD APPLICABLE.....	12
4.2 EVALUATION INFORMATION.....	12
5. POWER SPECTRAL DENSITY	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST SETUP BLOCK DIAGRAM.....	13
5.3 TEST PROCEDURE.....	13
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
6. DTS BANDWIDTH	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST SETUP BLOCK DIAGRAM.....	23
6.3 TEST PROCEDURE.....	23
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	23
7. RF OUTPUT POWER	33
7.1 STANDARD APPLICABLE.....	33
7.2 TEST SETUP BLOCK DIAGRAM.....	33
7.3 TEST PROCEDURE.....	33
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	33
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	43
8.1 STANDARD APPLICABLE.....	43
8.2 TEST PROCEDURE.....	43
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	45
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	45
9. OUT OF BAND EMISSIONS	60
9.1 STANDARD APPLICABLE.....	60
9.2 TEST PROCEDURE.....	60
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	61
10. CONDUCTED EMISSIONS	94
10.1 TEST PROCEDURE.....	94
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	94
10.3 TEST RECEIVER SETUP.....	94
10.4 SUMMARY OF TEST RESULTS/PLOTS.....	94

Report version

Version No.	Date of issue	Description
Rev.00	Aug.28, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen, China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 BRANCH
 Address of manufacturer: SEIYU INDUSTRIAL PARK,DA SAN VILLAGE,DA SHUI KENG,GUANLAN TOWN,LONGHUA NEW DISTRICT, SHENZHEN,P.R.C

General Description of EUT	
Product Name:	50" SMART 4K UHD TV
Trade Name:	RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA, RCASMARTVIRTUOSO
Model No.:	D50A114d-U-A-I
Adding Model(s):	RNSMU5036, XXXXXXXXXXXX50XXXXXXXXXXXXXXXXX (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model D50A114d-U-A-I, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	16.71dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.76dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1091	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information


This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Setup Block Diagram

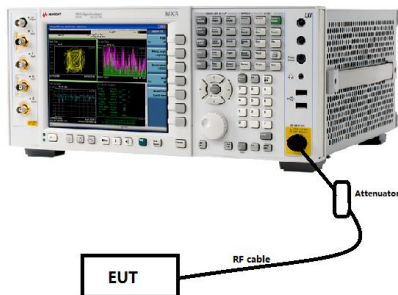

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.4 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 0	Antenna 1		
802.11b_11Mbps	2412	-17.53	-18.81	/	8
	2437	-18.15	-17.78	/	8
	2462	-17.22	-17.61	/	8
802.11g_54Mbps	2412	-19.33	-19.38	/	8
	2437	-19.21	-19.74	/	8
	2462	-19.64	-19.64	/	8
802.11n-HT20_MCS7	2412	-20.42	-19.57	-16.96	8
	2437	-19.76	-19.29	-16.51	8
	2462	-19.51	-20.16	-16.81	8
802.11n-HT40_MCS7	2422	-23.79	-23.57	-20.67	8
	2437	-24.29	-24.40	-21.33	8
	2452	-25.52	-26.32	-22.89	8




Please refer to the following test plots:

➤ Antenna 0
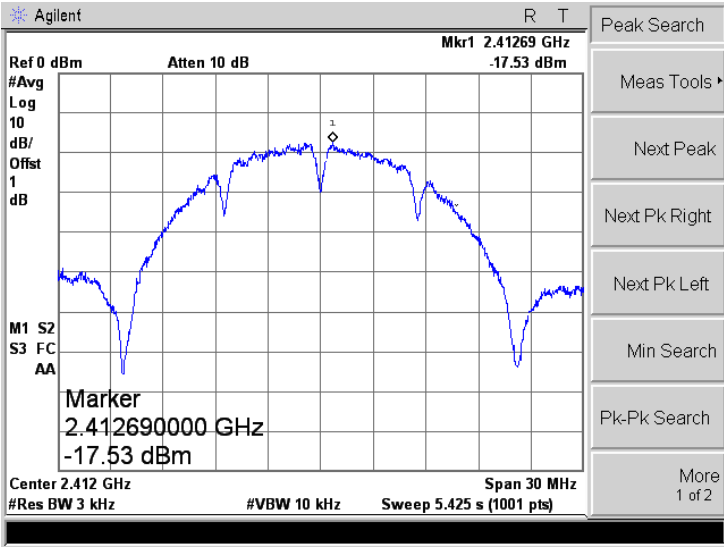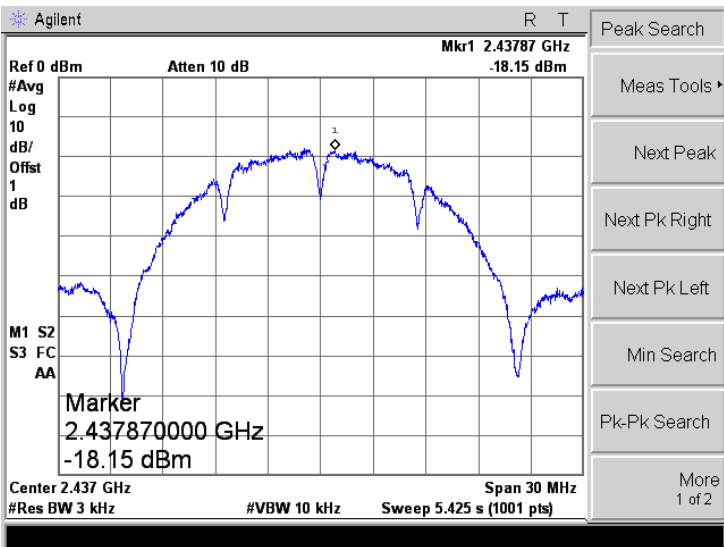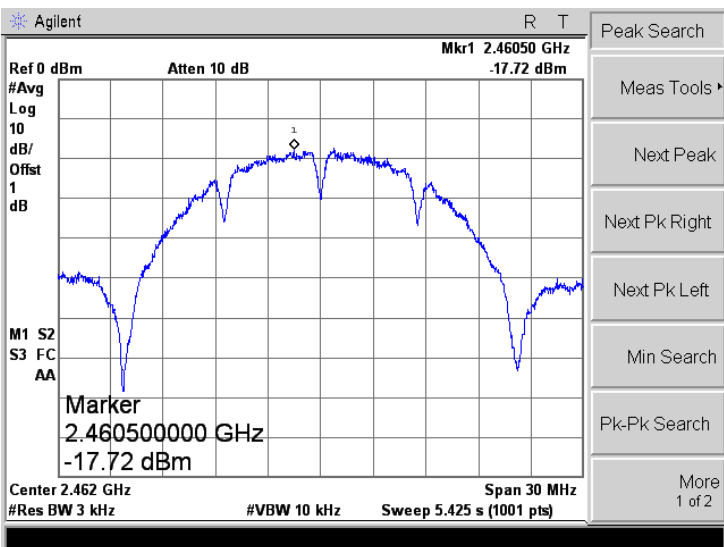
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

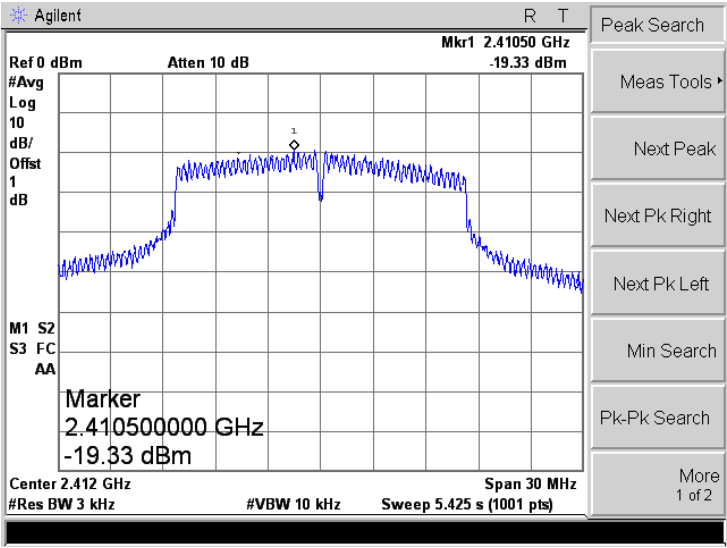
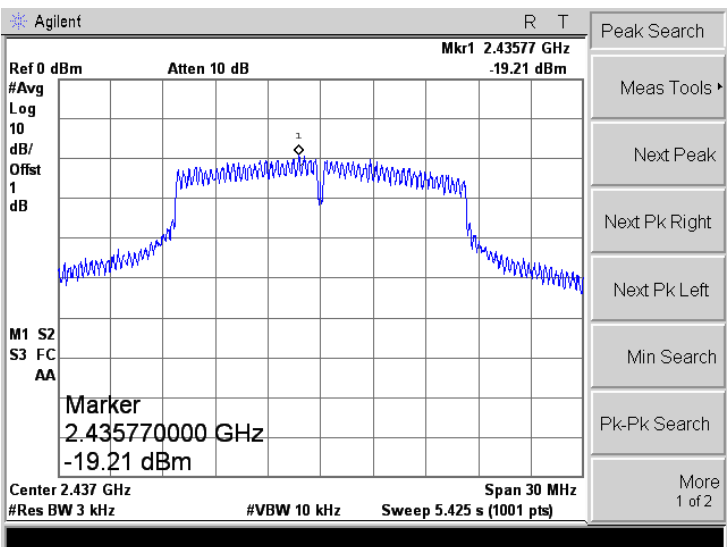
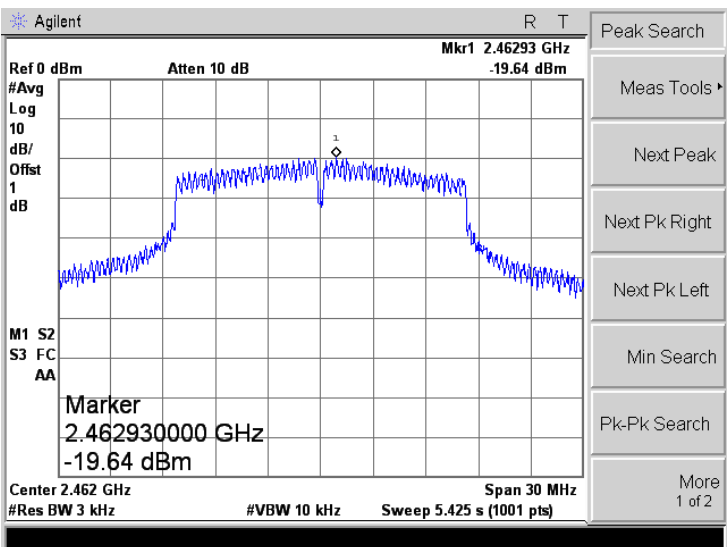
<p>802.11g-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41050 GHz -19.33 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.41050000 GHz -19.33 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43577 GHz -19.21 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.43577000 GHz -19.21 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.46293 GHz -19.64 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.46293000 GHz -19.64 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>

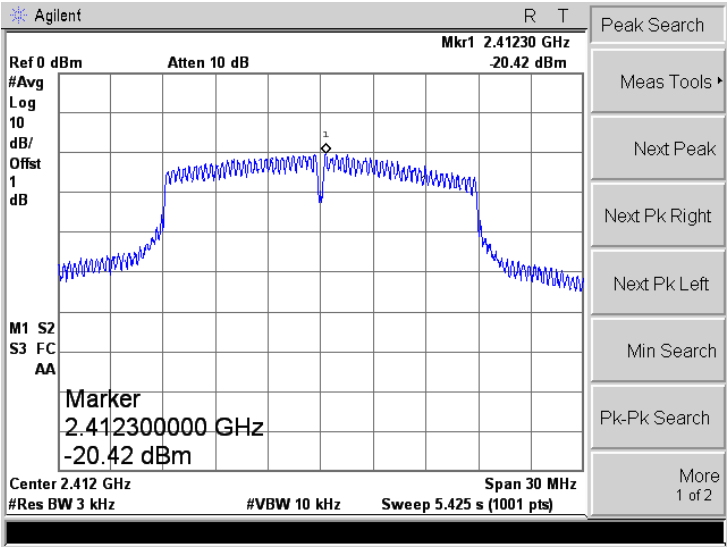
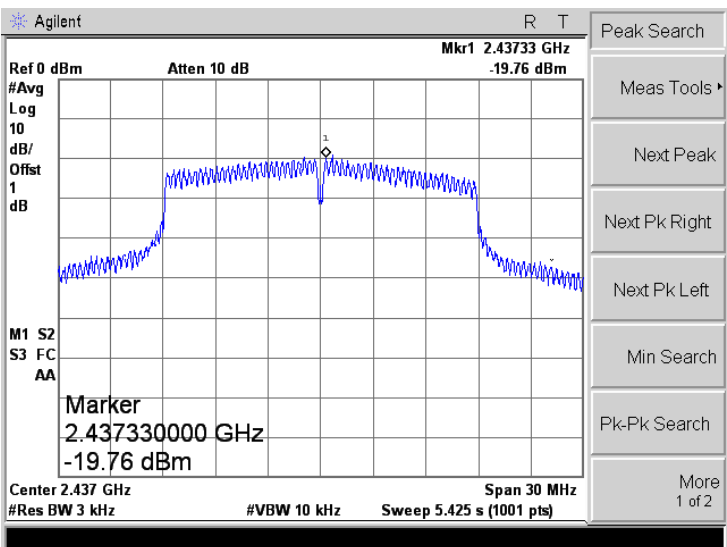
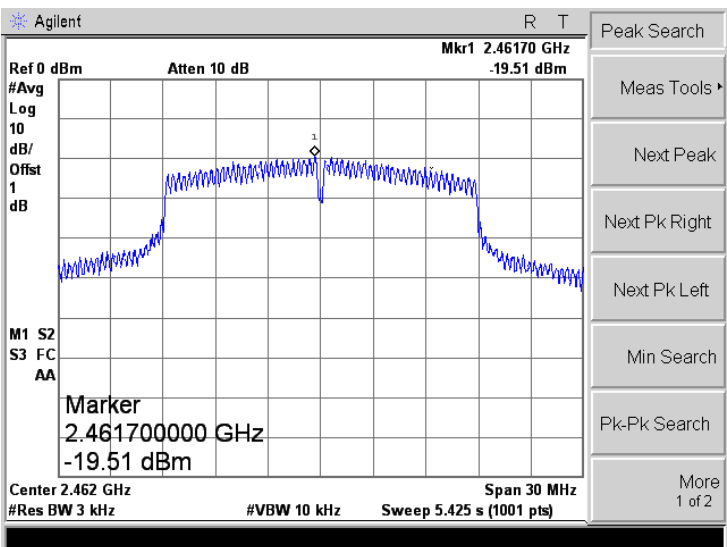
<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41230 GHz -20.42 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.412300000 GHz -20.42 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43733 GHz -19.76 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.437330000 GHz -19.76 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.46170 GHz -19.51 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.461700000 GHz -19.51 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>

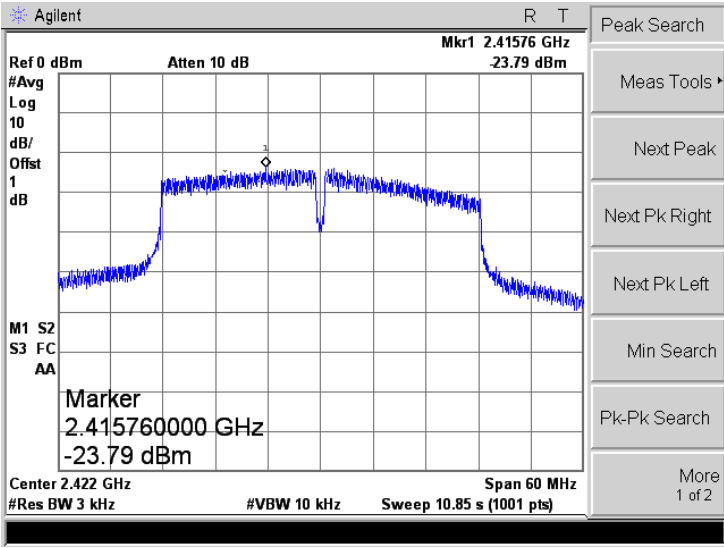
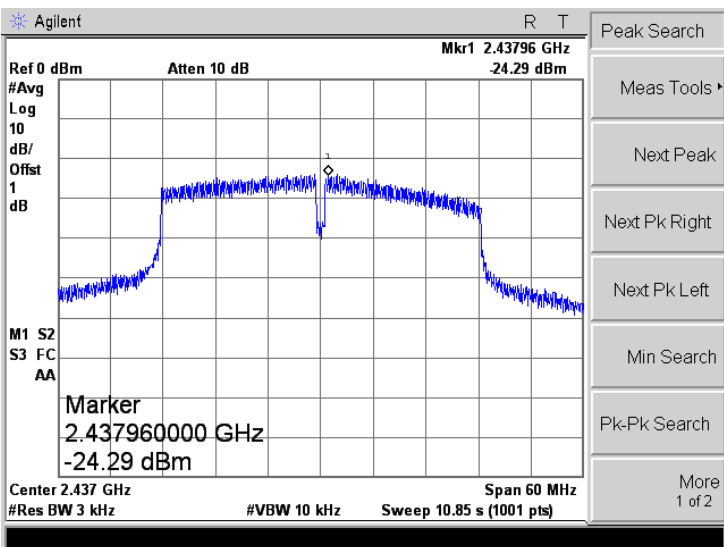
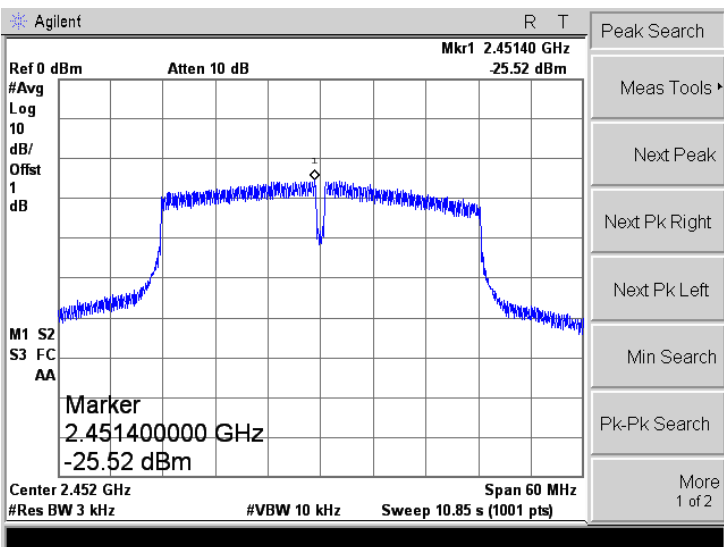
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

➤ Antenna 1

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
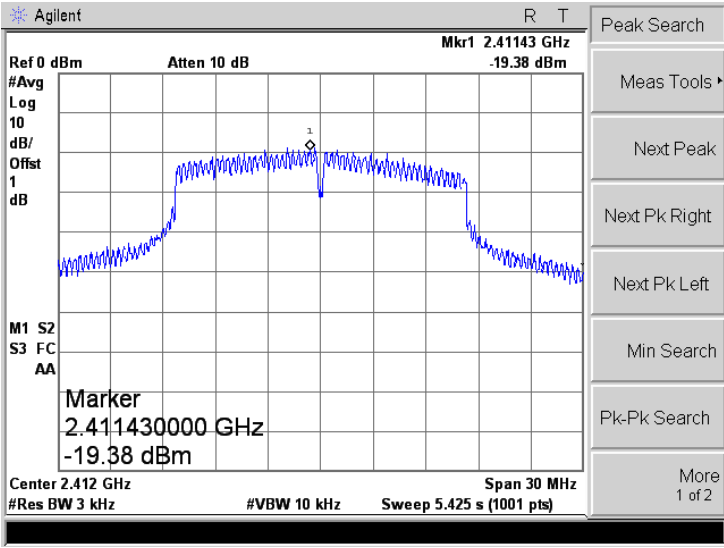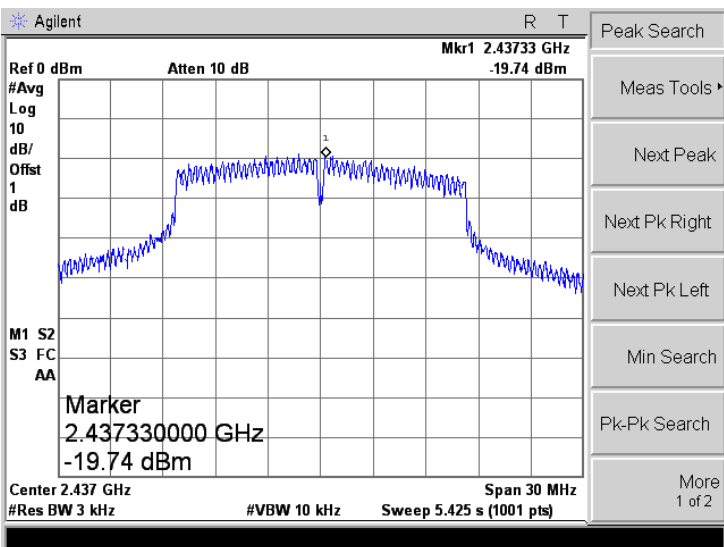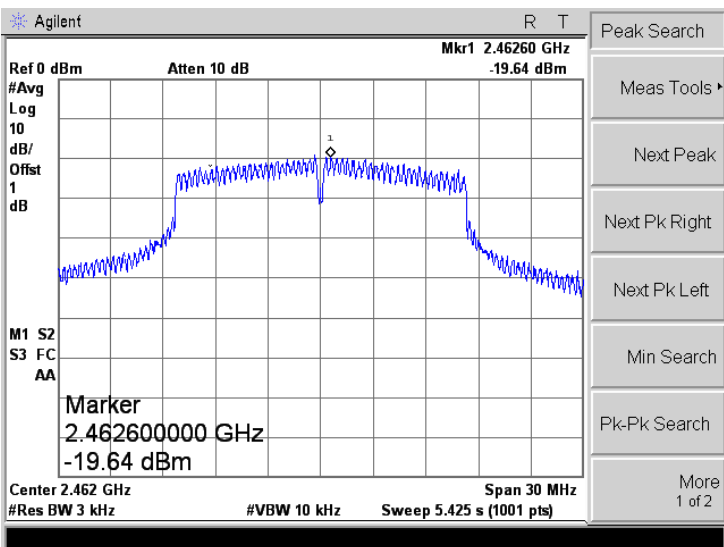
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	
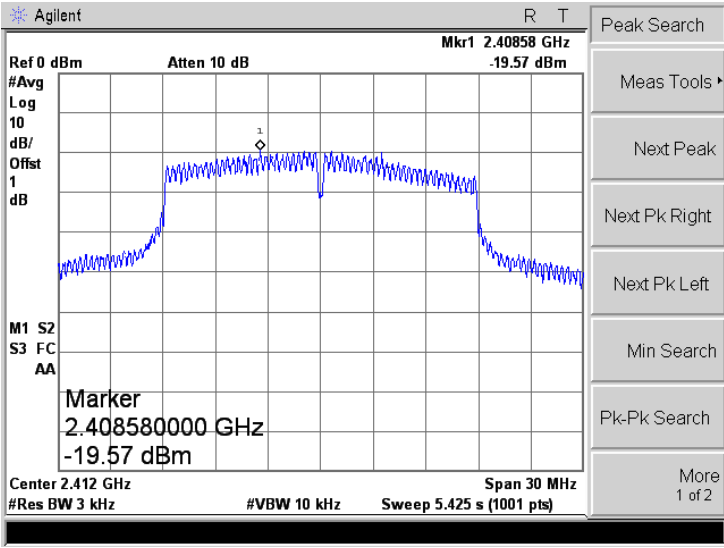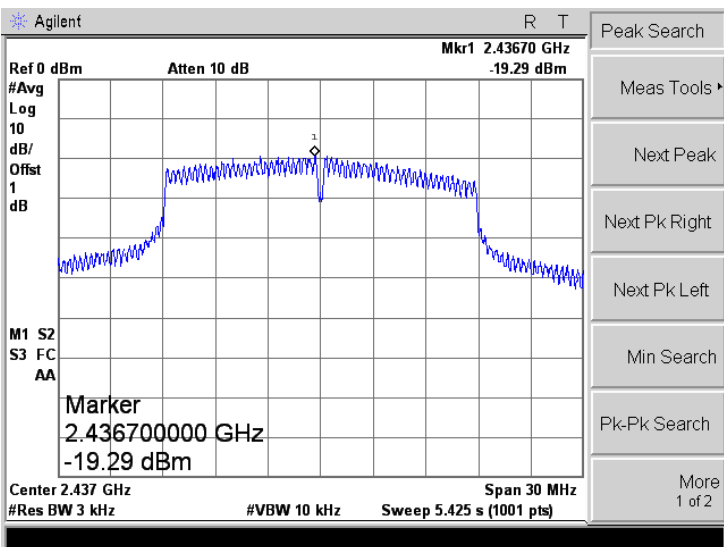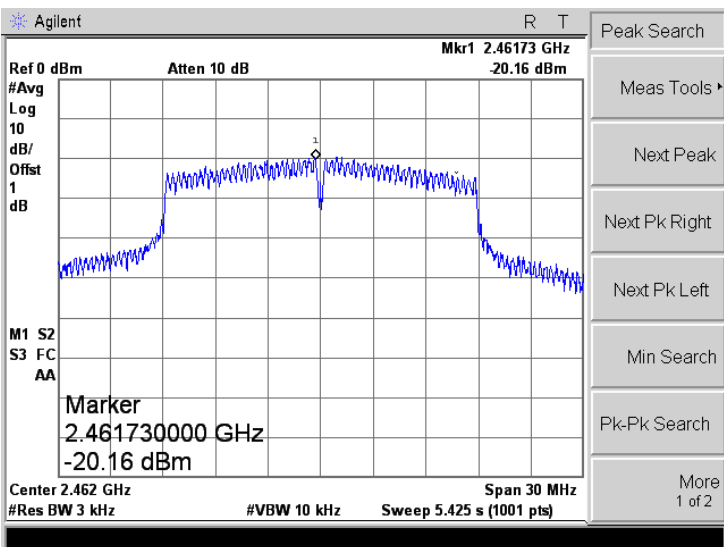
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

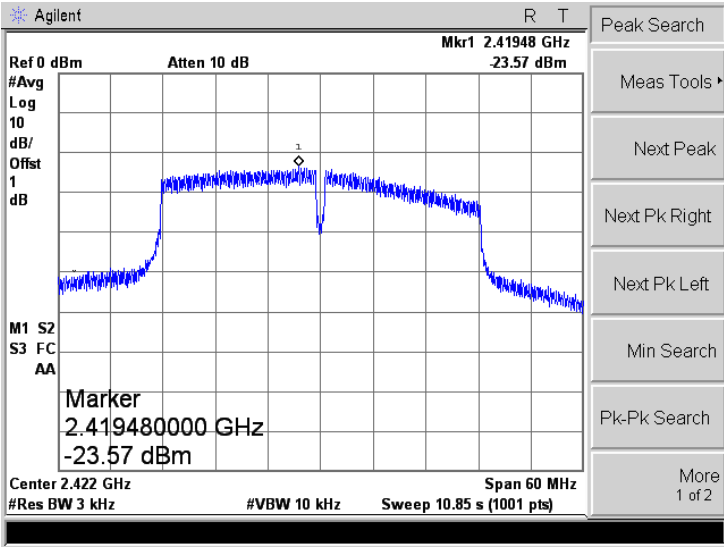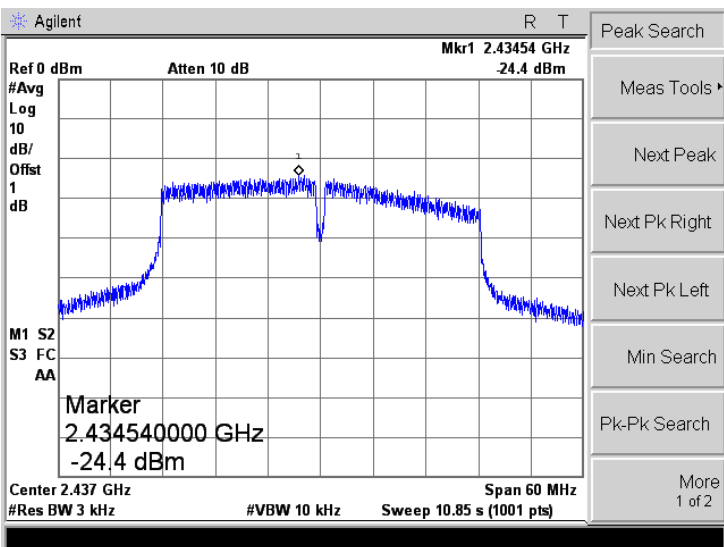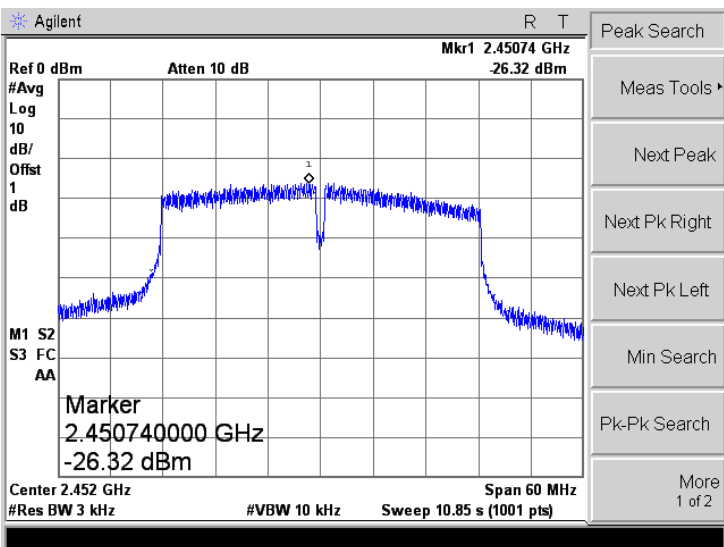
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.41948 GHz -23.57 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.419480000 GHz -23.57 dBm Center 2.422 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43454 GHz -24.4 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.434540000 GHz -24.4 dBm Center 2.437 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.45074 GHz -26.32 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.450740000 GHz -26.32 dBm Center 2.452 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>

6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Setup Block Diagram

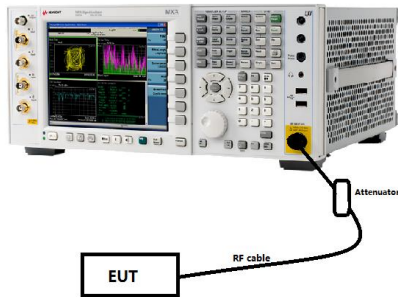

6.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 0	Antenna 1	
802.11b_11Mbps	2412	9.548	9.032	≥ 500
	2437	9.496	9.048	≥ 500
	2462	9.035	8.575	≥ 500
802.11g_54Mbps	2412	16.077	16.312	≥ 500
	2437	16.078	16.321	≥ 500
	2462	15.810	16.313	≥ 500
802.11n-HT20_MCS7	2412	17.554	16.855	≥ 500
	2437	16.667	17.126	≥ 500
	2462	17.509	17.536	≥ 500
802.11n-HT40_MCS7	2422	35.272	33.403	≥ 500
	2437	34.582	34.385	≥ 500
	2452	35.851	34.831	≥ 500

Please refer to the following test plots:

➤ Antenna 0




<p>802.11b-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0778 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 28.715 kHz x dB Bandwidth 9.548 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11b-Middle</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0722 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -30.054 kHz x dB Bandwidth 9.496 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11b-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.3220 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -50.354 kHz x dB Bandwidth 9.035 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>

<p>802.11g-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>16.3157 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>12.494 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.077 MHz</td> <td></td> </tr> </table> <p>Trace/View: 1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	16.3157 MHz	x dB	-6.00 dB	Transmit Freq Error	12.494 kHz		x dB Bandwidth	16.077 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
16.3157 MHz	x dB	-6.00 dB											
Transmit Freq Error	12.494 kHz												
x dB Bandwidth	16.077 MHz												
<p>802.11g-Middle</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>16.3097 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-4.805 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.078 MHz</td> <td></td> </tr> </table> <p>Trace/View: 1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	16.3097 MHz	x dB	-6.00 dB	Transmit Freq Error	-4.805 kHz		x dB Bandwidth	16.078 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
16.3097 MHz	x dB	-6.00 dB											
Transmit Freq Error	-4.805 kHz												
x dB Bandwidth	16.078 MHz												
<p>802.11g-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>16.3203 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-5.536 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.810 MHz</td> <td></td> </tr> </table> <p>Trace/View: 1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	16.3203 MHz	x dB	-6.00 dB	Transmit Freq Error	-5.536 kHz		x dB Bandwidth	15.810 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
16.3203 MHz	x dB	-6.00 dB											
Transmit Freq Error	-5.536 kHz												
x dB Bandwidth	15.810 MHz												
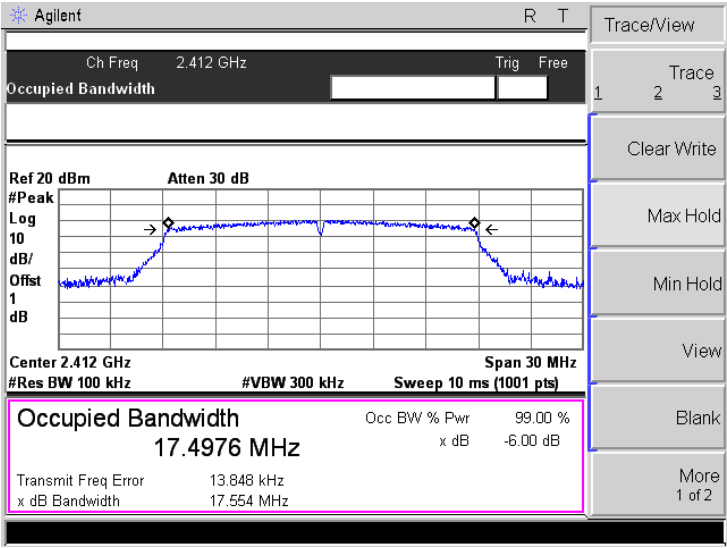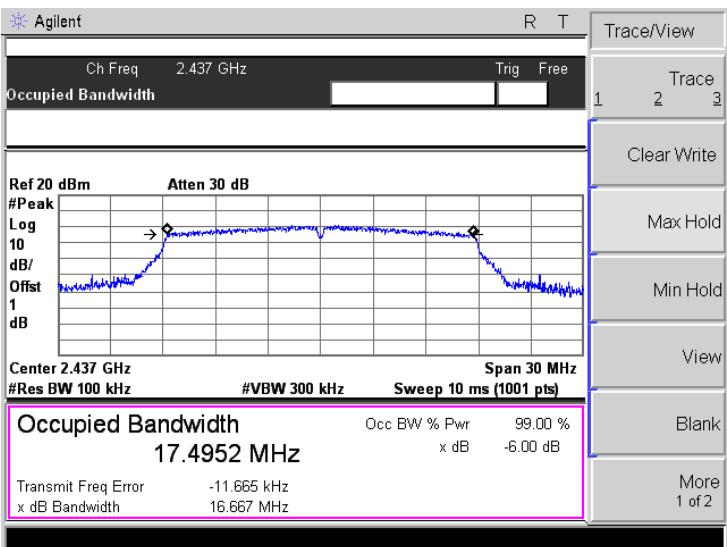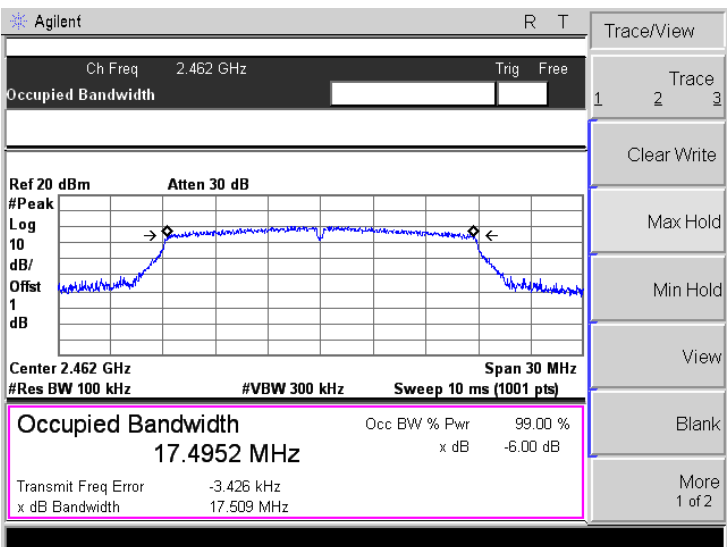
<p>802.11n-HT20-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4976 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 13.848 kHz x dB Bandwidth 17.554 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4952 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -11.665 kHz x dB Bandwidth 16.667 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4952 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -3.426 kHz x dB Bandwidth 17.509 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>35.7328 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	35.7328 MHz	x dB	-6.00 dB	Transmit Freq Error			x dB Bandwidth		
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
35.7328 MHz	x dB	-6.00 dB											
Transmit Freq Error													
x dB Bandwidth													
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>35.7756 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	35.7756 MHz	x dB	-6.00 dB	Transmit Freq Error			x dB Bandwidth		
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
35.7756 MHz	x dB	-6.00 dB											
Transmit Freq Error													
x dB Bandwidth													
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>35.8287 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	35.8287 MHz	x dB	-6.00 dB	Transmit Freq Error			x dB Bandwidth		
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
35.8287 MHz	x dB	-6.00 dB											
Transmit Freq Error													
x dB Bandwidth													

➤ Antenna 1
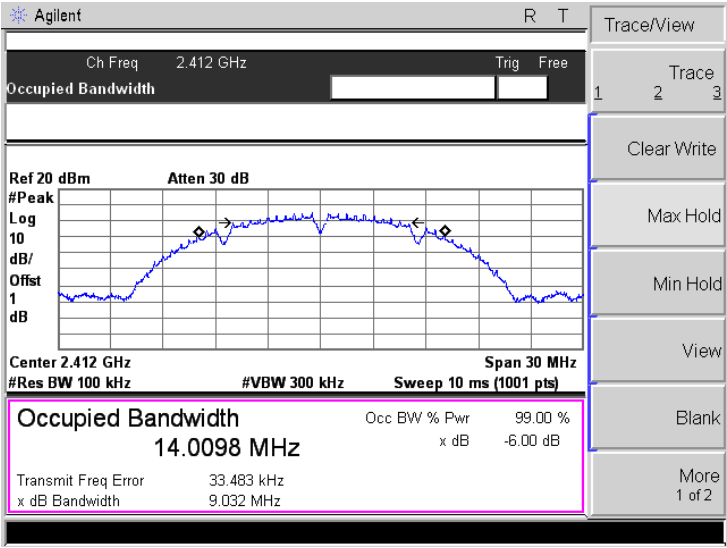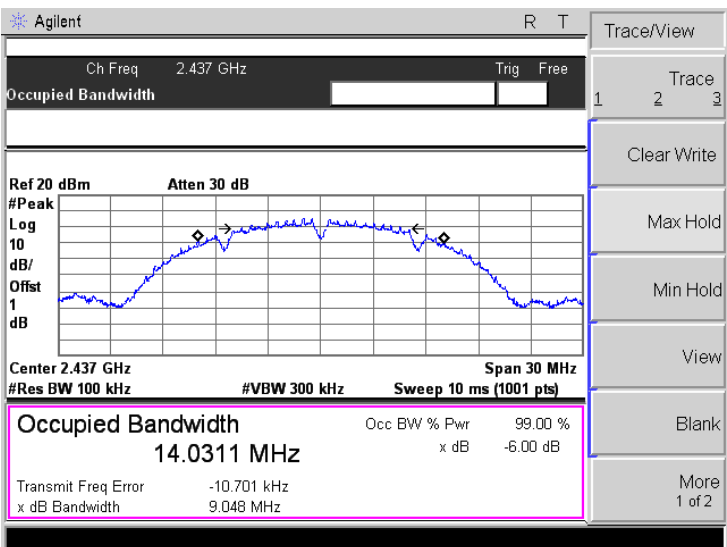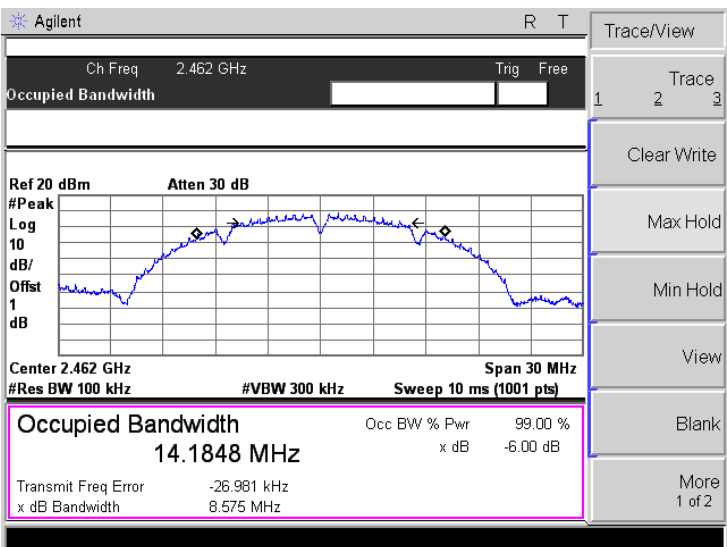
<p>802.11b-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0098 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 33.483 kHz</p> <p>x dB Bandwidth 9.032 MHz</p> <p>Trace/View: 1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.0311 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -10.701 kHz</p> <p>x dB Bandwidth 9.048 MHz</p> <p>Trace/View: 1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.1848 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -26.981 kHz</p> <p>x dB Bandwidth 8.575 MHz</p> <p>Trace/View: 1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11g-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.2905 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 16.315 kHz x dB Bandwidth 16.312 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11g-Middle</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.2951 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -3.035 kHz x dB Bandwidth 16.321 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11g-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3003 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -5.224 kHz x dB Bandwidth 16.313 MHz</p> <p>Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>

<p>802.11n-HT20-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.4823 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>19.461 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.855 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>1 2 3 Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.4823 MHz		x dB	-6.00 dB	Transmit Freq Error	19.461 kHz			x dB Bandwidth	16.855 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.4823 MHz		x dB	-6.00 dB														
Transmit Freq Error	19.461 kHz																
x dB Bandwidth	16.855 MHz																
<p>802.11n-HT20-Middle</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.5063 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>327.610 Hz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.126 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>1 2 3 Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.5063 MHz		x dB	-6.00 dB	Transmit Freq Error	327.610 Hz			x dB Bandwidth	17.126 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.5063 MHz		x dB	-6.00 dB														
Transmit Freq Error	327.610 Hz																
x dB Bandwidth	17.126 MHz																
<p>802.11n-HT20-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2">Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">17.5081 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>3.789 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.536 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace/View</p> <p>1 2 3 Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth		Occ BW % Pwr	99.00 %	17.5081 MHz		x dB	-6.00 dB	Transmit Freq Error	3.789 kHz			x dB Bandwidth	17.536 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
17.5081 MHz		x dB	-6.00 dB														
Transmit Freq Error	3.789 kHz																
x dB Bandwidth	17.536 MHz																


<p>802.11n-HT40-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7499 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 48.314 kHz</p> <p>x dB Bandwidth 33.403 MHz</p> <p>Trace/View: 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.8062 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -26.419 kHz</p> <p>x dB Bandwidth 34.385 MHz</p> <p>Trace/View: 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.8397 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -48.609 kHz</p> <p>x dB Bandwidth 34.831 MHz</p> <p>Trace/View: 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Setup Block Diagram

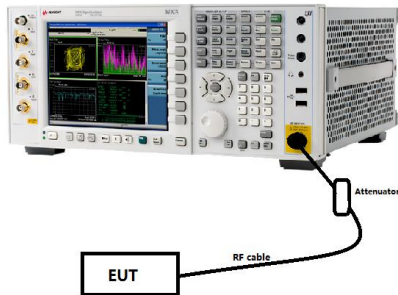

7.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.4 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm)		Output Power (MAX Antenna) mW	Limit mW	
		ANT 0	ANT 1			
802.11b	2412	14.43	14.24	27.73	1000	
	2437	14.32	14.61	28.91	1000	
	2462	14.43	14.98	31.48	1000	
802.11g	2412	13.44	13.50	22.39	1000	
	2437	13.69	13.87	24.38	1000	
	2462	13.25	13.85	24.27	1000	
Test Mode	Test Channel MHz	Test Result(dBm)		Total dBm	Output Power mW	Limit mW
		ANT 0	ANT 1			
802.11n HT20	2412	13.10	13.20	16.16	41.31	1000
	2437	13.73	13.66	16.71	46.83	1000
	2462	13.27	13.85	16.58	45.50	1000
802.11n HT40	2422	12.08	12.68	15.40	34.68	1000
	2437	12.42	12.46	15.45	35.08	1000
	2452	12.24	11.98	15.12	32.53	1000




Please refer to the following test plots:

➤ Antenna 0

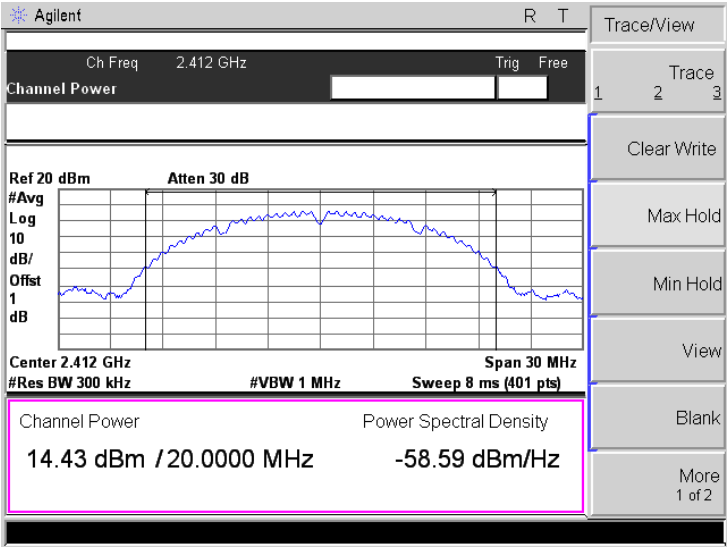
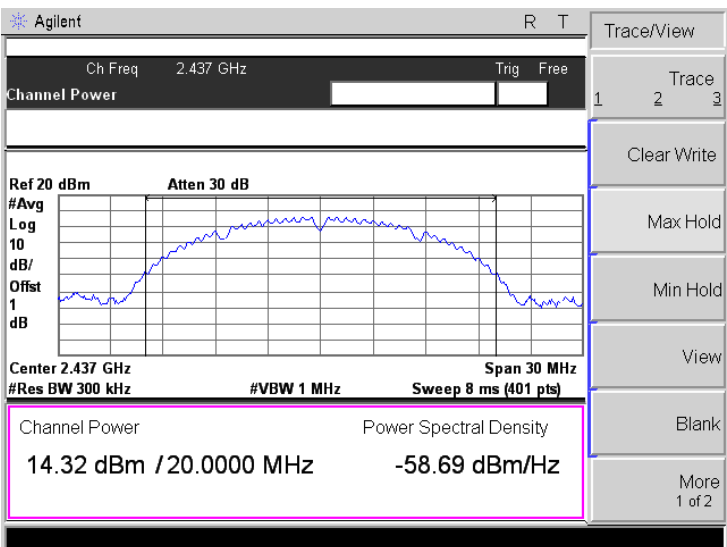
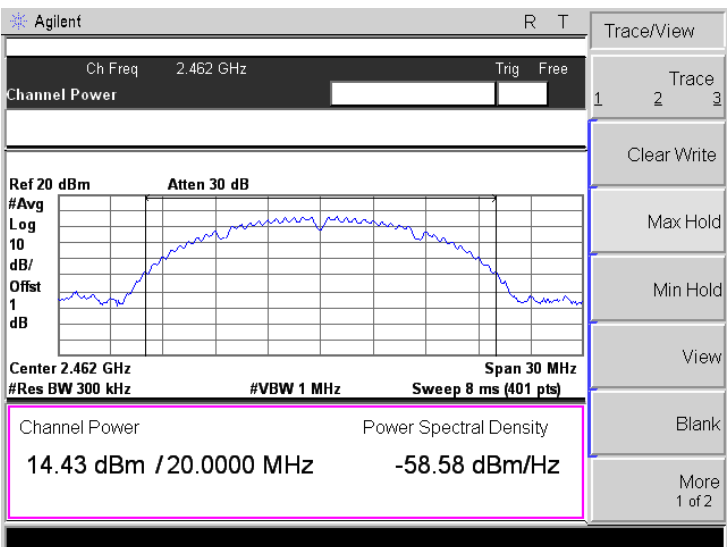
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.43 dBm / 20.0000 MHz -58.59 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.32 dBm / 20.0000 MHz -58.69 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.43 dBm / 20.0000 MHz -58.58 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

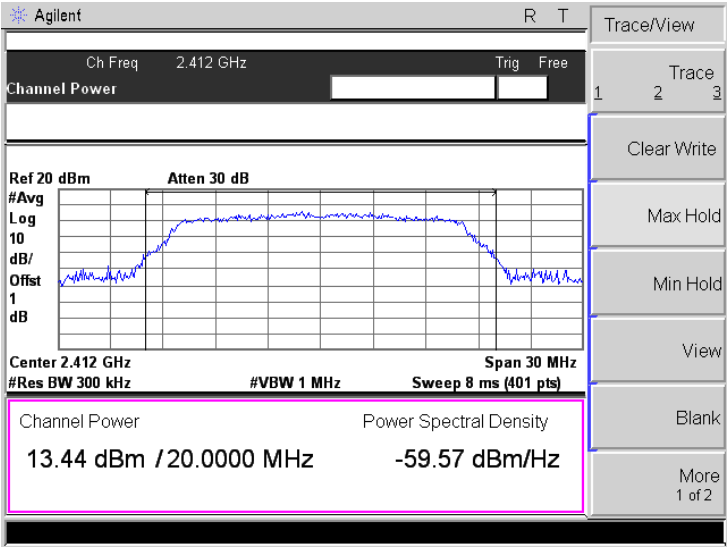
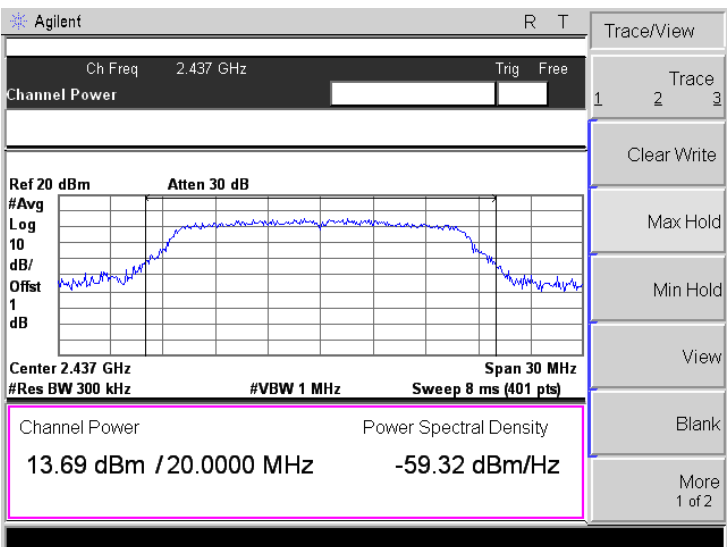
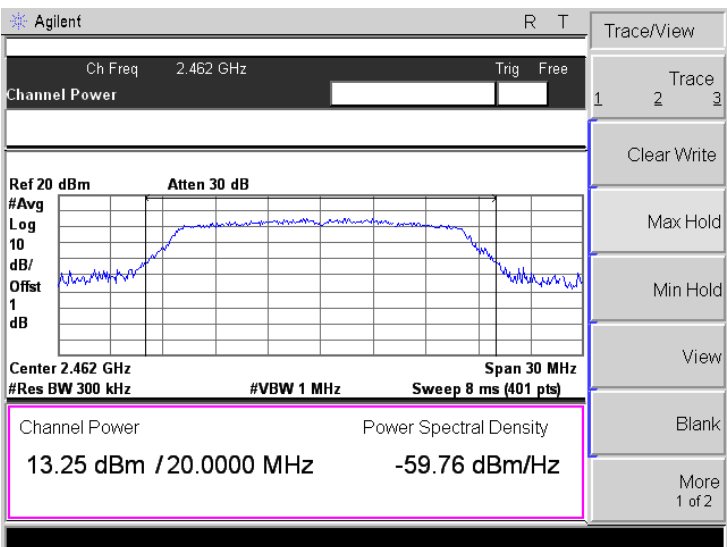
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.44 dBm / 20.0000 MHz -59.57 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.69 dBm / 20.0000 MHz -59.32 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.25 dBm / 20.0000 MHz -59.76 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
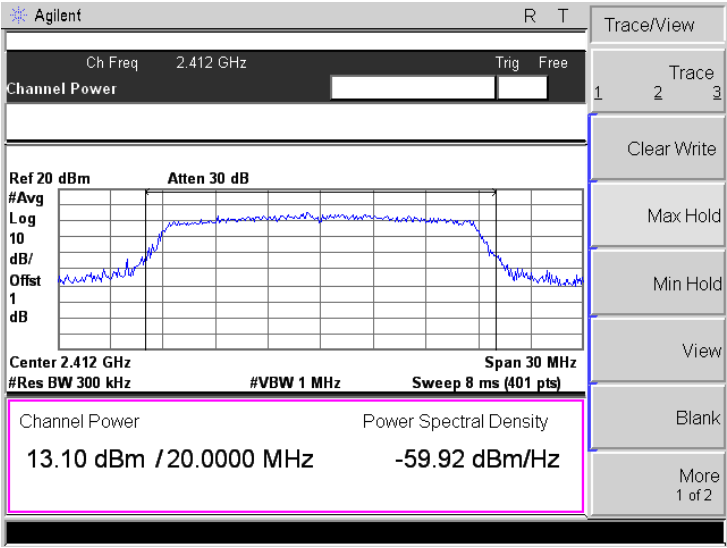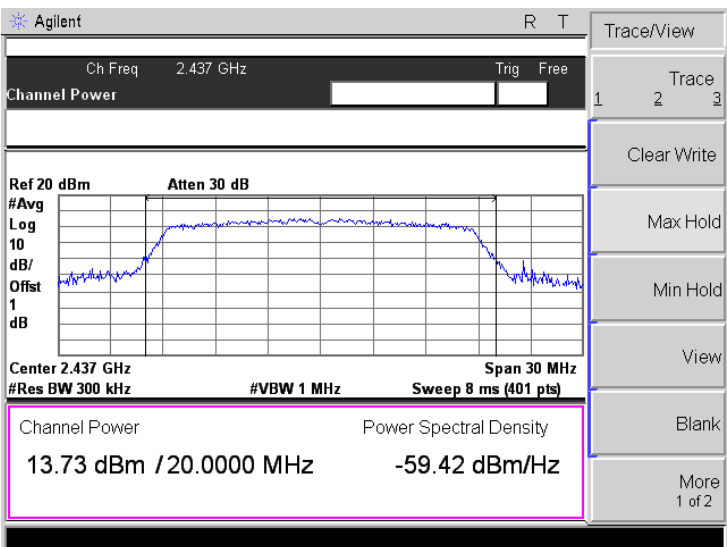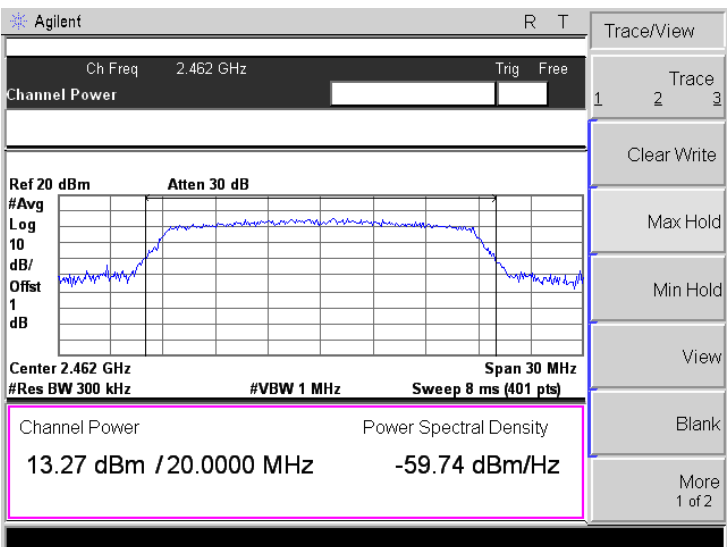
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.10 dBm / 20.0000 MHz -59.92 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.73 dBm / 20.0000 MHz -59.42 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.27 dBm / 20.0000 MHz -59.74 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

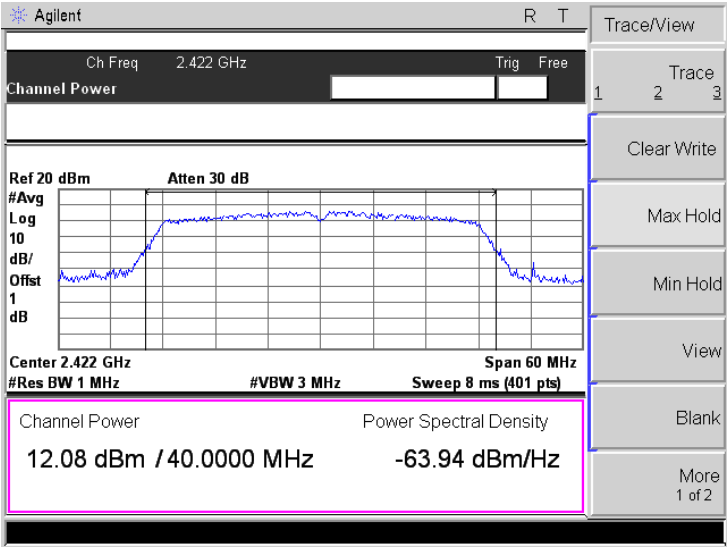
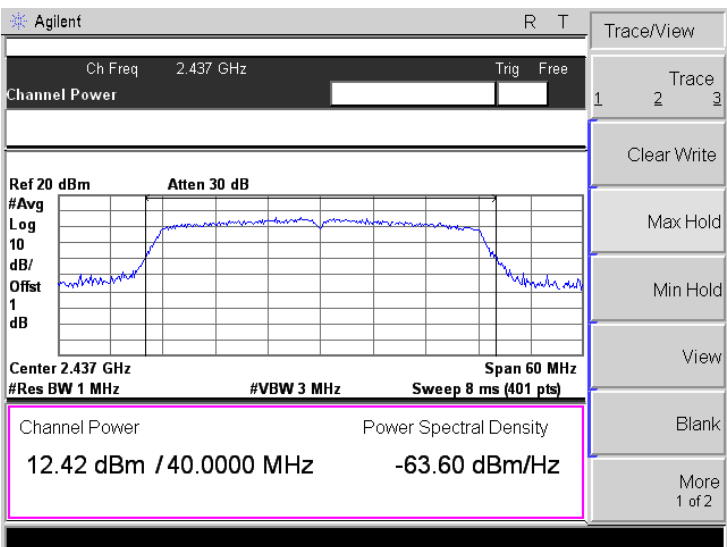
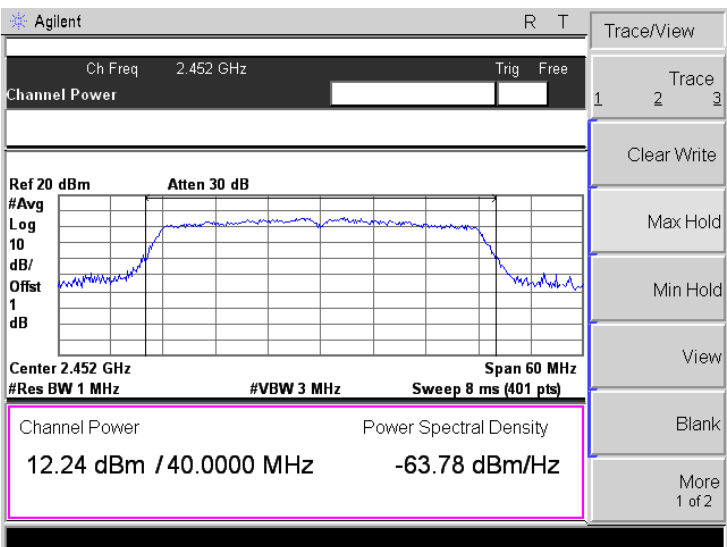
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.08 dBm / 40.0000 MHz -63.94 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.42 dBm / 40.0000 MHz -63.60 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.24 dBm / 40.0000 MHz -63.78 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

➤ Antenna 1
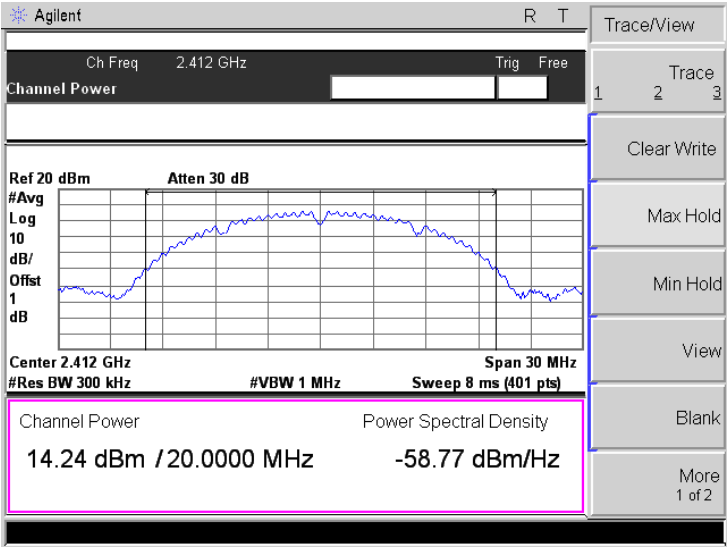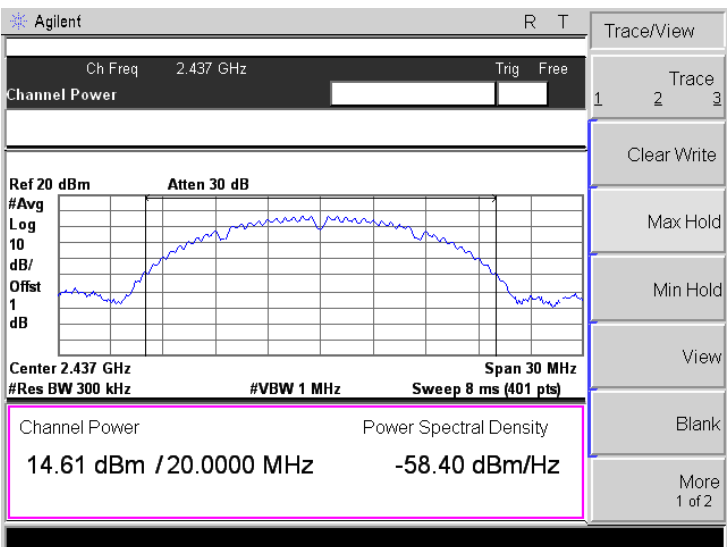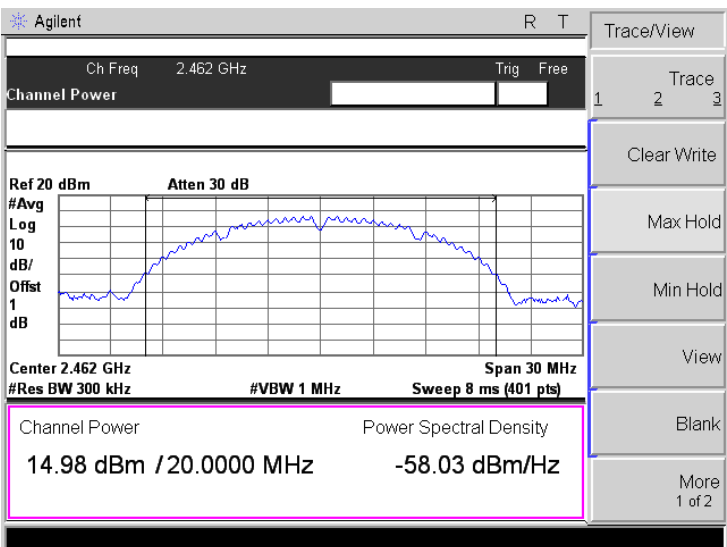
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T Trace/View Ch Freq 2.412 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.24 dBm / 20.0000 MHz -58.77 dBm/Hz Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T Trace/View Ch Freq 2.437 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.61 dBm / 20.0000 MHz -58.40 dBm/Hz Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T Trace/View Ch Freq 2.462 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.98 dBm / 20.0000 MHz -58.03 dBm/Hz Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
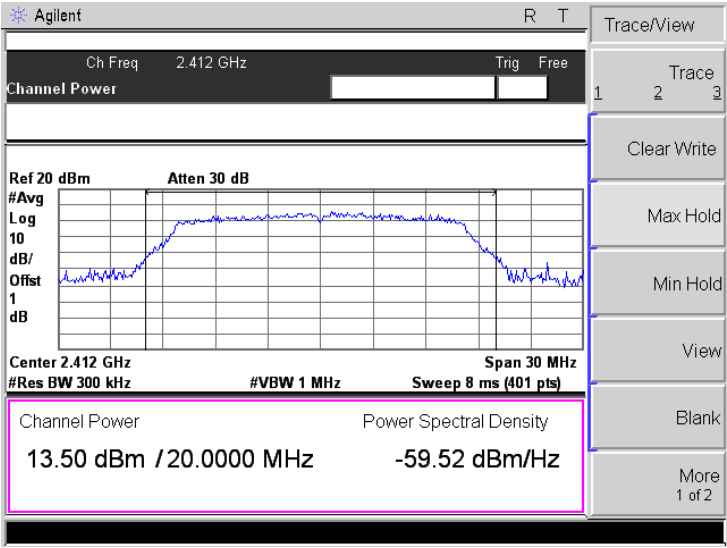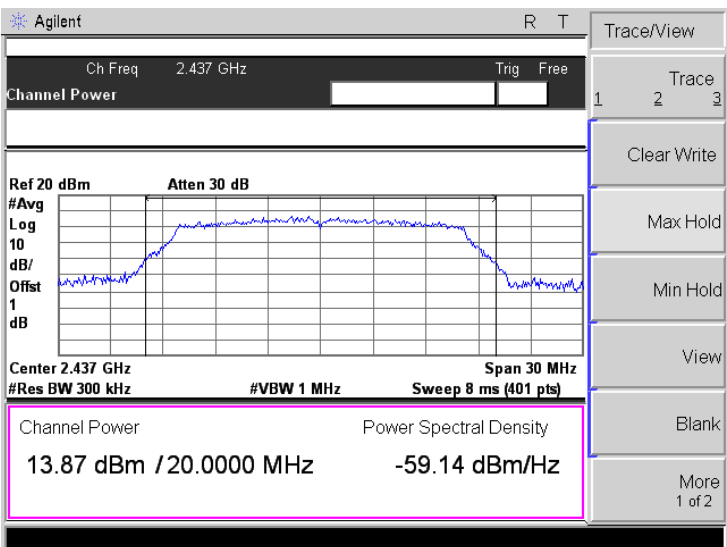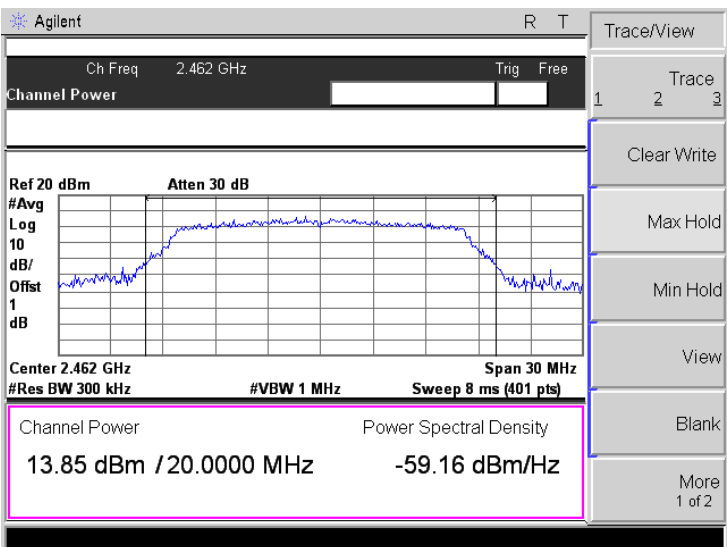
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.50 dBm / 20.0000 MHz -59.52 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.87 dBm / 20.0000 MHz -59.14 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.85 dBm / 20.0000 MHz -59.16 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11n-HT20-Low MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.20 dBm / 20.0000 MHz -59.81 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.66 dBm / 20.0000 MHz -59.35 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High MCS7</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.85 dBm / 20.0000 MHz -59.16 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
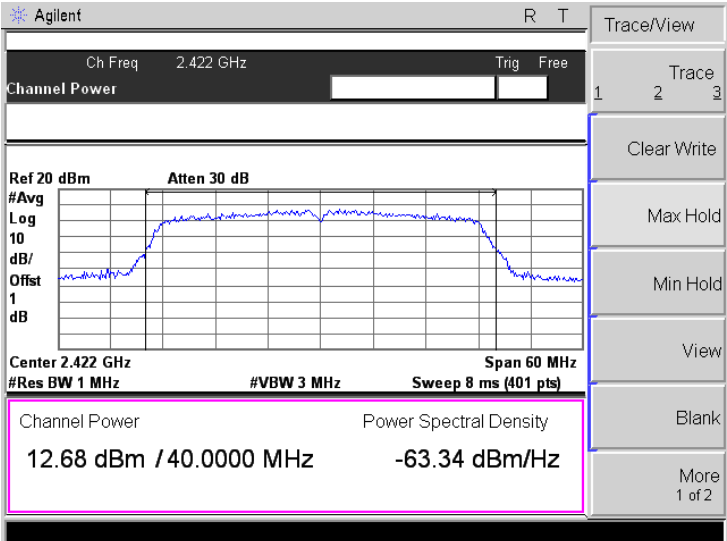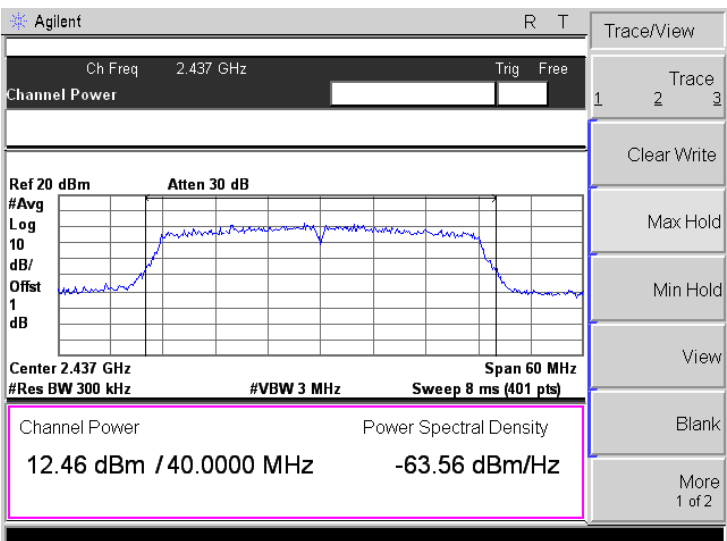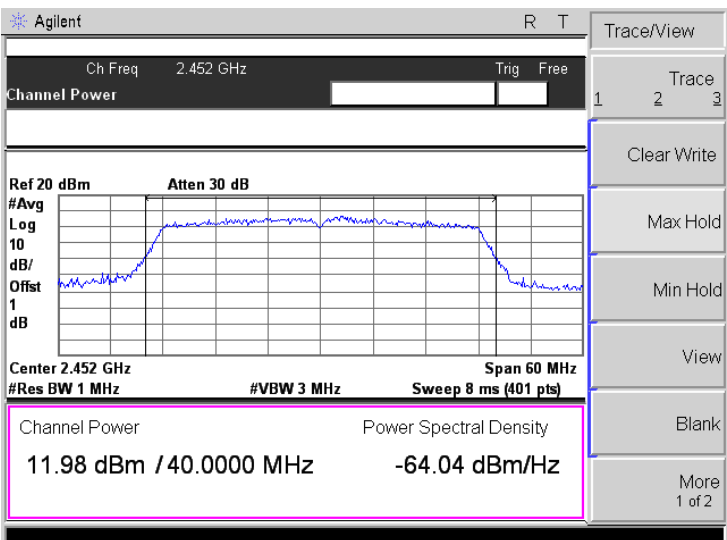
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.68 dBm / 40.0000 MHz -63.34 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 300 kHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.46 dBm / 40.0000 MHz -63.56 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.98 dBm / 40.0000 MHz -64.04 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

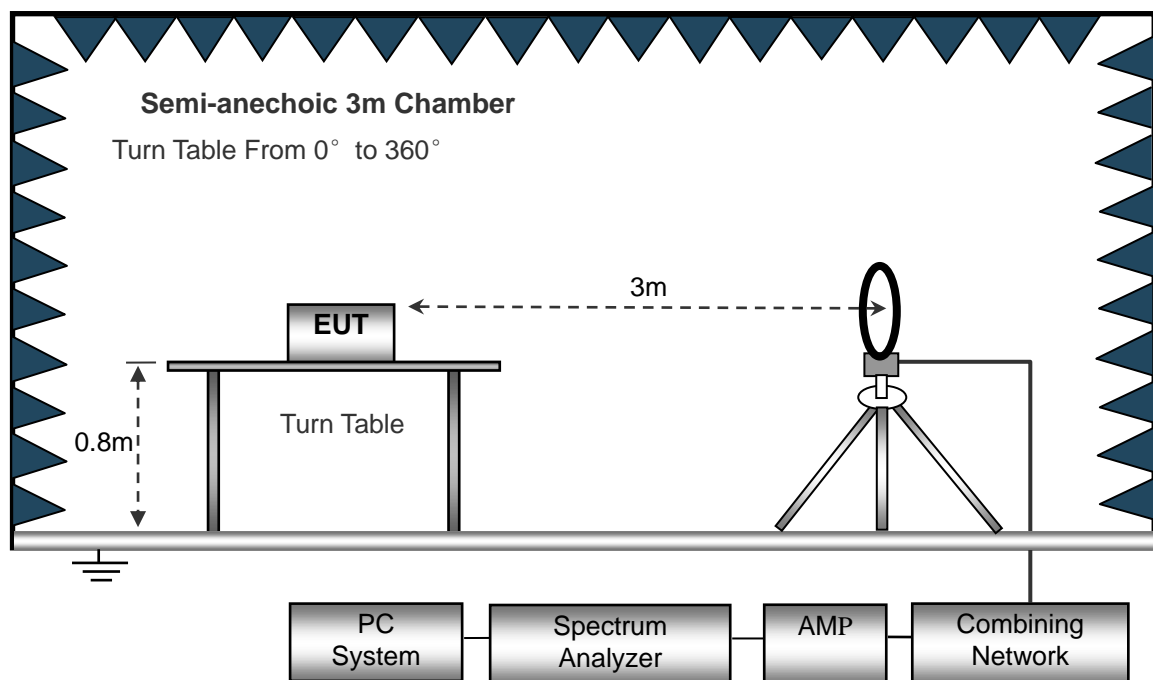

The test setup for emission measurement from 30 MHz to 1 GHz..

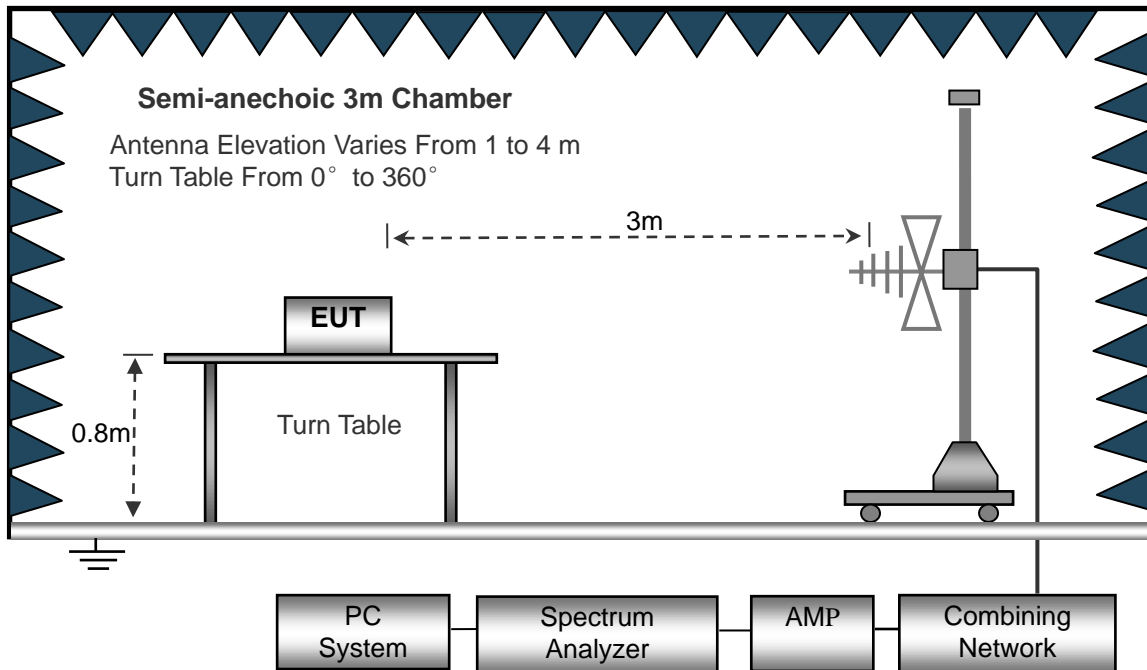

The test setup for emission measurement above 1 GHz..

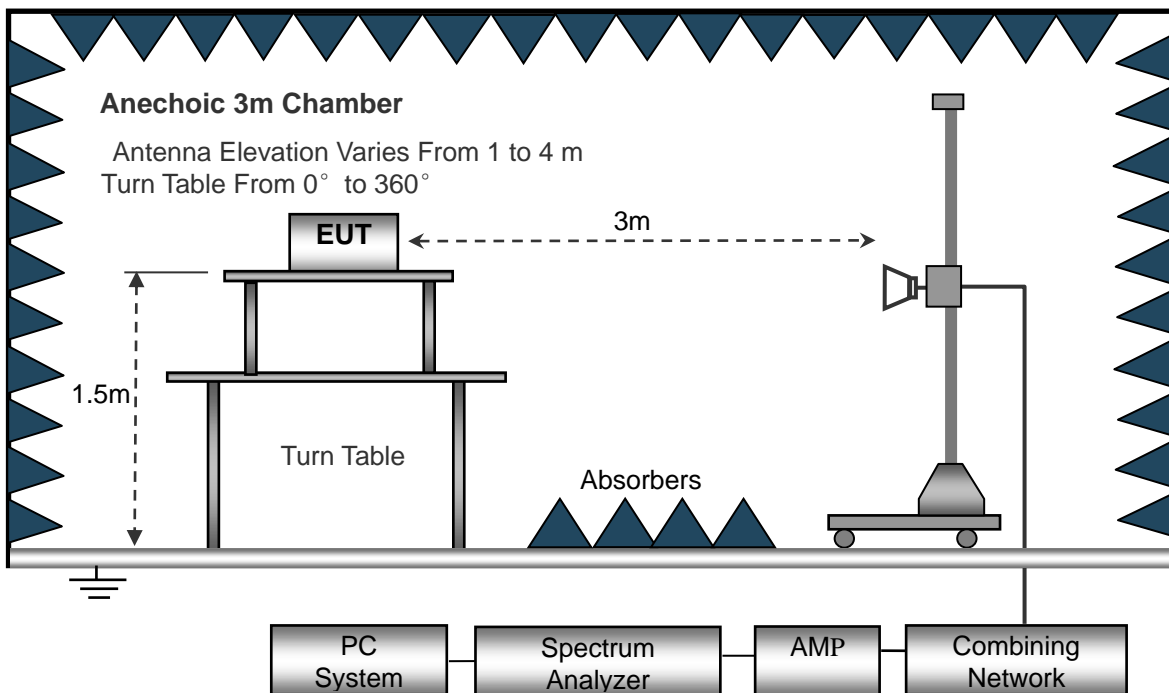

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


- Spurious Emissions Below 1GHz
- Antenna 0

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

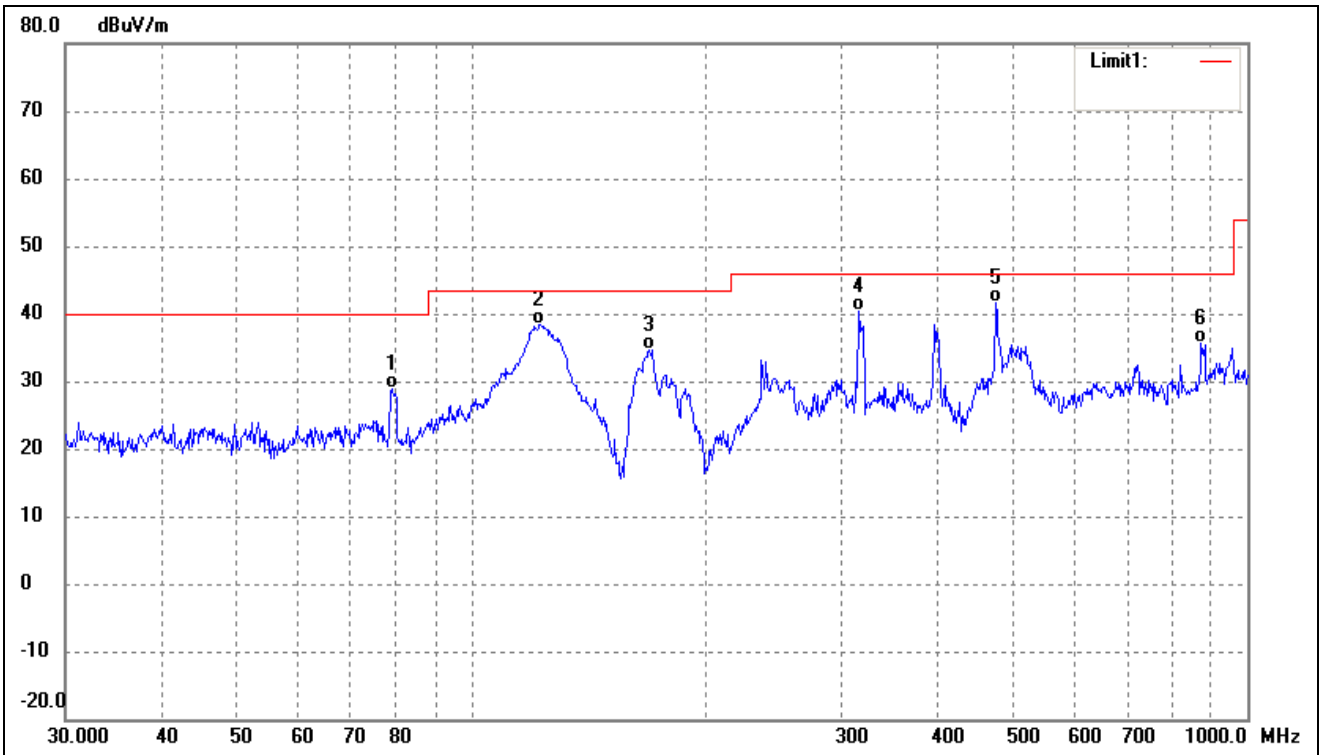


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.9652	45.64	-16.64	29.00	40.00	-11.00	-	-	QP
2	122.4040	53.25	-14.93	38.32	43.50	-5.18	-	-	QP
3	169.5990	49.77	-15.05	34.72	43.50	-8.78	-	-	QP
4	315.4808	49.33	-8.95	40.38	46.00	-5.62	-	-	QP
5	473.8347	46.39	-4.85	41.54	46.00	-4.46	-	-	QP
6	872.1832	35.19	0.51	35.70	46.00	-10.30	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

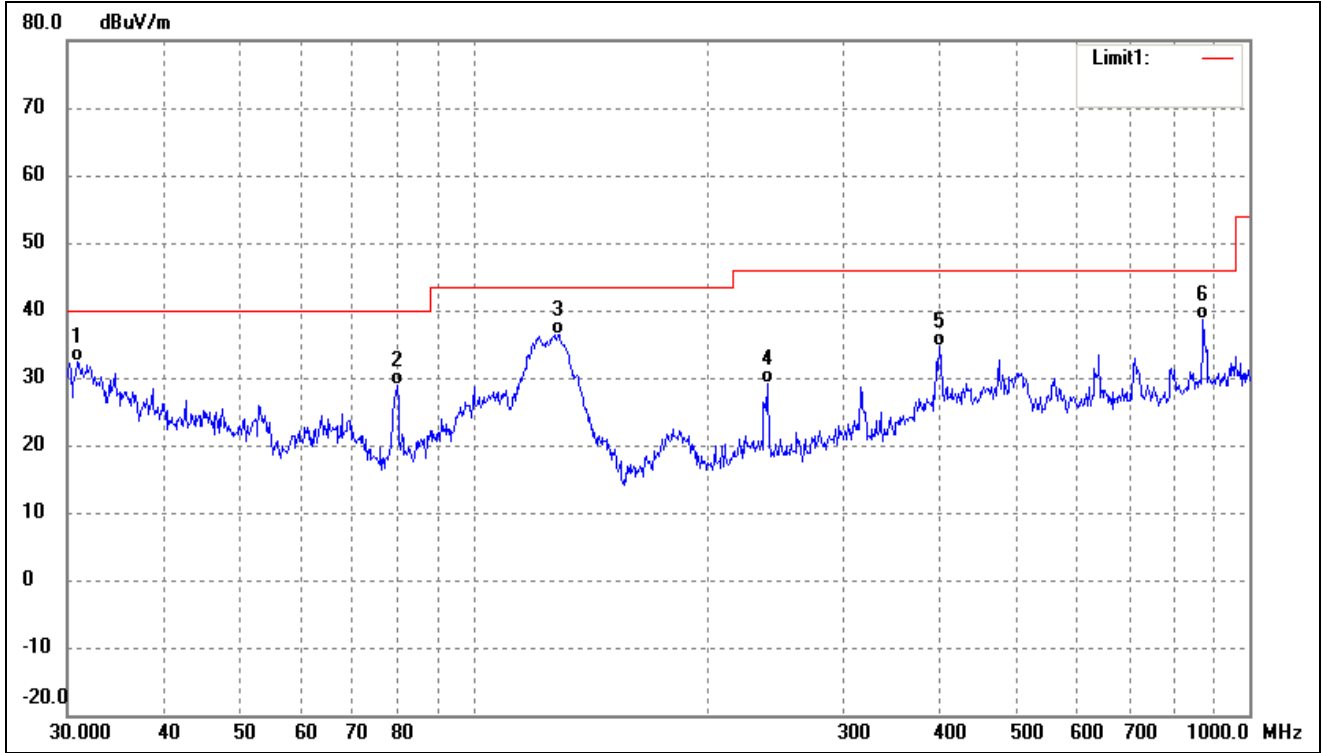


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.8535	46.42	-14.10	32.32	40.00	-7.68	-	-	QP
2	79.8003	45.60	-16.77	28.83	40.00	-11.17	-	-	QP
3	128.5630	52.97	-16.58	36.39	43.50	-7.11	-	-	QP
4	239.1473	40.56	-11.46	29.10	46.00	-16.90	-	-	QP
5	399.0302	41.14	-6.49	34.65	46.00	-11.35	-	-	QP
6	872.1832	38.19	0.51	38.70	46.00	-7.30	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

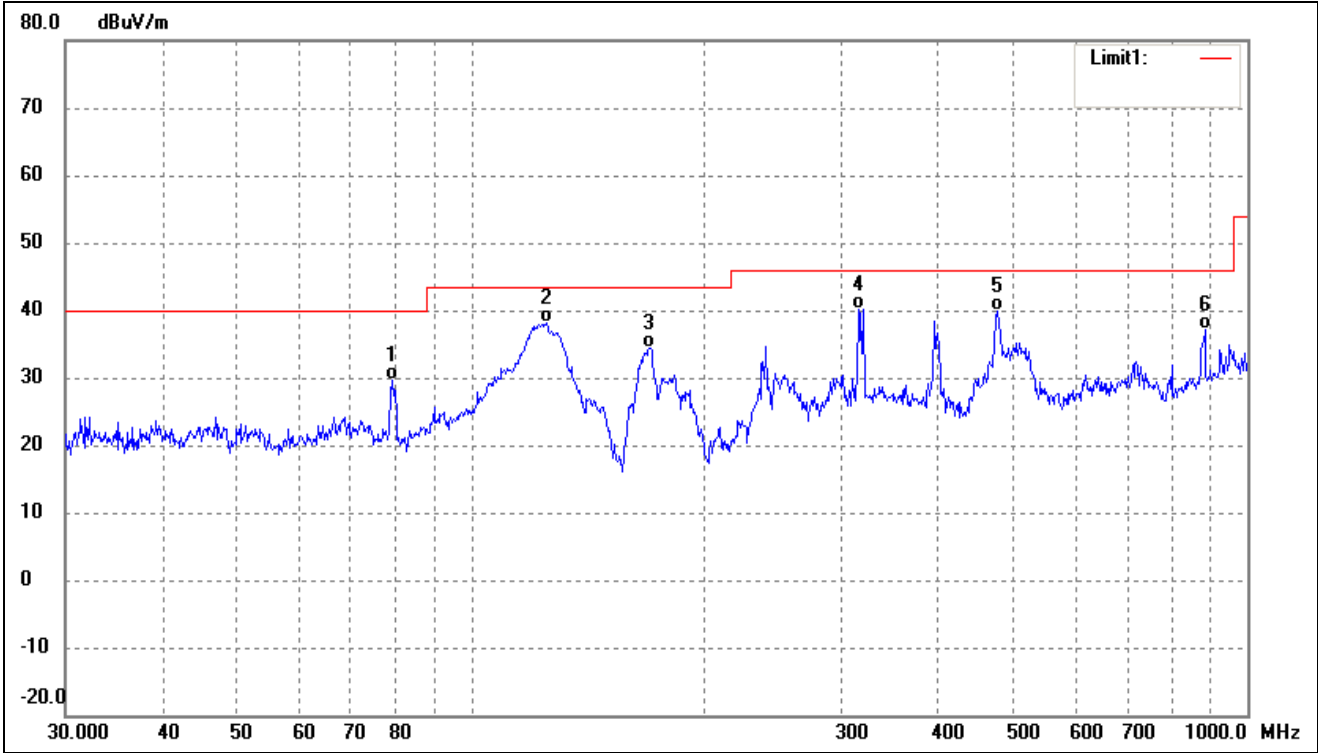


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	79.2426	46.37	-16.69	29.68	40.00	-10.32	-	-	QP
2	125.0066	53.83	-15.64	38.19	43.50	-5.31	-	-	QP
3	169.5990	49.52	-15.05	34.47	43.50	-9.03	-	-	QP
4	315.4808	49.10	-8.95	40.15	46.00	-5.85	-	-	QP
5	475.4991	44.64	-4.80	39.84	46.00	-6.16	-	-	QP
6	881.4067	36.35	0.79	37.14	46.00	-8.86	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

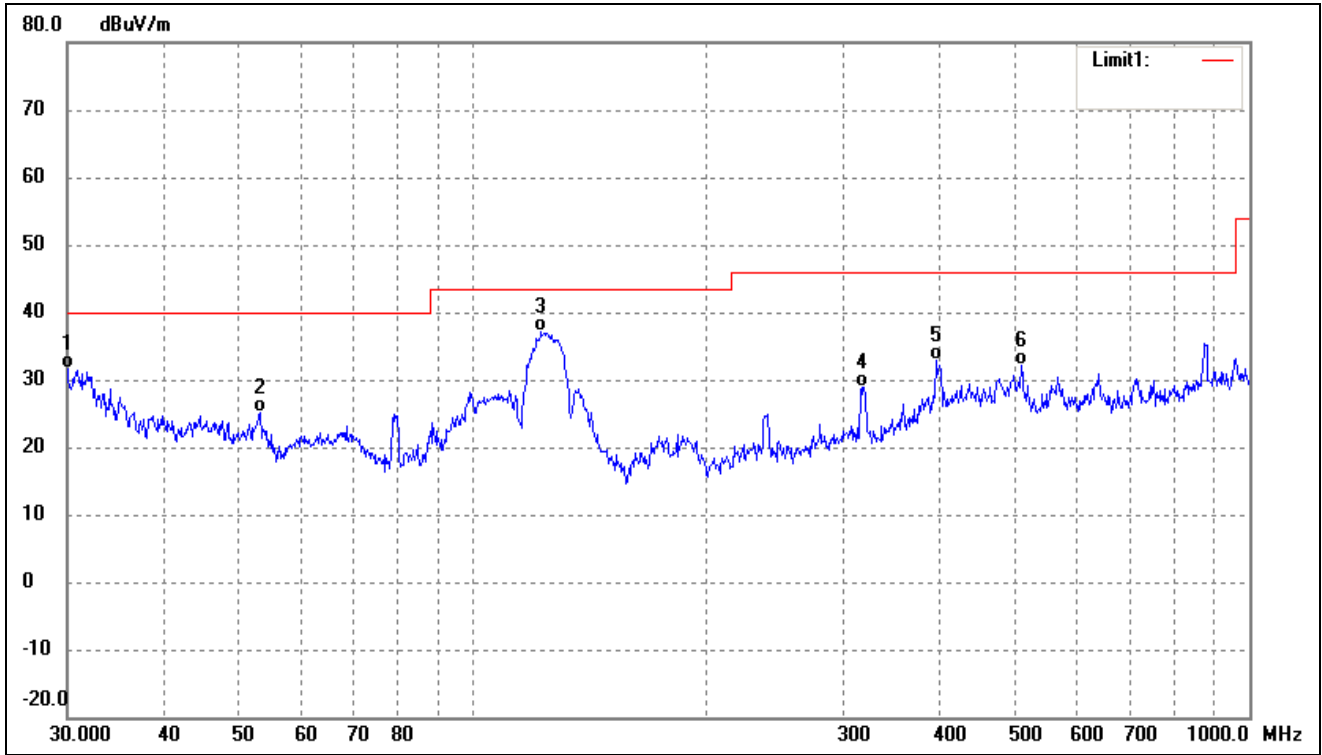


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.0000	45.82	-14.15	31.67	40.00	-8.33	-	-	QP
2	53.1313	37.55	-12.41	25.14	40.00	-14.86	-	-	QP
3	122.4040	51.96	-14.93	37.03	43.50	-6.47	-	-	QP
4	316.5890	37.83	-8.95	28.88	46.00	-17.12	-	-	QP
5	394.8545	39.45	-6.61	32.84	46.00	-13.16	-	-	QP
6	508.2582	36.29	-4.09	32.20	46.00	-13.80	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

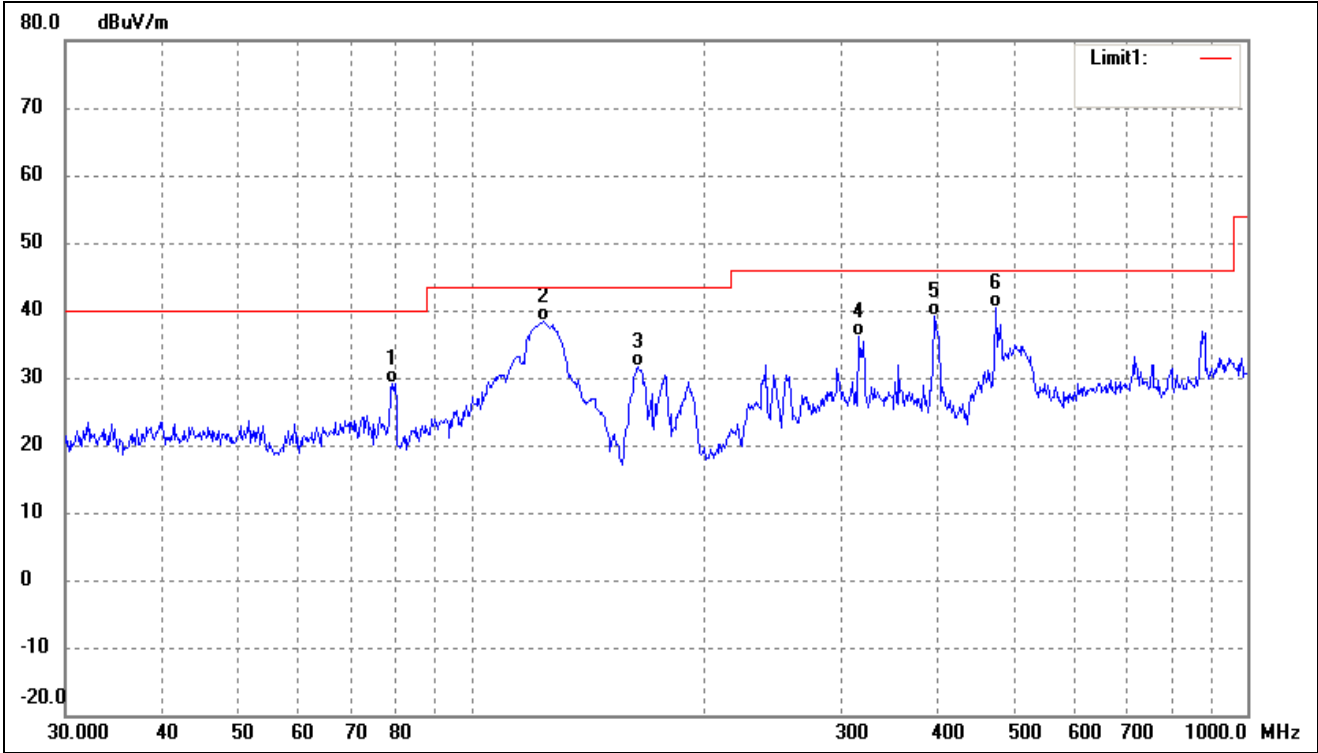

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.9652	45.86	-16.64	29.22	40.00	-10.78	-	-	QP
2	123.6985	53.74	-15.30	38.44	43.50	-5.06	-	-	QP
3	163.7550	46.97	-15.35	31.62	43.50	-11.88	-	-	QP
4	315.4808	45.19	-8.95	36.24	46.00	-9.76	-	-	QP
5	394.8545	45.66	-6.61	39.05	46.00	-6.95	-	-	QP
6	473.8347	45.28	-4.85	40.43	46.00	-5.57	-	-	QP


802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

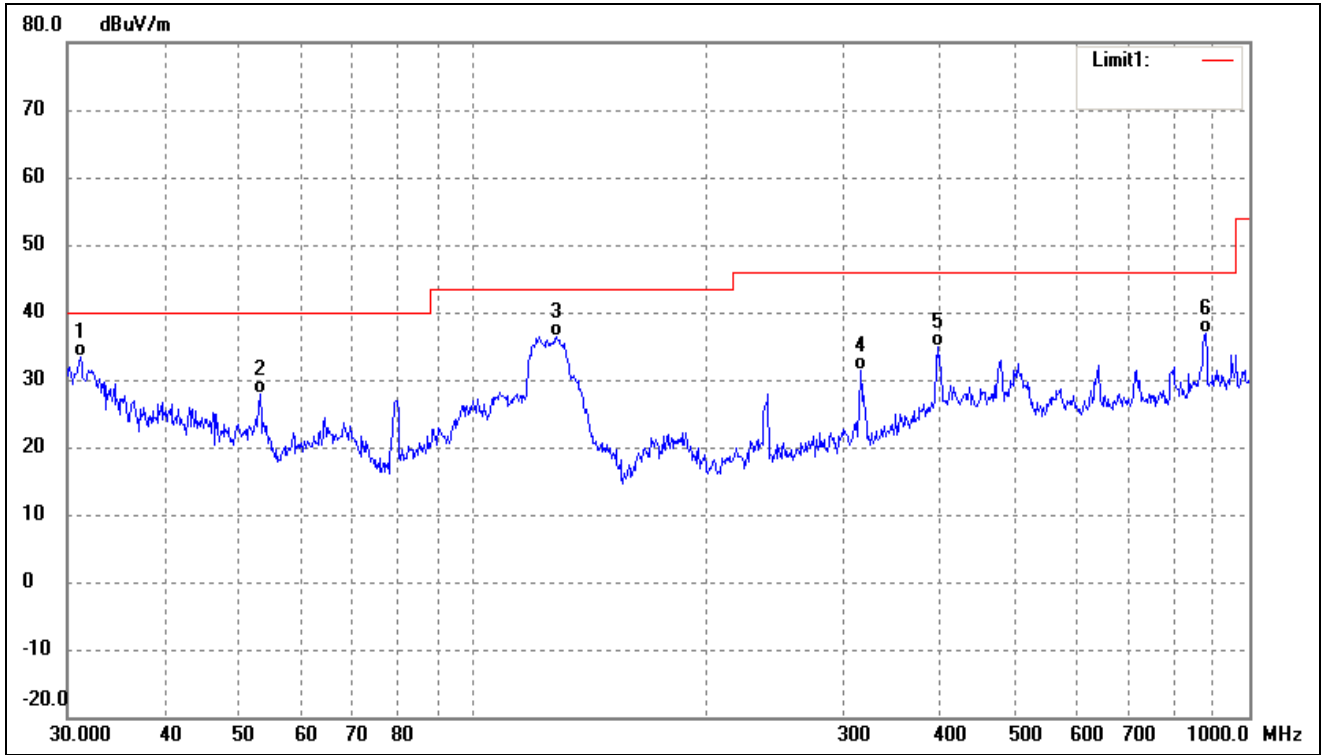

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.1798	47.43	-14.08	33.35	40.00	-6.65	-	-	QP
2	53.1313	40.30	-12.41	27.89	40.00	-12.11	-	-	QP
3	128.1130	52.94	-16.47	36.47	43.50	-7.03	-	-	QP
4	315.4808	40.29	-8.95	31.34	46.00	-14.66	-	-	QP
5	396.2415	41.50	-6.57	34.93	46.00	-11.07	-	-	QP
6	878.3214	36.32	0.67	36.99	46.00	-9.01	-	-	QP


➤ Worst case Antenna 1

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

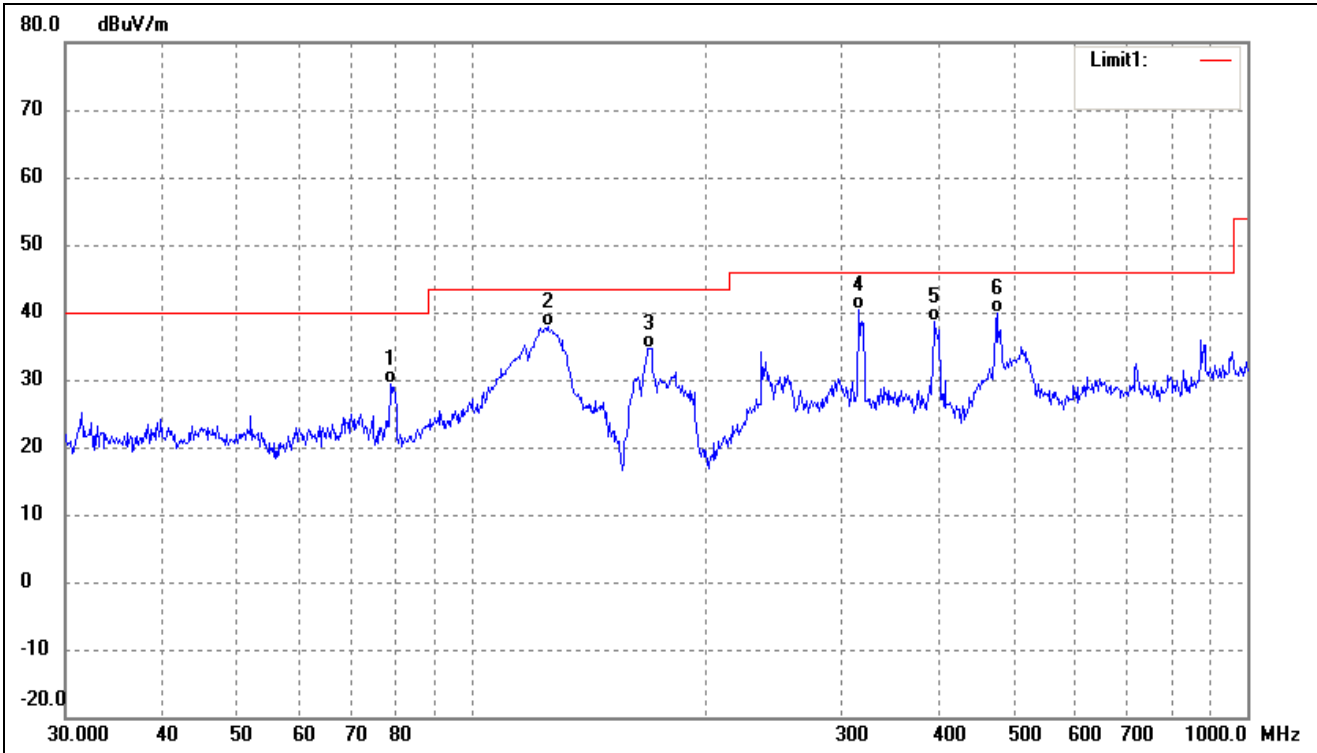


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.6888	45.99	-16.60	29.39	40.00	-10.61	-	-	QP
2	125.4457	53.59	-15.74	37.85	43.50	-5.65	-	-	QP
3	169.5990	49.74	-15.05	34.69	43.50	-8.81	-	-	QP
4	315.4808	49.36	-8.95	40.41	46.00	-5.59	-	-	QP
5	394.8545	45.31	-6.61	38.70	46.00	-7.30	-	-	QP
6	475.4991	44.60	-4.80	39.80	46.00	-6.20	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

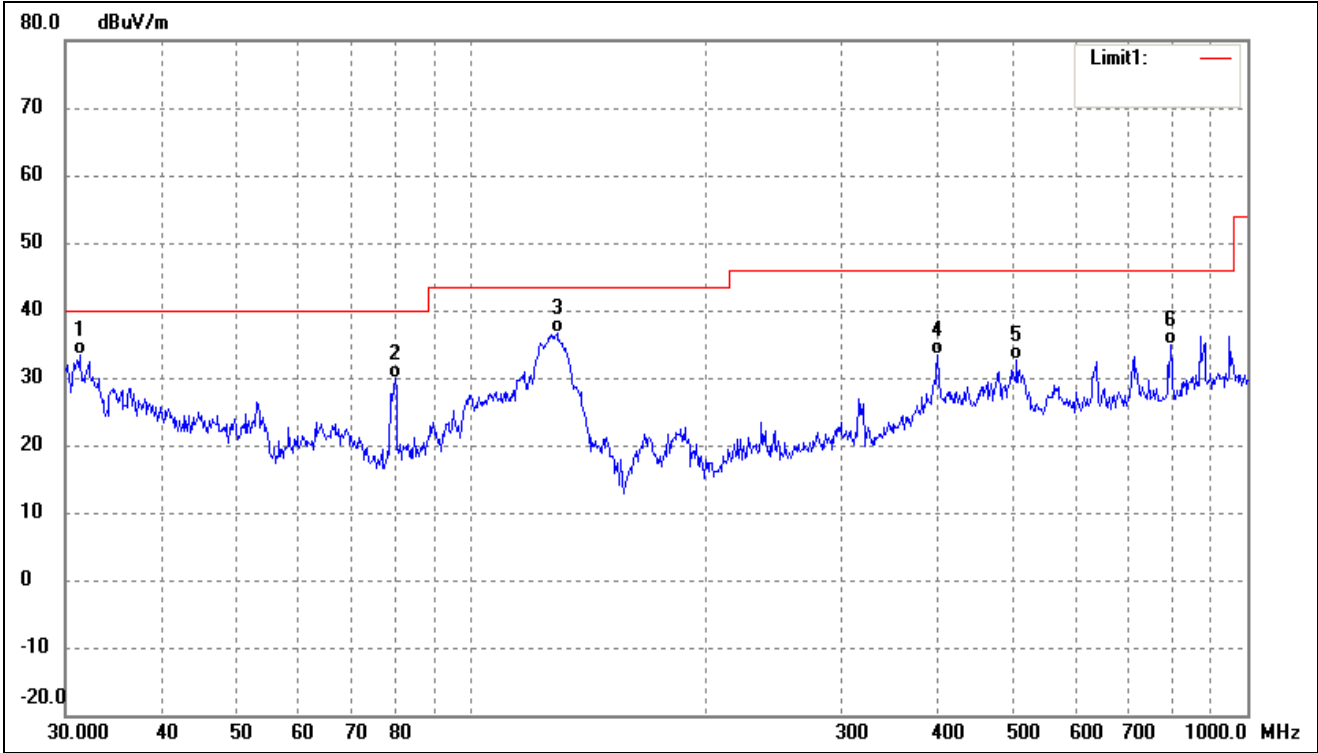


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.2893	47.34	-14.08	33.26	40.00	-6.74	-	-	QP
2	79.8003	46.71	-16.77	29.94	40.00	-10.06	-	-	QP
3	129.0146	53.23	-16.70	36.53	43.50	-6.97	-	-	QP
4	399.0302	39.89	-6.49	33.40	46.00	-12.60	-	-	QP
5	504.7062	36.65	-4.07	32.58	46.00	-13.42	-	-	QP
6	796.1830	36.21	-1.25	34.96	46.00	-11.04	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

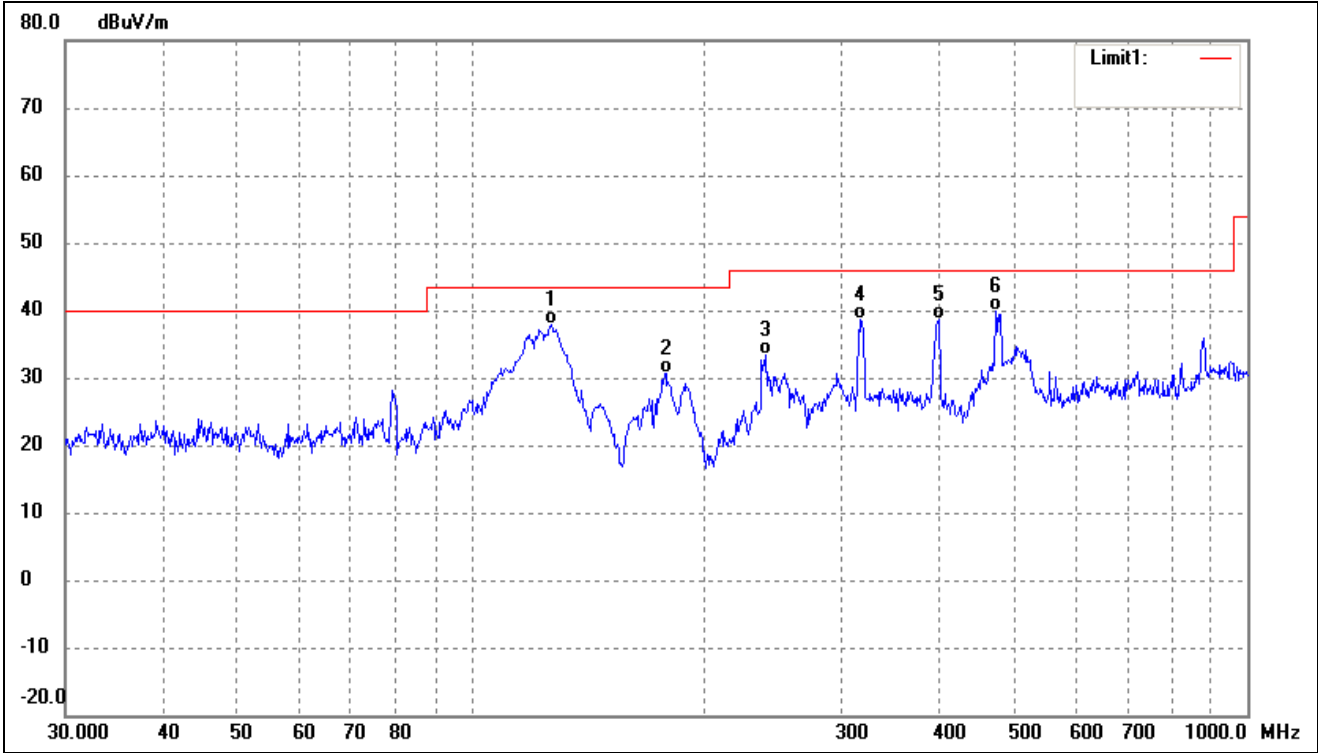


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	126.7723	53.93	-16.12	37.81	43.50	-5.69	-	-	QP
2	178.1327	45.02	-14.44	30.58	43.50	-12.92	-	-	QP
3	239.9874	44.74	-11.42	33.32	46.00	-12.68	-	-	QP
4	317.7011	47.57	-8.94	38.63	46.00	-7.37	-	-	QP
5	400.4319	44.98	-6.45	38.53	46.00	-7.47	-	-	QP
6	473.8347	44.74	-4.85	39.89	46.00	-6.11	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

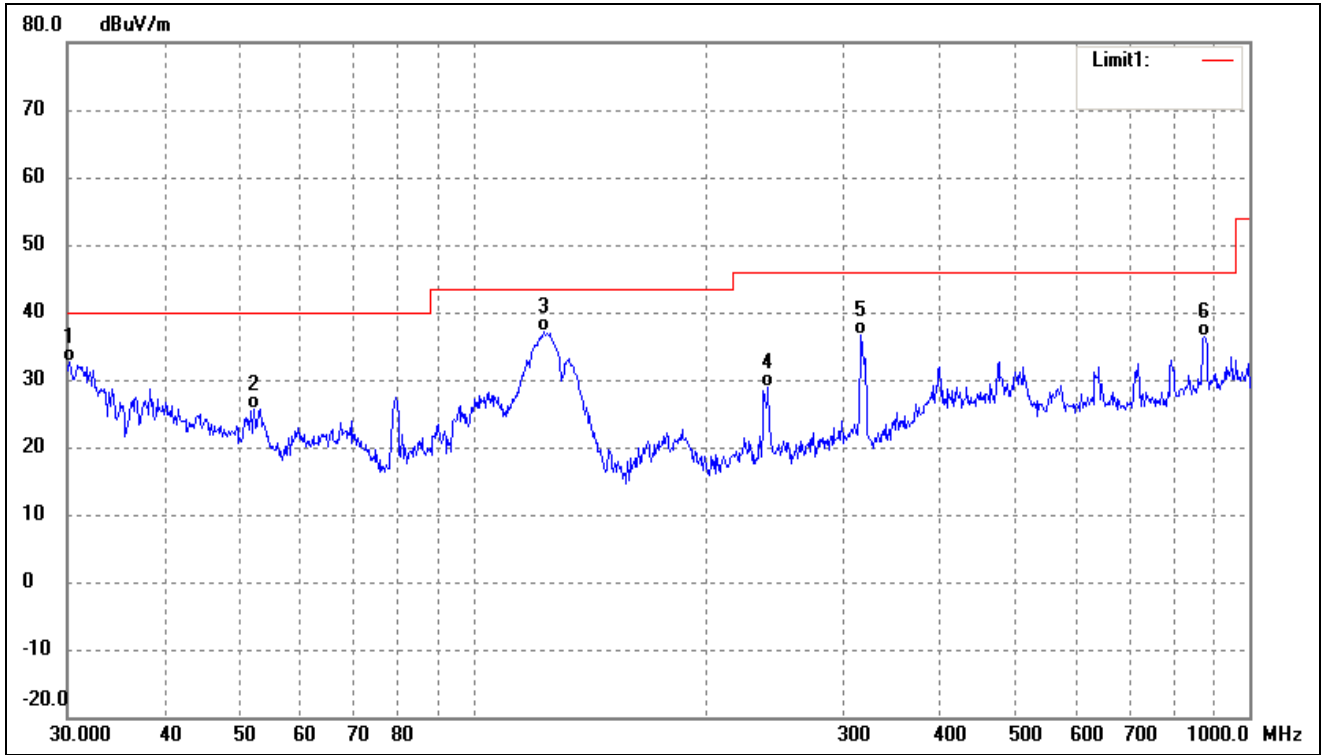


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.2111	46.66	-14.14	32.52	40.00	-7.48	-	-	QP
2	52.2079	37.84	-12.15	25.69	40.00	-14.31	-	-	QP
3	123.2655	52.34	-15.17	37.17	43.50	-6.33	-	-	QP
4	239.9874	40.37	-11.42	28.95	46.00	-17.05	-	-	QP
5	315.4808	45.49	-8.95	36.54	46.00	-9.46	-	-	QP
6	875.2470	35.71	0.55	36.26	46.00	-9.74	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

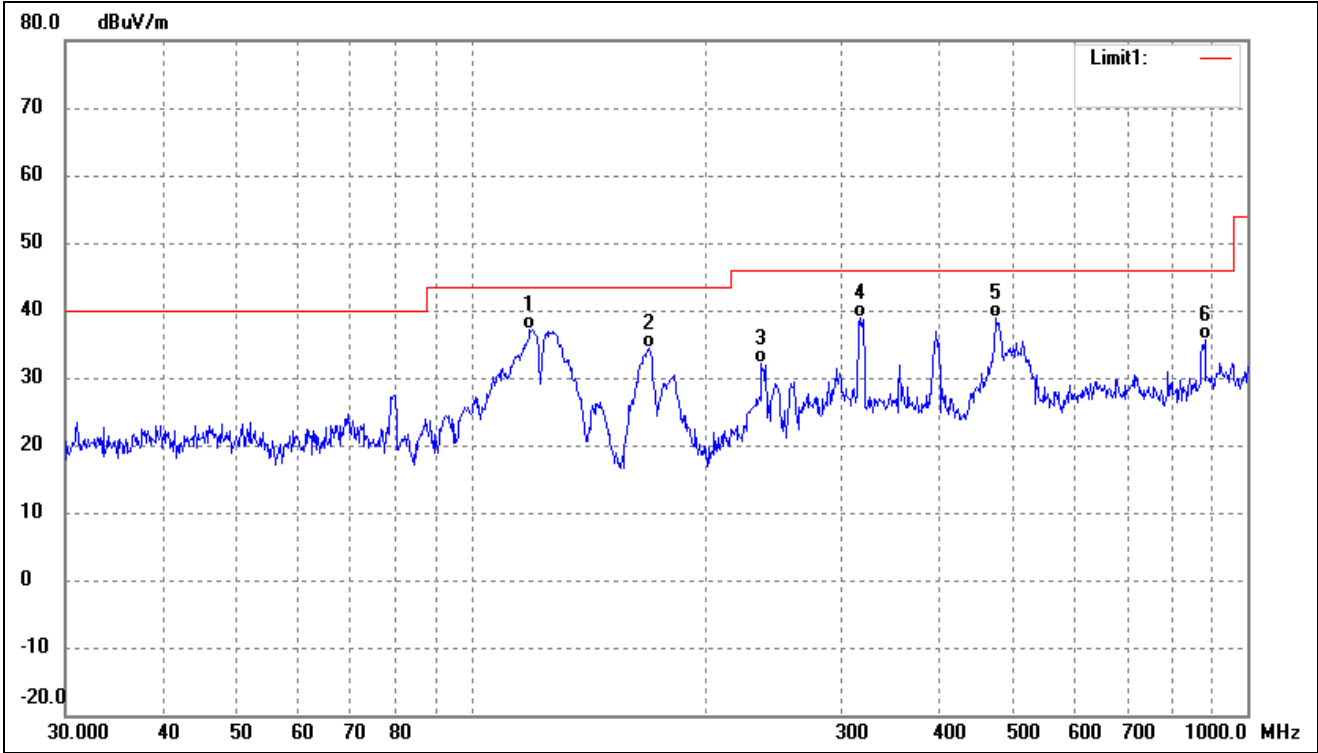

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	119.0180	51.26	-14.20	37.06	43.50	-6.44	-	-	QP
2	169.5990	49.41	-15.05	34.36	43.50	-9.14	-	-	QP
3	236.6447	43.71	-11.58	32.13	46.00	-13.87	-	-	QP
4	316.5890	47.73	-8.95	38.78	46.00	-7.22	-	-	QP
5	473.8347	43.81	-4.85	38.96	46.00	-7.04	-	-	QP
6	881.4067	34.84	0.79	35.63	46.00	-10.37	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

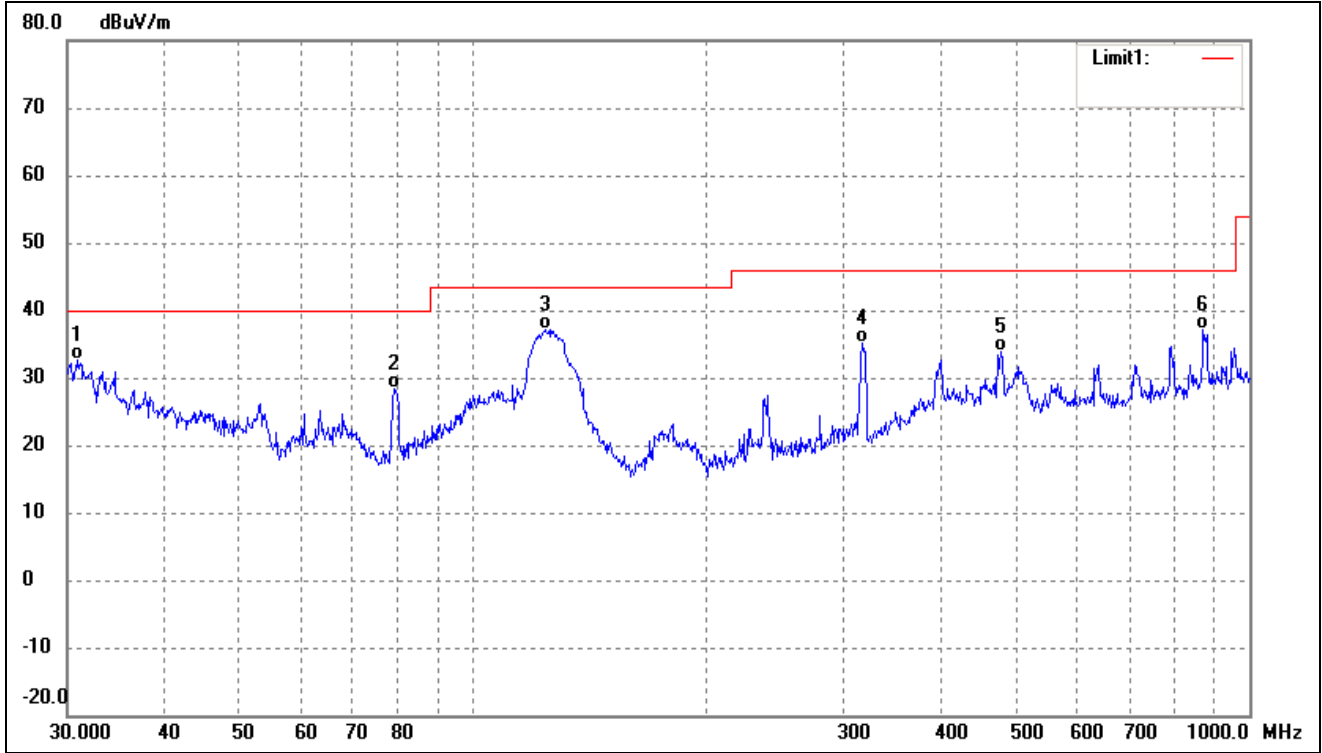

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.9619	46.61	-14.09	32.52	40.00	-7.48	-	-	QP
2	79.2426	45.16	-16.69	28.47	40.00	-11.53	-	-	QP
3	124.1330	52.61	-15.40	37.21	43.50	-6.29	-	-	QP
4	317.7011	44.14	-8.94	35.20	46.00	-10.80	-	-	QP
5	478.8456	38.47	-4.69	33.78	46.00	-12.22	-	-	QP
6	872.1832	36.63	0.51	37.14	46.00	-8.86	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps(Worst mode)
- Antenna 0

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	61.57	-3.86	57.71	74	-16.29	H	PK
4824.000	42.86	-3.86	39.00	54	-15.00	H	AV
7236.000	57.17	1.10	58.27	74	-15.73	H	PK
7236.000	39.30	1.10	40.40	54	-13.60	H	AV
4824.000	62.83	-3.86	58.97	74	-15.03	V	PK
4824.000	45.36	-3.86	41.50	54	-12.50	V	AV
7236.000	57.10	1.10	58.20	74	-15.80	V	PK
7236.000	40.27	1.10	41.37	54	-12.63	V	AV
Middle Channel-2437MHz							
4874.000	61.02	-3.74	57.28	74	-16.72	H	PK
4874.000	42.89	-3.74	39.15	54	-14.85	H	AV
7311.000	57.36	1.47	58.83	74	-15.17	H	PK
7311.000	39.58	1.47	41.05	54	-12.95	H	AV
4874.000	62.52	-3.74	58.78	74	-15.22	V	PK
4874.000	45.75	-3.74	42.01	54	-11.99	V	AV
7311.000	57.21	1.47	58.68	74	-15.32	V	PK
7311.000	40.14	1.47	41.61	54	-12.39	V	AV
High Channel-2462MHz							
4924.000	61.46	-3.63	57.83	74	-16.17	H	PK
4924.000	42.87	-3.63	39.24	54	-14.76	H	AV
7386.000	57.58	1.62	59.20	74	-14.80	H	PK
7386.000	39.44	1.62	41.06	54	-12.94	H	AV
4924.000	63.32	-3.63	59.69	74	-14.31	V	PK
4924.000	45.30	-3.63	41.67	54	-12.33	V	AV
7386.000	57.47	1.62	59.09	74	-14.91	V	PK
7386.000	40.68	1.62	42.30	54	-11.70	V	AV

➤ Antenna 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	44.60	-3.86	40.74	54	-13.26	H	AV
4824.000	55.15	1.10	56.25	74	-17.75	H	PK
7236.000	40.20	1.10	41.30	54	-12.70	H	AV
7236.000	60.23	-3.86	56.37	74	-17.63	H	PK
4824.000	41.78	-3.86	37.92	54	-16.08	V	AV
4824.000	59.06	1.10	60.16	74	-13.84	V	PK
7236.000	40.11	1.10	41.21	54	-12.79	V	AV
7236.000	44.60	-3.86	40.74	54	-13.26	V	PK
Middle Channel-2437MHz							
4874.000	61.30	-3.74	57.56	74	-16.44	H	PK
4874.000	45.04	-3.74	41.30	54	-12.70	H	AV
7311.000	55.69	1.47	57.16	74	-16.84	H	PK
7311.000	39.74	1.47	41.21	54	-12.79	H	AV
4874.000	60.59	-3.74	56.85	74	-17.15	V	PK
4874.000	41.88	-3.74	38.14	54	-15.86	V	AV
7311.000	59.10	1.47	60.57	74	-13.43	V	PK
7311.000	40.63	1.47	42.10	54	-11.90	V	AV
High Channel-2462MHz							
4924.000	61.55	-3.63	57.92	74	-16.08	H	PK
4924.000	44.85	-3.63	41.22	54	-12.78	H	AV
7386.000	55.32	1.62	56.94	74	-17.06	H	PK
7386.000	39.54	1.62	41.16	54	-12.84	H	AV
4924.000	59.82	-3.63	56.19	74	-17.81	V	PK
4924.000	41.59	-3.63	37.96	54	-16.04	V	AV
7386.000	58.96	1.62	60.58	74	-13.42	V	PK
7386.000	39.83	1.62	41.45	54	-12.55	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


- Radiated test
- Antenna 0(Worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

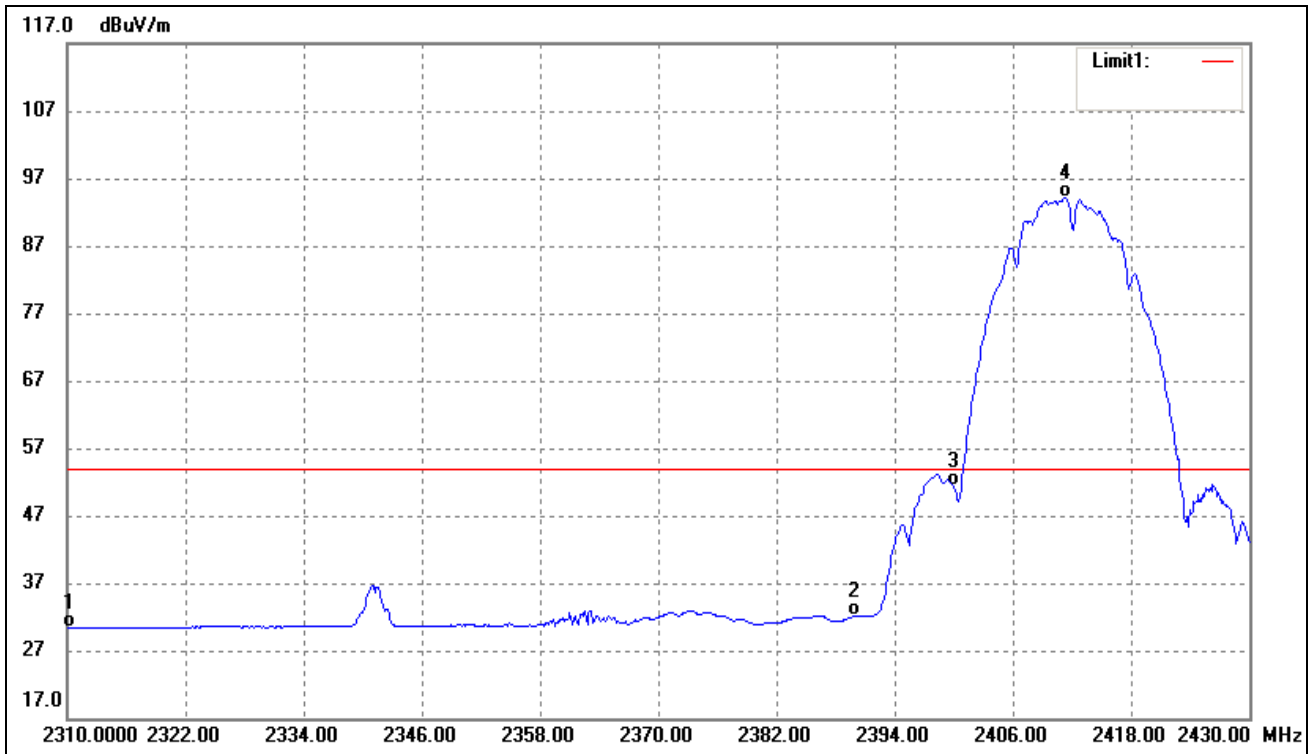


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.01	-9.66	30.35	54.00	-23.65	Average Detector
		52.64	-9.66	42.98	74.00	-31.02	Peak Detector
2	2390.000	41.66	-9.50	32.16	54.00	-21.84	Average Detector
		54.31	-9.50	44.81	74.00	-29.19	Peak Detector
3	2400.000	60.90	-9.48	51.42	Delta=42.77dBc		Average Detector
4	2411.280	103.65	-9.46	94.19			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

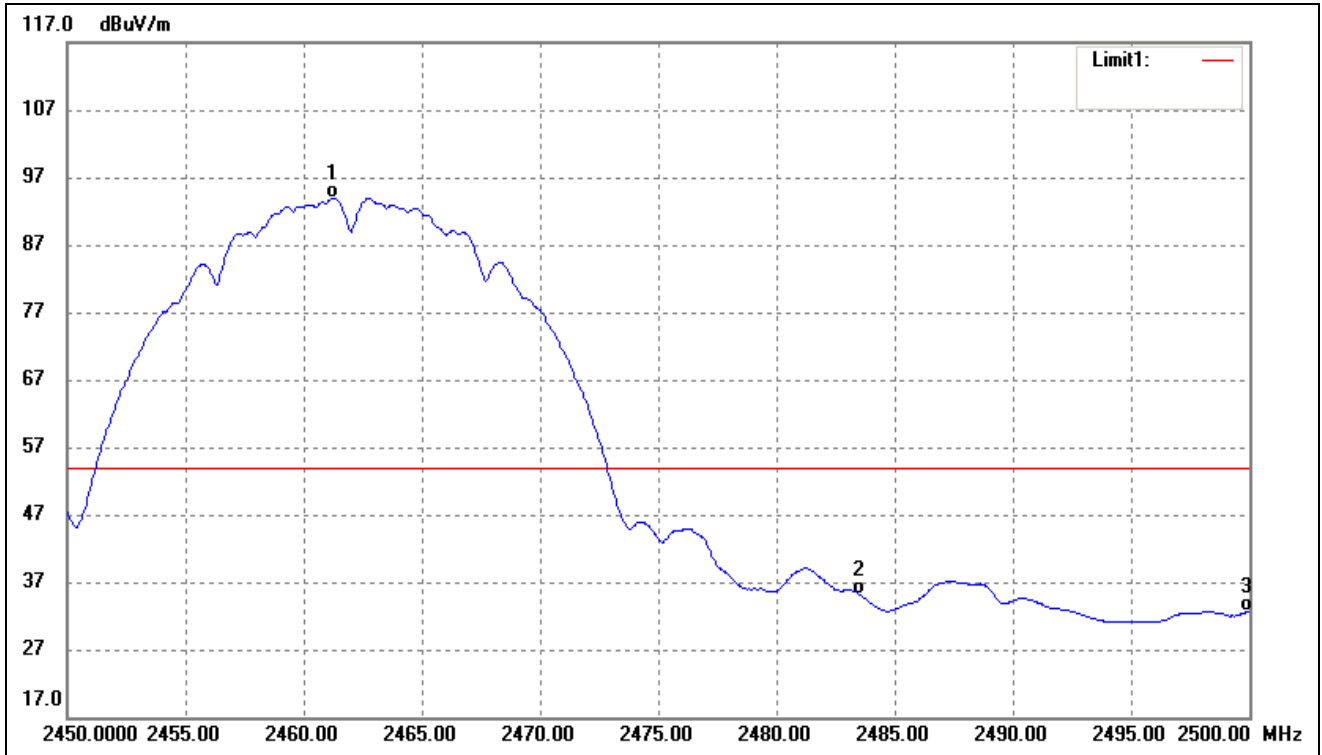


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	103.28	-9.36	93.92	/	/	Average Detector
	2460.900	107.72	-9.36	98.36	/	/	Peak Detector
2	2483.500	44.55	-9.31	35.24	54.00	-18.76	Average Detector
	2483.500	55.76	-9.31	46.45	74.00	-27.55	Peak Detector
3	2500.000	41.95	-9.28	32.67	54.00	-21.33	Average Detector
	2500.000	54.72	-9.28	45.44	74.00	-28.56	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

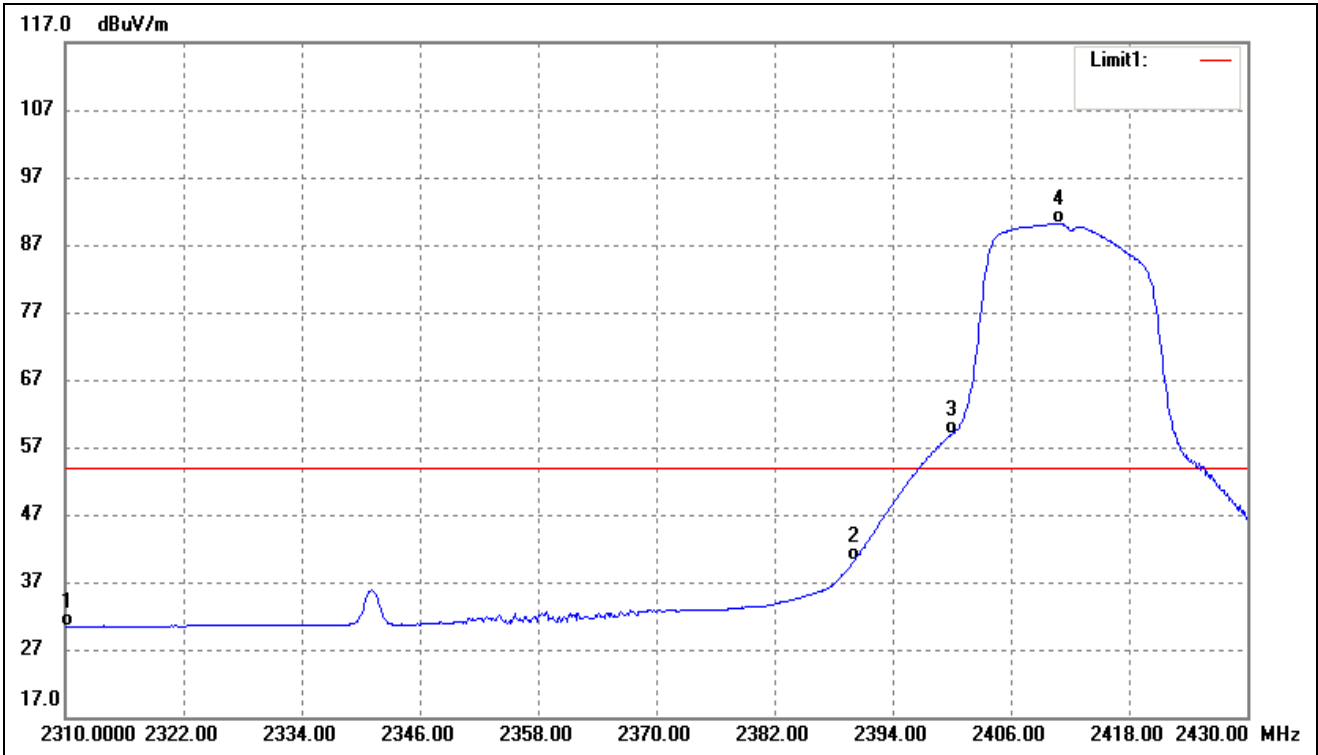


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.03	-9.66	30.37	54.00	-23.63	Average Detector
	2310.000	52.31	-9.66	42.65	74.00	-31.35	Peak Detector
2	2390.000	49.55	-9.50	40.05	54.00	-13.95	Average Detector
	2390.000	73.07	-9.50	63.57	74.00	-10.43	Peak Detector
3	2400.000	68.42	-9.48	58.94	Delta=31.28dBc		Average Detector
4	2410.920	99.68	-9.46	90.22			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

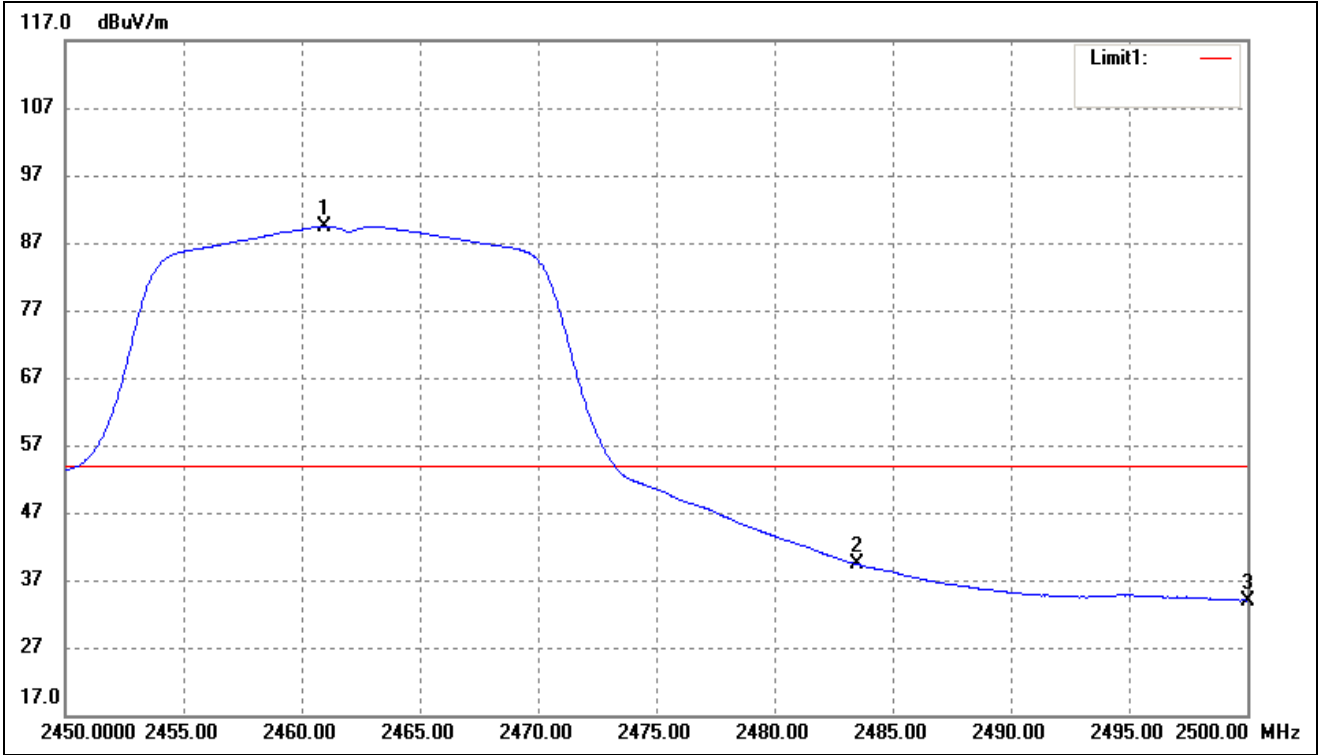


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.950	98.85	-9.36	89.49	/	/	Average Detector
	2464.250	110.67	-9.35	101.32	/	/	Peak Detector
2	2483.500	48.66	-9.31	39.35	54.00	-14.65	Average Detector
	2483.500	68.78	-9.31	59.47	74.00	-14.53	Peak Detector
3	2500.000	43.20	-9.28	33.92	54.00	-20.08	Average Detector
	2500.000	55.53	-9.28	46.25	74.00	-27.75	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

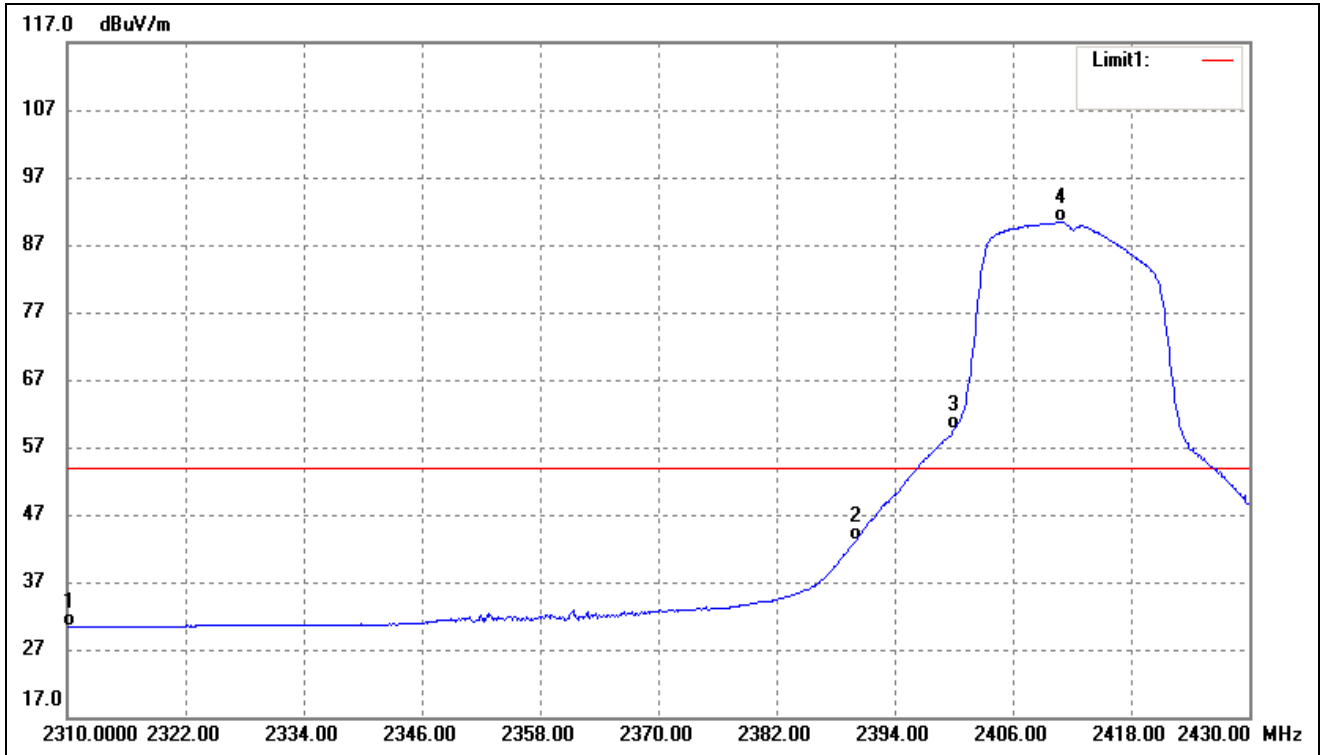


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.01	-9.66	30.35	54.00	-23.65	Average Detector
		51.37	-9.66	41.71	74.00	-32.29	Peak Detector
2	2390.000	52.72	-9.50	43.22	54.00	-10.78	Average Detector
		74.71	-9.50	65.21	74.00	-8.79	Peak Detector
3	2400.000	69.21	-9.48	59.73	Delta=30.58dBc		Average Detector
4	2410.800	99.77	-9.46	90.31			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

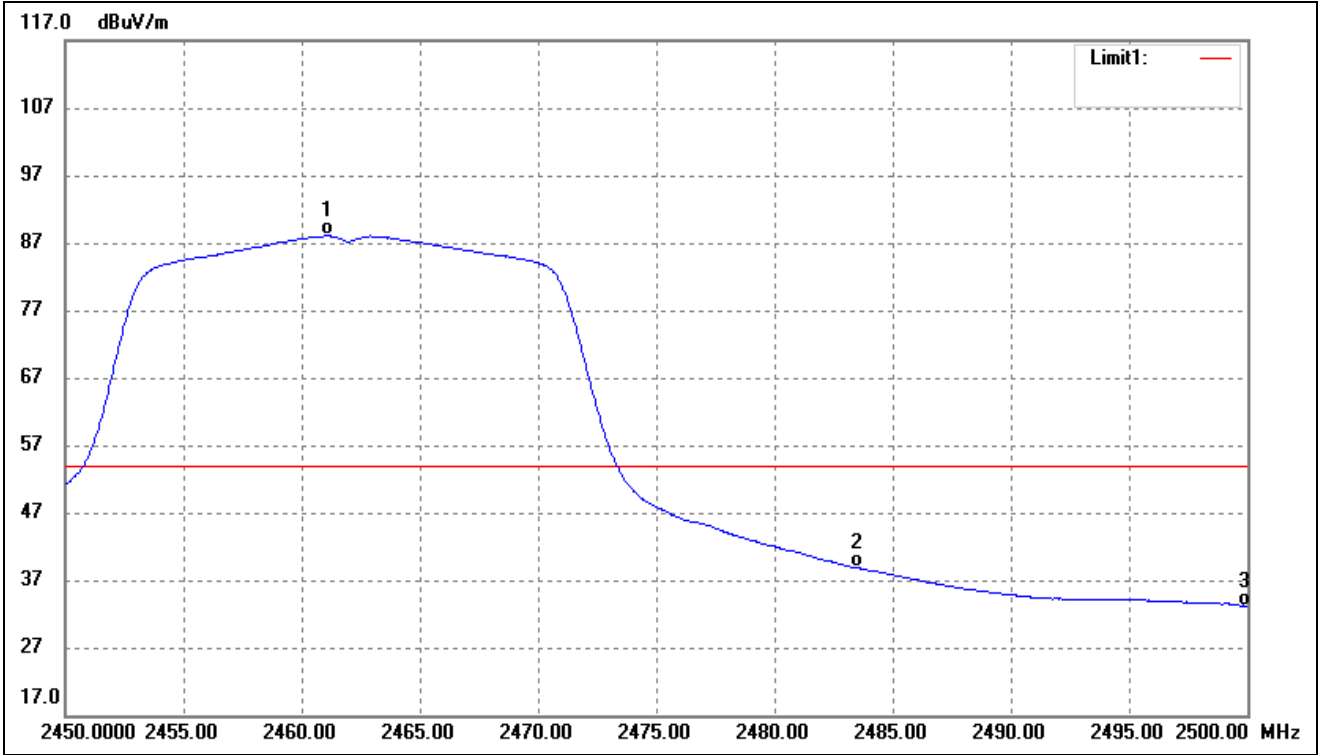


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.100	97.42	-9.36	88.06	/	/	Average Detector
	2460.400	109.37	-9.36	100.01	/	/	Peak Detector
2	2483.500	48.12	-9.31	38.81	54.00	-15.19	Average Detector
	2483.500	68.39	-9.31	59.08	74.00	-14.92	Peak Detector
3	2500.000	42.48	-9.28	33.20	54.00	-20.80	Average Detector
	2500.000	55.15	-9.28	45.87	74.00	-28.13	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

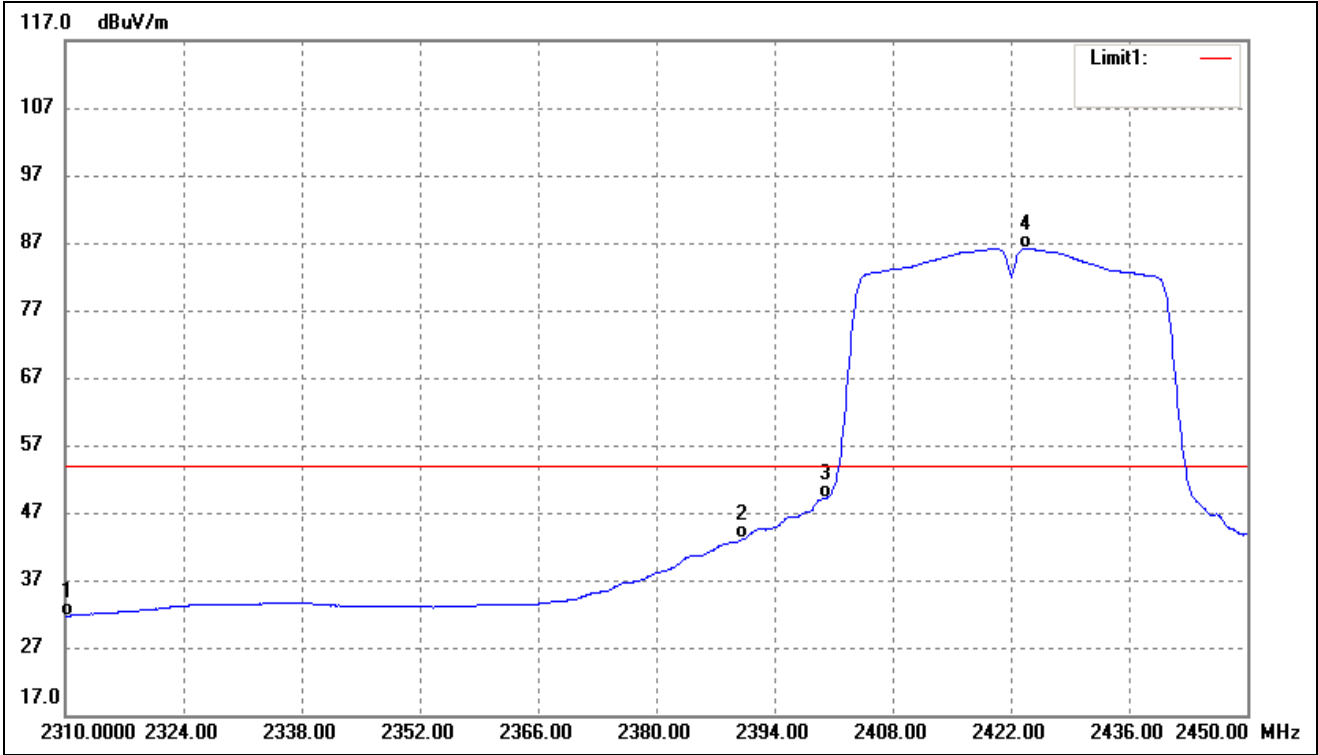

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.19	-9.66	30.53	54.00	-23.47	Average Detector
	2310.000	52.72	-9.66	43.06	74.00	-30.94	Peak Detector
2	2390.000	48.83	-9.50	39.33	54.00	-14.67	Average Detector
	2390.000	64.83	-9.50	55.33	74.00	-18.67	Peak Detector
3	2400.000	61.19	-9.48	51.71	Delta=32.8dBc		Average Detector
4	2415.420	93.97	-9.46	84.51			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)


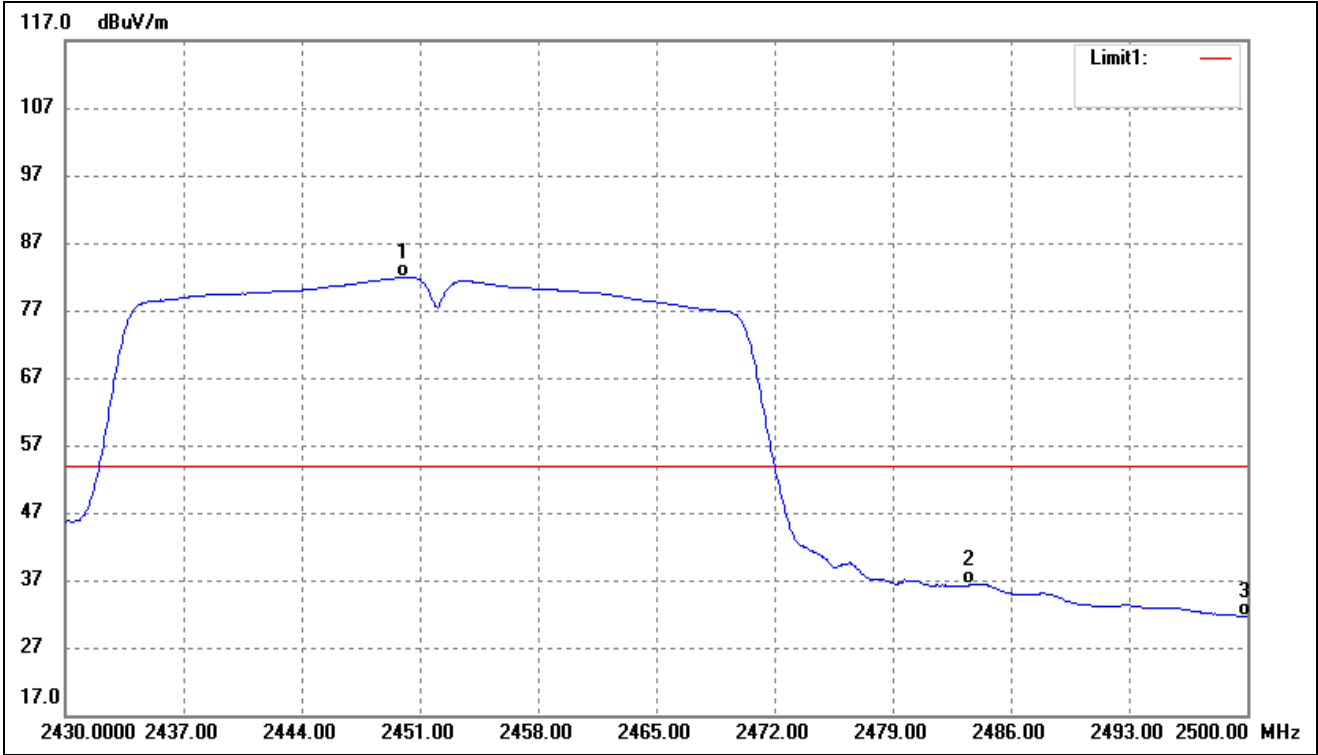


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.020	91.30	-9.38	81.92	/	/	Average Detector
	2449.600	103.34	-9.39	93.95	/	/	Peak Detector
2	2483.500	45.57	-9.31	36.26	54.00	-17.74	Average Detector
	2483.500	58.58	-9.31	49.27	74.00	-24.73	Peak Detector
3	2500.000	40.97	-9.28	31.69	54.00	-22.31	Average Detector
	2500.000	53.88	-9.28	44.60	74.00	-29.40	Peak Detector

➤ Antenna 0



802.11b_11Mbps

Low

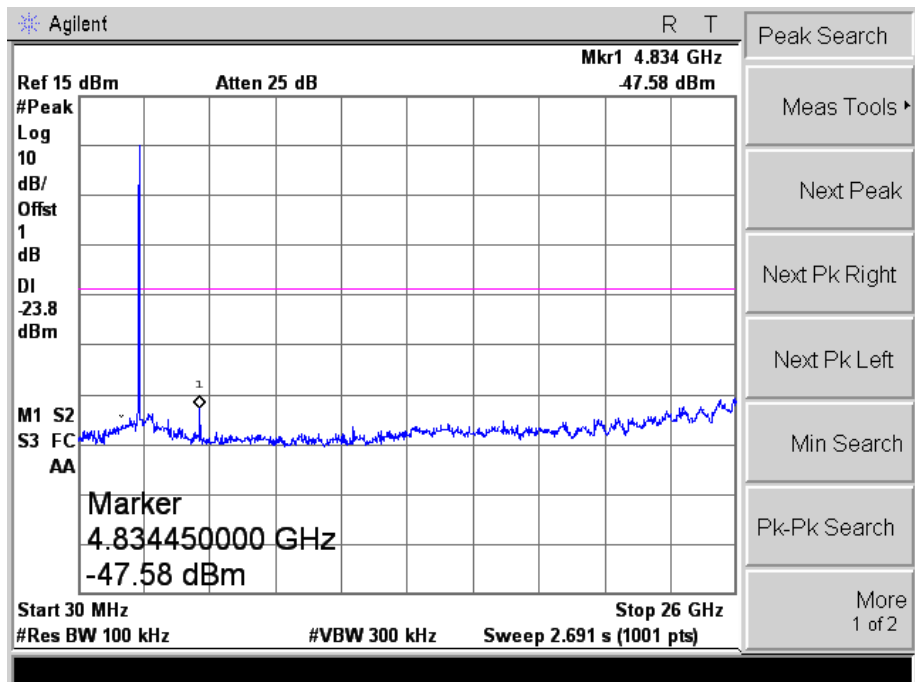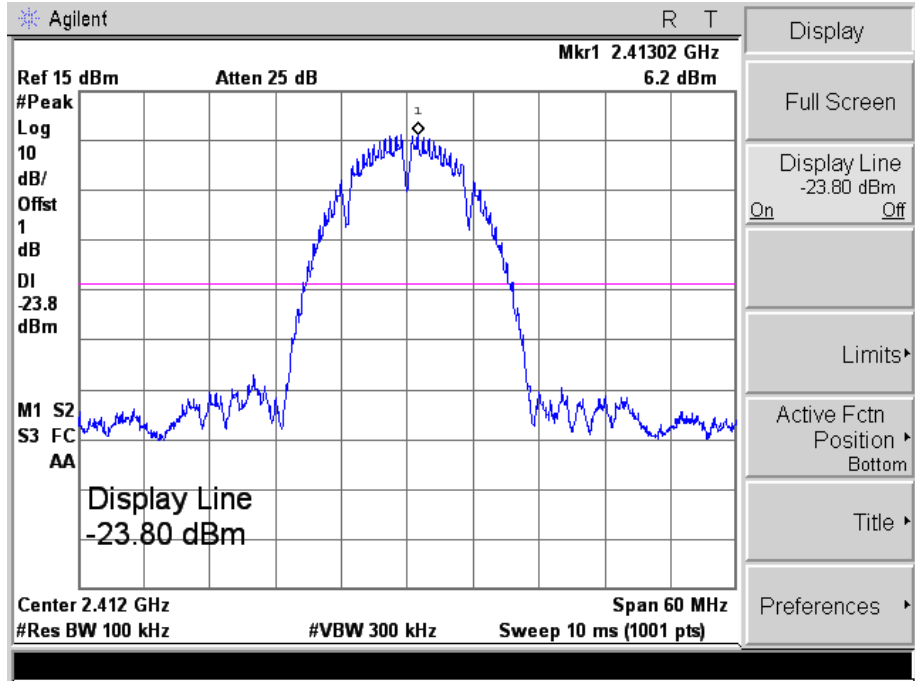



802.11b_11Mbps

Middle

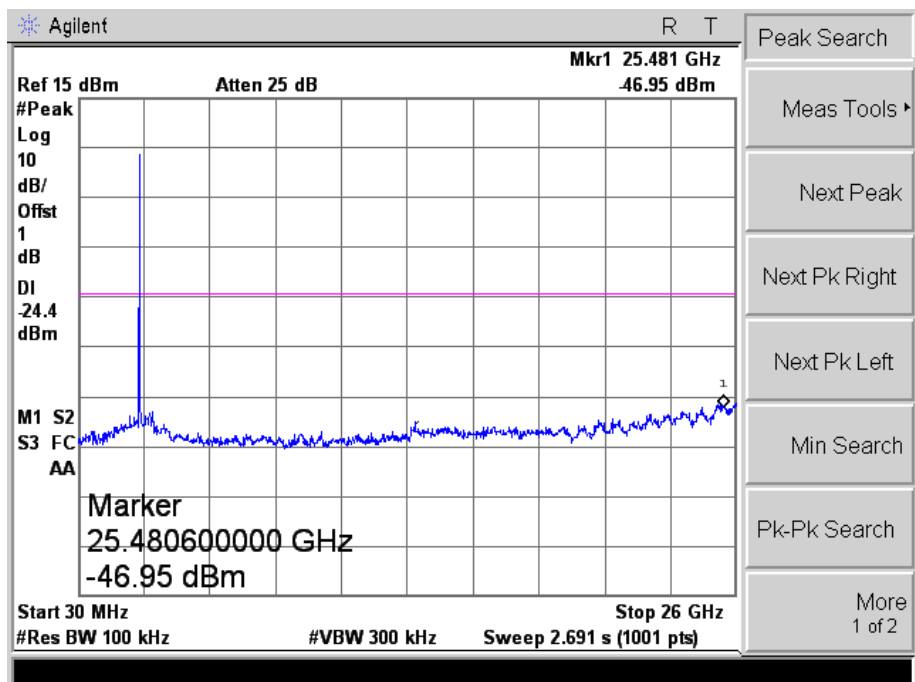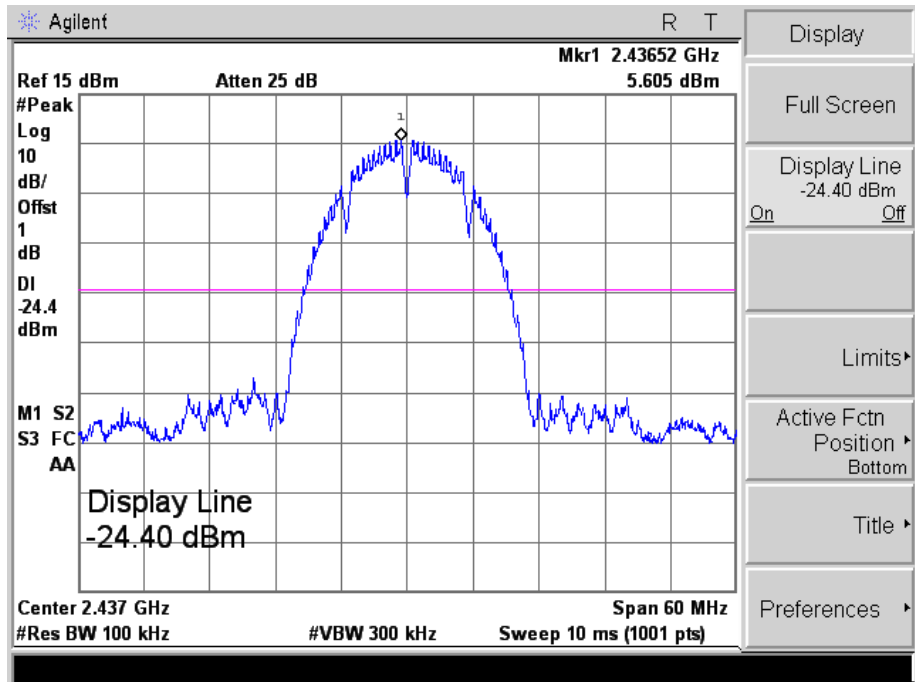



802.11b_11Mbps

High

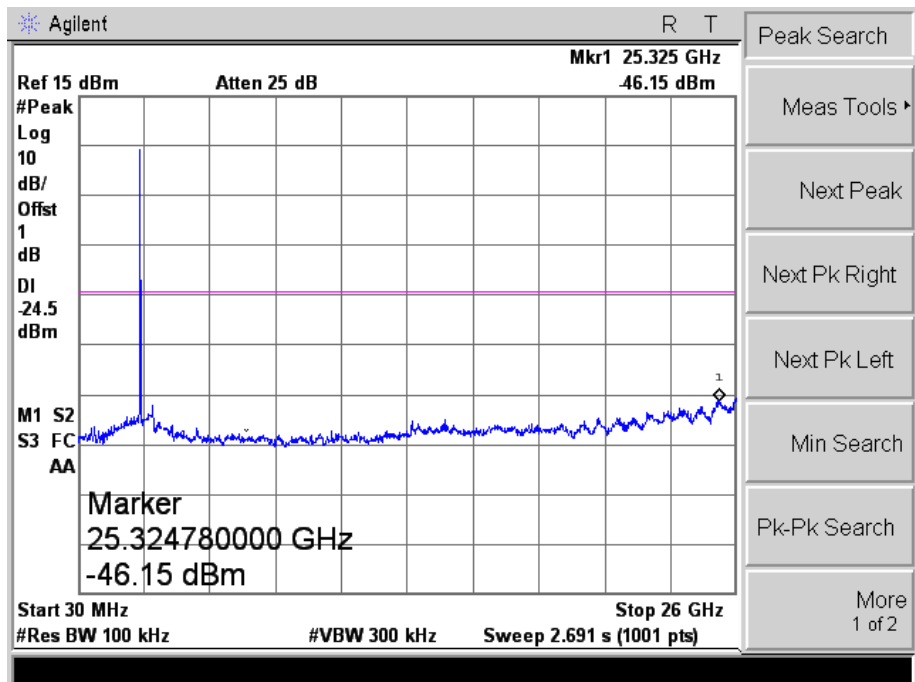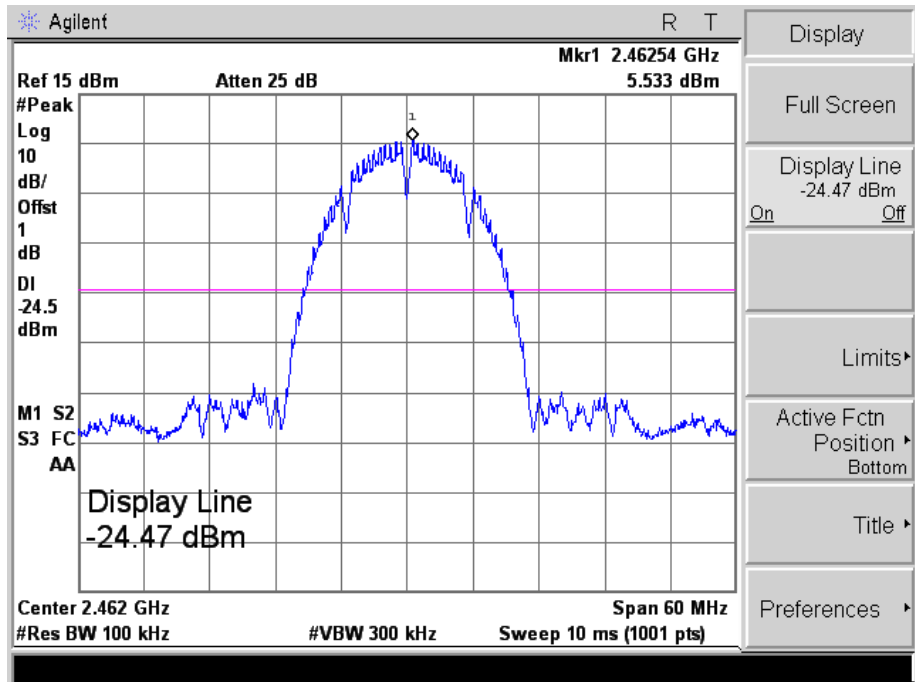



802.11g_54Mbps

Low

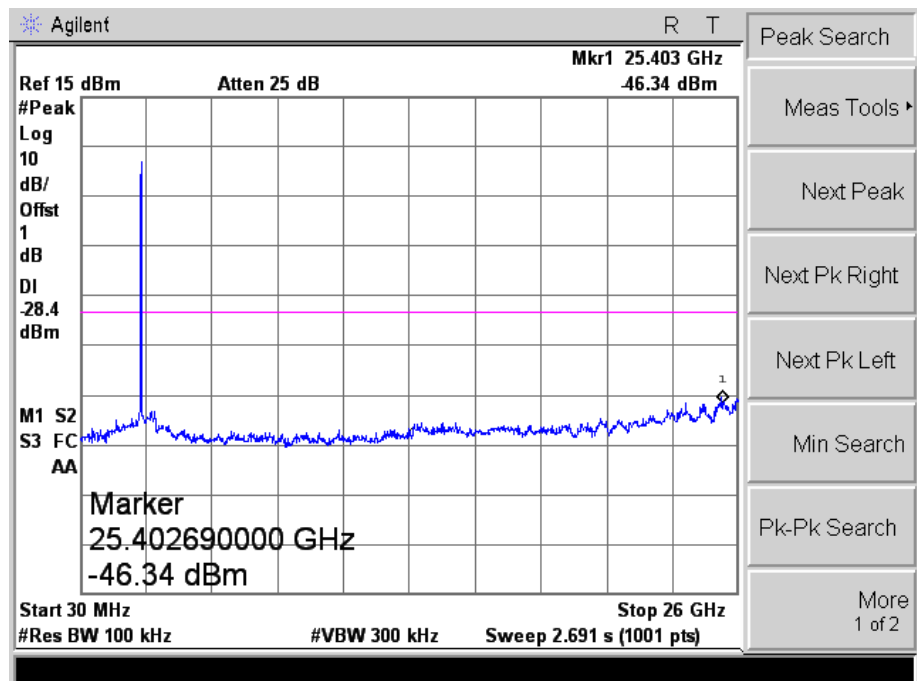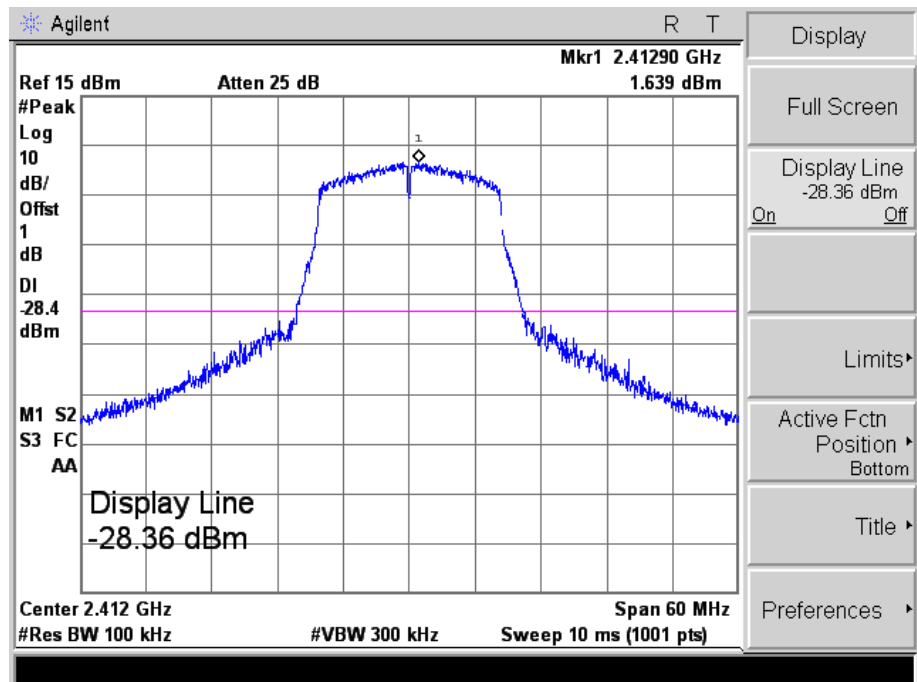



802.11g_54Mbps

Middle

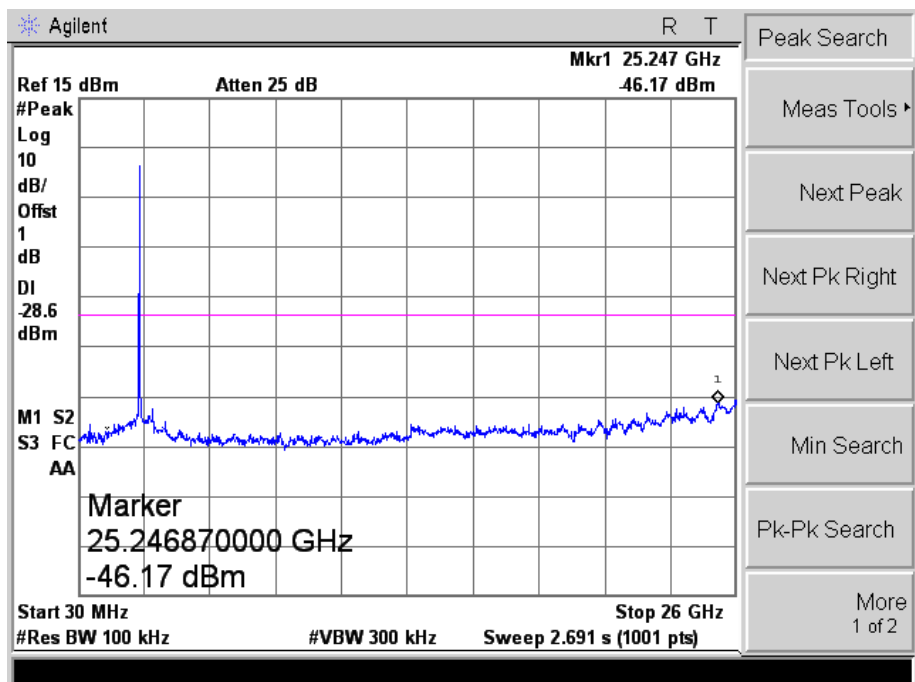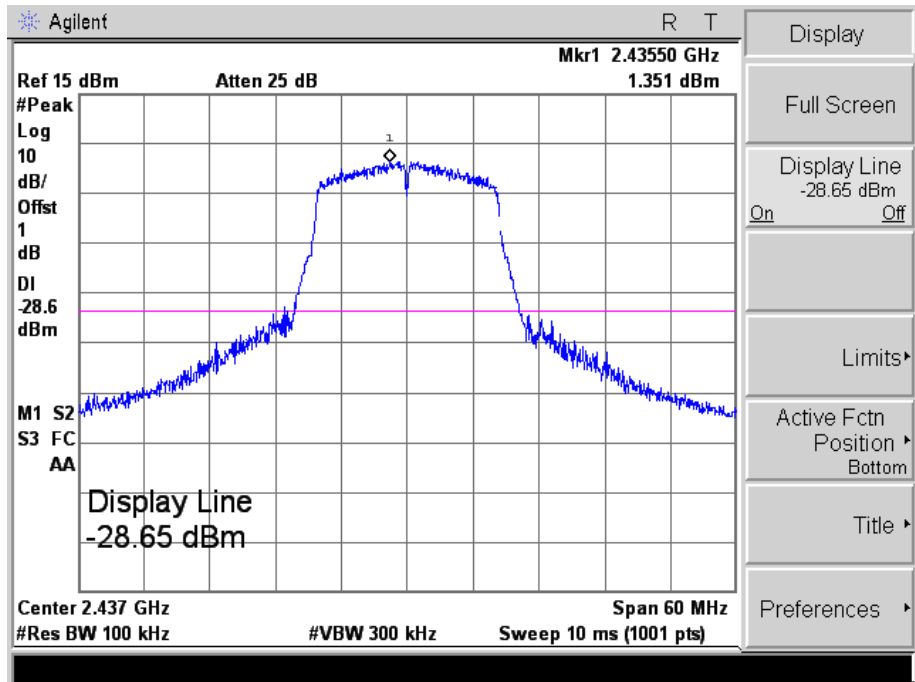



802.11g_54Mbps

High

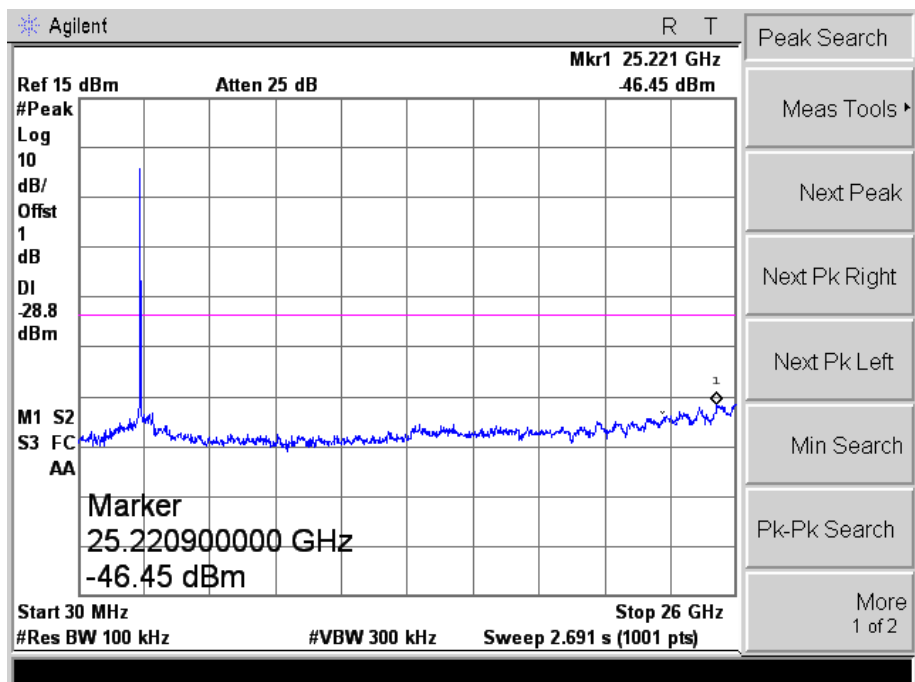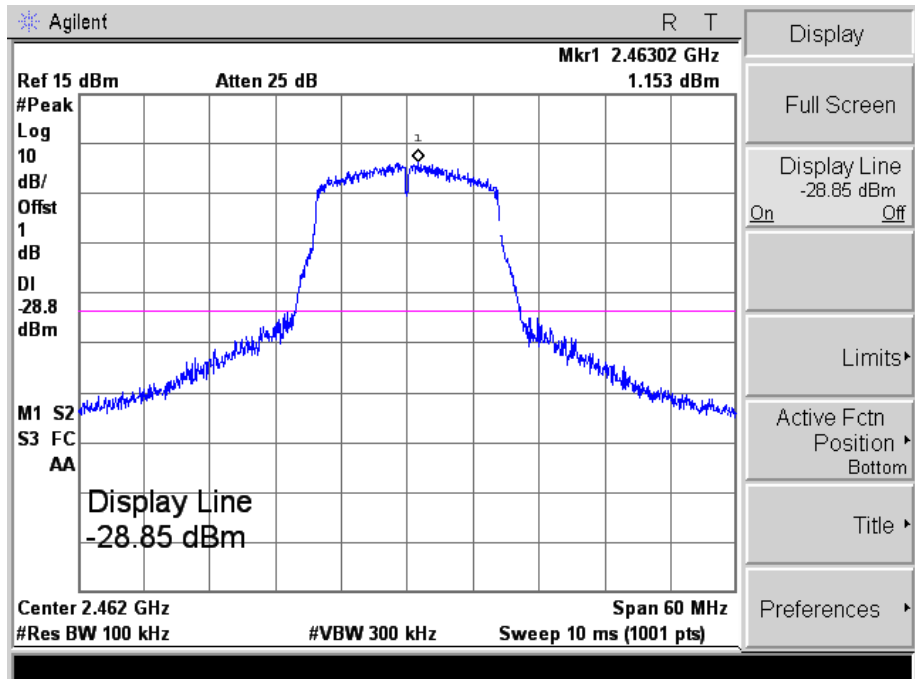



802.11n-HT20_MCS7

Low

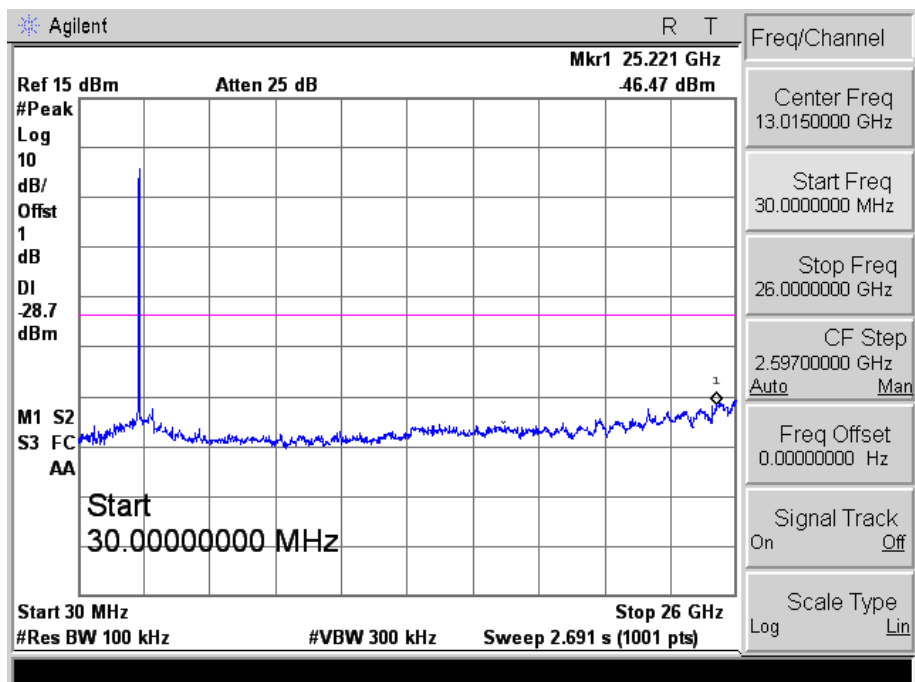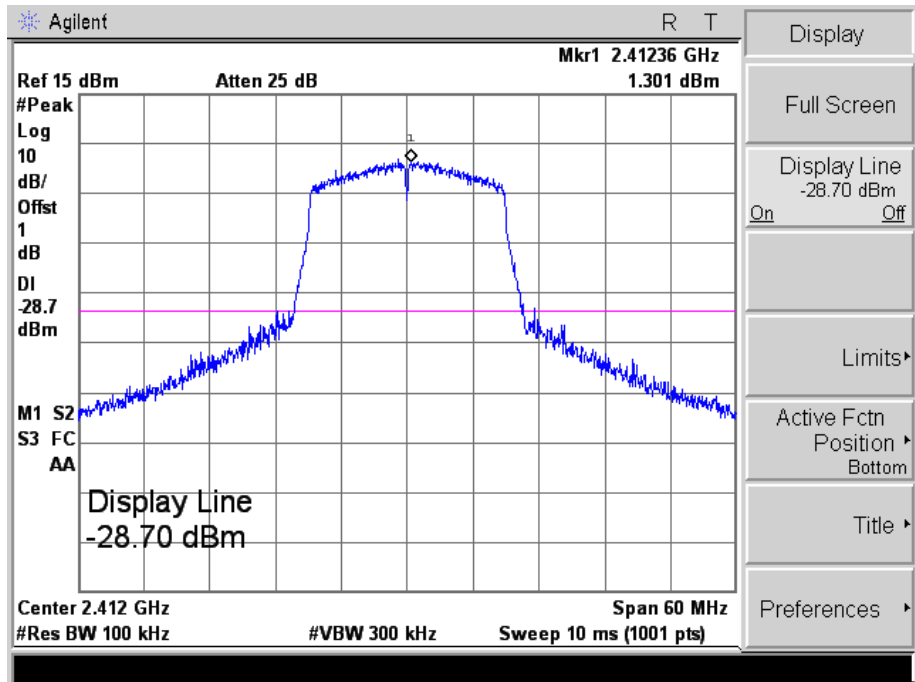



802.11n-HT20_MCS7

Middle

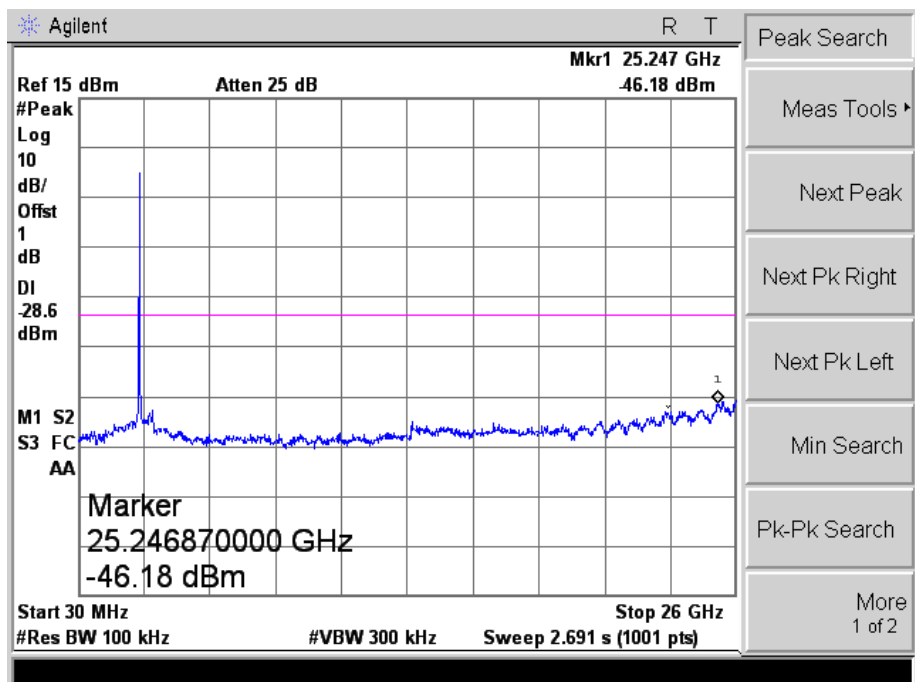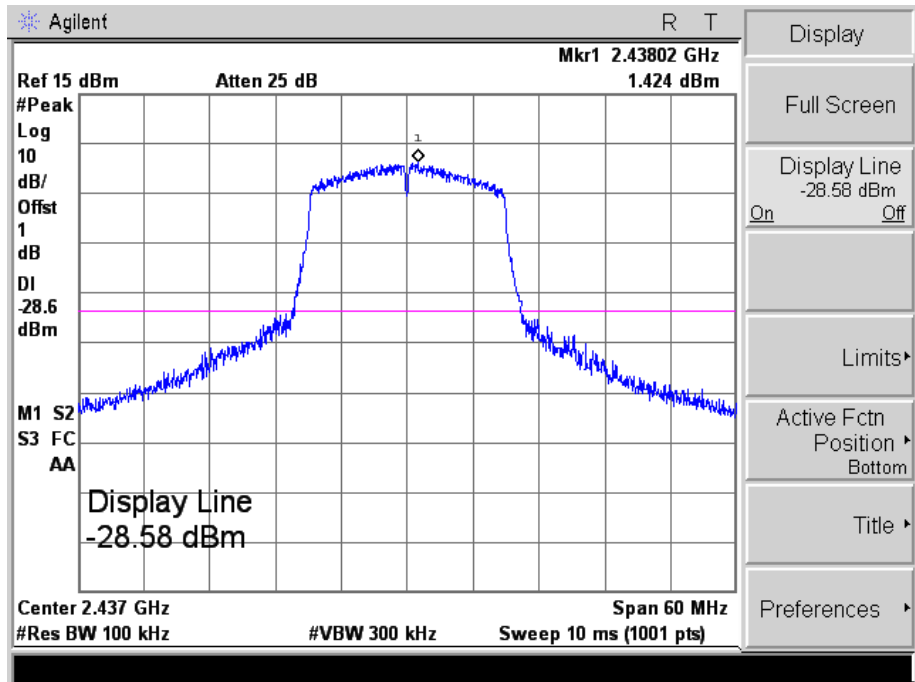



802.11n-HT20_MCS7

High

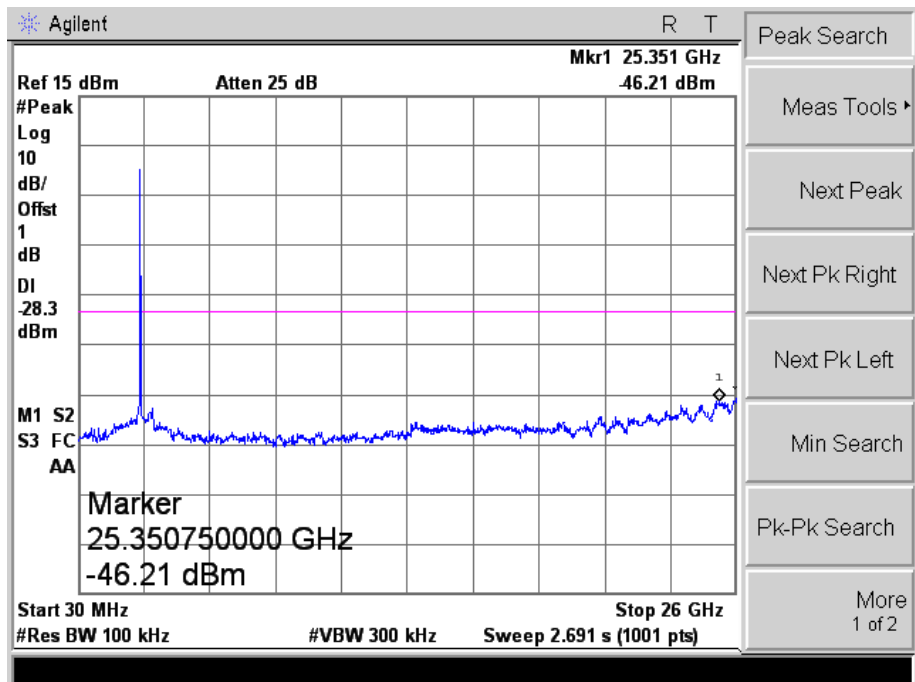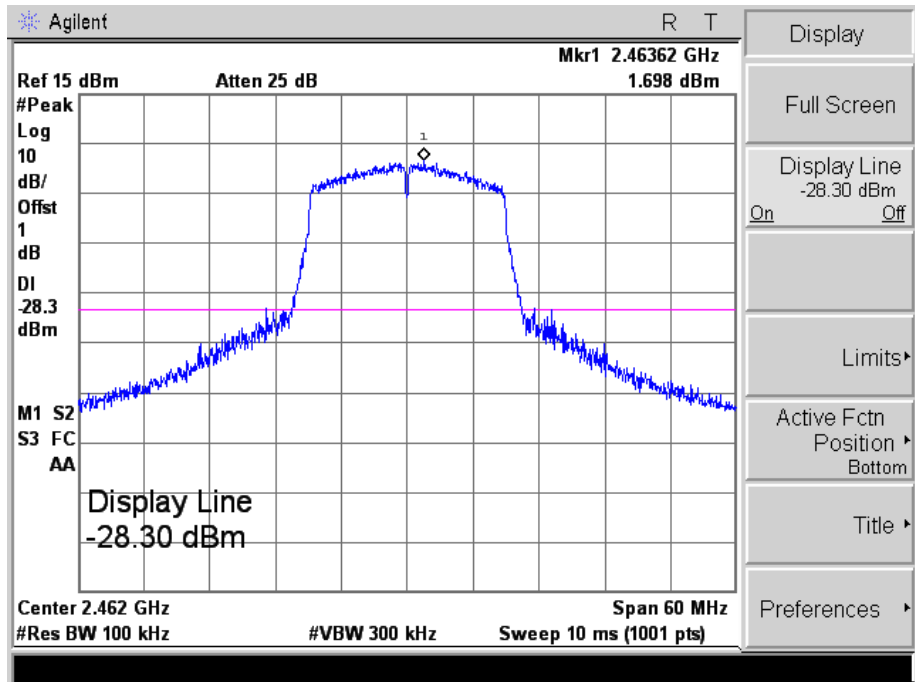



802.11n-HT40_MCS7

Low

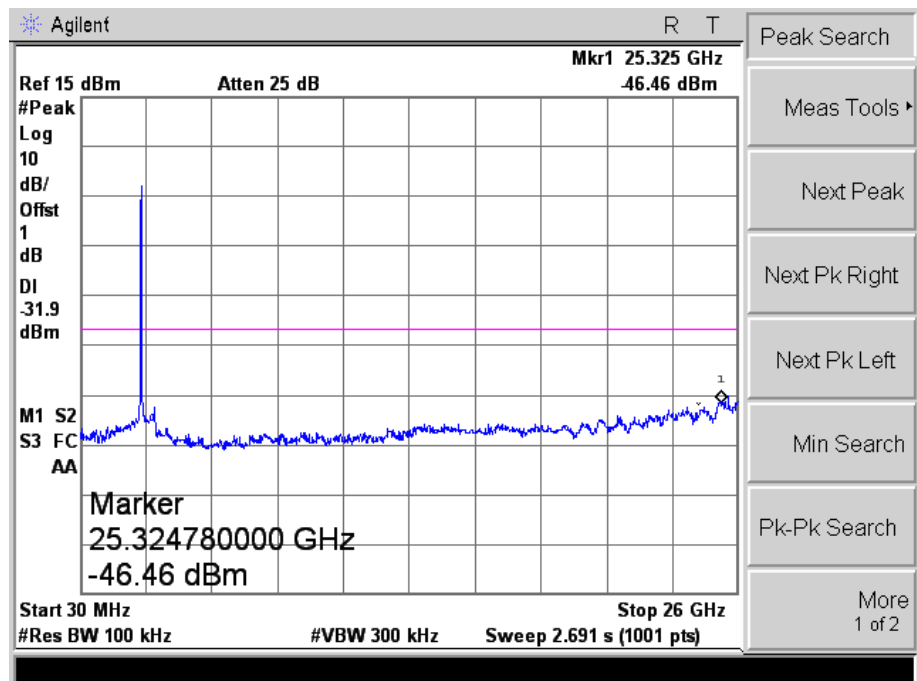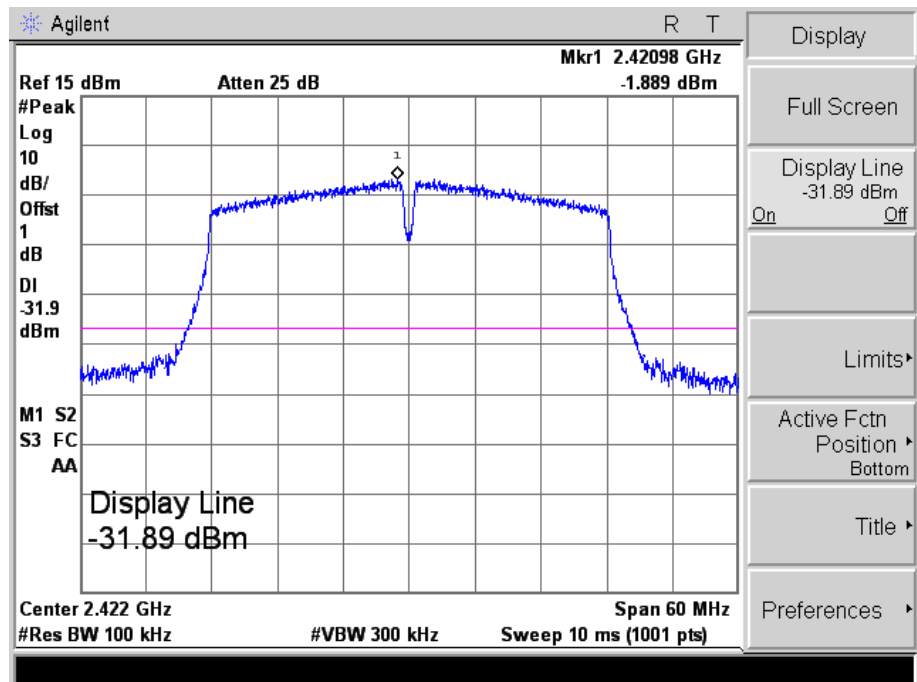



802.11n-HT40_MCS7

Middle

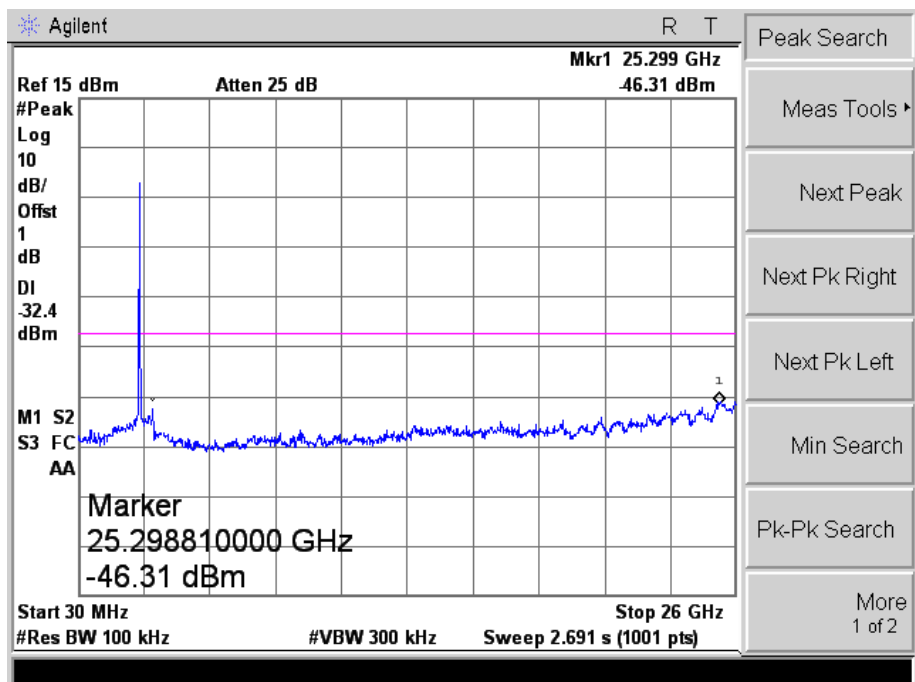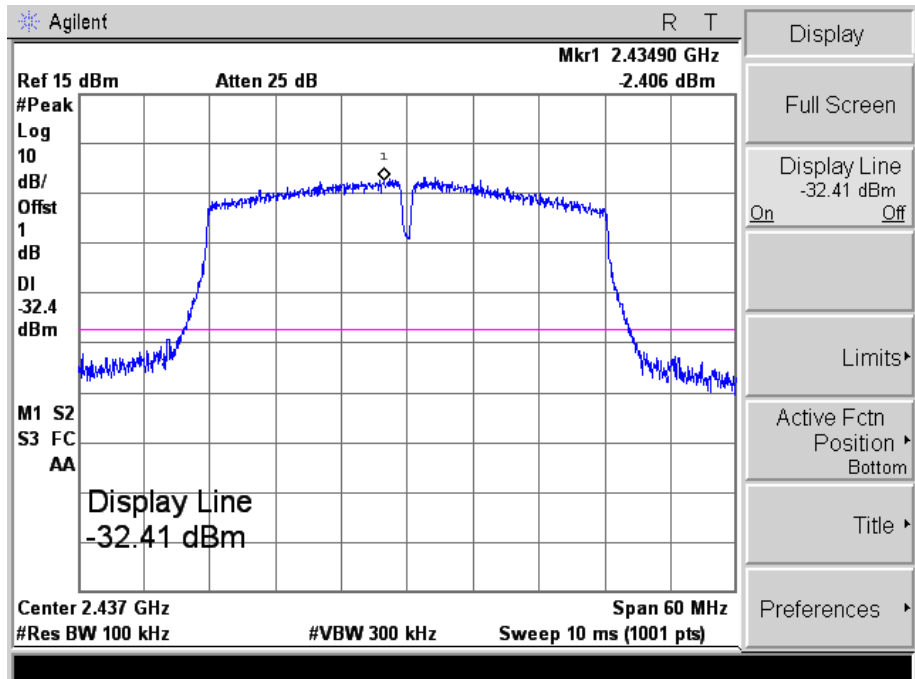

802.11n-HT40_MCS7



High

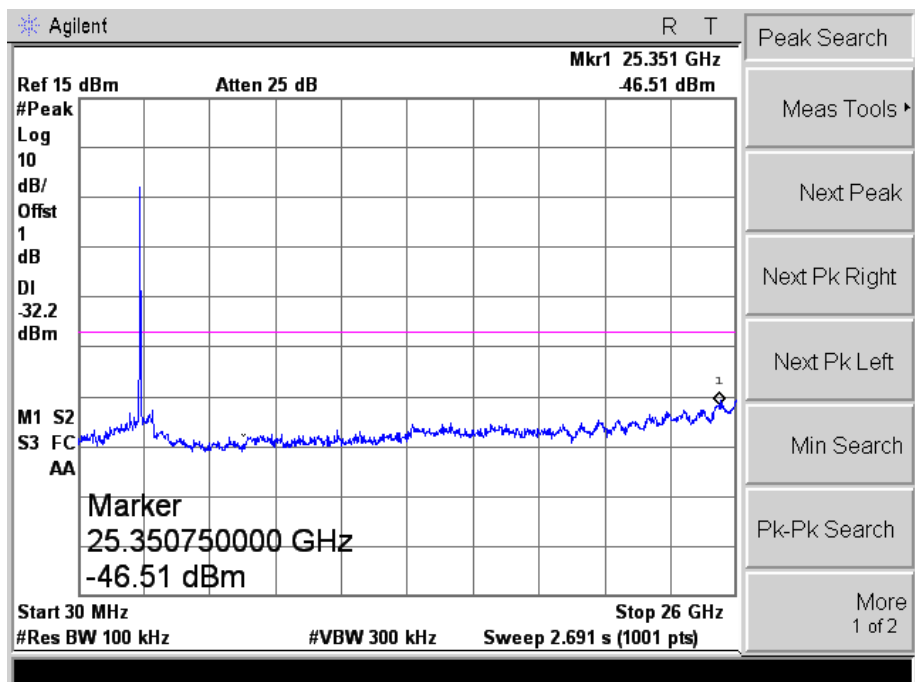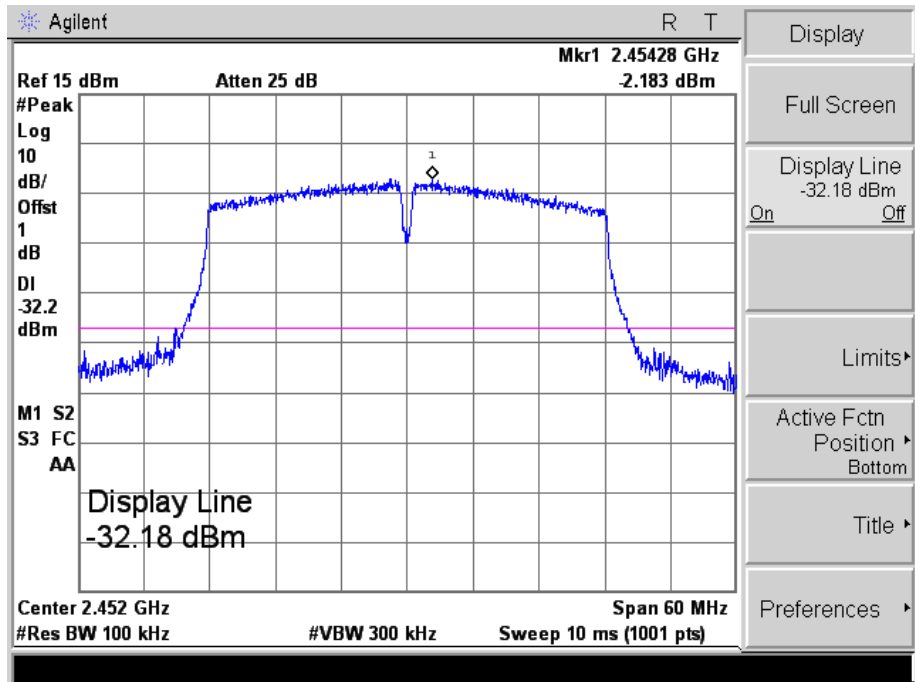

➤ Antenna 1



802.11b_11Mbps

Low

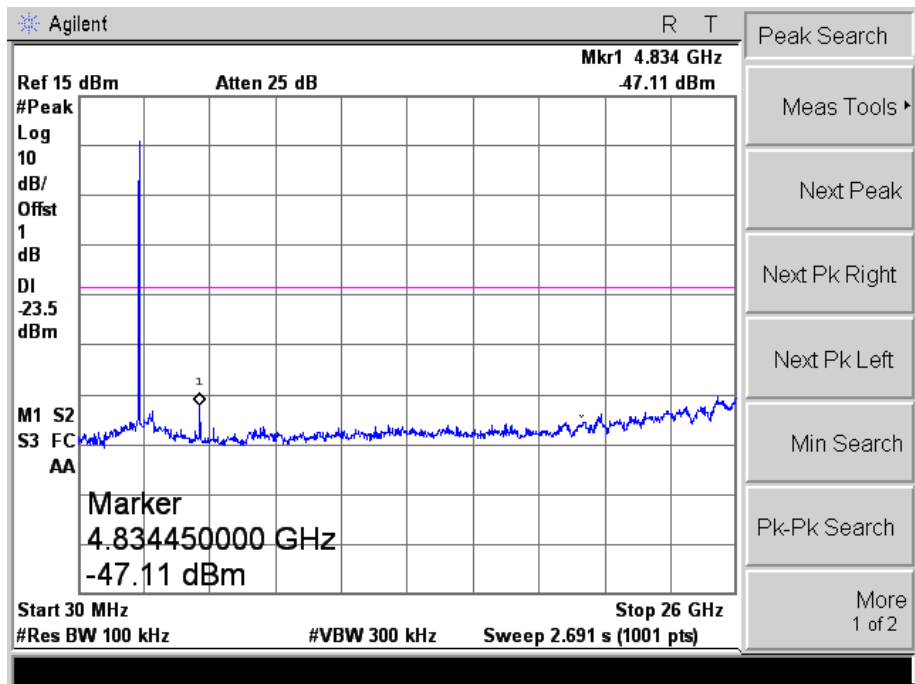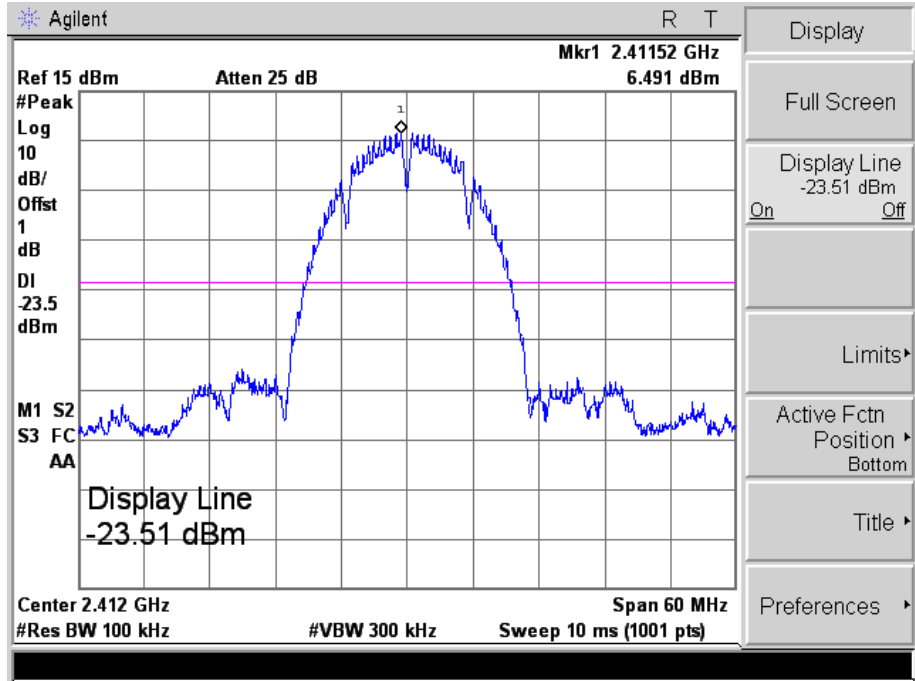



802.11b_11Mbps

Middle

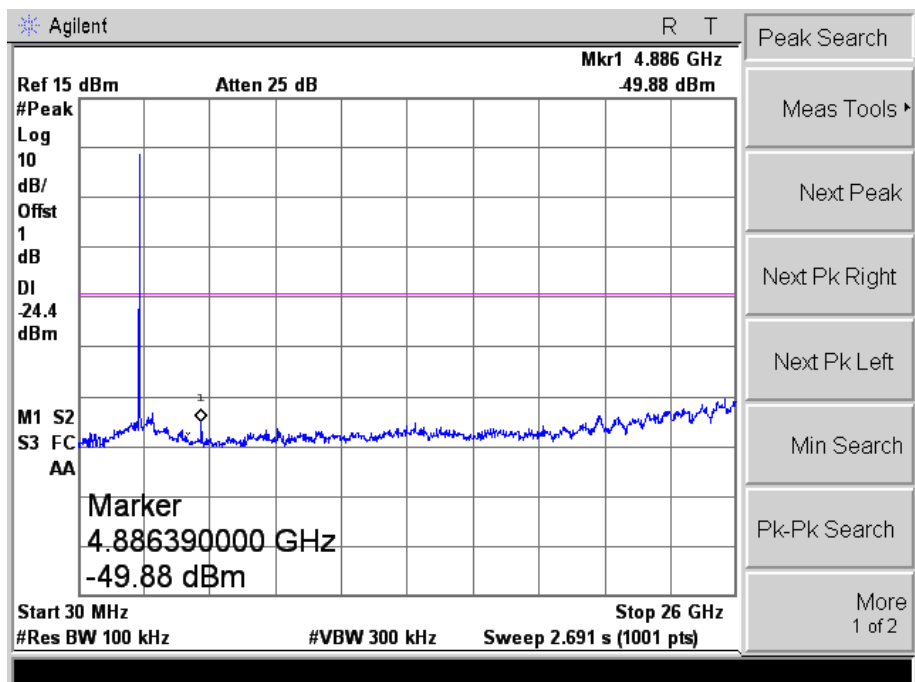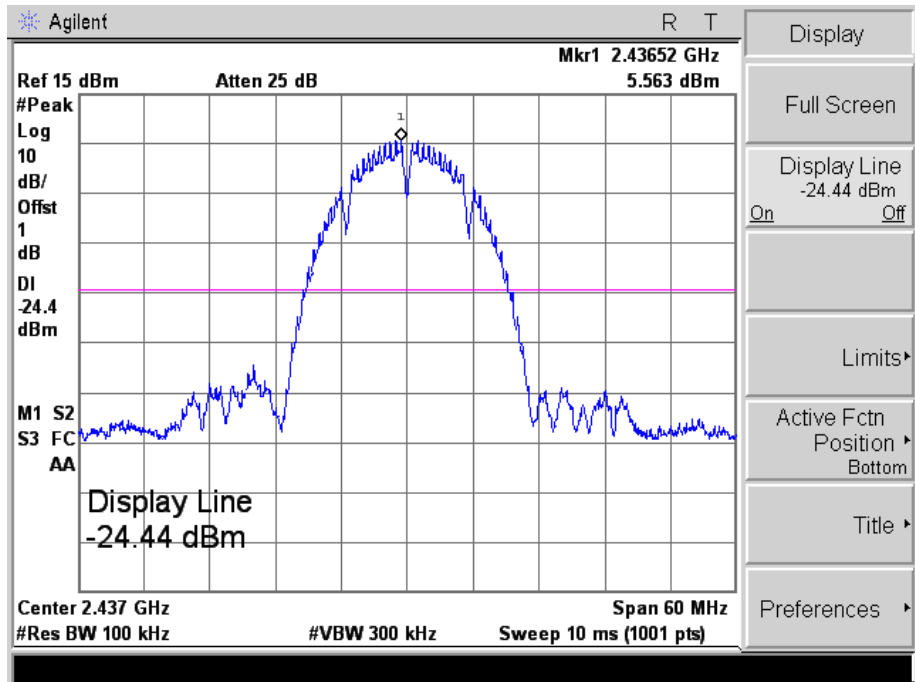



802.11b_11Mbps

High

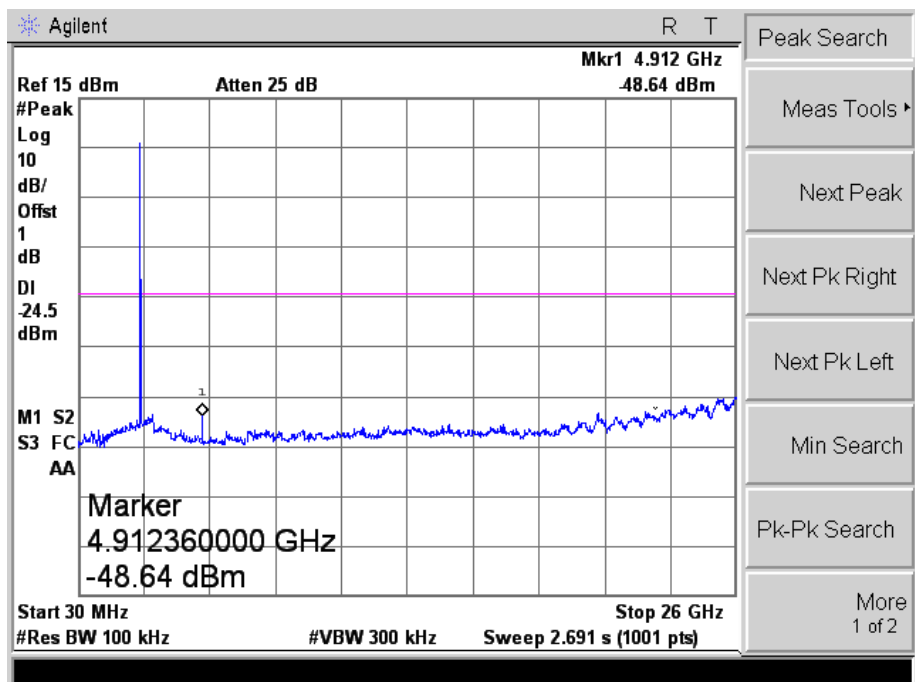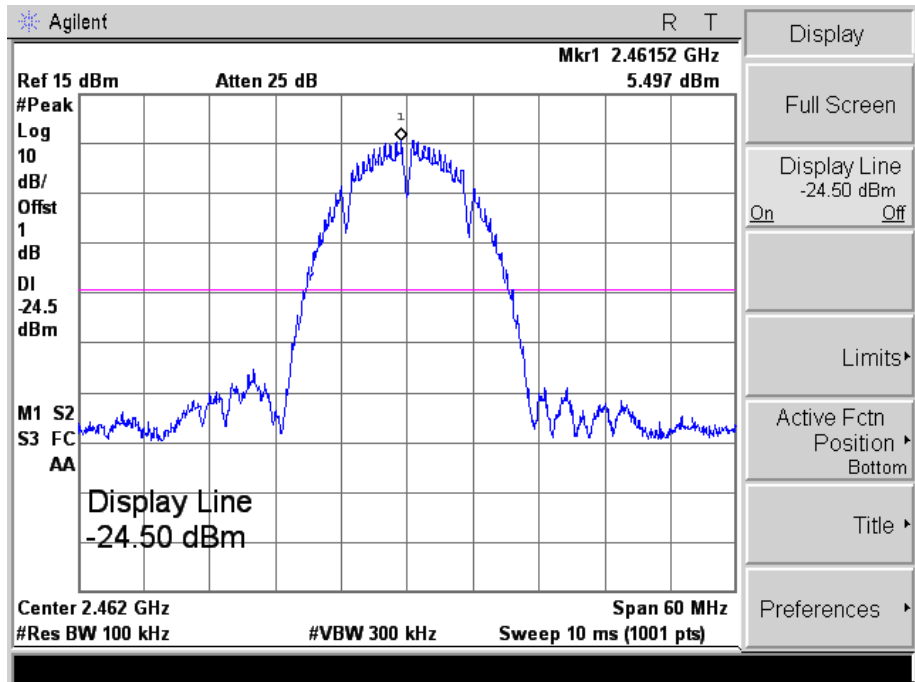



802.11g_54Mbps

Low

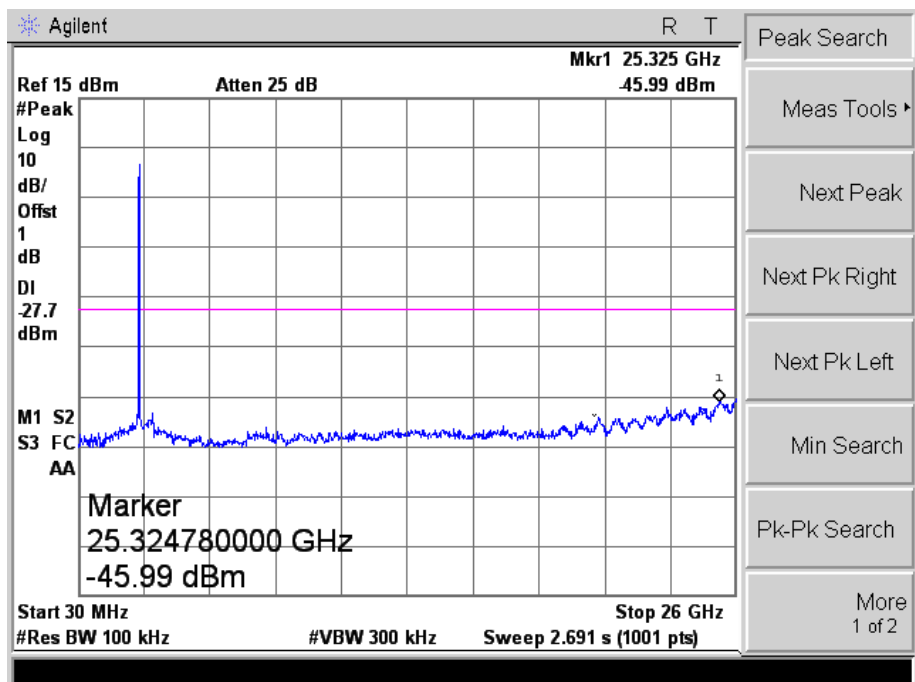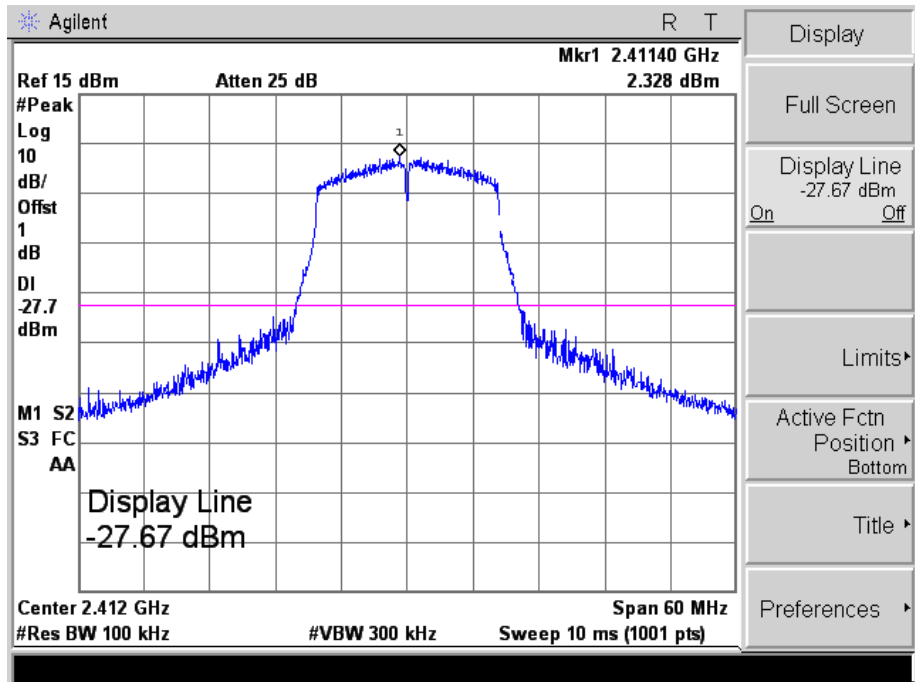



802.11g_54Mbps

Middle

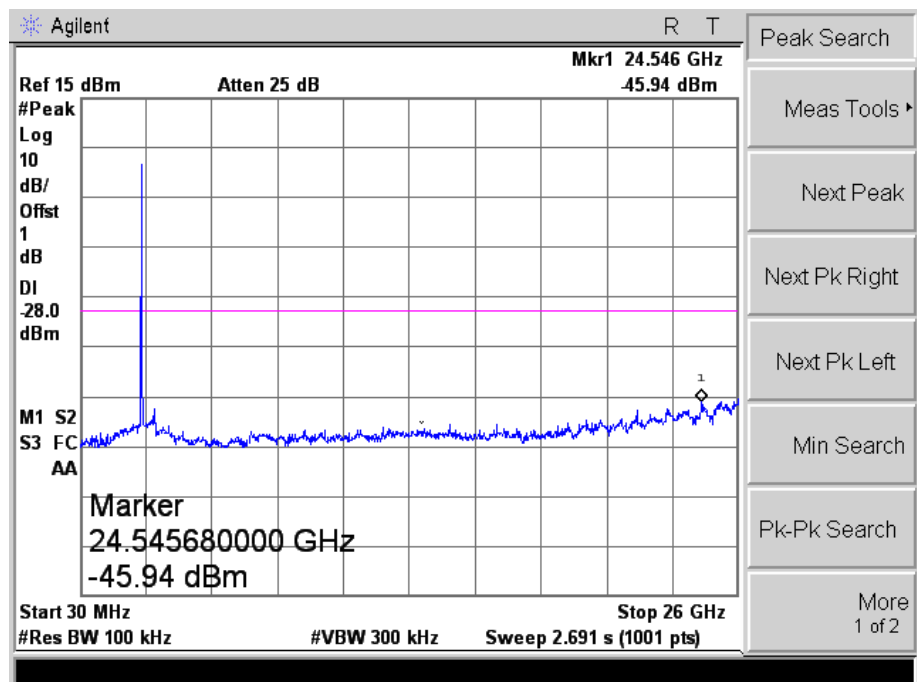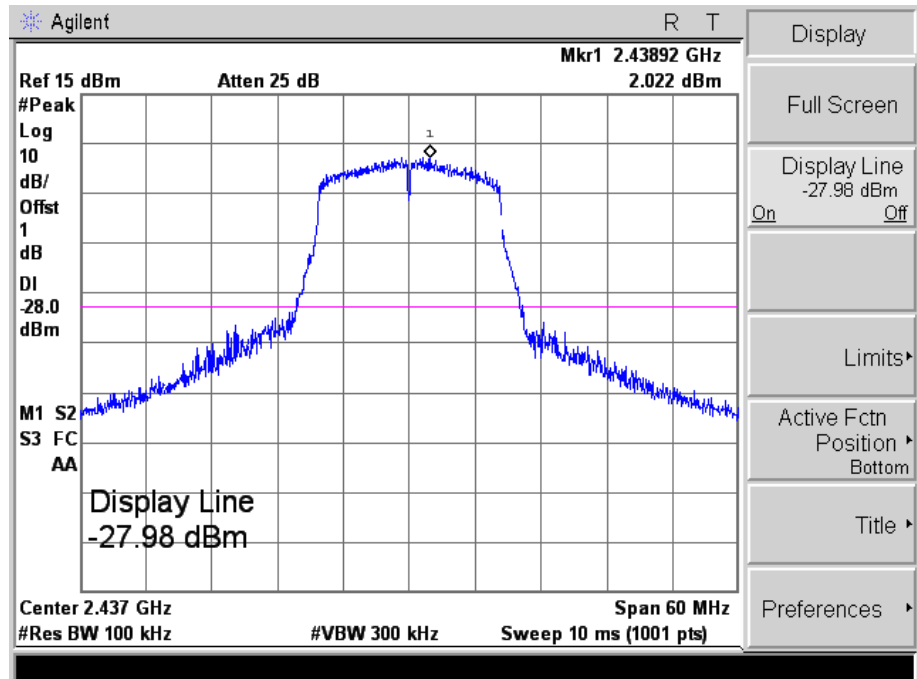



802.11g_54Mbps

High

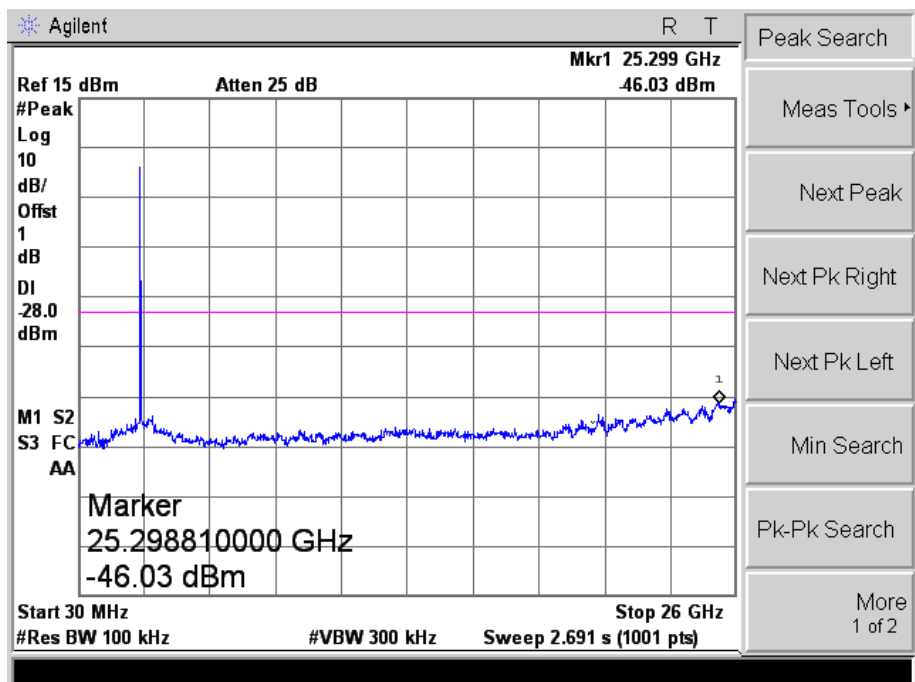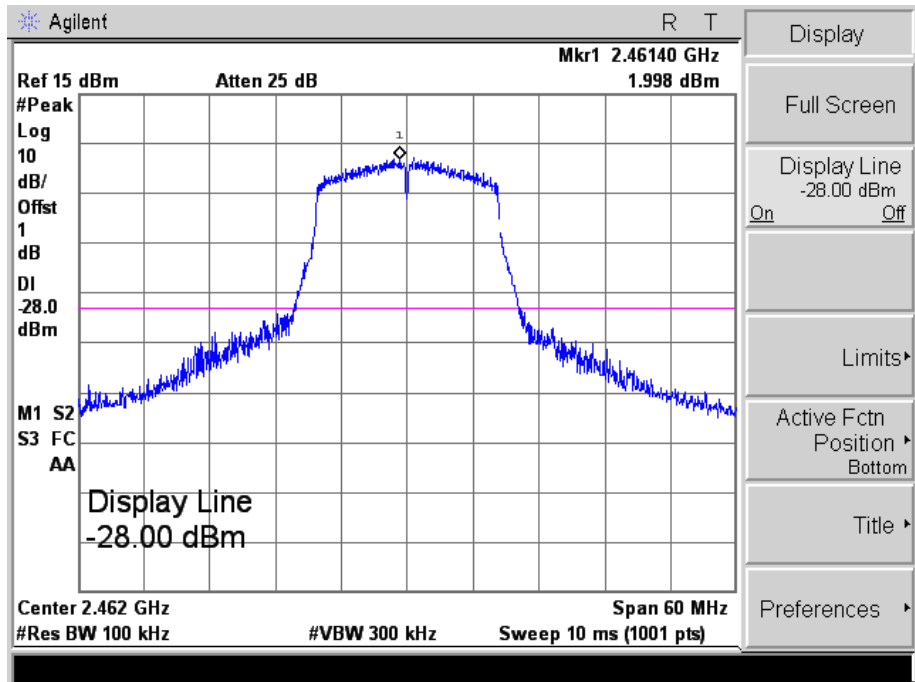



802.11n-HT20_MCS7

Low

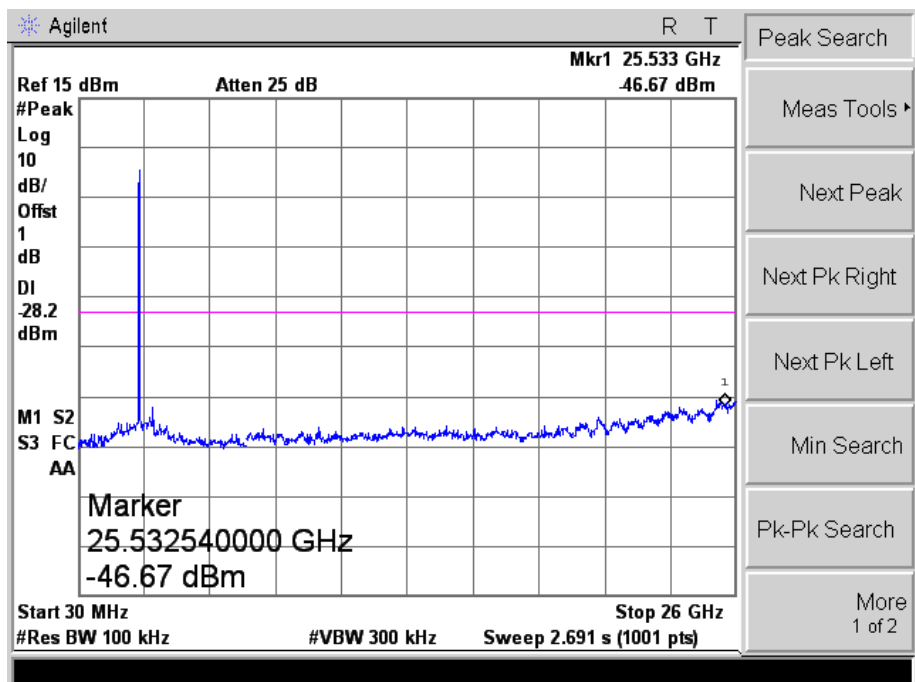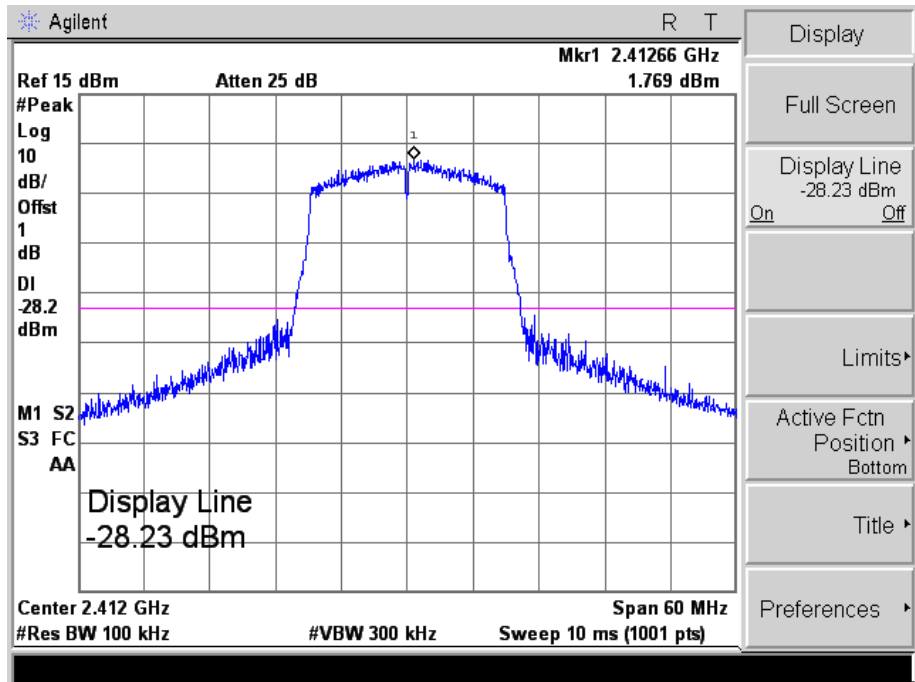



802.11n-HT20_MCS7

Middle

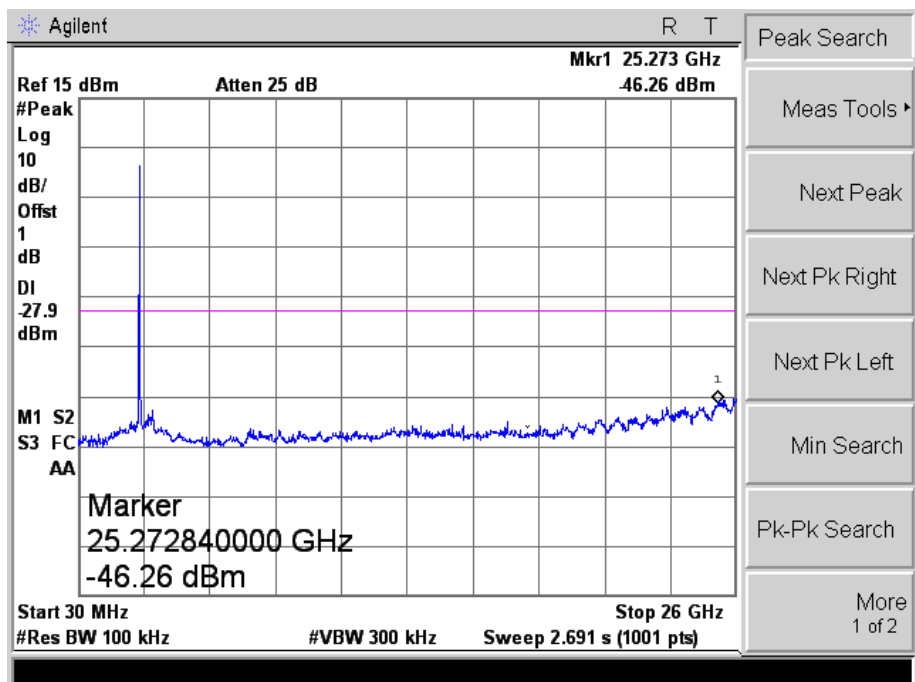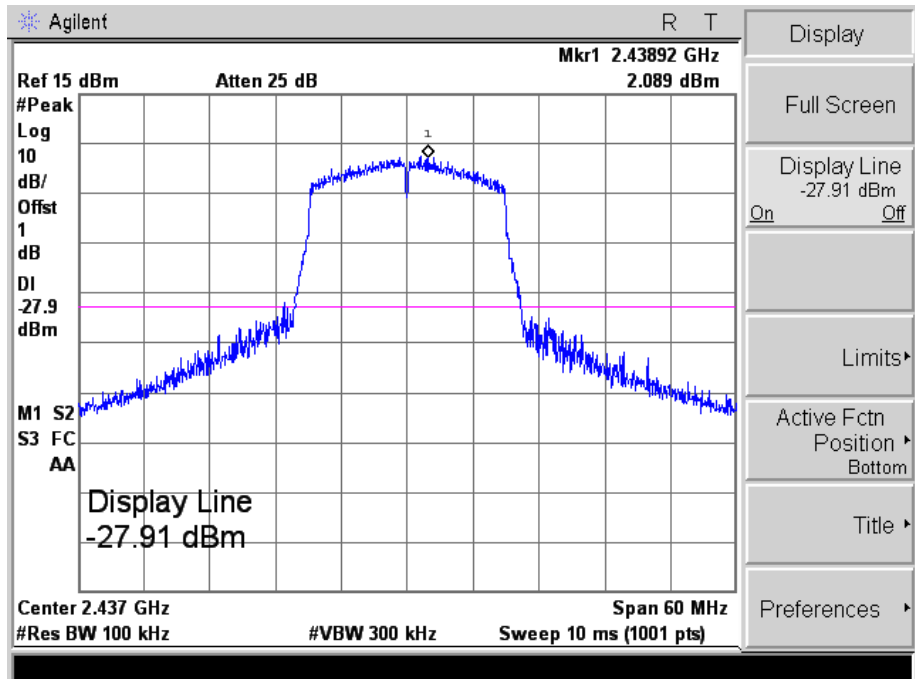



802.11n-HT20_MCS7

High

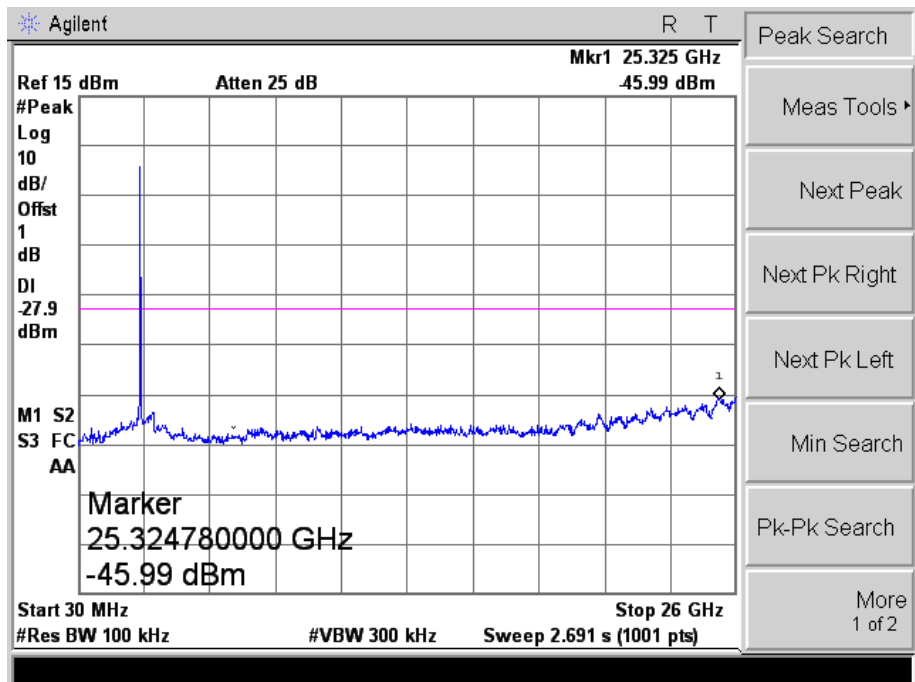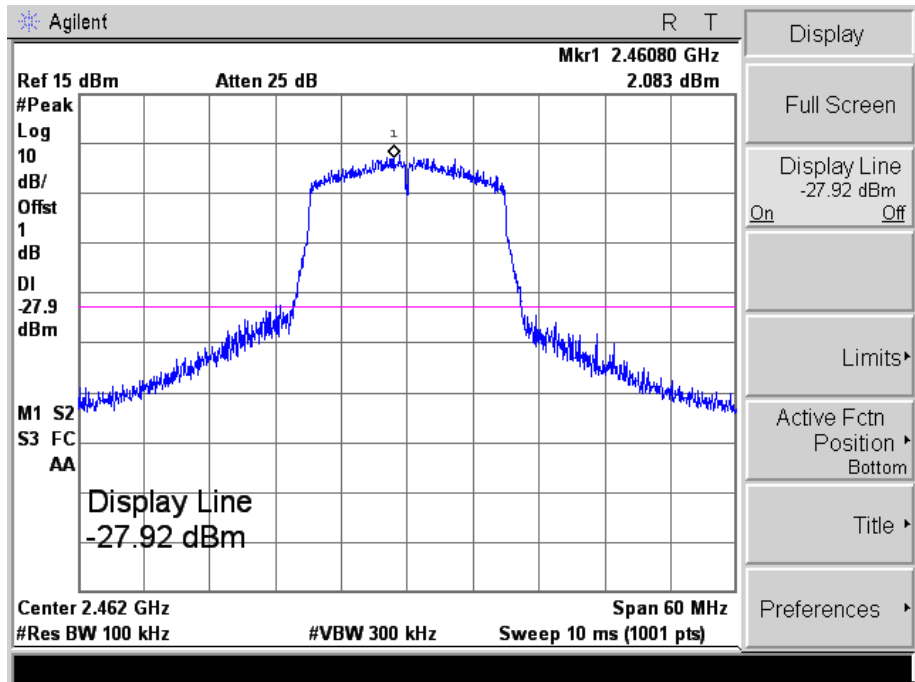



802.11n-HT40_MCS7

Low

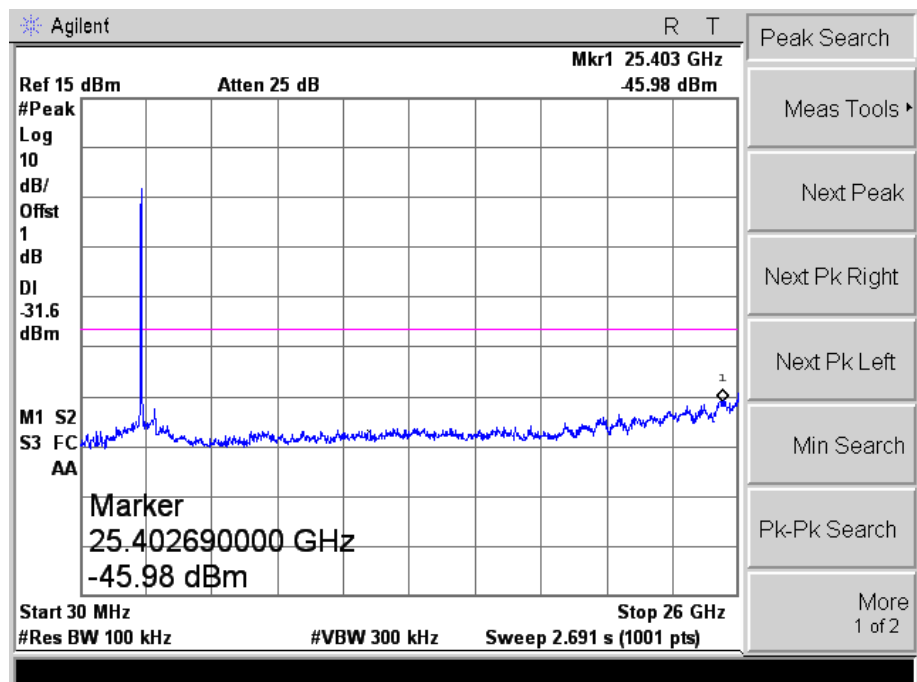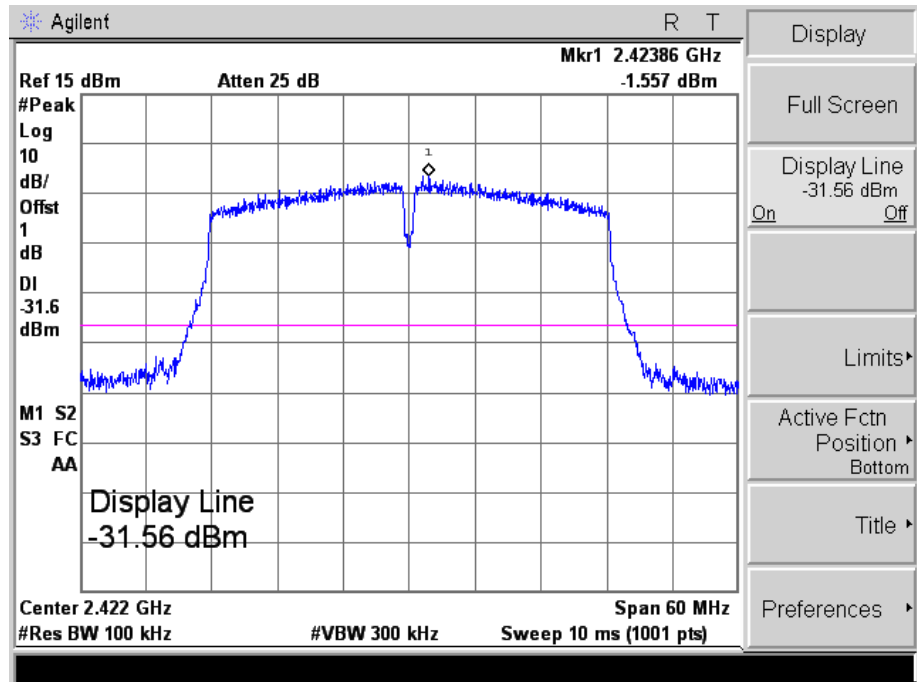



802.11n-HT40_MCS7

Middle

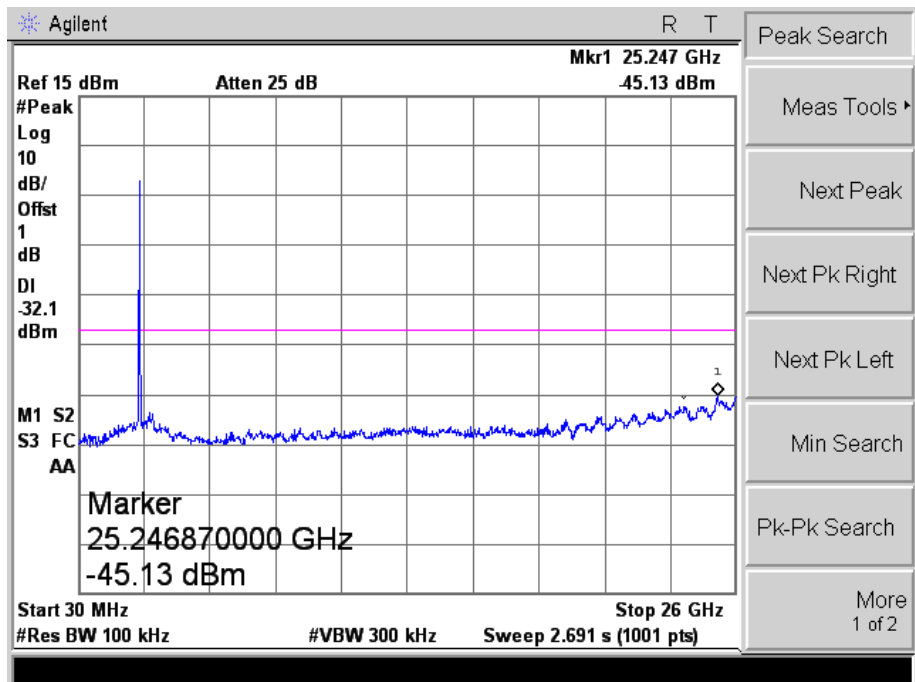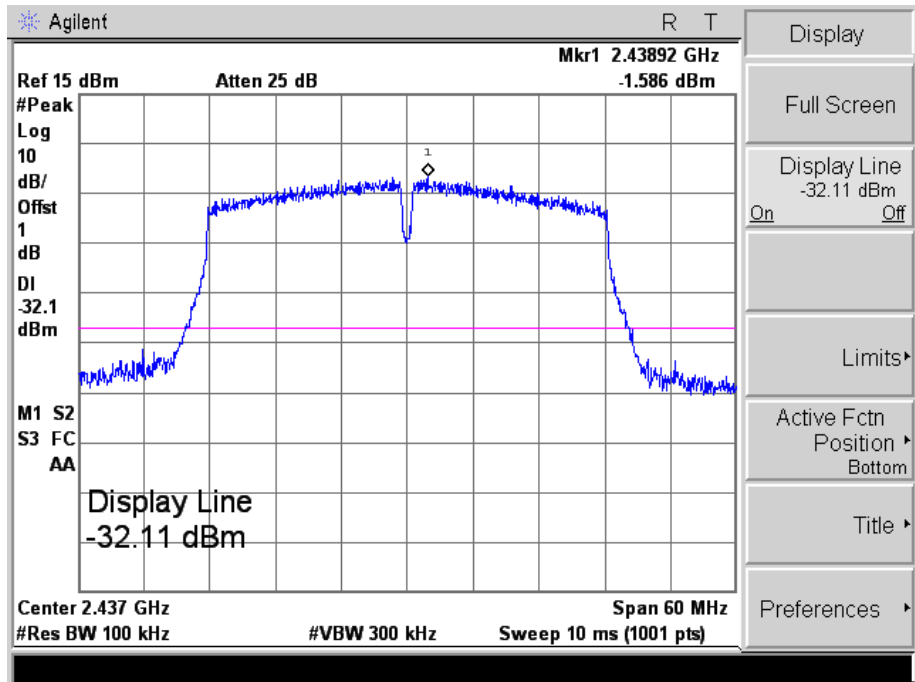

802.11n-HT40_MCS7

High

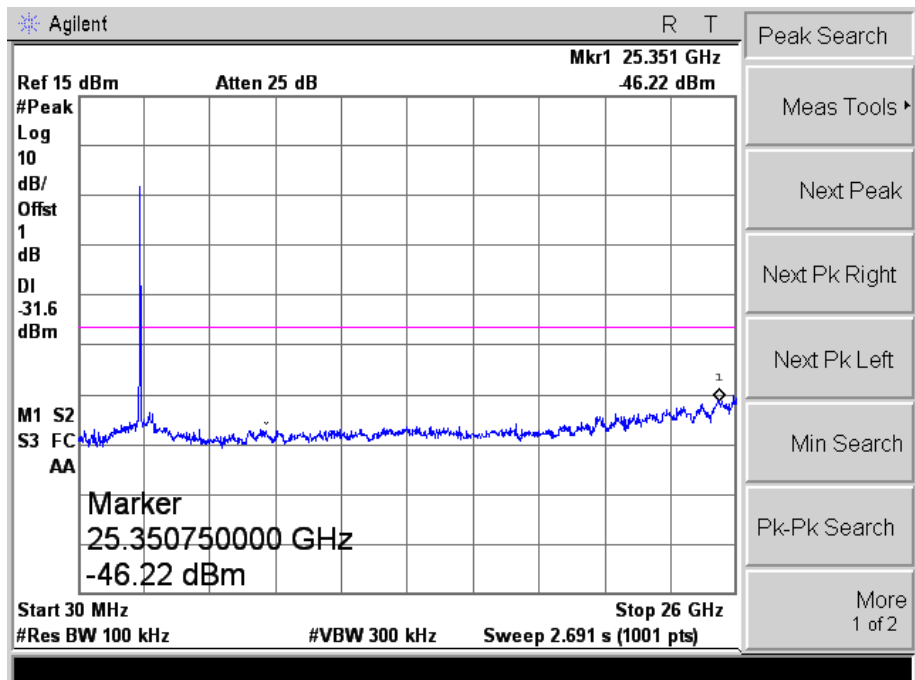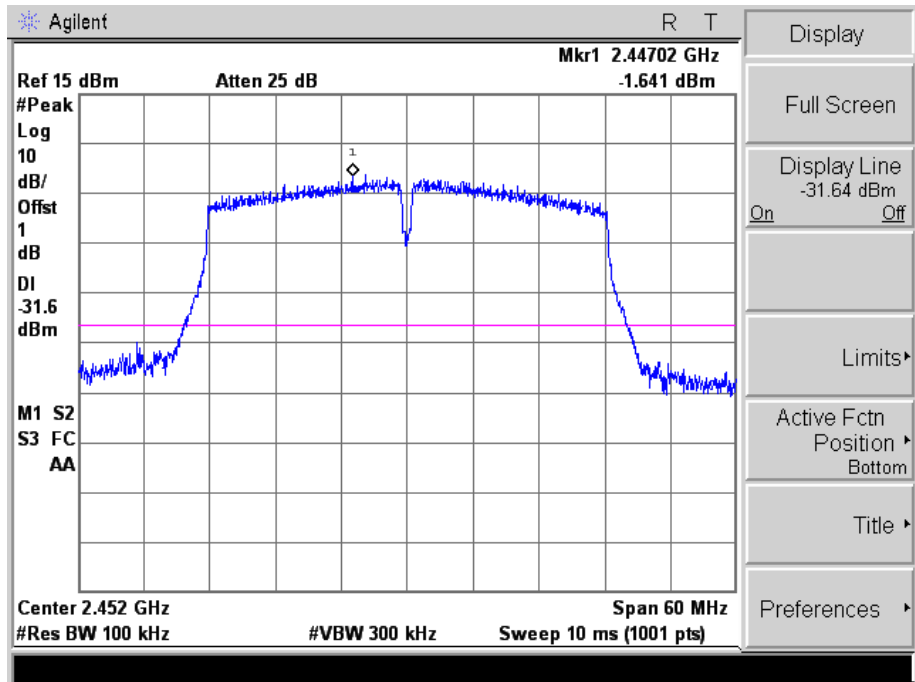


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

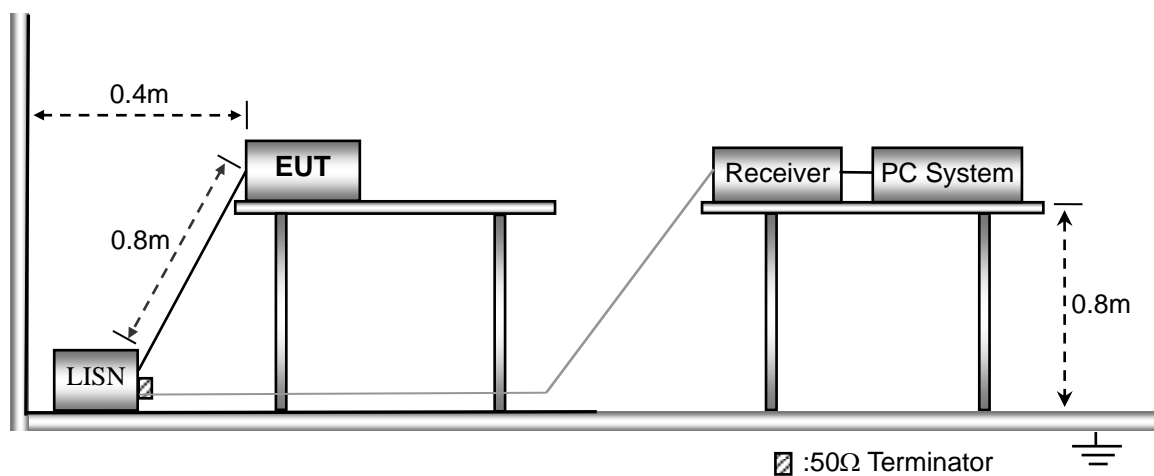


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

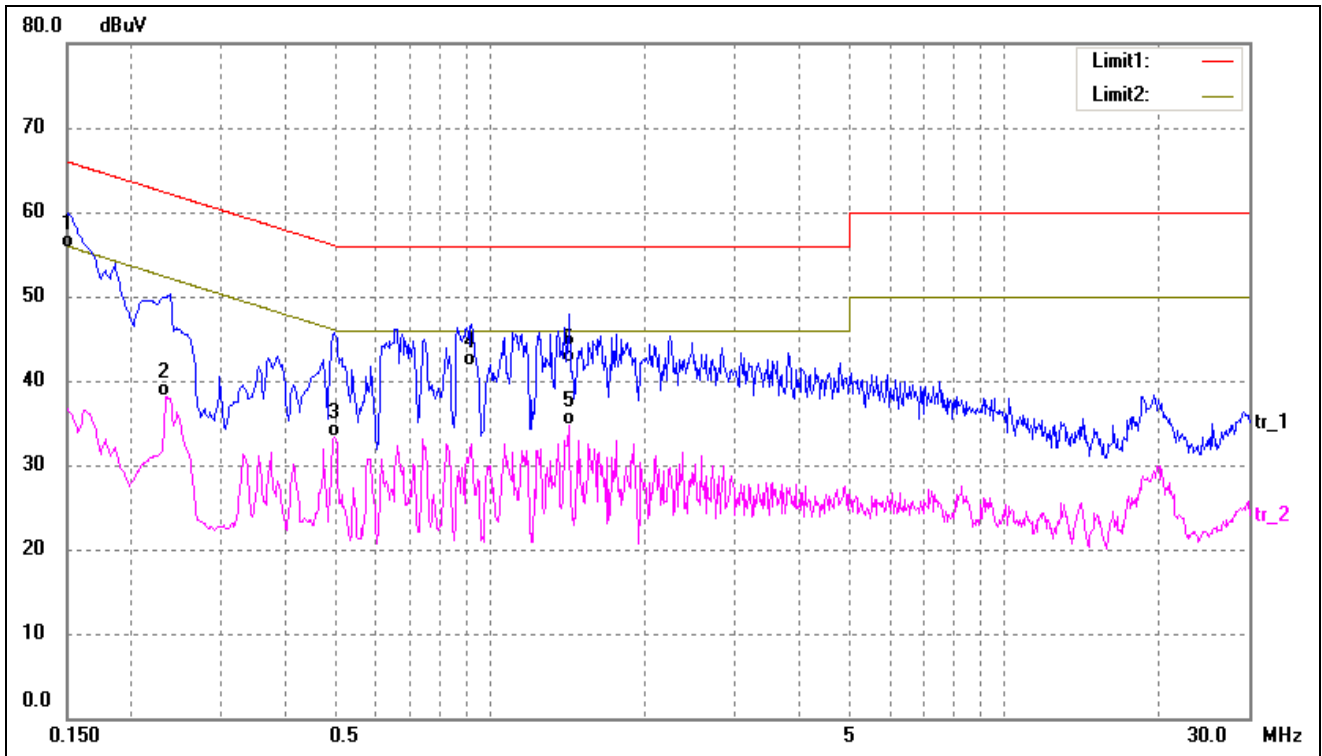

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1516	45.39	10.26	55.65	65.91	-10.26	QP
2	0.2340	27.76	10.26	38.02	52.31	-14.29	AVG
3	0.4980	23.06	10.22	33.28	46.03	-12.75	AVG
4	0.9220	31.55	10.22	41.77	56.00	-14.23	QP
5	1.4220	24.47	10.22	34.69	46.00	-11.31	AVG
6	1.4260	31.97	10.23	42.20	56.00	-13.80	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

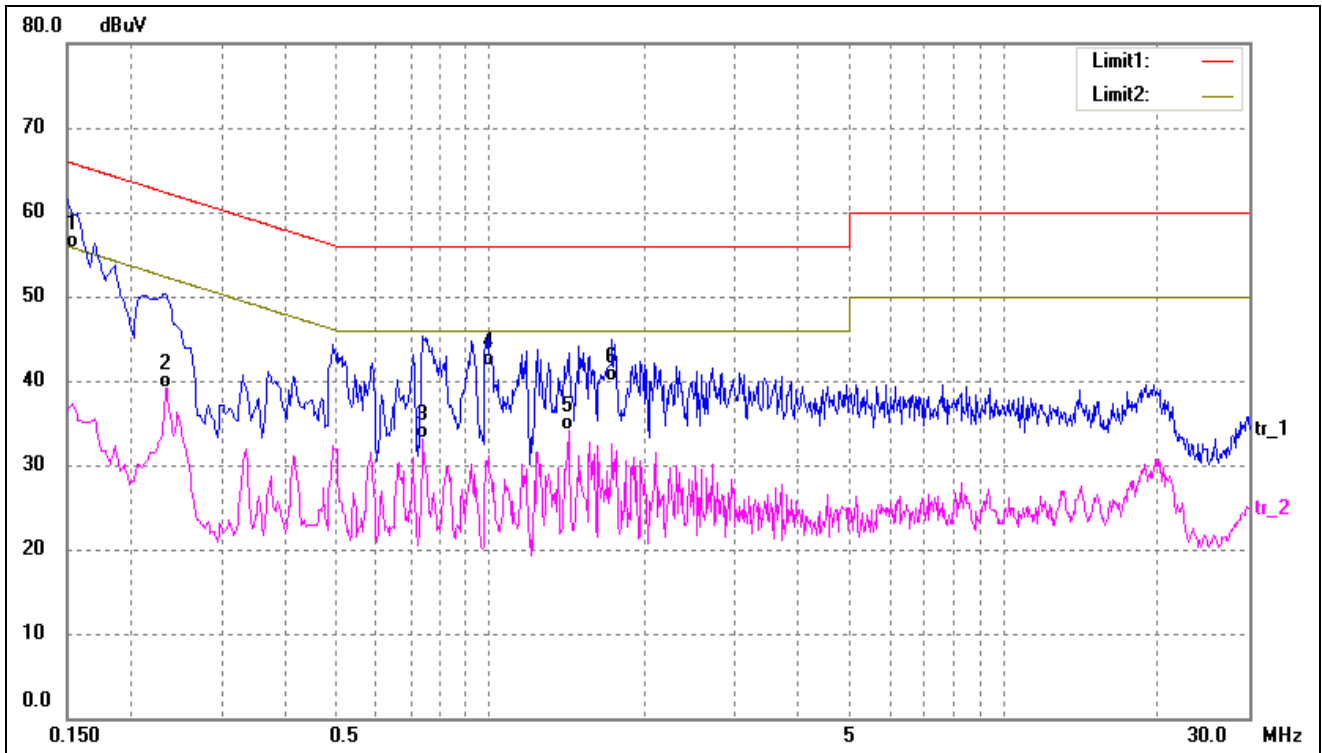

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1524	45.43	10.26	55.69	65.87	-10.18	QP
2	0.2340	28.86	10.26	39.12	52.31	-13.19	AVG
3	0.7420	22.99	10.18	33.17	46.00	-12.83	AVG
4	0.9900	31.49	10.20	41.69	56.00	-14.31	QP
5	1.4220	23.88	10.22	34.10	46.00	-11.90	AVG
6	1.7300	29.68	10.26	39.94	56.00	-16.06	QP

***** END OF REPORT *****