

# TEST REPORT

**Reference No.**..... : WTH24X03062202W002  
**FCC ID**..... : XOM-ETS-5000K  
**Applicant**..... : Shenzhen Qiyue Optronics Company Limited  
**Address**..... : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,  
Shangmeilin, Futian District, Shenzhen , China  
**Manufacturer**..... : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED BRANCH  
**Address**..... : A/B/C/D Building, Xitian Industrial Park, Dashuikeng Community,Guanlan  
Street, Longhua New District, Shenzhen City, China  
**Product Name**..... : 50" Class Smart 4K UHD LED TV  
**Model No.**..... : ETS-5000K  
**Standards**..... : FCC Part 15.247  
**Date of Receipt sample**..... : 2024-03-25  
**Date of Test**..... : 2024-03-25 to 2024-04-15  
**Date of Issue**..... : 2024-04-15  
**Test Report Form No.**..... : WTX\_Part 15\_247W  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Jason Su

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION .....4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    1.2 TEST STANDARDS .....5

    1.3 TEST METHODOLOGY .....5

    1.4 TEST FACILITY .....5

    1.5 EUT SETUP AND TEST MODE .....6

    1.6 MEASUREMENT UNCERTAINTY .....7

    1.7 TEST EQUIPMENT LIST AND DETAILS .....8

**2. SUMMARY OF TEST RESULTS ..... 11**

**3. ANTENNA REQUIREMENT ..... 12**

    3.1 STANDARD APPLICABLE .....12

    3.2 EVALUATION INFORMATION .....12

**4. POWER SPECTRAL DENSITY ..... 13**

    4.1 STANDARD APPLICABLE .....13

    4.2 TEST SETUP BLOCK DIAGRAM .....13

    4.3 TEST PROCEDURE .....13

    4.4 SUMMARY OF TEST RESULTS/PLOTS .....13

**5. DTS BANDWIDTH ..... 14**

    5.1 STANDARD APPLICABLE .....14

    5.2 TEST SETUP BLOCK DIAGRAM .....14

    5.3 TEST PROCEDURE .....14

    5.4 SUMMARY OF TEST RESULTS/PLOTS .....14

**6. RF OUTPUT POWER ..... 15**

    6.1 STANDARD APPLICABLE .....15

    6.2 TEST SETUP BLOCK DIAGRAM .....15

    6.3 TEST PROCEDURE .....15

    6.4 SUMMARY OF TEST RESULTS/PLOTS .....15

**7. FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 16**

    7.1 STANDARD APPLICABLE .....16

    7.2 TEST PROCEDURE .....16

    7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION .....18

    7.4 SUMMARY OF TEST RESULTS/PLOTS .....18

**8. OUT OF BAND EMISSIONS ..... 26**

    8.1 STANDARD APPLICABLE .....26

    8.2 TEST PROCEDURE .....26

    8.3 SUMMARY OF TEST RESULTS/PLOTS .....27

**9. CONDUCTED EMISSIONS ..... 36**

    9.1 TEST PROCEDURE .....36

    9.2 BASIC TEST SETUP BLOCK DIAGRAM .....36

    9.3 TEST RECEIVER SETUP .....36

    9.4 SUMMARY OF TEST RESULTS/PLOTS .....36

**APPENDIX SUMMARY ..... 39**

**APPENDIX A ..... 40**

**APPENDIX B ..... 49**

**APPENDIX C ..... 58**

**APPENDIX D ..... 67**

**APPENDIX PHOTOGRAPHS ..... 84**

**Report version**

Version No.	Date of issue	Description
Rev.00	2024-04-15	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory: YIBIN WANXIN Electronic Technology Co.,LTD  
 Address of factory: Building 5, building6, Yibin Wanxin Electronic Technology  
 Intelligent Terminal Industrial Park, Xinggang Road West 136,  
 Lingang Economic Development Zone Yibin city, Sichuan province

General Description of EUT	
Product Name:	50" Class Smart 4K UHD LED TV
Trade Name:	Emerson
Model No.:	ETS-5000K
Adding Model(s):	D50A315d-U-A-W, XXXXXXXX50XXXXXXX(Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ETS-5000K, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	Antenna 0: 17.18dBm (Conducted) Antenna 1: 17.24dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	2dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02**: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**662911 D01 Multiple Transmitter Output v02r01**: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note:  
The 2.4GHz WIFI has two antennas and support Multiple Outputs for 802.11n mode for this report; Antenna 0 Gain is 2dBi; Antenna 1 Gain is 2dBi; For this function is belong to Correlated Categorization equipment According to KDB 662911, for same directional gain.  
Directional gain =  $G_{ANT} + 10 \log(N_{ANT})$  dBi =  $2 + 10 \log(2)$  dBi = 5.01dBi

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI	1.5	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	Legion R7000P ARH7	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-26GHz ±3.92dB

**1.7 Test Equipment List and Details**

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23



WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has two integral antennas, fulfill the requirement of this section.

## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram



### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A

## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram



### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

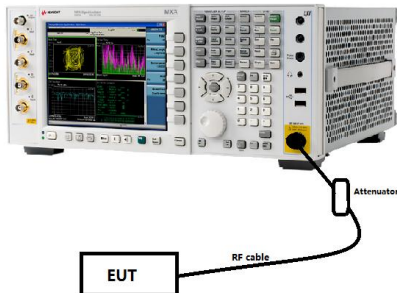

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

The test setup for emission measurement below 30MHz.

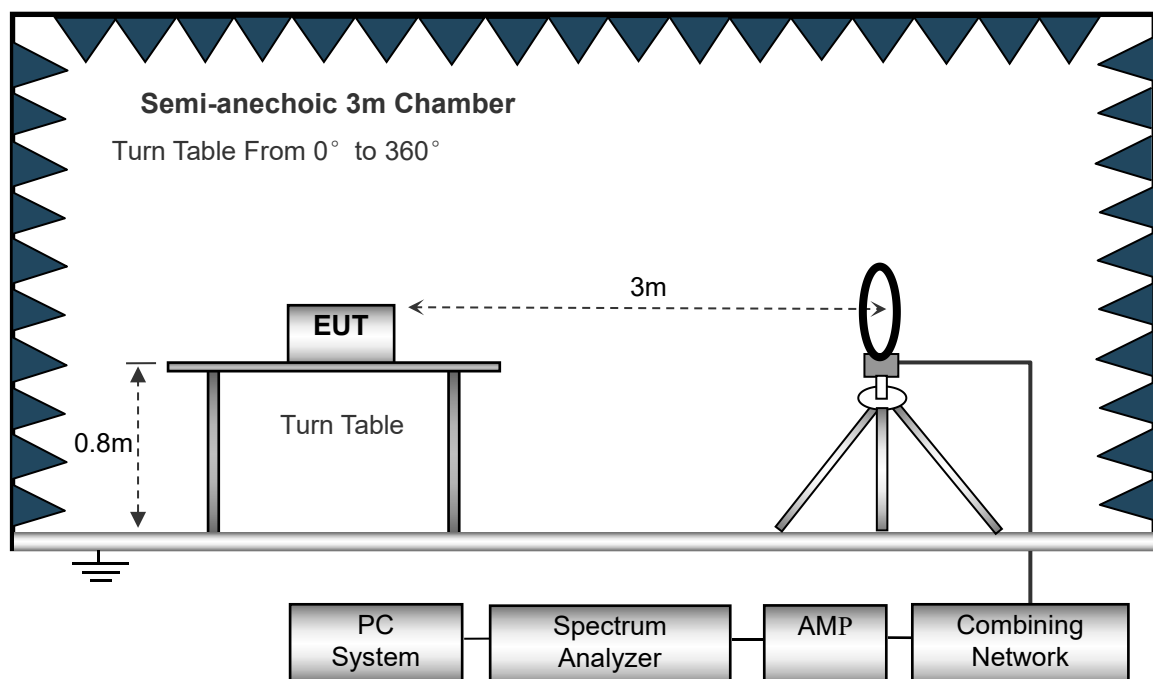




The test setup for emission measurement from 30MHz to 1GHz.

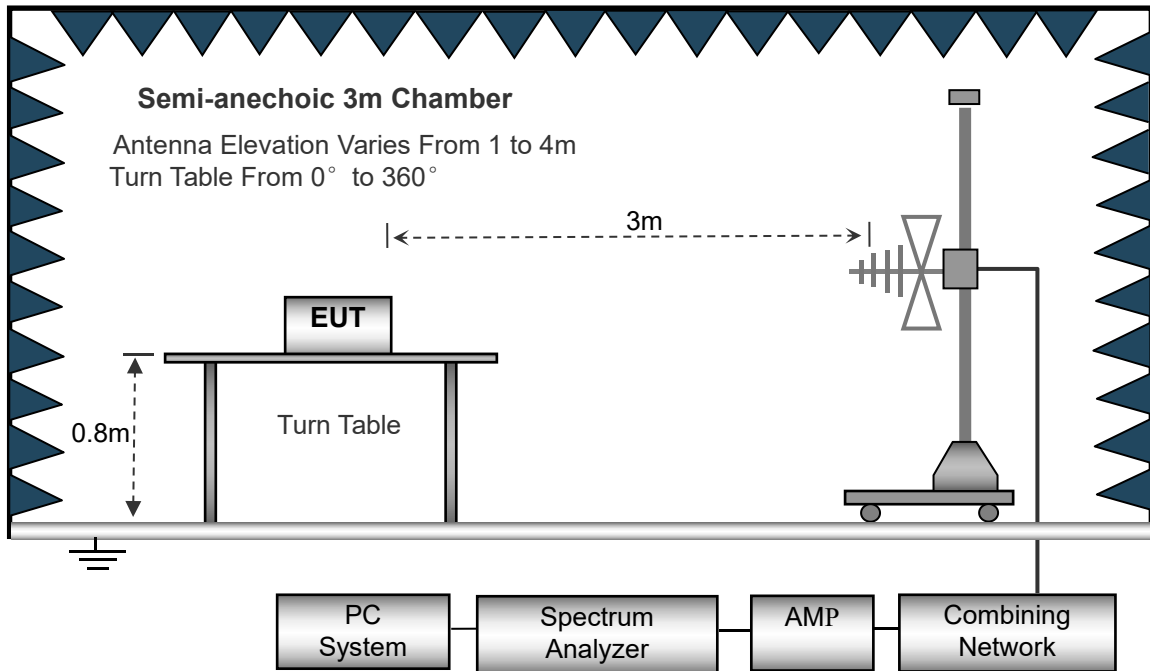

The test setup for emission measurement above 1GHz.

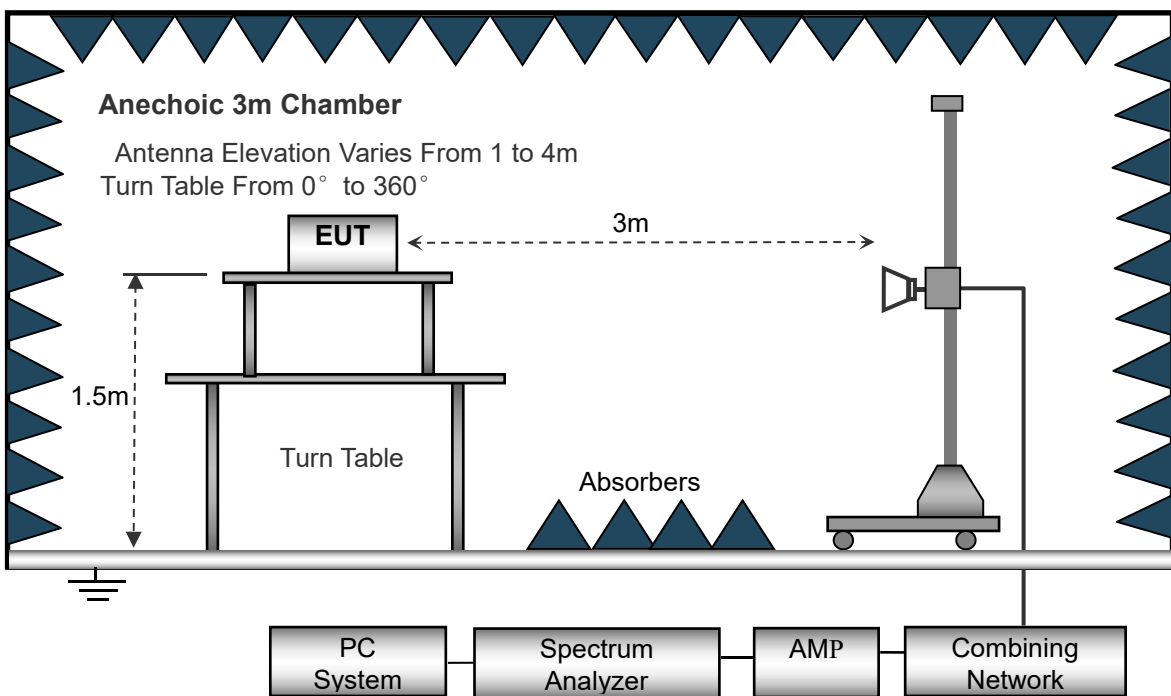

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b\_11Mbps) is recorded in this report.*


- Spurious Emissions Below 1GHz
- Antenna 0(Worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.0558	28.96	-8.38	20.58	40.00	-19.42	-	-	peak
2	101.1797	39.38	-12.39	26.99	43.50	-16.51	-	-	peak
3	197.2514	41.04	-11.83	29.21	43.50	-14.29	-	-	peak
4	282.2702	48.58	-8.86	39.72	46.00	-6.28	-	-	peak
5	373.8862	38.55	-6.50	32.05	46.00	-13.95	-	-	peak
6	723.7930	36.77	-0.65	36.12	46.00	-9.88	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

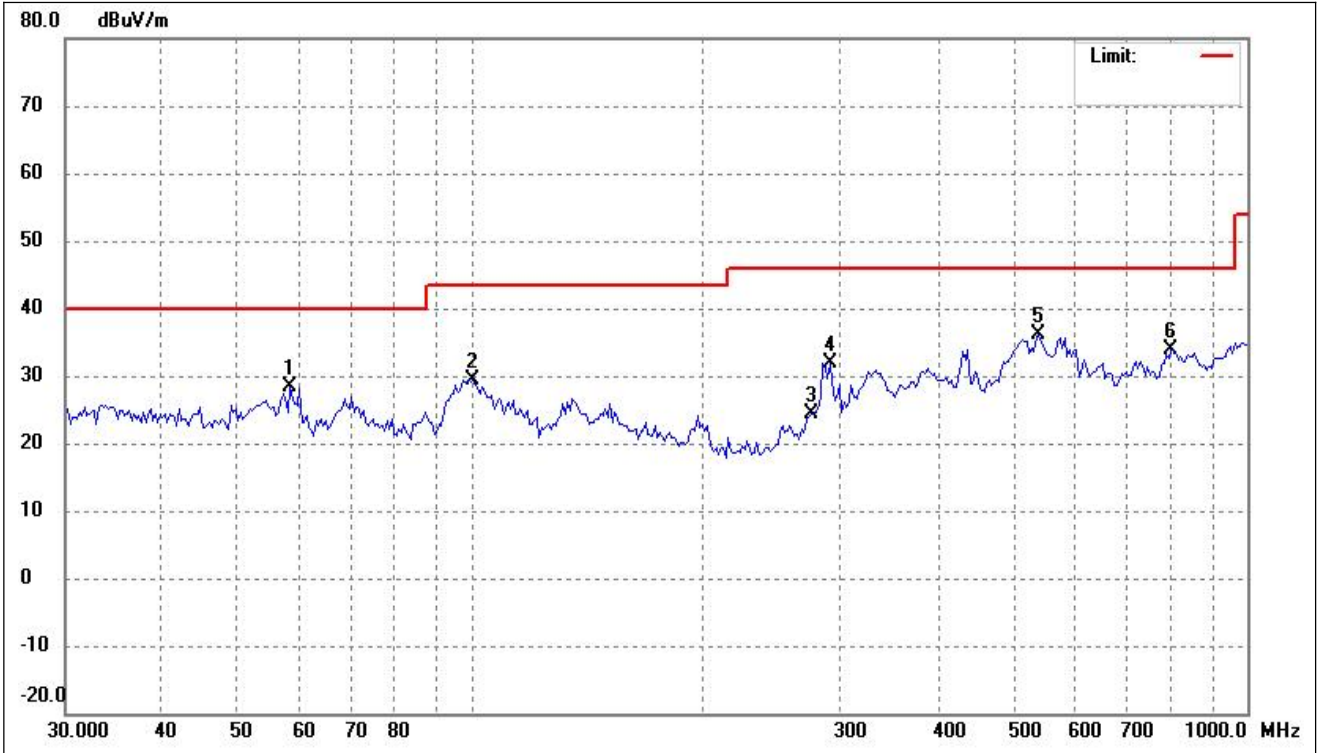


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	58.4855	37.14	-8.84	28.30	40.00	-11.70	-	-	peak
2	100.4712	41.89	-12.45	29.44	43.50	-14.06	-	-	peak
3	274.4464	33.63	-9.13	24.50	46.00	-21.50	-	-	peak
4	290.3170	40.38	-8.58	31.80	46.00	-14.20	-	-	peak
5	538.8107	39.25	-3.15	36.10	46.00	-9.90	-	-	peak
6	798.6205	33.70	0.29	33.99	46.00	-12.01	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

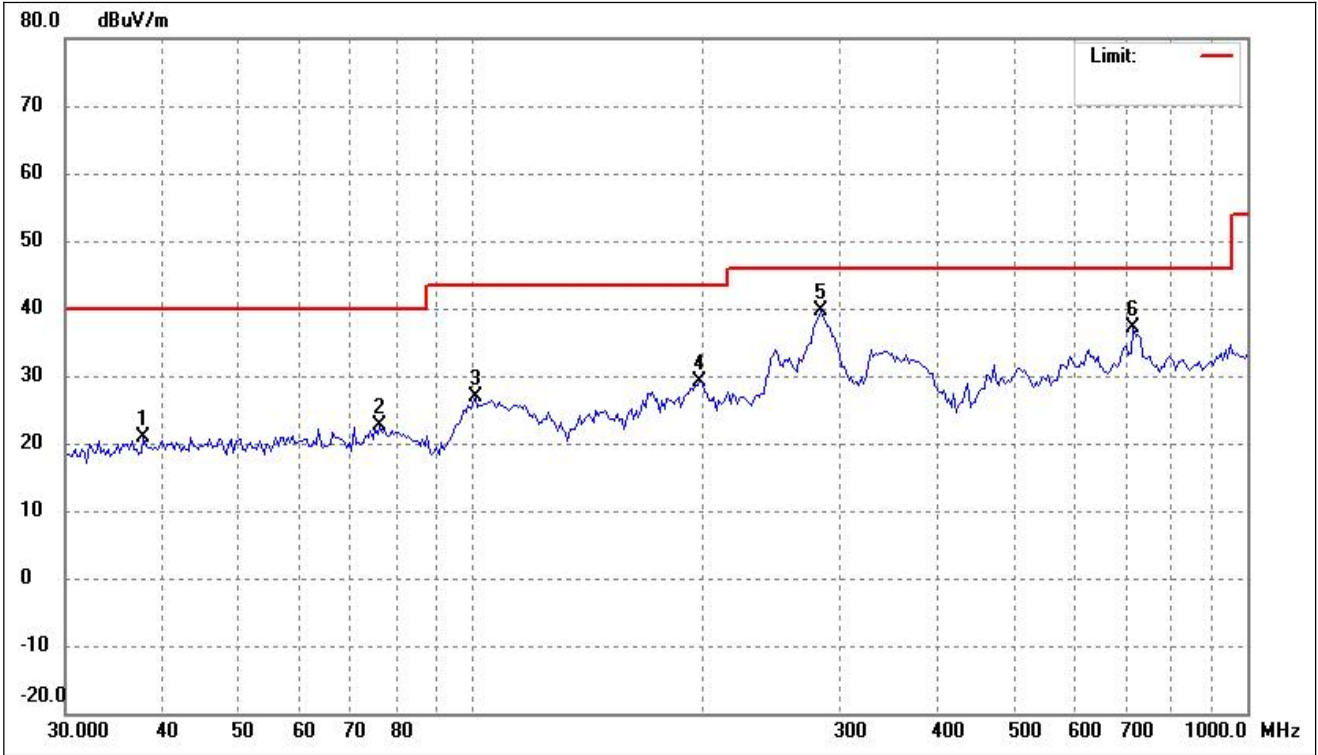


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.8297	29.80	-8.94	20.86	40.00	-19.14	-	-	peak
2	76.3869	34.70	-12.16	22.54	40.00	-17.46	-	-	peak
3	101.1797	39.38	-12.39	26.99	43.50	-16.51	-	-	peak
4	197.2514	41.04	-11.83	29.21	43.50	-14.29	-	-	peak
5	282.2702	48.58	-8.86	39.72	46.00	-6.28	-	-	peak
6	713.6917	38.05	-0.84	37.21	46.00	-8.79	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

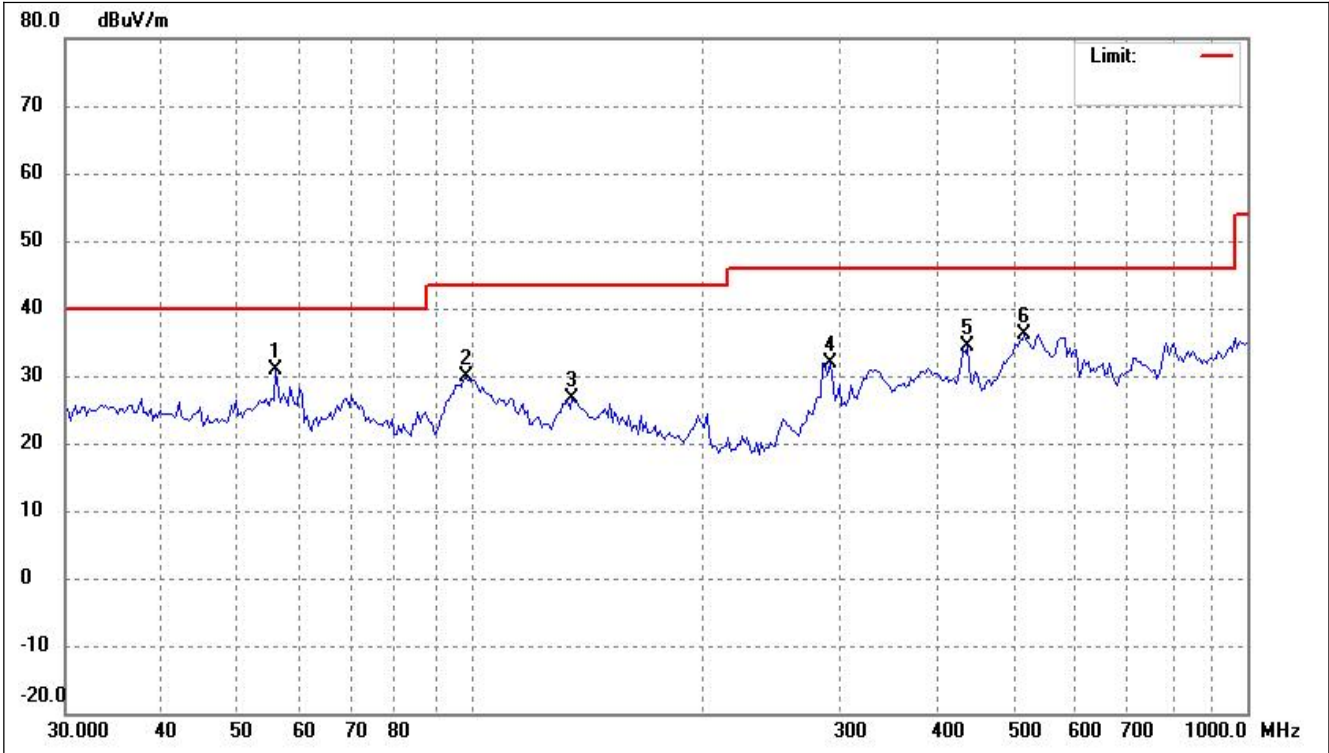


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	56.0708	39.56	-8.70	30.86	40.00	-9.14	-	-	peak
2	98.3752	42.49	-12.59	29.90	43.50	-13.60	-	-	peak
3	134.9645	36.18	-9.64	26.54	43.50	-16.96	-	-	peak
4	290.3170	40.38	-8.58	31.80	46.00	-14.20	-	-	peak
5	436.3956	39.36	-4.96	34.40	46.00	-11.60	-	-	peak
6	516.5651	39.78	-3.65	36.13	46.00	-9.87	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

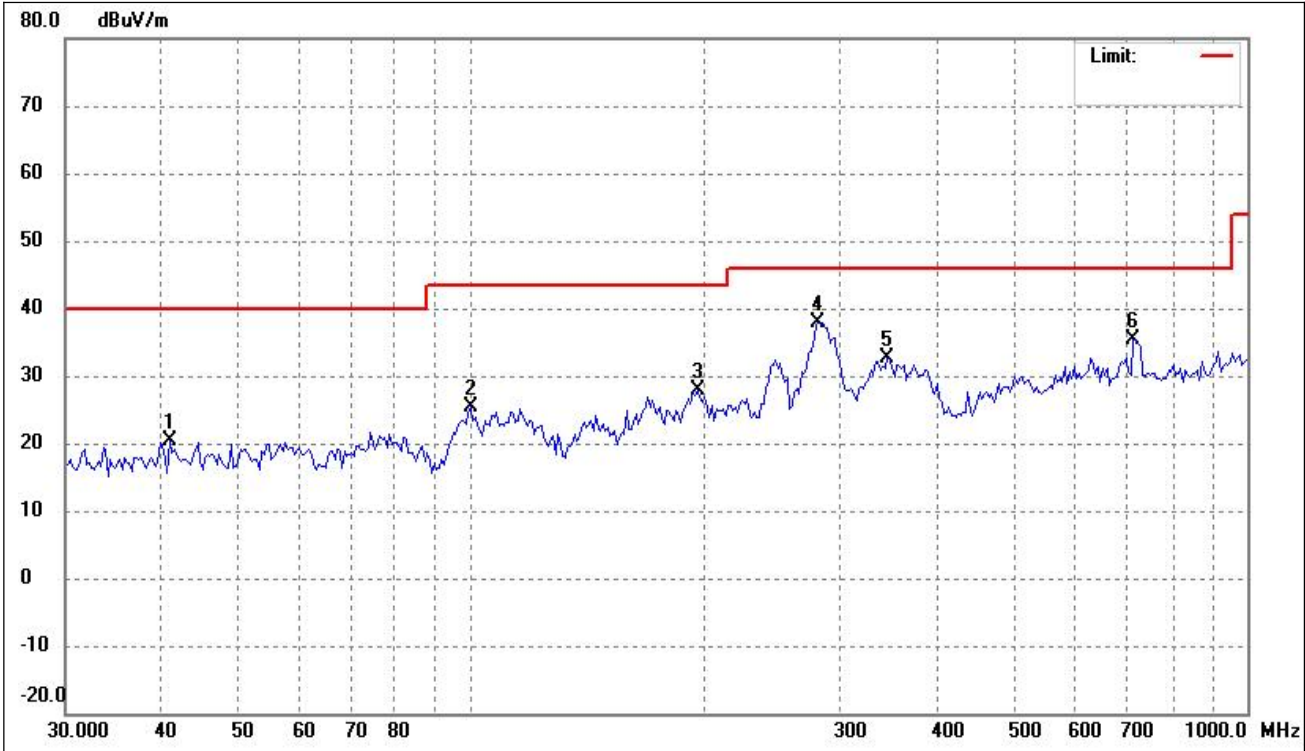

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.8699	28.73	-8.47	20.26	40.00	-19.74	-	-	peak
2	99.7676	37.99	-12.51	25.48	43.50	-18.02	-	-	peak
3	195.8701	39.71	-11.75	27.96	43.50	-15.54	-	-	peak
4	280.2936	46.75	-8.93	37.82	46.00	-8.18	-	-	peak
5	343.6506	39.87	-7.22	32.65	46.00	-13.35	-	-	peak
6	713.6917	36.34	-0.84	35.50	46.00	-10.50	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

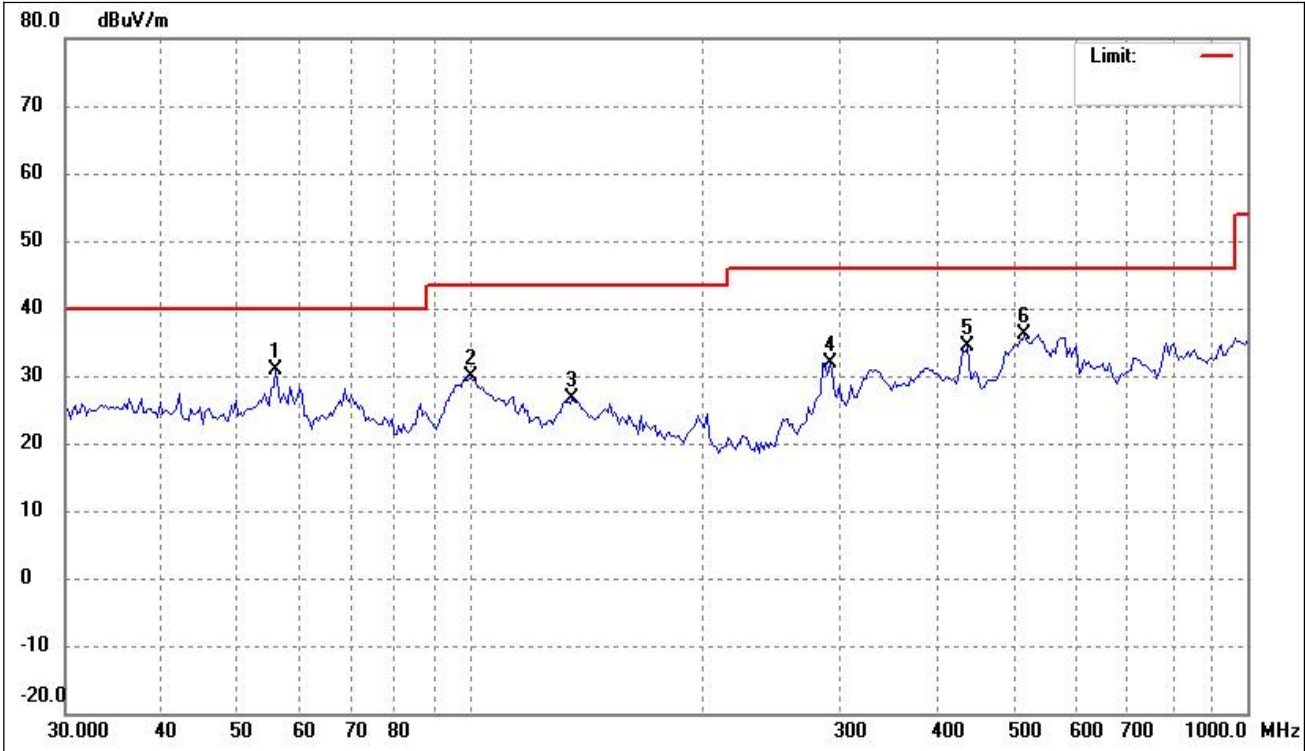

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	56.0708	39.56	-8.70	30.86	40.00	-9.14	-	-	peak
2	99.7676	42.46	-12.51	29.95	43.50	-13.55	-	-	peak
3	134.9645	36.18	-9.64	26.54	43.50	-16.96	-	-	peak
4	290.3170	40.38	-8.58	31.80	46.00	-14.20	-	-	peak
5	436.3956	39.36	-4.96	34.40	46.00	-11.60	-	-	peak
6	516.5651	39.78	-3.65	36.13	46.00	-9.87	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



- Spurious Emissions Above 1GHz
- Test Mode: 802.11b\_11Mbps(Worst case)
- Antenna 0(Worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	54.29	-3.86	50.43	74	-23.57	H	PK
4824.000	41.19	-3.86	37.33	54	-16.67	H	AV
7236.000	52.30	1.10	53.40	74	-20.60	H	PK
7236.000	38.20	1.10	39.30	54	-14.70	H	AV
4824.000	51.65	-3.86	47.79	74	-26.21	V	PK
4824.000	41.97	-3.86	38.11	54	-15.89	V	AV
7236.000	56.07	1.10	57.17	74	-16.83	V	PK
7236.000	44.48	1.10	45.58	54	-8.42	V	AV
Middle Channel-2437MHz							
4874.000	53.50	-3.86	49.64	74	-24.36	H	PK
4874.000	41.06	-3.86	37.20	54	-16.80	H	AV
7311.000	51.53	1.10	52.63	74	-21.37	H	PK
7311.000	38.72	1.10	39.82	54	-14.18	H	AV
4874.000	52.14	-3.86	48.28	74	-25.72	V	PK
4874.000	39.89	-3.86	36.03	54	-17.97	V	AV
7311.000	54.01	1.10	55.11	74	-18.89	V	PK
7311.000	45.23	1.10	46.33	54	-7.67	V	AV
High Channel-2462MHz							
4924.000	55.06	-3.63	51.43	74	-22.57	H	PK
4924.000	41.59	-3.63	37.96	54	-16.04	H	AV
7386.000	51.75	1.62	53.37	74	-20.63	H	PK
7386.000	39.48	1.62	41.10	54	-12.90	H	AV
4924.000	51.19	-3.63	47.56	74	-26.44	V	PK
4924.000	37.94	-3.63	34.31	54	-19.69	V	AV
7386.000	52.00	1.62	53.62	74	-20.38	V	PK
7386.000	45.27	1.62	46.89	54	-7.11	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots

- Radiated test
- Antenna 0(worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.90	0.98	44.88	54.00	-9.12	Average Detector
		56.83	0.98	57.81	74.00	-16.19	Peak Detector
2	2386.713	49.58	1.13	50.71	54.00	-3.29	Average Detector
3	2390.000	46.28	1.13	47.41	54.00	-6.59	Average Detector
		58.98	1.13	60.11	74.00	-13.89	Peak Detector
4	2398.016	63.99	1.15	65.14	Delta=36.82dBc		Average Detector
5	2400.000	56.86	1.15	58.01		Average Detector	
6	2412.926	100.78	1.18	101.96		Average Detector	

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.725	98.40	1.27	99.67	/	/	Average Detector
	2463.327	103.47	1.27	104.74	/	/	Peak Detector
2	2483.500	45.03	1.32	46.35	54.00	-7.65	Average Detector
	2483.500	56.46	1.32	57.78	74.00	-16.22	Peak Detector
3	2500.000	43.31	1.35	44.66	54.00	-9.34	Average Detector
	2500.000	55.42	1.35	56.77	74.00	-17.23	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

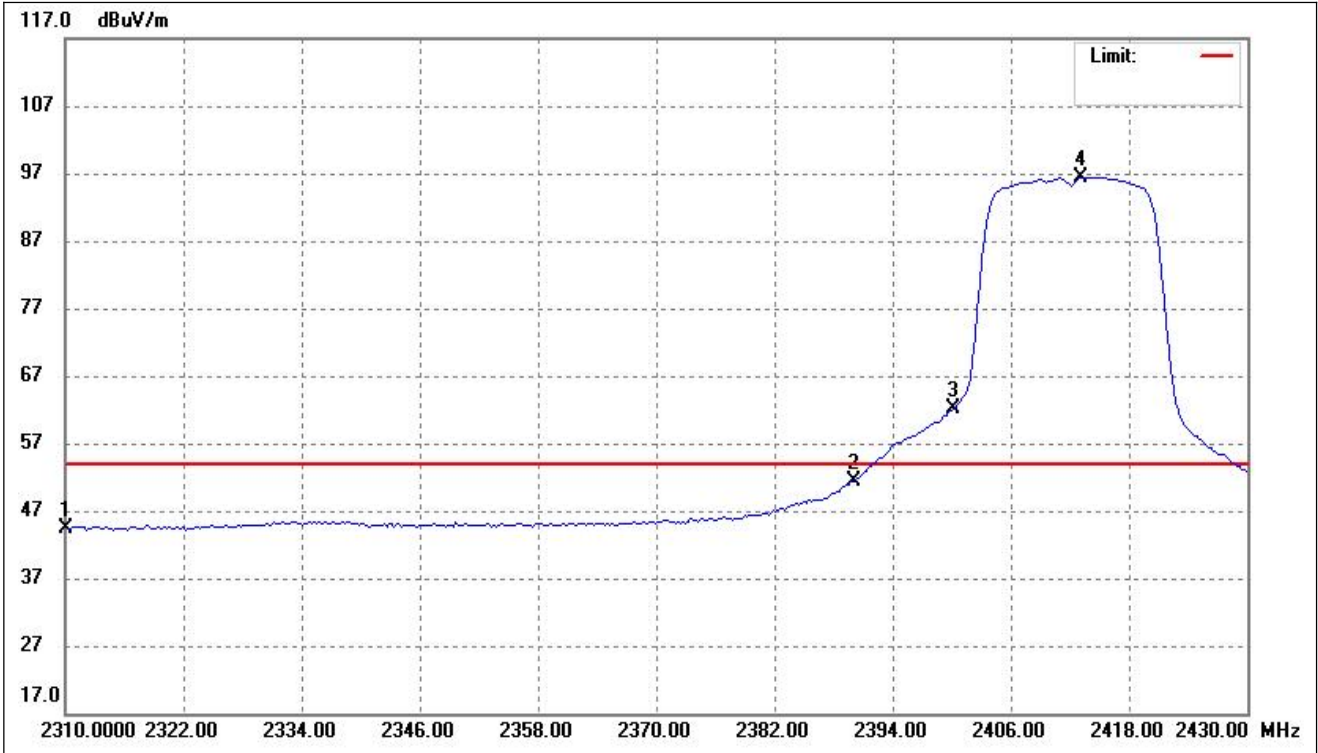


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.33	0.98	44.31	54.00	-9.69	Average Detector
		56.46	0.98	57.44	74.00	-16.56	Peak Detector
2	2390.000	50.34	1.13	51.47	54.00	-2.53	Average Detector
		67.87	1.13	69.00	74.00	-5.00	Peak Detector
3	2400.000	60.96	1.15	62.11	Delta=34.33dBc		Average Detector
4	2413.166	95.26	1.18	96.44		Average Detector	

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

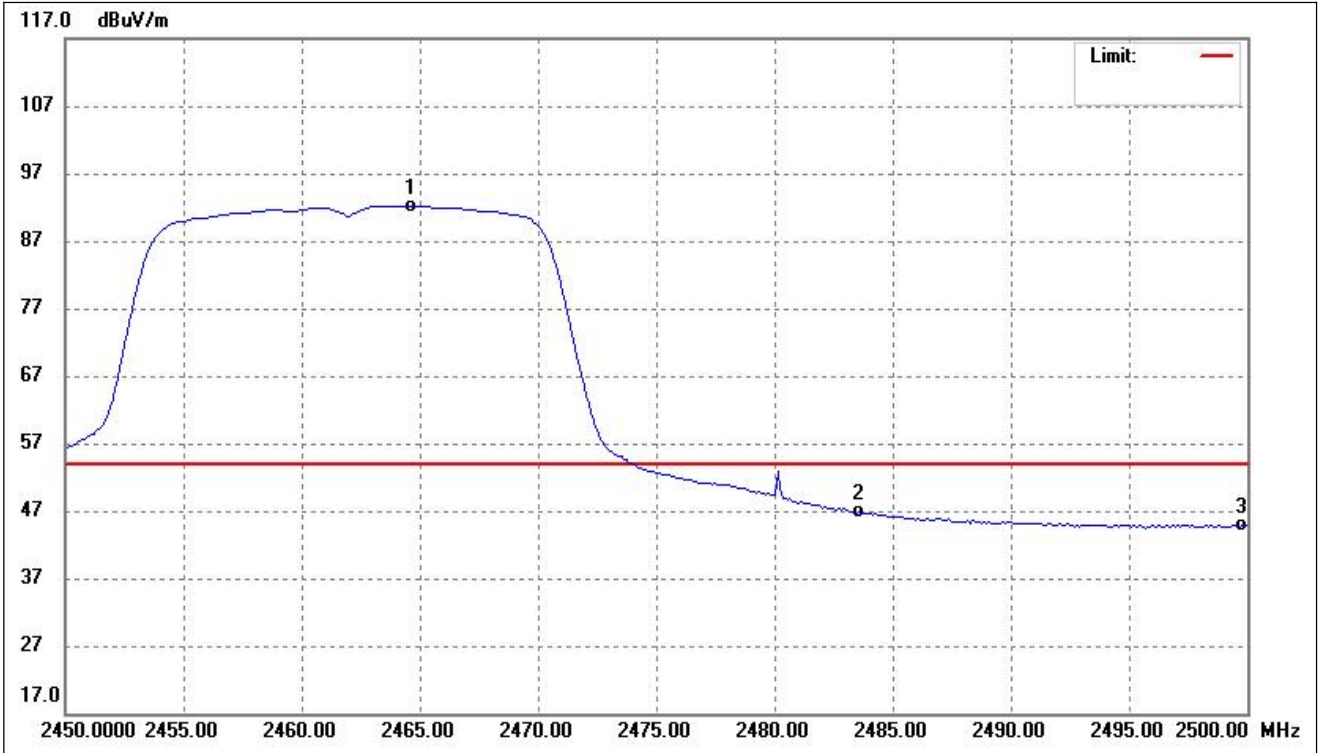

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.629	90.87	1.27	92.14	/	/	Average Detector
	2463.527	101.22	1.27	102.49	/	/	Peak Detector
2	2483.500	45.59	1.32	46.91	54.00	-7.09	Average Detector
	2483.500	59.04	1.32	60.36	74.00	-13.64	Peak Detector
3	2500.000	43.43	1.35	44.78	54.00	-9.22	Average Detector
	2500.000	55.67	1.35	57.02	74.00	-16.98	Peak Detector


802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

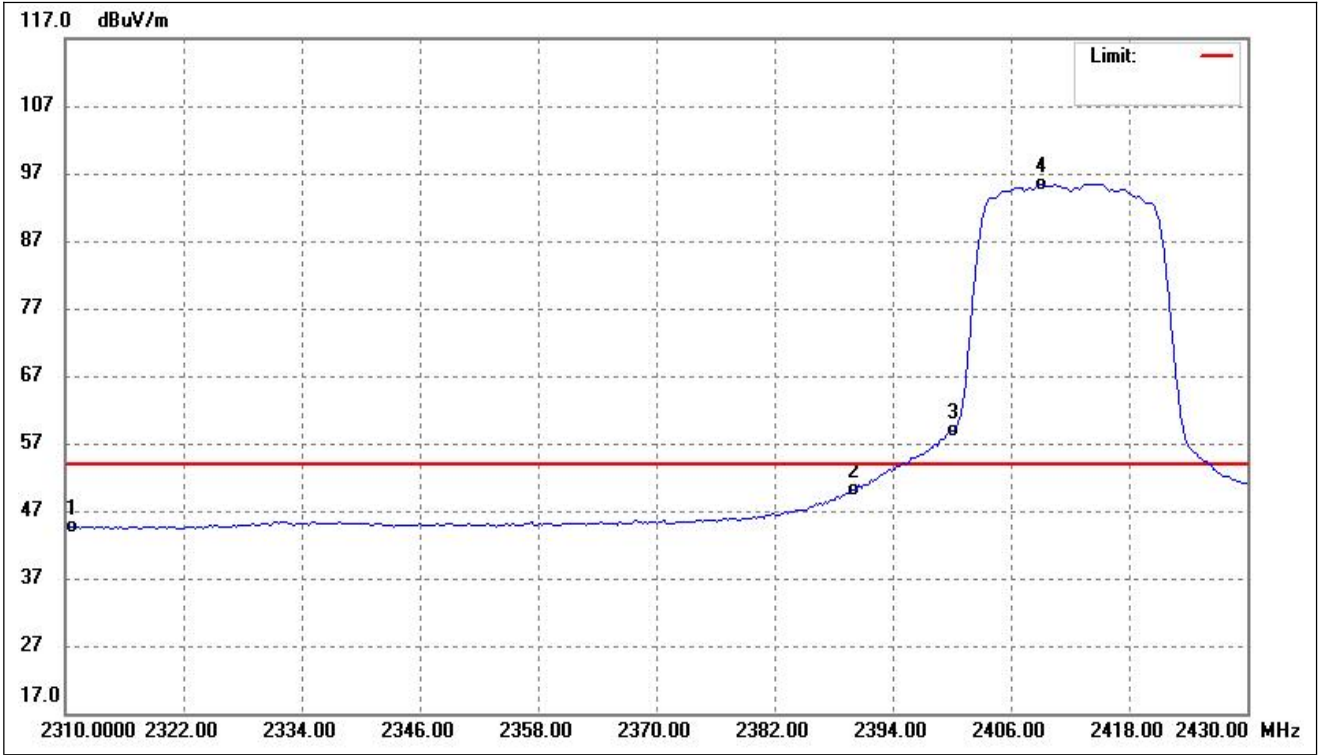

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.58	0.98	44.56	54.00	-9.44	Average Detector
		55.17	0.98	56.15			74.00
2	2390.000	48.94	1.13	50.07	54.00	-3.93	Average Detector
		67.45	1.13	68.58			74.00
3	2400.000	57.77	1.15	58.92	Delta=36.56dBc		Average Detector
4	2409.078	94.30	1.18	95.48			Average Detector




802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

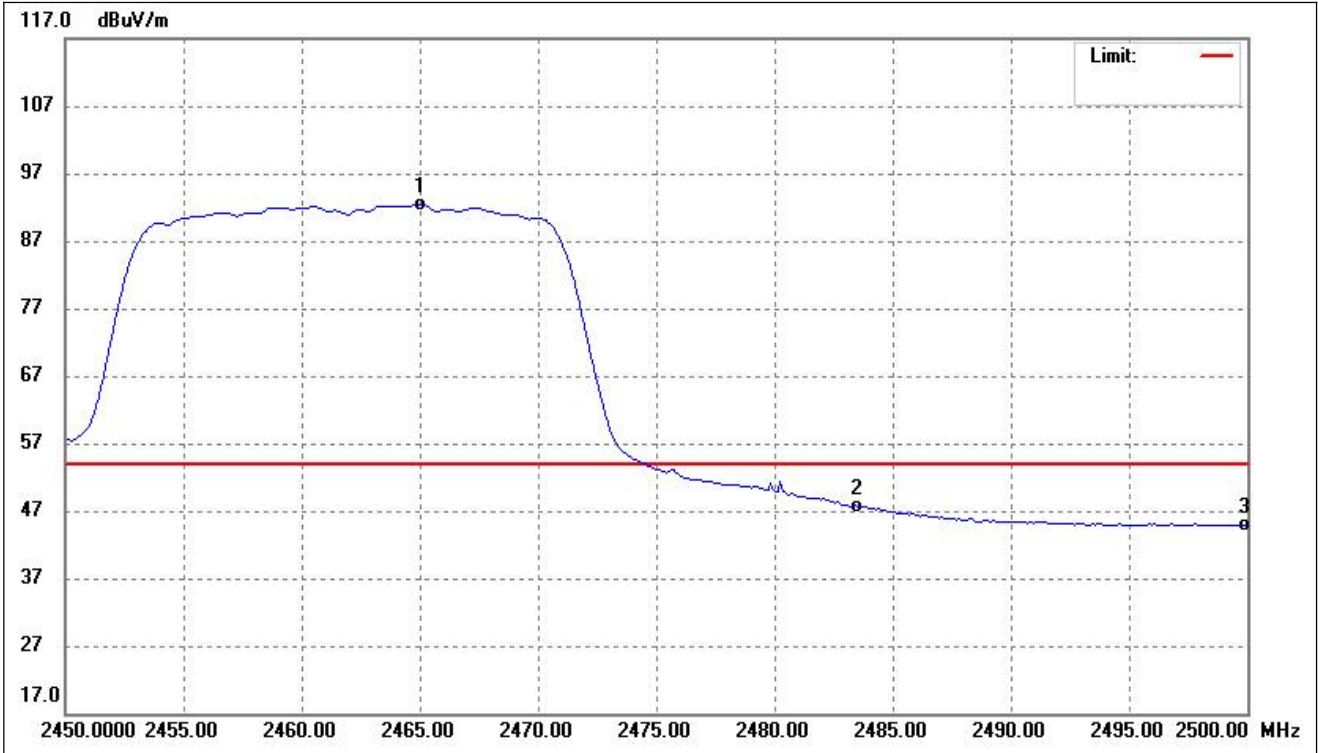


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.030	91.06	1.27	92.33	/	/	Average Detector
	2463.627	101.29	1.27	102.56	/	/	Peak Detector
2	2483.500	46.20	1.32	47.52	54.00	-6.48	Average Detector
	2483.500	59.05	1.32	60.37	74.00	-13.63	Peak Detector
3	2500.000	43.54	1.35	44.89	54.00	-9.11	Average Detector
	2500.000	55.56	1.35	56.91	74.00	-17.09	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

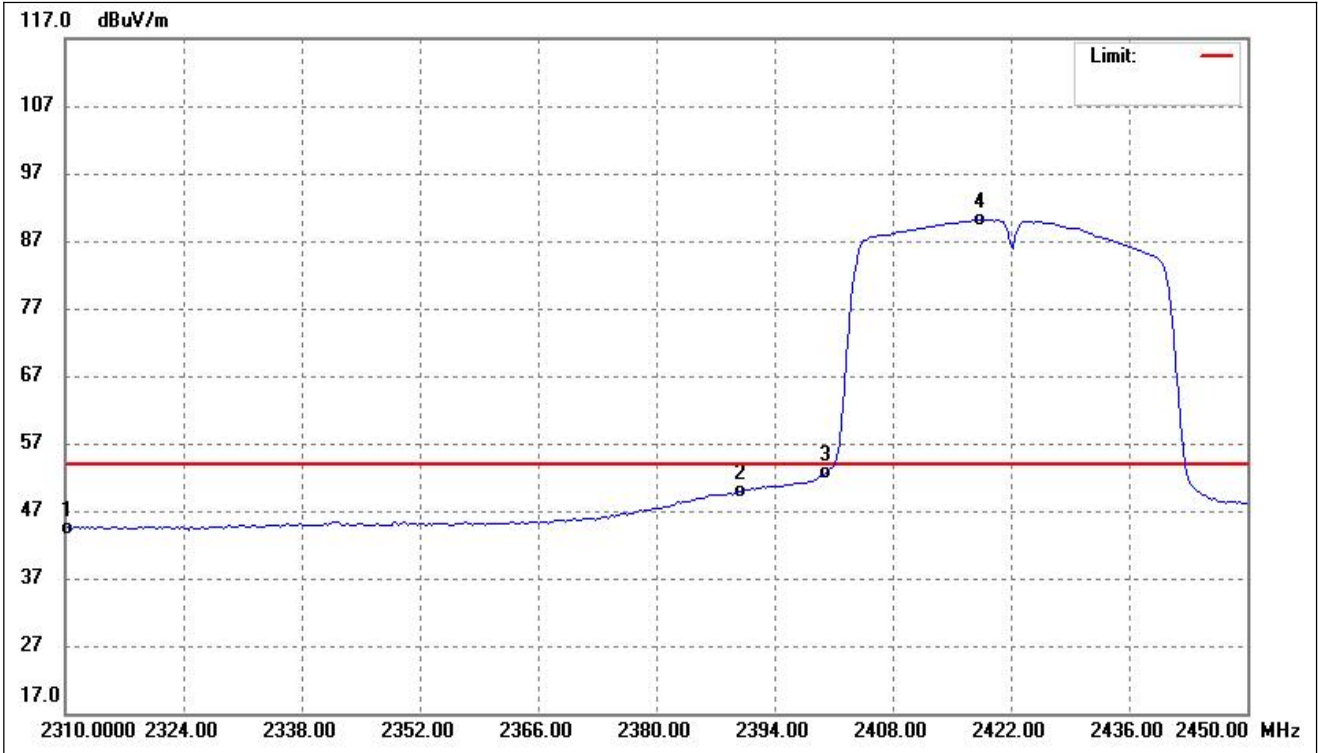

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.38	0.98	44.36	54.00	-9.64	Average Detector
		55.73	0.98	56.71	74.00	-17.29	Peak Detector
2	2390.000	48.78	1.13	49.91	54.00	-4.09	Average Detector
		65.96	1.13	67.09	74.00	-6.91	Peak Detector
3	2400.000	51.52	1.15	52.67	54.00	-1.33	Average Detector
		70.67	1.15	71.82	74.00	-2.18	Peak Detector
4	2418.297	88.97	1.19	90.16	/	/	Average Detector
		99.56	1.19	100.75	/	/	Peak Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

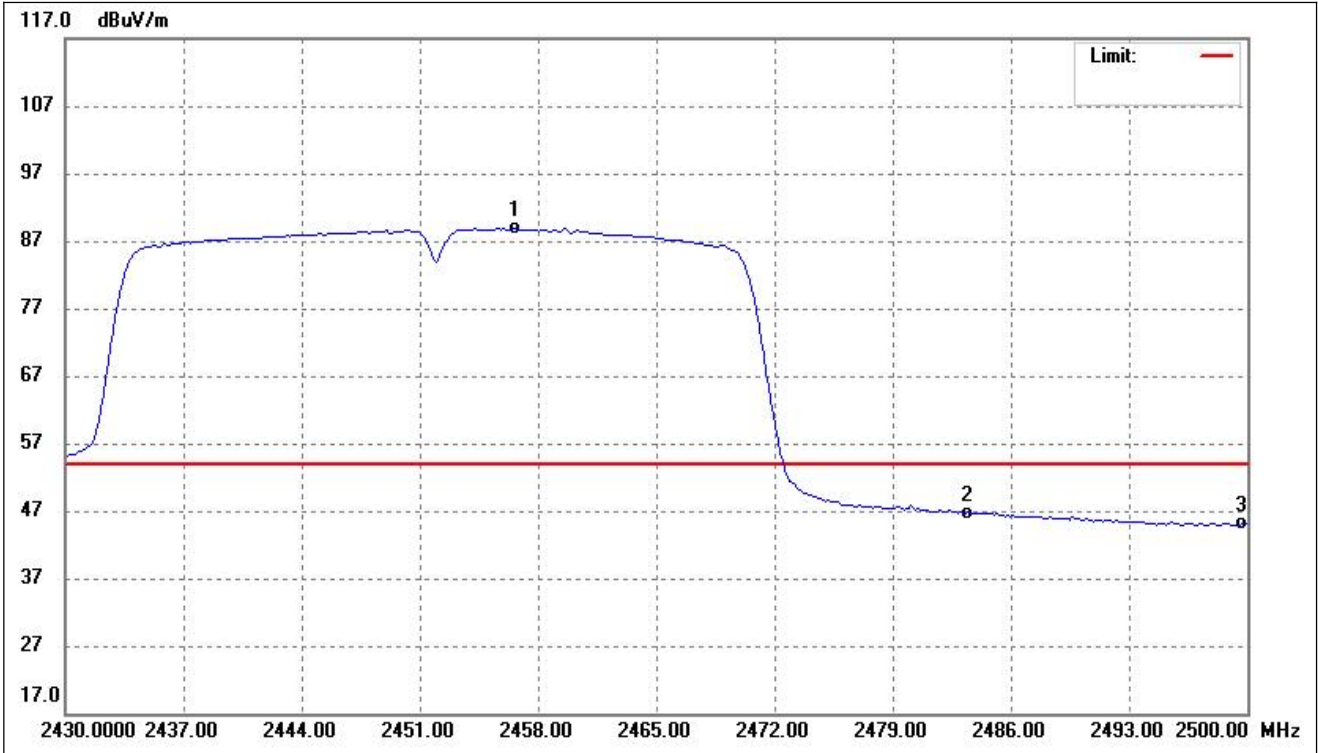

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.653	87.62	1.26	88.88	/	/	Average Detector
	2438.697	95.91	1.23	97.14	/	/	Peak Detector
2	2483.500	45.37	1.32	46.69	54.00	-7.31	Average Detector
	2483.500	58.60	1.32	59.92	74.00	-14.08	Peak Detector
3	2500.000	43.72	1.35	45.07	54.00	-8.93	Average Detector
	2500.000	55.90	1.35	57.25	74.00	-16.75	Peak Detector

➤ Conducted test

**Please refer to Appendix D**


## 9. Conducted Emissions

### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

### 9.2 Basic Test Setup Block Diagram

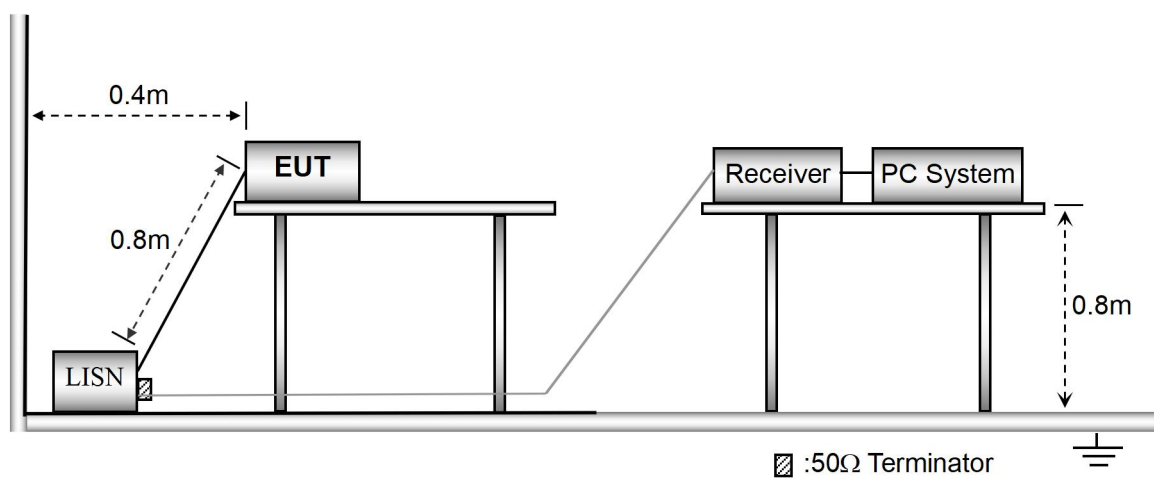


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


### 9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

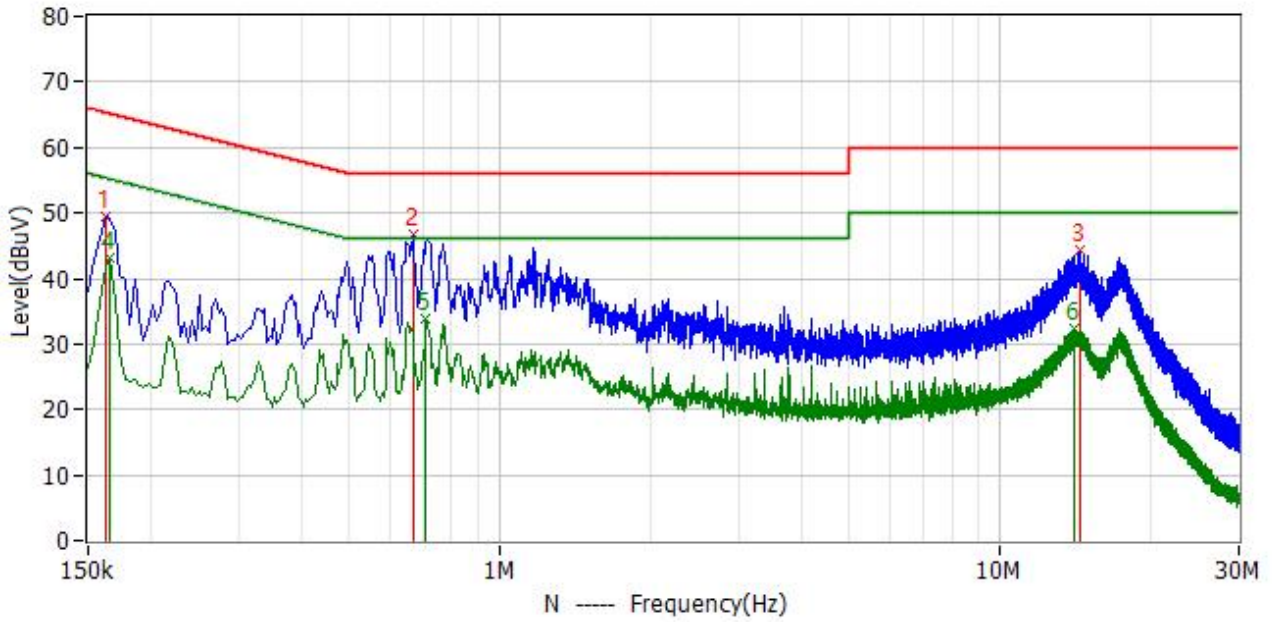

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1*	162.000kHz	39.7	9.7	49.4	65.4	-16.0	PK
2*	670.000kHz	37.1	9.7	46.8	56.0	-9.2	PK
3*	14.422MHz	34.5	9.7	44.2	60.0	-15.8	PK
4*	166.000kHz	33.5	9.7	43.2	55.2	-12.0	AV
5*	710.000kHz	24.1	9.7	33.8	46.0	-12.2	AV
6*	14.082MHz	22.6	9.7	32.3	50.0	-17.7	AV

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

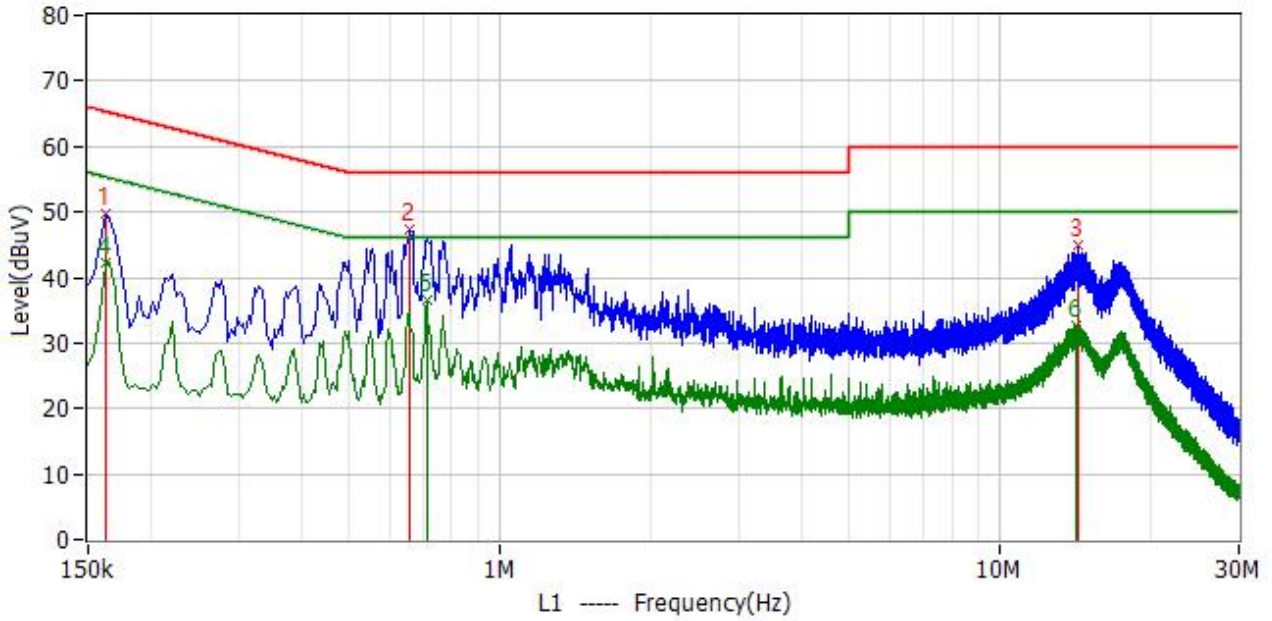

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1*	162.000kHz	39.8	9.9	49.7	65.4	-15.6	PK
2*	662.000kHz	37.6	9.7	47.3	56.0	-8.7	PK
3*	14.286MHz	35.1	9.7	44.8	60.0	-15.2	PK
4*	162.000kHz	32.3	9.9	42.2	55.4	-13.2	AV
5*	714.000kHz	26.8	9.8	36.6	46.0	-9.4	AV
6*	14.242MHz	23.1	9.7	32.8	50.0	-17.2	AV

## APPENDIX SUMMARY

---

Project No.	WTH24X03062202W	Test Engineer	Timi Huang
Start date	2024/4/8	Finish date	2024/4/12
Temperature	24°C	Humidity	52%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

**APPENDIX A**


Power Spectral Density					
Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 1		
802.11b_1Mbps	2412	-20.19	-19.36	/	8
	2437	-20.10	-19.28	/	8
	2462	-19.82	-19.04	/	8
802.11g_6Mbps	2412	-21.43	-21.78	/	8
	2437	-22.77	-21.79	/	8
	2462	-22.99	-21.68	/	8
802.11n-HT20_MCS0	2412	-21.97	-21.90	-18.92	8
	2437	-23.19	-22.16	-19.63	8
	2462	-22.80	-22.51	-19.64	8
802.11n-HT40_MCS0	2422	-25.35	-25.40	-22.36	8
	2437	-25.39	-25.48	-22.42	8
	2452	-25.51	-25.46	-22.47	8



Antenna 0

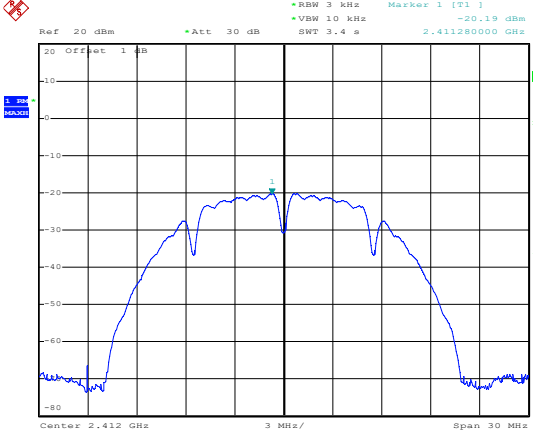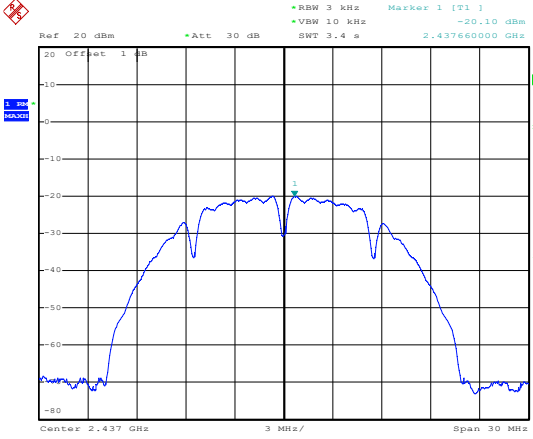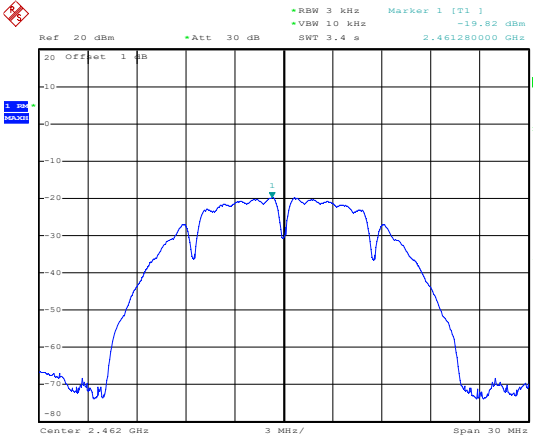
<p>802.11b-Low</p>	 <p>Date: 8.APR.2024 14:25:13</p>
<p>802.11b-Middle</p>	 <p>Date: 8.APR.2024 14:26:28</p>
<p>802.11b-High</p>	 <p>Date: 8.APR.2024 14:31:22</p>

802.11g-Low

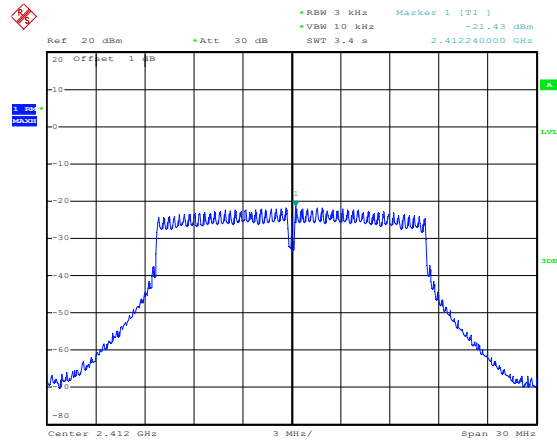


Date: 8.APR.2024 14:29:06

802.11g-Middle



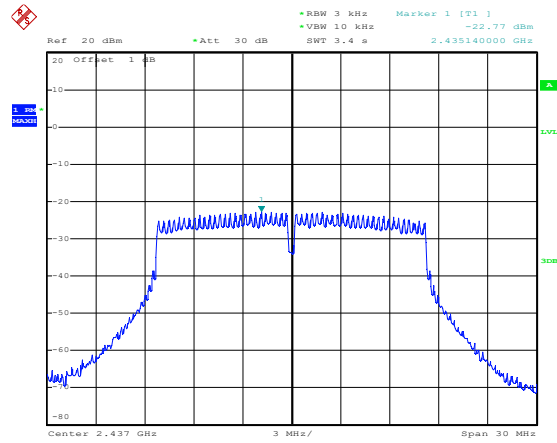





Date: 8.APR.2024 14:29:57

802.11g-High



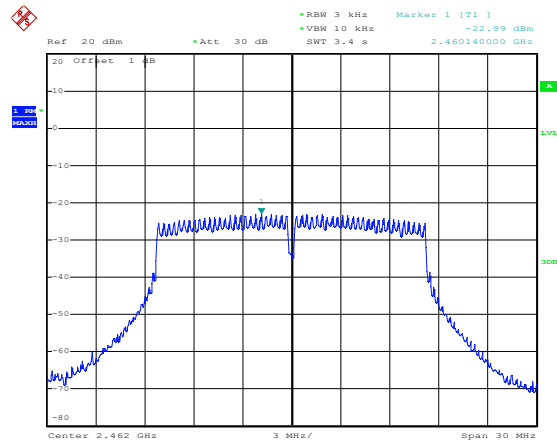





Date: 8.APR.2024 14:30:48

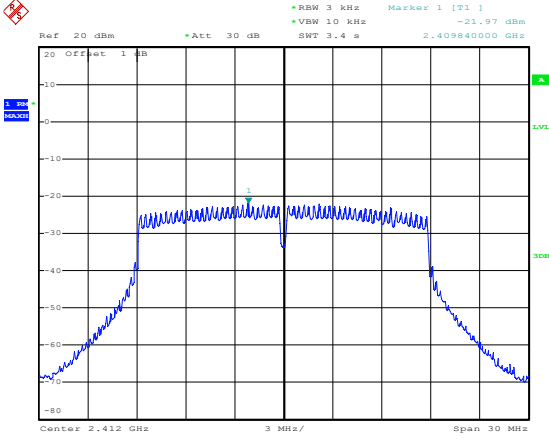
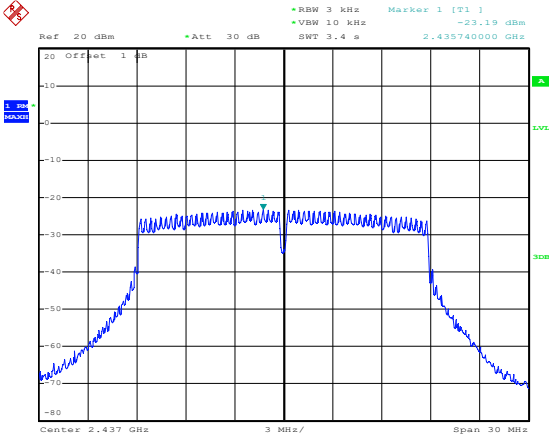
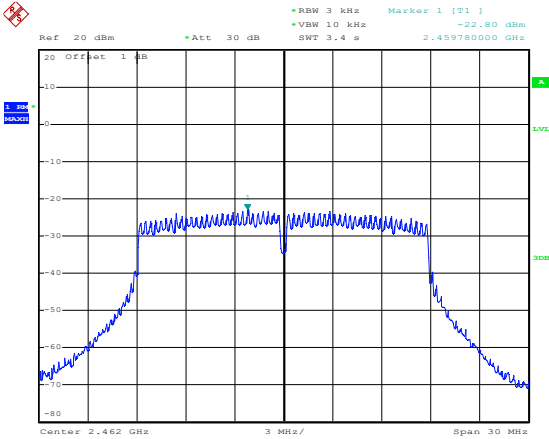
<p>802.11n-HT20-Low</p>	 <p>Date: 8.APR.2024 14:32:04</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 8.APR.2024 14:32:51</p>
<p>802.11n-HT20-High</p>	 <p>Date: 8.APR.2024 14:33:27</p>

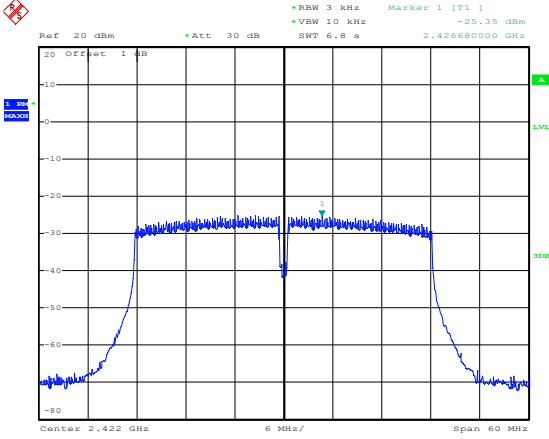
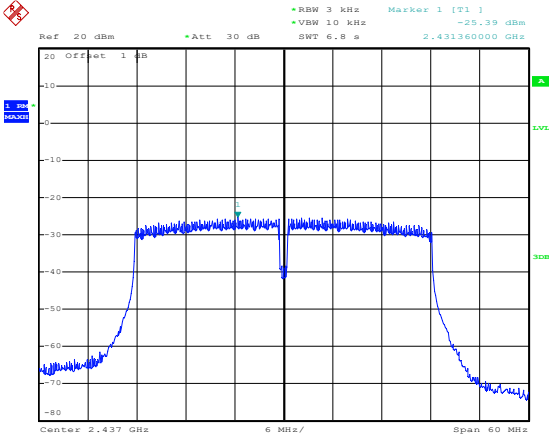
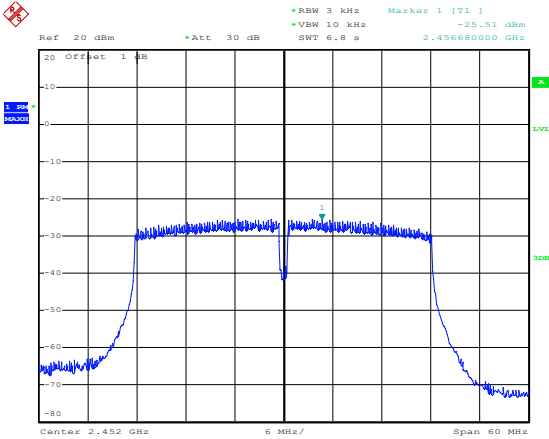
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1] -25.35 dBm *VSW 10 kHz SWT 6.8 s 2.426680000 GHz</p> <p>20 Offset 1 dB -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.422 GHz 6 MHz/ Span 60 MHz</p> <p>Date: 8.APR.2024 14:34:24</p>
<p>802.11n-HT40-Middle</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1] -25.39 dBm *VSW 10 kHz SWT 6.8 s 2.431360000 GHz</p> <p>20 Offset 1 dB -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.437 GHz 6 MHz/ Span 60 MHz</p> <p>Date: 8.APR.2024 14:35:06</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1] -25.51 dBm *VSW 10 kHz SWT 6.8 s 2.456680000 GHz</p> <p>20 Offset 1 dB -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.452 GHz 6 MHz/ Span 60 MHz</p> <p>Date: 8.APR.2024 14:35:44</p>

Antenna 1
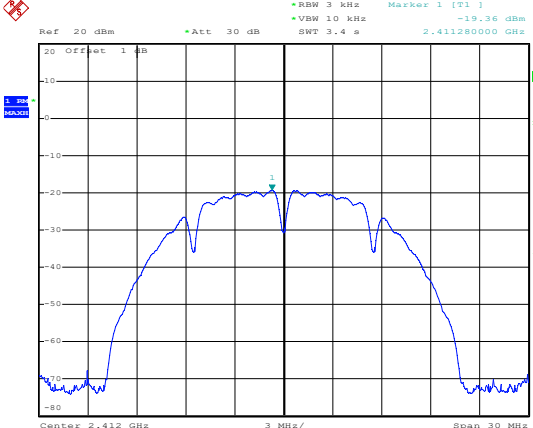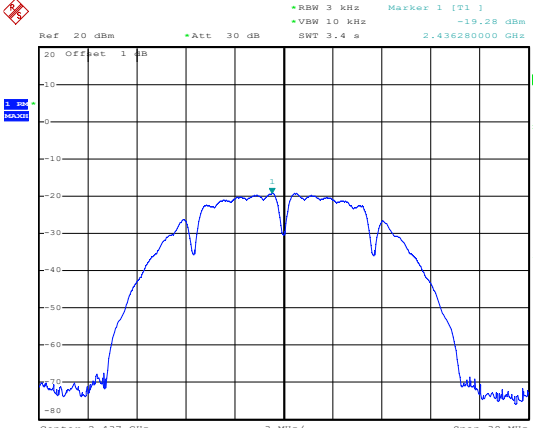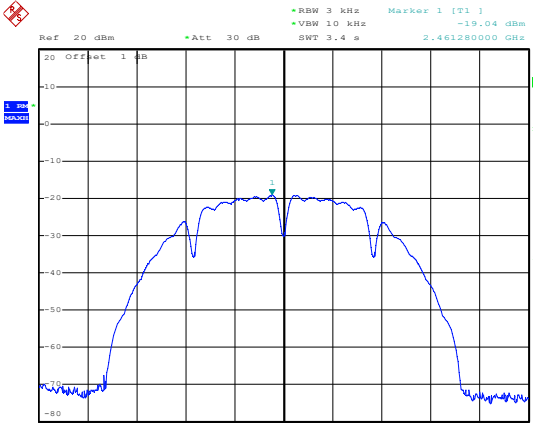
<p>802.11b-Low</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 3 kHz, VBW: 10 kHz, SWT: 3.4 s, Marker 1 [T1]: -19.36 dBm, 2.411280000 GHz</p> <p>Center: 2.412 GHz, Span: 30 MHz</p> <p>Date: 11.APR.2024 15:21:27</p>
<p>802.11b-Middle</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 3 kHz, VBW: 10 kHz, SWT: 3.4 s, Marker 1 [T1]: -19.28 dBm, 2.436280000 GHz</p> <p>Center: 2.437 GHz, Span: 30 MHz</p> <p>Date: 11.APR.2024 15:21:48</p>
<p>802.11b-High</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 3 kHz, VBW: 10 kHz, SWT: 3.4 s, Marker 1 [T1]: -19.04 dBm, 2.461280000 GHz</p> <p>Center: 2.462 GHz, Span: 30 MHz</p> <p>Date: 11.APR.2024 15:22:10</p>
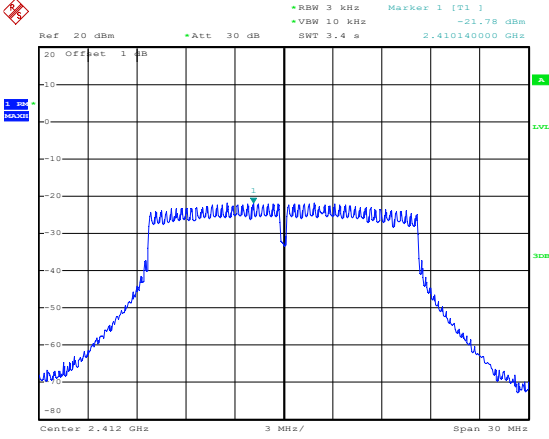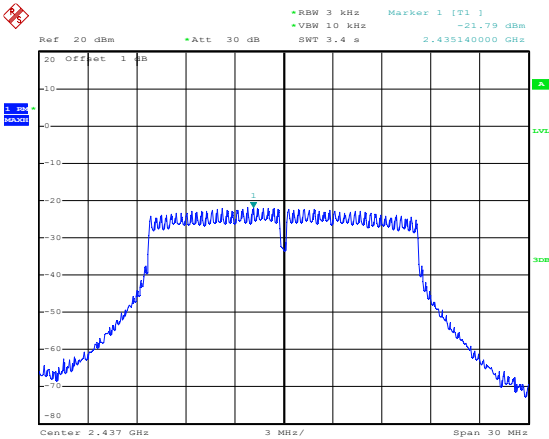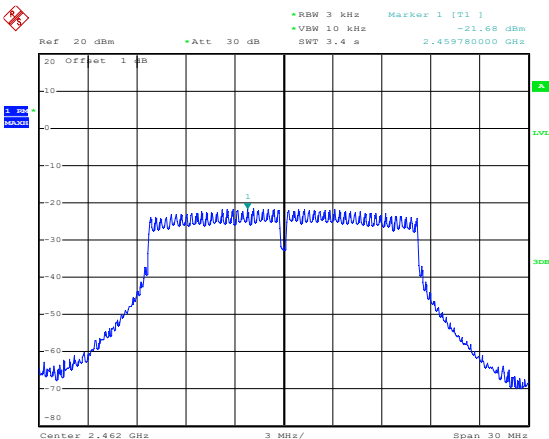
<p>802.11g-Low</p>	 <p>Date: 11.APR.2024 15:22:34</p>
<p>802.11g-Middle</p>	 <p>Date: 11.APR.2024 15:22:53</p>
<p>802.11g-High</p>	 <p>Date: 11.APR.2024 15:23:14</p>
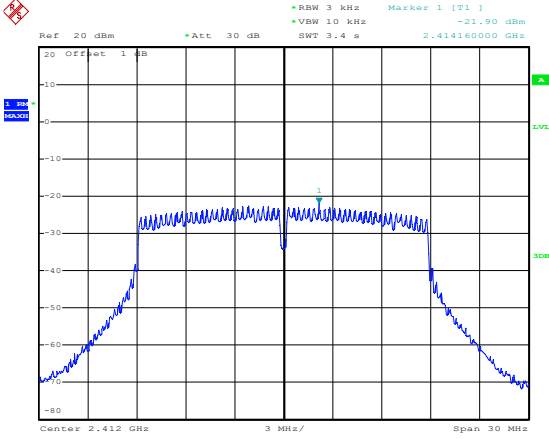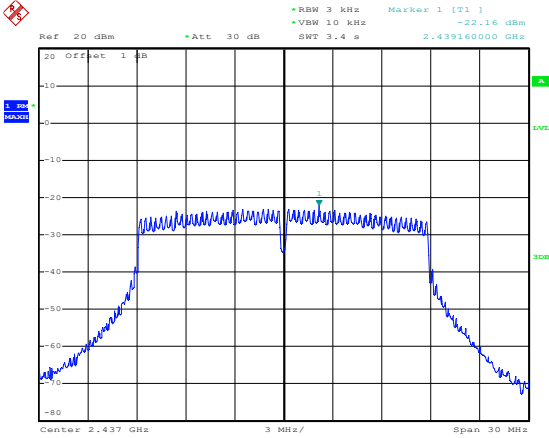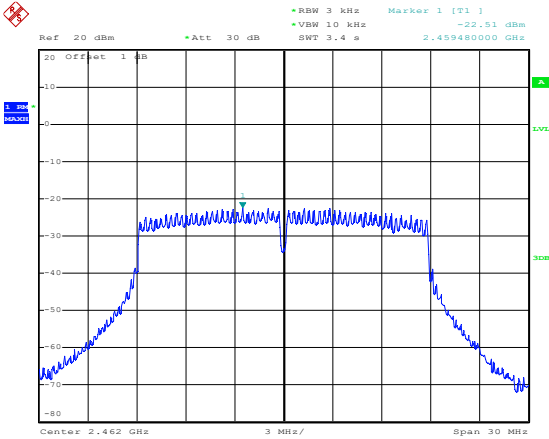
<p>802.11n-HT20-Low</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    *VSW 10 kHz    Marker 1 [T1]    -21.90 dBm    SWT 3.4 s    2.414160000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.412 GHz    3 MHz/    Span 30 MHz</p> <p>Date: 11.APR.2024 15:24:09</p>
<p>802.11n-HT20-Middle</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    *VSW 10 kHz    Marker 1 [T1]    -22.16 dBm    SWT 3.4 s    2.439160000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.437 GHz    3 MHz/    Span 30 MHz</p> <p>Date: 11.APR.2024 15:24:38</p>
<p>802.11n-HT20-High</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    *VSW 10 kHz    Marker 1 [T1]    -22.51 dBm    SWT 3.4 s    2.459480000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.462 GHz    3 MHz/    Span 30 MHz</p> <p>Date: 11.APR.2024 15:24:58</p>
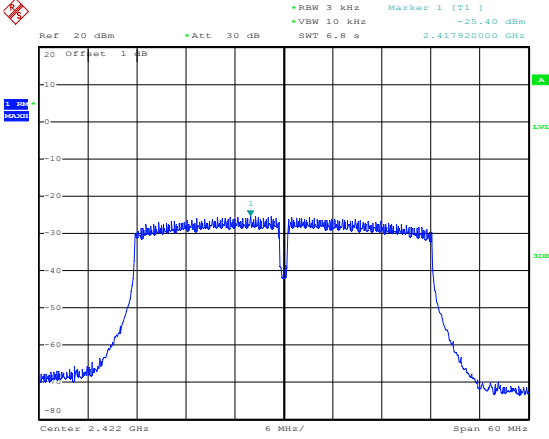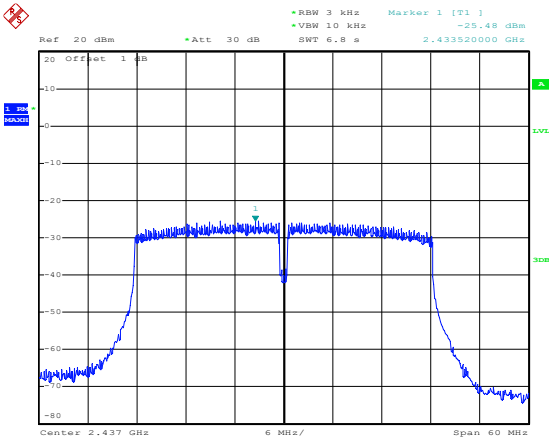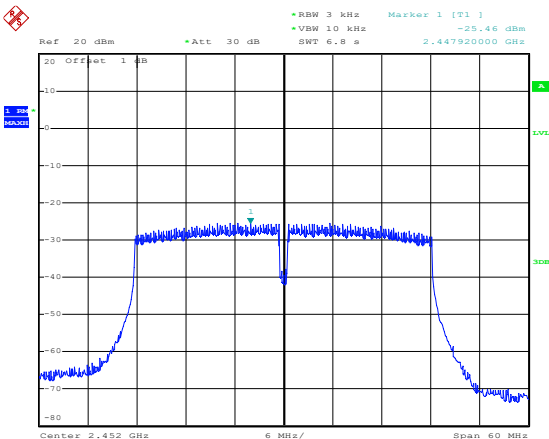
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -25.40 dBm *VSW 10 kHz    *SWT 6.8 s    2.417920000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.422 GHz    6 MHz/    Span 60 MHz</p> <p>Date: 11.APR.2024 15:25:28</p>
<p>802.11n-HT40-Middle</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -25.48 dBm *VSW 10 kHz    *SWT 6.8 s    2.433520000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.437 GHz    6 MHz/    Span 60 MHz</p> <p>Date: 11.APR.2024 15:25:54</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -25.46 dBm *VSW 10 kHz    *SWT 6.8 s    2.447920000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.452 GHz    6 MHz/    Span 60 MHz</p> <p>Date: 11.APR.2024 15:26:17</p>




**APPENDIX B**

DTS Bandwidth				
Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 0	Antenna 1	
802.11b_1Mbps	2412	10.26	10.24	≥500
	2437	10.26	10.32	≥500
	2462	10.26	10.32	≥500
802.11g_6Mbps	2412	16.64	16.64	≥500
	2437	16.56	16.56	≥500
	2462	16.64	16.56	≥500
802.11n-HT20_MCS0	2412	17.76	17.84	≥500
	2437	17.76	17.76	≥500
	2462	17.76	17.84	≥500
802.11n-HT40_MCS0	2422	36.80	36.80	≥500
	2437	36.80	36.80	≥500
	2452	36.80	36.80	≥500


Antenna 0

802.11b-Low

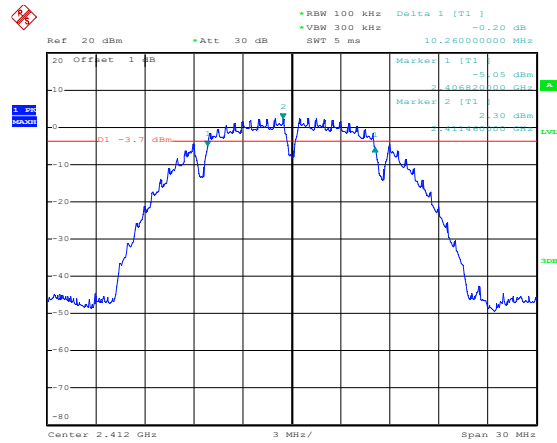


Date: 8.APR.2024 14:41:16

802.11b-Middle



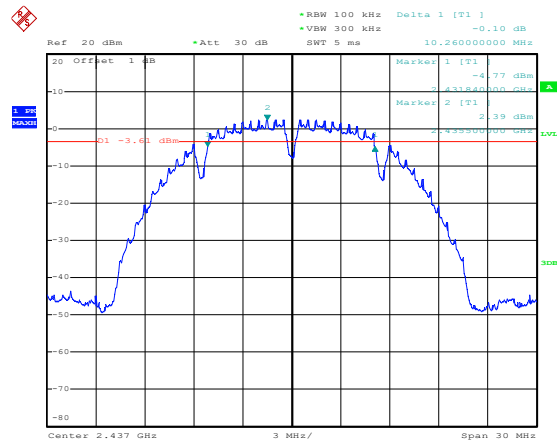


Date: 8.APR.2024 14:42:31


802.11b-High

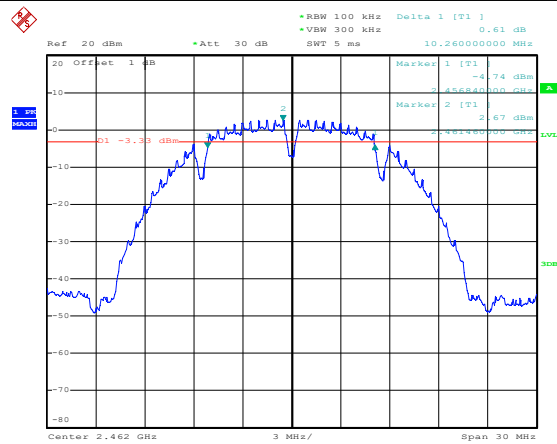

Date: 8.APR.2024 14:43:40

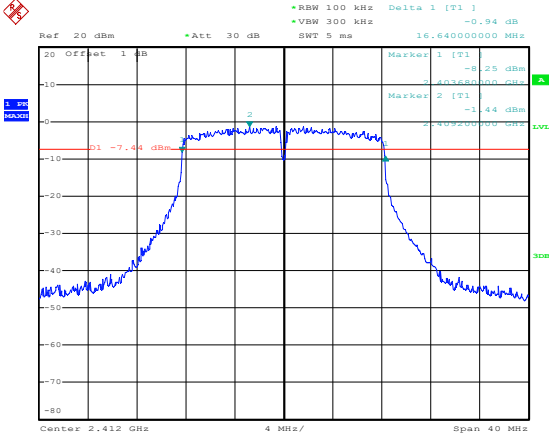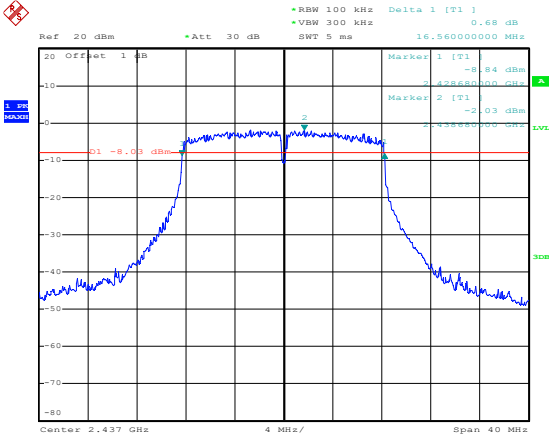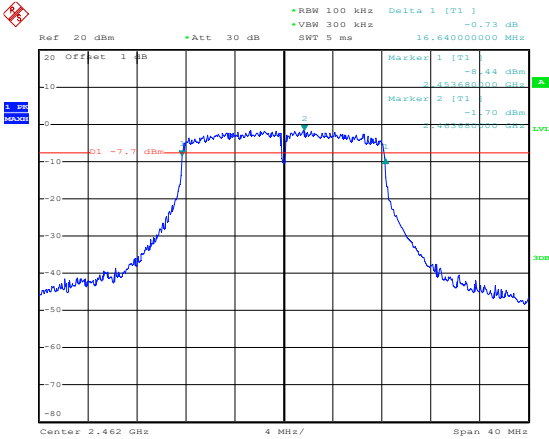
<p>802.11g-Low</p>	 <p>Ref 20 dBm *Att 30 dB          *RBW 100 kHz Delta 1 [T1] -0.94 dB          *VSW 300 kHz          SWT 5 ms 16.64000000 MHz</p> <p>Marker 1 [T1] -9.25 dBm          Marker 2 [T1] -11.44 dBm</p> <p>D1 -7.44 dBm</p> <p>Center 2.412 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 8.APR.2024 15:03:20</p>
<p>802.11g-Middle</p>	 <p>Ref 20 dBm *Att 30 dB          *RBW 100 kHz Delta 1 [T1] 0.68 dB          *VSW 300 kHz          SWT 5 ms 16.56000000 MHz</p> <p>Marker 1 [T1] -8.84 dBm          Marker 2 [T1] -2.03 dBm</p> <p>D1 -8.03 dBm</p> <p>Center 2.437 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 8.APR.2024 15:14:03</p>
<p>802.11g-High</p>	 <p>Ref 20 dBm *Att 30 dB          *RBW 100 kHz Delta 1 [T1] -0.73 dB          *VSW 300 kHz          SWT 5 ms 16.64000000 MHz</p> <p>Marker 1 [T1] -8.44 dBm          Marker 2 [T1] -1.70 dBm</p> <p>D1 -7.7 dBm</p> <p>Center 2.462 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 8.APR.2024 15:15:07</p>

802.11n-HT20-Low

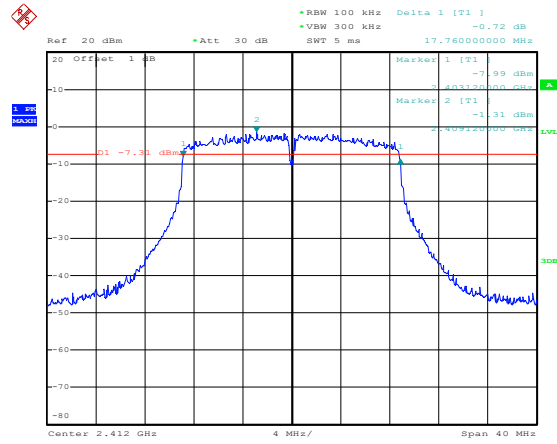


Date: 8.APR.2024 15:16:10

802.11n-HT20-Middle

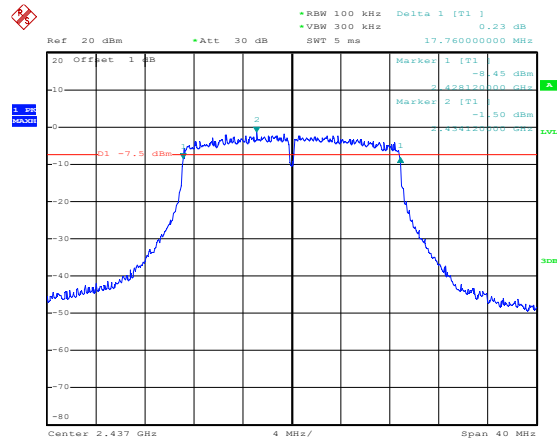

Date: 8.APR.2024 15:16:50




802.11n-HT20-High



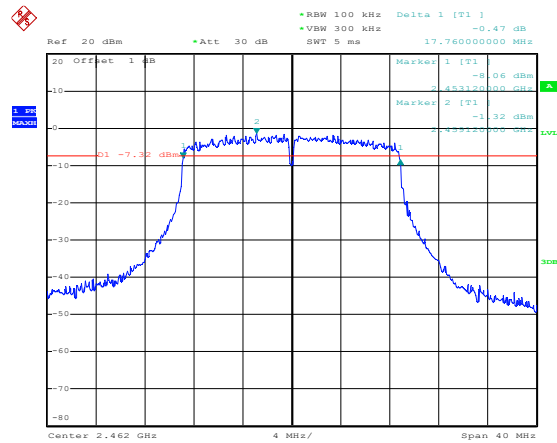





Date: 8.APR.2024 15:17:41

<p>802.11n-HT40-Low</p>	<p>             *RBW 100 kHz Delta 1 [T1 ]              *VSW 300 kHz 1.44 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 36.80000000 MHz              Marker 1 [T1 ] -13.75 dBm              Marker 2 [T1 ] -4.80 dBm              Center 2.422 GHz 8 MHz/ Span 80 MHz              Date: 8.APR.2024 15:18:24         </p>
<p>802.11n-HT40-Middle</p>	<p>             *RBW 100 kHz Delta 1 [T1 ]              *VSW 300 kHz 4.43 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 36.80000000 MHz              Marker 1 [T1 ] -17.64 dBm              Marker 2 [T1 ] -4.63 dBm              Center 2.437 GHz 8 MHz/ Span 80 MHz              Date: 8.APR.2024 15:18:58         </p>
<p>802.11n-HT40-High</p>	<p>             *RBW 100 kHz Delta 1 [T1 ]              *VSW 300 kHz 1.77 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 36.80000000 MHz              Marker 1 [T1 ] -14.69 dBm              Marker 2 [T1 ] -4.87 dBm              Center 2.452 GHz 8 MHz/ Span 80 MHz              Date: 8.APR.2024 15:19:32         </p>




Antenna 1
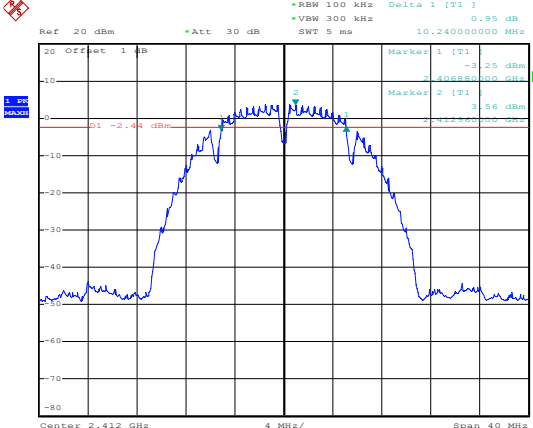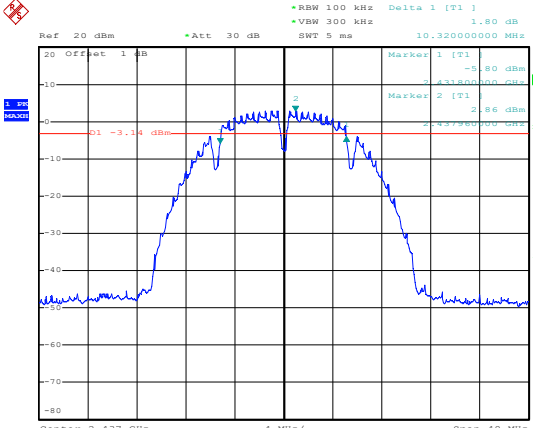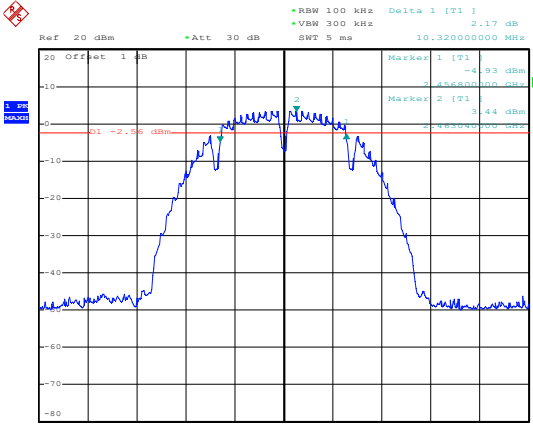
<p>802.11b-Low</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Delta 1 [T1]: 0.95 dB, 10.24000000 MHz</p> <p>Marker 1 [T1]: -3.25 dBm, 2.412000000 GHz          Marker 2 [T1]: -3.56 dBm, 2.412000000 GHz</p> <p>Center: 2.412 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2024 17:08:45</p>
<p>802.11b-Middle</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Delta 1 [T1]: 1.80 dB, 10.32000000 MHz</p> <p>Marker 1 [T1]: -5.80 dBm, 2.437000000 GHz          Marker 2 [T1]: -2.86 dBm, 2.437000000 GHz</p> <p>Center: 2.437 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2024 17:12:19</p>
<p>802.11b-High</p>	 <p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Delta 1 [T1]: 2.17 dB, 10.32000000 MHz</p> <p>Marker 1 [T1]: -4.93 dBm, 2.462000000 GHz          Marker 2 [T1]: 3.44 dBm, 2.462000000 GHz</p> <p>Center: 2.462 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2024 17:13:45</p>
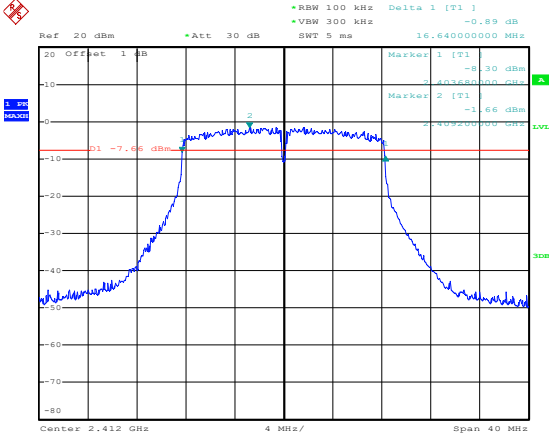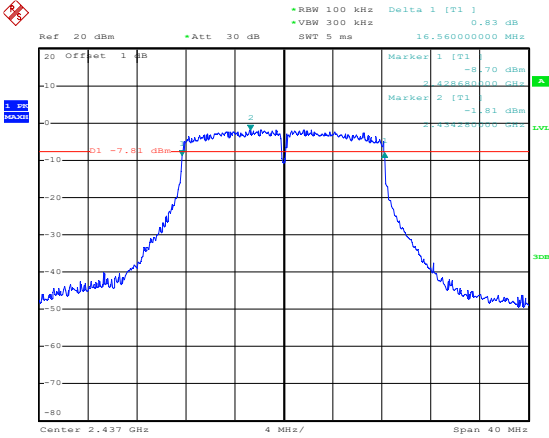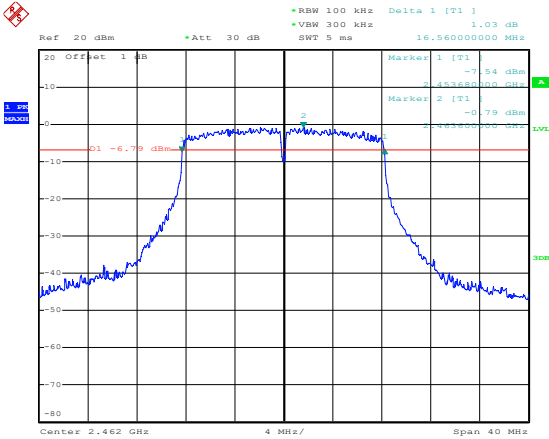
<p>802.11g-Low</p>	 <p>Date: 12.APR.2024 17:24:35</p>
<p>802.11g-Middle</p>	 <p>Date: 12.APR.2024 17:23:48</p>
<p>802.11g-High</p>	 <p>Date: 12.APR.2024 17:22:38</p>
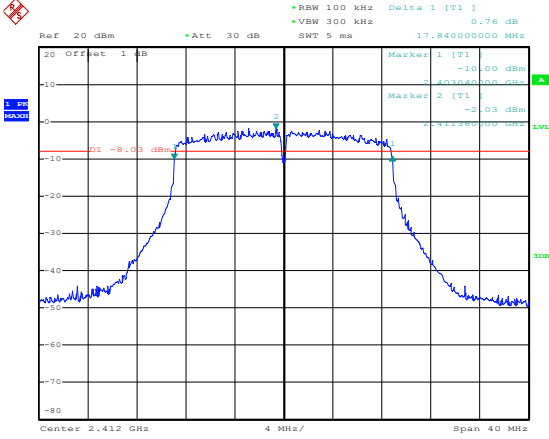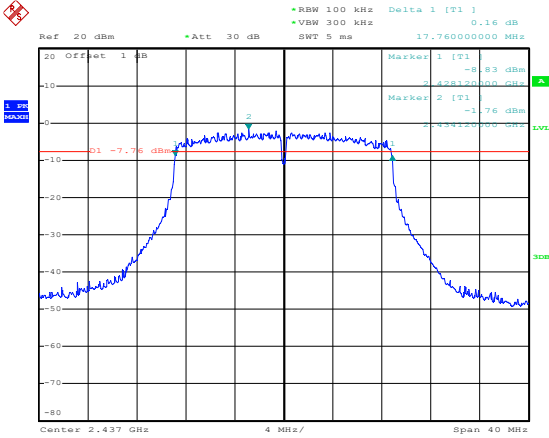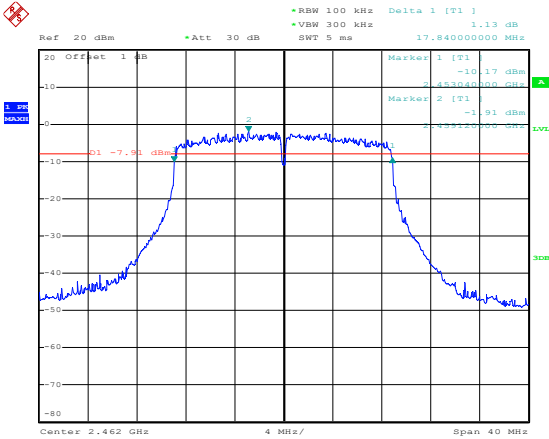
<p>802.11n-HT20-Low</p>	 <p>Date: 12.APR.2024 17:25:35</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 12.APR.2024 17:26:54</p>
<p>802.11n-HT20-High</p>	 <p>Date: 12.APR.2024 17:27:46</p>

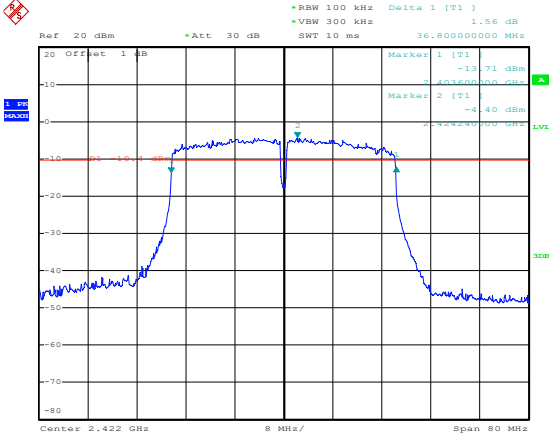
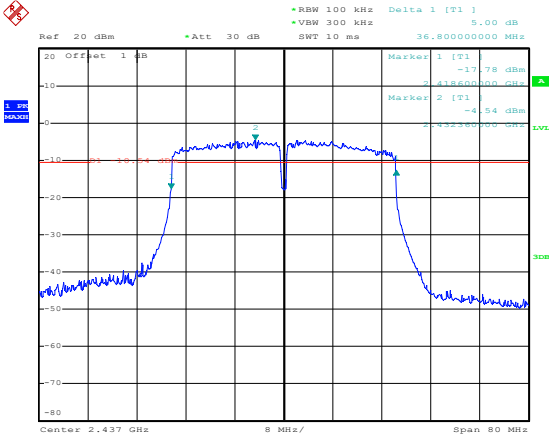
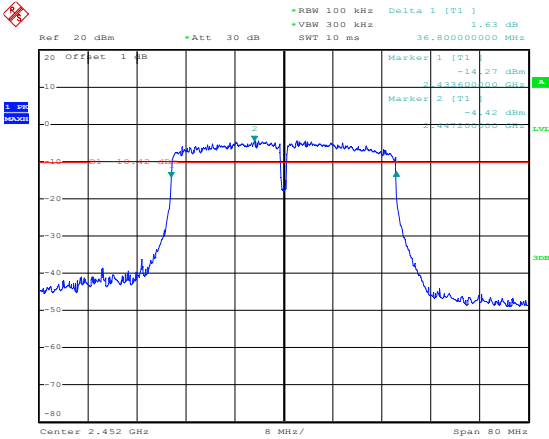





<p>802.11n-HT40-Low</p>	 <p>Date: 12.APR.2024 17:29:02</p>
<p>802.11n-HT40-Middle</p>	 <p>Date: 12.APR.2024 17:29:51</p>
<p>802.11n-HT40-High</p>	 <p>Date: 12.APR.2024 17:30:57</p>




**APPENDIX C**




RF Output Power					
Test Mode	Frequency MHz	Antenna 0 dBm	Antenna 1 dBm	Total Power dBm	Limit dBm
802.11b_1Mbps	2412	17.18	17.22	/	30.00
	2437	16.97	17.24	/	30.00
	2462	17.01	17.07	/	30.00
802.11g_6Mbps	2412	15.84	15.75	/	30.00
	2437	15.78	15.71	/	30.00
	2462	15.86	15.98	/	30.00
802.11n HT20_MCS0	2412	14.99	14.92	17.97	30.00
	2437	14.86	14.90	17.89	30.00
	2462	14.42	15.09	17.78	30.00
802.11n HT40_MCS0	2422	14.25	14.10	17.19	30.00
	2437	14.15	14.01	17.09	30.00
	2452	14.06	14.14	17.11	30.00

Antenna 0

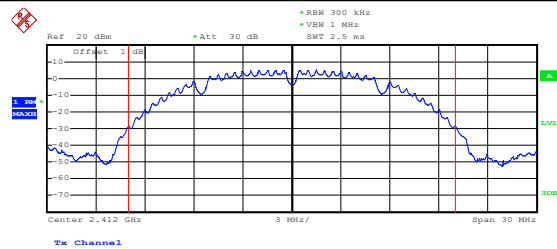
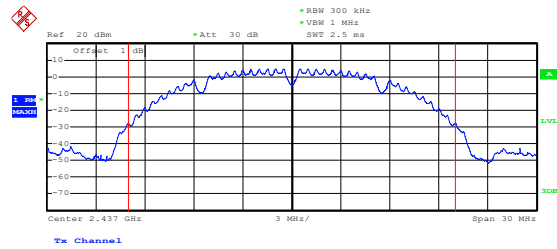
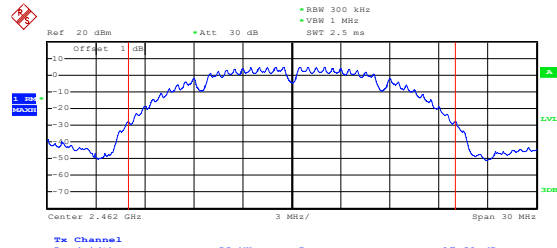
<p>802.11b-Low</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz          Offset 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.412 GHz    3 MHz/    Span 30 MHz</p> <p><b>Tx Channel</b>          Bandwidth    20 MHz    Power    17.18 dBm</p> <p>Date: 8.APR.2024 14:10:01</p>
<p>802.11b-Middle</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz          Offset 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.437 GHz    3 MHz/    Span 30 MHz</p> <p><b>Tx Channel</b>          Bandwidth    20 MHz    Power    16.97 dBm</p> <p>Date: 8.APR.2024 14:10:34</p>
<p>802.11b-High</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz          Offset 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.462 GHz    3 MHz/    Span 30 MHz</p> <p><b>Tx Channel</b>          Bandwidth    20 MHz    Power    17.01 dBm</p> <p>Date: 8.APR.2024 14:11:21</p>

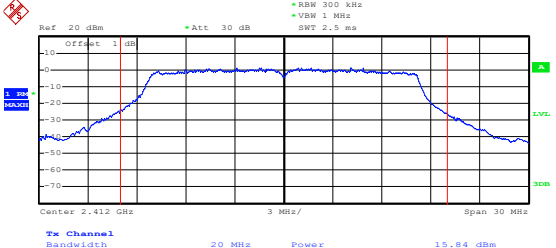
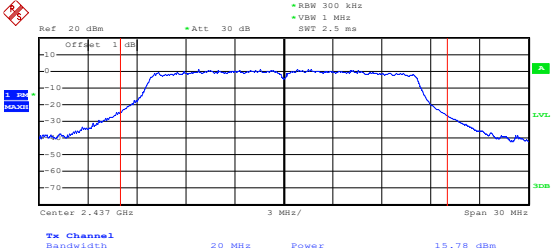
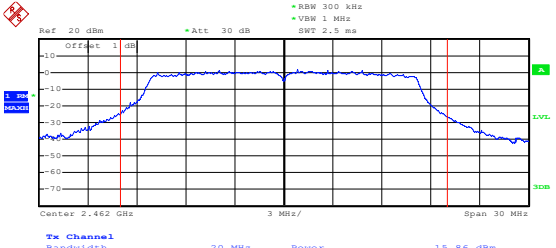
<p>802.11g-Low</p>	 <p>Date: 8.APR.2024 14:12:15</p>
<p>802.11g-Middle</p>	 <p>Date: 8.APR.2024 14:13:09</p>
<p>802.11g-High</p>	 <p>Date: 8.APR.2024 14:13:32</p>
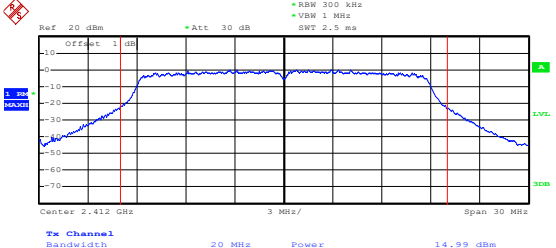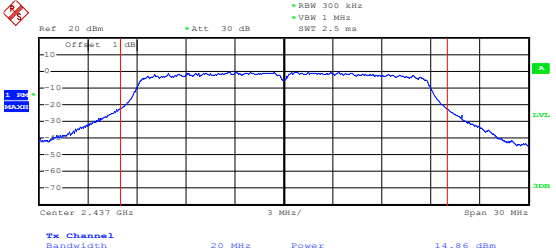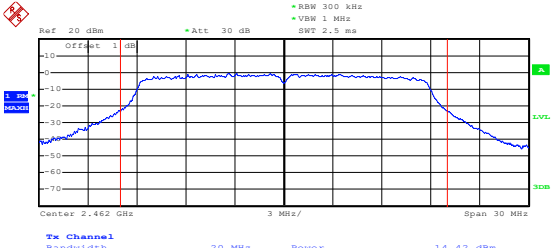
<p>802.11n-HT20-Low</p>	 <p>Date: 8.APR.2024 14:14:17</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 8.APR.2024 14:15:53</p>
<p>802.11n-HT20-High</p>	 <p>Date: 8.APR.2024 14:17:57</p>

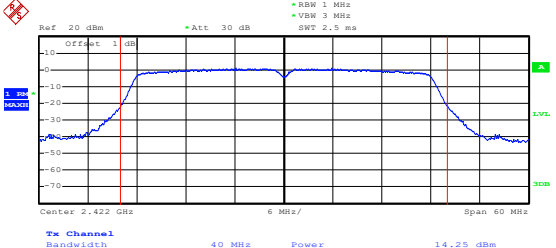
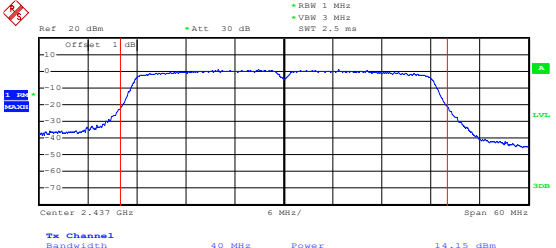
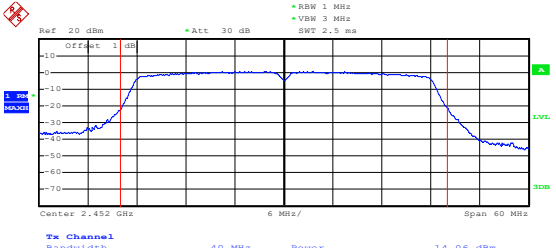
<p>802.11n-HT40-Low</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW: 1 MHz          Offset: 1 dB    VBW: 3 MHz    SWT: 2.5 ms</p> <p>Center: 2.422 GHz    Span: 60 MHz</p> <p><b>Tx Channel</b>          Bandwidth: 40 MHz    Power: 14.25 dBm</p> <p>Date: 8.APR.2024 14:19:26</p>
<p>802.11n-HT40-Middle</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW: 1 MHz          Offset: 1 dB    VBW: 3 MHz    SWT: 2.5 ms</p> <p>Center: 2.437 GHz    Span: 60 MHz</p> <p><b>Tx Channel</b>          Bandwidth: 40 MHz    Power: 14.15 dBm</p> <p>Date: 8.APR.2024 14:20:53</p>
<p>802.11n-HT40-High</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW: 1 MHz          Offset: 1 dB    VBW: 3 MHz    SWT: 2.5 ms</p> <p>Center: 2.452 GHz    Span: 60 MHz</p> <p><b>Tx Channel</b>          Bandwidth: 40 MHz    Power: 14.06 dBm</p> <p>Date: 8.APR.2024 14:21:24</p>




### Antenna 1
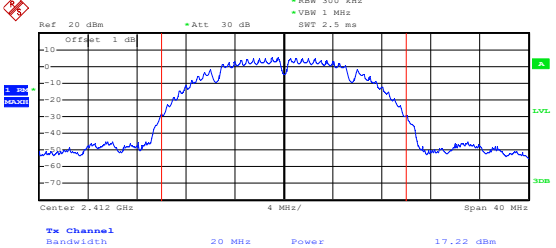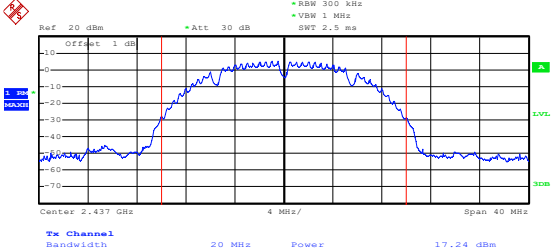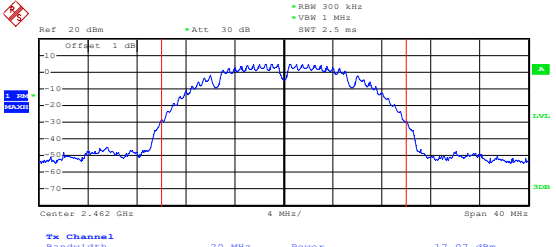
<p>802.11b-Low</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz Offset: 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.412 GHz    4 MHz/    Span 40 MHz</p> <p>Tx Channel Bandwidth    20 MHz    Power    17.22 dBm</p> <p>Date: 11.APR.2024 15:09:00</p>
<p>802.11b-Middle</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz Offset: 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.437 GHz    4 MHz/    Span 40 MHz</p> <p>Tx Channel Bandwidth    20 MHz    Power    17.24 dBm</p> <p>Date: 11.APR.2024 15:09:19</p>
<p>802.11b-High</p>	 <p>Ref: 20 dBm    *Att: 30 dB    RBW 300 kHz Offset: 1 dB    VBW 1 MHz    SWT 2.5 ms</p> <p>Center 2.462 GHz    4 MHz/    Span 40 MHz</p> <p>Tx Channel Bandwidth    20 MHz    Power    17.07 dBm</p> <p>Date: 11.APR.2024 15:13:45</p>
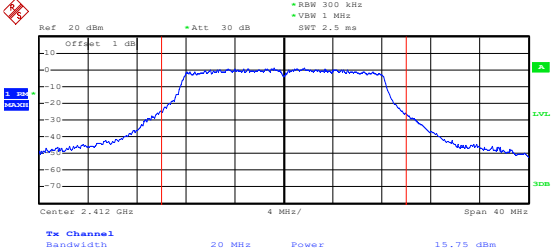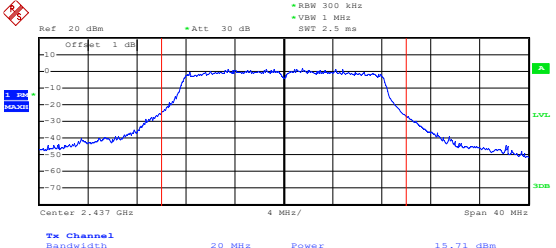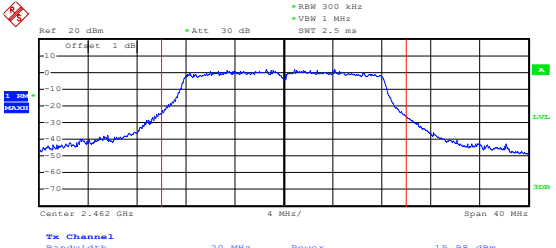
<p>802.11g-Low</p>	 <p>Ref: 20 dBm    +Att: 30 dB    RBW: 300 kHz Offset: 1 dB    VBW: 1 MHz    SWT: 2.5 ms</p> <p>Center: 2.412 GHz    Span: 40 MHz</p> <p><b>Tx Channel</b> Bandwidth: 20 MHz    Power: 15.75 dBm</p> <p>Date: 11.APR.2024 15:15:27</p>
<p>802.11g-Middle</p>	 <p>Ref: 20 dBm    +Att: 30 dB    RBW: 300 kHz Offset: 1 dB    VBW: 1 MHz    SWT: 2.5 ms</p> <p>Center: 2.437 GHz    Span: 40 MHz</p> <p><b>Tx Channel</b> Bandwidth: 20 MHz    Power: 15.71 dBm</p> <p>Date: 11.APR.2024 15:15:46</p>
<p>802.11g-High</p>	 <p>Ref: 20 dBm    +Att: 30 dB    RBW: 300 kHz Offset: 1 dB    VBW: 1 MHz    SWT: 2.5 ms</p> <p>Center: 2.462 GHz    Span: 40 MHz</p> <p><b>Tx Channel</b> Bandwidth: 20 MHz    Power: 15.98 dBm</p> <p>Date: 11.APR.2024 15:16:03</p>

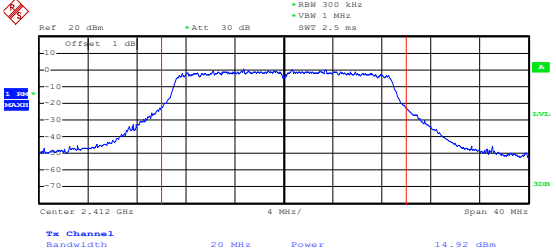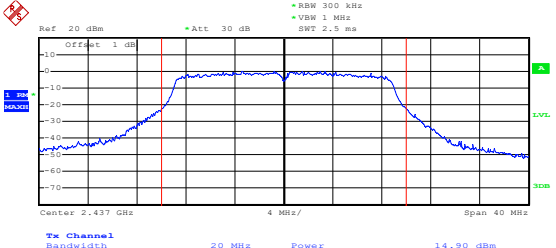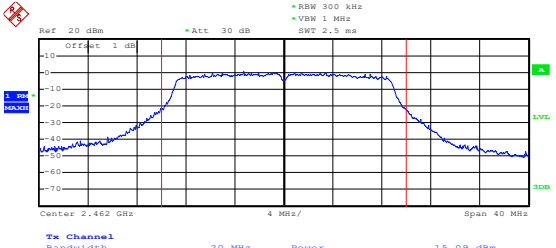

<p>802.11n-HT20-Low</p>	 <p>Date: 11.APR.2024 15:16:41</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 11.APR.2024 15:17:02</p>
<p>802.11n-HT20-High</p>	 <p>Date: 11.APR.2024 15:17:24</p>

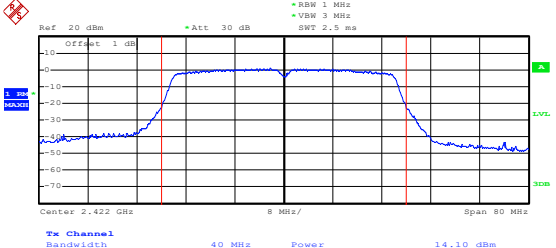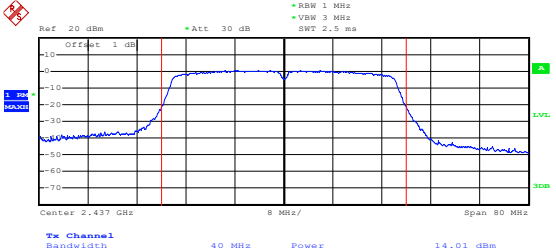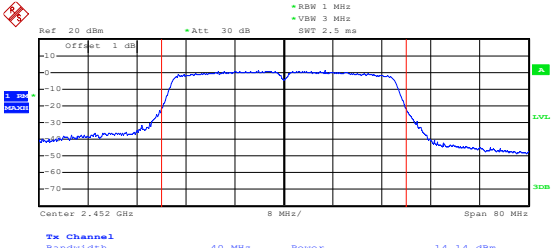
<p>802.11n-HT40-Low</p>	 <p>Date: 11.APR.2024 15:18:15</p>
<p>802.11n-HT40-Middle</p>	 <p>Date: 11.APR.2024 15:18:41</p>
<p>802.11n-HT40-High</p>	 <p>Date: 11.APR.2024 15:18:57</p>

# APPENDIX D


## Conducted Out of Band Emissions

### Antenna 0

802.11b-Low

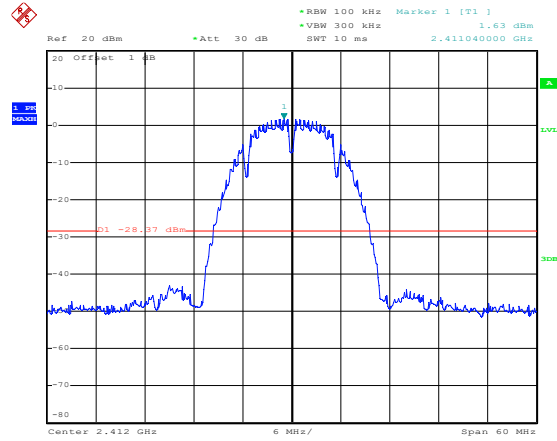


Date: 11.APR.2024 14:26:00

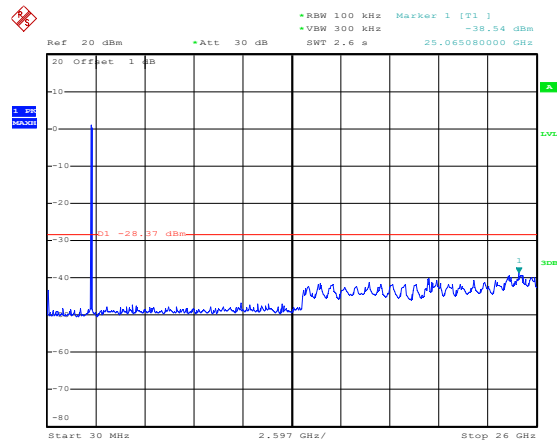


Date: 11.APR.2024 14:26:53

802.11b-Middle

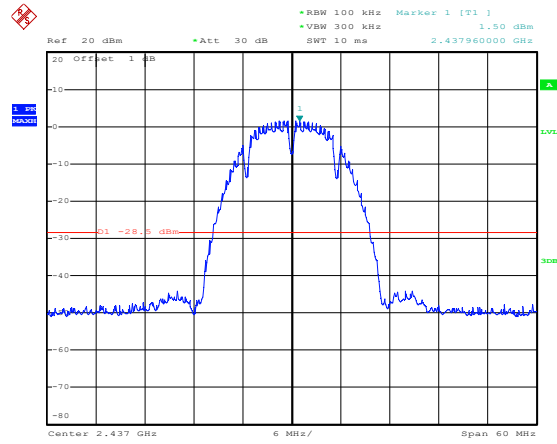


Date: 11.APR.2024 14:34:22



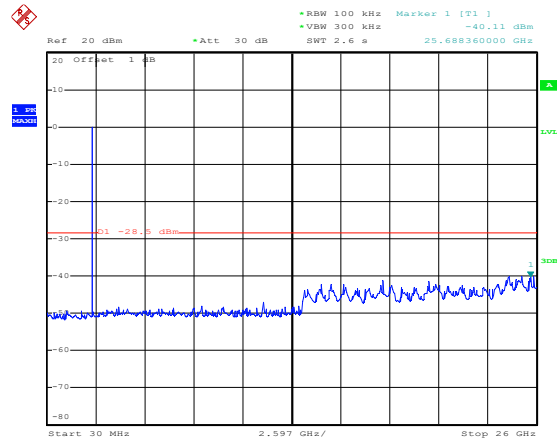


Date: 11.APR.2024 14:34:38


802.11b-High

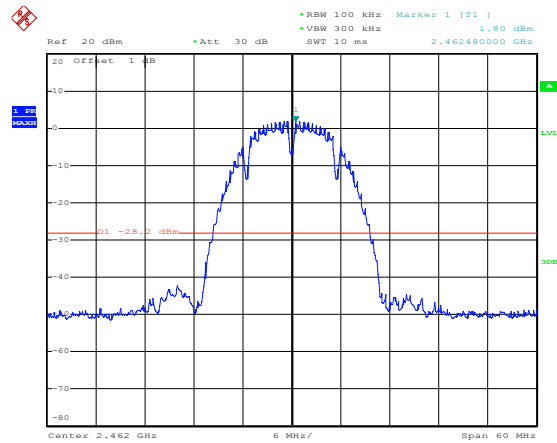


Date: 11.APR.2024 14:35:03

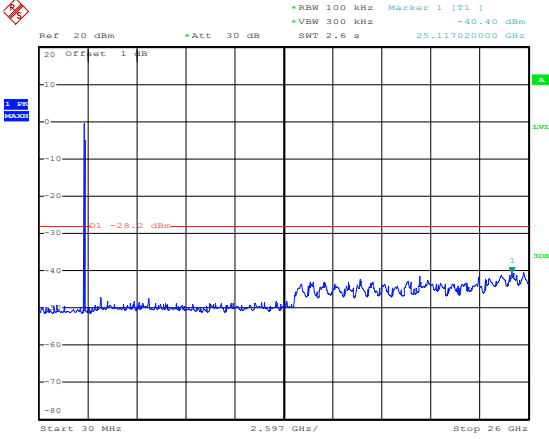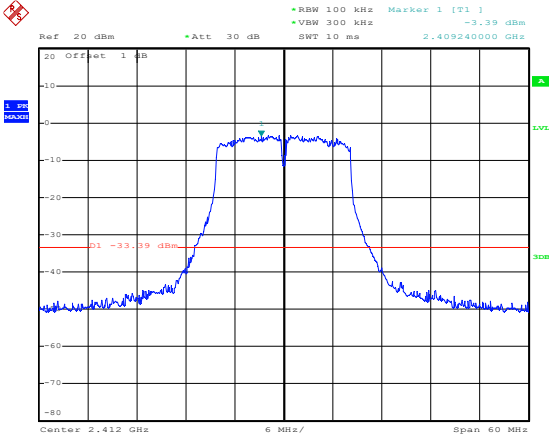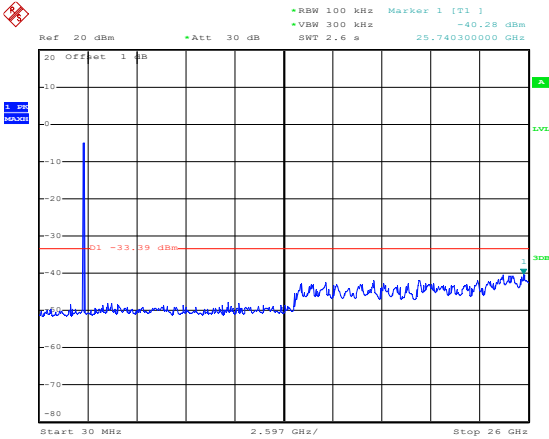	 <p>Date: 11.APR.2024 14:35:12</p>
<p>802.11g-Low</p>	 <p>Date: 11.APR.2024 14:52:56</p>
	 <p>Date: 11.APR.2024 14:53:13</p>

802.11g-Middle

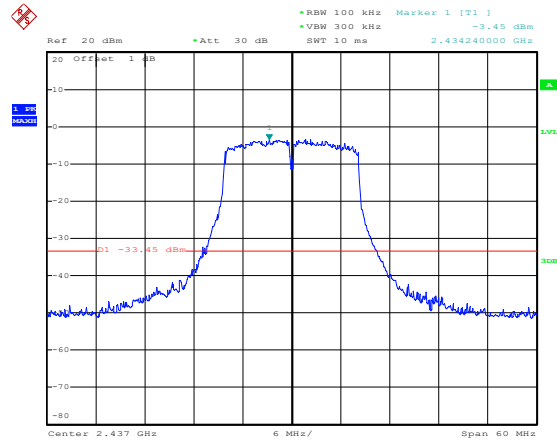


Date: 11.APR.2024 14:53:37


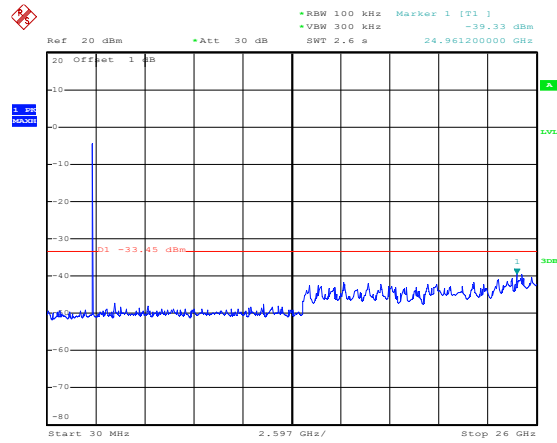


Date: 11.APR.2024 14:53:52


802.11g-High

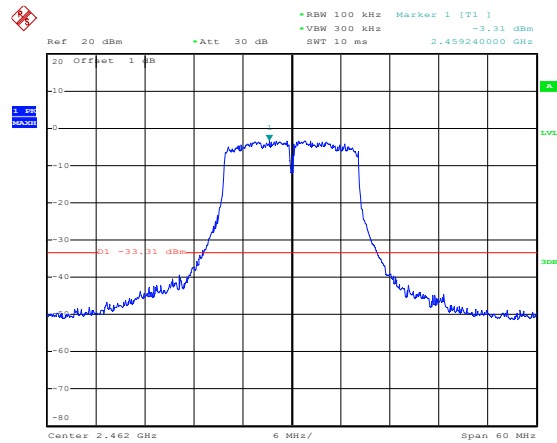


Date: 11.APR.2024 14:54:19

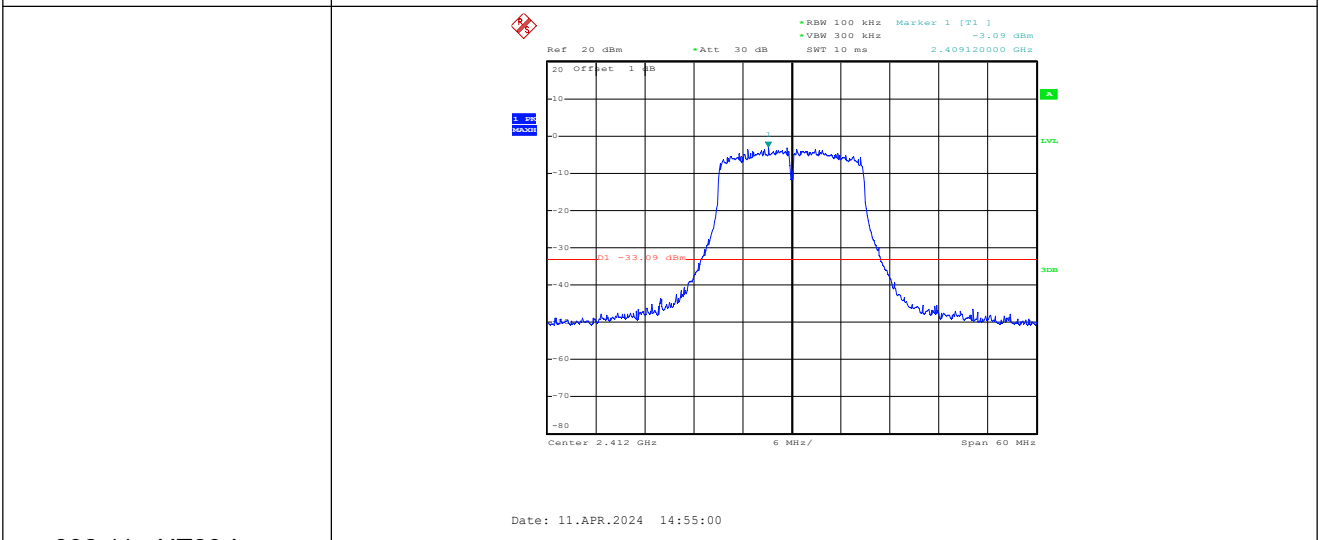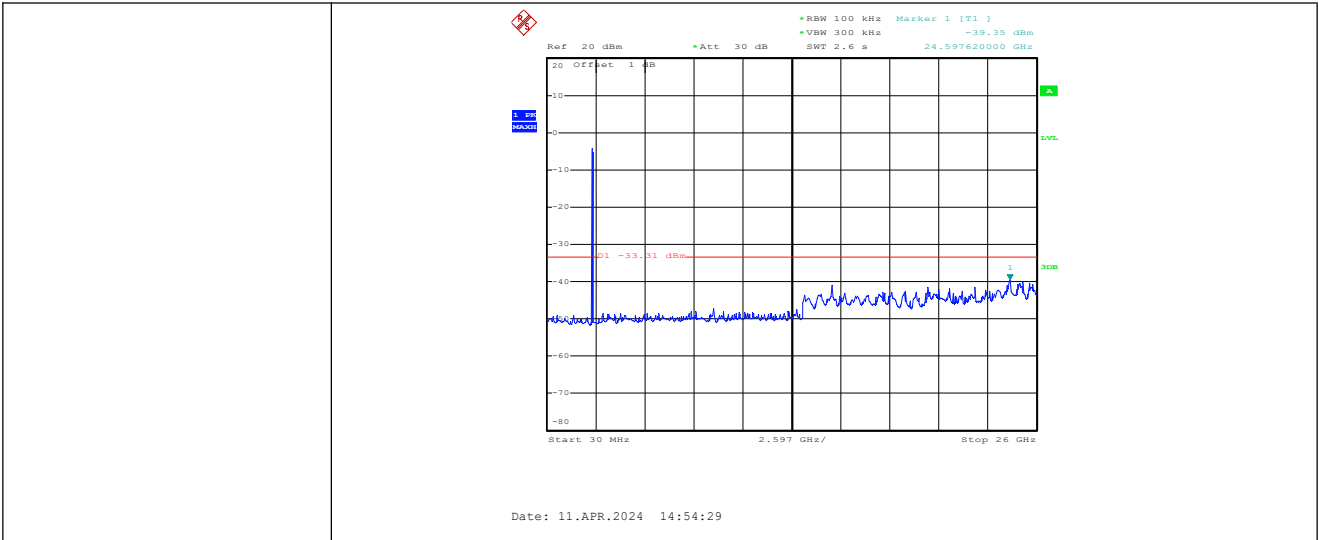


802.11n-HT20-Low

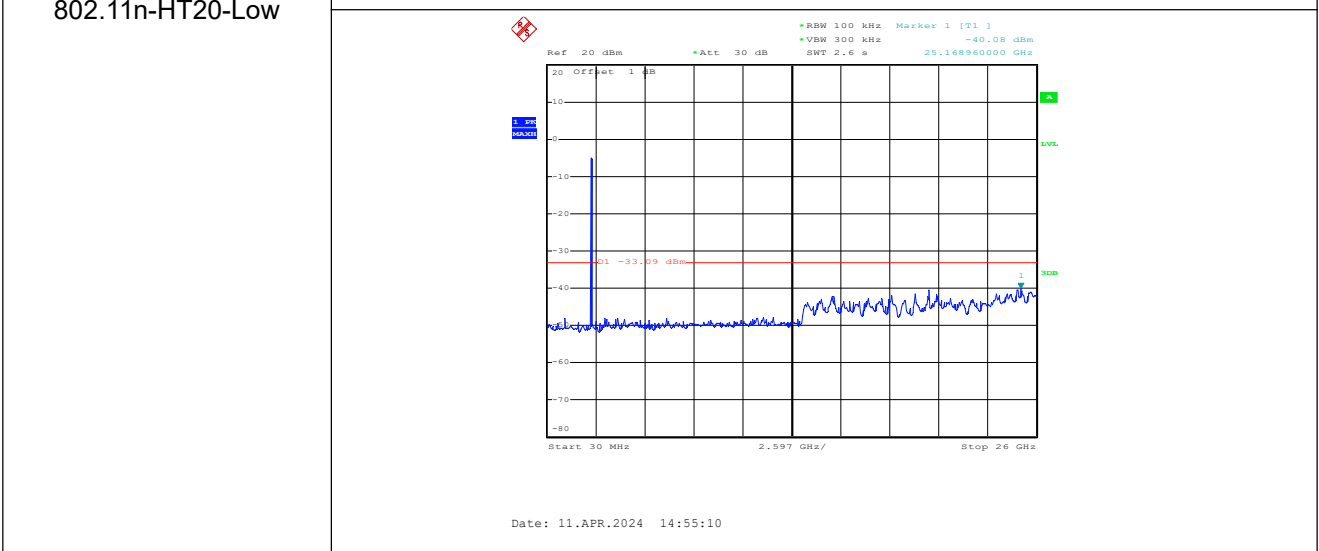

802.11n-HT20-Middle

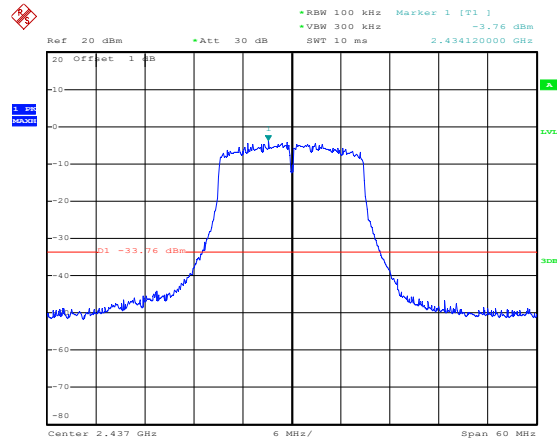


Date: 11.APR.2024 14:55:37

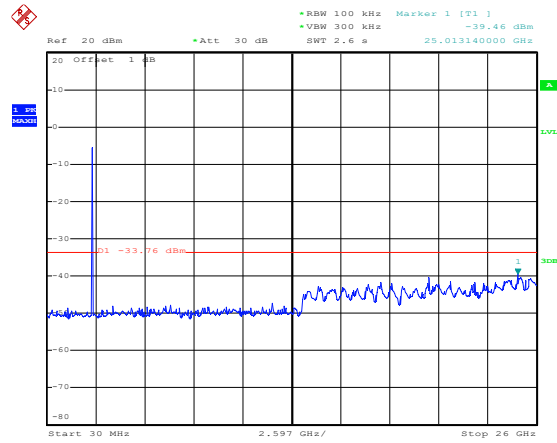



Date: 11.APR.2024 14:55:50

802.11n-HT20-High

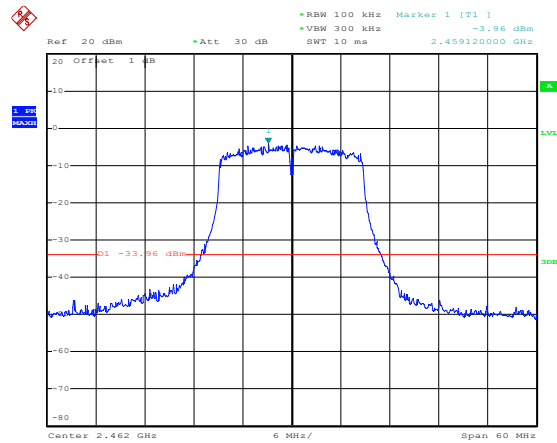


Date: 11.APR.2024 14:56:27




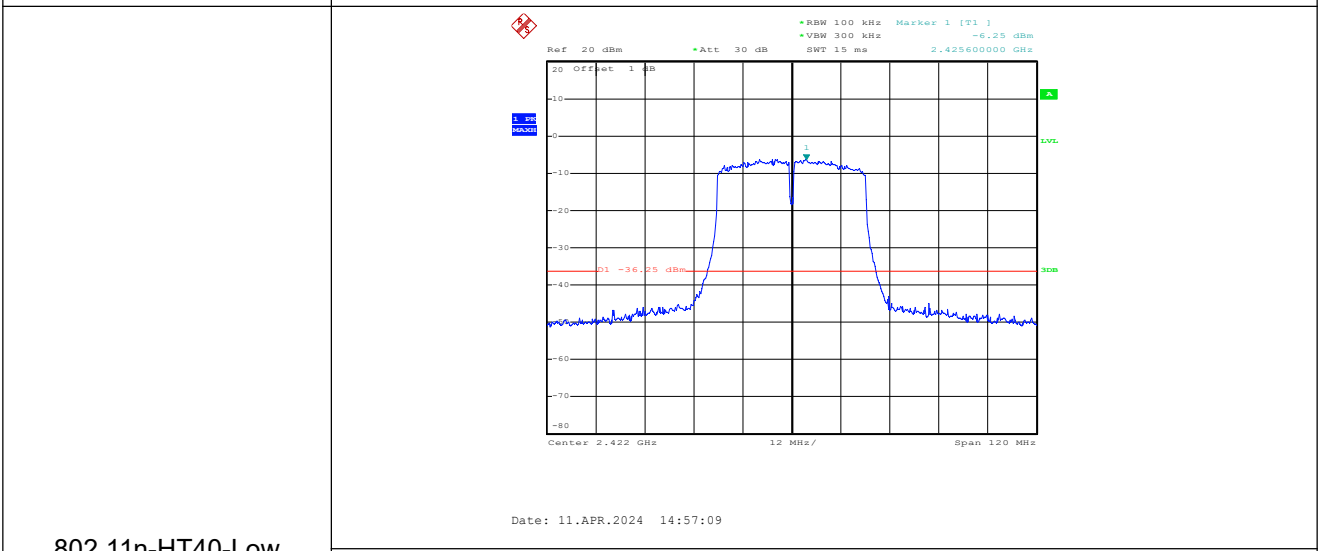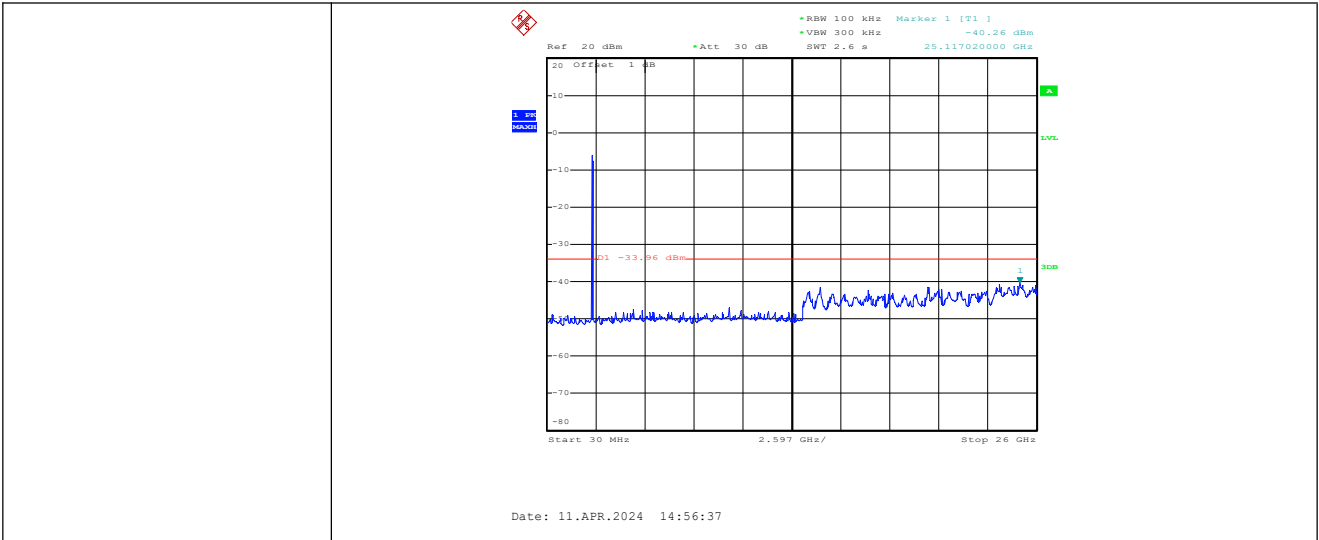


802.11n-HT40-Low

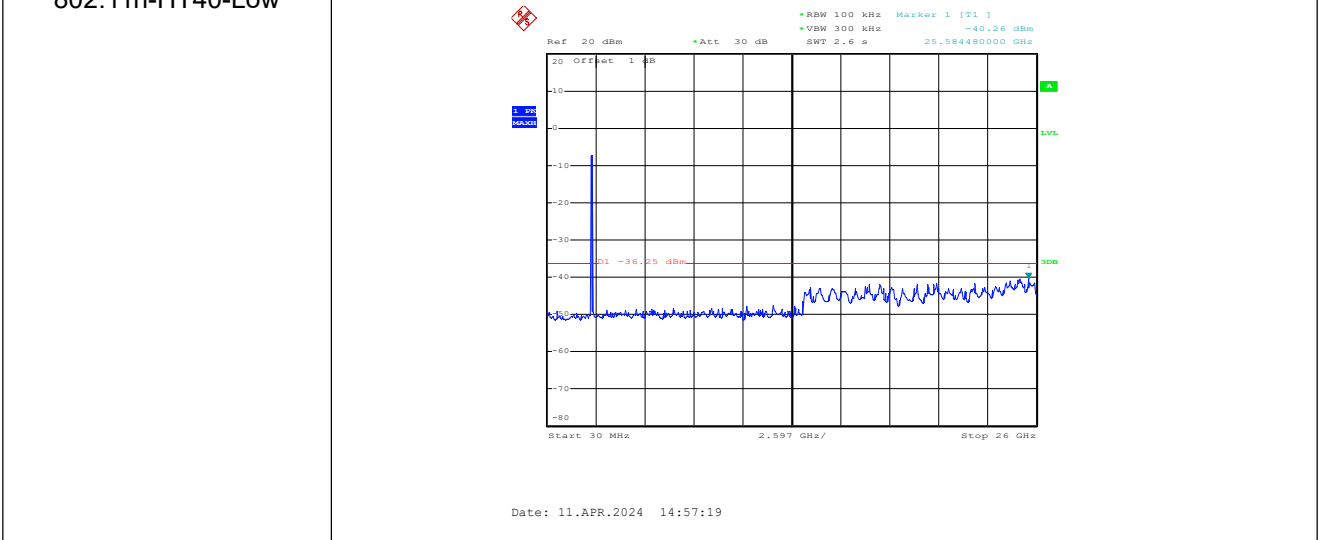

802.11n-HT40-Middle

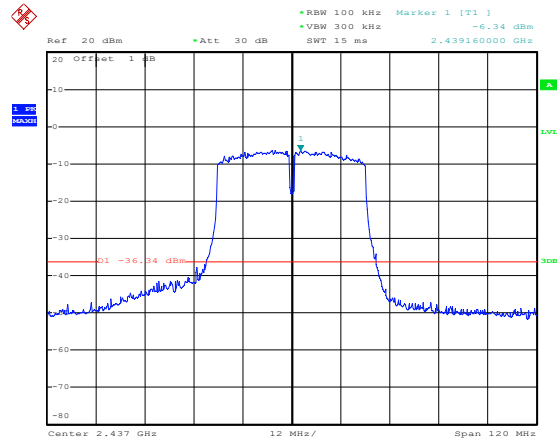


Date: 11.APR.2024 14:57:50

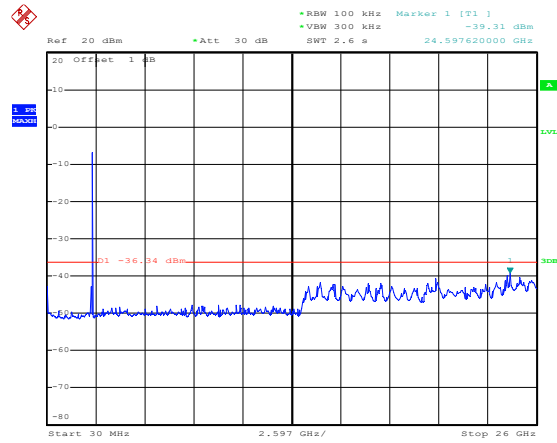


Date: 11.APR.2024 14:58:02

802.11n-HT40-High

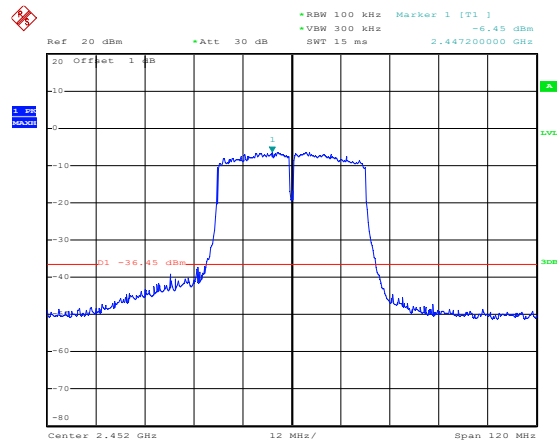


Date: 11.APR.2024 14:58:34

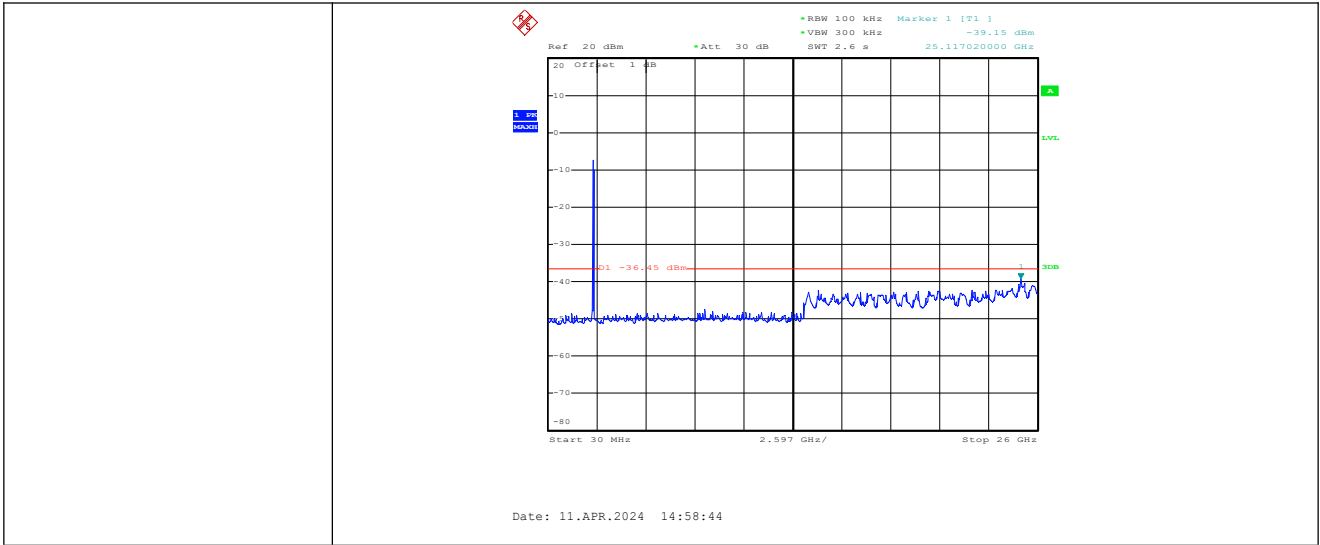


Antenna 1

802.11b-Low

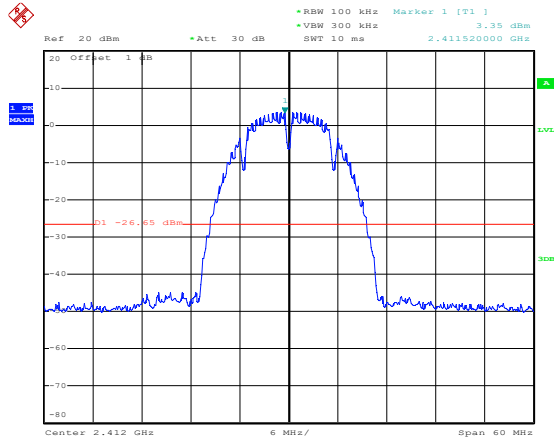


Date: 12.APR.2024 17:35:23


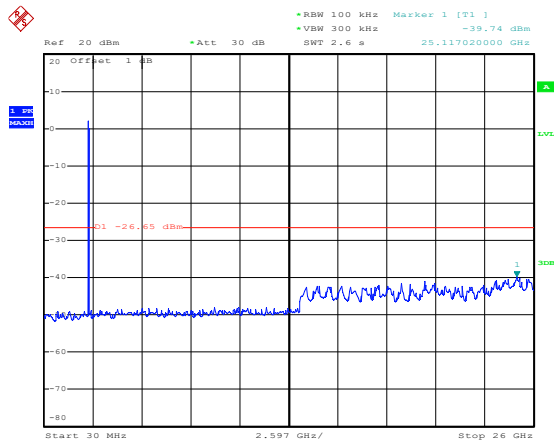


Date: 12.APR.2024 17:35:46


802.11b-Middle

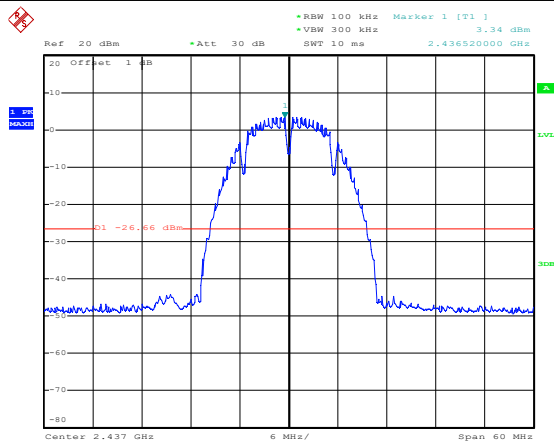


Date: 12.APR.2024 17:40:06

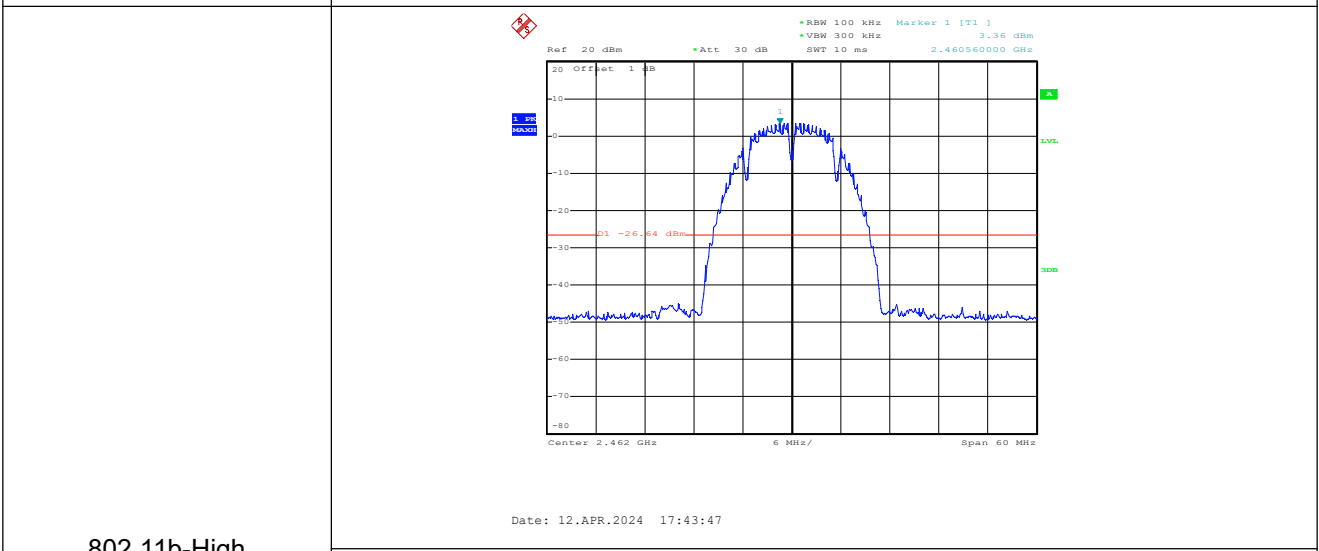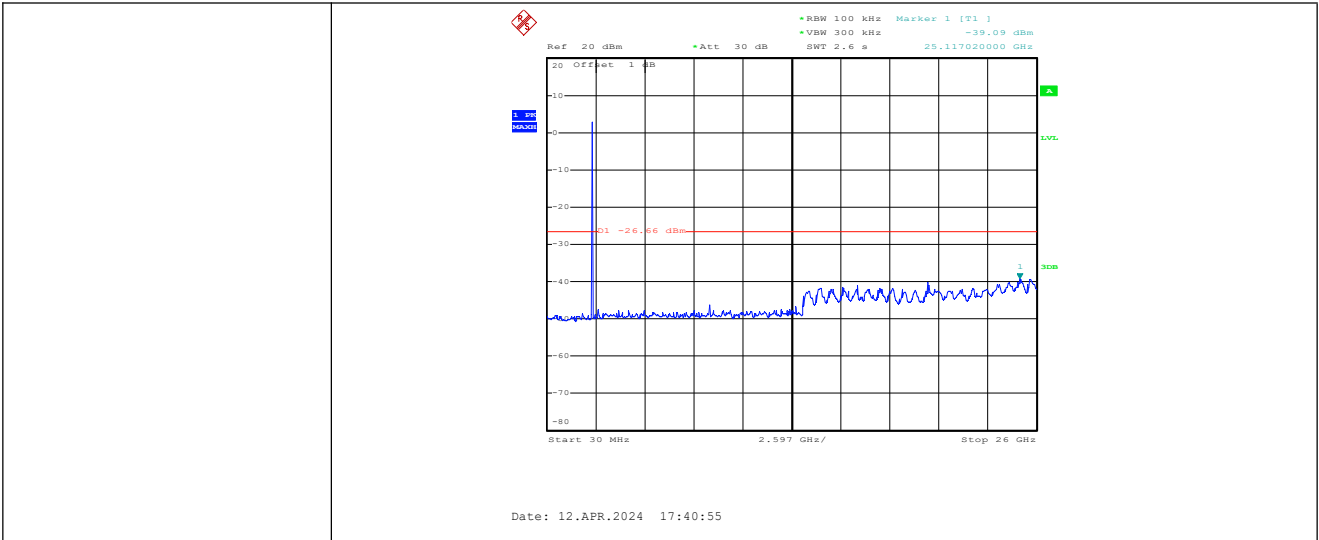


802.11b-High

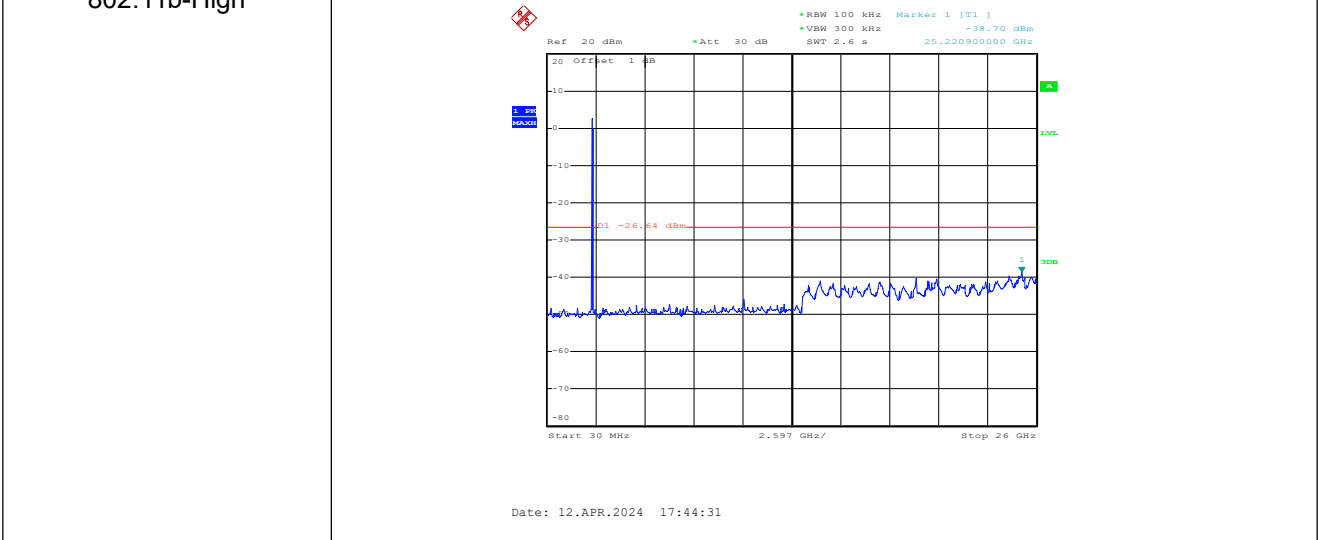

802.11g-Low

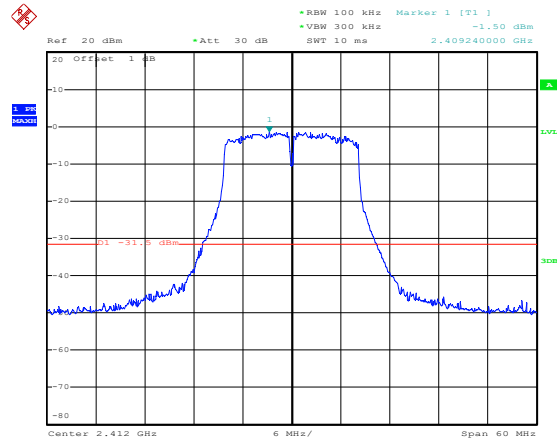


Date: 12.APR.2024 17:45:46



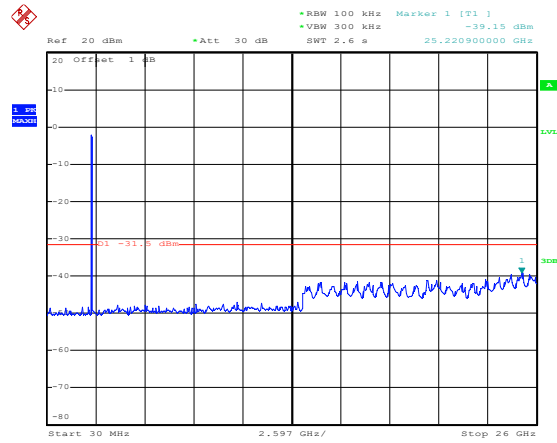


Date: 12.APR.2024 17:46:22


802.11g-Middle

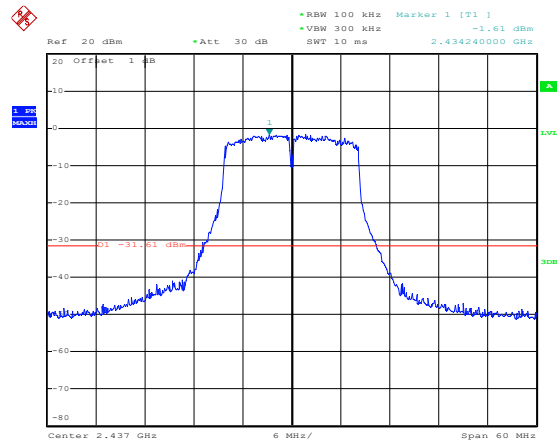


Date: 12.APR.2024 17:46:56

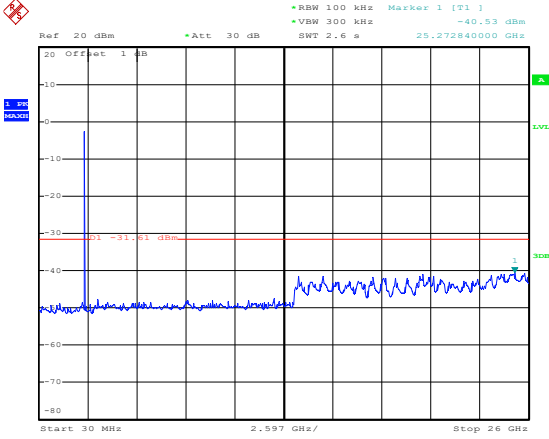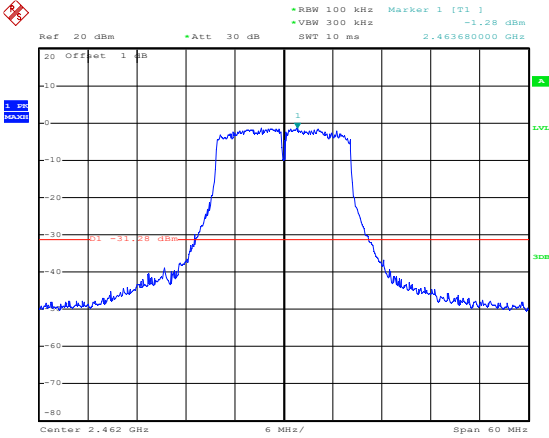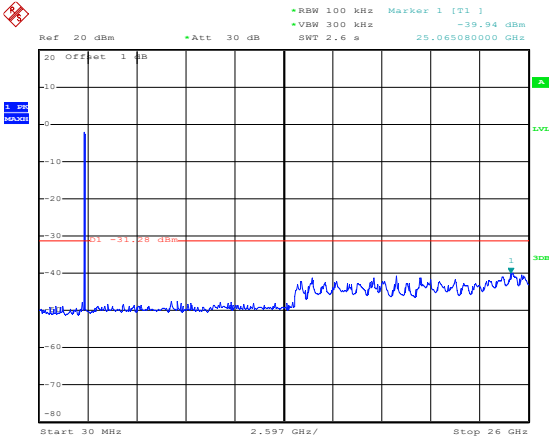	 <p>Date: 12.APR.2024 17:47:12</p>
<p>802.11g-High</p>	 <p>Date: 12.APR.2024 17:48:09</p>
	 <p>Date: 12.APR.2024 17:48:33</p>

802.11n-HT20-Low

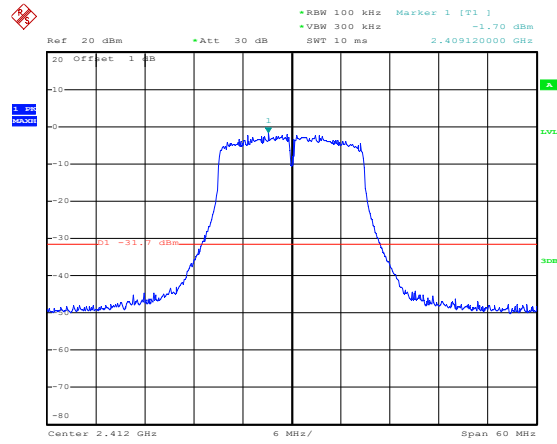


Date: 12.APR.2024 17:50:08

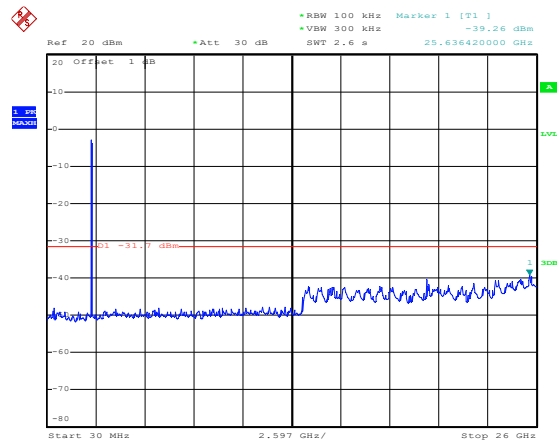




Date: 12.APR.2024 17:50:25

802.11n-HT20-Middle

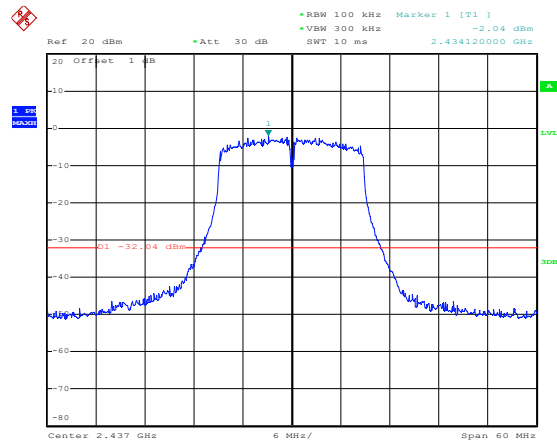


Date: 12.APR.2024 17:50:56

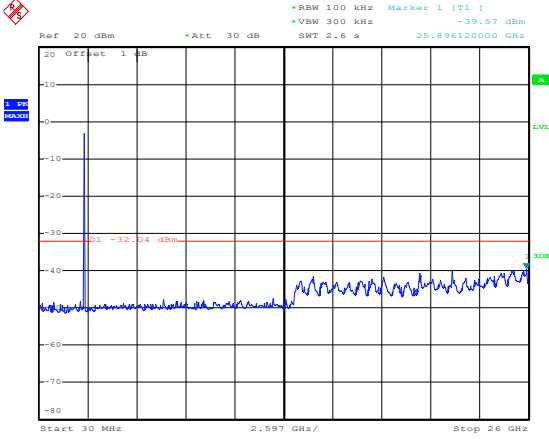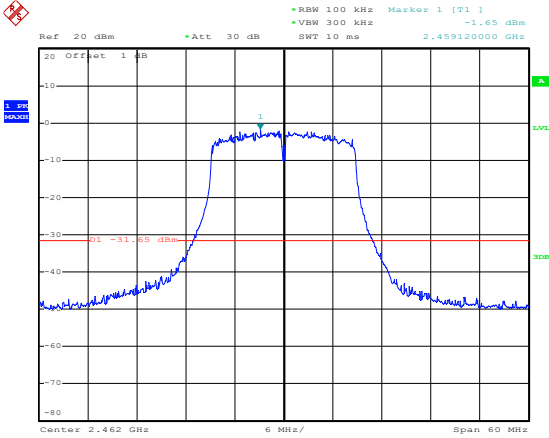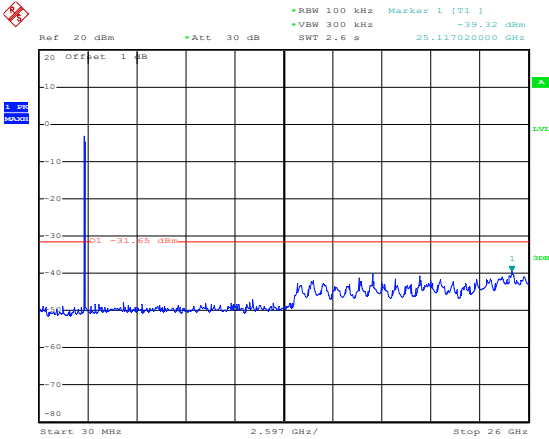


	 <p>Date: 12.APR.2024 17:51:12</p>
<p>802.11n-HT20-High</p>	 <p>Date: 12.APR.2024 17:52:34</p>
	 <p>Date: 12.APR.2024 17:52:52</p>

802.11n-HT40-Low

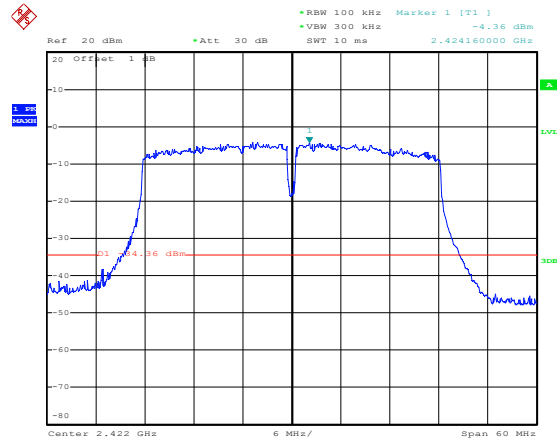


Date: 12.APR.2024 17:53:42



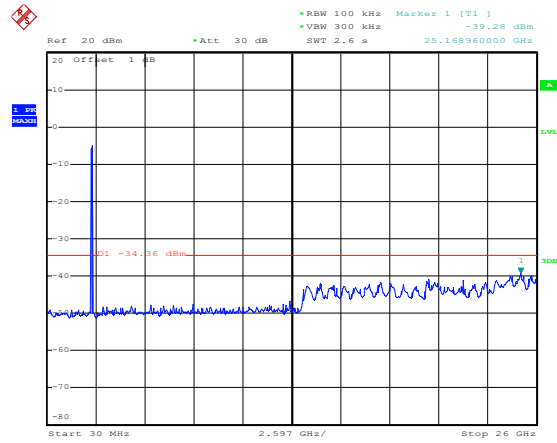


Date: 12.APR.2024 17:54:07

802.11n-HT40-Middle

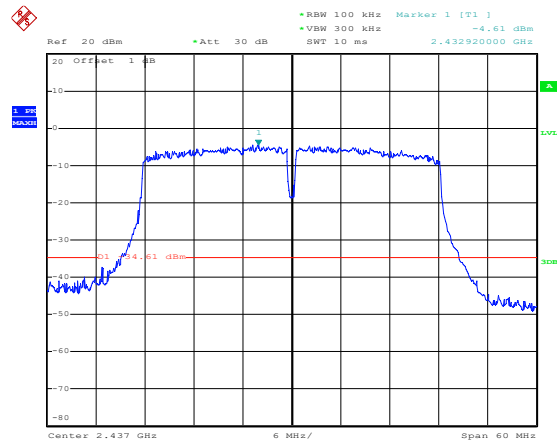

Date: 12.APR.2024 17:54:46

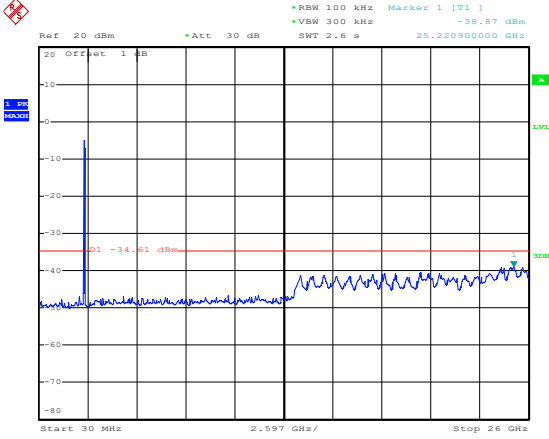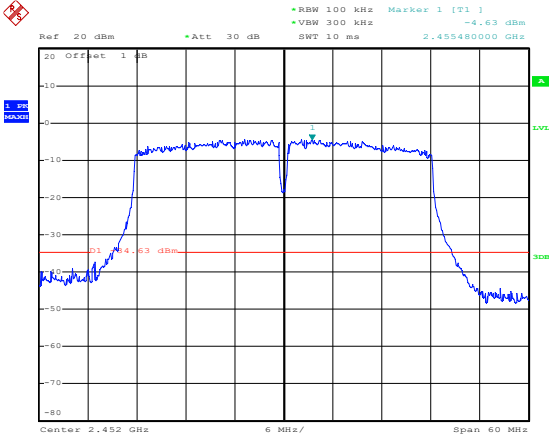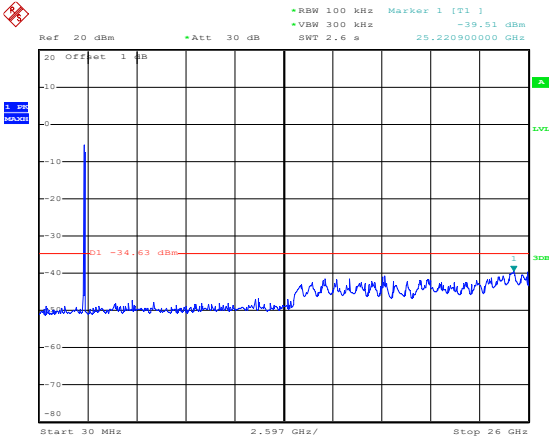	 <p>Date: 12.APR.2024 17:58:48</p>
802.11n-HT40-High	 <p>Date: 12.APR.2024 17:55:47</p>
	 <p>Date: 12.APR.2024 17:56:06</p>

## APPENDIX PHOTOGRAPHS

---

Please refer to "ANNEX"

\*\*\*\* END OF REPORT \*\*\*\*