

FCC Part 15C Measurement and Test Report

For

SHENZHEN QIYUE OPTRONICS COMPANY LIMITED

Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,

Shangmeilin, Futian District, Shenzhen , China

FCC ID: XOMD50A114D-U-A-I

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>50" SMART 4K UHD TV</u>
Tested Model:	<u>D50A114d-U-A-I</u>
Report No.:	<u>WTG19X09067775W-1</u>
Sample Receipt Date:	<u>2019-09-27</u>
Tested Date:	<u>2019-09-27 to 2019-10-16</u>
Issued Date:	<u>2019-10-16</u>
Tested By:	<u>Mike Shi / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Mike Shi

Silin Chen

Jandy So



Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. RF EXPOSURE	11
3.1 STANDARD APPLICABLE	11
3.2 TEST RESULT	11
4. ANTENNA REQUIREMENT	12
4.1 STANDARD APPLICABLE	12
4.2 EVALUATION INFORMATION	12
5. POWER SPECTRAL DENSITY	13
5.1 STANDARD APPLICABLE	13
5.2 TEST PROCEDURE	13
5.3 SUMMARY OF TEST RESULTS/PLOTS	13
6. DTS BANDWIDTH	22
6.1 STANDARD APPLICABLE	22
6.2 TEST PROCEDURE	22
6.3 SUMMARY OF TEST RESULTS/PLOTS	22
7. RF OUTPUT POWER	31
7.1 STANDARD APPLICABLE	31
7.2 TEST PROCEDURE	31
7.3 SUMMARY OF TEST RESULTS/PLOTS	31
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	41
8.1 STANDARD APPLICABLE	41
8.2 TEST PROCEDURE	41
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	43
8.4 SUMMARY OF TEST RESULTS/PLOTS	43
9. OUT OF BAND EMISSIONS	58
9.1 STANDARD APPLICABLE	58
9.2 TEST PROCEDURE	58
9.3 SUMMARY OF TEST RESULTS/PLOTS	59
10. CONDUCTED EMISSIONS	92
10.1 TEST PROCEDURE	92
10.2 BASIC TEST SETUP BLOCK DIAGRAM	92
10.3 TEST RECEIVER SETUP	92
10.4 SUMMARY OF TEST RESULTS/PLOTS	92

Report version

Version No.	Date of issue	Description
Rev.00	2019-10-16	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen , China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 BRANCH
 Address of manufacturer: SEIYU INDUSTRIAL PARK, DA SAN VILLAGE, DA SHUI KENG, GUANLAN TOWN, LONGHUA NEW DISTRICT, SHENZHEN,P.R.C

General Description of EUT	
Product Name:	50" SMART 4K UHD TV
Trade Name:	RCA smarTVirtuoso, RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA
Model No.:	D50A114d-U-A-I
Adding Model(s):	PLED5038-C-UHDSMXXXXXXXXXXXXXXXXXXXX50XXXXXX XXXXXXXXXXXX (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model D50A114d-U-A-I, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	15.96dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	4.4dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI Cable	1.2	Shielded	Without Ferrite
VGI Cable	1.2	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
PC	dell	10FYQ42	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_11Mbps	2412	-7.39	-7.37	/	8
	2437	-6.37	-6.93	/	8
	2462	-6.22	-6.18	/	8
802.11g_54Mbps	2412	-8.58	-10.57	/	8
	2437	-8.47	-9.58	/	8
	2462	-8.97	-9.29	/	8
802.11n-HT20_MCS7	2412	-8.91	-10.60	-6.66	8
	2437	-8.41	-10.08	-6.15	8
	2462	-9.14	-10.56	-6.78	8
802.11n-HT40_MCS7	2422	-12.72	-14.74	-10.42	8
	2437	-13.91	-13.85	-10.87	8
	2452	-14.57	-14.38	-11.46	8




Please refer to the following test plots:

➤ Antenna 1

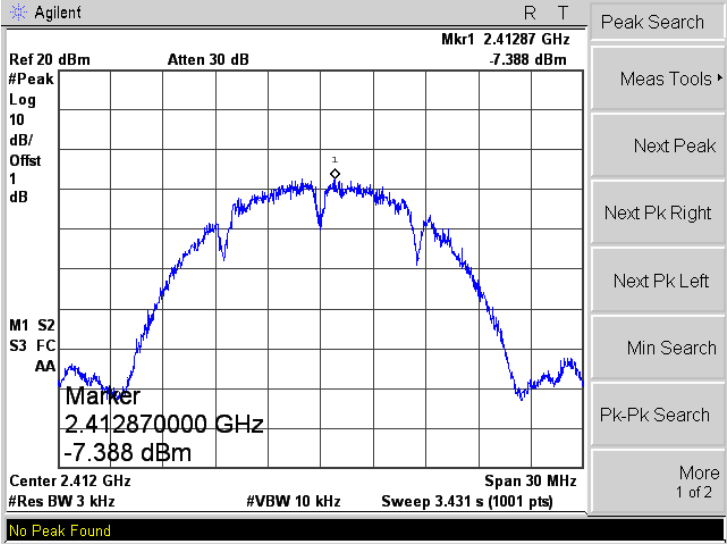
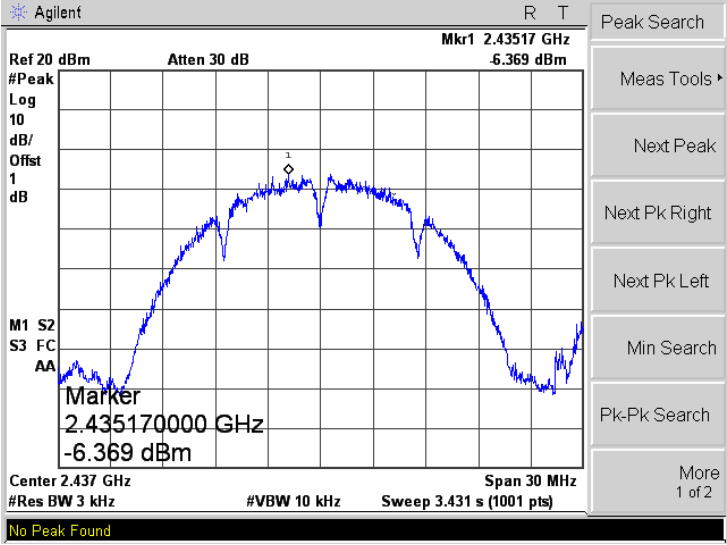
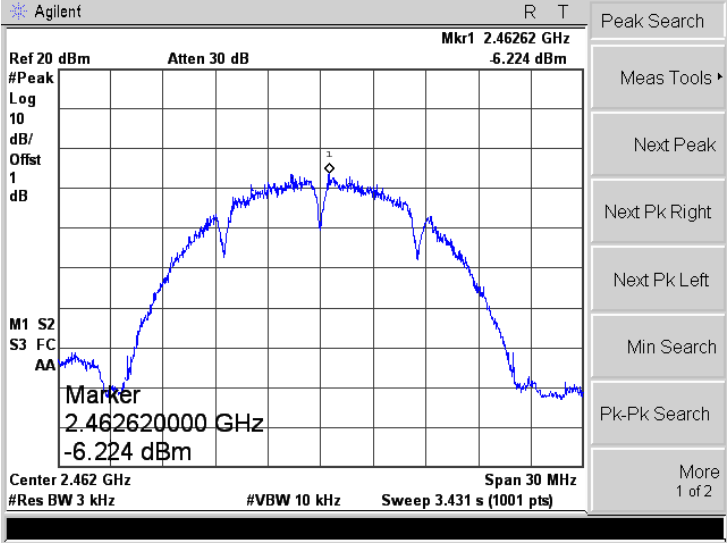
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

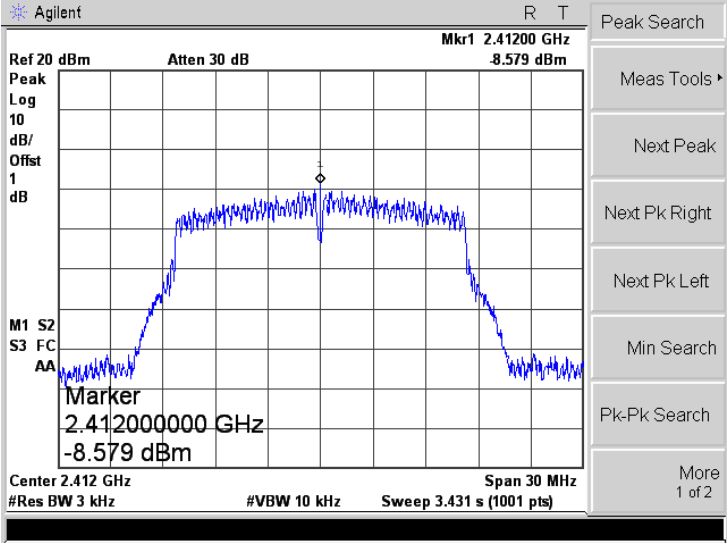
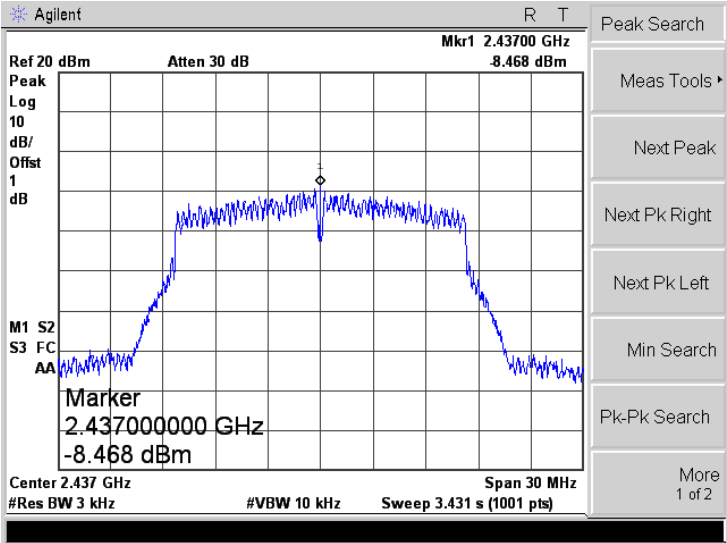
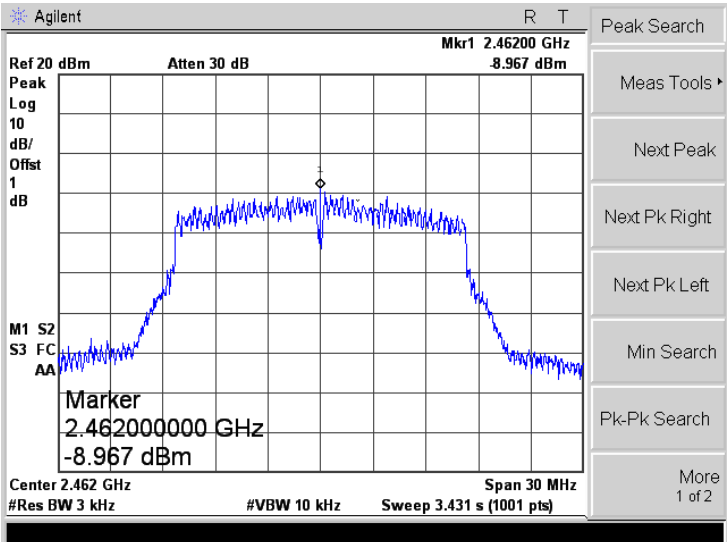
<p>802.11g-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41200 GHz -8.579 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> <p>Marker 2.41200000 GHz -8.579 dBm</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43700 GHz -8.468 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> <p>Marker 2.43700000 GHz -8.468 dBm</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46200 GHz -8.967 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> <p>Marker 2.46200000 GHz -8.967 dBm</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>

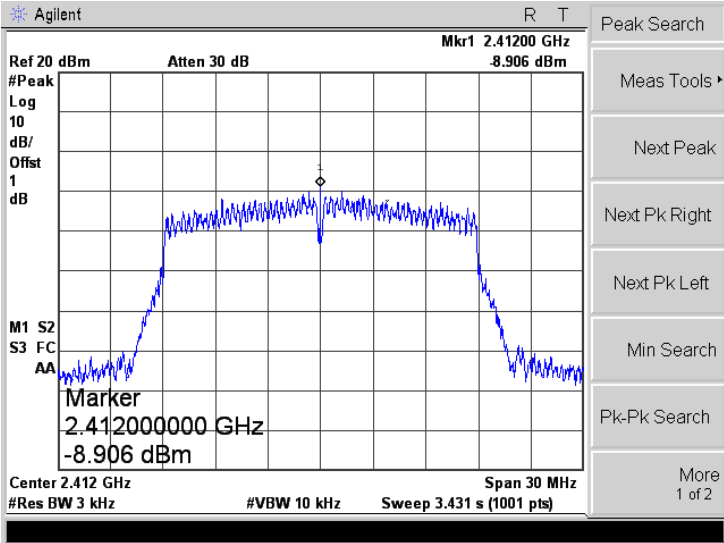
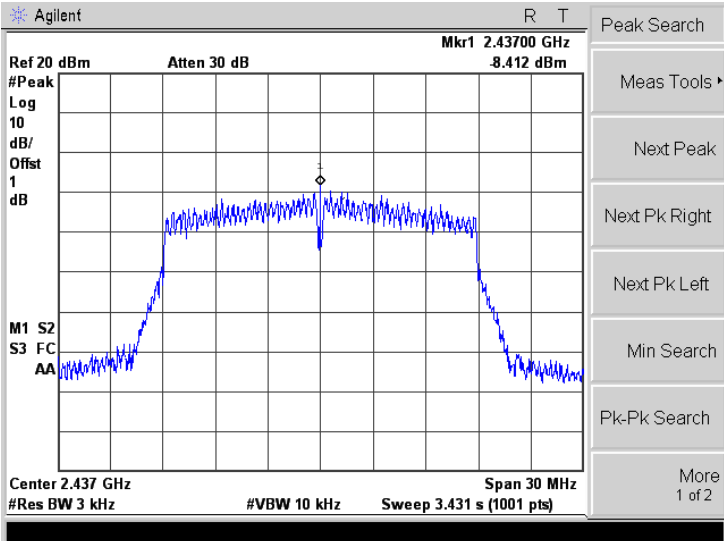
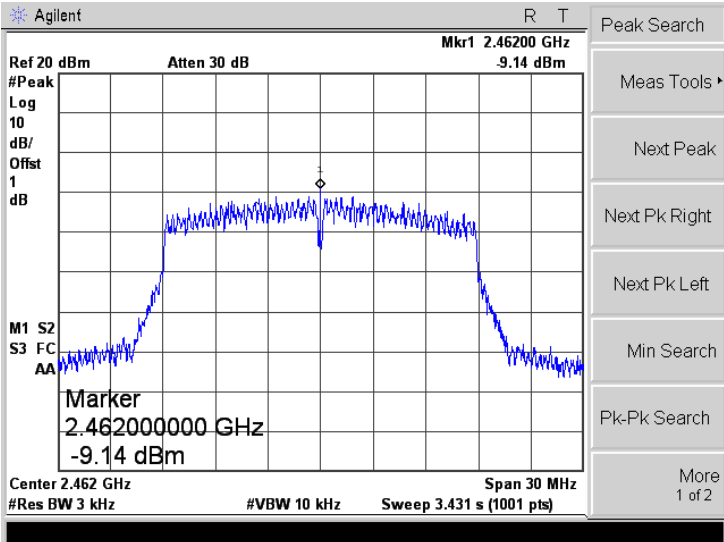
<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41200 GHz -8.906 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.41200000 GHz -8.906 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43700 GHz -8.412 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46200 GHz -9.14 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.46200000 GHz -9.14 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>

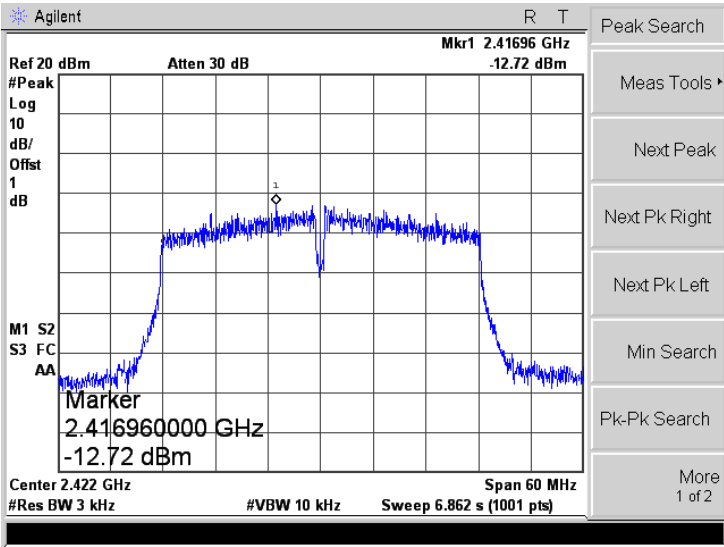
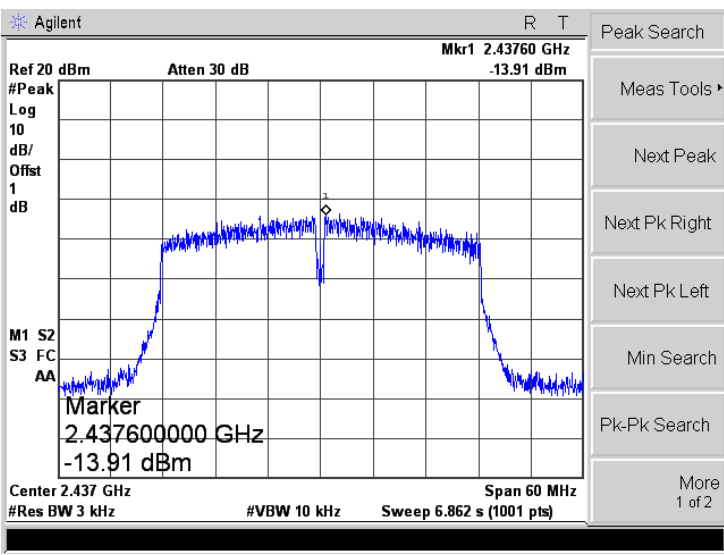
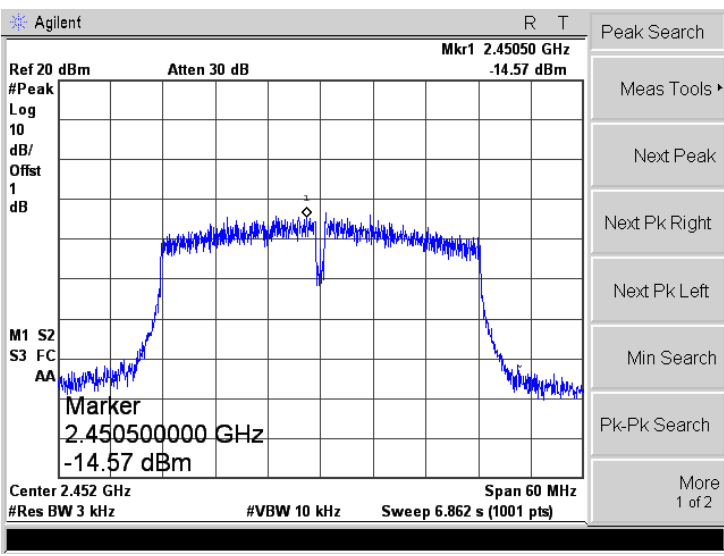
802.11n-HT40-Low	
802.11n-HT40-Middle	
802.11n-HT40-High	

➤ Antenna 2
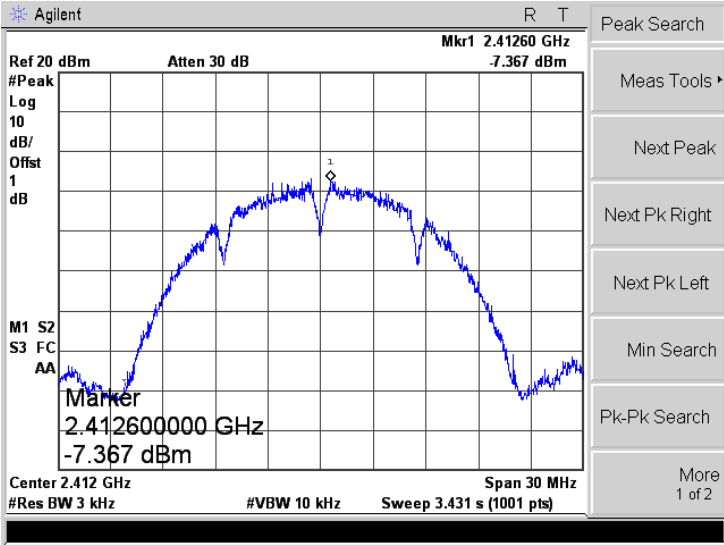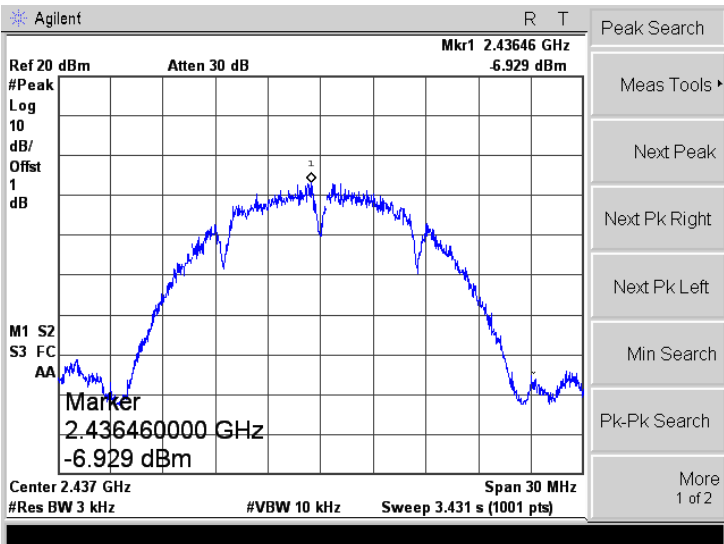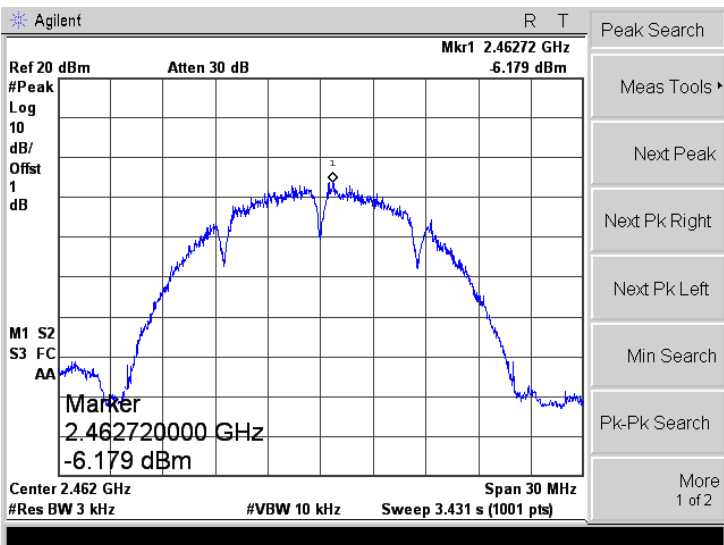
<p>802.11b-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41260 GHz -7.367 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.41260000 GHz -7.367 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11b-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43646 GHz -6.929 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.436460000 GHz -6.929 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>
<p>802.11b-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46272 GHz -6.179 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.462720000 GHz -6.179 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)</p>

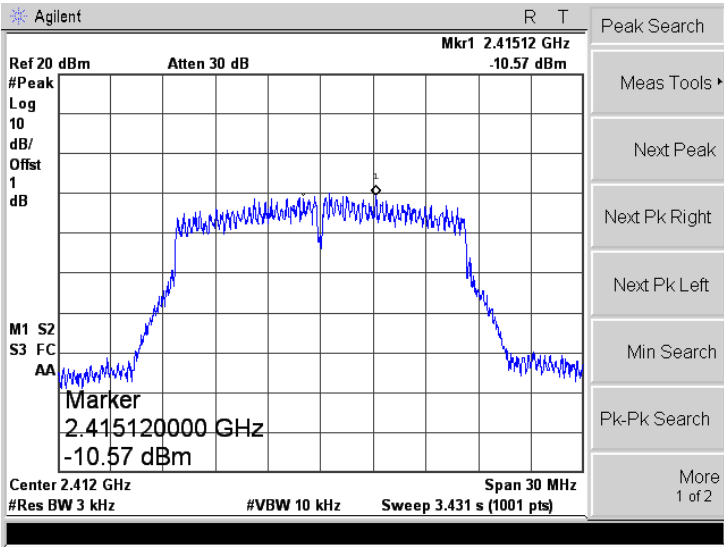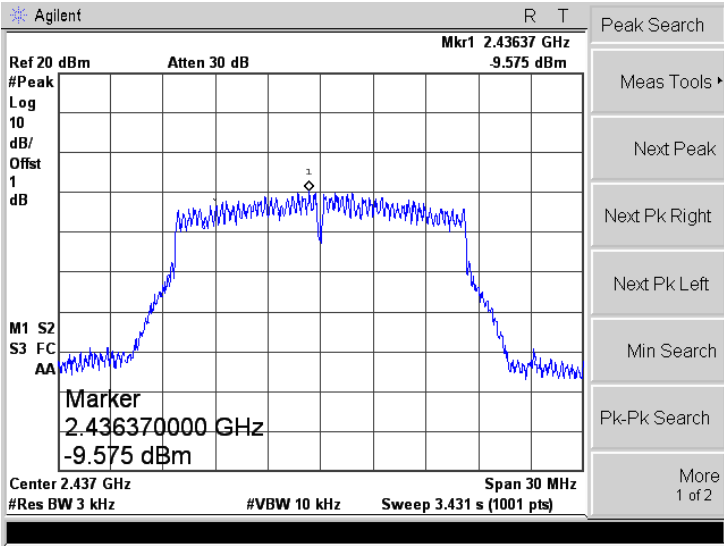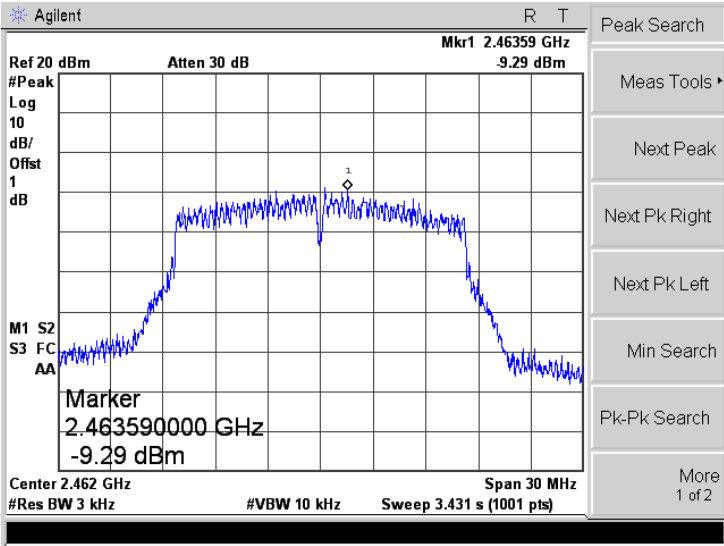802.11g-Low	
802.11g-Middle	
802.11g-High	
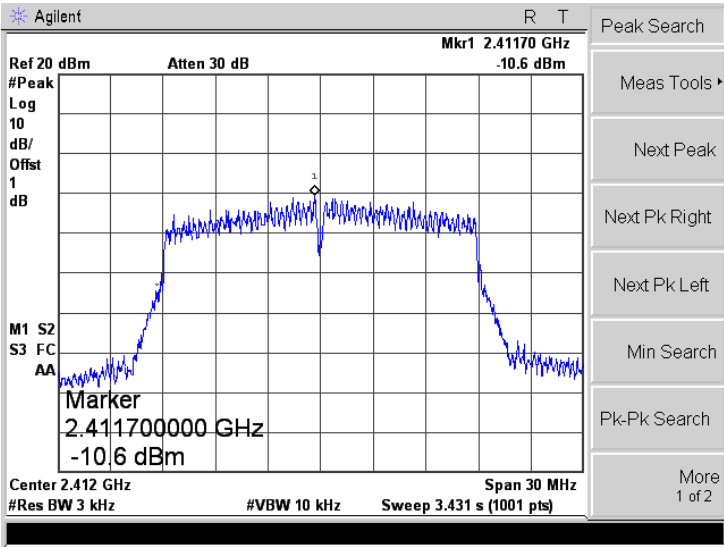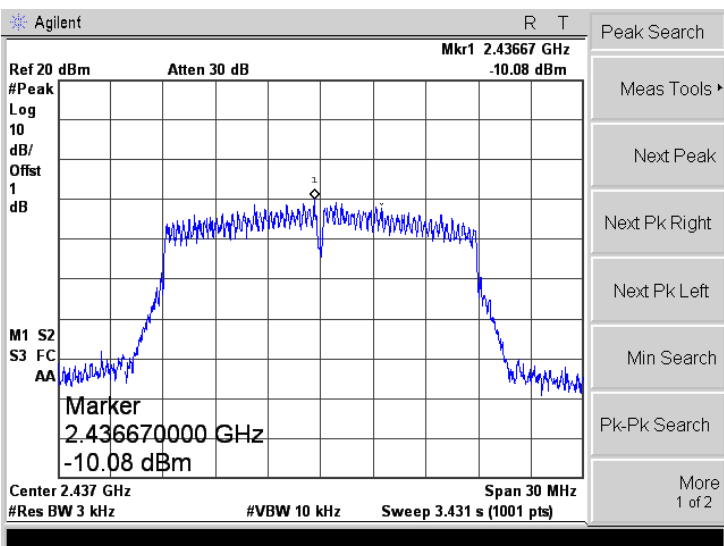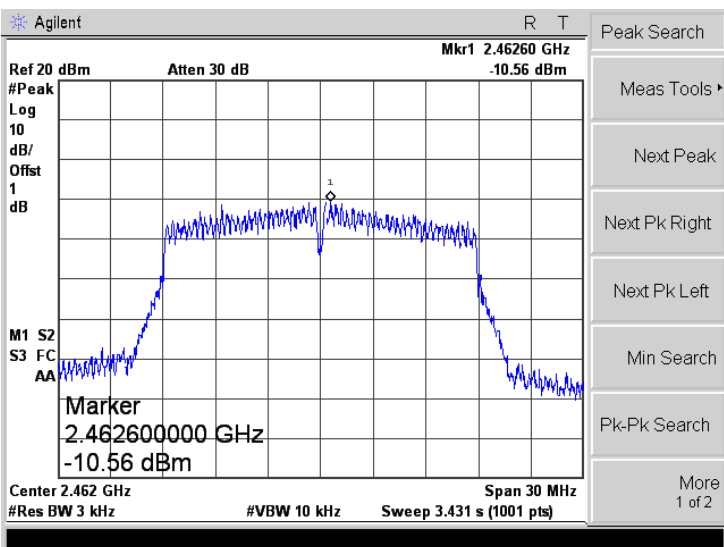
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
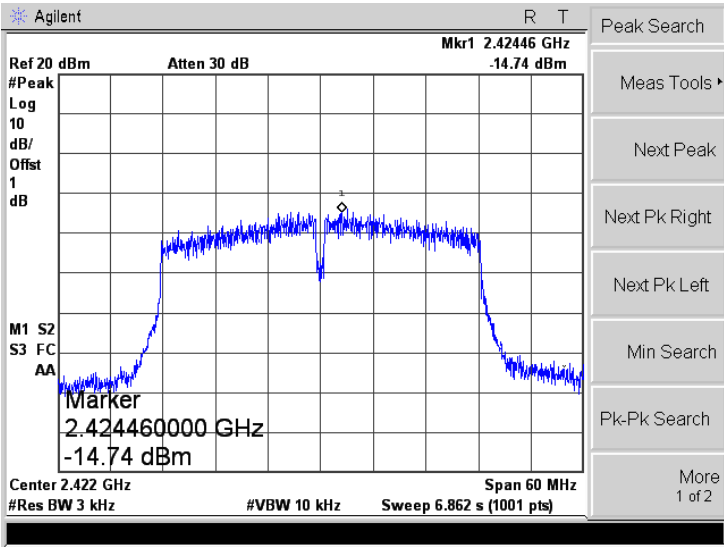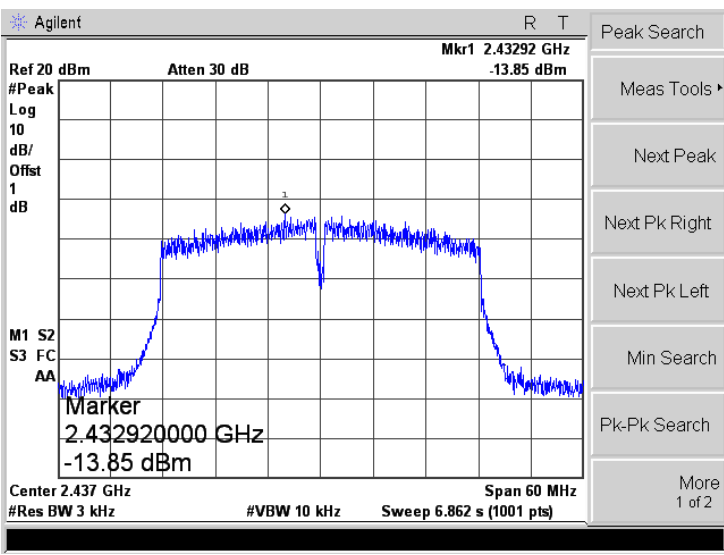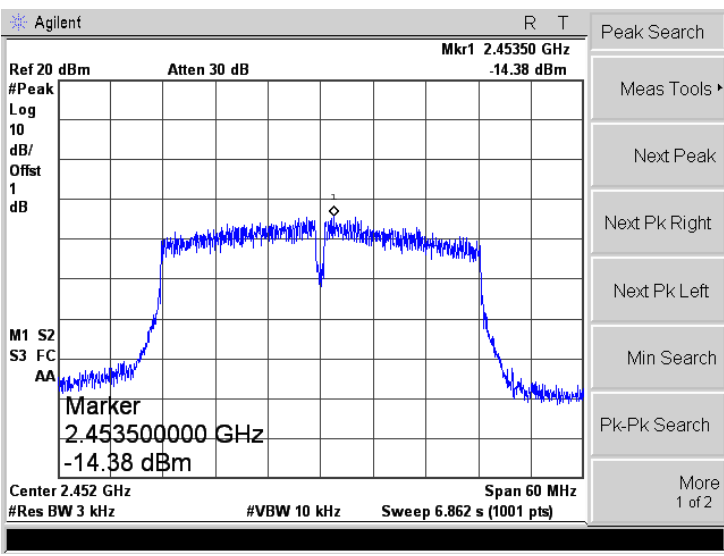
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:




- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




6.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_11Mbps	2412	9.523	9.071	≥ 500
	2437	8.548	9.037	≥ 500
	2462	9.514	8.536	≥ 500
802.11g_54Mbps	2412	16.278	16.282	≥ 500
	2437	16.287	16.327	≥ 500
	2462	16.083	16.068	≥ 500
802.11n-HT20_MCS7	2412	16.753	15.886	≥ 500
	2437	17.147	17.149	≥ 500
	2462	17.306	17.547	≥ 500
802.11n-HT40_MCS7	2422	34.407	34.391	≥ 500
	2437	32.899	33.814	≥ 500
	2452	33.566	33.819	≥ 500




Please refer to the following test plots:

➤ Antenna 1

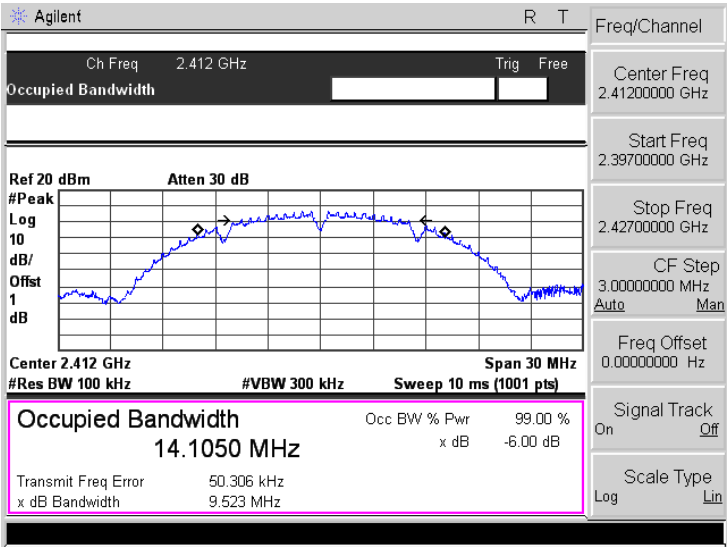
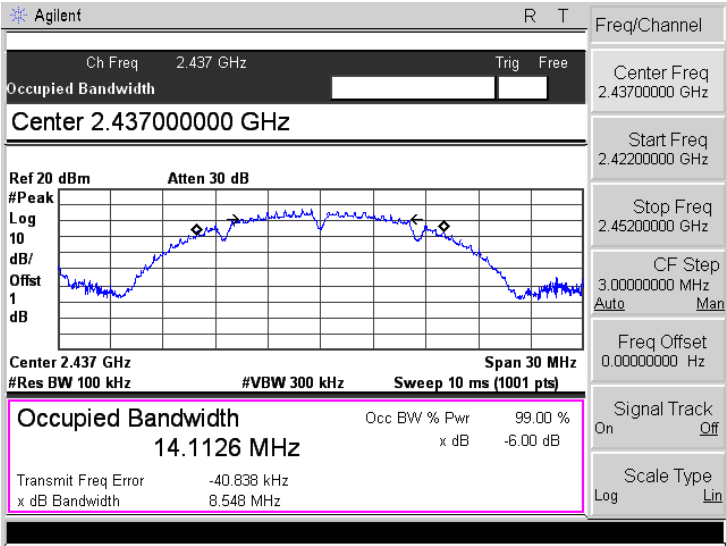
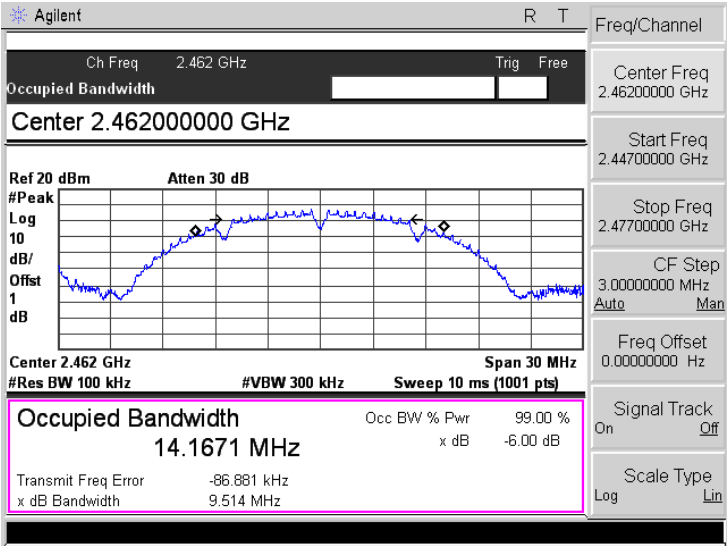
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

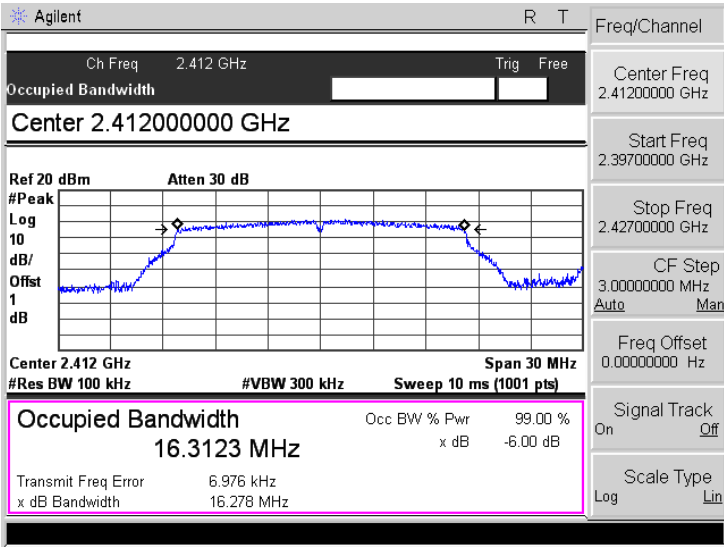
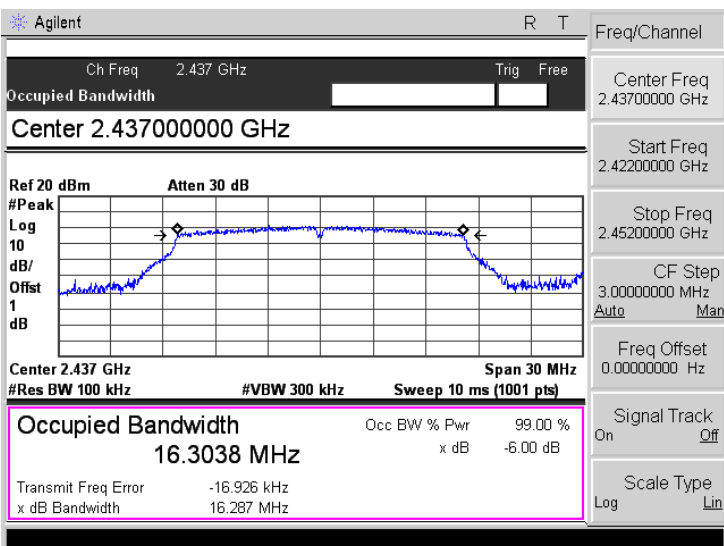
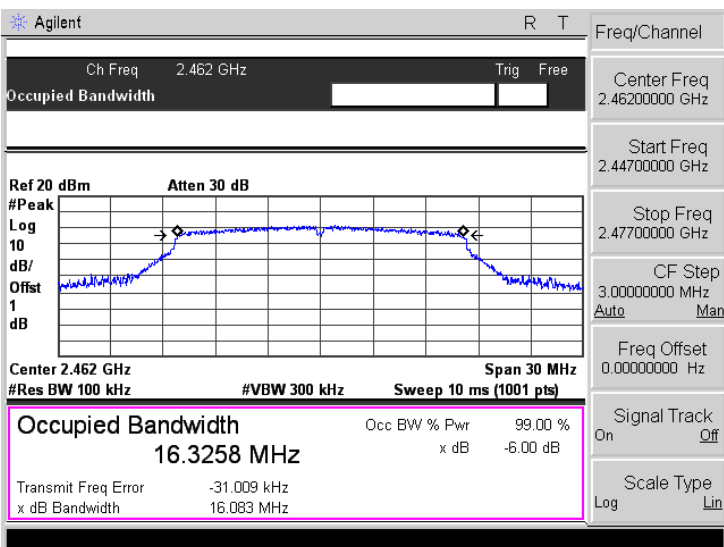
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3123 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 6.976 kHz x dB Bandwidth 16.278 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3038 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.926 kHz x dB Bandwidth 16.287 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3258 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.009 kHz x dB Bandwidth 16.083 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

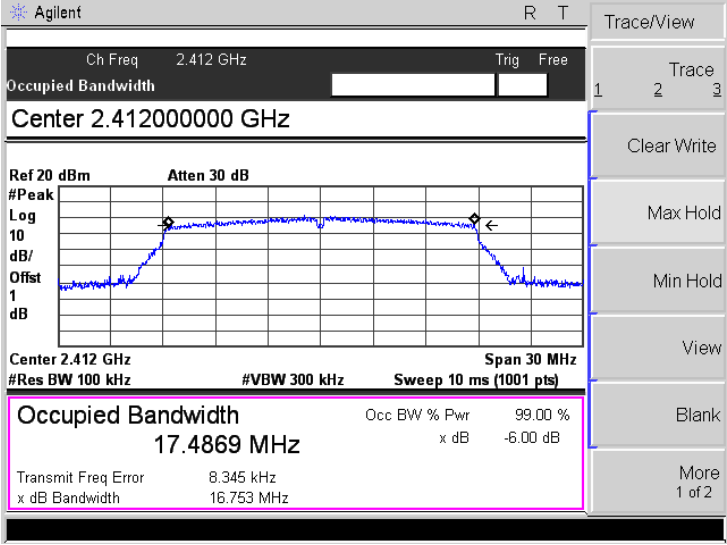
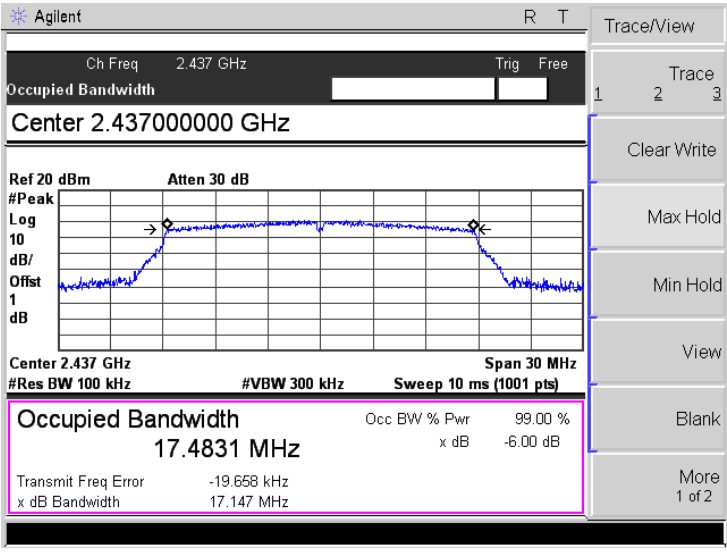
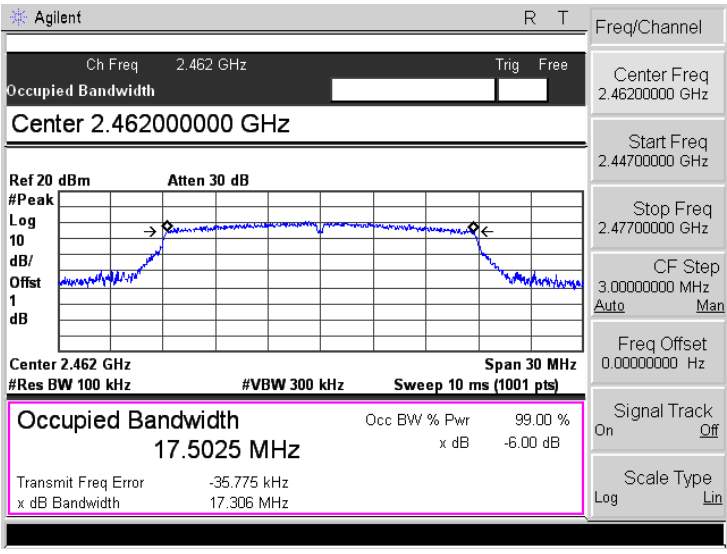
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

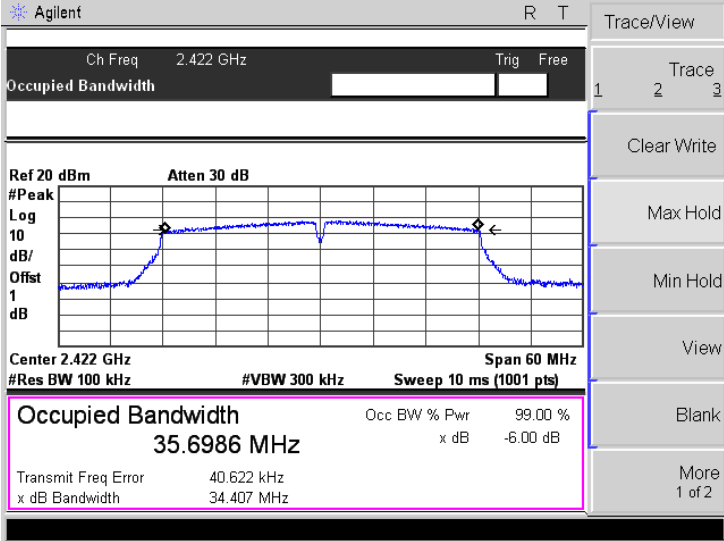
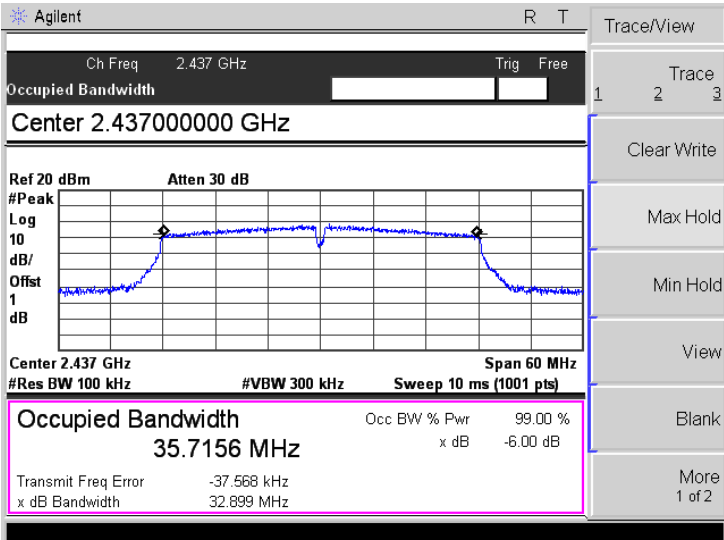
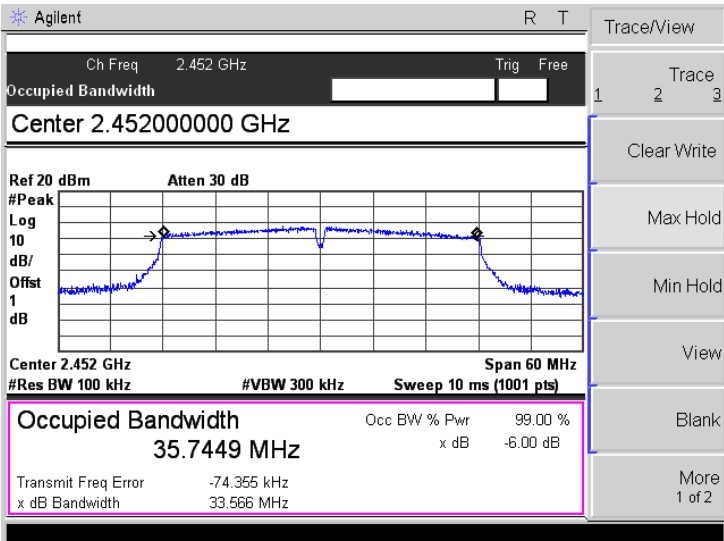
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>35.6986 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 40.622 kHz</p> <p>x dB Bandwidth 34.407 MHz</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>35.7156 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -37.568 kHz</p> <p>x dB Bandwidth 32.899 MHz</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.452000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>35.7449 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -74.355 kHz</p> <p>x dB Bandwidth 33.566 MHz</p>

➤ Antenna 2
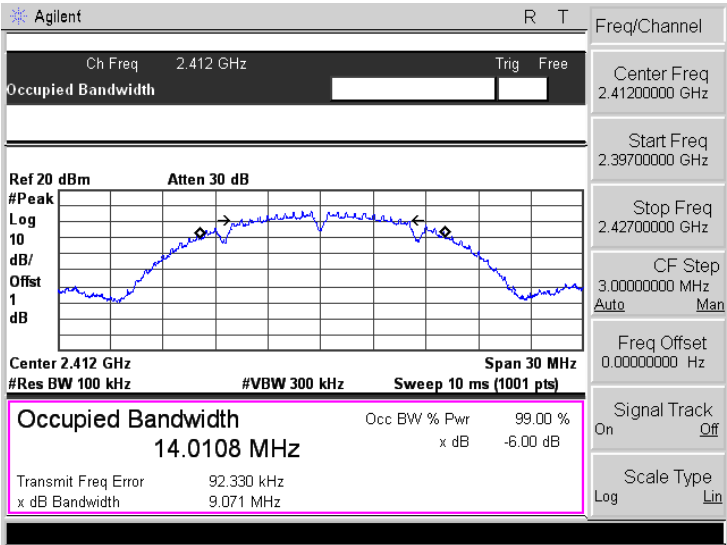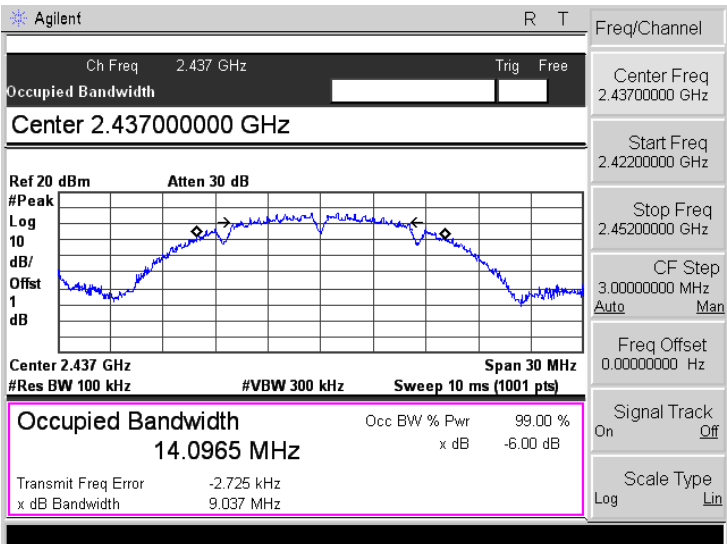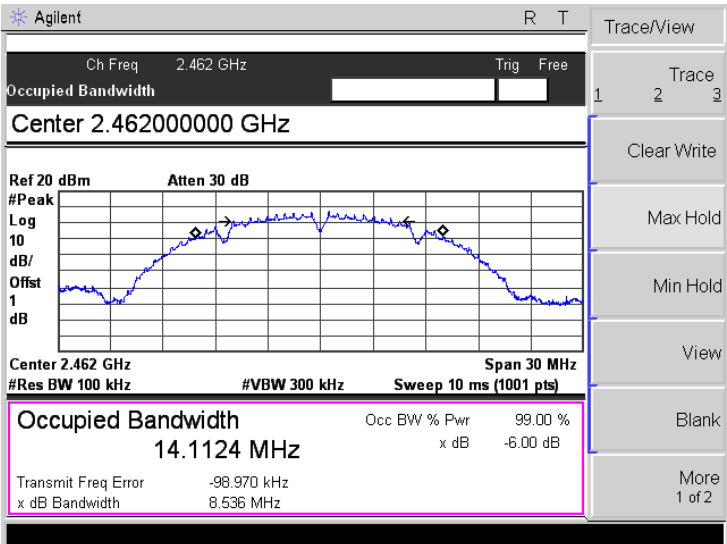
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
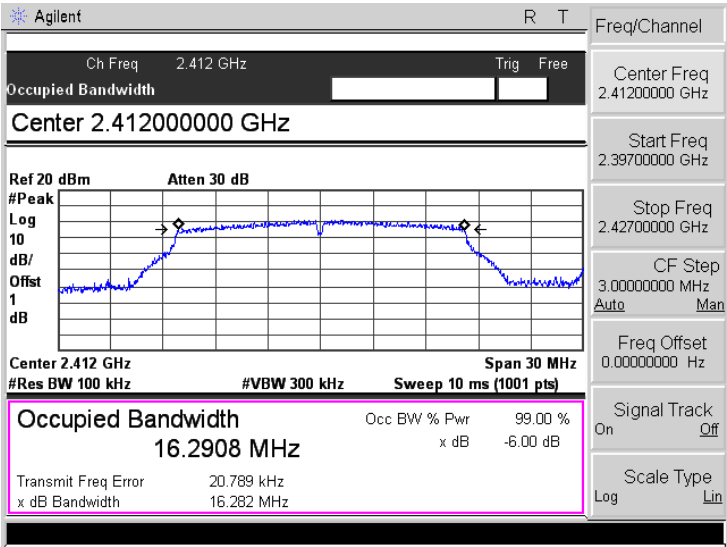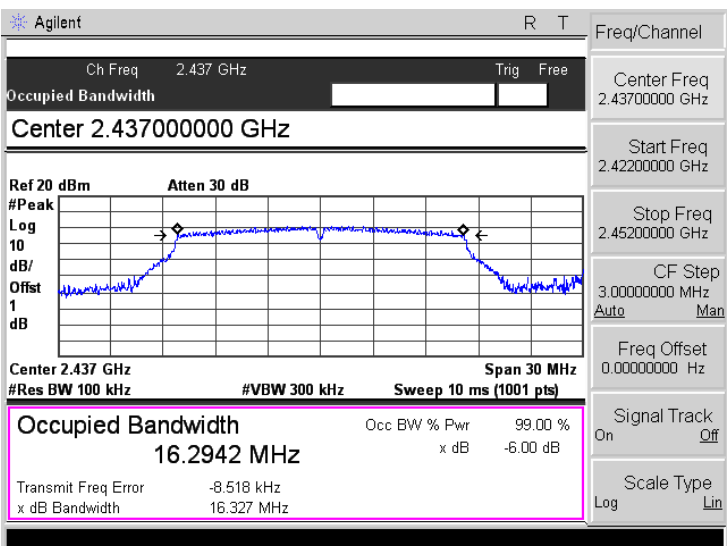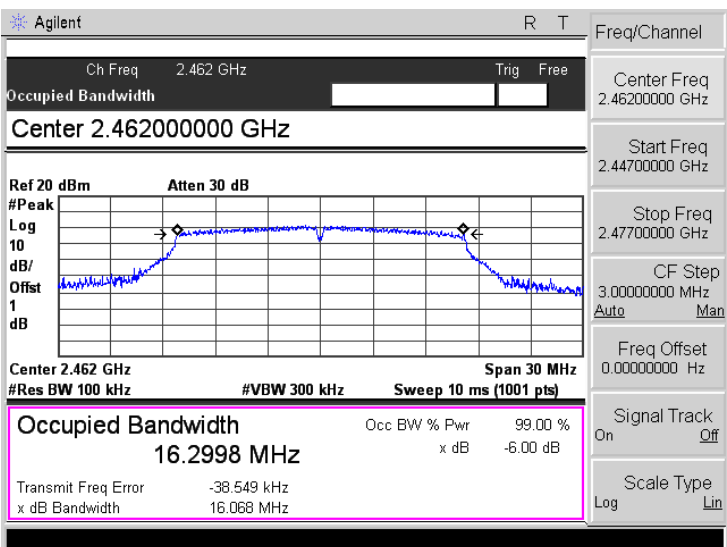
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.2908 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 20.789 kHz x dB Bandwidth 16.282 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.2942 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.518 kHz x dB Bandwidth 16.327 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.2998 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -38.549 kHz x dB Bandwidth 16.068 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

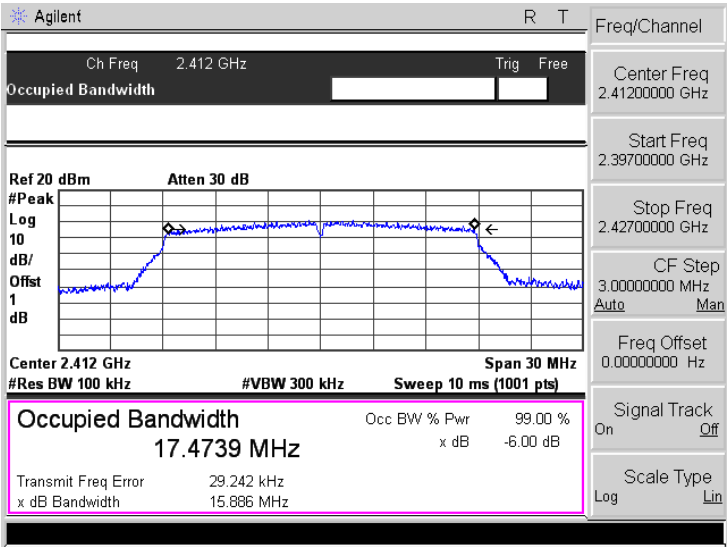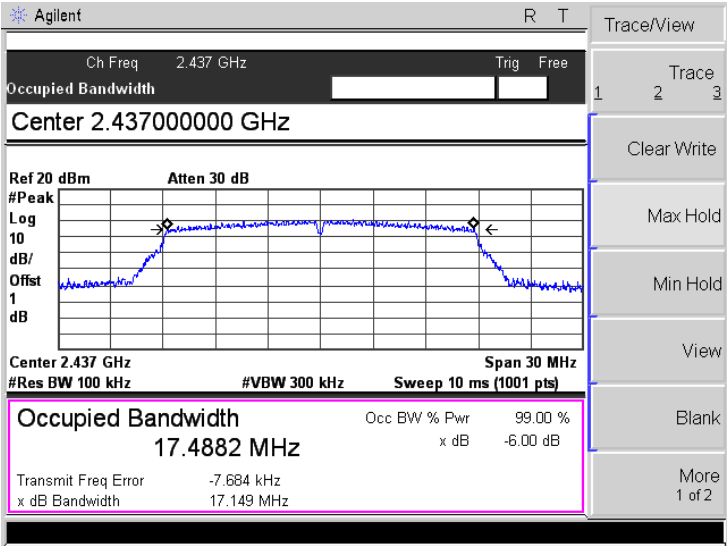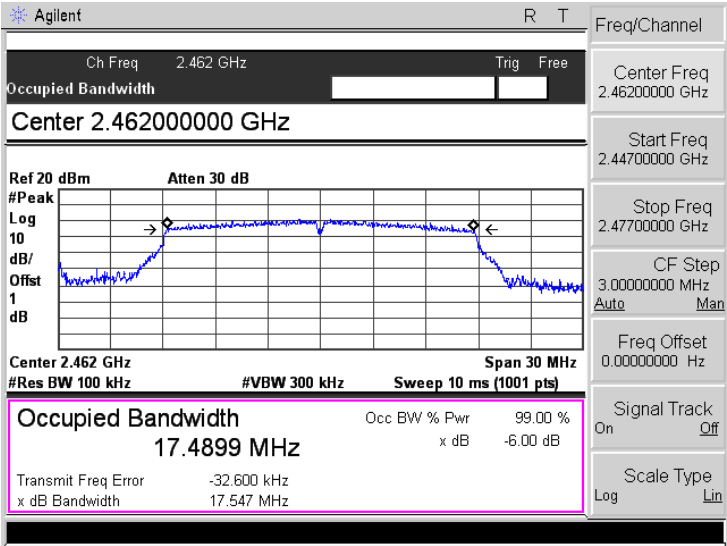802.11n-HT20-Low	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center 2.412 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4739 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 29.242 kHz x dB Bandwidth 15.886 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11n-HT20-Middle	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4882 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.684 kHz x dB Bandwidth 17.149 MHz</p> <p>Trace/View</p> <p>1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
802.11n-HT20-High	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4899 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -32.600 kHz x dB Bandwidth 17.547 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

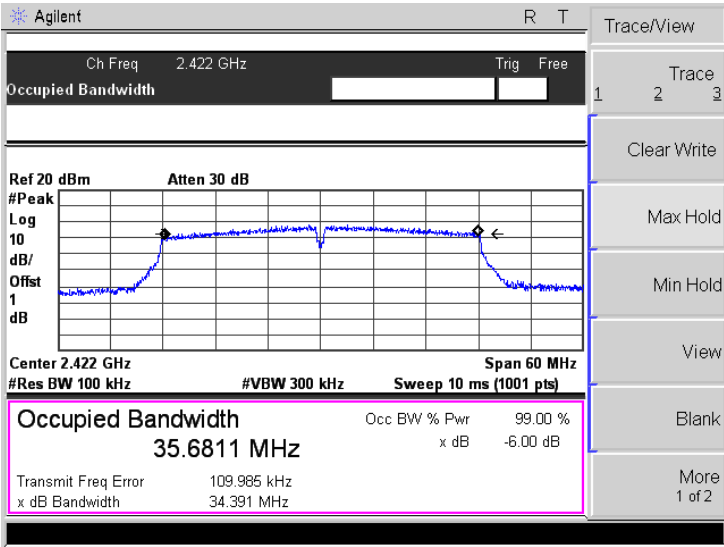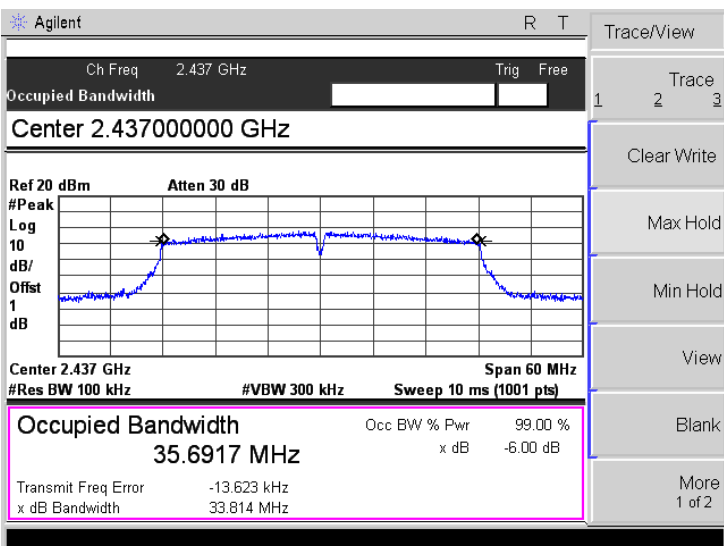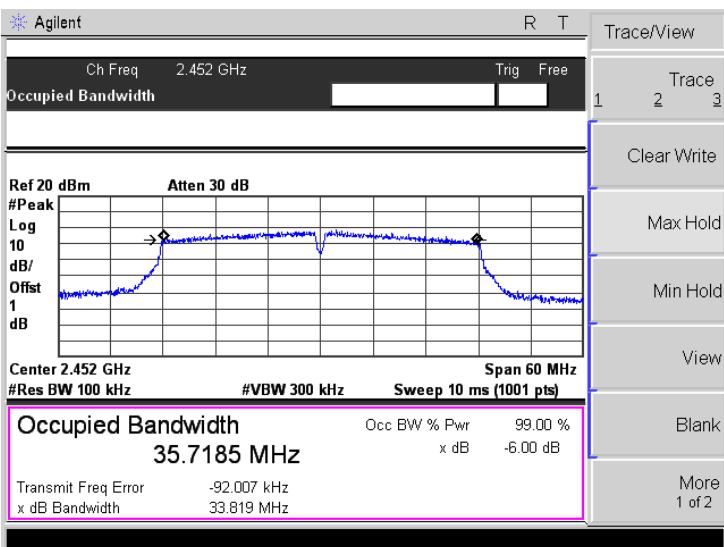802.11n-HT40-Low	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.6811 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 109.985 kHz</p> <p>x dB Bandwidth 34.391 MHz</p>
802.11n-HT40-Middle	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.6917 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.623 kHz</p> <p>x dB Bandwidth 33.814 MHz</p>
802.11n-HT40-High	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.7185 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -92.007 kHz</p> <p>x dB Bandwidth 33.819 MHz</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm)		Output Power (MAX Antenna) mW	Limit mW	
		Antenna 1	Antenna 2			
802.11b _11Mbps	2412	15.13	15.01	32.58	1000	
	2437	15.25	15.90	38.90	1000	
	2462	15.48	15.62	36.48	1000	
802.11g _54Mbps	2412	13.64	13.49	23.12	1000	
	2437	13.42	13.91	24.60	1000	
	2462	13.35	13.88	24.43	1000	
Test Mode	Test Channel MHz	Test Result(dBm)		Total dBm	Output Power mW	Limit mW
		Antenna 1	Antenna 2			
802.11n HT20_MCS7	2412	12.90	11.93	15.45	35.09	1000
	2437	12.95	12.42	15.70	37.18	1000
	2462	12.66	13.22	15.96	39.44	1000
802.11n HT40_MCS7	2422	12.44	12.03	15.25	33.50	1000
	2437	12.20	12.30	15.26	33.58	1000
	2452	12.71	12.06	15.41	34.73	1000




Please refer to the following test plots:

➤ Antenna 1

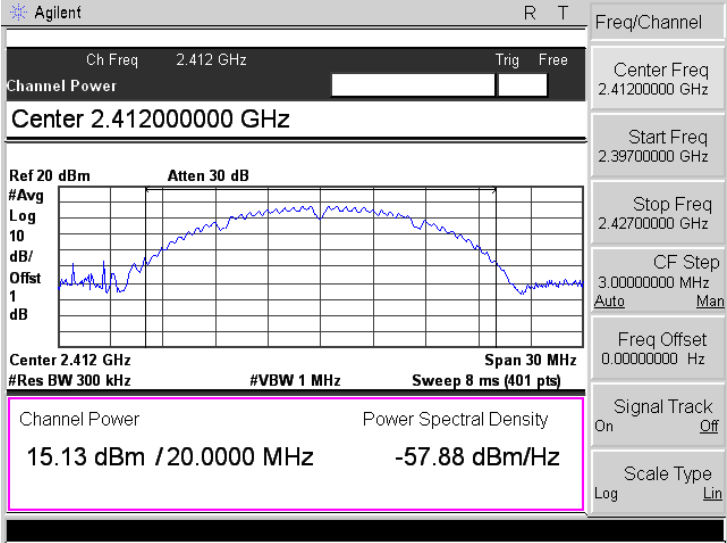
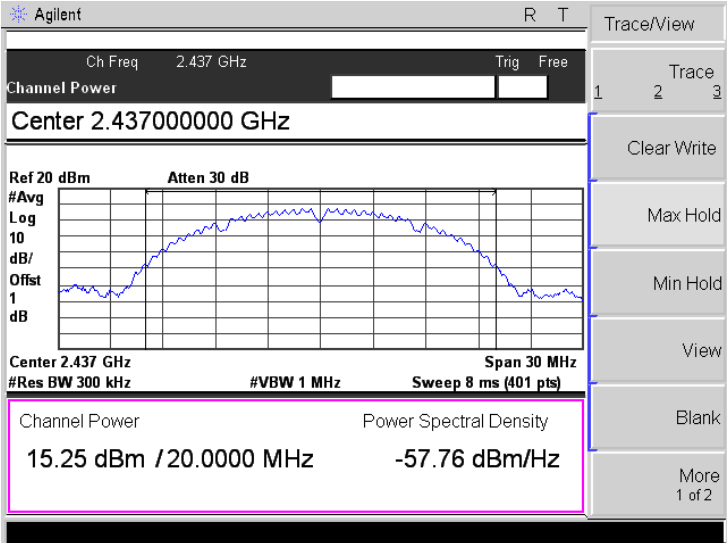
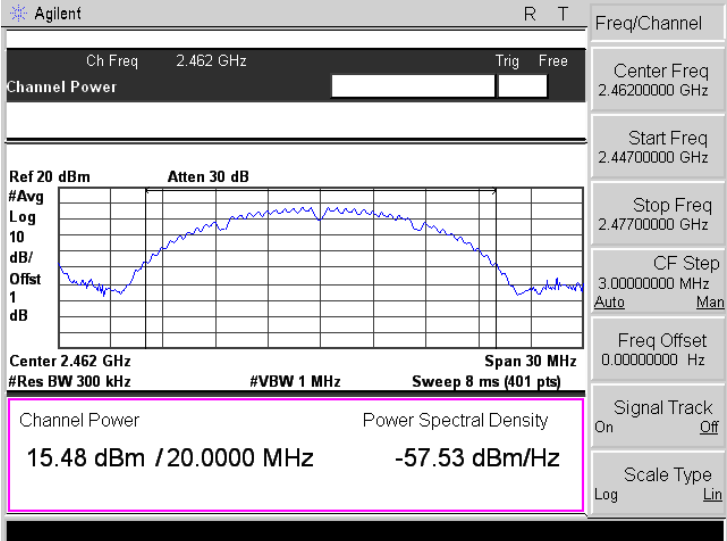
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 15.13 dBm / 20.0000 MHz -57.88 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 15.25 dBm / 20.0000 MHz -57.76 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 15.48 dBm / 20.0000 MHz -57.53 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

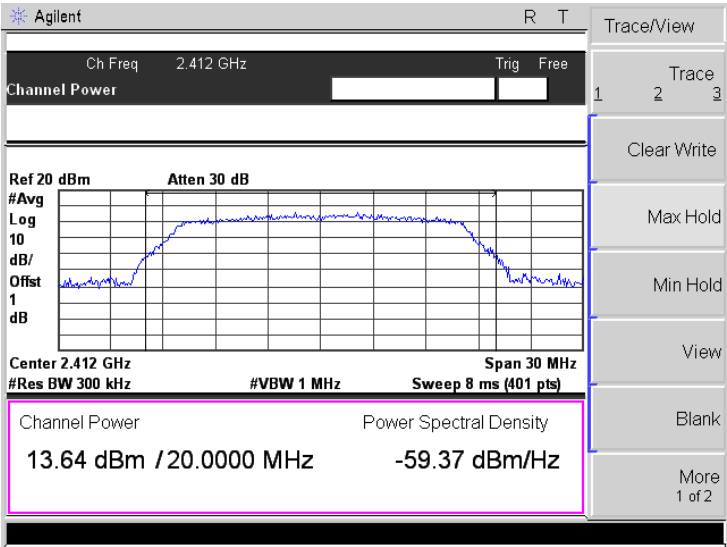
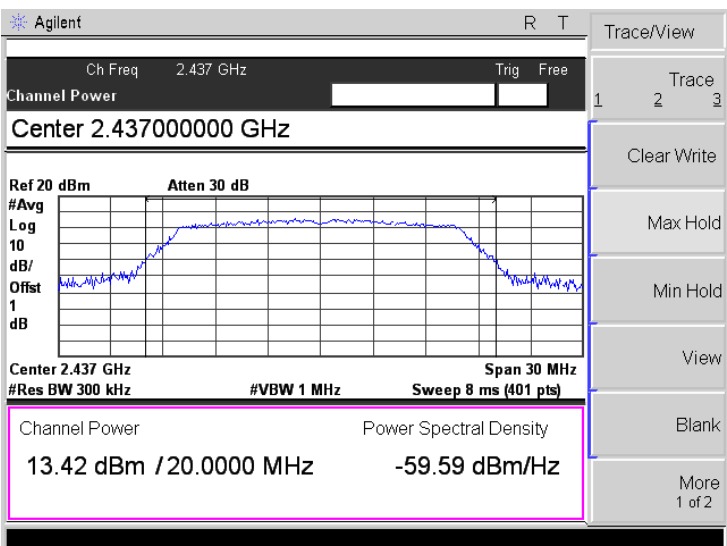
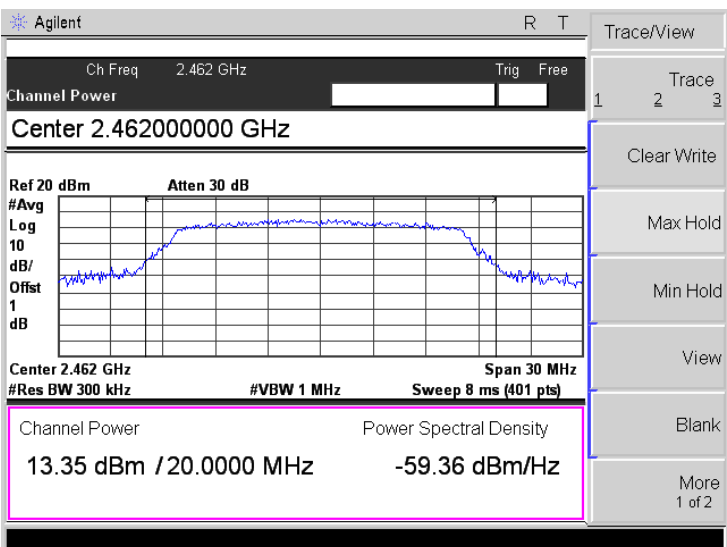
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.64 dBm / 20.0000 MHz -59.37 dBm/Hz</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.42 dBm / 20.0000 MHz -59.59 dBm/Hz</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.35 dBm / 20.0000 MHz -59.36 dBm/Hz</p>

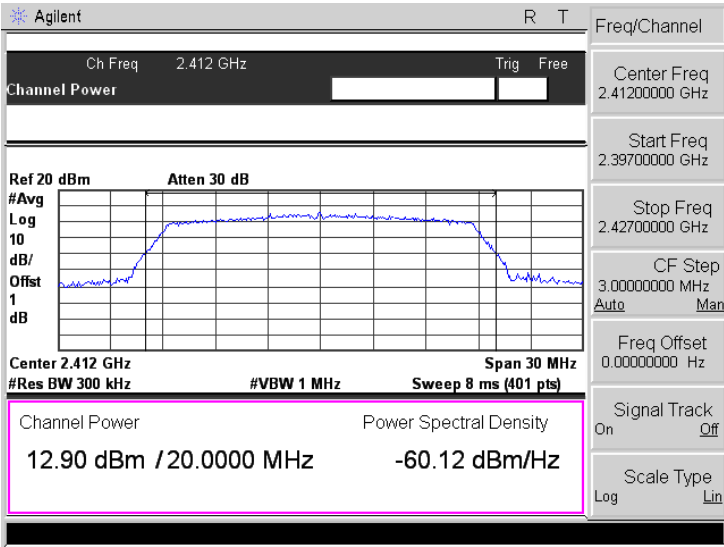
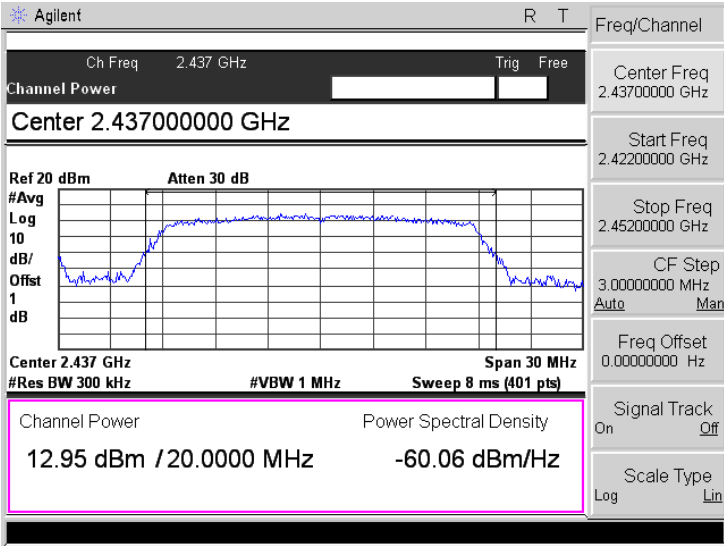
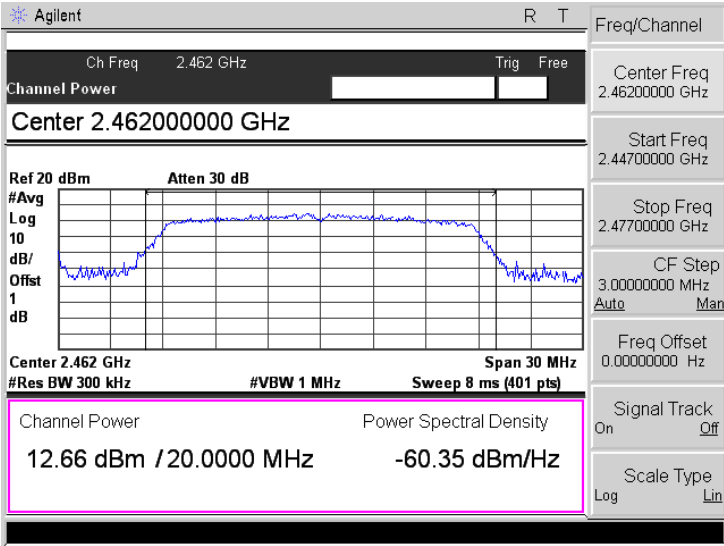
<p>802.11n-HT20-Low MCS7</p>	
<p>802.11n-HT20-Middle MCS7</p>	
<p>802.11n-HT20-High MCS7</p>	

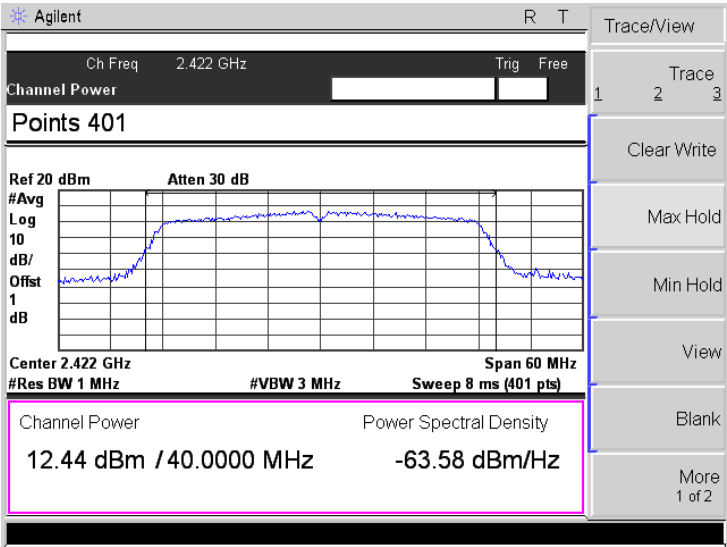
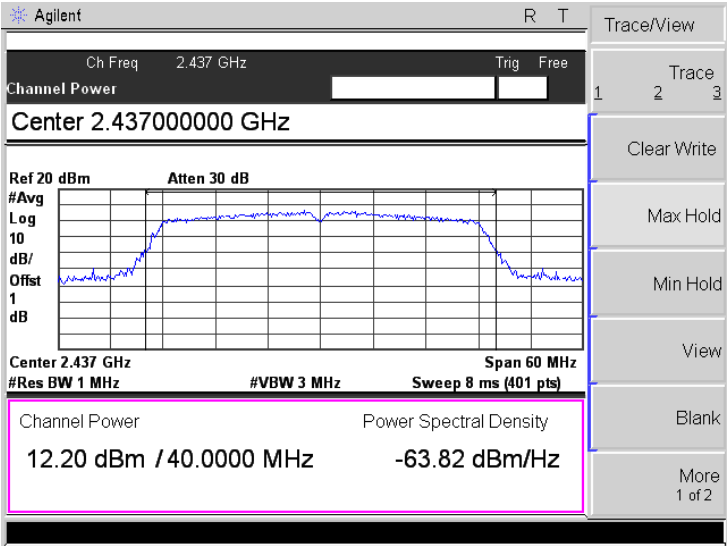
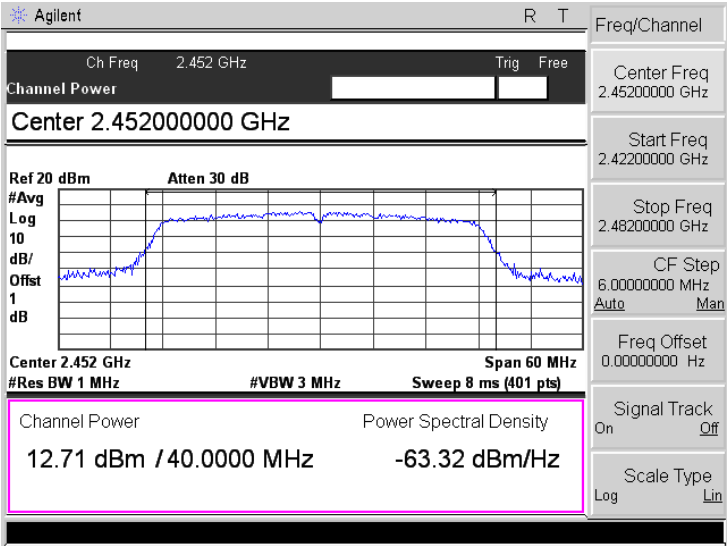
<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	

➤ Antenna 2
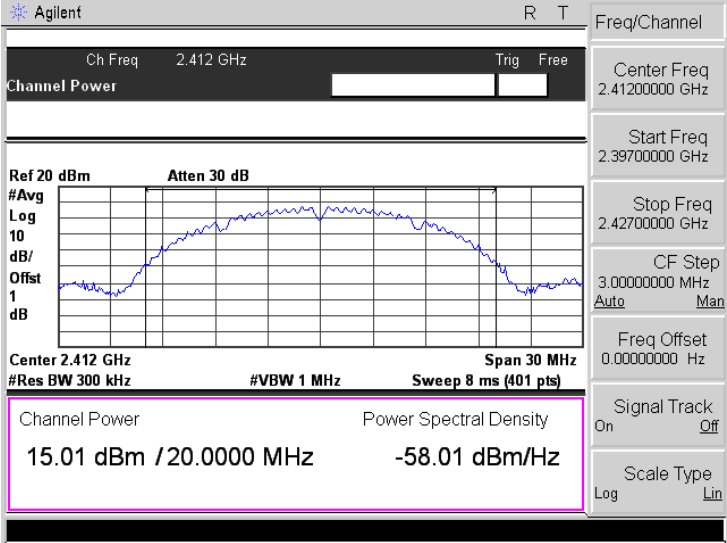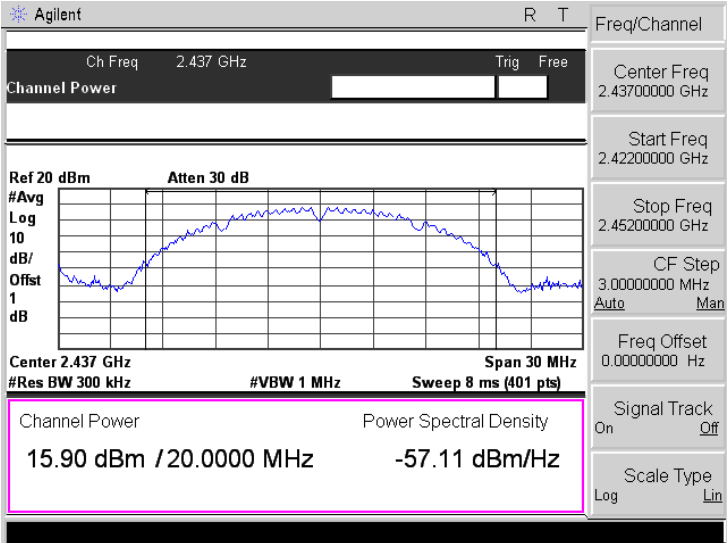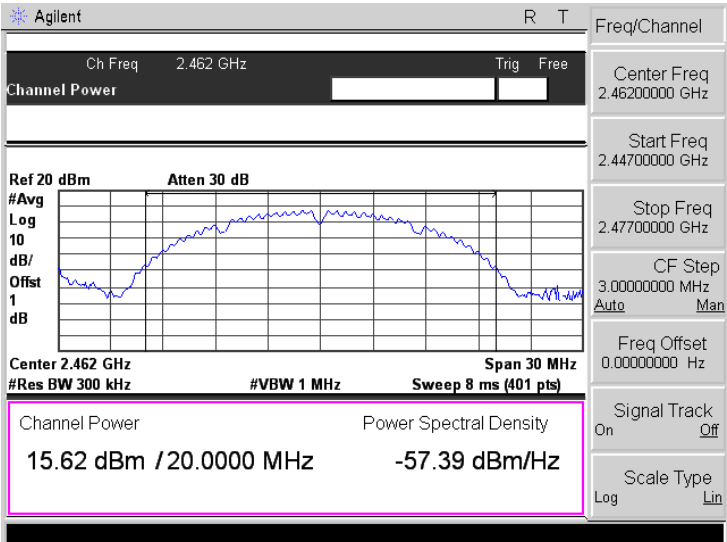
<p>802.11b-Low 11Mbps</p>	 <p>Agilent Channel Power</p> <p>Ch Freq 2.412 GHz</p> <p>Center 2.412 GHz</p> <p>Channel Power: 15.01 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -58.01 dBm/Hz</p> <p>Ref 20 dBm, Atten 30 dB</p> <p>#Avg 10, Log, dB/Offst 1 dB</p> <p>Center 2.412 GHz, #Res BW 300 kHz, #VBW 1 MHz, Span 30 MHz, Sweep 8 ms (401 pts)</p> <p>Freq/Channel: Center Freq 2.41200000 GHz, Start Freq 2.39700000 GHz, Stop Freq 2.42700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent Channel Power</p> <p>Ch Freq 2.437 GHz</p> <p>Center 2.437 GHz</p> <p>Channel Power: 15.90 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -57.11 dBm/Hz</p> <p>Ref 20 dBm, Atten 30 dB</p> <p>#Avg 10, Log, dB/Offst 1 dB</p> <p>Center 2.437 GHz, #Res BW 300 kHz, #VBW 1 MHz, Span 30 MHz, Sweep 8 ms (401 pts)</p> <p>Freq/Channel: Center Freq 2.43700000 GHz, Start Freq 2.42200000 GHz, Stop Freq 2.45200000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent Channel Power</p> <p>Ch Freq 2.462 GHz</p> <p>Center 2.462 GHz</p> <p>Channel Power: 15.62 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -57.39 dBm/Hz</p> <p>Ref 20 dBm, Atten 30 dB</p> <p>#Avg 10, Log, dB/Offst 1 dB</p> <p>Center 2.462 GHz, #Res BW 300 kHz, #VBW 1 MHz, Span 30 MHz, Sweep 8 ms (401 pts)</p> <p>Freq/Channel: Center Freq 2.46200000 GHz, Start Freq 2.44700000 GHz, Stop Freq 2.47700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
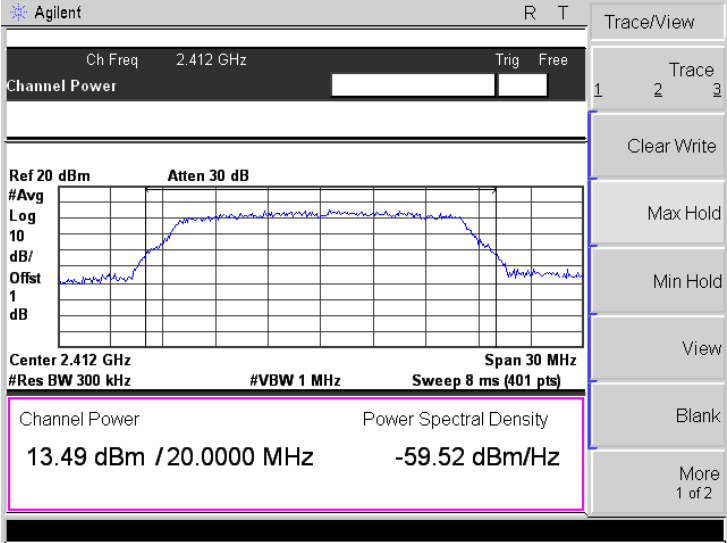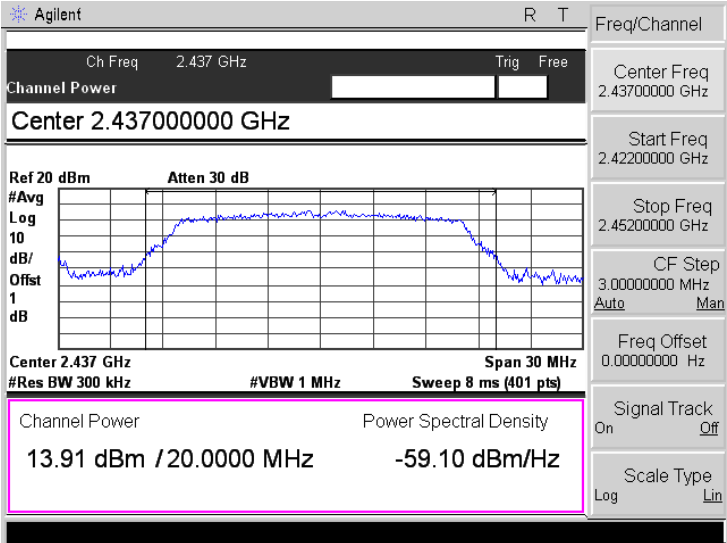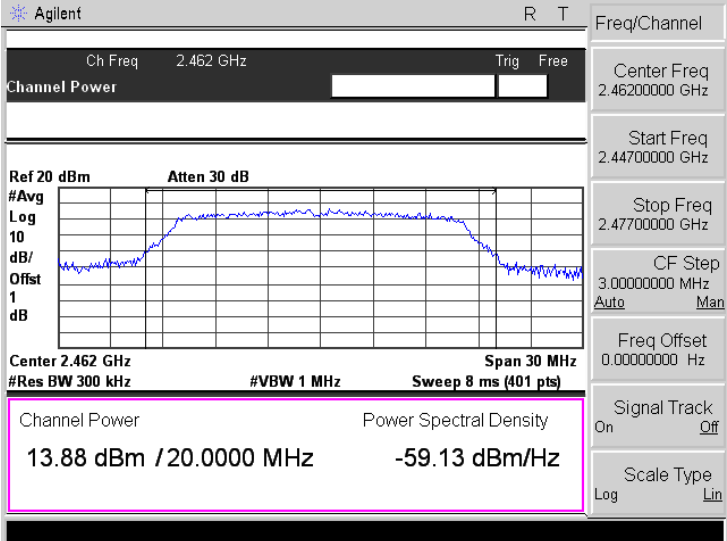
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.49 dBm / 20.0000 MHz -59.52 dBm/Hz</p> <p>Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.91 dBm / 20.0000 MHz -59.10 dBm/Hz</p> <p>Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.88 dBm / 20.0000 MHz -59.13 dBm/Hz</p> <p>Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
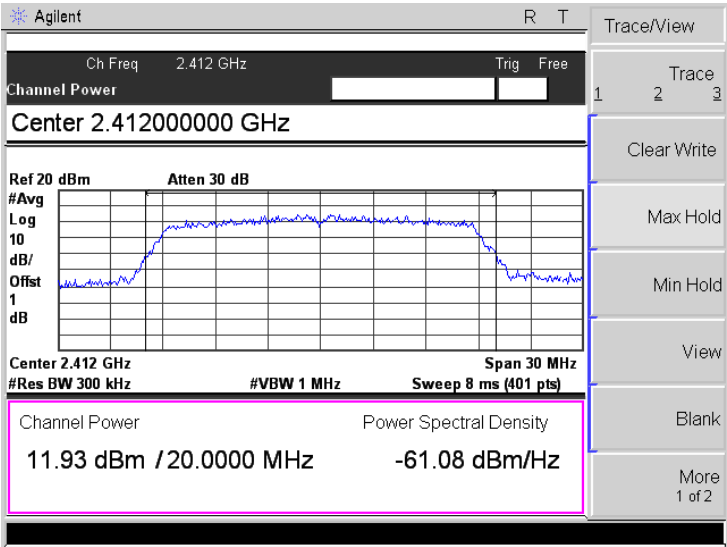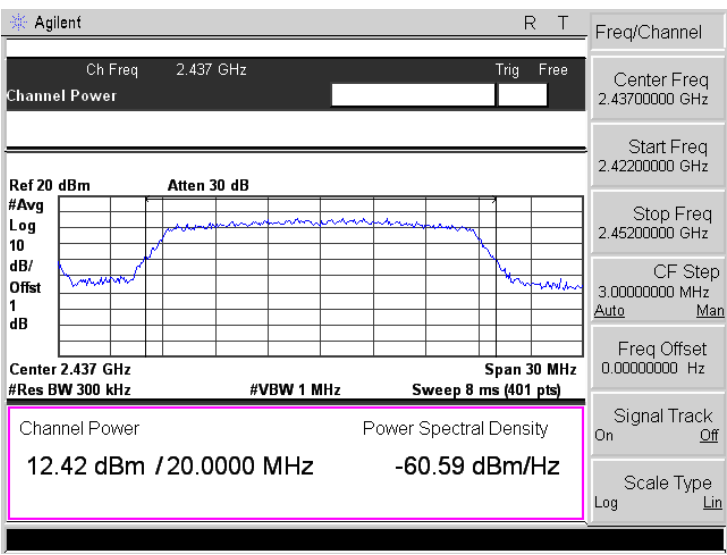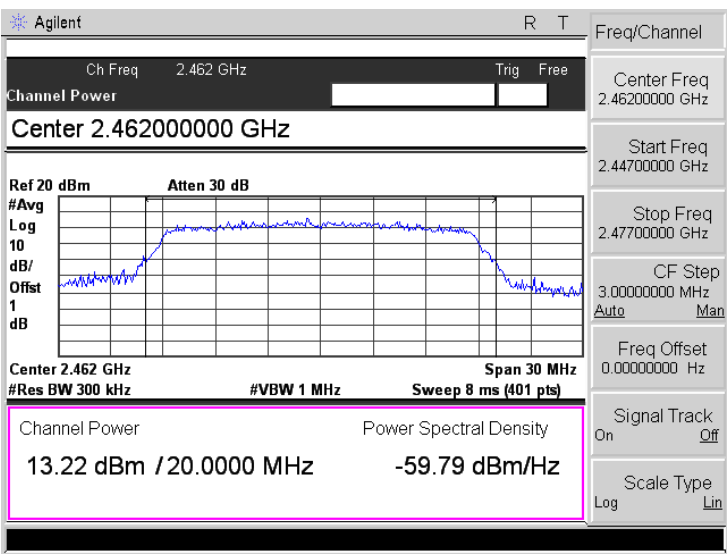
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.93 dBm / 20.0000 MHz -61.08 dBm/Hz</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.42 dBm / 20.0000 MHz -60.59 dBm/Hz</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.22 dBm / 20.0000 MHz -59.79 dBm/Hz</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
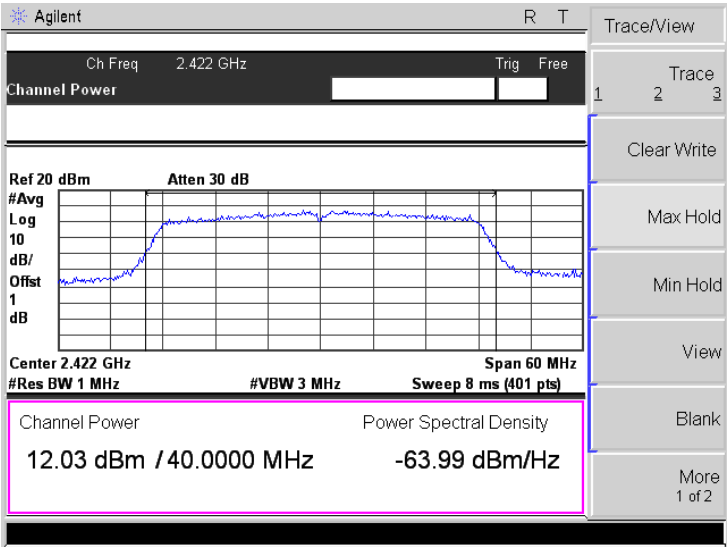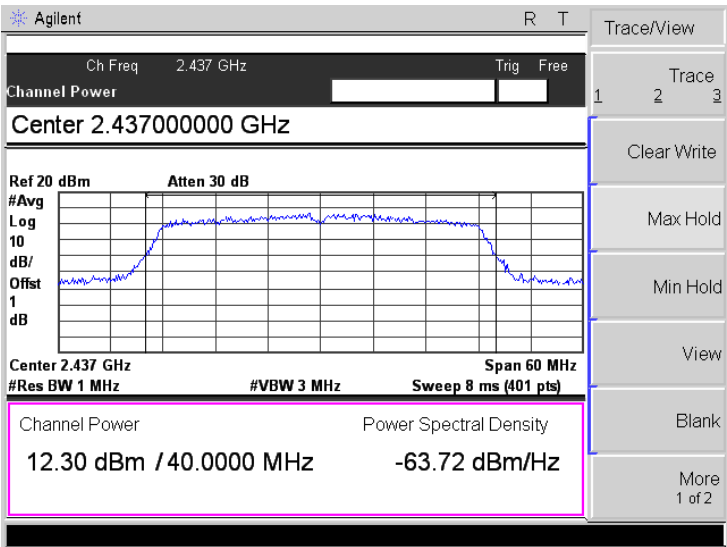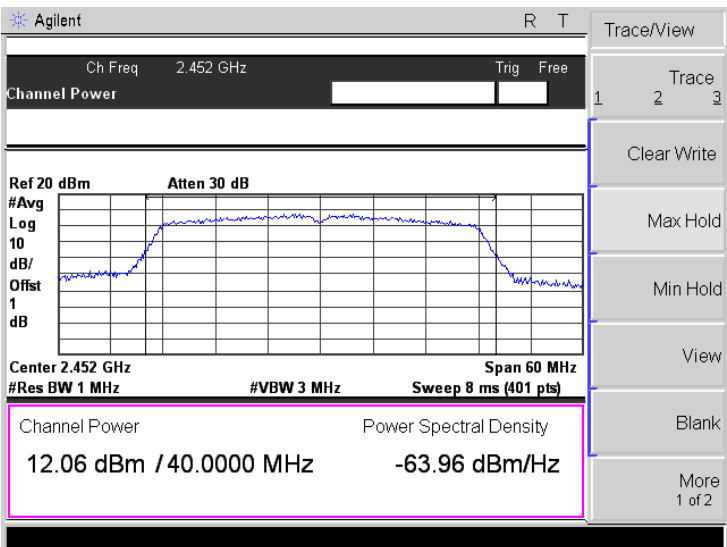
<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable



According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

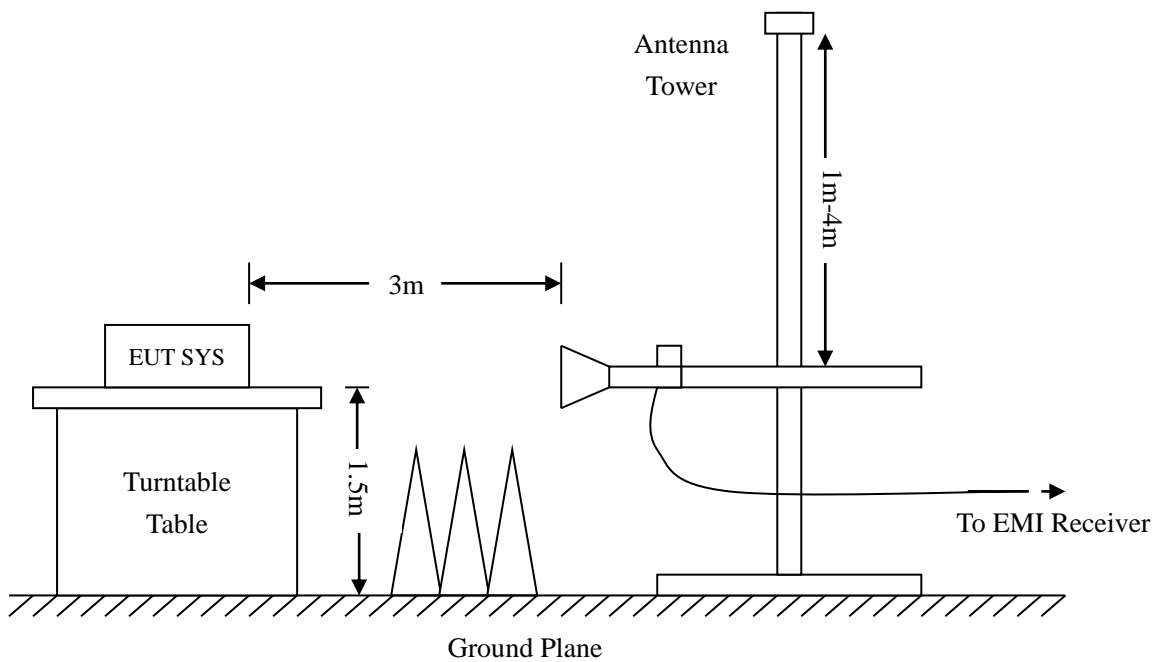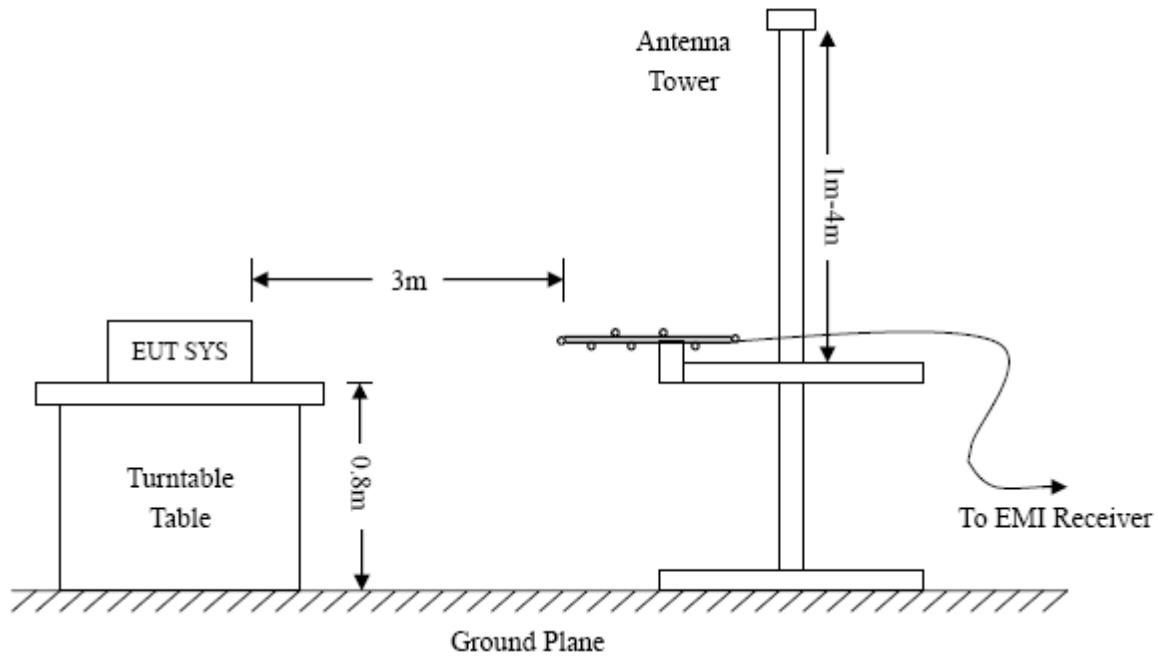

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.


- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

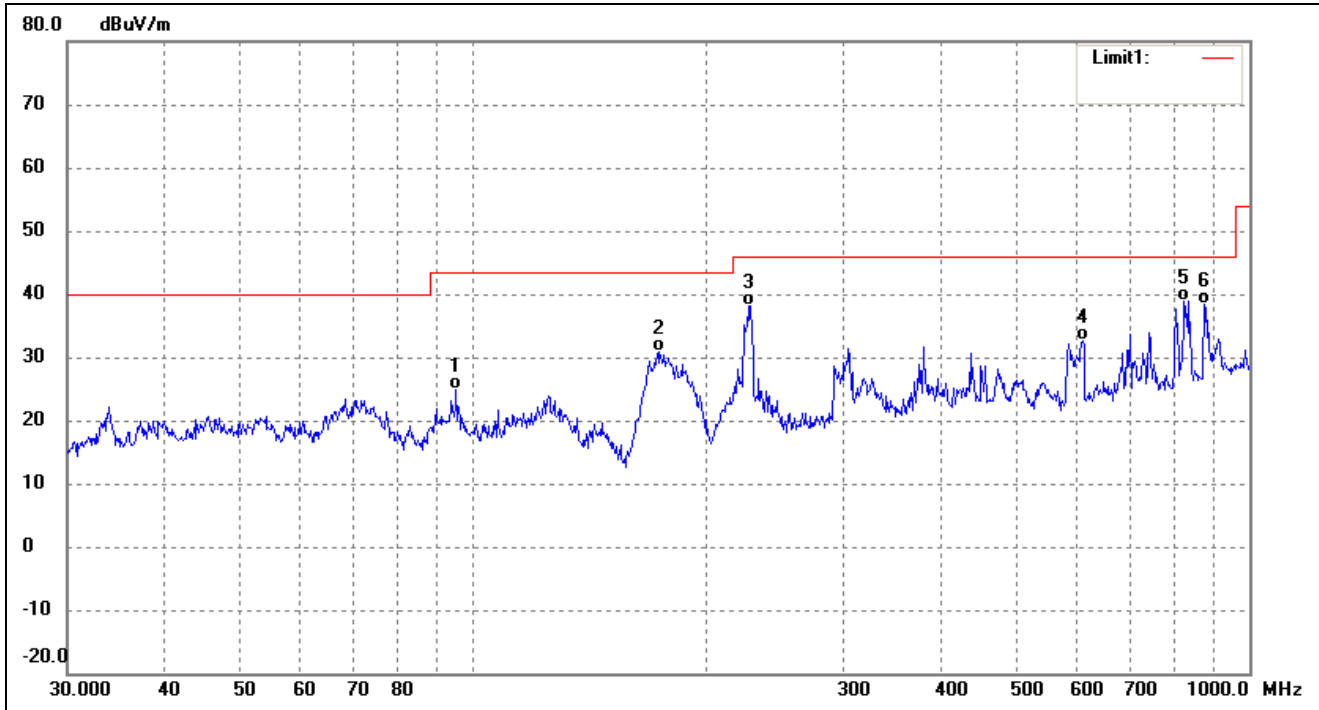


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	95.0930	40.70	-15.90	24.80	43.50	-18.70	94	100	QP
2	173.2051	47.49	-16.50	30.99	43.50	-12.51	122	100	QP
3	226.0994	52.07	-13.87	38.20	46.00	-7.80	59	100	QP
4	609.9217	38.22	-5.67	32.55	46.00	-13.45	148	100	QP
5	824.5968	42.00	-3.09	38.91	46.00	-7.09	116	100	QP
6	875.2470	40.67	-2.31	38.36	46.00	-7.64	125	100	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

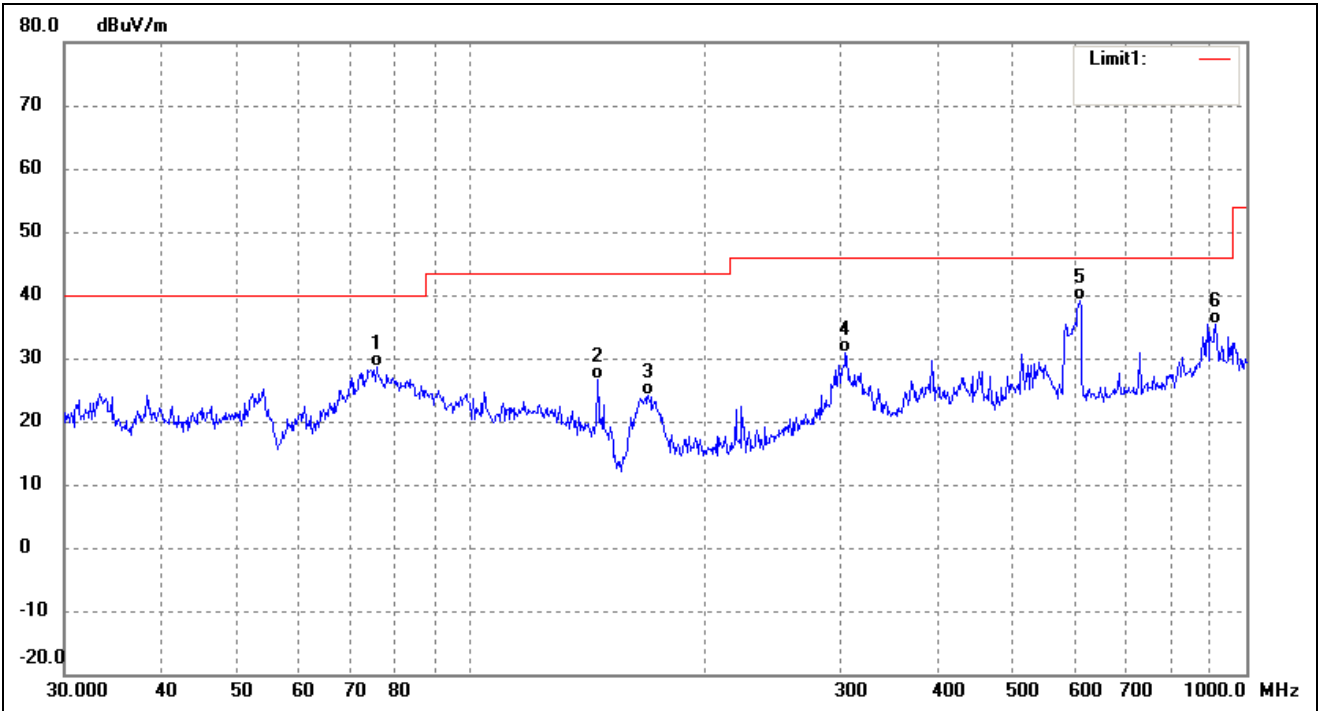


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	75.7114	47.12	-18.42	28.70	40.00	-11.30	243	100	QP
2	145.8611	44.12	-17.44	26.68	43.50	-16.82	160	100	QP
3	169.5990	40.91	-16.75	24.16	43.50	-19.34	97	100	QP
4	304.6100	41.80	-10.88	30.92	46.00	-15.08	190	100	QP
5	609.9217	44.68	-5.67	39.01	46.00	-6.99	152	100	QP
6	912.8620	36.44	-0.99	35.45	46.00	-10.55	138	100	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

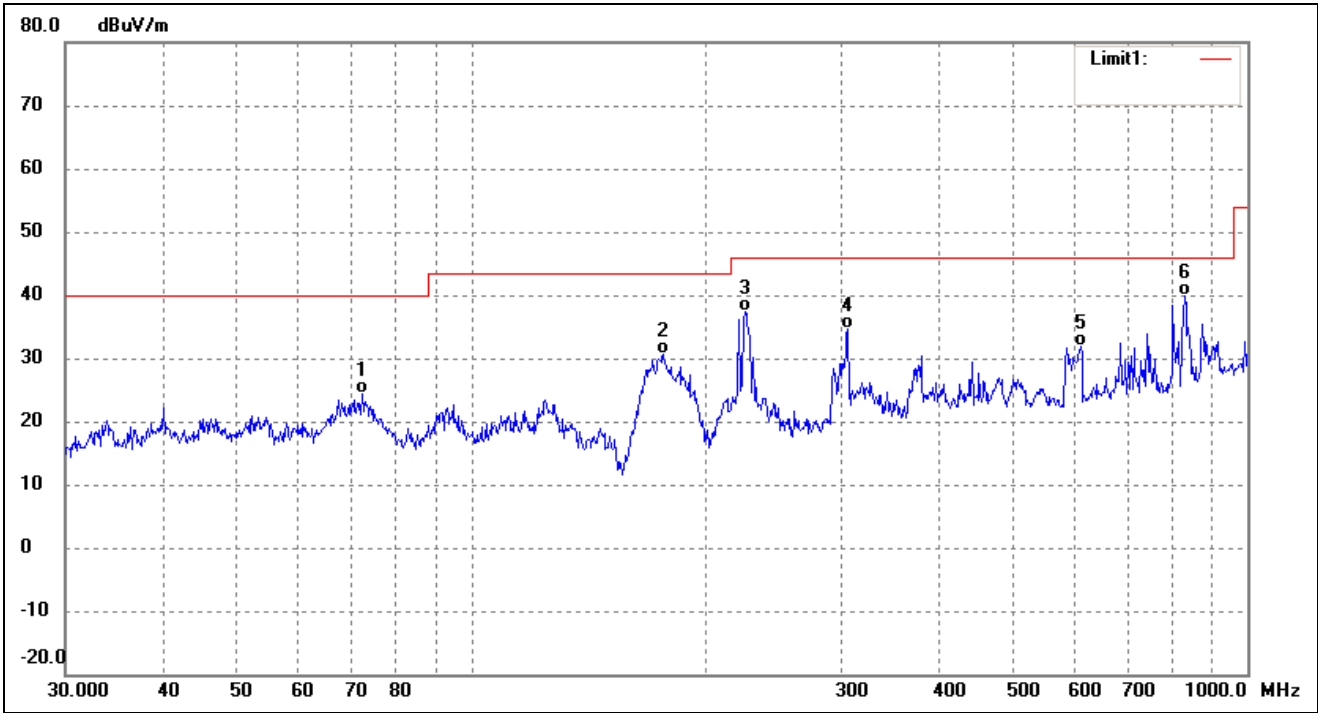


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	72.3376	42.01	-17.54	24.47	40.00	-15.53	309	100	QP
2	176.8878	46.86	-16.26	30.60	43.50	-12.90	98	100	QP
3	225.3080	51.26	-13.90	37.36	46.00	-8.64	136	100	QP
4	305.6800	45.45	-10.88	34.57	46.00	-11.43	109	100	QP
5	609.9217	37.59	-5.67	31.92	46.00	-14.08	93	100	QP
6	830.4002	42.75	-2.98	39.77	46.00	-6.23	343	100	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

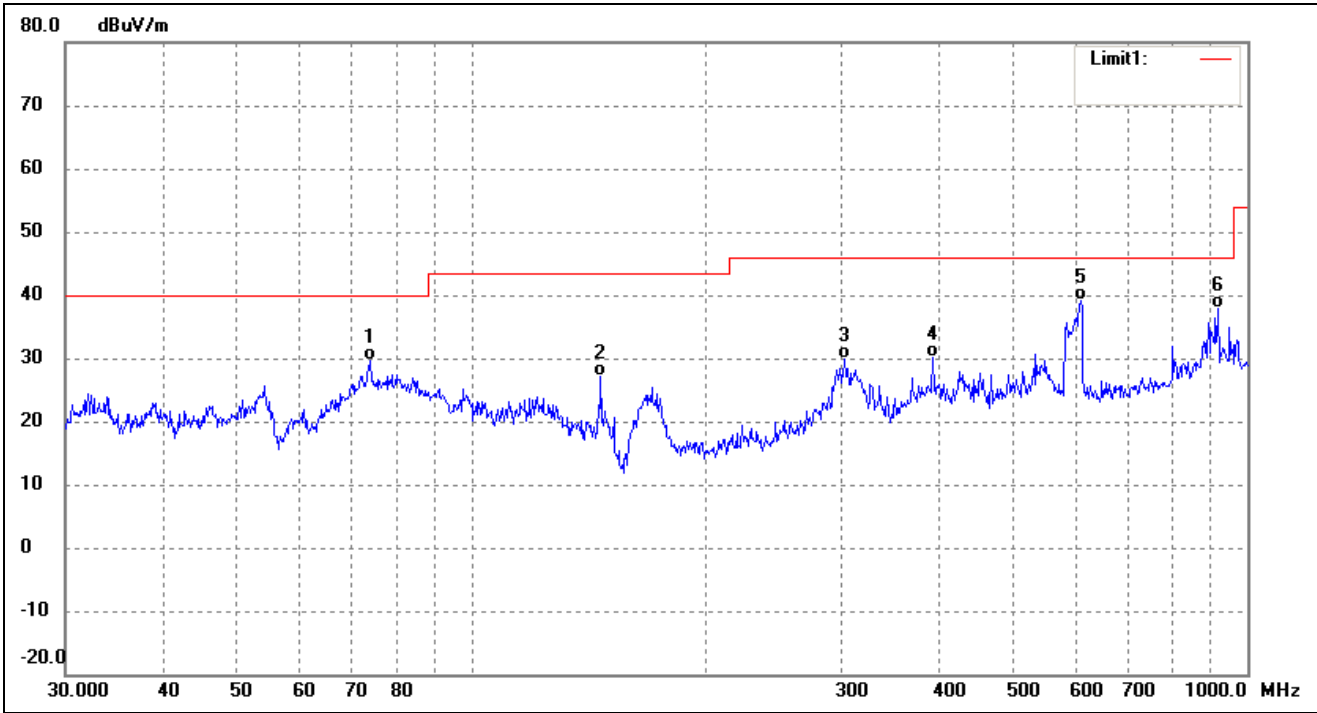


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	74.1351	47.58	-18.05	29.53	40.00	-10.47	202	100	QP
2	146.8877	44.44	-17.37	27.07	43.50	-16.43	324	100	QP
3	302.4812	40.66	-10.85	29.81	46.00	-16.19	70	100	QP
4	393.4724	39.56	-9.48	30.08	46.00	-15.92	209	100	QP
5	609.9217	44.73	-5.67	39.06	46.00	-6.94	329	100	QP
6	916.0687	38.84	-0.93	37.91	46.00	-8.09	175	100	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

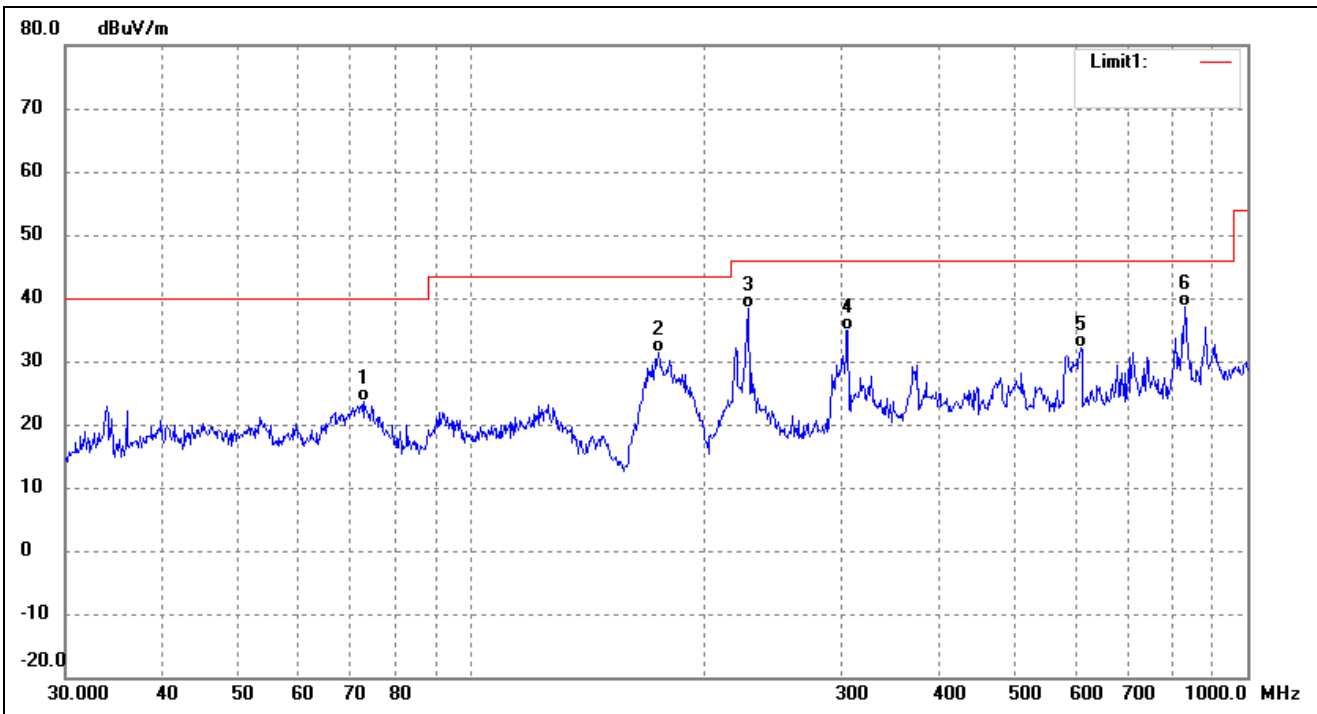

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	72.8466	41.28	-17.68	23.60	40.00	-16.40	148	100	QP
2	174.4241	47.91	-16.42	31.49	43.50	-12.01	187	100	QP
3	227.6906	52.18	-13.79	38.39	46.00	-7.61	90	100	QP
4	305.6800	45.83	-10.88	34.95	46.00	-11.05	109	100	QP
5	609.9217	37.87	-5.67	32.20	46.00	-13.80	350	100	QP
6	830.4002	41.65	-2.98	38.67	46.00	-7.33	94	100	QP


802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

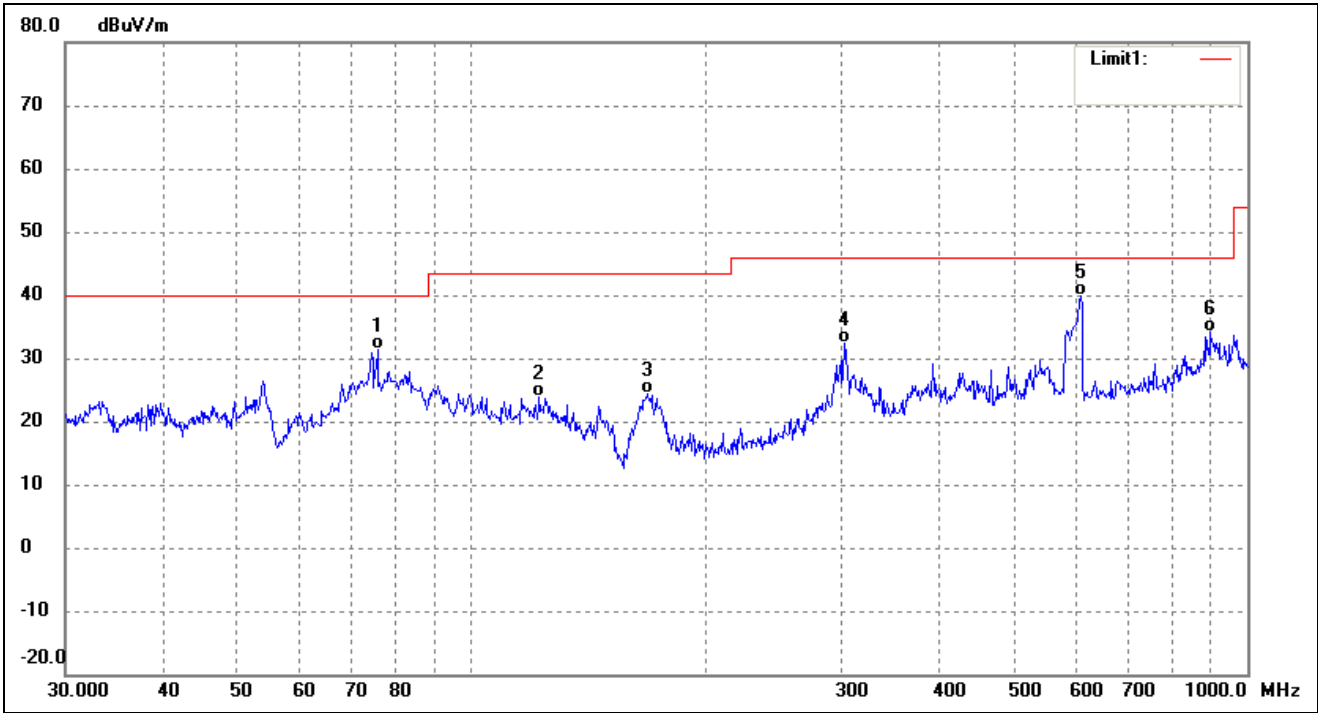

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	75.7114	49.69	-18.42	31.27	40.00	-8.73	180	100	QP
2	122.4040	40.56	-16.57	23.99	43.50	-19.51	205	100	QP
3	168.4138	41.20	-16.81	24.39	43.50	-19.11	76	100	QP
4	302.4812	43.28	-10.85	32.43	46.00	-13.57	133	100	QP
5	609.9217	45.44	-5.67	39.77	46.00	-6.23	234	100	QP
6	896.9965	35.44	-1.34	34.10	46.00	-11.90	227	100	QP


➤ Worst case Antenna 2

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

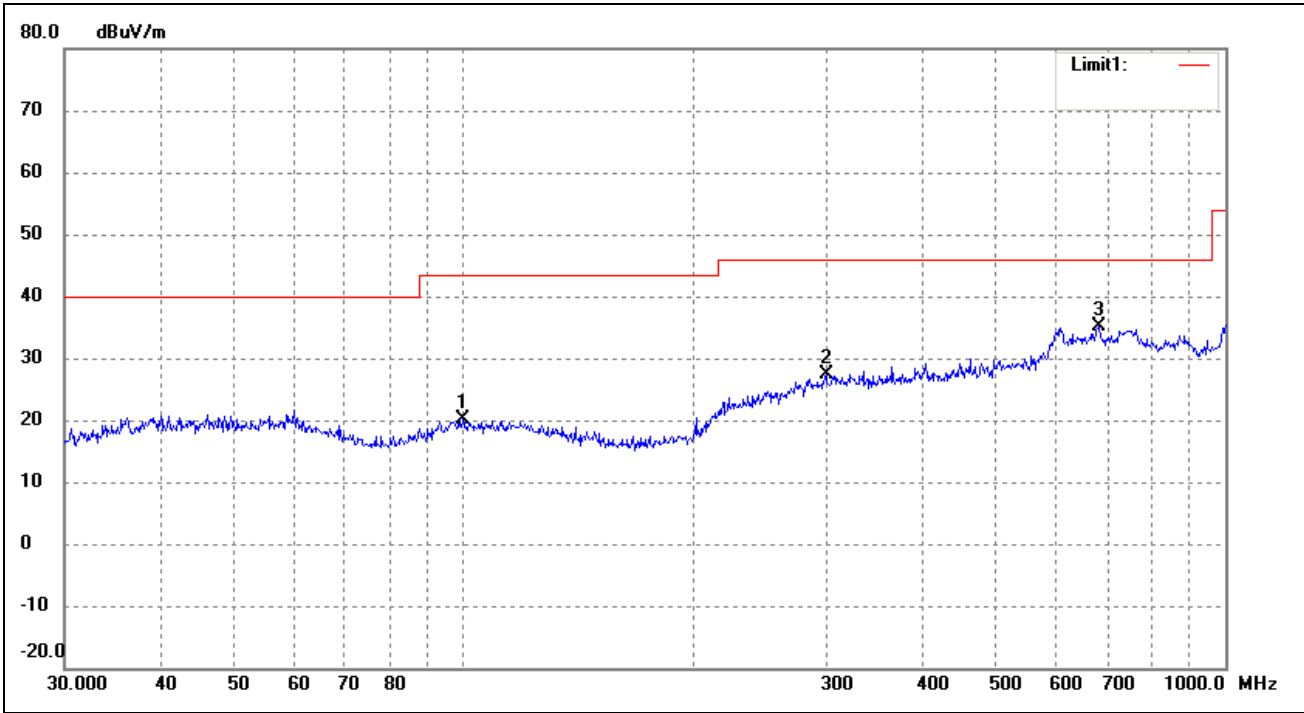


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	99.8777	15.14	5.11	20.25	43.50	-23.25	254	100	peak
2	299.3158	15.19	12.15	27.34	46.00	-18.66	100	100	peak
3	682.3485	15.96	19.08	35.04	46.00	-10.96	284	100	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

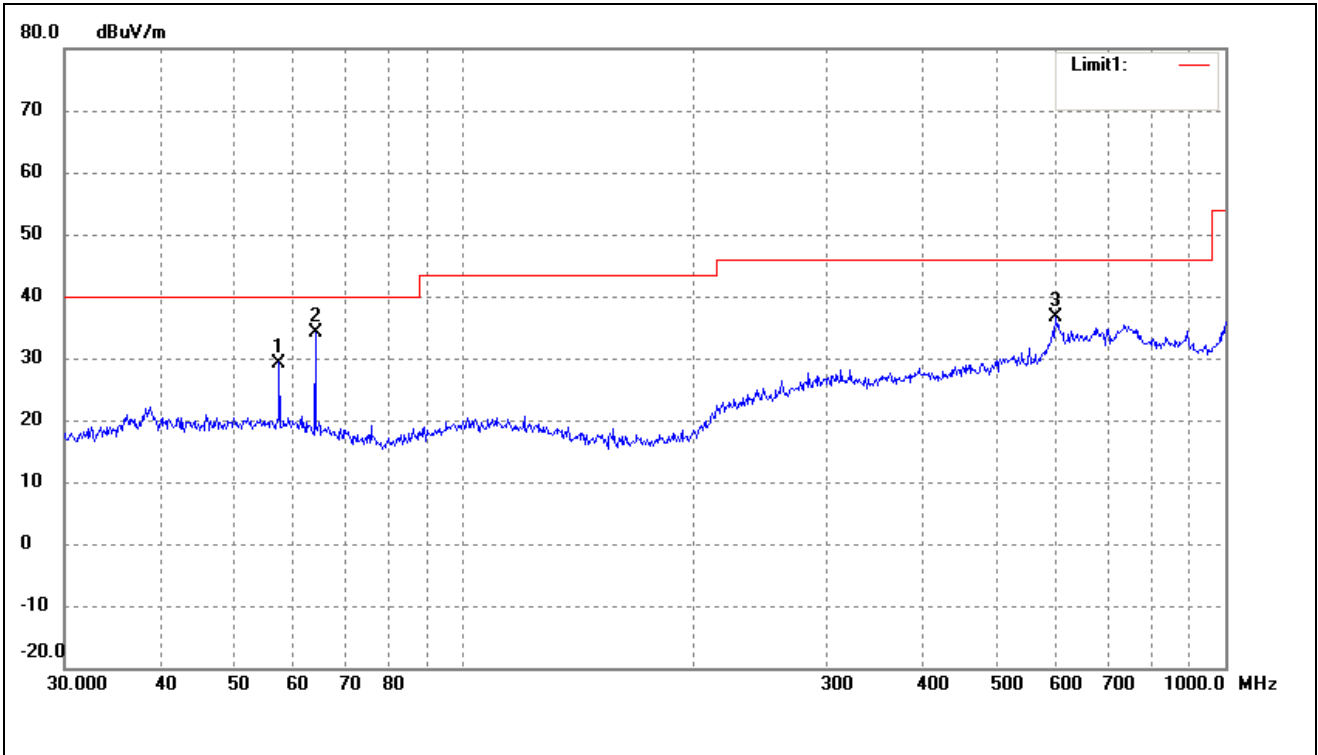


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	57.3923	23.91	5.34	29.25	40.00	-10.75	100	100	peak
2	63.9828	29.75	4.50	34.25	40.00	-5.75	100	100	peak
3	599.3213	17.38	19.19	36.57	46.00	-9.43	100	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

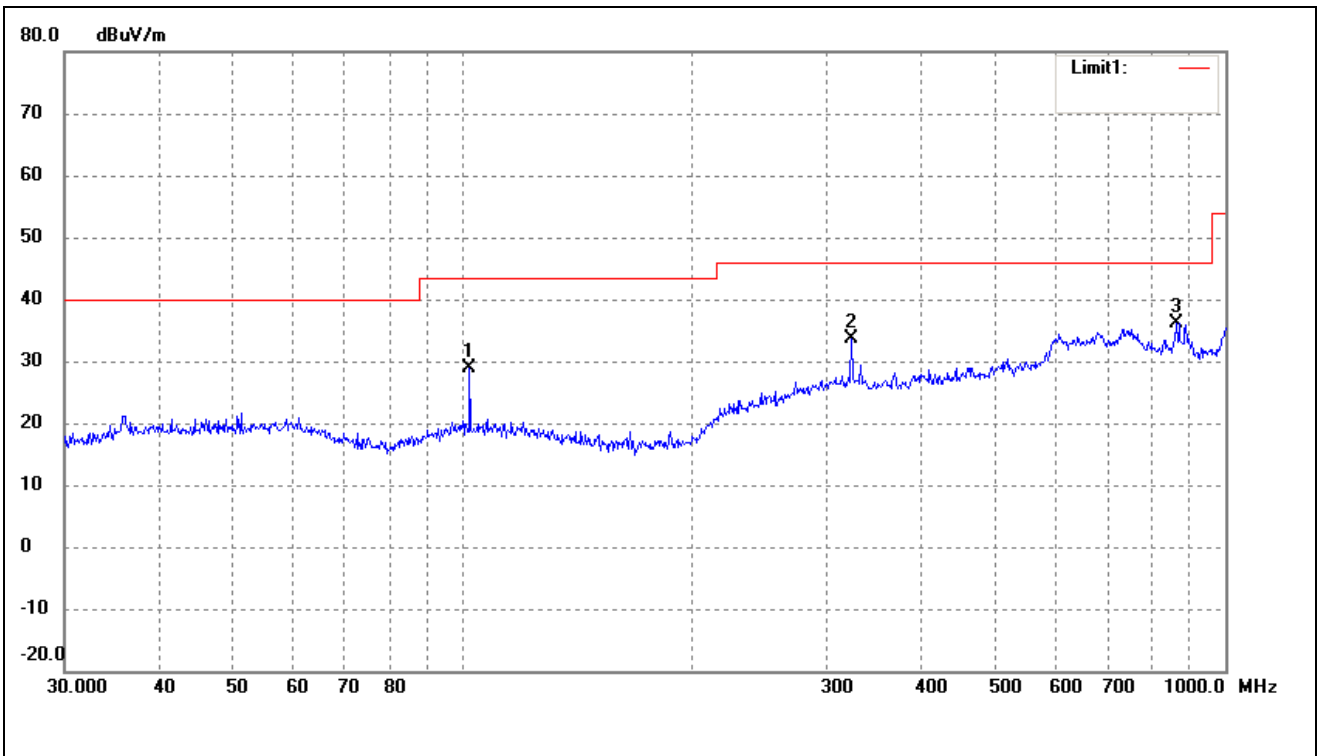


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.0014	23.77	5.11	28.88	43.50	-14.62	100	100	peak
2	323.3204	21.32	12.19	33.51	46.00	-12.49	100	100	peak
3	863.0562	18.82	17.38	36.20	46.00	-9.80	100	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

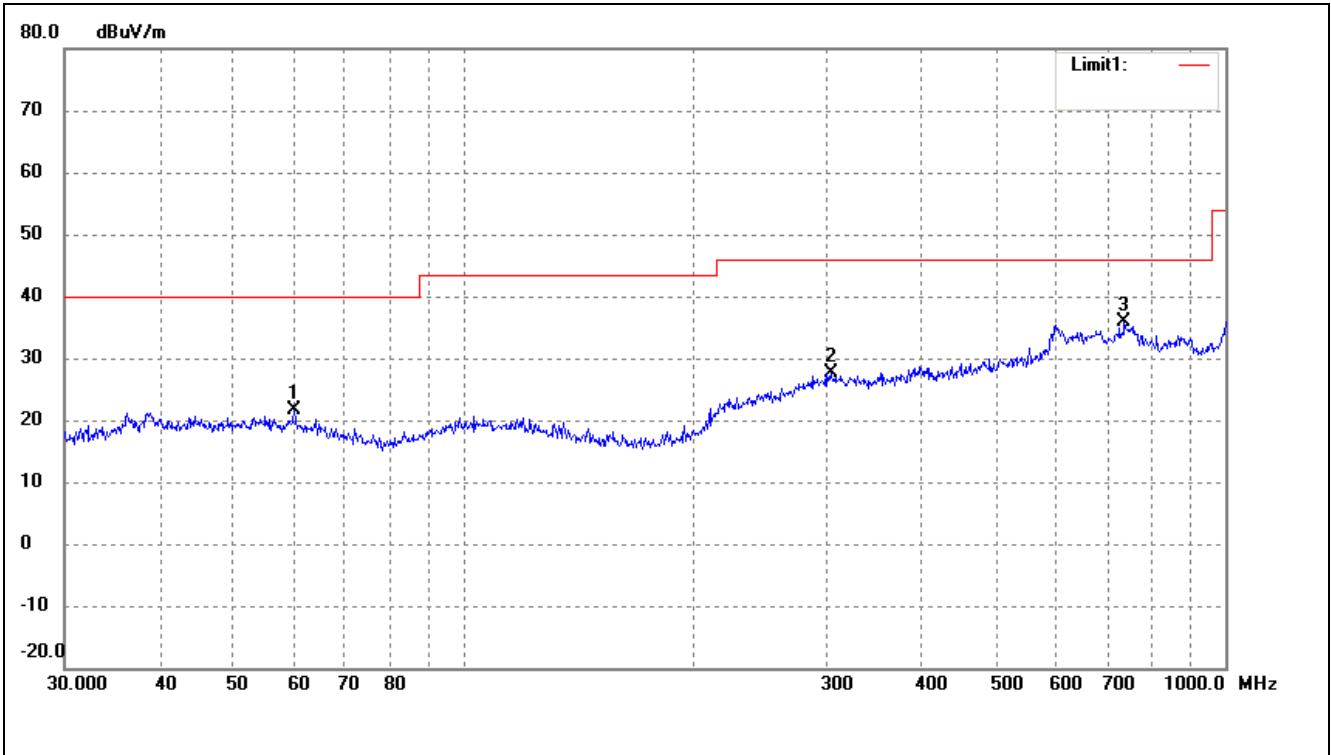


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.0691	16.32	5.36	21.68	40.00	-18.32	256	100	peak
2	303.5437	15.45	12.19	27.64	46.00	-18.36	360	100	peak
3	737.0714	16.47	19.37	35.84	46.00	-10.16	360	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

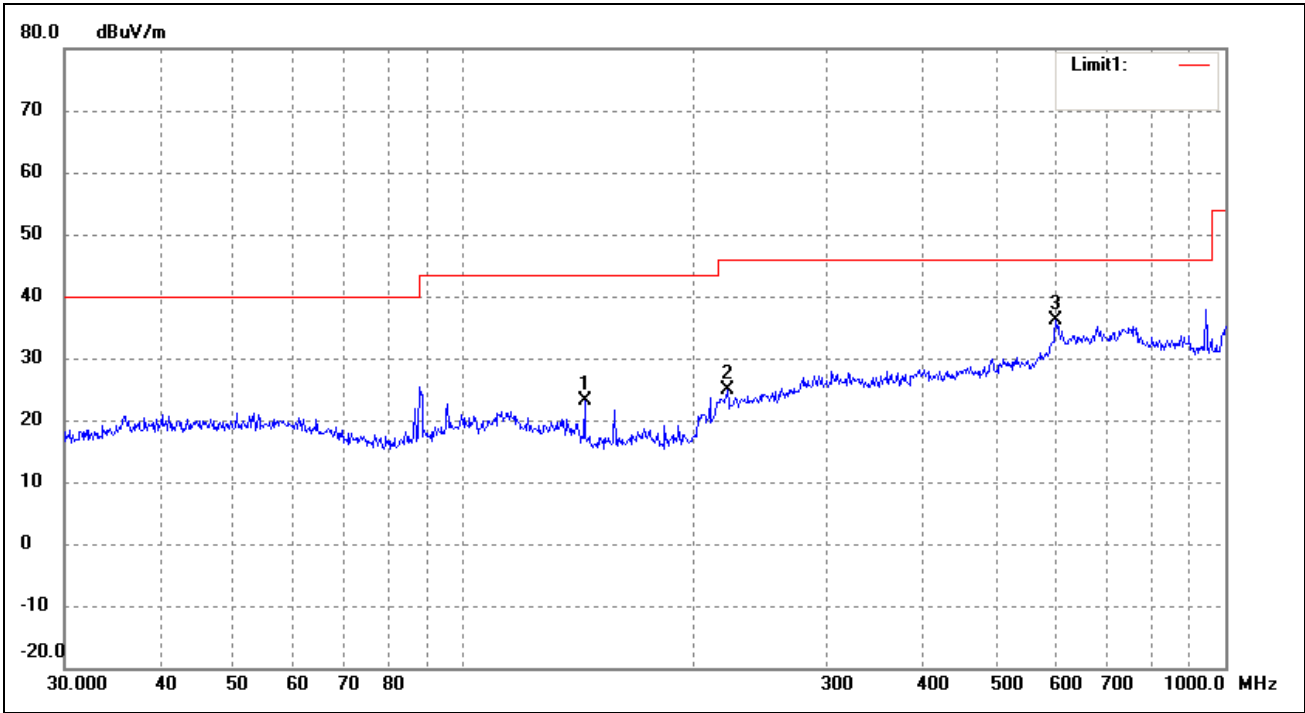

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	144.3348	19.88	3.23	23.11	43.50	-20.39	176	100	peak
2	222.1698	16.68	8.24	24.92	46.00	-21.08	255	100	peak
3	599.3213	16.89	19.19	36.08	46.00	-9.92	360	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

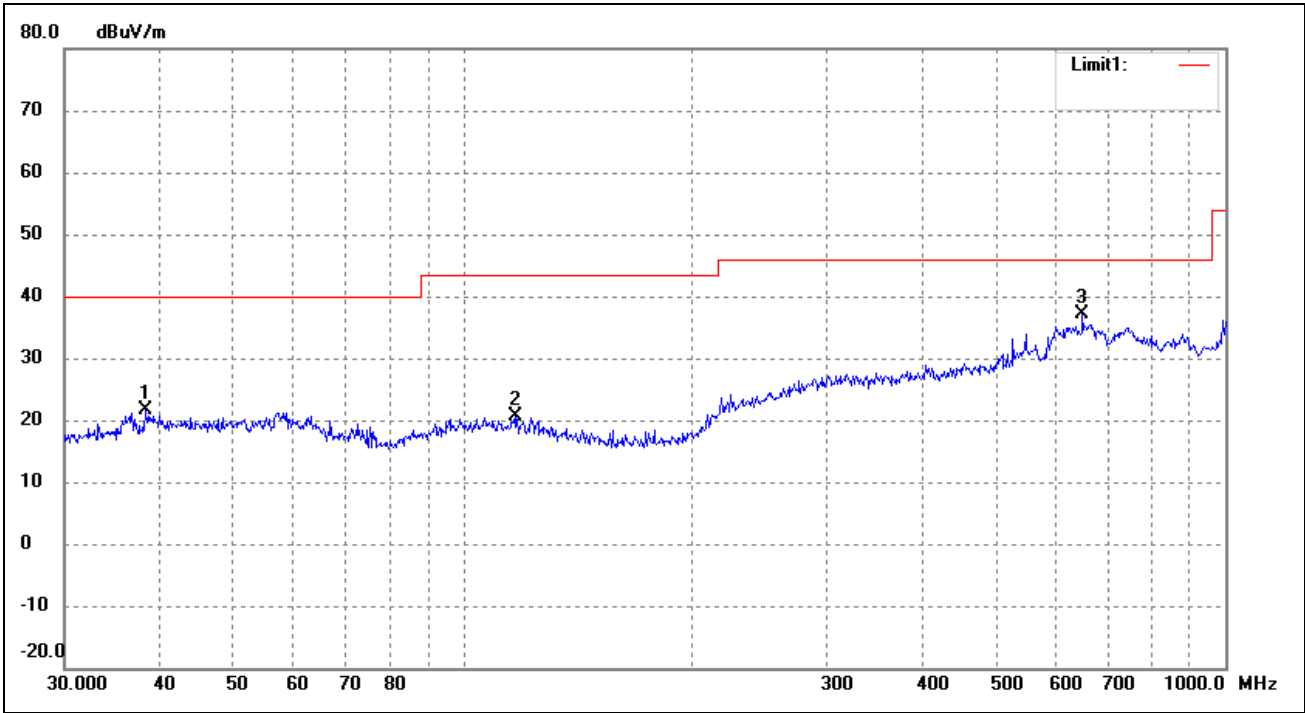

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.3462	16.66	4.97	21.63	40.00	-18.37	360	100	peak
2	116.9495	15.57	5.03	20.60	43.50	-22.90	225	100	peak
3	649.6597	18.64	18.39	37.03	46.00	-8.97	160	100	peak

- Spurious Emissions Above 1GHz
- Antenna 1
- Test Mode: 802.11b_11Mbps (Worst mode)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	60.12	-3.86	56.26	74	-17.74	H	PK
4824.000	43.41	-3.86	39.55	54	-14.45	H	AV
7236.000	58.15	1.10	59.25	74	-14.75	H	PK
7236.000	38.75	1.10	39.85	54	-14.15	H	AV
4824.000	60.30	-3.86	56.44	74	-17.56	V	PK
4824.000	45.97	-3.86	42.11	54	-11.89	V	AV
7236.000	55.20	1.10	56.30	74	-17.70	V	PK
7236.000	39.08	1.10	40.18	54	-13.82	V	AV
Middle Channel-2437MHz							
4874.000	60.62	-3.74	56.88	74	-17.12	H	PK
4874.000	41.43	-3.74	37.69	54	-16.31	H	AV
7311.000	54.06	1.47	55.53	74	-18.47	H	PK
7311.000	39.00	1.47	40.47	54	-13.53	H	AV
4874.000	63.29	-3.74	59.55	74	-14.45	V	PK
4874.000	43.07	-3.74	39.33	54	-14.67	V	AV
7311.000	57.43	1.47	58.90	74	-15.10	V	PK
7311.000	38.21	1.47	39.68	54	-14.32	V	AV
High Channel-2462MHz							
4924.000	58.53	-3.63	54.90	74	-19.10	H	PK
4924.000	42.96	-3.63	39.33	54	-14.67	H	AV
7386.000	55.76	1.62	57.38	74	-16.62	H	PK
7386.000	40.41	1.62	42.03	54	-11.97	H	AV
4924.000	61.09	-3.63	57.46	74	-16.54	V	PK
4924.000	44.37	-3.63	40.74	54	-13.26	V	AV
7386.000	55.39	1.62	57.01	74	-16.99	V	PK
7386.000	42.98	1.62	44.60	54	-9.40	V	AV

- Antenna 2
- Test Mode: 802.11b_11Mbps (Worst mode)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	60.29	-3.86	56.43	74	-17.57	H	PK
4824.000	45.38	-3.86	41.52	54	-12.48	H	AV
7236.000	55.41	1.10	56.51	74	-17.49	H	PK
7236.000	40.87	1.10	41.97	54	-12.03	H	AV
4824.000	60.09	-3.86	56.23	74	-17.77	V	PK
4824.000	42.78	-3.86	38.92	54	-15.08	V	AV
7236.000	59.29	1.10	60.39	74	-13.61	V	PK
7236.000	41.19	1.10	42.29	54	-11.71	V	AV
Middle Channel-2437MHz							
4874.000	62.39	-3.74	58.65	74	-15.35	H	PK
4874.000	41.58	-3.74	37.84	54	-16.16	H	AV
7311.000	56.90	1.47	58.37	74	-15.63	H	PK
7311.000	40.64	1.47	42.11	54	-11.89	H	AV
4874.000	60.95	-3.74	57.21	74	-16.79	V	PK
4874.000	43.95	-3.74	40.21	54	-13.79	V	AV
7311.000	55.04	1.47	56.51	74	-17.49	V	PK
7311.000	40.18	1.47	41.65	54	-12.35	V	AV
High Channel-2462MHz							
4924.000	61.06	-3.63	57.43	74	-16.57	H	PK
4924.000	41.91	-3.63	38.28	54	-15.72	H	AV
7386.000	54.45	1.62	56.07	74	-17.93	H	PK
7386.000	39.66	1.62	41.28	54	-12.72	H	AV
4924.000	61.85	-3.63	58.22	74	-15.78	V	PK
4924.000	46.12	-3.63	42.49	54	-11.51	V	AV
7386.000	53.90	1.62	55.52	74	-18.48	V	PK
7386.000	40.99	1.62	42.61	54	-11.39	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1 (worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

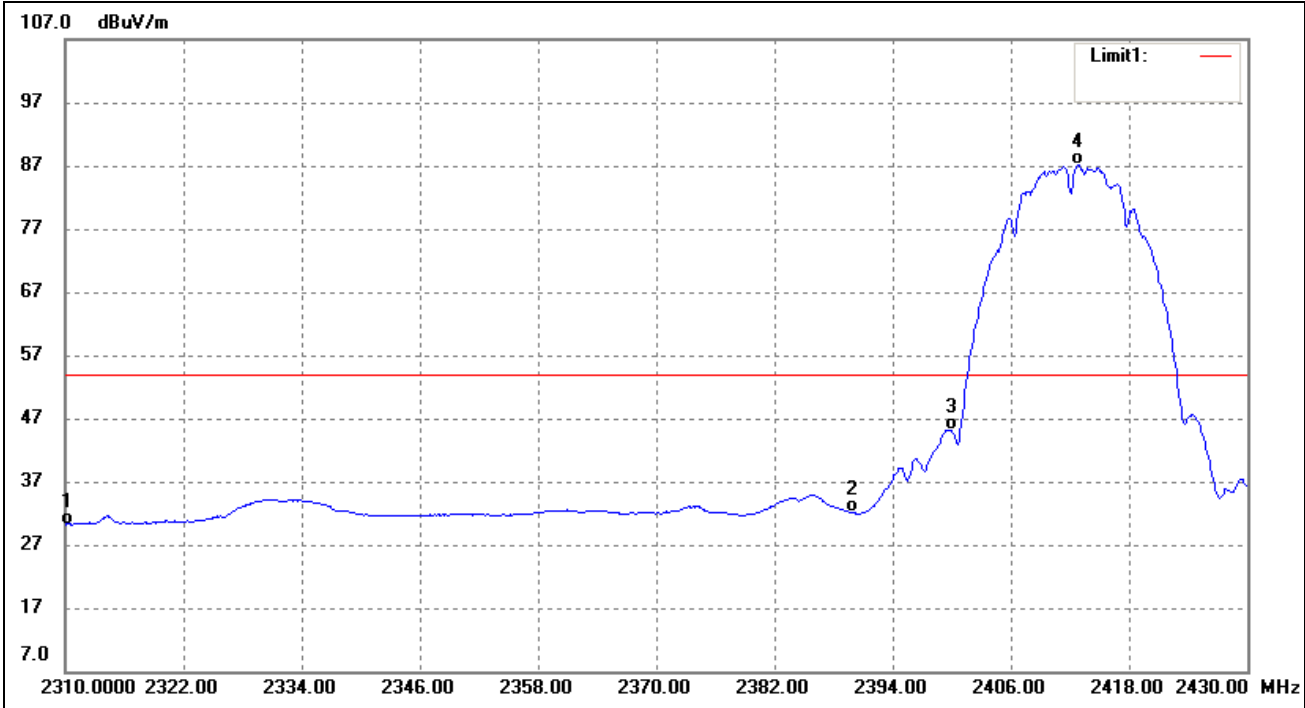


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.88	-9.66	30.22	54.00	-23.78	Average Detector
	2310.000	50.37	-9.66	40.71	74.00	-33.29	Peak Detector
2	2390.000	41.55	-9.50	32.05	54.00	-21.95	Average Detector
	2390.000	54.05	-9.50	44.55	74.00	-29.45	Peak Detector
3	2400.000	54.65	-9.48	45.17	Delta=41.92dBc		Average Detector
4	2412.720	96.55	-9.46	87.09		Average Detector	

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

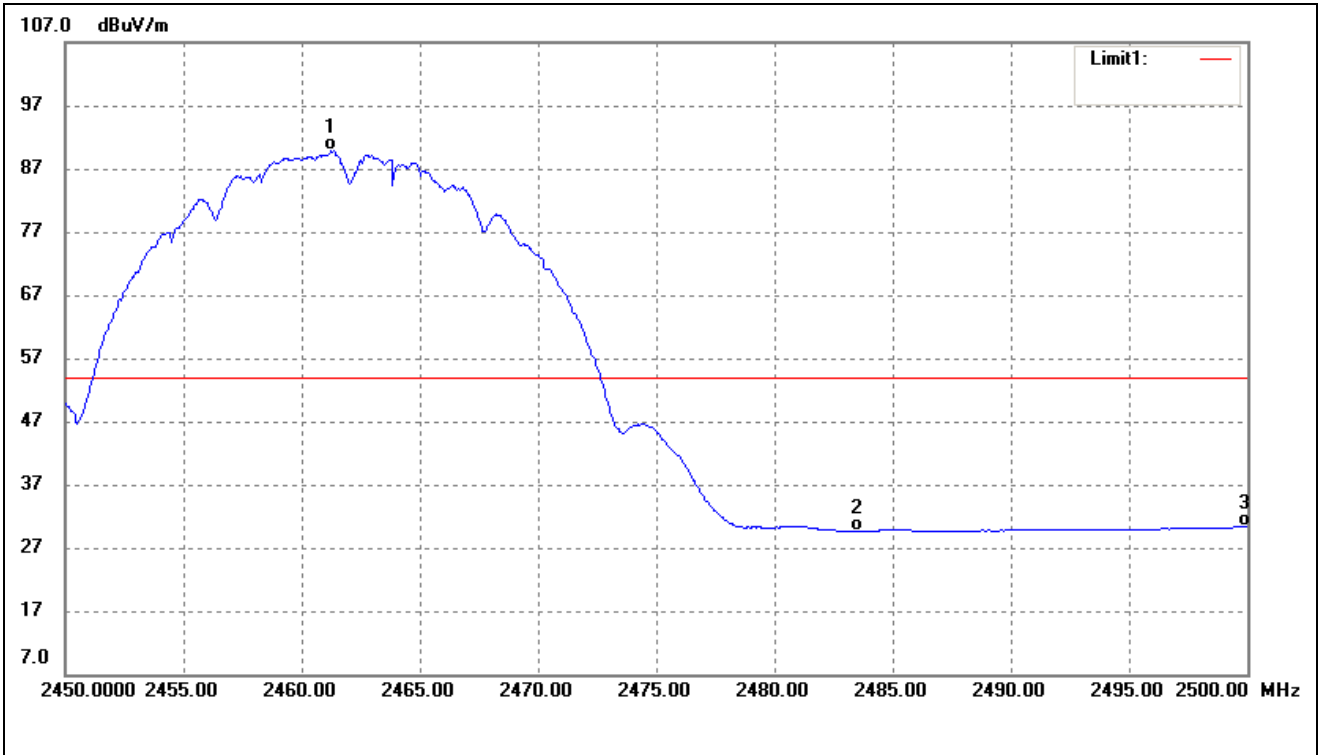


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	99.20	-9.36	89.84	/	/	Average Detector
	2460.900	104.25	-9.36	94.89	/	/	Peak Detector
2	2483.500	38.96	-9.31	29.65	54.00	-24.35	Average Detector
	2483.500	57.45	-9.31	48.14	74.00	-25.86	Peak Detector
3	2500.000	39.59	-9.28	30.31	54.00	-23.69	Average Detector
	2500.000	57.17	-9.28	47.89	74.00	-26.11	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

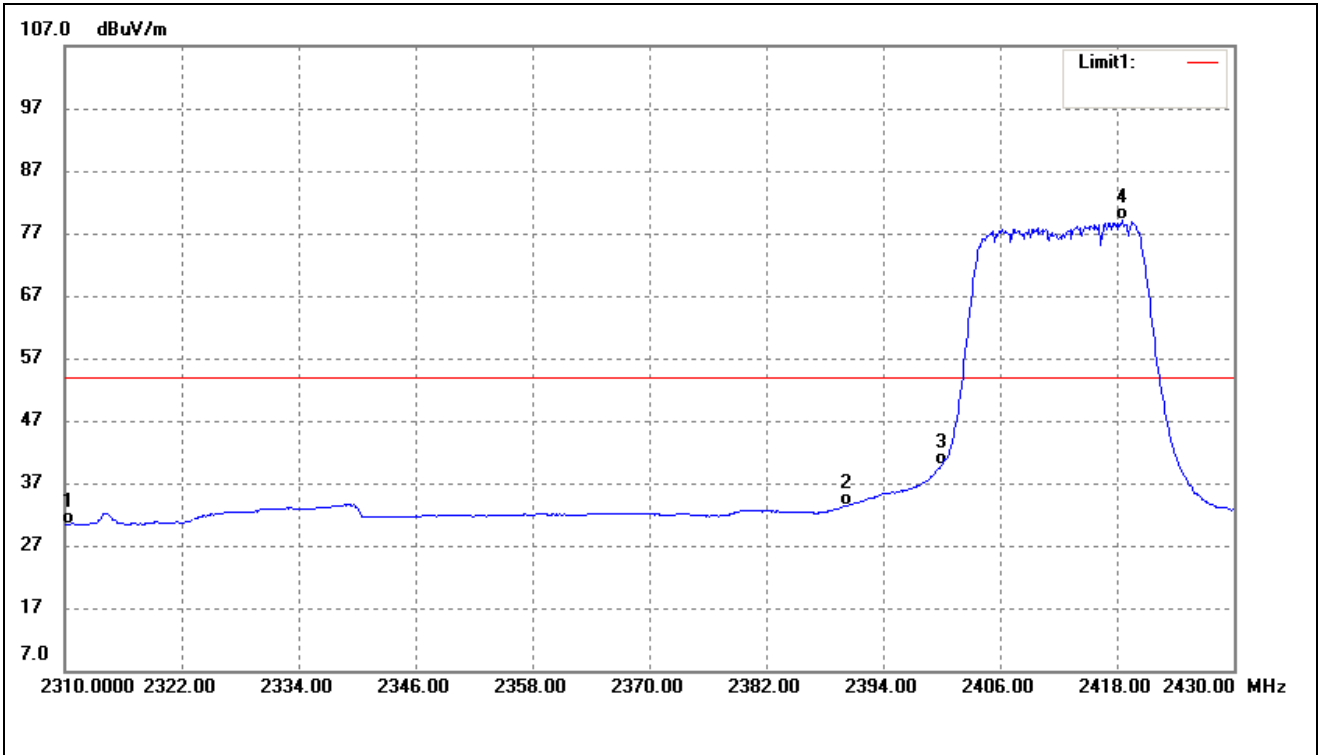


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.96	-9.66	30.30	54.00	-23.70	Average Detector
	2310.000	51.79	-9.66	42.13	74.00	-31.87	Peak Detector
2	2390.000	42.82	-9.50	33.32	54.00	-20.68	Average Detector
	2390.000	59.27	-9.50	49.77	74.00	-24.23	Peak Detector
3	2400.000	49.39	-9.48	39.91	Delta=39.30dBc		Average Detector
4	2418.600	88.65	-9.44	79.21		Average Detector	

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

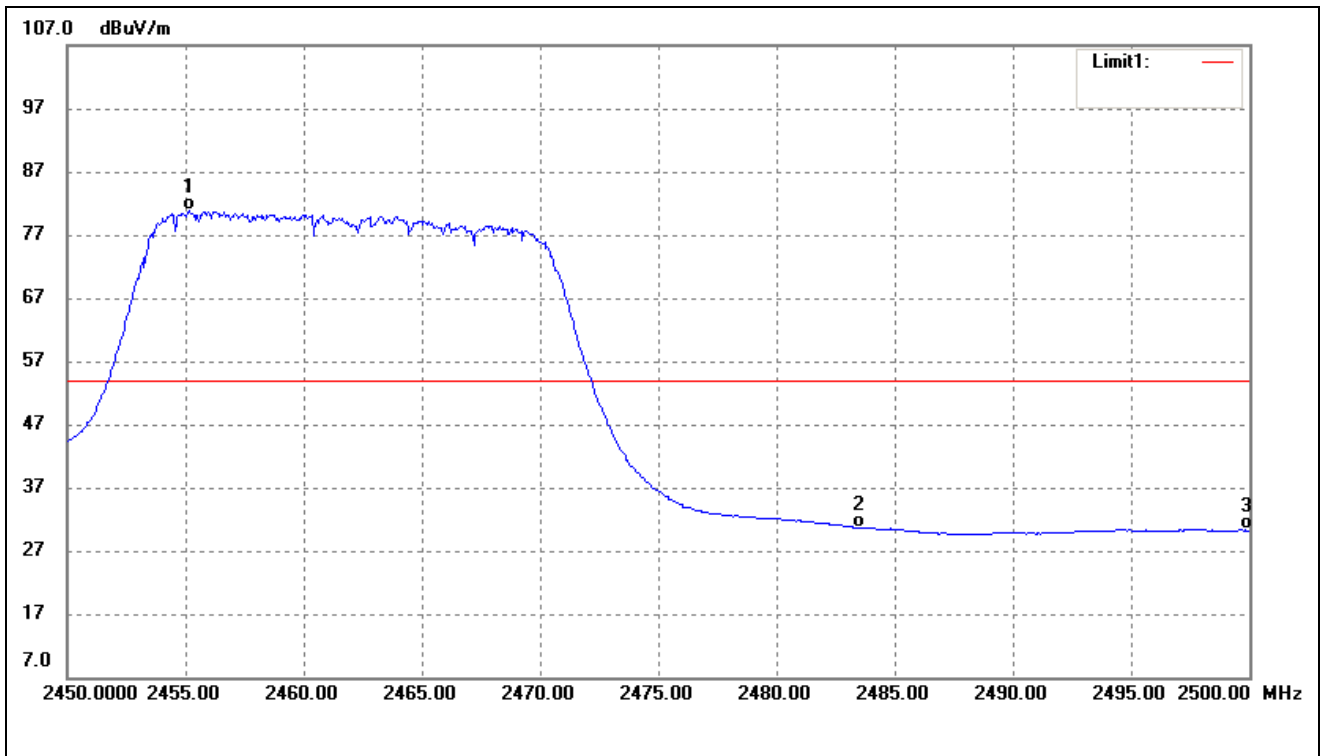


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.150	90.23	-9.37	80.86	/	/	Average Detector
	2455.350	103.43	-9.37	94.06	/	/	Peak Detector
2	2483.500	39.99	-9.31	30.68	54.00	-23.32	Average Detector
	2483.500	52.20	-9.31	42.89	74.00	-31.11	Peak Detector
3	2500.000	39.55	-9.28	30.27	54.00	-23.73	Average Detector
	2500.000	52.55	-9.28	43.27	74.00	-30.73	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

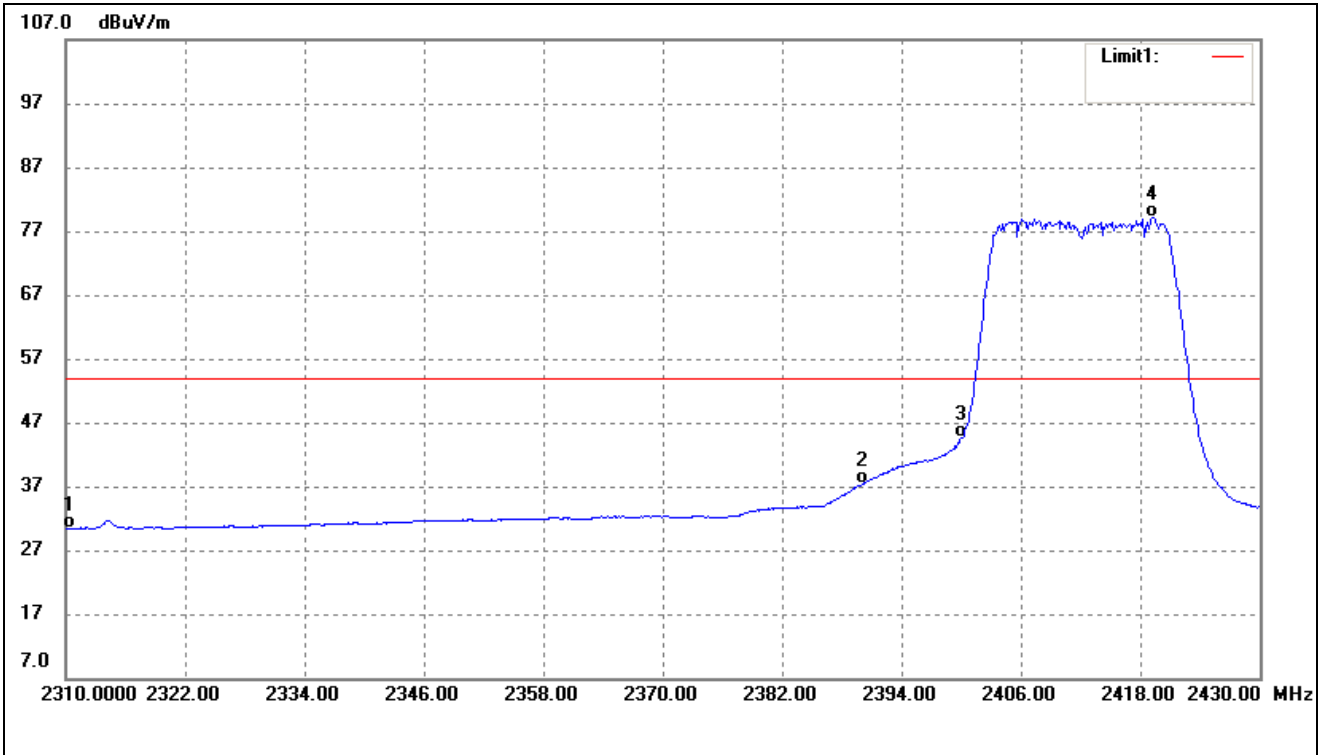


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.04	-9.66	30.38	54.00	-23.62	Average Detector
	2310.000	52.82	-9.66	43.16	74.00	-30.84	Peak Detector
2	2390.000	46.83	-9.50	37.33	54.00	-16.67	Average Detector
	2390.000	70.62	-9.50	61.12	74.00	-12.88	Peak Detector
3	2400.000	54.05	-9.48	44.57	Delta=34.62dBc		Average Detector
4	2419.200	88.63	-9.44	79.19			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

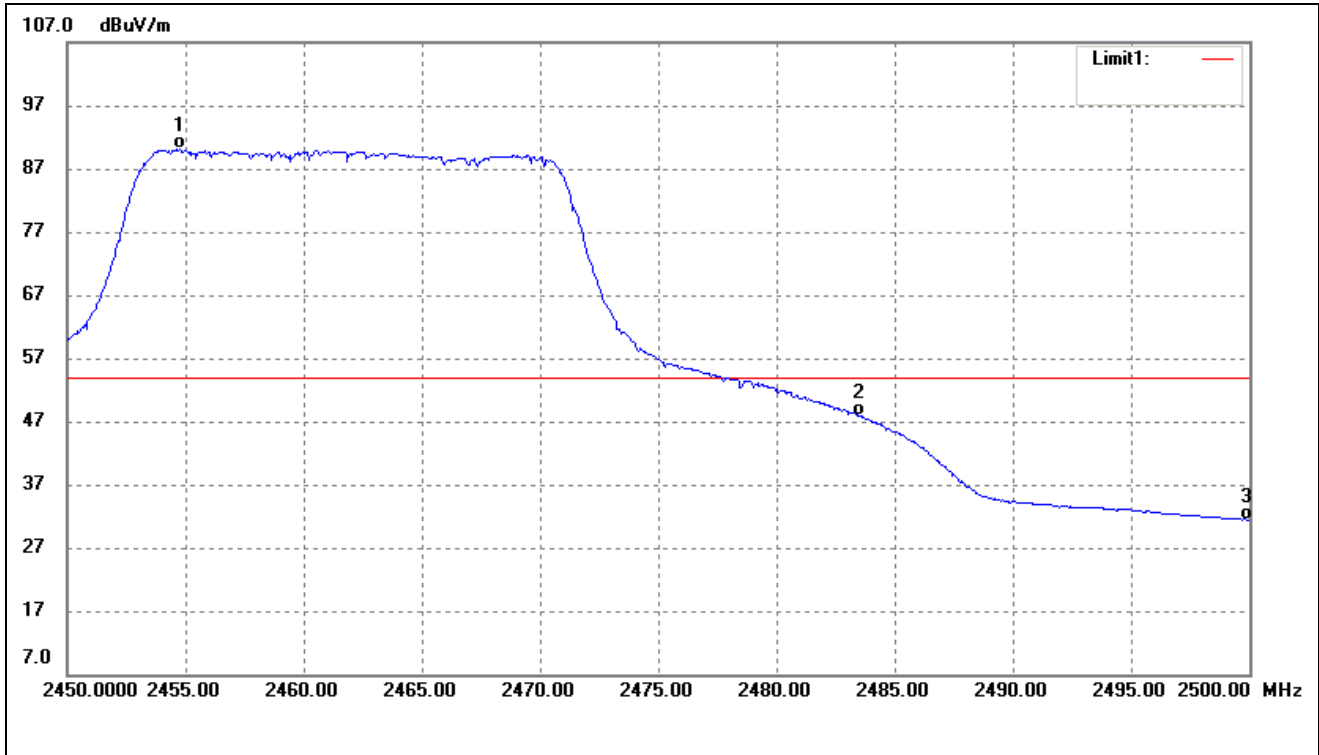


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.750	99.38	-9.37	90.01	/	/	Average Detector
	2460.450	109.56	-9.36	100.20	/	/	Peak Detector
2	2483.500	57.20	-9.31	47.89	54.00	-6.11	Average Detector
	2483.500	79.26	-9.31	69.95	74.00	-4.05	Peak Detector
3	2500.000	40.76	-9.28	31.48	54.00	-22.52	Average Detector
	2500.000	53.51	-9.28	44.23	74.00	-29.77	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

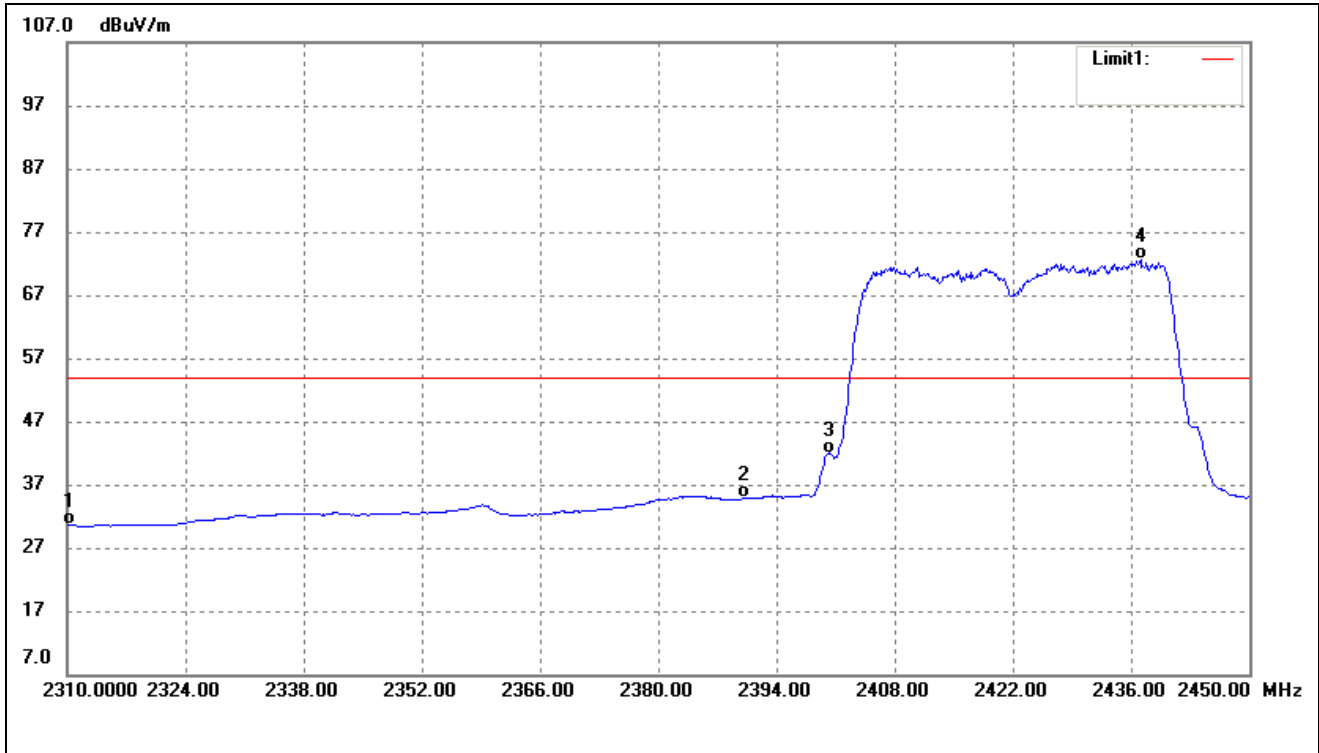

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.29	-9.66	30.63	54.00	-23.37	Average Detector
	2310.000	52.07	-9.66	42.41	74.00	-31.59	Peak Detector
2	2390.000	44.37	-9.50	34.87	54.00	-19.13	Average Detector
	2390.000	60.44	-9.50	50.94	74.00	-23.06	Peak Detector
3	2400.000	51.31	-9.48	41.83	Delta=30.72dBc		Average Detector
4	2437.120	81.95	-9.40	72.55			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)


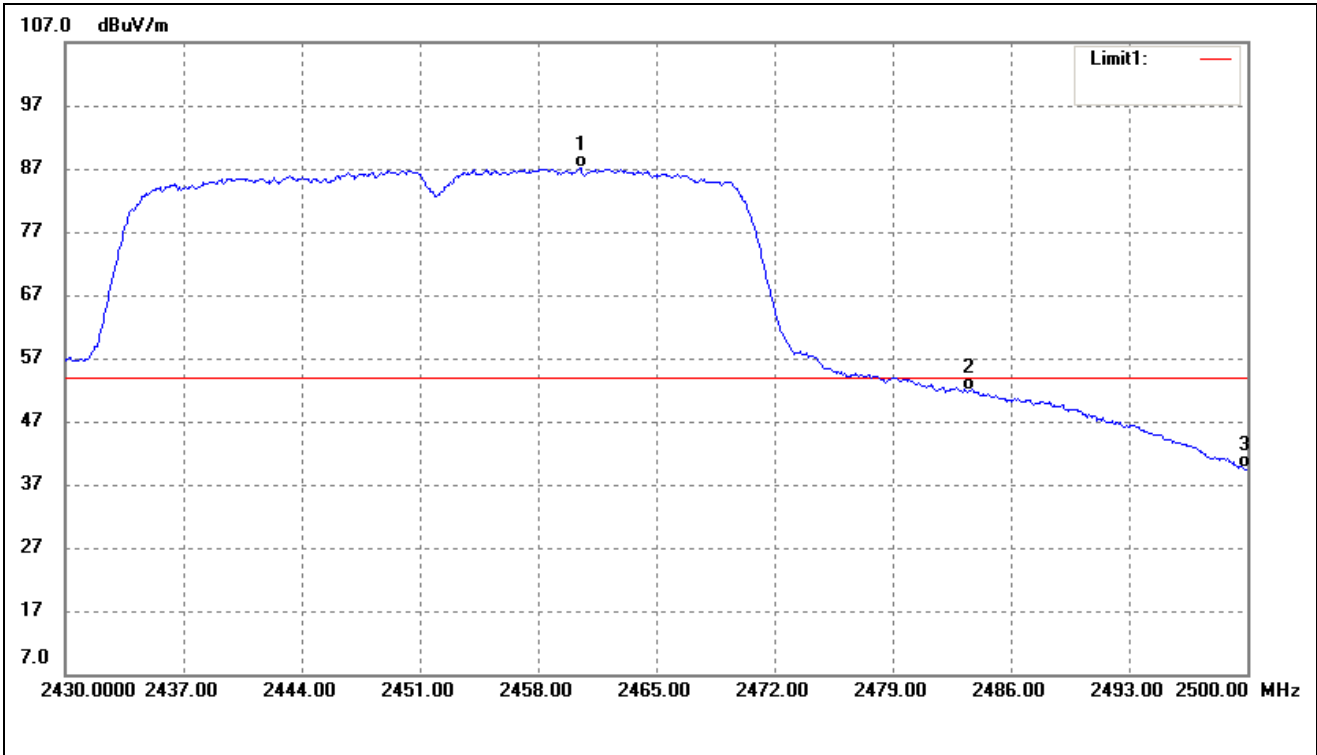


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.520	96.39	-9.36	87.03	/	/	Average Detector
	2462.620	106.49	-9.36	97.13	/	/	Peak Detector
2	2483.500	61.30	-9.31	51.99	54.00	-2.01	Average Detector
	2483.500	76.53	-9.31	67.22	74.00	-6.78	Peak Detector
3	2500.000	48.85	-9.28	39.57	54.00	-14.43	Average Detector
	2500.000	64.77	-9.28	55.49	74.00	-18.51	Peak Detector

➤ Antenna 1



802.11b_11Mbps

Low

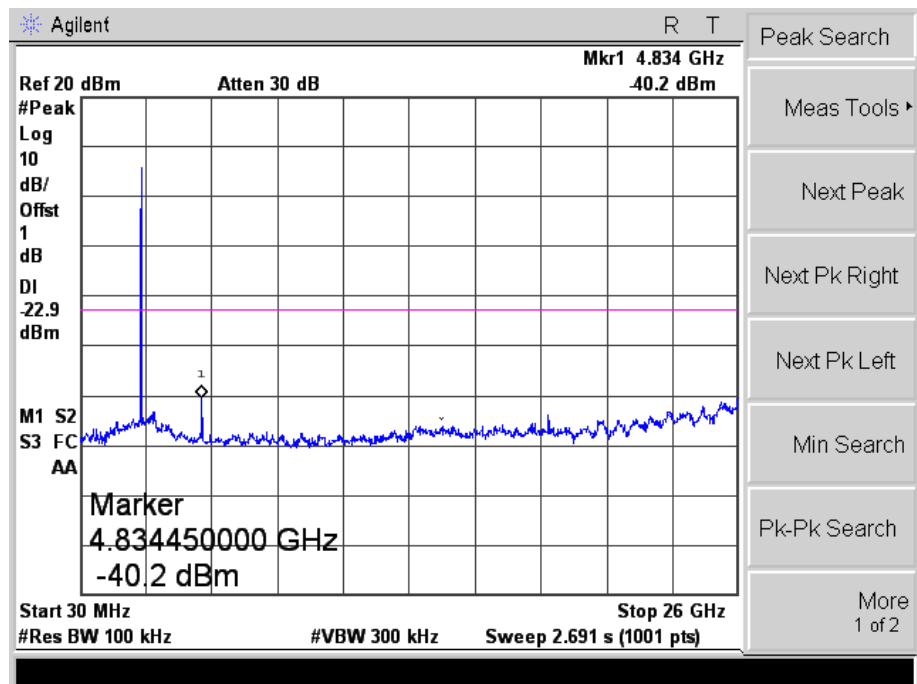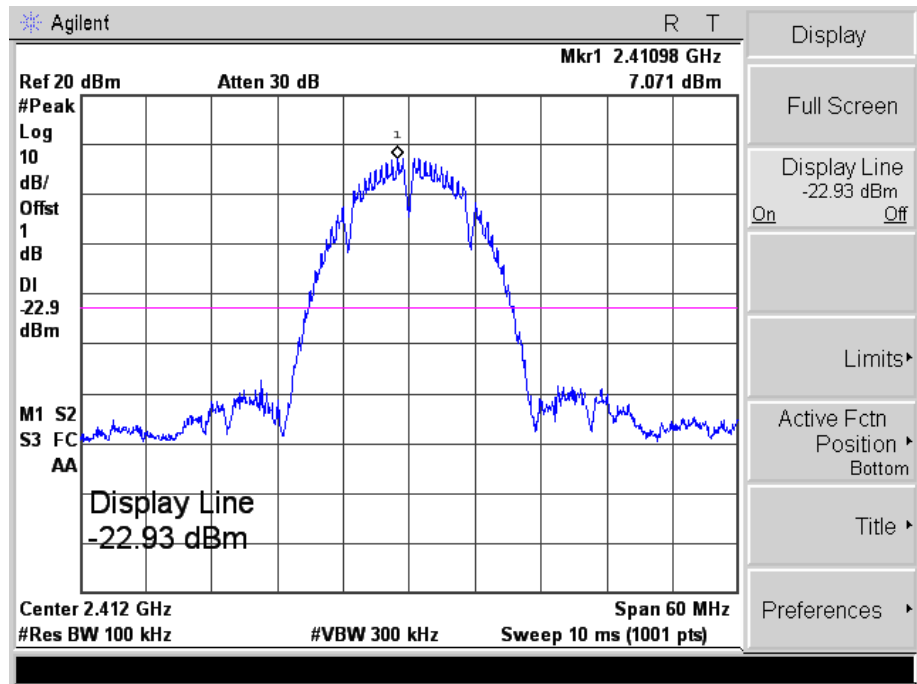



802.11b_11Mbps

Middle

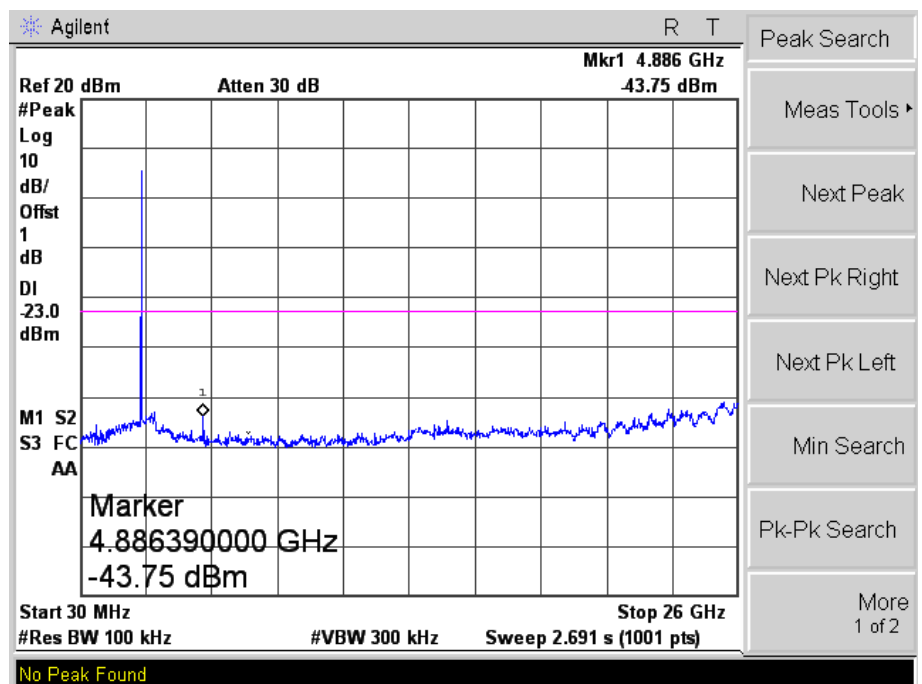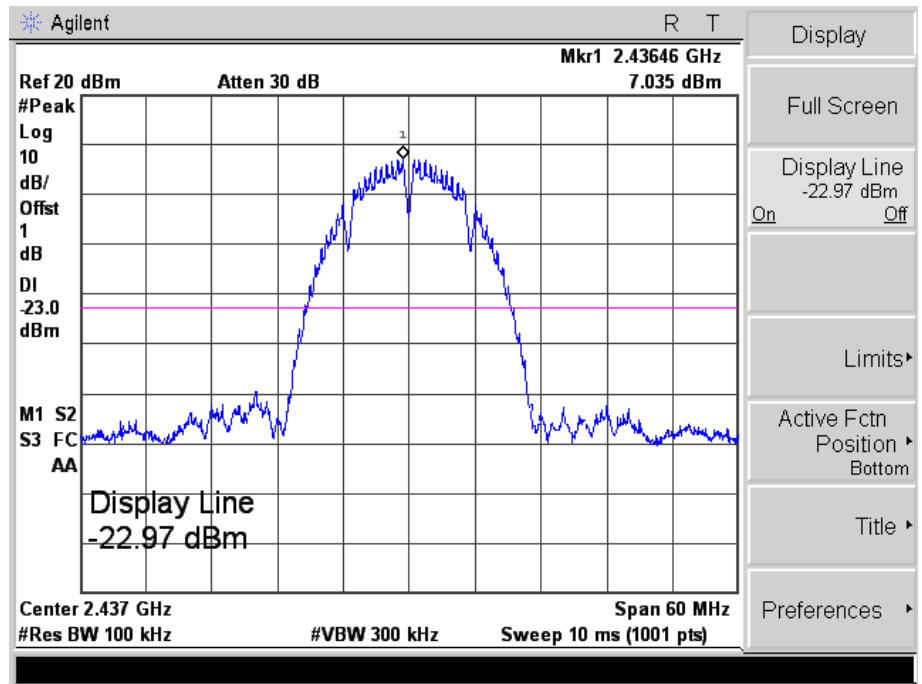



802.11b_11Mbps

High

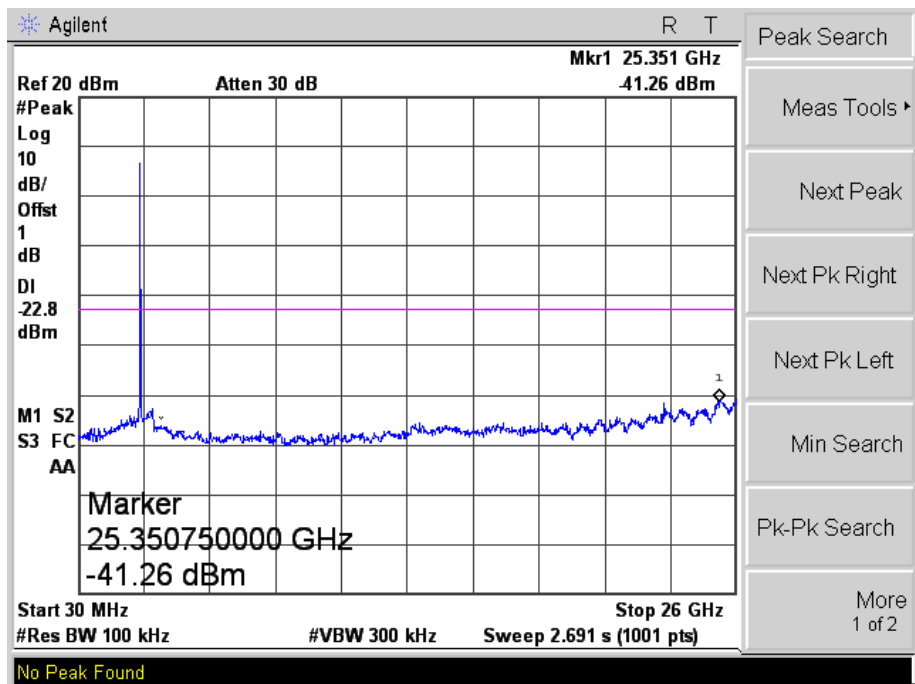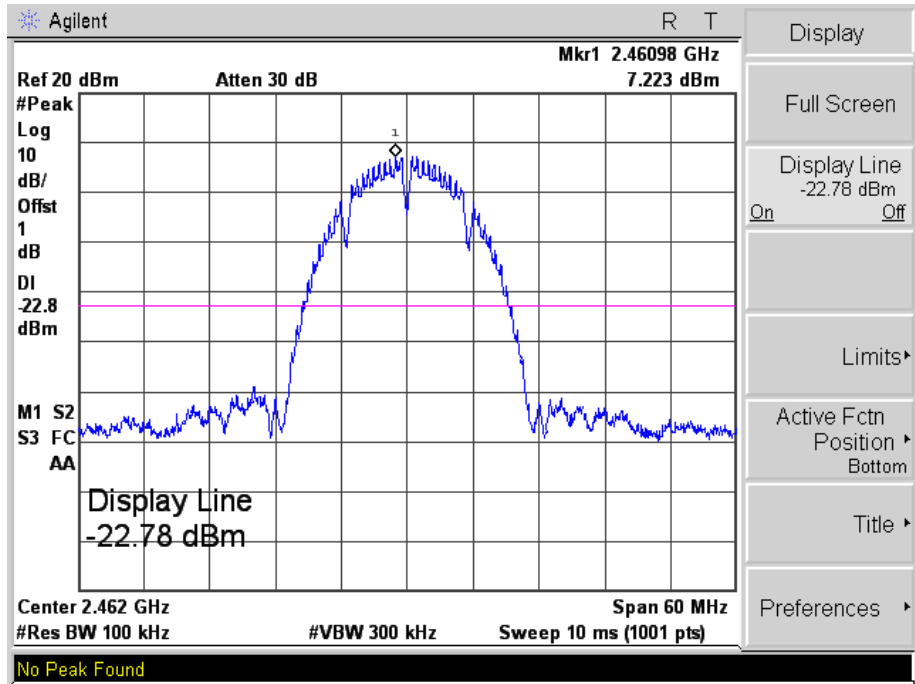



802.11g_54Mbps

Low

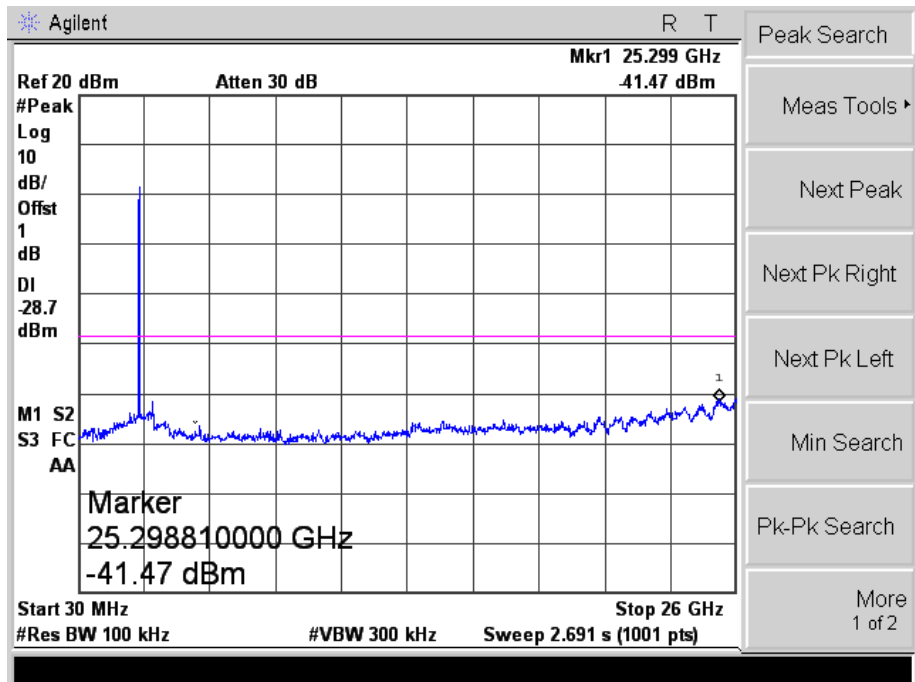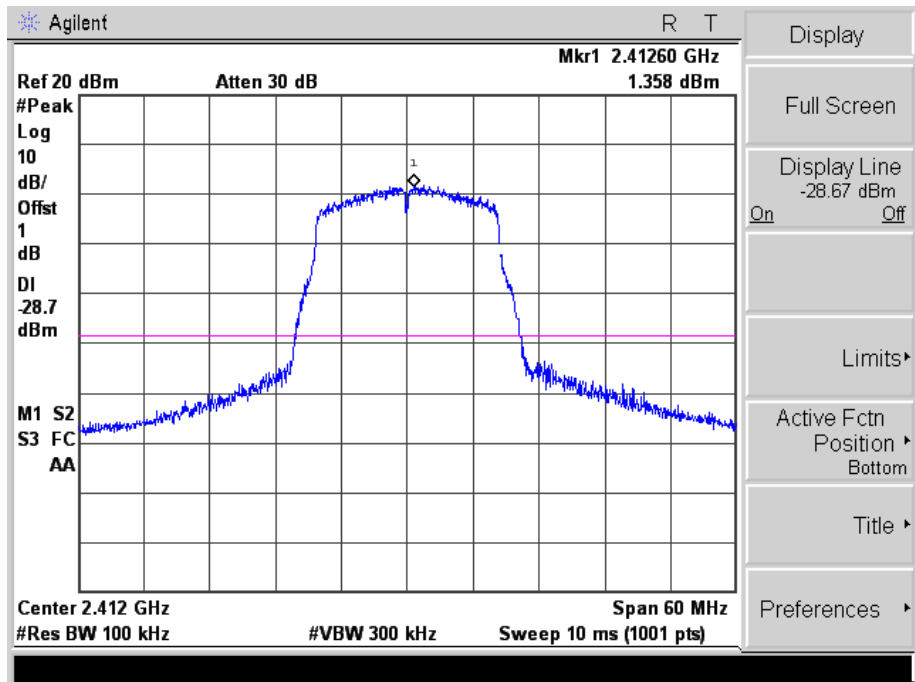



802.11g_54Mbps

Middle

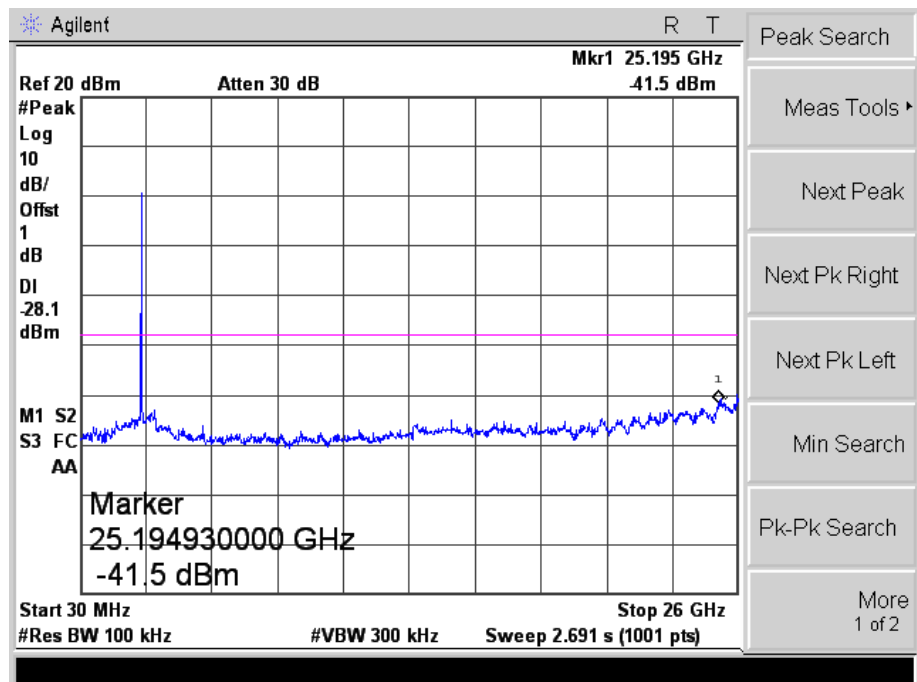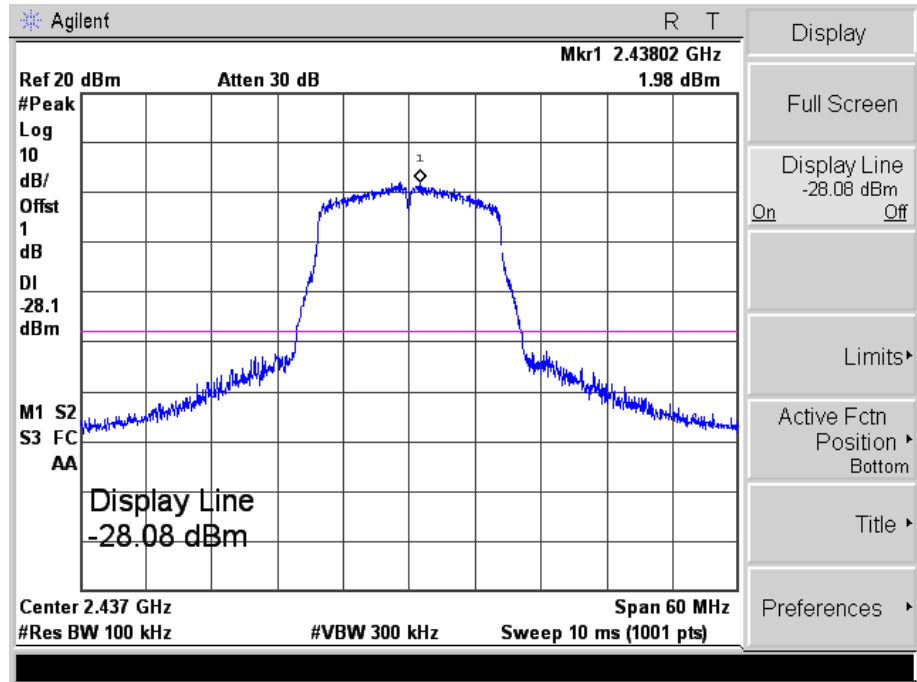



802.11g_54Mbps

High

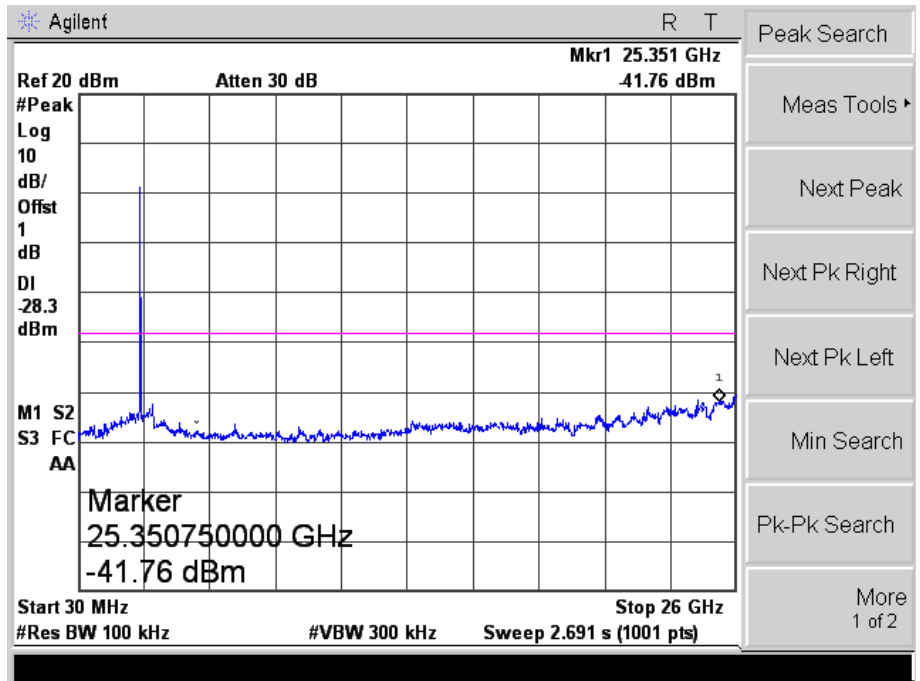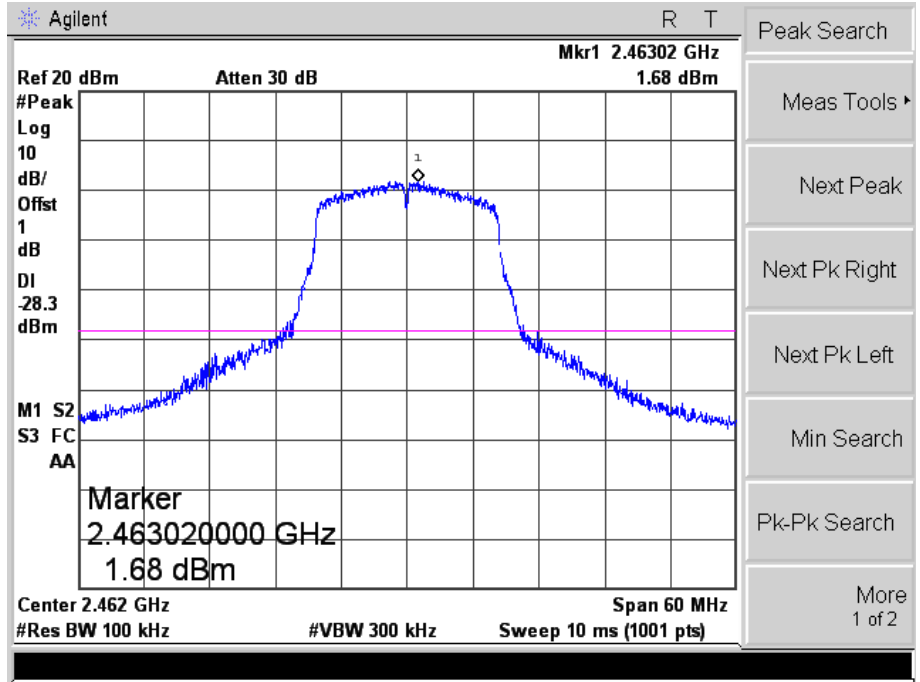



802.11n-HT20_MCS7

Low

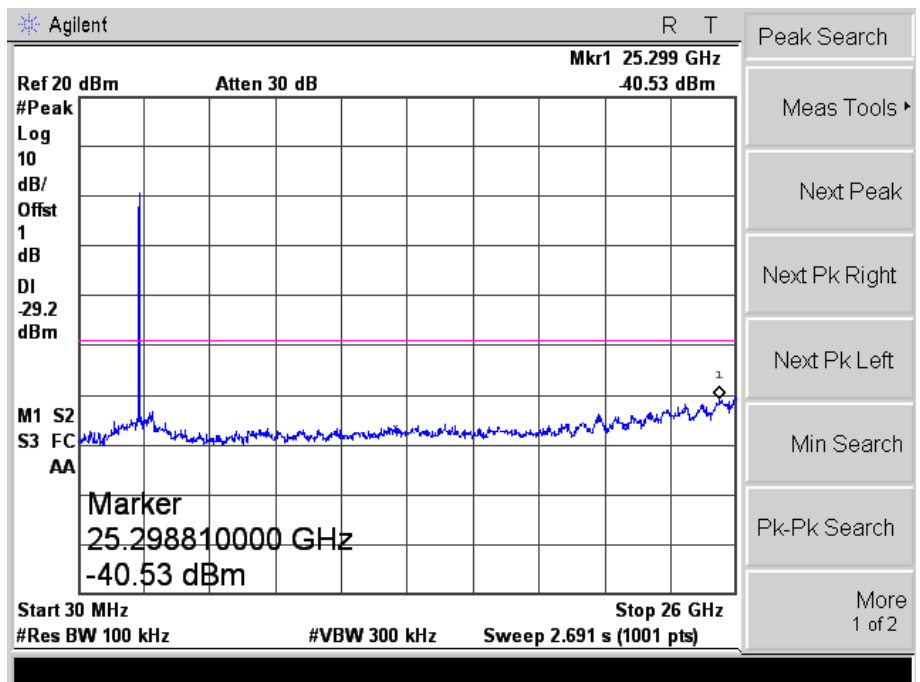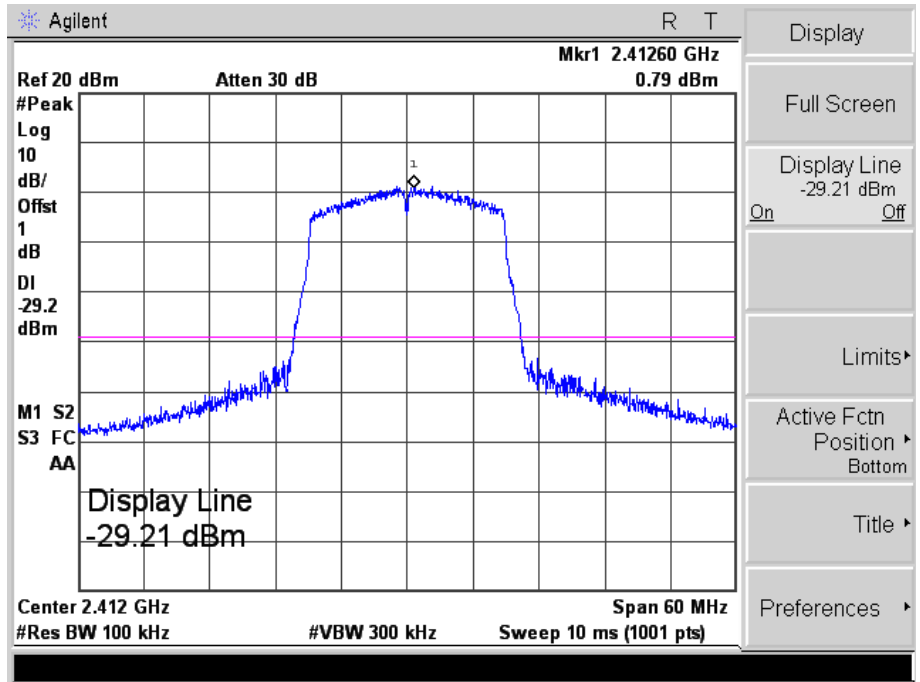



802.11n-HT20_MCS7

Middle

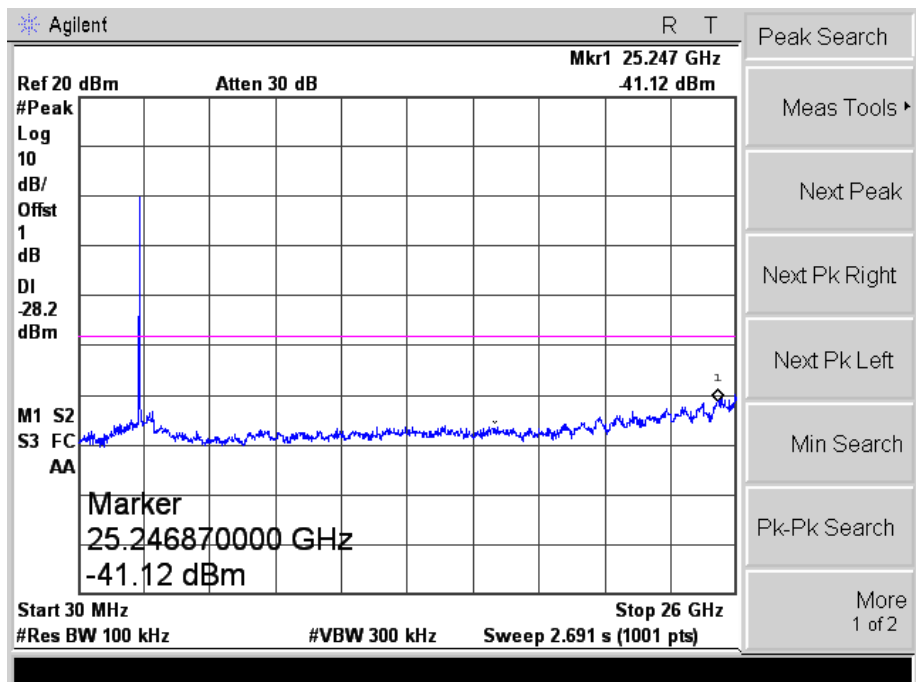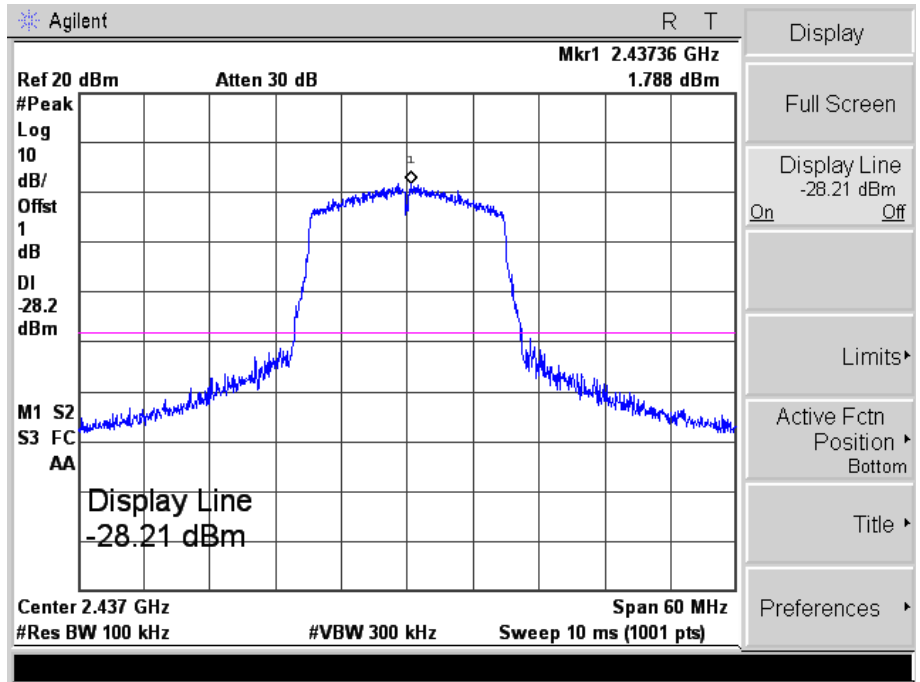



802.11n-HT20_MCS7

High

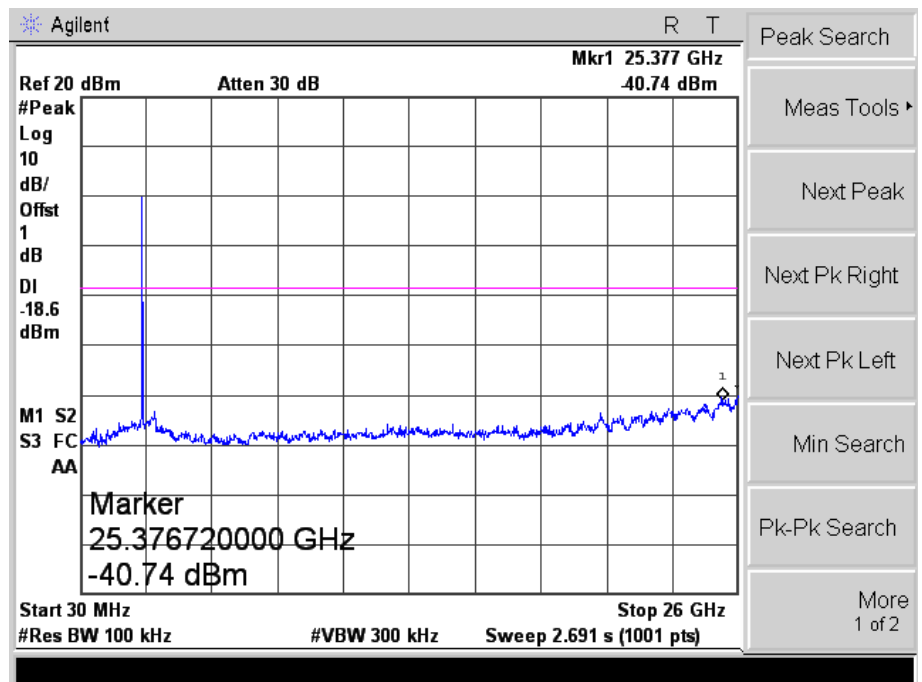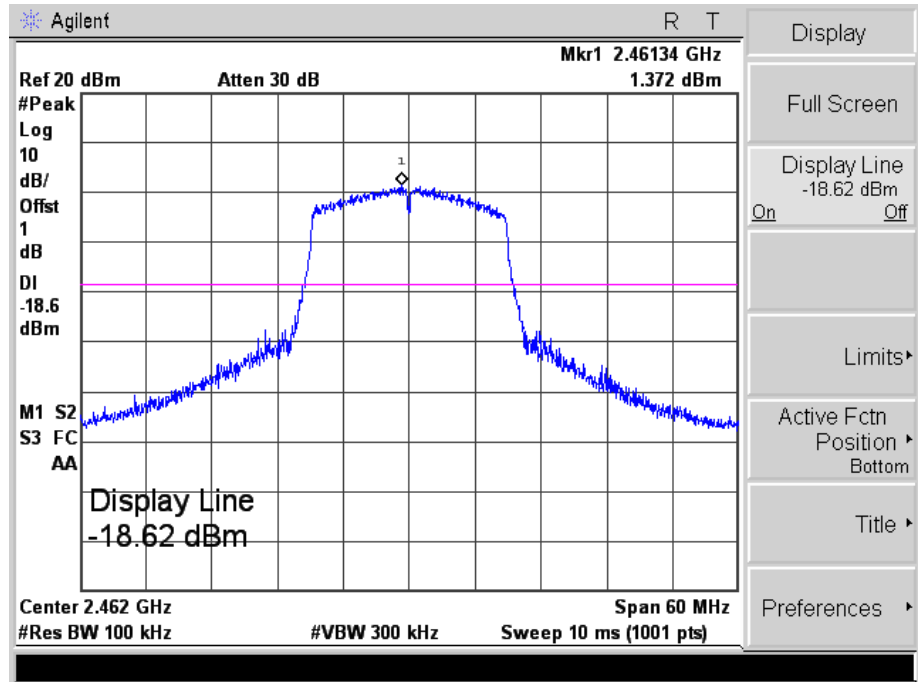



802.11n-HT40_MCS7

Low

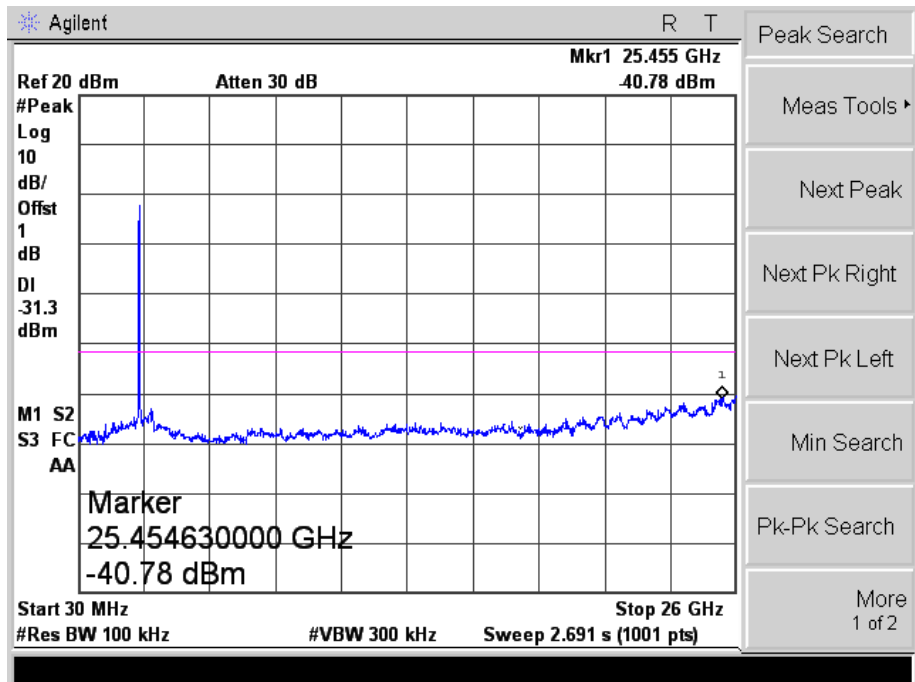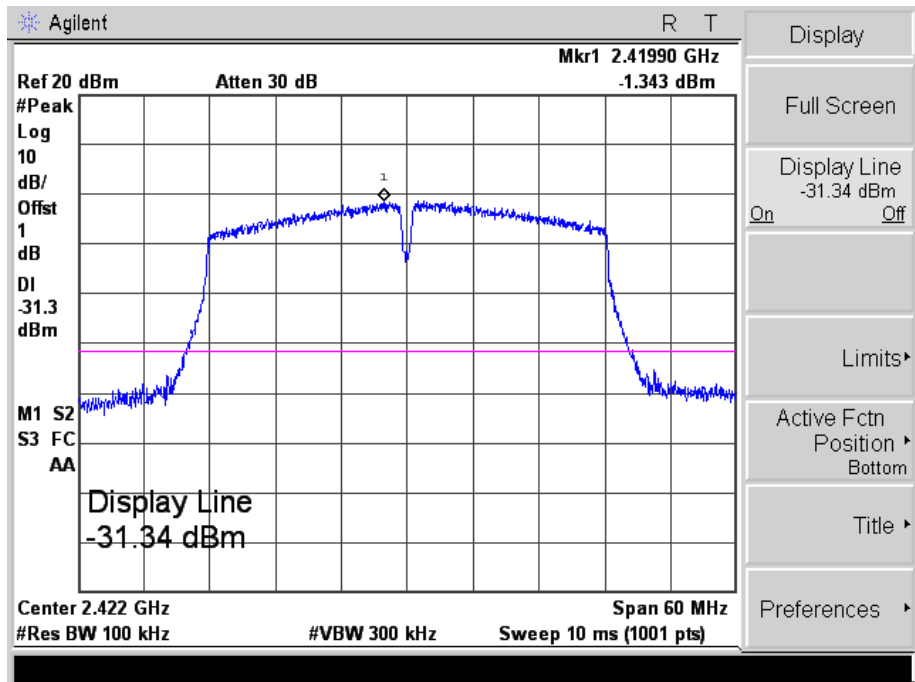



802.11n-HT40_MCS7

Middle

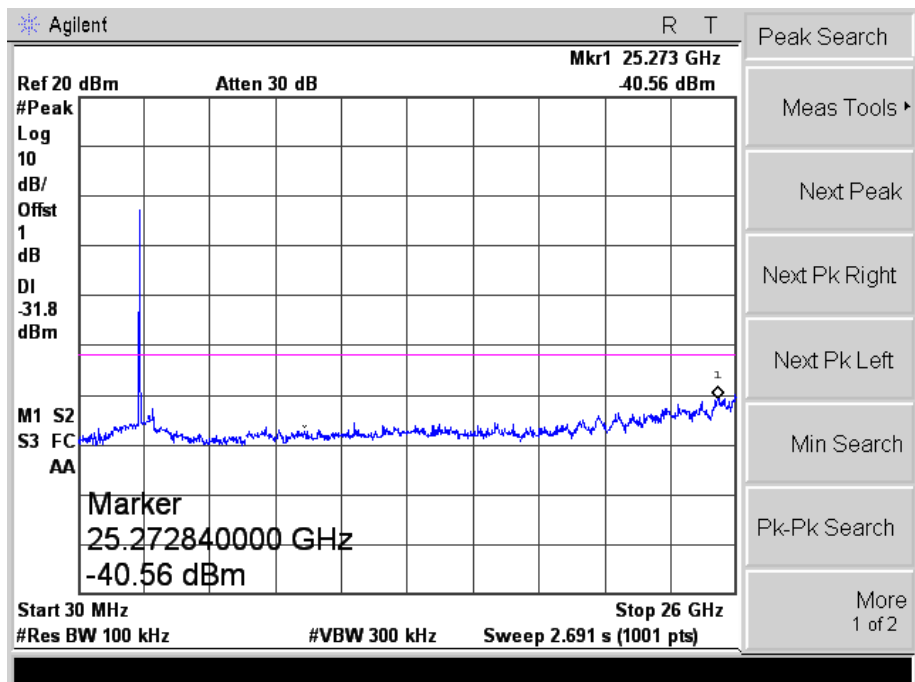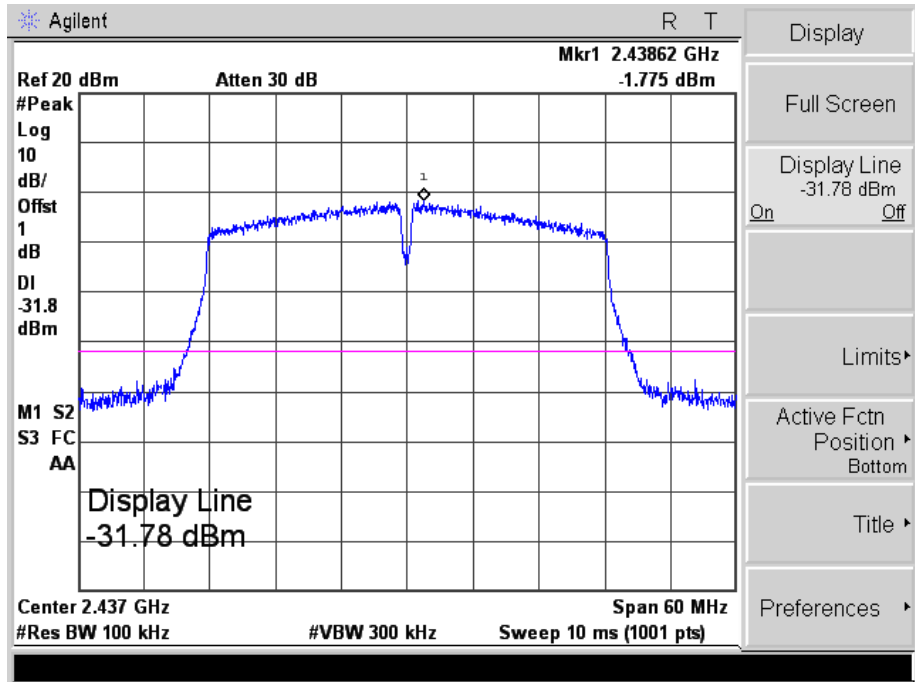

802.11n-HT40_MCS7



High

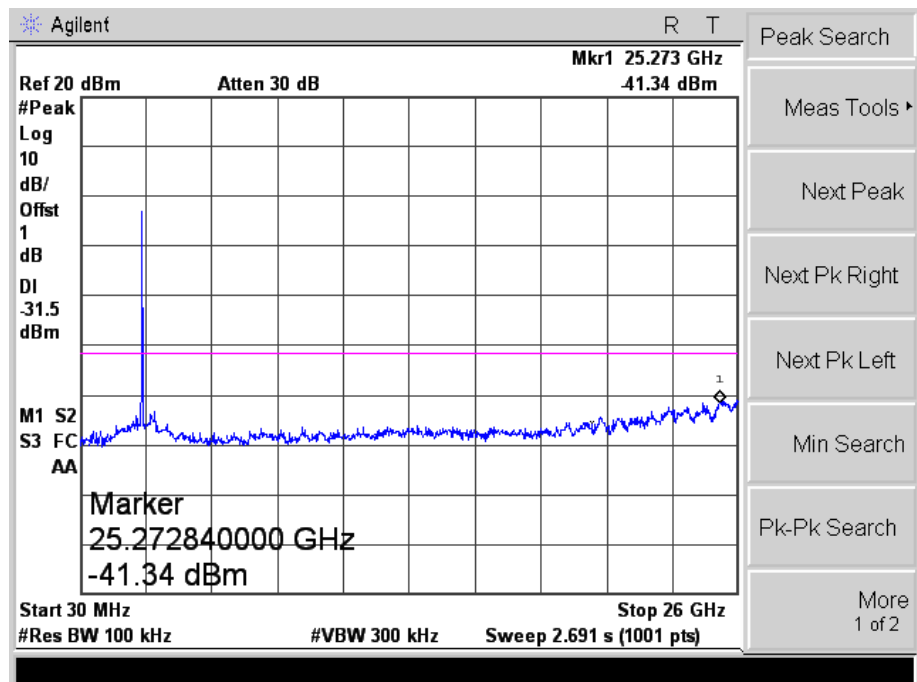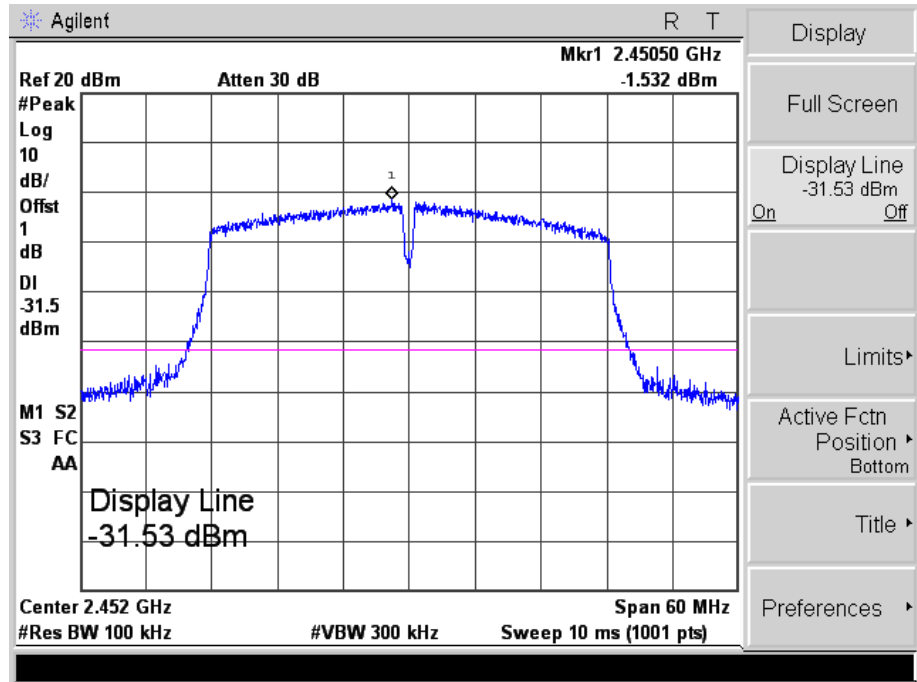

➤ Antenna 2



802.11b_11Mbps

Low

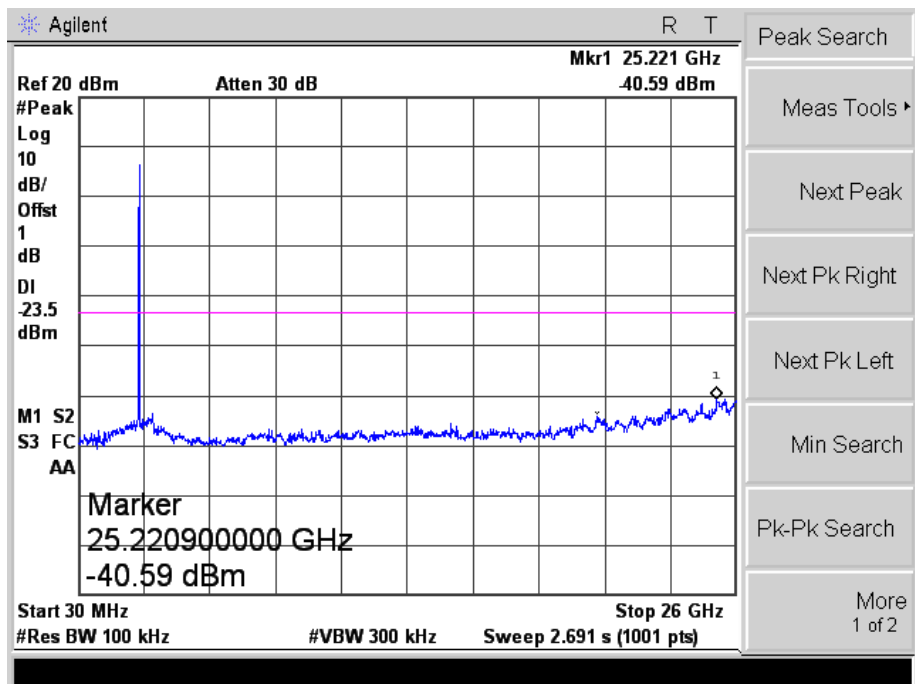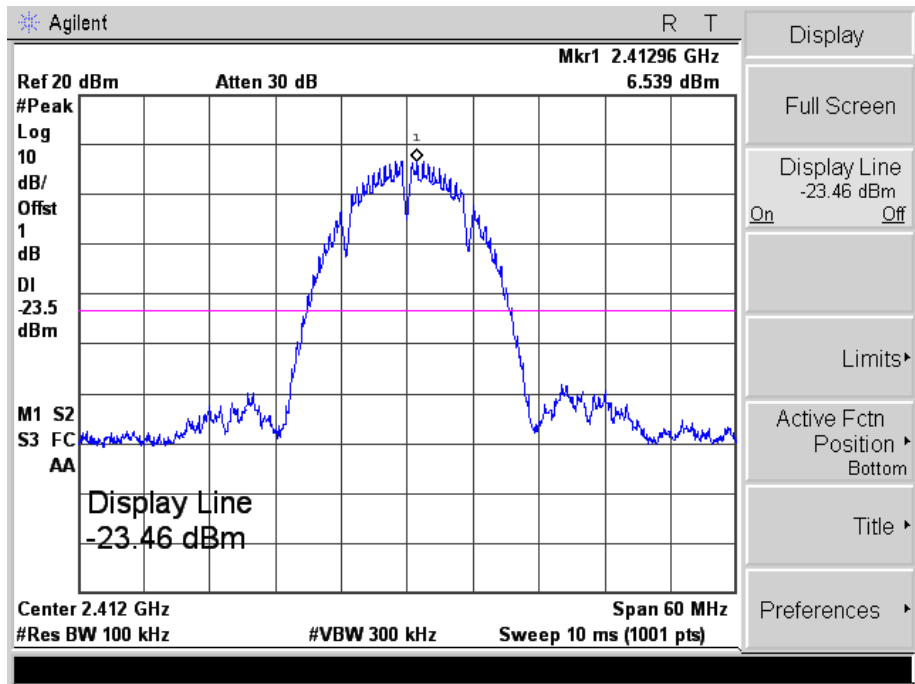



802.11b_11Mbps

Middle

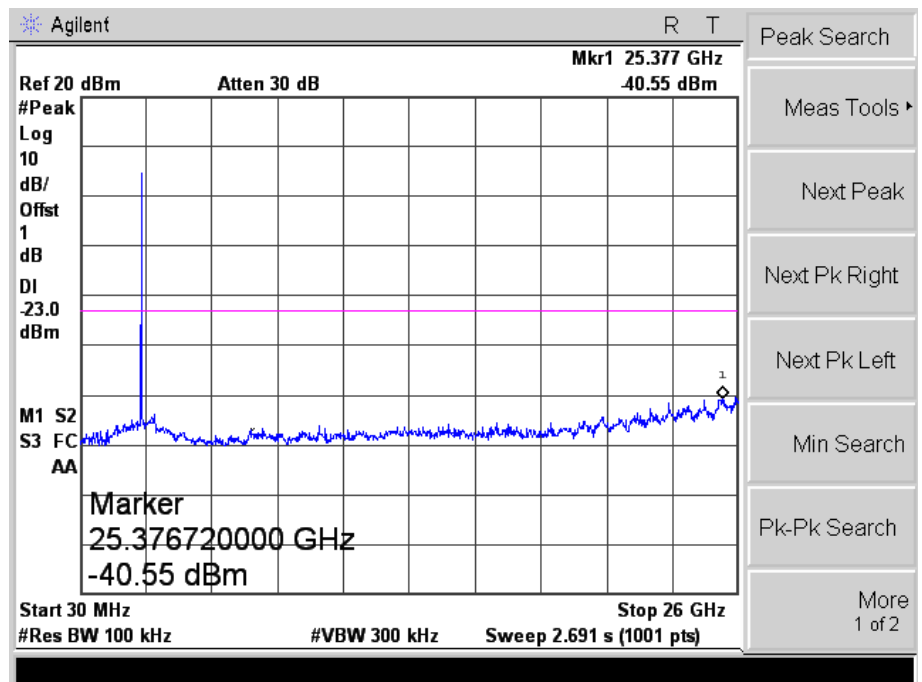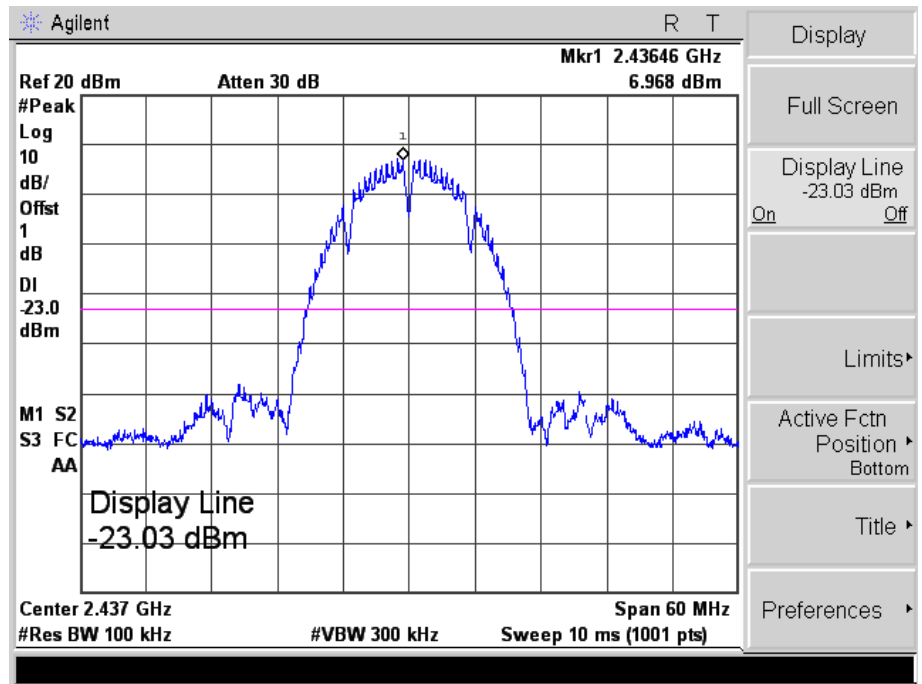



802.11b_11Mbps

High

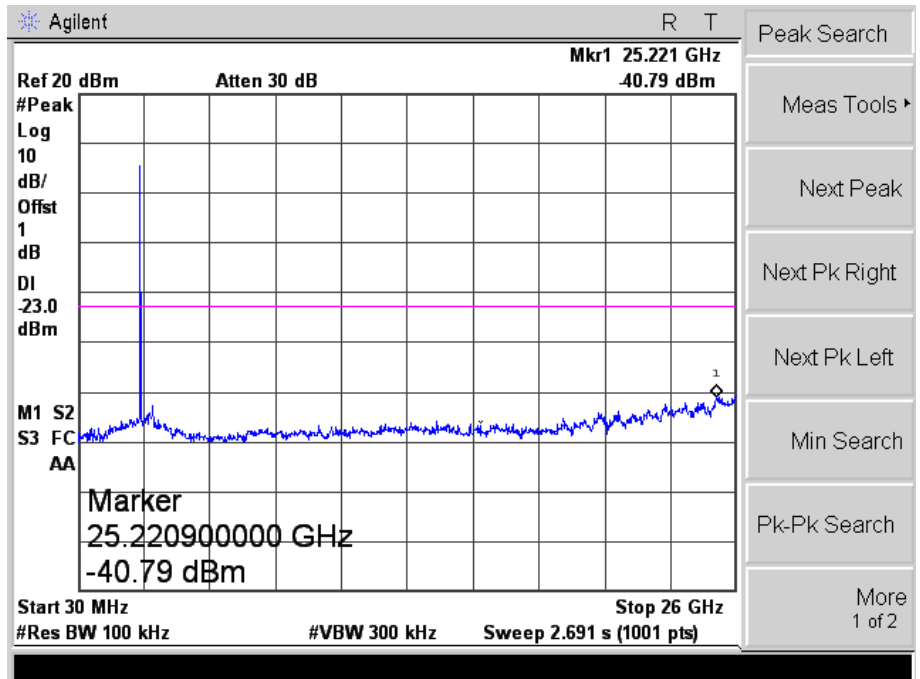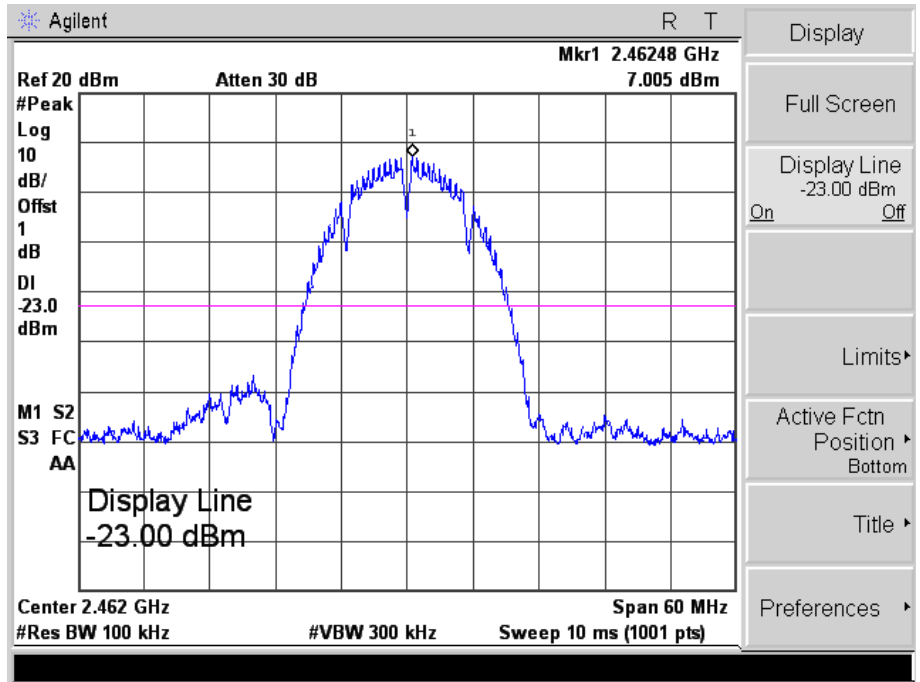



802.11g_54Mbps

Low

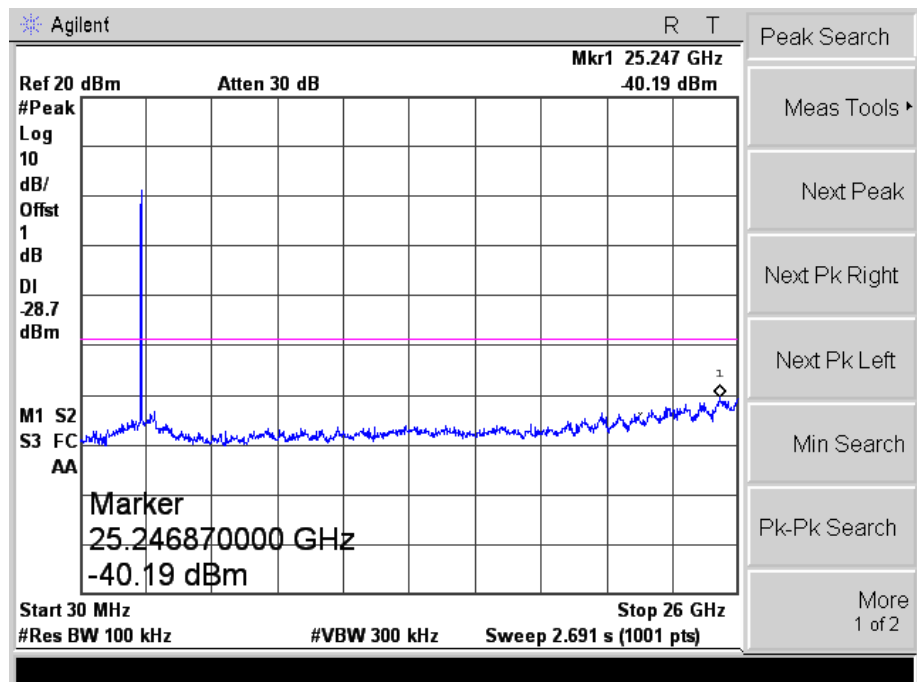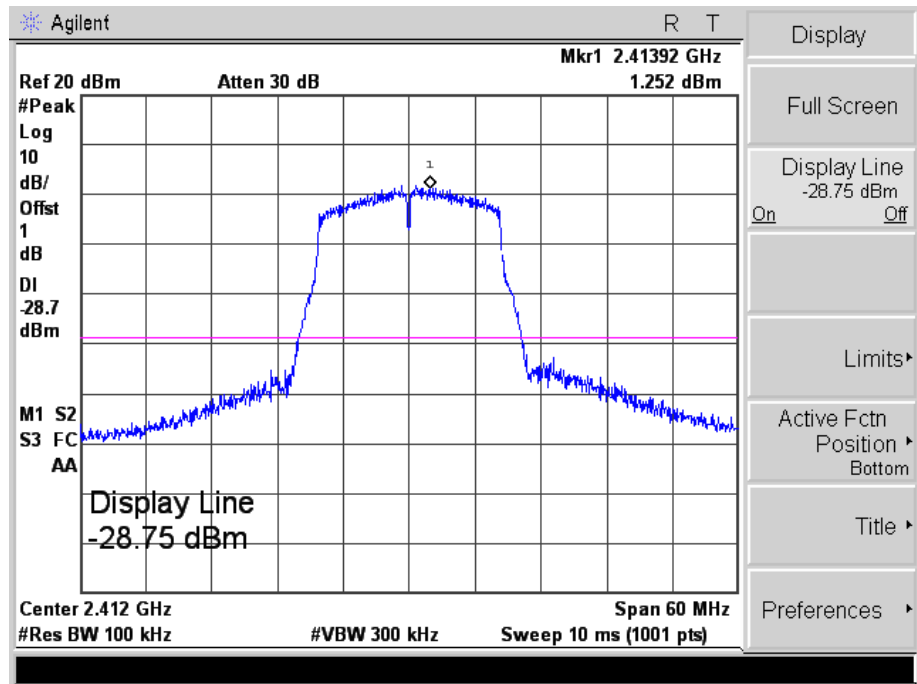



802.11g_54Mbps

Middle

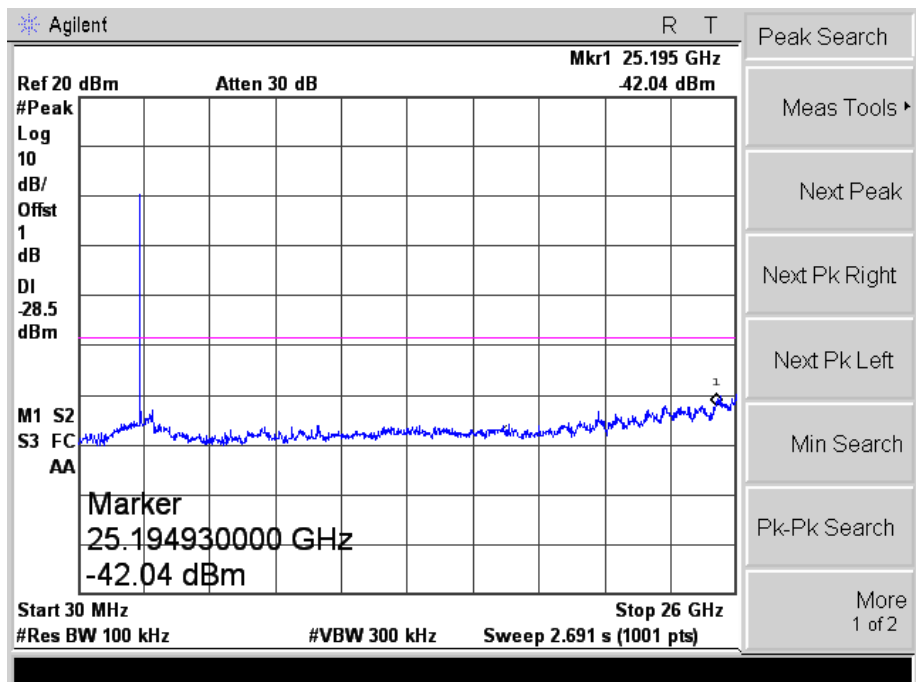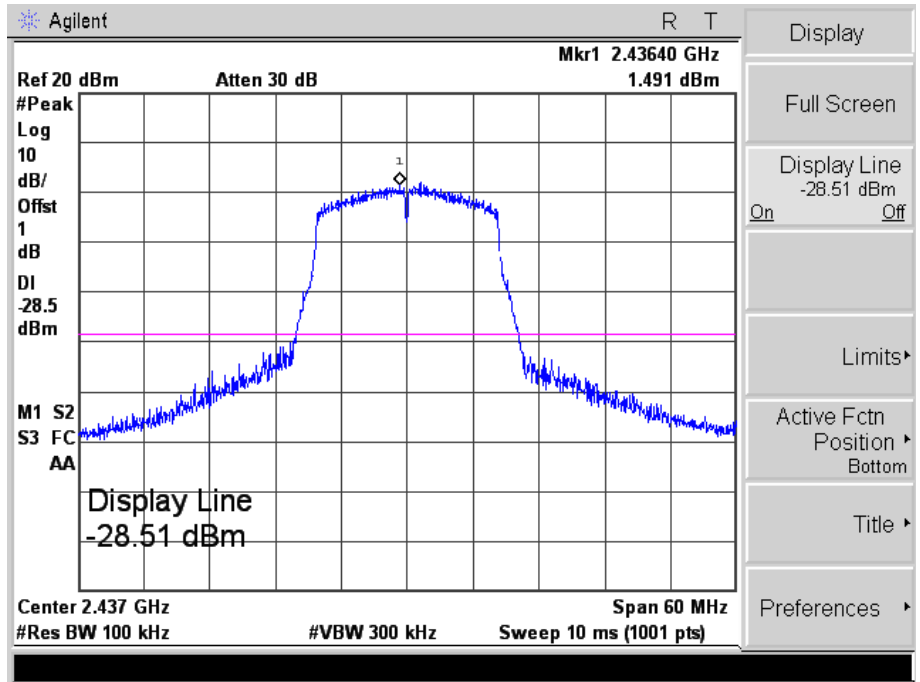



802.11g_54Mbps

High

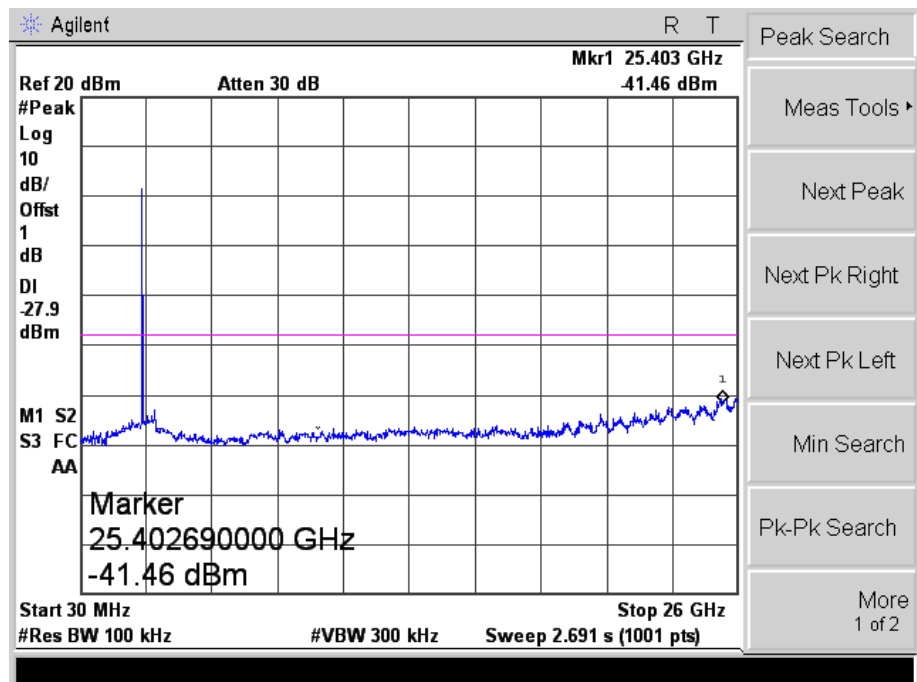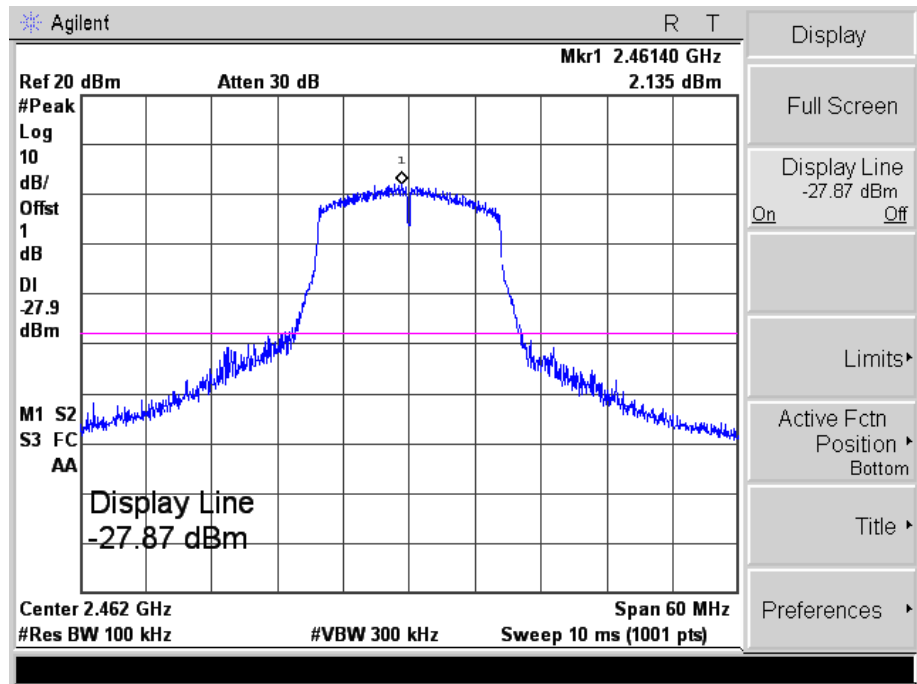



802.11n-HT20_MCS7

Low

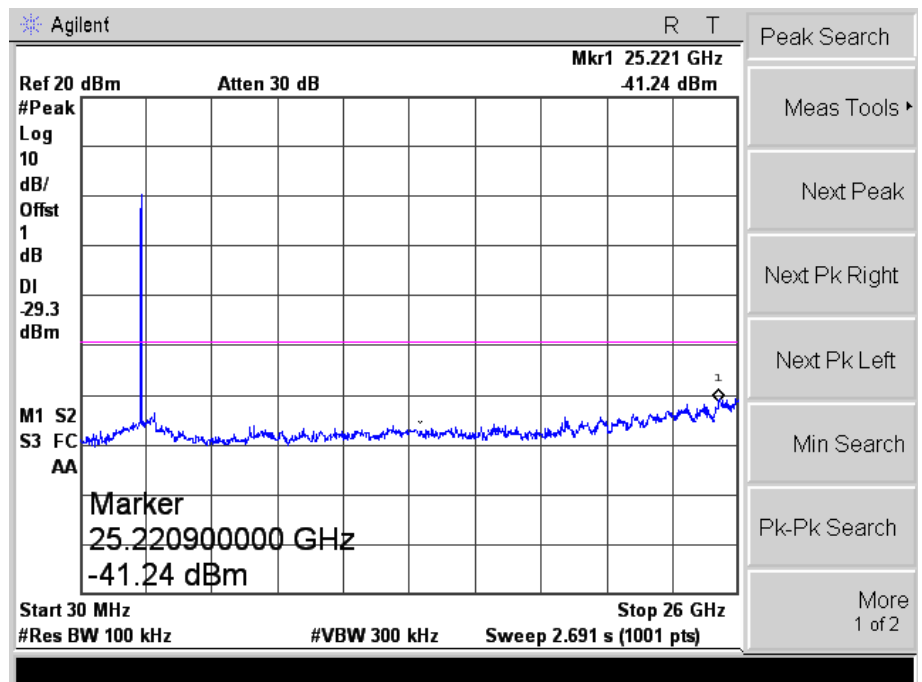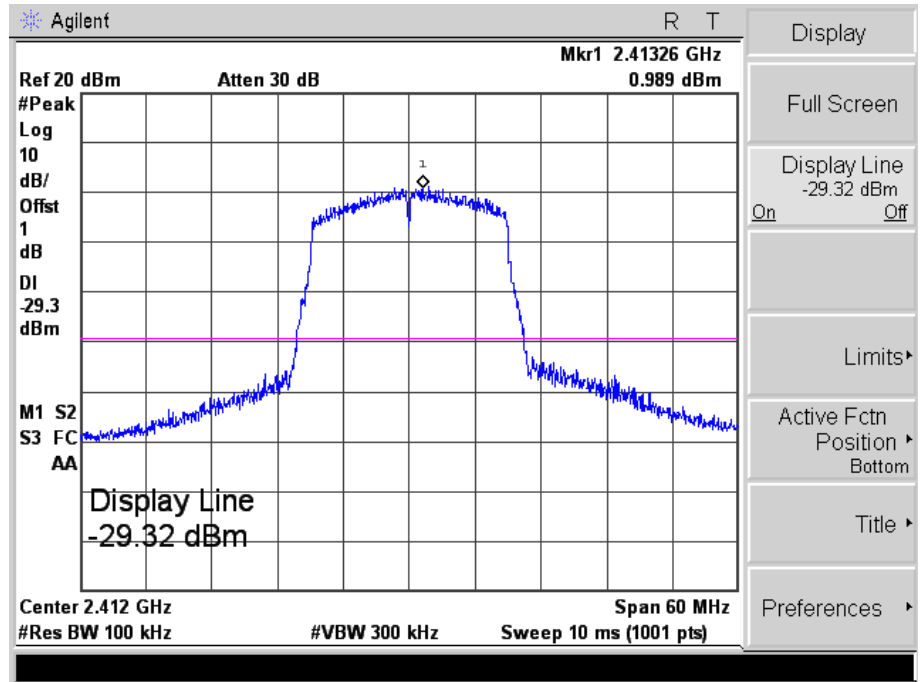



802.11n-HT20_MCS7

Middle

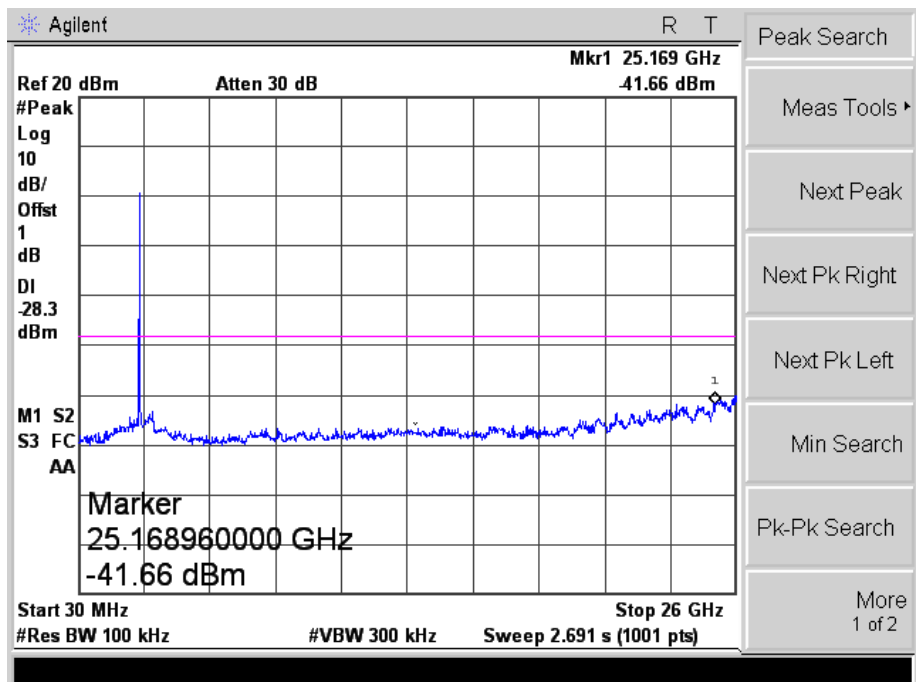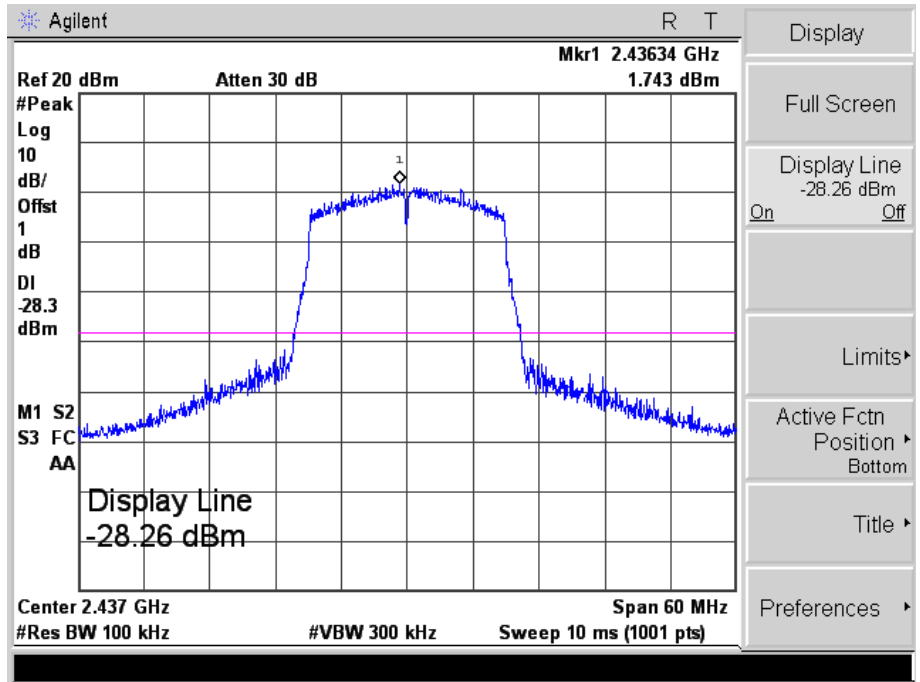



802.11n-HT20_MCS7

High

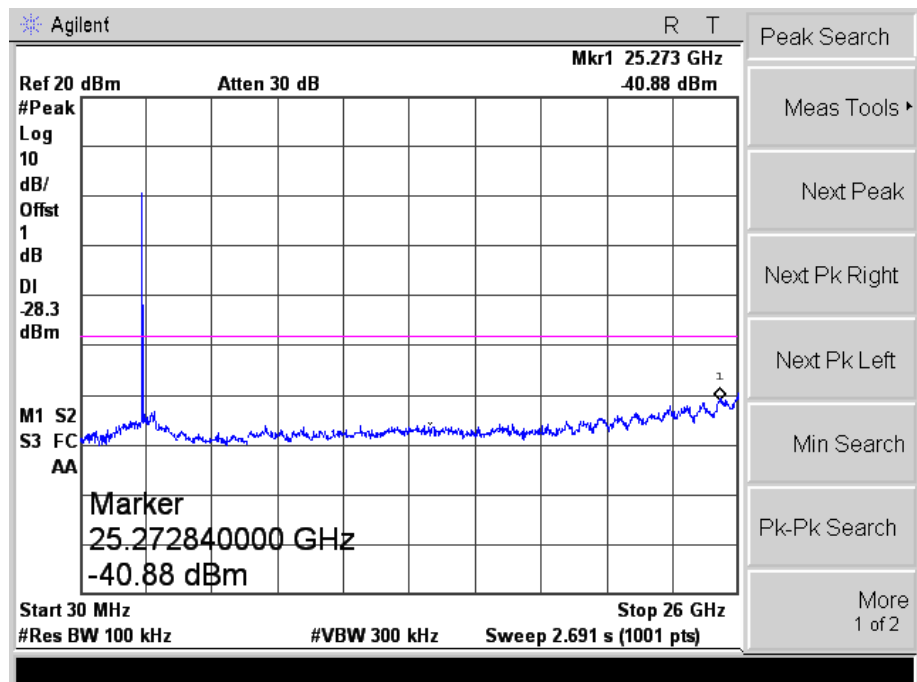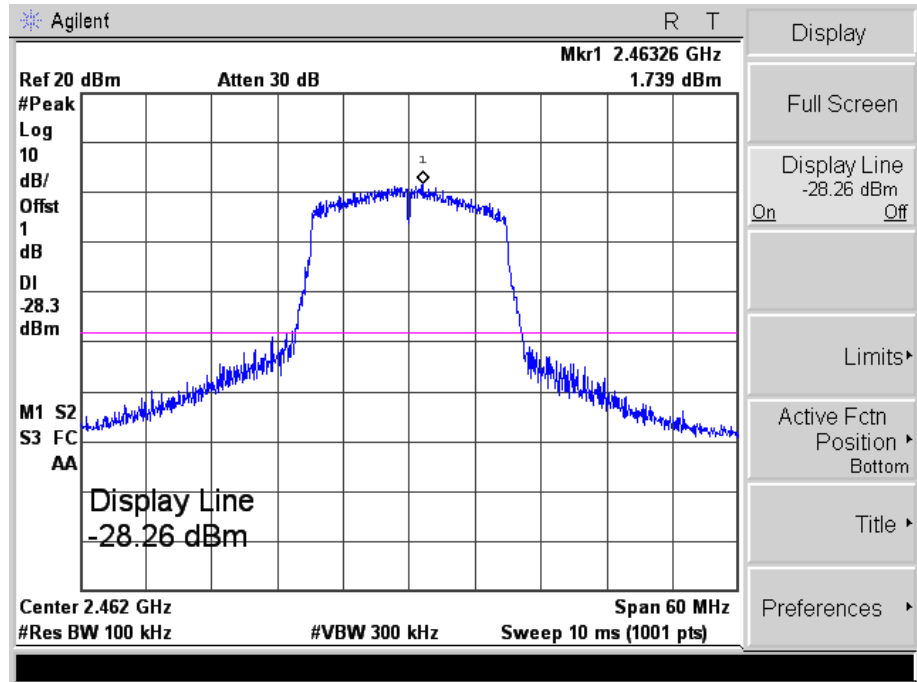



802.11n-HT40_MCS7

Low

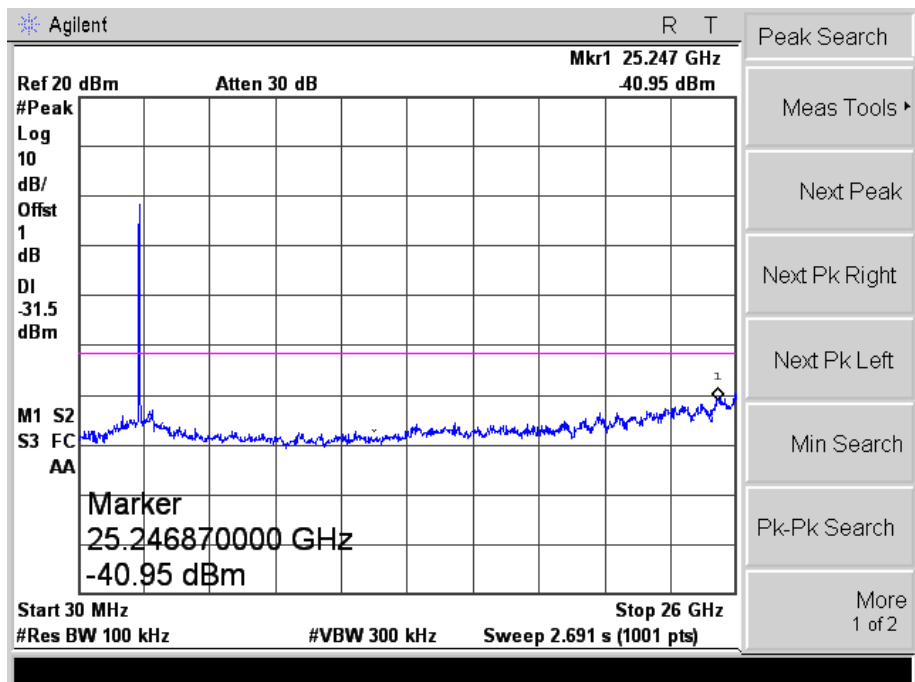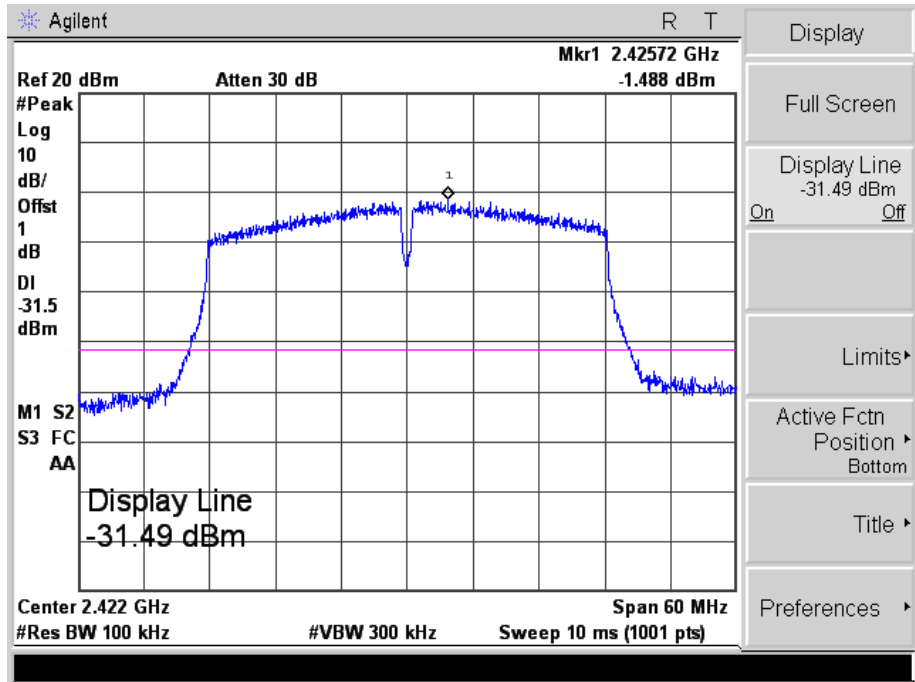



802.11n-HT40_MCS7

Middle

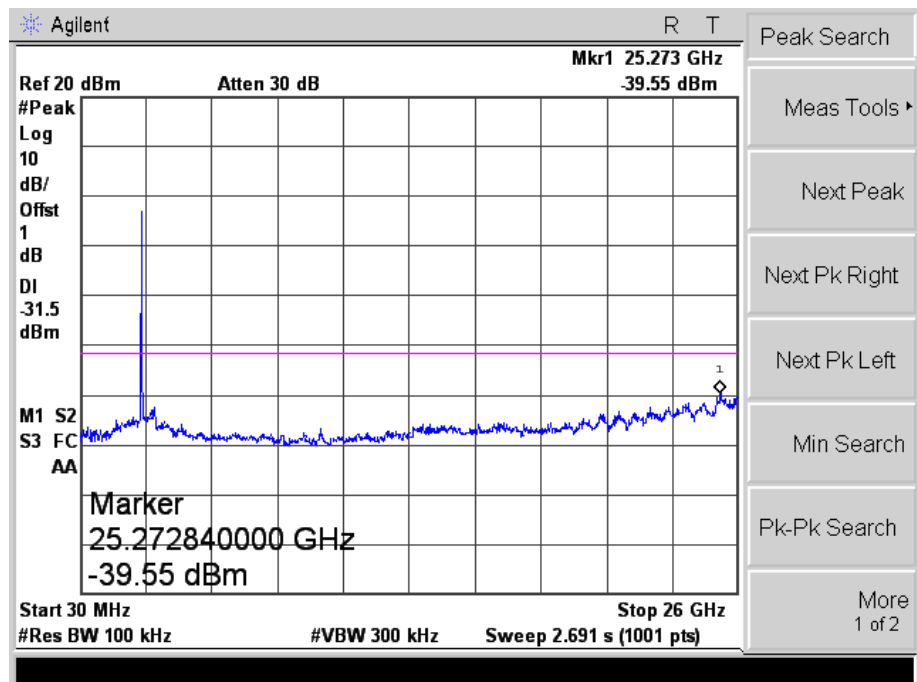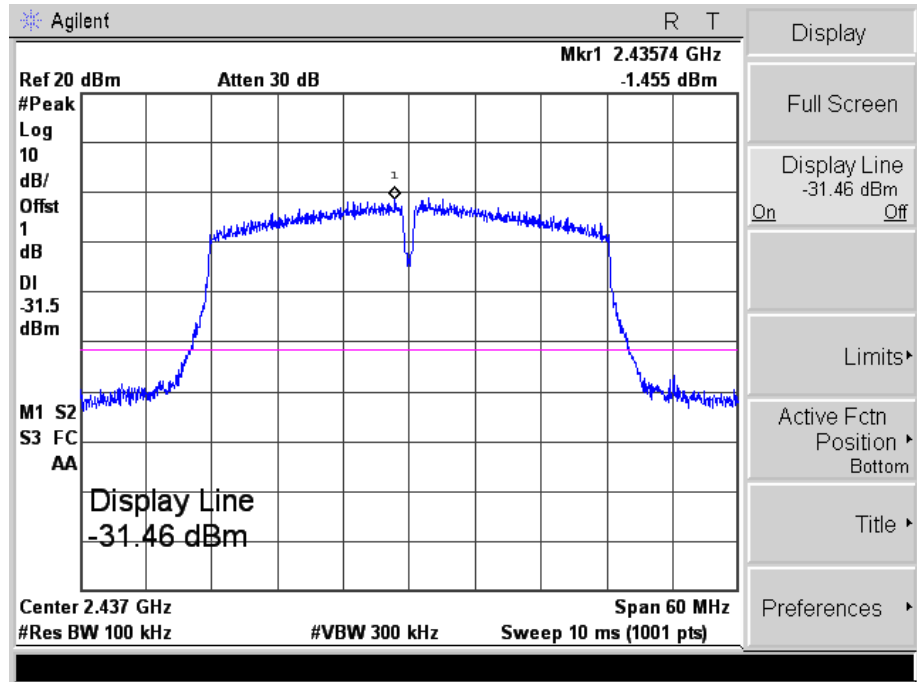

802.11n-HT40_MCS7

High

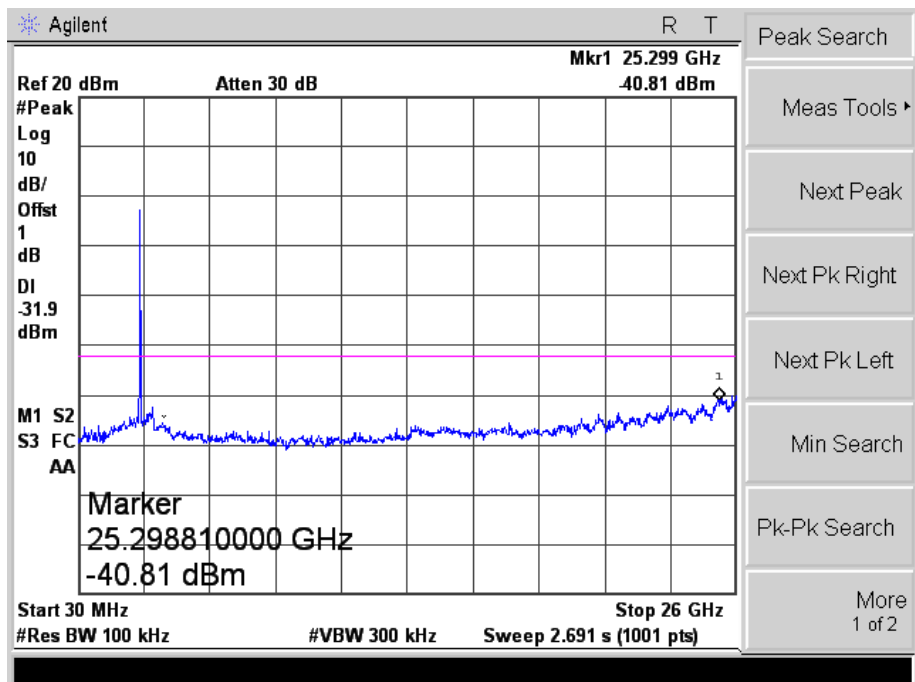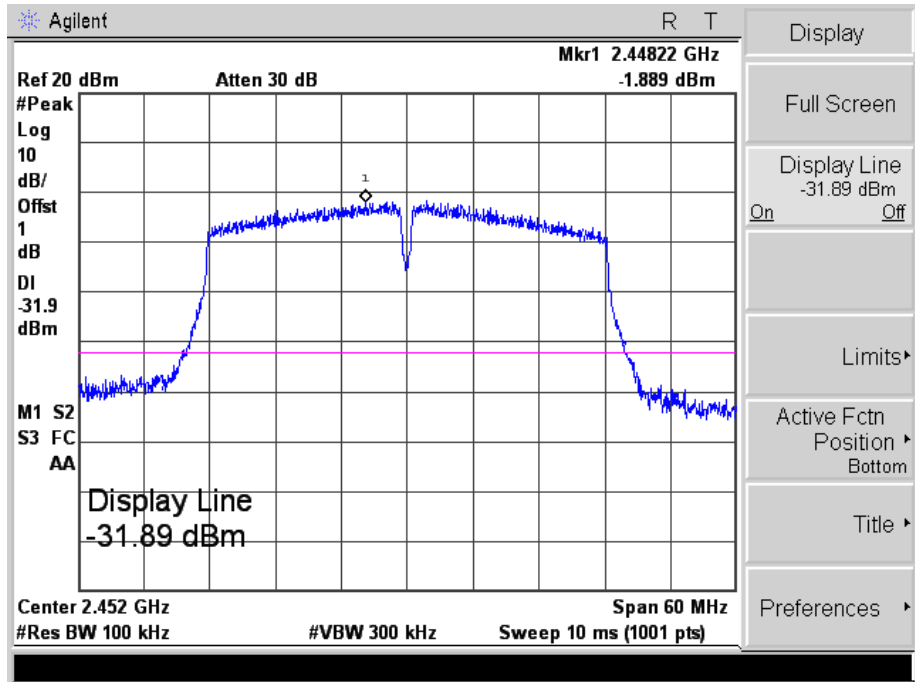


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

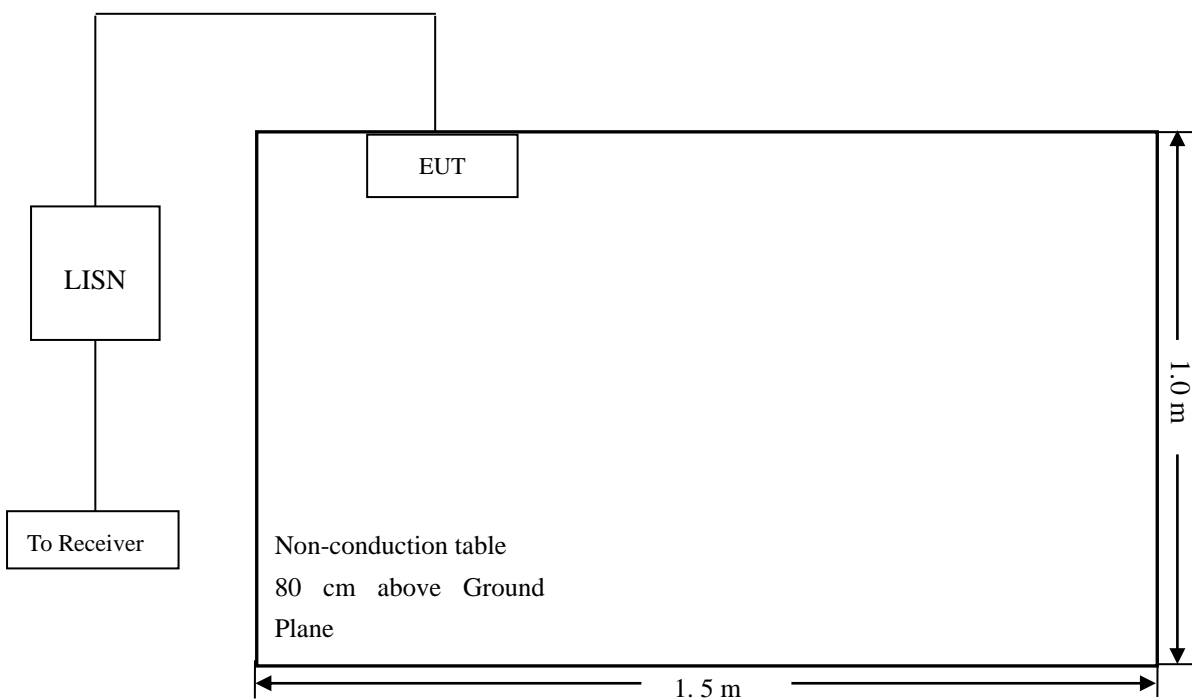


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

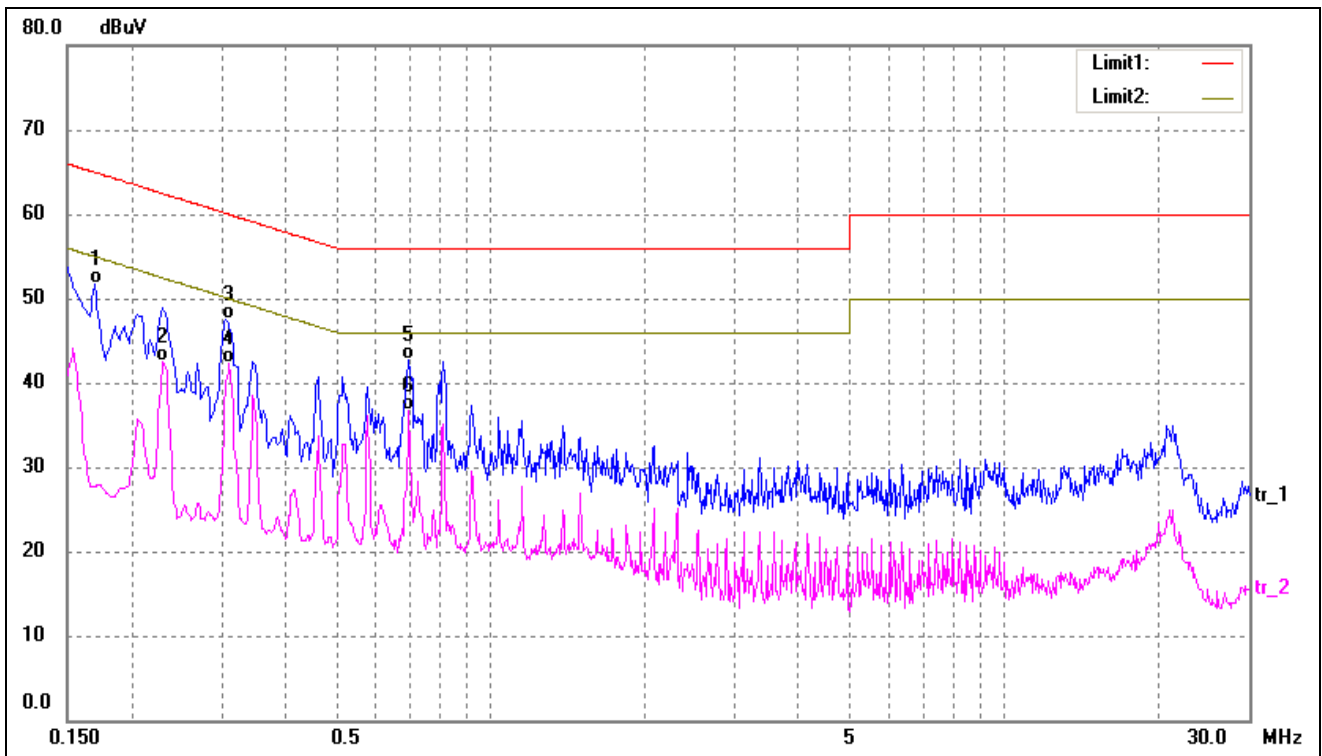

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	41.66	9.95	51.61	64.96	-13.35	QP
2	0.2300	32.59	9.99	42.58	52.45	-9.87	AVG
3	0.3060	37.51	10.01	47.52	60.08	-12.56	QP
4*	0.3100	32.30	10.01	42.31	49.97	-7.66	AVG
5	0.6900	32.64	10.05	42.69	56.00	-13.31	QP
6	0.6940	26.58	10.05	36.63	46.00	-9.37	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

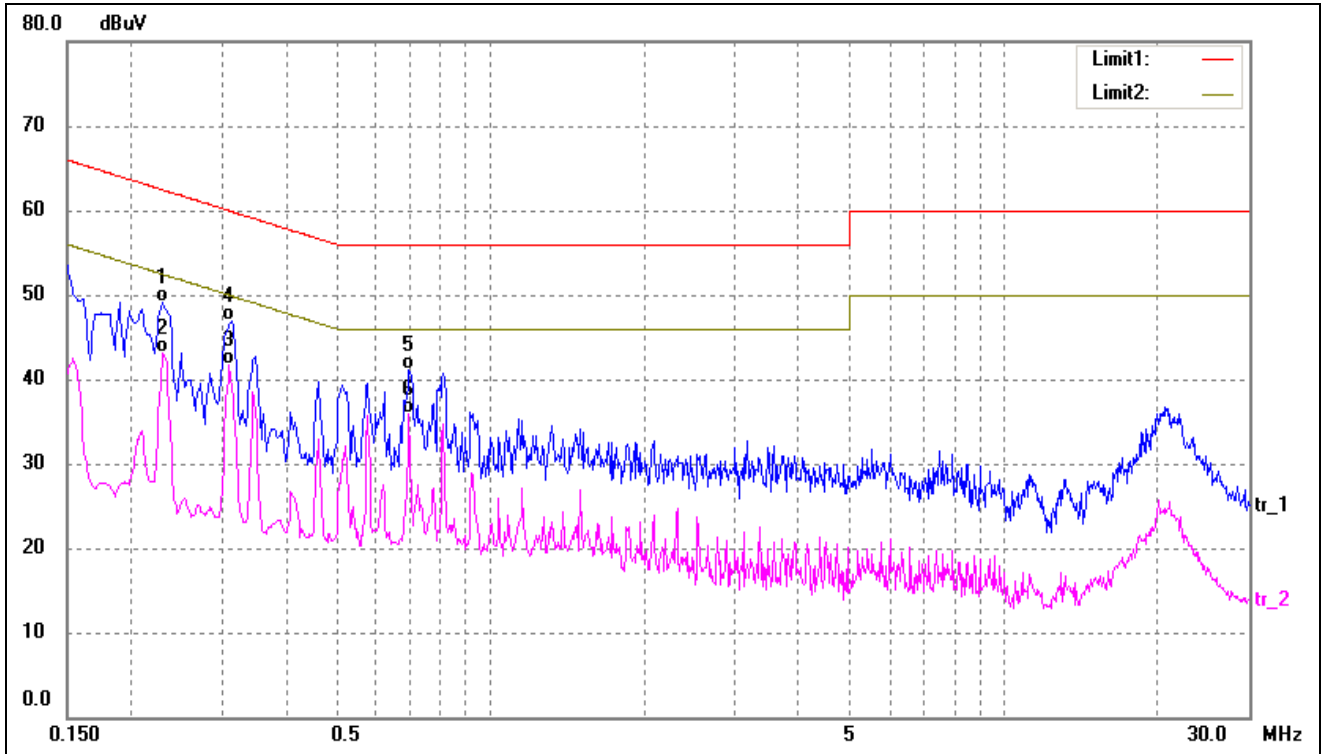

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2300	39.05	9.99	49.04	62.45	-13.41	QP
2	0.2300	33.16	9.99	43.15	52.45	-9.30	AVG
3*	0.3100	31.74	10.01	41.75	49.97	-8.22	AVG
4	0.3140	36.90	10.01	46.91	59.86	-12.95	QP
5	0.6940	31.12	10.05	41.17	56.00	-14.83	QP
6	0.6940	25.85	10.05	35.90	46.00	-10.10	AVG

***** END OF REPORT *****