

# FCC Part 15C Measurement and Test Report

For

**SHENZHEN QIYUE OPTRONICS COMPANY LIMITED**

**Flat3, Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,**

**Shangmeilin, Futian District, Shenzhen , China**

**FCC ID: XOMD65A114**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>65 INCH SMART 4K UHD TV</u>
<b>Tested Model:</b>	<u>D65A114-U-A-I</u>
<b>Report No.:</b>	<u>WTG19X07048634W-2</u>
<b>Sample Receipt Date:</b>	<u>2019-07-18</u>
<b>Tested Date:</b>	<u>2019-07-18 to 2019-08-26</u>
<b>Issued Date:</b>	<u>2019-08-26</u>
<b>Tested By:</b>	<u>Mike Shi / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	

*Mike Shi*

*Silin Chen*

*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

    1.2 TEST STANDARDS.....5

    1.3 TEST METHODOLOGY .....5

    1.4 TEST FACILITY .....5

    1.5 EUT SETUP AND TEST MODE.....6

    1.6 MEASUREMENT UNCERTAINTY .....7

    1.7 TEST EQUIPMENT LIST AND DETAILS .....8

**2. SUMMARY OF TEST RESULTS .....10**

**3. RF EXPOSURE .....11**

    3.1 STANDARD APPLICABLE.....11

    3.2 TEST RESULT.....11

**4. ANTENNA REQUIREMENT .....12**

    4.1 STANDARD APPLICABLE.....12

    4.2 EVALUATION INFORMATION .....12

**5. POWER SPECTRAL DENSITY .....13**

    5.1 STANDARD APPLICABLE.....13

    5.2 TEST PROCEDURE.....13

    5.3 SUMMARY OF TEST RESULTS/PLOTS .....13

**6. DTS BANDWIDTH.....22**

    6.1 STANDARD APPLICABLE.....22

    6.2 TEST PROCEDURE.....22

    6.3 SUMMARY OF TEST RESULTS/PLOTS .....22

**7. RF OUTPUT POWER .....31**

    7.1 STANDARD APPLICABLE.....31

    7.2 TEST PROCEDURE.....31

    7.3 SUMMARY OF TEST RESULTS/PLOTS .....31

**8. FIELD STRENGTH OF SPURIOUS EMISSIONS .....41**

    8.1 STANDARD APPLICABLE.....41

    8.2 TEST PROCEDURE.....41

    8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....43

    8.4 SUMMARY OF TEST RESULTS/PLOTS .....43

**9. OUT OF BAND EMISSIONS.....52**

    9.1 STANDARD APPLICABLE.....52

    9.2 TEST PROCEDURE.....52

    9.3 SUMMARY OF TEST RESULTS/PLOTS .....53

**10. CONDUCTED EMISSIONS .....86**

    10.1 TEST PROCEDURE.....86

    10.2 BASIC TEST SETUP BLOCK DIAGRAM.....86

    10.3 TEST RECEIVER SETUP .....86

    10.4 SUMMARY OF TEST RESULTS/PLOTS .....86

**Report version**

Version No.	Date of issue	Description
Rev.00	2019-08-26	Original
/	/	/

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen, China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
 BRANCH  
 Address of manufacturer: SEIYU INDUSTRIAL PARK,DA SAN VILLAGE,DA SHUI KENG,GUANLAN TOWN,LONGHUA NEW DISTRICT,SHENZHEN,P.R.C

General Description of EUT	
Product Name:	65 INCH SMART 4K UHD TV
Trade Name:	/
Model No.:	D65A114-U-A-I
Adding Model(s):	RNSMU6536, XXXXXXXXXXXXXXXXXXXX65XXXXXXXXXX
	XXXXXXXXXXXX (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC100-120V,60Hz
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model D65A114-U-A-I RNSMU6536, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	15.96dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	4.4dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02**: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

**662911 D01 Multiple Transmitter Output v02r01**: Emissions Testing of Transmitters with Multiple Outputs in the Same Band

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI Cable	1.2	Shielded	Without Ferrite
VGI Cable	1.2	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
PC	dell	10FYQ42	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has two integral antennas, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




### 5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_11Mbps	2412	-7.39	-7.37	/	8
	2437	-6.37	-6.93	/	8
	2462	-6.22	-6.18	/	8
802.11g_54Mbps	2412	-8.58	-10.57	/	8
	2437	-8.47	-9.58	/	8
	2462	-8.97	-9.29	/	8
802.11n-HT20_MCS7	2412	-8.91	-10.60	-6.66	8
	2437	-8.41	-10.08	-6.15	8
	2462	-9.14	-10.56	-6.78	8
802.11n-HT40_MCS7	2422	-12.72	-14.74	-10.42	8
	2437	-13.91	-13.85	-10.87	8
	2452	-14.57	-14.38	-11.46	8

Please refer to the following test plots:




➤ Antenna 1
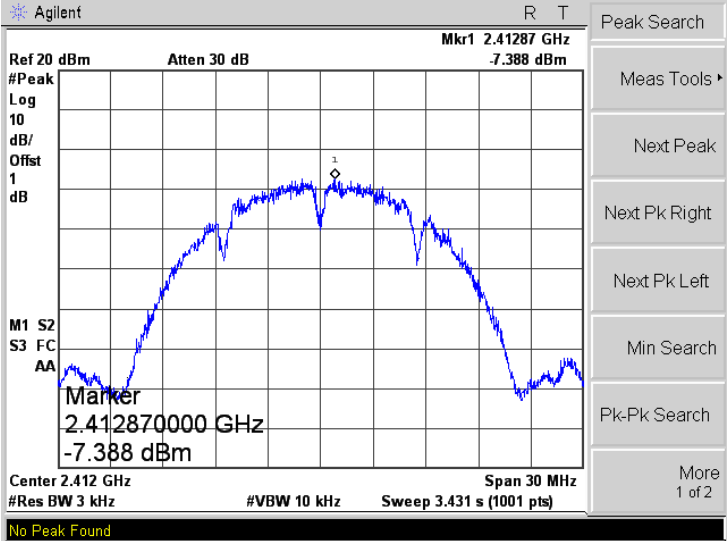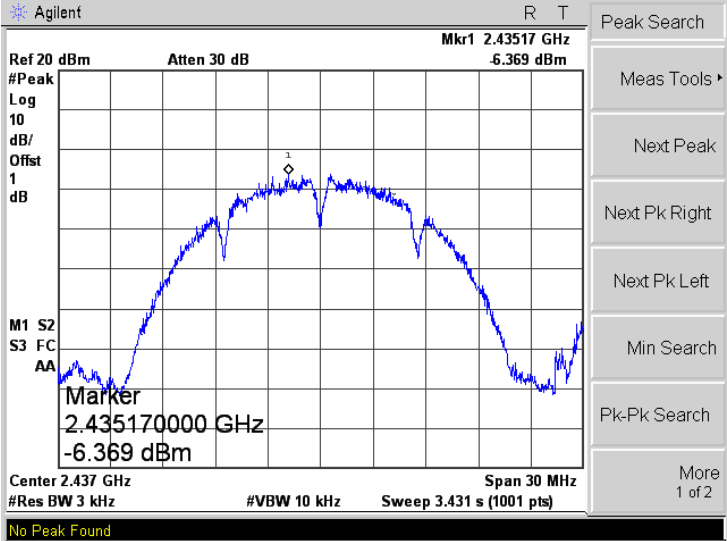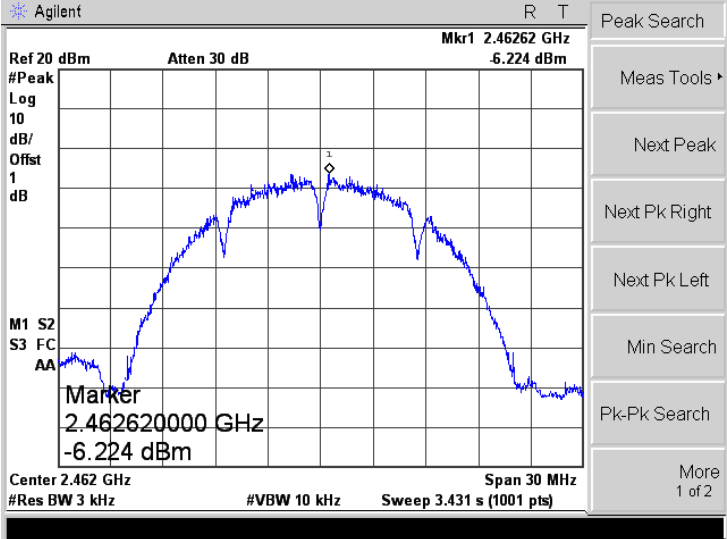
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

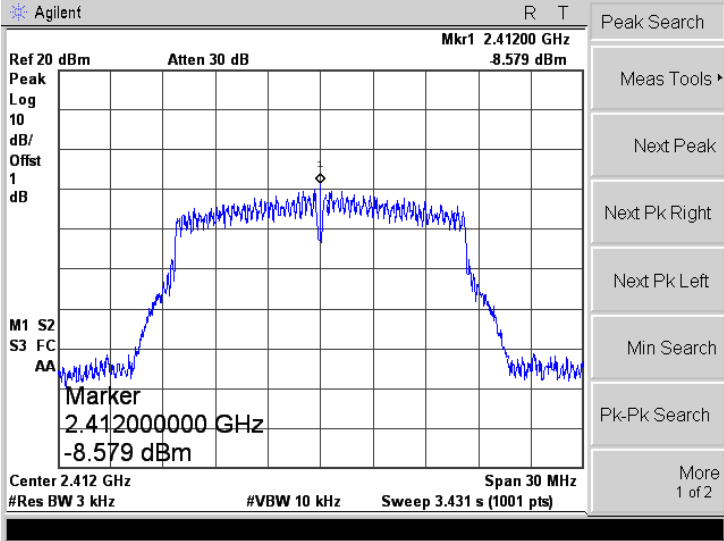
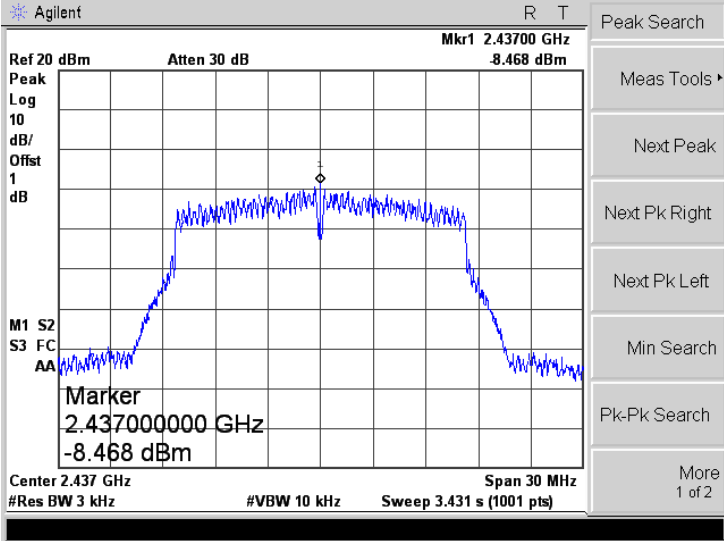
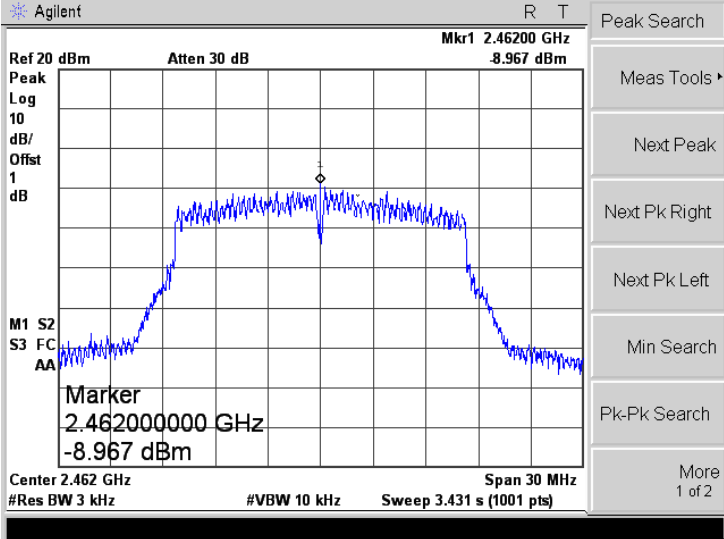
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	

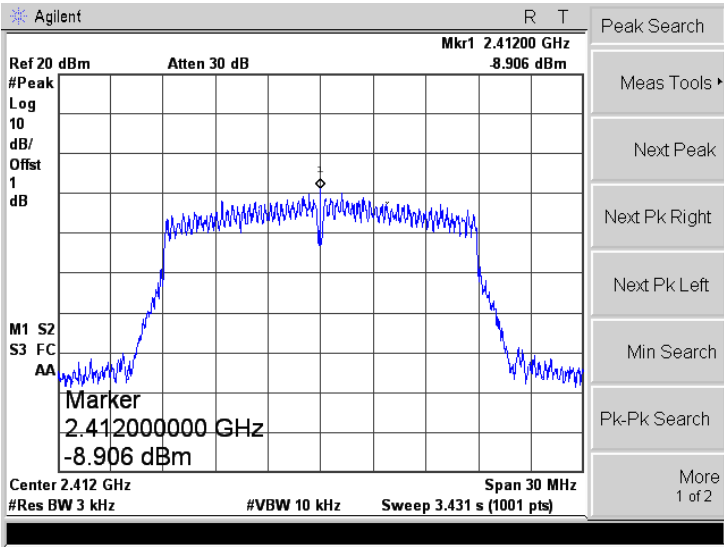
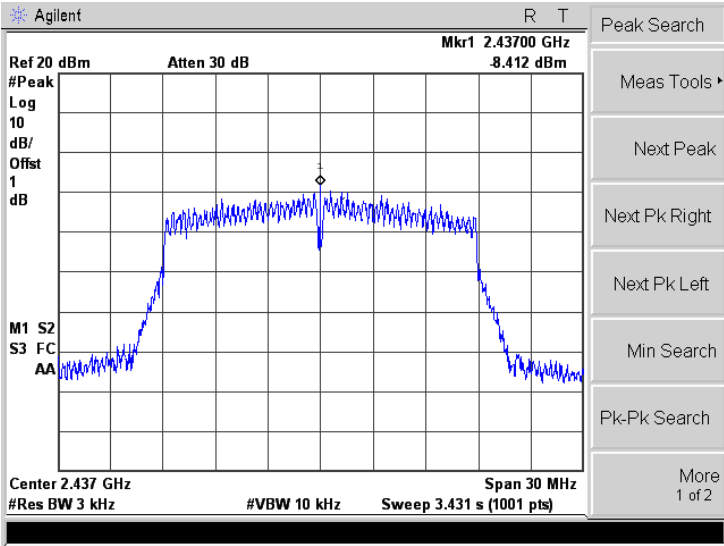
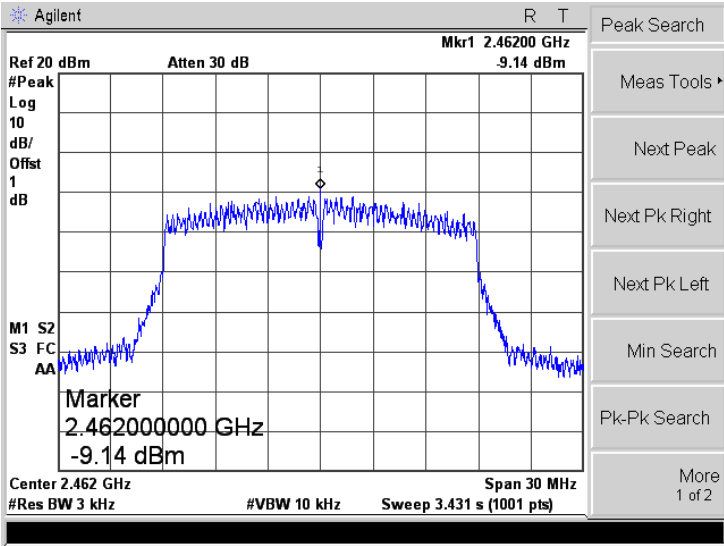
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

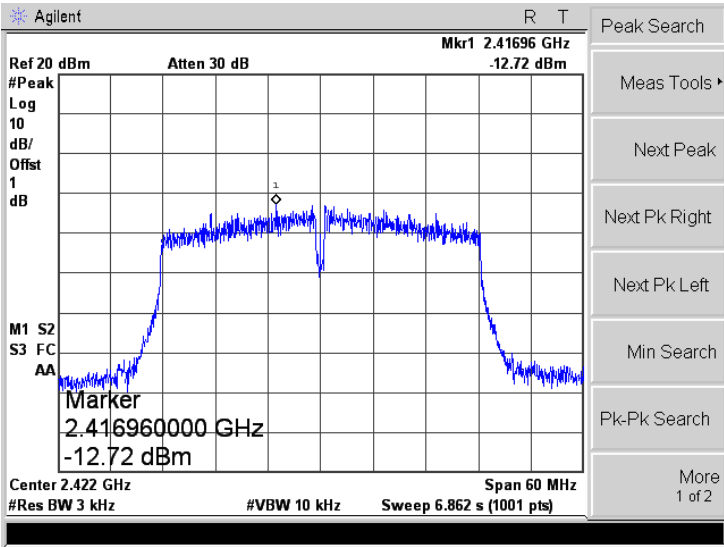
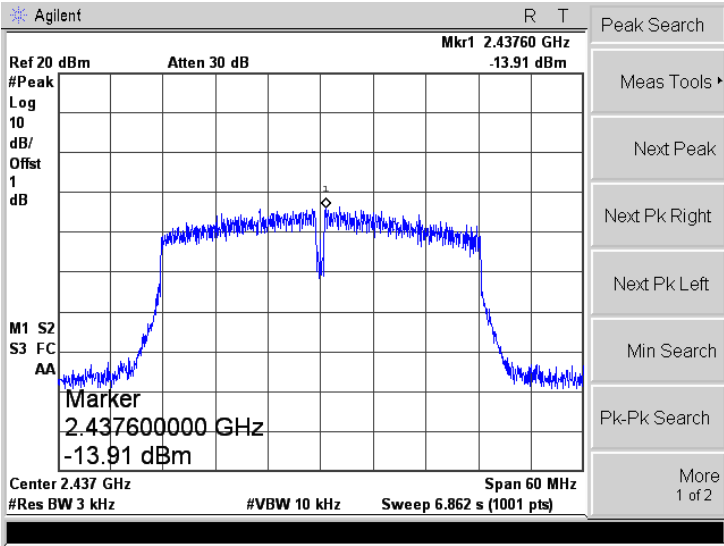
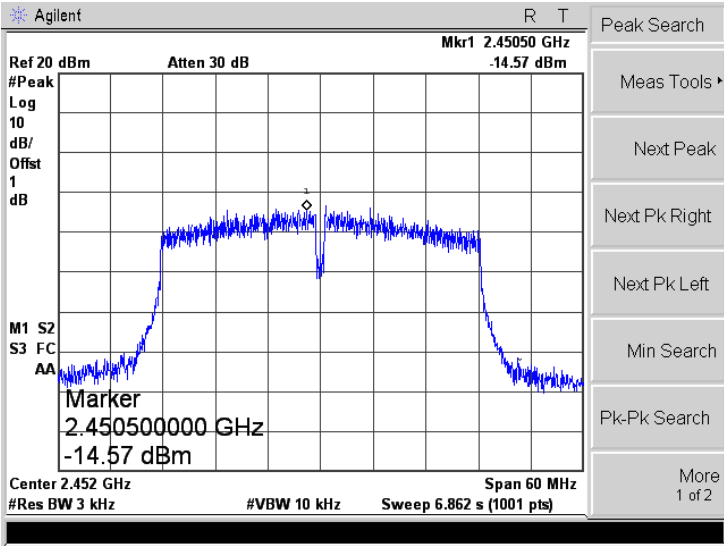





802.11n-HT40-Low	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.41696 GHz -12.72 dBm                  #Peak                  Log 10                  dB/ Offst 1 dB                  M1 S2                  S3 FC                  AA                  Marker                  2.416960000 GHz                  -12.72 dBm                  Center 2.422 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>
802.11n-HT40-Middle	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.43760 GHz -13.91 dBm                  #Peak                  Log 10                  dB/ Offst 1 dB                  M1 S2                  S3 FC                  AA                  Marker                  2.437600000 GHz                  -13.91 dBm                  Center 2.437 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>
802.11n-HT40-High	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.45050 GHz -14.57 dBm                  #Peak                  Log 10                  dB/ Offst 1 dB                  M1 S2                  S3 FC                  AA                  Marker                  2.450500000 GHz                  -14.57 dBm                  Center 2.452 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>

## ➤ Antenna 2
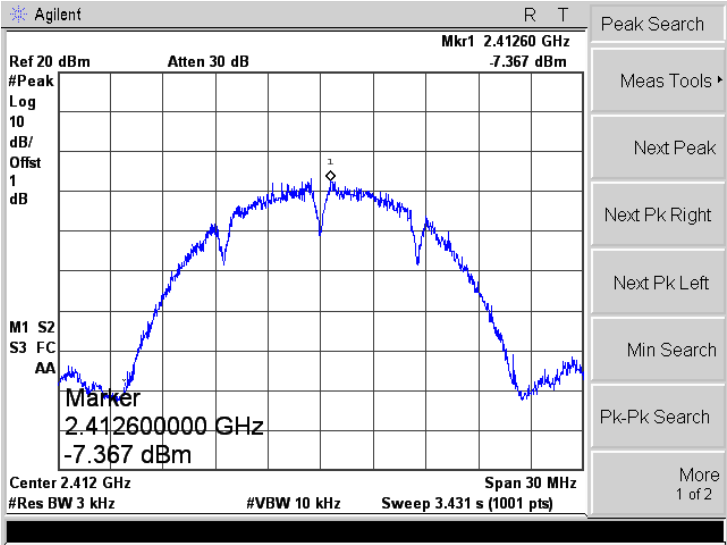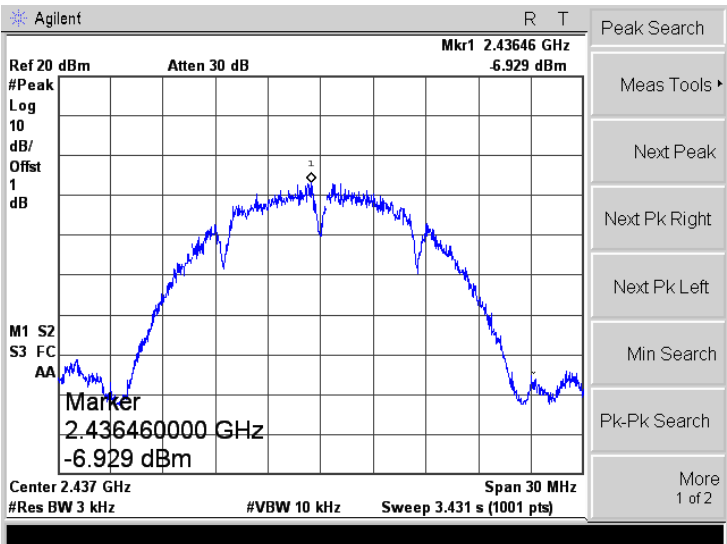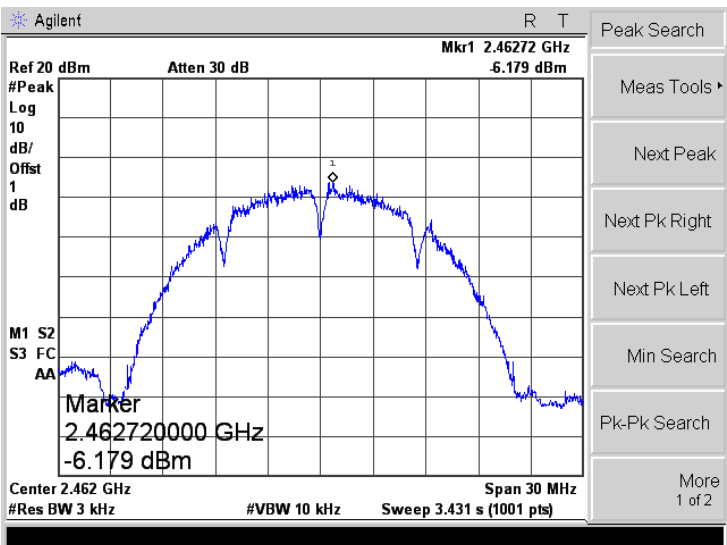
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
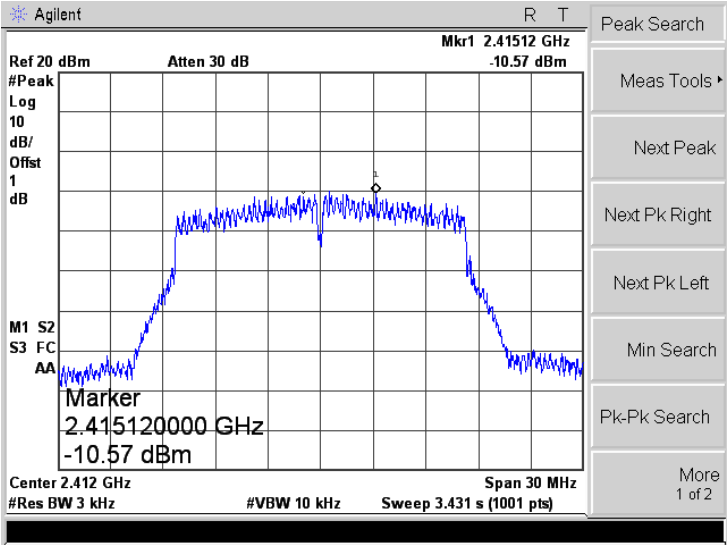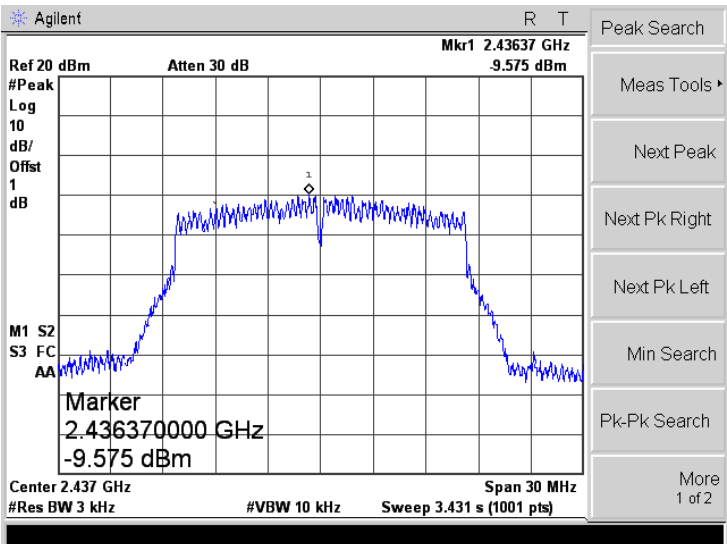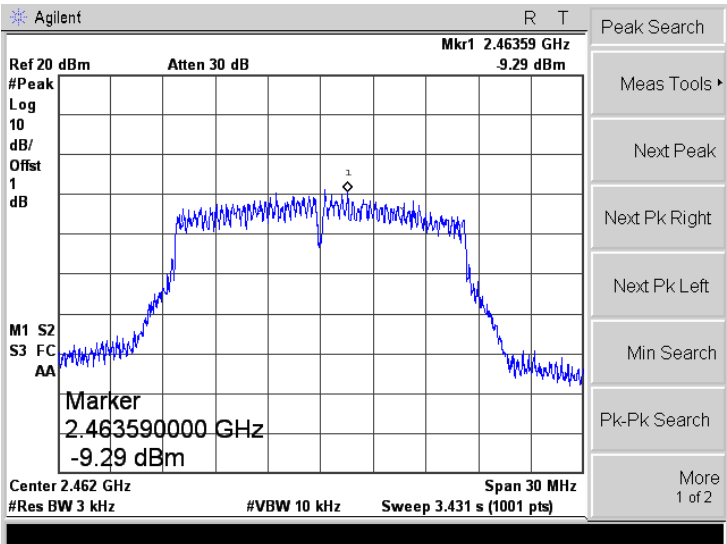
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	

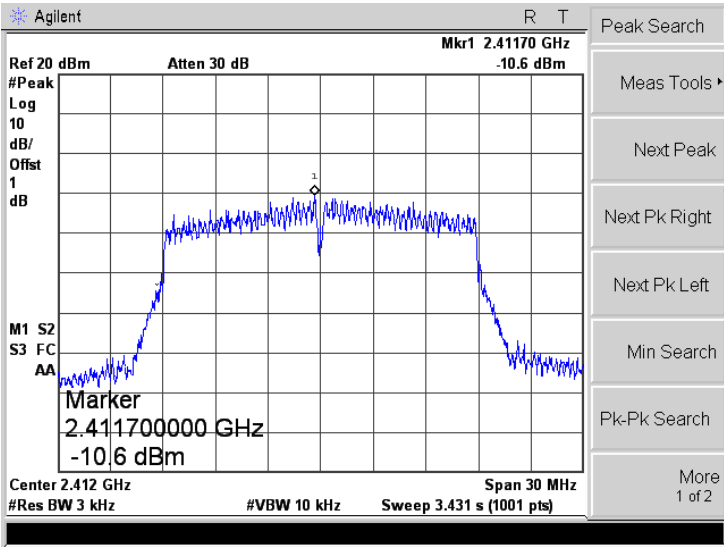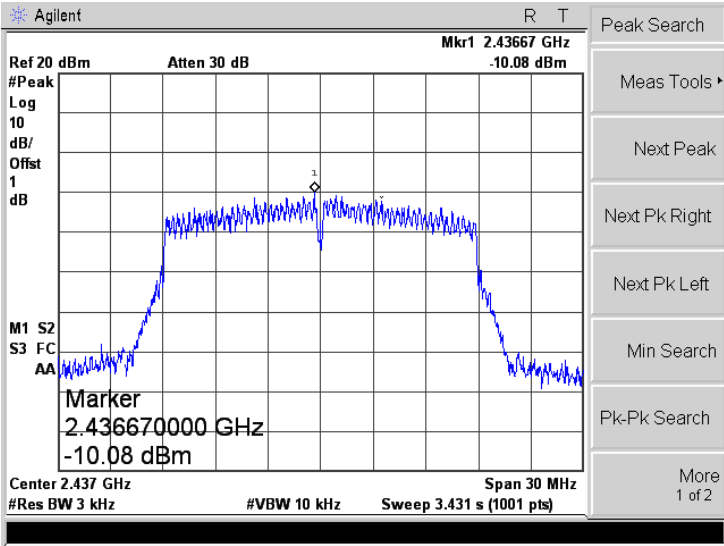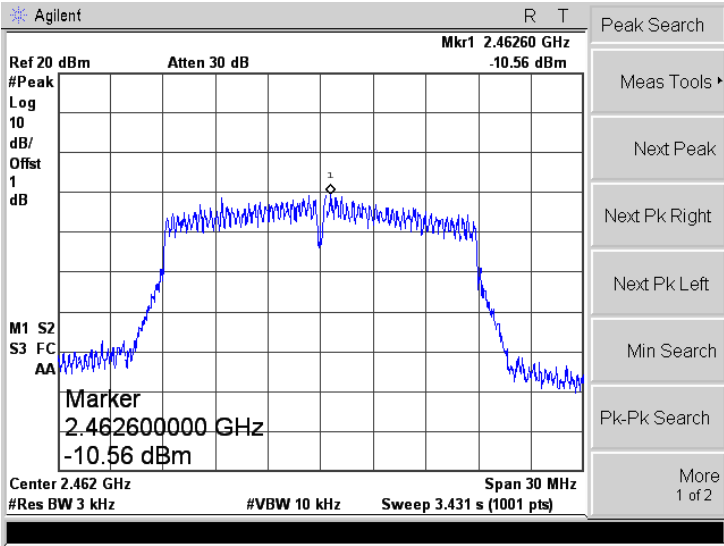802.11n-HT20-Low	 <p>Agilent R T Peak Search                  Ref 20 dBm Atten 30 dB Mkr1 2.41170 GHz -10.6 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.41170000 GHz -10.6 dBm                  Center 2.412 GHz Span 30 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)                  More 1 of 2</p>
802.11n-HT20-Middle	 <p>Agilent R T Peak Search                  Ref 20 dBm Atten 30 dB Mkr1 2.43667 GHz -10.08 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.436670000 GHz -10.08 dBm                  Center 2.437 GHz Span 30 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)                  More 1 of 2</p>
802.11n-HT20-High	 <p>Agilent R T Peak Search                  Ref 20 dBm Atten 30 dB Mkr1 2.46260 GHz -10.56 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.462600000 GHz -10.56 dBm                  Center 2.462 GHz Span 30 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 3.431 s (1001 pts)                  More 1 of 2</p>
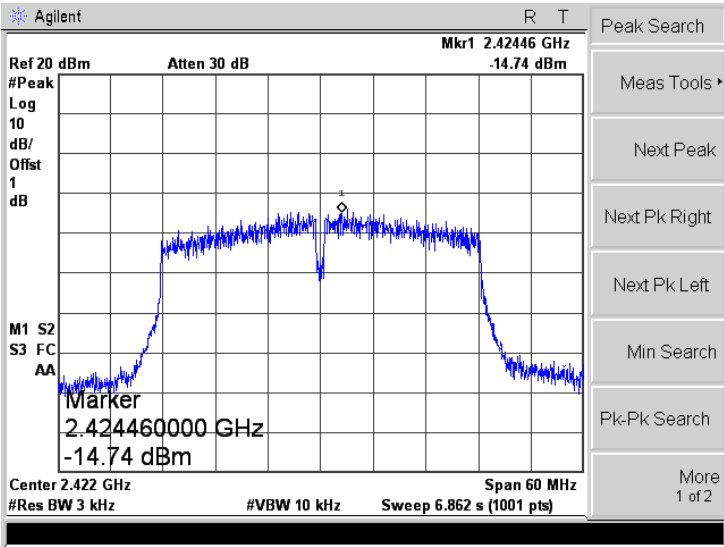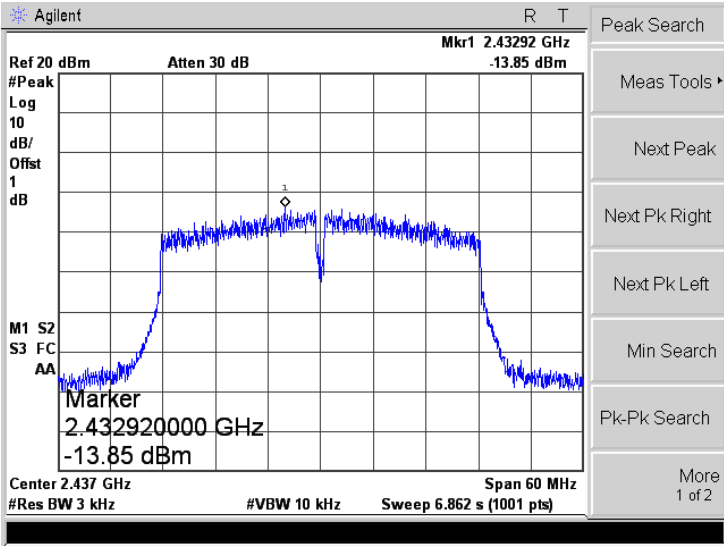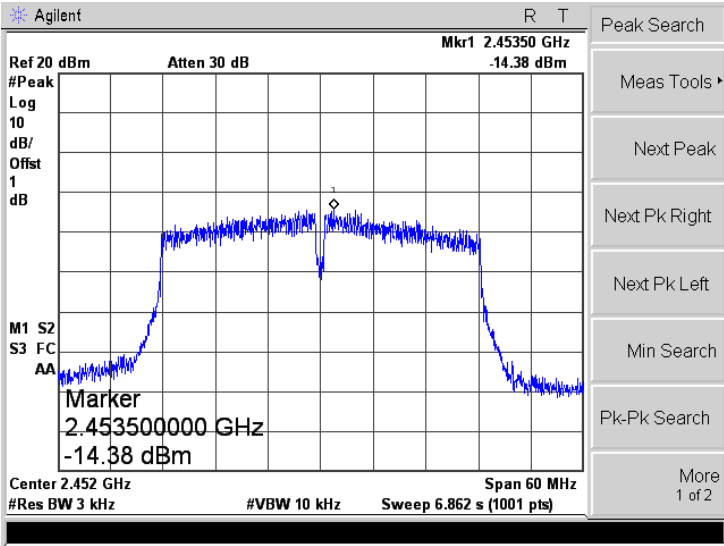
<p>802.11n-HT40-Low</p>	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.42446 GHz -14.74 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.424460000 GHz -14.74 dBm                  Center 2.422 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.43292 GHz -13.85 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.432920000 GHz -13.85 dBm                  Center 2.437 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T                  Ref 20 dBm Atten 30 dB Mkr1 2.45350 GHz -14.38 dBm                  #Peak Log 10 dB/ Offst 1 dB                  M1 S2 S3 FC AA                  Marker 2.453500000 GHz -14.38 dBm                  Center 2.452 GHz Span 60 MHz                  #Res BW 3 kHz #VBW 10 kHz Sweep 6.862 s (1001 pts)</p>

## 6. DTS Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:




- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




### 6.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_11Mbps	2412	9.523	9.071	$\geq 500$
	2437	8.548	9.037	$\geq 500$
	2462	9.514	8.536	$\geq 500$
802.11g_54Mbps	2412	16.278	16.282	$\geq 500$
	2437	16.287	16.327	$\geq 500$
	2462	16.083	16.068	$\geq 500$
802.11n-HT20_MCS7	2412	16.753	15.886	$\geq 500$
	2437	17.147	17.149	$\geq 500$
	2462	17.306	17.547	$\geq 500$
802.11n-HT40_MCS7	2422	34.407	34.391	$\geq 500$
	2437	32.899	33.814	$\geq 500$
	2452	33.566	33.819	$\geq 500$




Please refer to the following test plots:




## ➤ Antenna 1
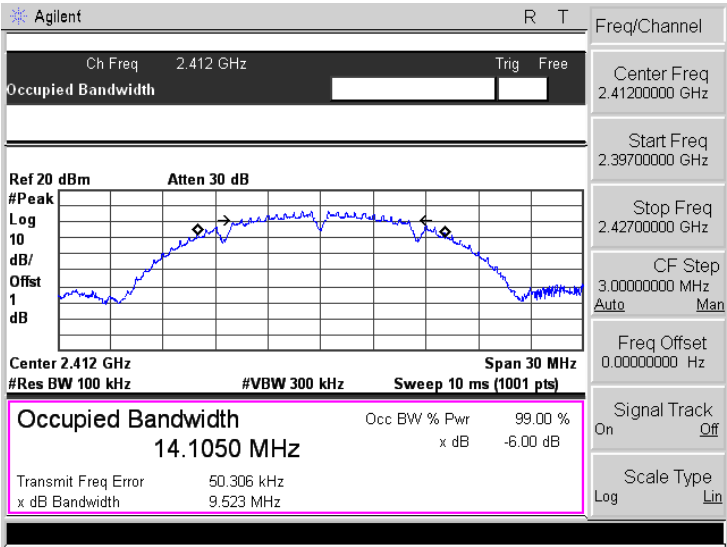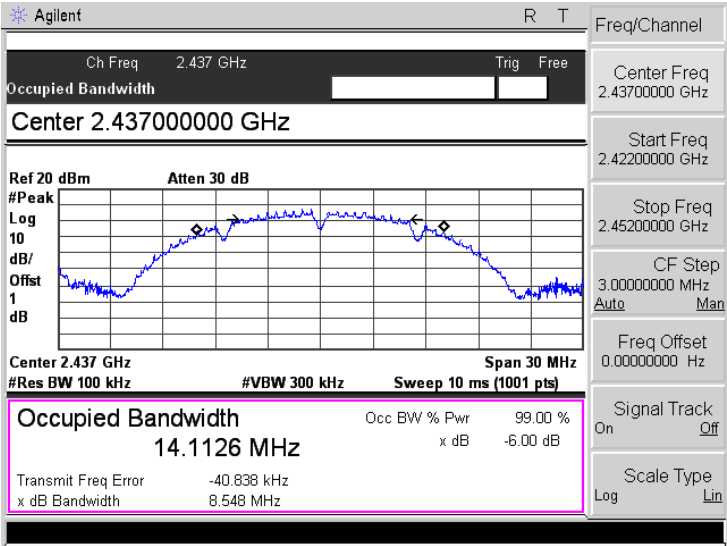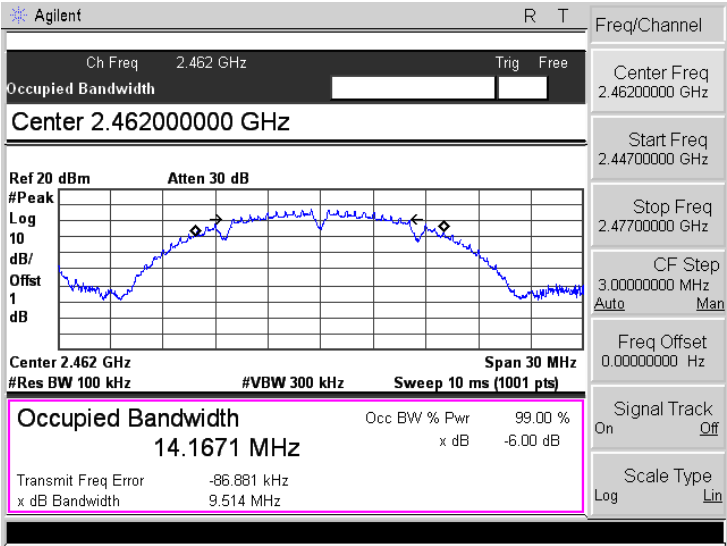
<p>802.11b-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.1050 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 50.306 kHz</p> <p>x dB Bandwidth 9.523 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.1126 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -40.838 kHz</p> <p>x dB Bandwidth 8.548 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 14.1671 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -86.881 kHz</p> <p>x dB Bandwidth 9.514 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

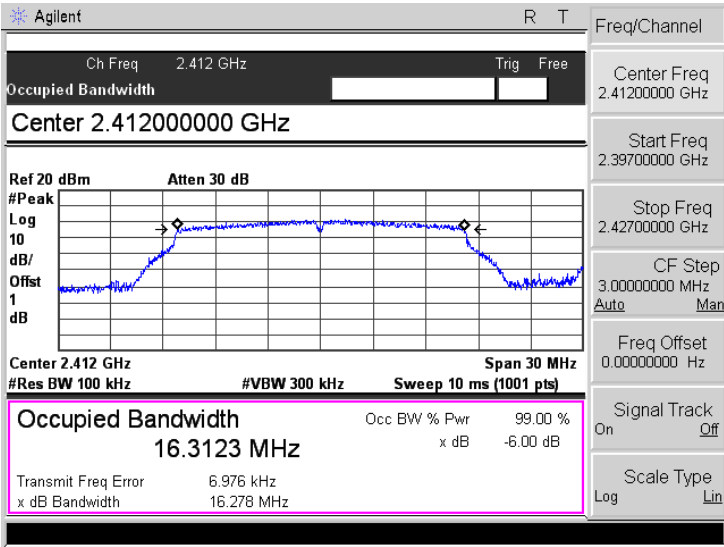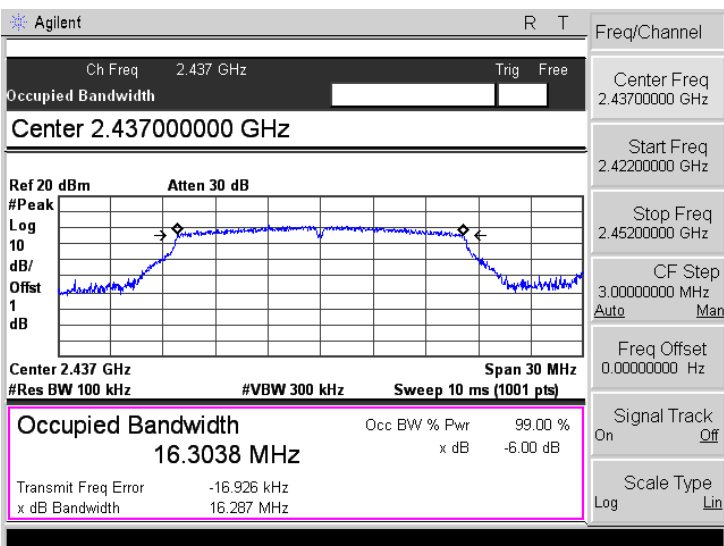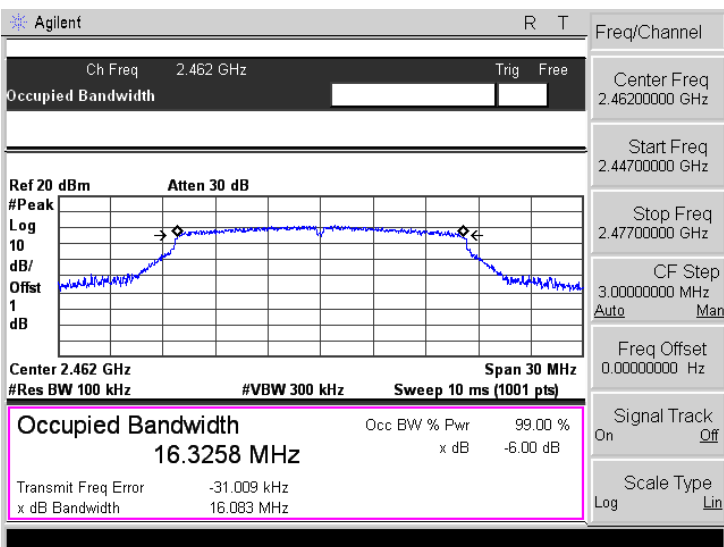802.11g-Low	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3123 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 6.976 kHz x dB Bandwidth 16.278 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11g-Middle	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3038 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.926 kHz x dB Bandwidth 16.287 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11g-High	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.3258 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.009 kHz x dB Bandwidth 16.083 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

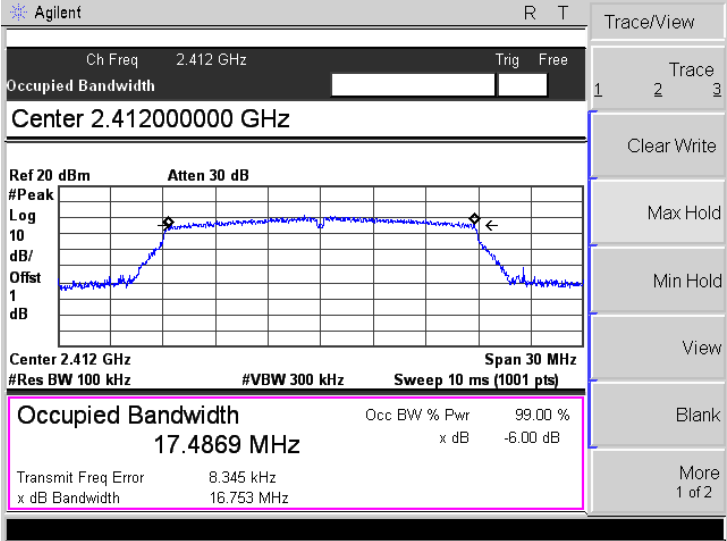
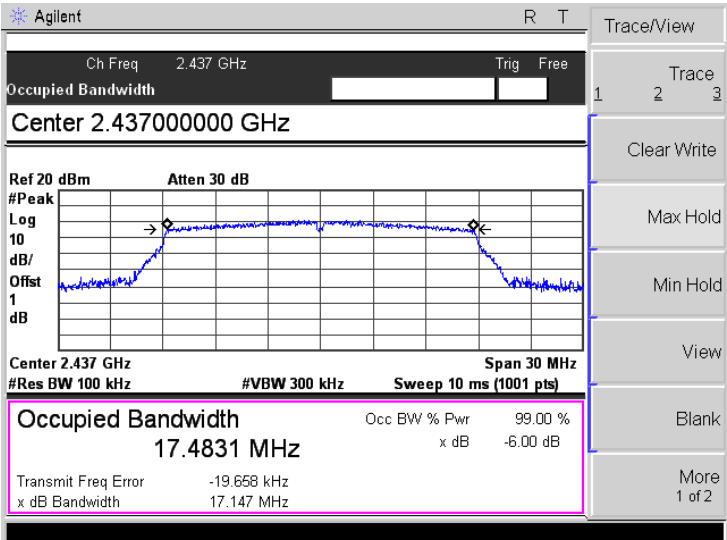
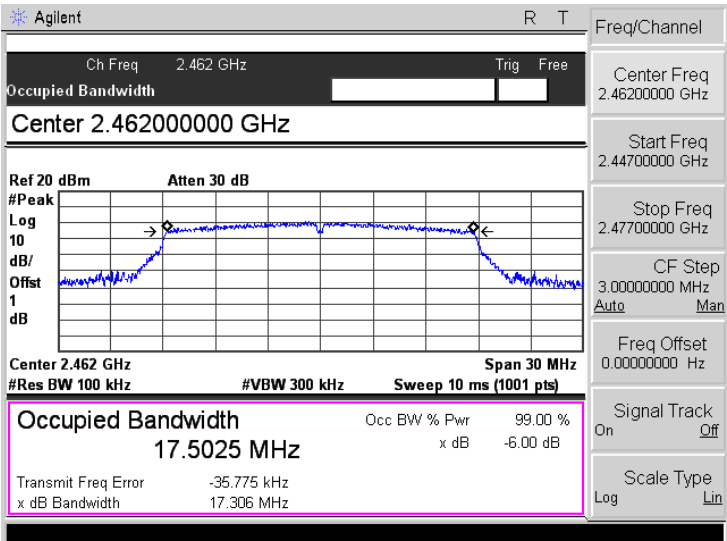





<p>802.11n-HT20-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.4869 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error 8.345 kHz</p> <p>x dB Bandwidth 16.753 MHz</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.4831 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -19.658 kHz</p> <p>x dB Bandwidth 17.147 MHz</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.5025 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -35.775 kHz</p> <p>x dB Bandwidth 17.306 MHz</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

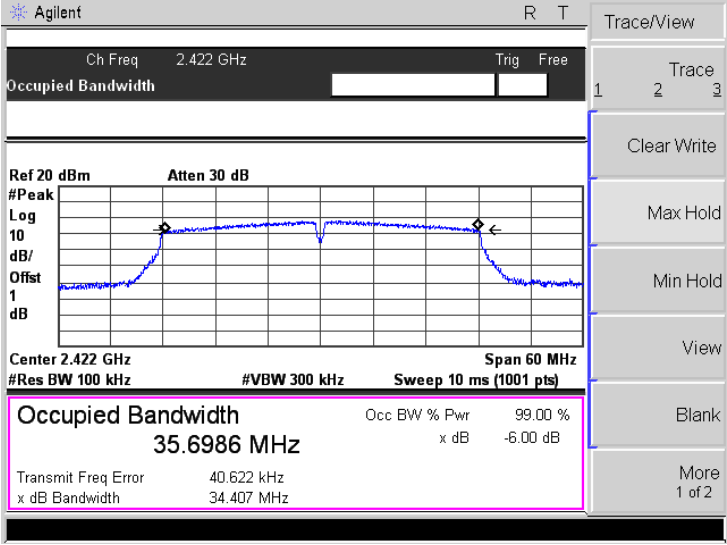
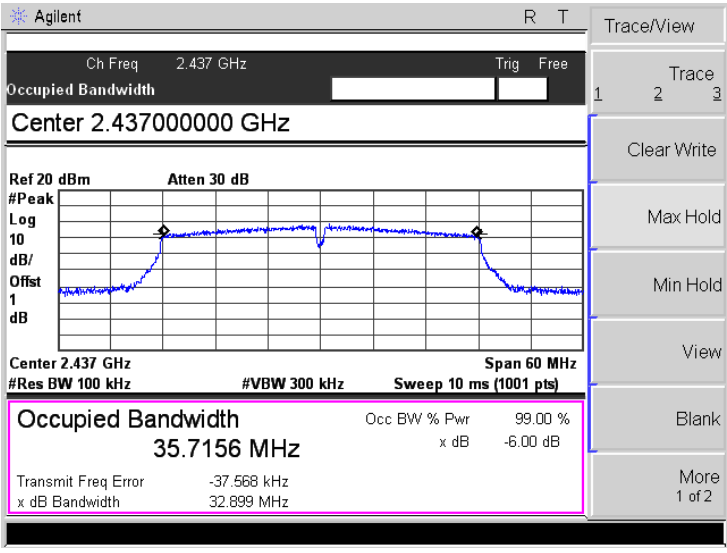
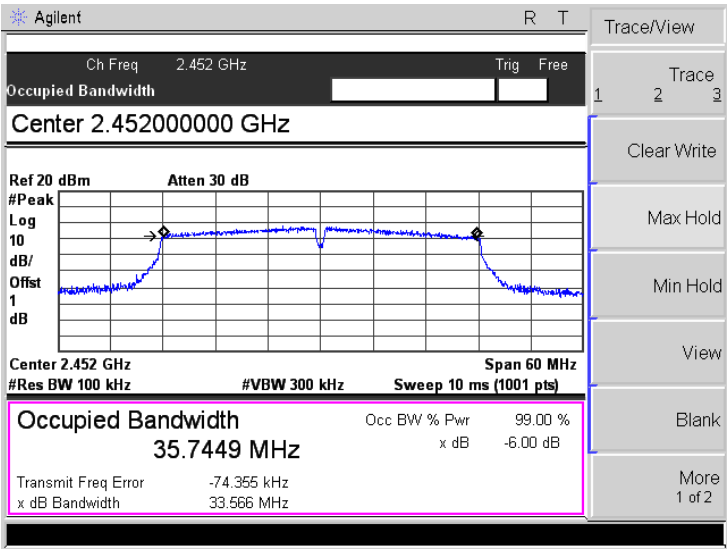
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">35.6986 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>40.622 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>34.407 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	35.6986 MHz		x dB	-6.00 dB	Transmit Freq Error	40.622 kHz			x dB Bandwidth	34.407 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
35.6986 MHz		x dB	-6.00 dB														
Transmit Freq Error	40.622 kHz																
x dB Bandwidth	34.407 MHz																
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">35.7156 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-37.568 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>32.899 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	35.7156 MHz		x dB	-6.00 dB	Transmit Freq Error	-37.568 kHz			x dB Bandwidth	32.899 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
35.7156 MHz		x dB	-6.00 dB														
Transmit Freq Error	-37.568 kHz																
x dB Bandwidth	32.899 MHz																
<p>802.11n-HT40-High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.452000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">35.7449 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-74.355 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>33.566 MHz</td> <td></td> <td></td> </tr> </table> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	35.7449 MHz		x dB	-6.00 dB	Transmit Freq Error	-74.355 kHz			x dB Bandwidth	33.566 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
35.7449 MHz		x dB	-6.00 dB														
Transmit Freq Error	-74.355 kHz																
x dB Bandwidth	33.566 MHz																

## ➤ Antenna 2

<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Occupied Bandwidth 14.0108 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 92.330 kHz</p> <p>x dB Bandwidth 9.071 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Occupied Bandwidth 14.0965 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -2.725 kHz</p> <p>x dB Bandwidth 9.037 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Occupied Bandwidth 14.1124 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -98.970 kHz</p> <p>x dB Bandwidth 8.536 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
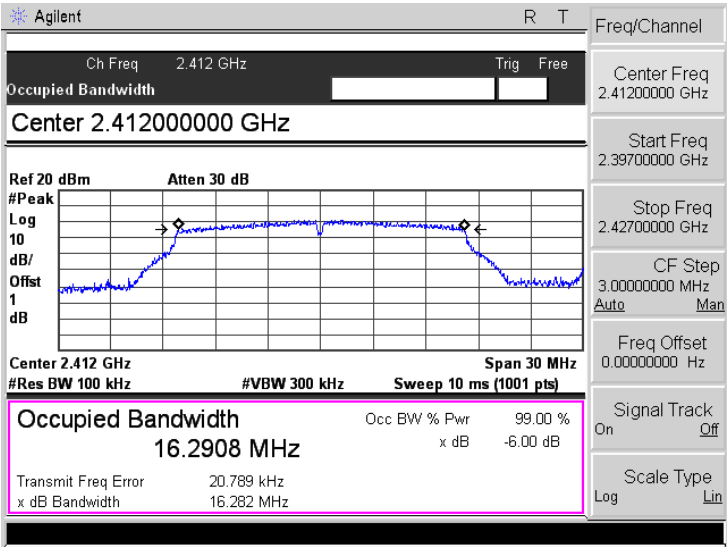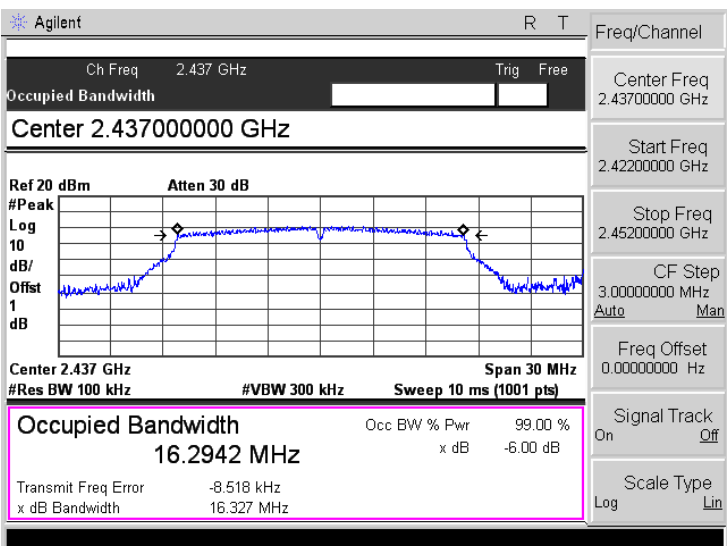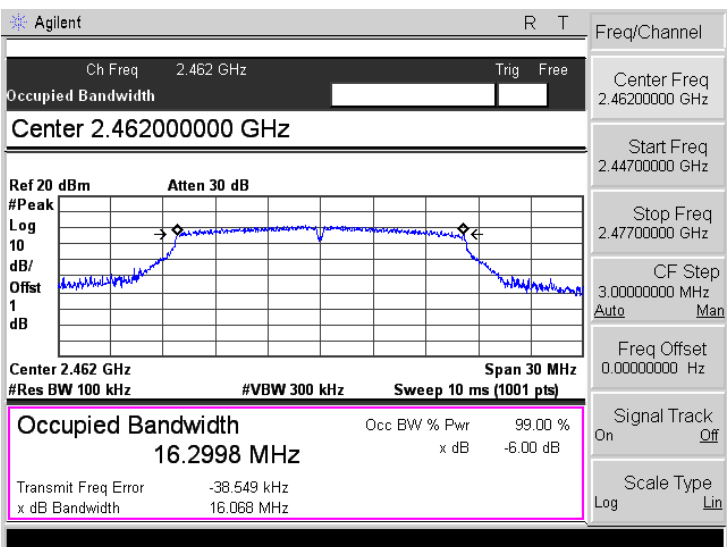
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.2908 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 20.789 kHz x dB Bandwidth 16.282 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.2942 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.518 kHz x dB Bandwidth 16.327 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.2998 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -38.549 kHz x dB Bandwidth 16.068 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

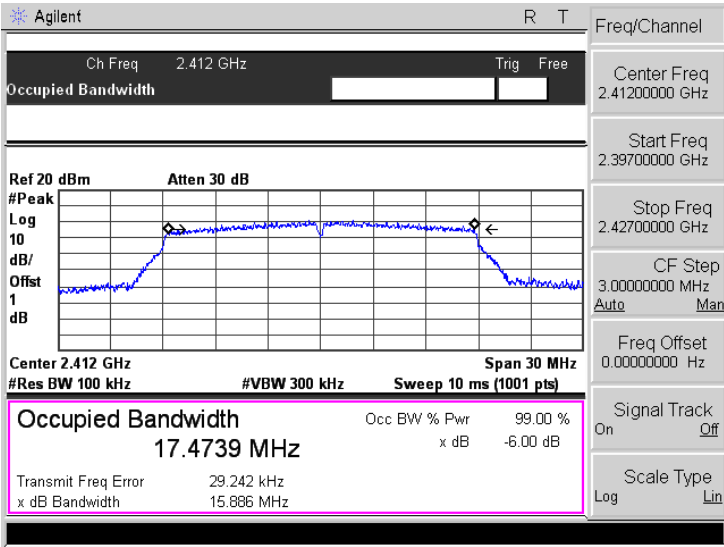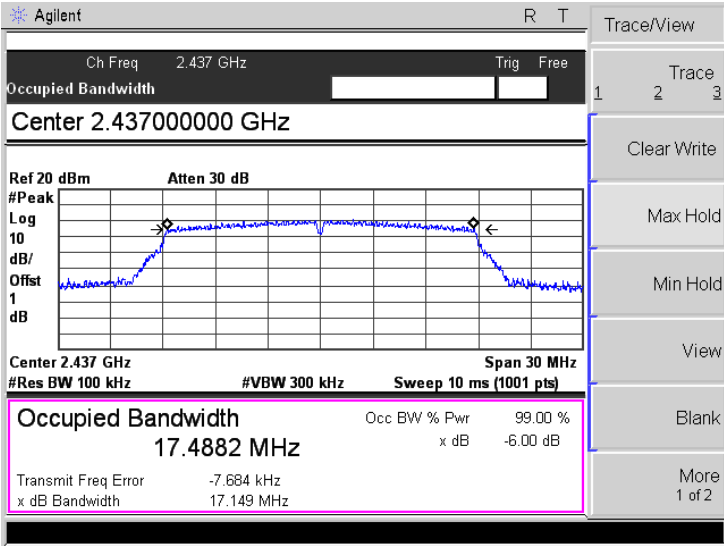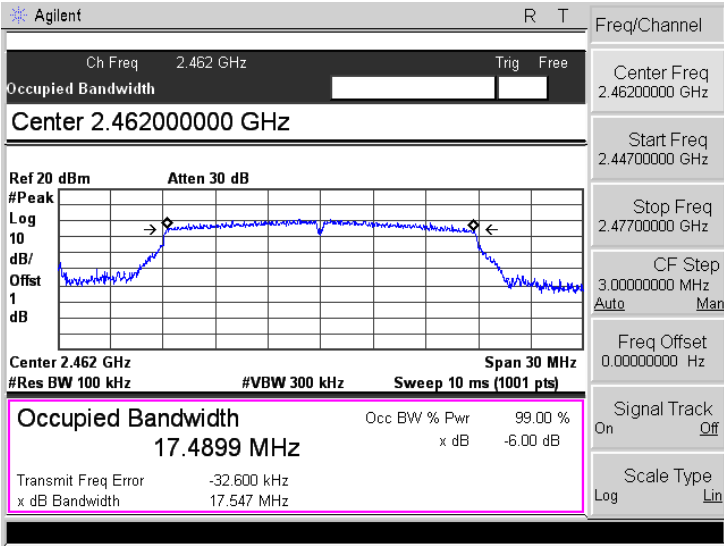802.11n-HT20-Low	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center 2.412 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 17.4739 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 29.242 kHz x dB Bandwidth 15.886 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11n-HT20-Middle	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 17.4882 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.684 kHz x dB Bandwidth 17.149 MHz</p> <p>Trace/View</p> <p>1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
802.11n-HT20-High	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 17.4899 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -32.600 kHz x dB Bandwidth 17.547 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

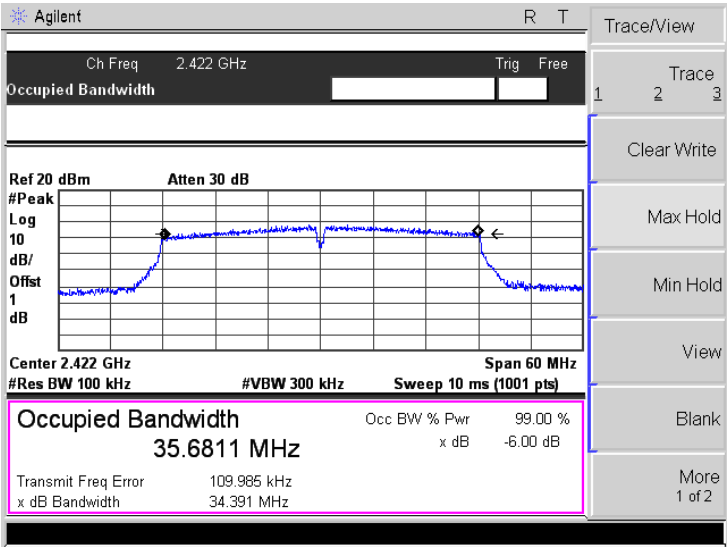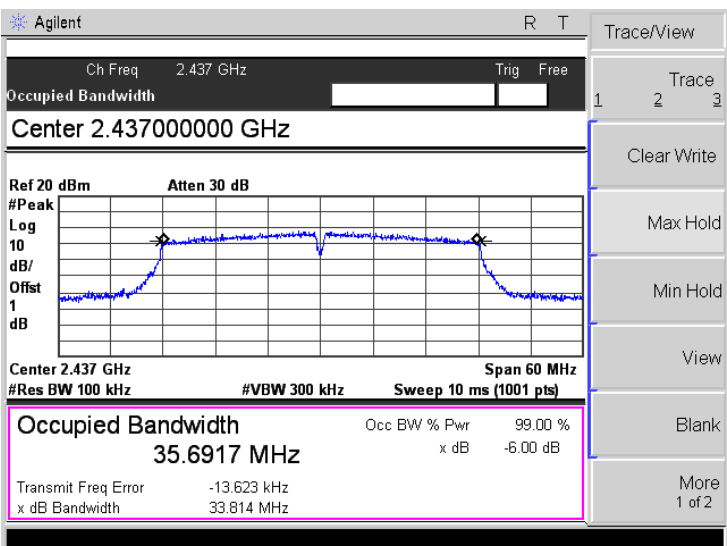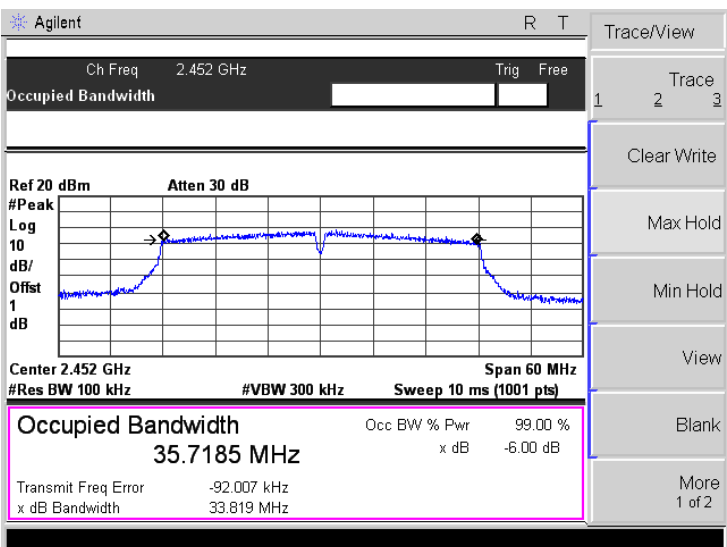802.11n-HT40-Low	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 35.6811 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 109.985 kHz</p> <p>x dB Bandwidth 34.391 MHz</p>
802.11n-HT40-Middle	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 35.6917 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.623 kHz</p> <p>x dB Bandwidth 33.814 MHz</p>
802.11n-HT40-High	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 35.7185 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -92.007 kHz</p> <p>x dB Bandwidth 33.819 MHz</p>

---

## 7. RF Output Power

---

### 7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.



### 7.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm)		Output Power (MAX Antenna) mW	Limit mW	
		Antenna 1	Antenna 2			
802.11b _11Mbps	2412	15.13	15.01	32.58	1000	
	2437	15.25	15.90	38.90	1000	
	2462	15.48	15.62	36.48	1000	
802.11g _54Mbps	2412	13.64	13.49	23.12	1000	
	2437	13.42	13.91	24.60	1000	
	2462	13.35	13.88	24.43	1000	
Test Mode	Test Channel MHz	Test Result(dBm)		Total dBm	Output Power mW	Limit mW
		Antenna 1	Antenna 2			
802.11n HT20_MCS7	2412	12.90	11.93	15.45	35.08	1000
	2437	12.95	12.42	15.70	37.15	1000
	2462	12.66	13.22	15.96	39.45	1000
802.11n HT40_MCS7	2422	12.44	12.03	15.25	33.50	1000
	2437	12.20	12.30	15.26	33.57	1000
	2452	12.71	12.06	15.41	34.75	1000




Please refer to the following test plots:






## ➤ Antenna 1


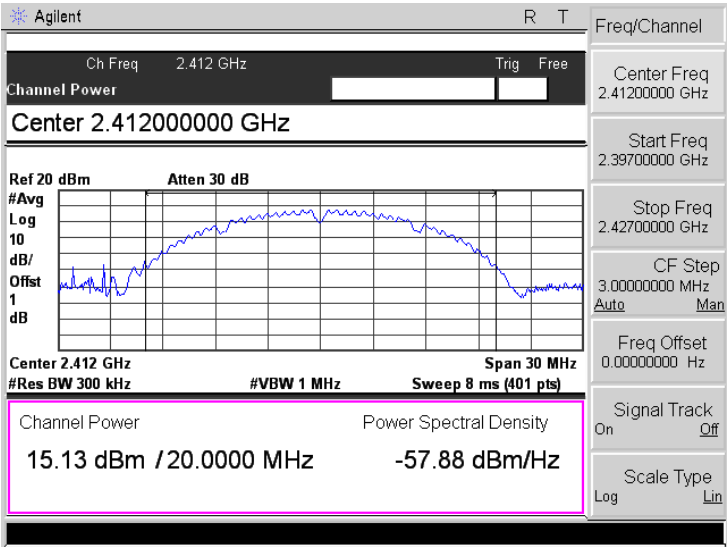
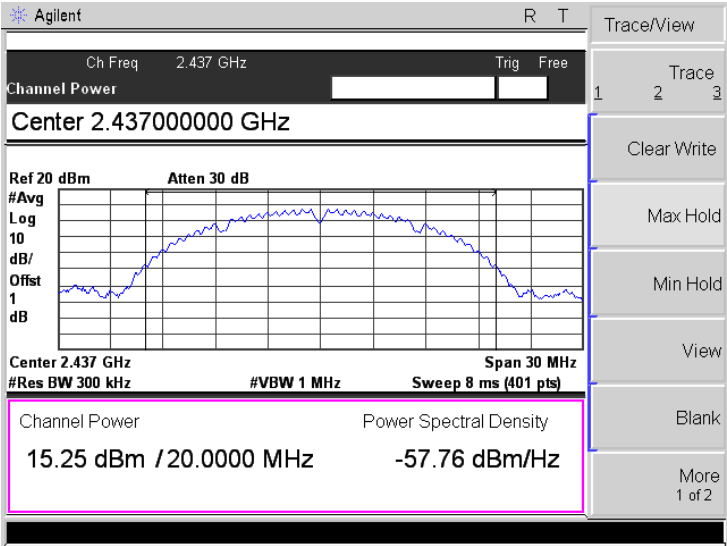
<p>802.11b-Low 11Mbps</p>	
<p>802.11b-Middle 11Mbps</p>	
<p>802.11b-High 11Mbps</p>	

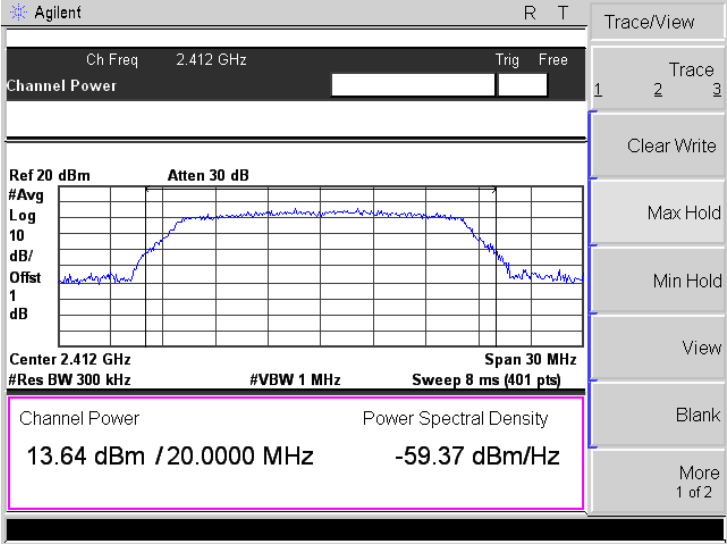
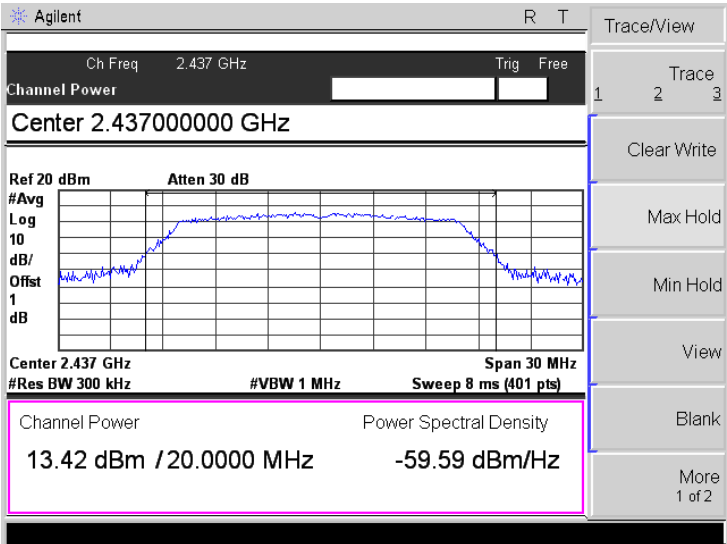
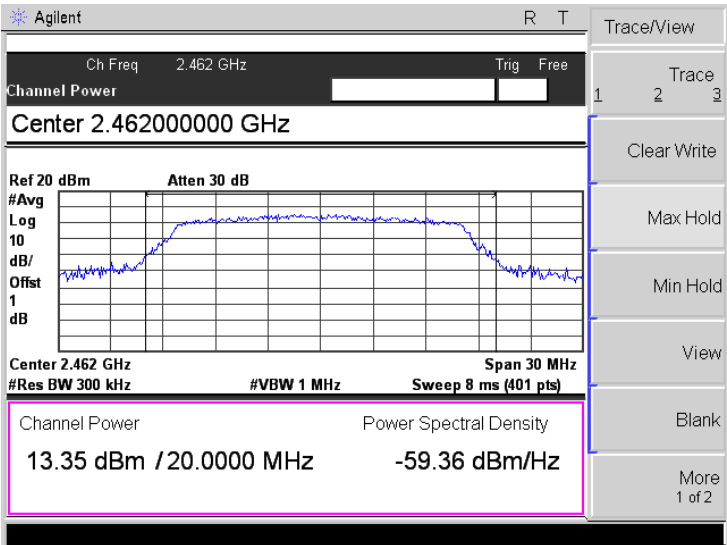
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.64 dBm / 20.0000 MHz -59.37 dBm/Hz</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.42 dBm / 20.0000 MHz -59.59 dBm/Hz</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.35 dBm / 20.0000 MHz -59.36 dBm/Hz</p>

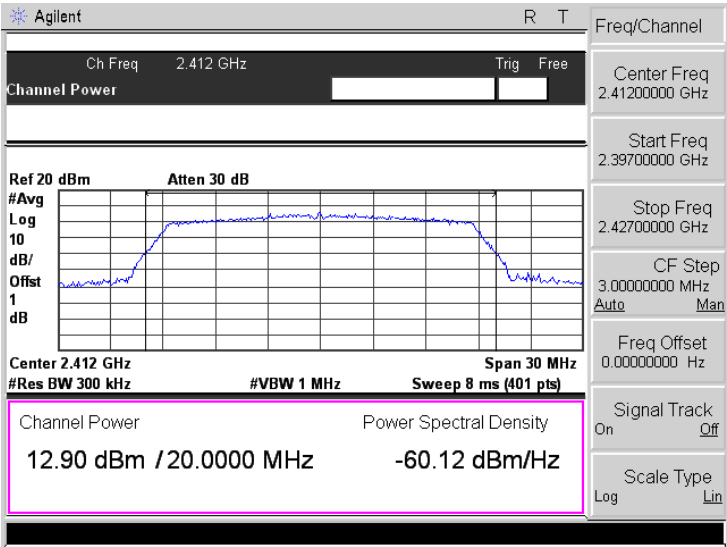
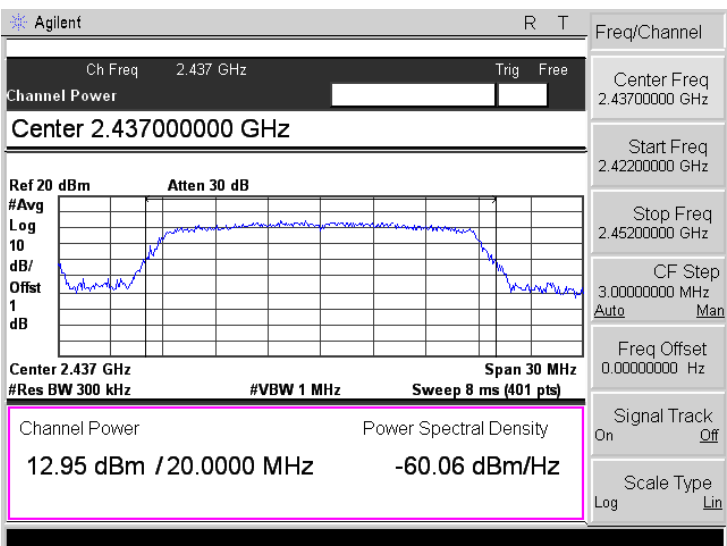
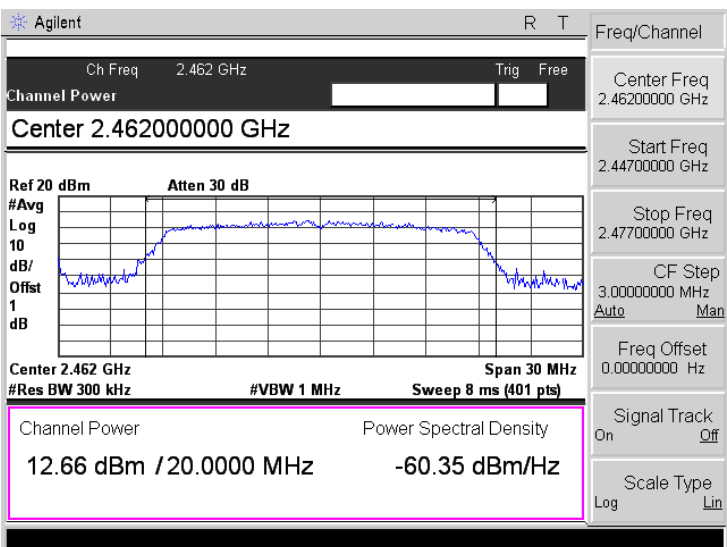
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.90 dBm / 20.0000 MHz -60.12 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.95 dBm / 20.0000 MHz -60.06 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.66 dBm / 20.0000 MHz -60.35 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

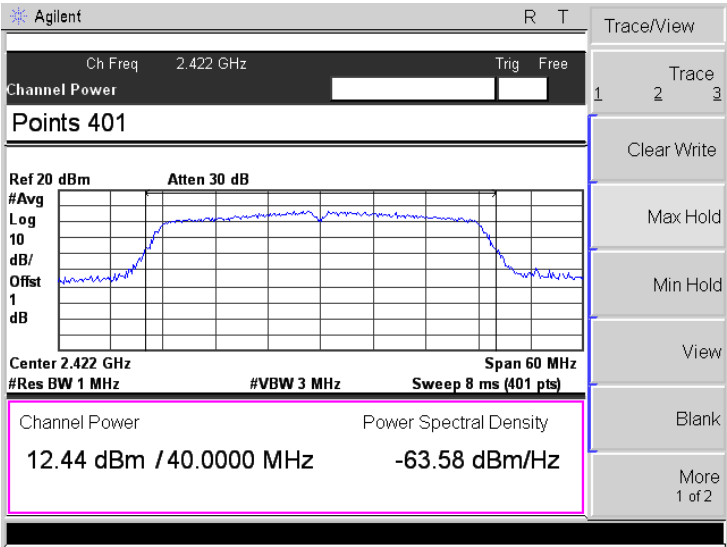
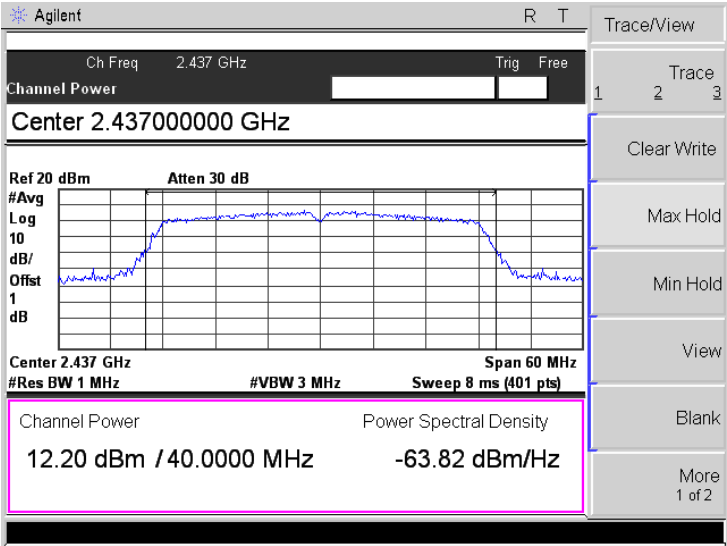
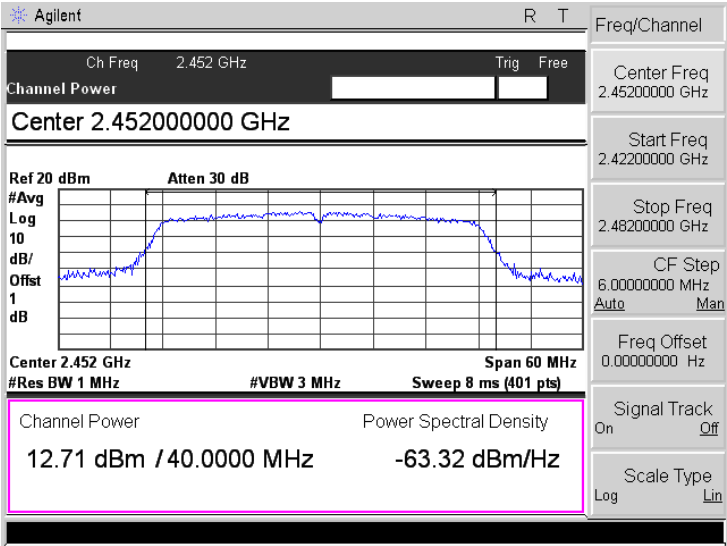
<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	

## ➤ Antenna 2
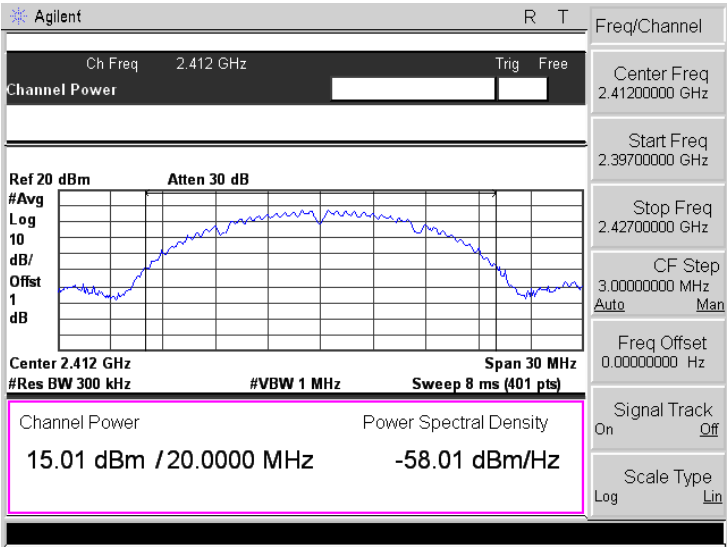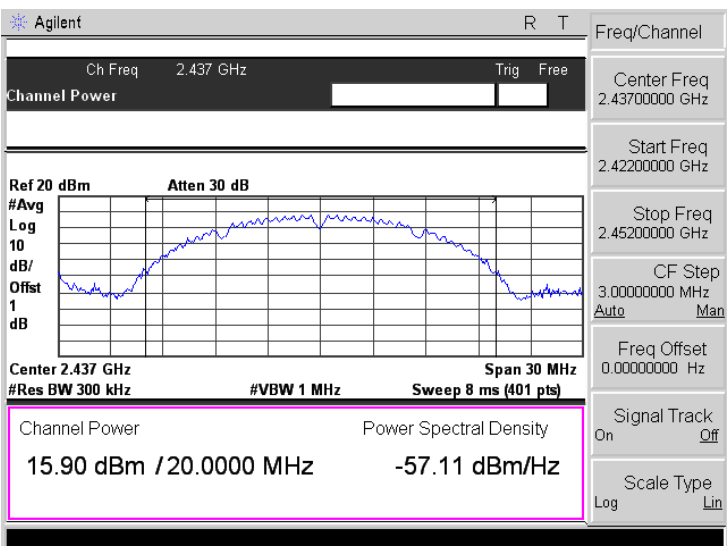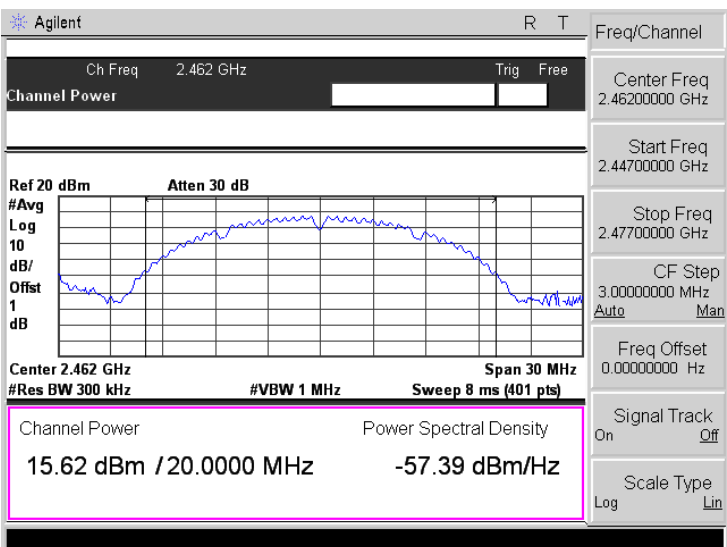
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.01 dBm / 20.0000 MHz -58.01 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.90 dBm / 20.0000 MHz -57.11 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.62 dBm / 20.0000 MHz -57.39 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
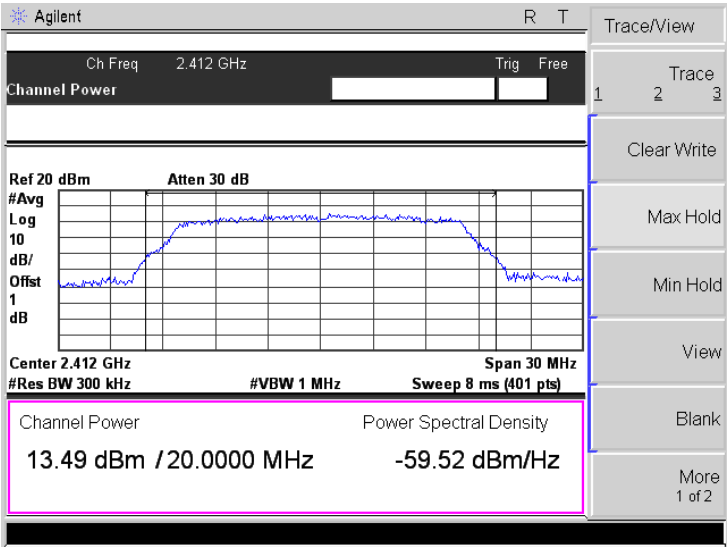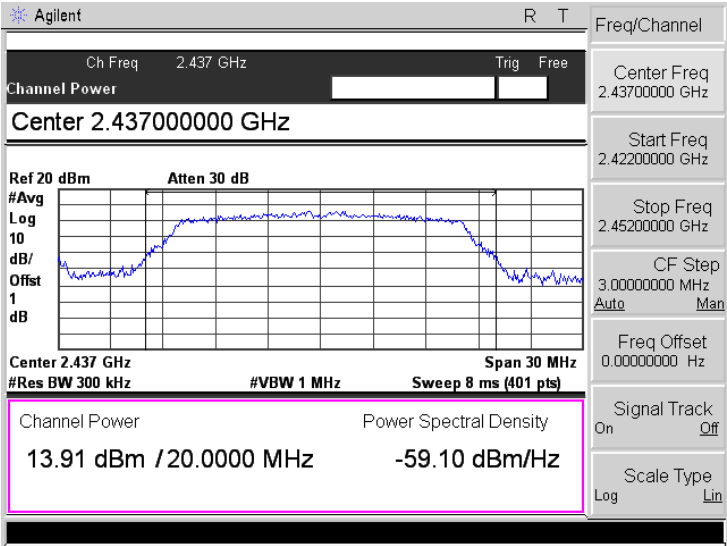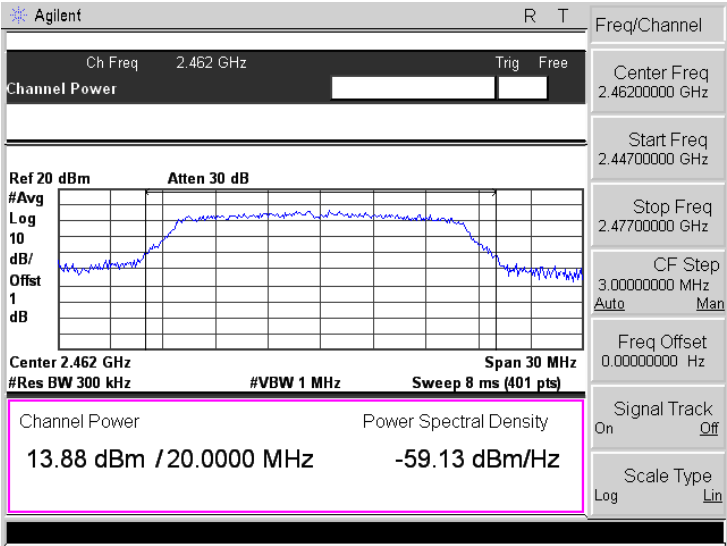
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.49 dBm / 20.0000 MHz -59.52 dBm/Hz</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.91 dBm / 20.0000 MHz -59.10 dBm/Hz</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.88 dBm / 20.0000 MHz -59.13 dBm/Hz</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
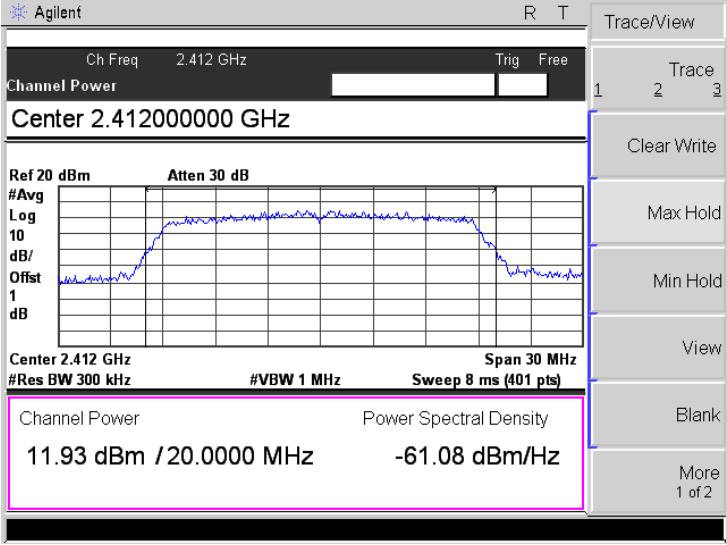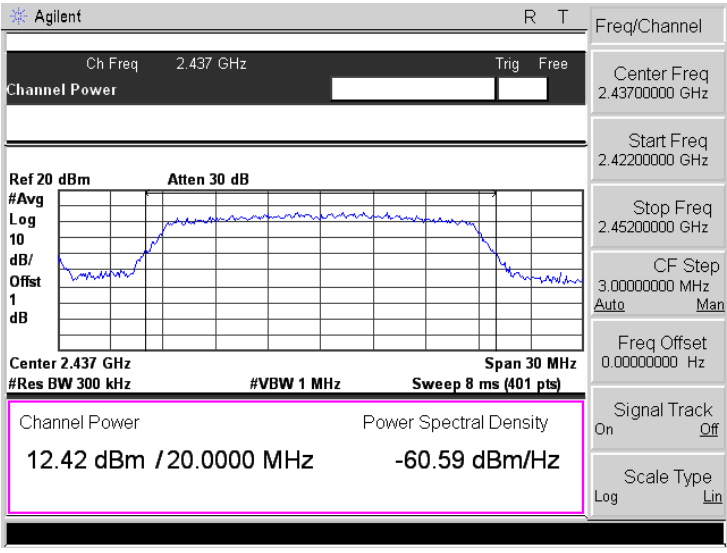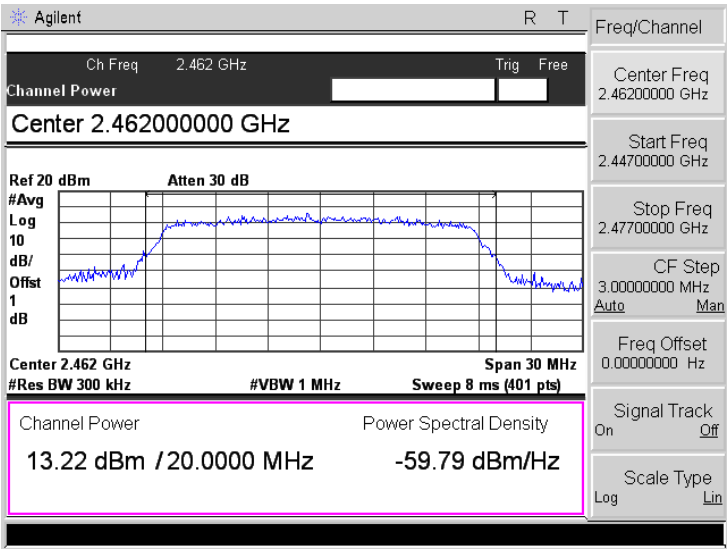
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.93 dBm / 20.0000 MHz -61.08 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.42 dBm / 20.0000 MHz -60.59 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.22 dBm / 20.0000 MHz -59.79 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
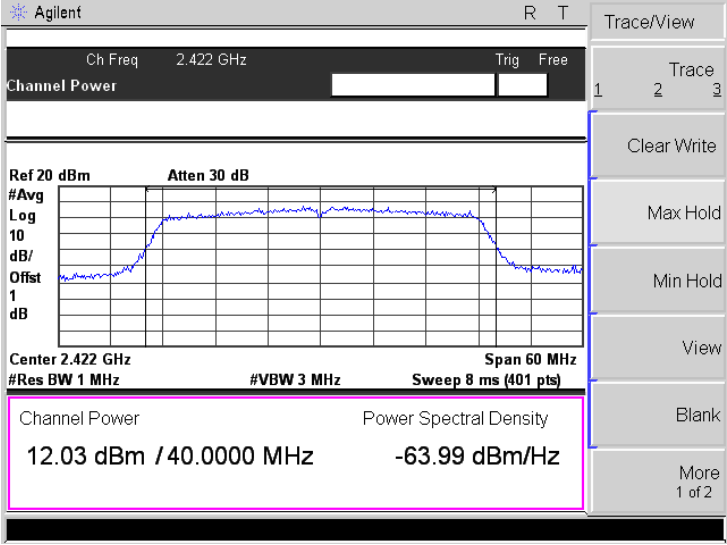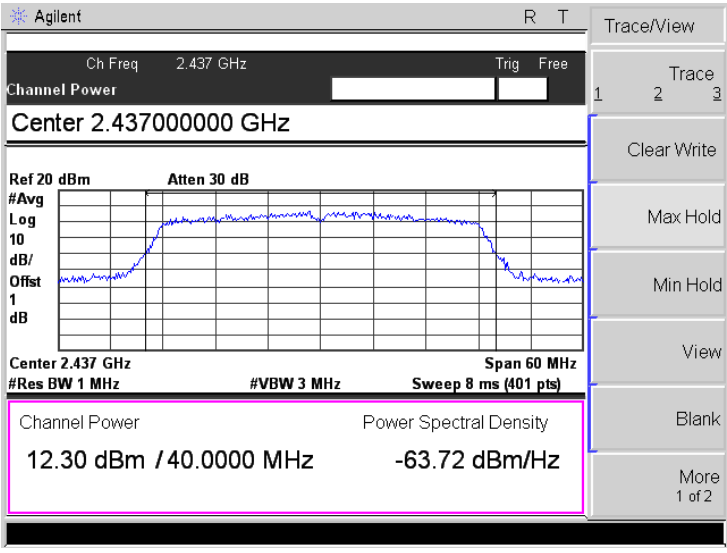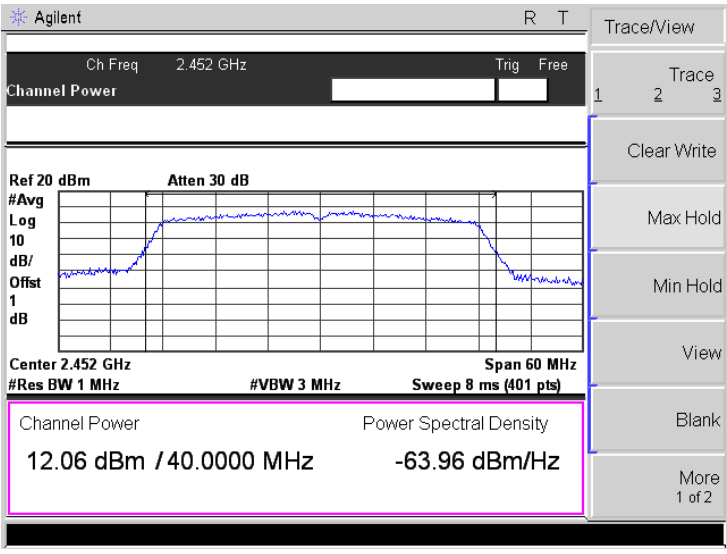
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.03 dBm / 40.0000 MHz -63.99 dBm/Hz</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.30 dBm / 40.0000 MHz -63.72 dBm/Hz</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.06 dBm / 40.0000 MHz -63.96 dBm/Hz</p>



## 8. Field Strength of Spurious Emissions

---

### 8.1 Standard Applicable



According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

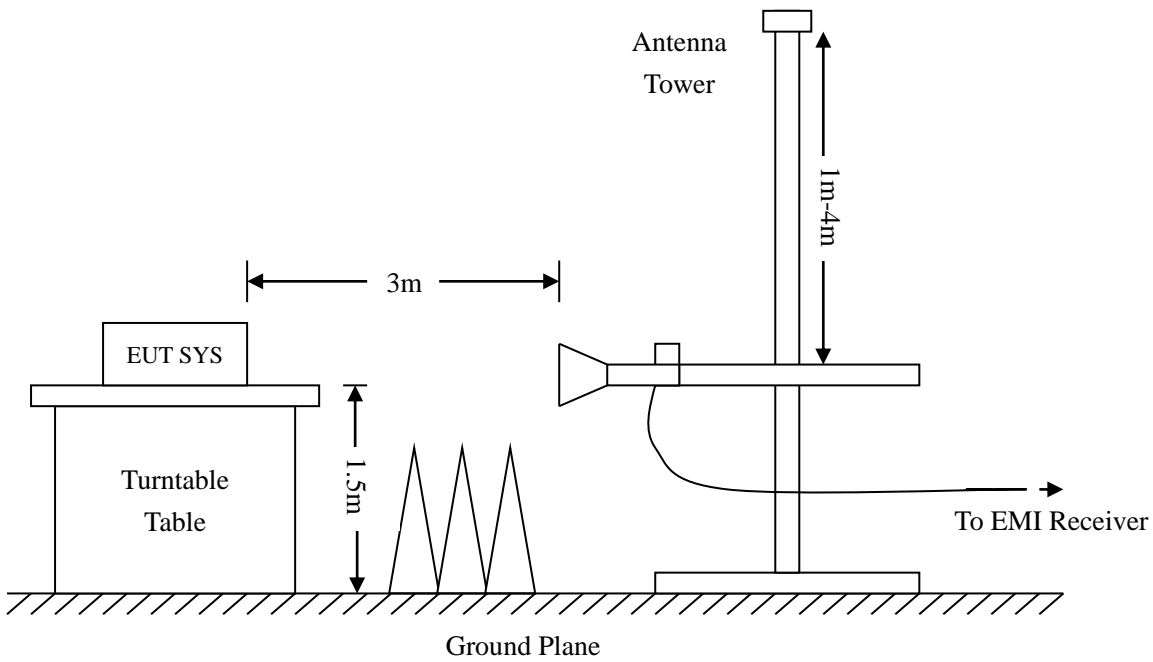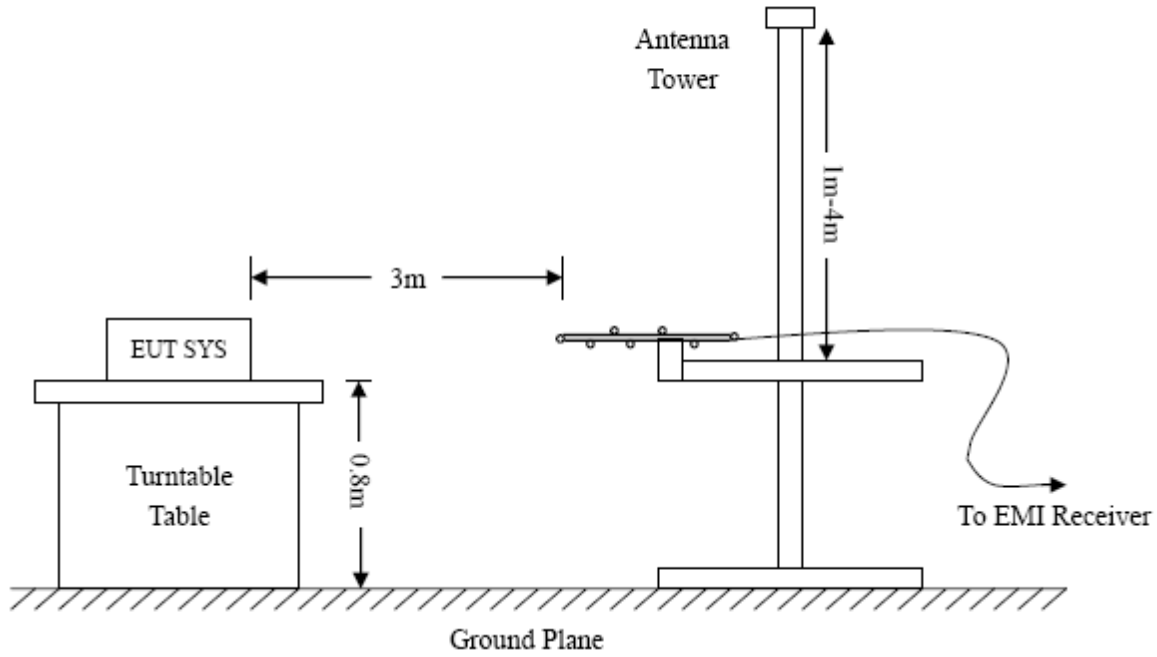

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


### 8.4 Summary of Test Results/Plots

*Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

*All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.*


- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b_11Mbps ( Worst case)			
Test Channel	Low	Polarity:	Horizontal

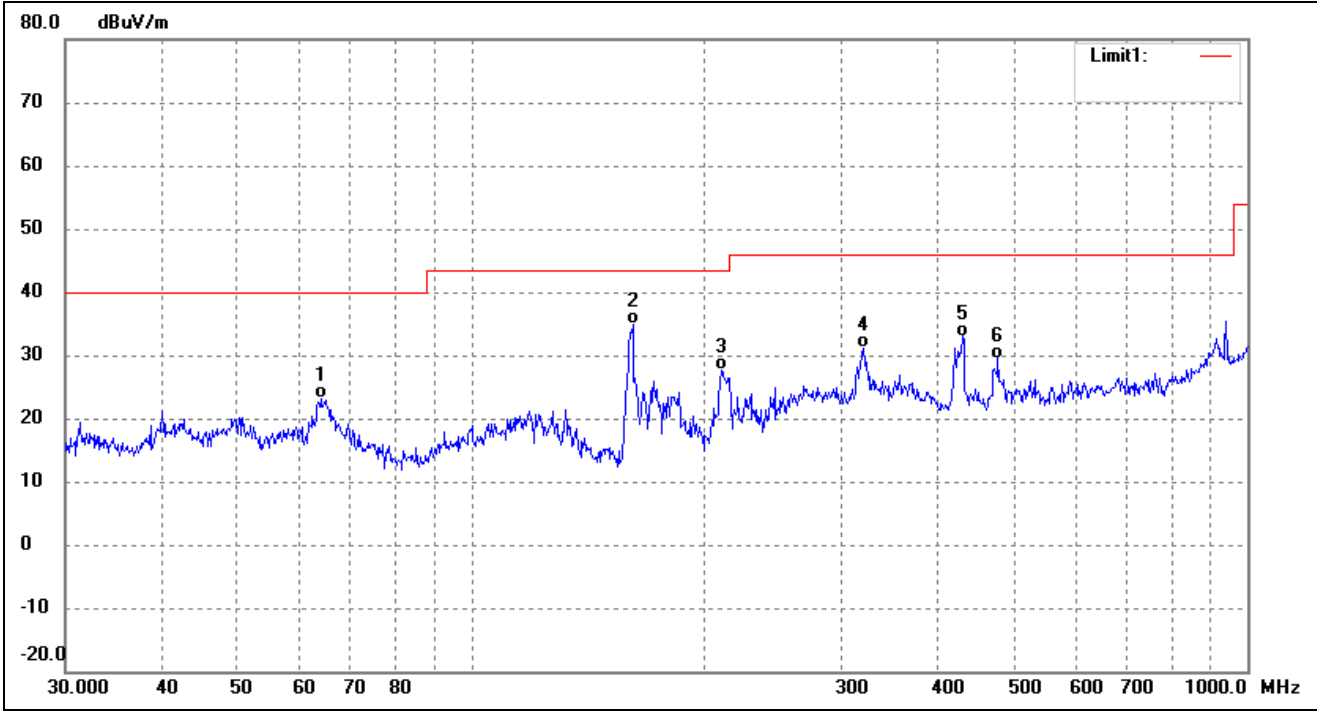


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	63.9828	39.01	-15.94	23.07	40.00	-16.93	56	100	QP
2	161.4742	51.20	-16.23	34.97	43.50	-8.53	193	100	QP
3	210.0482	39.93	-12.42	27.51	43.50	-15.99	102	100	QP
4	319.9370	39.60	-8.35	31.25	46.00	-14.75	126	100	QP
5	429.5228	40.97	-7.97	33.00	46.00	-13.00	61	100	QP
6	477.1694	37.57	-8.07	29.50	46.00	-16.50	208	100	QP

802.11b_11Mbps( Worst case)			
Test Channel	Low	Polarity:	Vertical

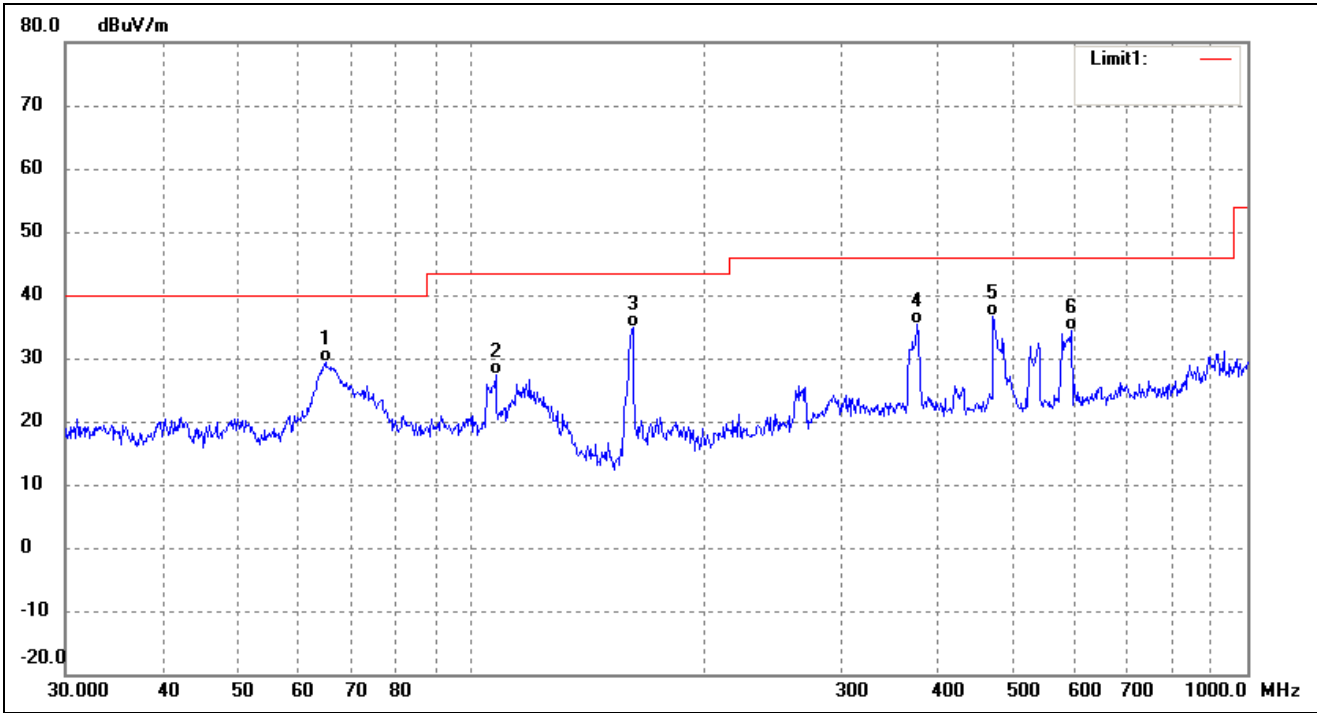


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	64.8865	45.50	-16.11	29.39	40.00	-10.61	156	100	QP
2	107.5101	42.16	-14.82	27.34	43.50	-16.16	274	100	QP
3	161.4742	51.11	-16.23	34.88	43.50	-8.62	92	100	QP
4	375.9385	43.29	-7.96	35.33	46.00	-10.67	251	100	QP
5	470.5232	44.66	-8.12	36.54	46.00	-9.46	125	100	QP
6	593.0497	40.14	-5.79	34.35	46.00	-11.65	334	100	QP

802.11b_11Mbps( Worst case)			
Test Channel	Middle	Polarity:	Horizontal

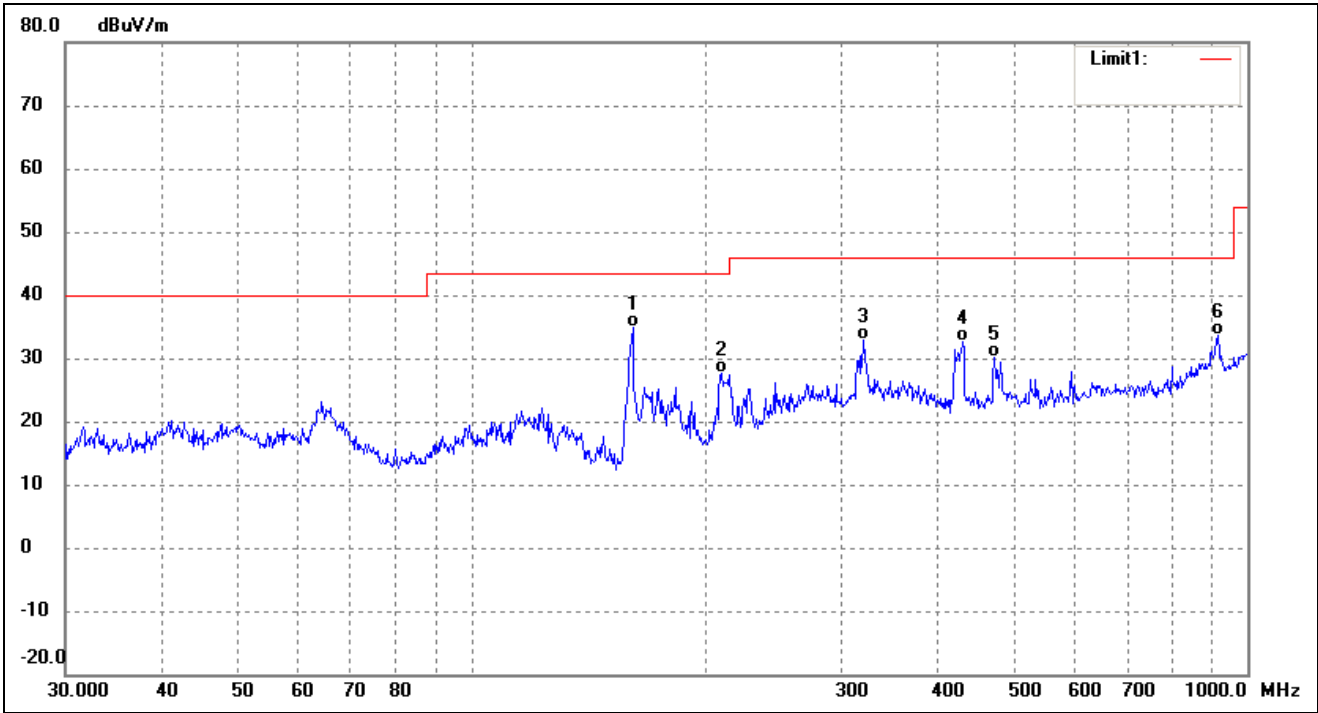


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	161.4742	51.21	-16.23	34.98	43.50	-8.52	257	100	QP
2	210.0482	40.08	-12.42	27.66	43.50	-15.84	93	100	QP
3	319.9370	41.17	-8.35	32.82	46.00	-13.18	157	100	QP
4	429.5228	40.69	-7.97	32.72	46.00	-13.28	106	100	QP
5	472.1760	38.13	-8.10	30.03	46.00	-15.97	256	100	QP
6	916.0687	34.52	-0.93	33.59	46.00	-12.41	311	100	QP

802.11b_11Mbps( Worst case)			
Test Channel	Middle	Polarity:	Vertical

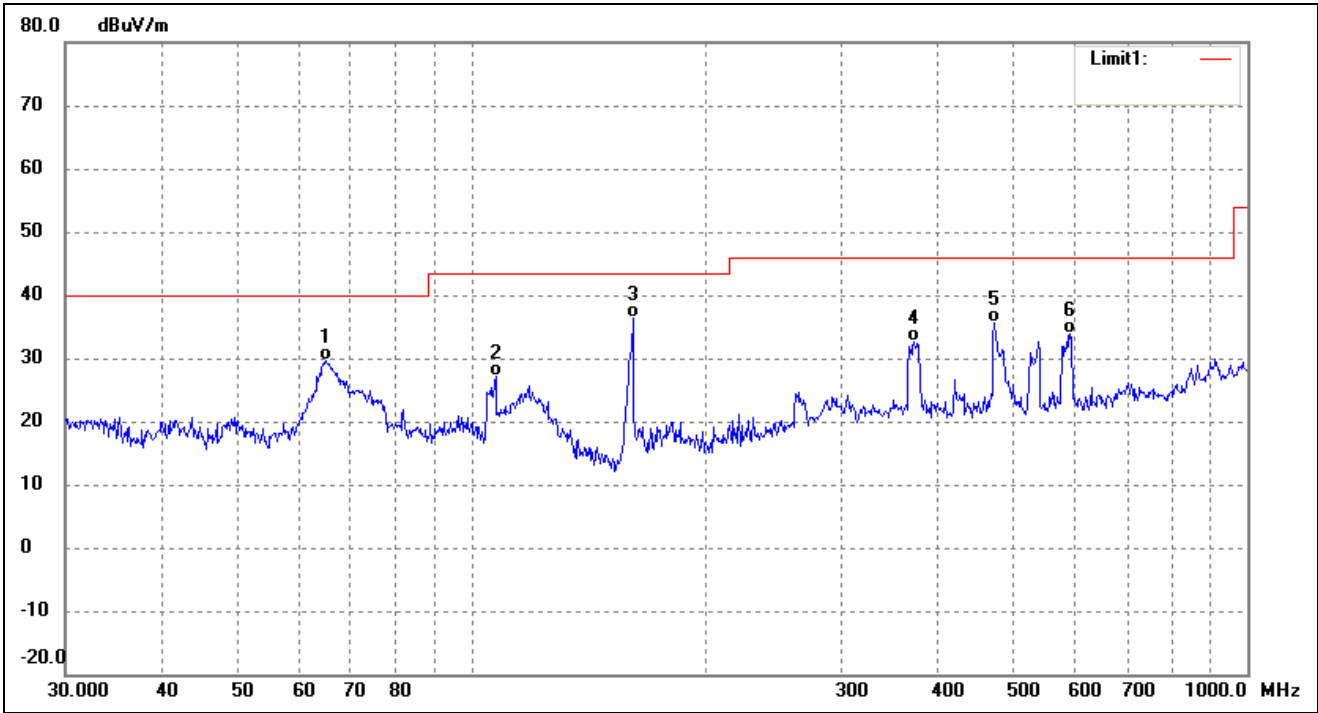

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	64.8865	45.82	-16.11	29.71	40.00	-10.29	267	100	QP
2	107.5101	41.90	-14.82	27.08	43.50	-16.42	116	100	QP
3	161.4742	52.57	-16.23	36.34	43.50	-7.16	76	100	QP
4	372.0045	40.45	-7.92	32.53	46.00	-13.47	110	100	QP
5	472.1760	43.84	-8.10	35.74	46.00	-10.26	208	100	QP
6	590.9737	39.73	-5.85	33.88	46.00	-12.12	207	100	QP


802.11b_11Mbps( Worst case)			
Test Channel	High	Polarity:	Horizontal

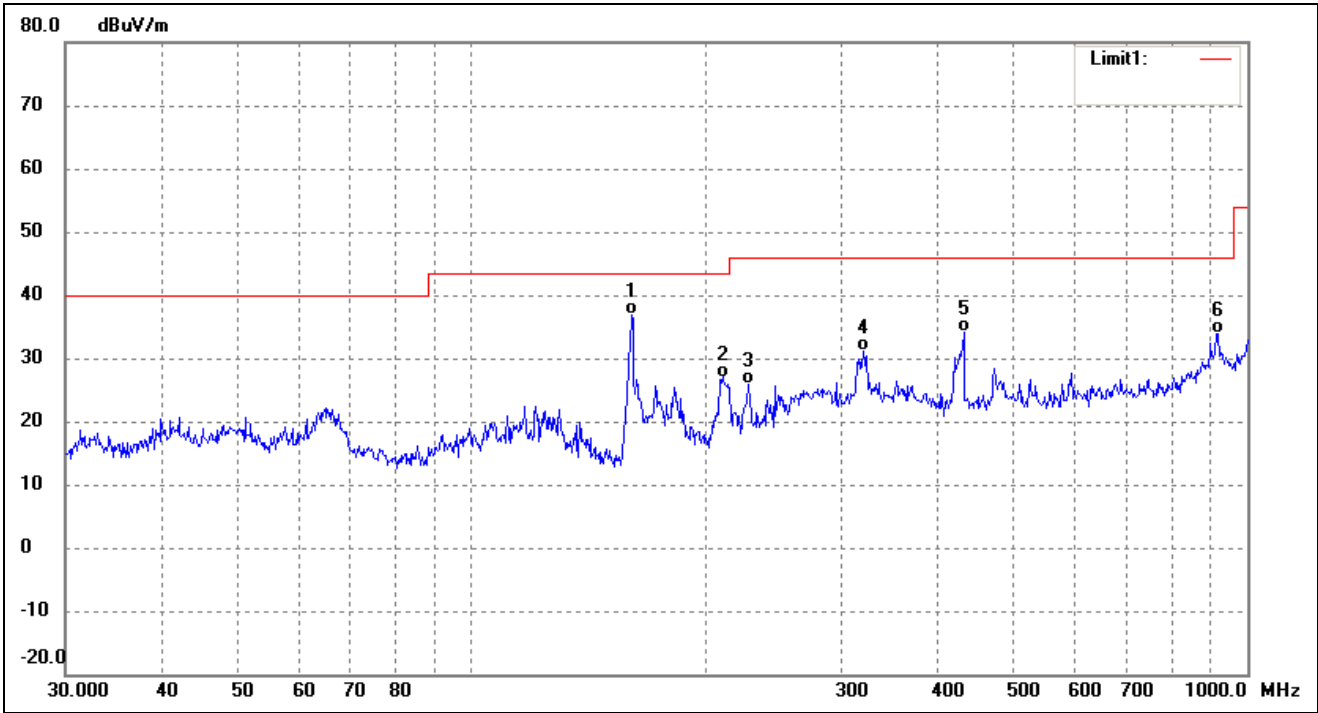

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	160.9089	53.10	-16.27	36.83	43.50	-6.67	167	100	QP
2	210.7860	39.40	-12.40	27.00	43.50	-16.50	198	100	QP
3	227.6906	37.72	-11.88	25.84	46.00	-20.16	65	100	QP
4	319.9370	39.53	-8.35	31.18	46.00	-14.82	250	100	QP
5	431.0316	42.10	-7.99	34.11	46.00	-11.89	64	100	QP
6	916.0687	34.77	-0.93	33.84	46.00	-12.16	237	100	QP



802.11b_11Mbps( Worst case)			
Test Channel	High	Polarity:	Vertical

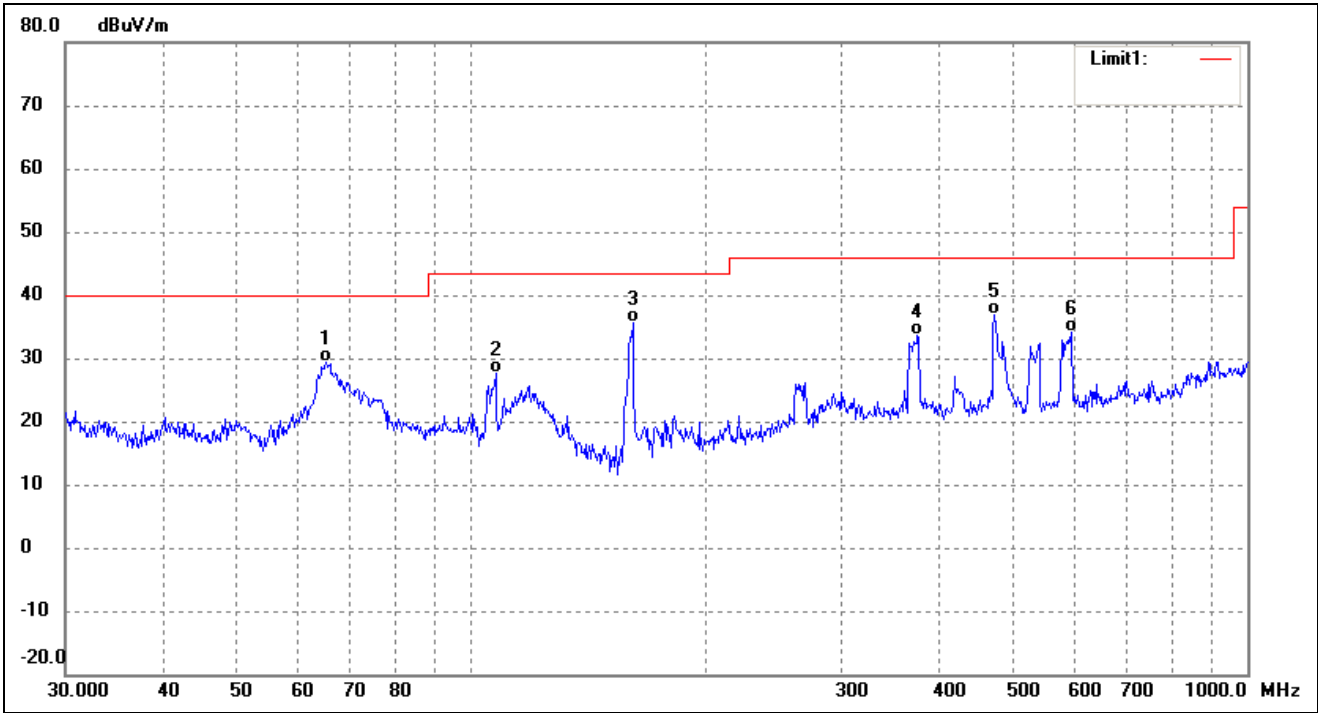

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	64.8865	45.44	-16.11	29.33	40.00	-10.67	261	100	QP
2	107.5101	42.37	-14.82	27.55	43.50	-15.95	100	100	QP
3	161.4742	51.91	-16.23	35.68	43.50	-7.82	124	100	QP
4	375.9385	41.55	-7.96	33.59	46.00	-12.41	103	100	QP
5	472.1760	44.90	-8.10	36.80	46.00	-9.20	58	100	QP
6	593.0497	39.99	-5.79	34.20	46.00	-11.80	244	100	QP

## ➤ Spurious Emissions Below 1GHz

## ➤ Antenna 1

## ➤ Test Mode: 802.11b\_11Mbps ( Worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	61.32	-3.86	57.46	74	-16.54	H	PK
4824.000	43.17	-3.86	39.31	54	-14.69	H	AV
7236.000	57.30	1.10	58.40	74	-15.60	H	PK
7236.000	39.71	1.10	40.81	54	-13.19	H	AV
4824.000	60.92	-3.86	57.06	74	-16.94	V	PK
4824.000	44.93	-3.86	41.07	54	-12.93	V	AV
7236.000	55.25	1.10	56.35	74	-17.65	V	PK
7236.000	40.09	1.10	41.19	54	-12.81	V	AV
Middle Channel-2437MHz							
4874.000	61.80	-3.74	58.06	74	-15.94	H	PK
4874.000	42.08	-3.74	38.34	54	-15.66	H	AV
7311.000	55.01	1.47	56.48	74	-17.52	H	PK
7311.000	39.28	1.47	40.75	54	-13.25	H	AV
4874.000	62.07	-3.74	58.33	74	-15.67	V	PK
4874.000	43.06	-3.74	39.32	54	-14.68	V	AV
7311.000	58.38	1.47	59.85	74	-14.15	V	PK
7311.000	39.17	1.47	40.64	54	-13.36	V	AV
High Channel-2462MHz							
4924.000	59.10	-3.63	55.47	74	-18.53	H	PK
4924.000	42.66	-3.63	39.03	54	-14.97	H	AV
7386.000	54.62	1.62	56.24	74	-17.76	H	PK
7386.000	41.44	1.62	43.06	54	-10.94	H	AV
4924.000	60.77	-3.63	57.14	74	-16.86	V	PK
4924.000	43.28	-3.63	39.65	54	-14.35	V	AV
7386.000	56.16	1.62	57.78	74	-16.22	V	PK
7386.000	42.08	1.62	43.70	54	-10.30	V	AV

- Antenna 2
- Test Mode: 802.11b\_11Mbps ( Worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.79	-3.86	56.93	74	-17.07	H	PK
4824.000	44.70	-3.86	40.84	54	-13.16	H	AV
7236.000	55.85	1.10	56.95	74	-17.05	H	PK
7236.000	39.80	1.10	40.90	54	-13.10	H	AV
4824.000	60.00	-3.86	56.14	74	-17.86	V	PK
4824.000	41.73	-3.86	37.87	54	-16.13	V	AV
7236.000	59.34	1.10	60.44	74	-13.56	V	PK
7236.000	39.78	1.10	40.88	54	-13.12	V	AV
Middle Channel-2437MHz							
4874.000	61.61	-3.74	57.87	74	-16.13	H	PK
4874.000	41.85	-3.74	38.11	54	-15.89	H	AV
7311.000	55.87	1.47	57.34	74	-16.66	H	PK
7311.000	40.99	1.47	42.46	54	-11.54	H	AV
4874.000	62.40	-3.74	58.66	74	-15.34	V	PK
4874.000	42.73	-3.74	38.99	54	-15.01	V	AV
7311.000	55.89	1.47	57.36	74	-16.64	V	PK
7311.000	39.99	1.47	41.46	54	-12.54	V	AV
High Channel-2462MHz							
4924.000	61.61	-3.63	57.98	74	-16.02	H	PK
4924.000	41.54	-3.63	37.91	54	-16.09	H	AV
7386.000	55.70	1.62	57.32	74	-16.68	H	PK
7386.000	41.09	1.62	42.71	54	-11.29	H	AV
4924.000	62.24	-3.63	58.61	74	-15.39	V	PK
4924.000	45.25	-3.63	41.62	54	-12.38	V	AV
7386.000	54.60	1.62	56.22	74	-17.78	V	PK
7386.000	39.96	1.62	41.58	54	-12.42	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

## B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq$   $[3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

## 9.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1 (Worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

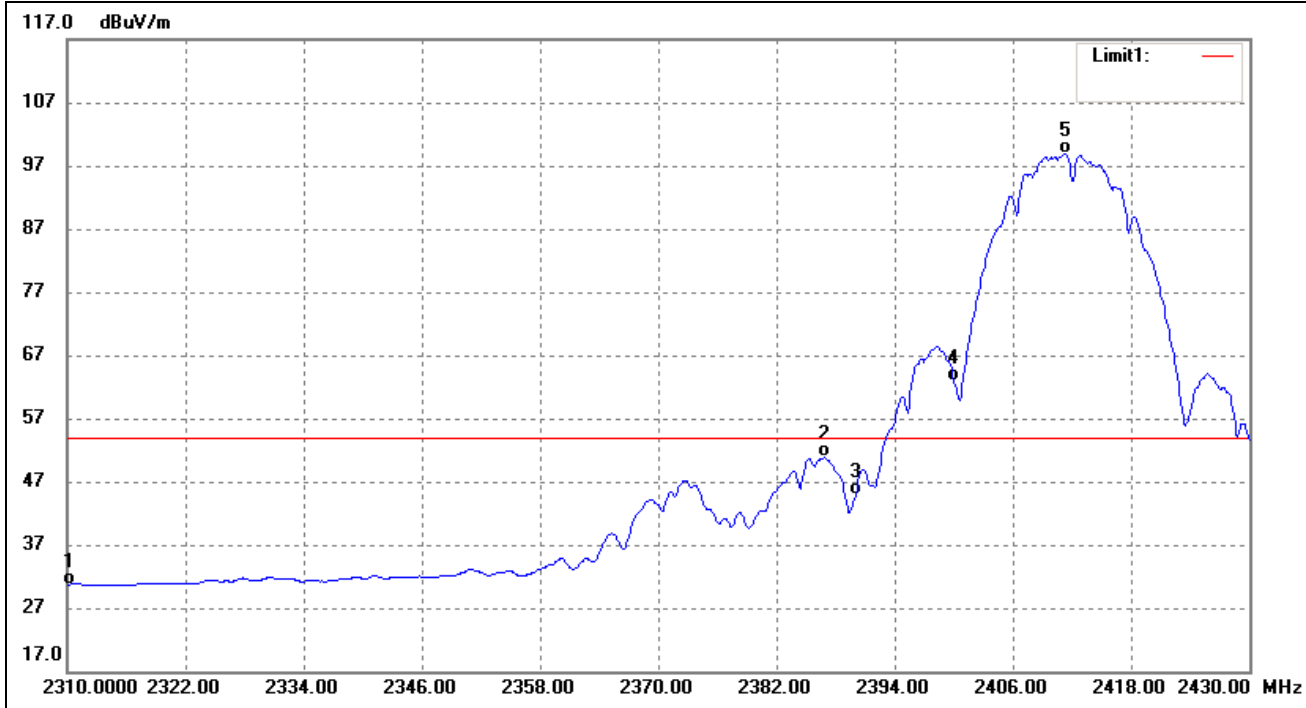


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.36	-9.66	30.70	54.00	-23.30	Average Detector
		52.93	-9.66	43.27	74.00	-30.73	Peak Detector
2	2386.800	60.28	-9.50	50.78	54.00	-3.22	Average Detector
		81.82	-9.5	72.32	74.00	-1.68	Peak Detector
3	2390.000	54.50	-9.50	45.00	54.00	-9.00	Average Detector
		63.23	-9.50	53.73	74.00	-20.27	Peak Detector
4	2400.000	72.33	-9.48	62.85	Delta=36.13dBc	Average Detector	
5	2411.280	108.44	-9.46	98.98		Average Detector	

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

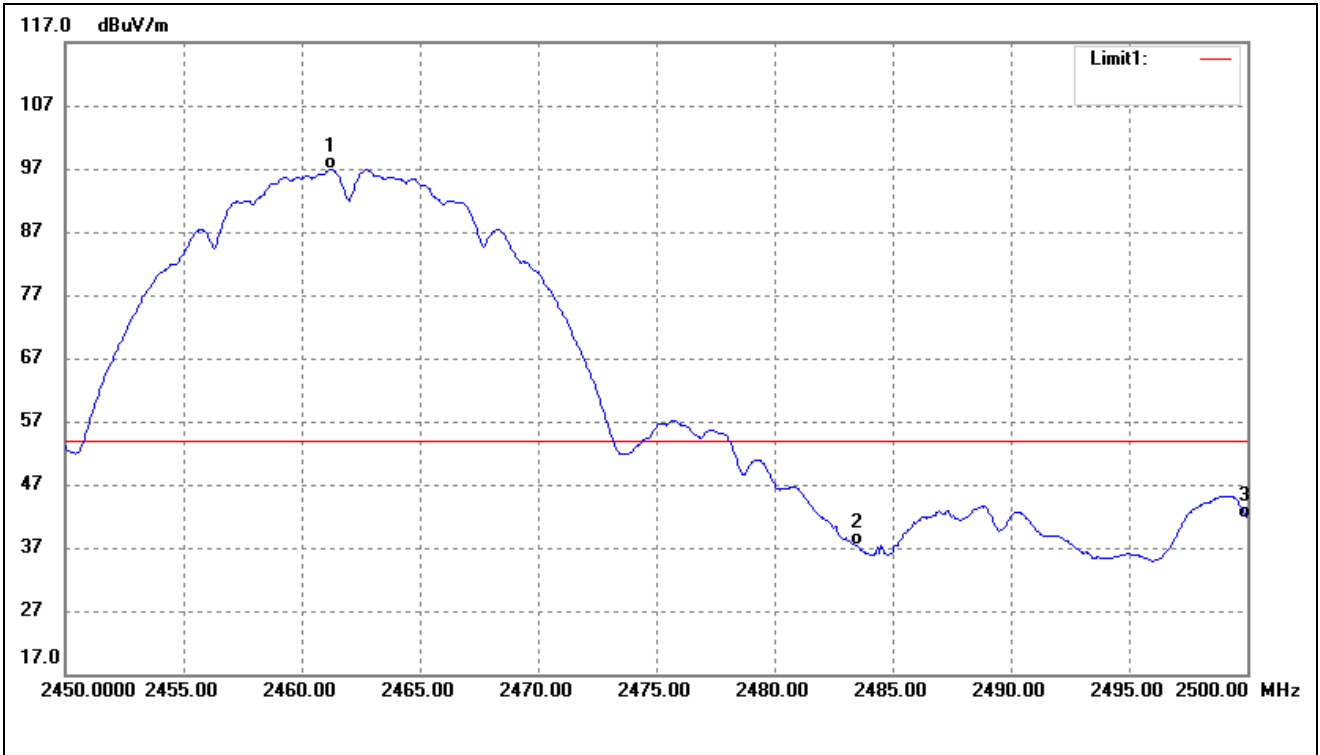

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	106.20	-9.36	96.84	/	/	Average Detector
	2463.050	110.76	-9.36	101.40	/	/	Peak Detector
2	2483.500	46.61	-9.31	37.30	54.00	-16.70	Average Detector
	2483.500	57.38	-9.31	48.07	74.00	-25.93	Peak Detector
3	2500.000	50.86	-9.28	41.58	54.00	-12.42	Average Detector
	2500.000	59.93	-9.28	50.65	74.00	-23.35	Peak Detector


802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

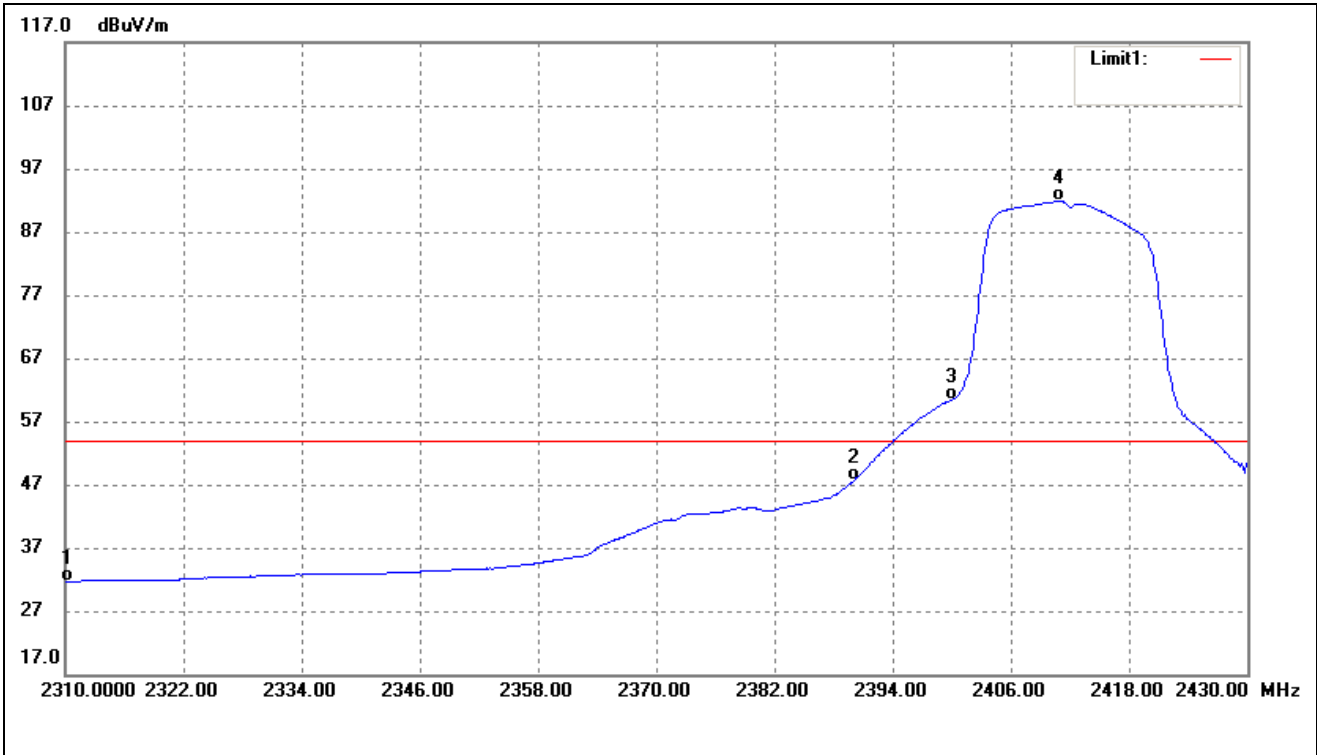

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.37	-9.66	31.71	54.00	-22.29	Average Detector
	2310.000	53.87	-9.66	44.21	74.00	-29.79	Peak Detector
2	2390.000	57.12	-9.50	47.62	54.00	-6.38	Average Detector
	2390.000	77.82	-9.50	68.32	74.00	-5.68	Peak Detector
3	2400.000	69.95	-9.48	60.47	Delta=31.38dBc		Average Detector
4	2410.800	101.31	-9.46	91.85			Average Detector




802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

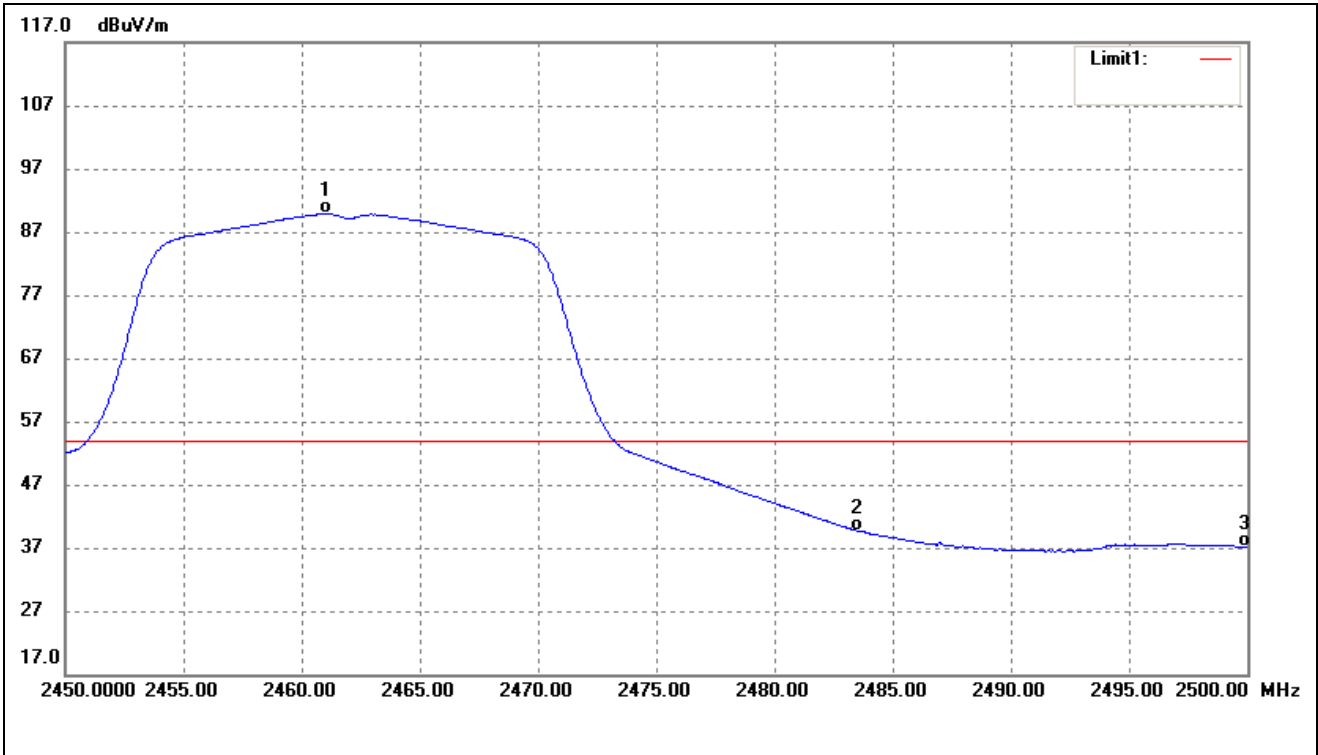


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.000	99.20	-9.36	89.84	/	/	Average Detector
	2462.900	110.09	-9.36	100.73	/	/	Peak Detector
2	2483.500	49.04	-9.31	39.73	54.00	-14.27	Average Detector
	2483.500	66.25	-9.31	56.94	74.00	-17.06	Peak Detector
3	2500.000	46.42	-9.28	37.14	54.00	-16.86	Average Detector
	2500.000	57.84	-9.28	48.56	74.00	-25.44	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

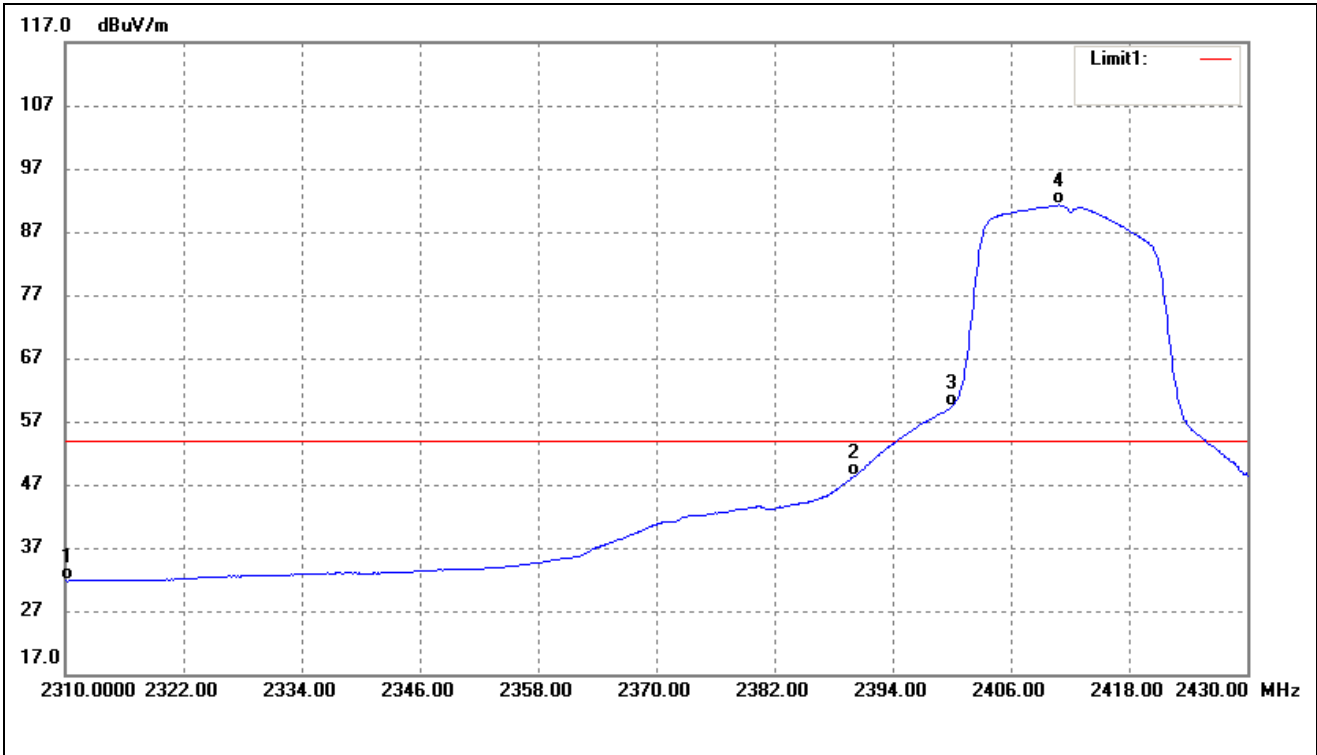


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.44	-9.66	31.78	54.00	-22.22	Average Detector
	2310.000	52.76	-9.66	43.10	74.00	-30.90	Peak Detector
2	2390.000	57.81	-9.50	48.31	54.00	-5.69	Average Detector
	2390.000	76.25	-9.50	66.75	74.00	-7.25	Peak Detector
3	2400.000	68.88	-9.48	59.40	Delta=31.87dBc		Average Detector
4	2410.800	100.73	-9.46	91.27			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

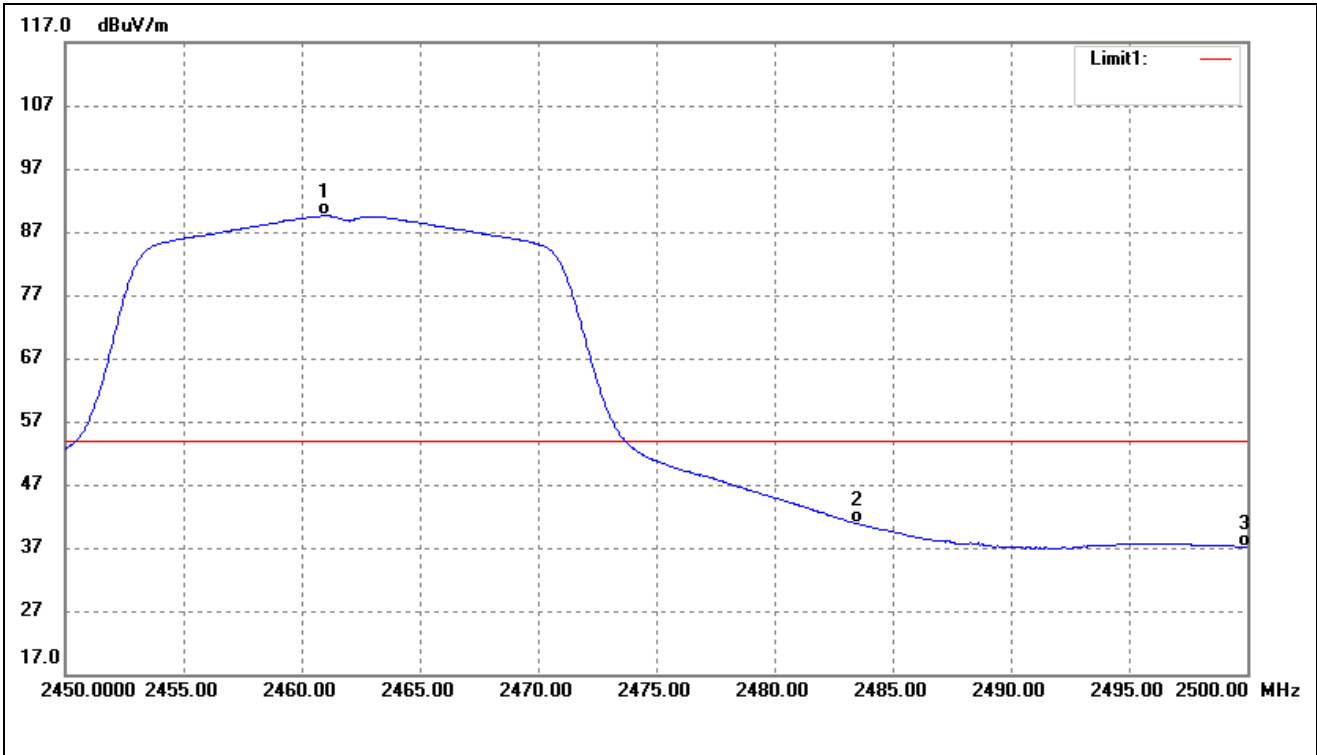


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.950	98.94	-9.36	89.58	/	/	Average Detector
	2462.000	110.50	-9.36	101.14	/	/	Peak Detector
2	2483.500	50.13	-9.31	40.82	54.00	-13.18	Average Detector
	2483.500	70.65	-9.31	61.34	74.00	-12.66	Peak Detector
3	2500.000	46.44	-9.28	37.16	54.00	-16.84	Average Detector
	2500.000	60.98	-9.28	51.70	74.00	-22.30	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

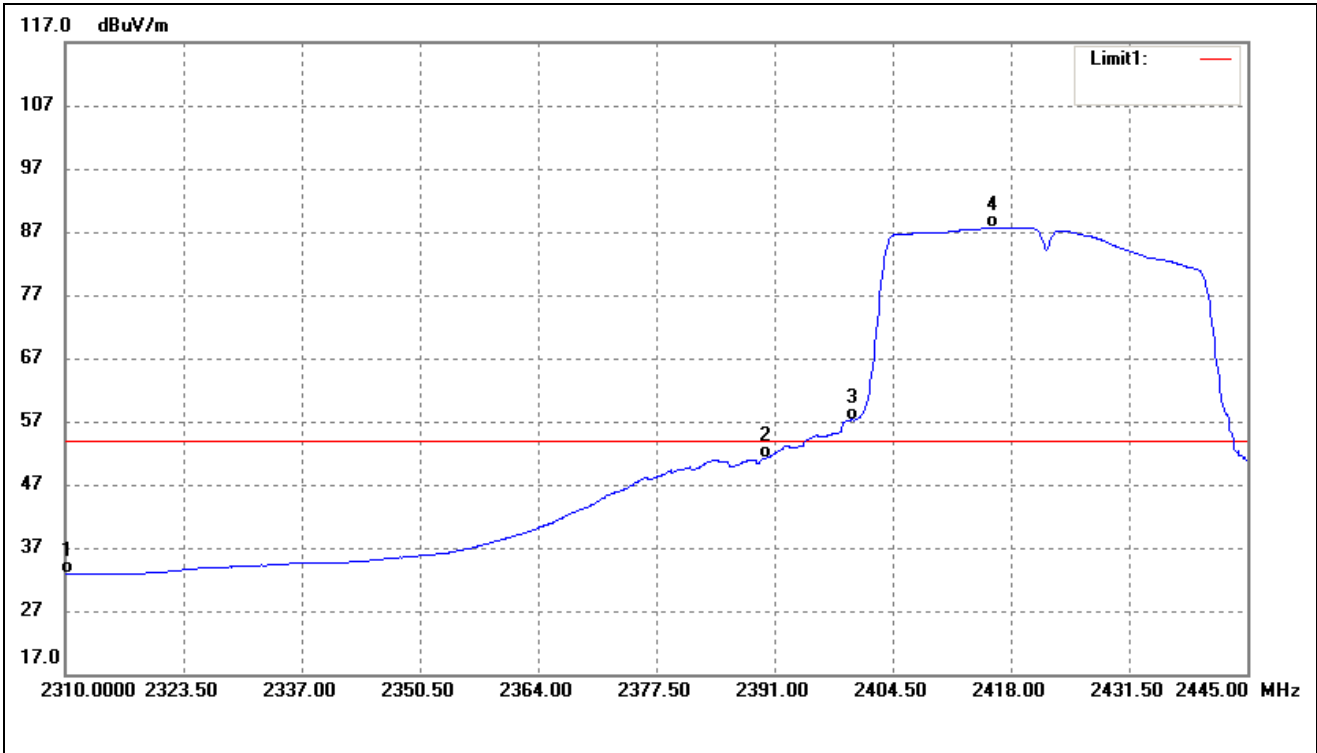

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.53	-9.66	32.87	54.00	-21.13	Average Detector
	2310.000	54.93	-9.66	45.27	74.00	-28.73	Peak Detector
2	2390.000	60.74	-9.50	51.24	54.00	-2.76	Average Detector
	2390.000	78.93	-9.50	69.43	74.00	-4.57	Peak Detector
3	2400.000	66.67	-9.48	57.19	Delta=30.48dBc		Average Detector
4	2415.975	97.13	-9.46	87.67			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)


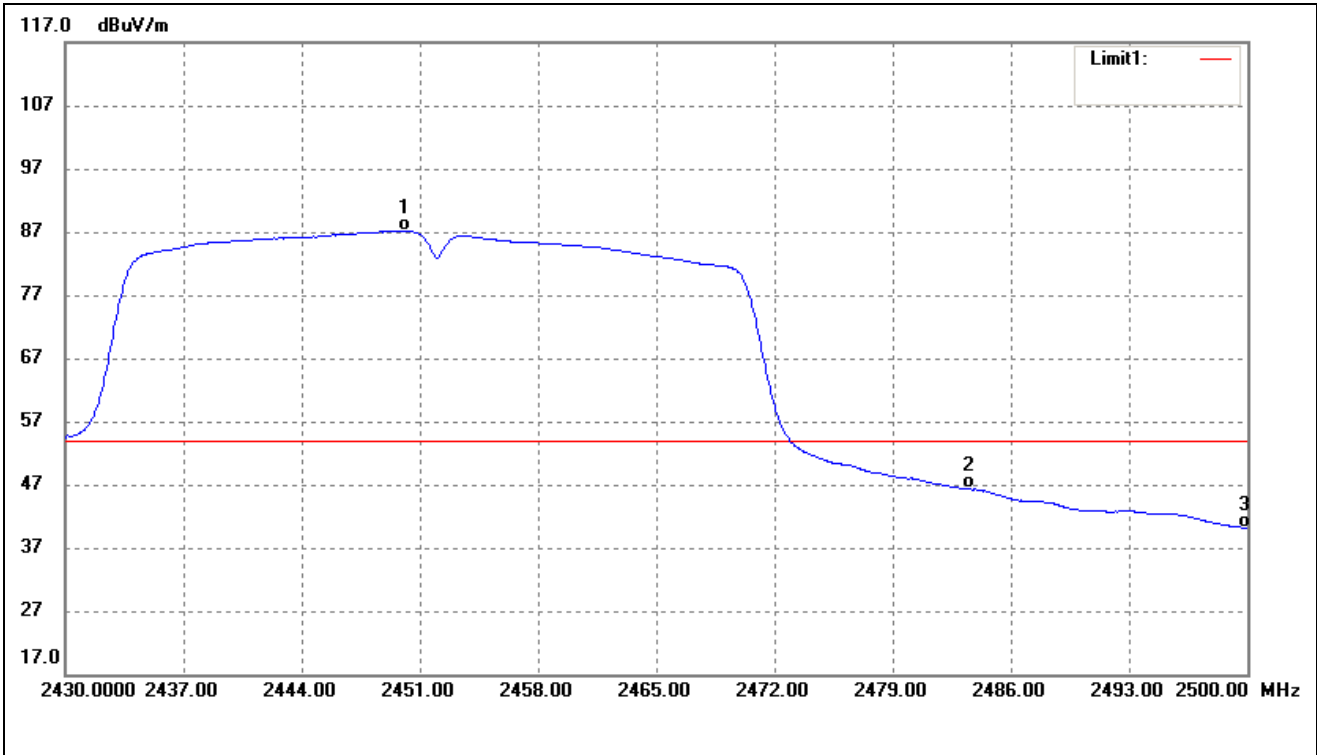


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.090	96.57	-9.38	87.19	/	/	Average Detector
	2441.550	108.23	-9.40	98.83	/	/	Peak Detector
2	2483.500	55.66	-9.31	46.35	54.00	-7.65	Average Detector
	2483.500	71.75	-9.31	62.44	74.00	-11.56	Peak Detector
3	2500.000	49.39	-9.28	40.11	54.00	-13.89	Average Detector
	2500.000	57.86	-9.28	48.58	74.00	-25.42	Peak Detector

## &gt; Antenna 1



802.11b\_11Mbps

Low

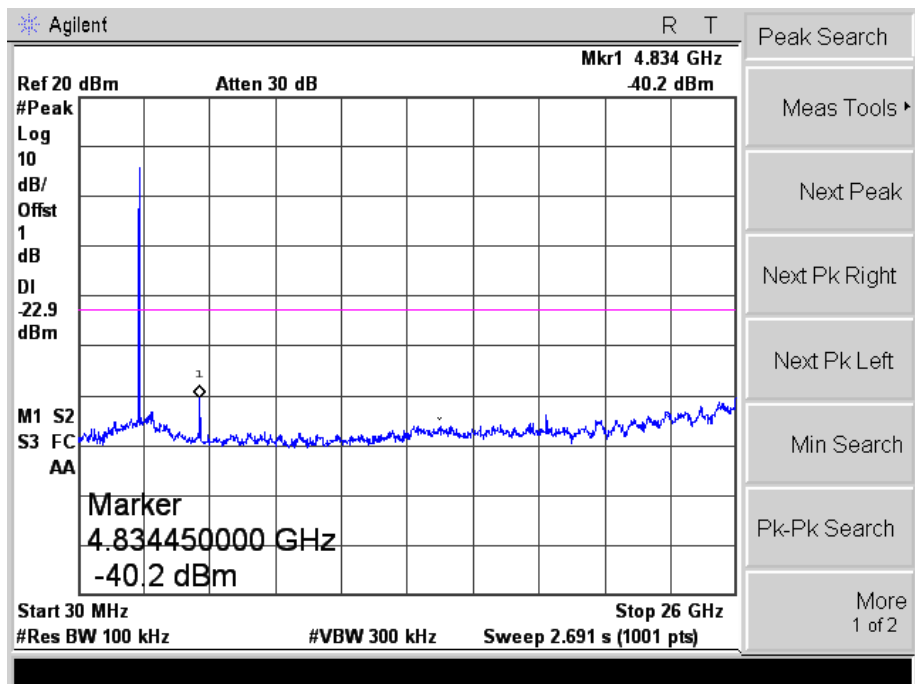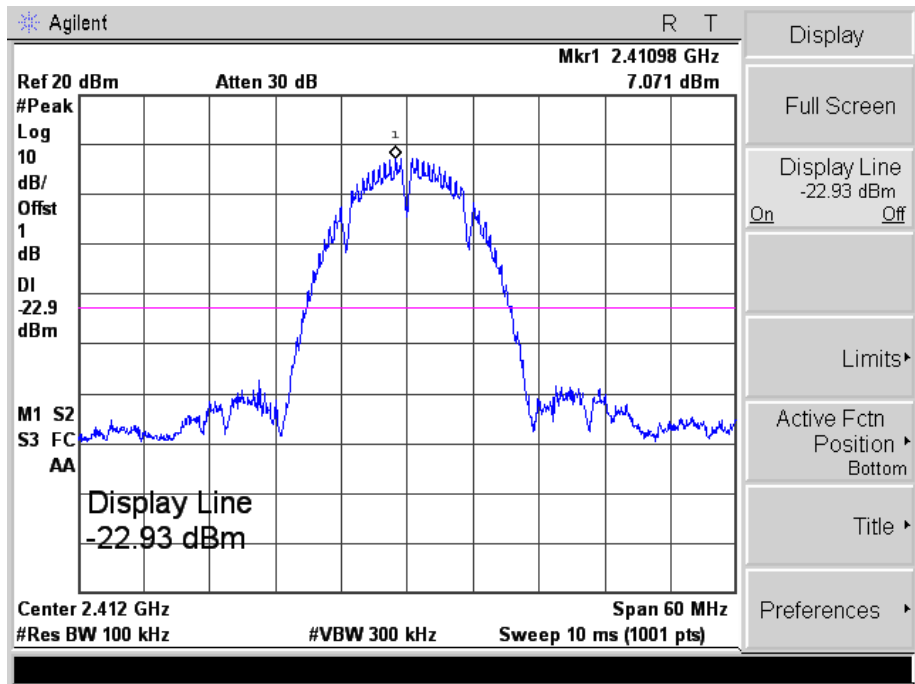



802.11b\_11Mbps

Middle

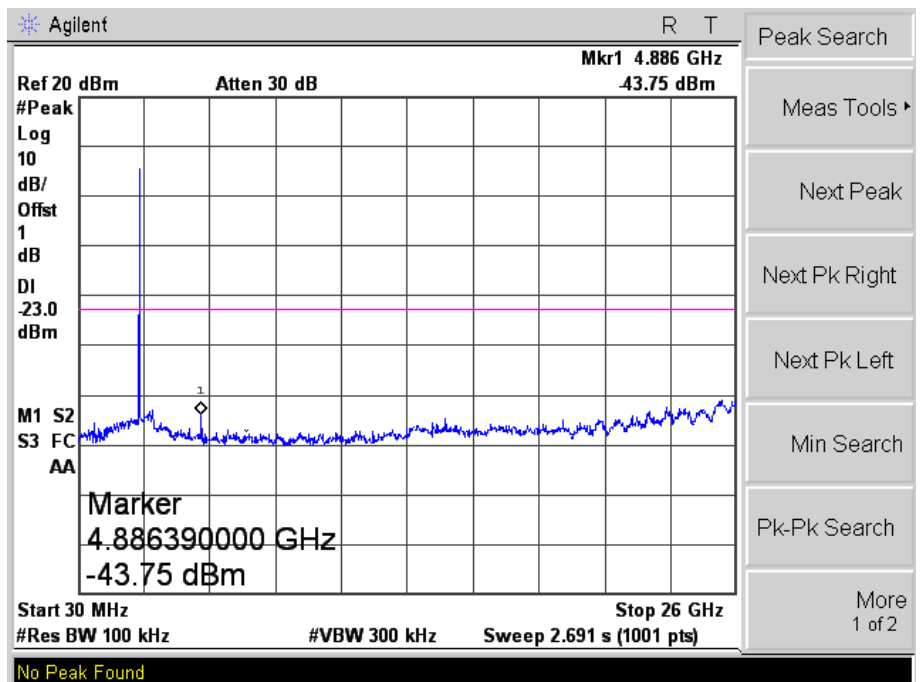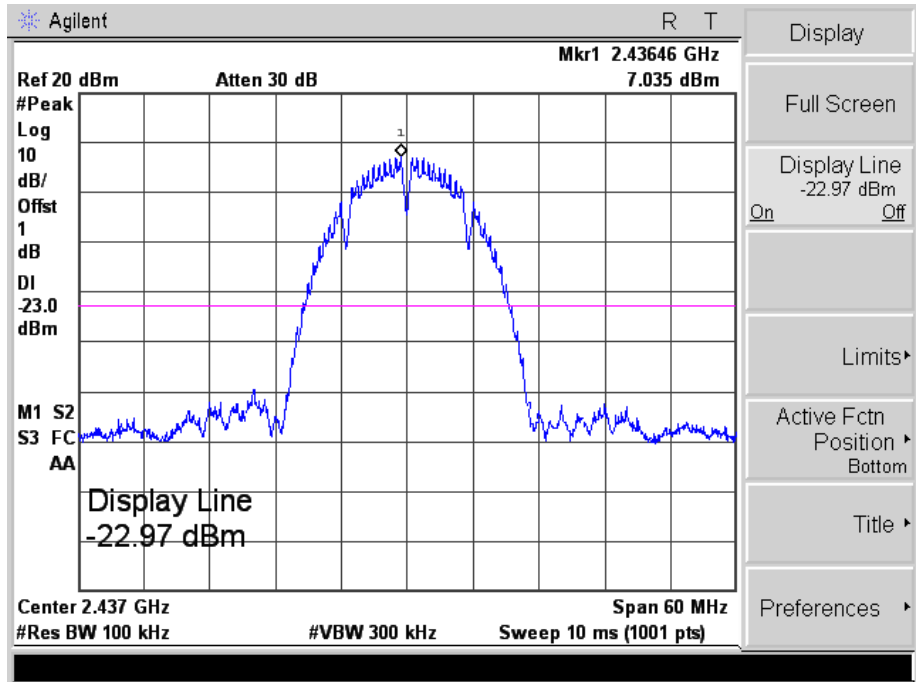

802.11b\_11Mbps



High

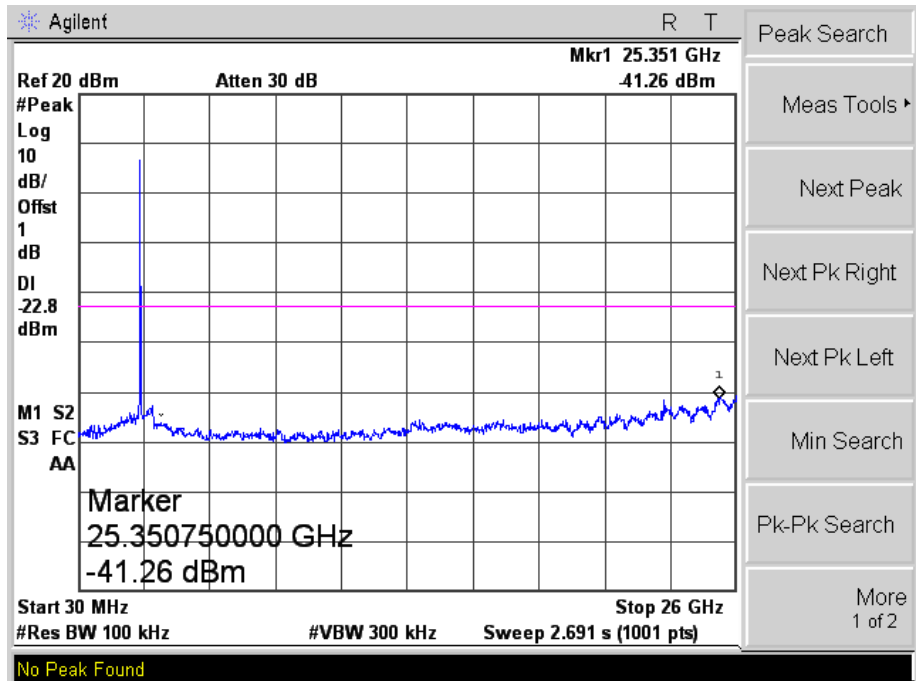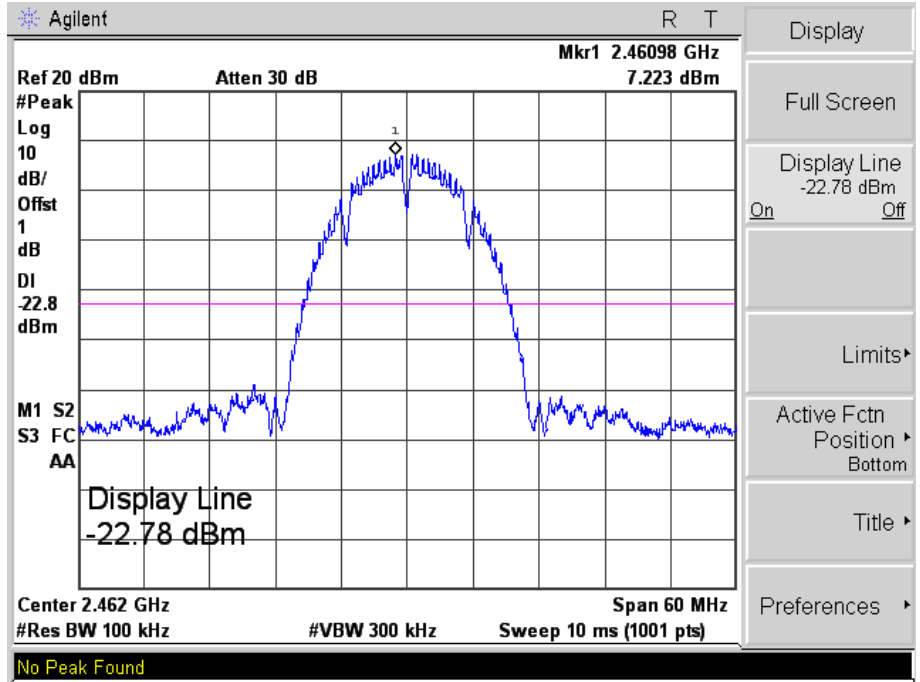





802.11g\_54Mbps

Low

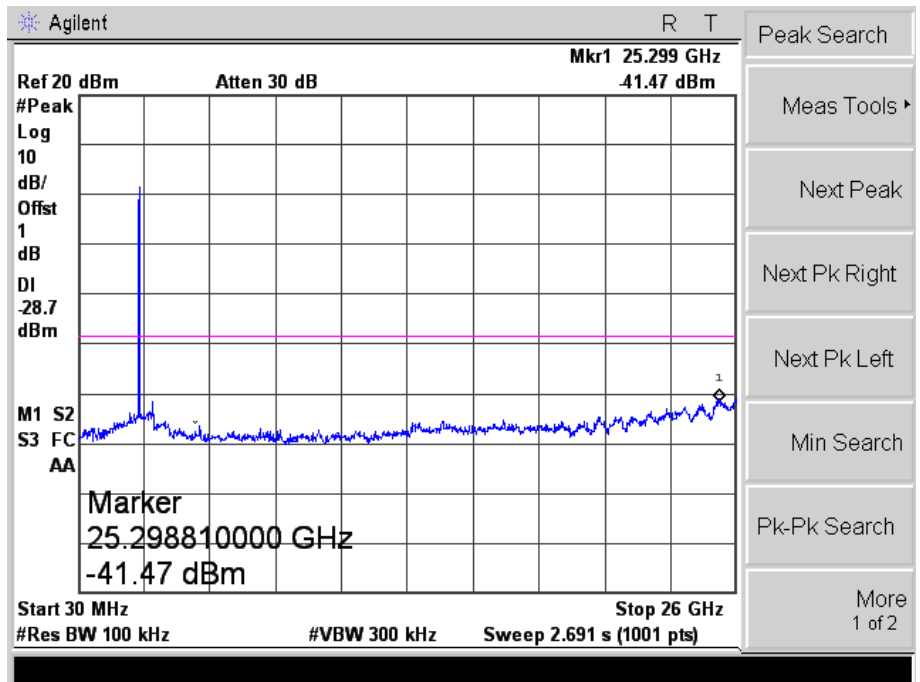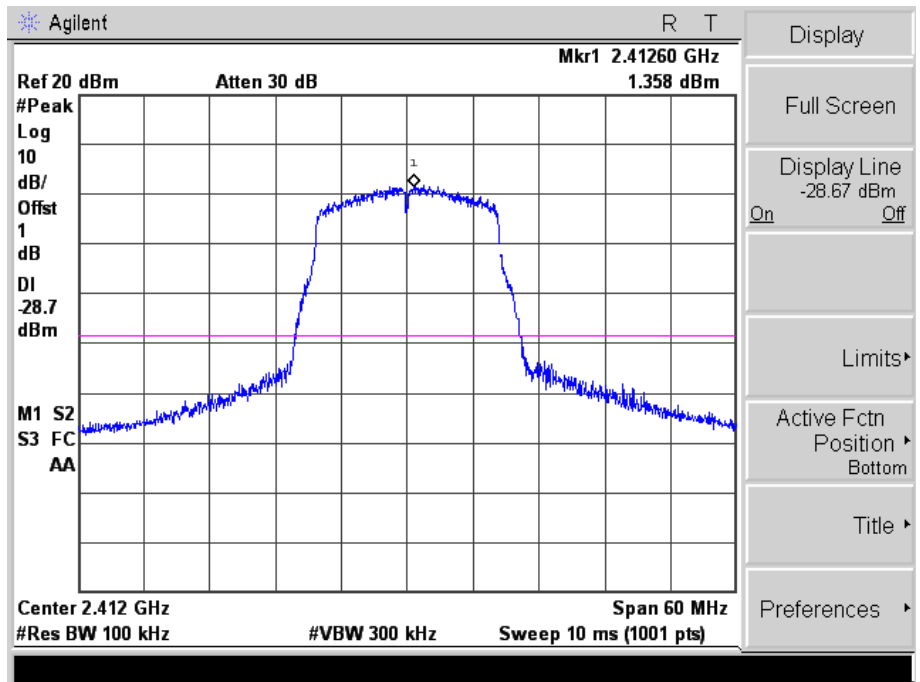



802.11g\_54Mbps

Middle

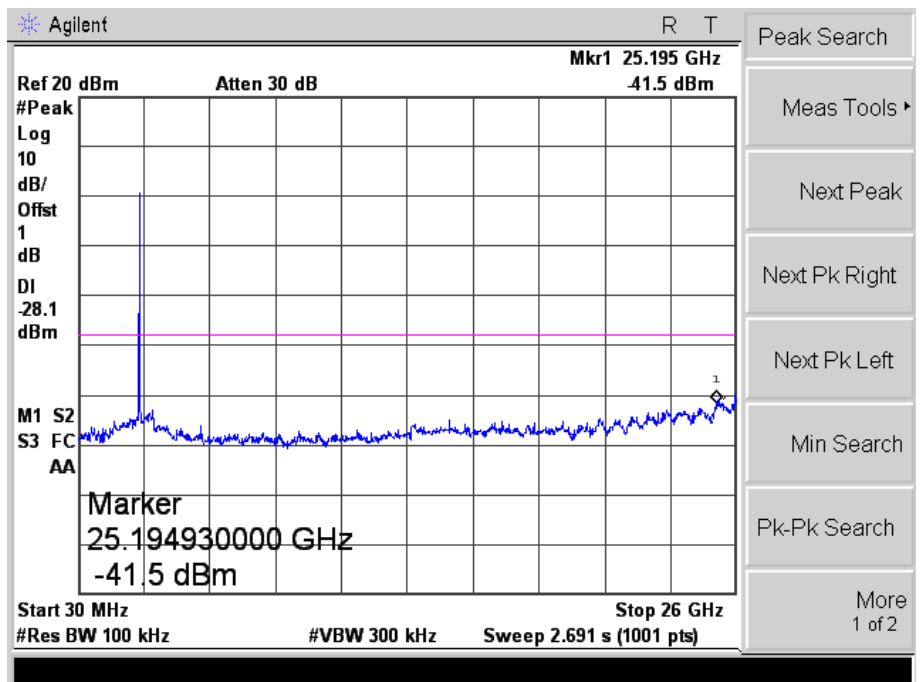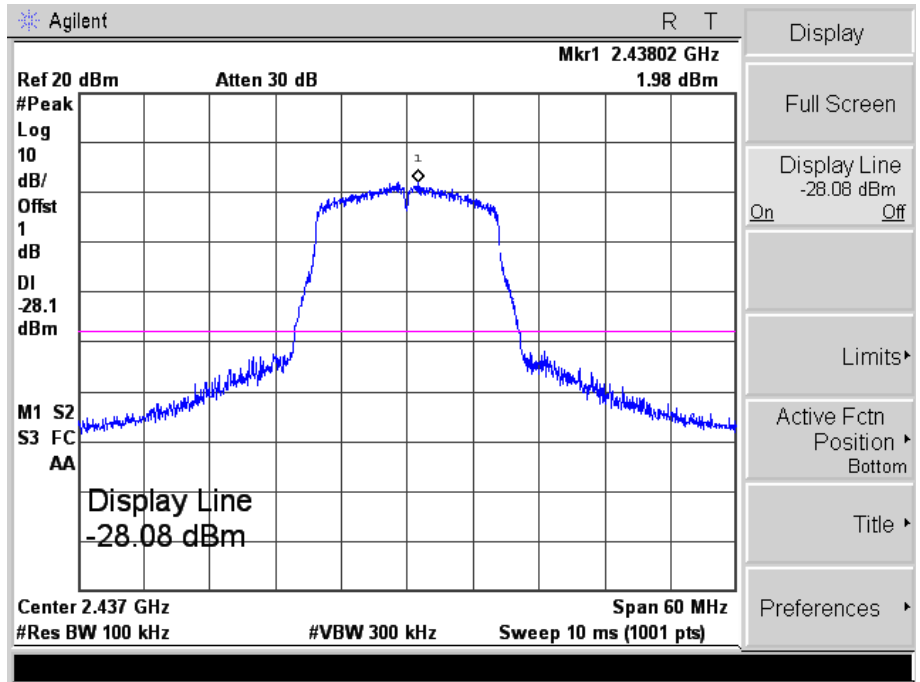



802.11g\_54Mbps

High

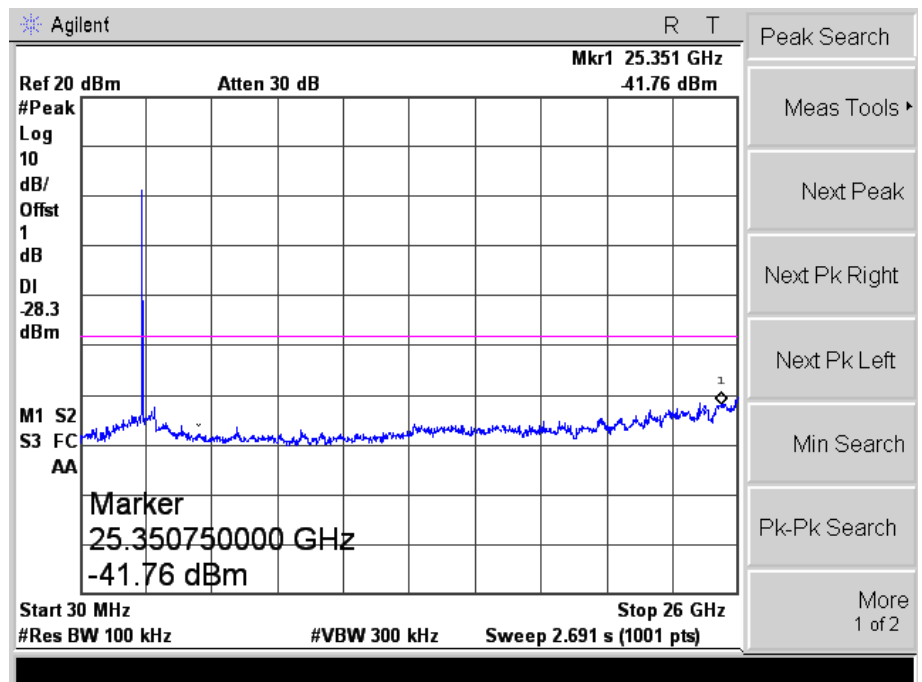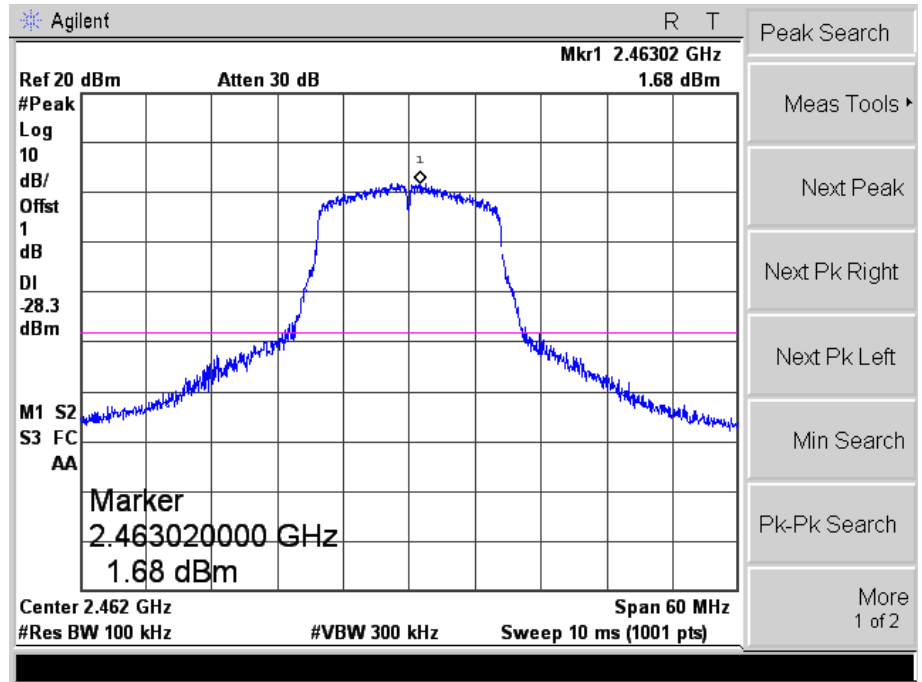



802.11n-HT20\_MCS7

Low

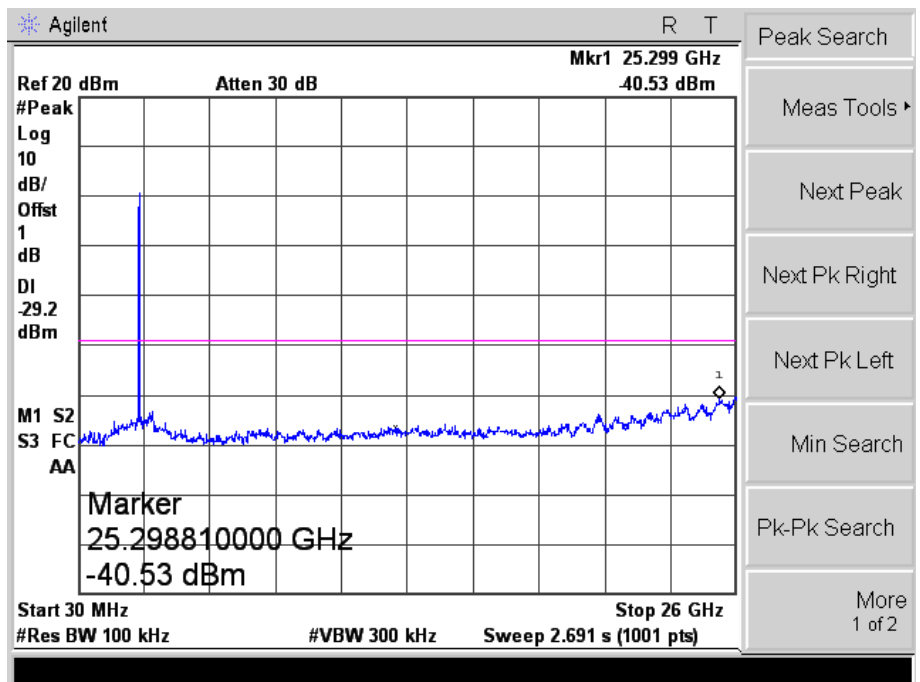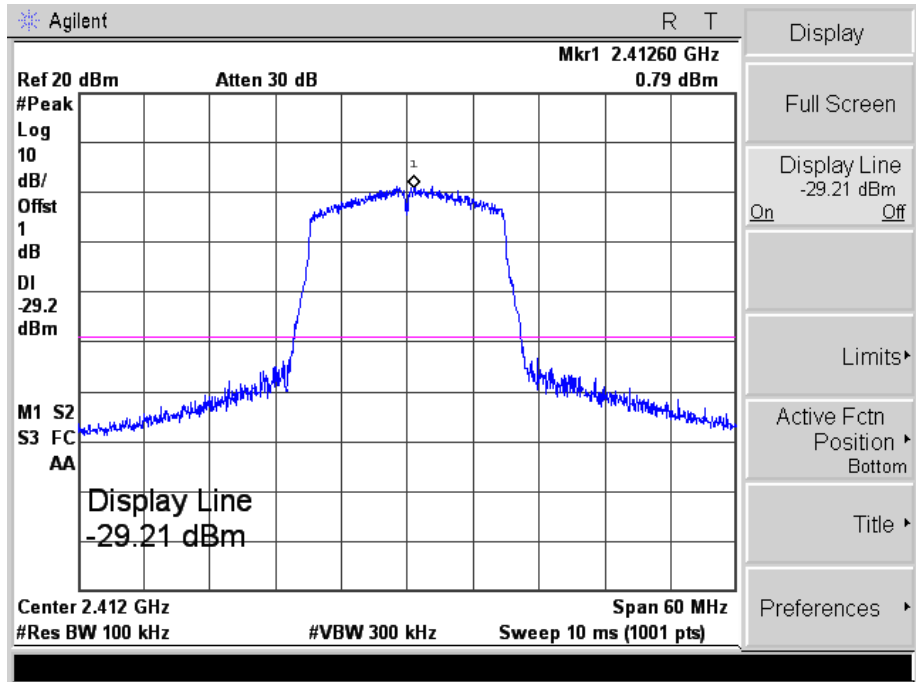



802.11n-HT20\_MCS7

Middle

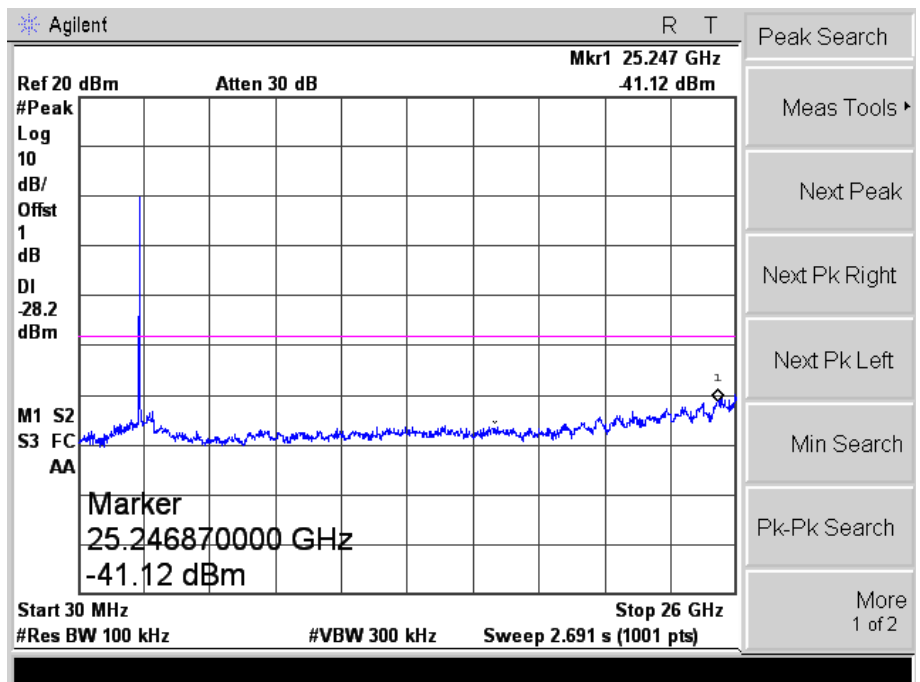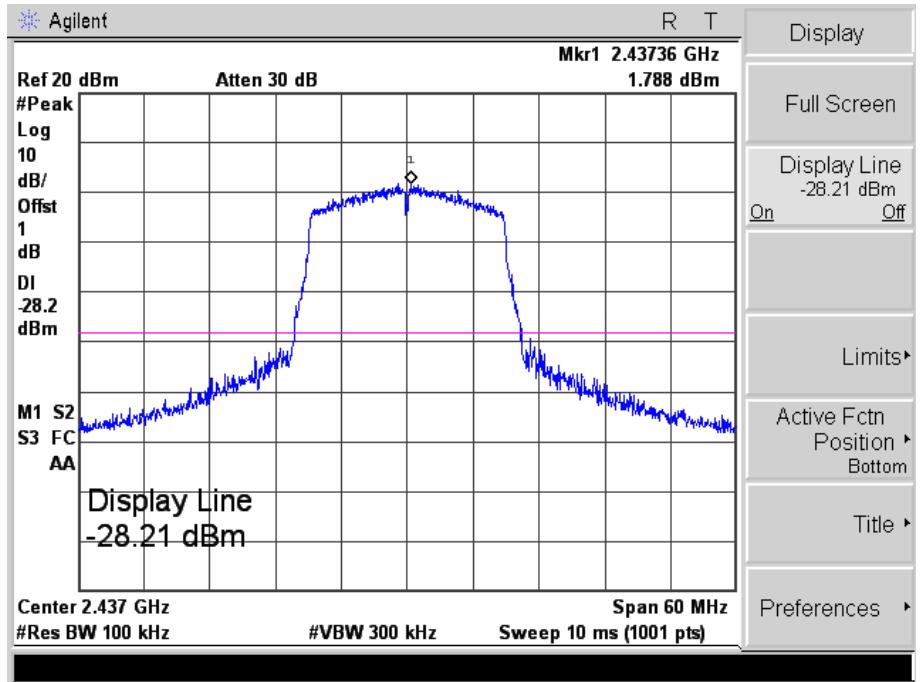



802.11n-HT20\_MCS7

High

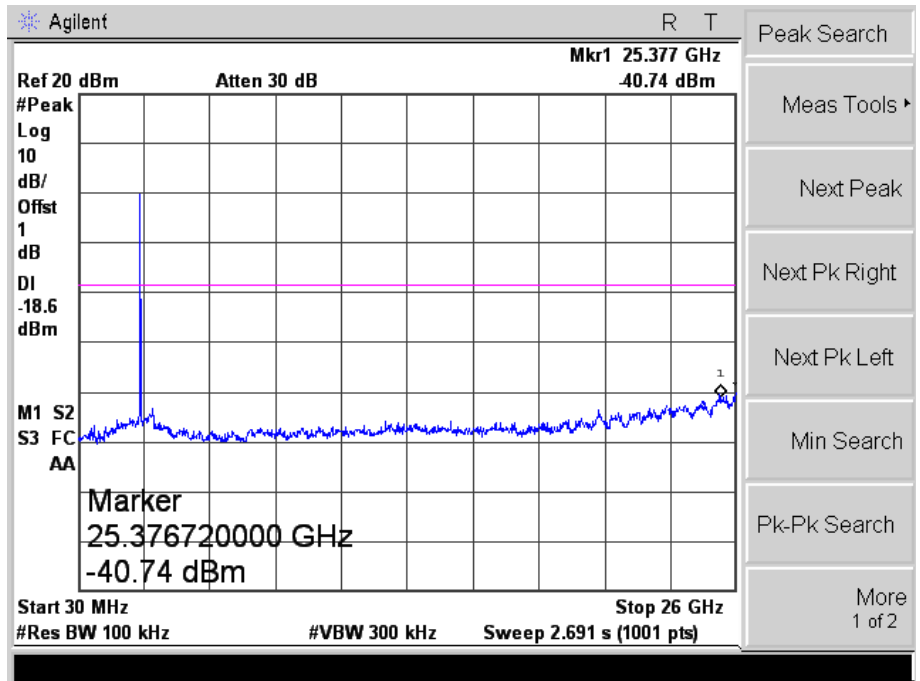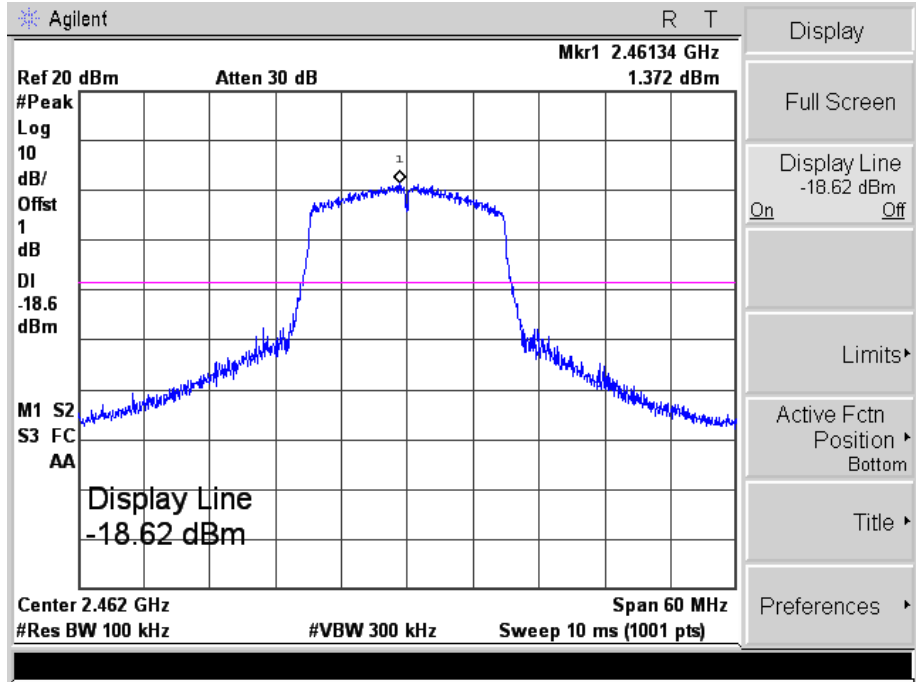



802.11n-HT40\_MCS7

Low

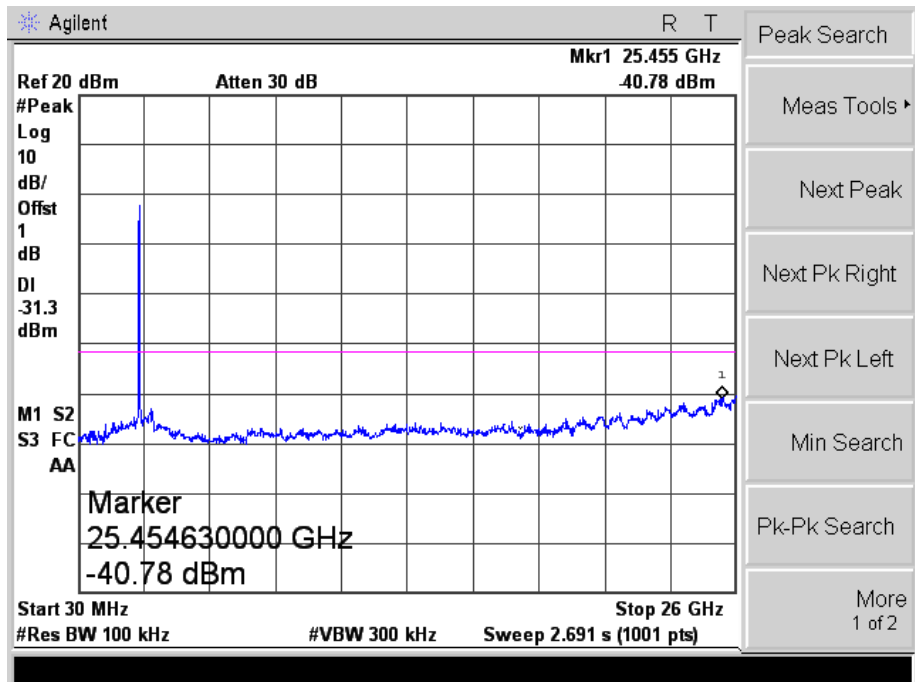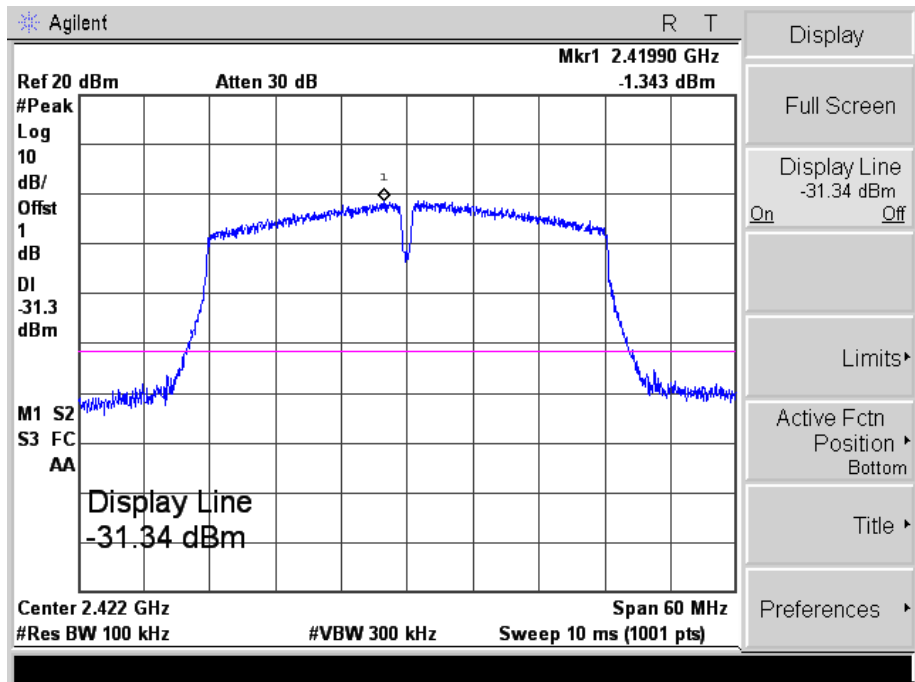

802.11n-HT40\_MCS7



Middle

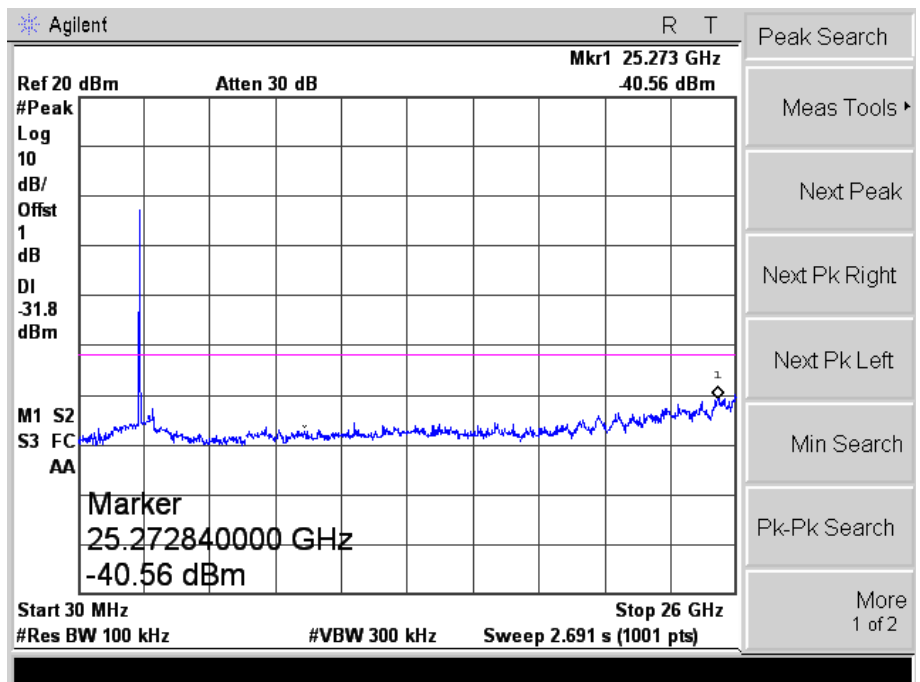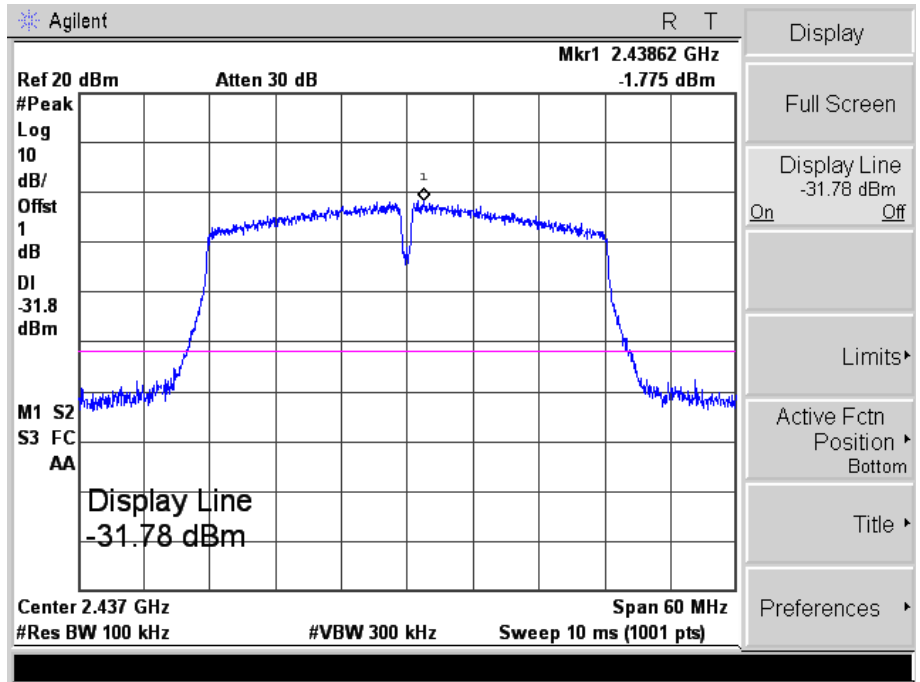



802.11n-HT40\_MCS7



High

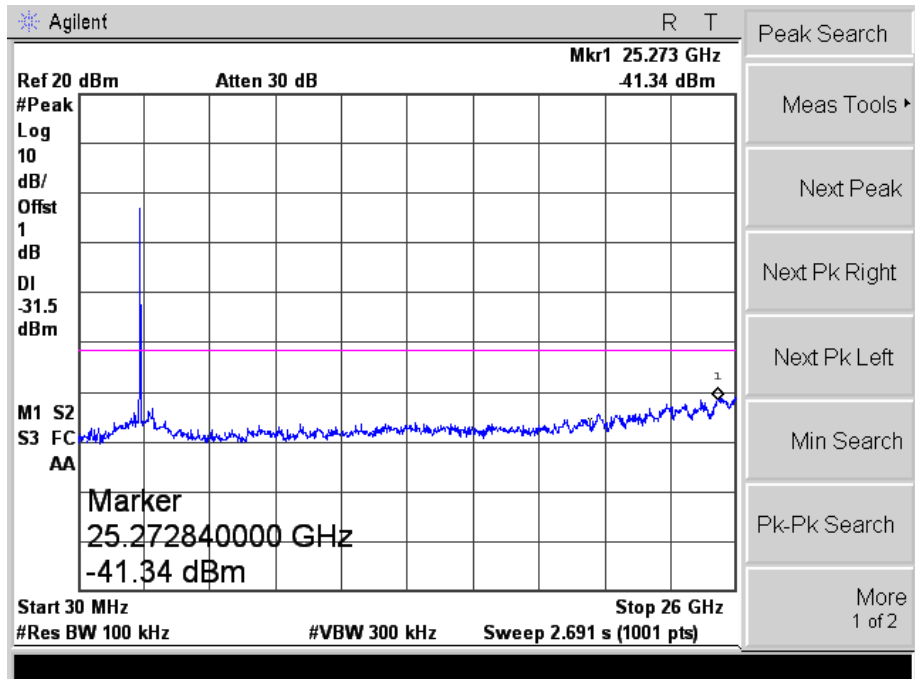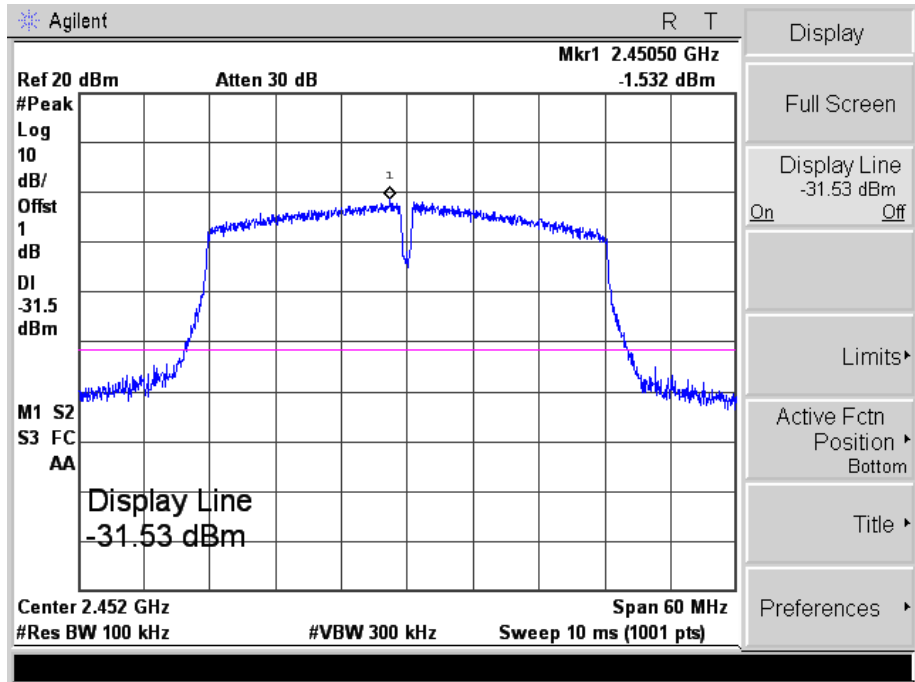

➤ Antenna 2



802.11b\_11Mbps

Low

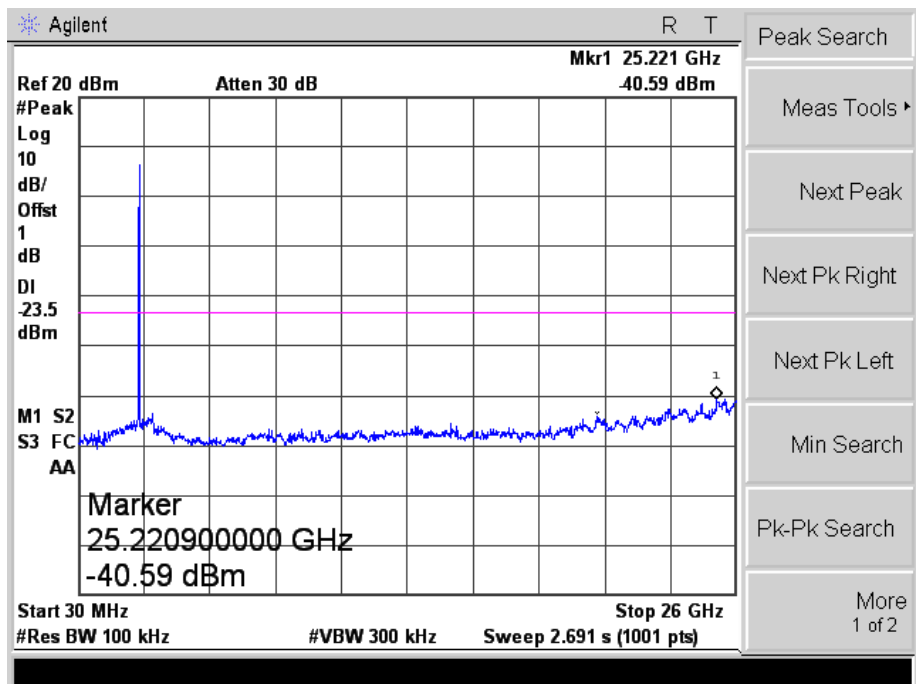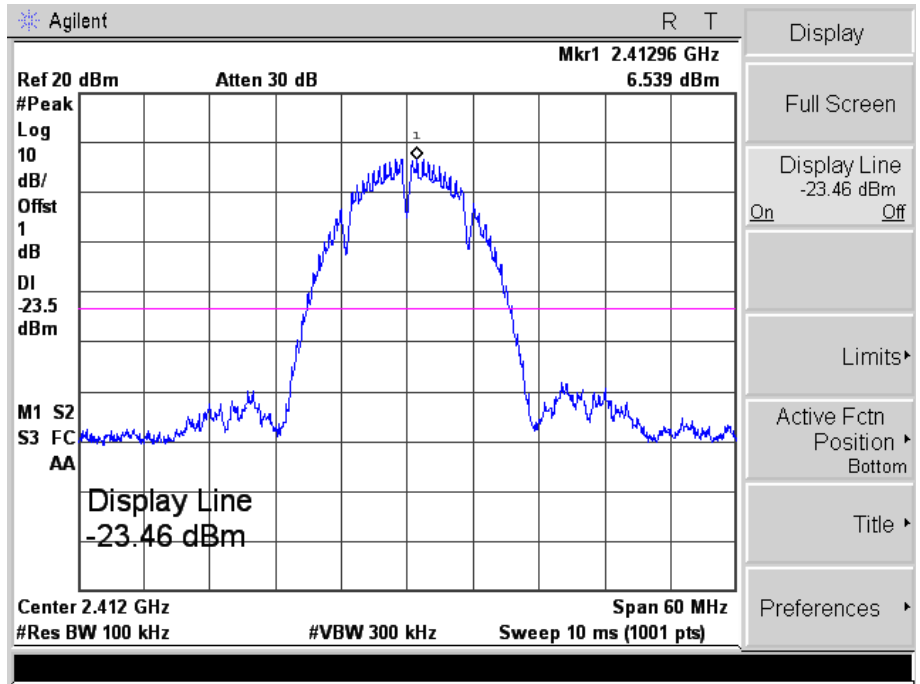



802.11b\_11Mbps

Middle

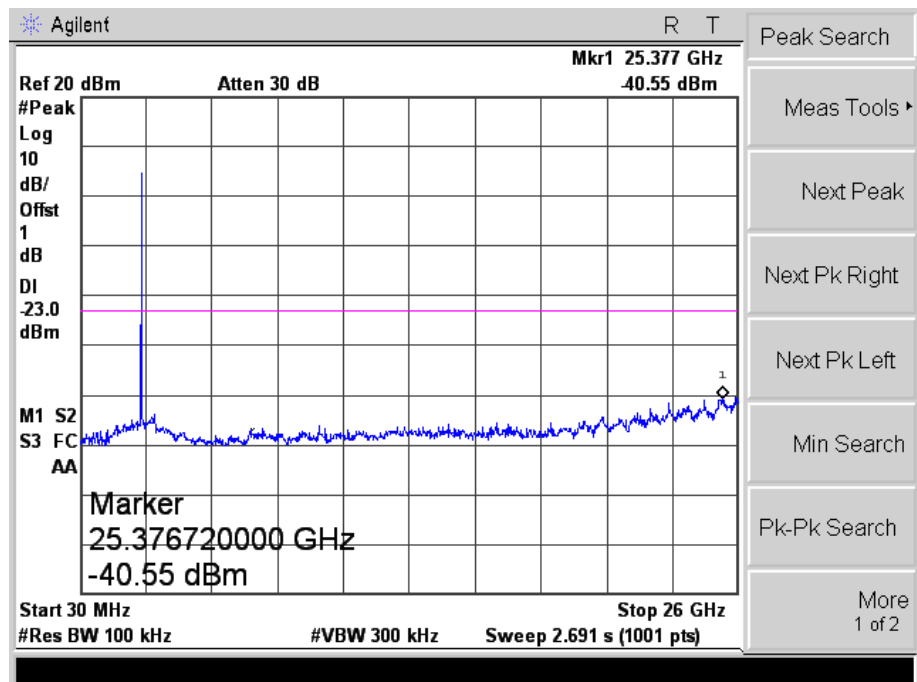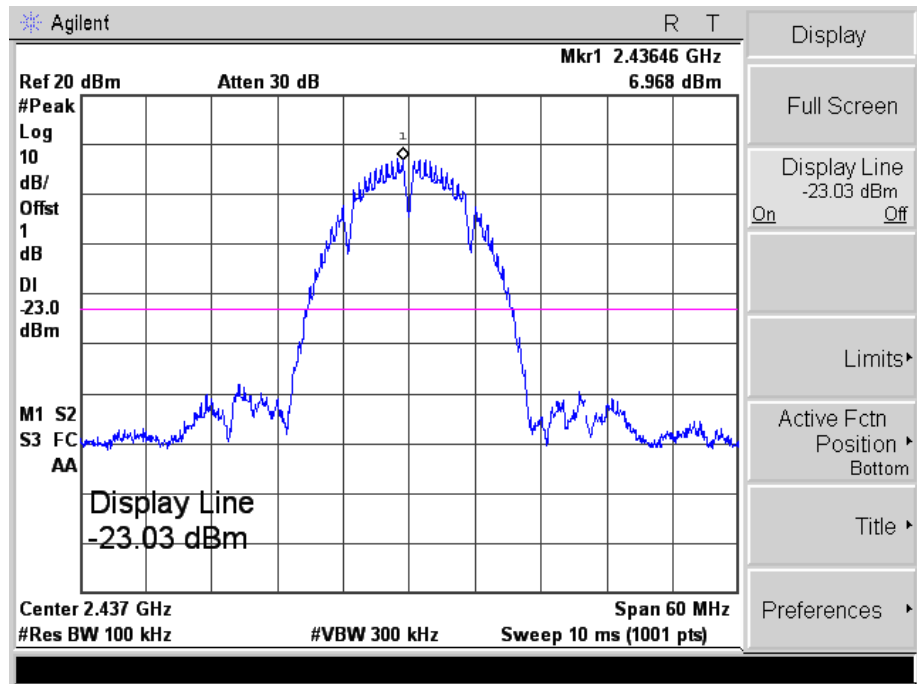



802.11b\_11Mbps

High

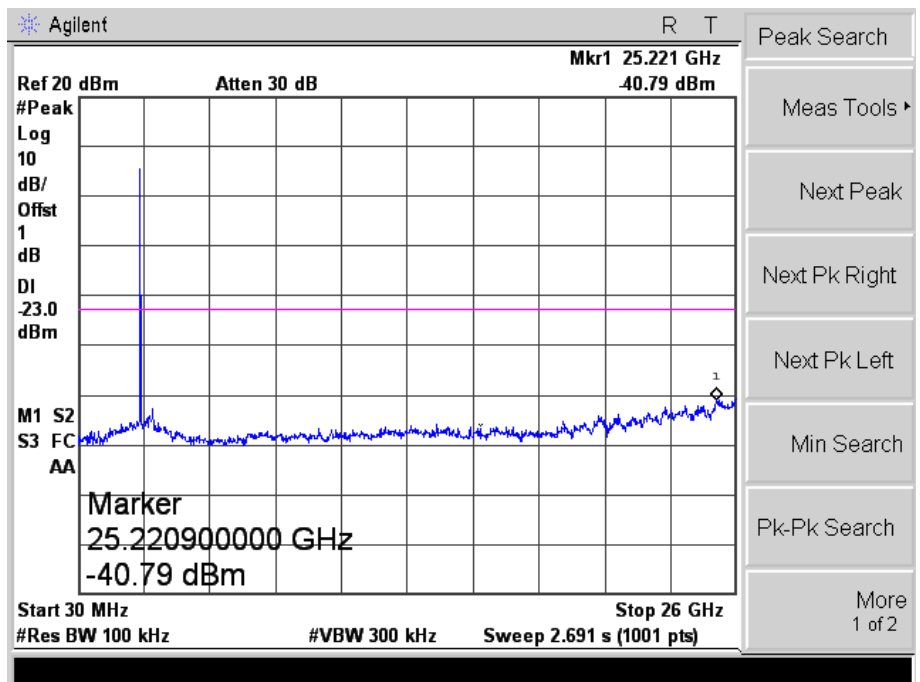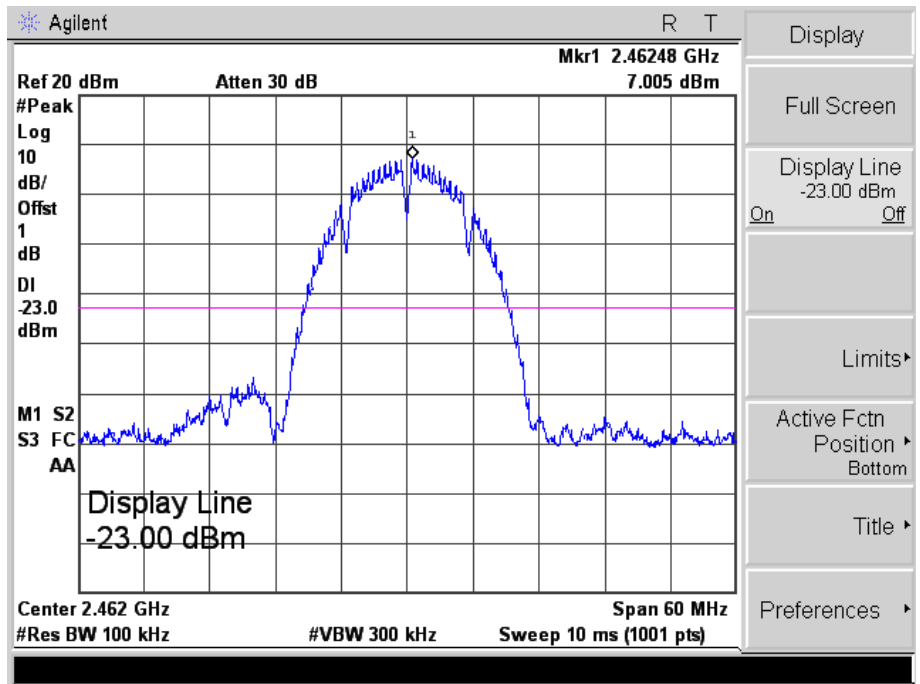



802.11g\_54Mbps

Low

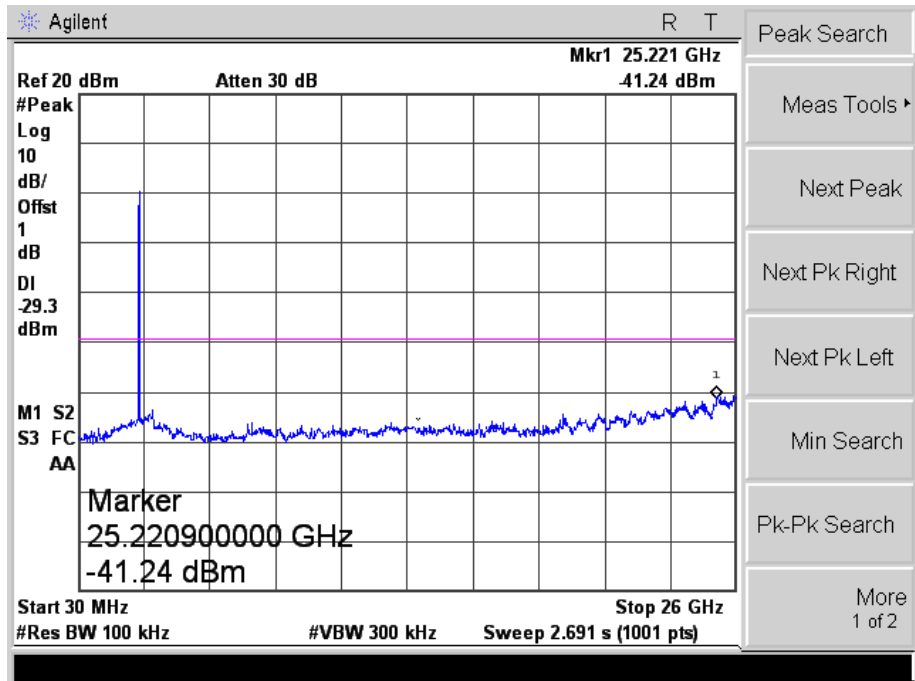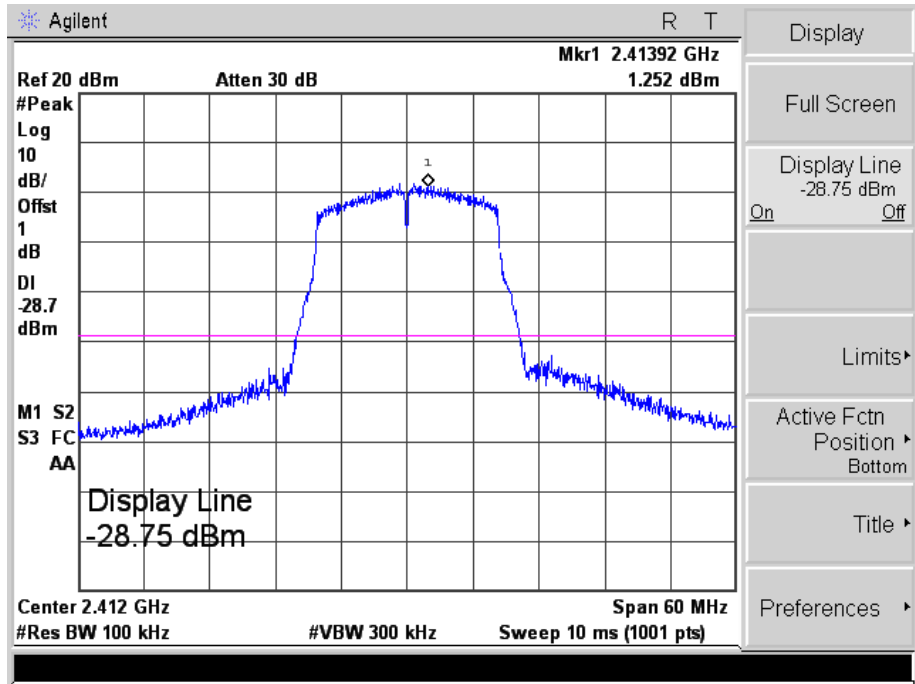



802.11g\_54Mbps

Middle

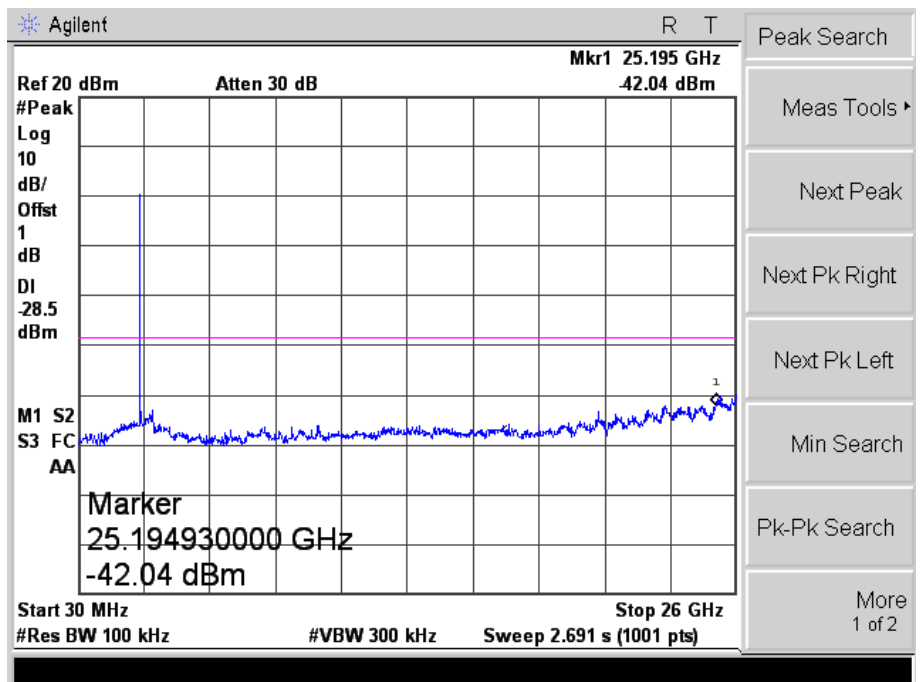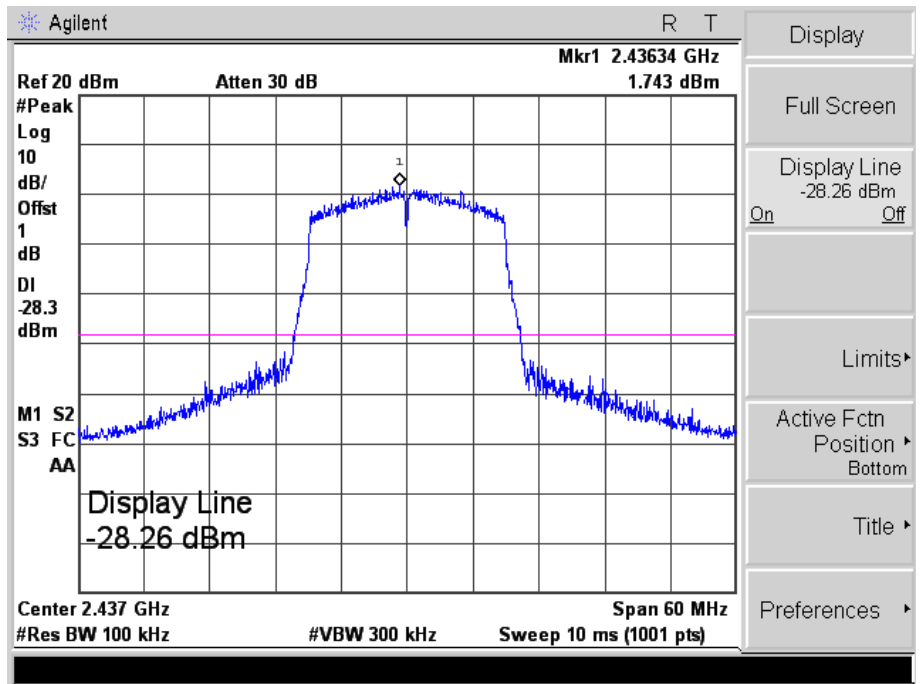



802.11g\_54Mbps

High

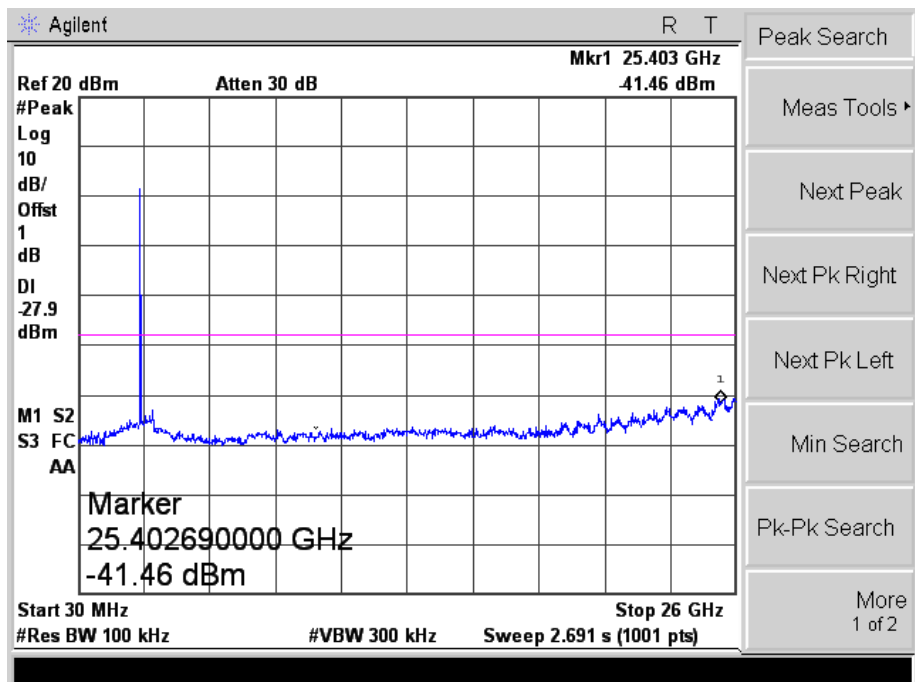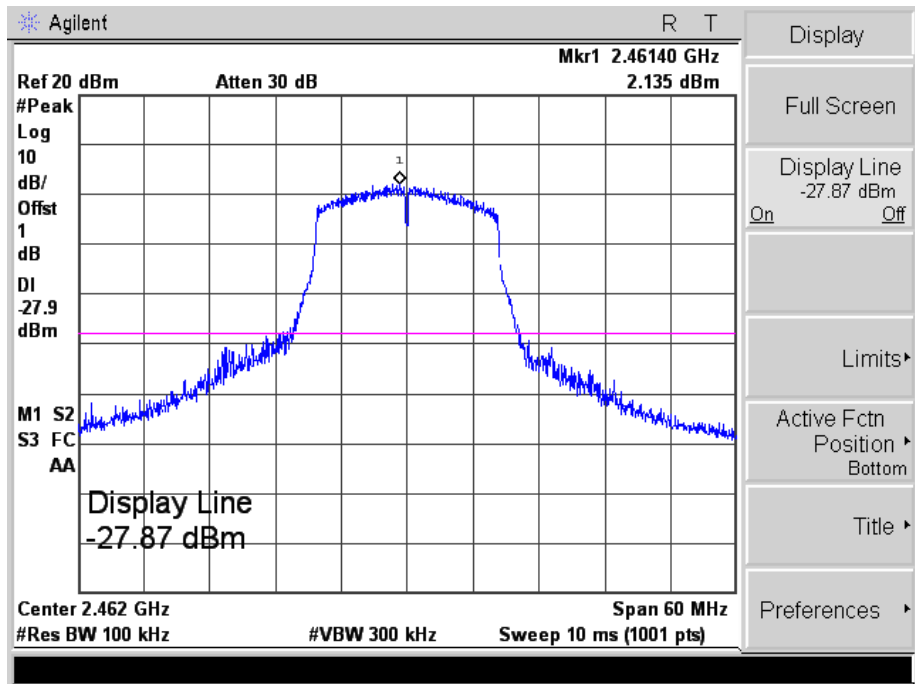

802.11n-HT20\_MCS7



Low

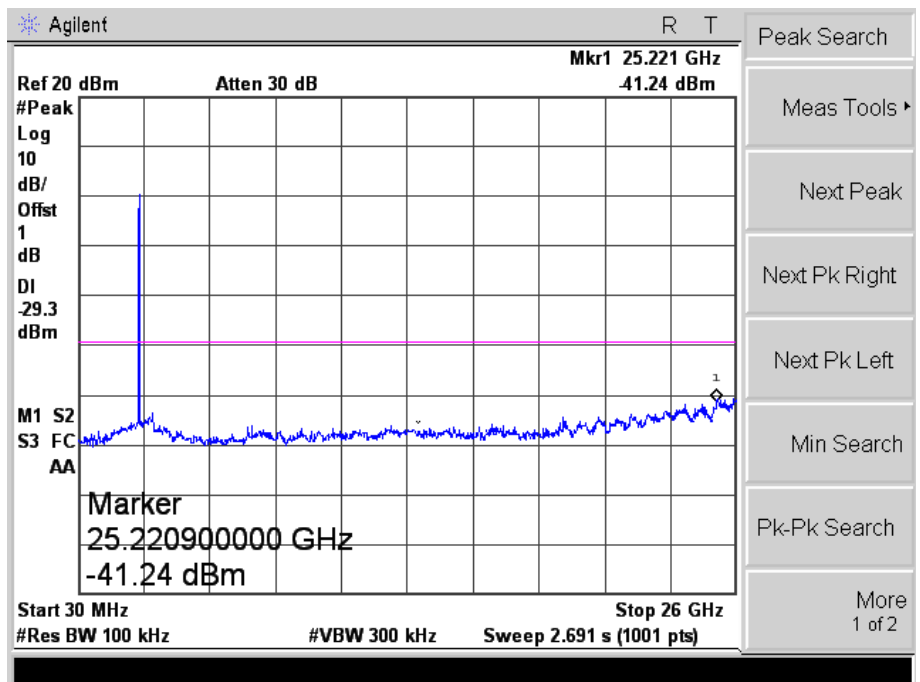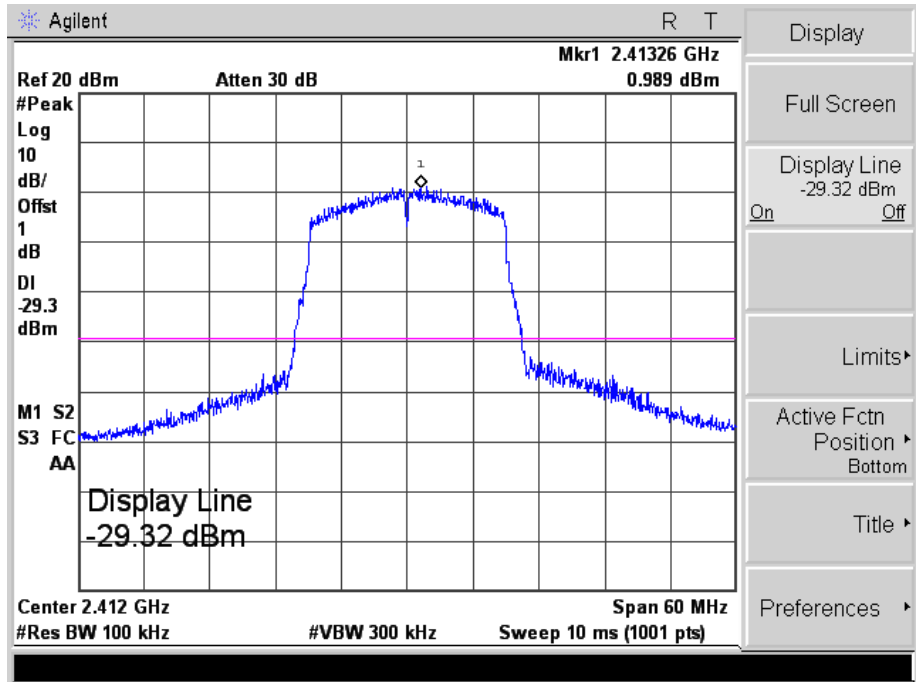





802.11n-HT20\_MCS7

Middle

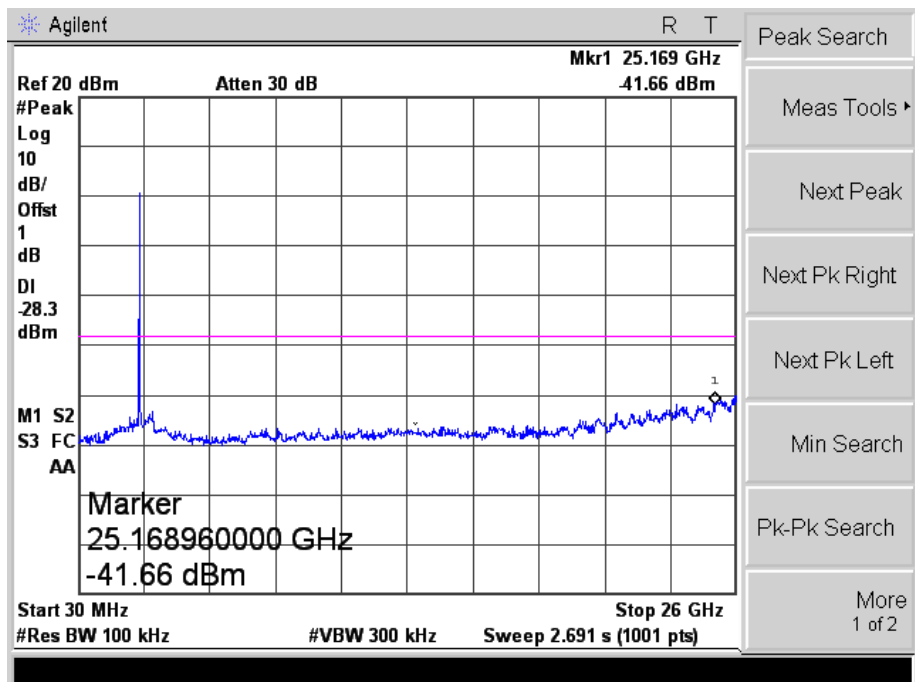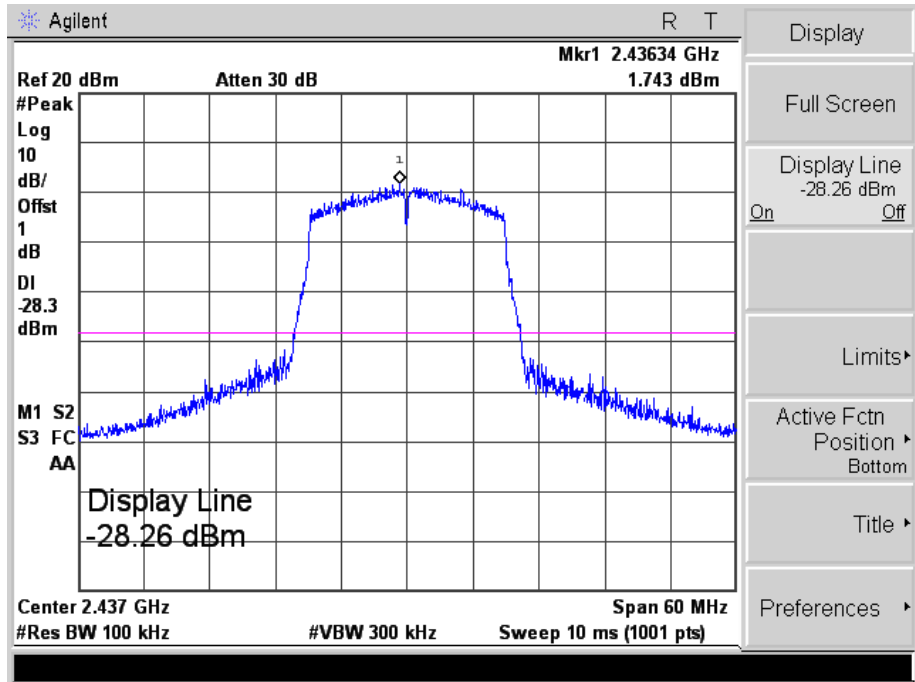



802.11n-HT20\_MCS7

High

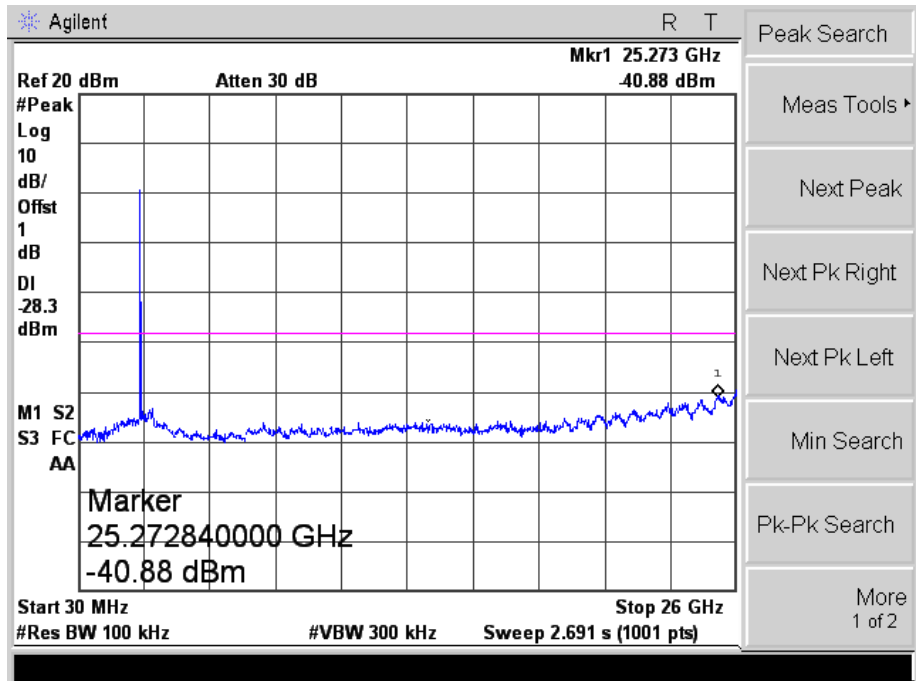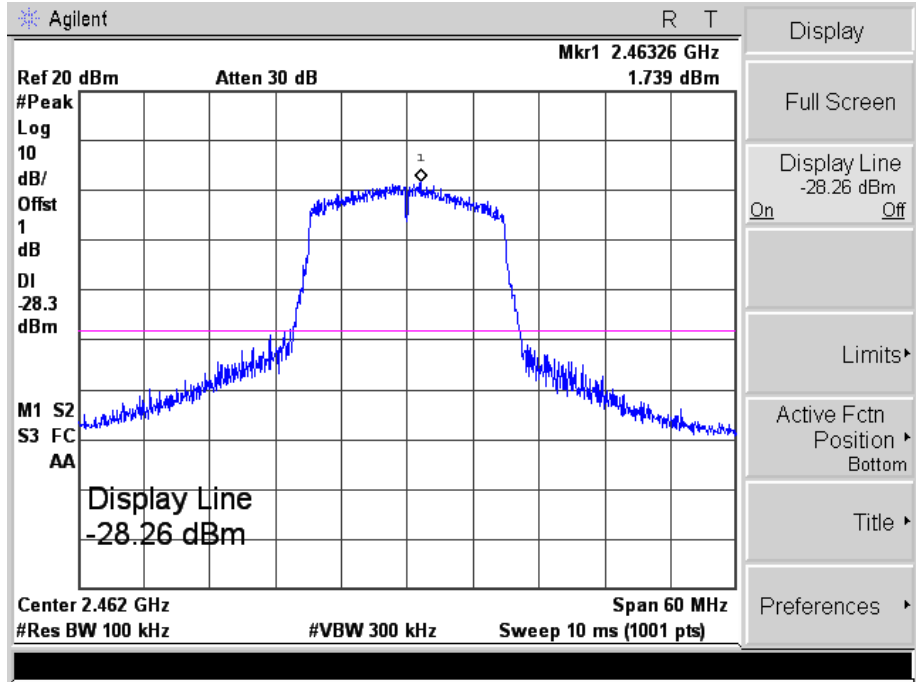



802.11n-HT40\_MCS7

Low

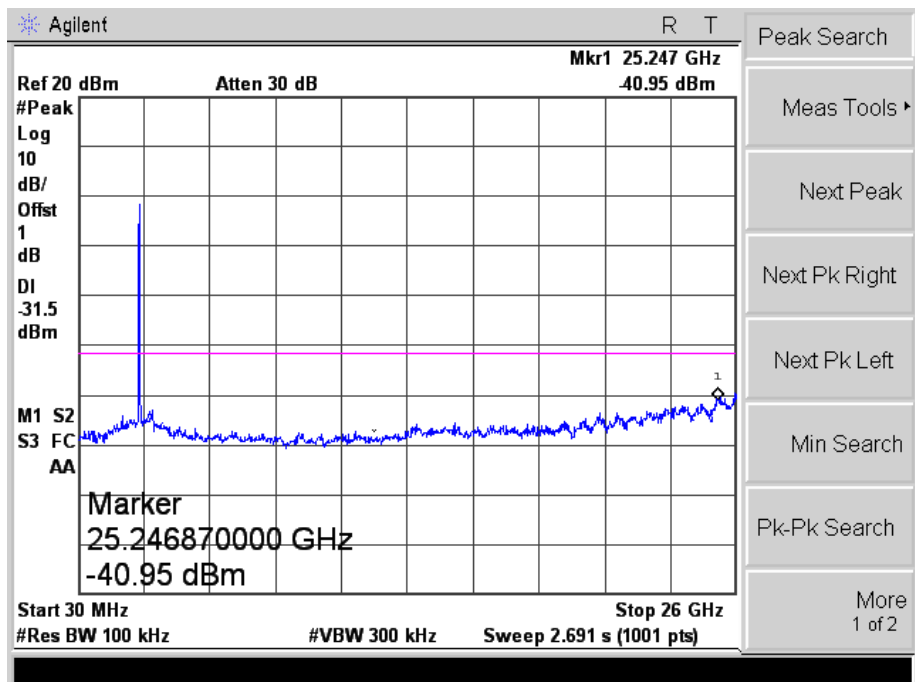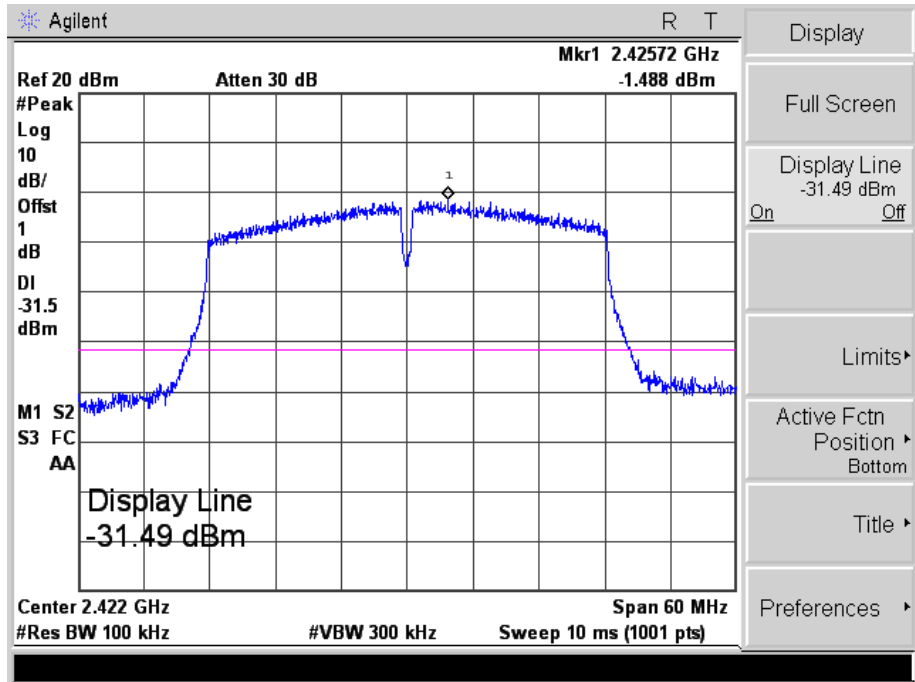



802.11n-HT40\_MCS7

Middle

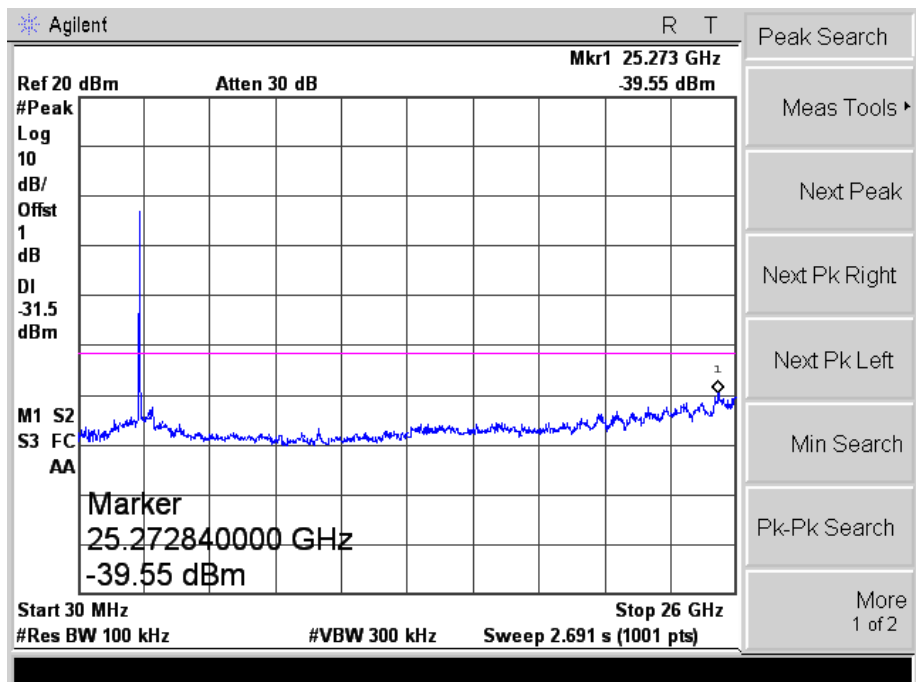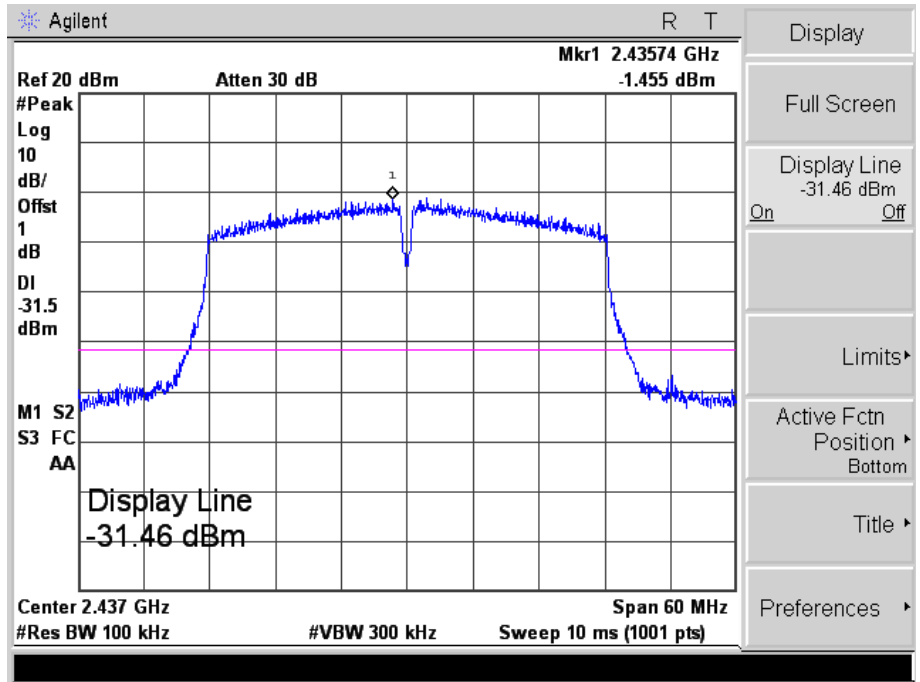

802.11n-HT40\_MCS7

High

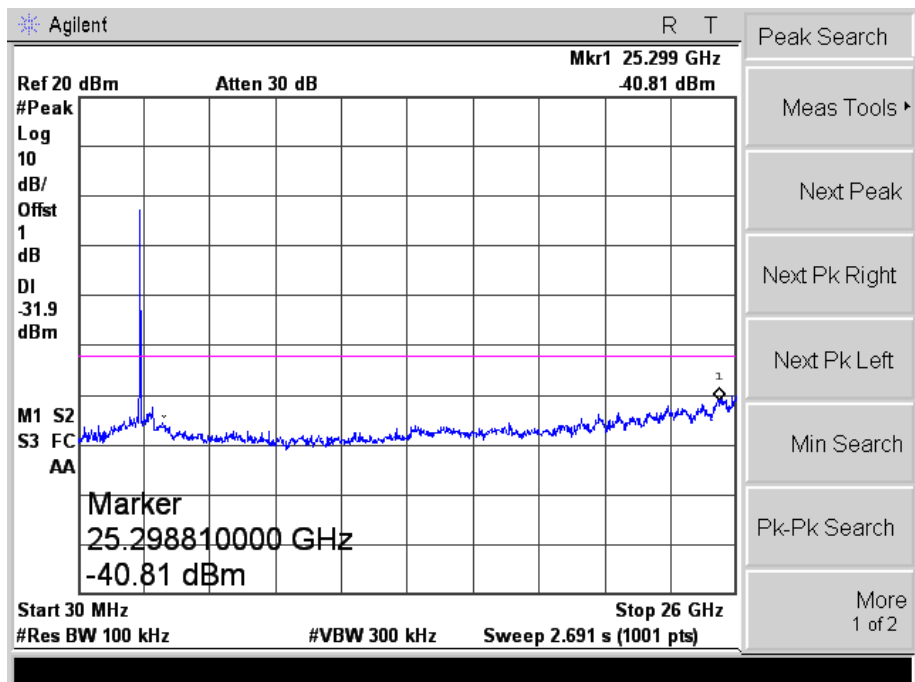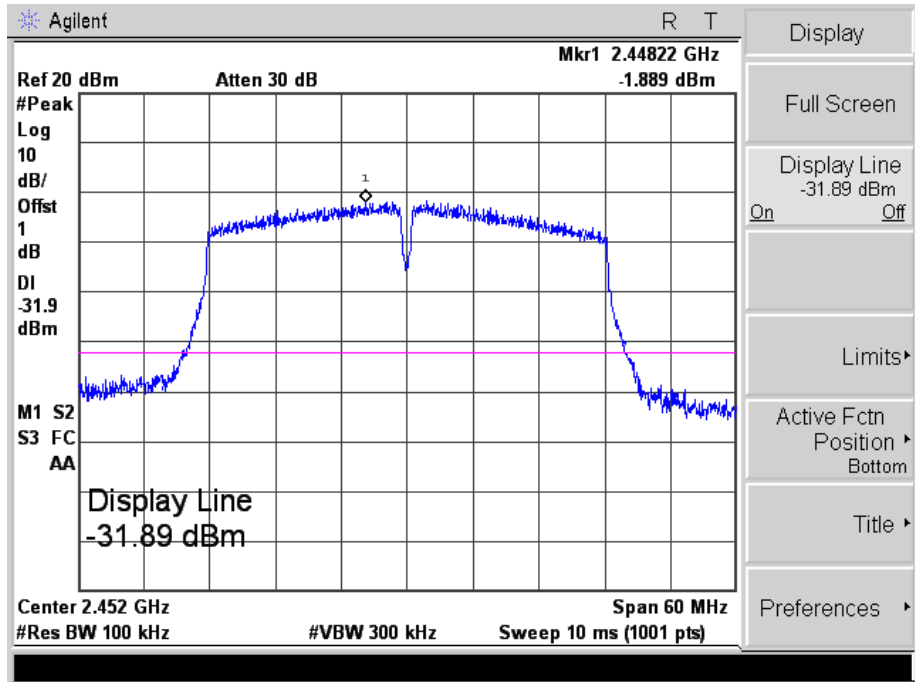


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

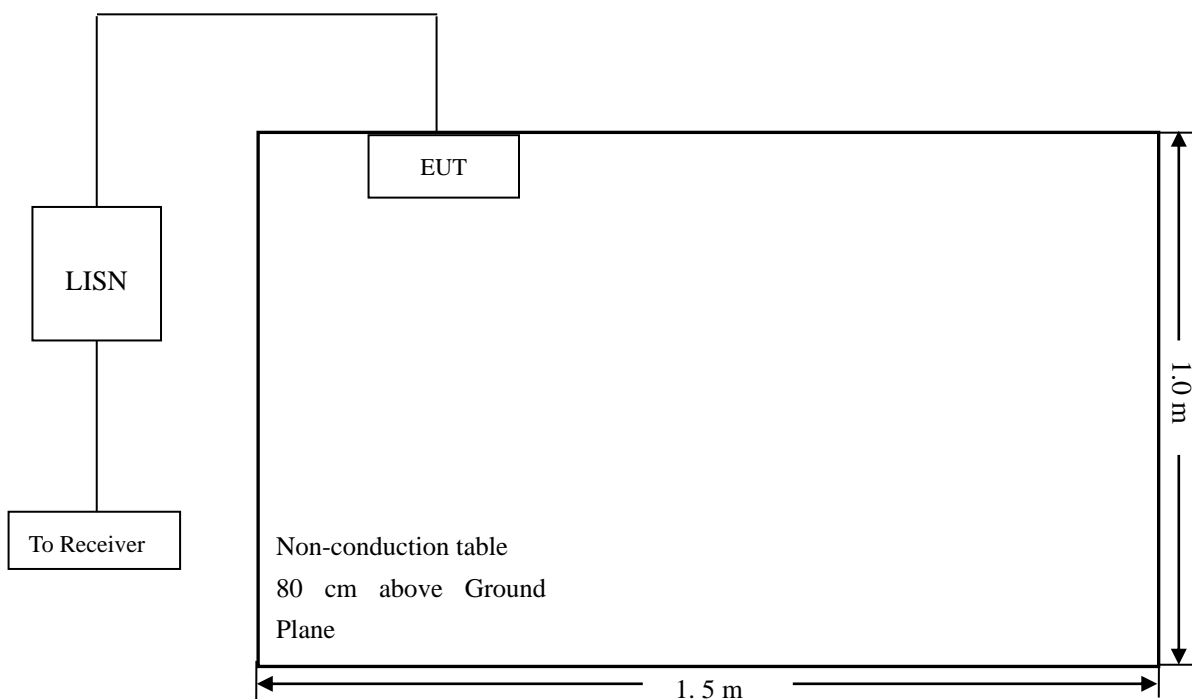


### 10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal


### 10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

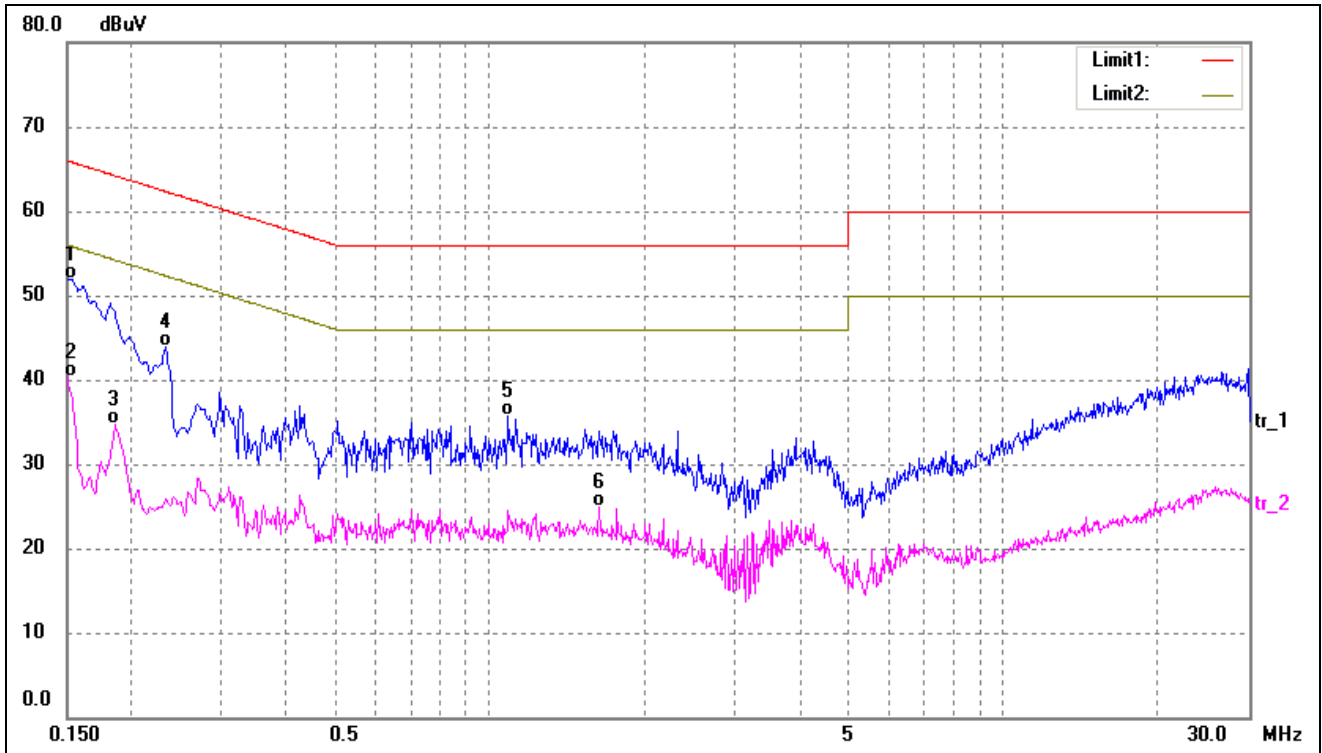

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	41.90	9.95	51.85	65.78	-13.93	QP
2	0.1539	30.33	9.95	40.28	55.78	-15.50	AVG
3	0.1860	24.69	9.96	34.65	54.21	-19.56	AVG
4	0.2340	33.90	10.00	43.90	62.30	-18.40	QP
5	1.0860	25.43	10.37	35.80	56.00	-20.20	QP
6	1.6300	14.52	10.37	24.89	46.00	-21.11	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

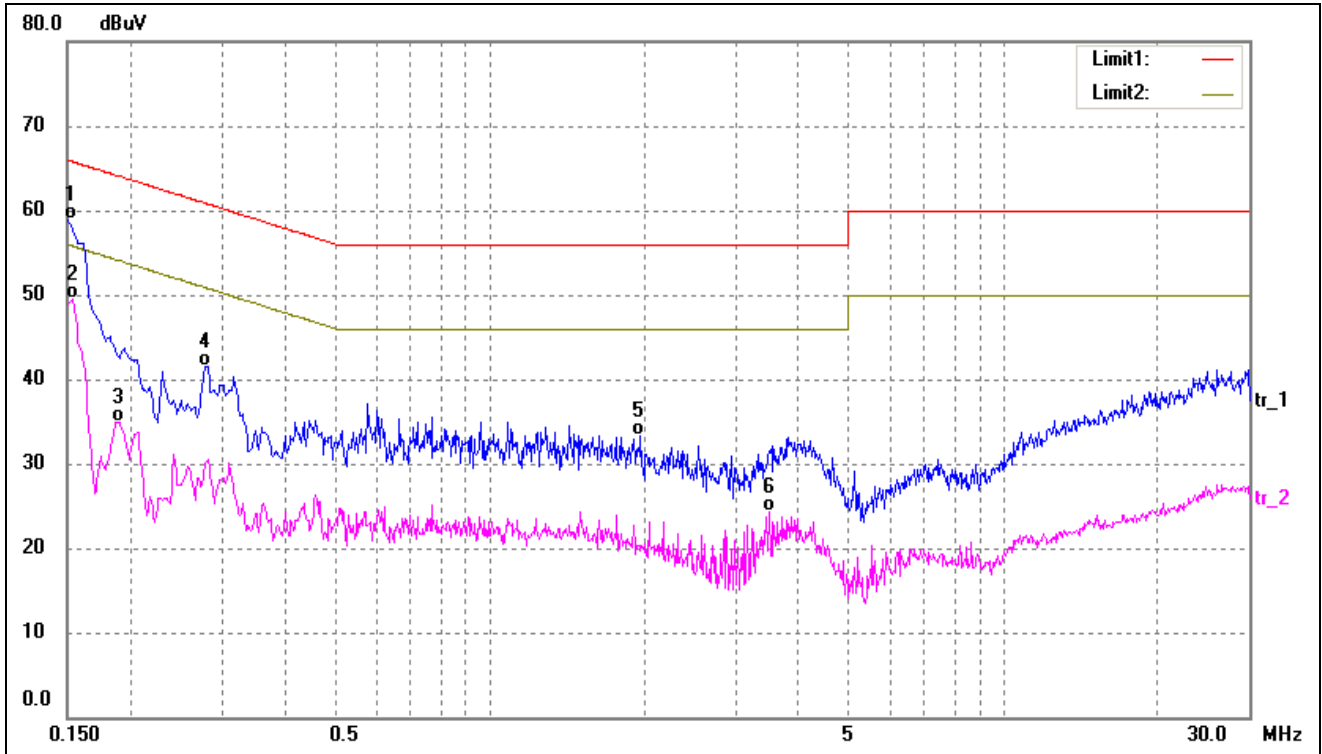

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	48.88	9.95	58.83	65.99	-7.16	QP
2*	0.1539	39.51	9.95	49.46	55.78	-6.32	AVG
3	0.1900	25.01	9.96	34.97	54.03	-19.06	AVG
4	0.2780	31.55	10.01	41.56	60.87	-19.31	QP
5	1.9660	22.97	10.37	33.34	56.00	-22.66	QP
6	3.4980	14.03	10.35	24.38	46.00	-21.62	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*