

# FCC Part 15C Measurement and Test Report

For

**Shenzhen QiyueOptronics Company Limited**

**Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,**

**Shangmeilin, Futian District,Shenzhen, China**

**FCC ID:XOMD86D18**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>86 INCH SMART 4K UHD TV</u>
<b>Tested Model:</b>	<u>RNSMU8615</u>
<b>Report No.:</b>	<u>WTG19G10073464W</u>
<b>Sample Receipt Date:</b>	<u>2019-10-24</u>
<b>Tested Date:</b>	<u>2019-10-24 to 2019-11-05</u>
<b>Issued Date:</b>	<u>2019-11-05</u>
<b>Tested By:</b>	<u>Rode Liu / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>JandySo / PSQ Manager</u>
<b>Prepared By:</b>	

*Rode Liu*  
*Silin Chen*  
*JandySo*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
<b>2. SUMMARY OF TEST RESULTS</b>	<b>10</b>
<b>3. RF EXPOSURE</b>	<b>11</b>
3.1 STANDARD APPLICABLE	11
3.2 TEST RESULT	11
<b>4. ANTENNA REQUIREMENT</b>	<b>12</b>
4.1 STANDARD APPLICABLE	12
4.2 EVALUATION INFORMATION	12
<b>5. POWER SPECTRAL DENSITY</b>	<b>13</b>
5.1 STANDARD APPLICABLE	13
5.2 TEST PROCEDURE	13
5.3 SUMMARY OF TEST RESULTS/PLOTS	13
<b>6. DTS BANDWIDTH</b>	<b>22</b>
6.1 STANDARD APPLICABLE	22
6.2 TEST PROCEDURE	22
6.3 SUMMARY OF TEST RESULTS/PLOTS	22
<b>7. RF OUTPUT POWER</b>	<b>31</b>
7.1 STANDARD APPLICABLE	31
7.2 TEST PROCEDURE	31
7.3 SUMMARY OF TEST RESULTS/PLOTS	31
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>33</b>
8.1 STANDARD APPLICABLE	33
8.2 TEST PROCEDURE	33
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	35
8.4 SUMMARY OF TEST RESULTS/PLOTS	35
<b>9. OUT OF BAND EMISSIONS</b>	<b>42</b>
9.1 STANDARD APPLICABLE	42
9.2 TEST PROCEDURE	42
9.3 SUMMARY OF TEST RESULTS/PLOTS	43
<b>10. CONDUCTED EMISSIONS</b>	<b>92</b>
10.1 TEST PROCEDURE	92
10.2 BASIC TEST SETUP BLOCK DIAGRAM	92
10.3 TEST RECEIVER SETUP	92
10.4 SUMMARY OF TEST RESULTS/PLOTS	92

## Report version

Version No.	Date of issue	Description
Rev.00	2019-11-05	Original
/	/	/

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen QiyueOptronics Company Limited  
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road  
 128, Shangmeilin, Futian District, Shenzhen, China  
 Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED  
 BRANCH  
 Address of manufacturer: SEIYU INDUSTRIAL PARK,DA SAN VILLAGE,DA SHUI  
 KENG,GUANLAN TOWN,LONGHUA NEW DISTRICT,  
 SHENZHEN,P.R.C

General Description of EUT	
Product Name:	86 INCH SMART 4K UHD TV
Trade Name:	RCA smarTVirtuoso,RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA
Model No.:	RNSMU8615
Adding Model(s):	XXXXXXXXXXXXXXXXXXXXX86XXXXXXXXXXXXXXXXXXXXX (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC 100-240V
Power Adapter Model:	N/A
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model RNSMU8615, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	23.52dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	4.44 dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**:Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02**:Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

**662911 D01 Multiple Transmitter Output v02r01**: Emissions Testing of Transmitters with Multiple Outputs in the Same Band

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd.

EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25°C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has two integral antennas, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Connect the antenna port(s) to the spectrum analyzer input,
- b) Configure the spectrum analyzer as shown below:
- c) Center frequency = DTS channel center frequency
- d) Span = 1.5 times the DTS bandwidth
- e)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ ,  $VBW \geq 3 \times RBW$
- f) Sweep time = auto couple
- g) Detector = peak
- h) Trace mode = max hold
- i) Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- j) Use the peak marker function to determine the maximum amplitude level within the RBW.
- k) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




### 5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result (dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_11Mbps	2412	-8.56	-7.49	/	8
	2437	-7.60	-7.49	/	8
	2462	-7.86	-7.67	/	8
802.11g_54Mbps	2412	-14.83	-14.48	/	8
	2437	-14.38	-15.01	/	8
	2462	-14.89	-14.22	/	8
802.11n-HT20_MCS7	2412	-14.10	-14.91	-11.48	8
	2437	-15.51	-13.15	-11.16	8
	2462	-14.77	-15.28	-12.01	8
802.11n-HT40_MCS7	2422	-20.72	-19.90	-17.28	8
	2437	-20.80	-20.20	-17.48	8
	2452	-20.34	-19.43	-16.85	8

Please refer to the following test plots:




➤ Antenna 1
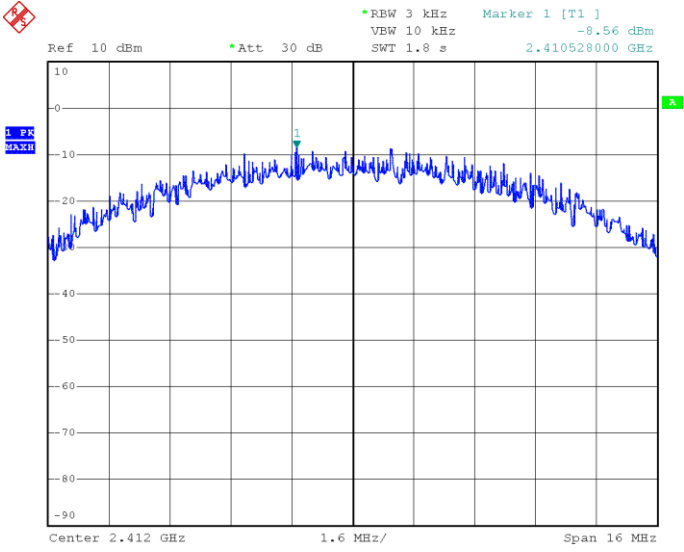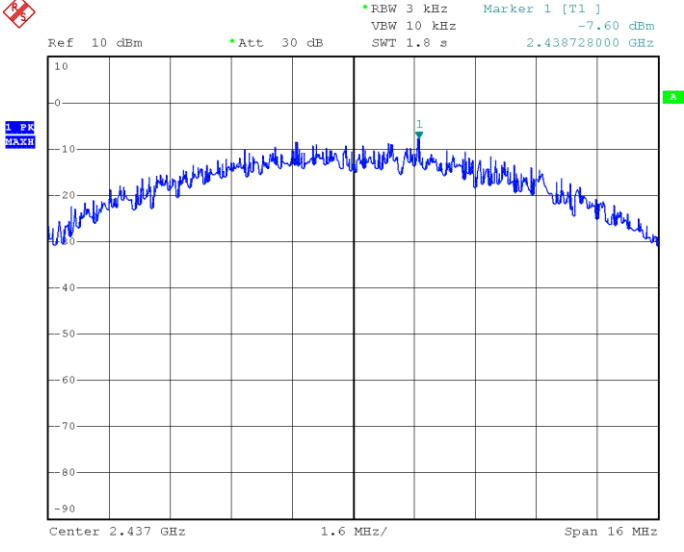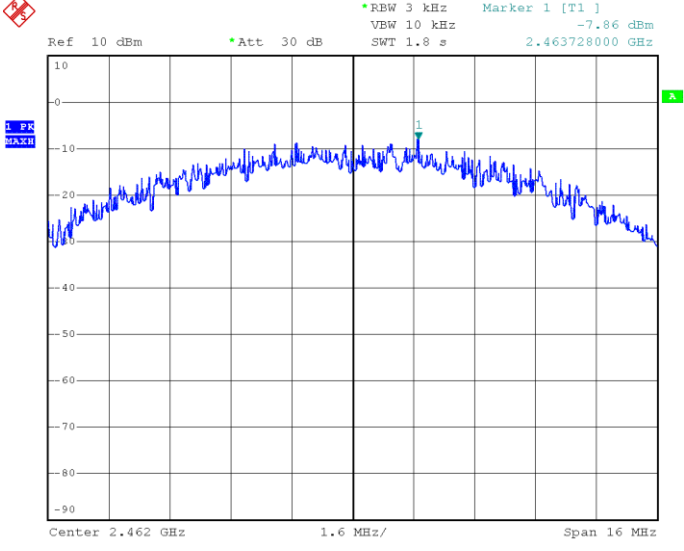
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

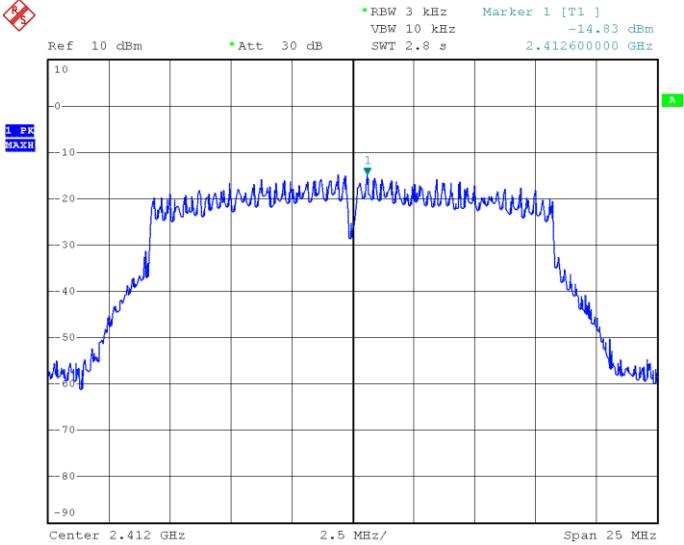
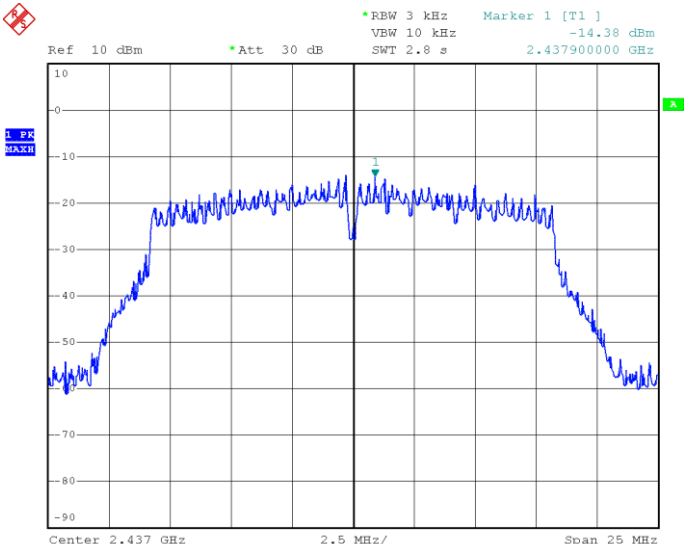
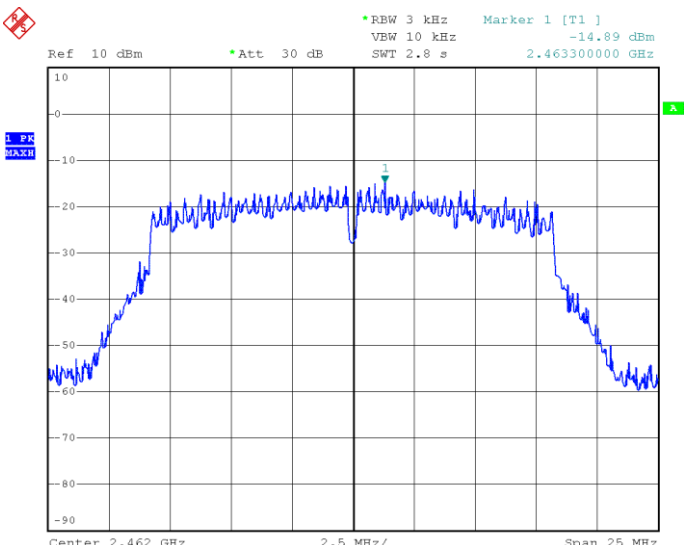
<p>802.11g-Low</p>	 <p>Ref 10 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -14.83 dBm          VBW 10 kHz    SWT 2.8 s    2.412600000 GHz</p> <p>Center 2.412 GHz    2.5 MHz/    Span 25 MHz</p>
<p>802.11g-Middle</p>	 <p>Ref 10 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -14.38 dBm          VBW 10 kHz    SWT 2.8 s    2.437900000 GHz</p> <p>Center 2.437 GHz    2.5 MHz/    Span 25 MHz</p>
<p>802.11g-High</p>	 <p>Ref 10 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -14.89 dBm          VBW 10 kHz    SWT 2.8 s    2.463300000 GHz</p> <p>Center 2.462 GHz    2.5 MHz/    Span 25 MHz</p>

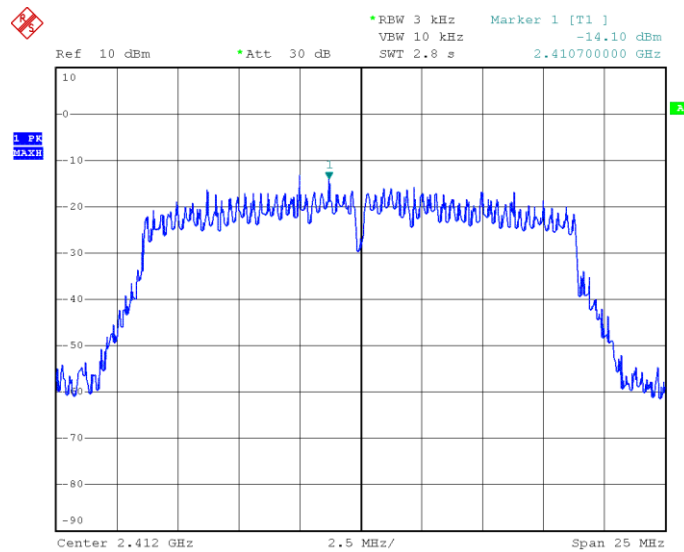
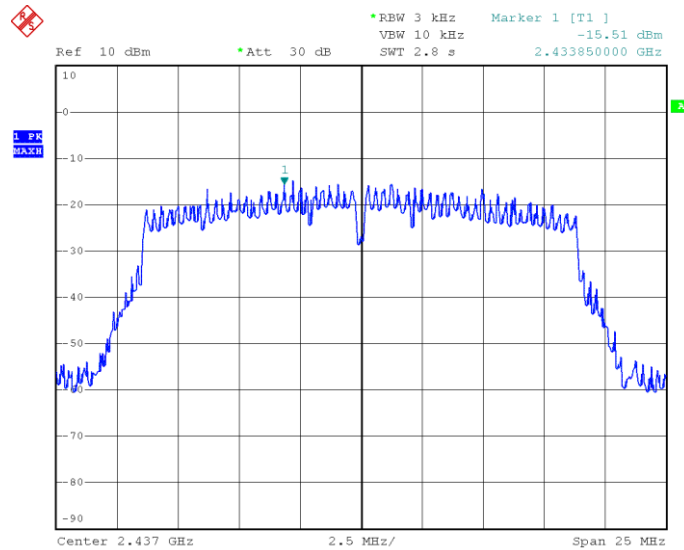
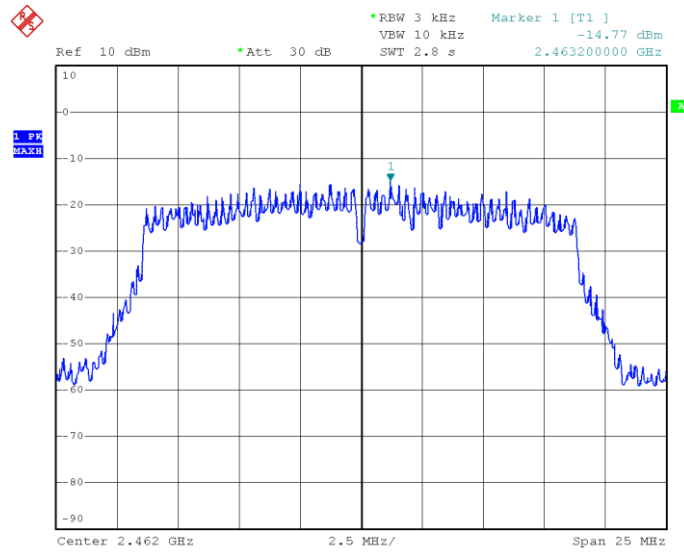
<p>802.11n-HT20-Low</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -14.10 dBm              VBW 10 kHz      SWT 2.8 s      2.410700000 GHz         </p> <p>Center 2.412 GHz      2.5 MHz/      Span 25 MHz</p>
<p>802.11n-HT20-Middle</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -15.51 dBm              VBW 10 kHz      SWT 2.8 s      2.433850000 GHz         </p> <p>Center 2.437 GHz      2.5 MHz/      Span 25 MHz</p>
<p>802.11n-HT20-High</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -14.77 dBm              VBW 10 kHz      SWT 2.8 s      2.463200000 GHz         </p> <p>Center 2.462 GHz      2.5 MHz/      Span 25 MHz</p>

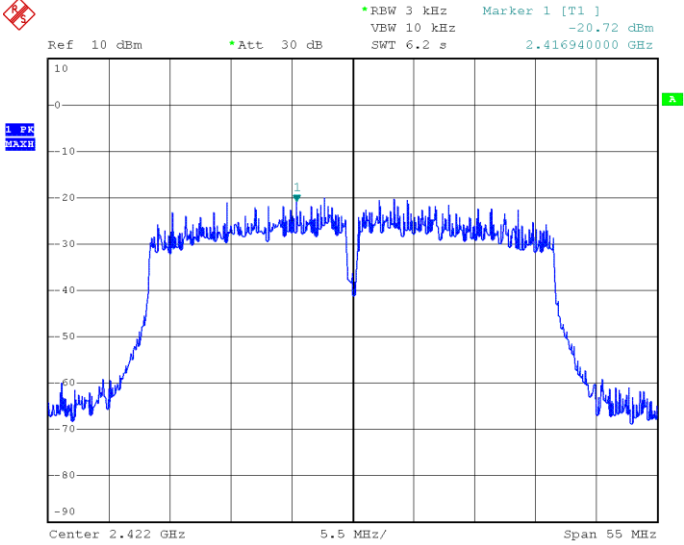
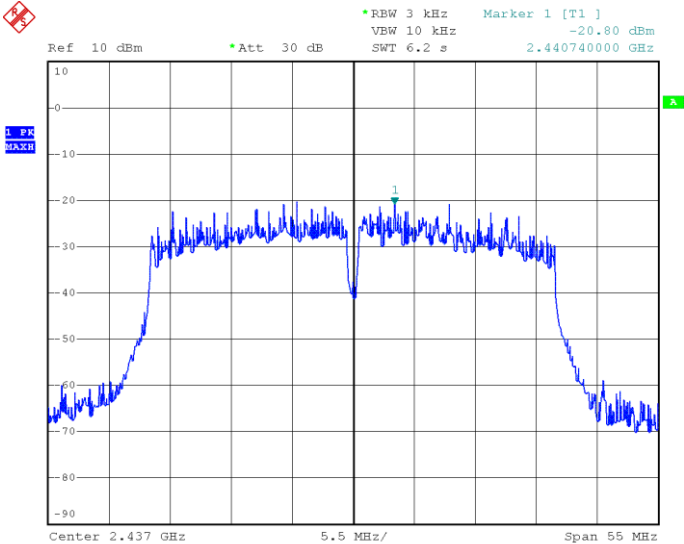
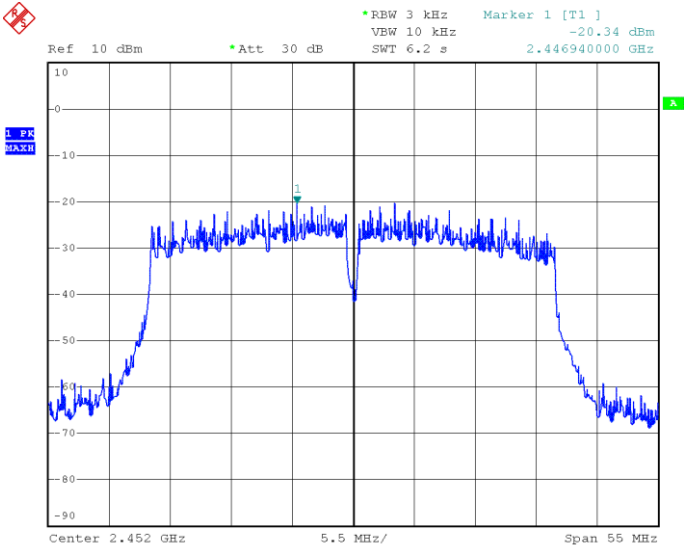





<p>802.11n-HT40-Low</p>	 <p> <span style="color: red;">✖</span> <span style="color: green;">*</span>RBW 3 kHz Marker 1 [T1 ]  <span style="color: green;">*</span>Att 30 dB VBW 10 kHz -20.72 dBm            Ref 10 dBm SWT 6.2 s 2.416940000 GHz  <span style="color: blue;">1</span> PK <span style="color: blue;">MAXH</span> <span style="color: green;">▶</span>            Center 2.422 GHz 5.5 MHz/ Span 55 MHz         </p>
<p>802.11n-HT40-Middle</p>	 <p> <span style="color: red;">✖</span> <span style="color: green;">*</span>RBW 3 kHz Marker 1 [T1 ]  <span style="color: green;">*</span>Att 30 dB VBW 10 kHz -20.80 dBm            Ref 10 dBm SWT 6.2 s 2.440740000 GHz  <span style="color: blue;">1</span> PK <span style="color: blue;">MAXH</span> <span style="color: green;">▶</span>            Center 2.437 GHz 5.5 MHz/ Span 55 MHz         </p>
<p>802.11n-HT40-High</p>	 <p> <span style="color: red;">✖</span> <span style="color: green;">*</span>RBW 3 kHz Marker 1 [T1 ]  <span style="color: green;">*</span>Att 30 dB VBW 10 kHz -20.34 dBm            Ref 10 dBm SWT 6.2 s 2.446940000 GHz  <span style="color: blue;">1</span> PK <span style="color: blue;">MAXH</span> <span style="color: green;">▶</span>            Center 2.452 GHz 5.5 MHz/ Span 55 MHz         </p>

➤ Antenna 2
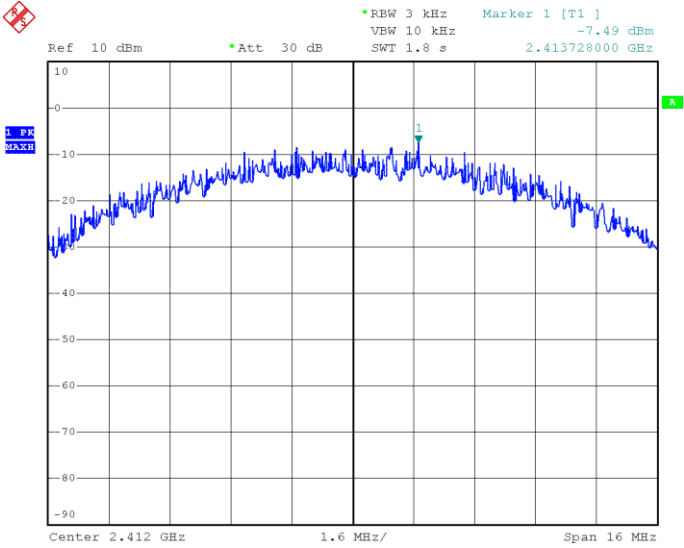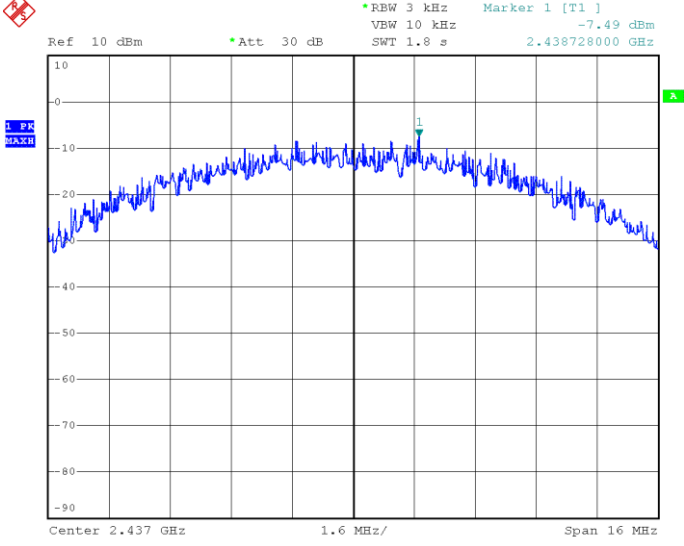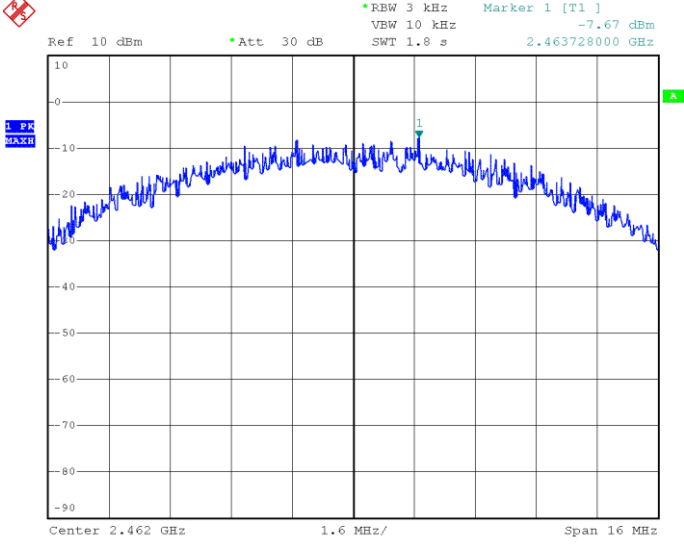
<p>802.11b-Low</p>	 <p>Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -7.49 dBm          VBW 10 kHz      SWT 1.8 s      2.413728000 GHz</p> <p>Center 2.412 GHz      1.6 MHz/      Span 16 MHz</p>
<p>802.11b-Middle</p>	 <p>Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -7.49 dBm          VBW 10 kHz      SWT 1.8 s      2.438728000 GHz</p> <p>Center 2.437 GHz      1.6 MHz/      Span 16 MHz</p>
<p>802.11b-High</p>	 <p>Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -7.67 dBm          VBW 10 kHz      SWT 1.8 s      2.463728000 GHz</p> <p>Center 2.462 GHz      1.6 MHz/      Span 16 MHz</p>
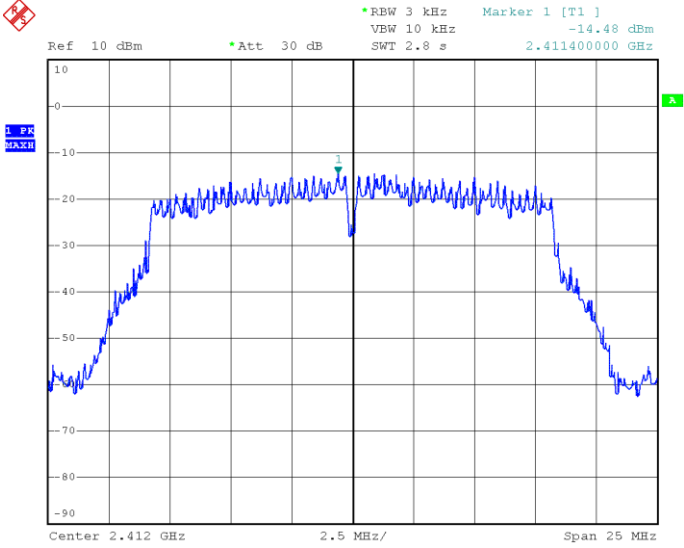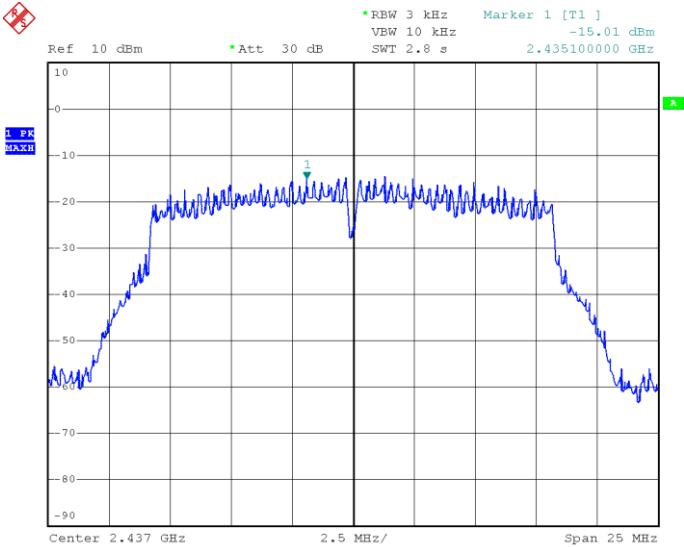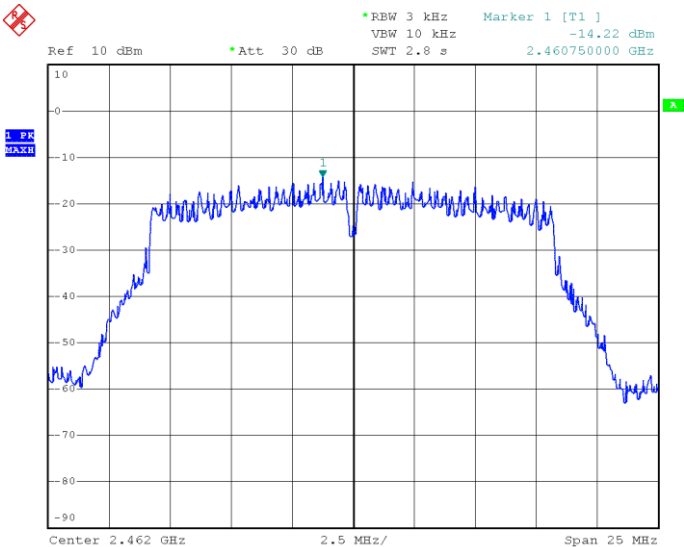
<p>802.11g-Low</p>	 <p>Ref 10 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -14.48 dBm          VBW 10 kHz SWT 2.8 s 2.411400000 GHz</p> <p>Center 2.412 GHz 2.5 MHz/ Span 25 MHz</p>
<p>802.11g-Middle</p>	 <p>Ref 10 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -15.01 dBm          VBW 10 kHz SWT 2.8 s 2.435100000 GHz</p> <p>Center 2.437 GHz 2.5 MHz/ Span 25 MHz</p>
<p>802.11g-High</p>	 <p>Ref 10 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -14.22 dBm          VBW 10 kHz SWT 2.8 s 2.460750000 GHz</p> <p>Center 2.462 GHz 2.5 MHz/ Span 25 MHz</p>
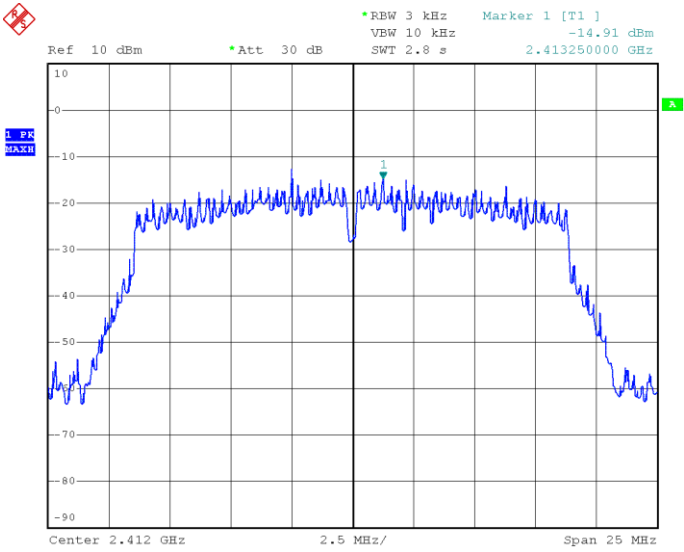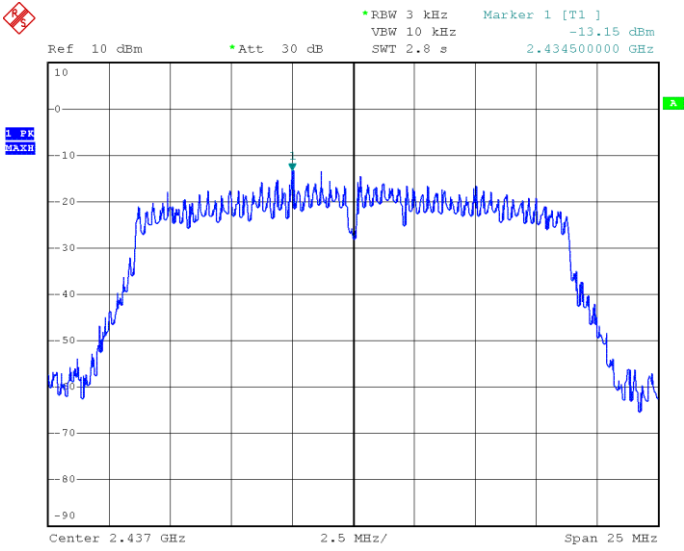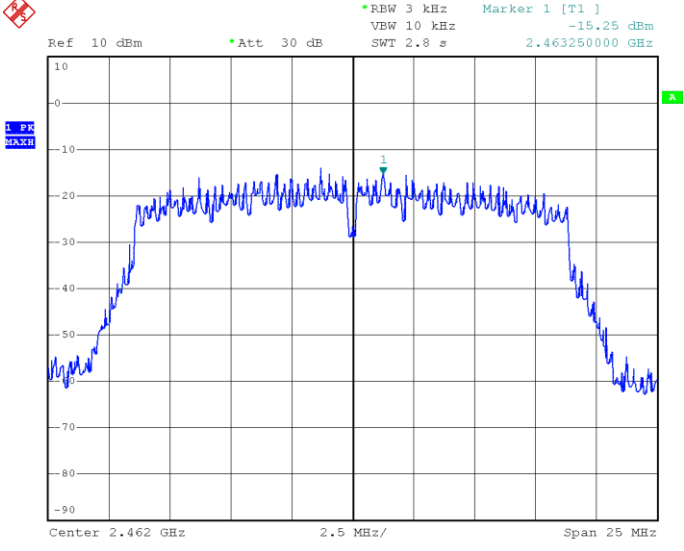
<p>802.11n-HT20-Low</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -14.91 dBm              VBW 10 kHz      SWT 2.8 s      2.413250000 GHz         </p> <p>             1 PK MAXH         </p> <p>             Center 2.412 GHz      2.5 MHz/      Span 25 MHz         </p>
<p>802.11n-HT20-Middle</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -13.15 dBm              VBW 10 kHz      SWT 2.8 s      2.434500000 GHz         </p> <p>             1 PK MAXH         </p> <p>             Center 2.437 GHz      2.5 MHz/      Span 25 MHz         </p>
<p>802.11n-HT20-High</p>	 <p>             Ref 10 dBm      *Att 30 dB      *RBW 3 kHz      Marker 1 [T1]      -15.25 dBm              VBW 10 kHz      SWT 2.8 s      2.463250000 GHz         </p> <p>             1 PK MAXH         </p> <p>             Center 2.462 GHz      2.5 MHz/      Span 25 MHz         </p>
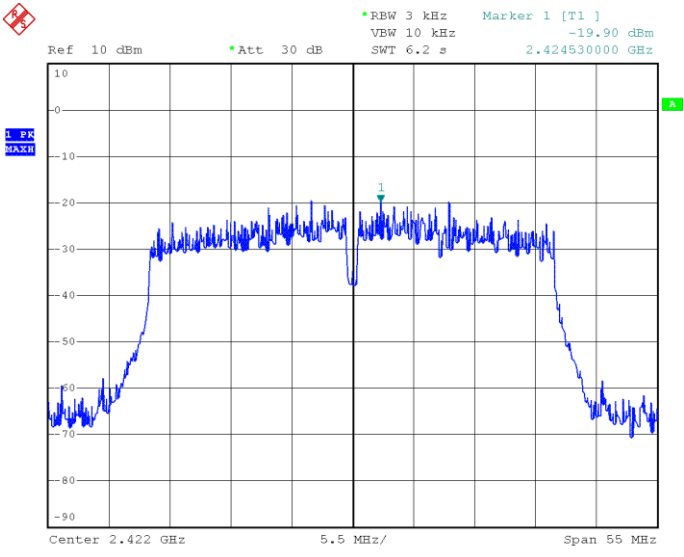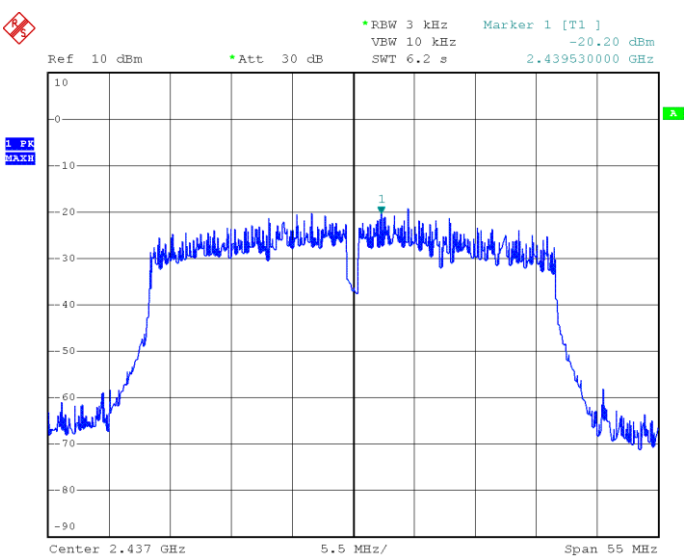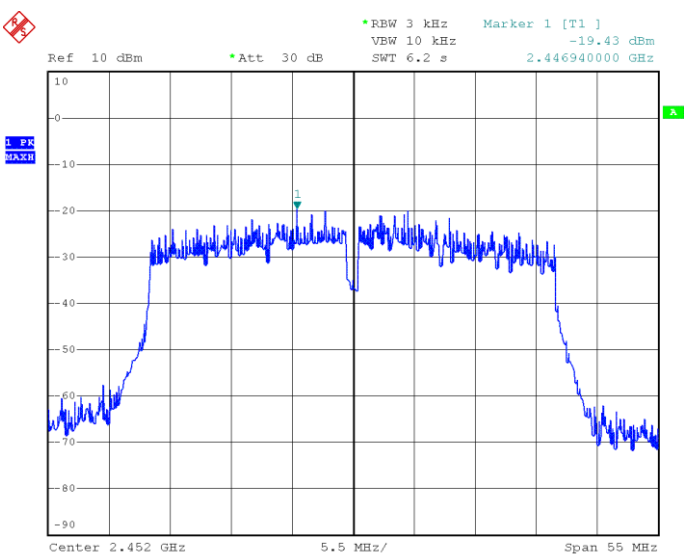
<p>802.11n-HT40-Low</p>	 <p>             *RBW 3 kHz    Marker 1 [T1]    -19.90 dBm              VBW 10 kHz              Ref 10 dBm    *Att 30 dB    SWT 6.2 s    2.424530000 GHz              1. PK    MAXH              Center 2.422 GHz    5.5 MHz/    Span 55 MHz         </p>
<p>802.11n-HT40-Middle</p>	 <p>             *RBW 3 kHz    Marker 1 [T1]    -20.20 dBm              VBW 10 kHz              Ref 10 dBm    *Att 30 dB    SWT 6.2 s    2.439530000 GHz              1. PK    MAXH              Center 2.437 GHz    5.5 MHz/    Span 55 MHz         </p>
<p>802.11n-HT40-High</p>	 <p>             *RBW 3 kHz    Marker 1 [T1]    -19.43 dBm              VBW 10 kHz              Ref 10 dBm    *Att 30 dB    SWT 6.2 s    2.446940000 GHz              1. PK    MAXH              Center 2.452 GHz    5.5 MHz/    Span 55 MHz         </p>

## 6. DTS Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:




- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




### 6.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_11Mbps	2412	8.04	8.34	$\geq 500$
	2437	8.58	8.28	$\geq 500$
	2462	8.46	8.16	$\geq 500$
802.11g_54Mbps	2412	15.18	15.42	$\geq 500$
	2437	15.12	15.18	$\geq 500$
	2462	15.24	15.18	$\geq 500$
802.11n-HT20_MCS7	2412	16.38	16.32	$\geq 500$
	2437	16.08	16.38	$\geq 500$
	2462	16.32	15.72	$\geq 500$
802.11n-HT40_MCS7	2422	35.04	34.92	$\geq 500$
	2437	34.92	34.88	$\geq 500$
	2452	34.80	35.12	$\geq 500$




Please refer to the following test plots:




➤ Antenna 1
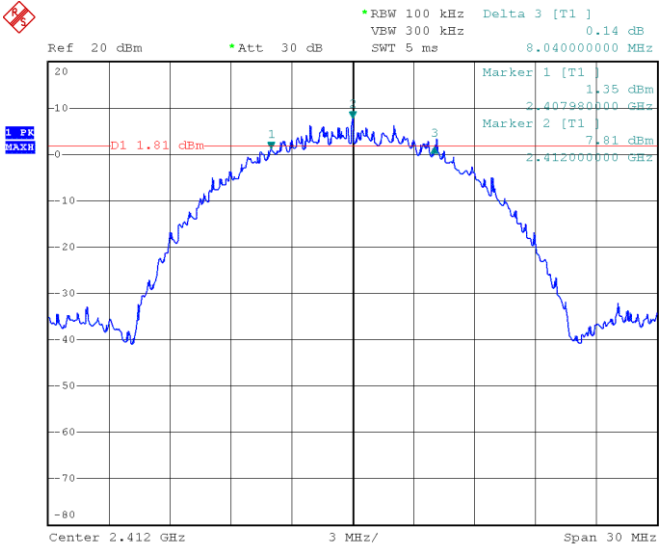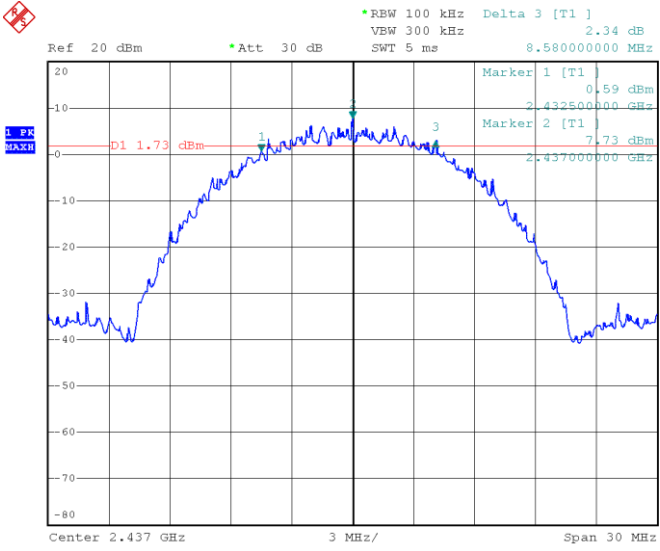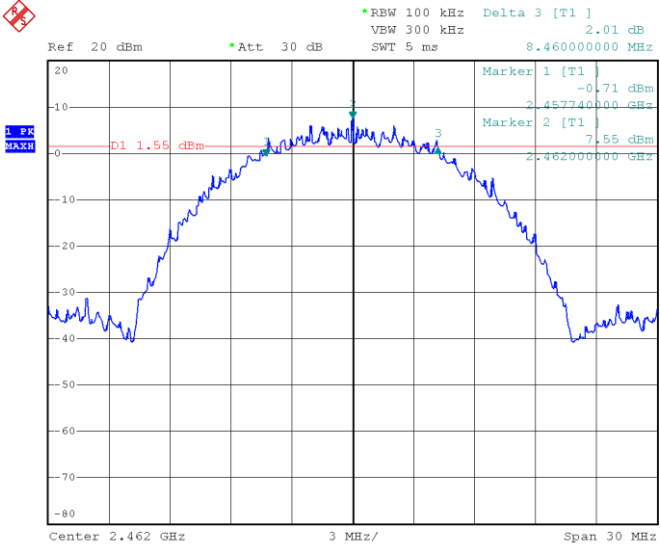
<p>802.11b-Low</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    0.14 dB              VBW 300 kHz    SWT 5 ms    8.040000000 MHz         </p> <p>             Marker 1 [T1]    1.35 dBm              2.407980000 GHz         </p> <p>             Marker 2 [T1]    7.81 dBm              2.412000000 GHz         </p> <p>             D1 1.81 dBm         </p> <p>             Center 2.412 GHz    3 MHz/    Span 30 MHz         </p>
<p>802.11b-Middle</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    2.34 dB              VBW 300 kHz    SWT 5 ms    8.580000000 MHz         </p> <p>             Marker 1 [T1]    0.59 dBm              2.432500000 GHz         </p> <p>             Marker 2 [T1]    7.73 dBm              2.437000000 GHz         </p> <p>             D1 1.73 dBm         </p> <p>             Center 2.437 GHz    3 MHz/    Span 30 MHz         </p>
<p>802.11b-High</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    2.01 dB              VBW 300 kHz    SWT 5 ms    8.460000000 MHz         </p> <p>             Marker 1 [T1]    -0.71 dBm              2.457740000 GHz         </p> <p>             Marker 2 [T1]    7.55 dBm              2.462000000 GHz         </p> <p>             D1 1.55 dBm         </p> <p>             Center 2.462 GHz    3 MHz/    Span 30 MHz         </p>

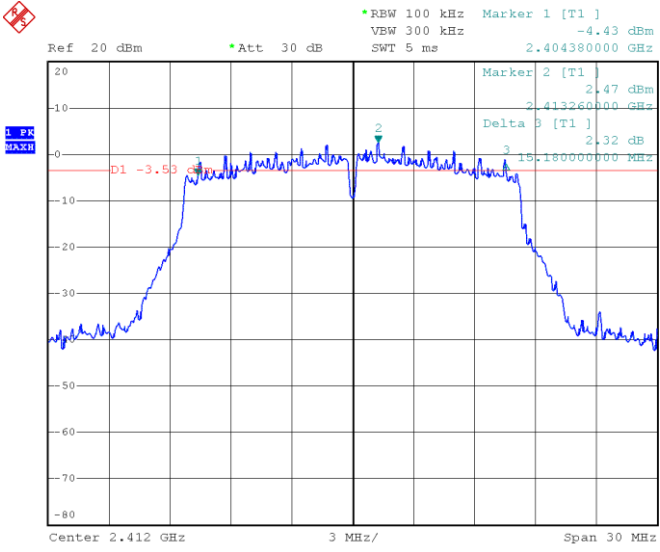
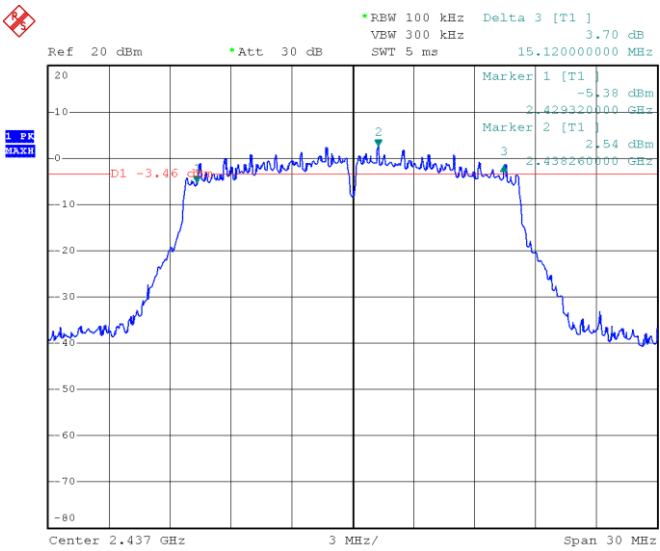
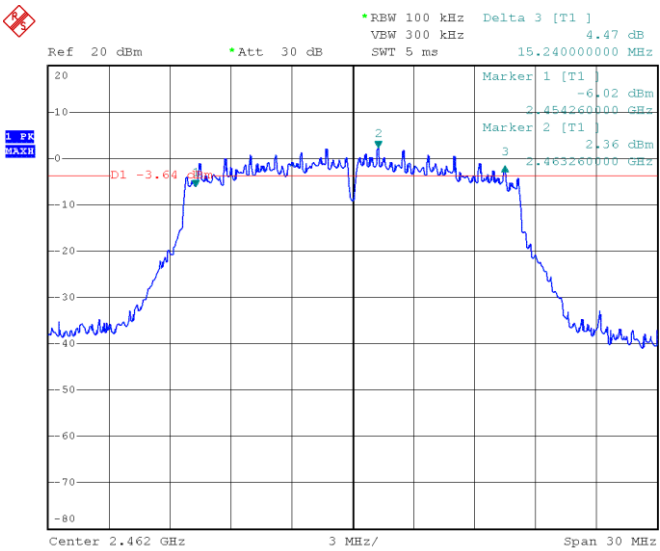
<p>802.11g-Low</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 1 [T1]      -4.43 dBm              VBW 300 kHz      2.404380000 GHz              SWT 5 ms              Delta 3 [T1]      2.32 dB              Marker 2 [T1]      2.47 dBm              2.413260000 GHz              Delta 3 [T1]      2.32 dB              3 19.180000000 MHz              D1 -3.53              1. PK              MAXH              Center 2.412 GHz      3 MHz/      Span 30 MHz         </p>
<p>802.11g-Middle</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Delta 3 [T1]      3.70 dB              VBW 300 kHz      15.120000000 MHz              SWT 5 ms              Delta 3 [T1]      2.54 dBm              Marker 1 [T1]      -5.38 dBm              2.429320000 GHz              Marker 2 [T1]      2.54 dBm              3 2.438260000 GHz              D1 -3.46              1. PK              MAXH              Center 2.437 GHz      3 MHz/      Span 30 MHz         </p>
<p>802.11g-High</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Delta 3 [T1]      4.47 dB              VBW 300 kHz      15.240000000 MHz              SWT 5 ms              Delta 3 [T1]      2.36 dBm              Marker 1 [T1]      -6.02 dBm              2.454260000 GHz              Marker 2 [T1]      2.36 dBm              3 2.463260000 GHz              D1 -3.64              1. PK              MAXH              Center 2.462 GHz      3 MHz/      Span 30 MHz         </p>

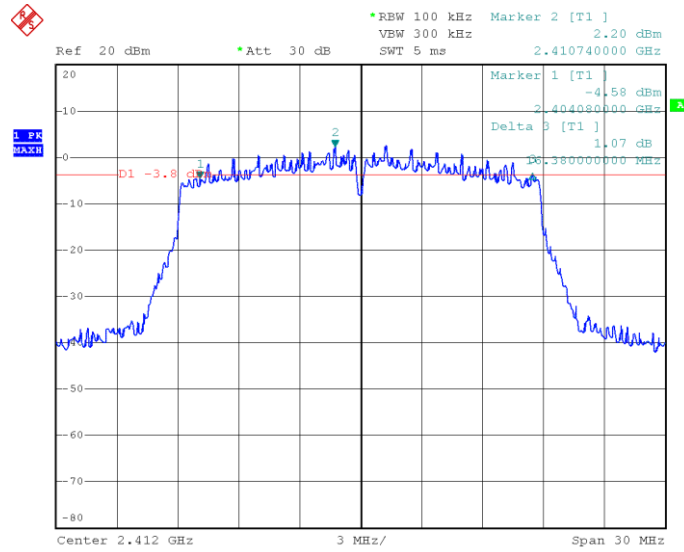
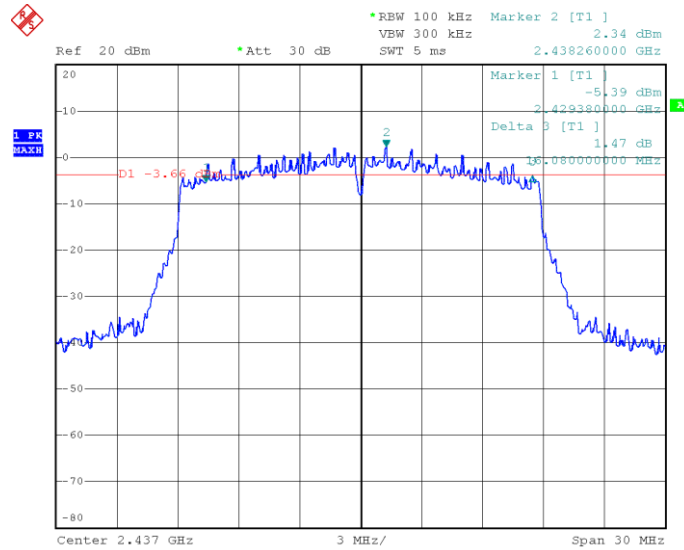
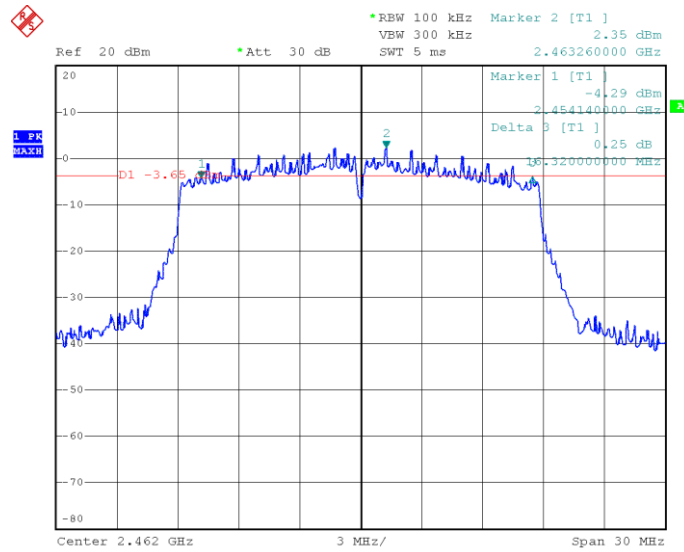





<p>802.11n-HT20-Low</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 2 [T1]      2.20 dBm              VBW 300 kHz      2.410740000 GHz              SWT 5 ms              Center 2.412 GHz      3 MHz/      Span 30 MHz              Marker 1 [T1]      -4.58 dBm              2.404020000 GHz              Delta 3 [T1]      1.07 dB              2.380000000 MHz              D1 -3.8 dBm         </p>
<p>802.11n-HT20-Middle</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 2 [T1]      2.34 dBm              VBW 300 kHz      2.438260000 GHz              SWT 5 ms              Center 2.437 GHz      3 MHz/      Span 30 MHz              Marker 1 [T1]      -5.39 dBm              2.429380000 GHz              Delta 3 [T1]      1.47 dB              2.380000000 MHz              D1 -3.66 dBm         </p>
<p>802.11n-HT20-High</p>	 <p>             Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 2 [T1]      2.35 dBm              VBW 300 kHz      2.463260000 GHz              SWT 5 ms              Center 2.462 GHz      3 MHz/      Span 30 MHz              Marker 1 [T1]      -4.29 dBm              2.454140000 GHz              Delta 3 [T1]      0.25 dB              2.380000000 MHz              D1 -3.65 dBm         </p>

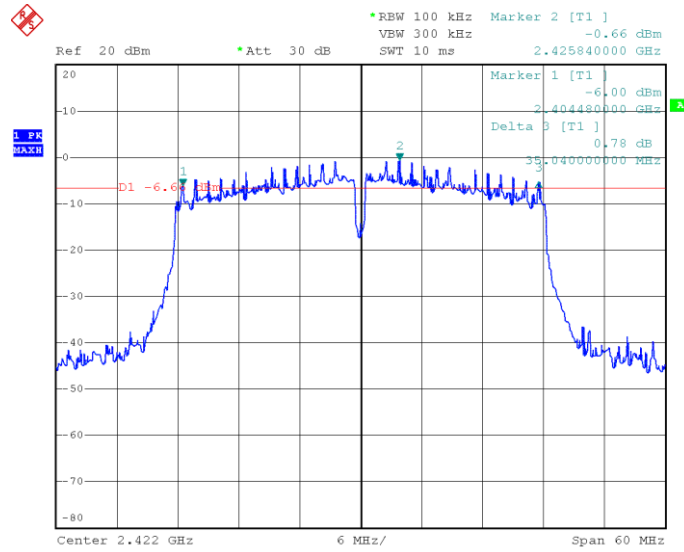
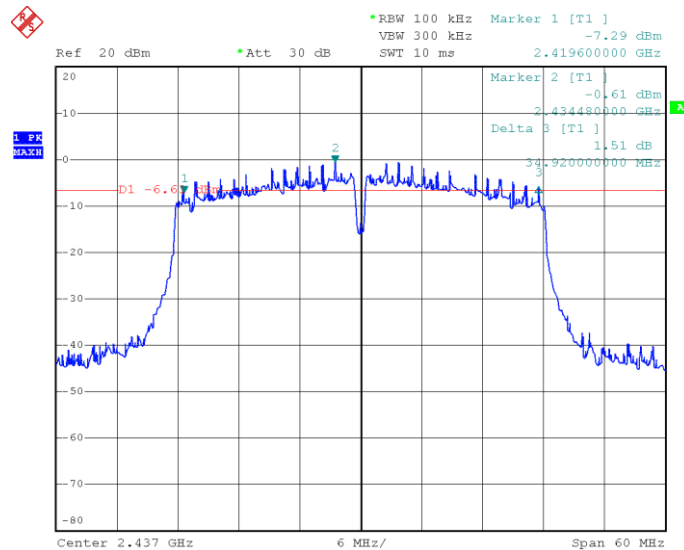
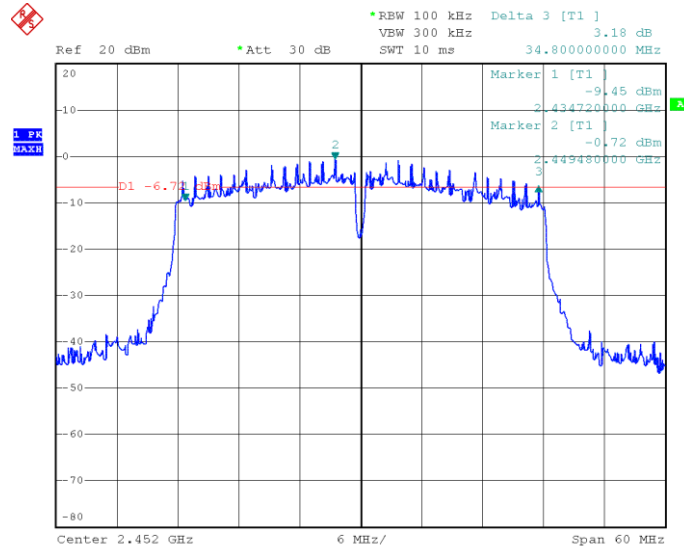
<p>802.11n-HT40-Low</p>	 <p>Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 2 [T1]      -0.66 dBm          VBW 300 kHz      2.425840000 GHz          SWT 10 ms      2.425840000 GHz</p> <p>Marker 1 [T1]      -6.00 dBm          2.404420000 GHz          Delta 3 [T1]      0.78 dB          33.040000000 MHz</p> <p>D1 -6.6 dBm</p> <p>Center 2.422 GHz      6 MHz/      Span 60 MHz</p>
<p>802.11n-HT40-Middle</p>	 <p>Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Marker 1 [T1]      -7.29 dBm          VBW 300 kHz      2.419600000 GHz          SWT 10 ms      2.419600000 GHz</p> <p>Marker 2 [T1]      -0.61 dBm          2.434420000 GHz          Delta 3 [T1]      1.51 dB          33.920000000 MHz</p> <p>D1 -6.6 dBm</p> <p>Center 2.437 GHz      6 MHz/      Span 60 MHz</p>
<p>802.11n-HT40-High</p>	 <p>Ref 20 dBm      *Att 30 dB      *RBW 100 kHz      Delta 3 [T1]      3.18 dB          VBW 300 kHz      34.800000000 MHz          SWT 10 ms      34.800000000 MHz</p> <p>Marker 1 [T1]      -9.45 dBm          2.434720000 GHz          Marker 2 [T1]      -0.72 dBm          2.449480000 GHz</p> <p>D1 -6.7 dBm</p> <p>Center 2.452 GHz      6 MHz/      Span 60 MHz</p>

➤ Antenna 2
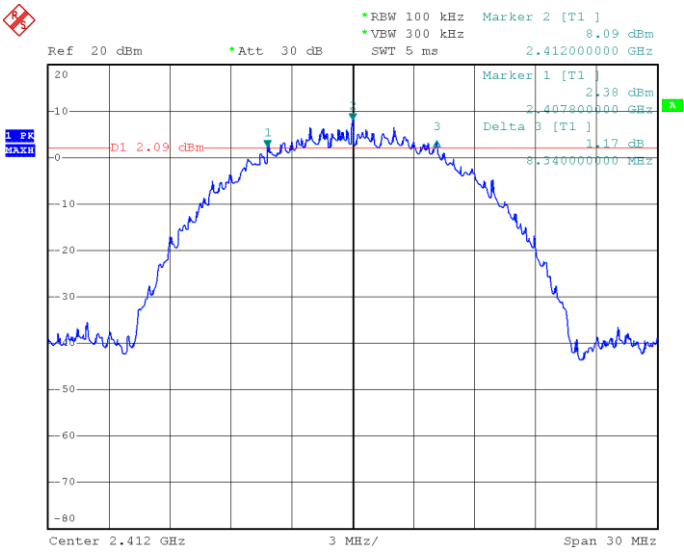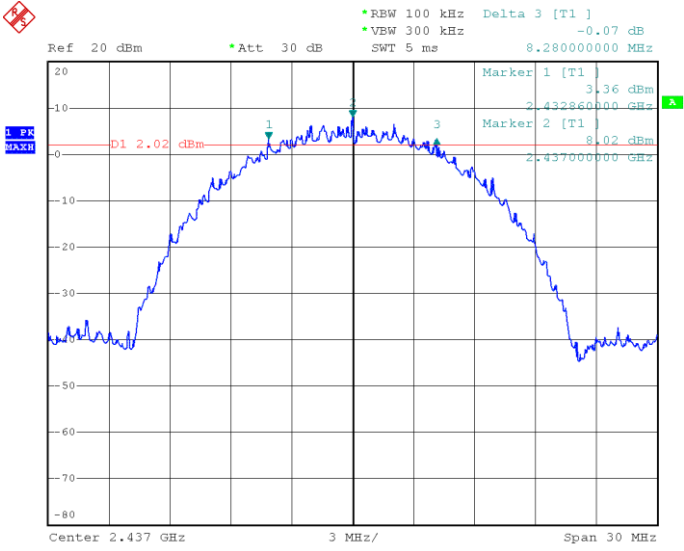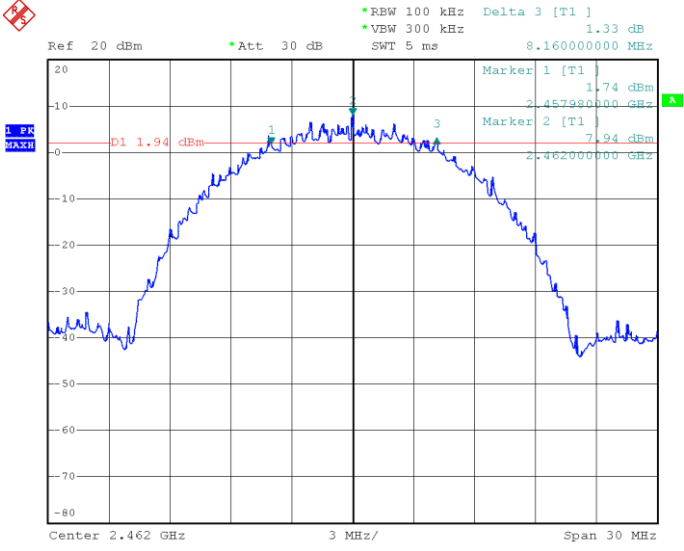
<p>802.11b-Low</p>	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Marker 2 [T1] 8.09 dBm          *VBW 300 kHz 2.412000000 GHz          SWT 5 ms 2.412000000 GHz          Delta 3 [T1] 1.17 dB          8.340000000 MHz</p> <p>Marker 1 [T1] 2.38 dBm          2.407800000 GHz</p> <p>D1 2.09 dBm</p> <p>Center 2.412 GHz 3 MHz/ Span 30 MHz</p>
<p>802.11b-Middle</p>	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 3 [T1] -0.07 dB          *VBW 300 kHz 8.280000000 MHz          SWT 5 ms 8.280000000 MHz          Delta 3 [T1] -0.07 dB</p> <p>Marker 1 [T1] 3.36 dBm          2.432860000 GHz</p> <p>Marker 2 [T1] 8.02 dBm          2.437000000 GHz</p> <p>D1 2.02 dBm</p> <p>Center 2.437 GHz 3 MHz/ Span 30 MHz</p>
<p>802.11b-High</p>	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 3 [T1] 1.33 dB          *VBW 300 kHz 8.160000000 MHz          SWT 5 ms 8.160000000 MHz          Delta 3 [T1] 1.33 dB</p> <p>Marker 1 [T1] 1.74 dBm          2.457980000 GHz</p> <p>Marker 2 [T1] 7.94 dBm          2.462000000 GHz</p> <p>D1 1.94 dBm</p> <p>Center 2.462 GHz 3 MHz/ Span 30 MHz</p>
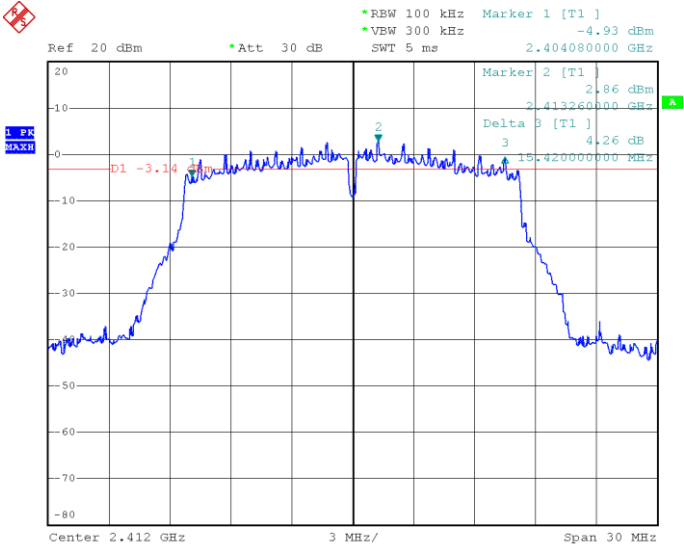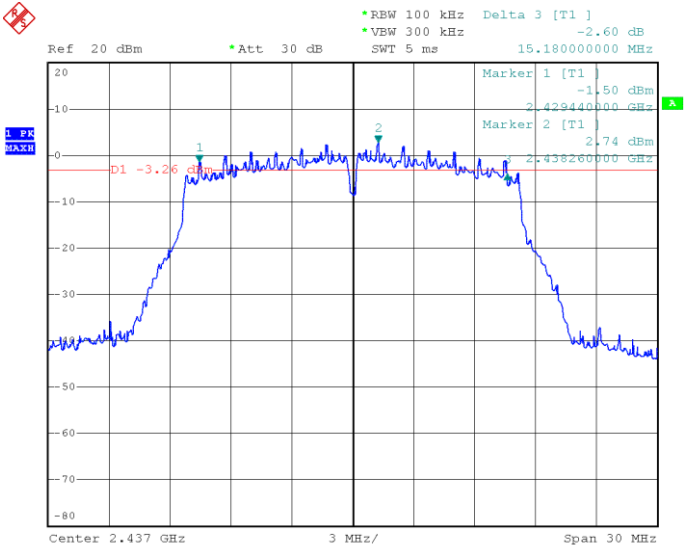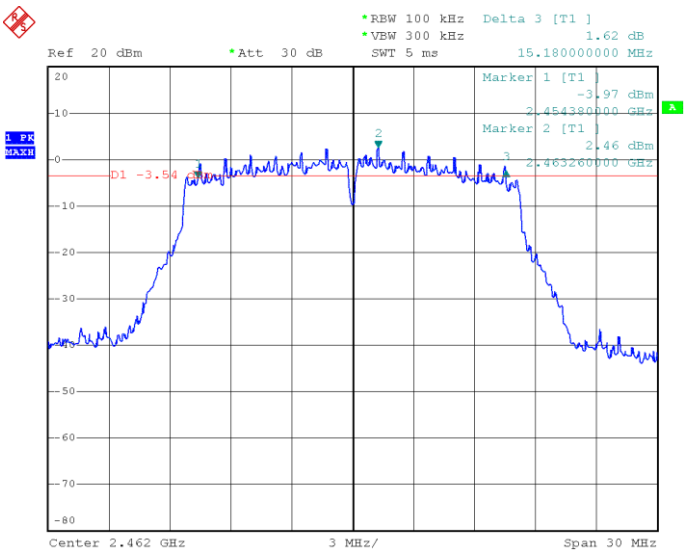
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	
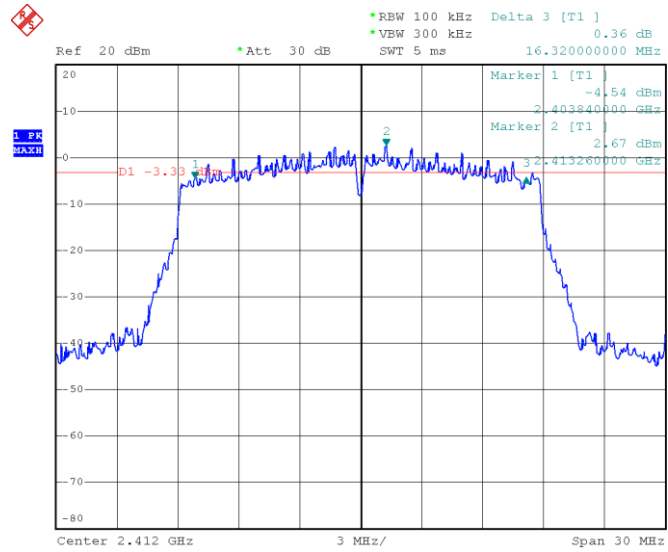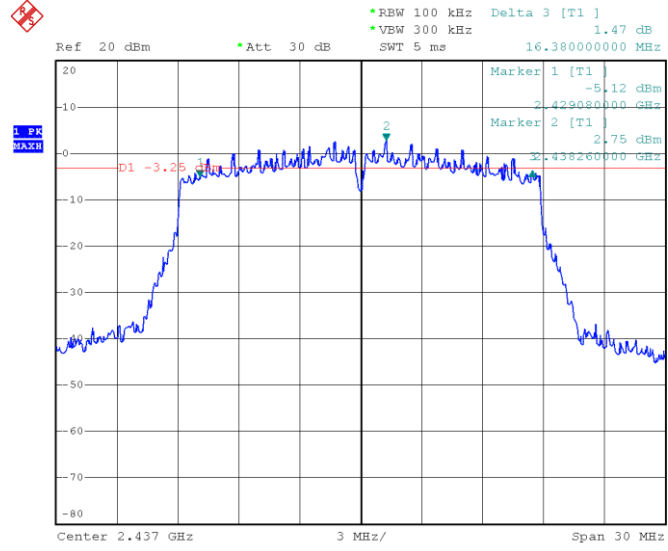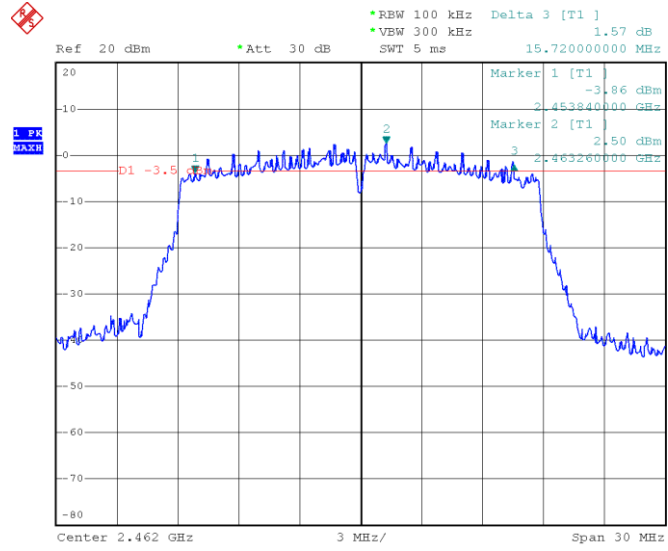
<p>802.11n-HT20-Low</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    0.36 dB              *VBW 300 kHz    SWT 5 ms    16.320000000 MHz         </p> <p>             Marker 1 [T1]    -4.54 dBm    2.403840000 GHz              Marker 2 [T1]    2.67 dBm    2.413200000 GHz         </p> <p>             D1 -3.33 dBm         </p> <p>             Center 2.412 GHz    3 MHz/    Span 30 MHz         </p>
<p>802.11n-HT20-Middle</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    1.47 dB              *VBW 300 kHz    SWT 5 ms    16.380000000 MHz         </p> <p>             Marker 1 [T1]    -5.12 dBm    2.429020000 GHz              Marker 2 [T1]    2.75 dBm    2.438200000 GHz         </p> <p>             D1 -3.25 dBm         </p> <p>             Center 2.437 GHz    3 MHz/    Span 30 MHz         </p>
<p>802.11n-HT20-High</p>	 <p>             Ref 20 dBm    *Att 30 dB    RBW 100 kHz    Delta 3 [T1]    1.57 dB              *VBW 300 kHz    SWT 5 ms    15.720000000 MHz         </p> <p>             Marker 1 [T1]    -3.86 dBm    2.453840000 GHz              Marker 2 [T1]    2.50 dBm    2.463200000 GHz         </p> <p>             D1 -3.5 dBm         </p> <p>             Center 2.462 GHz    3 MHz/    Span 30 MHz         </p>
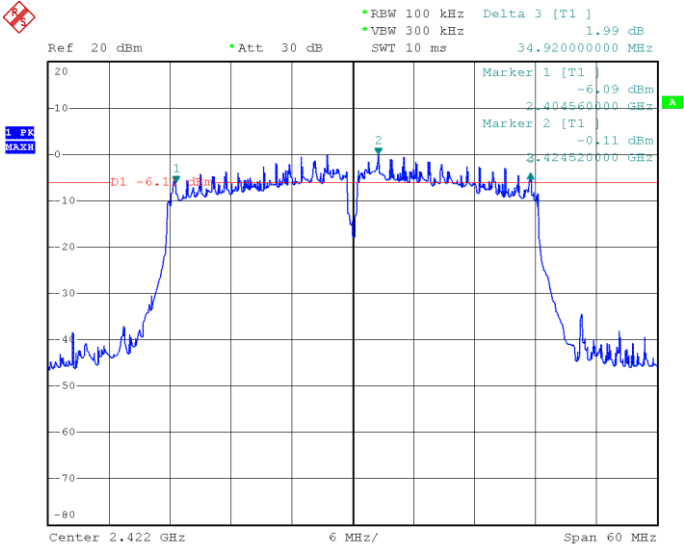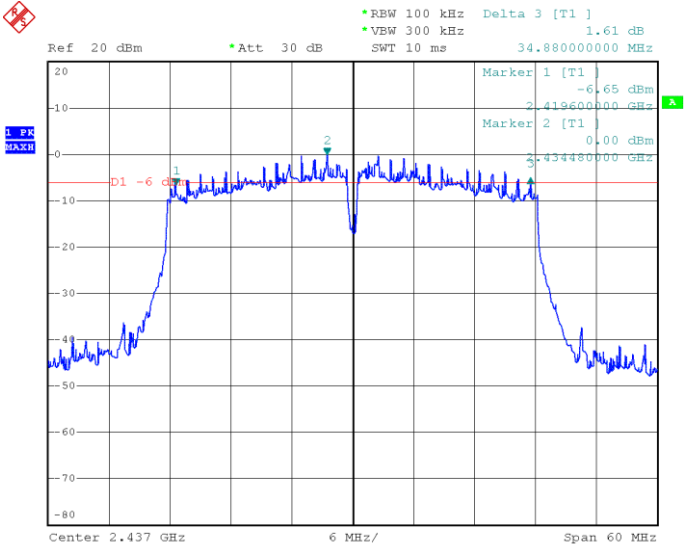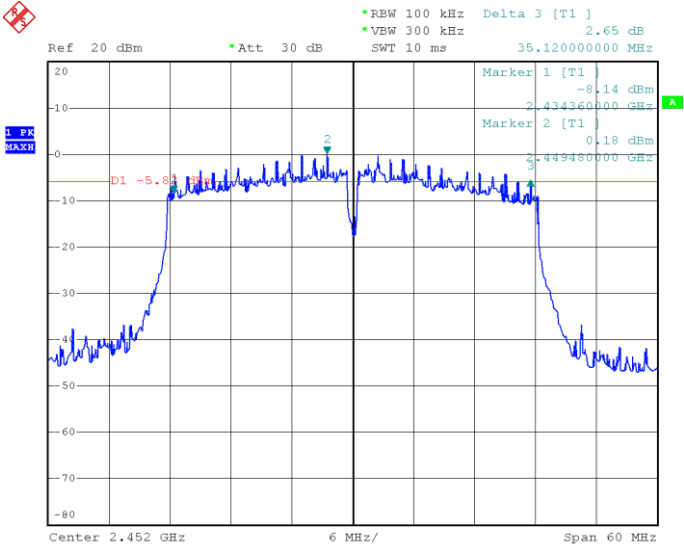
<p>802.11n-HT40-Low</p>	 <p>             *RBW 100 kHz Delta 3 [T1 ]              *VBW 300 kHz 1.99 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 34.920000000 MHz              Marker 1 [T1] -6.09 dBm              2.404560000 GHz              Marker 2 [T1] -0.11 dBm              2.424520000 GHz              D1 -6.11 dBm              Center 2.422 GHz 6 MHz/ Span 60 MHz           </p>
<p>802.11n-HT40-Middle</p>	 <p>             *RBW 100 kHz Delta 3 [T1 ]              *VBW 300 kHz 1.61 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 34.880000000 MHz              Marker 1 [T1] -6.65 dBm              2.419600000 GHz              Marker 2 [T1] 0.00 dBm              2.434480000 GHz              D1 -6 dBm              Center 2.437 GHz 6 MHz/ Span 60 MHz           </p>
<p>802.11n-HT40-High</p>	 <p>             *RBW 100 kHz Delta 3 [T1 ]              *VBW 300 kHz 2.65 dB              Ref 20 dBm *Att 30 dB SWT 10 ms 35.120000000 MHz              Marker 1 [T1] -8.14 dBm              2.434360000 GHz              Marker 2 [T1] 0.18 dBm              2.449480000 GHz              D1 -5.81 dBm              Center 2.452 GHz 6 MHz/ Span 60 MHz           </p>

## 7. RF Output Power

---

### 7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to section KDB-558074 D01 v05r02 Subclause 8.3.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 7.3 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power 1 dBm	Power 2 dBm	Power 1 mW	Power 2 mW	Total Power dBm	Output Power mW	Limit mW
802.11b _11Mbps	2412	21.31	21.56	135.21	143.22	/	/	1000
	2437	21.16	21.33	130.62	135.83	/	/	1000
	2462	21.02	21.09	126.47	128.53	/	/	1000
802.11g _54Mbps	2412	20.88	21.25	122.46	133.35	/	/	1000
	2437	20.94	21.09	124.17	128.53	/	/	1000
	2462	20.77	20.82	119.40	120.78	/	/	1000
802.11n HT20_MCS7	2412	20.49	20.53	111.94	112.98	23.52	224.92	1000
	2437	20.20	20.59	104.71	114.55	23.41	219.26	1000
	2462	20.36	20.31	108.64	107.40	23.35	216.04	1000
802.11n HT40_MCS7	2422	18.25	17.93	66.83	62.09	21.10	128.92	1000
	2437	18.04	18.52	63.68	71.12	21.30	134.80	1000
	2452	17.95	17.76	62.37	59.70	20.87	122.08	1000



## 8. Field Strength of Spurious Emissions

---

### 8.1 Standard Applicable



According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

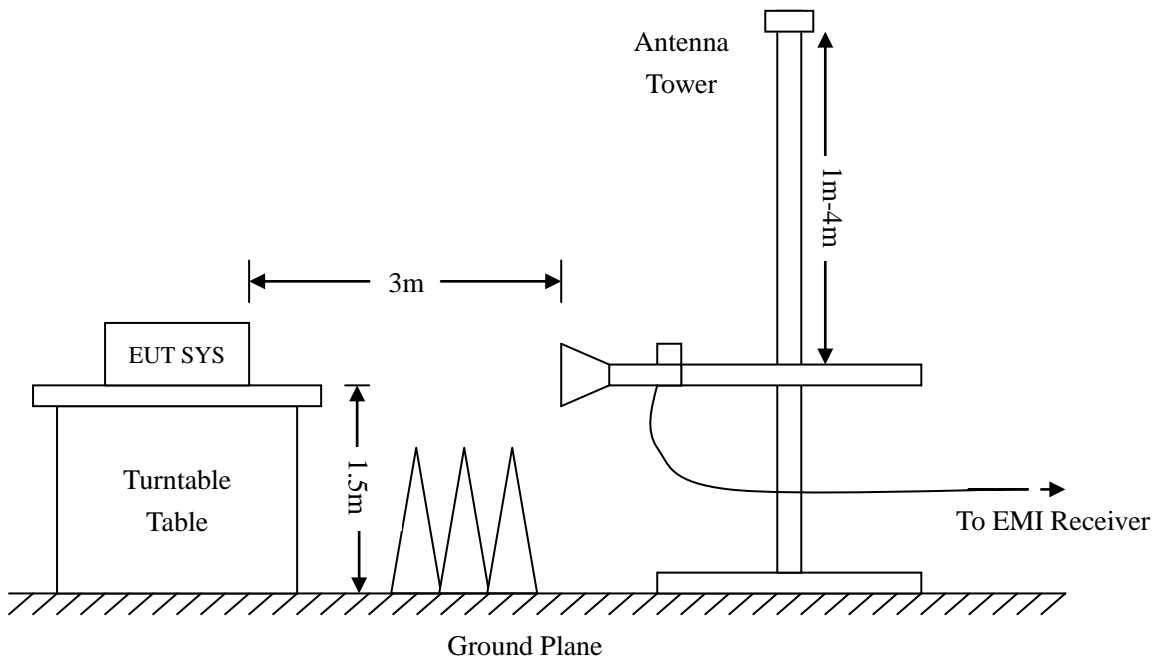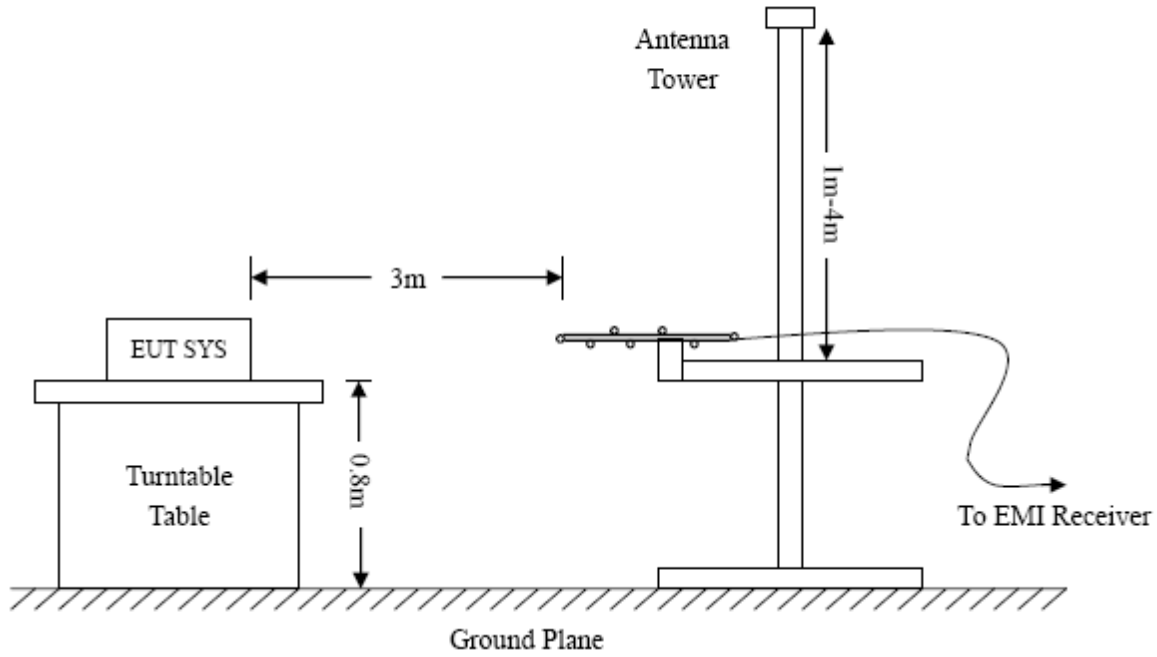

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part15 Limit}$$

### 8.4 Summary of Test Results/Plots

*Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


*All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.*


*2. For 9kHz ~ 30MHz, The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.*

*3. For 30MHz ~1000MHz, Have pre-scan all modulation mode and antennas, found the 802.11b mode low channel at antenna 1 which it was worst case, so only the worst case's data on the test report.*

*4. Above 1000MHz, Have pre-scan all modulation mode and antennas, found the antenna 1 which it was worst case, so only the worst case's data on the test report.*

- Spurious Emissions Below 1GHz
- Worst case Antenna 1

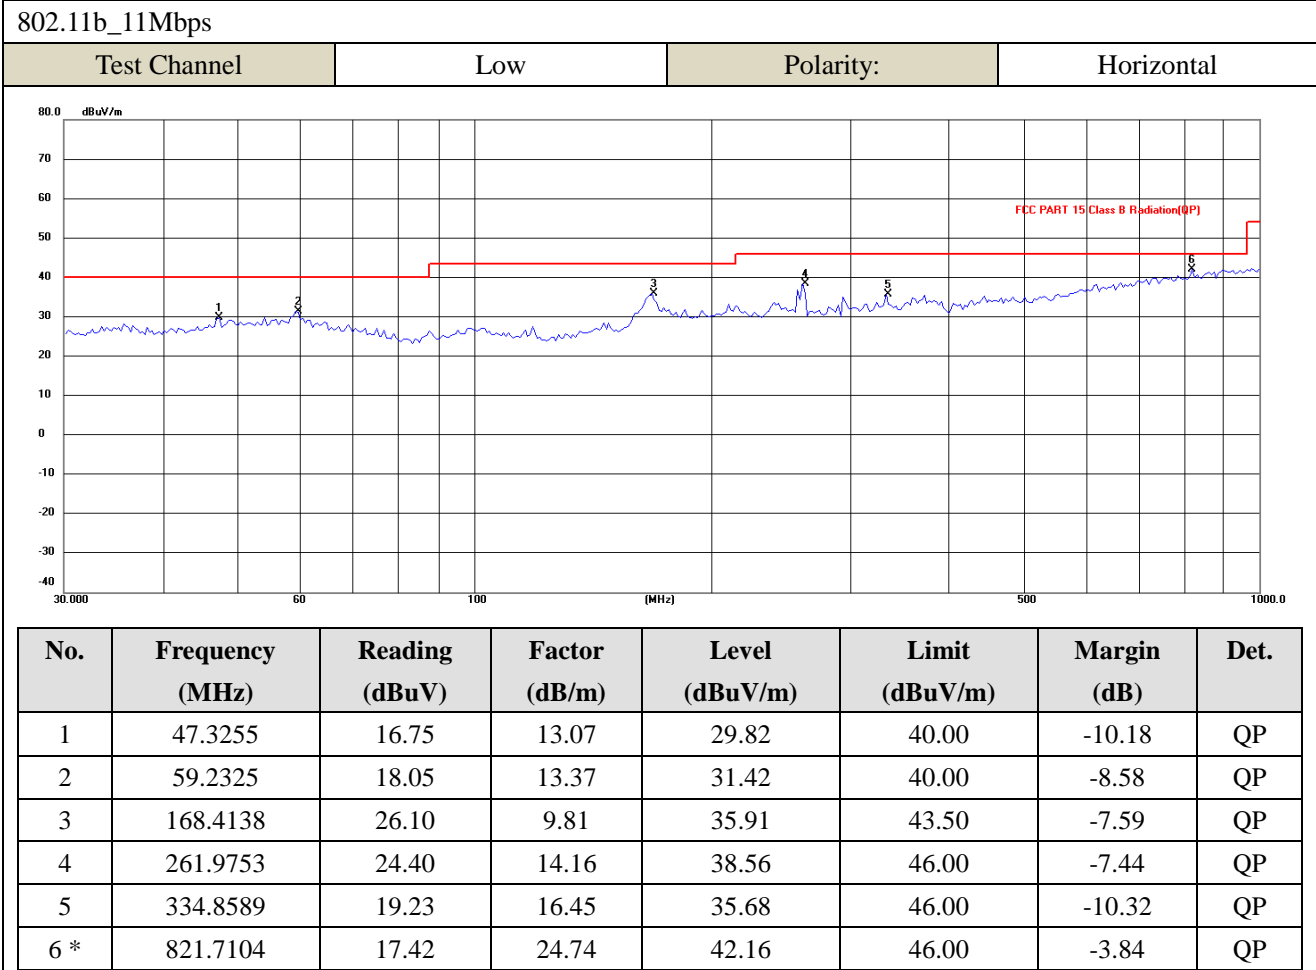

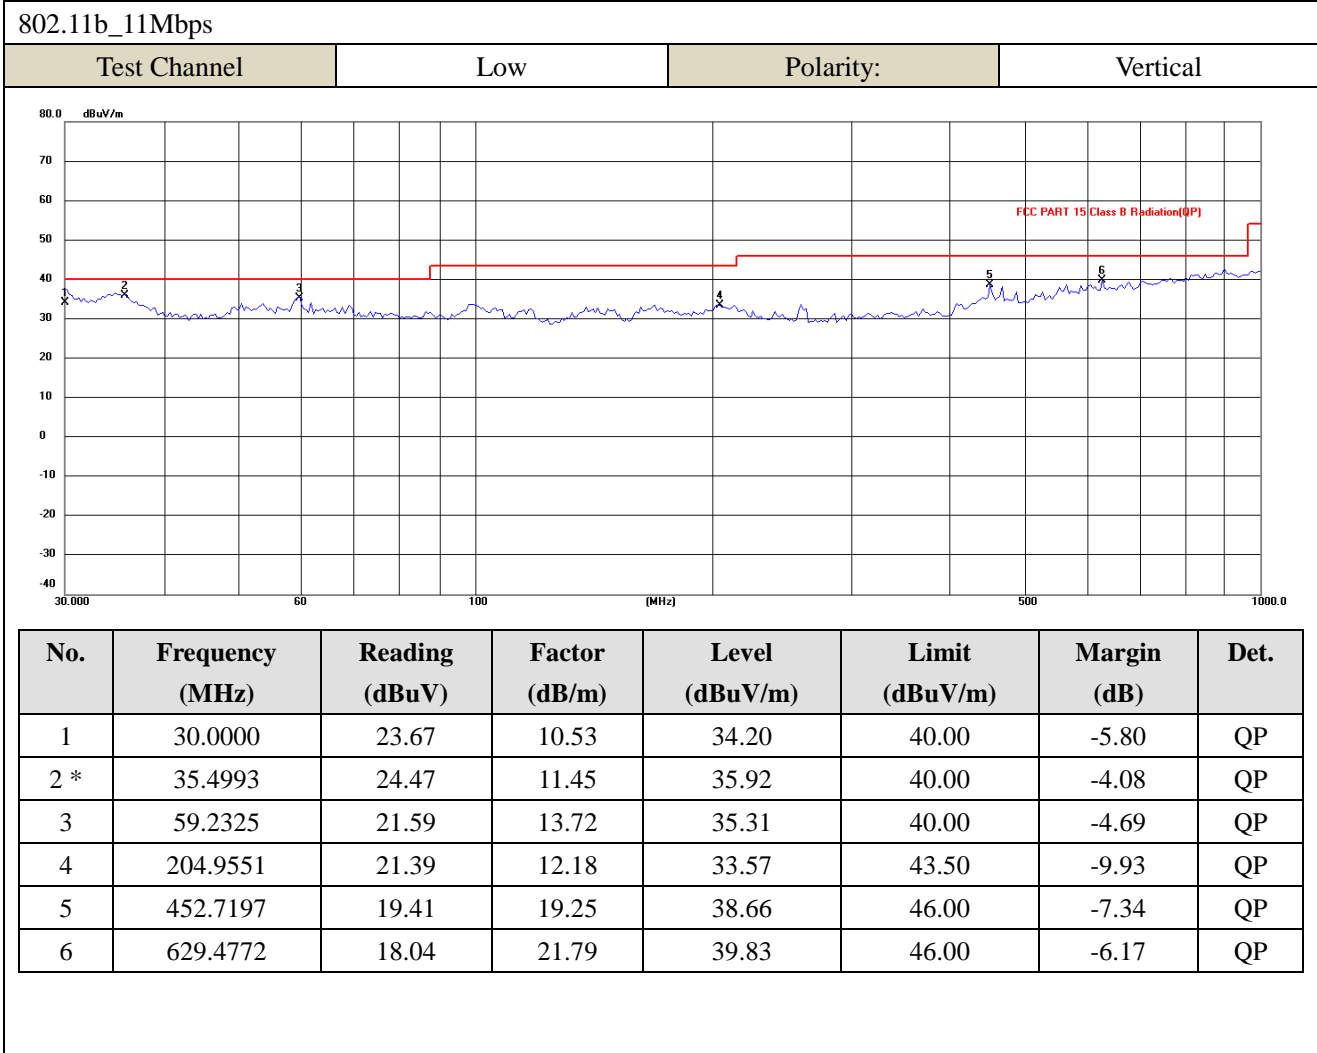

- Spurious Emissions Above 1GHz at antenna 1
- Test Mode: 802.11b\_11Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	53.92	-3.87	50.05	74	-23.95	H	PK
4824.000	38.39	-3.87	34.52	54	-19.48	H	AV
7236.000	45.61	1.14	46.75	74	-27.25	H	PK
7236.000	34.22	1.19	35.41	54	-18.59	H	AV
4824.000	56.27	-3.86	52.41	74	-21.59	V	PK
4824.000	39.21	-3.86	35.35	54	-18.65	V	AV
7236.000	47.74	1.1	48.84	74	-25.16	V	PK
7236.000	35.73	1.1	36.83	54	-17.17	V	AV
Middle Channel-2437MHz							
4874.000	53.47	-3.74	49.73	74	-24.27	H	PK
4874.000	38.34	-3.74	34.6	54	-19.4	H	AV
7311.000	45.78	1.47	47.25	74	-26.75	H	PK
7311.000	30.94	1.47	32.41	54	-21.59	H	AV
4874.000	51.43	-3.74	47.69	74	-26.31	V	PK
4874.000	38	-3.74	34.26	54	-19.74	V	AV
7311.000	44.91	1.47	46.38	74	-27.62	V	PK
7311.000	30.57	1.47	32.04	54	-21.96	V	AV
High Channel-2462MHz							
4924.000	53.65	-3.59	50.06	74	-23.94	H	PK
4924.000	39.21	-3.59	35.62	54	-18.38	H	AV
7386.000	43.49	1.79	45.28	74	-28.72	H	PK
7386.000	31.77	1.79	33.56	54	-20.44	H	AV
4924.000	51.5	-3.59	47.91	74	-26.09	V	PK
4924.000	38.25	-3.59	34.66	54	-19.34	V	AV
7386.000	44.02	1.79	45.81	74	-28.19	V	PK
7386.000	30.77	1.79	32.56	54	-21.44	V	AV

➤ Test Mode: 802.11g\_54Mbps

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	55.53	-3.86	51.67	74	-22.33	H	PK
4824.000	42.08	-3.86	38.22	54	-15.78	H	AV
7236.000	48.13	1.1	49.23	74	-24.77	H	PK
7236.000	34.14	1.1	35.24	54	-18.76	H	AV
4824.000	55.55	-3.86	51.69	74	-22.31	V	PK
4824.000	42.06	-3.86	38.2	54	-15.8	V	AV
7236.000	48.65	1.1	49.75	74	-24.25	V	PK
7236.000	34.73	1.1	35.83	54	-18.17	V	AV
Middle Channel-2437MHz							
4874.000	55.13	-3.74	51.39	74	-22.61	H	PK
4874.000	43.13	-3.74	39.39	54	-14.61	H	AV
7311.000	47.09	1.47	48.56	74	-25.44	H	PK
7311.000	35.01	1.47	36.48	54	-17.52	H	AV
4874.000	56.63	-3.74	52.89	74	-21.11	V	PK
4874.000	43.27	-3.74	39.53	54	-14.47	V	AV
7311.000	47.83	1.47	49.3	74	-24.7	V	PK
7311.000	34.52	1.47	35.99	54	-18.01	V	AV
High Channel-2462MHz							
4924.000	54.03	-3.59	50.44	74	-23.56	H	PK
4924.000	40.6	-3.59	37.01	54	-16.99	H	AV
7386.000	46.89	1.79	48.68	74	-25.32	H	PK
7386.000	34.47	1.79	36.26	54	-17.74	H	AV
4924.000	55.67	-3.59	52.08	74	-21.92	V	PK
4924.000	42.1	-3.59	38.51	54	-15.49	V	AV
7386.000	48.01	1.79	49.8	74	-24.2	V	PK
7386.000	35.14	1.79	36.93	54	-17.07	V	AV

➤ Test Mode: 802.11n-HT20\_MCS7

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	55.63	-3.86	51.77	74	-22.23	H	PK
4824.000	40.39	-3.86	36.53	54	-17.47	H	AV
7236.000	46.97	1.1	48.07	74	-25.93	H	PK
7236.000	34.18	1.1	35.28	54	-18.72	H	AV
4824.000	56.27	-3.86	52.41	74	-21.59	V	PK
4824.000	42.59	-3.86	38.73	54	-15.27	V	AV
7236.000	48.64	1.1	49.74	74	-24.26	V	PK
7236.000	34.96	1.1	36.06	54	-17.94	V	AV
Middle Channel-2437MHz							
4874.000	54.19	-3.74	50.45	74	-23.55	H	PK
4874.000	42.33	-3.74	38.59	54	-15.41	H	AV
7311.000	48.45	1.47	49.92	74	-24.08	H	PK
7311.000	32.84	1.47	34.31	54	-19.69	H	AV
4874.000	54.48	-3.74	50.74	74	-23.26	V	PK
4874.000	42.03	-3.74	38.29	54	-15.71	V	AV
7311.000	47.92	1.47	49.39	74	-24.61	V	PK
7311.000	34.39	1.47	35.86	54	-18.14	V	AV
High Channel-2462MHz							
4924.000	53.93	-3.59	50.34	74	-23.66	H	PK
4924.000	43.08	-3.59	39.49	54	-14.51	H	AV
7386.000	48.02	1.79	49.81	74	-24.19	H	PK
7386.000	35.84	1.79	37.63	54	-16.37	H	AV
4924.000	55.26	-3.59	51.67	74	-22.33	V	PK
4924.000	40.89	-3.59	37.3	54	-16.7	V	AV
7386.000	47.98	1.79	49.77	74	-24.23	V	PK
7386.000	34.55	1.79	36.34	54	-17.66	V	AV



➤ Test Mode: 802.11n-HT40\_MCS7

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.000	53.48	-3.9	49.58	74	-24.42	H	PK
4824.000	38.4	-3.9	34.5	54	-19.5	H	AV
7266.000	46.59	1.06	47.65	74	-26.35	H	PK
7266.000	32.8	1.06	33.86	54	-20.14	H	AV
4844.000	54.38	-3.9	50.48	74	-23.52	V	PK
4824.000	39.53	-3.9	35.63	54	-18.37	V	AV
7266.000	49.04	1.06	50.1	74	-23.9	V	PK
7266.000	34.87	1.06	35.93	54	-18.07	V	AV
Middle Channel-2437MHz							
4874.000	52.76	-3.74	49.02	74	-24.98	H	PK
4874.000	38.03	-3.74	34.29	54	-19.71	H	AV
7311.000	44.99	1.47	46.46	74	-27.54	H	PK
7311.000	32.27	1.47	33.74	54	-20.26	H	AV
4874.000	53.9	-3.74	50.16	74	-23.84	V	PK
4874.000	40.06	-3.74	36.32	54	-17.68	V	AV
7311.000	46.01	1.47	47.48	74	-26.52	V	PK
7311.000	34.09	1.47	35.56	54	-18.44	V	AV
High Channel-2452MHz							
4904.000	52.88	-3.63	49.25	74	-24.75	H	PK
4904.000	39.52	-3.63	35.89	54	-18.11	H	AV
7356.000	45.74	1.62	47.36	74	-26.64	H	PK
7356.000	30.97	1.62	32.59	54	-21.41	H	AV
4904.000	55	-3.63	51.37	74	-22.63	V	PK
4904.000	40.94	-3.63	37.31	54	-16.69	V	AV
7356.000	48.41	1.62	50.03	74	-23.97	V	PK
7356.000	35.21	1.62	36.83	54	-17.17	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v05r02Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq$   $[3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**


Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

**9.3 Summary of Test Results/Plots**

- Radiated test
  - Antenna 1
  - 802.11b-Lowest Band edge
  - Vertical (Worst case)

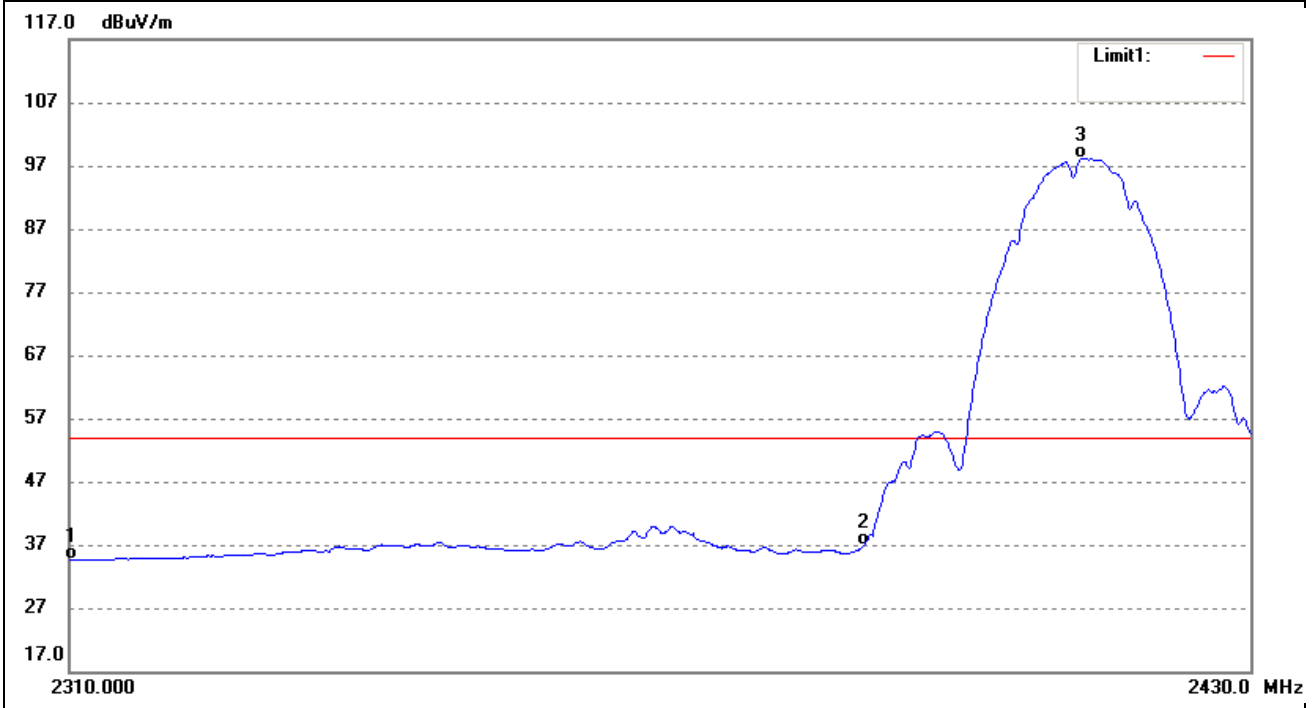


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.37	-7.78	34.59	54.00	-19.41	AVG
2	2390.000	44.30	-7.32	36.98	54.00	-17.02	AVG
3	2412.465	105.37	-7.19	98.18	/	/	AVG

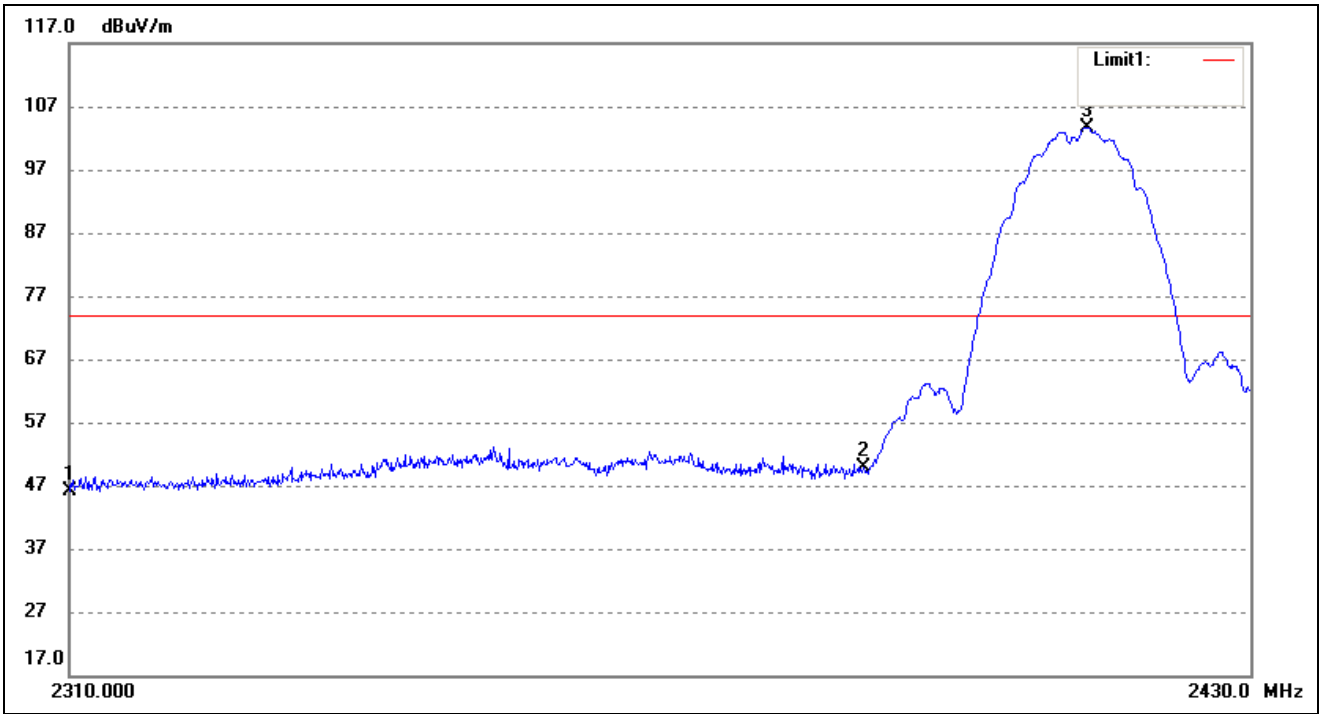


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	53.97	-7.78	46.19	74.00	-27.81	peak
2	2390.000	57.13	-7.32	49.81	74.00	-24.19	peak
3	2413.076	110.81	-7.18	103.63	/	/	peak

➤ 802.11b-Highest Band edge  
Vertical (Worst case)

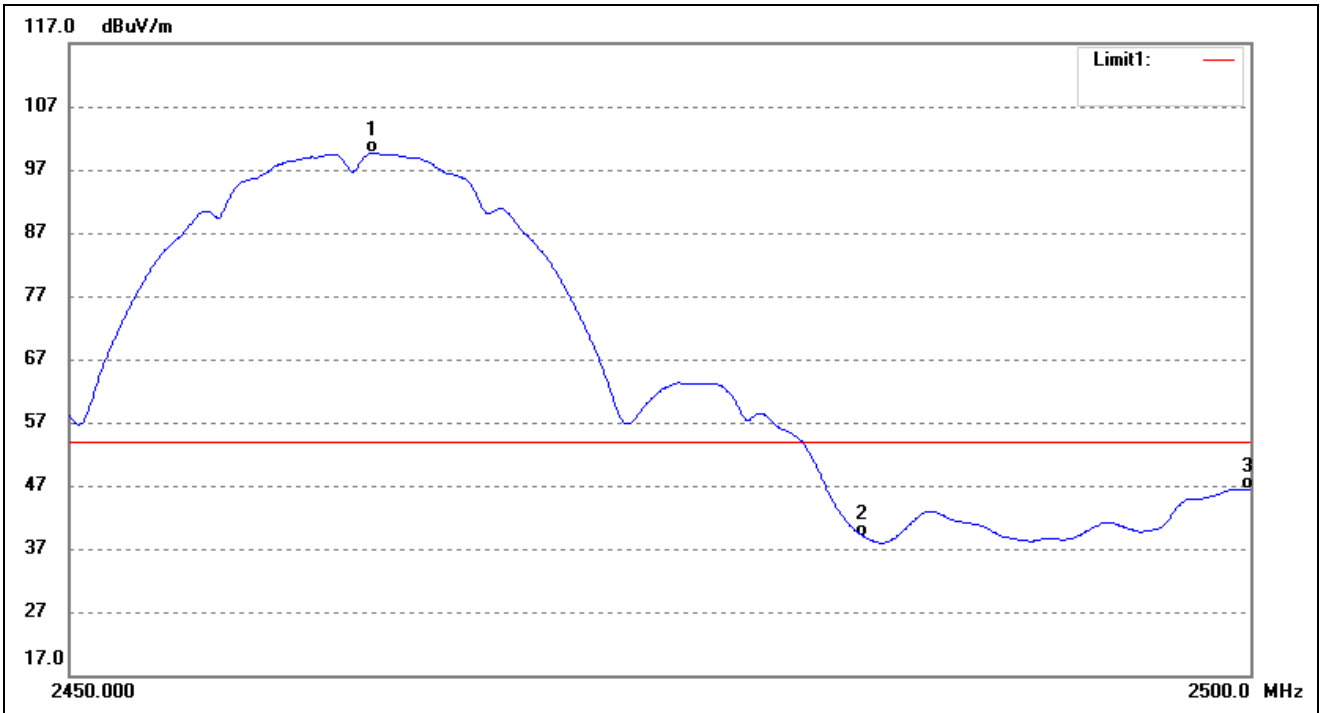


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.704	106.51	-6.89	99.62	/	/	AVG
2	2483.500	45.70	-6.77	38.93	54.00	-15.07	AVG
3	2500.000	53.09	-6.67	46.42	54.00	-7.58	AVG

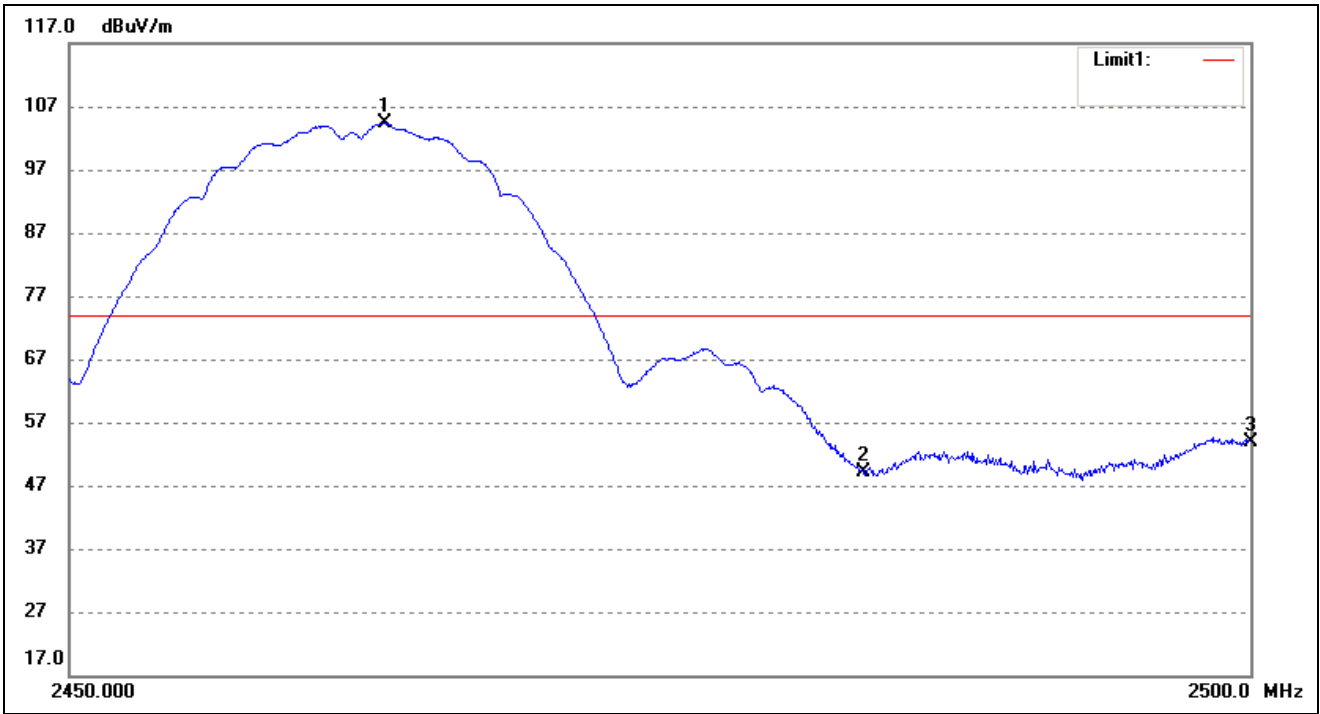


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.251	111.22	-6.89	104.33	/	/	peak
2	2483.500	55.89	-6.77	49.12	74.00	-24.88	peak
3	2500.000	60.55	-6.67	53.88	74.00	-20.12	peak

- 802.11g-Lowest Band edge
- Vertical (Worst case)

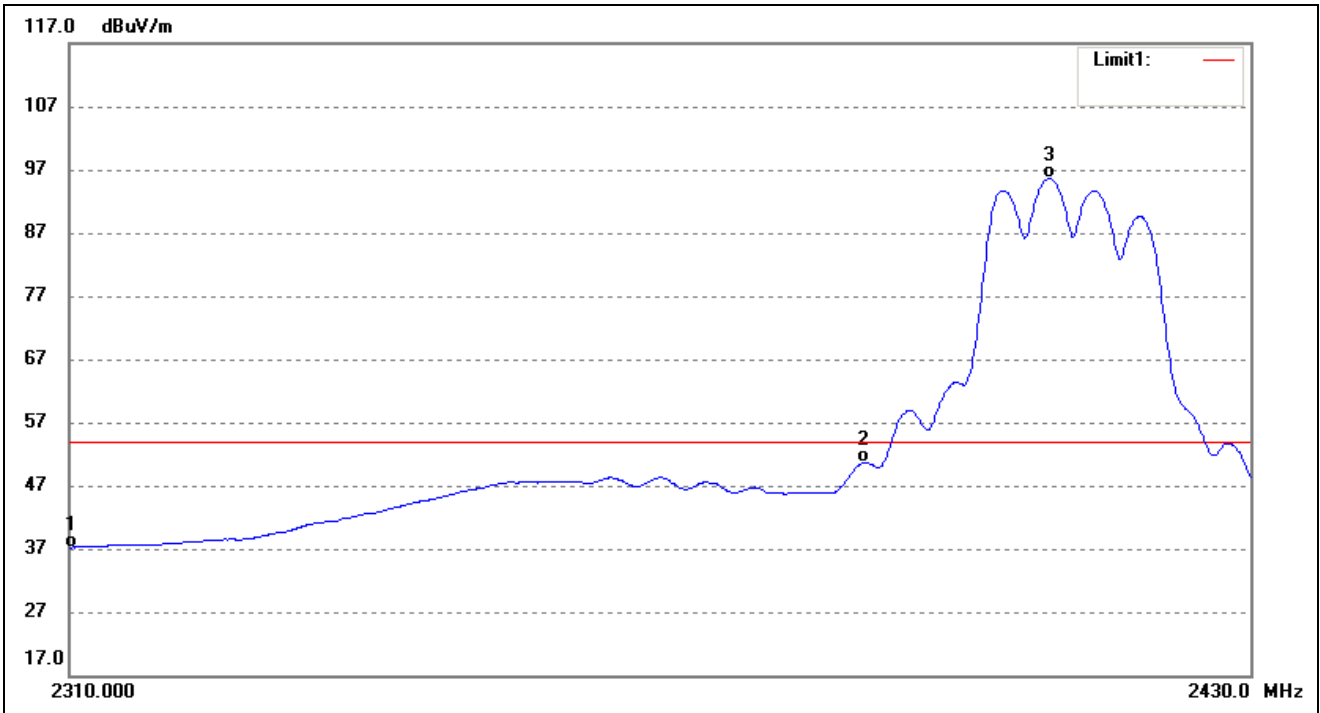


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.97	-7.78	37.19	54.00	-16.81	AVG
2	2390.000	58.05	-7.32	50.73	54.00	-3.27	AVG
3	2409.169	102.74	-7.21	95.53	/	/	AVG



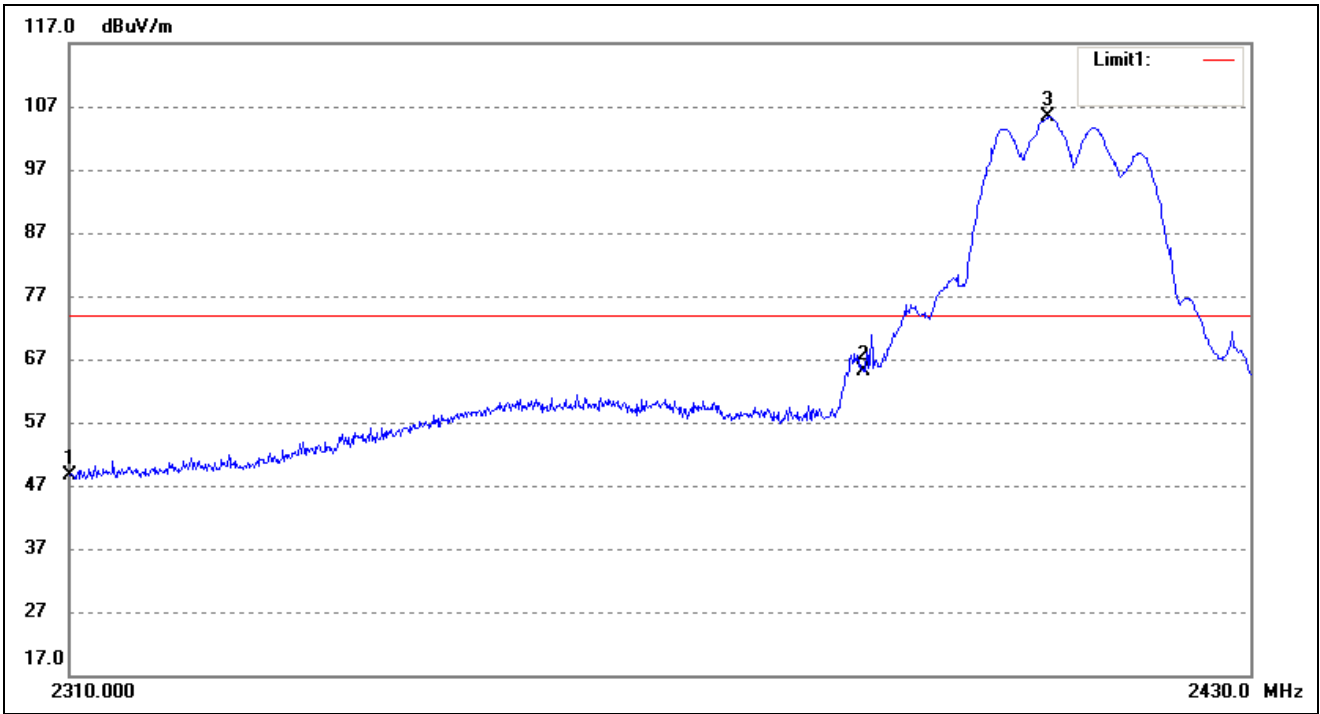


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	56.40	-7.78	48.62	74.00	-25.38	peak
2	2390.000	72.35	-7.32	65.03	74.00	-8.97	peak
3	2409.047	112.64	-7.21	105.43	/	/	peak

➤ 802.11g-Highest Band edge  
Vertical (Worst case)

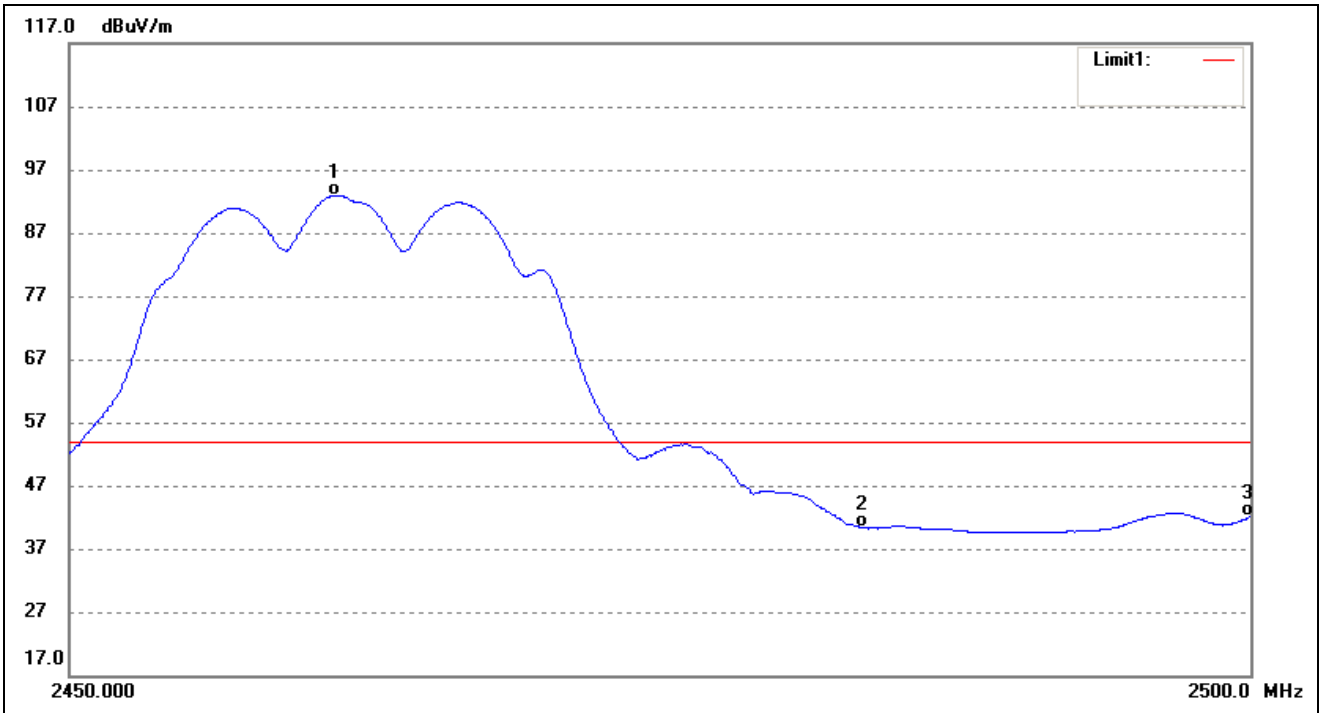


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.162	99.90	-6.90	93.00	/	/	AVG
2	2483.500	47.11	-6.77	40.34	54.00	-13.66	AVG
3	2500.000	48.84	-6.67	42.17	54.00	-11.83	AVG

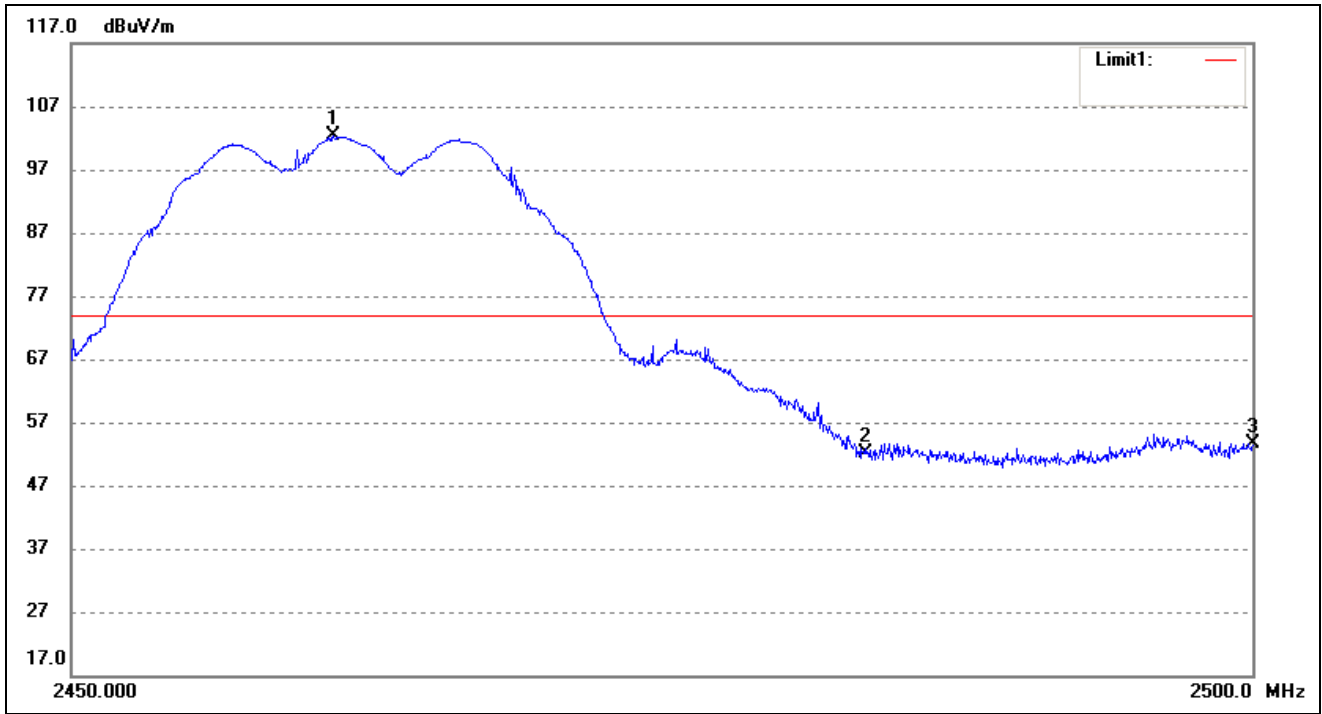


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.013	109.33	-6.90	102.43	/	/	peak
2	2483.500	58.82	-6.77	52.05	74.00	-21.95	peak
3	2500.000	60.32	-6.67	53.65	74.00	-20.35	peak

➤ 802.11n-HT20-Lowest Band edge  
Vertical (Worst case)

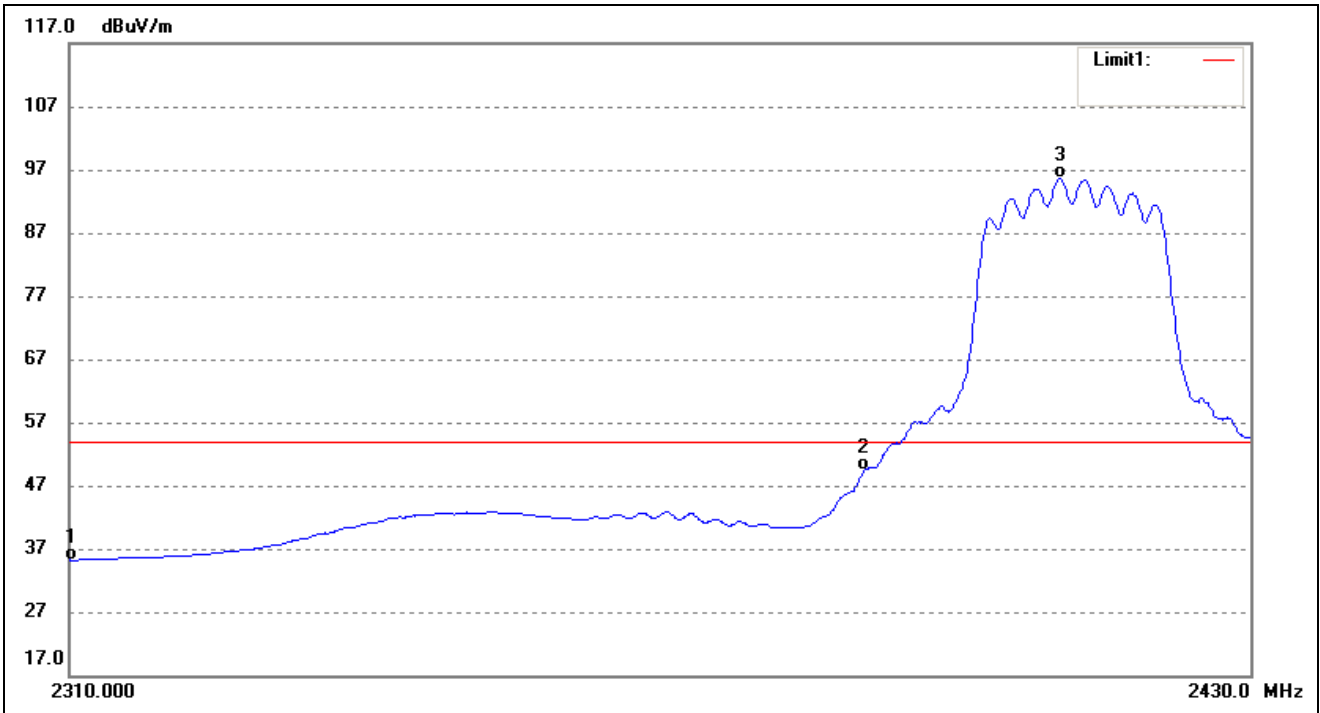


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.00	-7.78	35.22	54.00	-18.78	AVG
2	2390.000	56.69	-7.32	49.37	54.00	-4.63	AVG
3	2410.267	102.75	-7.19	95.56	/	/	AVG

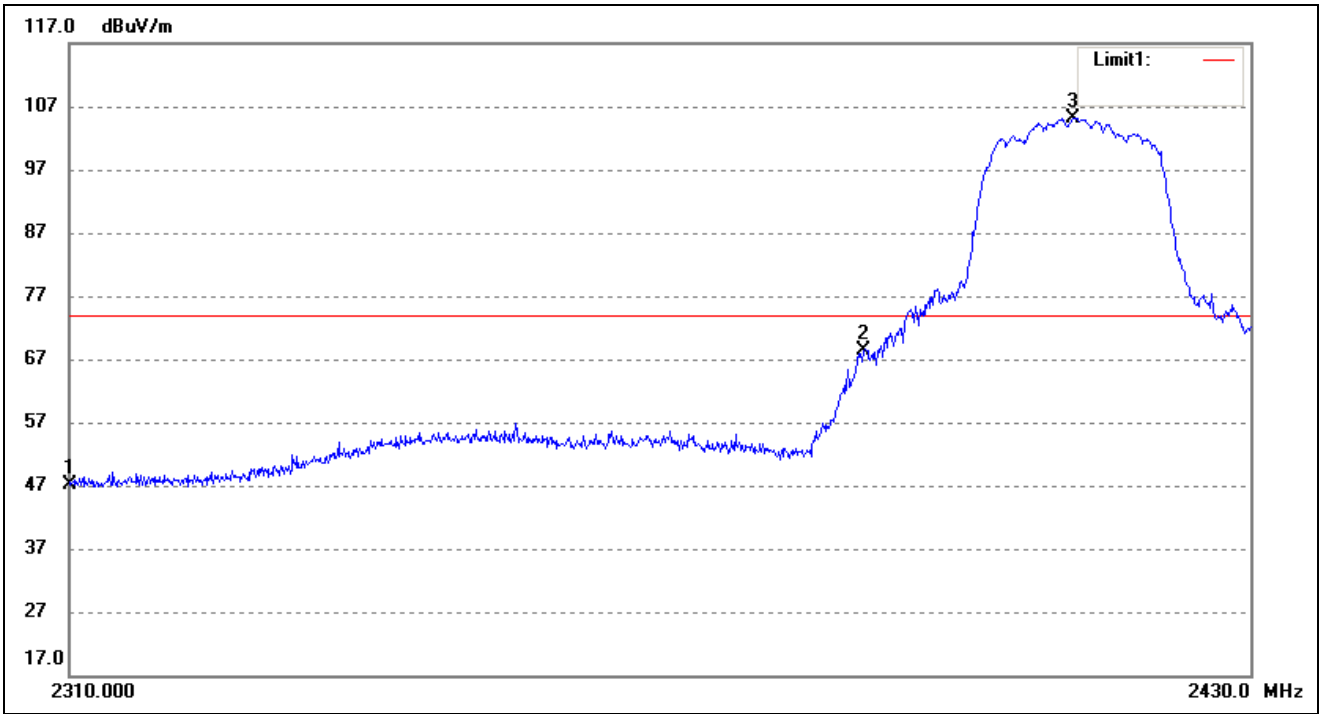


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	54.85	-7.78	47.07	74.00	-26.93	peak
2	2390.000	75.79	-7.32	68.47	74.00	-5.53	peak
3	2411.610	112.37	-7.19	105.18	/	/	peak

- 802.11n-HT20-Highest Band edge
- Vertical (Worst case)

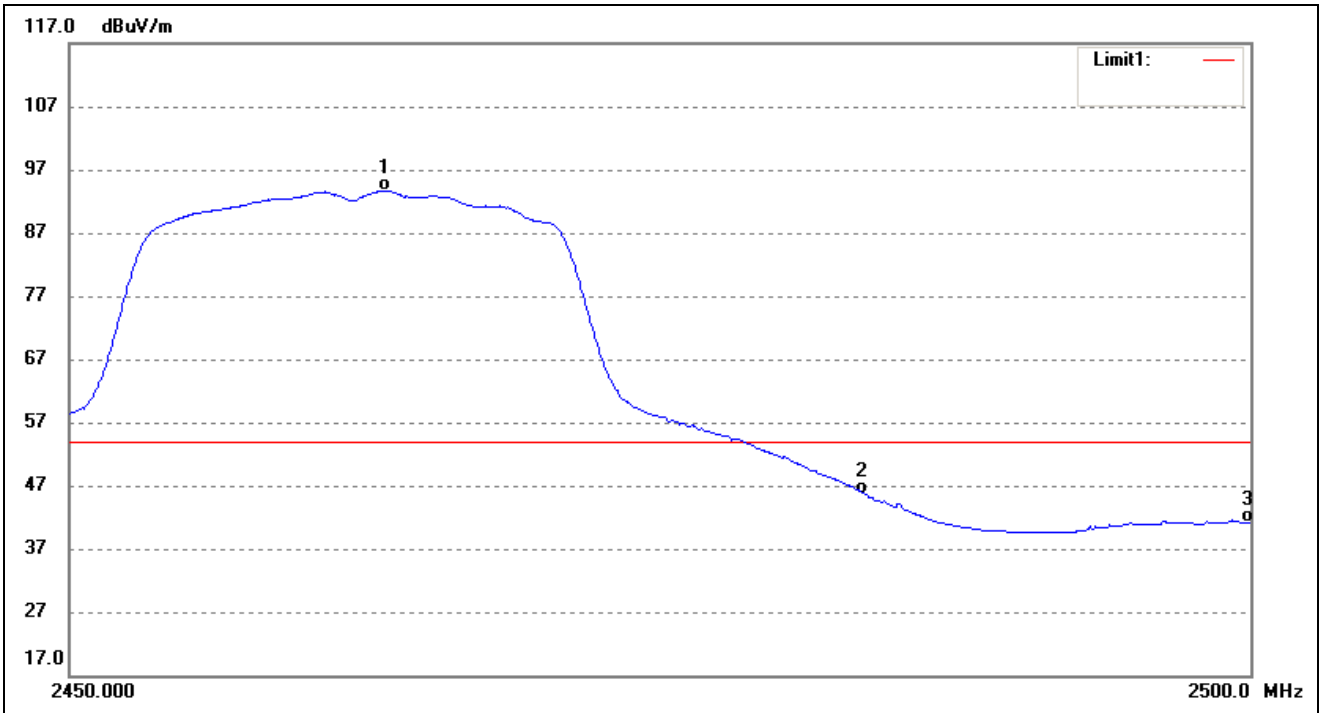


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.251	100.59	-6.89	93.70	/	/	AVG
2	2483.500	52.52	-6.77	45.75	54.00	-8.25	AVG
3	2500.000	47.72	-6.67	41.05	54.00	-12.95	AVG

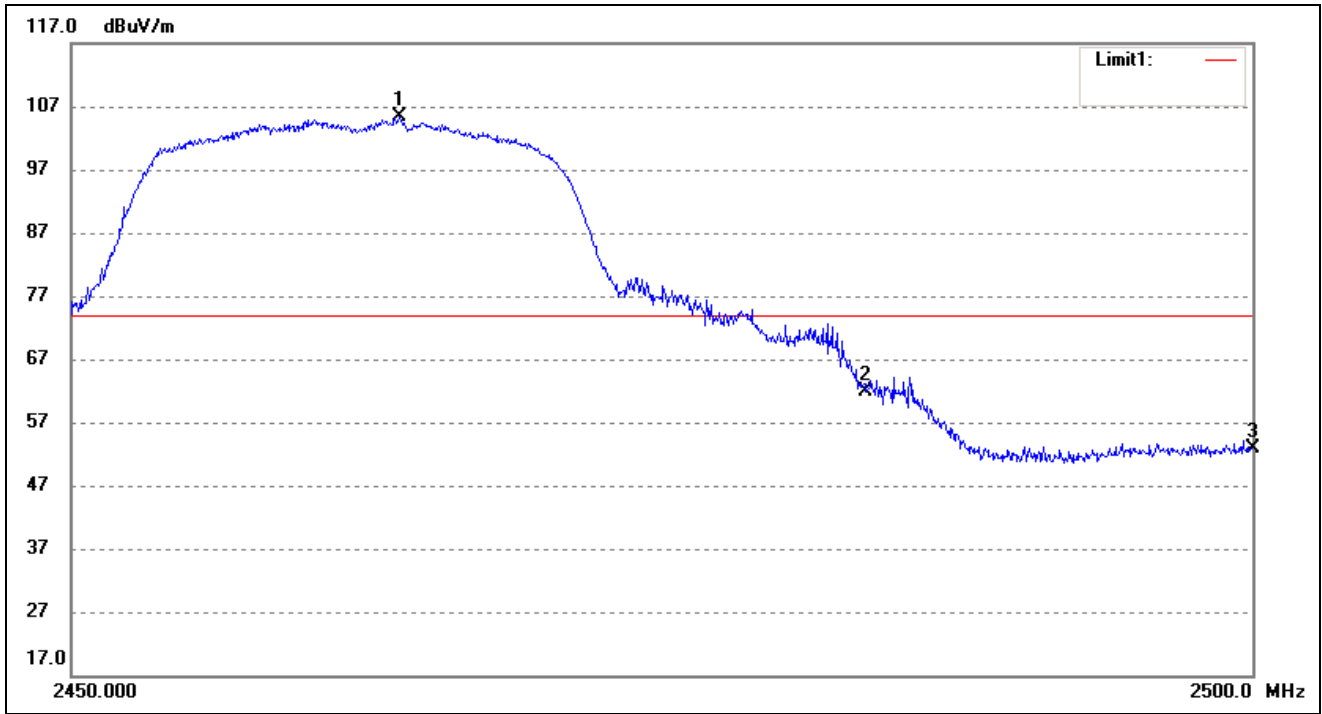


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.799	112.15	-6.89	105.26	/	/	peak
2	2483.500	68.75	-6.77	61.98	74.00	-12.02	peak
3	2500.000	59.43	-6.67	52.76	74.00	-21.24	peak

- 802.11n-HT40-Lowest Band edge
- Vertical (Worst case)

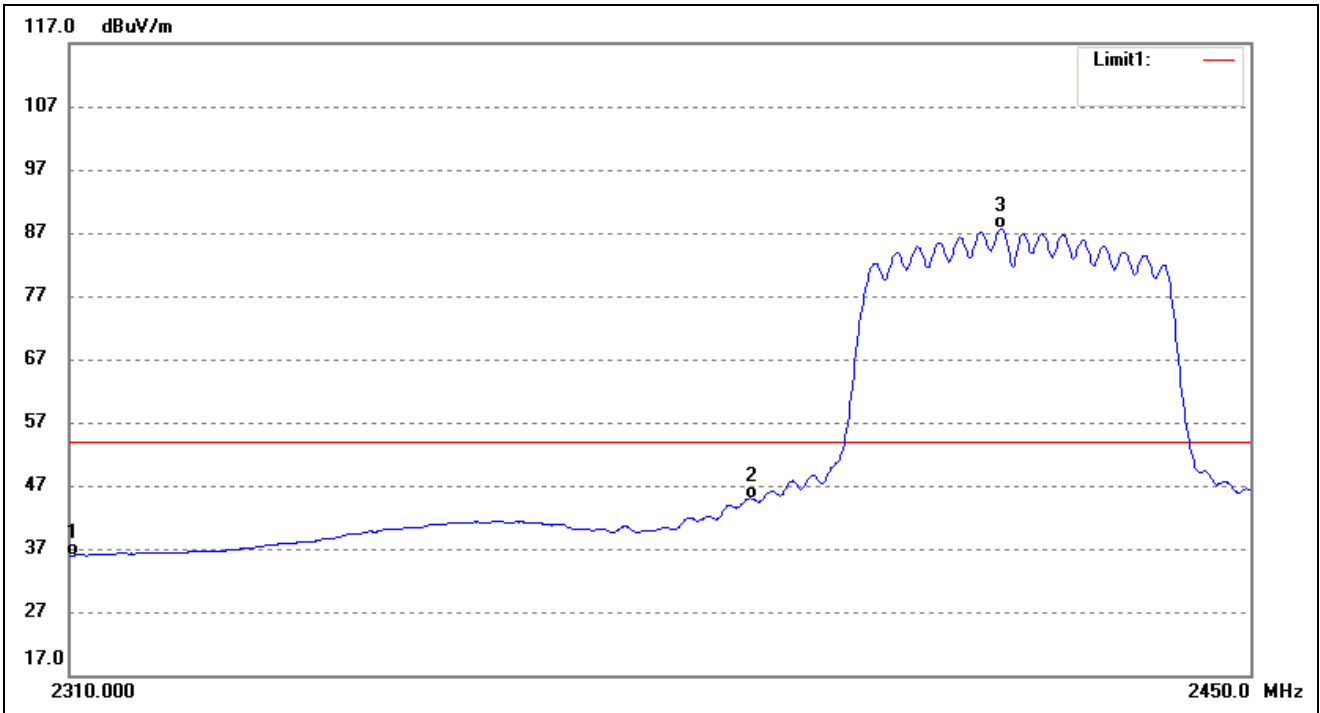


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.71	-7.78	35.93	54.00	-18.07	AVG
2	2390.000	52.26	-7.32	44.94	54.00	-9.06	AVG
3	2419.770	94.83	-7.14	87.69	/	/	AVG



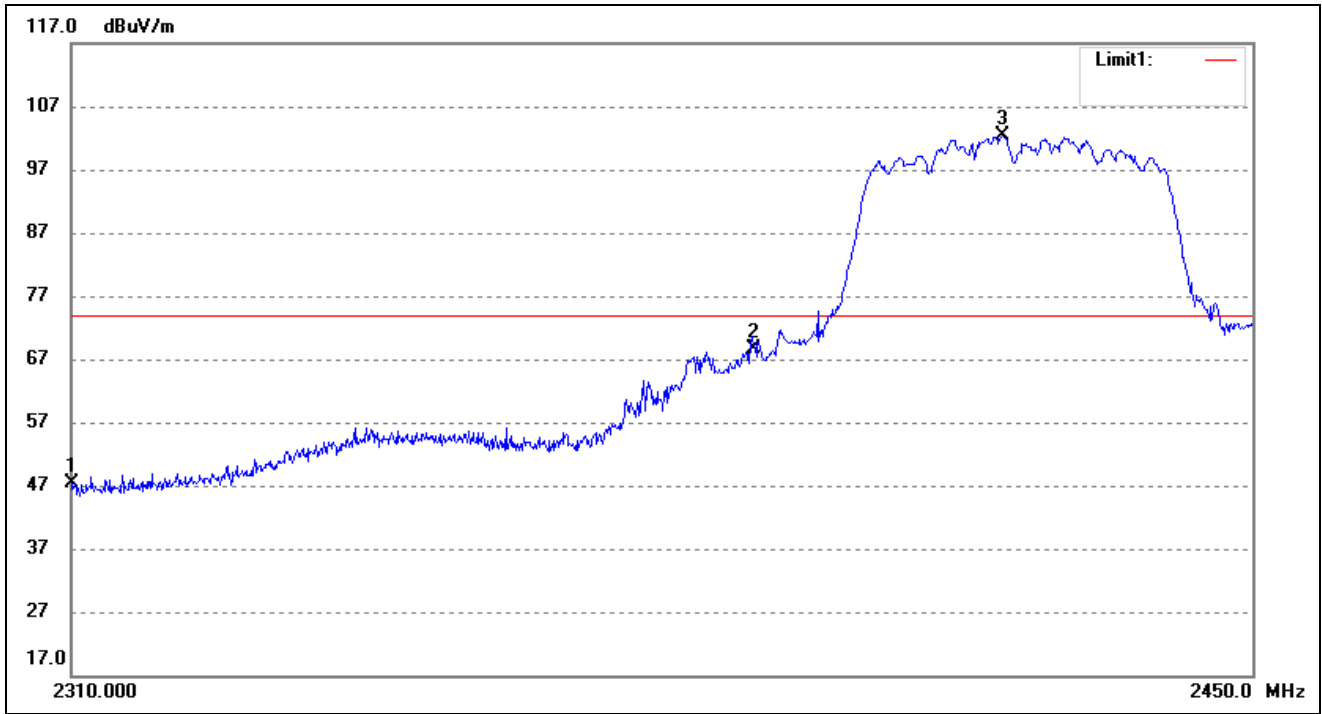


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	55.15	-7.78	47.37	74.00	-26.63	peak
2	2390.000	75.91	-7.32	68.59	74.00	-5.41	peak
3	2419.628	109.57	-7.14	102.43	/	/	peak

➤ 802.11n-HT40-Highest Band edge  
Vertical (Worst case)

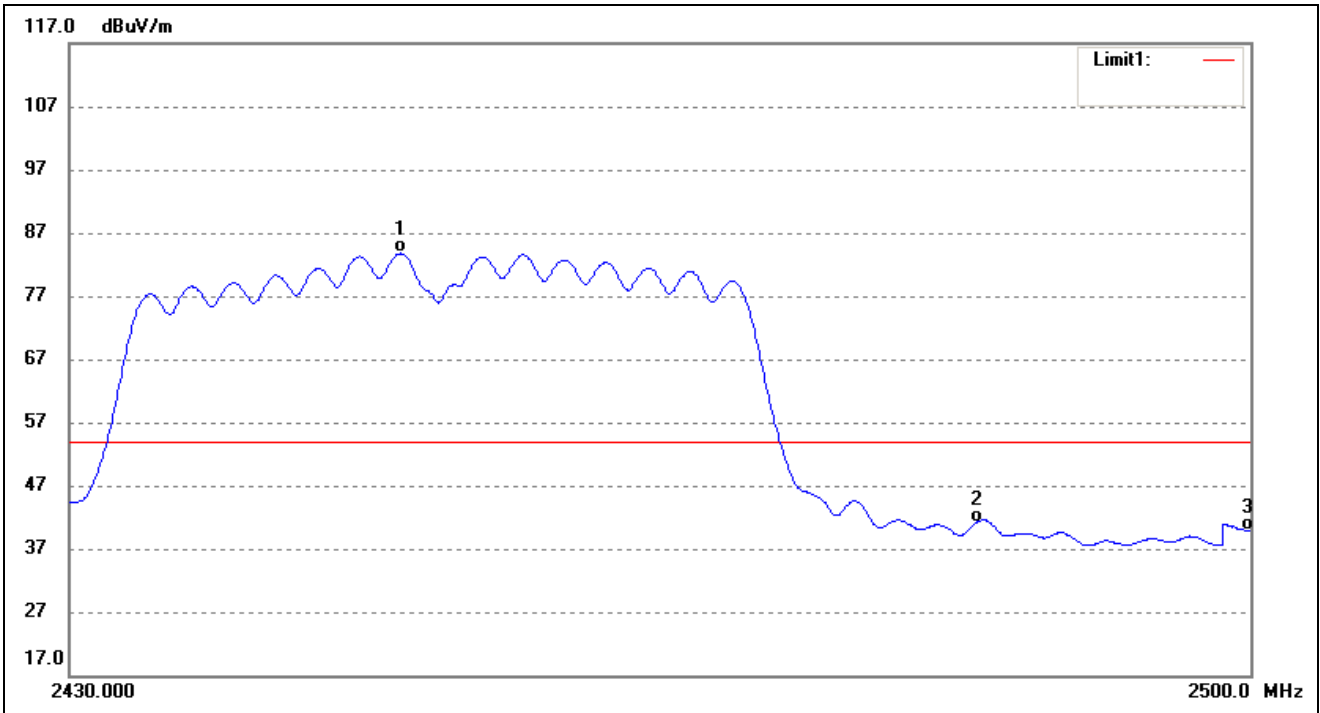


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2449.400	90.75	-6.96	83.79	/	/	AVG
2	2483.500	47.82	-6.77	41.05	54.00	-12.95	AVG
3	2500.000	46.60	-6.67	39.93	54.00	-14.07	AVG

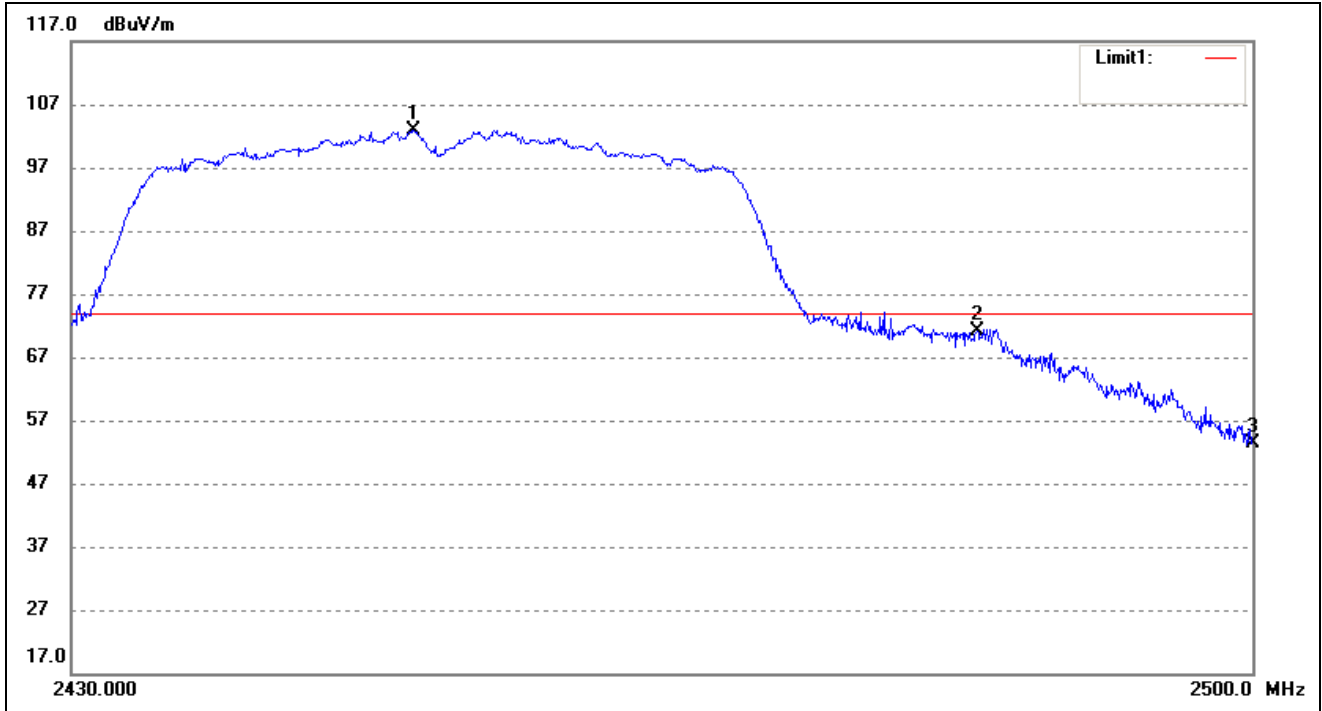


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.096	109.85	-6.96	102.89	/	/	peak
2	2483.500	77.99	-6.77	71.22	74.00	-2.78	peak
3	2500.000	60.15	-6.67	53.48	74.00	-20.52	peak

- Antenna 1+Antenna2
- 802.11n-HT20-Lowest Band edge
- Vertical (Worst case)

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

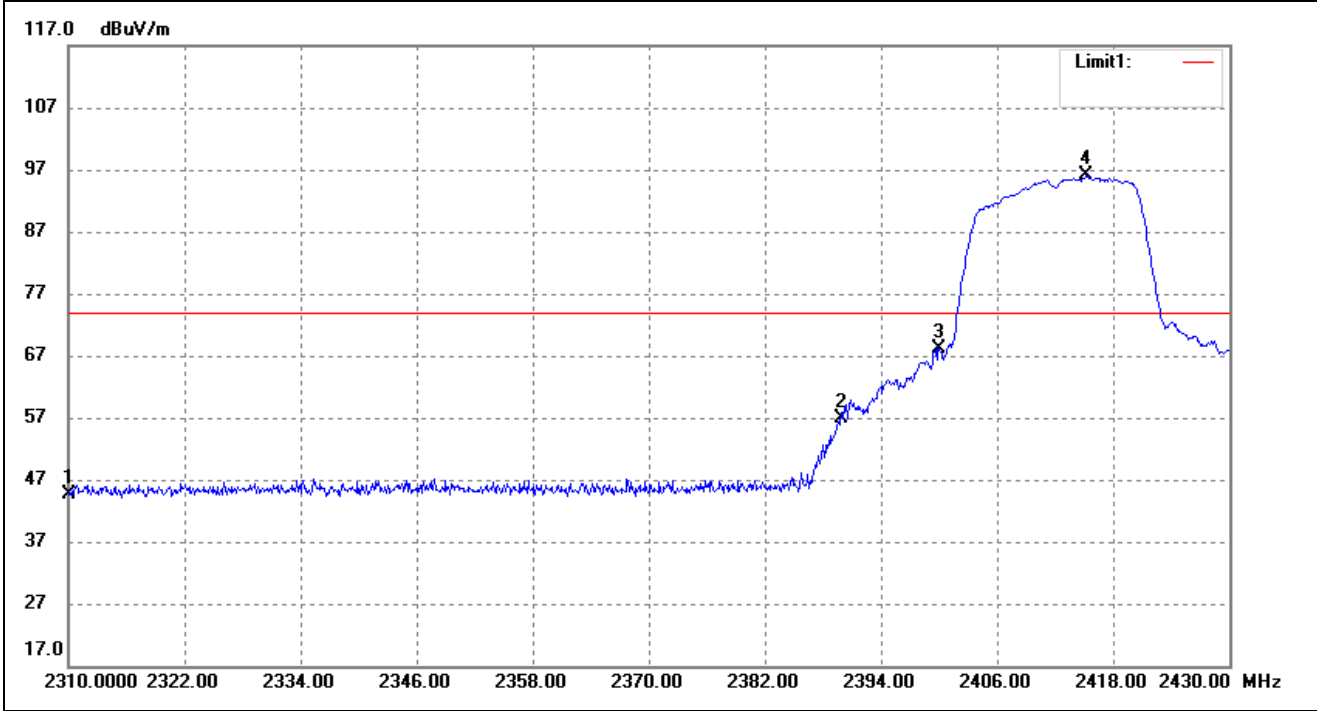


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	52.49	-7.78	44.71	74.00	-29.29	peak
2	2390.000	64.19	-7.32	56.87	74.00	-17.13	peak
3	2400.000	75.33	-7.26	68.07	74.00	-5.93	peak
4	2415.240	103.25	-7.17	96.08	/	/	peak

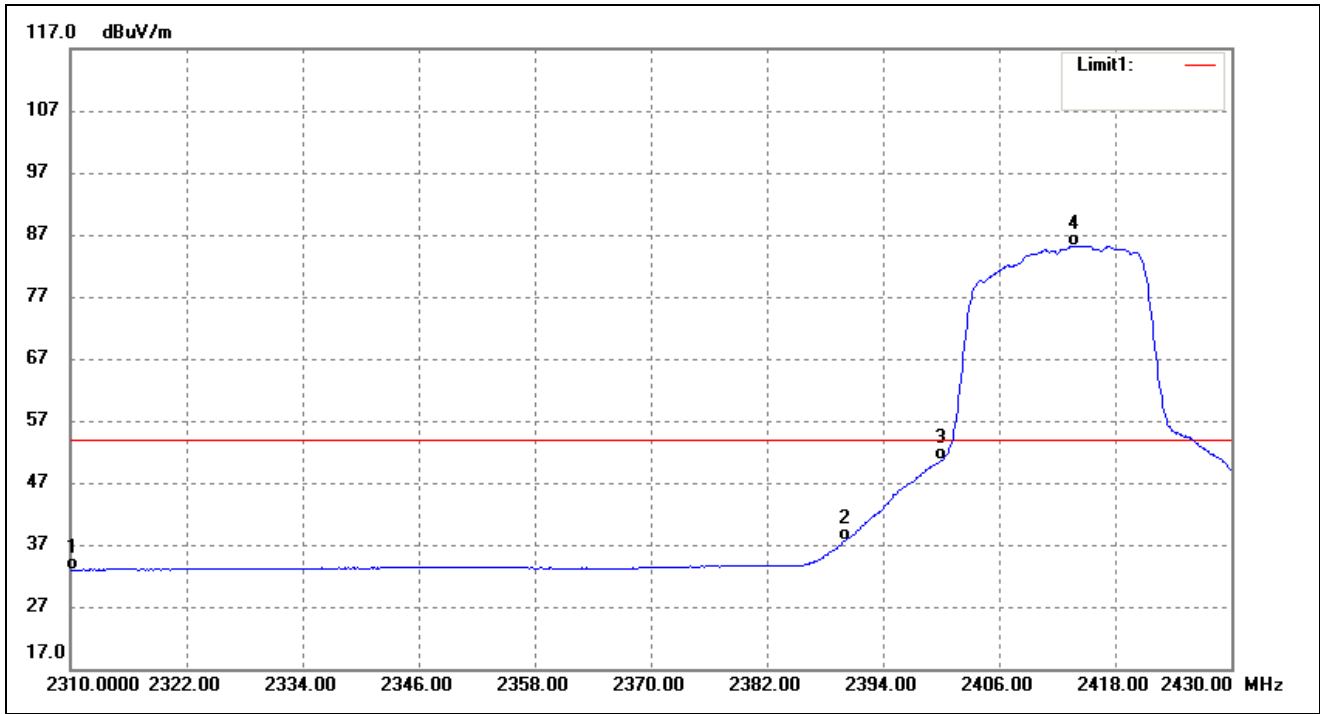


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.72	-7.78	32.94	54.00	-21.06	AVG
2	2390.000	44.98	-7.32	37.66	54.00	-16.34	AVG
3	2400.000	57.86	-7.26	50.60	/		AVG
4	2413.680	92.40	-7.18	85.22			AVG

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

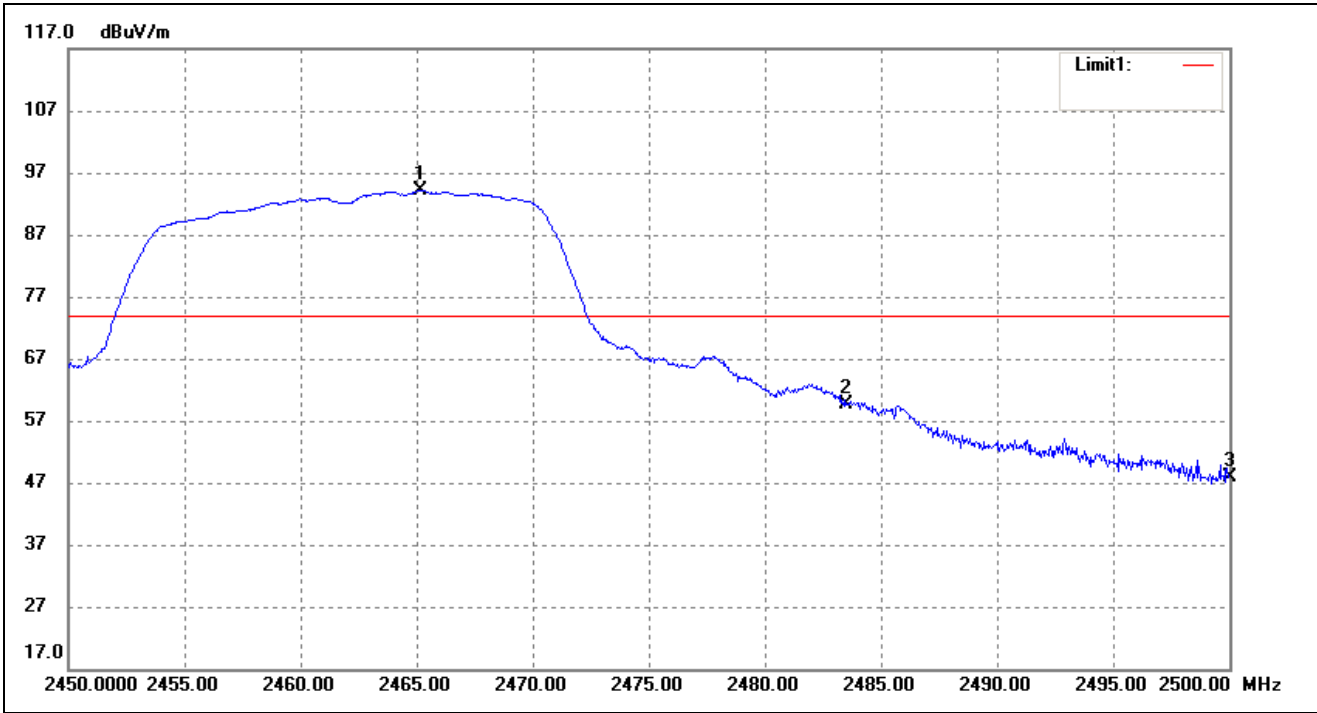


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.150	101.04	-6.87	94.17	/	/	peak
2	2483.500	66.39	-6.77	59.62	74.00	-14.38	peak
3	2500.000	54.50	-6.67	47.83	74.00	-26.17	peak

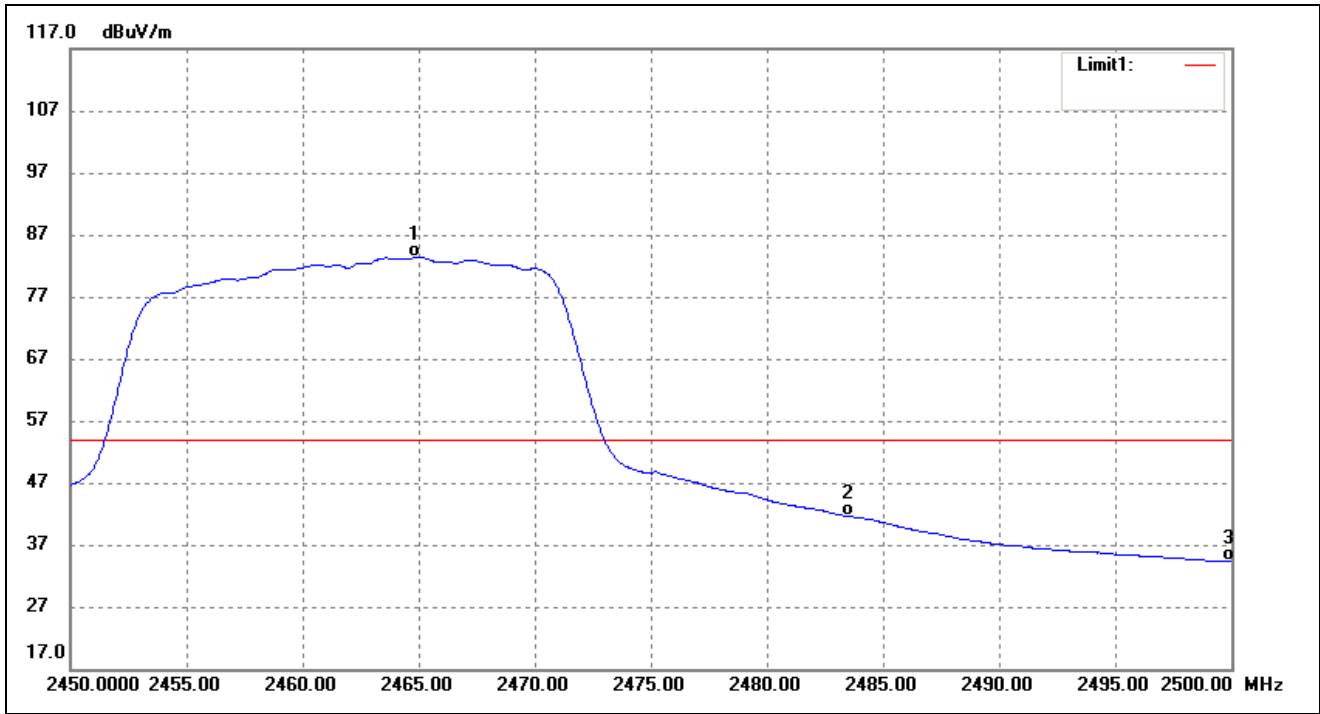


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.850	90.23	-6.88	83.35	/	/	AVG
2	2483.500	48.38	-6.77	41.61	54.00	-12.39	AVG
3	2500.000	40.94	-6.67	34.27	54.00	-19.73	AVG

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

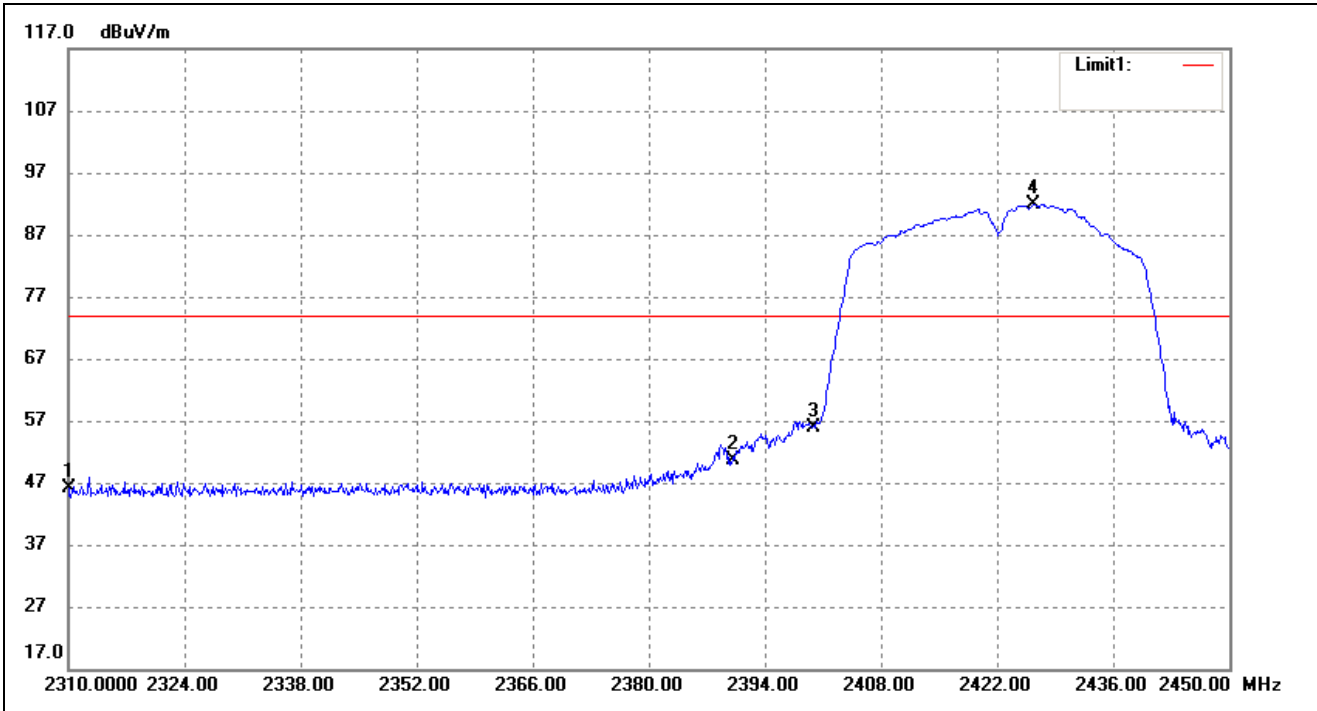


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	53.91	-7.78	46.13	74.00	-27.87	peak
2	2390.000	57.99	-7.32	50.67	74.00	-23.33	peak
3	2400.000	63.20	-7.26	55.94	74.00	-18.06	peak
4	2426.340	98.97	-7.10	91.87	/	/	peak



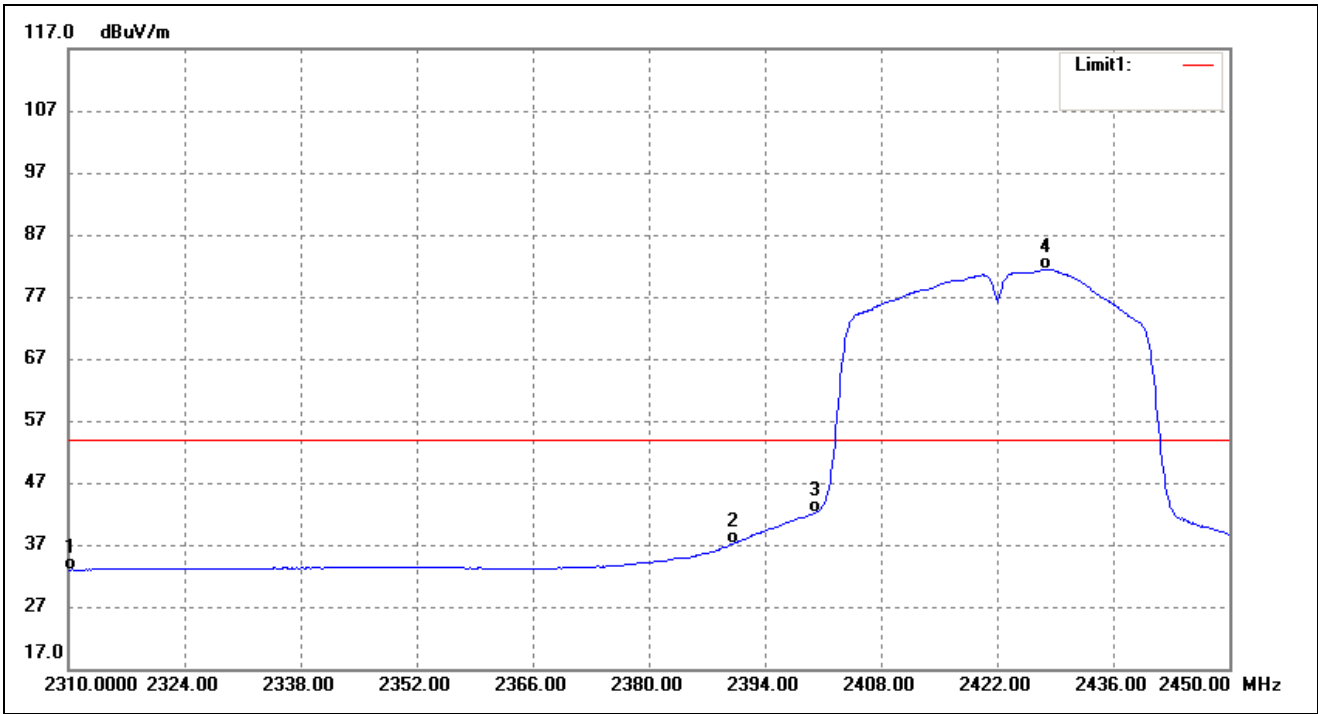


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.76	-7.78	32.98	54.00	-21.02	AVG
2	2390.000	44.44	-7.32	37.12	54.00	-16.88	AVG
3	2400.000	49.43	-7.26	42.17	/		AVG
4	2427.880	88.47	-7.10	81.37			AVG

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

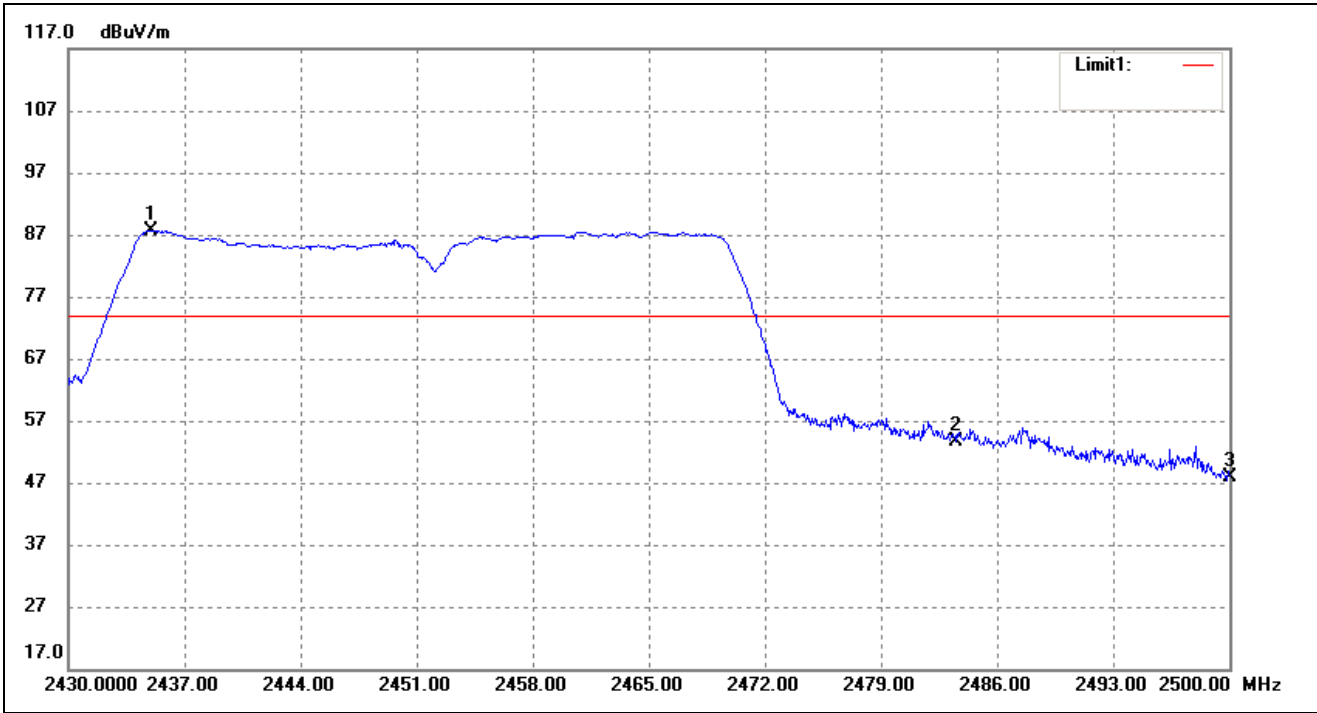

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2434.970	94.78	-7.05	87.73	/	/	peak
2	2483.500	60.51	-6.77	53.74	74.00	-20.26	peak
3	2500.000	54.54	-6.67	47.87	74.00	-26.13	peak



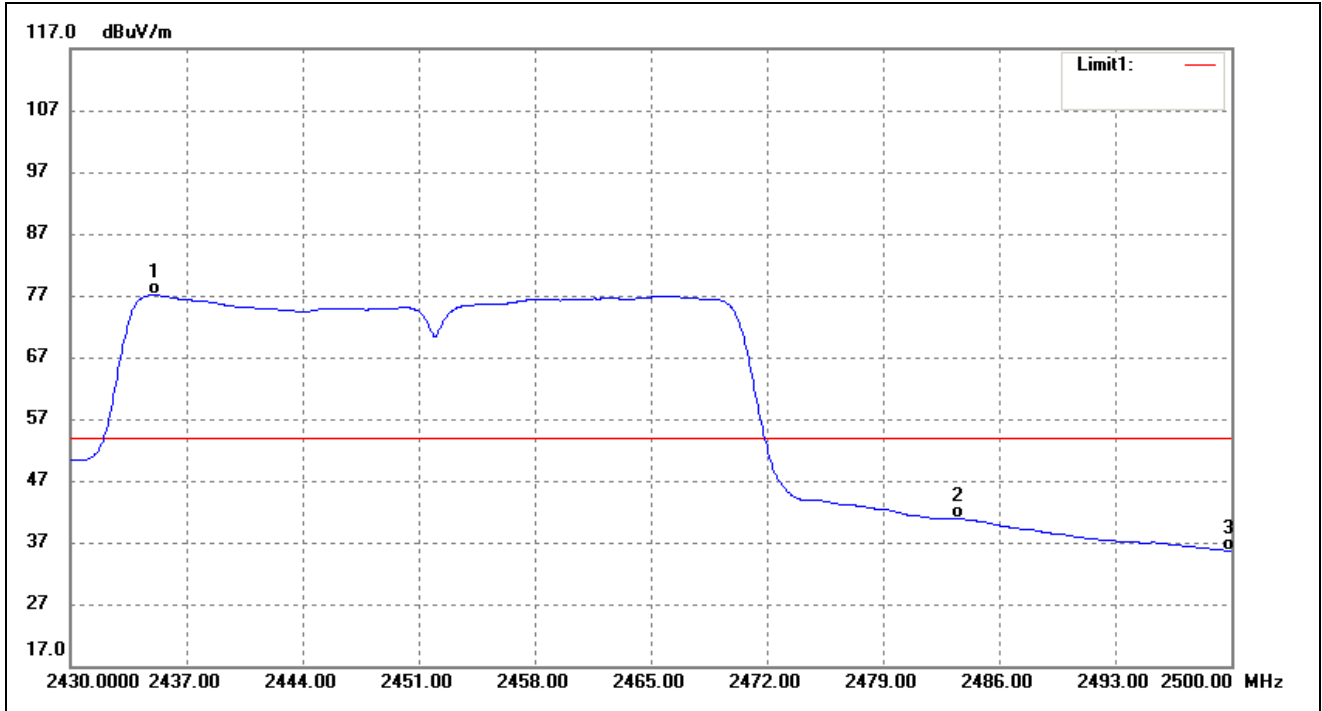


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2435.110	84.10	-7.04	77.06	/	/	AVG
2	2483.500	47.71	-6.77	40.94	54.00	-13.06	AVG
3	2500.000	42.30	-6.67	35.63	54.00	-18.37	AVG

➤ Antenna 1



802.11b\_11Mbps

Low

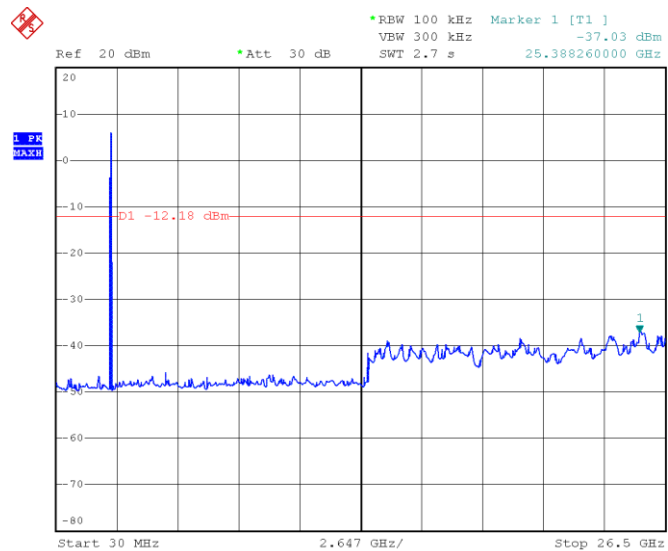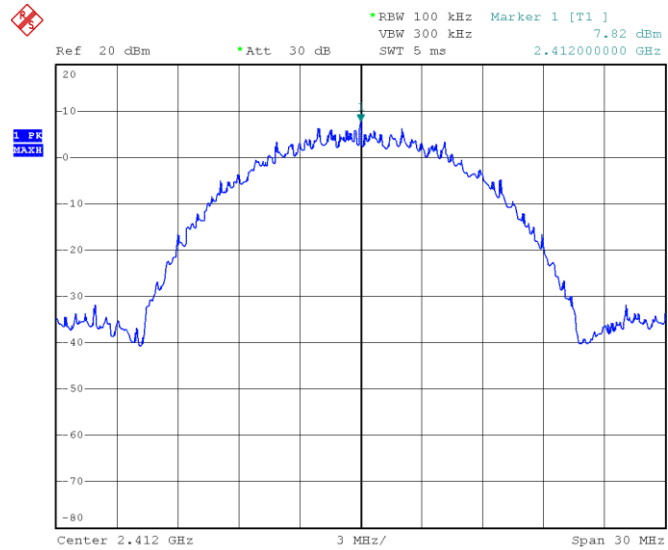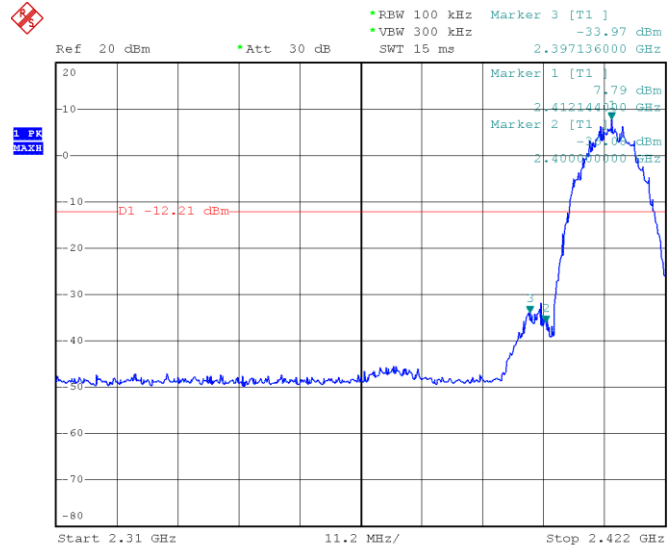




802.11b\_11Mbps

Middle

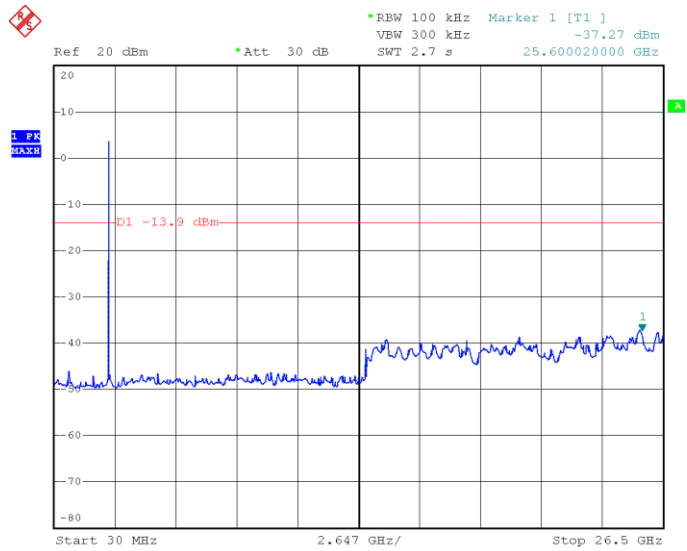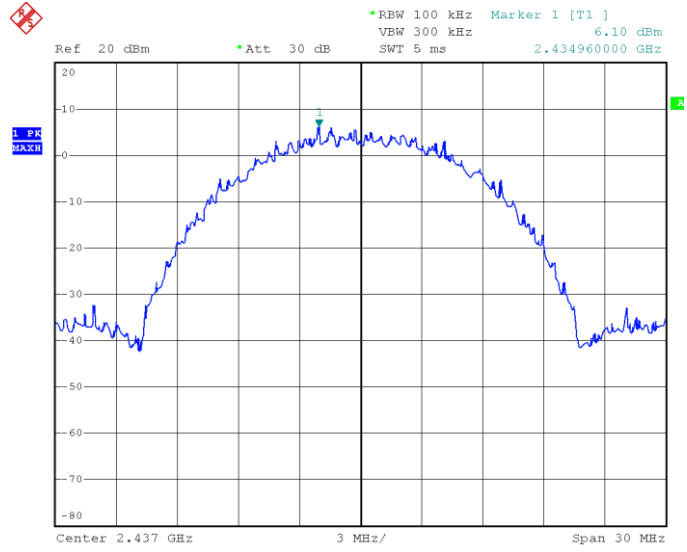




802.11b\_11Mbps

High

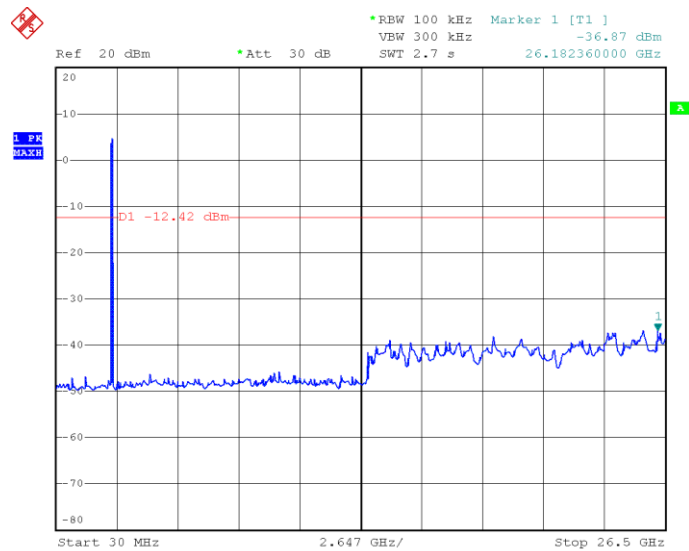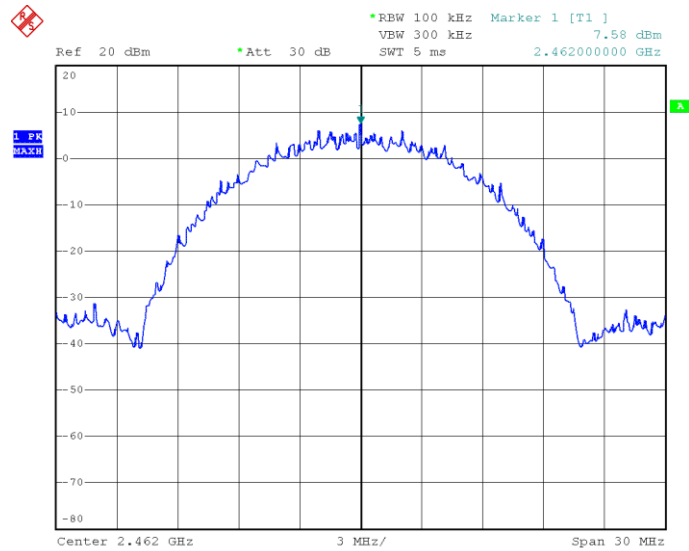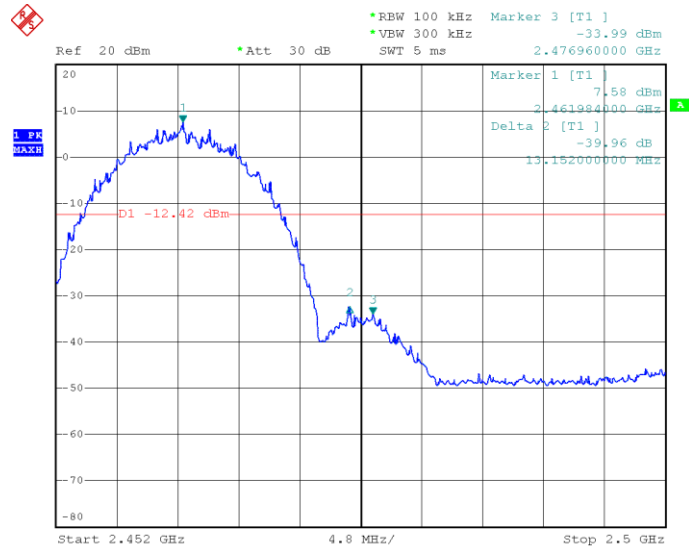



802.11g\_54Mbps

Low

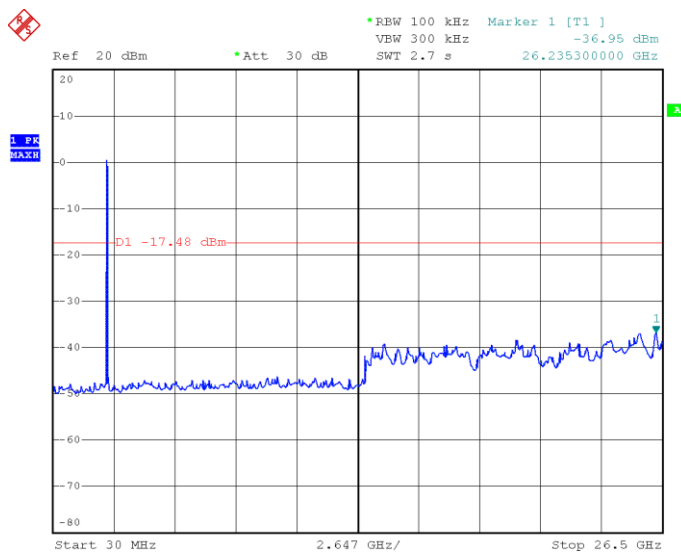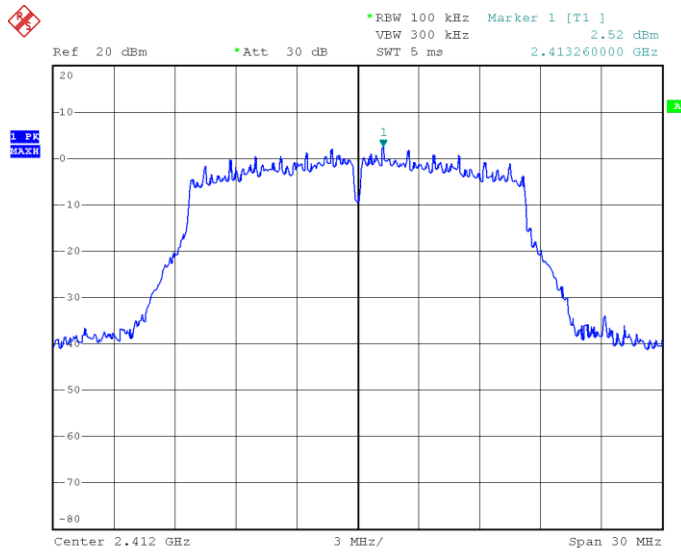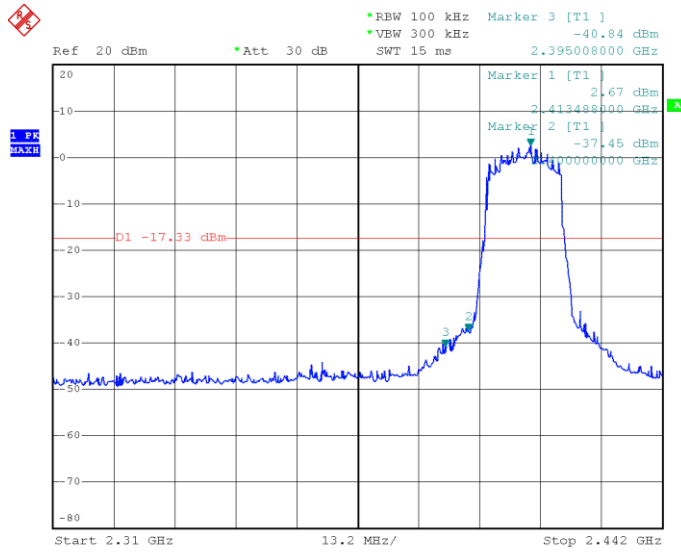

802.11g\_54Mbps




Middle

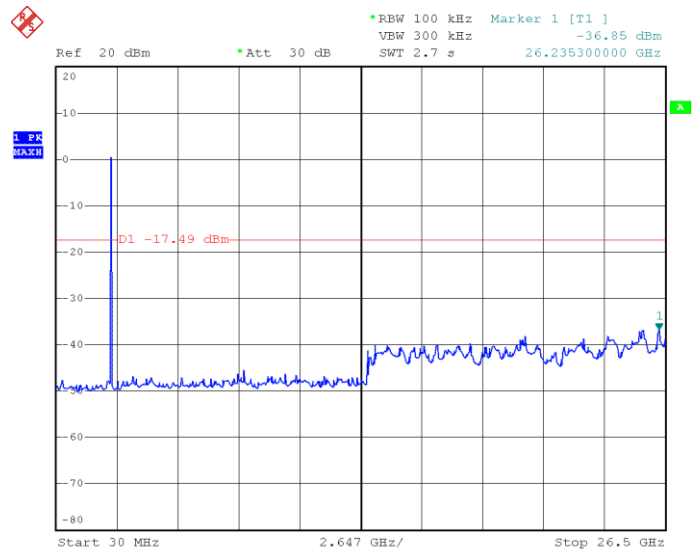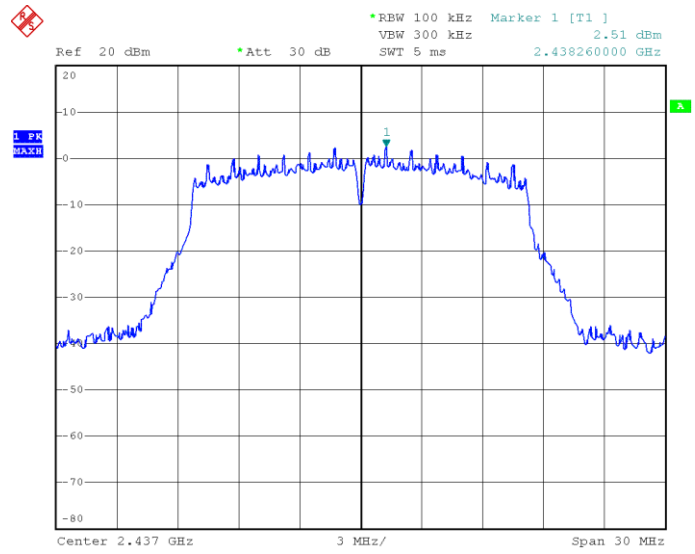






802.11g\_54Mbps

High

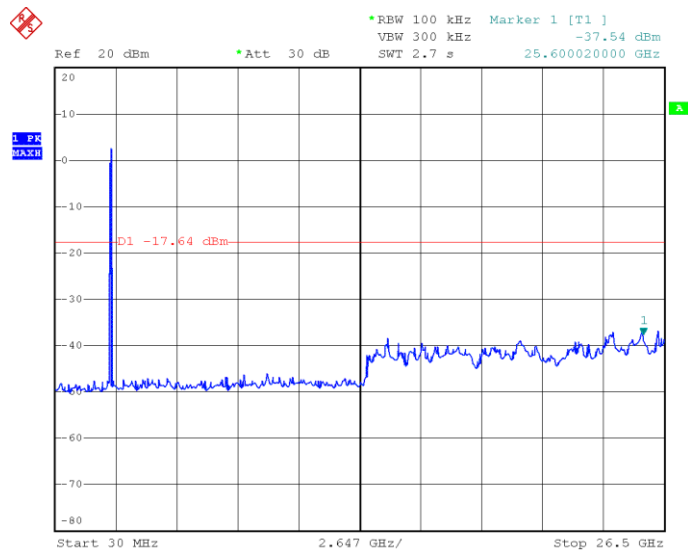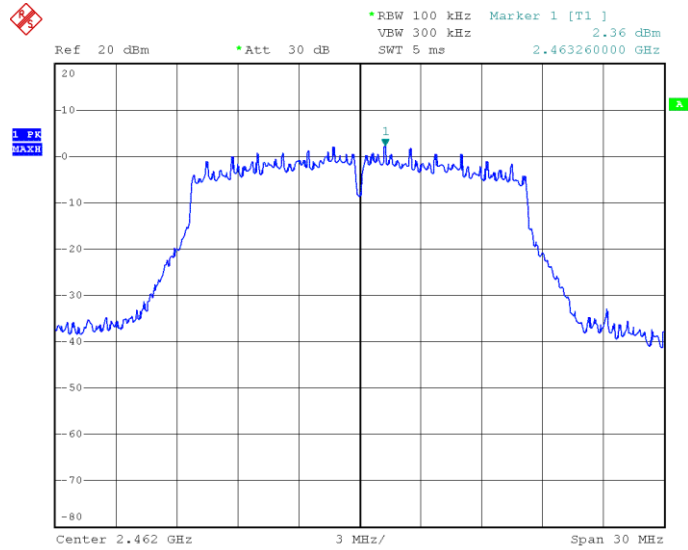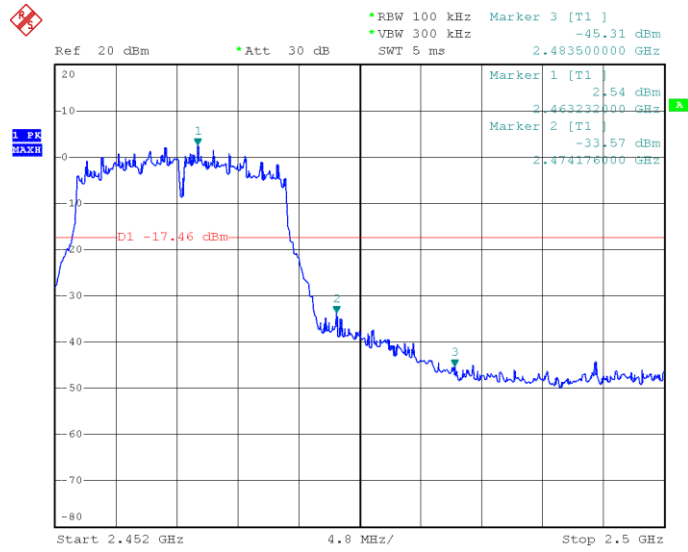



802.11n-HT20\_MCS7

Low

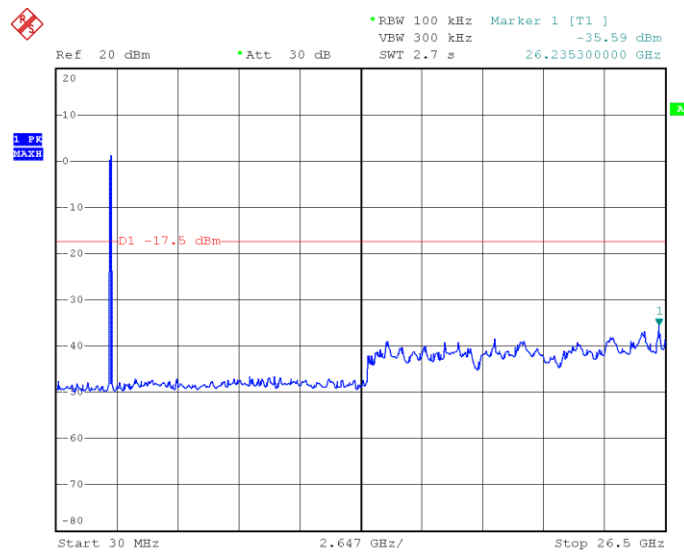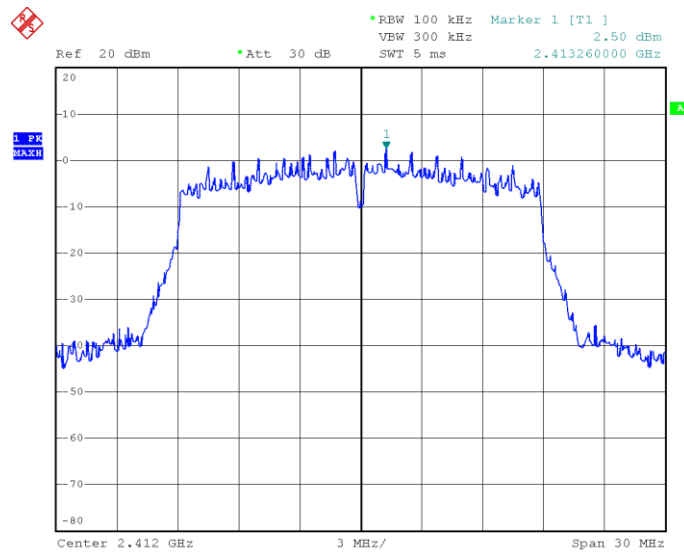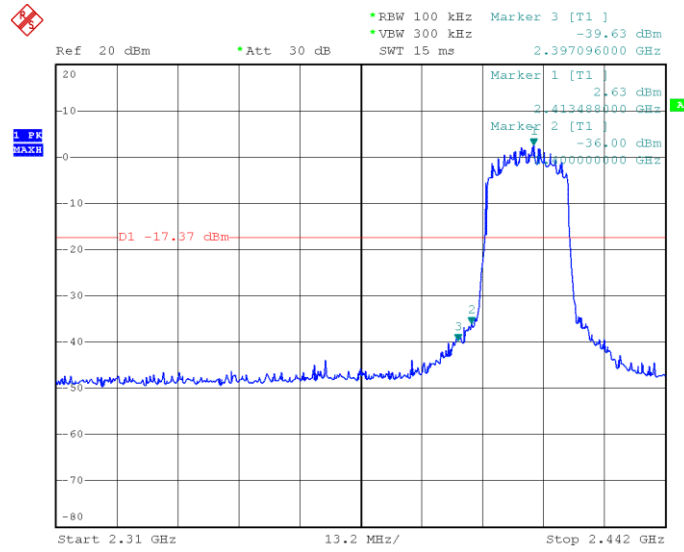




802.11n-HT20\_MCS7

Middle

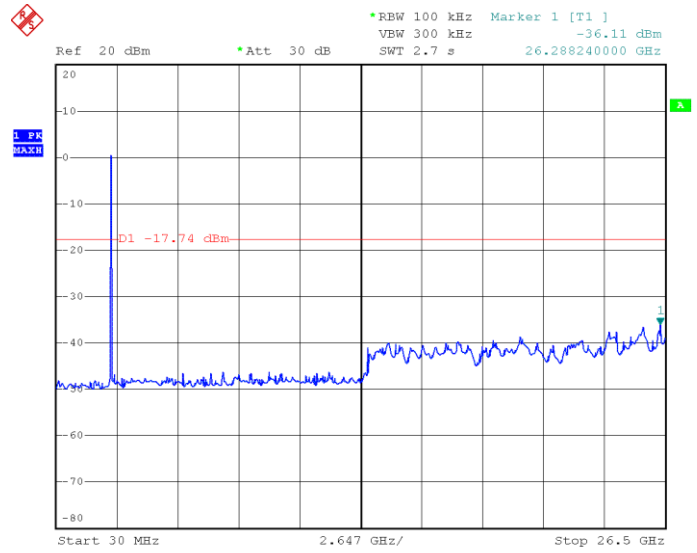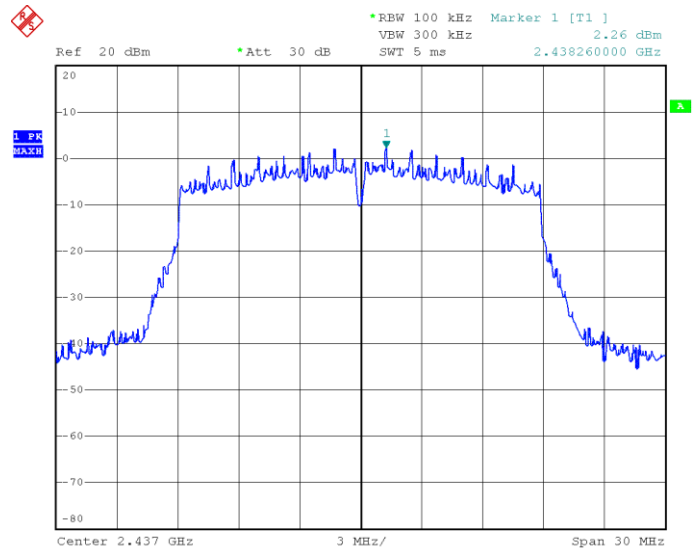




802.11n-HT20\_MCS7

High

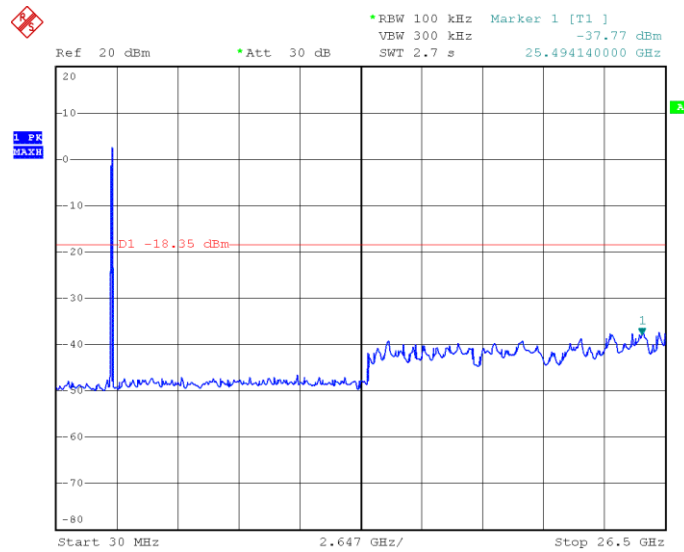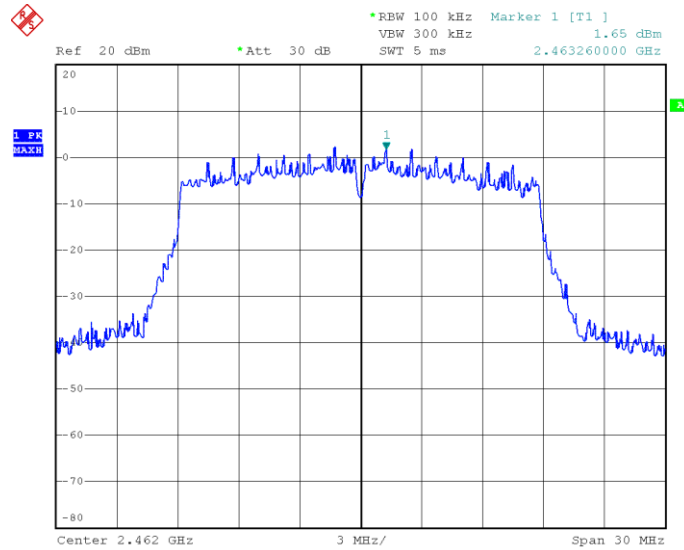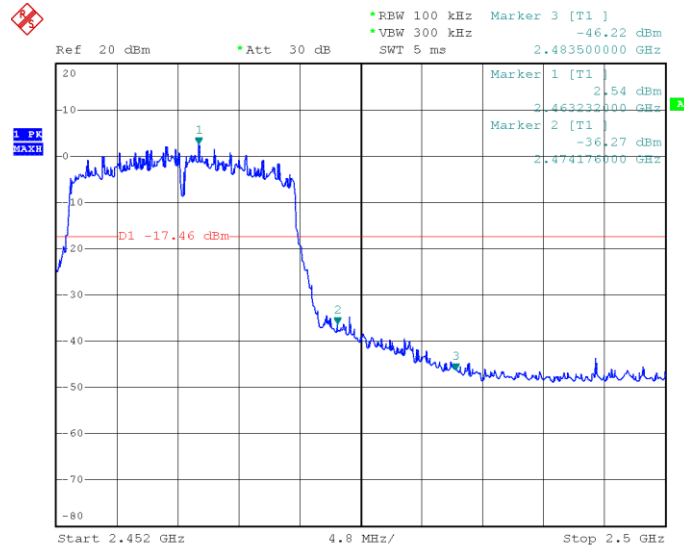



802.11n-HT40\_MCS7

Low

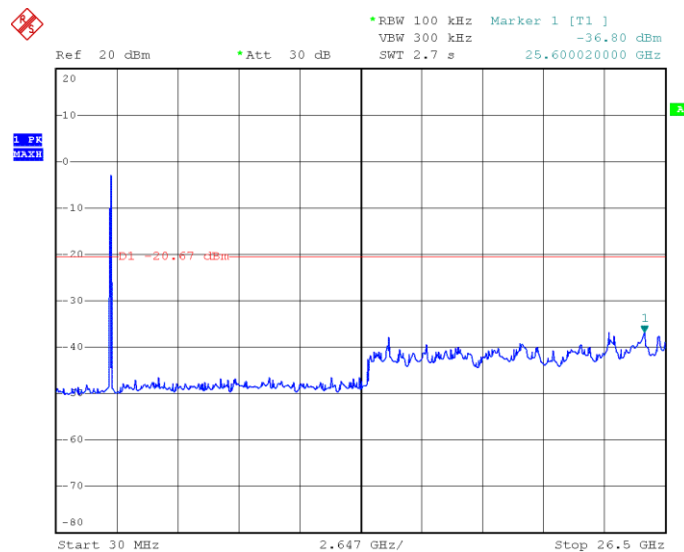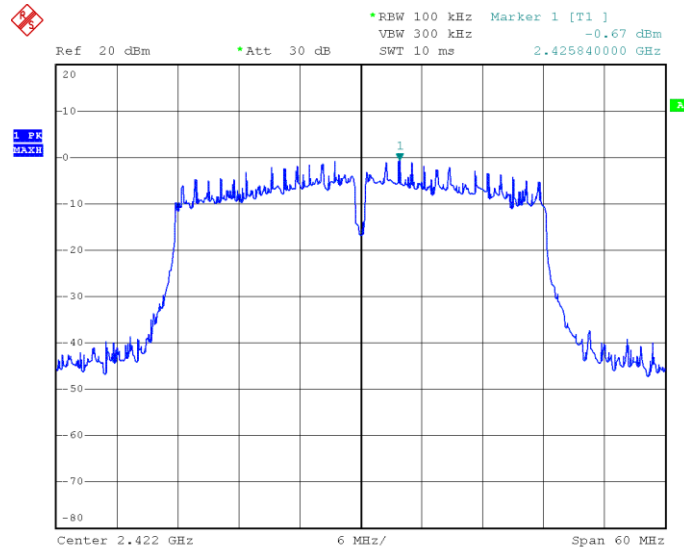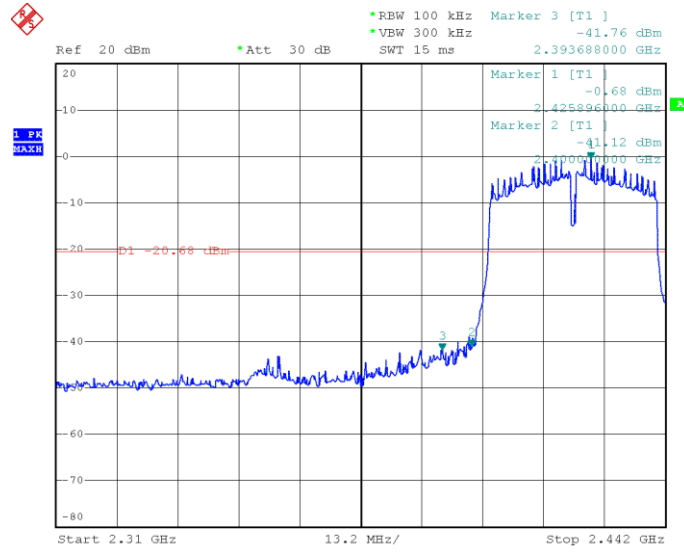




## 802.11n-HT40\_MCS7

Middle

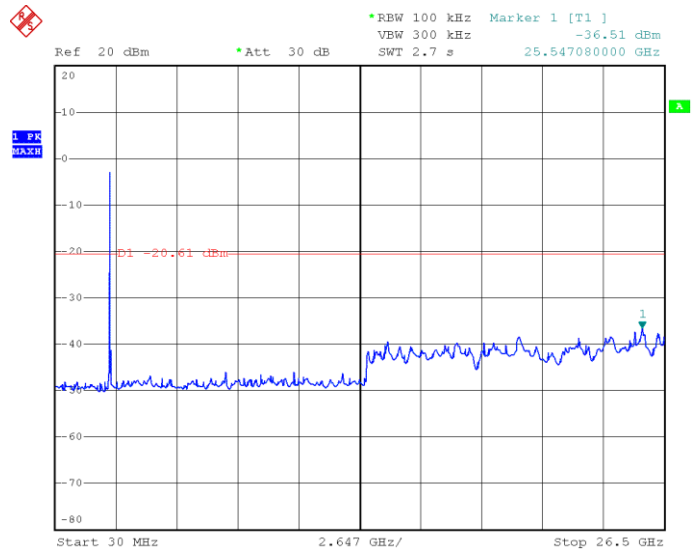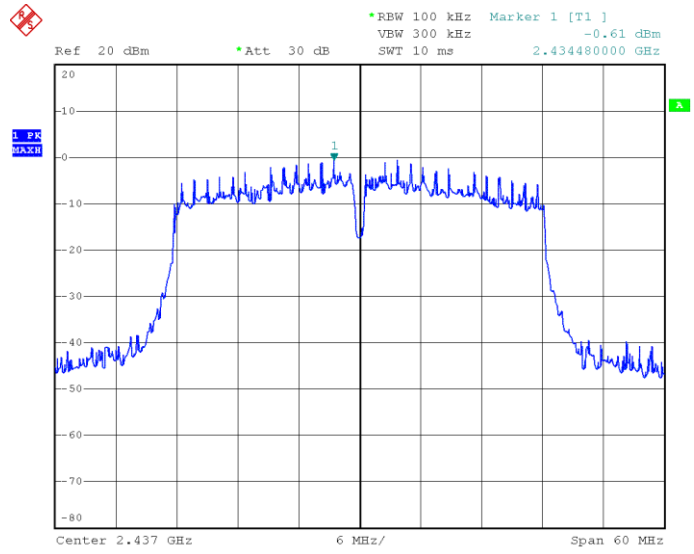

## 802.11n-HT40\_MCS7




High

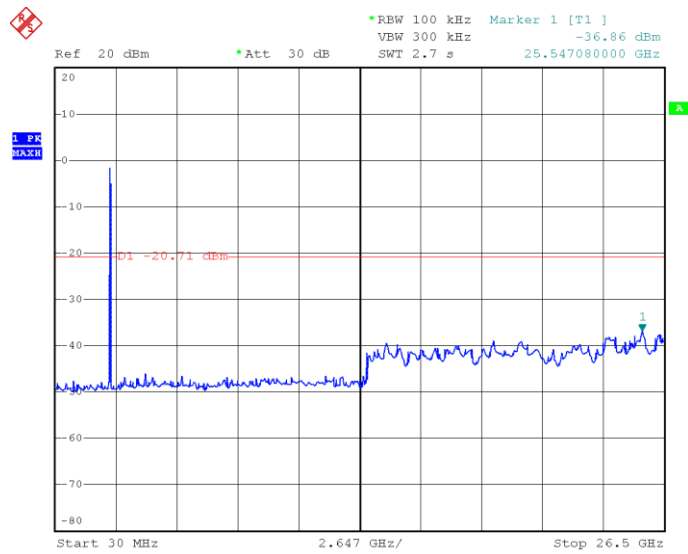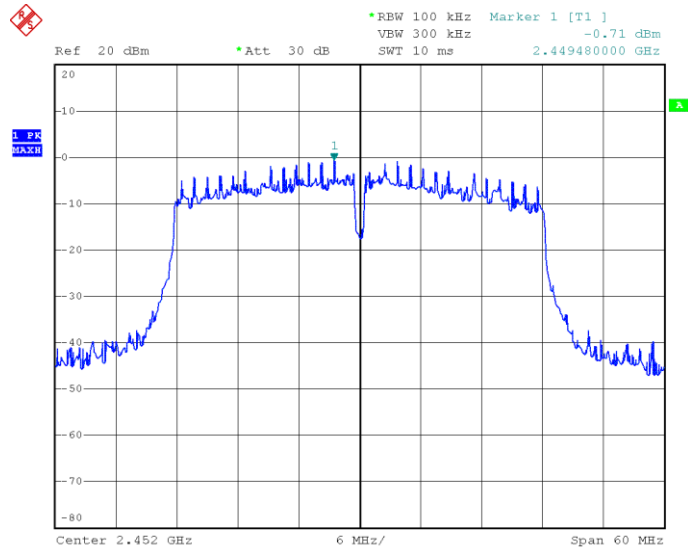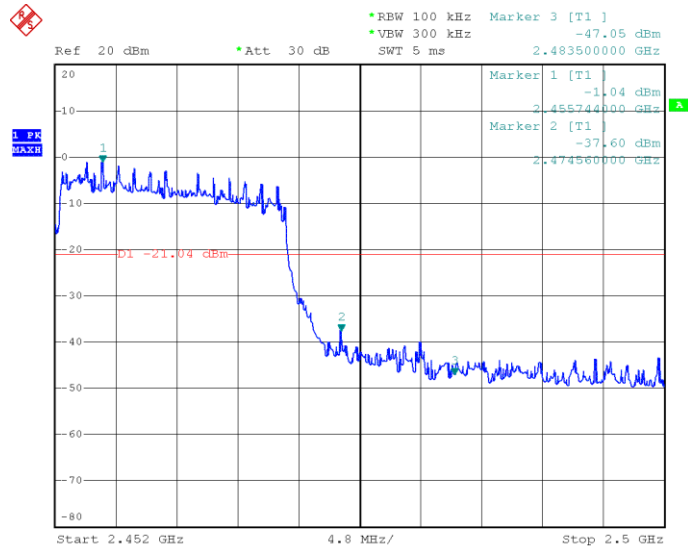

➤ Antenna 2

802.11b\_11Mbps



Low

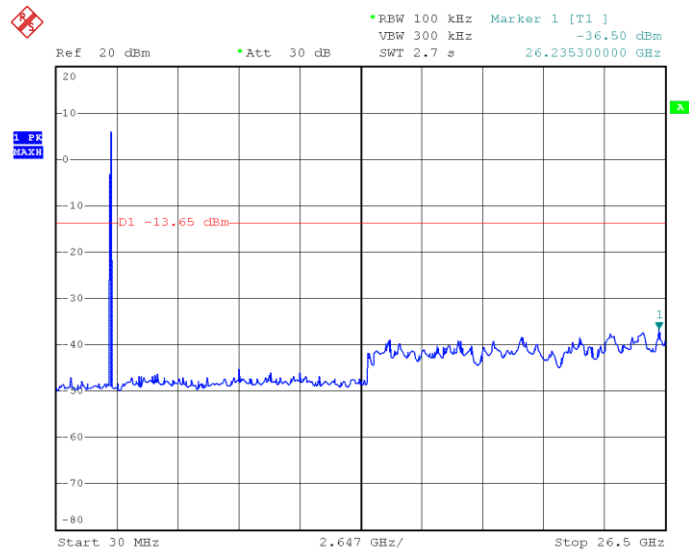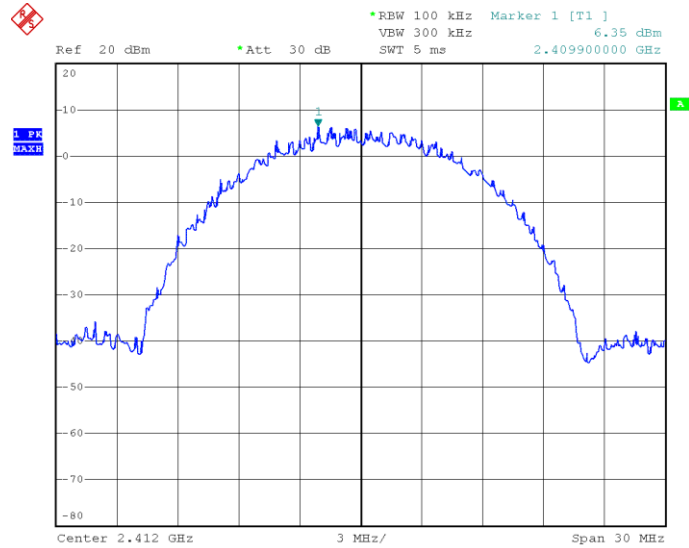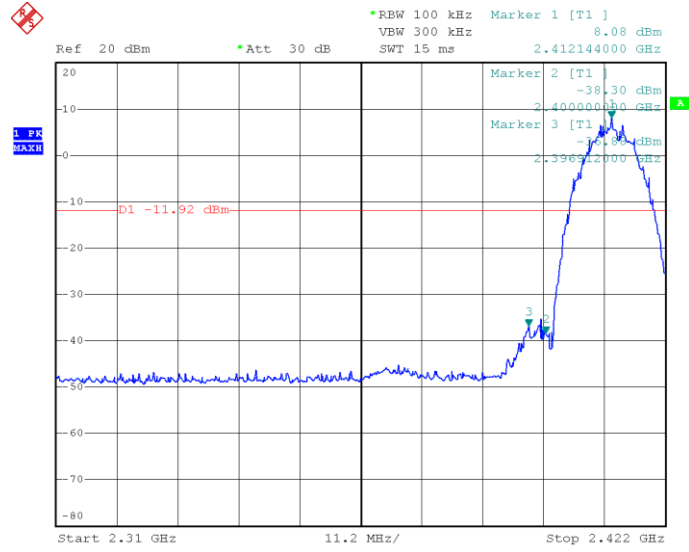






802.11b\_11Mbps

Middle

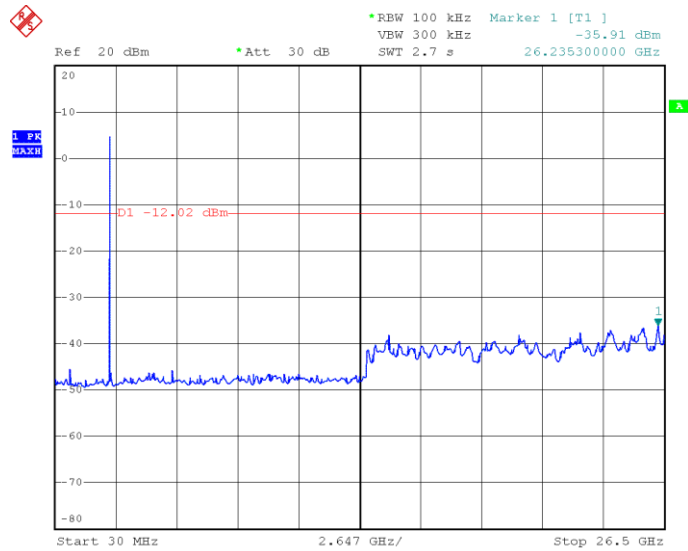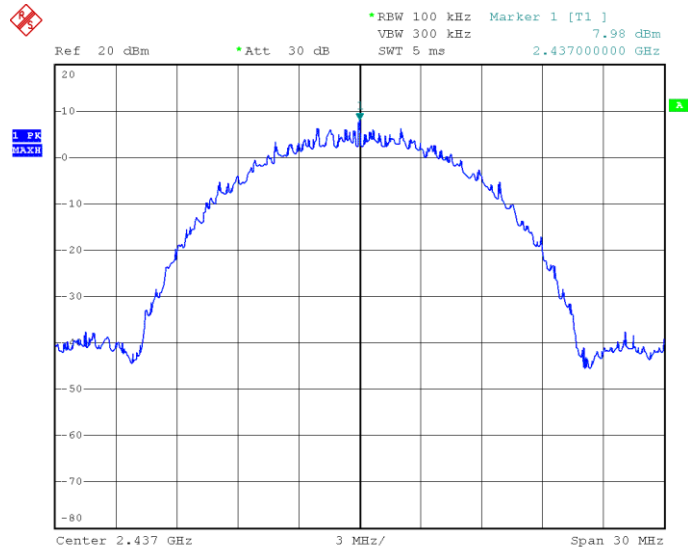




802.11b\_11Mbps

High

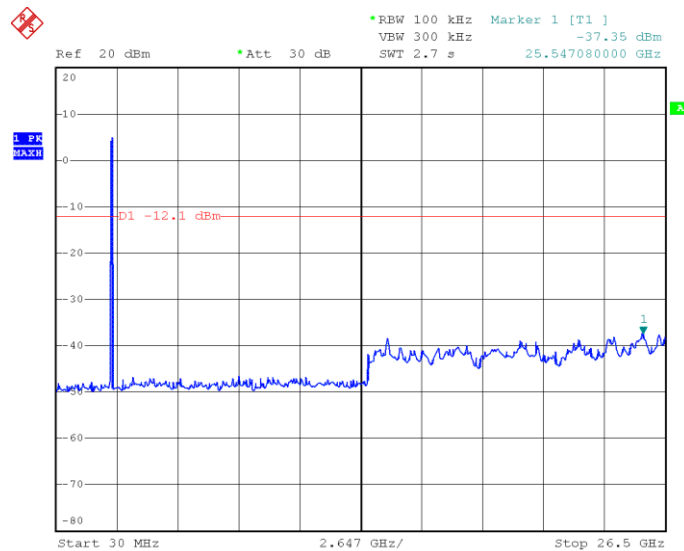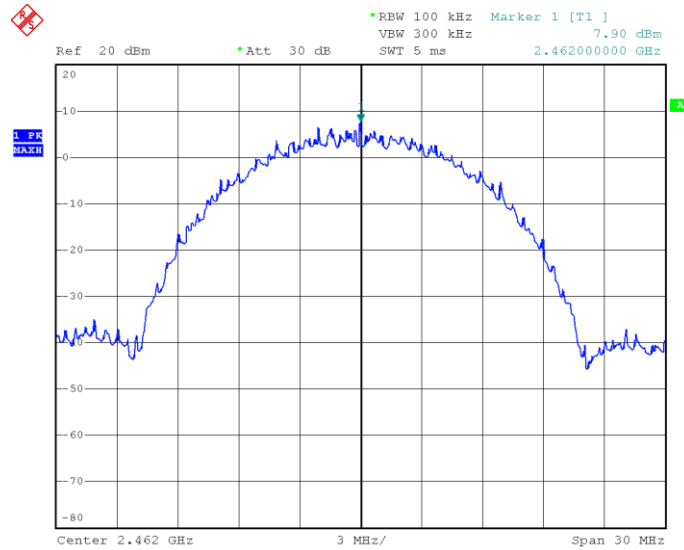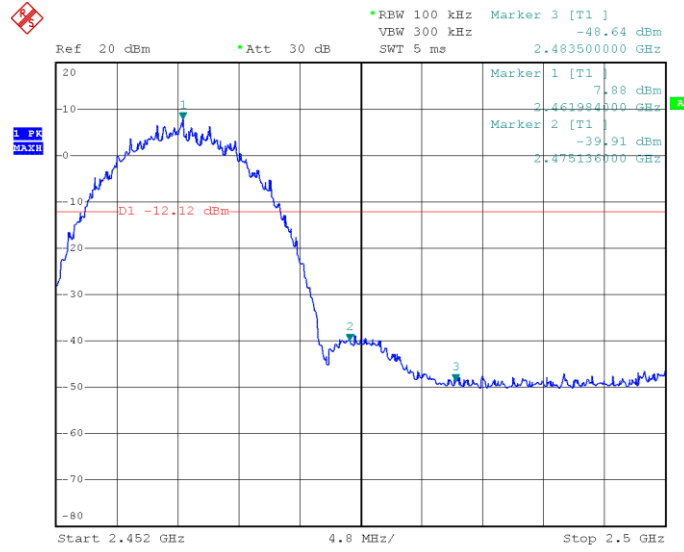



802.11g\_54Mbps

Low

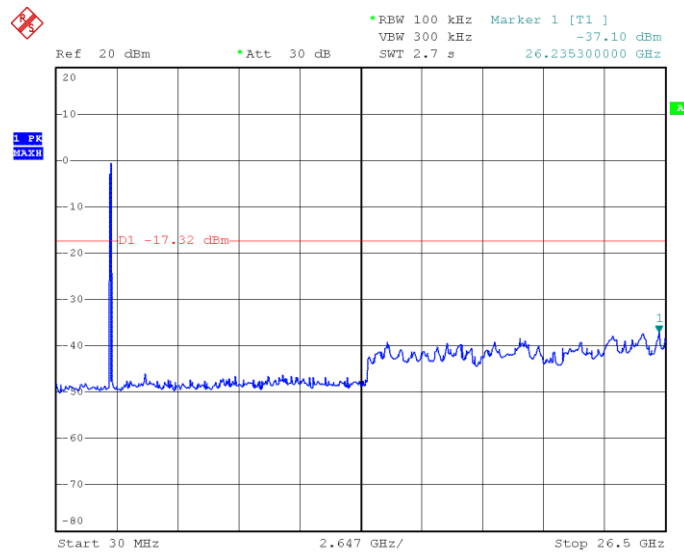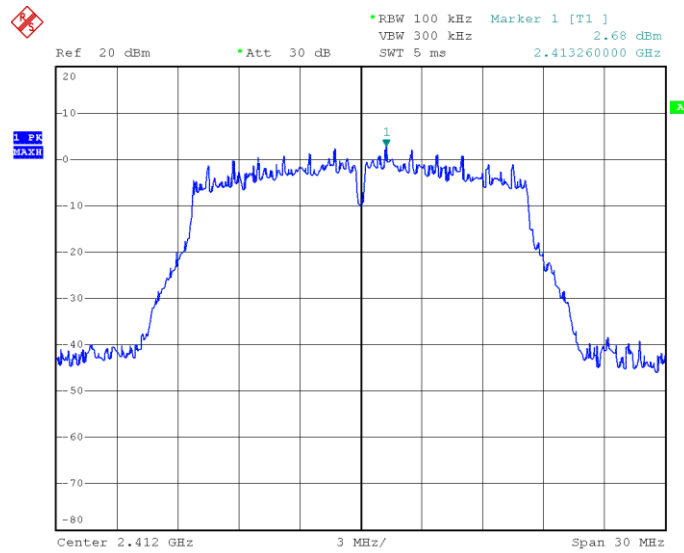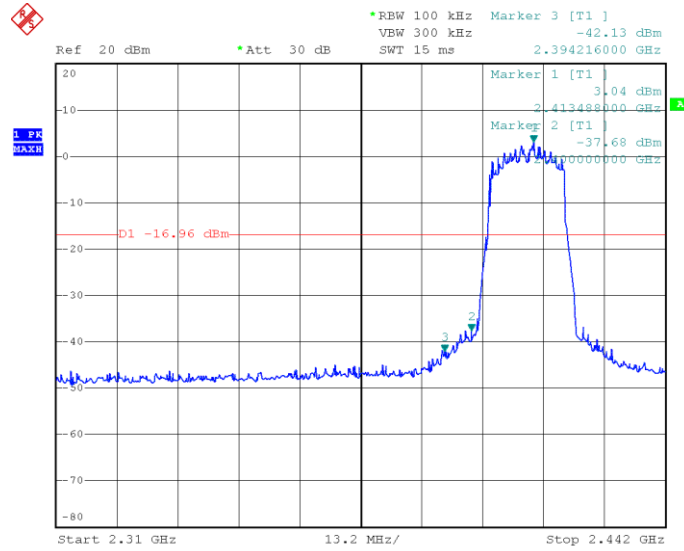




802.11g\_54Mbps

Middle

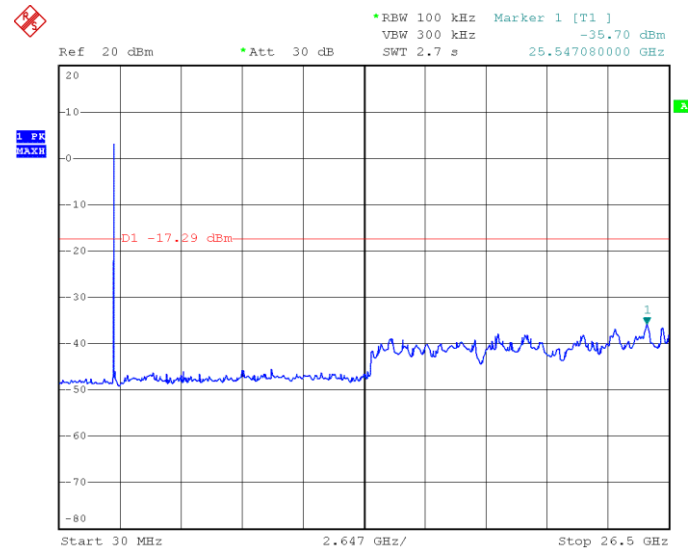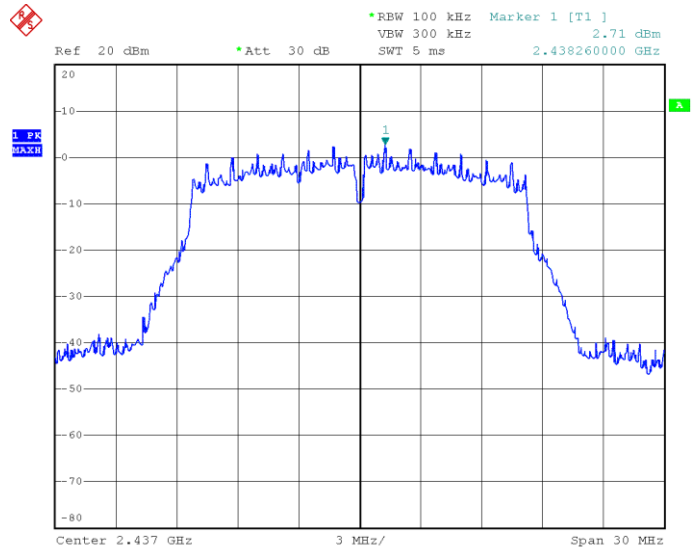




802.11g\_54Mbps

High

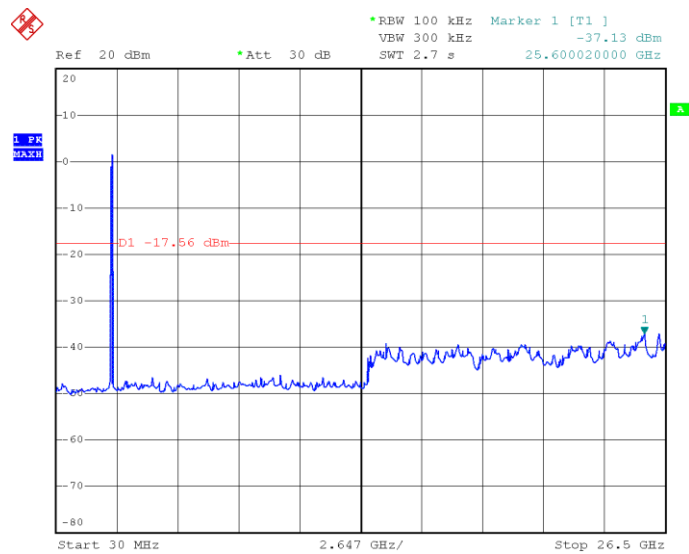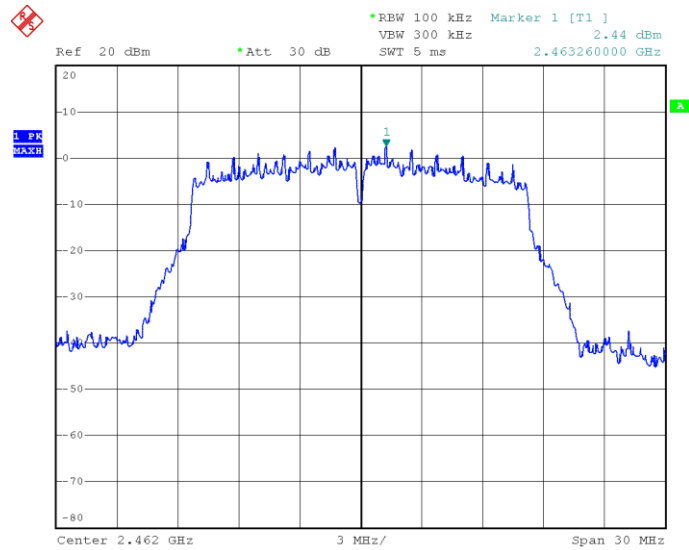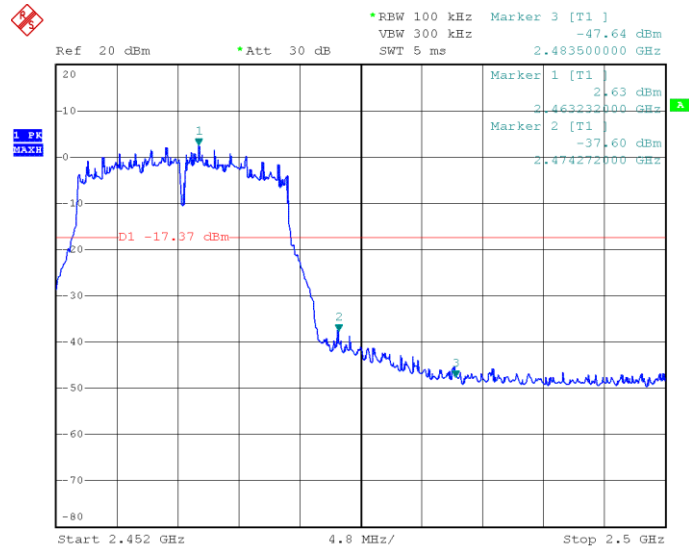



802.11n-HT20\_MCS7

Low

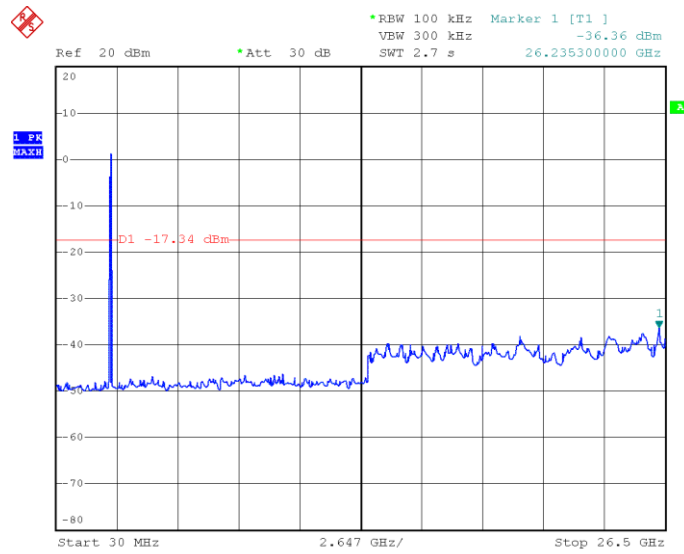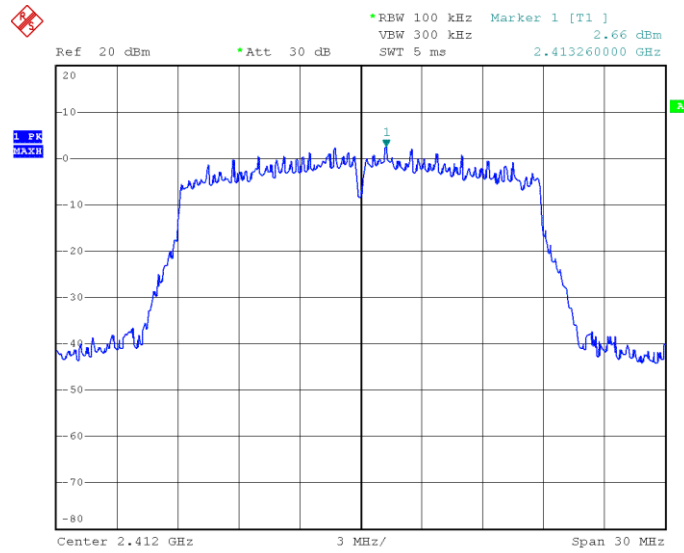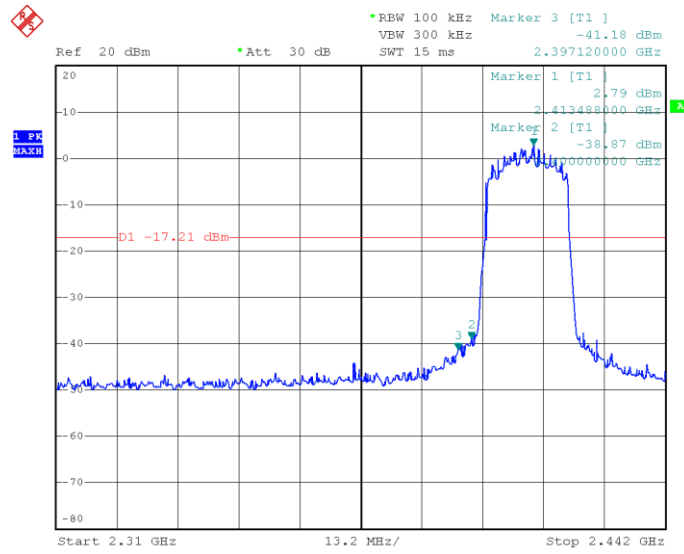



## 802.11n-HT20\_MCS7

Middle

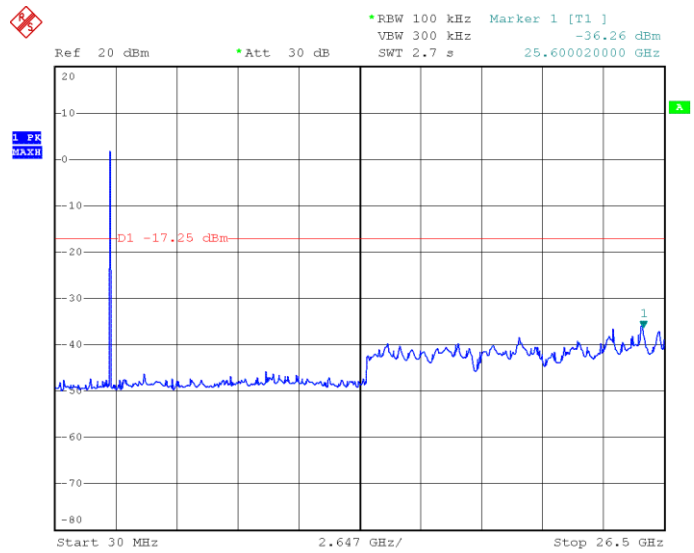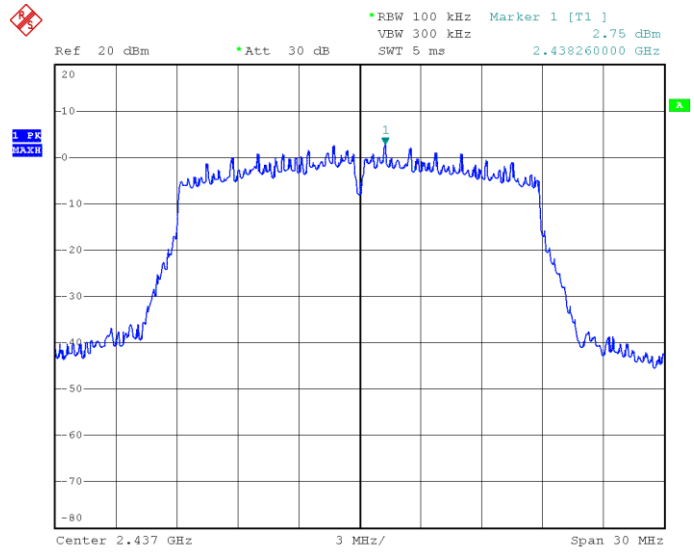

802.11n-HT20\_MCS7




High

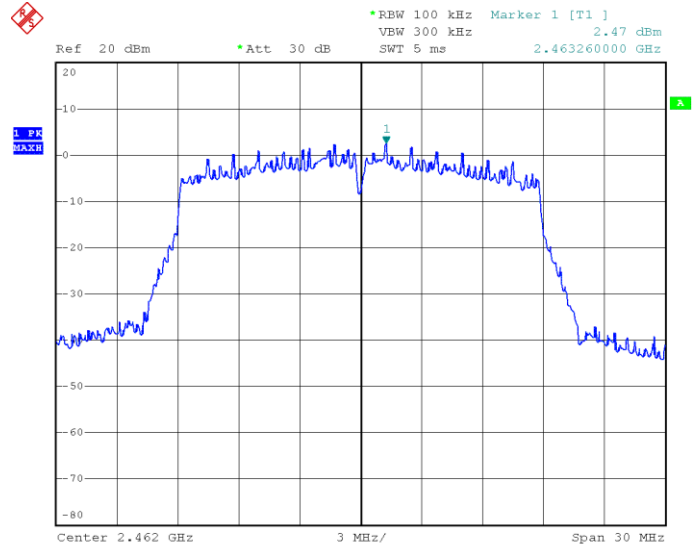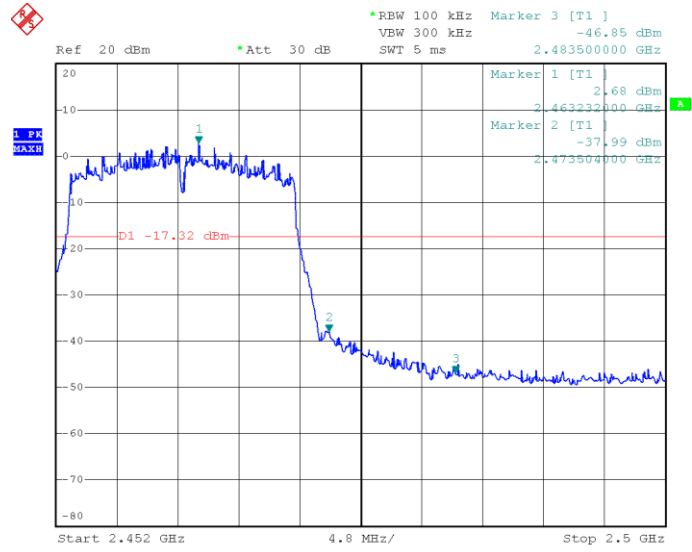





802.11n-HT40\_MCS7

Low

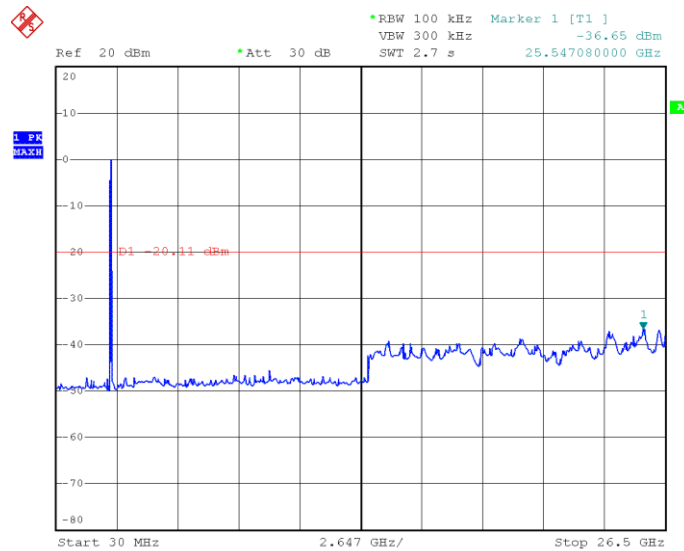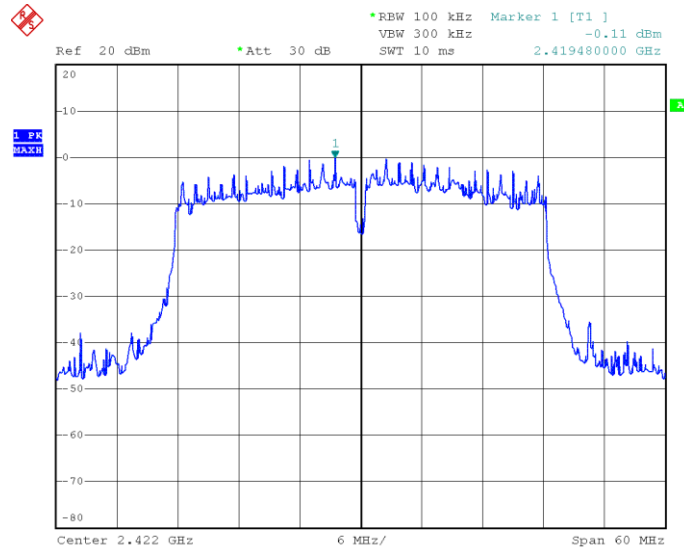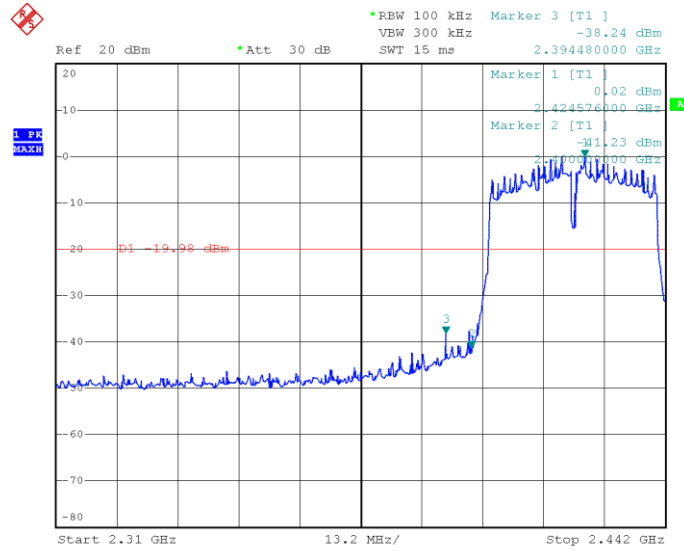




802.11n-HT40\_MCS7

Middle

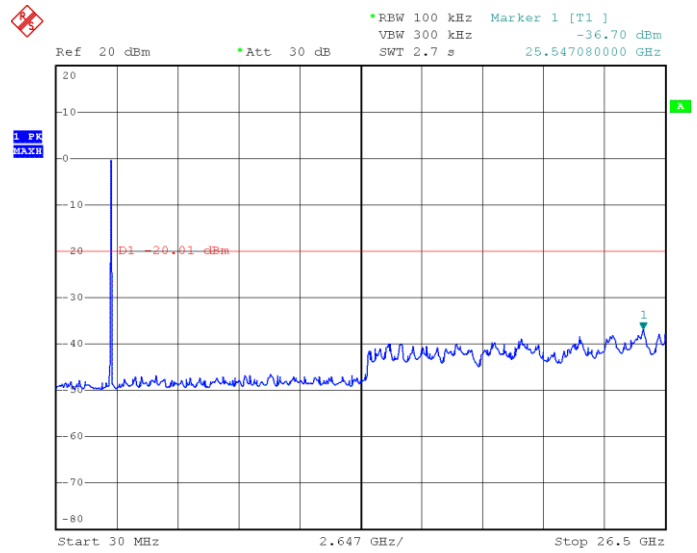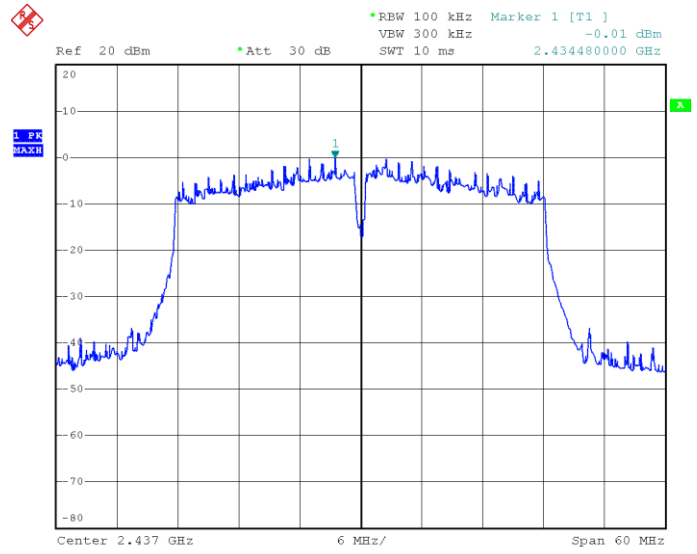

802.11n-HT40\_MCS7

High

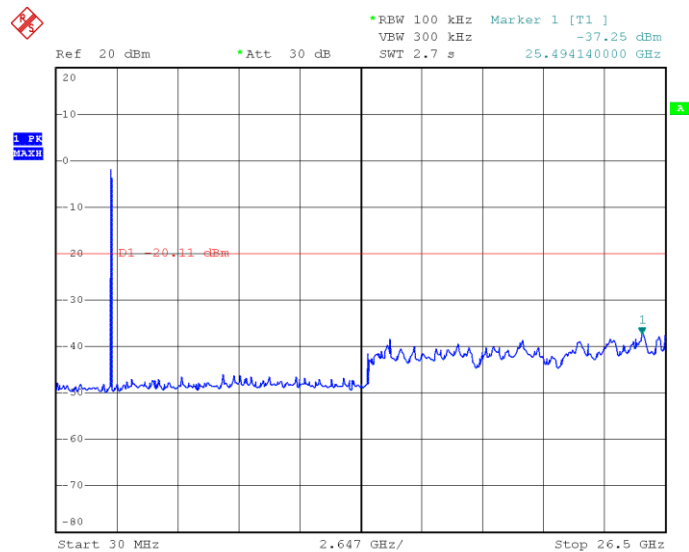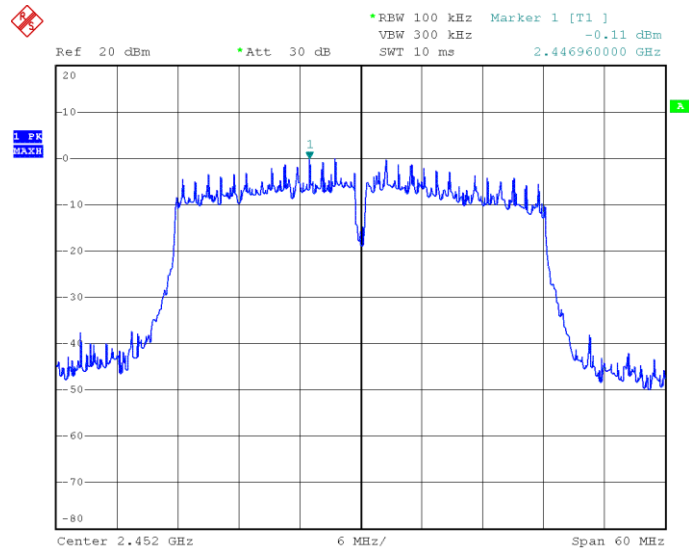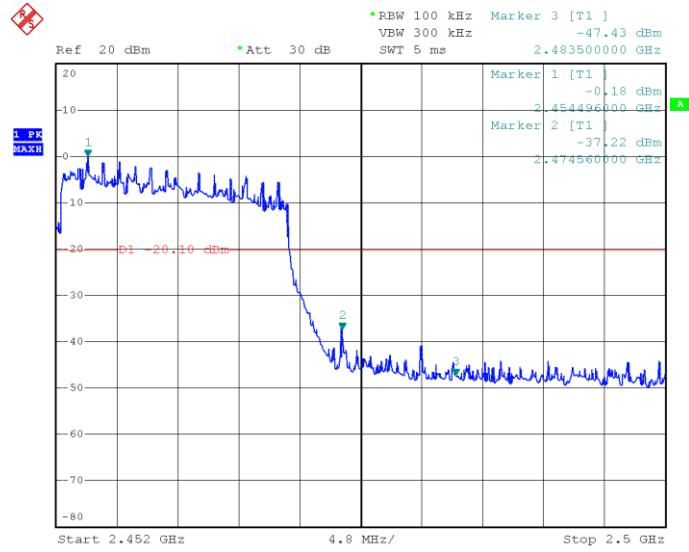


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

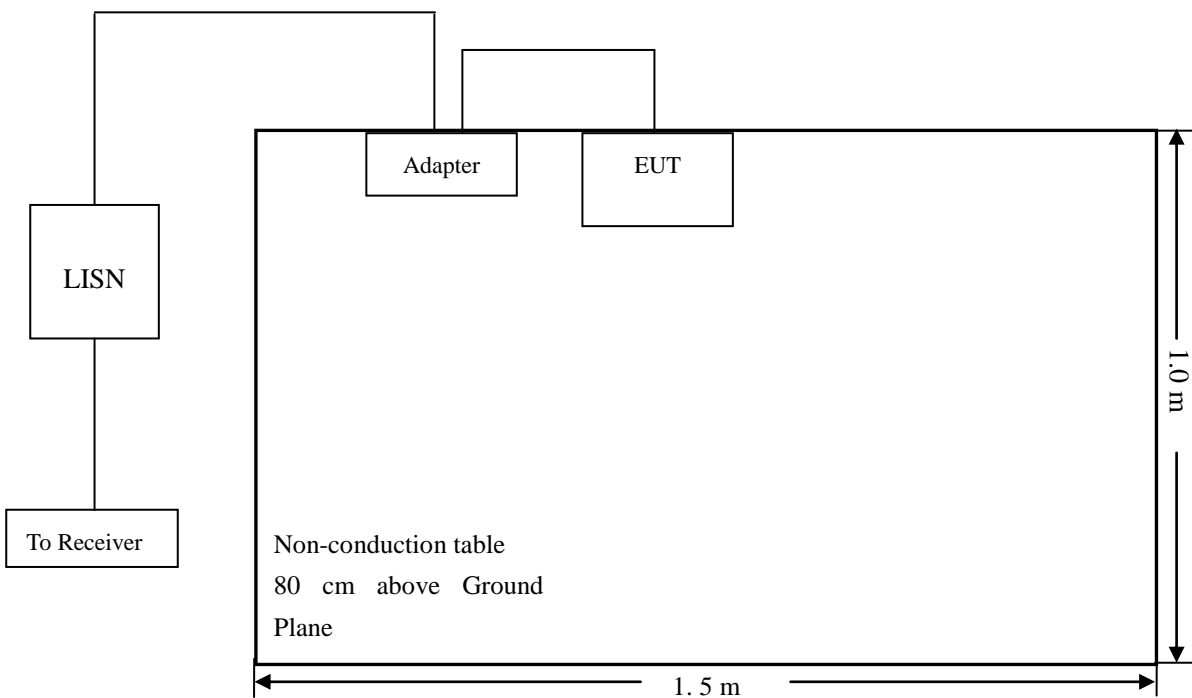



### 10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth ..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

### 10.4 Summary of Test Results/Plots

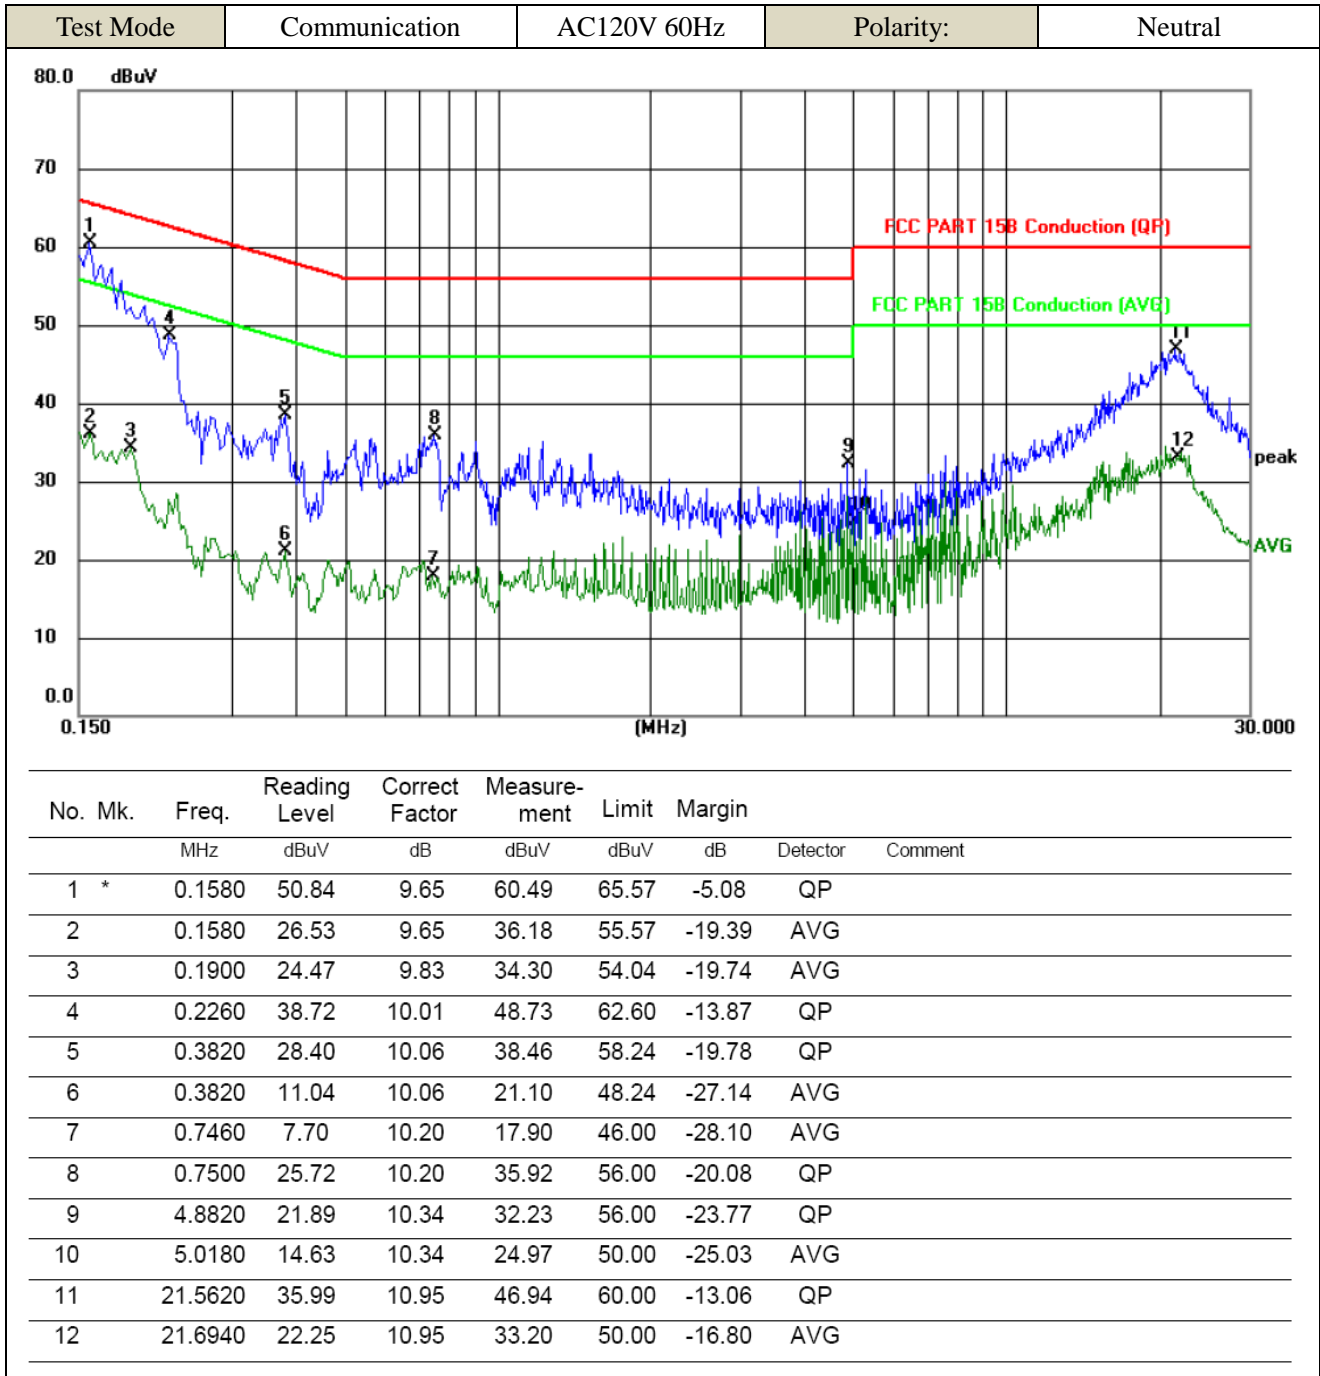

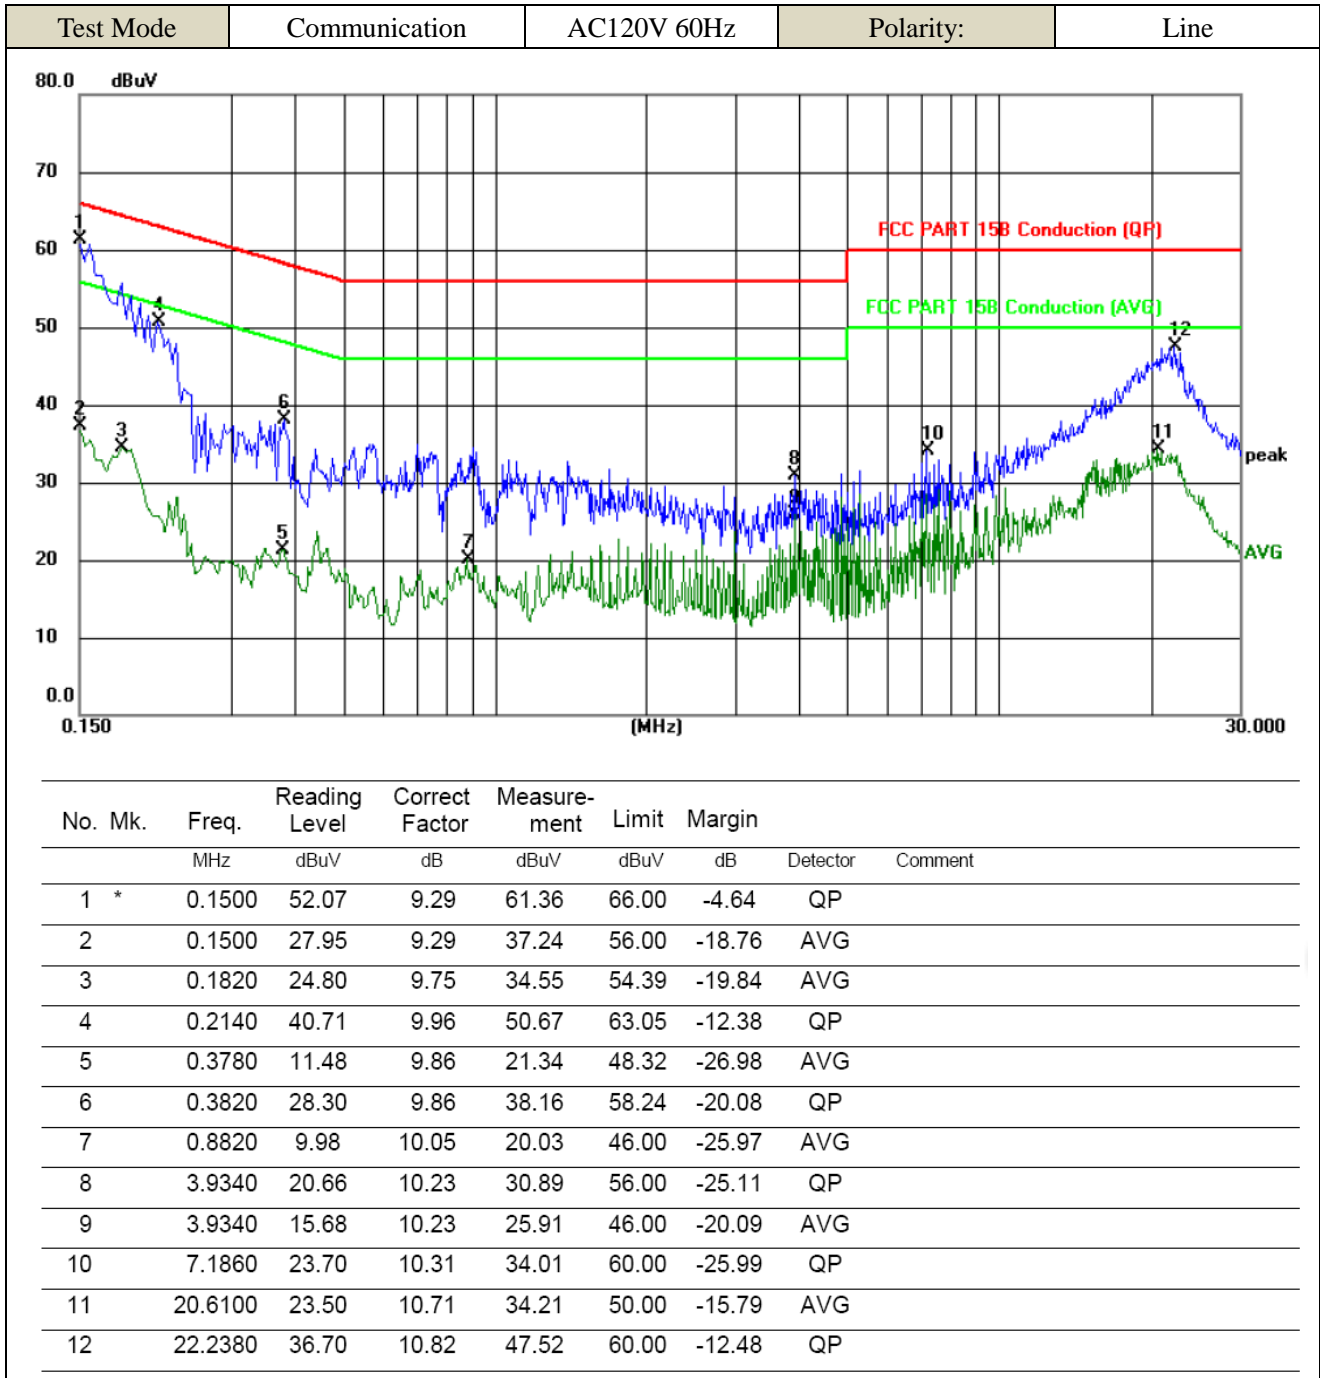

\*\*\*\*\* END OF REPORT \*\*\*\*\*