

FCC Part 15C




Measurement and Test Report

For

Shenzhen Qiyue Optronics Company Limited

Flat3, Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen, China

FCC ID: XOMRNSMU4336A

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>43 inches SMART 4K UHD TV</u>
Tested Model:	<u>D43GA064-U-A-I RNSMU4336</u> <u>XXXXXXXXXXXX43XXXXXXXXXXXX</u> (Where "X" can be any alphanumeric of a-z, A-Z or 0-9 or blank & "-".)
Report No.:	<u>SEM1811039-1</u>
Sample Receipt Date:	<u>October 23, 2018</u>
Tested Date:	<u>October 24 ~ November 22, 2018</u>
Issued Date:	<u>November 23, 2018</u>
Tested By:	<u>Jason Su / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. 518101, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 1.2 TEST STANDARDS.....4

 1.3 TEST METHODOLOGY.....4

 1.4 TEST FACILITY.....4

 1.5 EUT SETUP AND TEST MODE.....5

 1.6 MEASUREMENT UNCERTAINTY.....5

 1.7 TEST EQUIPMENT LIST AND DETAILS.....6

2. SUMMARY OF TEST RESULTS7

3. RF EXPOSURE8

 3.1 STANDARD APPLICABLE.....8

 3.2 TEST RESULT.....8

4. ANTENNA REQUIREMENT9

 4.1 STANDARD APPLICABLE.....9

 4.2 EVALUATION INFORMATION.....9

5. POWER SPECTRAL DENSITY10

 5.1 STANDARD APPLICABLE.....10

 5.2 TEST PROCEDURE.....10

 5.3 ENVIRONMENTAL CONDITIONS.....10

 5.4 SUMMARY OF TEST RESULTS/PLOTS.....11

6. 6DB BANDWIDTH24

 6.1 STANDARD APPLICABLE.....24

 6.2 TEST PROCEDURE.....24

 6.3 ENVIRONMENTAL CONDITIONS.....24

 6.4 SUMMARY OF TEST RESULTS/PLOTS.....24

7. RF OUTPUT POWER37

 7.1 STANDARD APPLICABLE.....37

 7.2 TEST PROCEDURE.....37

 7.3 ENVIRONMENTAL CONDITIONS.....37

 7.4 SUMMARY OF TEST RESULTS/PLOTS.....38

8. FIELD STRENGTH OF SPURIOUS EMISSIONS39

 8.1 MEASUREMENT UNCERTAINTY.....39

 8.2 STANDARD APPLICABLE.....39

 8.3 TEST PROCEDURE.....39

 8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....41

 8.5 ENVIRONMENTAL CONDITIONS.....41

 8.6 SUMMARY OF TEST RESULTS/PLOTS.....41

9. OUT OF BAND EMISSIONS.....52

 9.1 STANDARD APPLICABLE.....52

 9.2 TEST PROCEDURE.....52

 9.3 ENVIRONMENTAL CONDITIONS.....53

 9.4 SUMMARY OF TEST RESULTS/PLOTS.....53

10. CONDUCTED EMISSIONS93

 10.1 MEASUREMENT UNCERTAINTY.....93

 10.2 TEST PROCEDURE.....93

 10.3 BASIC TEST SETUP BLOCK DIAGRAM.....93

 10.4 ENVIRONMENTAL CONDITIONS.....93

 10.5 TEST RECEIVER SETUP.....94

 10.6 SUMMARY OF TEST RESULTS/PLOTS.....94

 10.7 CONDUCTED EMISSIONS TEST DATA.....94

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information	
Applicant:	Shenzhen Qiyue Optronics Company Limited
Address of applicant:	Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen, China
Manufacturer:	SHENZHEN QIYUE OPTRONICS COMPANY LIMITED BRANCH
Address of manufacturer:	SEIYU INDUSTRIAL PARK, DA SAN VILLAGE, DA SHUI KENG, GUANLAN TOWN, LONGHUA NEW DISTRICT, SHENZHEN, P.R.C

General Description of EUT	
Product Name:	43 inches SMART 4K UHD TV
Trade Name:	RCA
Model No.:	D43GA064-U-A-I RNSMU4336 XXXXXXXXXXXX43XXXXXXXXXXXX (Where "X" can be any alphanumeric of a-z, A-Z or 0-9 or blank & "-".)
Rated Voltage:	AC 100-120V~ 60Hz, 68W
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	IEEE 802.11b/ g / nHT20: 2412MHz~2462MHz IEEE802.11nHT40: 2422MHz~2452MHz
RF Output Power:	11.29dBm (Conducted)
Modulation:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Type of Antenna:	Wi-Fi Antenna
Antenna Gain:	Antenna 1: 3 dBi Antenna 2: 3 dBi

1.2 Test Standards

The following report is prepared on behalf of the **Shenzhen Qiyue Optronics Company Limited** in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commission rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commission rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Core
AC Net Cord	1.5	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§15.203;§15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF Exposure, please see the MPE Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two internal Antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 V05, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz		Limit dBm/3kHz
		Antenna 1	Antenna 2	
802.11b	2412	-24.93	-24.22	8
	2437	-25.28	-24.90	8
	2462	-24.82	-25.11	8
802.11g	2412	-26.58	-27.24	8
	2437	-27.18	-27.64	8
	2462	-26.93	-27.91	8

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz			Limit dBm/3kHz
		Antenna 1	Antenna 2	total	
802.11n HT20	2412	-26.29	-27.82	-23.98	8
	2437	-27.07	-27.69	-24.36	8
	2462	-27.18	-28.17	-24.64	8
802.11n HT40	2422	-31.01	-30.00	-27.47	8
	2437	-30.41	-30.69	-27.54	8
	2452	-30.47	-30.04	-27.24	8

Please refer to the following test plots:


Antenna 1

802.11b-Low Channel

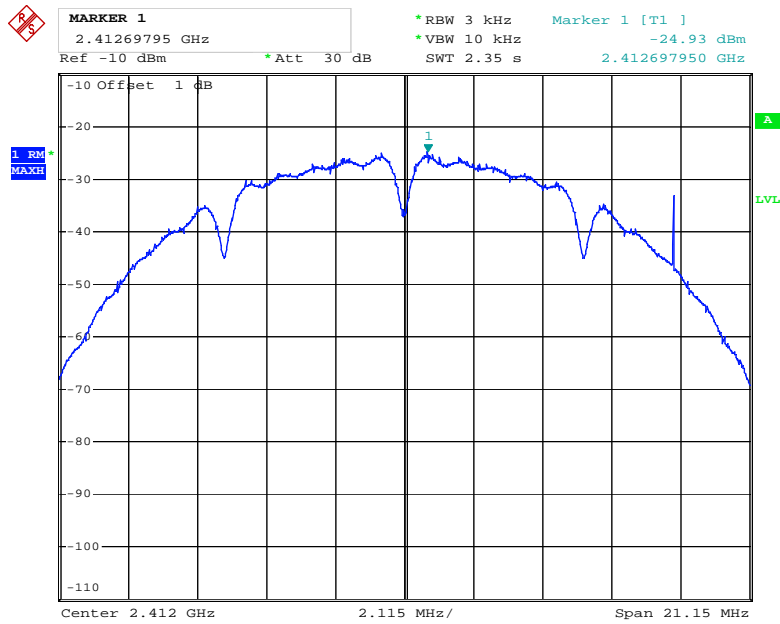


Date: 20.NOV.2018 08:54:32

802.11b-Middle Channel

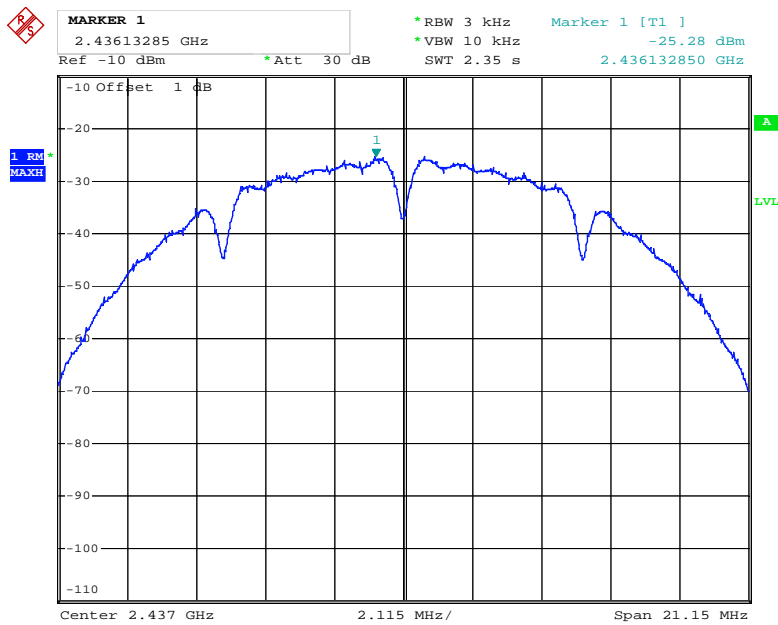


Date: 20.NOV.2018 08:54:14

802.11b-High Channel

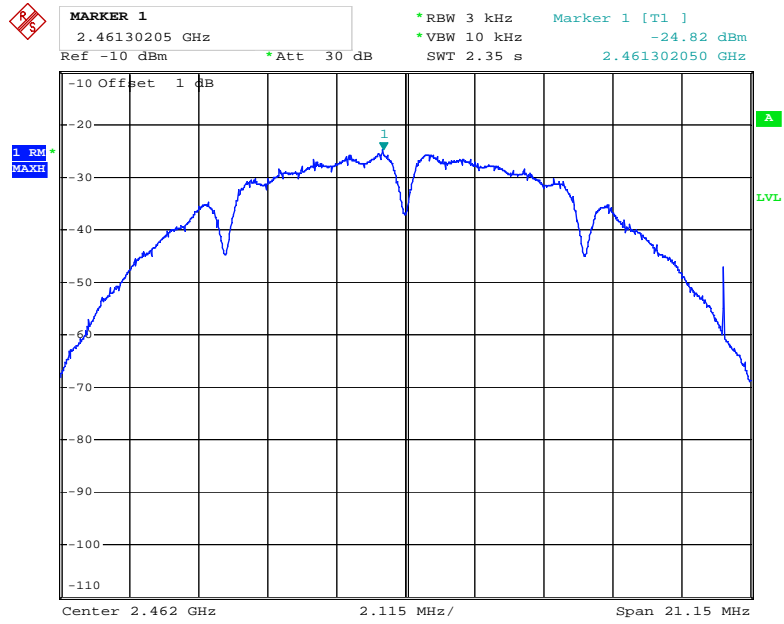


Date: 20.NOV.2018 08:53:53

802.11g-Low Channel

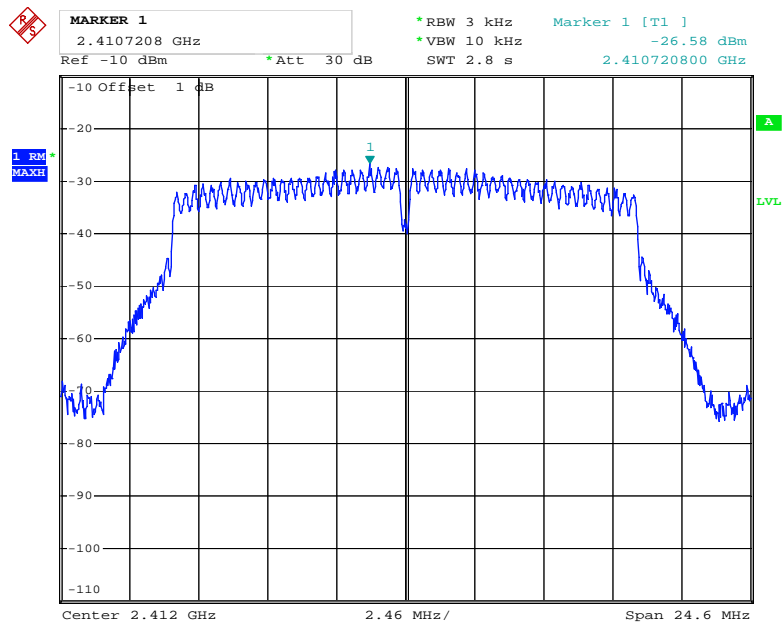


Date: 20.NOV.2018 08:21:44

802.11g-Middle Channel

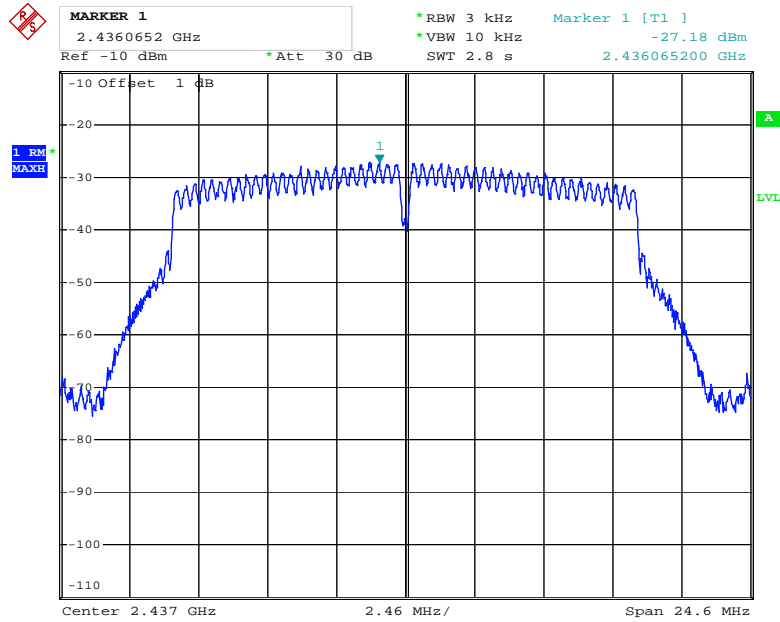


Date: 20.NOV.2018 08:21:18

802.11g-High Channel

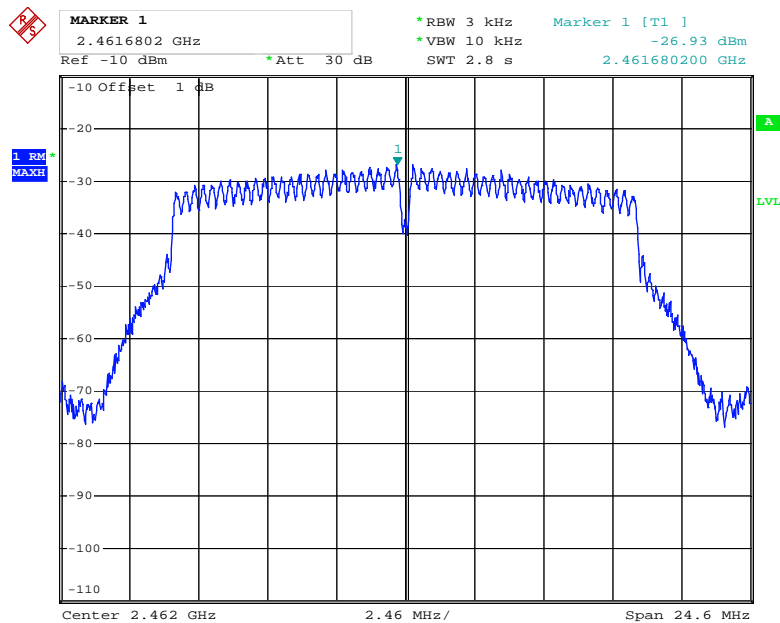


Date: 20.NOV.2018 08:20:28

802.11n-HT20-Low Channel

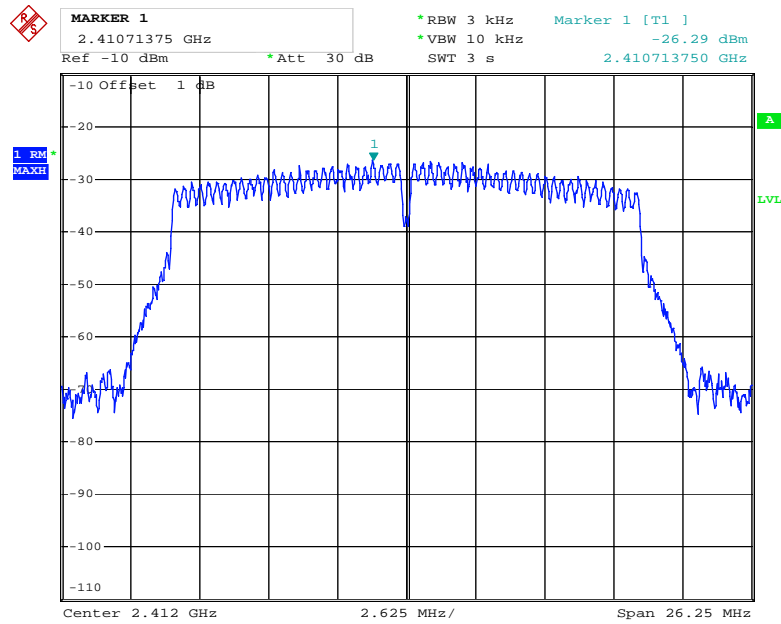


Date: 20.NOV.2018 07:46:18

802.11n-HT20-Middle Channel

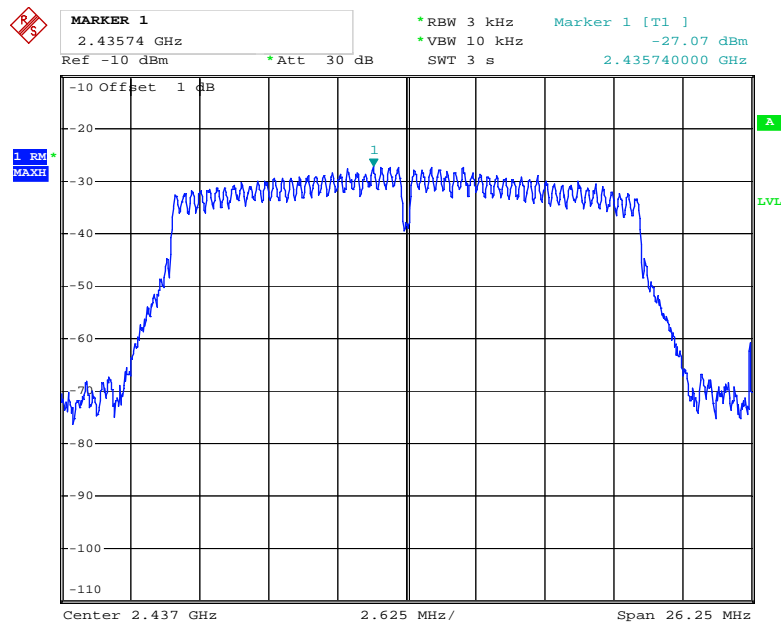


Date: 20.NOV.2018 08:19:10

802.11n-HT20-High Channel

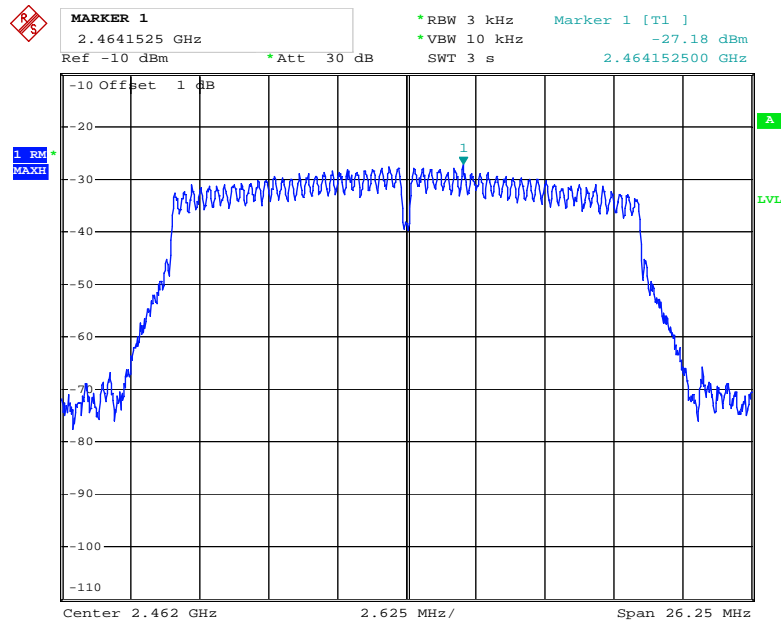


Date: 20.NOV.2018 08:19:53

802.11n-HT40-Low Channel

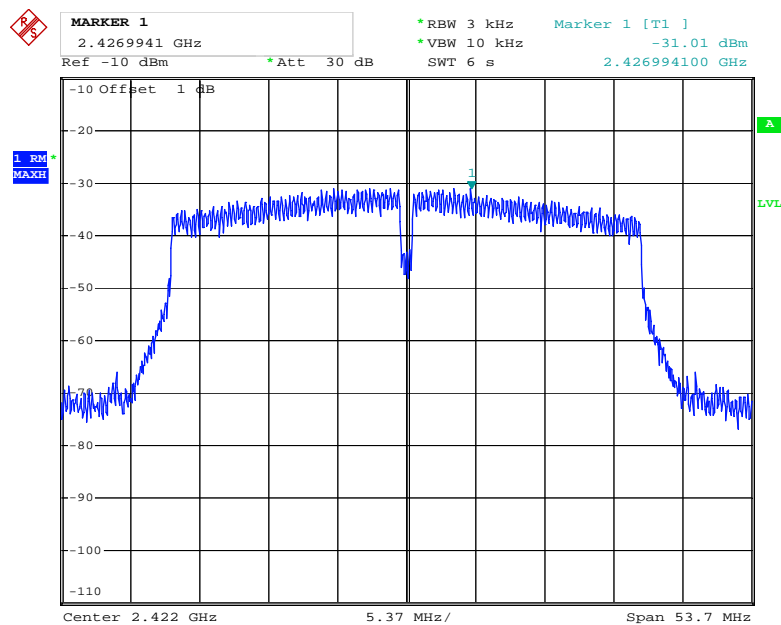


Date: 20.NOV.2018 07:45:10

802.11n-HT40-Middle Channel

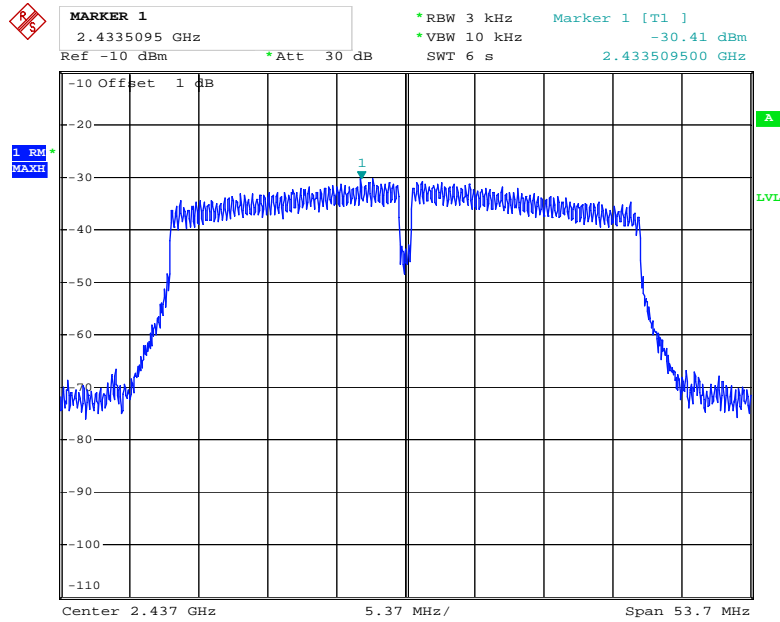

Date: 20.NOV.2018 07:44:36


802.11n-HT40-High Channel

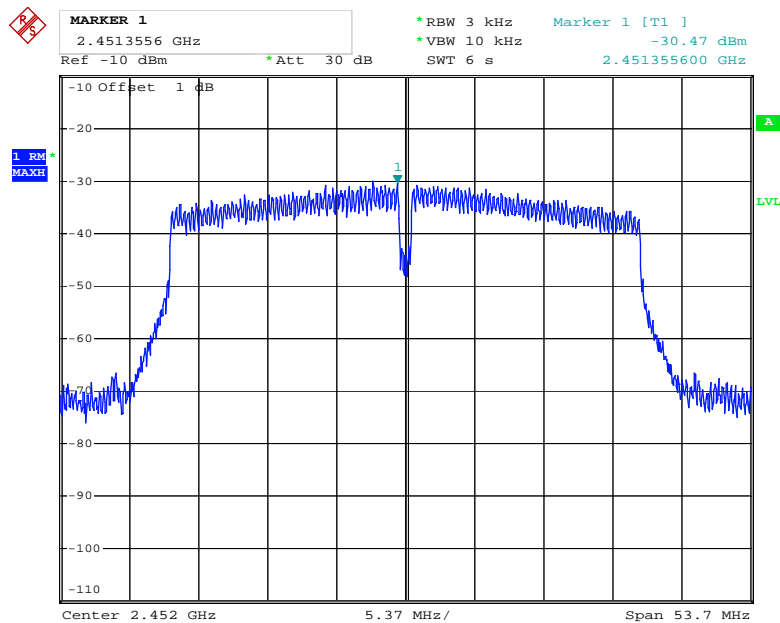

Date: 20.NOV.2018 07:43:09


Antenna 2

802.11b-Low Channel

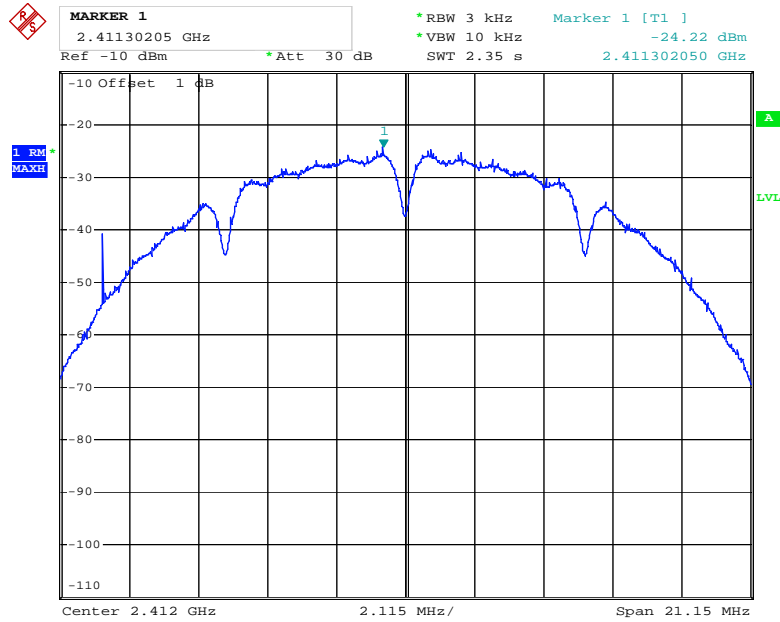


Date: 20.NOV.2018 09:46:36

802.11b-Middle Channel

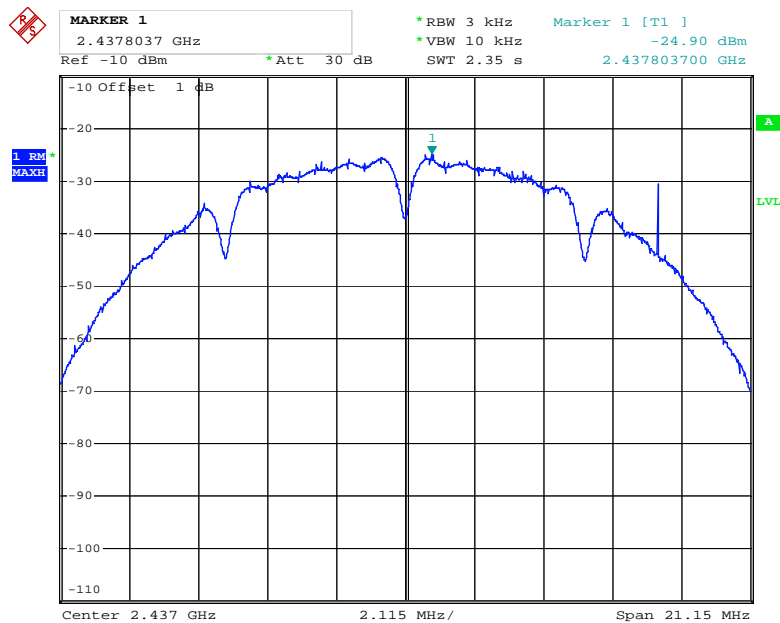


Date: 20.NOV.2018 09:47:13

802.11b-High Channel

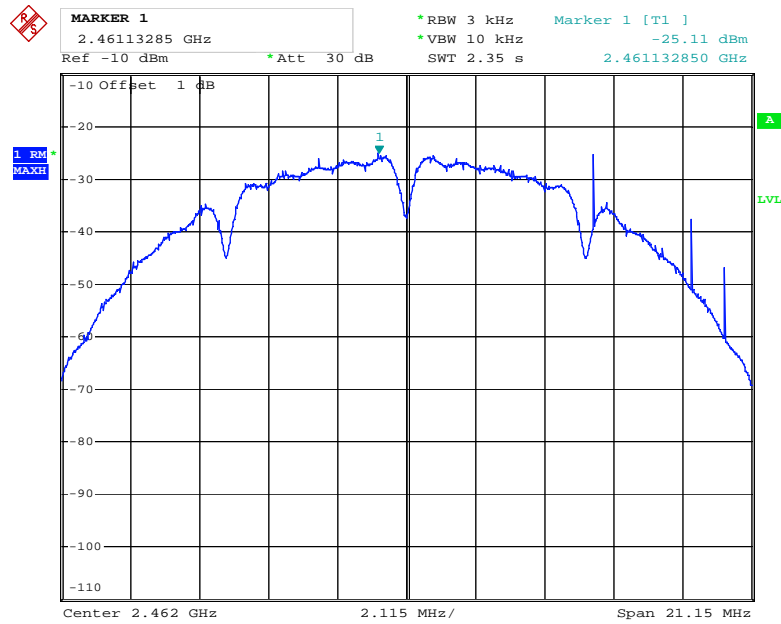


Date: 20.NOV.2018 09:47:34

802.11g-Low Channel

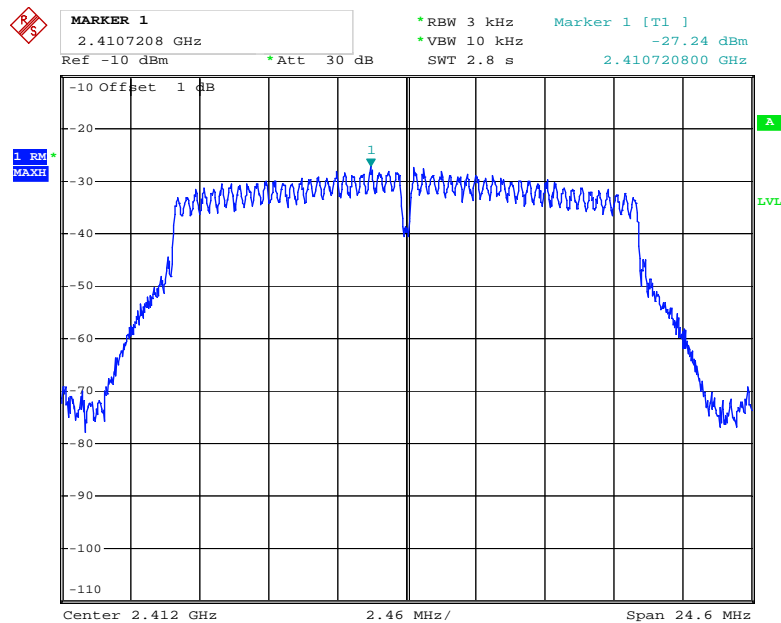


Date: 20.NOV.2018 09:46:00

802.11g-Middle Channel

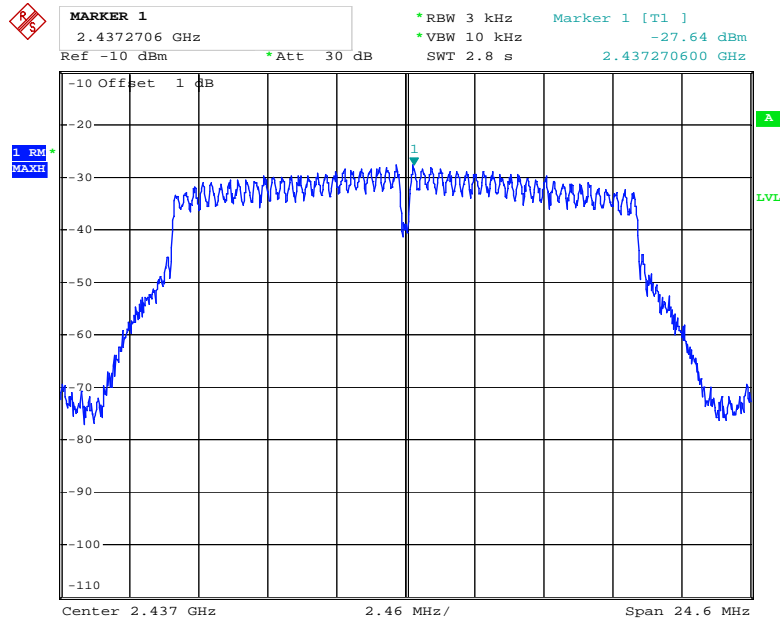


Date: 20.NOV.2018 09:45:38

802.11g-High Channel

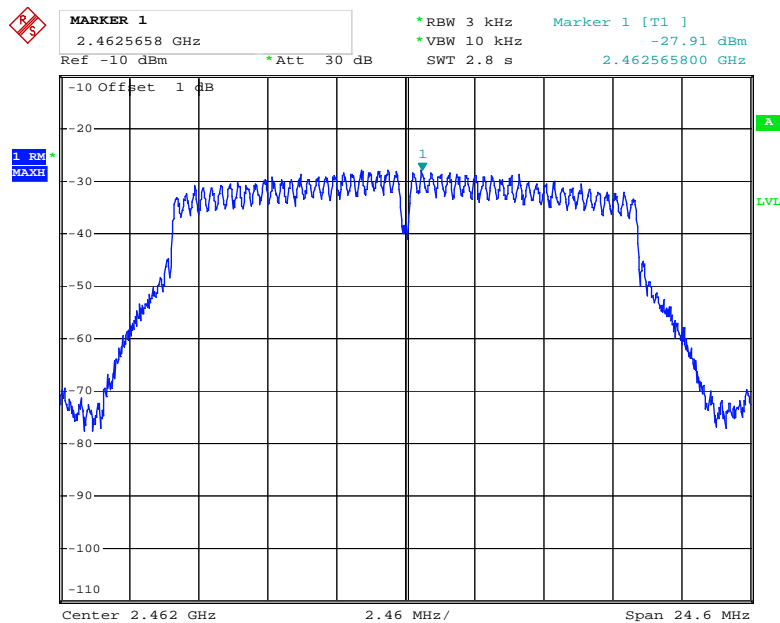


Date: 20.NOV.2018 09:45:22

802.11n-HT20-Low Channel

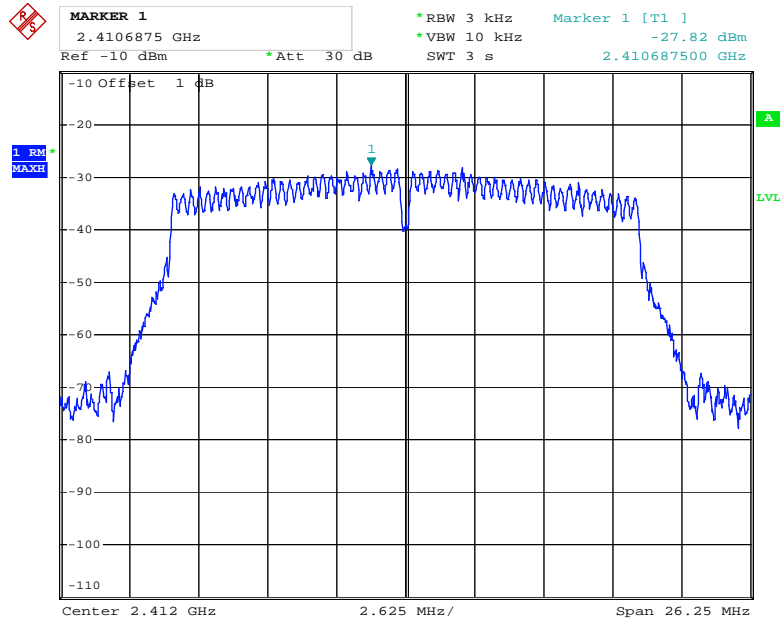


Date: 20.NOV.2018 09:44:13

802.11n-HT20-Middle Channel

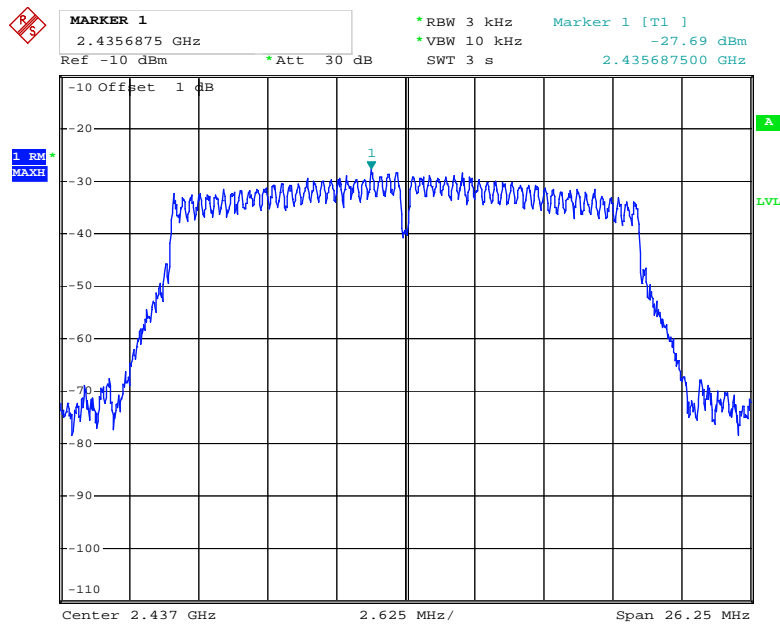


Date: 20.NOV.2018 09:44:40

802.11n-HT20-High Channel

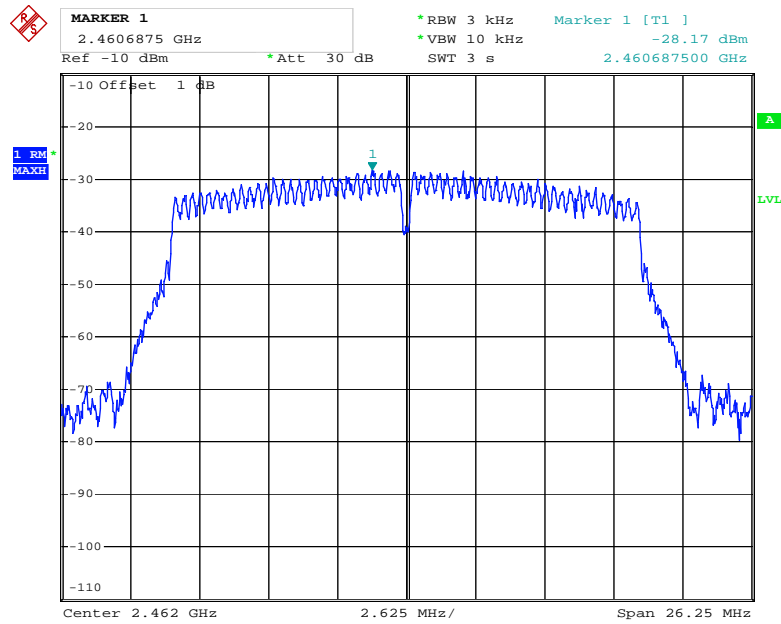


Date: 20.NOV.2018 09:44:59

802.11n-HT40-Low Channel

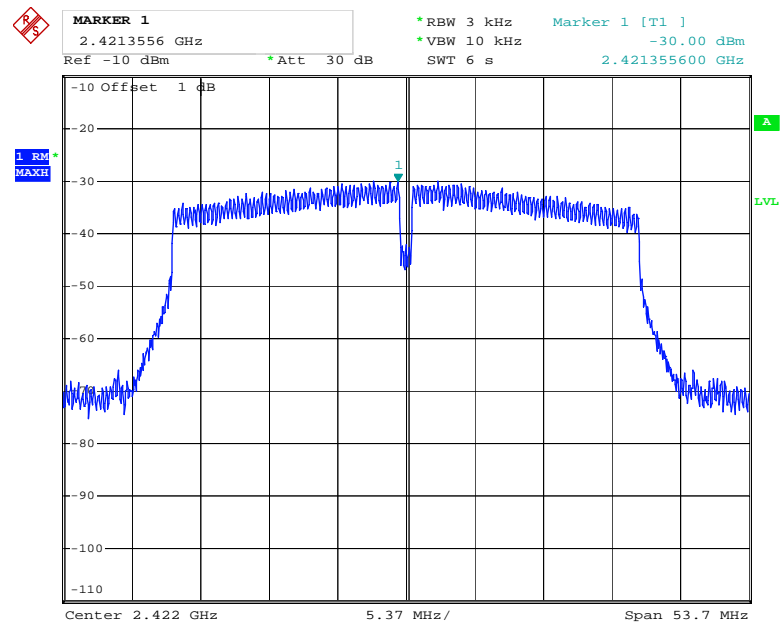


Date: 20.NOV.2018 09:43:39

802.11n-HT40-Middle Channel

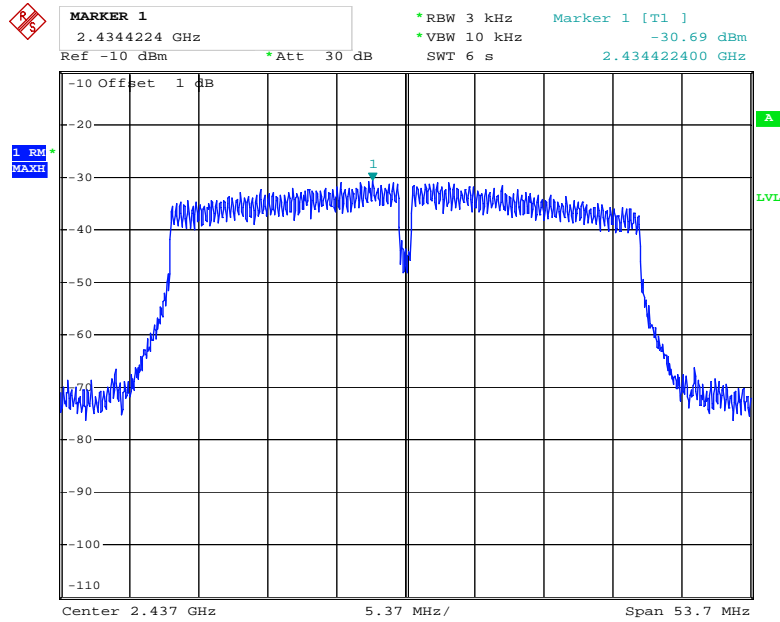

Date: 20.NOV.2018 09:40:15

802.11n-HT40-High Channel

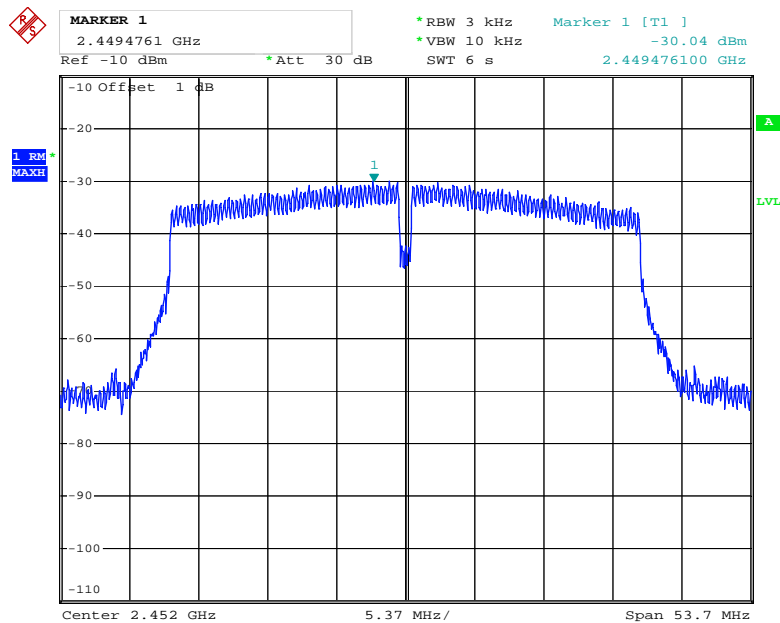

Date: 20.NOV.2018 09:39:51

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a) (2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


6.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	6 dB Bandwidth MHz		99% Bandwidth MHz		Limit kHz
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	
802.11b	2412	9.60	9.21	14.04	14.07	≥ 500
	2437	9.18	9.18	14.04	14.07	≥ 500
	2462	9.21	9.66	14.07	14.07	≥ 500
802.11g	2412	15.18	15.18	16.32	16.32	≥ 500
	2437	15.15	15.15	16.32	16.32	≥ 500
	2462	15.24	15.18	16.32	16.32	≥ 500
802.11n-HT20	2412	15.18	15.21	17.49	17.49	≥ 500
	2437	15.18	15.18	17.49	17.49	≥ 500
	2462	15.21	15.18	17.49	17.46	≥ 500
802.11n-HT40	2422	35.28	35.28	35.76	35.76	≥ 500
	2437	35.28	35.28	35.76	35.76	≥ 500
	2452	35.28	35.28	35.76	35.76	≥ 500

Please refer to the following test plots:


Antenna 1

802.11b-Low Channel

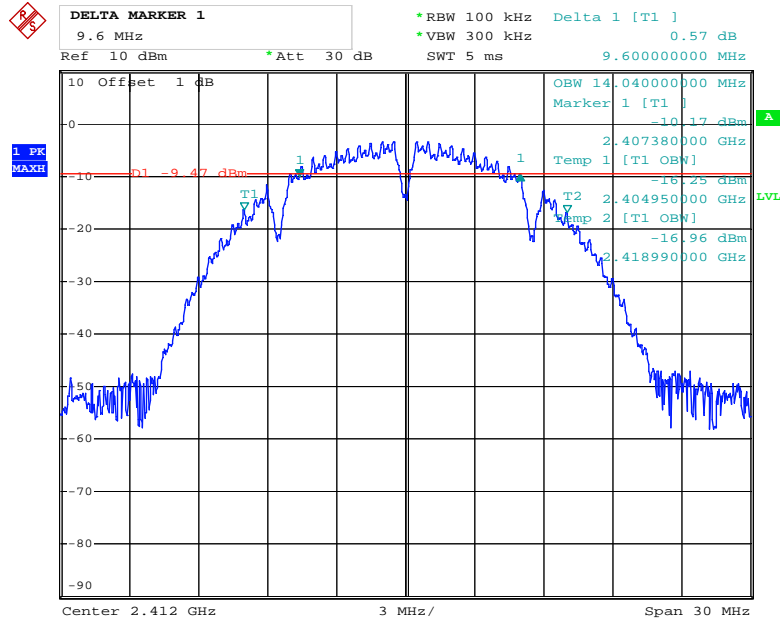


Date: 20.NOV.2018 08:48:18

802.11b-Middle Channel

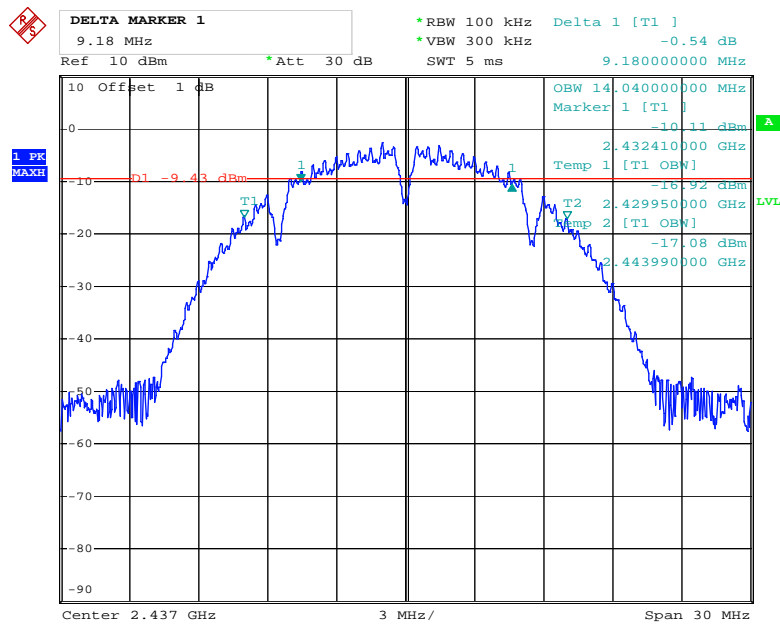


Date: 20.NOV.2018 08:50:04

802.11b-High Channel

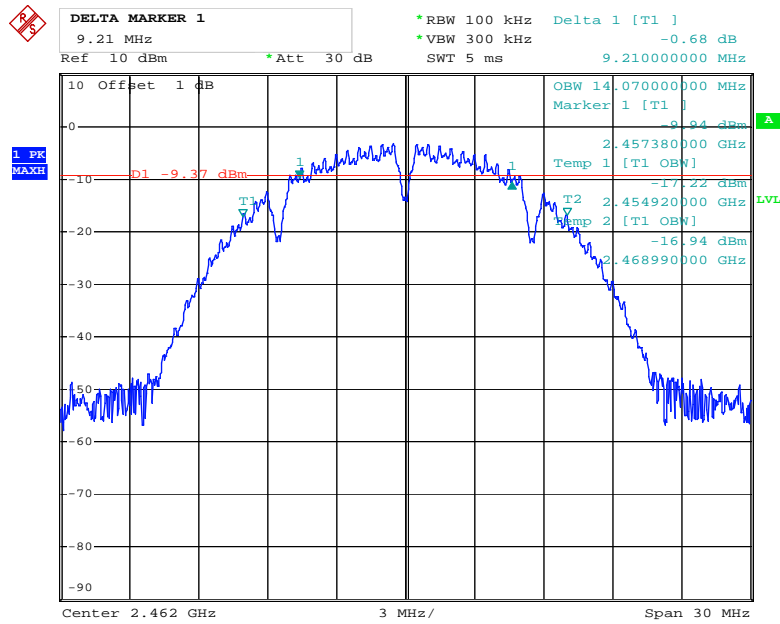


Date: 20.NOV.2018 08:51:30

802.11 g-Low Channel

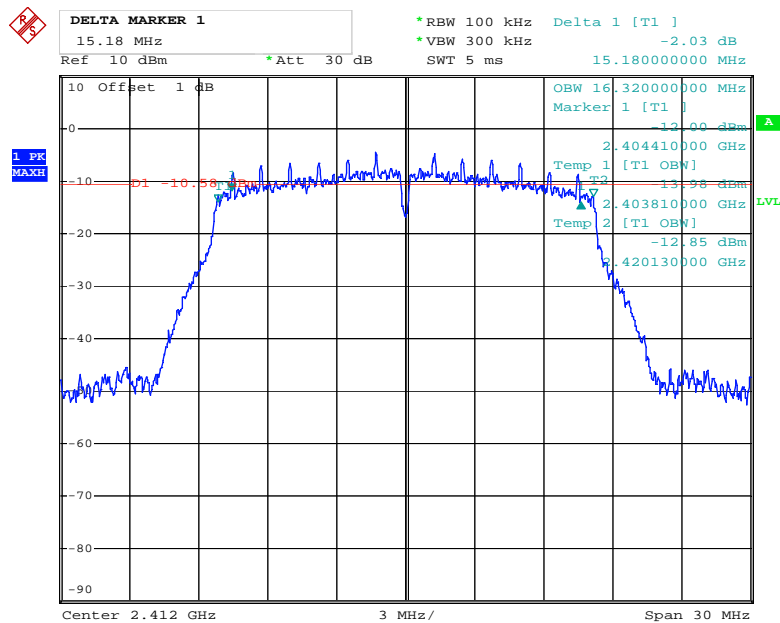


Date: 20.NOV.2018 07:32:22

802.11g-Middle Channel

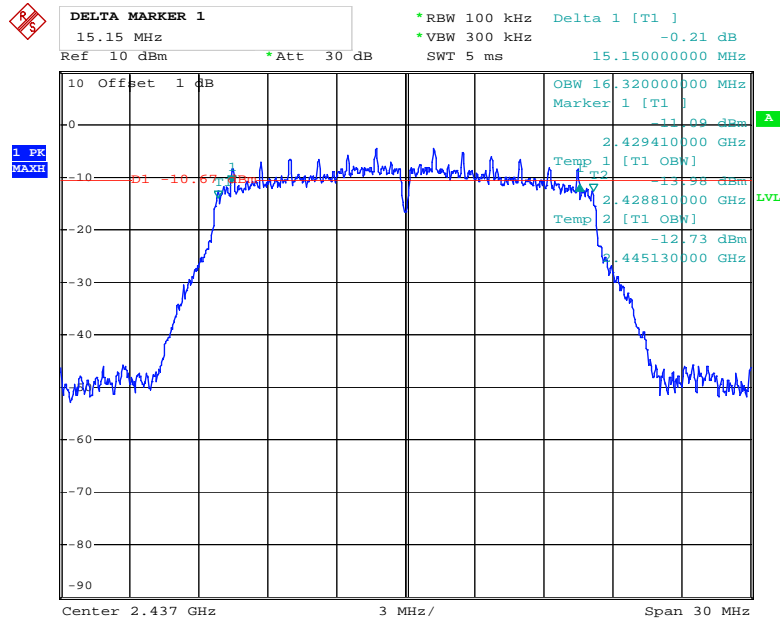


Date: 20.NOV.2018 07:31:21

802.11g-High Channel

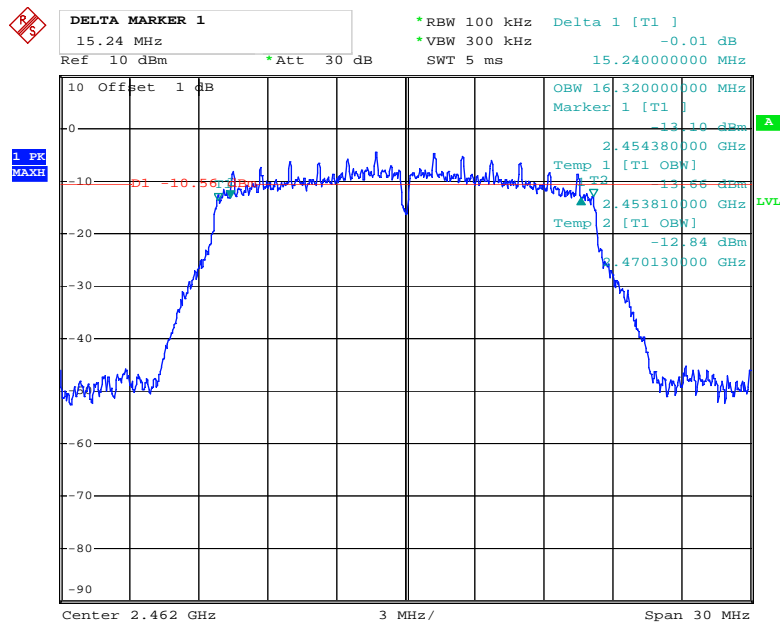


Date: 20.NOV.2018 07:30:04

802.11n-HT20-Low Channel

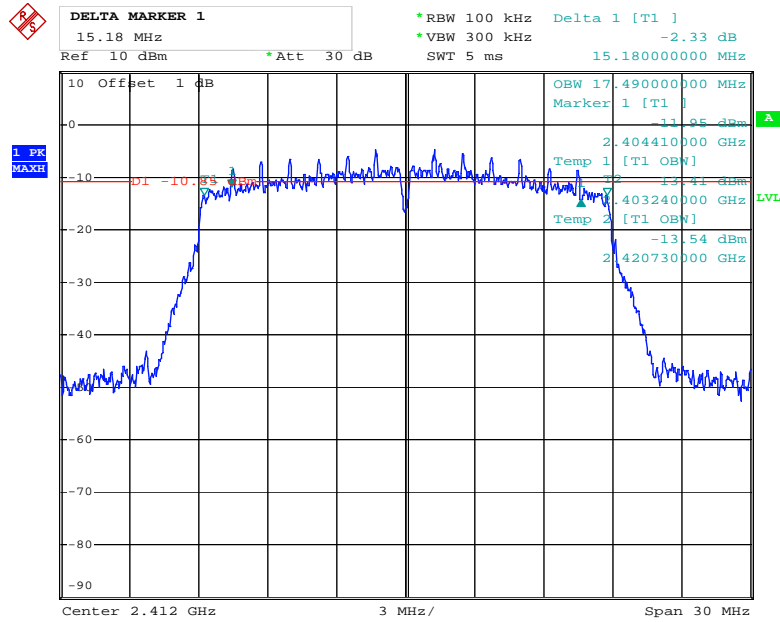


Date: 20.NOV.2018 07:33:49

802.11n-HT20-Middle Channel

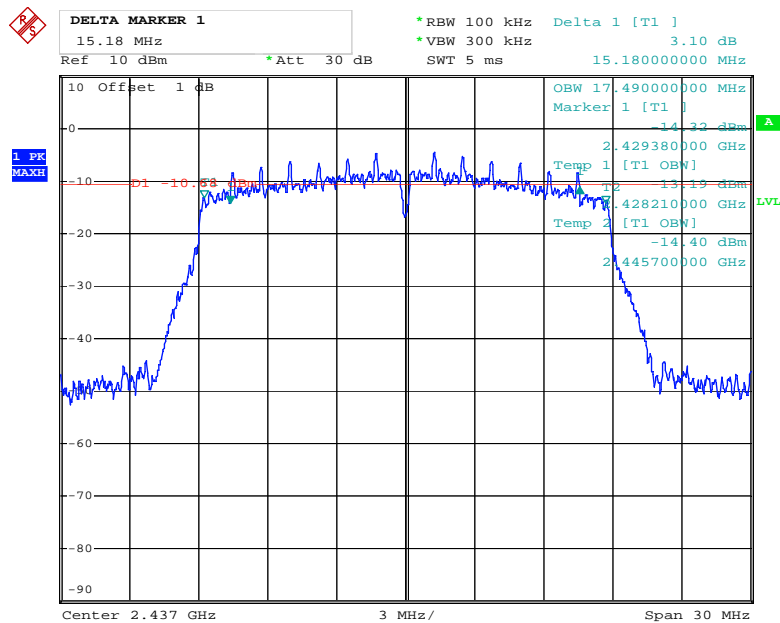


Date: 20.NOV.2018 07:35:06

802.11n-HT20-High Channel

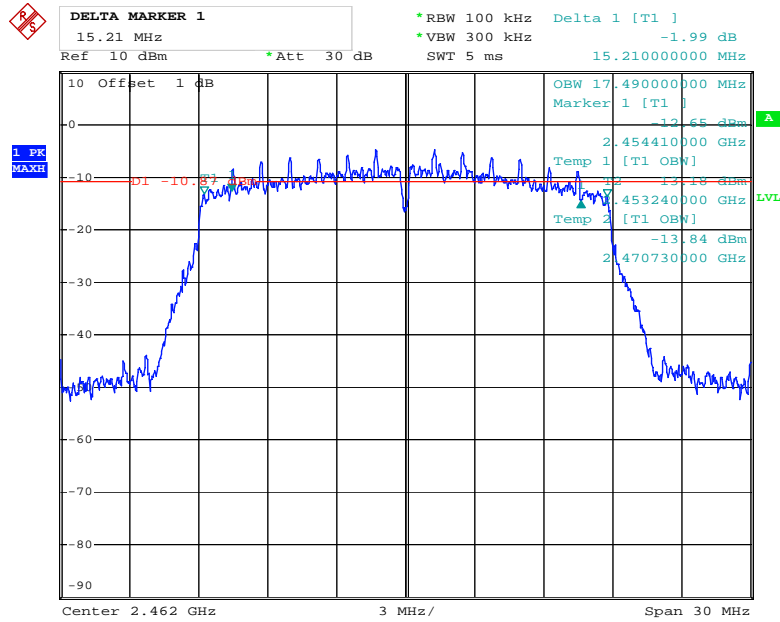


Date: 20.NOV.2018 07:36:29

802.11n-HT40-Low Channel

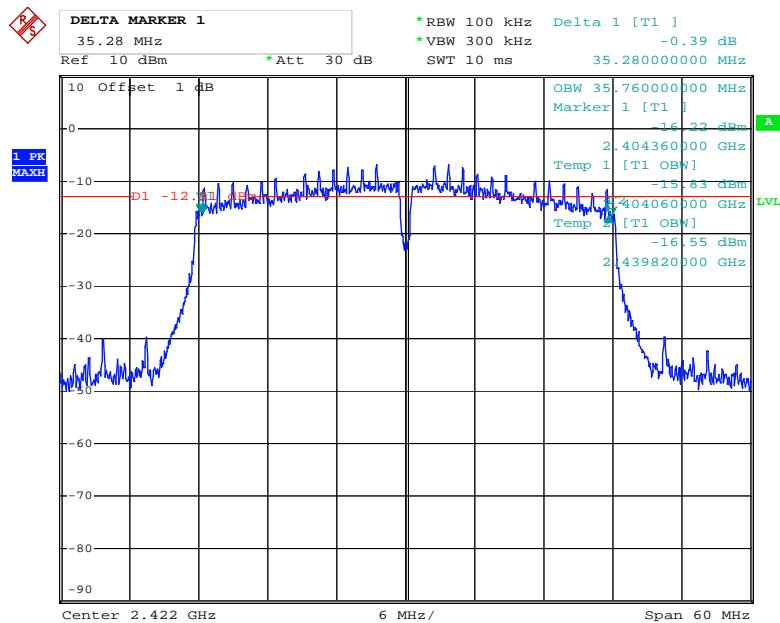


Date: 20.NOV.2018 07:38:24

802.11n-HT40-Middle Channel

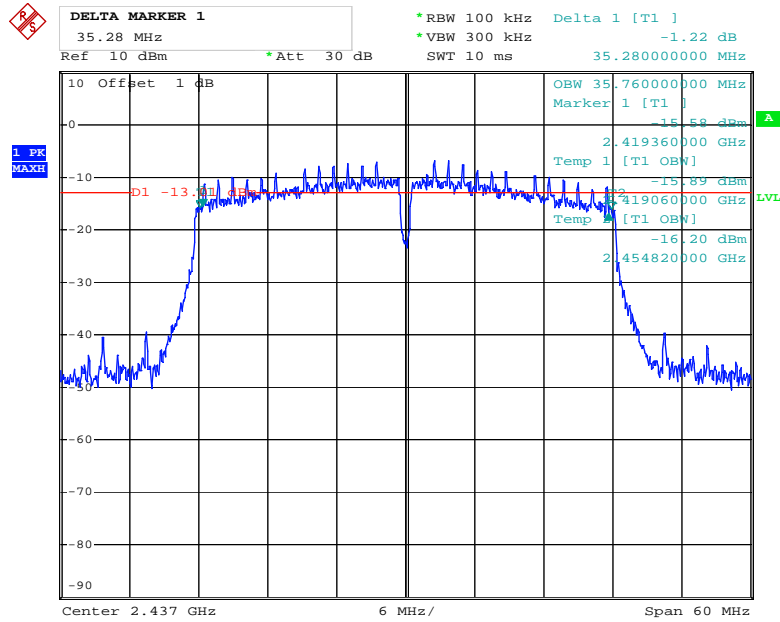

Date: 20.NOV.2018 07:39:49


802.11n-HT40-High Channel

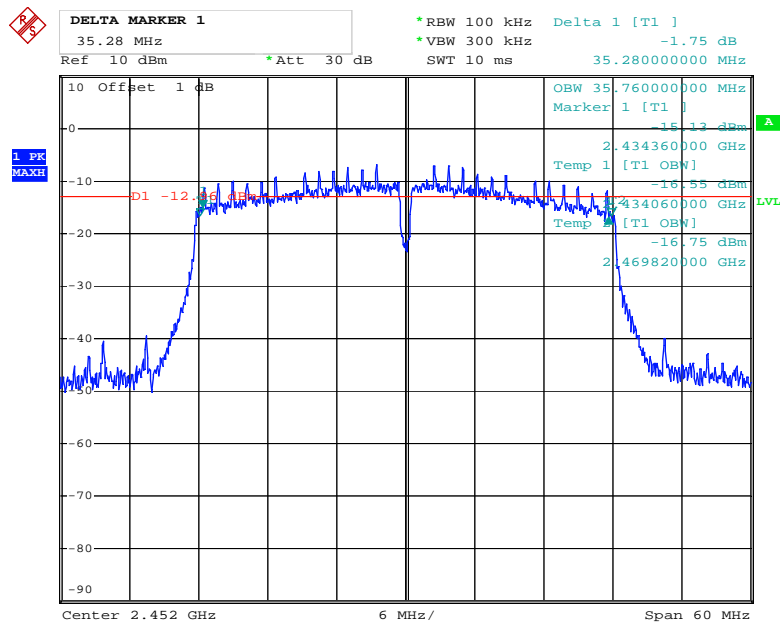

Date: 20.NOV.2018 07:41:37


Antenna 2

802.11b-Low Channel

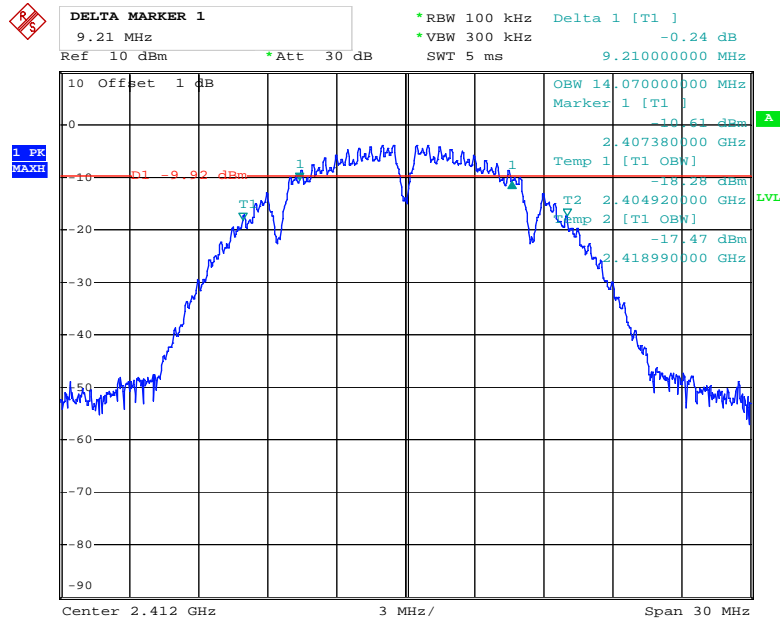


Date: 20.NOV.2018 09:20:24

802.11b-Middle Channel

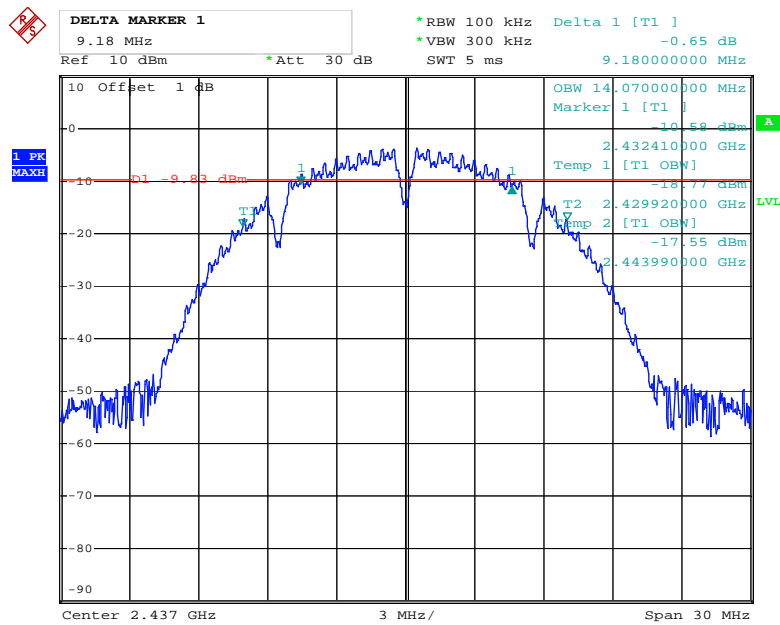


Date: 20.NOV.2018 09:21:35

802.11b-High Channel

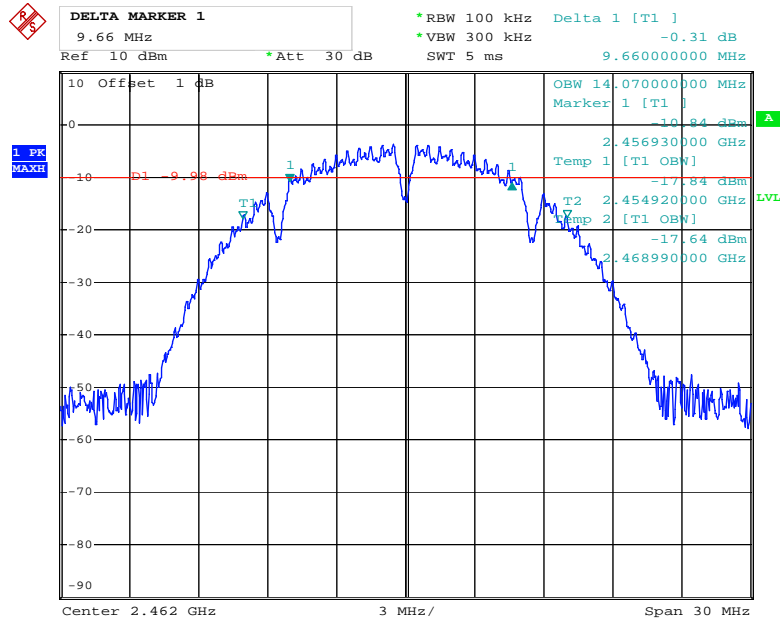


Date: 20.NOV.2018 09:22:43

802.11 g-Low Channel

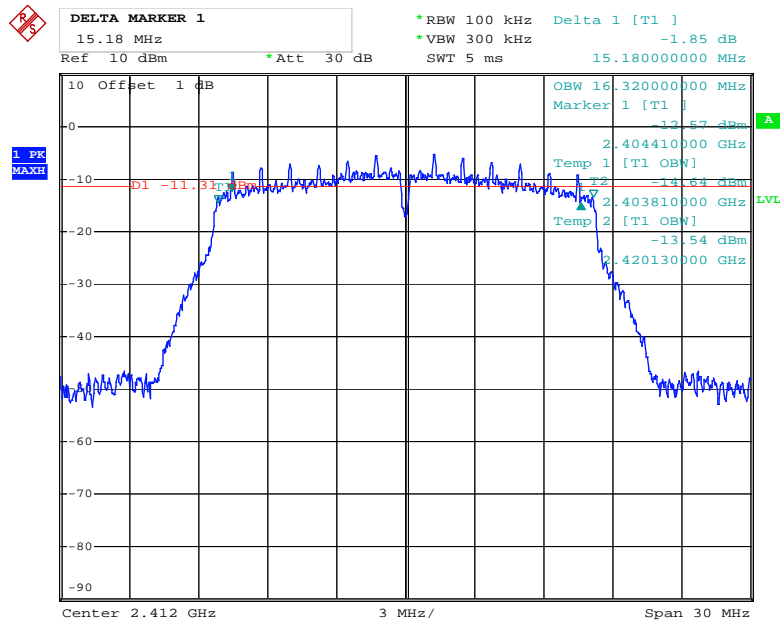


Date: 20.NOV.2018 09:17:13

802.11g-Middle Channel

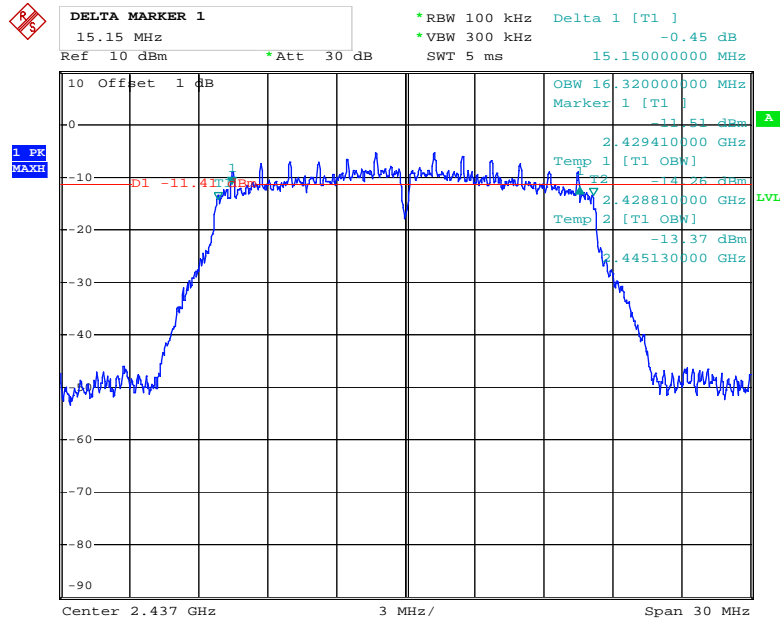


Date: 20.NOV.2018 09:16:02

802.11g-High Channel

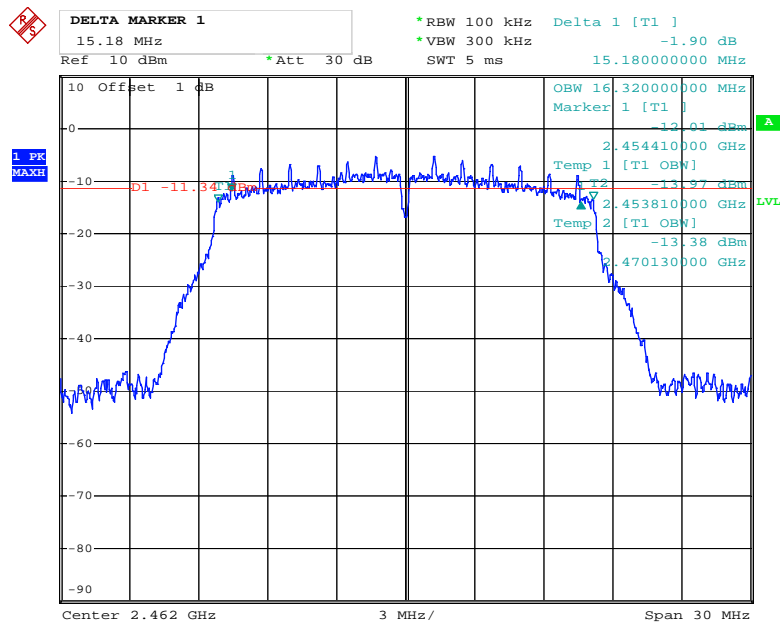


Date: 20.NOV.2018 09:14:54

802.11n-HT20-Low Channel

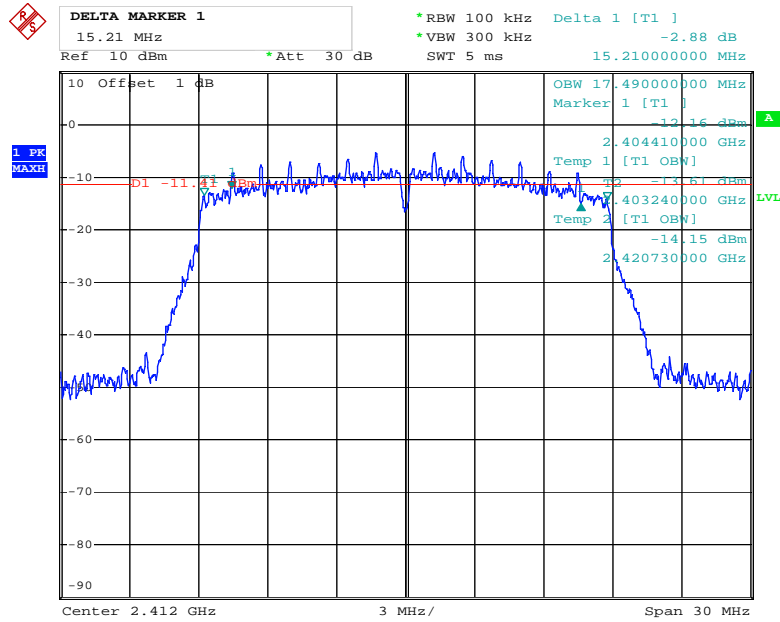


Date: 20.NOV.2018 09:11:15

802.11n-HT20-Middle Channel

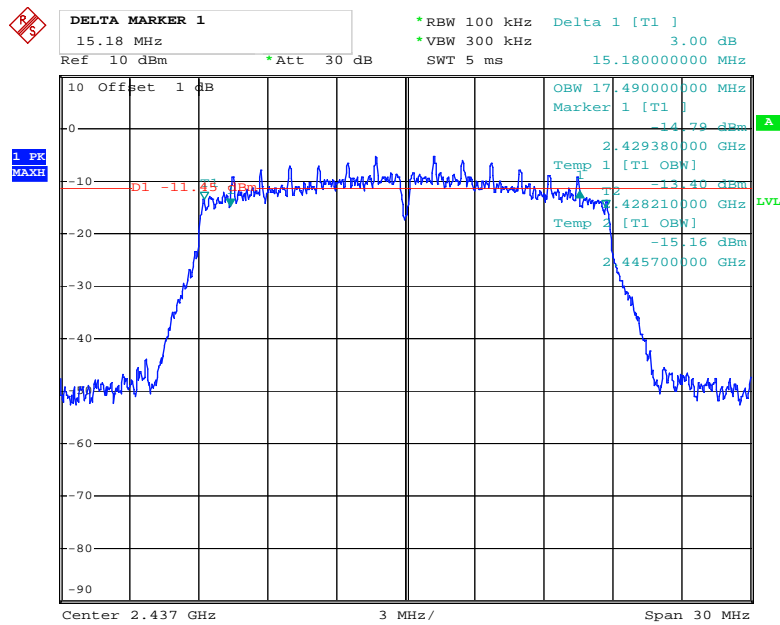


Date: 20.NOV.2018 09:12:25

802.11n-HT20-High Channel

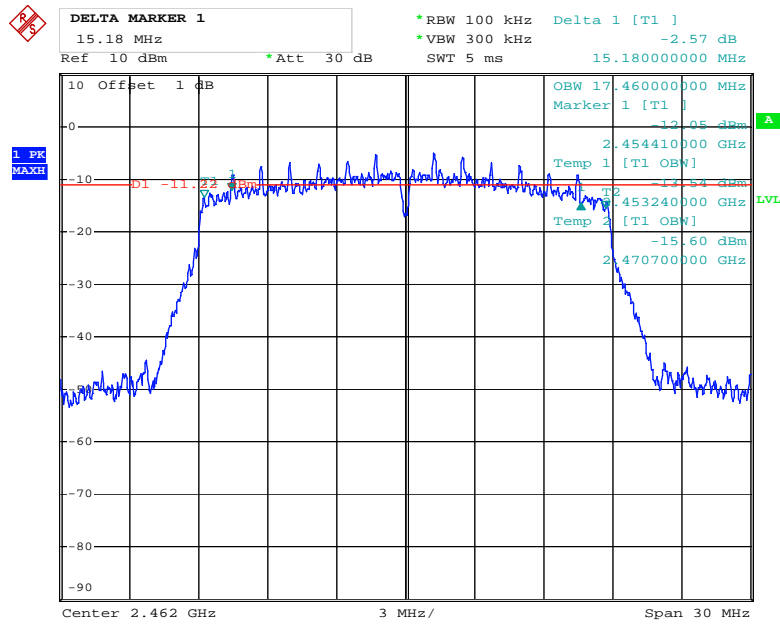


Date: 20.NOV.2018 09:13:23

802.11n-HT40-Low Channel

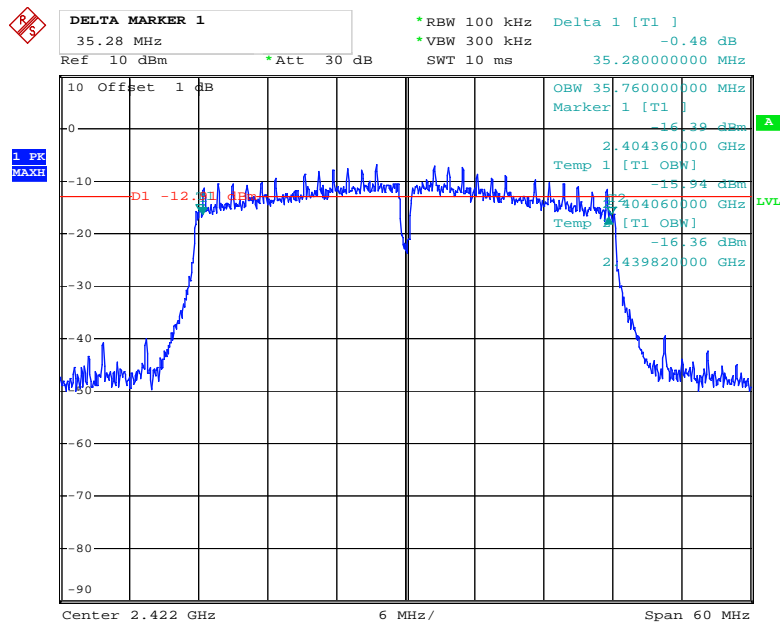


Date: 20.NOV.2018 09:06:03

802.11n-HT40-Middle Channel

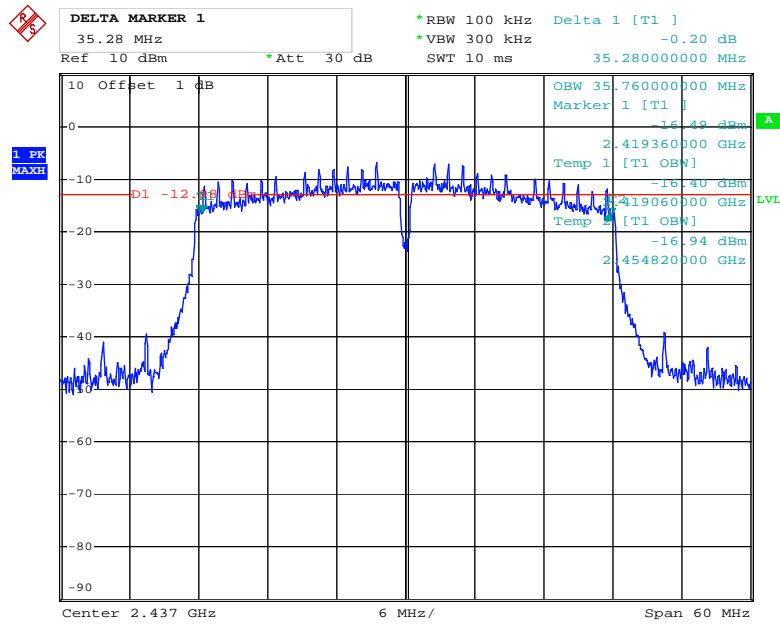

Date: 20.NOV.2018 09:04:37

802.11n-HT40-High Channel

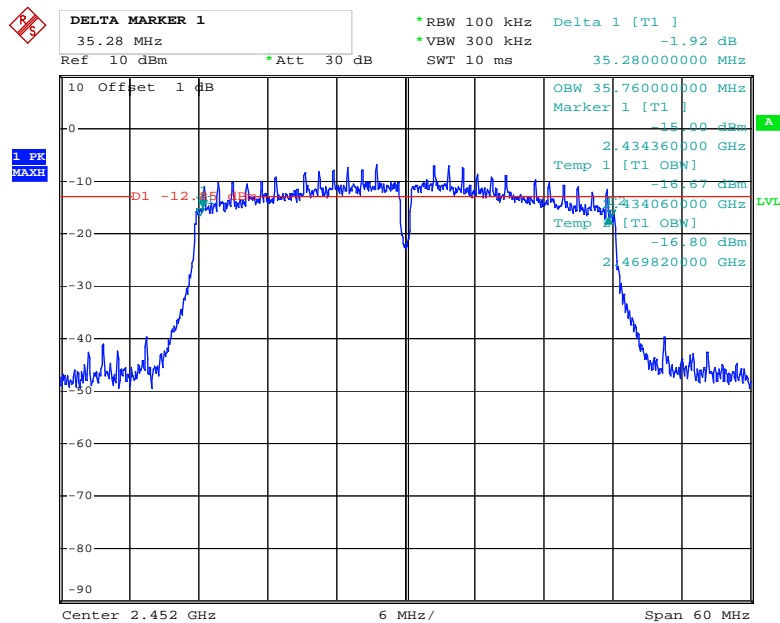

Date: 20.NOV.2018 09:03:25

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz bands: 1 Watt.

7.2 Test Procedure

According to KDB-558074 D01 V05, (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98 \%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power dBm		Output Power mW		Limit mW
		Antenna 1	Antenna 2	Antenna 1	Antenna 2	
802.11b	2412	9.49	9.41	8.9	8.7	1000
	2437	9.51	9.43	8.9	8.8	1000
	2462	9.51	9.49	8.9	8.7	1000
802.11g	2412	8.62	8.86	7.3	7.7	1000
	2437	8.85	8.95	7.7	7.9	1000
	2462	8.57	8.82	7.2	7.6	1000

Test Mode	Frequency MHz	Power dBm			Output Power mW	Limit mW
		Antenna 1	Antenna 2	total	total	
802.11n HT20	2412	8.15	8.23	11.20	13.2	1000
	2437	8.24	8.32	11.29	13.5	1000
	2462	8.18	8.28	11.24	13.3	1000
802.11n HT40	2422	7.91	7.53	10.73	11.8	1000
	2437	7.75	7.79	10.78	12.0	1000
	2452	7.94	7.54	10.75	11.9	1000

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


8.3 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

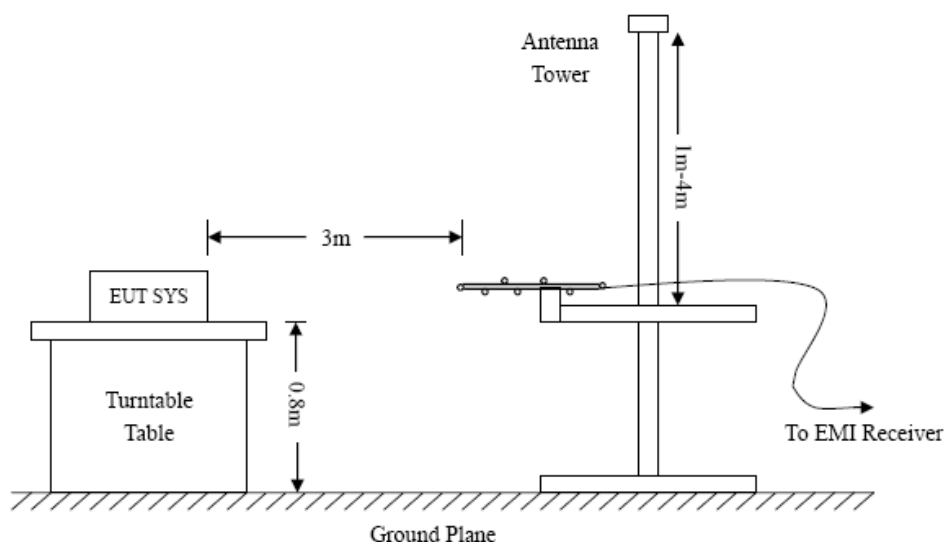

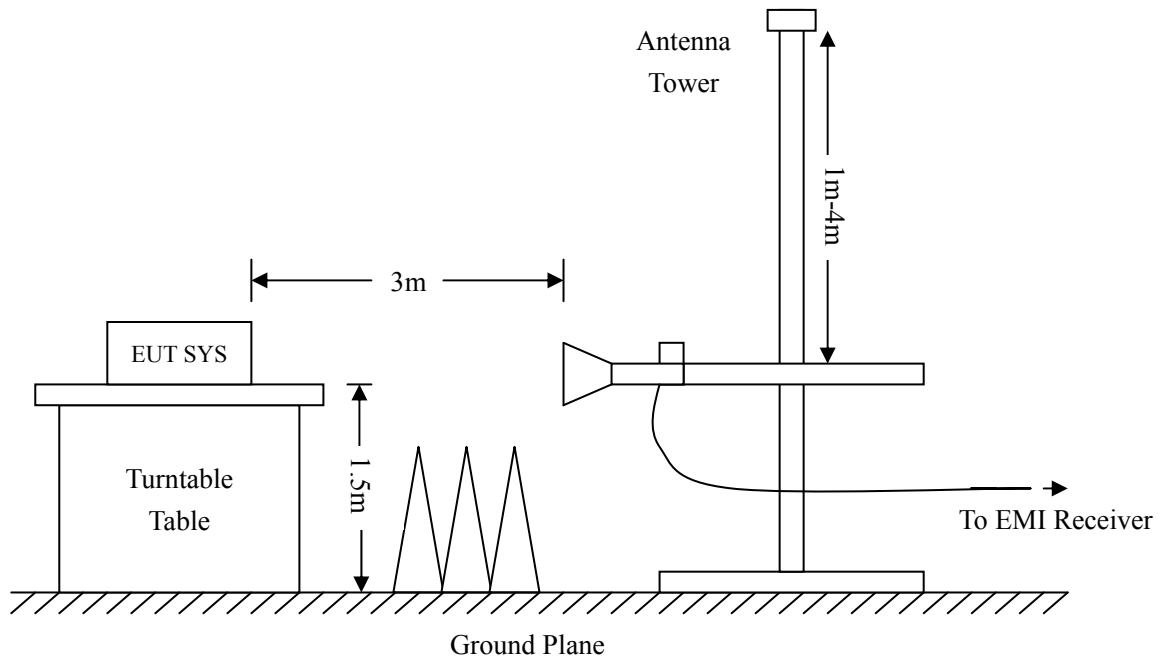

Frequency: 9kHz-30MHz
 RBW=10 KHz,
 VBW =30 KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency: 30MHz-1GHz
 RBW=120 KHz,
 VBW=300 KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency: Above 1GHz
 RBW=1MHz,
 VBW=3MHz (Peak), 10Hz (AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.6 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: The worst mode IEEE 802.11b (channel low, middle, high)) data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: 43 inches SMART 4K UHD TV
 Tested Model: RNSMU4336
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz

Test Specification: Horizontal

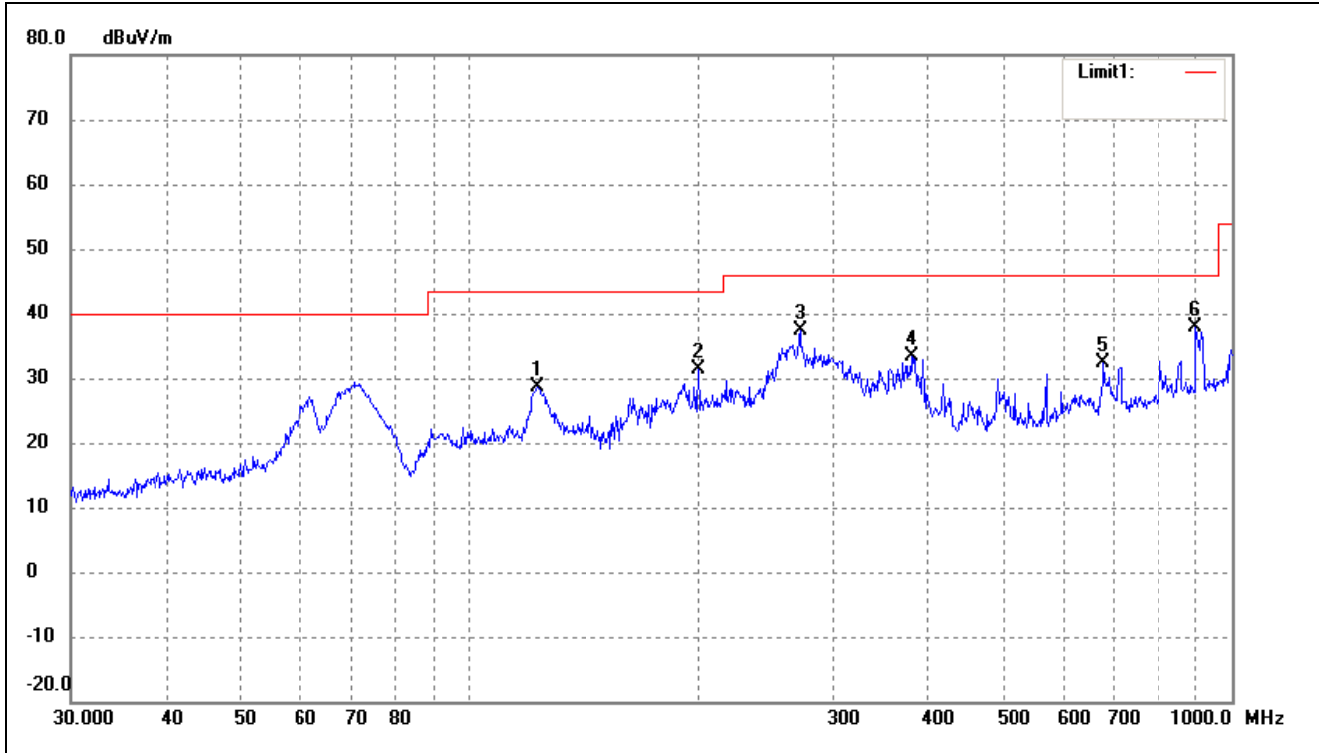

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	122.8340	44.81	-16.13	28.68	43.50	-14.82	165	100	peak
2	199.2855	44.54	-13.27	31.27	43.50	-12.23	45	100	peak
3	271.3246	48.53	-11.06	37.47	46.00	-8.53	23	100	peak
4	379.9141	42.39	-8.91	33.48	46.00	-12.52	169	100	peak
5	677.5798	36.76	-4.31	32.45	46.00	-13.55	251	100	peak
6	896.9965	37.11	0.78	37.89	46.00	-8.11	312	100	peak


Test Specification: Vertical

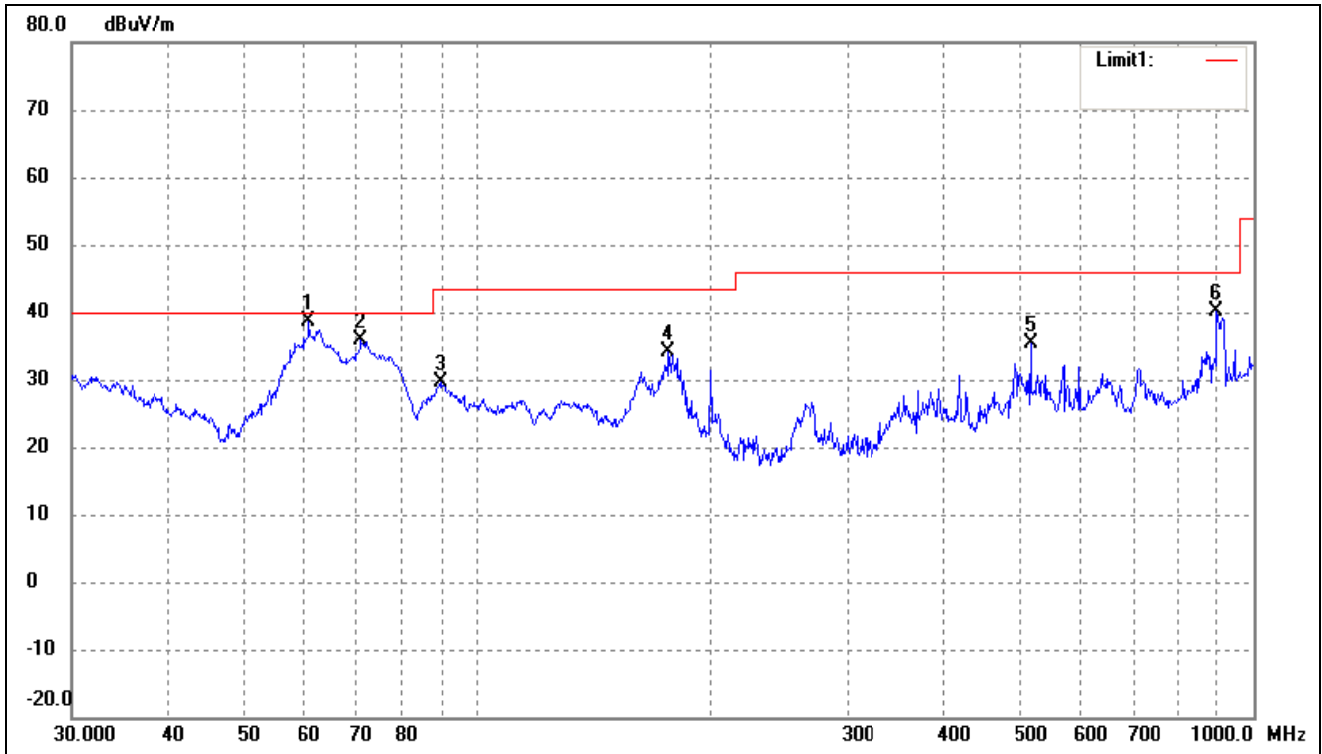

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.7043	52.11	-13.43	38.68	40.00	-1.32	5	100	peak
2	70.8315	51.80	-16.03	35.77	40.00	-4.23	210	100	peak
3	89.5899	43.31	-13.72	29.59	43.50	-13.91	106	100	peak
4	176.2686	49.85	-15.80	34.05	43.50	-9.45	88	100	peak
5	517.2480	42.79	-7.40	35.39	46.00	-10.61	314	100	peak
6	896.9965	39.47	0.78	40.25	46.00	-5.75	105	100	peak


Operating Condition: 802.11b Transmitting Middle Channel-2437MHz
 Comment: 120V/60Hz

Test Specification: Horizontal

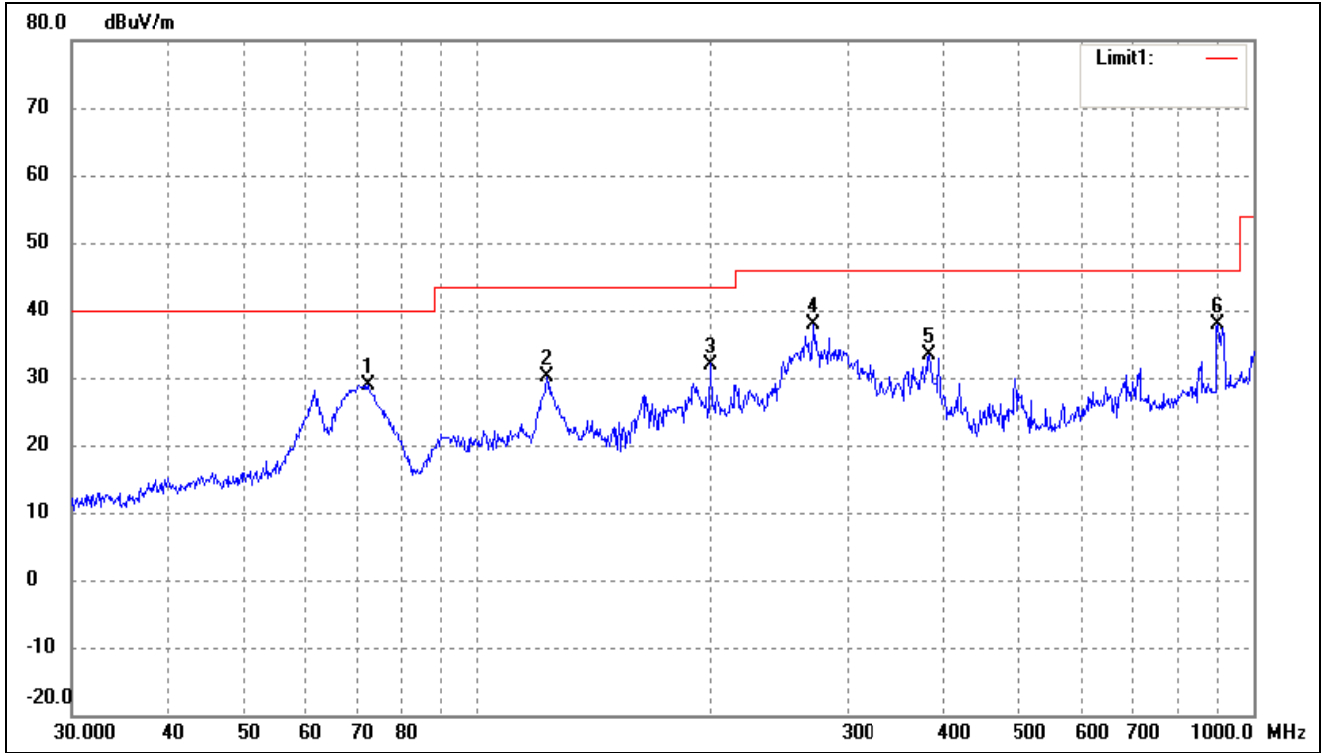

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	72.3376	45.30	-16.32	28.98	40.00	-11.02	16	100	peak
2	122.8340	46.14	-16.13	30.01	43.50	-13.49	189	100	peak
3	199.2855	45.27	-13.27	32.00	43.50	-11.50	103	100	peak
4	270.3748	48.89	-11.09	37.80	46.00	-8.20	281	100	peak
5	382.5879	42.25	-8.97	33.28	46.00	-12.72	345	100	peak
6	900.1474	37.13	0.86	37.99	46.00	-8.01	110	100	peak

Test Specification: Vertical

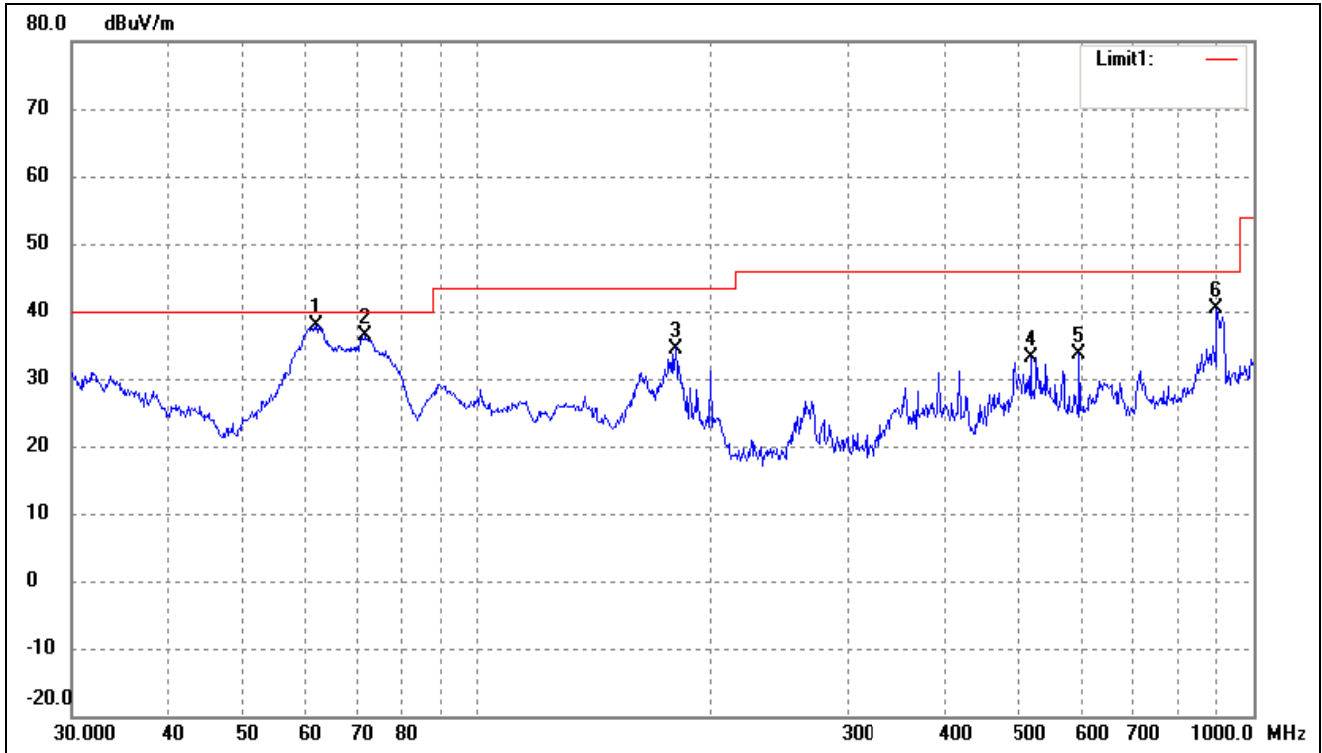

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	61.9951	51.55	-13.60	37.95	40.00	-2.05	14	100	peak
2	71.8319	52.51	-16.22	36.29	40.00	-3.71	214	100	peak
3	180.0165	49.90	-15.40	34.50	43.50	-9.00	156	100	peak
4	517.2480	40.55	-7.40	33.15	46.00	-12.85	109	100	peak
5	597.2234	39.00	-5.35	33.65	46.00	-12.35	246	100	peak
6	896.9965	39.62	0.78	40.40	46.00	-5.60	251	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: 120V/60Hz

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	70.8315	45.68	-16.03	29.65	40.00	-10.35	146	100	peak
2	199.9856	45.82	-13.20	32.62	43.50	-10.88	199	100	peak
3	270.3748	48.58	-11.09	37.49	46.00	-8.51	205	100	peak
4	393.4723	41.01	-9.03	31.98	46.00	-14.02	276	100	peak
5	677.5798	37.36	-4.31	33.05	46.00	-12.95	300	100	peak
6	896.9965	34.47	0.78	35.25	46.00	-10.75	91	100	peak

Test Specification: Vertical

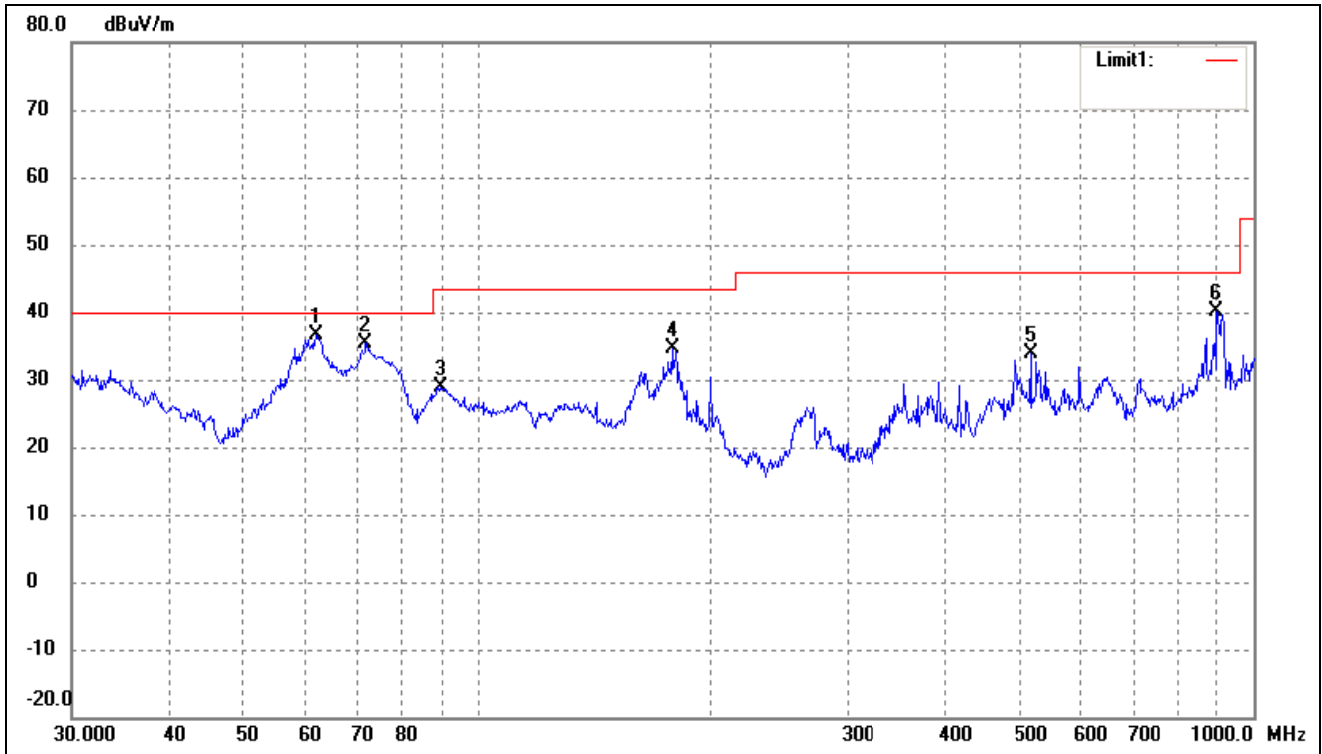

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	61.9951	50.18	-13.60	36.58	40.00	-3.42	14	100	peak
2	71.8319	51.57	-16.22	35.35	40.00	-4.65	116	100	peak
3	89.5899	42.70	-13.72	28.98	43.50	-14.52	44	100	peak
4	178.1327	50.14	-15.61	34.53	43.50	-8.97	56	100	peak
5	517.2480	41.31	-7.40	33.91	46.00	-12.09	260	100	peak
6	896.9965	39.26	0.78	40.04	46.00	-5.96	348	100	peak

Test Mode: 802.11b

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824	62.32	-3.87	58.45	74	-15.55	H	Peak
4824	46.33	-3.87	42.46	54	-11.54	H	AV
7236	55.58	1.14	56.72	74	-17.28	H	Peak
7236	42.61	1.19	43.8	54	-10.2	H	AV
4824	60.71	-3.86	56.85	74	-17.15	V	Peak
4824	45.35	-3.86	41.49	54	-12.51	V	AV
7236	55.05	1.1	56.15	74	-17.85	V	Peak
7236	42.95	1.1	44.05	54	-9.95	V	AV
Middle Channel-2437MHz							
4874	62.55	-3.74	58.81	74	-15.19	H	Peak
4874	45.2	-3.74	41.46	54	-12.54	H	AV
7311	57.5	1.47	58.97	74	-15.03	H	Peak
7311	41.44	1.47	42.91	54	-11.09	H	AV
4874	63.46	-3.74	59.72	74	-14.28	V	Peak
4874	46.14	-3.74	42.4	54	-11.6	V	AV
7311	54.59	1.47	56.06	74	-17.94	V	Peak
7311	40.64	1.47	42.11	54	-11.89	V	AV
High Channel-2462MHz							
4924	60.63	-3.59	57.04	74	-16.96	H	Peak
4924	45.84	-3.59	42.25	54	-11.75	H	AV
7386	56.49	1.79	58.28	74	-15.72	H	Peak
7386	42.98	1.79	44.77	54	-9.23	H	AV
4924	63.43	-3.59	59.84	74	-14.16	V	Peak
4924	44.82	-3.59	41.23	54	-12.77	V	AV
7386	57.44	1.79	59.23	74	-14.77	V	Peak
7386	40.73	1.79	42.52	54	-11.48	V	AV

Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824	62.4	-3.87	58.53	74	-15.47	H	Peak
4824	43.63	-3.87	39.76	54	-14.24	H	AV
7236	56.85	1.14	57.99	74	-16.01	H	Peak
7236	43.2	1.19	44.39	54	-9.61	H	AV
4824	63.23	-3.86	59.37	74	-14.63	V	Peak
4824	45.54	-3.86	41.68	54	-12.32	V	AV
7236	56.48	1.1	57.58	74	-16.42	V	Peak
7236	41.6	1.1	42.7	54	-11.3	V	AV
Middle Channel-2437MHz							
4874	62.96	-3.74	59.22	74	-14.78	H	Peak
4874	44.43	-3.74	40.69	54	-13.31	H	AV
7311	54.87	1.47	56.34	74	-17.66	H	Peak
7311	42.55	1.47	44.02	54	-9.98	H	AV
4874	62.18	-3.74	58.44	74	-15.56	V	Peak
4874	44.46	-3.74	40.72	54	-13.28	V	AV
7311	57.67	1.47	59.14	74	-14.86	V	Peak
7311	40.79	1.47	42.26	54	-11.74	V	AV
High Channel-2462MHz							
4924	62.59	-3.59	59	74	-15	H	Peak
4924	45.81	-3.59	42.22	54	-11.78	H	AV
7386	57.41	1.79	59.2	74	-14.8	H	Peak
7386	40.45	1.79	42.24	54	-11.76	H	AV
4924	63.41	-3.59	59.82	74	-14.18	V	Peak
4924	43.59	-3.59	40	54	-14	V	AV
7386	56.29	1.79	58.08	74	-15.92	V	Peak
7386	41.19	1.79	42.98	54	-11.02	V	AV

Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824	61.09	-3.87	57.22	74	-16.78	H	Peak
4824	43.83	-3.87	39.96	54	-14.04	H	AV
7236	57.7	1.14	58.84	74	-15.16	H	Peak
7236	41.05	1.19	42.24	54	-11.76	H	AV
4824	63.93	-3.86	60.07	74	-13.93	V	Peak
4824	45.26	-3.86	41.4	54	-12.6	V	AV
7236	57	1.1	58.1	74	-15.9	V	Peak
7236	41.82	1.1	42.92	54	-11.08	V	AV
Middle Channel-2437MHz							
4874	64.4	-3.74	60.66	74	-13.34	H	Peak
4874	46.35	-3.74	42.61	54	-11.39	H	AV
7311	60.68	1.47	62.15	74	-11.85	H	Peak
7311	42.87	1.47	44.34	54	-9.66	H	AV
4874	65.91	-3.74	62.17	74	-11.83	V	Peak
4874	46.35	-3.74	42.61	54	-11.39	V	AV
7311	59.76	1.47	61.23	74	-12.77	V	Peak
7311	43.94	1.47	45.41	54	-8.59	V	AV
High Channel-2462MHz							
4924	65.32	-3.59	61.73	74	-12.27	H	Peak
4924	47.65	-3.59	44.06	54	-9.94	H	AV
7386	56.74	1.79	58.53	74	-15.47	H	Peak
7386	44.73	1.79	46.52	54	-7.48	H	AV
4924	64.34	-3.59	60.75	74	-13.25	V	Peak
4924	48.13	-3.59	44.54	54	-9.46	V	AV
7386	60.25	1.79	62.04	74	-11.96	V	Peak
7386	45.05	1.79	46.84	54	-7.16	V	AV

Test Mode: 802.11n-HT40

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2422MHz							
4844	62.15	-3.87	58.28	74	-15.72	H	PK
4824	45.59	-3.87	41.72	54	-12.28	H	AV
7266	58.18	1.14	59.32	74	-14.68	H	PK
7266	41.76	1.19	42.95	54	-11.05	H	AV
4844	63	-3.86	59.14	74	-14.86	V	PK
4824	45.23	-3.86	41.37	54	-12.63	V	AV
7266	58.35	1.1	59.45	74	-14.55	V	PK
7266	42.72	1.1	43.82	54	-10.18	V	AV
Middle Channel-2437MHz							
4874	61.19	-3.74	57.45	74	-16.55	H	PK
4874	44.23	-3.74	40.49	54	-13.51	H	AV
7311	56.08	1.47	57.55	74	-16.45	H	PK
7311	42.66	1.47	44.13	54	-9.87	H	AV
4874	60.66	-3.74	56.92	74	-17.08	V	PK
4874	43.84	-3.74	40.1	54	-13.9	V	AV
7311	56.89	1.47	58.36	74	-15.64	V	PK
7311	43.48	1.47	44.95	54	-9.05	V	AV
High Channel-2452MHz							
4904	62.77	-3.59	59.18	74	-14.82	H	PK
4904	44.65	-3.59	41.06	54	-12.94	H	AV
7356	56.49	1.79	58.28	74	-15.72	H	PK
7356	41.38	1.79	43.17	54	-10.83	H	AV
4904	60.98	-3.59	57.39	74	-16.61	V	PK
4904	46.47	-3.59	42.88	54	-11.12	V	AV
7356	55.57	1.79	57.36	74	-16.64	V	PK
7356	42.5	1.79	44.29	54	-9.71	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 V05, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V05, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


9.4 Summary of Test Results/Plots

802.11b-Lowest Band edge

Vertical (Worst case)

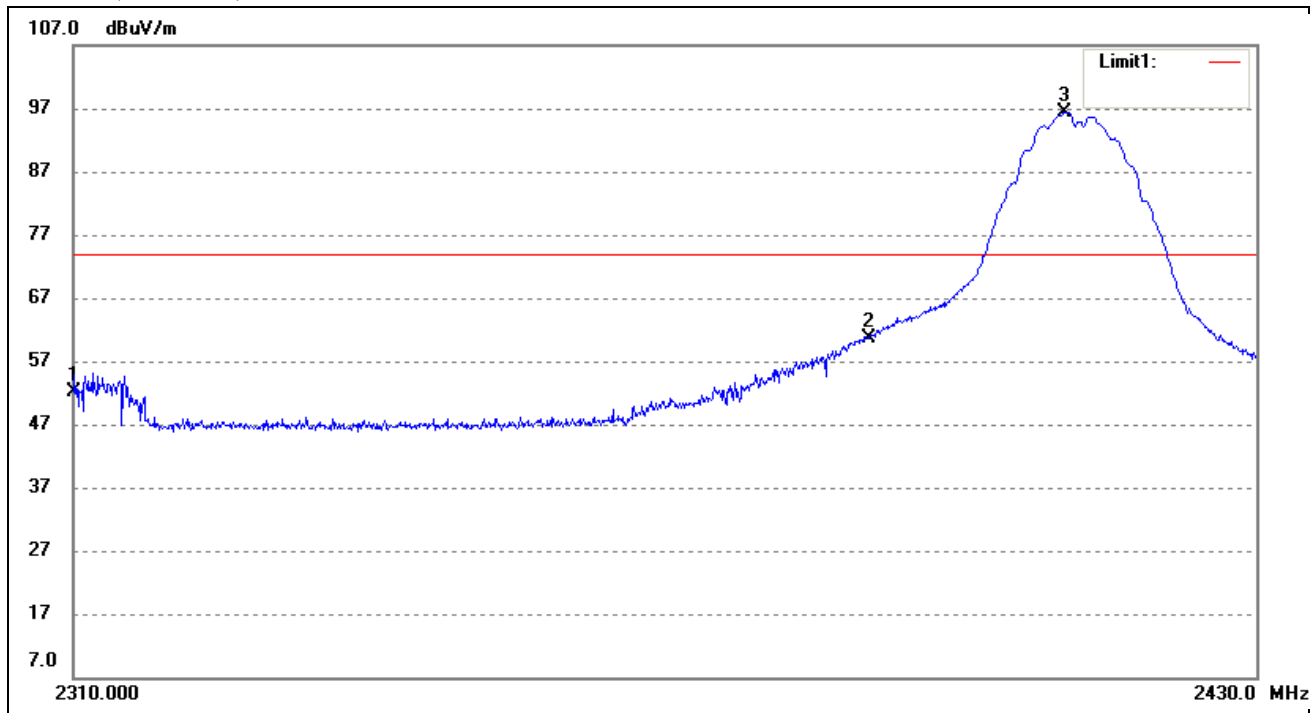


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	60.01	-7.78	52.23	74.00	-21.77	26	100	peak
2	2390.000	67.98	-7.32	60.66	74.00	-13.34	24	100	peak
3	2410.145	103.68	-7.19	96.49	/	/	150	100	peak

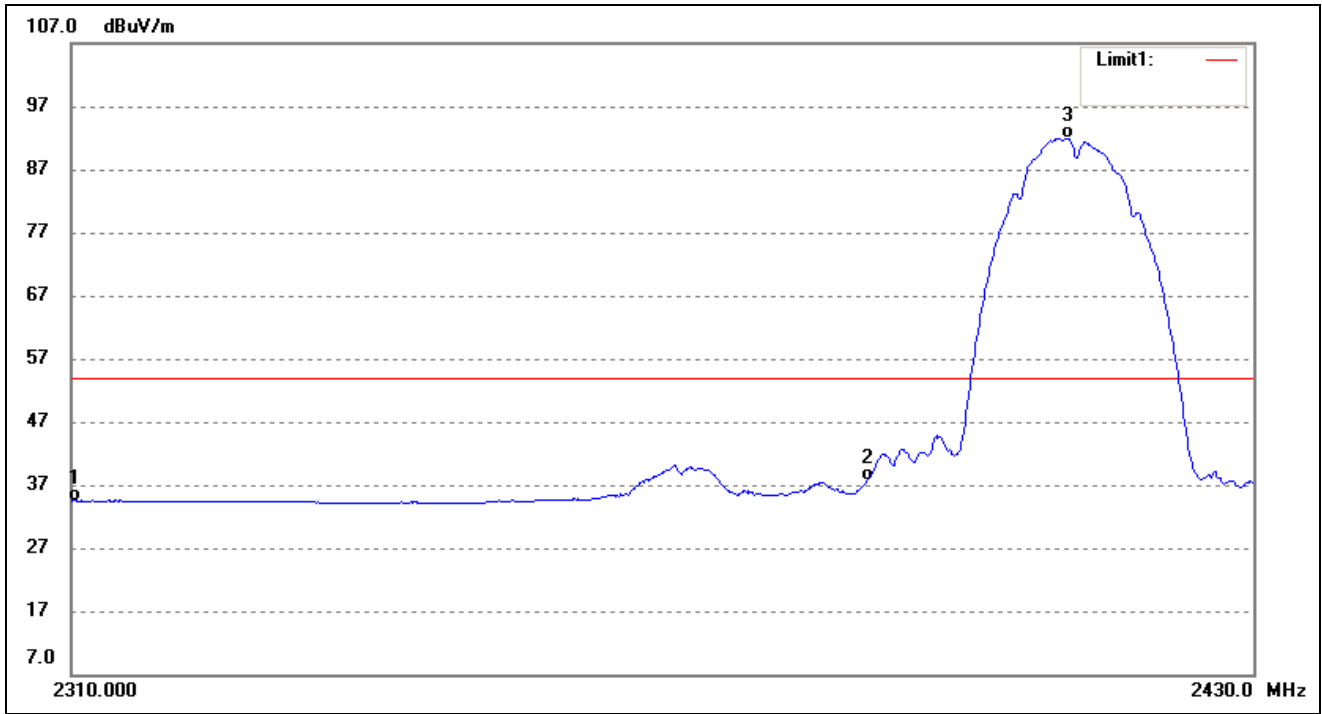


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	42.17	-7.78	34.39	54.00	-19.61	65	100	AVG
2	2390.000	44.85	-7.32	37.53	54.00	-16.47	266	100	AVG
3	2410.756	99.13	-7.19	91.94	/	/	140	100	AVG

802.11b-Highest Band edge

Vertical (Worst case)

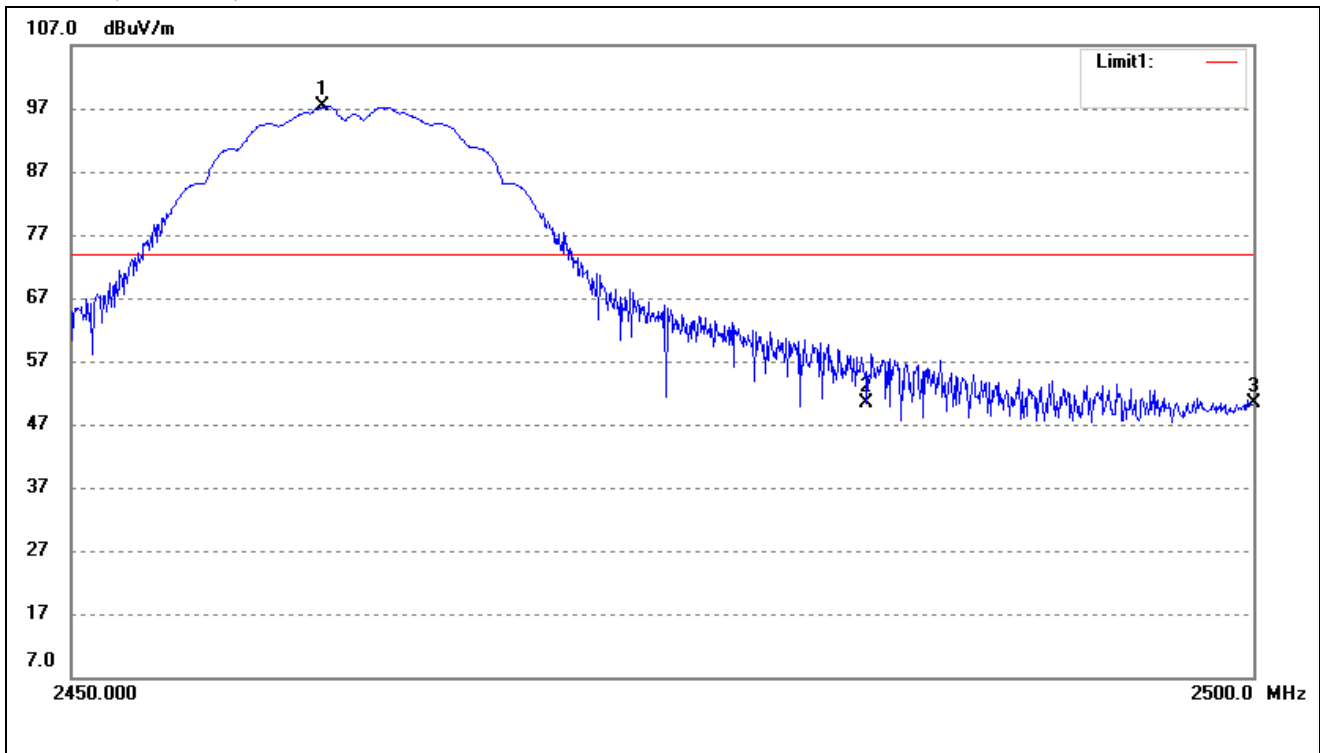


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2460.566	104.23	-6.90	97.33	/	/	19	100	peak
2	2483.500	57.05	-6.77	50.28	74.00	-23.72	163	100	peak
3	2500.000	57.02	-6.67	50.35	74.00	-23.65	147	100	peak

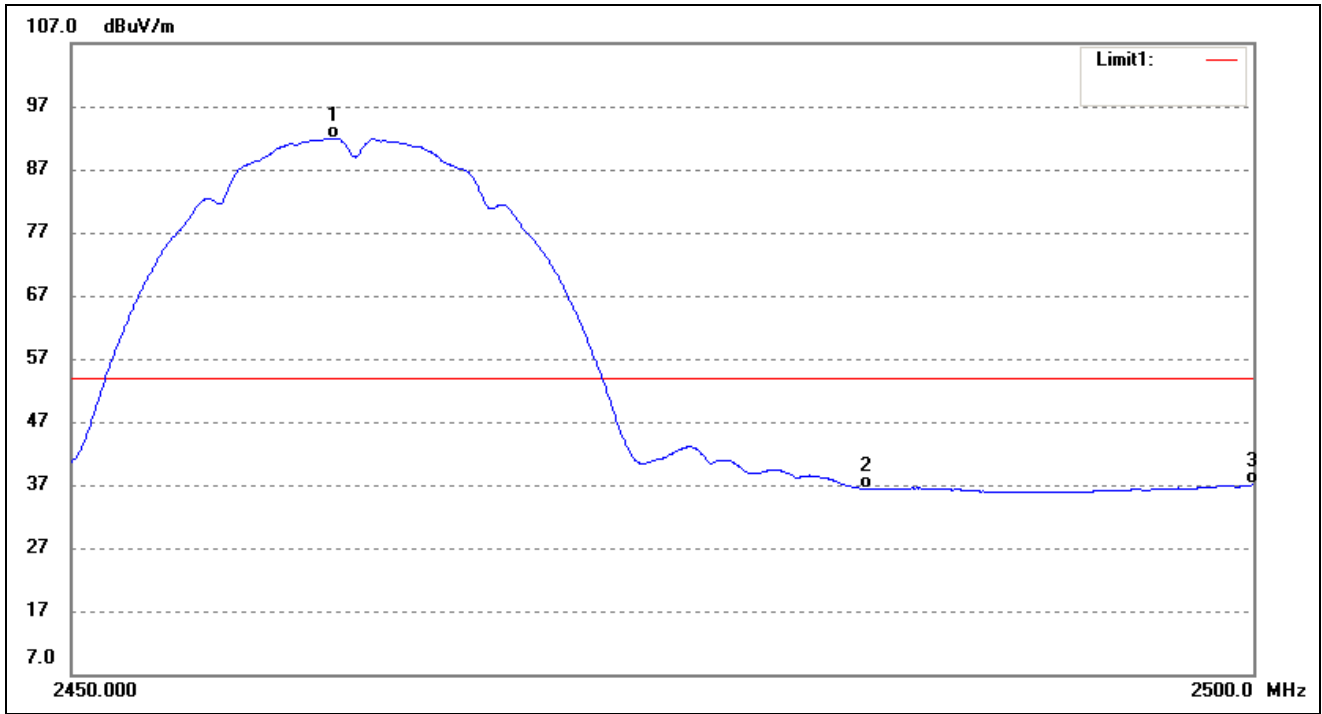


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2461.013	98.90	-6.90	92.00	/	/	247	100	AVG
2	2483.500	43.17	-6.77	36.40	54.00	-17.60	56	100	AVG
3	2500.000	43.68	-6.67	37.01	54.00	-16.99	68	100	AVG

802.11g-Lowest Band edge

Vertical (Worst case)

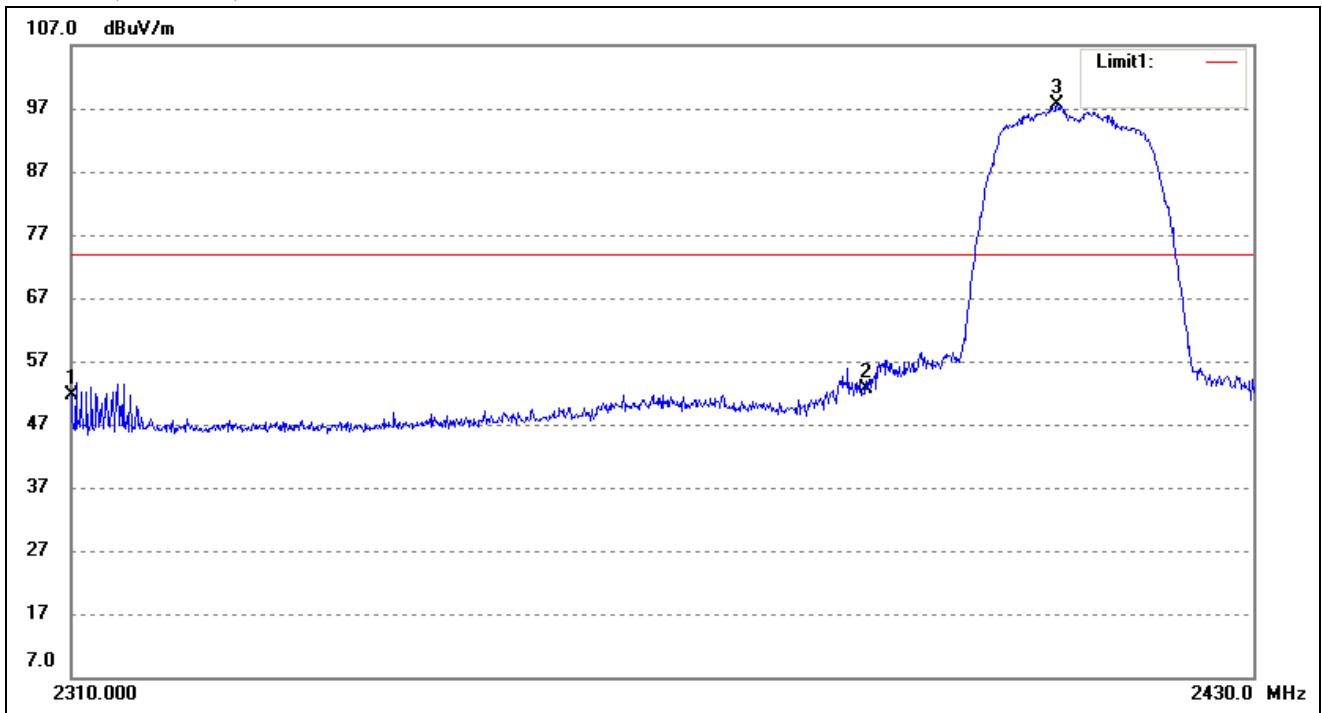


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	59.35	-7.78	51.57	74.00	-22.43	141	100	peak
2	2390.000	59.98	-7.32	52.66	74.00	-21.34	16	100	peak
3	2409.657	104.71	-7.19	97.52	/	/	295	100	peak

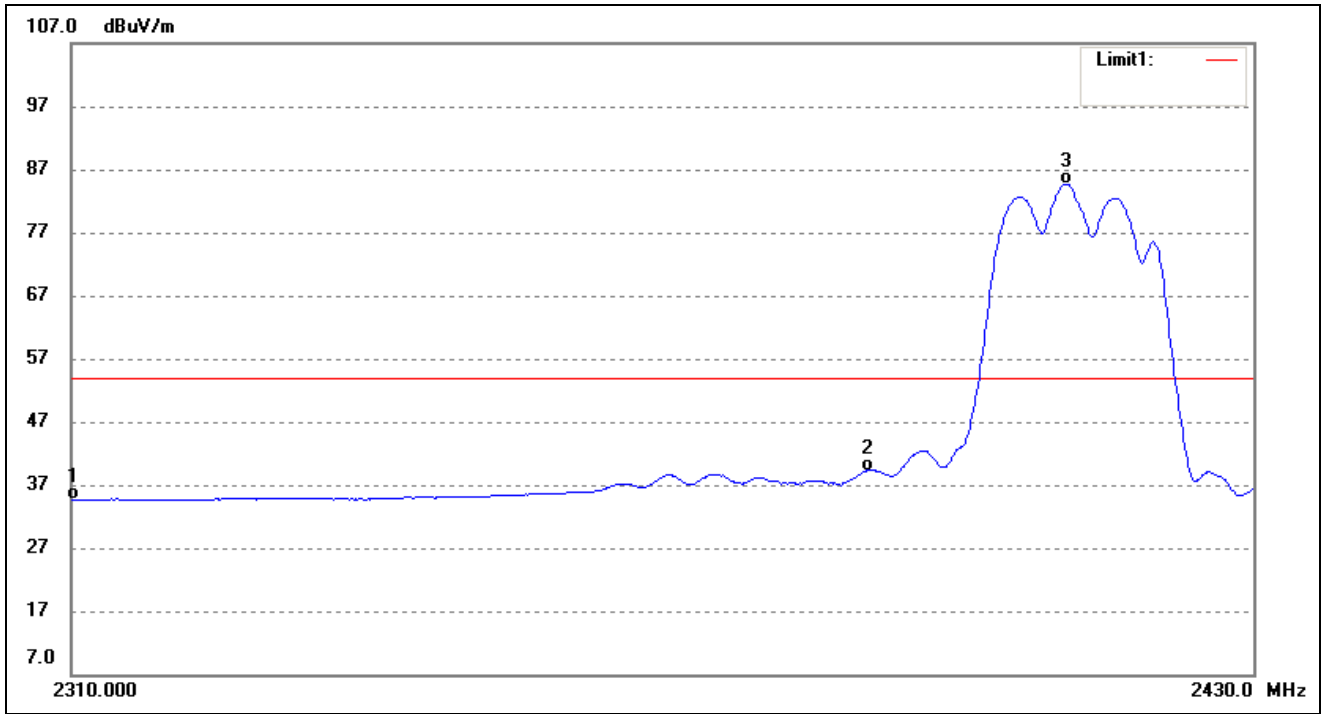


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	42.40	-7.78	34.62	54.00	-19.38	195	100	AVG
2	2390.000	46.57	-7.32	39.25	54.00	-14.75	245	100	AVG
3	2410.633	91.91	-7.19	84.72	/	/	266	100	AVG

802.11g-Highest Band edge

Vertical (Worst case)

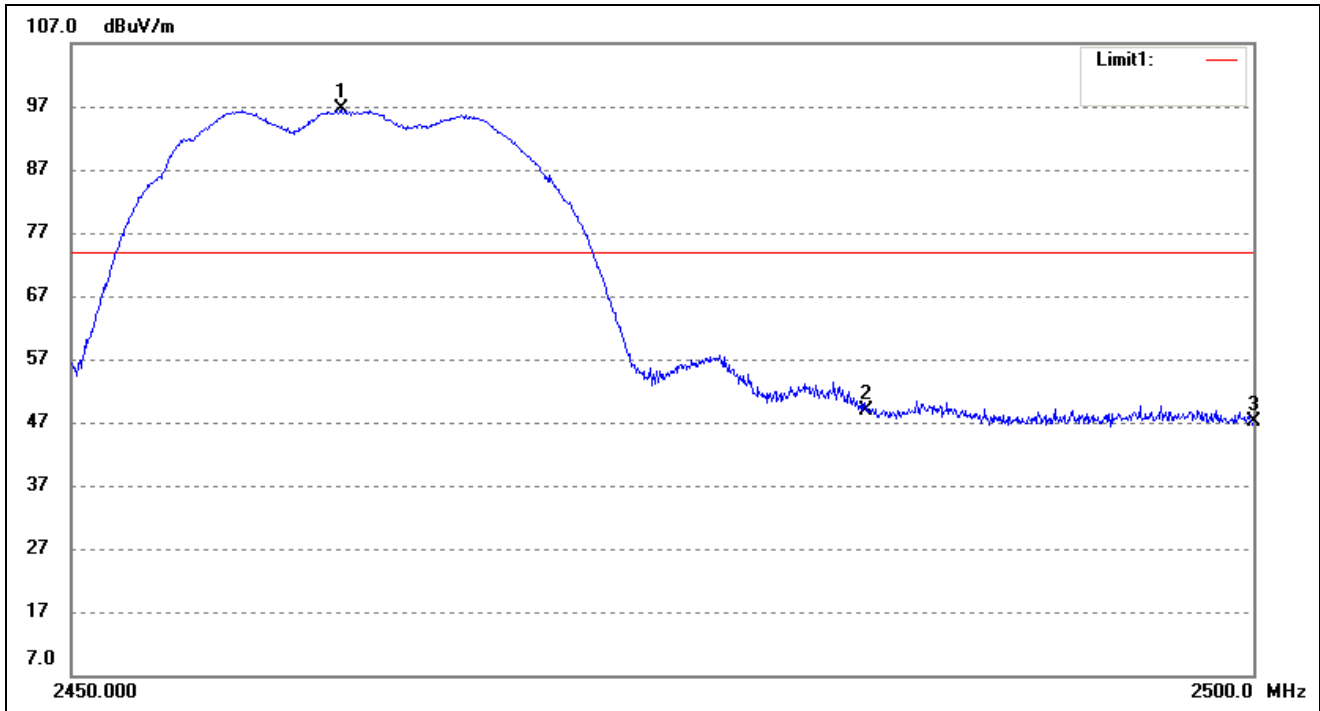


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2461.311	103.64	-6.90	96.74	/	/	195	100	Peak
2	2483.500	55.64	-6.77	48.87	74.00	-25.13	24	100	Peak
3	2500.000	53.80	-6.67	47.13	74.00	-26.87	78	100	Peak

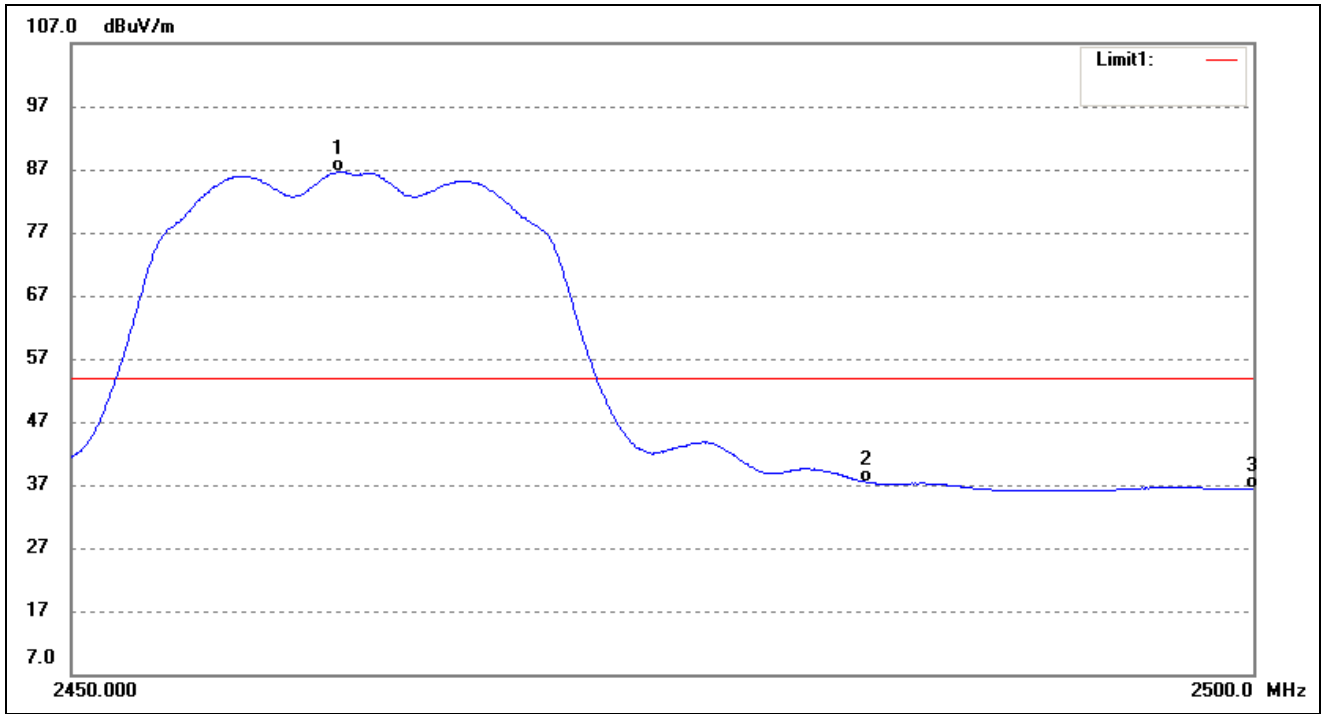


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2461.212	93.55	-6.90	86.65	/	/	6	100	AVG
2	2483.500	44.14	-6.77	37.37	54.00	-16.63	24	100	AVG
3	2500.000	43.14	-6.67	36.47	54.00	-17.53	54	100	AVG

802.11n-HT20-Lowest Band edge

Vertical (Worst case)

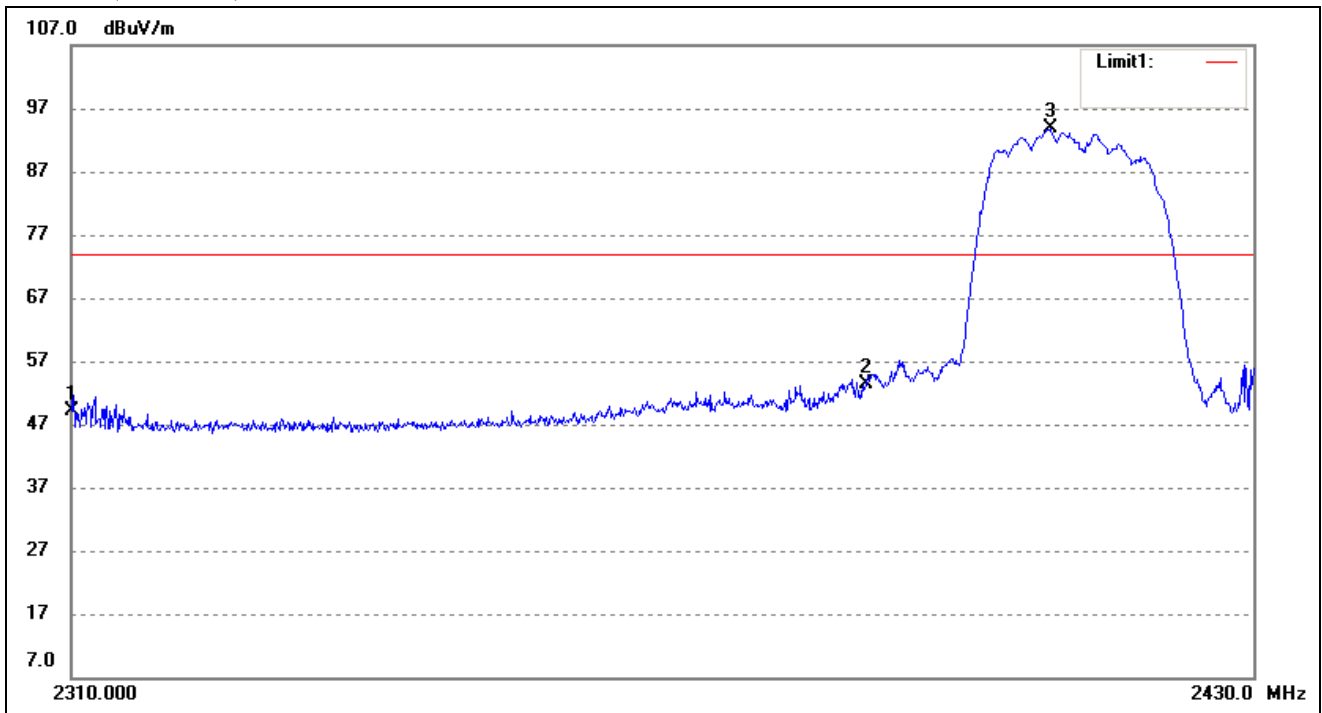


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	56.88	-7.78	49.10	74.00	-24.90	146	100	Peak
2	2390.000	60.67	-7.32	53.35	74.00	-20.65	6	100	Peak
3	2408.925	100.98	-7.21	93.77	/	/	236	100	Peak

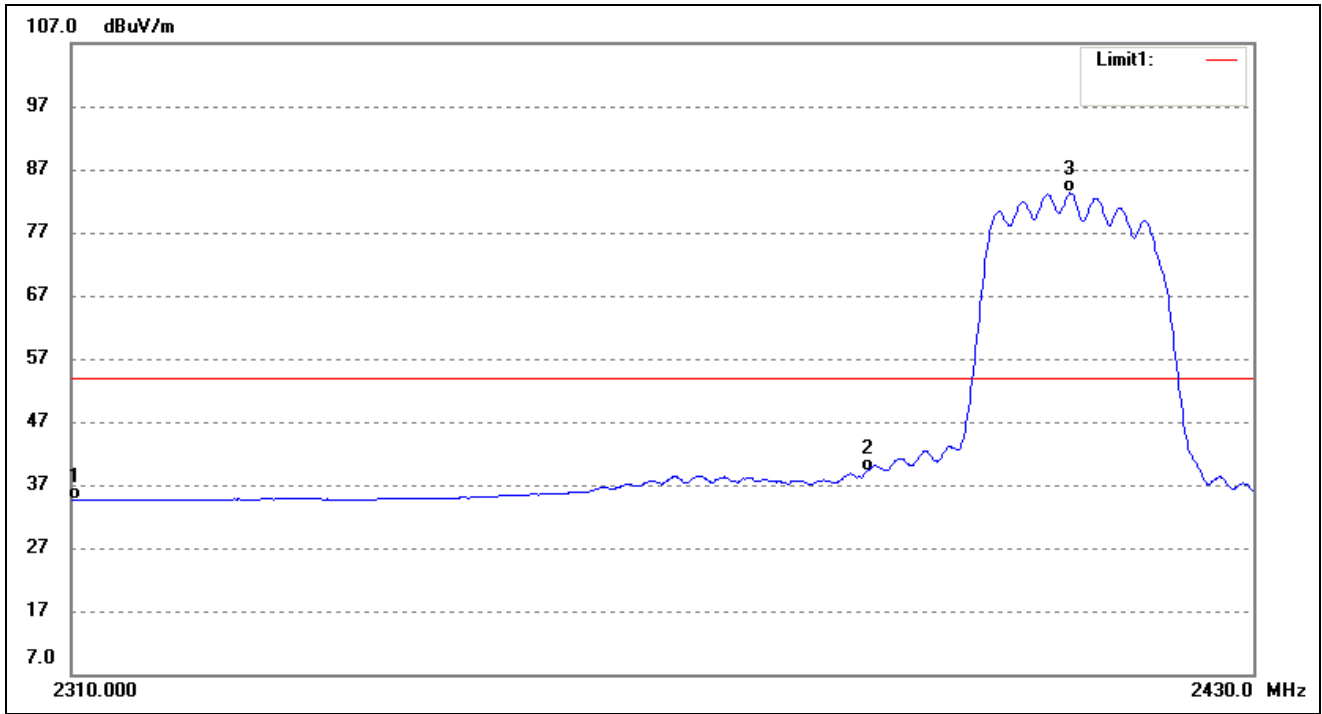


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	42.38	-7.78	34.60	54.00	-19.40	156	100	AVG
2	2390.000	46.41	-7.32	39.09	54.00	-14.91	26	100	AVG
3	2411.000	90.46	-7.19	83.27	/	/	354	100	AVG

802.11n-HT20-Highest Band edge

Vertical (Worst case)

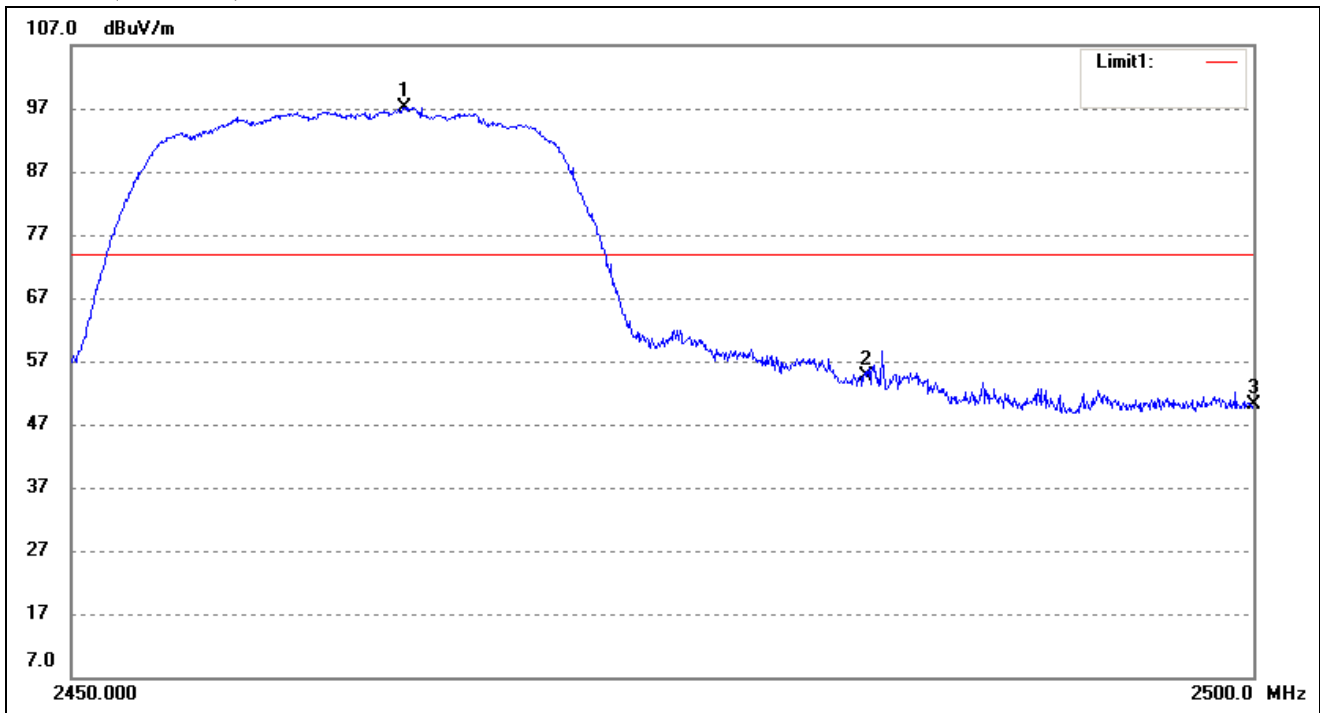


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2463.998	104.10	-6.89	97.21	/	/	147	100	peak
2	2483.500	61.38	-6.77	54.61	74.00	-19.39	223	100	peak
3	2500.000	56.75	-6.67	50.08	74.00	-23.92	35	100	peak

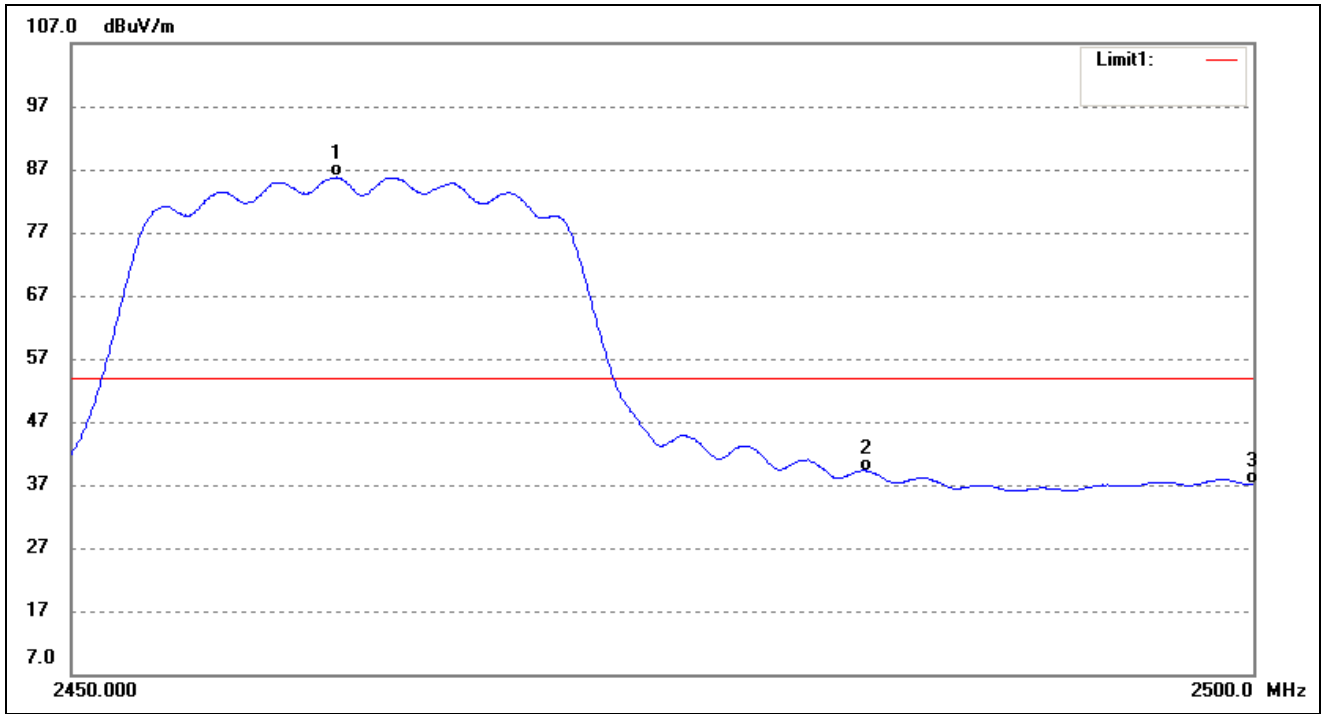


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2461.162	92.68	-6.90	85.78	/	/	70	100	AVG
2	2483.500	45.99	-6.77	39.22	54.00	-14.78	23	100	AVG
3	2500.000	43.84	-6.67	37.17	54.00	-16.83	34	100	AVG

802.11n-HT40-Lowest Band edge

Vertical (Worst case)

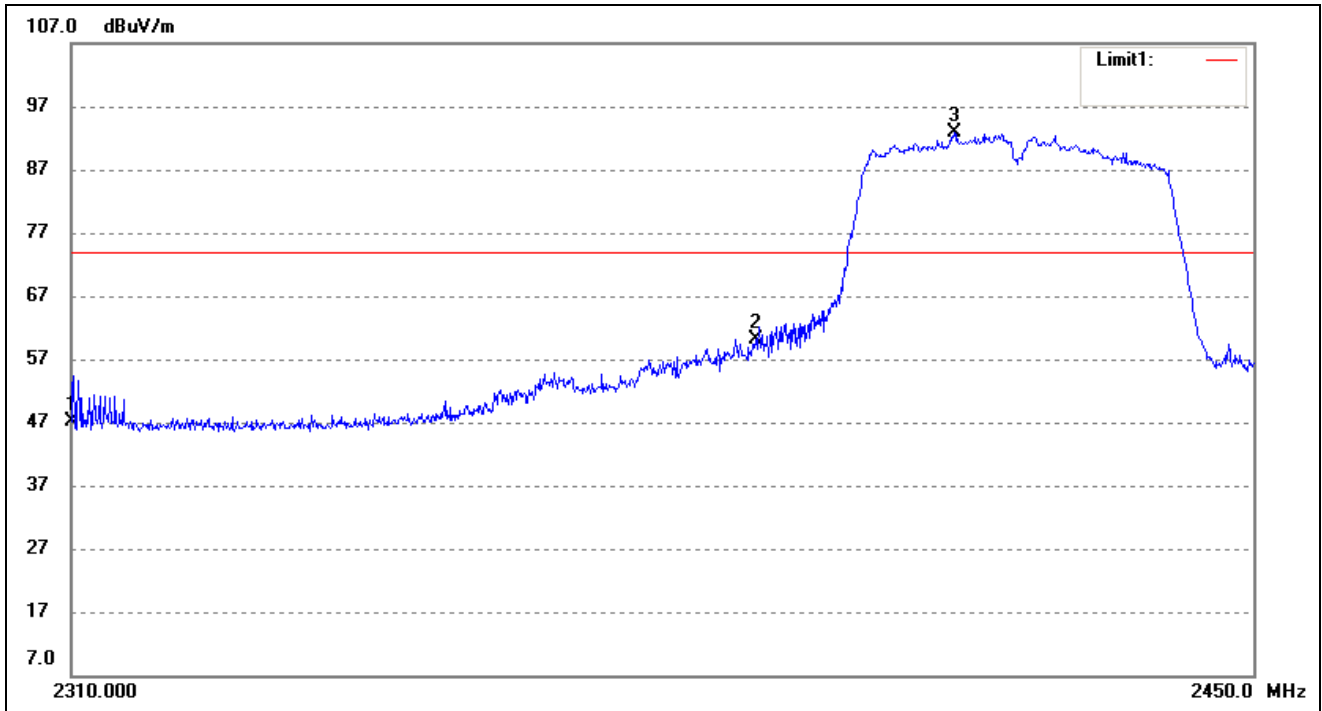


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	54.83	-7.78	47.05	74.00	-26.95	178	100	peak
2	2390.000	67.39	-7.32	60.07	74.00	-13.93	246	100	peak
3	2413.798	99.97	-7.18	92.79	/	/	86	100	peak

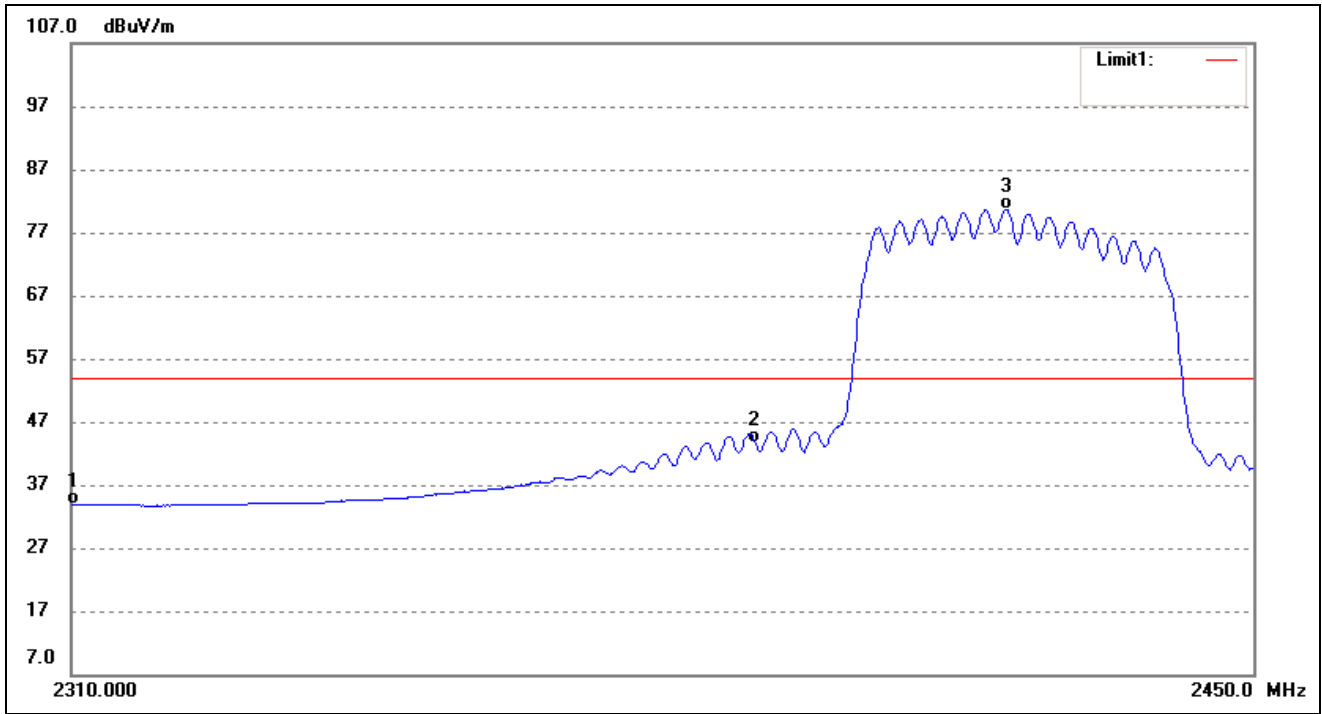


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	41.58	-7.78	33.80	54.00	-20.20	25	100	AVG
2	2390.000	51.06	-7.32	43.74	54.00	-10.26	264	100	AVG
3	2420.055	87.78	-7.14	80.64	/	/	36	100	AVG

802.11n-HT40-Highest Band edge

Vertical (Worst case)

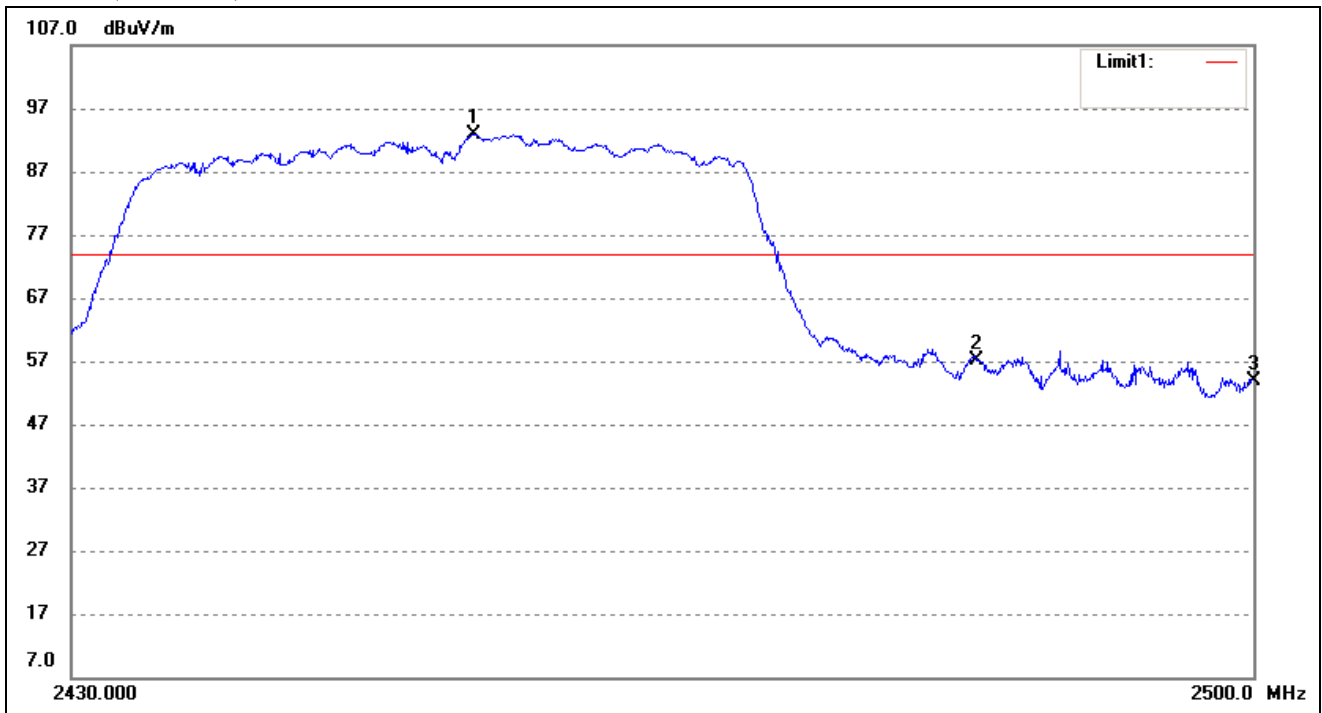

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2453.577	99.84	-6.94	92.90	/	/	244	100	peak
2	2483.500	63.94	-6.77	57.17	74.00	-16.83	26	100	peak
3	2500.000	60.65	-6.67	53.98	74.00	-20.02	31	100	peak

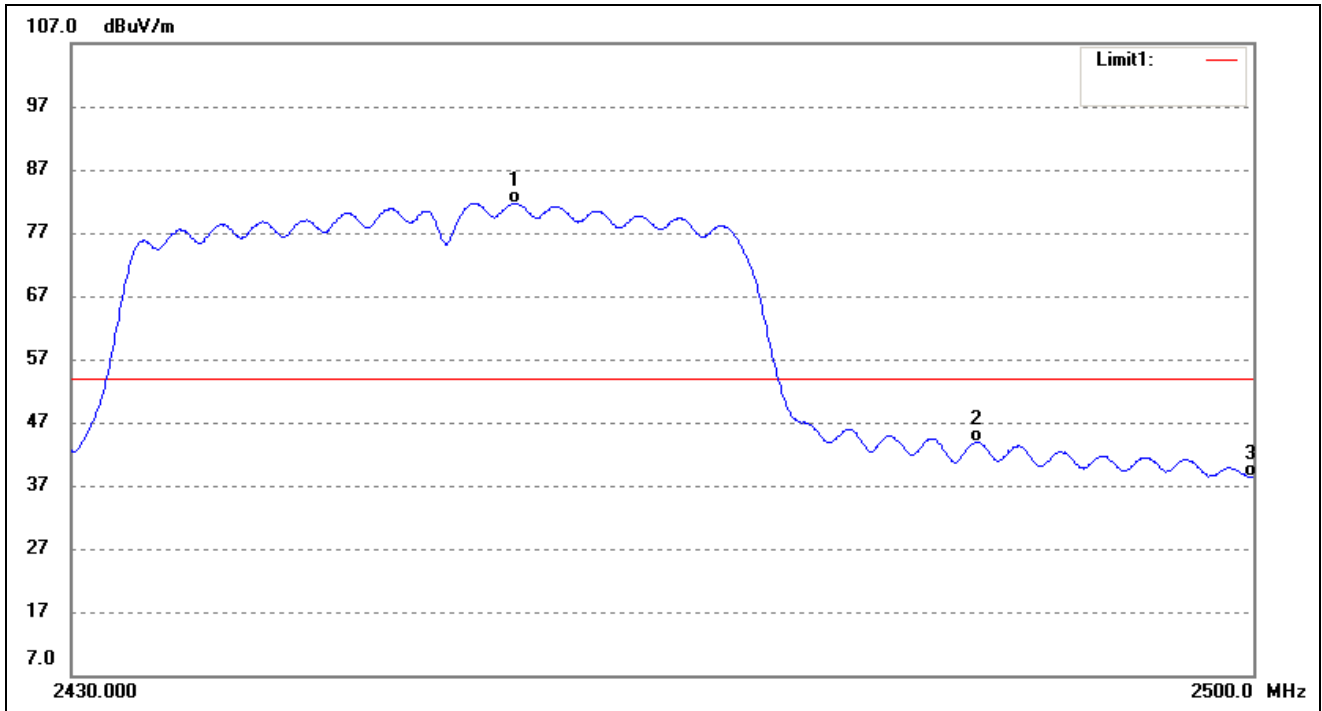


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2456.017	88.62	-6.92	81.70	/	/	23	100	AVG
2	2483.500	50.69	-6.77	43.92	54.00	-10.08	129	100	AVG
3	2500.000	44.96	-6.67	38.29	54.00	-15.71	35	100	AVG

Out-of-Band and Spurious Emission (Conducted)


Antenna 1

802.11b


Low Channel

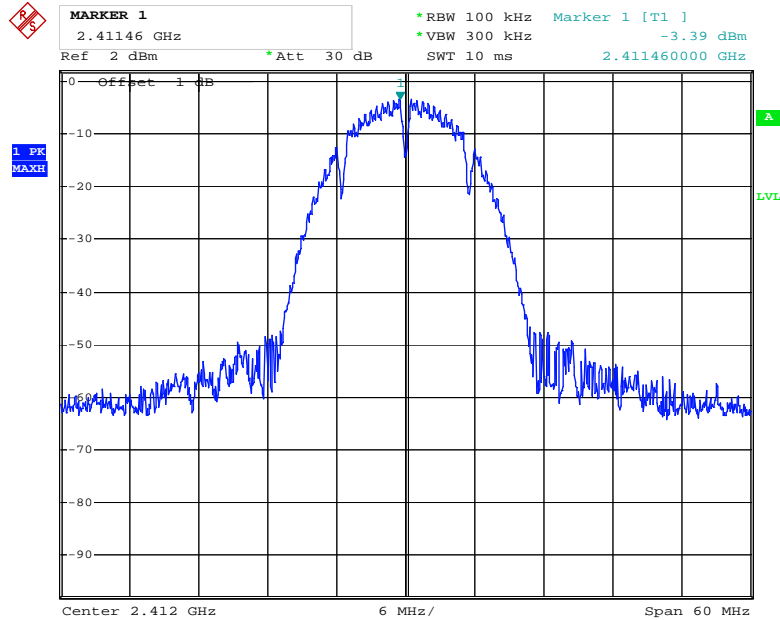


Date: 20.NOV.2018 08:37:53

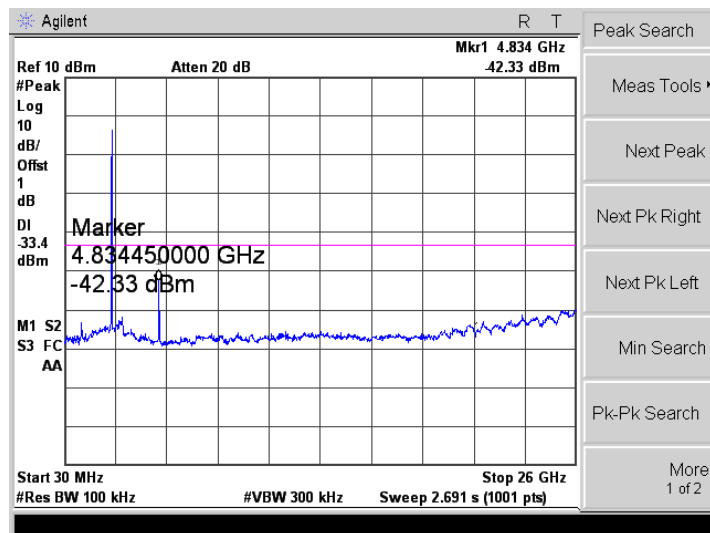


Middle Channel

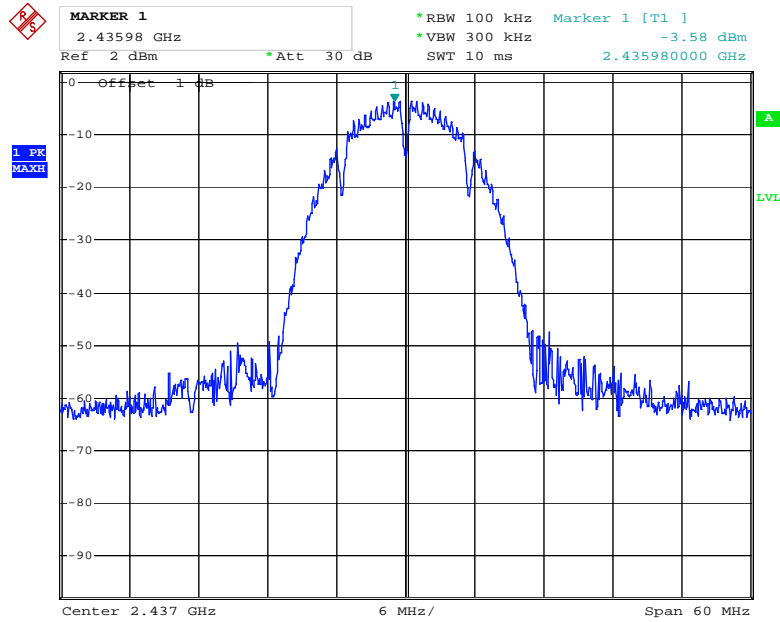


Date: 20.NOV.2018 08:37:19

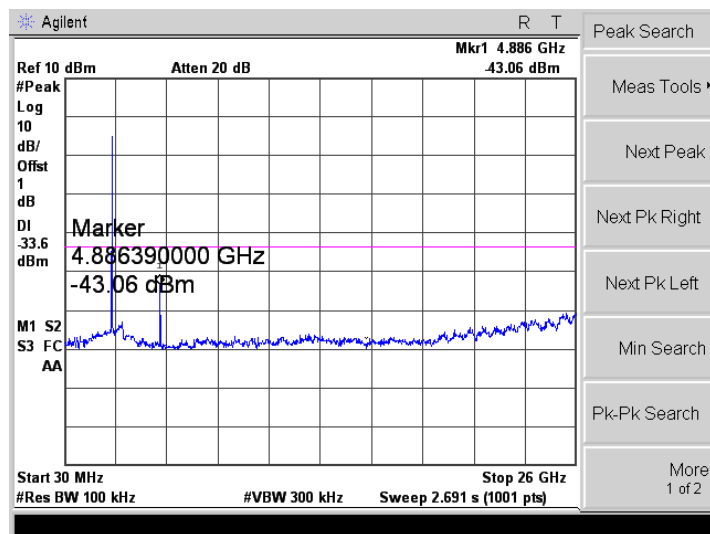


High Channel

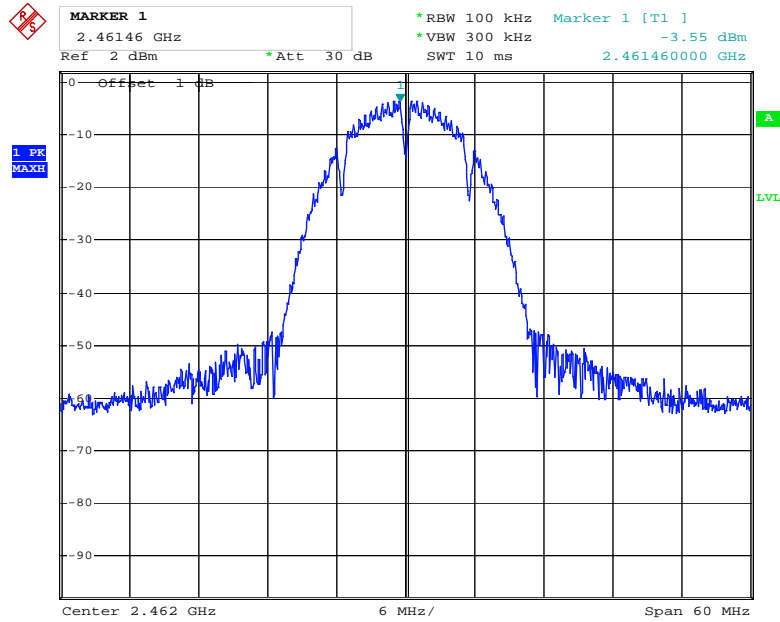


Date: 20.NOV.2018 08:36:45

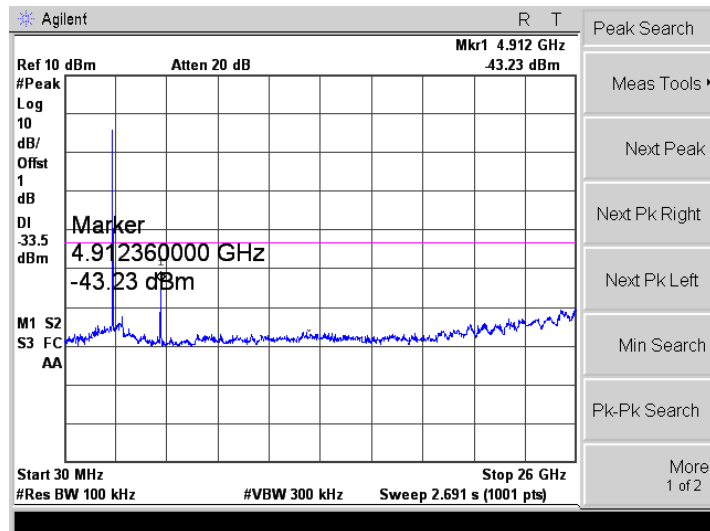


802.11g
Low Channel

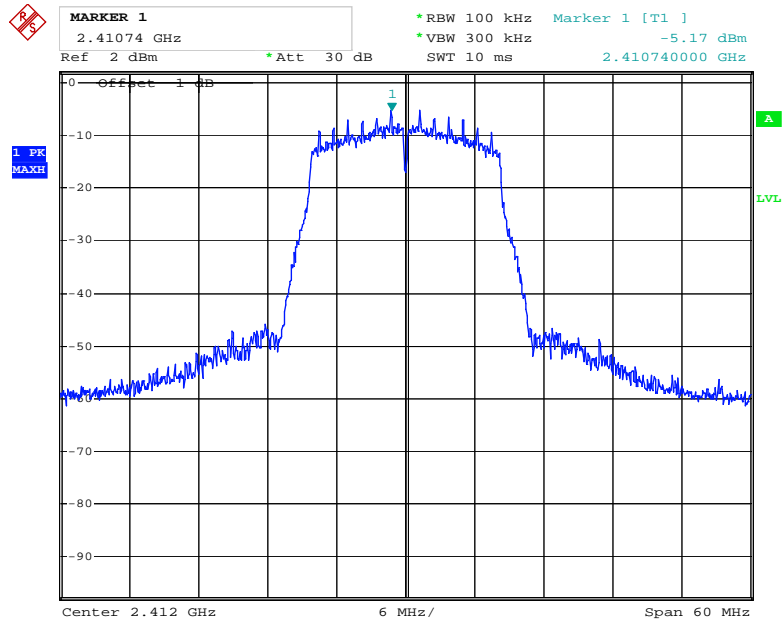


Date: 20.NOV.2018 08:34:46

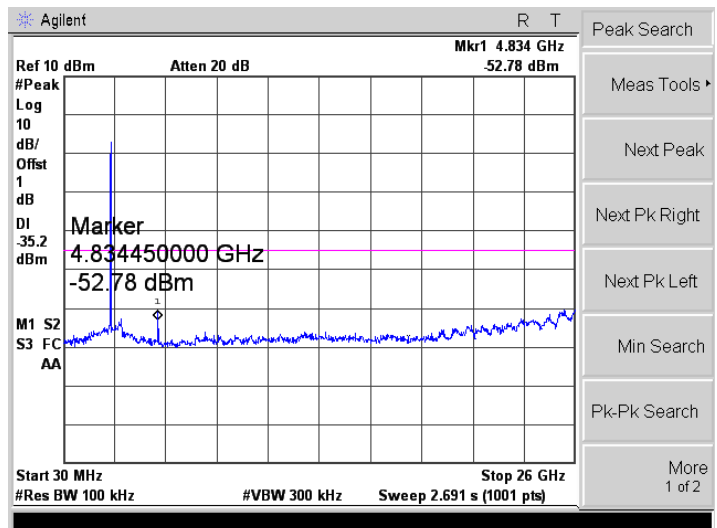


Middle Channel

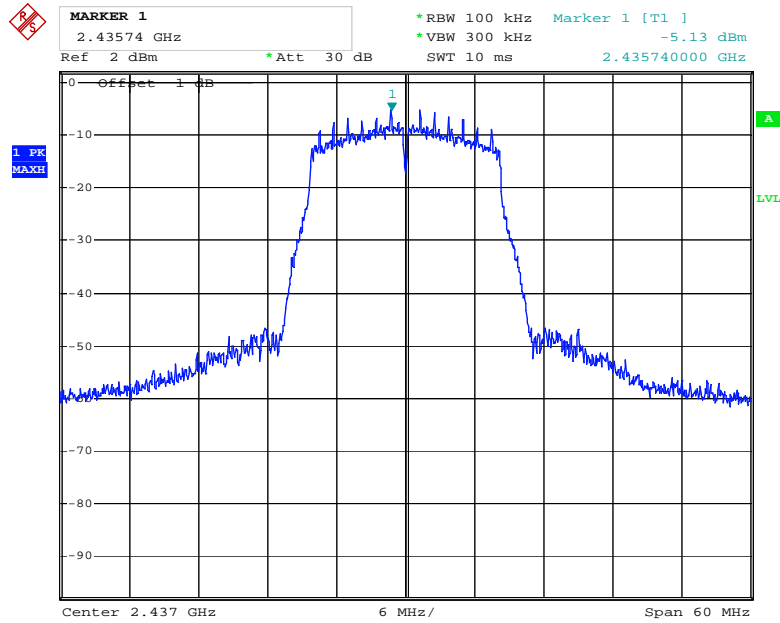


Date: 20.NOV.2018 08:35:24

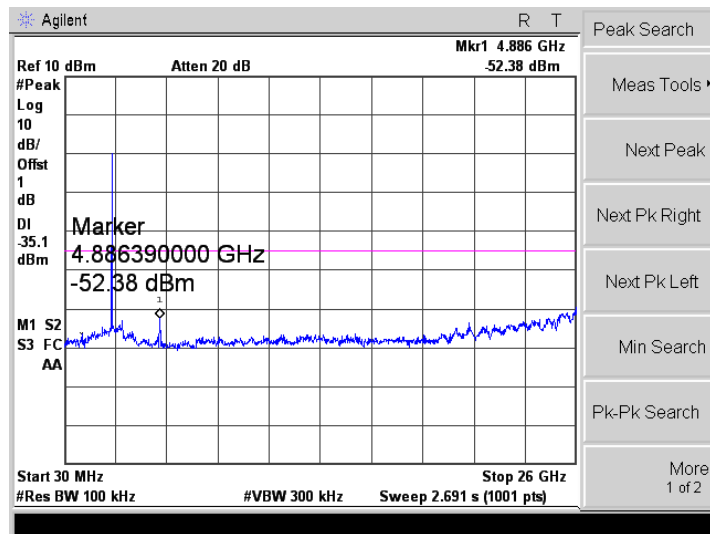


High Channel

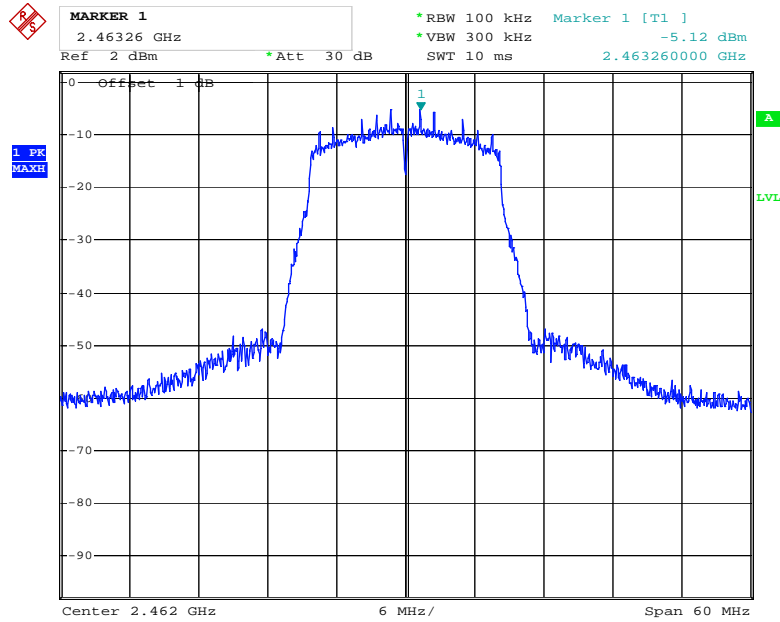


Date: 20.NOV.2018 08:35:48

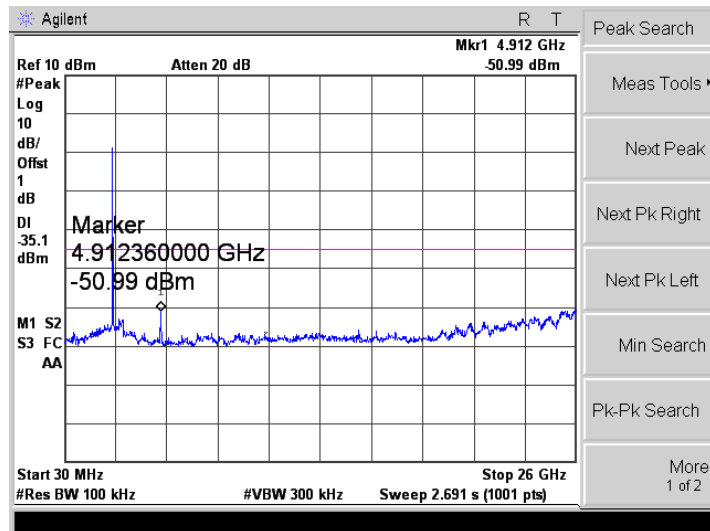


11n-HT20
Low Channel

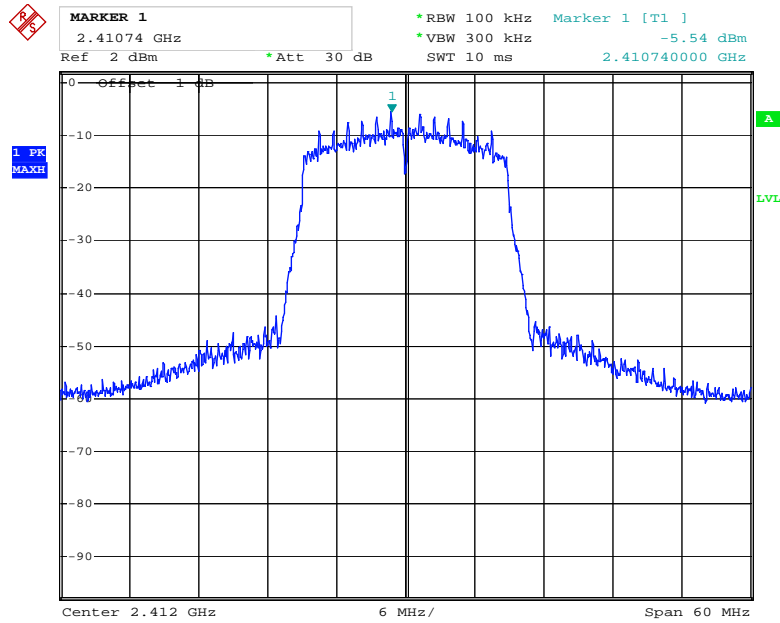


Date: 20.NOV.2018 08:39:26

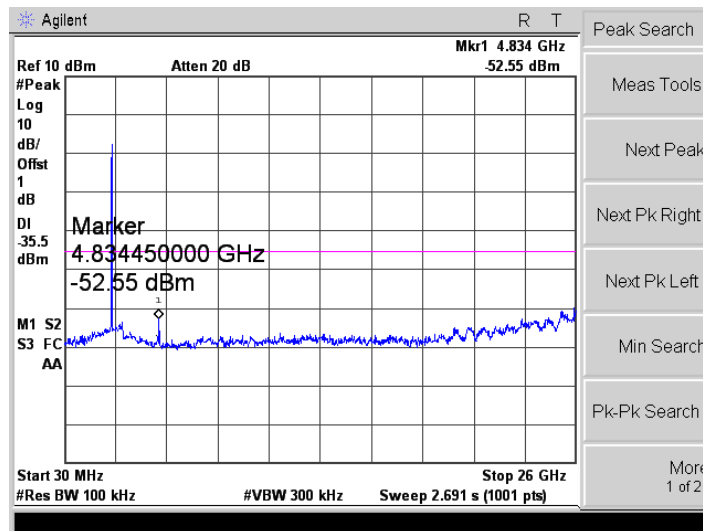


Middle Channel

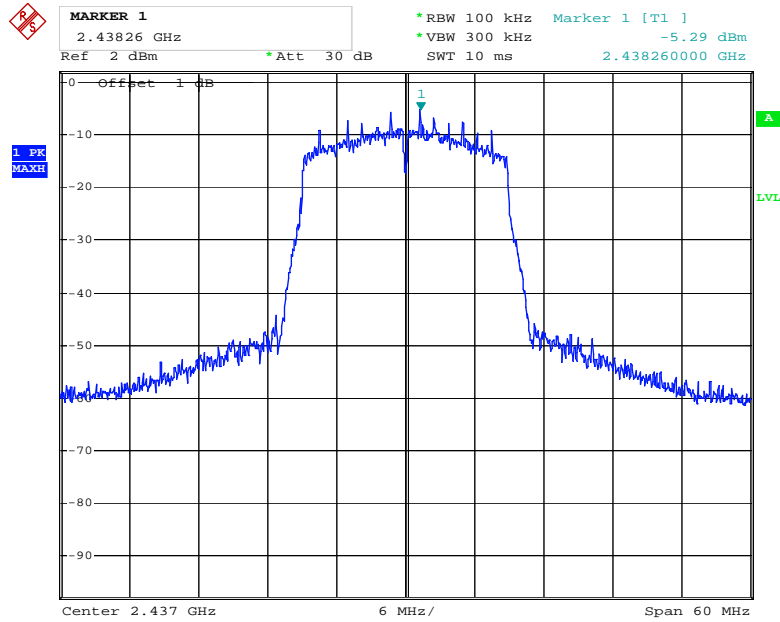


Date: 20.NOV.2018 08:40:03

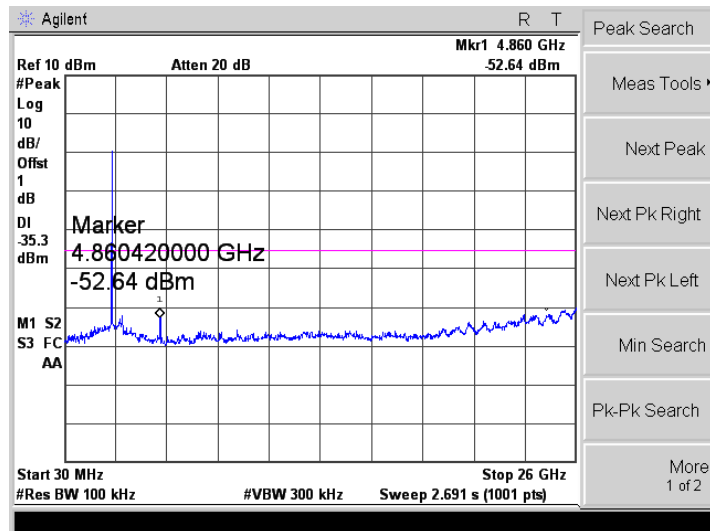


High Channel

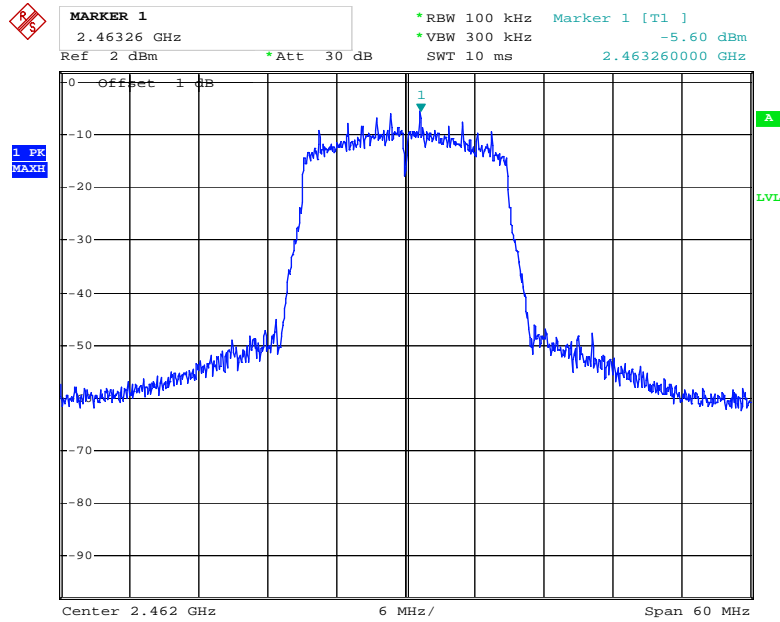


Date: 20.NOV.2018 08:40:27

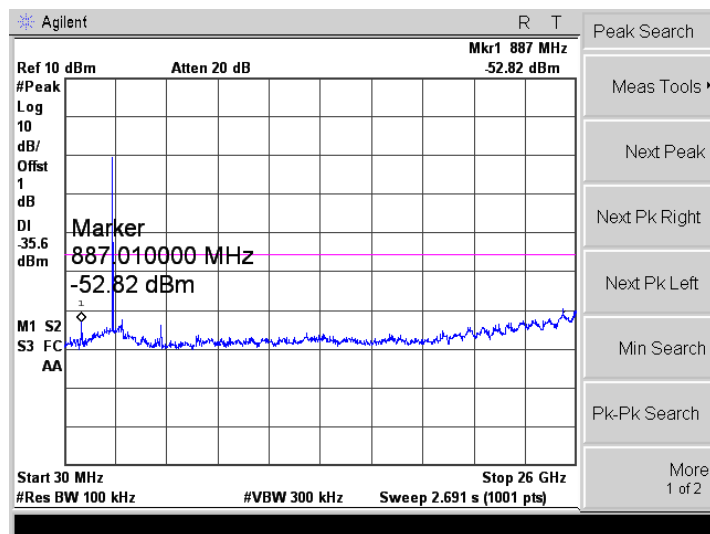


11n-HT40
Low Channel

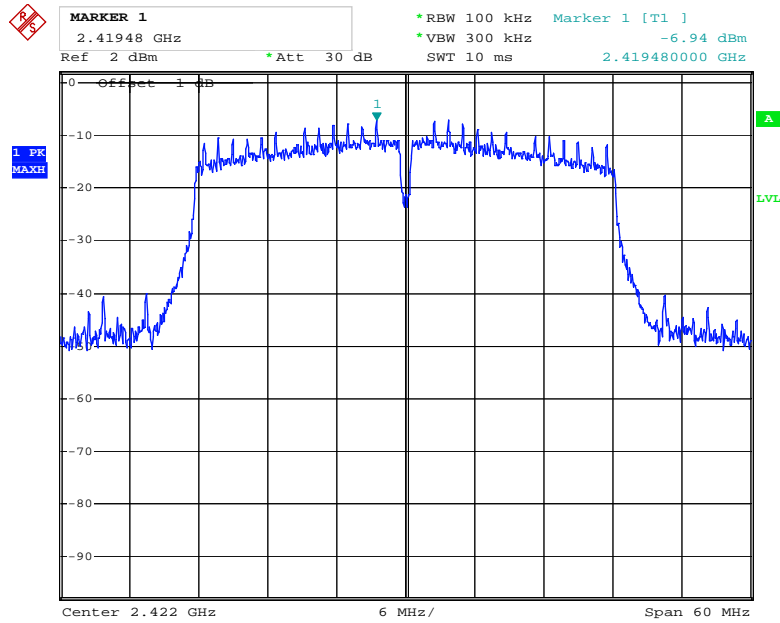


Date: 20.NOV.2018 08:42:30

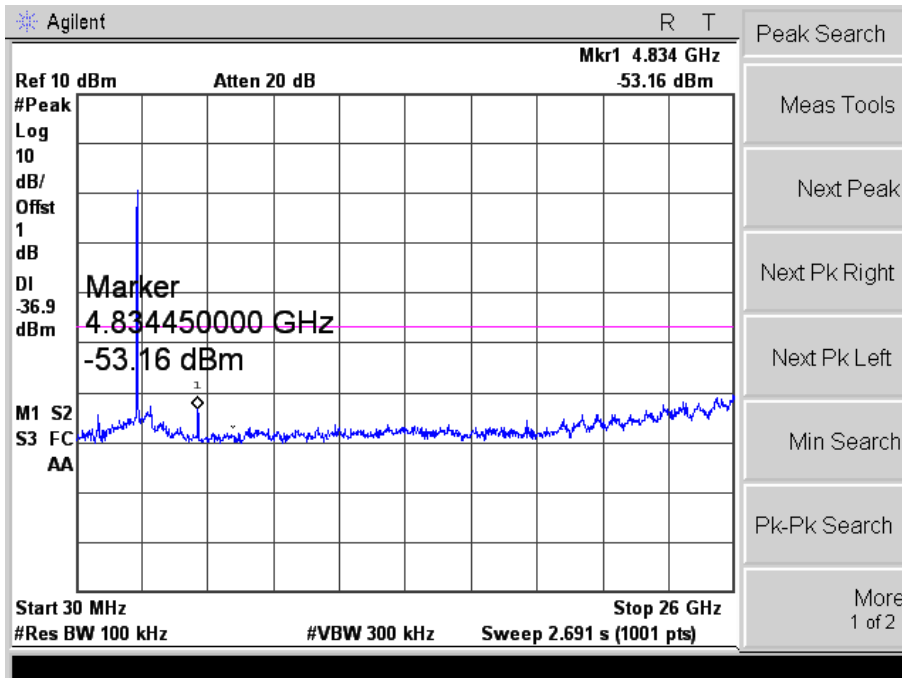


Middle Channel

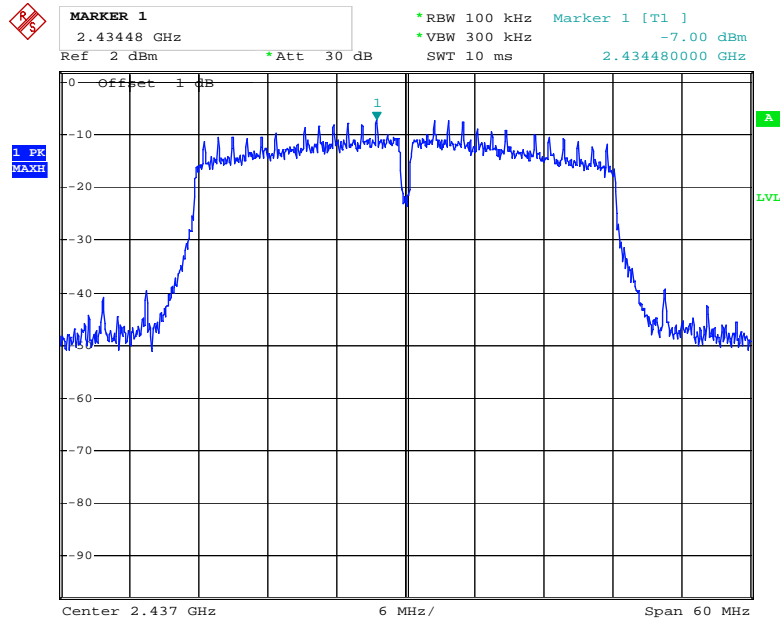


Date: 20.NOV.2018 08:41:56

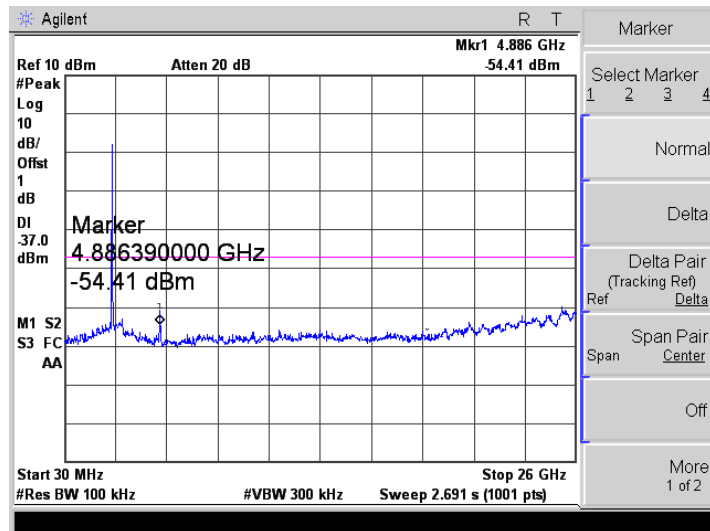


High Channel

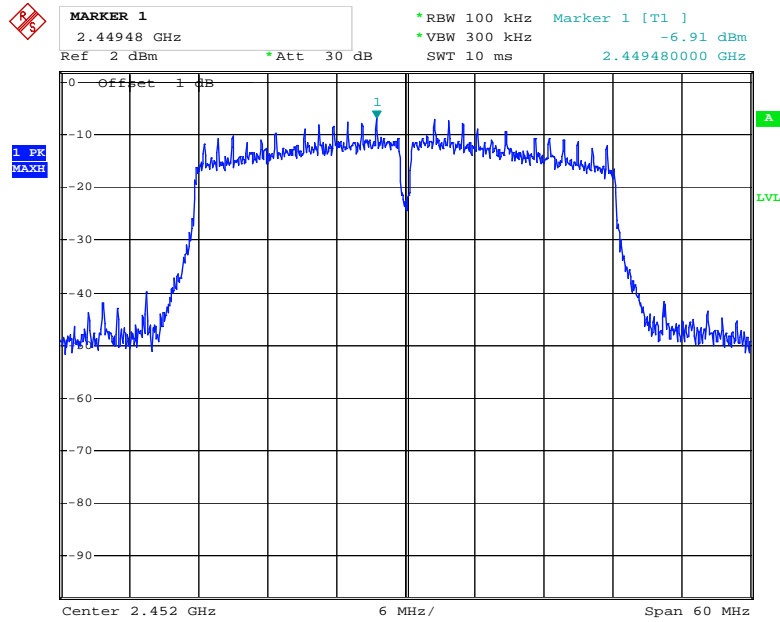


Date: 20.NOV.2018 08:41:23

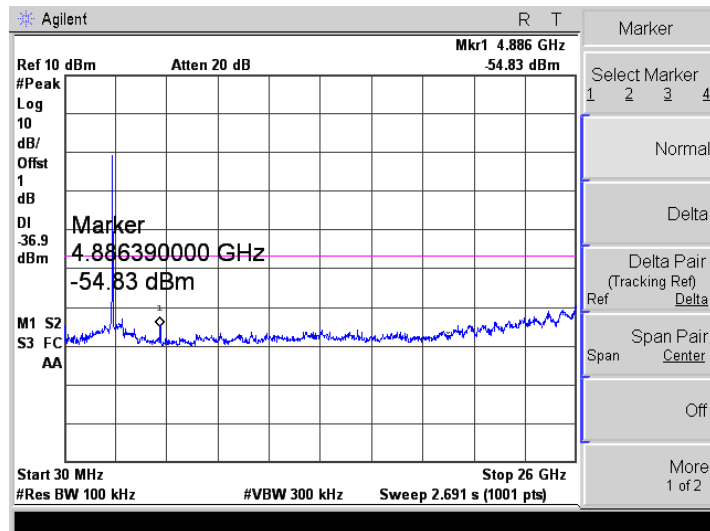


Antenna 2
802.11b
Low Channel

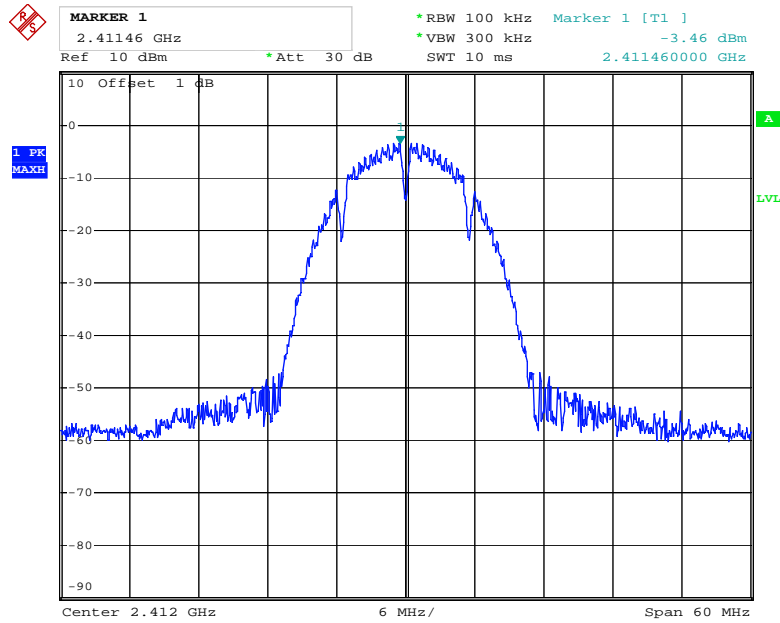


Date: 20.NOV.2018 09:25:18

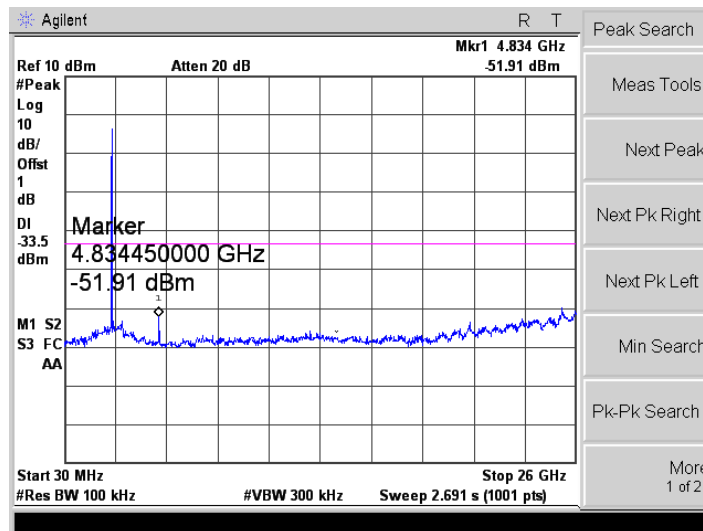


Middle Channel

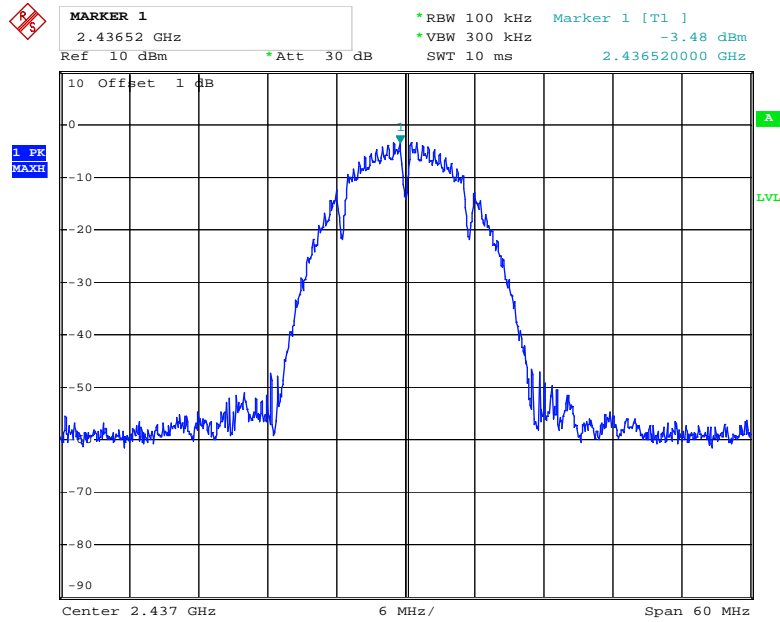


Date: 20.NOV.2018 09:24:42

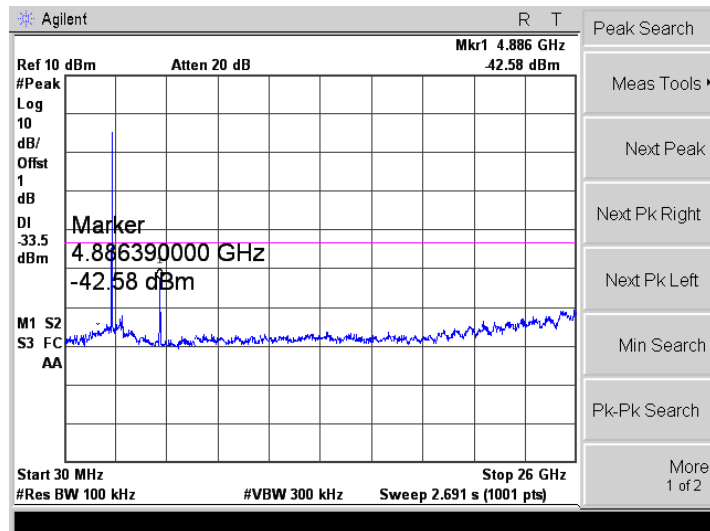


High Channel

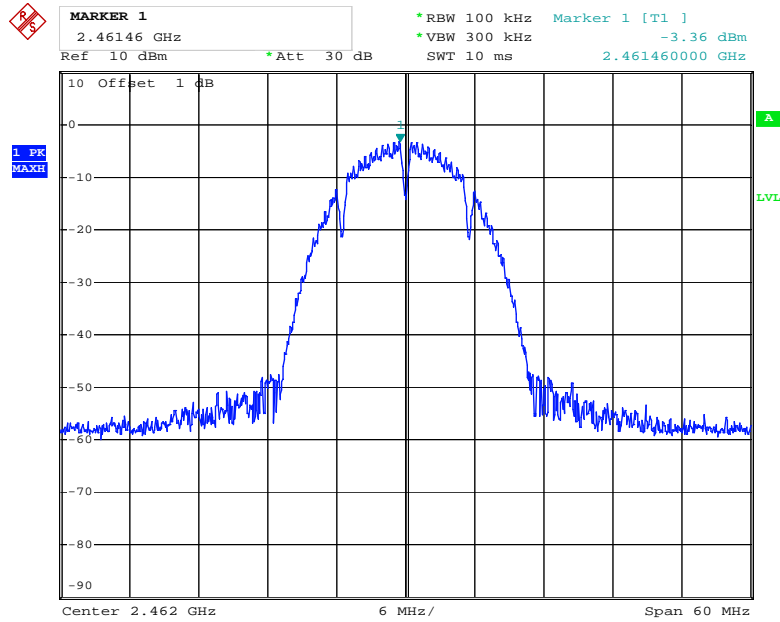


Date: 20.NOV.2018 09:24:21

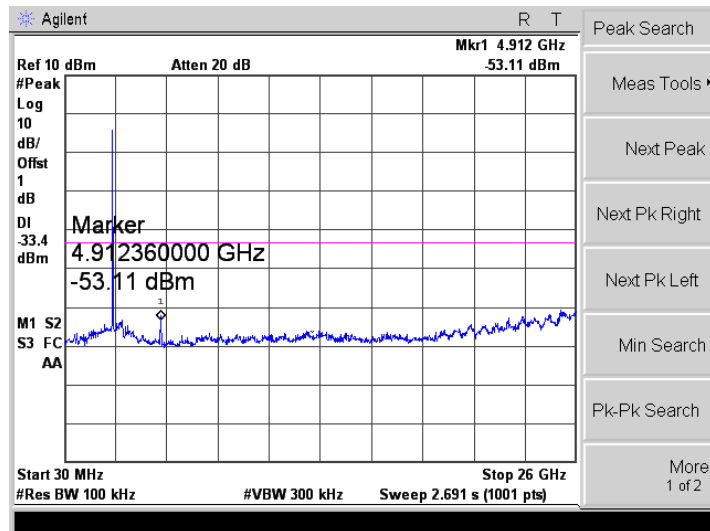


802.11g
Low Channel

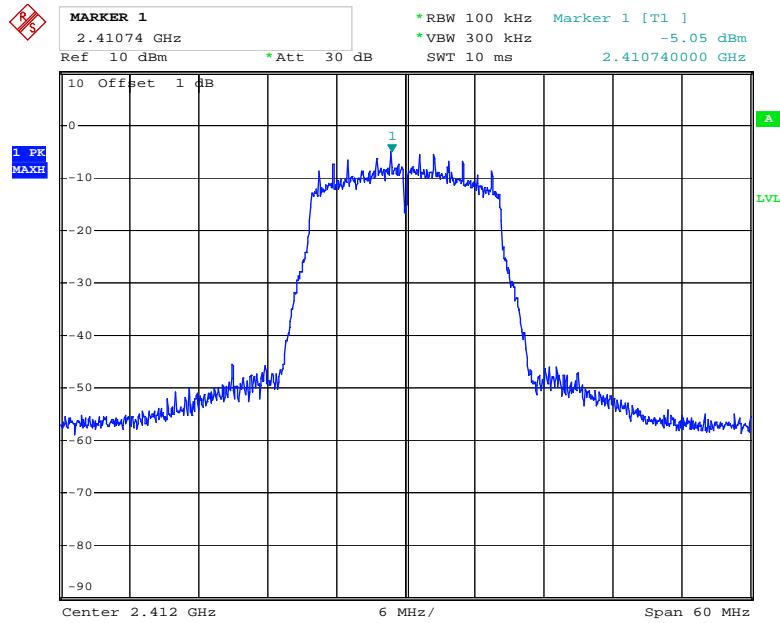


Date: 20.NOV.2018 09:26:35

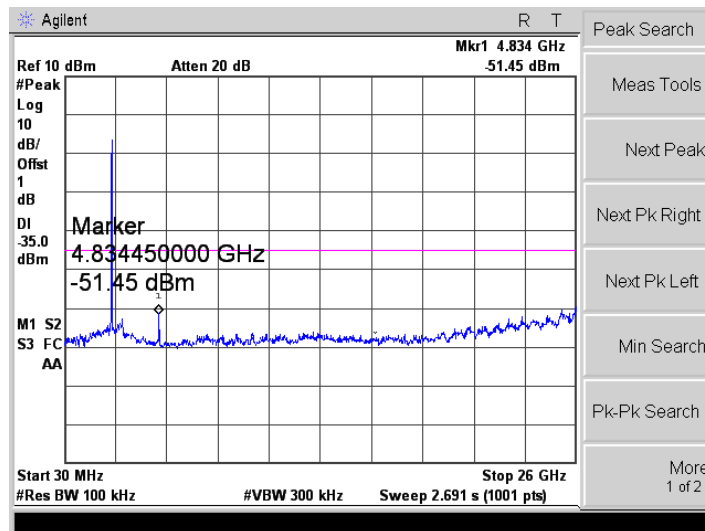


Middle Channel

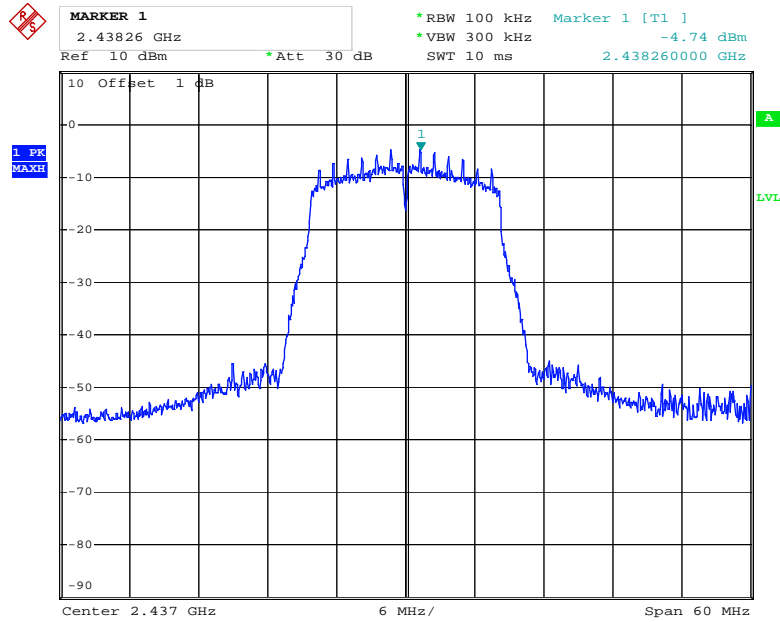


Date: 20.NOV.2018 09:29:27

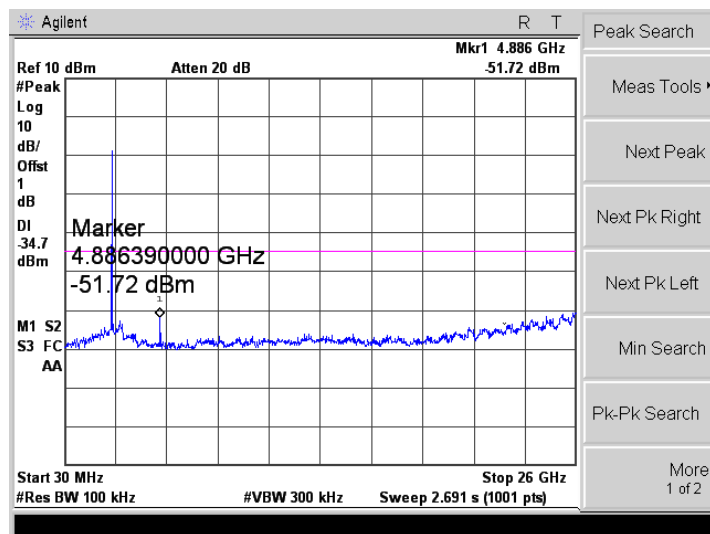


High Channel

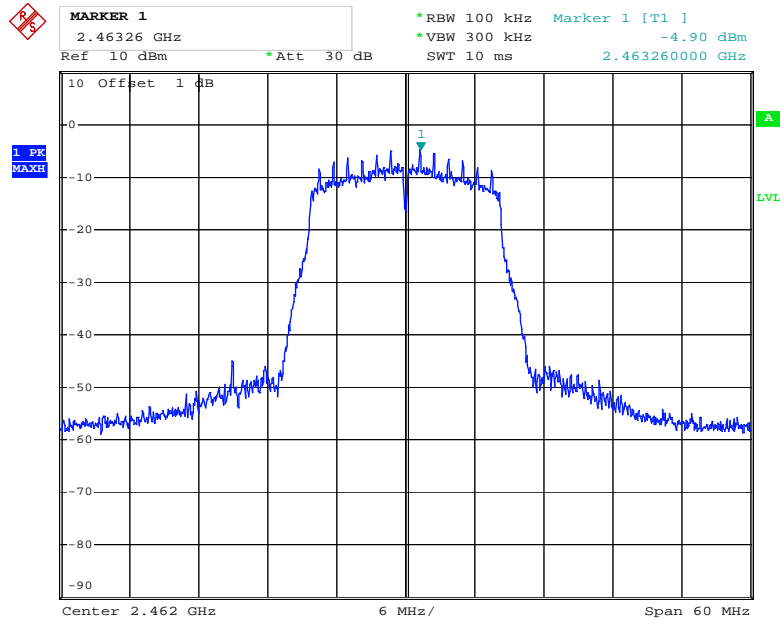


Date: 20.NOV.2018 09:30:17

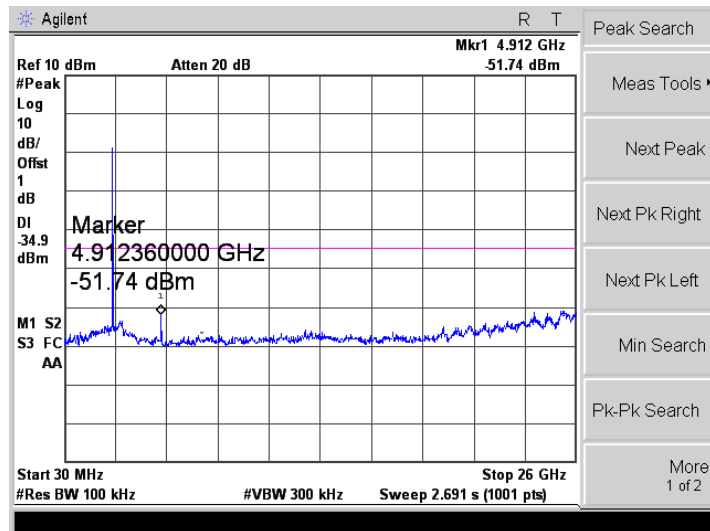


11n-HT20
Low Channel

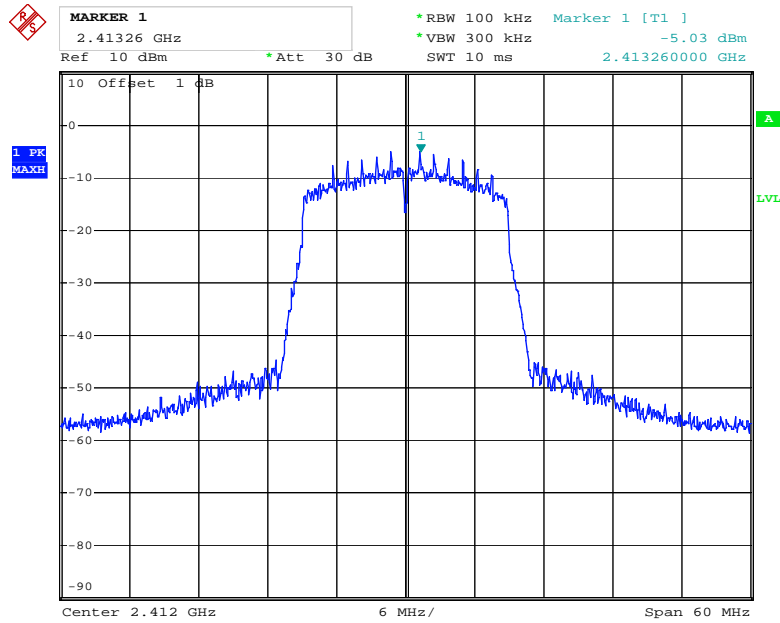


Date: 20.NOV.2018 09:33:11

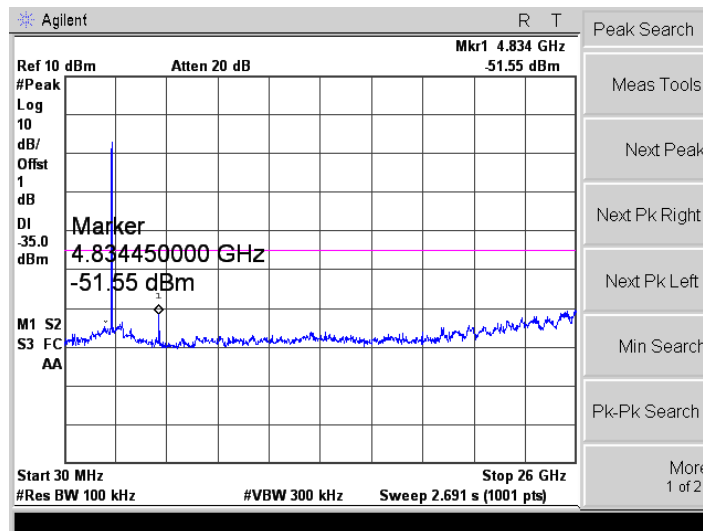


Middle Channel

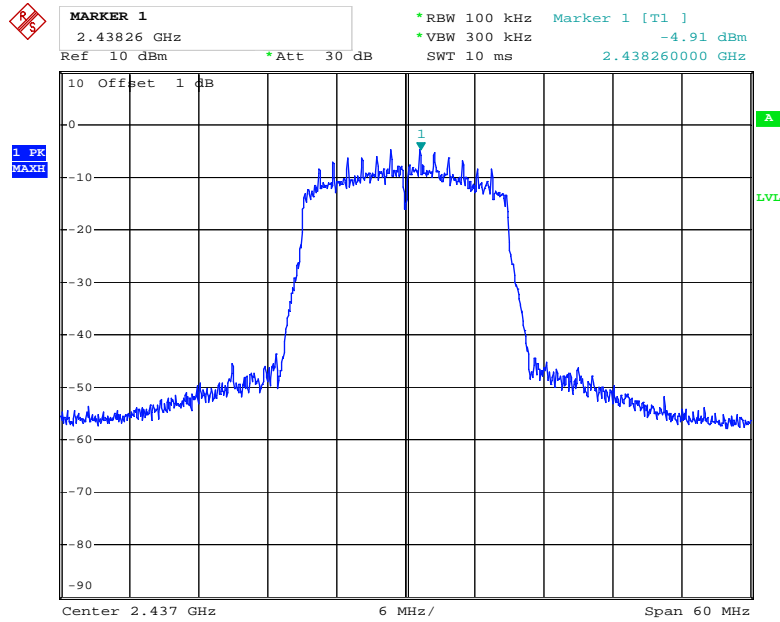


Date: 20.NOV.2018 09:32:33

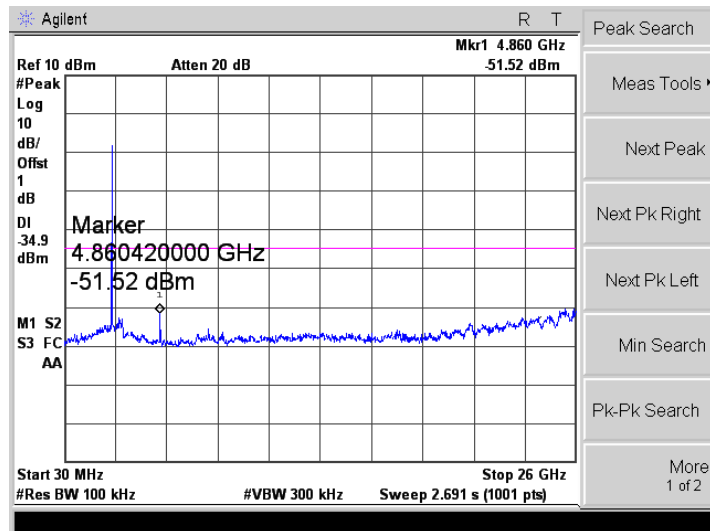


High Channel

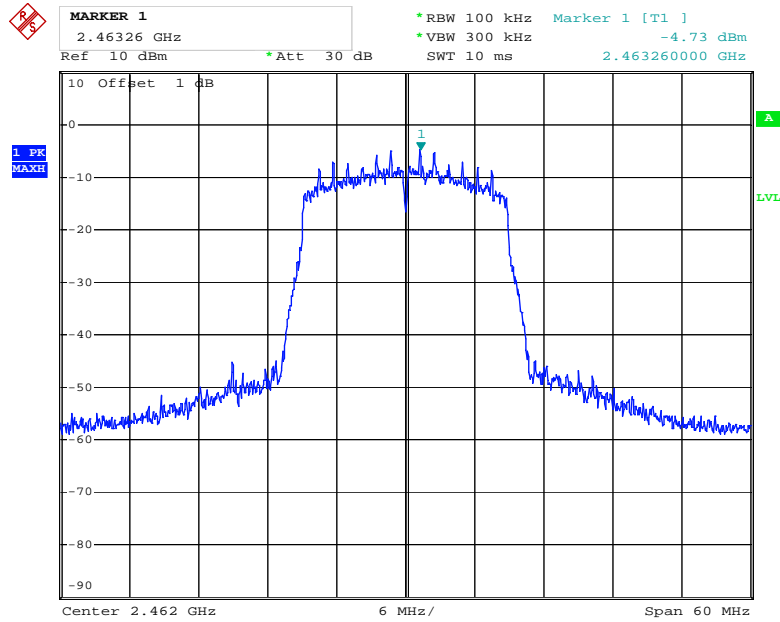


Date: 20.NOV.2018 09:31:20

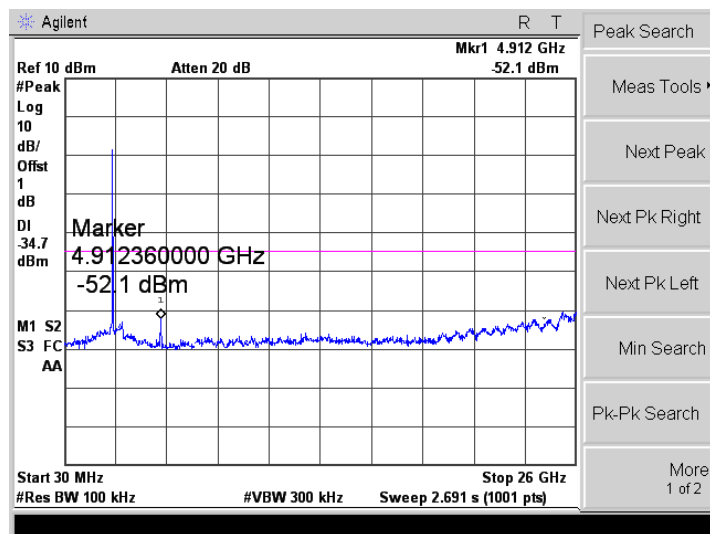


11n-HT40
Low Channel

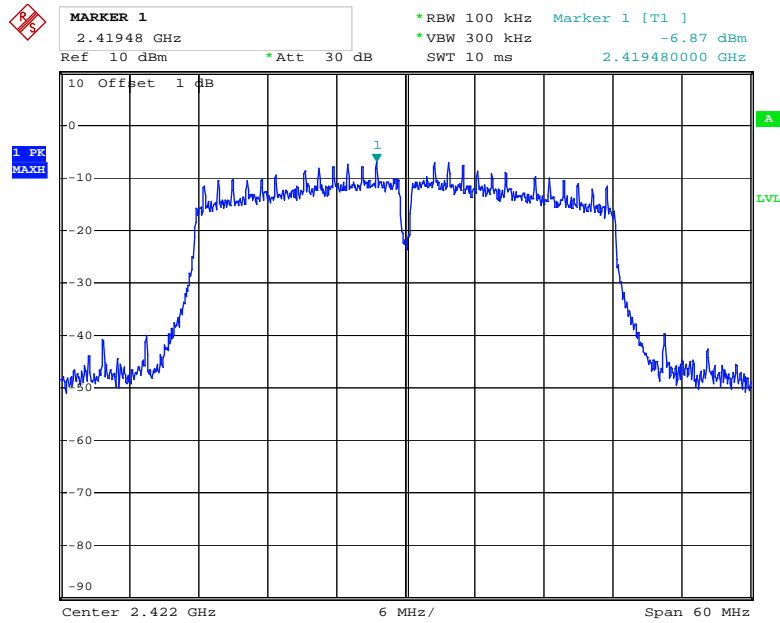


Date: 20.NOV.2018 09:34:11

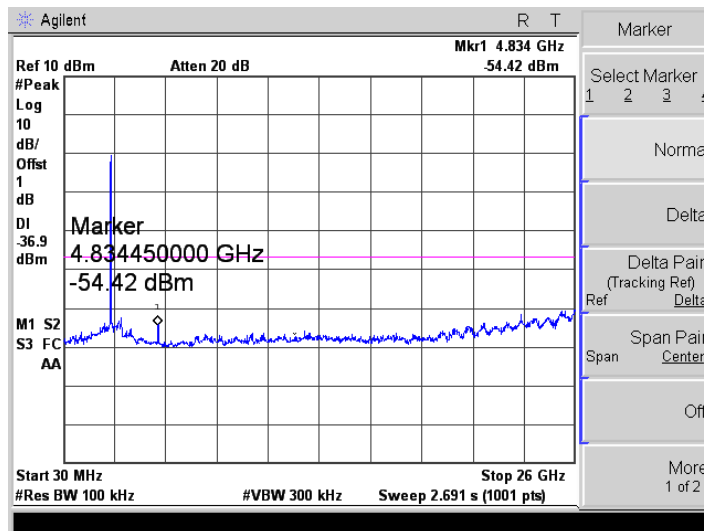


Middle Channel

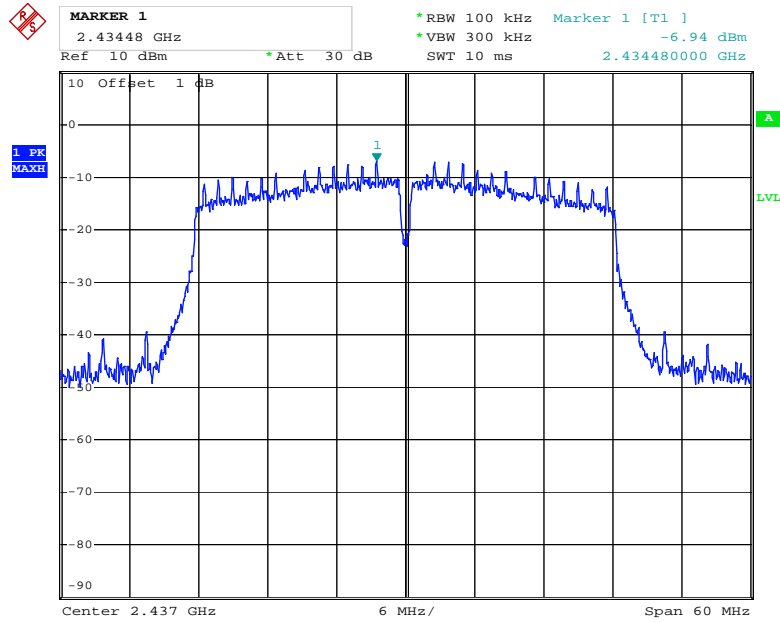


Date: 20.NOV.2018 09:35:49

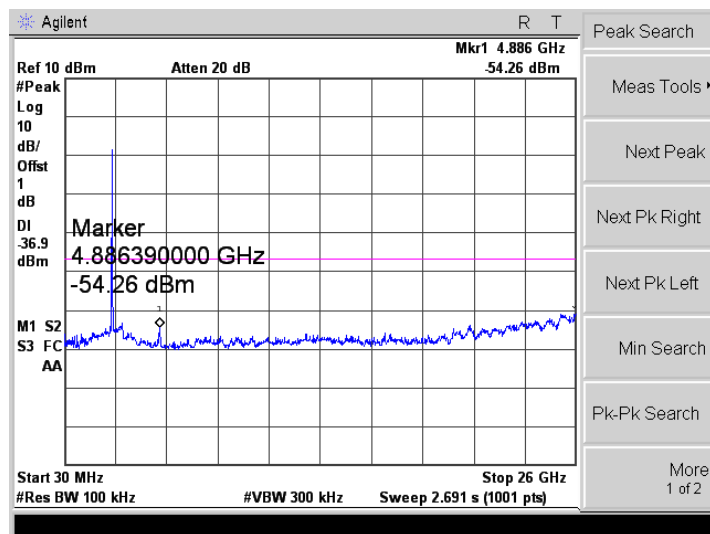

High Channel

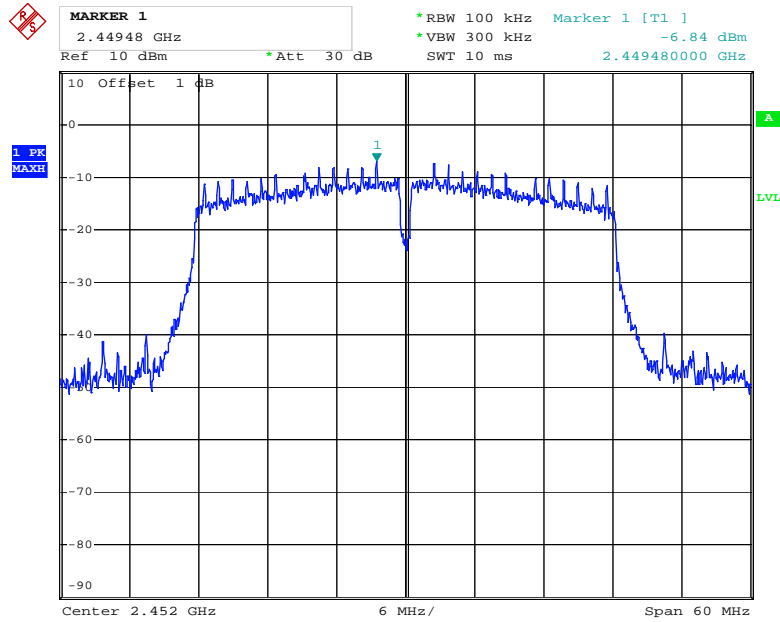

Date: 20.NOV.2018 09:36:14

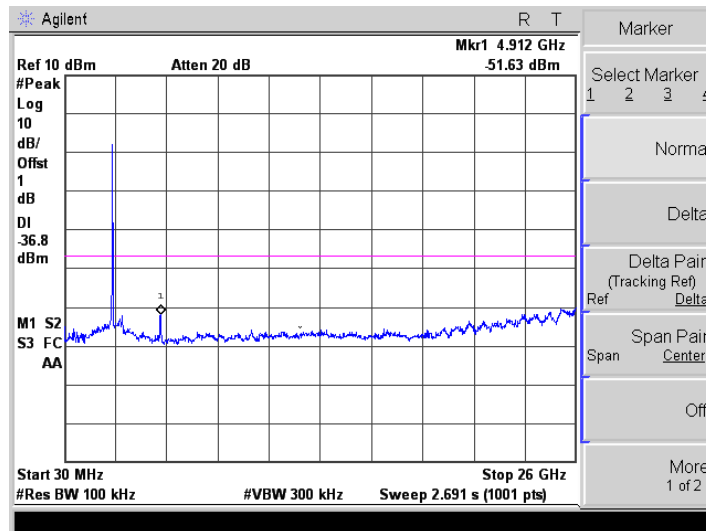

10. Conducted Emissions

10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.3 Basic Test Setup Block Diagram

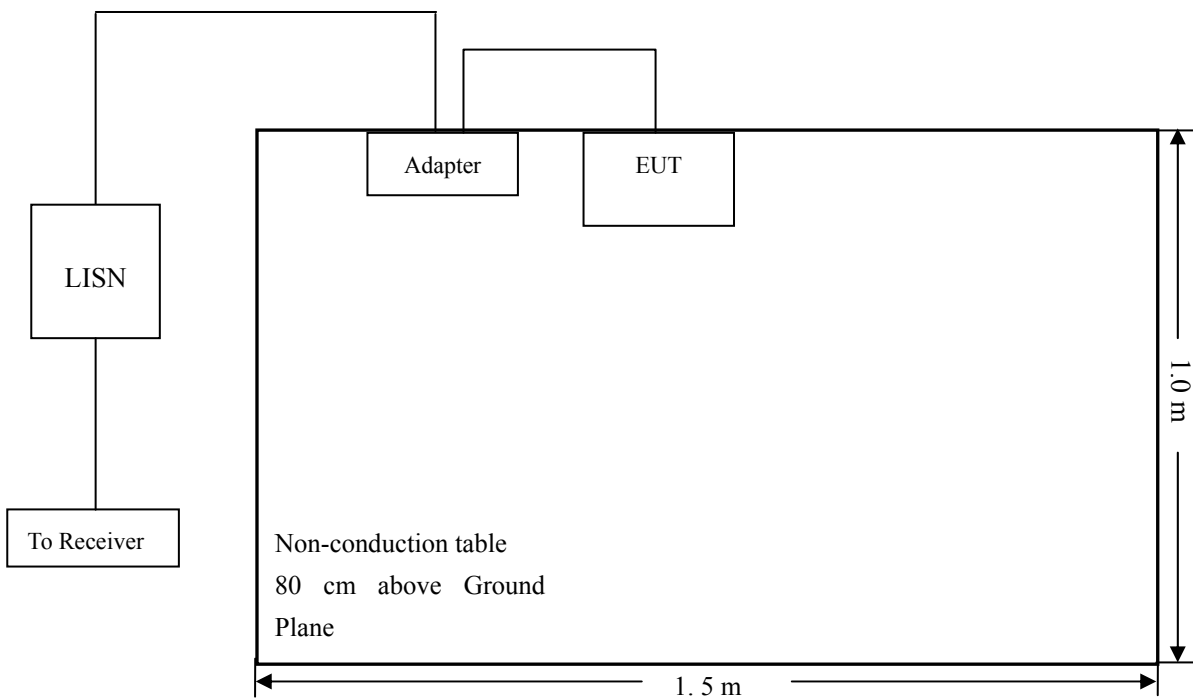

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin:

10.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

EUT: 43 inches SMART 4K UHD TV
 Tested Model: RNSMU4336
 Operating Condition: Transmitting
 Comment: AC 120V/60Hz
 Test Specification: Neutral

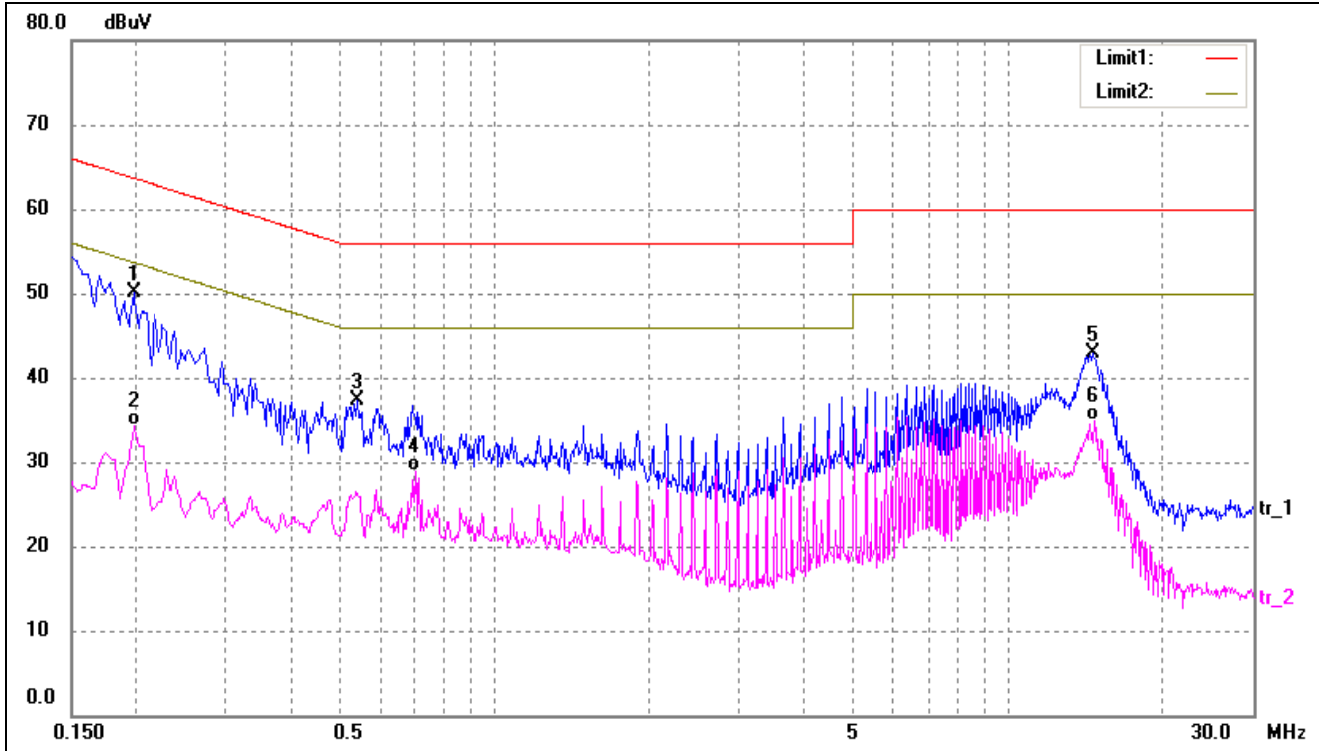


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1980	39.93	10.12	50.05	63.69	-13.64	peak
2	0.1980	24.26	10.12	34.38	53.69	-19.31	AVG
3	0.5420	26.94	10.31	37.25	56.00	-18.75	peak
4	0.7019	18.57	10.39	28.96	46.00	-17.04	AVG
5	14.6300	31.80	11.02	42.82	60.00	-17.18	peak
6	14.7620	23.88	11.02	34.90	50.00	-15.10	AVG

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.

EUT: 43 inches SMART 4K UHD TV
 Tested Model: RNSMU4336
 Operating Condition: Transmitting
 Comment: AC 120V/60Hz
 Test Specification: Line

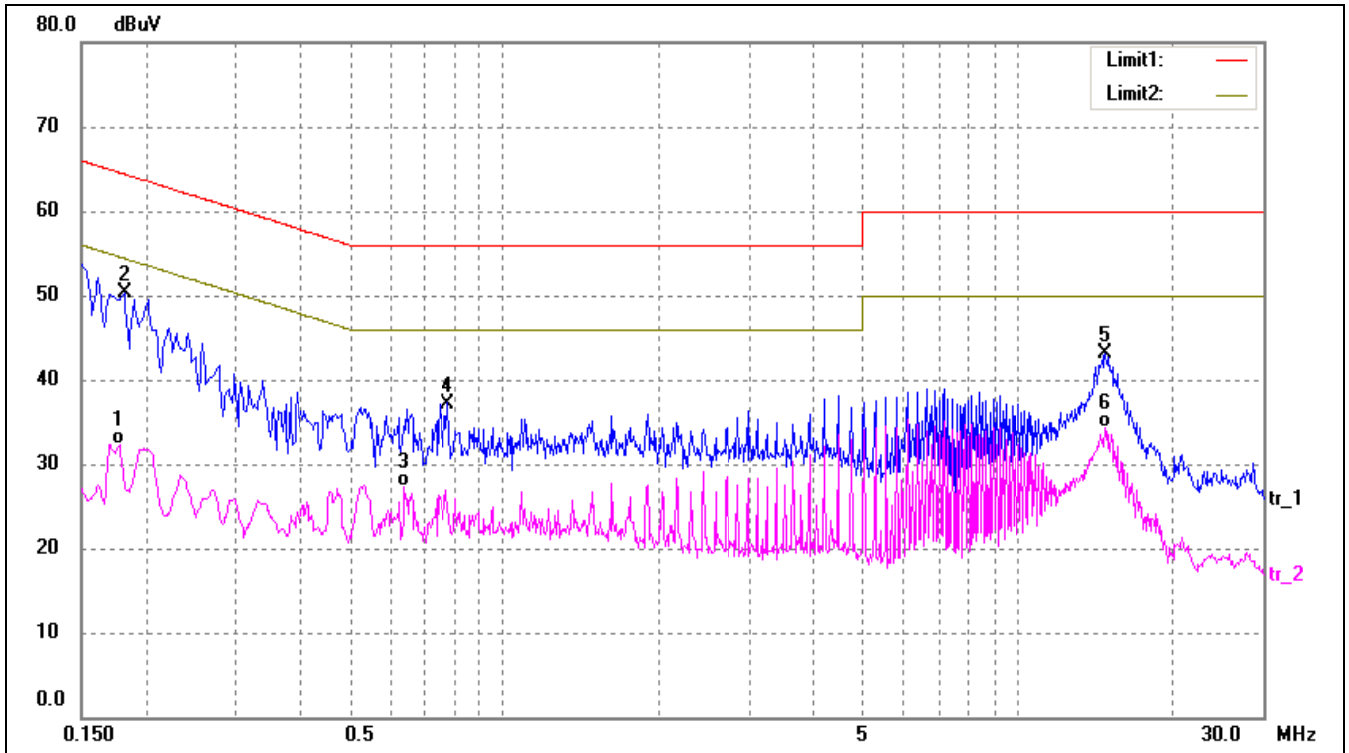

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	22.24	10.11	32.35	54.57	-22.22	AVG
2*	0.1819	40.26	10.11	50.37	64.39	-14.02	peak
3	0.6380	16.90	10.36	27.26	46.00	-18.74	AVG
4	0.7780	26.78	10.42	37.20	56.00	-18.80	peak
5	14.7620	32.05	11.02	43.07	60.00	-16.93	peak
6	14.7620	23.25	11.02	34.27	50.00	-15.73	AVG

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.

***** END OF REPORT *****