



FCC PART 15.247

TEST REPORT

For

Dongguan Xinan Sunrise Electronic Co., LTD

LanYuan Road ZengTian Industrial District XinAn Community ChangAn Town, DongGuan, China

FCC ID: XONSR306X01

Report Type: Original Report	Product Type: 802.11B/G/N PCI WIRELESS ADAPTER
Test Engineer: Leon Chen	
Report Number: R1DG120516002-00	
Report Date: 2012-07-03	
Reviewed By: Ivan Cao EMC Engineer	Leon Chen
Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	
Prepared By:	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT.....	7
EXTERNAL CABLE.....	7
PRINTER	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY.....	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	40

APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	48
FCC §15.247(e) - POWER SPECTRAL DENSITY	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Dongguan Xian Sunrise Electronic Co., LTD's product, model RT3060F(FCC ID:XONSR306X01) or (the "EUT") in this report is a *802.11B/G/N PCI WIRELESS ADAPTER*, which was measured approximately: 11.5 cm (L) x 5.1 cm (W) x 0.2 cm (H).

** All measurement and test data in this report was gathered from production serial number: 591800000000001 (Assigned by applicant). The EUT was received on 2012-05-17.*

Objective

This report is prepared on behalf of *Dongguan Xian Sunrise Electronic Co., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b and 802.11g, 802.11n20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT for 802.11b, 802.11g and 802.11 n20 modes were tested with Channel 1, 6 and 11.

For 802.11n40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations.

EUT Exercise Software

The test was performed under “RT3X9X QA TEST.exe” which was provided by the manufacturer.

Equipment Modifications

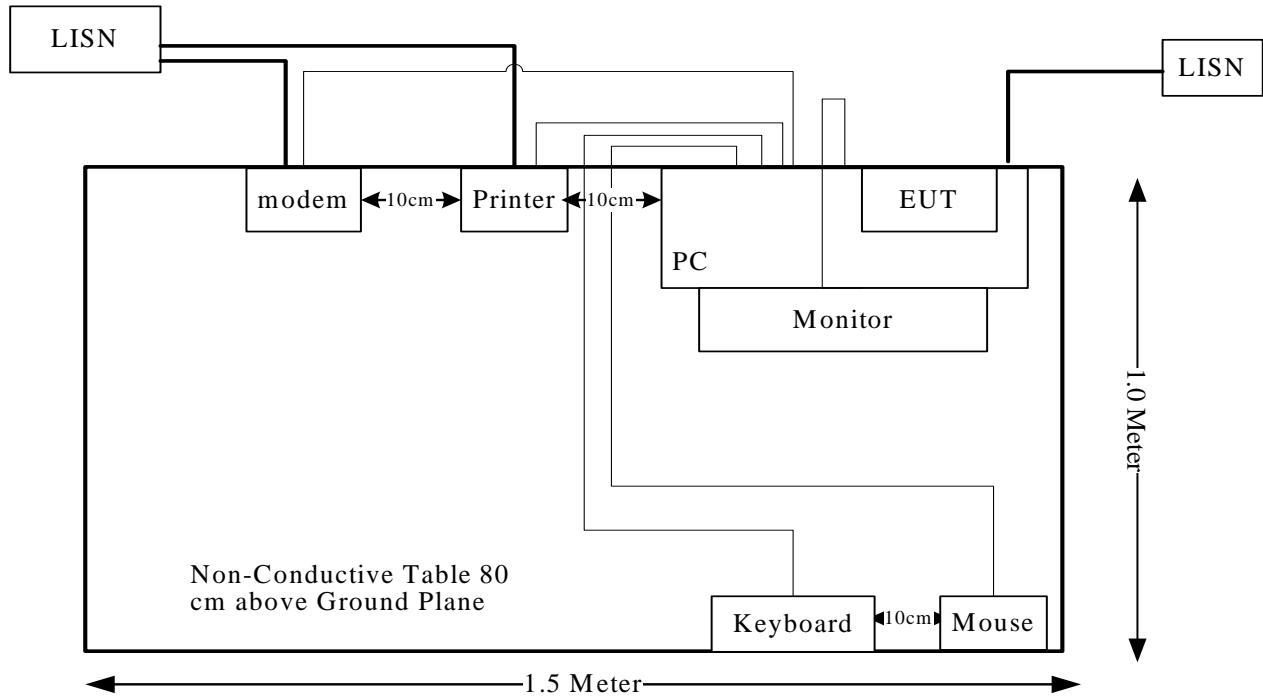
No modification was made to the EUT tested.

Support Equipment

Manufacturer	Description	Model	Serial Number
DELL	PC	GX620	CK22891
DELL	Keyboard	SK-8115	CNOJ46287161652IOYMU
DELL	Mouse	M056V0A	F0Y02PTY
DELL	Monitor	1706FPVT	CN-OT9461-71618-588-A59X
HP	Printer	#C3941A	JPTVOB2337
SAST	Modem	AEM-2100	090200213

External Cable

Cable Description	Length (m)	From Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port of PC	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of PC	Modem
Shielded Detachable USB Cable	1.5	USB Port of PC	Keyboard
Shielded Detachable USB Cable	1.5	USB Port of PC	Mouse
Shielded Detachable VGA Cable	1.5	VGA Port of PC	Monitor

Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412	2	1.58	16.53	44.98	20	0.0142	1.0
802.11g	2412	2	1.58	13.67	23.28	20	0.0073	1.0
802.11n ht20	2412	2	1.58	13.72	23.55	20	0.0074	1.0
802.11n ht40	2422	2	1.58	13.05	20.18	20	0.0064	1.0

Result: The device meet FCC MPE at 20cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one dipole antennas with special connector attached to the EUT, which complied with 15.203, the maximum gain is 2.0 dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

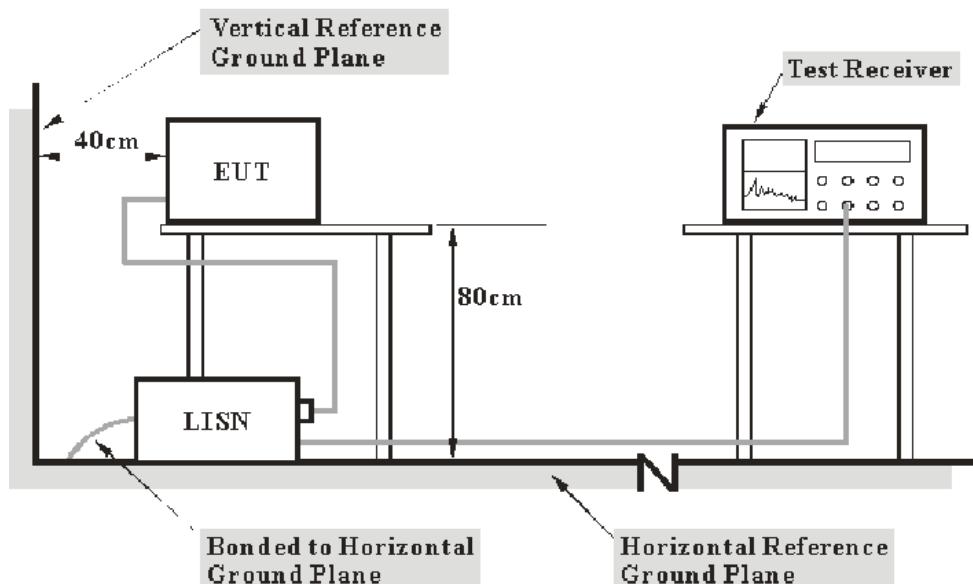
FCC§15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Dongguan) is ± 1.5 dB (k=2, 95% level of confidence).

EUT Setup



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The PC was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.1	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Com-Power	L.I.S.N.2	LI-200	12005	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

4.93 dB at 2.555 MHz in the **Neutral** conducted mode

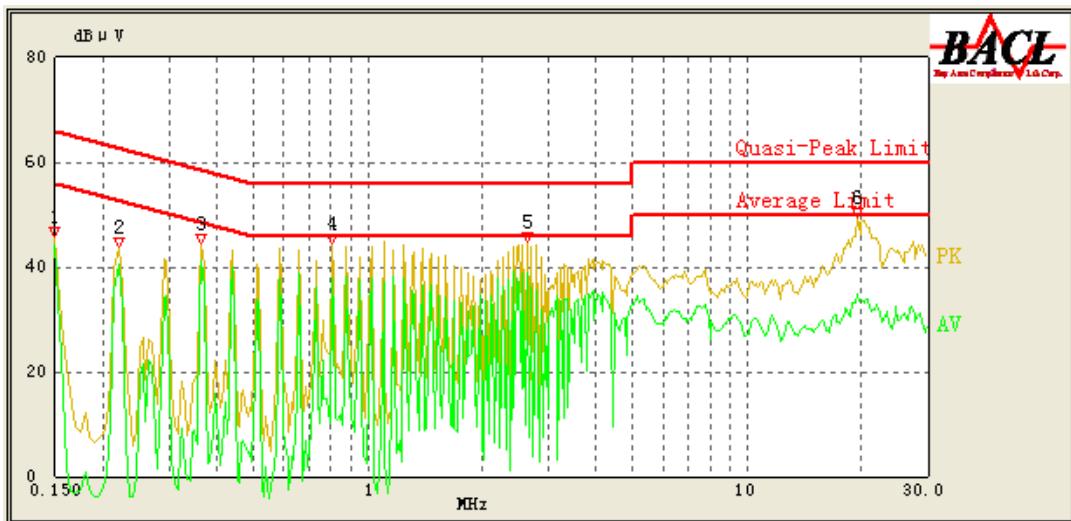
Test Data

Environmental Conditions

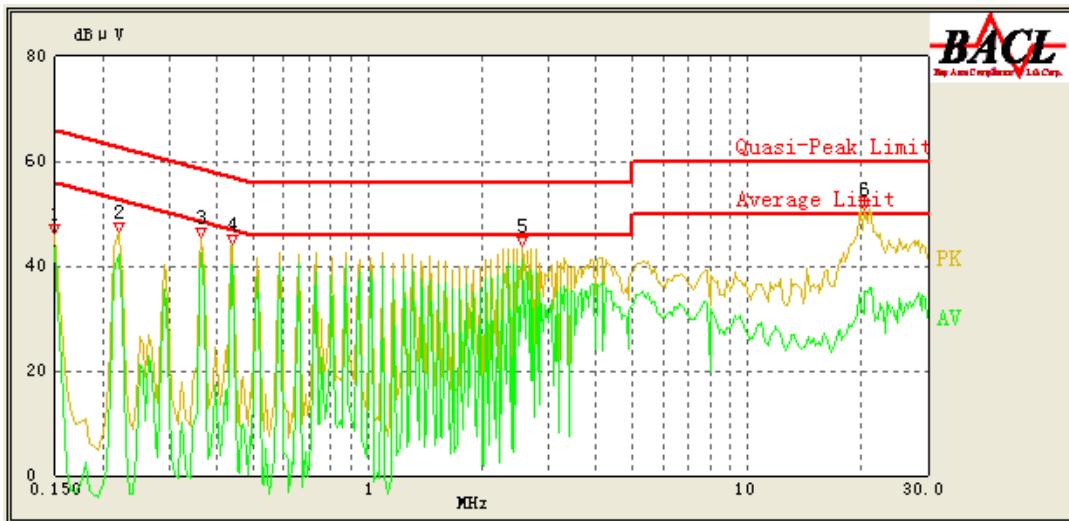
Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Leon Chen on 2012-06-21.

Test Mode: Transmitting

120 V, 60 Hz, Line:

Frequency (MHz)	Corrected Result (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK /QP/Ave.)
2.635	38.69	1.10	46.00	7.31	Ave.
0.805	37.79	1.10	46.00	8.21	Ave.
0.365	41.32	1.10	49.86	8.54	Ave.
0.150	44.11	1.10	56.00	11.89	Ave.
2.635	44.05	1.10	56.00	11.95	QP
0.805	42.57	1.10	56.00	13.43	QP
0.220	40.54	1.10	54.00	13.46	Ave.
19.530	34.97	1.10	50.00	15.03	Ave.
0.365	43.33	1.10	59.86	16.53	QP
19.535	41.47	1.10	60.00	18.53	QP
0.220	42.58	1.10	64.00	21.42	QP
0.150	43.95	1.10	66.00	22.05	QP

120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Result (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK /QP/Ave.)
2.555	41.07	1.10	46.00	4.93	Ave.
0.365	42.52	1.10	49.86	7.34	Ave.
0.440	40.33	1.10	47.71	7.38	Ave.
0.220	42.22	1.10	54.00	11.78	Ave.
0.150	43.53	1.10	56.00	12.47	Ave.
0.440	43.54	1.10	57.71	14.17	QP
20.480	35.02	1.10	50.00	14.98	Ave.
0.365	43.48	1.10	59.86	16.38	QP
0.220	45.21	1.10	64.00	18.79	QP
2.555	35.89	1.10	56.00	20.11	QP
0.150	45.26	1.10	66.00	20.74	QP
20.480	36.54	1.10	60.00	23.46	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

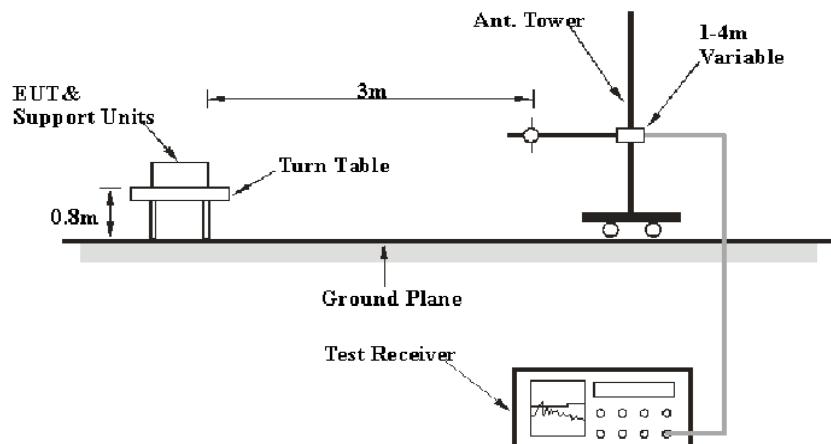
Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

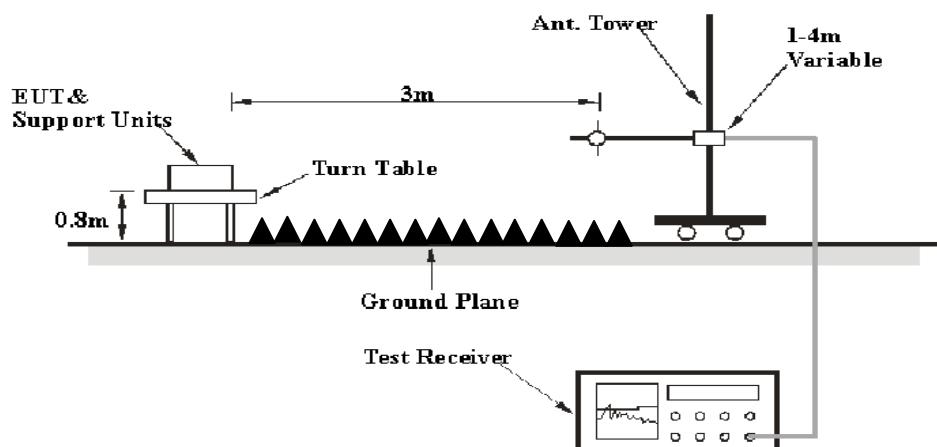
Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is 4.9 dB($k=2$, 95% level of confidence).

EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The PC was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>	<u>Detector</u>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-07-05	2012-07-04
Mini-circuits	Amplifier	ZVA-213+	T-E27H	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-12-01	2012-11-30
HP	Spectrum Analyzer	8593A	2919A00242	2011-07-09	2012-07-08
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

2.74 dB at 2483.5 MHz in the Vertical polarization (802.11g mode)

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Leon Chen on 2012-06-28.

Mode: Transmitting

1) 30MHz-25GHz

802.11b Mode:

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/QP/Ave.)	Polar (H/V)	Corrected Factor (dB)	Correction Data (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2412MHz)								
2412	64.21	Ave.	H	35	99.21	N/A	N/A	Fundamental
2412	67.46	PK	H	35	102.46	N/A	N/A	Fundamental
2412	70.26	PK	V	35	105.26	N/A	N/A	Fundamental
2412	66.2	Ave.	V	35	101.2	N/A	N/A	Fundamental
4824	39.03	Ave.	V	10.79	49.82	54	4.18	Harmonic
4824	38.37	Ave.	H	10.79	49.16	54	4.84	Harmonic
9648	13.87	Ave.	H	34.26	48.13	54	5.87	harmonic
9648	13.69	Ave.	V	34.26	47.95	54	6.05	harmonic
7236	14.25	Ave.	V	32.14	46.39	54	7.61	harmonic
7236	13.48	Ave.	H	32.14	45.62	54	8.38	harmonic
9648	30.71	PK	V	34.26	64.97	74	9.03	harmonic
9648	30.65	PK	H	34.26	64.91	74	9.09	harmonic
7236	31.22	PK	H	32.14	63.36	74	10.64	harmonic
7236	30.25	PK	V	32.14	62.39	74	11.61	harmonic
402.4	31.89	QP	V	-2.03	29.86	46	16.14	spurious
402.4	31.82	QP	H	-2.03	29.79	46	16.21	spurious
4824	43.97	PK	V	10.79	54.76	74	19.24	Harmonic
4824	41.72	PK	H	10.79	52.51	74	21.49	Harmonic
2386	15.55	Ave.	V	6.95	22.5	54	31.5	spurious
2386	15.36	Ave.	H	6.95	22.31	54	31.69	spurious
2386	28.95	PK	V	6.95	35.9	74	38.1	spurious
2386	28.62	PK	H	6.95	35.57	74	38.43	spurious
Middle Channel (2437MHz)								
2437	67.21	PK	H	35.2	102.41	N/A	N/A	Fundamental
2437	69.83	PK	V	35.2	105.03	N/A	N/A	Fundamental
2437	63.26	Ave.	H	35.2	98.46	N/A	N/A	Fundamental
2437	64.59	Ave.	V	35.2	99.79	N/A	N/A	Fundamental
4874	40.48	Ave.	V	11.08	51.56	54	2.44	Harmonic
9738	14.22	Ave.	V	34.75	48.97	54	5.03	harmonic
9738	13.98	Ave.	H	34.75	48.73	54	5.27	harmonic
7301	14.26	Ave.	V	32.59	46.85	54	7.15	harmonic
7301	13.58	Ave.	H	32.59	46.17	54	7.83	harmonic
9738	30.25	PK	V	34.75	65	74	9	harmonic
9738	30.14	PK	H	34.75	64.89	74	9.11	harmonic
7301	30.29	PK	H	32.59	62.88	74	11.12	harmonic
7301	30.25	PK	V	32.59	62.84	74	11.16	harmonic
4874	30.95	Ave.	H	11.08	42.03	54	11.97	Harmonic
4874	46.72	PK	V	11.08	57.8	74	16.2	Harmonic
321.2	32.01	QP	H	-3.72	28.29	46	17.71	spurious
321.2	31.1	QP	V	-3.72	27.38	46	18.62	spurious
4874	40.41	PK	H	11.08	51.49	74	22.51	Harmonic

High Channel (2462MHz)								
			H	35.3	101.95	N/A	N/A	Fundamental
2462	66.65	PK	V	35.3	104.74	N/A	N/A	Fundamental
2462	69.44	PK	H	35.3	97.56	N/A	N/A	Fundamental
2462	62.26	Ave.	V	35.3	99.44	N/A	N/A	Fundamental
2462	64.14	Ave.	H	34.79	48.84	54	5.16	spurious
9848	14.05	Ave.	V	34.79	48.78	54	5.22	spurious
9848	13.99	Ave.	H	10.98	47.66	54	6.34	Harmonic
7386	14.25	Ave.	V	32.87	47.12	54	6.88	spurious
7386	13.97	Ave.	H	32.87	46.84	54	7.16	spurious
4924	35.45	Ave.	V	34.79	46.43	54	7.57	Harmonic
9848	31.29	PK	H	34.79	66.08	74	7.92	spurious
9848	30.17	PK	V	34.79	64.96	74	9.04	spurious
7386	31.02	PK	H	32.87	63.89	74	10.11	spurious
7386	30.29	PK	V	32.87	63.16	74	10.84	spurious
611.1	31.19	QP	H	-0.73	30.46	46	15.54	spurious
611.1	30.88	QP	V	-0.73	30.15	46	15.85	spurious
4924	40.38	PK	H	10.98	51.36	74	22.64	Harmonic
4924	40.26	PK	V	10.98	51.24	74	22.76	Harmonic
2483.5	16.28	Ave.	H	7.53	23.81	54	30.19	spurious
2483.5	15.62	Ave.	V	7.53	23.15	54	30.85	spurious
2483.5	29.89	PK	H	7.53	37.42	74	36.58	spurious
2483.5	28.66	PK	V	7.53	36.19	74	37.81	spurious

802.11g Mode:

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/QP/Ave.)	Polar (H/V)	Corrected Factor (dB)	Correction Data (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2412MHz)								
2412	67.2	PK	H	35	102.2	N/A	N/A	Fundamental
2412	70	PK	V	35	105	N/A	N/A	Fundamental
2412	60.23	Ave.	H	35	95.23	N/A	N/A	Fundamental
2412	63.28	Ave.	V	35	98.28	N/A	N/A	Fundamental
4824	38.73	Ave.	V	10.79	49.52	54	4.48	Harmonic
4824	38.12	Ave.	H	10.79	48.91	54	5.09	Harmonic
9648	14.22	Ave.	H	34.26	48.48	54	5.52	harmonic
9648	13.98	Ave.	V	34.26	48.24	54	5.76	harmonic
7236	14.26	Ave.	V	32.14	46.4	54	7.6	harmonic
7236	13.97	Ave.	H	32.14	46.11	54	7.89	harmonic
9648	30.22	PK	V	34.26	64.48	74	9.52	harmonic
9648	29.58	PK	H	34.26	63.84	74	10.16	harmonic
7236	31.27	PK	V	32.14	63.41	74	10.59	harmonic
7236	30.25	PK	H	32.14	62.39	74	11.61	harmonic
402.4	31.63	QP	V	-2.03	29.6	46	16.4	spurious
402.4	31.54	QP	H	-2.03	29.51	46	16.49	spurious
4824	43.64	PK	V	10.79	54.43	74	19.57	Harmonic
4824	41.44	PK	H	10.79	52.23	74	21.77	Harmonic
2386	15.23	Ave.	V	6.95	22.18	54	31.82	spurious
2386	15.09	Ave.	H	6.95	22.04	54	31.96	spurious
2386	28.72	PK	V	6.95	35.67	74	38.33	spurious
2386	28.39	PK	H	6.95	35.34	74	38.66	spurious
Middle Channel (2437MHz)								
2437	67.05	PK	H	35.2	102.25	N/A	N/A	Fundamental
2437	69.69	PK	V	35.2	104.89	N/A	N/A	Fundamental
2437	60.22	Ave.	H	35.2	95.42	N/A	N/A	Fundamental
2437	62.02	Ave.	V	35.2	97.22	N/A	N/A	Fundamental
4874	40.25	Ave.	V	11.08	51.33	54	2.67	Harmonic
9738	14.2	Ave.	V	34.75	48.95	54	5.05	harmonic
9738	13.78	Ave.	H	34.75	48.53	54	5.47	harmonic
7301	14.22	Ave.	V	32.59	46.81	54	7.19	harmonic
7301	14.03	Ave.	H	32.59	46.62	54	7.38	harmonic
9738	30.36	PK	H	34.75	65.11	74	8.89	harmonic
9738	30.15	PK	V	34.75	64.9	74	9.1	harmonic
7301	31.25	PK	V	32.59	63.84	74	10.16	harmonic
7301	30.14	PK	H	32.59	62.73	74	11.27	harmonic
4874	30.68	Ave.	H	11.08	41.76	54	12.24	Harmonic
4874	46.49	PK	V	11.08	57.57	74	16.43	Harmonic
471.2	31.71	QP	H	-3.72	27.99	46	18.01	spurious
471.2	30.81	QP	V	-3.72	27.09	46	18.91	spurious
4874	40.09	PK	H	11.08	51.17	74	22.83	Harmonic

High Channel (2462MHz)								
Frequency	S.A. Reading	Detector	Polar	Corrected Factor	Correction Data	Limit	Margin	Comment
(MHz)	(dB μ V)	(PK/QP/Ave.)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
Low Channel (2412MHz)								
2412	66.35	PK	H	35	101.35	N/A	N/A	Fundamental
2412	69.13	PK	V	35	104.13	N/A	N/A	Fundamental
2412	57.59	Ave.	H	35	92.59	N/A	N/A	Fundamental
2412	60.25	Ave.	V	35	95.25	N/A	N/A	Fundamental
9648	15.22	Ave.	H	34.26	49.48	54	4.52	harmonic
4824	37.85	Ave.	V	10.79	48.64	54	5.36	Harmonic
9648	14.35	Ave.	V	34.26	48.61	54	5.39	harmonic
4824	37.3	Ave.	H	10.79	48.09	54	5.91	Harmonic
7236	14.39	Ave.	V	32.14	46.53	54	7.47	harmonic
7236	14.03	Ave.	H	32.14	46.17	54	7.83	harmonic
9648	30.65	PK	H	34.26	64.91	74	9.09	harmonic
9648	30.58	PK	V	34.26	64.84	74	9.16	harmonic
7236	31.24	PK	V	32.14	63.38	74	10.62	harmonic
7236	30.69	PK	H	32.14	62.83	74	11.17	harmonic
502.4	30.75	QP	V	-2.03	28.72	46	17.28	spurious
502.4	30.69	QP	H	-2.03	28.66	46	17.34	spurious
4824	42.72	PK	V	10.79	53.51	74	20.49	Harmonic
4824	40.54	PK	H	10.79	51.33	74	22.67	Harmonic
2386	14.35	Ave.	V	6.95	21.3	54	32.7	spurious
2386	14.28	Ave.	H	6.95	21.23	54	32.77	spurious
2386	27.88	PK	V	6.95	34.83	74	39.17	spurious
2386	27.55	PK	H	6.95	34.5	74	39.5	spurious

802.11n20 Mode:

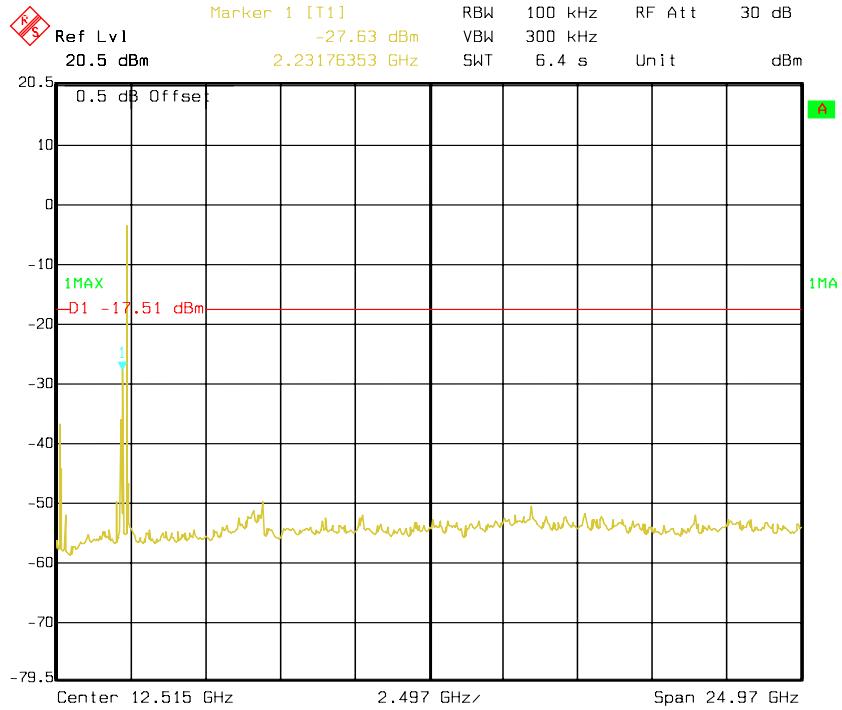
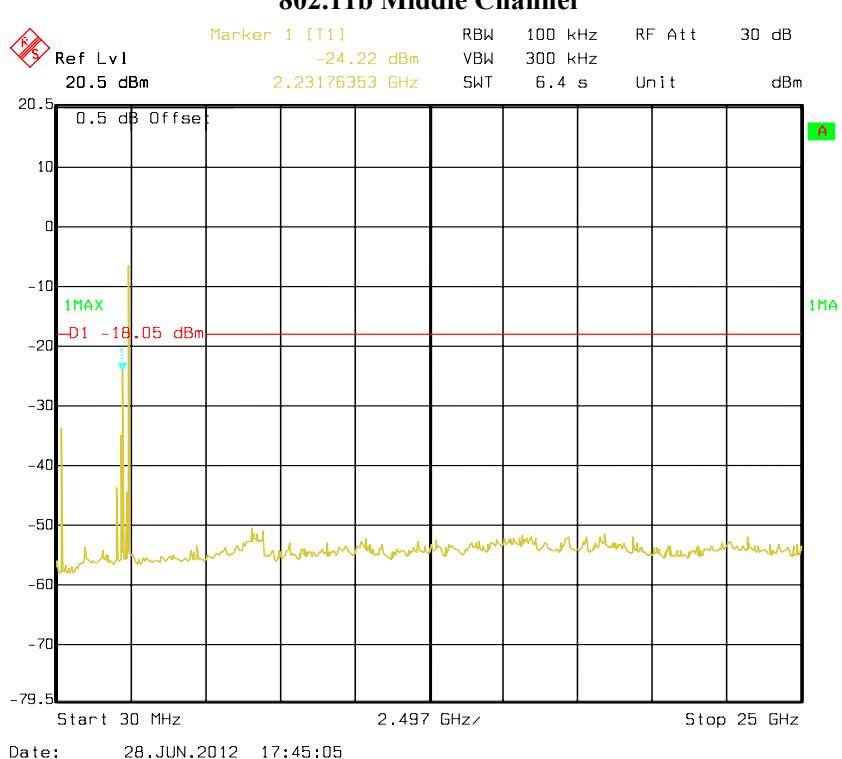
Frequency	S.A. Reading	Detector	Polar	Corrected Factor	Correction Data	Limit	Margin	Comment
(MHz)	(dB μ V)	(PK/QP/Ave.)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
Low Channel (2412MHz)								
2412	66.35	PK	H	35	101.35	N/A	N/A	Fundamental
2412	69.13	PK	V	35	104.13	N/A	N/A	Fundamental
2412	57.59	Ave.	H	35	92.59	N/A	N/A	Fundamental
2412	60.25	Ave.	V	35	95.25	N/A	N/A	Fundamental
9648	15.22	Ave.	H	34.26	49.48	54	4.52	harmonic
4824	37.85	Ave.	V	10.79	48.64	54	5.36	Harmonic
9648	14.35	Ave.	V	34.26	48.61	54	5.39	harmonic
4824	37.3	Ave.	H	10.79	48.09	54	5.91	Harmonic
7236	14.39	Ave.	V	32.14	46.53	54	7.47	harmonic
7236	14.03	Ave.	H	32.14	46.17	54	7.83	harmonic
9648	30.65	PK	H	34.26	64.91	74	9.09	harmonic
9648	30.58	PK	V	34.26	64.84	74	9.16	harmonic
7236	31.24	PK	V	32.14	63.38	74	10.62	harmonic
7236	30.69	PK	H	32.14	62.83	74	11.17	harmonic
502.4	30.75	QP	V	-2.03	28.72	46	17.28	spurious
502.4	30.69	QP	H	-2.03	28.66	46	17.34	spurious
4824	42.72	PK	V	10.79	53.51	74	20.49	Harmonic
4824	40.54	PK	H	10.79	51.33	74	22.67	Harmonic
2386	14.35	Ave.	V	6.95	21.3	54	32.7	spurious
2386	14.28	Ave.	H	6.95	21.23	54	32.77	spurious
2386	27.88	PK	V	6.95	34.83	74	39.17	spurious
2386	27.55	PK	H	6.95	34.5	74	39.5	spurious

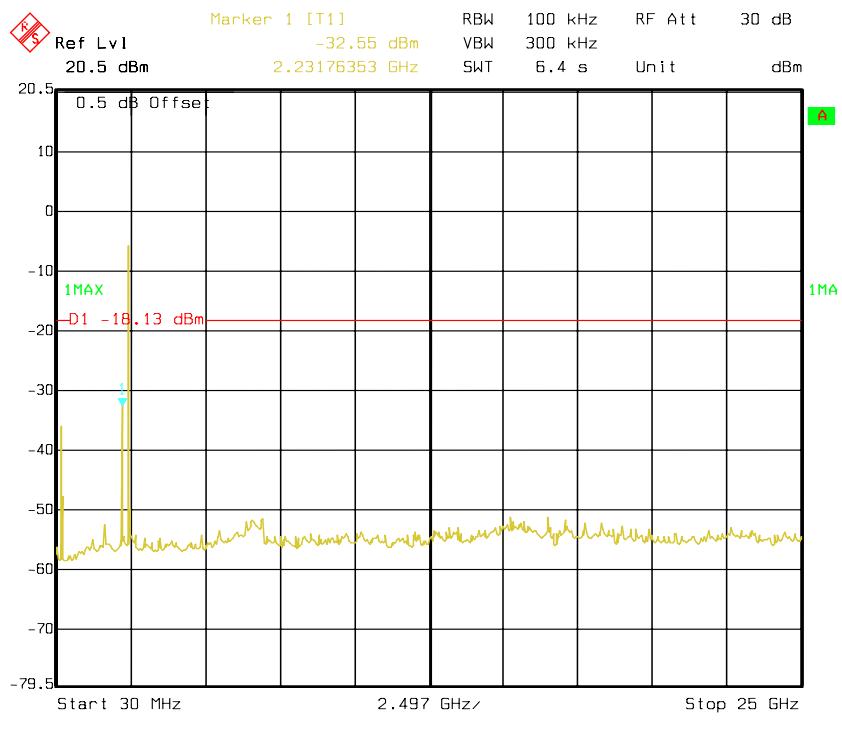
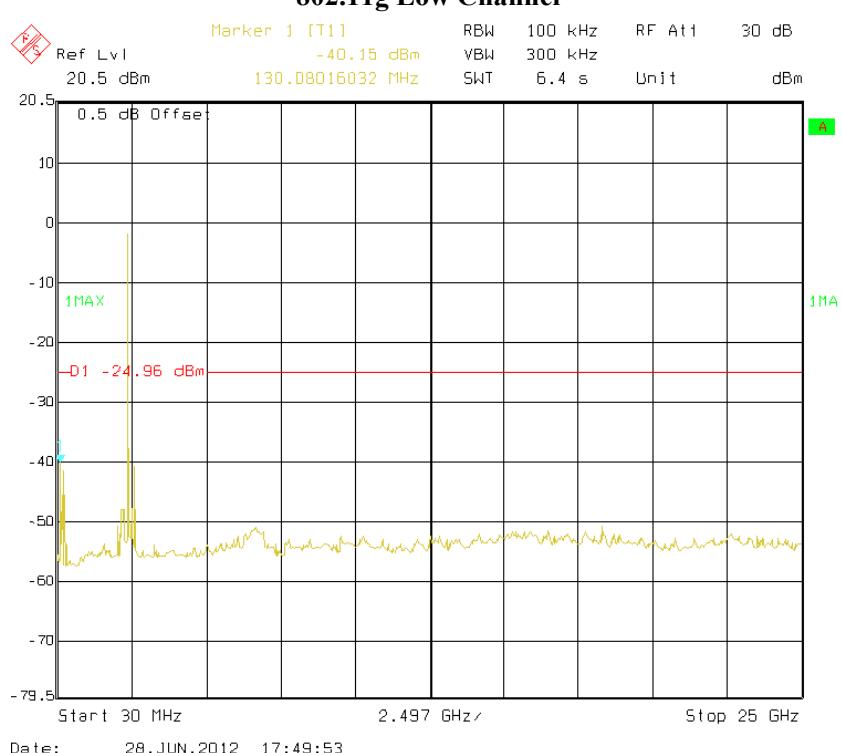
Middle Channel (2437MHz)								
2437	66.09	PK	H	35.2	101.29	N/A	N/A	Fundamental
2437	68.81	PK	V	35.2	104.01	N/A	N/A	Fundamental
2437	60.22	Ave.	H	35.2	95.42	N/A	N/A	Fundamental
2437	62.02	Ave.	V	35.2	97.22	N/A	N/A	Fundamental
4874	39.4	Ave.	V	11.08	50.48	54	3.52	Harmonic
9738	14.23	Ave.	V	34.75	48.98	54	5.02	harmonic
9738	13.98	Ave.	H	34.75	48.73	54	5.27	harmonic
7301	15.21	Ave.	V	32.59	47.8	54	6.2	harmonic
7301	14.26	Ave.	H	32.59	46.85	54	7.15	harmonic
9738	30.36	PK	H	34.75	65.11	74	8.89	harmonic
9738	30.15	PK	V	34.75	64.9	74	9.1	harmonic
7301	31.25	PK	V	32.59	63.84	74	10.16	harmonic
7301	31.02	PK	H	32.59	63.61	74	10.39	harmonic
4874	29.72	Ave.	H	11.08	40.8	54	13.2	Harmonic
4874	45.64	PK	V	11.08	56.72	74	17.28	Harmonic
471.2	30.82	QP	H	-3.72	27.1	46	18.9	spurious
471.2	29.92	QP	V	-3.72	26.2	46	19.8	spurious
4874	39.25	PK	H	11.08	50.33	74	23.67	Harmonic
High Channel (2462MHz)								
2462	65.53	PK	H	35.3	100.83	N/A	N/A	Fundamental
2462	68.31	PK	V	35.3	103.61	N/A	N/A	Fundamental
2462	57.02	Ave.	H	35.3	92.32	N/A	N/A	Fundamental
2462	59.25	Ave.	V	35.3	94.55	N/A	N/A	Fundamental
9848	14.02	Ave.	V	34.79	48.81	54	5.19	spurious
9848	13.99	Ave.	H	34.79	48.78	54	5.22	spurious
9848	32.42	PK	H	34.79	67.21	74	6.79	spurious
7386	14.03	Ave.	H	32.87	46.9	54	7.1	spurious
7386	13.79	Ave.	V	32.87	46.66	54	7.34	spurious
4924	35.47	Ave.	H	10.98	46.45	54	7.55	Harmonic
9848	31.02	PK	V	34.79	65.81	74	8.19	spurious
4924	34.36	Ave.	V	10.98	45.34	54	8.66	Harmonic
7386	31.15	PK	V	32.87	64.02	74	9.98	spurious
7386	31.05	PK	H	32.87	63.92	74	10.08	spurious
621.1	30.15	QP	V	-0.73	29.42	46	16.58	spurious
621.1	29.89	QP	H	-0.73	29.16	46	16.84	spurious
4924	39.33	PK	V	10.98	50.31	74	23.69	Harmonic
4924	39.26	PK	H	10.98	50.24	74	23.76	Harmonic
2483.5	15.1	Ave.	H	7.53	22.63	54	31.37	spurious
2483.5	14.66	Ave.	V	7.53	22.19	54	31.81	spurious
2483.5	28.76	PK	H	7.53	36.29	74	37.71	spurious
2483.5	27.46	PK	V	7.53	34.99	74	39.01	spurious

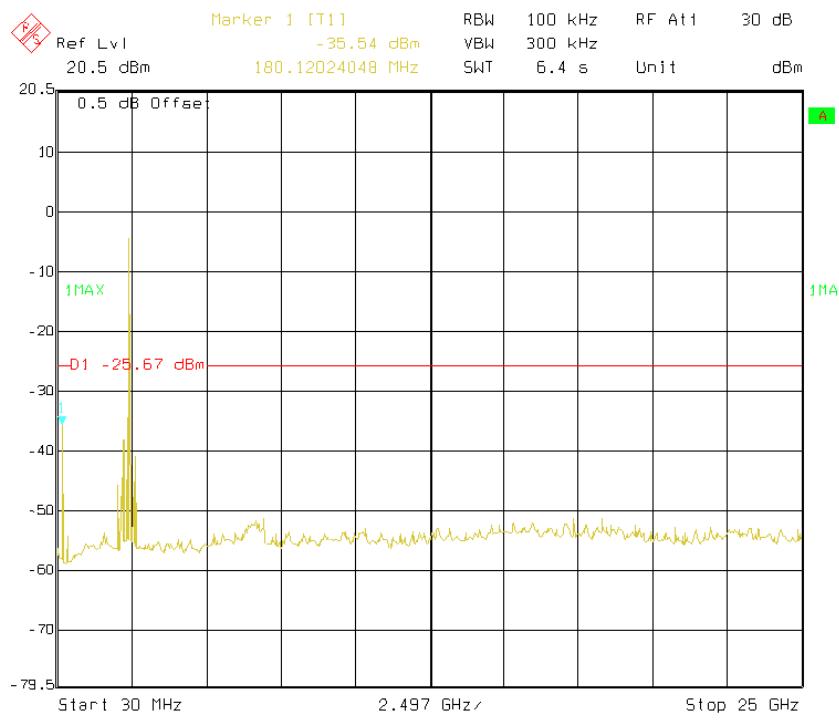
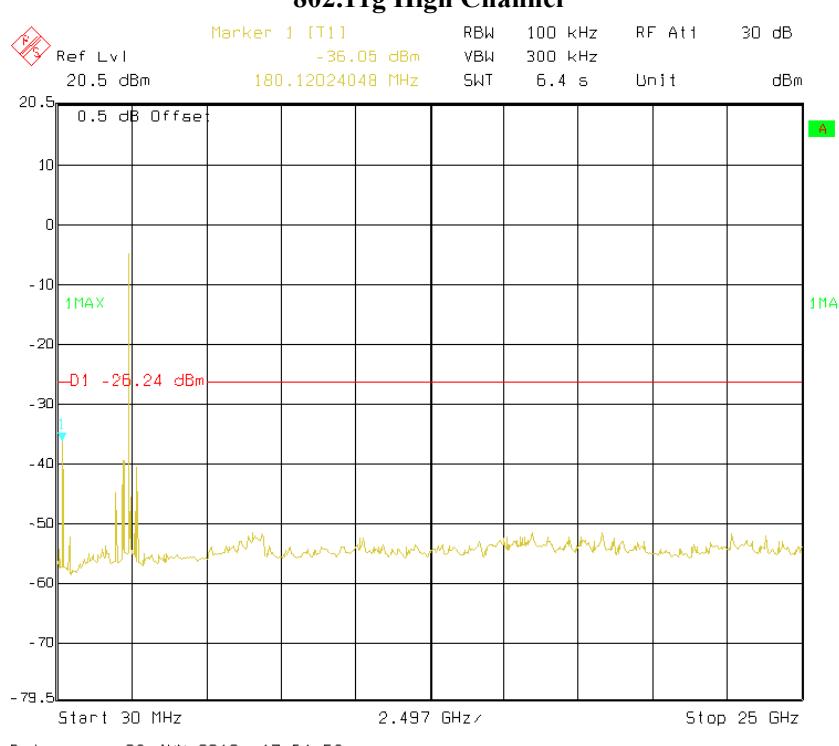
802.11n40 Mode:

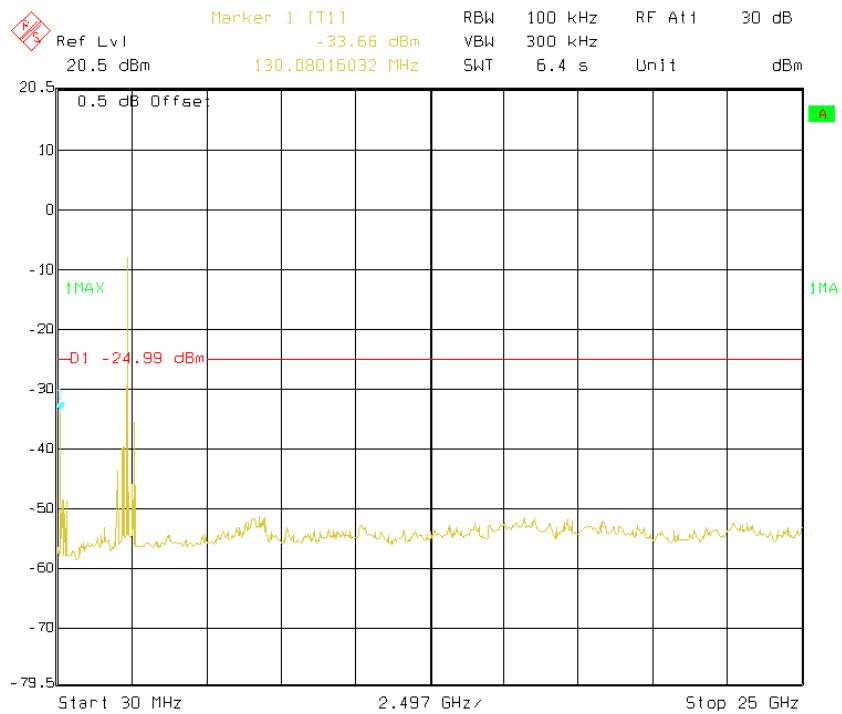
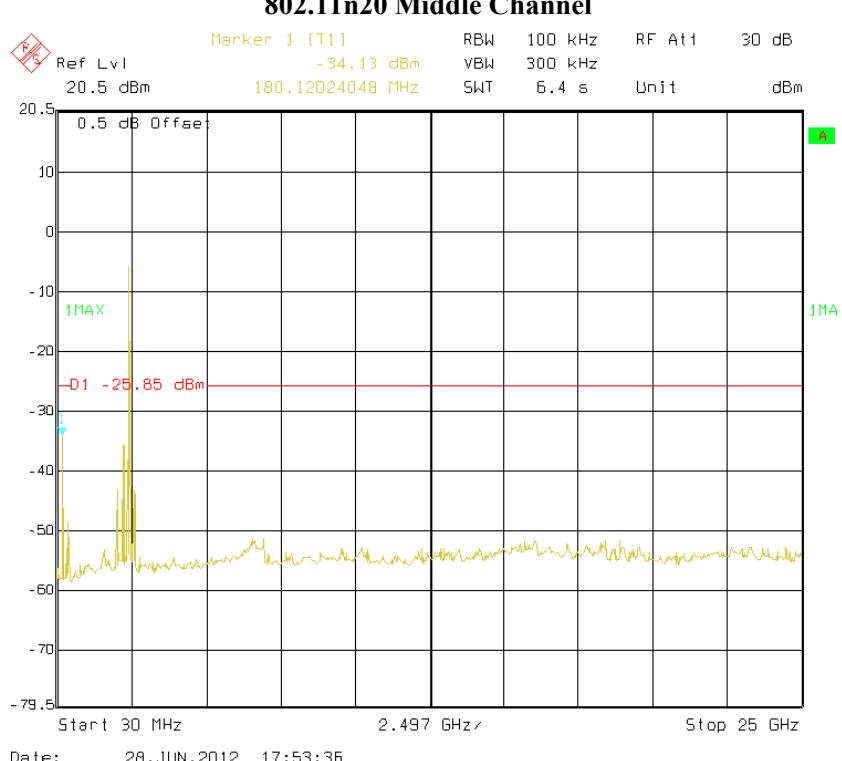
Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/QP/Ave.)	Polar (H/V)	Corrected Factor (dB)	Correction Data (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2422MHz)								
2422	65.25	PK	H	35	100.25	N/A	N/A	Fundamental
2422	68.04	PK	V	35	103.04	N/A	N/A	Fundamental
2422	57.29	Ave.	H	35	92.29	N/A	N/A	Fundamental
2422	59.28	Ave.	V	35	94.28	N/A	N/A	Fundamental
9688	14.26	Ave.	V	34.66	48.92	54	5.08	harmonic
9688	14.02	Ave.	H	34.66	48.68	54	5.32	harmonic
4844	36.51	Ave.	V	10.79	47.3	54	6.7	Harmonic
4844	35.99	Ave.	H	10.79	46.78	54	7.22	Harmonic
7266	14.27	Ave.	V	32.44	46.71	54	7.29	harmonic
7266	14.03	Ave.	H	32.44	46.47	54	7.53	harmonic
9688	30.69	PK	H	34.66	65.35	74	8.65	harmonic
9688	30.25	PK	V	34.66	64.91	74	9.09	harmonic
7266	31.25	PK	V	32.44	63.69	74	10.31	harmonic
7266	30.26	PK	H	32.44	62.7	74	11.3	harmonic
502.4	29.48	QP	V	-2.03	27.45	46	18.55	spurious
502.4	29.44	QP	H	-2.03	27.41	46	18.59	spurious
4824	41.41	PK	V	10.79	52.2	74	21.8	Harmonic
4824	39.21	PK	H	10.79	50	74	24	Harmonic
2386	14.03	Ave.	V	6.95	20.98	54	33.02	spurious
2386	13.94	Ave.	H	6.95	20.89	54	33.11	spurious
2386	26.53	PK	V	6.95	33.48	74	40.52	spurious
2386	26.27	PK	H	6.95	33.22	74	40.78	spurious
Middle Channel (2437MHz)								
2437	64.95	PK	H	35.2	100.15	N/A	N/A	Fundamental
2437	67.6	PK	V	35.2	102.8	N/A	N/A	Fundamental
2437	57.89	Ave.	H	35.2	93.09	N/A	N/A	Fundamental
2437	59.88	Ave.	V	35.2	95.08	N/A	N/A	Fundamental
4874	38.09	Ave.	V	11.08	49.17	54	4.83	Harmonic
9738	14.25	Ave.	V	34.75	49	54	5	harmonic
9738	14.02	Ave.	H	34.75	48.77	54	5.23	harmonic
7301	14.36	Ave.	H	32.59	46.95	54	7.05	harmonic
7301	13.98	Ave.	V	32.59	46.57	54	7.43	harmonic
9738	31.28	PK	H	34.75	66.03	74	7.97	harmonic
9738	30.25	PK	V	34.75	65	74	9	harmonic
7301	31.02	PK	V	32.59	63.61	74	10.39	harmonic
7301	30.29	PK	H	32.59	62.88	74	11.12	harmonic
4874	28.52	Ave.	H	11.08	39.6	54	14.4	Harmonic
4874	44.31	PK	V	11.08	55.39	74	18.61	Harmonic
471.2	29.57	QP	H	-3.72	25.85	46	20.15	spurious
471.2	28.63	QP	V	-3.72	24.91	46	21.09	spurious
4874	37.97	PK	H	11.08	49.05	74	24.95	Harmonic

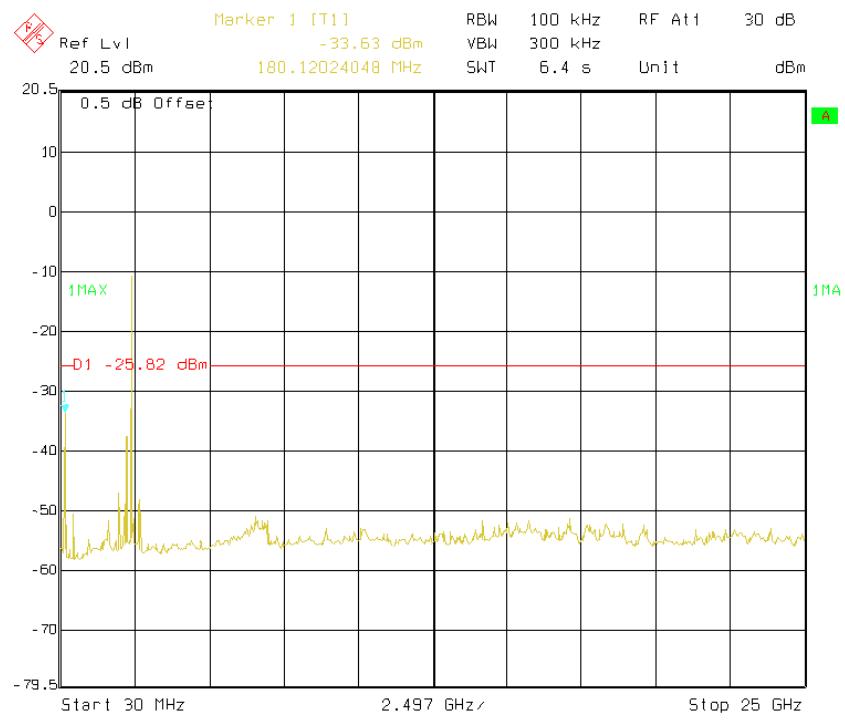
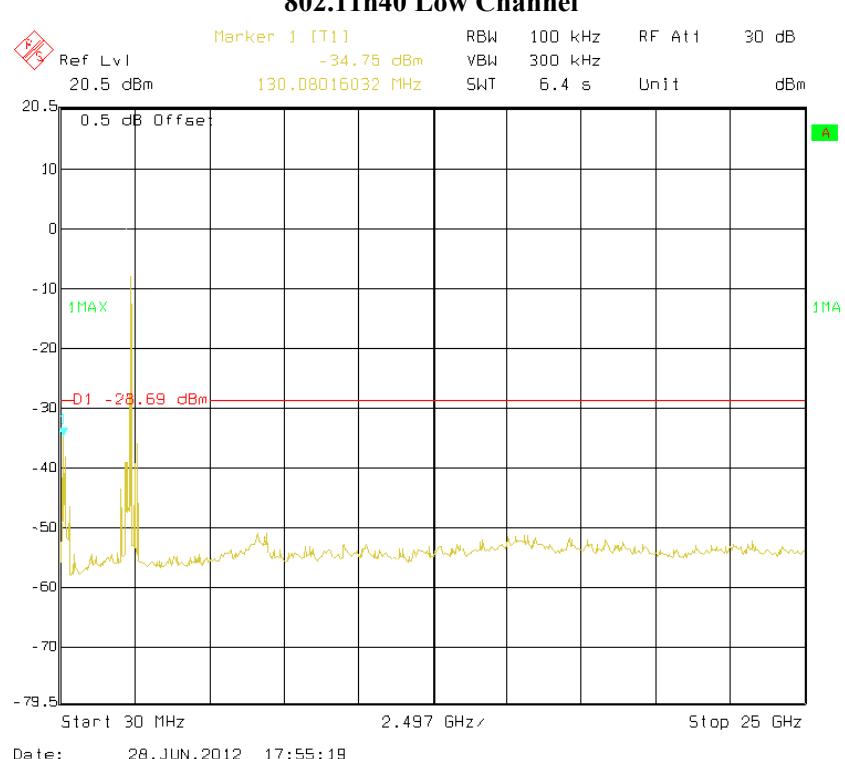
High Channel (2452MHz)								
			H	35.3	99.7	N/A	N/A	Fundamental
2452	64.4	PK	V	35.3	102.51	N/A	N/A	Fundamental
2452	67.21	PK	H	35.3	92.19	N/A	N/A	Fundamental
2452	56.89	Ave.	V	35.3	93.45	N/A	N/A	Fundamental
2452	58.15	Ave.	H	34.19	48.25	54	5.75	spurious
9808	14.06	Ave.	V	34.19	48.22	54	5.78	spurious
9808	14.03	Ave.	H	32.27	46.48	54	7.52	spurious
7356	14.21	Ave.	V	32.27	46.33	54	7.67	spurious
7356	14.06	Ave.	H	10.98	45.2	54	8.8	Harmonic
4904	34.22	Ave.	V	34.19	65.17	74	8.83	spurious
9808	30.98	PK	H	34.19	64.44	74	9.56	spurious
9808	30.25	PK	V	10.98	43.99	54	10.01	Harmonic
4904	33.01	Ave.	H	32.27	63.16	74	10.84	spurious
7356	30.89	PK	V	32.27	63.04	74	10.96	spurious
7356	30.77	PK	H	-0.73	28.17	46	17.83	spurious
621.1	28.9	QP	V	-0.73	27.81	46	18.19	spurious
621.1	28.54	QP	H	10.98	48.94	74	25.06	Harmonic
4904	37.96	PK	V	7.53	48.79	74	25.21	Harmonic
4904	37.81	PK	H	7.53	22.31	54	31.69	spurious
2483.5	14.78	Ave.	V	7.53	21.77	54	32.23	spurious
2483.5	14.24	Ave.	H	7.53	35.1	74	38.9	spurious
2483.5	27.57	PK	V	7.53	33.81	74	40.19	spurious
2483.5	26.28	PK	H	7.53				

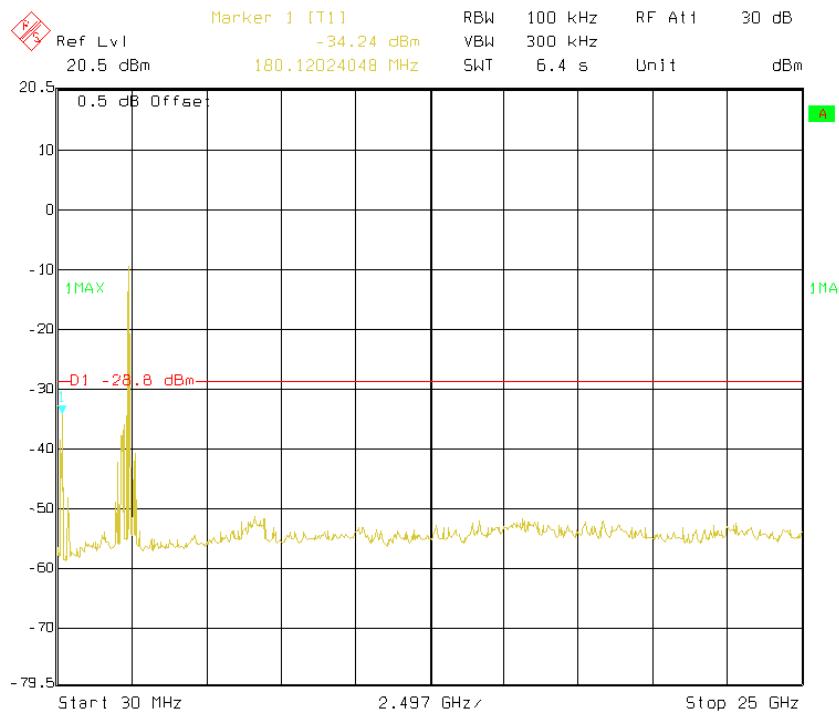
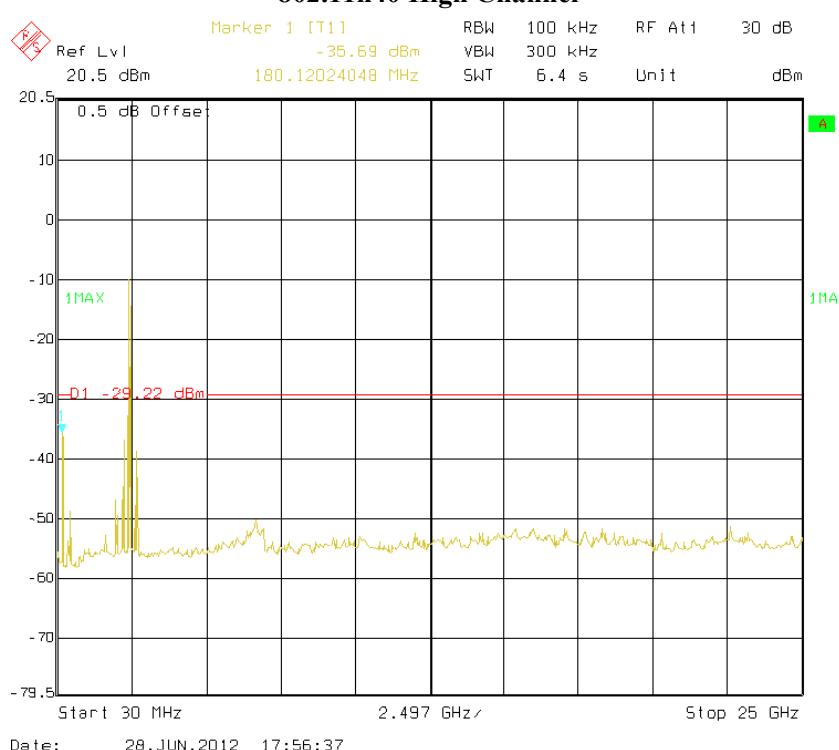
Conducted Spurious Emissions at Antenna Port**802.11b Low Channel****802.11b Middle Channel**

802.11b High Channel**802.11g Low Channel**

802.11g Middle Channel**802.11g High Channel**

802.11n20 Low Channel**802.11n20 Middle Channel**

802.11n20 High Channel**802.11n40 Low Channel**

802.11n40 Middle Channel**802.11n40 High Channel**


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

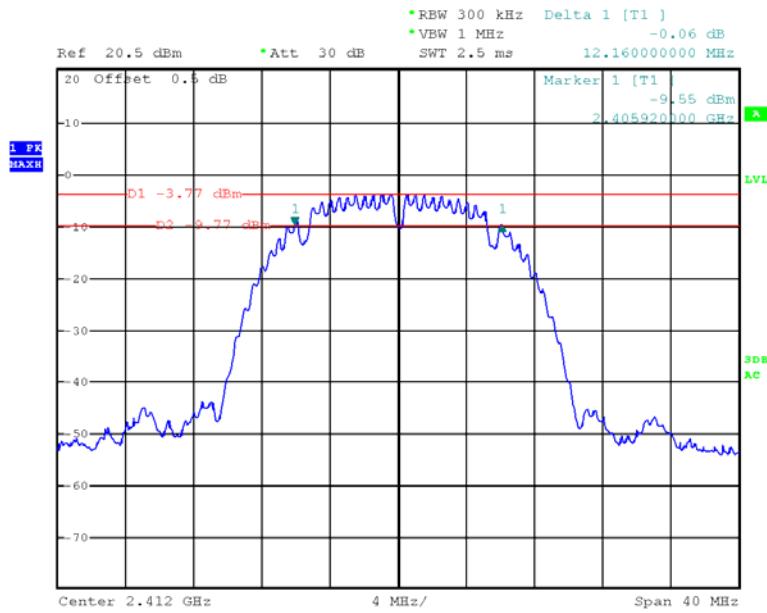
Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0kPa

The testing was performed by Leon Chen on 2012-06-12.

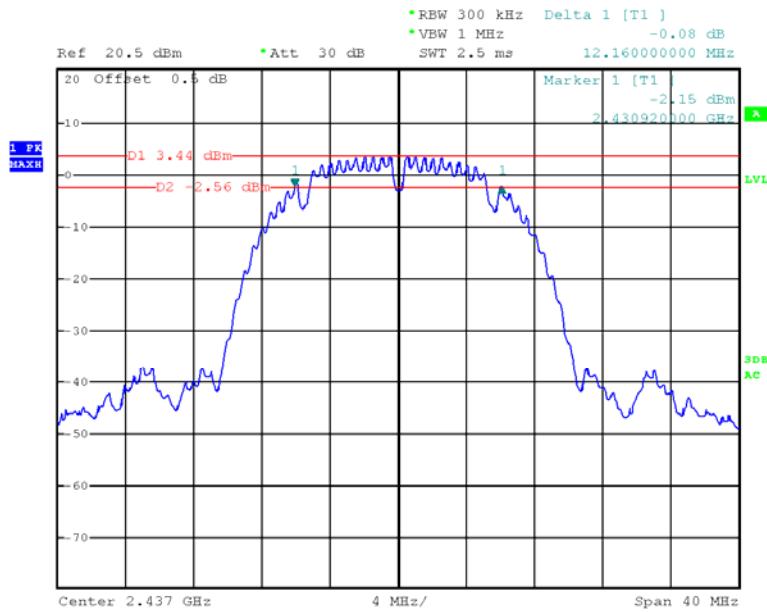
Test Result: Pass.

Please refer to the following tables and plots.

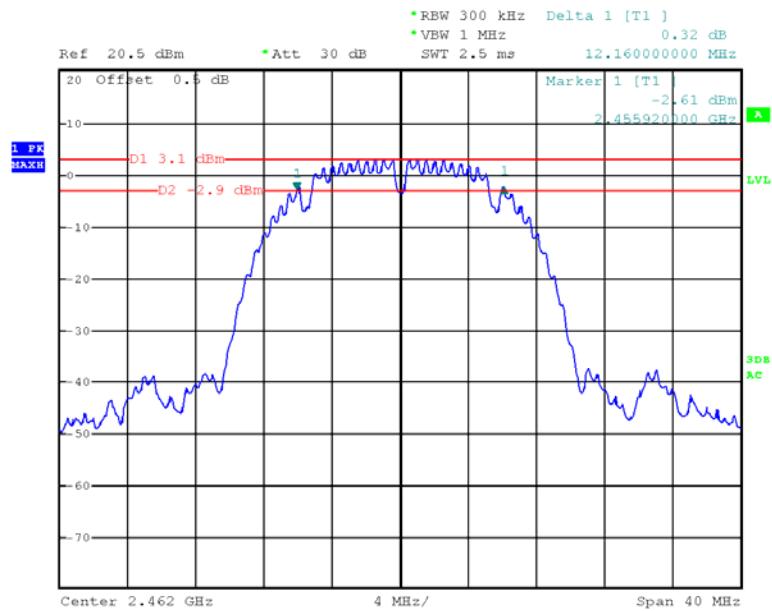
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (KHz)
802.11b mode			
Low	2412	12.16	>500
Middle	2437	12.16	>500
High	2462	12.16	>500
802.11g mode			
Low	2412	16.48	>500
Middle	2437	16.48	>500
High	2462	16.48	>500
802.11n20 mode			
Low	2412	17.52	>500
Middle	2437	17.52	>500
High	2462	17.52	>500
802.11n40 mode			
Low	2422	36.32	>500
Middle	2437	36.32	>500
High	2452	36.32	>500

802.11b Low Channel

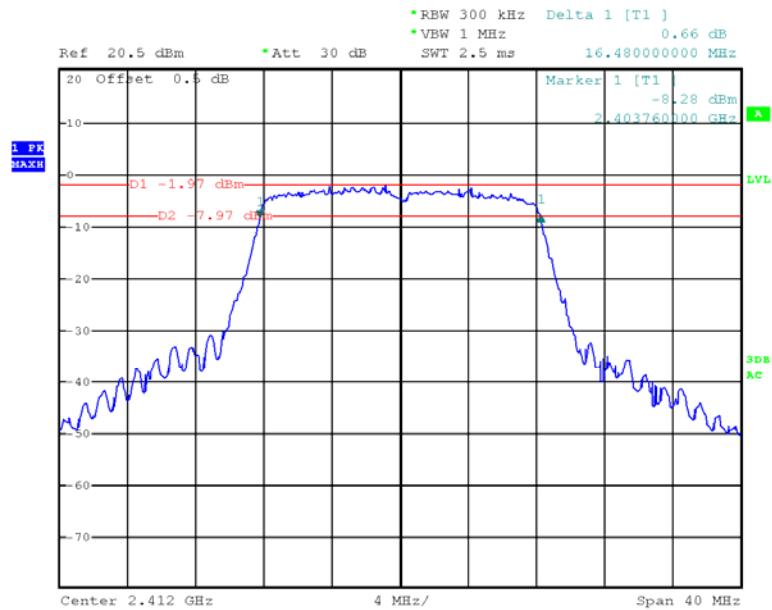
Date: 12.JUN.2012 16:51:38

802.11b Middle Channel

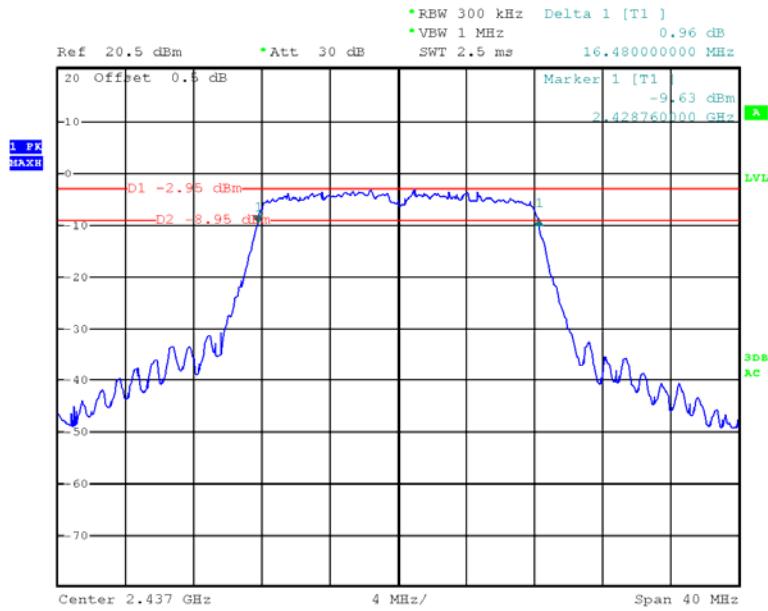
Date: 12.JUN.2012 16:56:31

802.11b High Channel

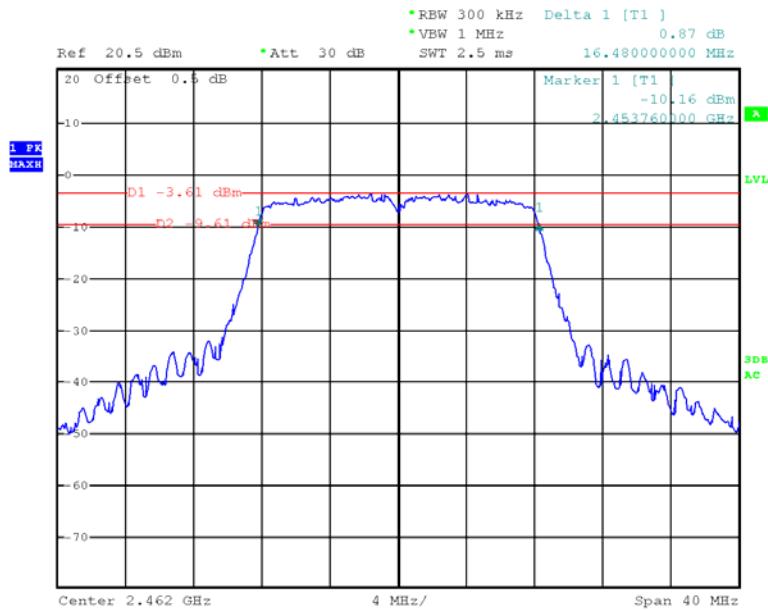
Date: 12.JUN.2012 17:00:20

802.11g Low Channel

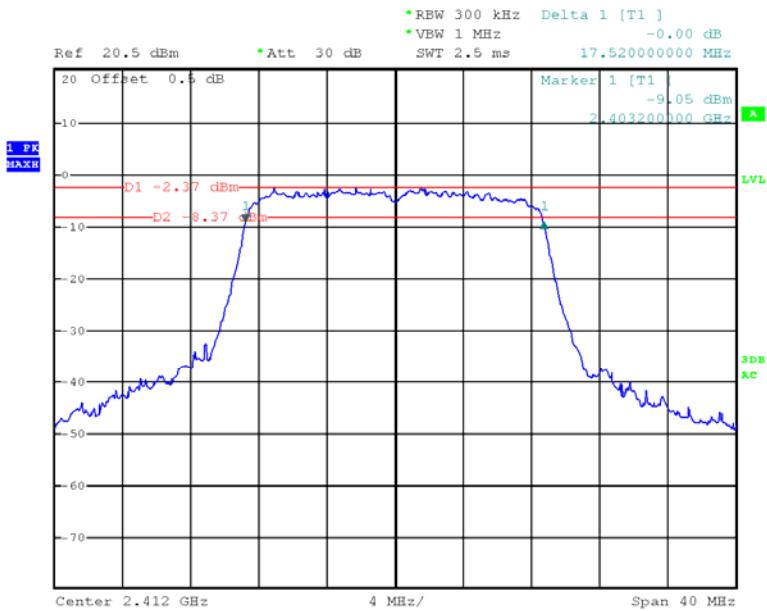
Date: 12.JUN.2012 16:41:40

802.11g Middle Channel

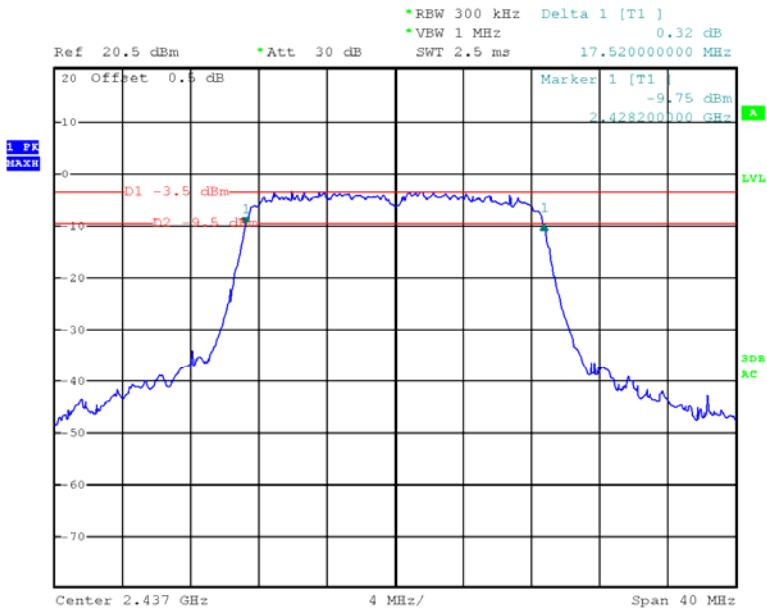
Date: 12.JUN.2012 16:45:37

802.11g High Channel

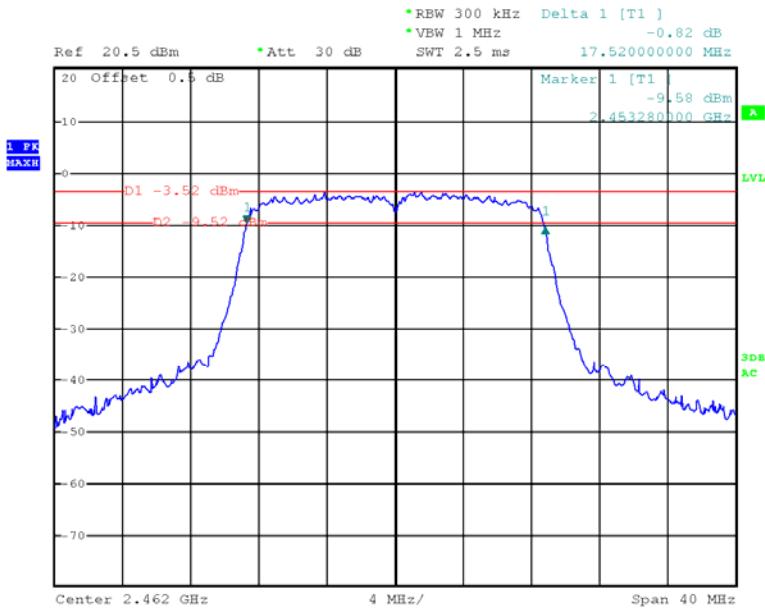
Date: 12.JUN.2012 16:48:55

802.11n20 Low Channel

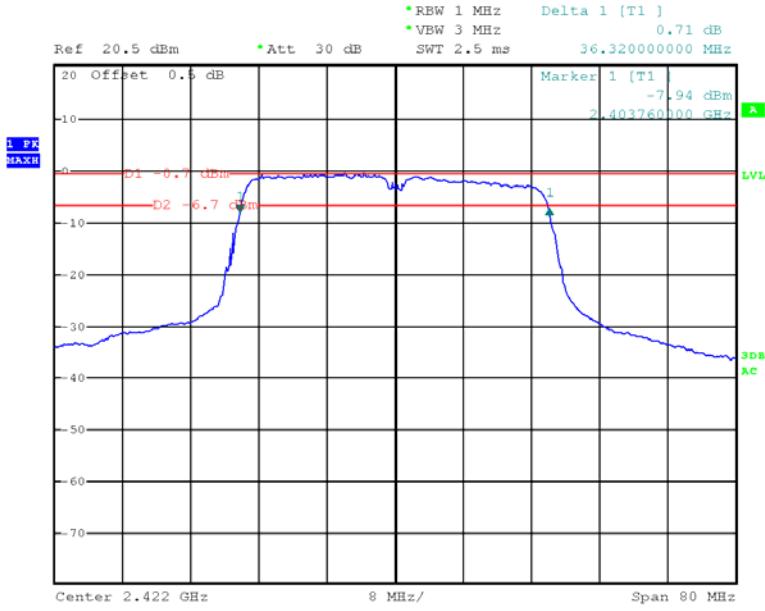
Date: 12.JUN.2012 17:01:56

802.11n20 Middle Channel

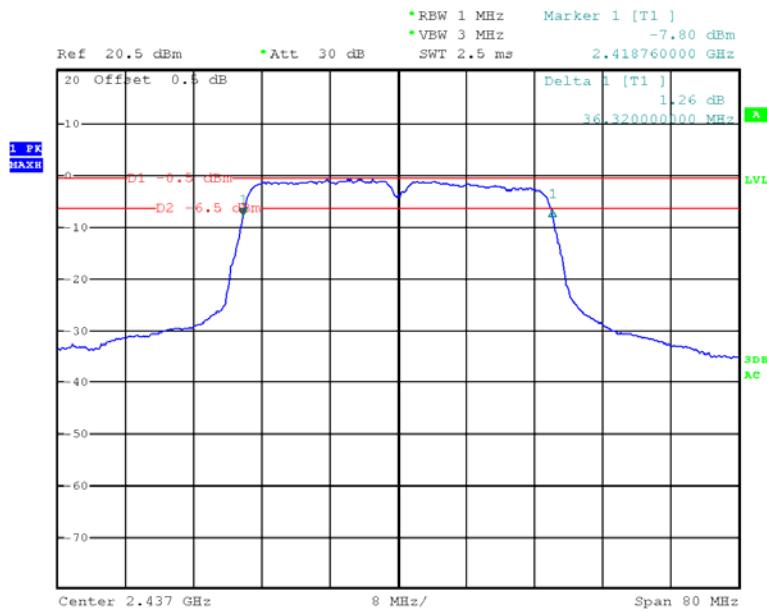
Date: 12.JUN.2012 17:07:49

802.11n20 High Channel

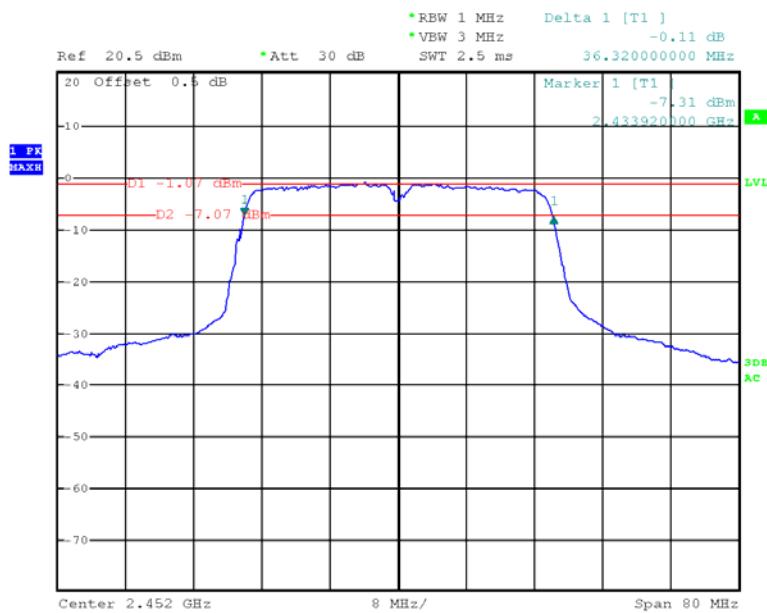
Date: 12.JUN.2012 17:06:29

802.11n40 Low Channel

Date: 12.JUN.2012 17:10:22

802.11n40 Middle Channel

Date: 12.JUN.2012 17:17:49

802.11n40 High Channel

Date: 12.JUN.2012 17:15:43

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

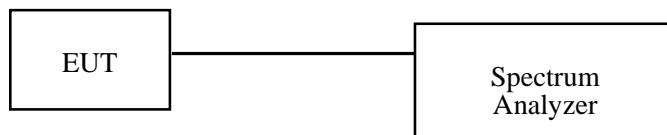
Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

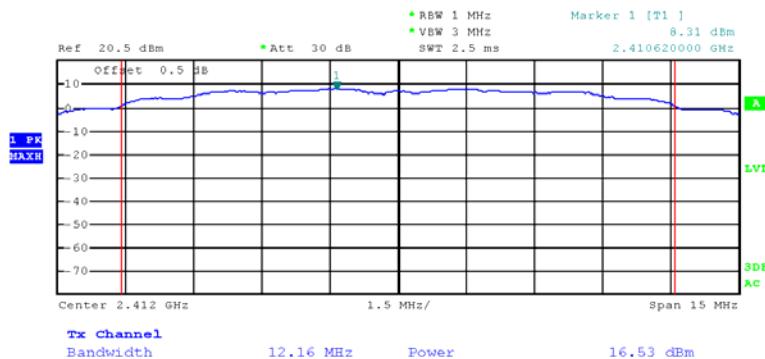
The testing was performed by Leon Chen on 2012-06-12.

Test Mode: Transmitting

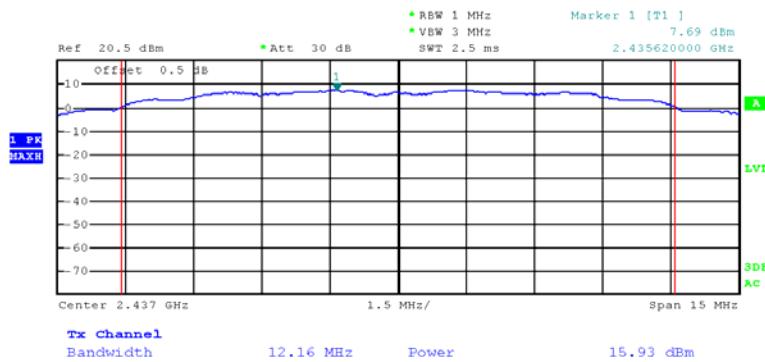
Channel	Frequency	Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
802.11b mode				
Low	2412 MHz	16.53	30	PASS
Middle	2437 MHz	15.93	30	PASS
High	2462 MHz	15.77	30	PASS
802.11g mode				
Low	2412 MHz	13.67	30	PASS
Middle	2437 MHz	12.88	30	PASS
High	2462 MHz	12.53	30	PASS
802.11n20 mode				
Low	2412 MHz	13.72	30	PASS
Middle	2437 MHz	12.98	30	PASS
High	2462 MHz	12.65	30	PASS
802.11n40 mode				
Low	2422 MHz	13.05	30	PASS
Middle	2437 MHz	12.98	30	PASS
High	2452 MHz	12.83	30	PASS

Note: The antenna gain is 2.0 dBi.

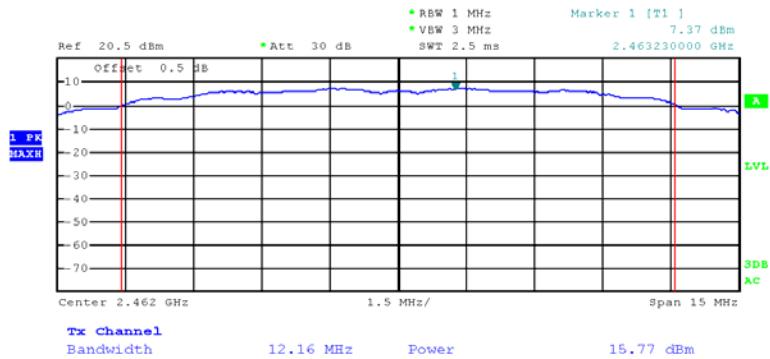
Please refer to the following plots

802.11b RF Output Power, Low Channel

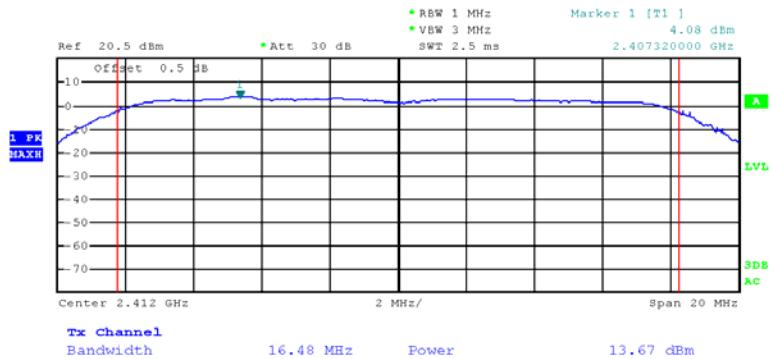
Date: 12.JUN.2012 16:54:24

802.11b RF Output Power, Middle Channel

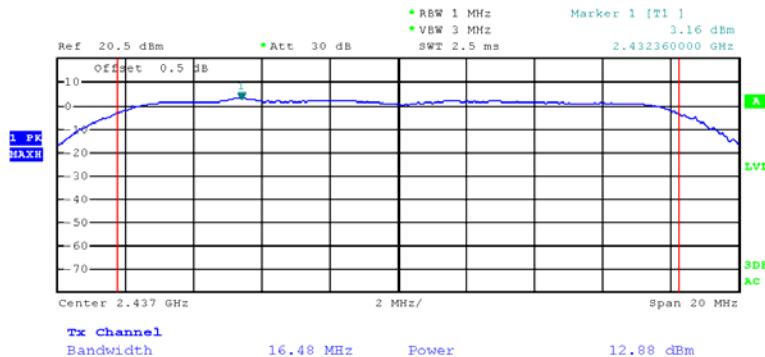
Date: 12.JUN.2012 16:57:43

802.11b RF Output Power, High Channel

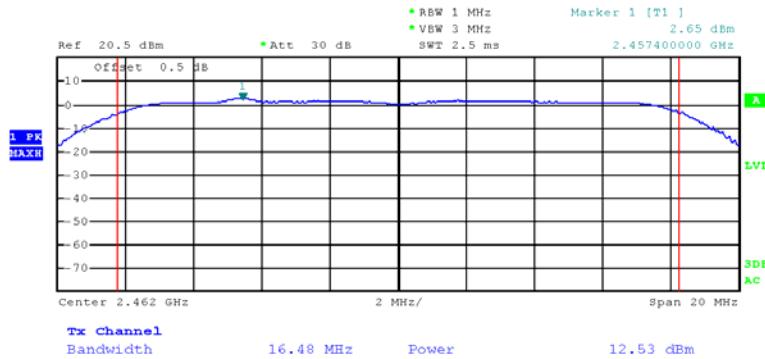
Date: 12.JUN.2012 16:59:00

802.11g RF Output Power, Low Channel

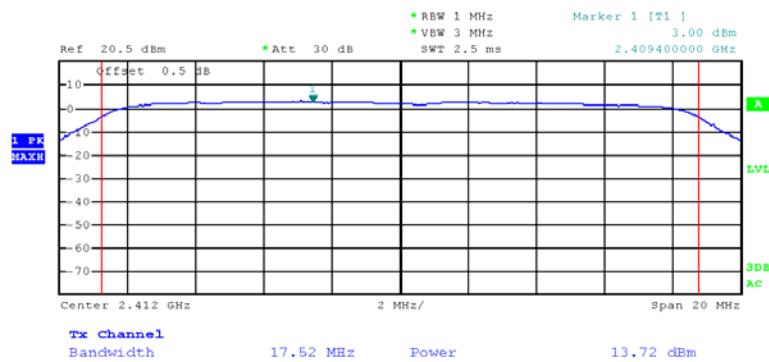
Date: 12.JUN.2012 16:43:51

802.11g RF Output Power, Middle Channel

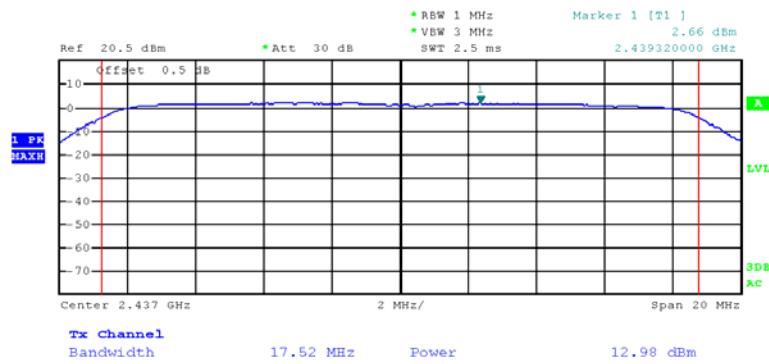
Date: 12.JUN.2012 16:46:39

802.11g RF Output Power, High Channel

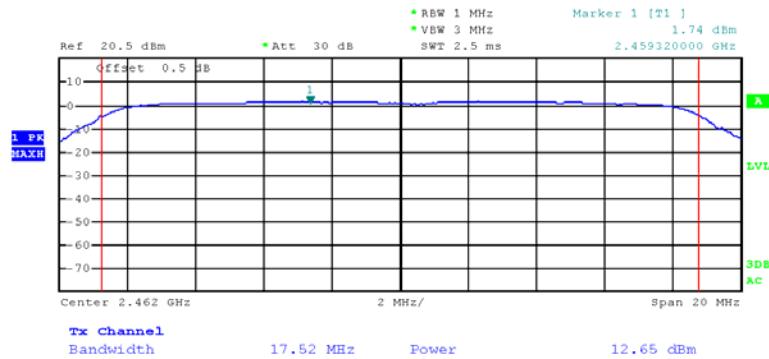
Date: 12.JUN.2012 16:49:45

802.11n20 RF Output Power, Low Channel

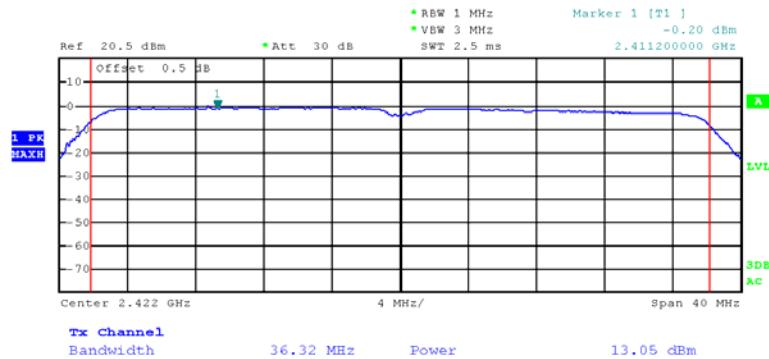
Date: 12.JUN.2012 17:03:03

802.11n20 RF Output Power, Middle Channel

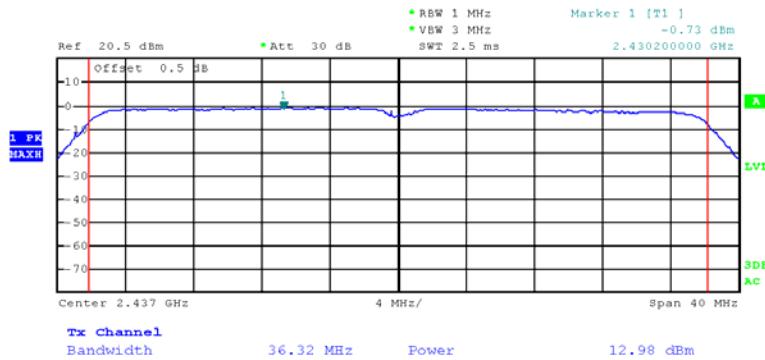
Date: 12.JUN.2012 17:04:19

802.11n20 RF Output Power, High Channel

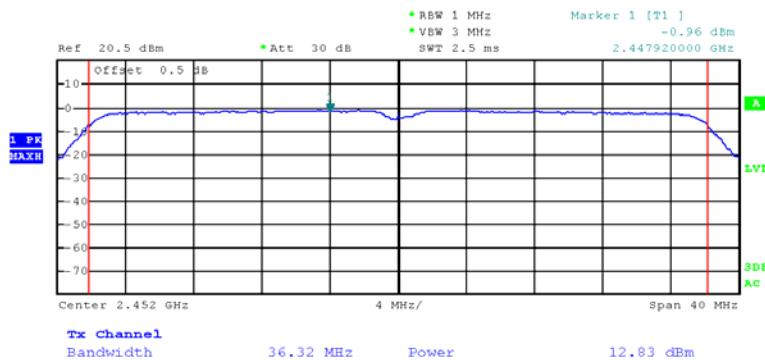
Date: 12.JUN.2012 17:05:02

802.11n40 RF Output Power, Low Channel

Date: 12.JUN.2012 17:12:14

802.11n40 RF Output Power, Middle Channel

Date: 12.JUN.2012 17:13:03

802.11n40 RF Output Power, High Channel

Date: 12.JUN.2012 17:14:39

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

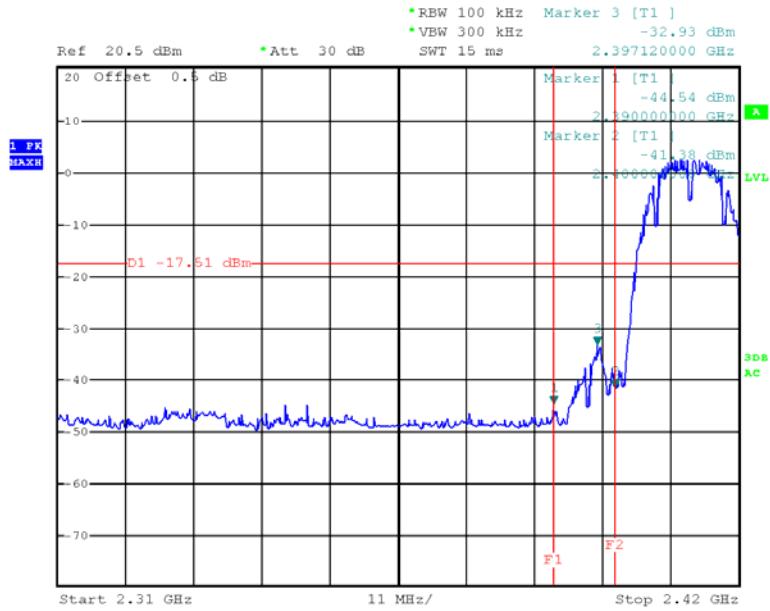
Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

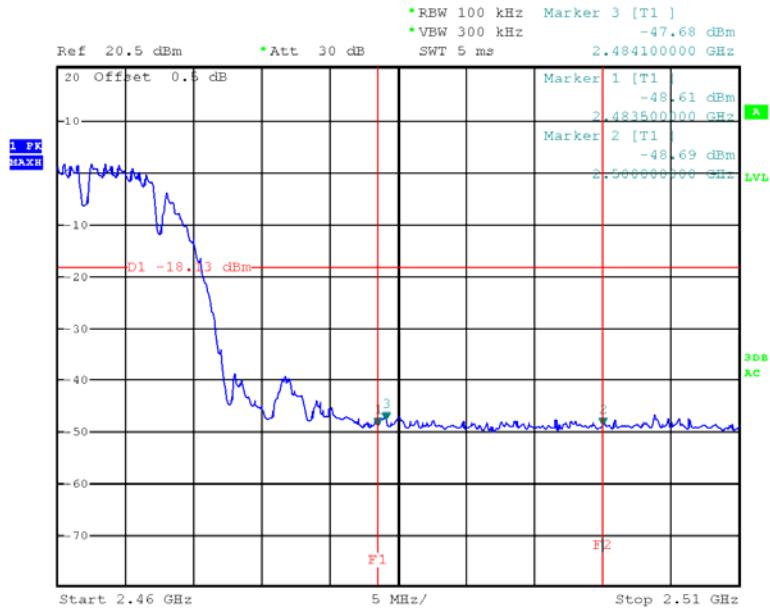
The testing was performed by Leon Chen on 2012-06-12.

Test Result: Compliance

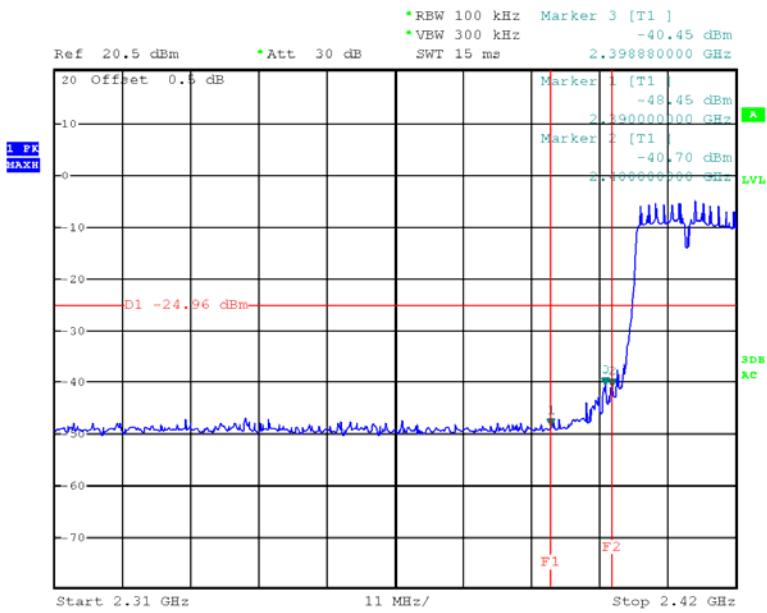
Please refer to following plots.

802.11b: Band Edge, Left Side

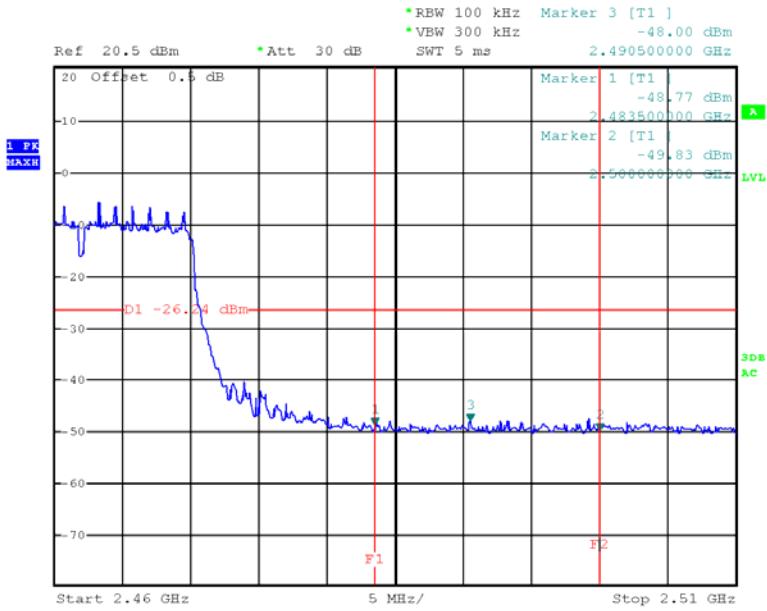
Date: 12.JUN.2012 17:51:48

802.11b: Band Edge, Right Side

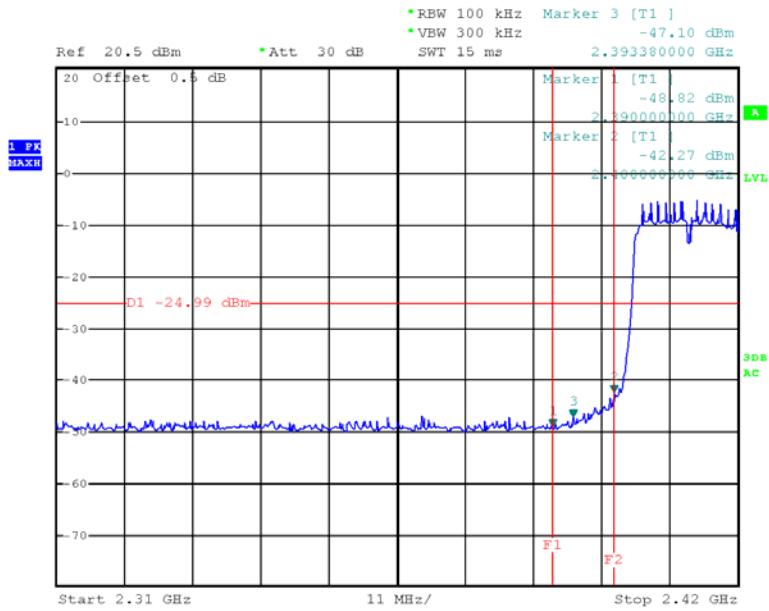
Date: 12.JUN.2012 19:13:39

802.11g: Band Edge, Left Side

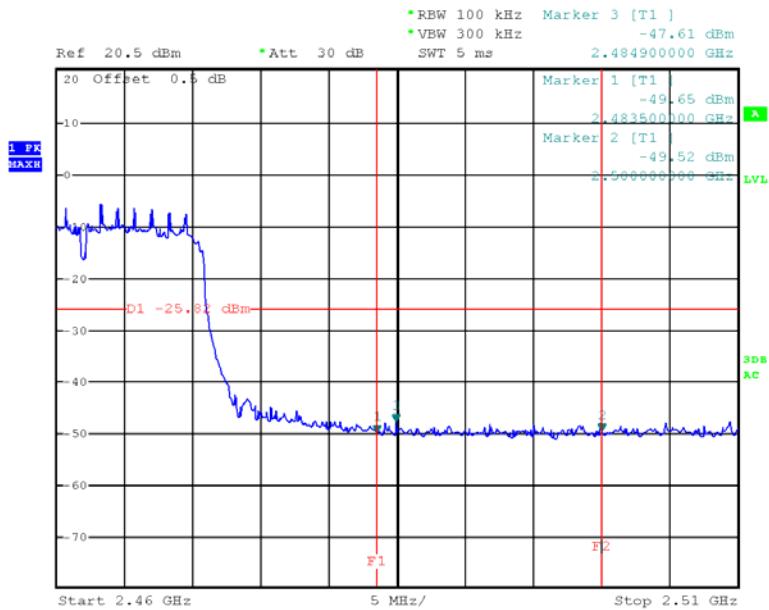
Date: 12.JUN.2012 19:16:51

802.11g: Band Edge, Right Side

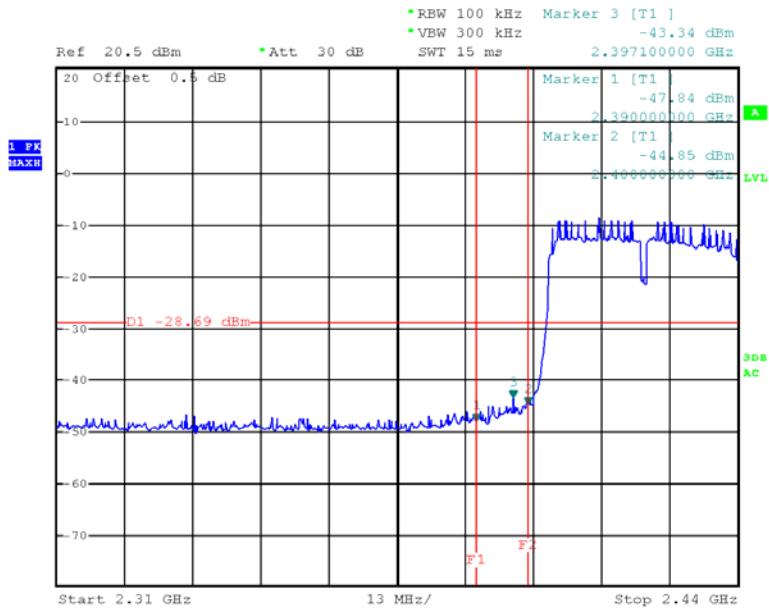
Date: 12.JUN.2012 19:21:19

802.11n20: Band Edge, Left Side

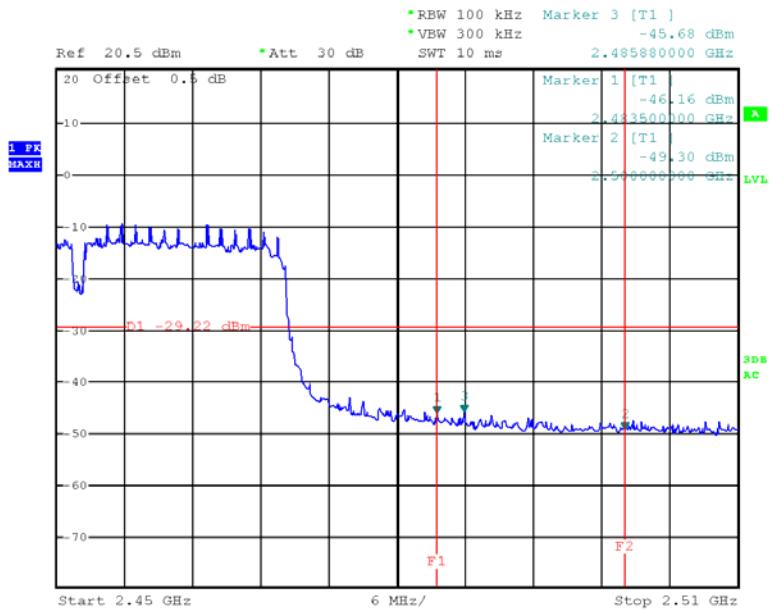
Date: 12.JUN.2012 19:24:44

802.11n20: Band Edge, Right Side

Date: 12.JUN.2012 19:29:04

802.11n40: Band Edge, Left Side

Date: 12.JUN.2012 19:38:26

802.11n40: Band Edge, Right Side

Date: 12.JUN.2012 19:34:38

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. According to KDB 558074 D01 DTS Meas Guidance v01, set the RBW = 100 kHz, VBW ≥ 300 kHz, set the span to 5-30 % greater than the EBW.
4. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
5. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCf) where BWCf = $10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Leon Chen on 2012-06-12 .

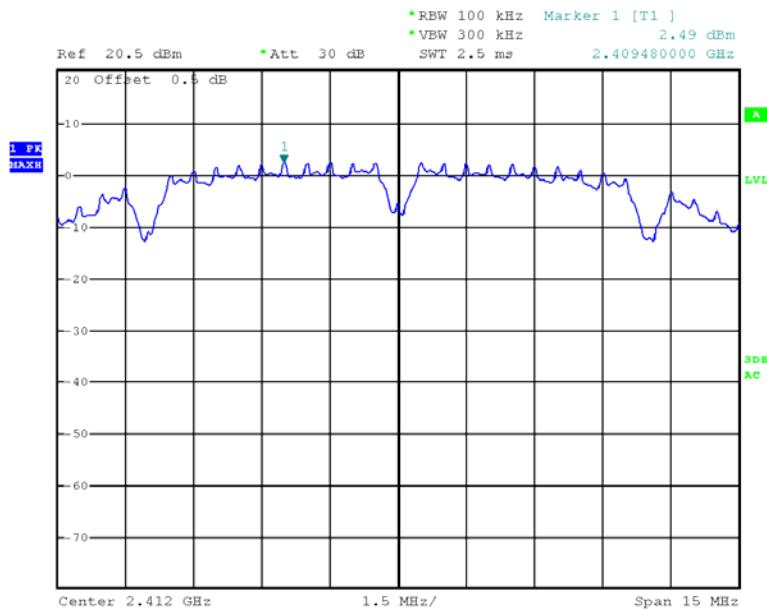
Test Mode: Transmitting

Test Result: Pass

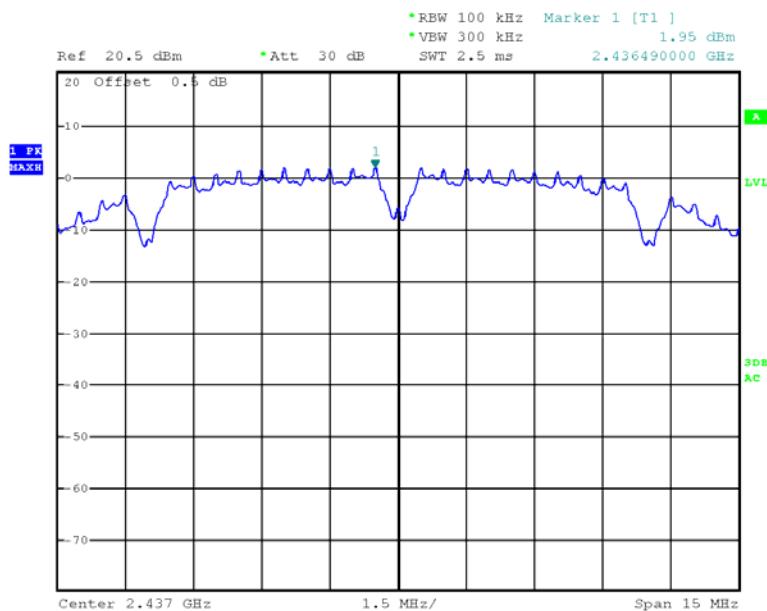
Channel	Reading Level	PSD	Limit	Result
	(dBm/100kHz)	(dBm/3kHz)	(dBm/3kHz)	
802.11b mode				
Low	2.49	-12.71	8	PASS
Middle	1.95	-13.25	8	PASS
High	1.87	-13.33	8	PASS
802.11g mode				
Low	-4.96	-20.16	8	PASS
Middle	-5.67	-20.87	8	PASS
High	-6.24	-21.44	8	PASS
802.11n20 mode				
Low	-4.99	-20.19	8	PASS
Middle	-5.85	-21.05	8	PASS
High	-5.82	-21.02	8	PASS
802.11n40 mode				
Low	-8.69	-23.89	8	PASS
Middle	-8.80	-24.00	8	PASS
High	-9.22	-24.42	8	PASS

Note: the antenna gain is 2.0dBi.

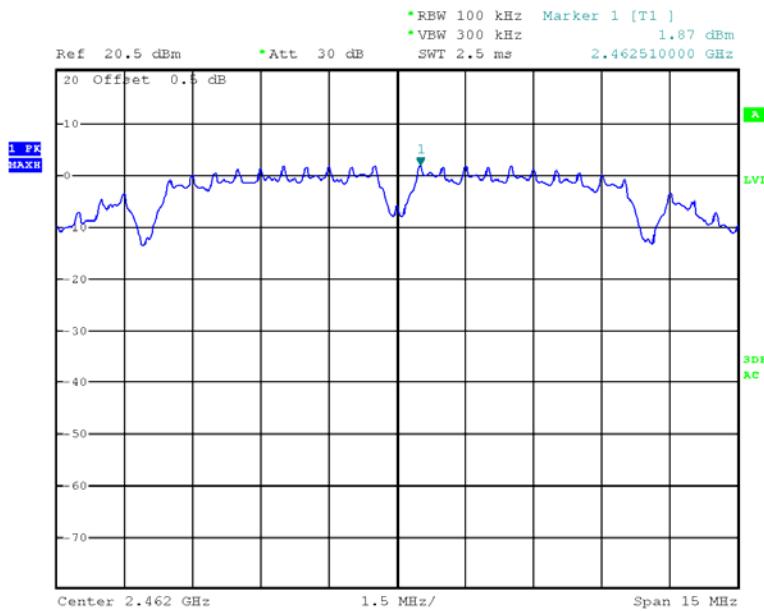
Please refer to the following plots

Power Spectral Density, 802.11b Low Channel

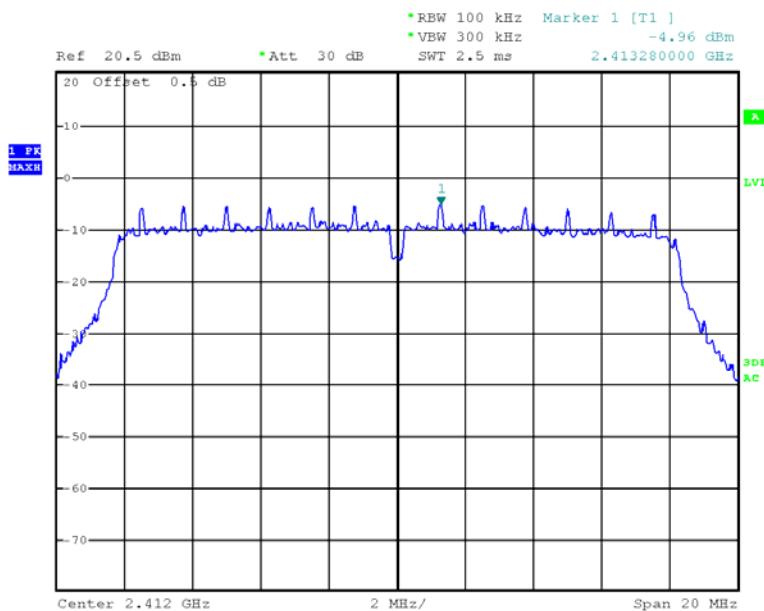
Date: 12.JUN.2012 17:43:10

Power Spectral Density, 802.11b Middle Channel

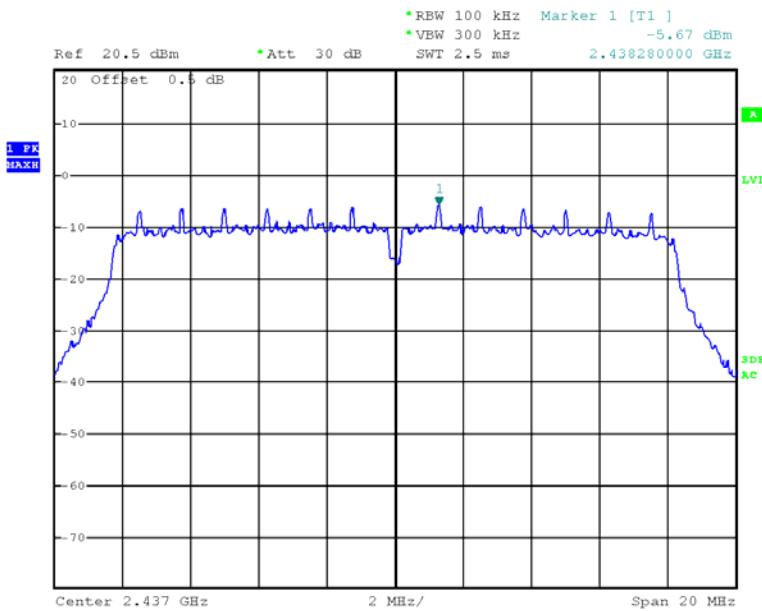
Date: 12.JUN.2012 17:54:48

Power Spectral Density, 802.11b High Channel

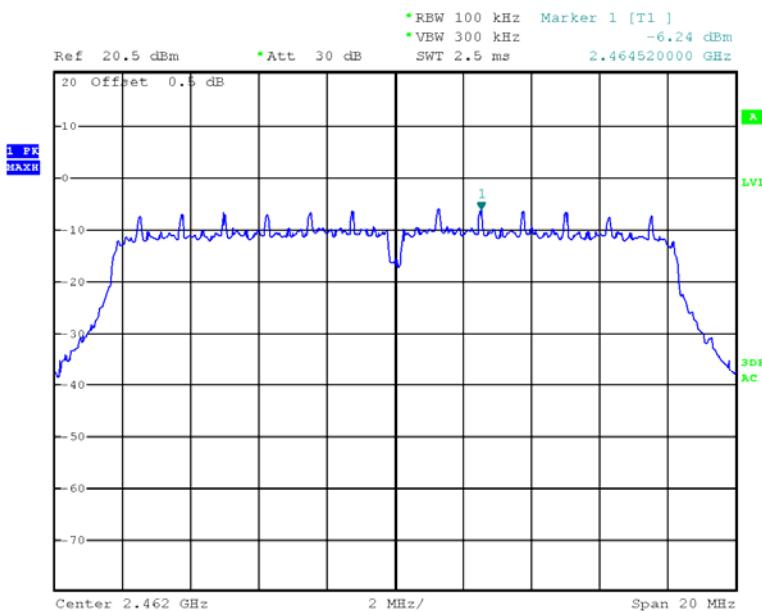
Date: 12.JUN.2012 18:04:10

Power Spectral Density, 802.11g Low Channel

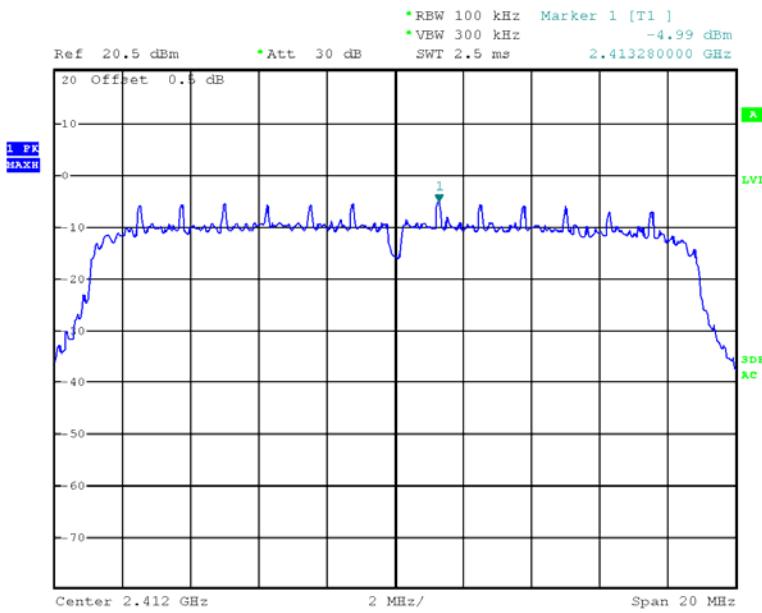
Date: 12.JUN.2012 19:15:33

Power Spectral Density, 802.11g Middle Channel

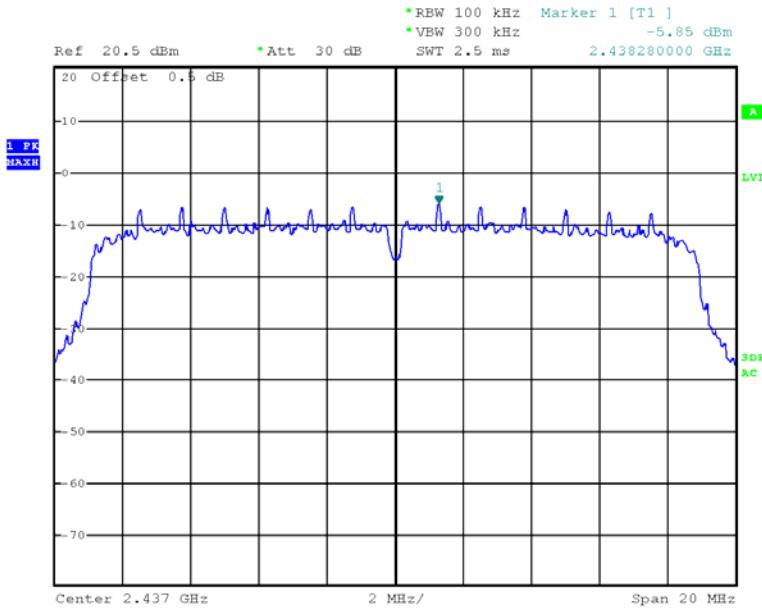
Date: 12.JUN.2012 19:18:06

Power Spectral Density, 802.11g High Channel

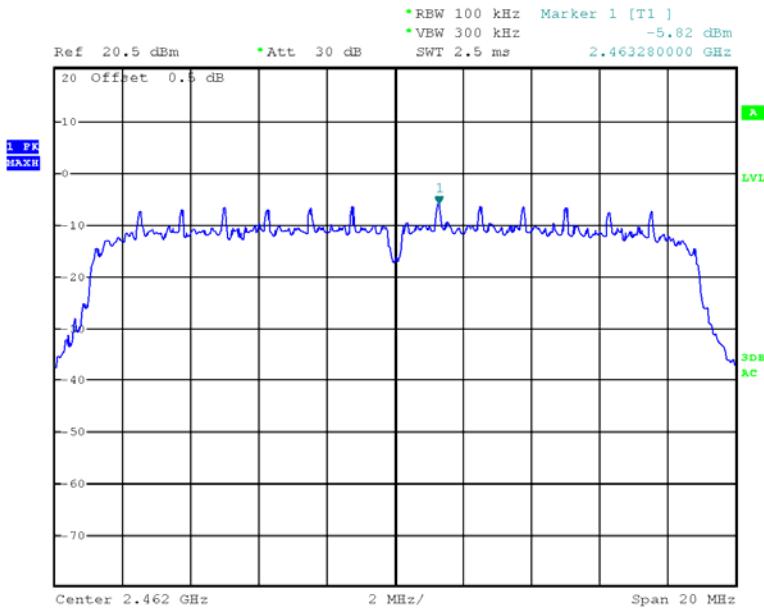
Date: 12.JUN.2012 19:19:30

Power Spectral Density, 802.11n20 Low Channel

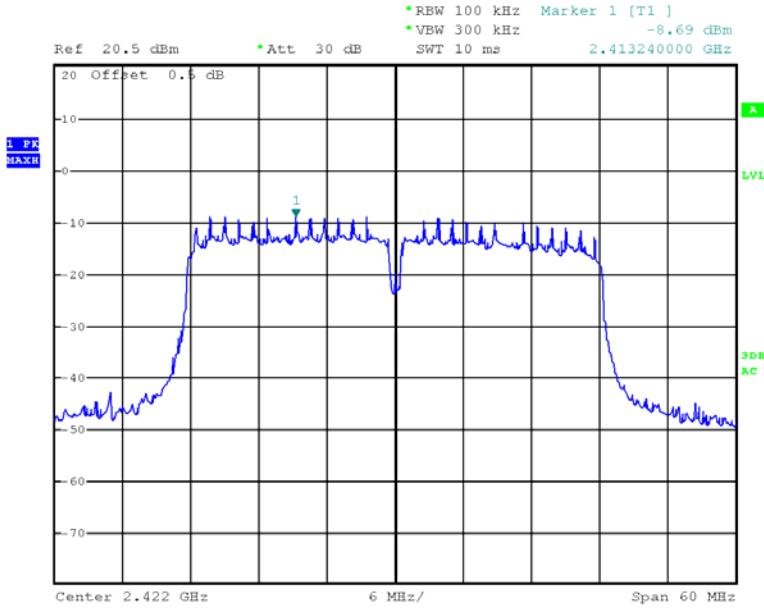
Date: 12.JUN.2012 19:22:55

Power Spectral Density, 802.11n20 Middle Channel

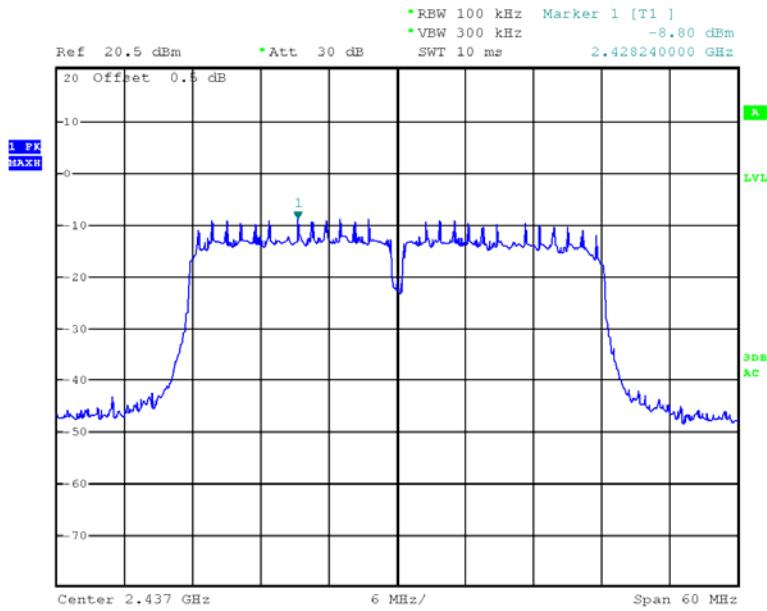
Date: 12.JUN.2012 19:26:18

Power Spectral Density, 802.11n20 High Channel

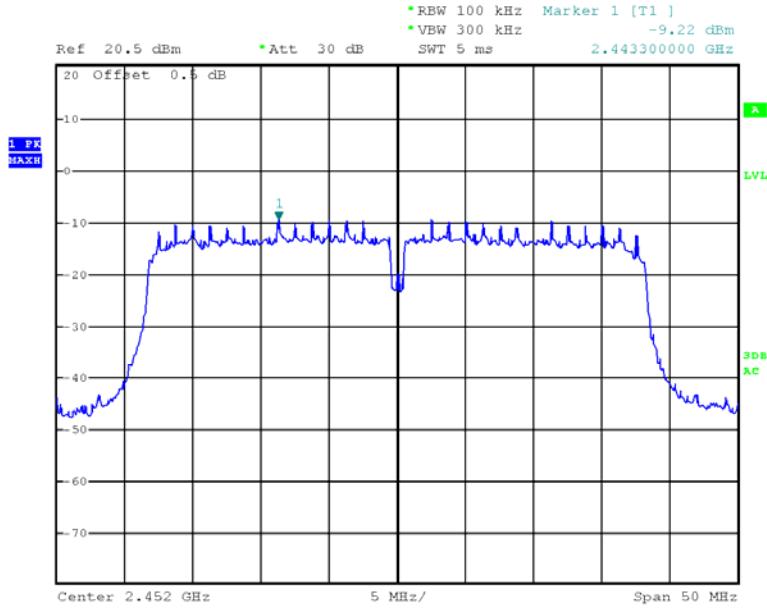
Date: 12.JUN.2012 19:27:27

Power Spectral Density, 802.11n40 Low Channel

Date: 12.JUN.2012 19:36:53

Power Spectral Density, 802.11n40 Middle Channel

Date: 12.JUN.2012 19:36:01

Power Spectral Density, 802.11n40 High Channel

Date: 12.JUN.2012 19:33:12

******* END OF REPORT *******