



FCC Radio Test Report

FCC ID: XP8DLM106

This report concerns (check one) : Original Grant Class I Change

Issued Date : Oct. 02, 2009
Project No. : R0909003A
Equipment : High Power IEEE 802.11bg miniPCI
Radio Module
Model Name : DLM106
Applicant : Doodle Labs LLP
Address : 745 Toapayoh Lorong 5, #04-01,
Singapore 319 455

Tested by:
Neutron Engineering Inc. EMC Laboratory
Date of Test:
Sep. 09, 2009 ~ Sep. 11, 2009

Testing Engineer : Rush Kao
(Rush Kao)
Technical Manager : Jeff Yang
(Jeff Yang)
Authorized Signatory : Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 MEASUREMENT INSTRUMENTS LIST	19
4.2.3 TEST PROCEDURE	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	21
4.2.8 TEST RESULTS - ABOVE 1000MHZ	23
4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS	47
5 . BANDWITH TEST	55
5.1 APPLIED PROCEDURES / LIMIT	55
5.1.1 MEASUREMENT INSTRUMENTS LIST	55
5.1.2 TEST PROCEDURE	55
5.1.3 DEVIATION FROM STANDARD	55
5.1.4 TEST SETUP	55
5.1.5 EUT OPERATION CONDITIONS	55
5.1.6 TEST RESULTS	56



Table of Contents	Page
6 . PEAK OUTPUT POWER TEST	60
6.1 APPLIED PROCEDURES / LIMIT	60
6.1.1 MEASUREMENT INSTRUMENTS LIST	60
6.1.2 TEST PROCEDURE	60
6.1.3 DEVIATION FROM STANDARD	60
6.1.4 TEST SETUP	60
6.1.5 EUT OPERATION CONDITIONS	60
6.1.6 TEST RESULTS	61
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	62
7.1 APPLIED PROCEDURES / LIMIT	62
7.1.1 MEASUREMENT INSTRUMENTS LIST	62
7.1.2 TEST PROCEDURE	62
7.1.3 DEVIATION FROM STANDARD	62
7.1.4 TEST SETUP	62
7.1.5 EUT OPERATION CONDITIONS	62
7.1.6 TEST RESULTS	63
8 . POWER SPECTRAL DENSITY TEST	67
8.1 APPLIED PROCEDURES / LIMIT	67
8.1.1 MEASUREMENT INSTRUMENTS LIST	67
8.1.2 TEST PROCEDURE	67
8.1.3 DEVIATION FROM STANDARD	67
8.1.4 TEST SETUP	67
8.1.5 EUT OPERATION CONDITIONS	67
8.1.6 TEST RESULTS	68
9 . RF EXPOSURE TEST	72
9.1 APPLIED PROCEDURES / LIMIT	72
9.1.1 MEASUREMENT INSTRUMENTS LIST	72
9.1.2 MPE CALCULATION METHOD	72
9.1.3 DEVIATION FROM STANDARD	73
9.1.4 TEST SETUP	73
9.1.5 EUT OPERATION CONDITIONS	73
9.1.6 TEST RESULTS - CHIP	74
10 . EUT TEST PHOTO	75



1. CERTIFICATION

Equipment : High Power IEEE 802.11bg miniPCI Radio Module
Brand Name : DOODLE LABS
Model Name : DLM106
Applicant : Doodle Labs LLP
Date of Test : Sep. 09, 2009 ~ Sep. 11, 2009
Standards : FCC Part15, Subpart C / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R0909003A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC			
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **CB08(FCC R.N.: 614388)** at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	2.86	
		30MHz ~ 200MHz	H	2.56	
		200MHz ~ 1,000MHz	V	2.88	
		200MHz ~ 1,000MHz	H	2.98	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	High Power IEEE 802.11bg miniPCI Radio Module
Brand Name	DOODLE LABS
Model Name	DLM106
OEM Brand/Model Name	N/A
Model Difference	N/A
Product Description	The EUT is a High Power IEEE 802.11bg miniPCI Radio Module.
	Operation Frequency: 2412~2462 MHz
	Modulation Type: 802.11b:CCK, DQPSK, DBPSK 802.11g:OFDM
	Bit Rate of Transmitter: 802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps
	Number Of Channel: 11CH .Please see Note 2.
	Antenna Designation: Please see Note 3.
	Antenna Gain(Peak): Please see Note 3.
	Output Power(Max): 802.11b: 18.21dBm (Max.) 802.11g: 29.23dBm (Max.)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Power Source	Supplied from miniPCI Slot.
Power Rating	N/A
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	Antenna: Please refer to the Note 3.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. CH 01 – CH 11 for 802.11b, 802.11g

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Dipole	UFL	2.0

4 The EUT incorporates SISO function. Physically, the EUT provides two completed transmitters and three receivers (1T1R)

Modulated type	TX Function
802.11b	1TX
802.11g	1TX



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	TX	RX	Description
Mode 1	v		802.11b/CH01, CH06, CH11
Mode 2	v		802.11g/CH01, CH06, CH11

For Conducted Test			
Final Test Mode	TX	RX	Description
Mode 1	v		802.11b/CH06


For Radiated Test < 1GHz			
Final Test Mode	TX	RX	Description
Mode 1	v		802.11b/CH06

For Radiated Test > 1GHz			
Final Test Mode	TX	RX	Description
Mode 1	v		802.11b/CH01, CH06, CH11
Mode 2	v		802.11g/CH01, CH06, CH11

For Antenna Port Conducted Measurement			
Final Test Mode	TX	RX	Description
Mode 1	v		802.11b/CH01, CH06, CH11
Mode 2	v		802.11g/CH01, CH06, CH11



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

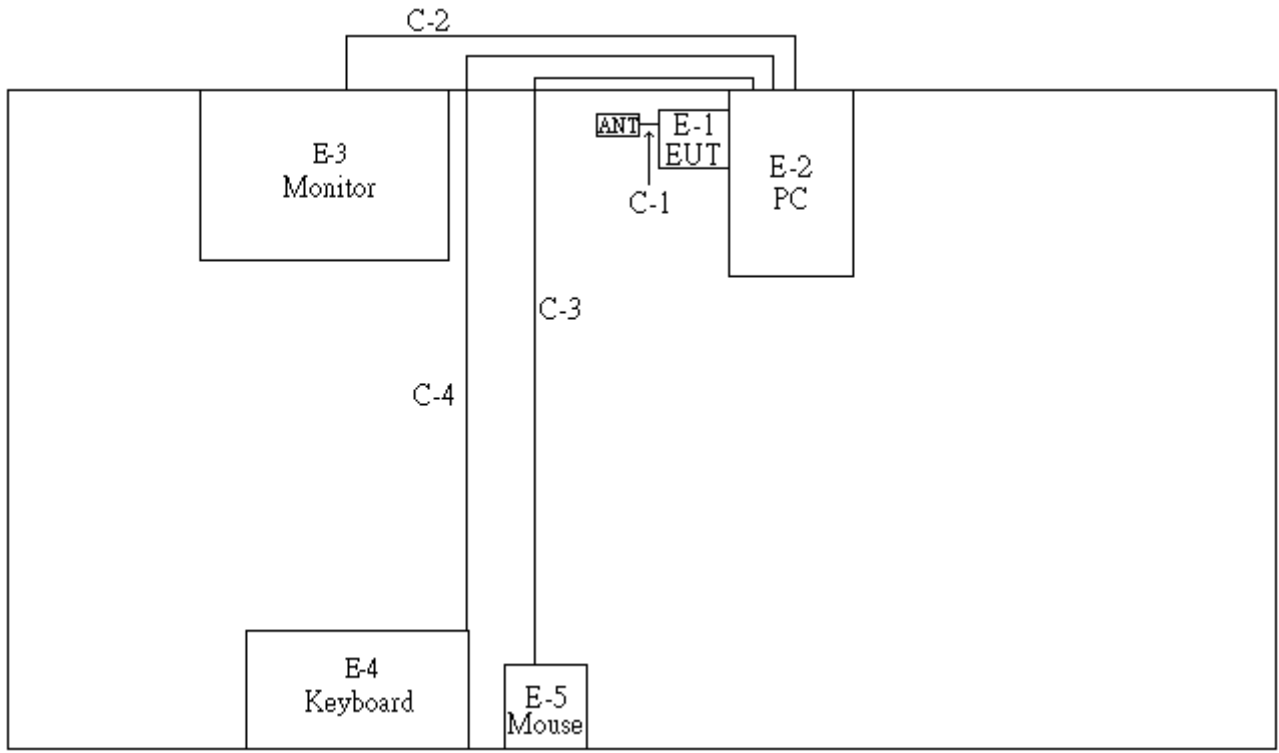



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	High Power IEEE 802.11bg miniPCI Radio Module	DOODLE LABS	DLM106	XP8DLM106	N/A	EUT
E-2	PC	DELL	DIMENSION2400	DOC	0Y09197082160FN	
E-3	19" LCD Monitor	ACER	X193HQ	DOC	92203073185	
E-4	USB K/B	DELL	SK-8115	DOC	ODJ3257161693R07EF	
E-5	Comfort Optical Mouse 3000	Microsoft	1043	DOC	7687300022052	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	0.1M	ANT cable
C-2	YES	YES	1.8M	Monitor VGA cable
C-3	YES	YES	1.7M	Mouse USB cable
C-4	YES	YES	2.0M	Keyboard USB cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Cable	N/A	SR03_C_01 &02	N/A	Aug. 18, 2010
2	LISN	EMCO	3816/2	00042991	Jan. 21, 2010
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Dec. 28, 2009
4	50Ω BNC TYPE Terminator	N/A	N/A	01	May 25, 2011
5	EMI Test Receiver	R&S	ESCI	100082	Mar. 17, 2010
6	LISN	EMCO	4825/2	00028234	Jul. 13, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

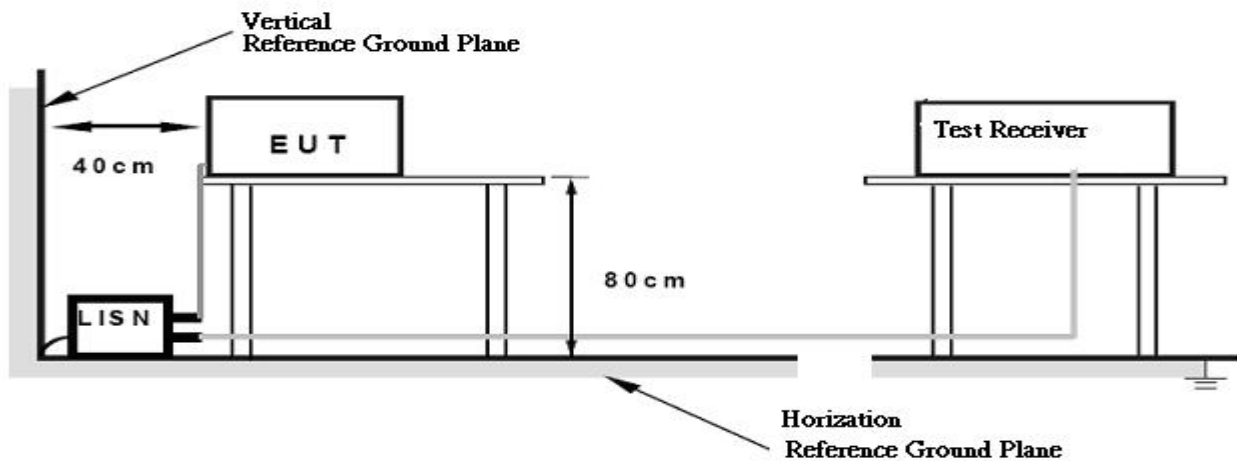



4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




4.1.7 TEST RESULTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	55%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.18	Line	50.83	*	64.71	54.71	-13.88	(QP)
0.23	Line	37.67	*	62.41	52.41	-24.74	(QP)
0.58	Line	34.71	*	56.00	46.00	-21.29	(QP)
1.09	Line	35.59	*	56.00	46.00	-20.41	(QP)
16.30	Line	40.86	*	60.00	50.00	-19.14	(QP)
18.35	Line	38.12	*	60.00	50.00	-21.88	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz ◦ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz ◦
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a " * " marked in AVG Mode column of Interference Voltage Measured ◦
- (3) Measuring frequency range from 150KHz to 30MHz ◦

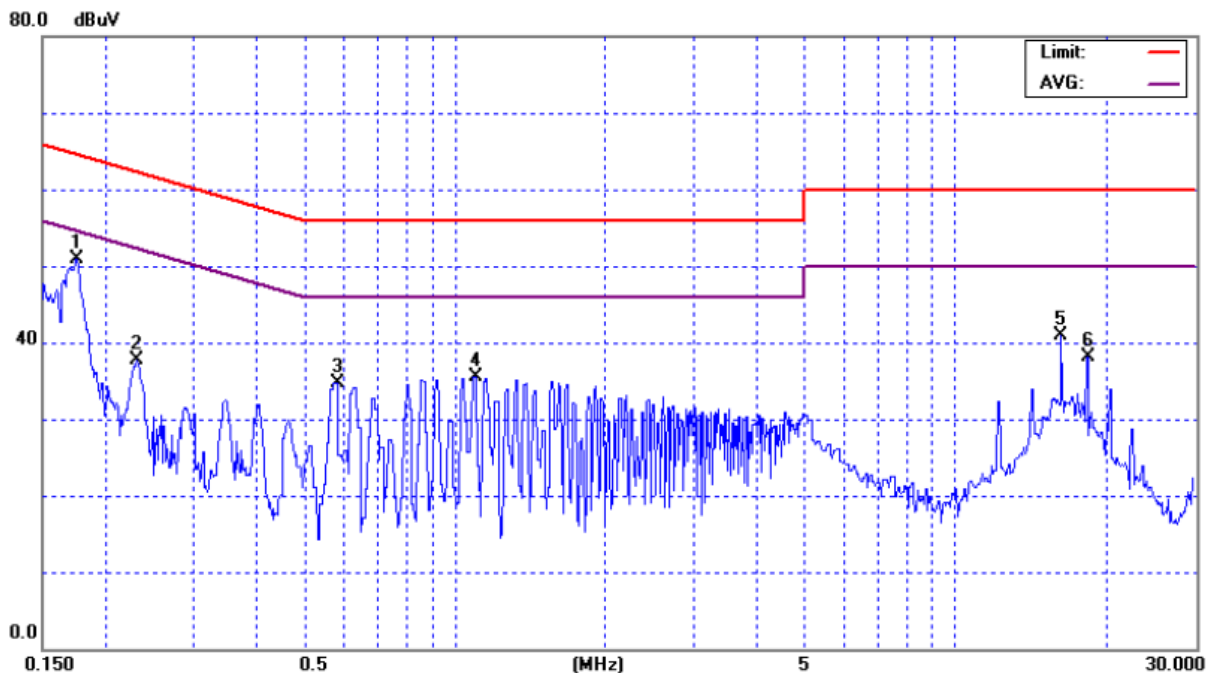




EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	55%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.17	Neutral	47.51	*	64.74	54.74	-17.23	(QP)
0.64	Neutral	35.17	*	56.00	46.00	-20.83	(QP)
0.87	Neutral	35.69	*	56.00	46.00	-20.31	(QP)
1.16	Neutral	35.62	*	56.00	46.00	-20.38	(QP)
12.20	Neutral	34.75	*	60.00	50.00	-25.25	(QP)
16.30	Neutral	41.50	*	60.00	50.00	-18.50	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz ◦ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz ◦
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a " * " marked in AVG Mode column of Interference Voltage Measured ◦
- (3) Measuring frequency range from 150KHz to 30MHz ◦

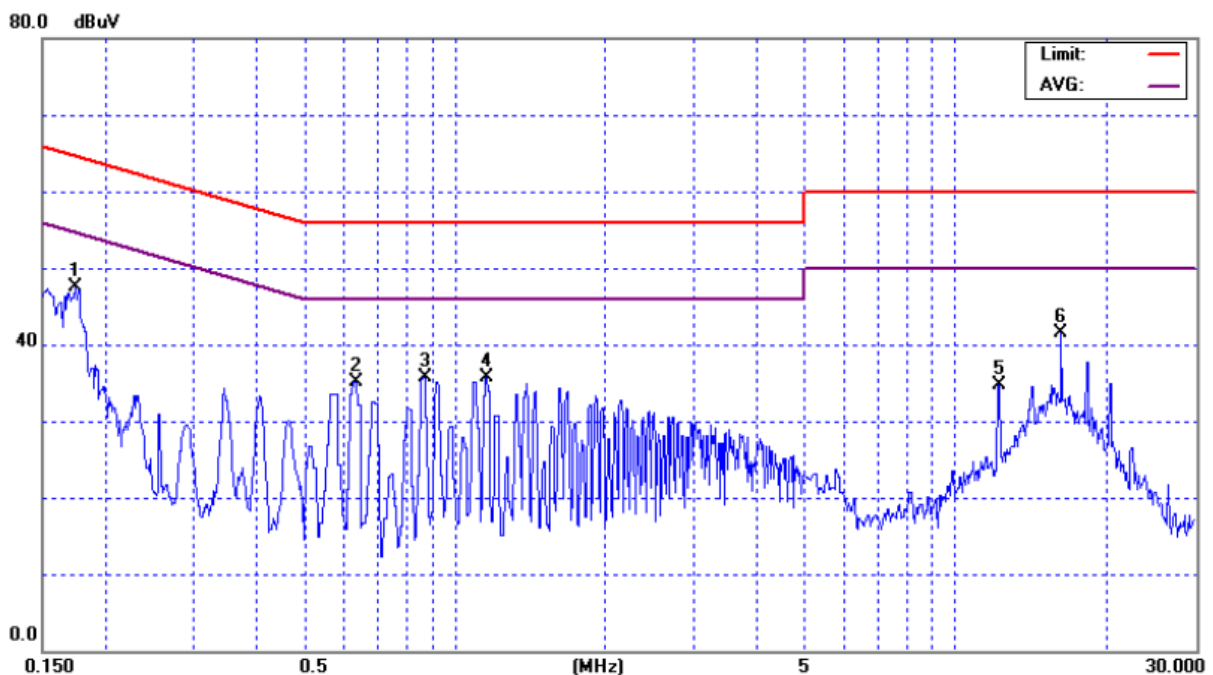



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LogBicon Ant	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2010
2	Test Cable	N/A	966_12M	1(12M)	Jun. 18, 2010
3	Test Cable	N/A	966_3M	1(10M)	Jun. 18, 2010
4	Pre-Amplifier	EMC	EMC-330	980001	Jun. 04, 2010
5	Spectrum Analyzer	R&S	FSP30	100854	Apr. 16, 2010
6	EMI Measuring Receiver	SHCAFFNER	SCR 3501	408	Nov. 24.2009
7	Spectrum Analyzer	R&S	FSP-30	100854	Apr. 16, 2010
8	Horn Ant	Schwarzbeck	BBHA-9120	D-546	Jun. 17, 2010
9	Pre-Amplifier	Agilent	8449B	3008A01714	Apr. 20, 2010
10	Microflex Cable	N/A	1M	N/A	May. 20, 2010
11	Microflex Cable	AISI	S104-SMAP-1	S104-SMAP-1	Aug. 23, 2010
12	Microflex Cable	N/A	3M	3M	Aug. 23, 2010

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

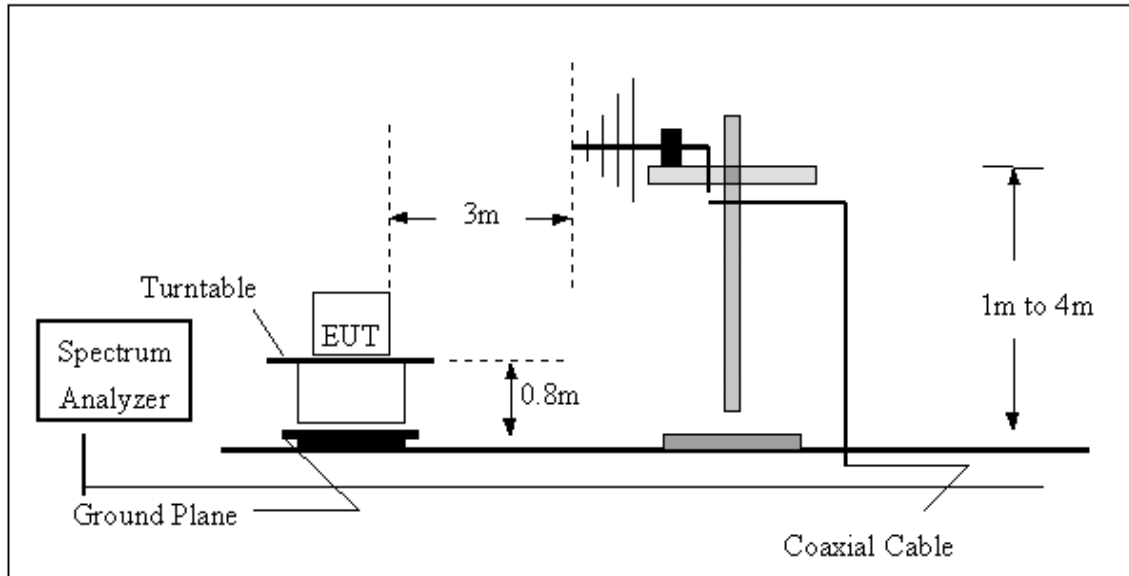

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

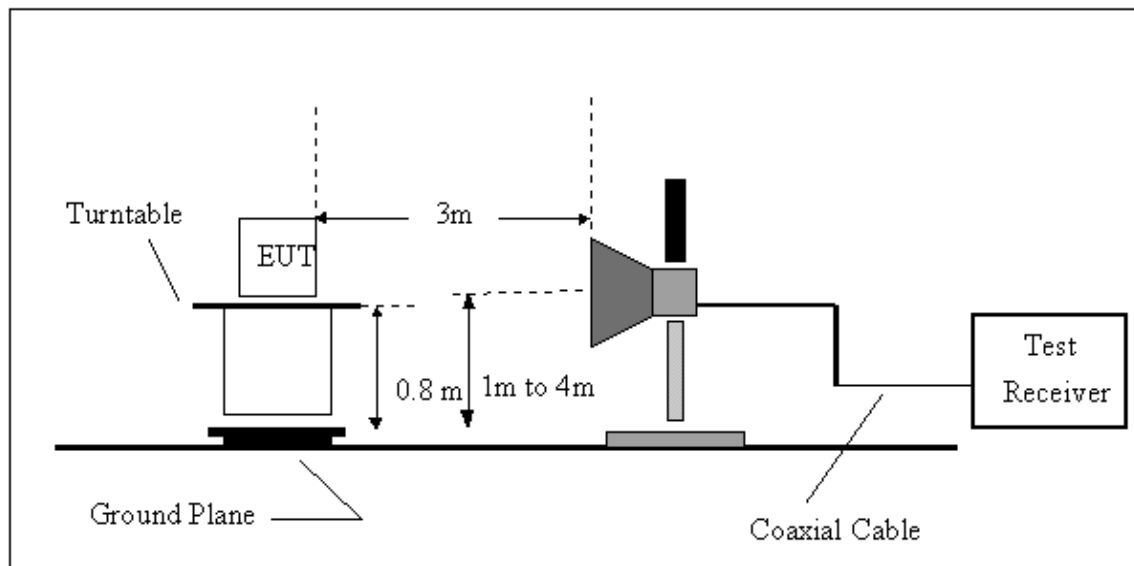

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 ° C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
119.24	V	62.58	-20.70	41.88	43.50	- 1.62	(QP)
144.46	V	50.66	-18.81	31.85	43.50	- 11.65	(QP)
249.22	V	46.88	-20.81	26.07	46.00	- 19.93	(QP)
359.80	V	51.18	-18.01	33.17	46.00	- 12.83	(QP)
720.64	V	42.01	-10.72	31.29	46.00	- 14.71	(QP)
912.70	V	42.16	-8.43	33.73	46.00	- 12.27	(QP)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.






EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
119.24	H	56.41	-20.70	35.71	43.50	- 7.79	(QP)
144.46	H	53.08	-18.81	34.27	43.50	- 9.23	(QP)
216.24	H	48.33	-22.00	26.33	46.00	- 19.67	(QP)
249.22	H	56.86	-20.81	36.05	46.00	- 9.95	(QP)
375.32	H	53.90	-17.65	36.25	46.00	- 9.75	(QP)
912.70	H	43.34	-8.43	34.91	46.00	- 11.09	(QP)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

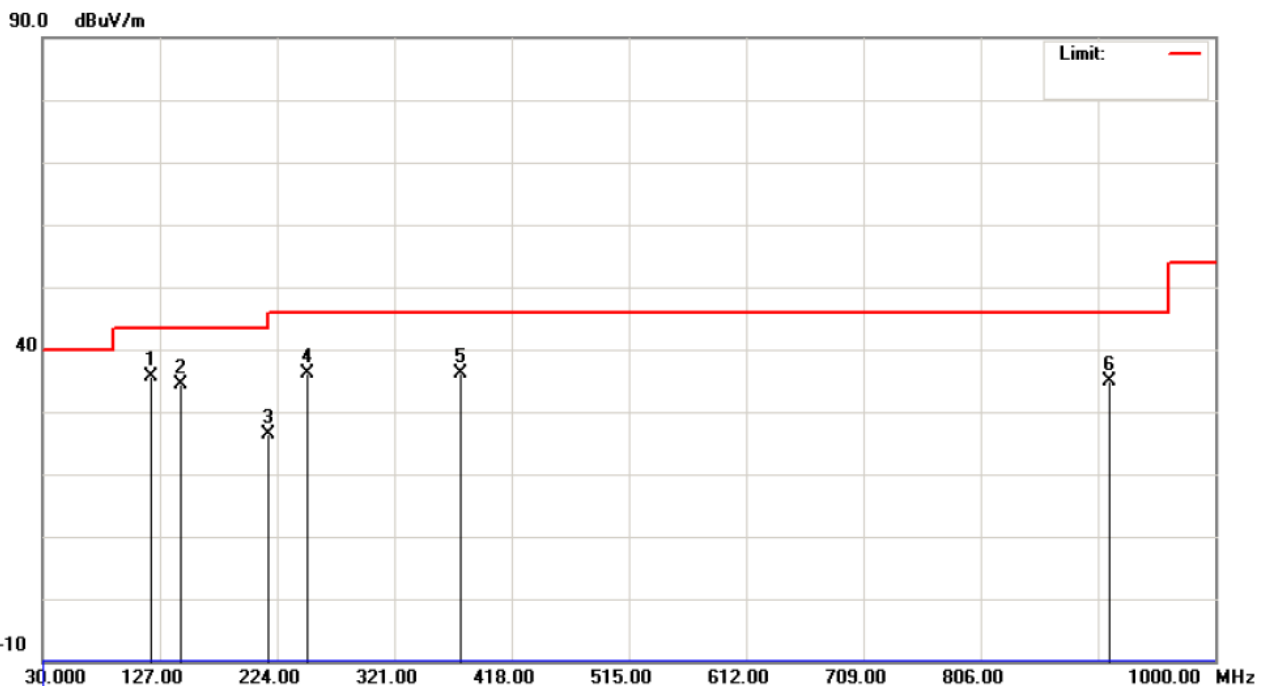



4.2.8 TEST RESULTS - ABOVE 1000MHZ

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25° C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2385.20	V	29.71	22.48	31.91	61.62	54.39	74.00	54.00	X/H
2413.00	V	75.20	71.58	32.02	107.22	103.60			X/F
4824.00	V	51.59	48.36	3.75	55.34	52.11	74.00	54.00	X/H
7234.40	V	45.66	34.91	9.02	54.68	43.93	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH01 (Above 1000 MHz, Vertical)

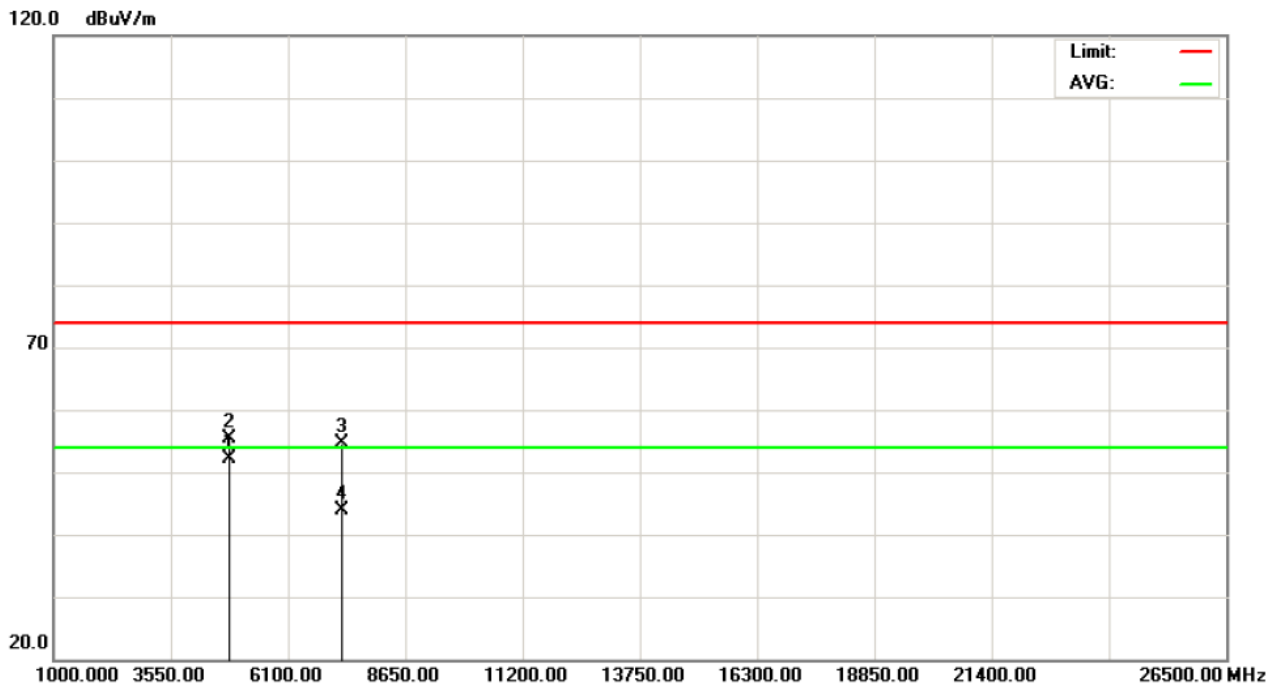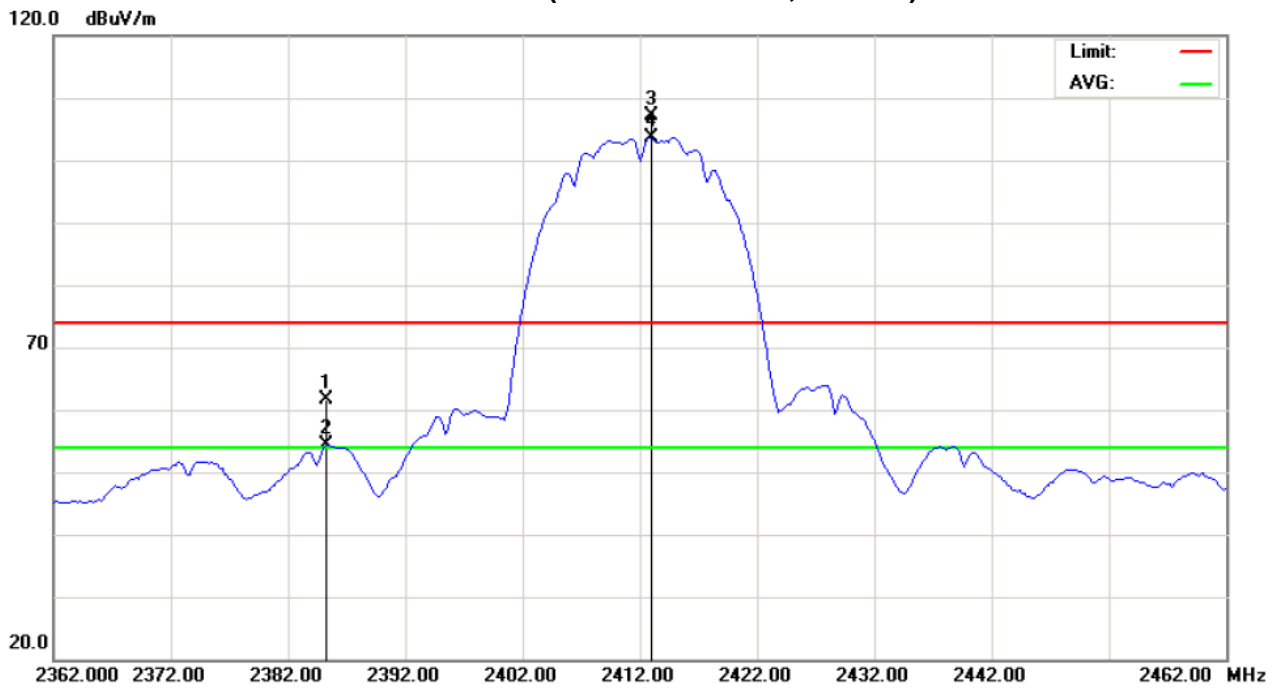



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2385.80	H	23.10	14.79	31.91	55.01	46.70	74.00	54.00	X/H
2414.80	H	66.12	62.48	32.02	98.14	94.50			X/F
4823.98	H	47.27	41.72	3.75	51.02	45.47	74.00	54.00	X/H
7237.40	H	45.13	33.49	9.02	54.15	42.51	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH01 (Above 1000 MHz, Horizontal)

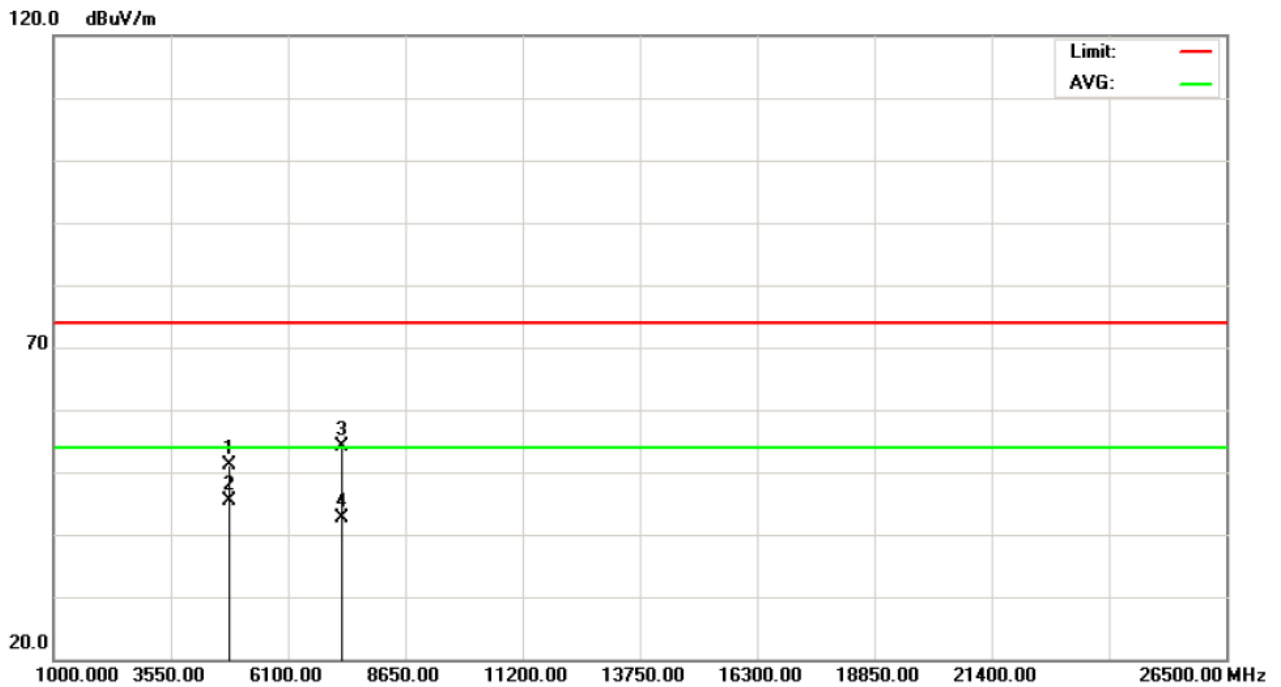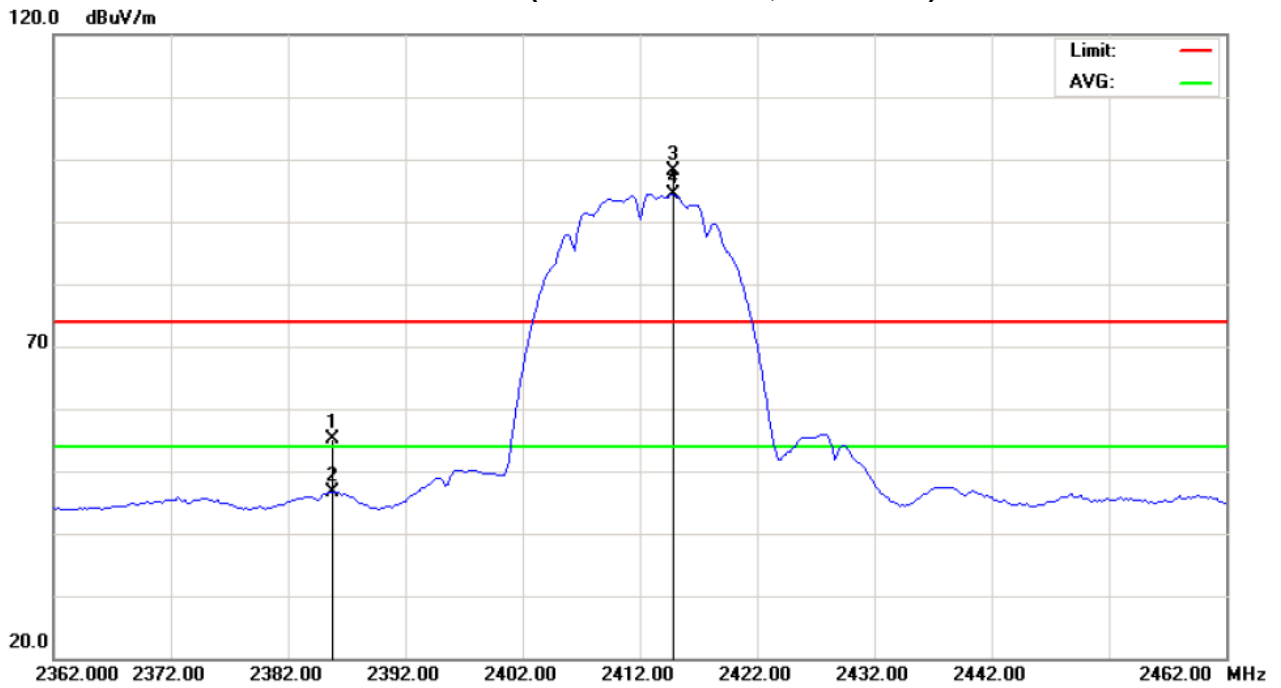



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2434.40	V	72.46	69.55	32.10	104.56	101.65			X/F
4874.01	V	51.09	47.65	3.90	54.99	51.55	74.00	54.00	X/H
7312.72	V	44.51	32.65	9.15	53.66	41.80	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Vertical)

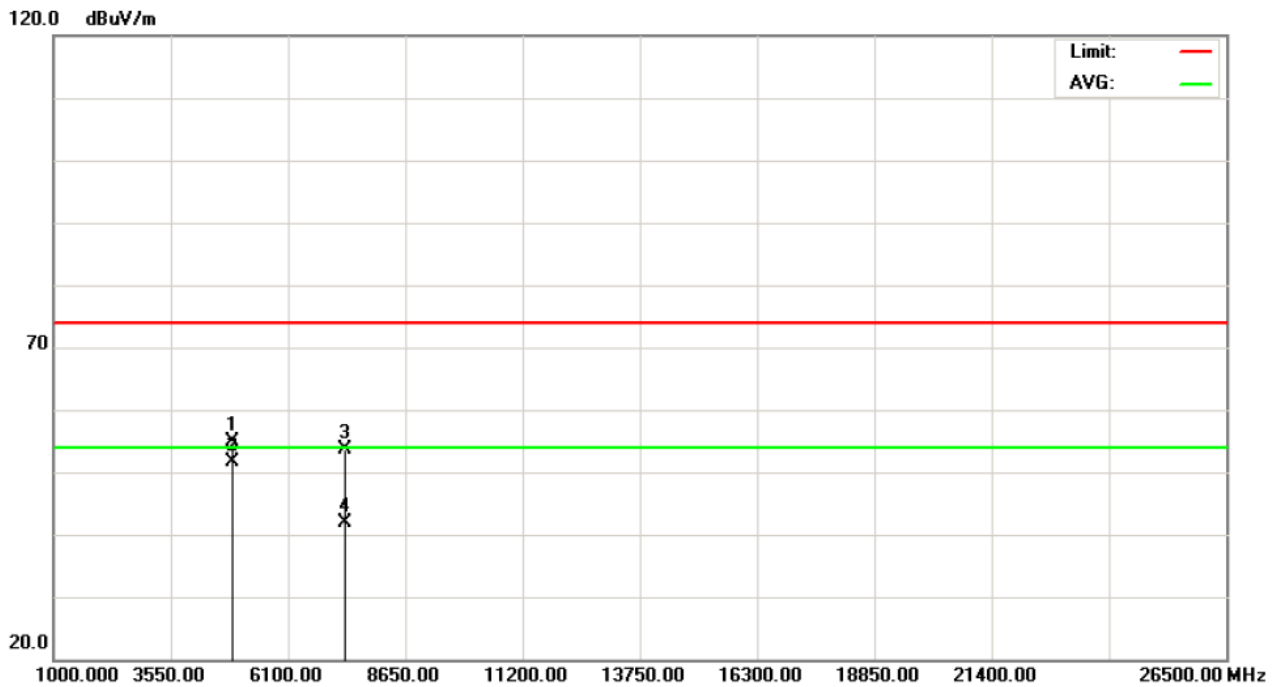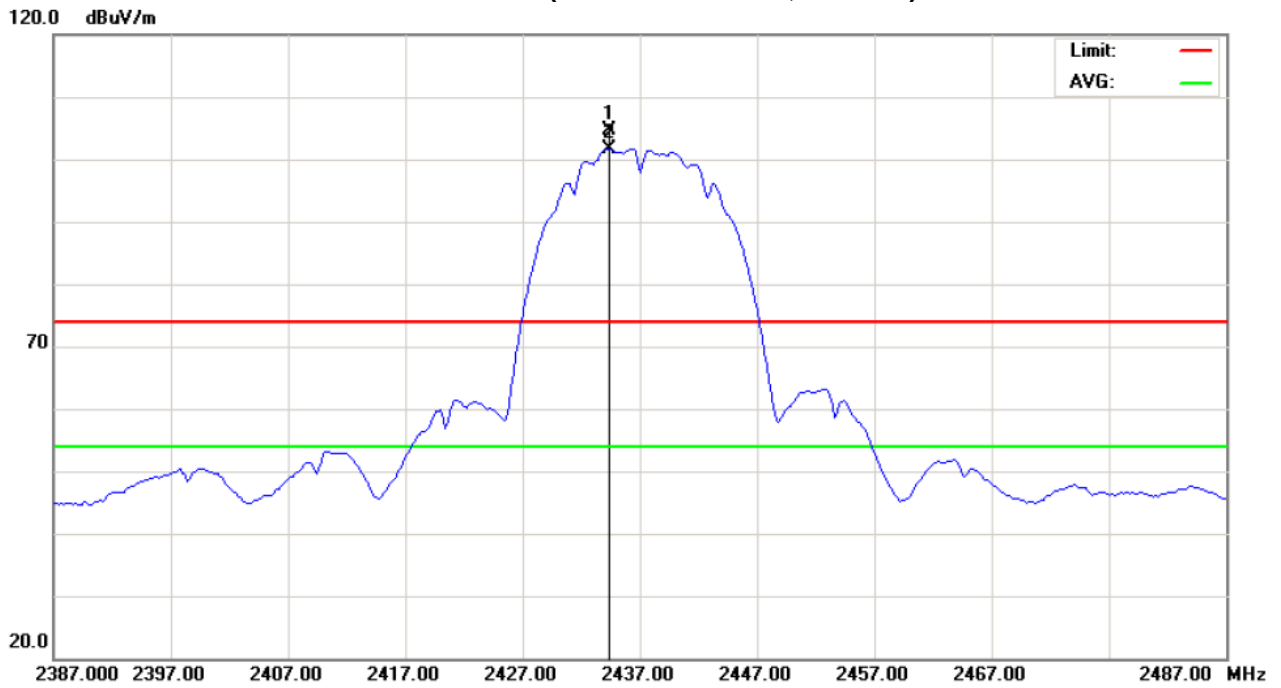



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2436.40	H	65.54	61.80	32.11	97.65	93.91			X/F
4873.94	H	48.69	41.36	3.90	52.59	45.26	74.00	54.00	X/H
7310.76	H	43.87	30.96	9.14	53.01	40.10	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Horizontal)

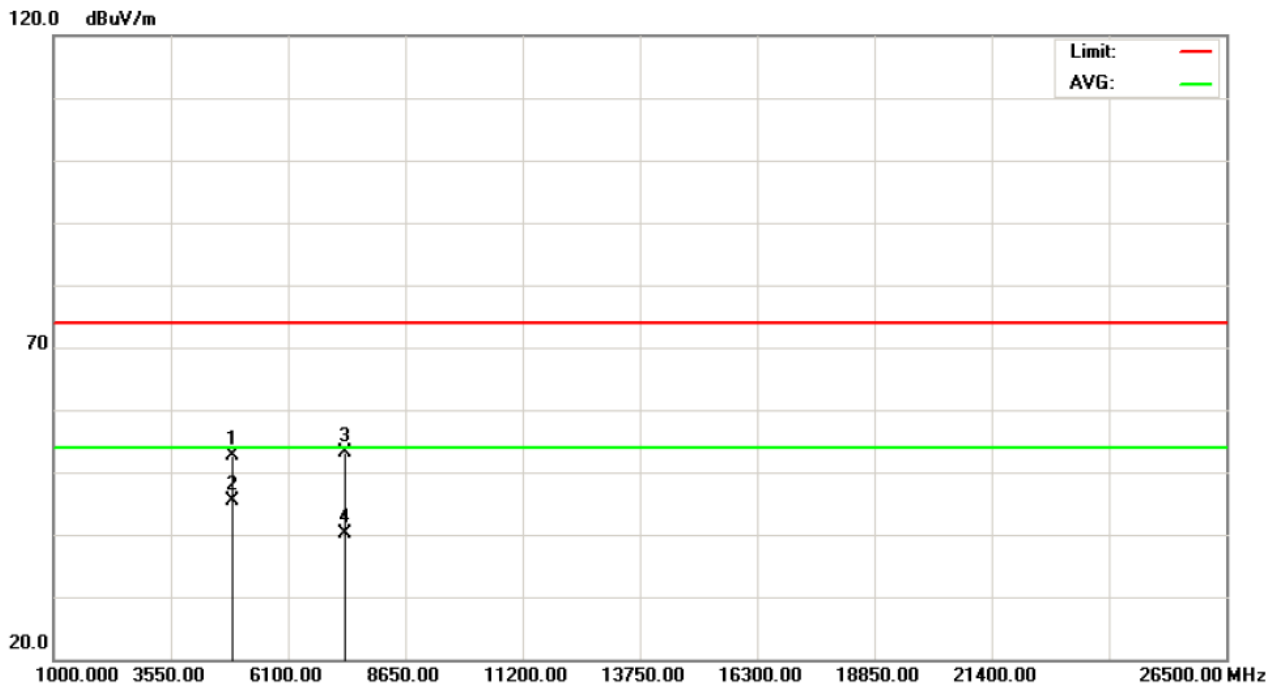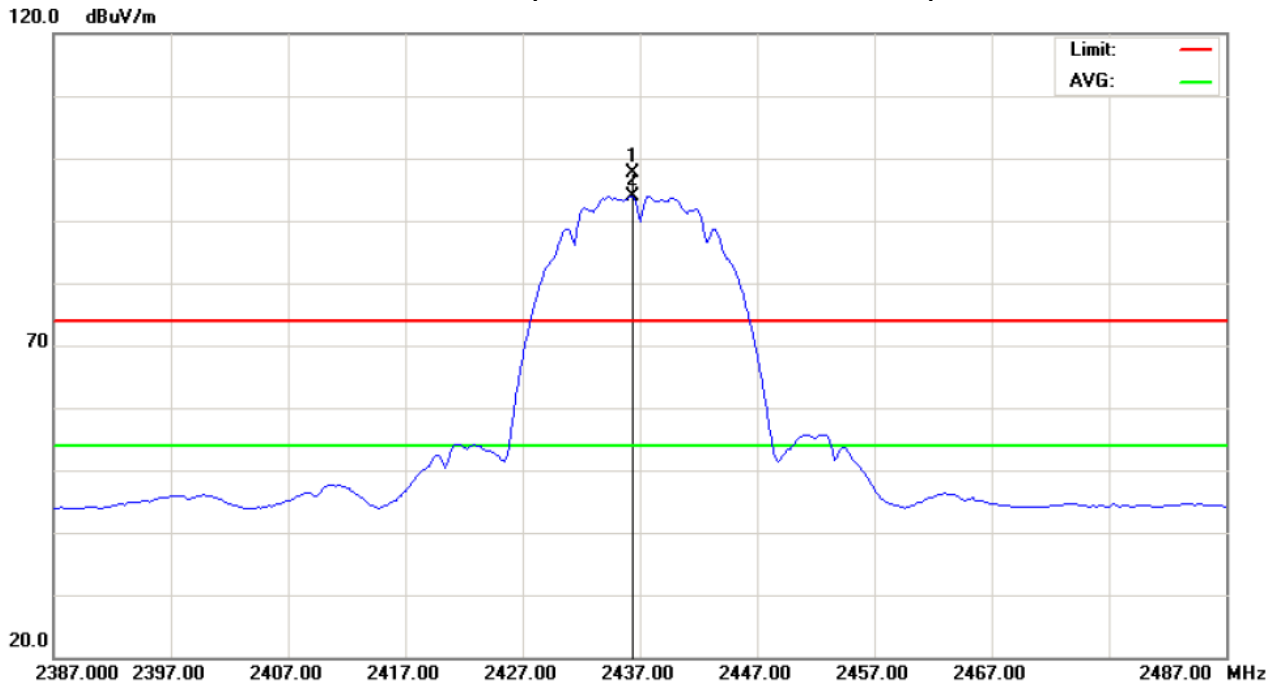



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH11		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2462.80	V	71.57	67.87	32.21	103.78	100.08			X/F
2488.10	V	25.65	17.31	32.30	57.95	49.61	74.00	54.00	X/H
4923.96	V	51.11	48.11	4.06	55.17	52.17	74.00	54.00	X/H
7387.08	V	44.79	33.73	9.27	54.06	43.00	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11 (Above 1000 MHz, Vertical)

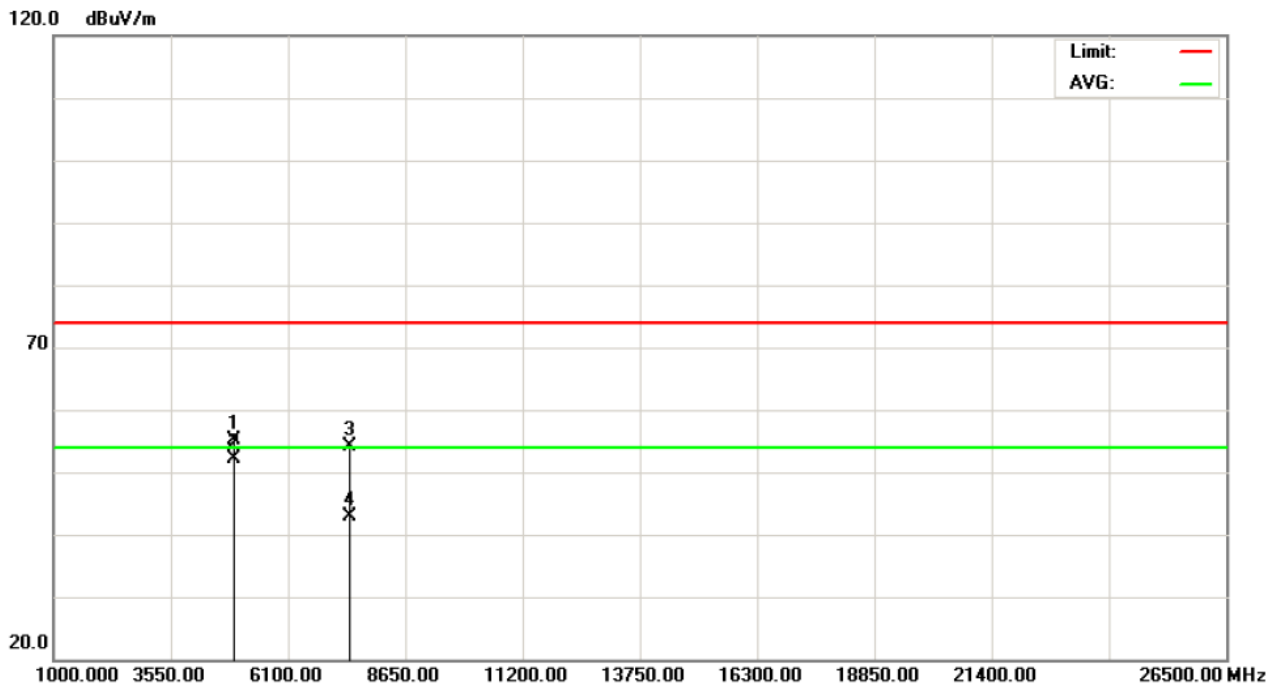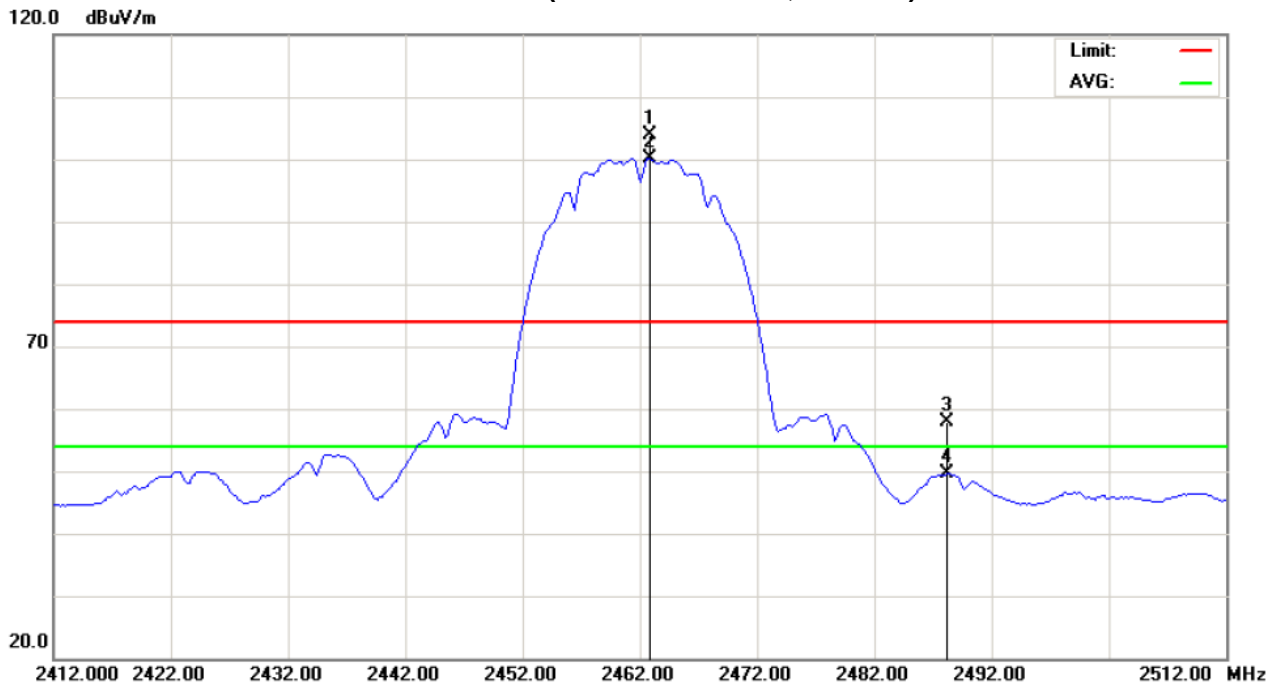



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH11		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2462.80	H	62.53	58.77	32.21	94.74	90.98			X/F
2487.50	H	22.13	13.78	32.30	54.43	46.08	74.00	54.00	X/H
4924.03	H	46.65	40.49	4.06	50.71	44.55	74.00	54.00	X/H
7385.52	H	45.51	32.81	9.26	54.77	42.07	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11 (Above 1000 MHz, Horizontal)

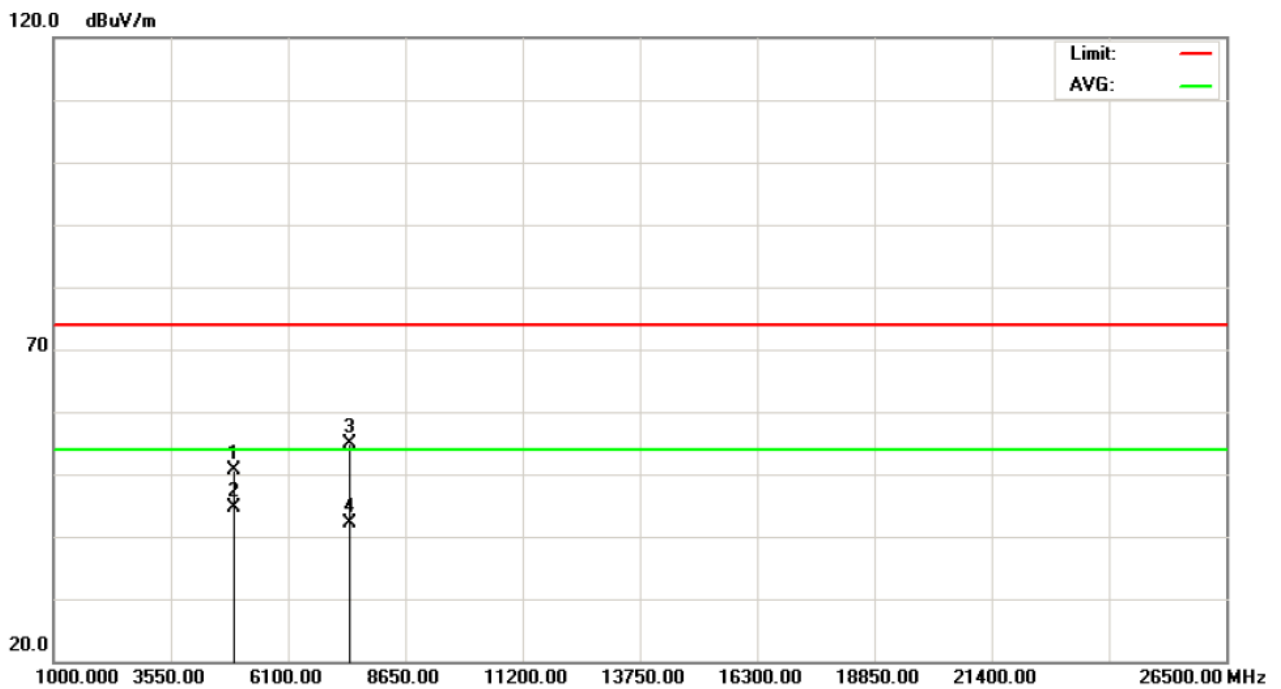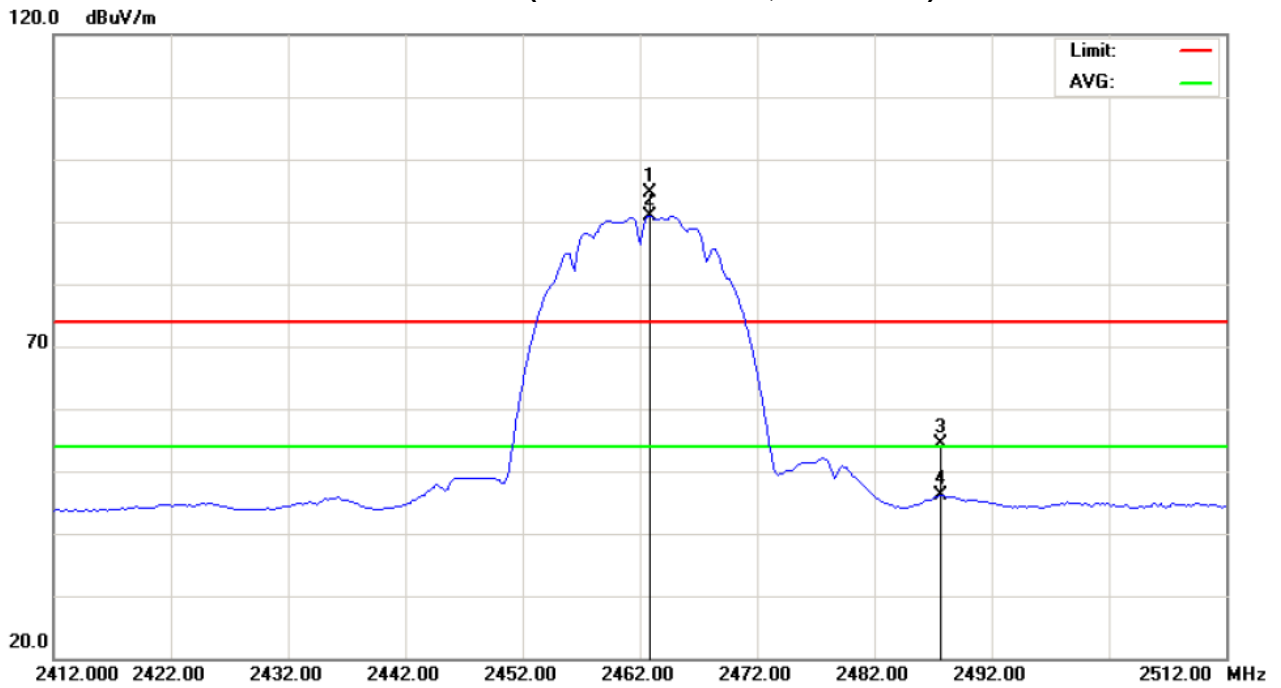



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25° C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	38.59	19.59	31.93	70.52	51.52	74.00	54.00	X/H
2414.00	V	75.59	66.38	32.02	107.61	98.40			X/F
4824.70	V	49.02	37.09	3.75	52.77	40.84	74.00	54.00	X/H
7236.20	V	44.86	33.55	9.02	53.88	42.57	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01 (Above 1000 MHz, Vertical)

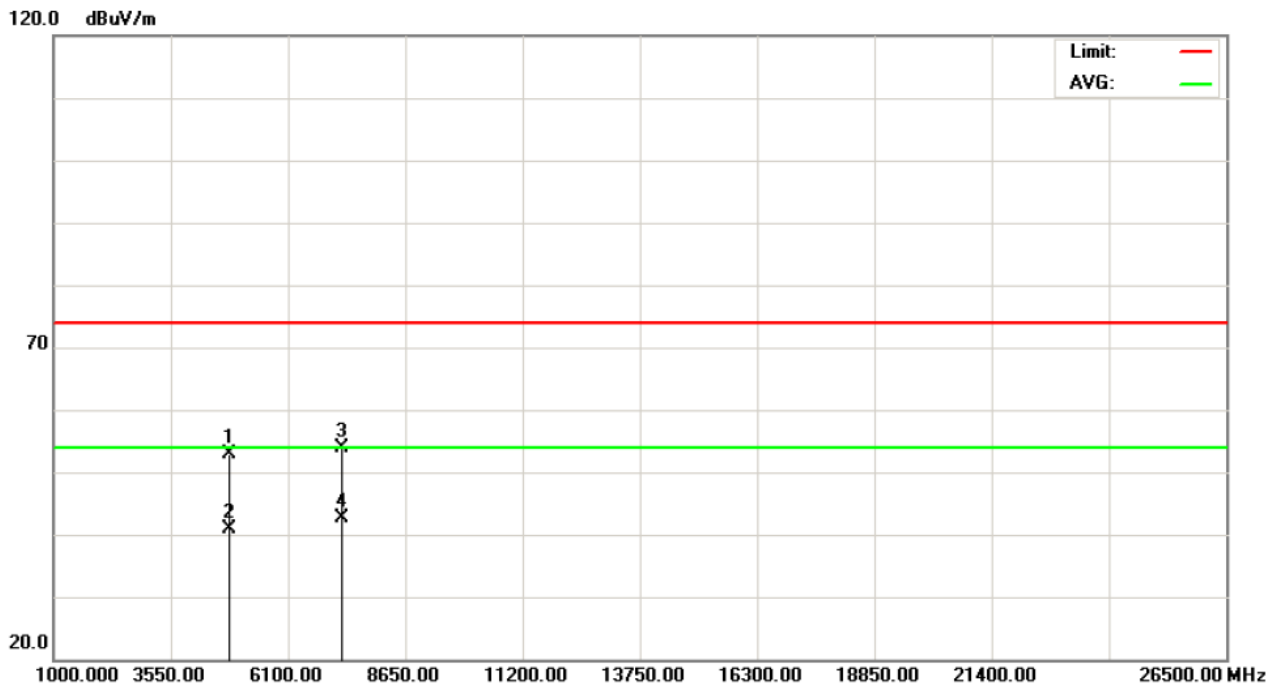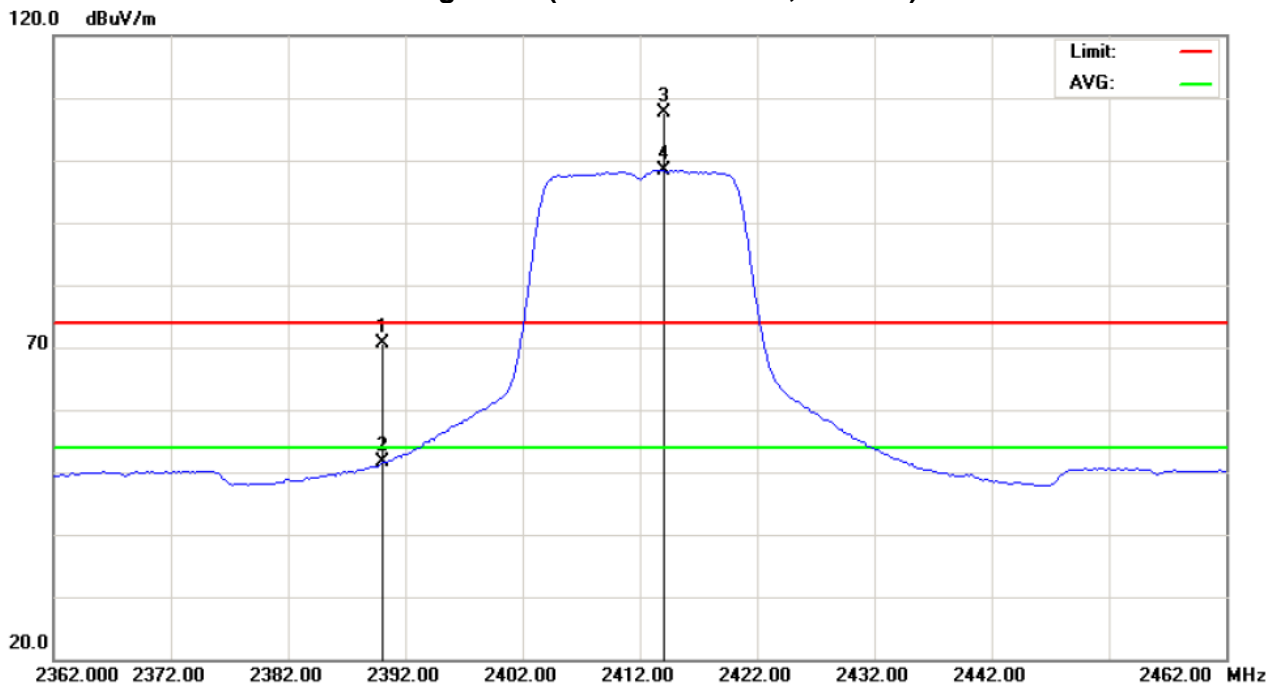



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	31.99	14.79	31.93	63.92	46.72	74.00	54.00	X/H
2410.40	H	67.97	59.27	32.01	99.98	91.28			X/F
4823.91	H	43.77	32.15	3.75	47.52	35.90	74.00	54.00	X/H
235.96	H	44.12	31.85	9.02	53.14	40.87	66.00	46.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01 (Above 1000 MHz, Horizontal)

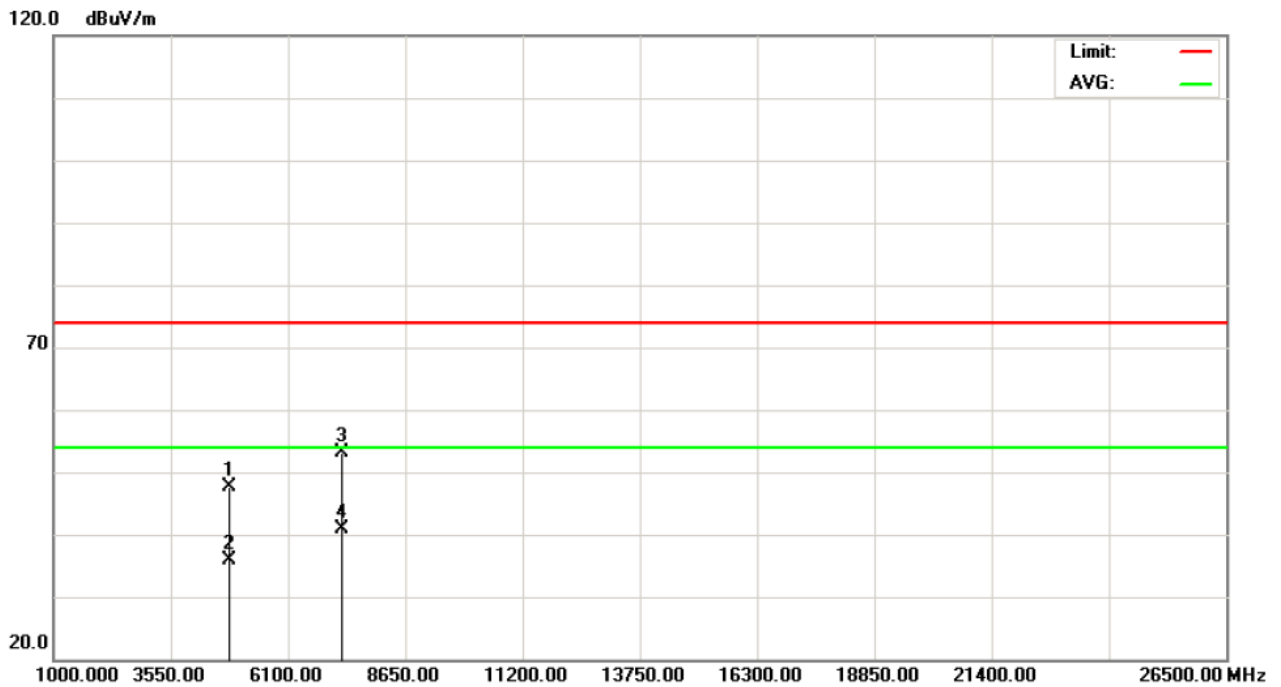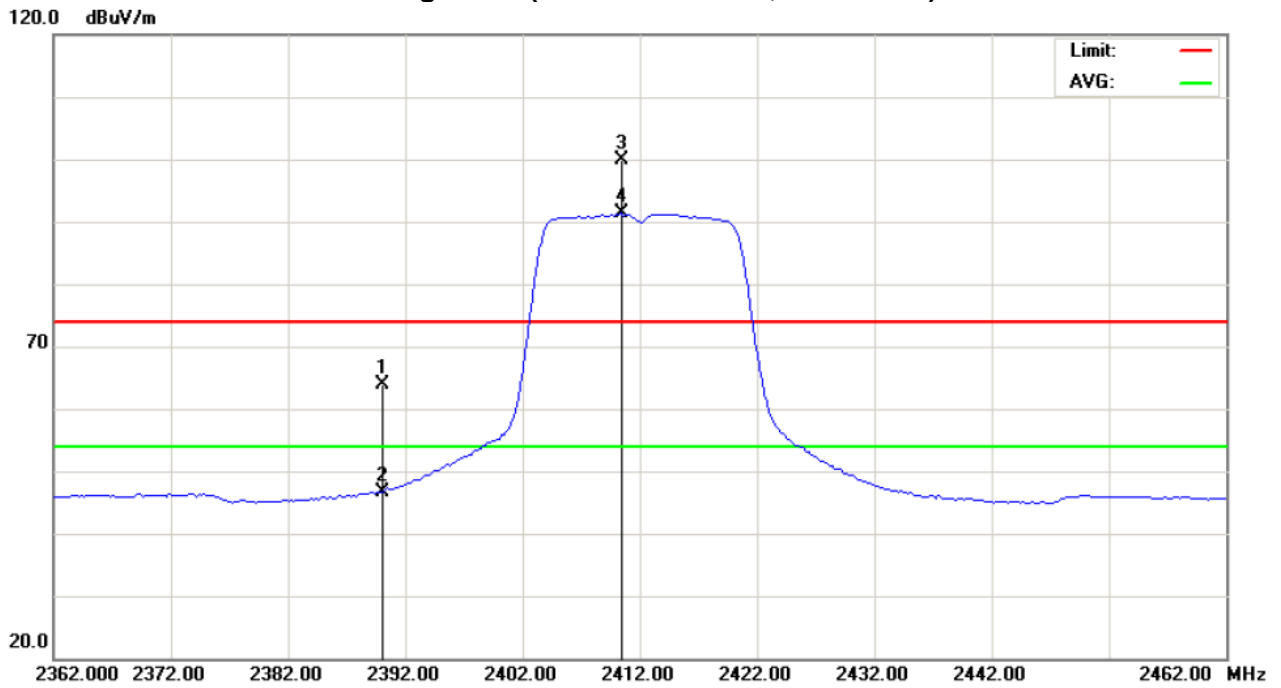



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	37.32	21.77	31.93	69.25	53.70			X/F
2434.00	V	80.89	70.35	32.10	112.99	102.45	74.00	54.00	X/H
2483.50	V	34.95	19.52	32.29	67.24	51.81	74.00	54.00	X/H
4873.80	V	58.01	45.11	3.90	61.91	49.01	74.00	54.00	X/H
7310.50	V	50.02	37.59	9.14	59.16	46.73	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06 (Above 1000 MHz, Vertical)

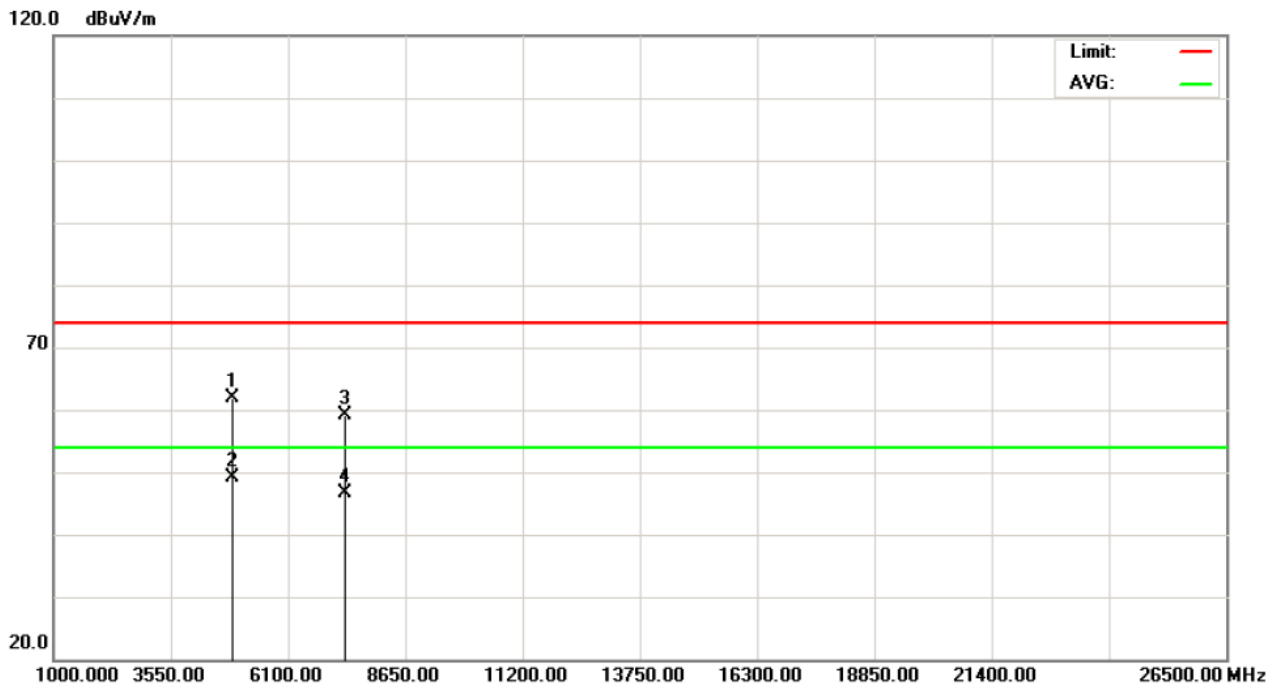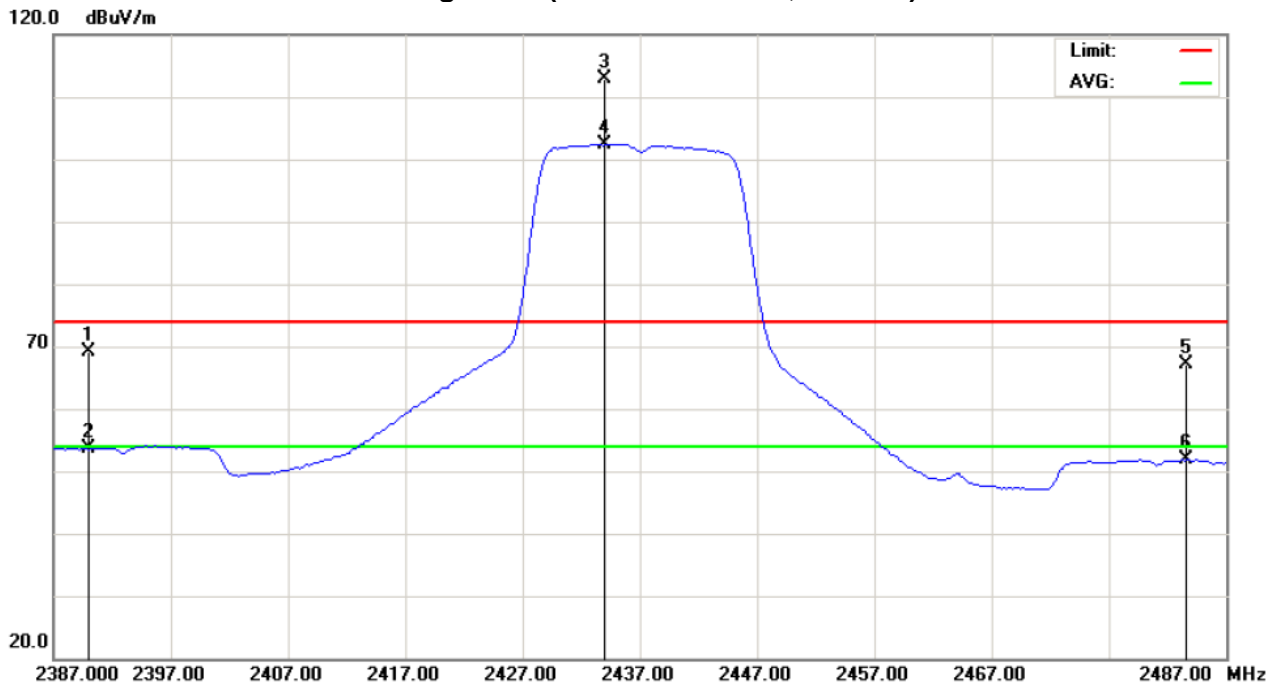



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH06		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	25.45	15.57	31.93	57.38	47.50			X/F
2433.80	H	70.80	61.40	32.10	102.90	93.50	74.00	54.00	X/H
2483.50	H	24.79	14.13	32.29	57.08	46.42	74.00	54.00	X/H
4874.80	H	50.90	38.15	3.91	54.81	42.06	74.00	54.00	X/H
7310.20	H	46.13	33.28	9.14	55.27	42.42	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06 (Above 1000 MHz, Horizontal)

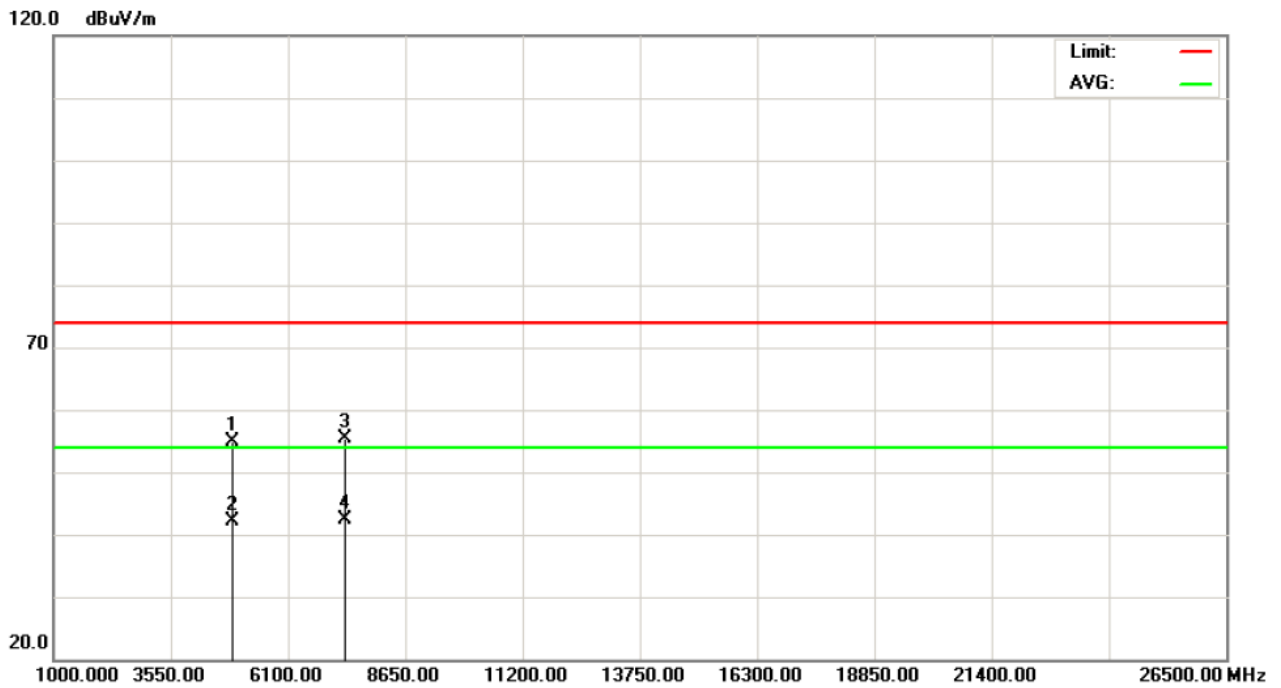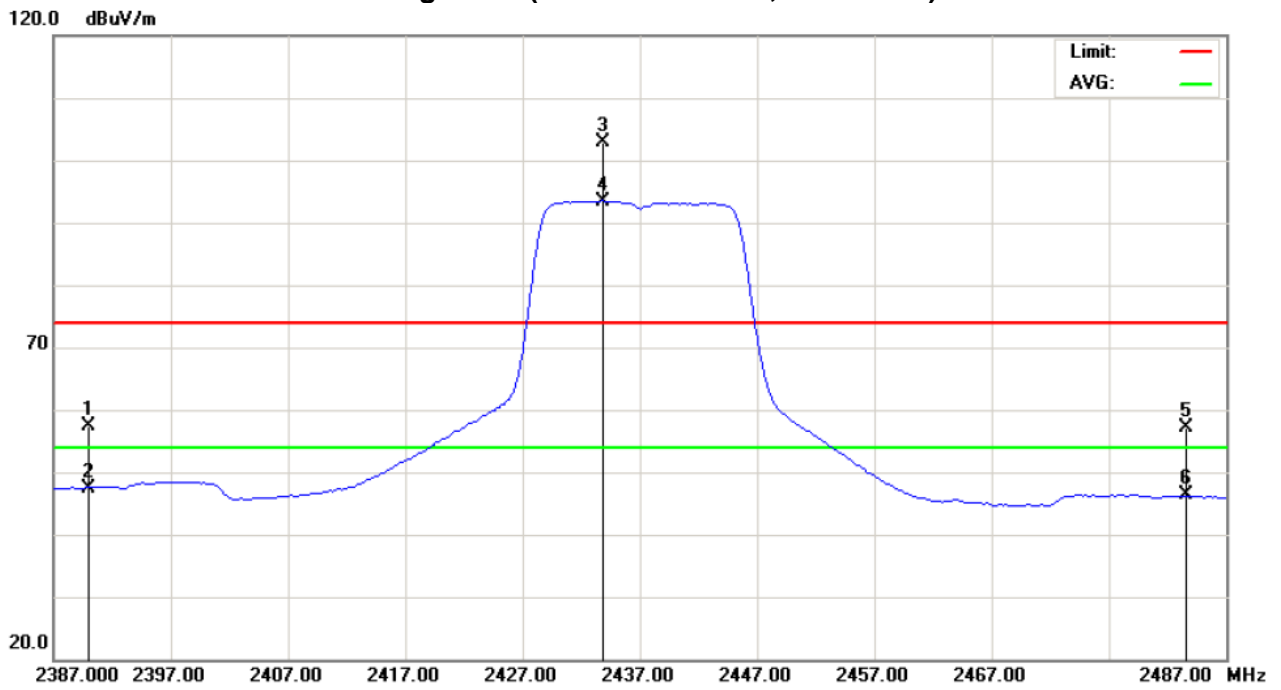



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH11		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2463.80	V	77.21	68.32	32.21	109.42	100.53			X/F
2483.50	V	39.56	19.22	32.29	71.85	51.51	74.00	54.00	X/H
4923.60	V	53.00	40.27	4.06	57.06	44.33	74.00	54.00	X/H
7386.10	V	48.63	36.70	9.27	57.90	45.97	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11 (Above 1000 MHz, Vertical)

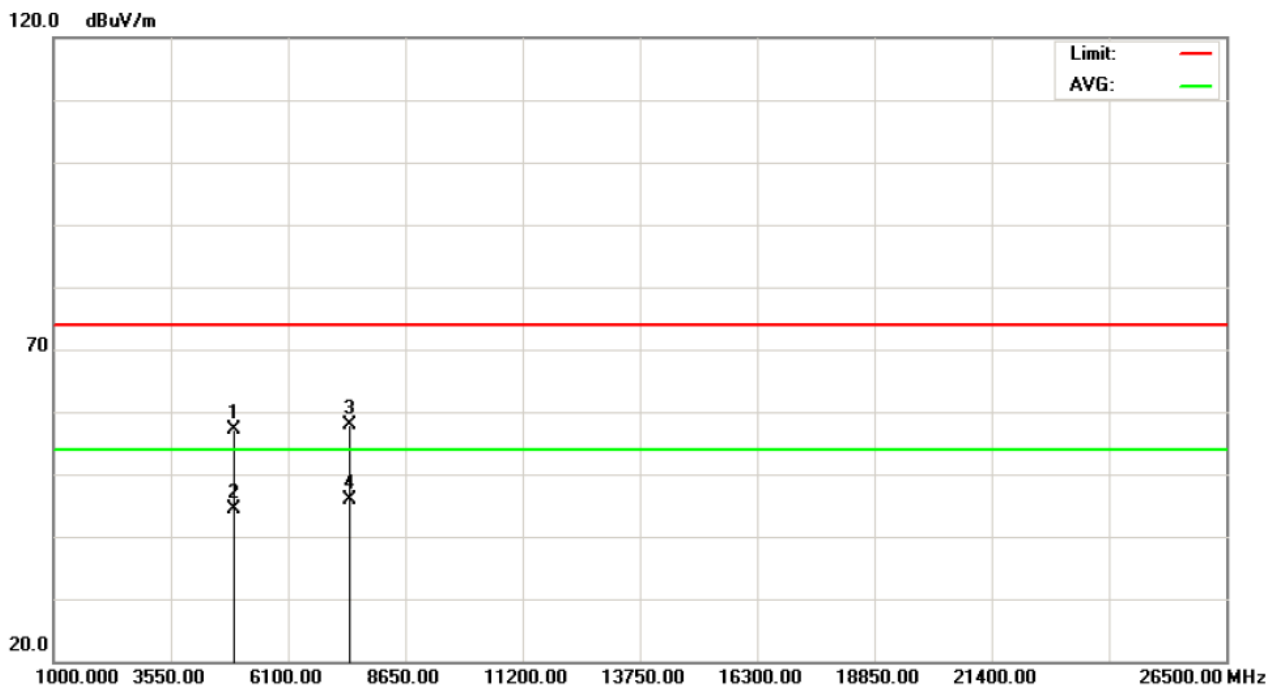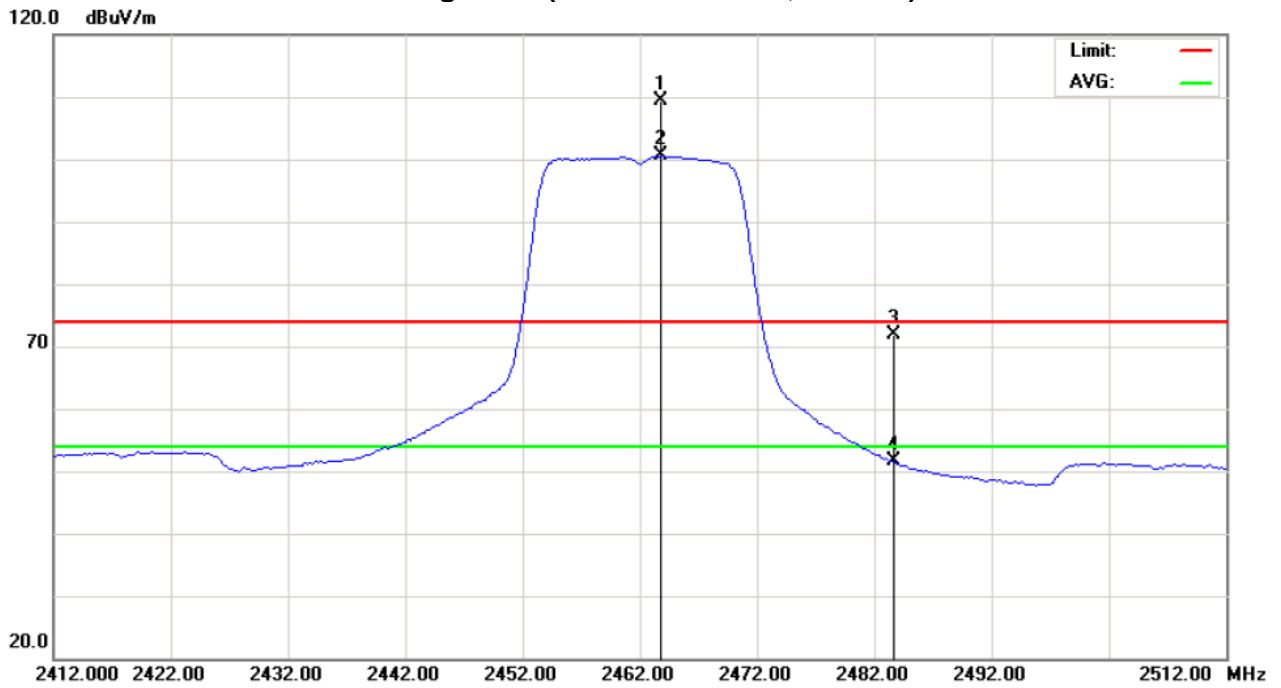



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH11		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2460.20	H	67.93	59.55	32.20	100.13	91.75			X/F
2483.50	H	33.86	14.17	32.29	66.15	46.46	74.00	54.00	X/H
4926.60	H	44.97	34.40	4.07	49.04	38.47	74.00	54.00	X/H
7385.30	H	45.25	32.23	9.26	54.51	41.49	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11 (Above 1000 MHz, Horizontal)

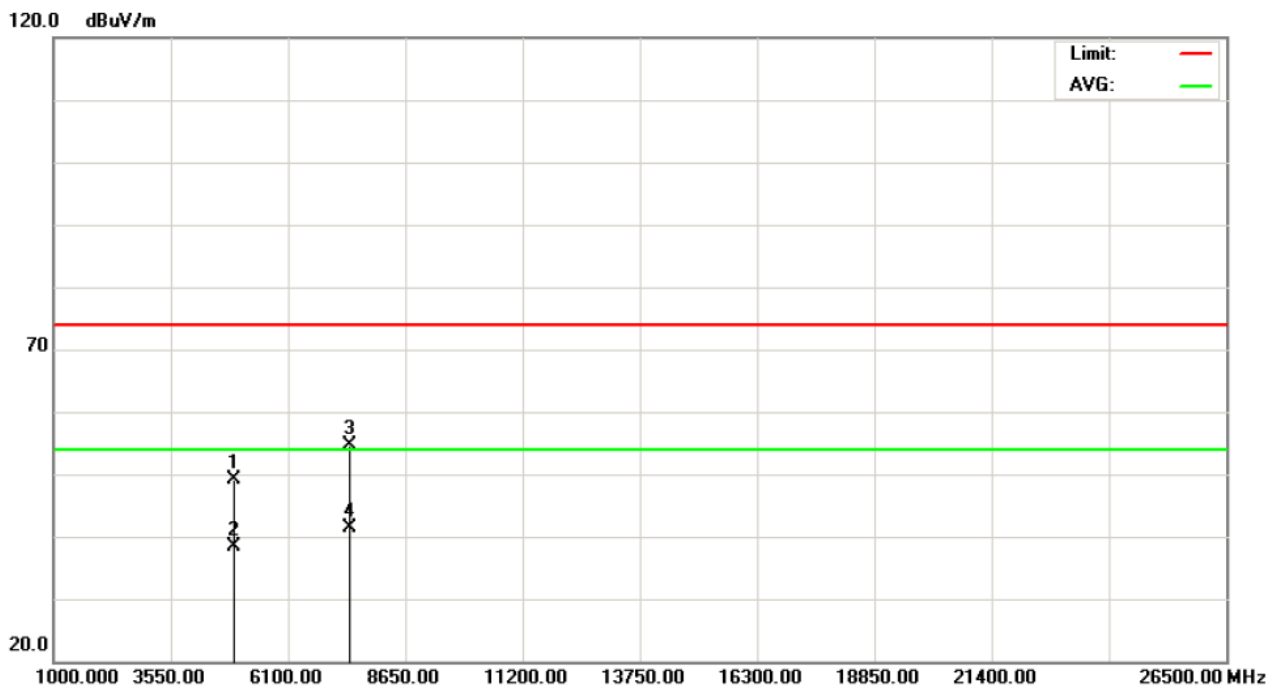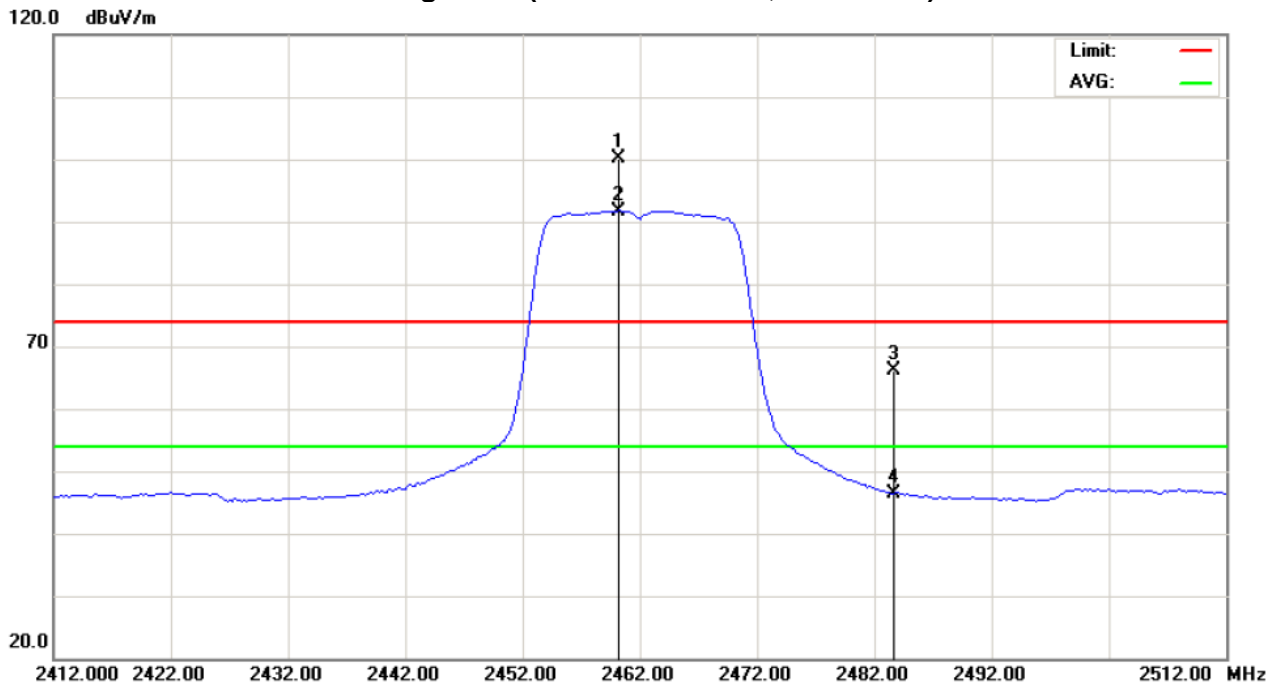



4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 ° C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b (Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2385.20	V	29.71	22.48	31.91	61.62	54.39	74.00	54.00	X
2488.10	V	25.65	17.31	32.30	57.95	49.61	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Vertical)

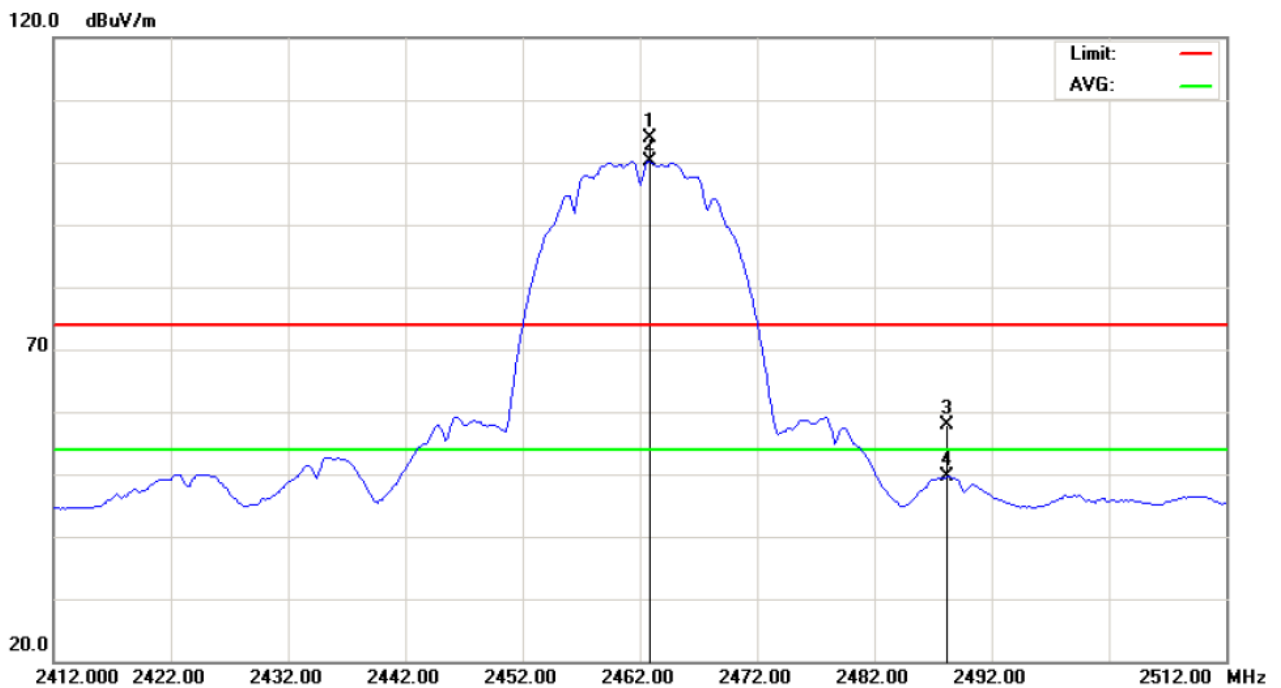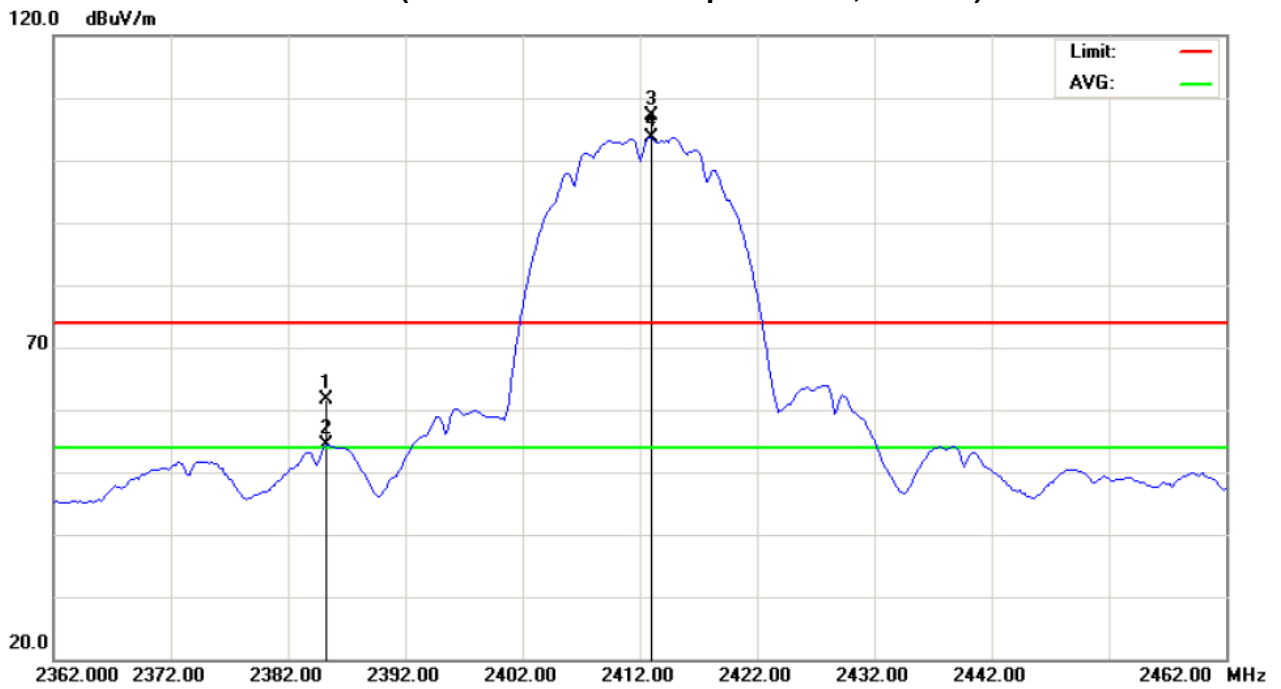



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2385.80	H	23.10	14.79	31.91	55.01	46.70	74.00	54.00	X
2487.50	H	22.13	13.78	32.30	54.43	46.08	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Horizontal)

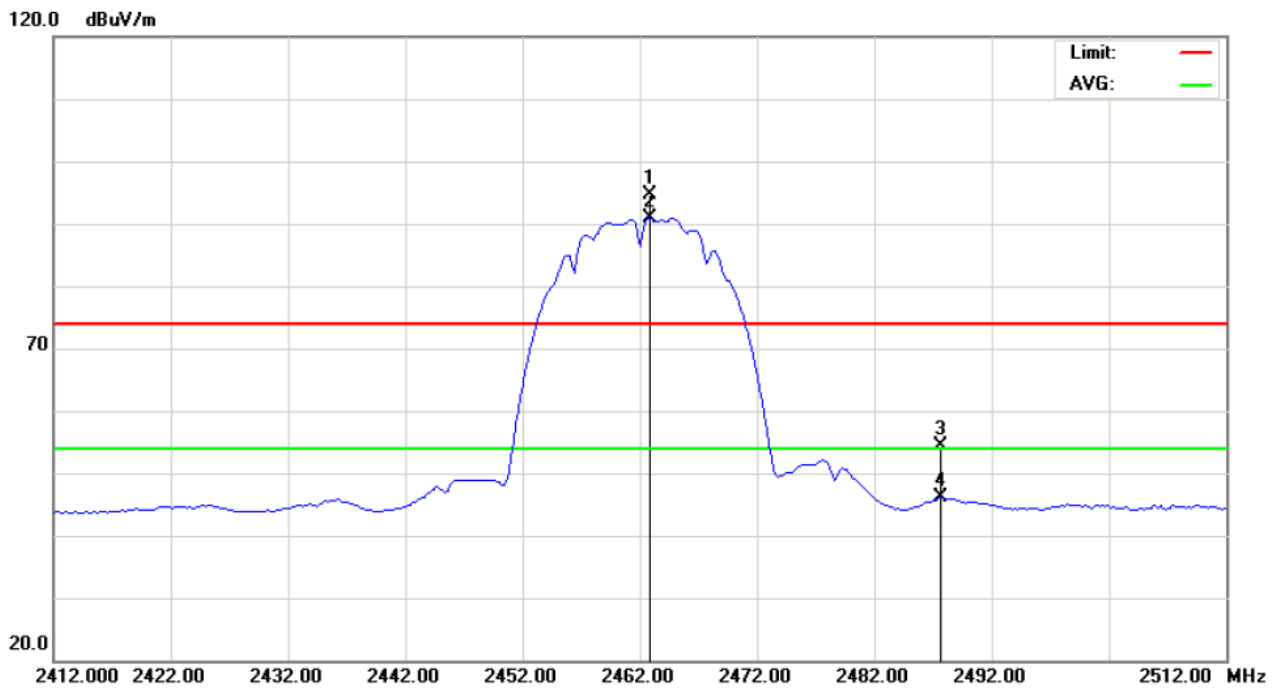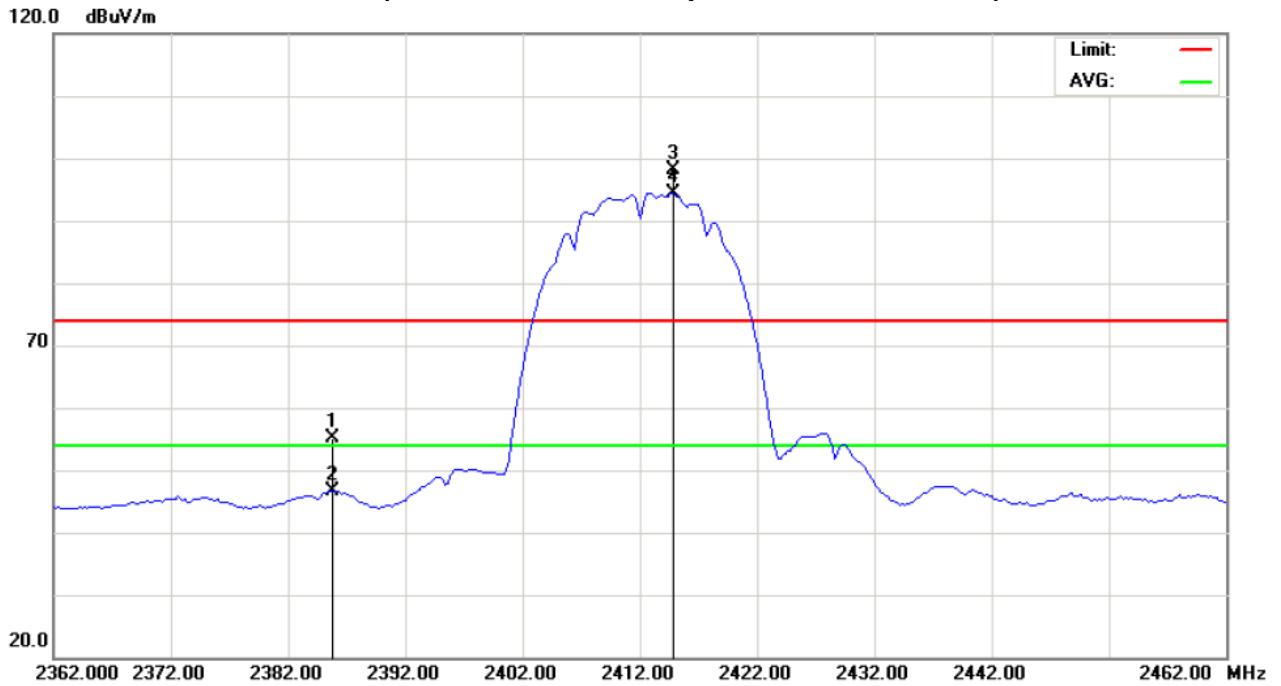



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g (Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	38.59	19.59	31.93	70.52	51.52	74.00	54.00	X
2483.50	V	39.56	19.22	32.29	71.85	51.51	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Vertical)

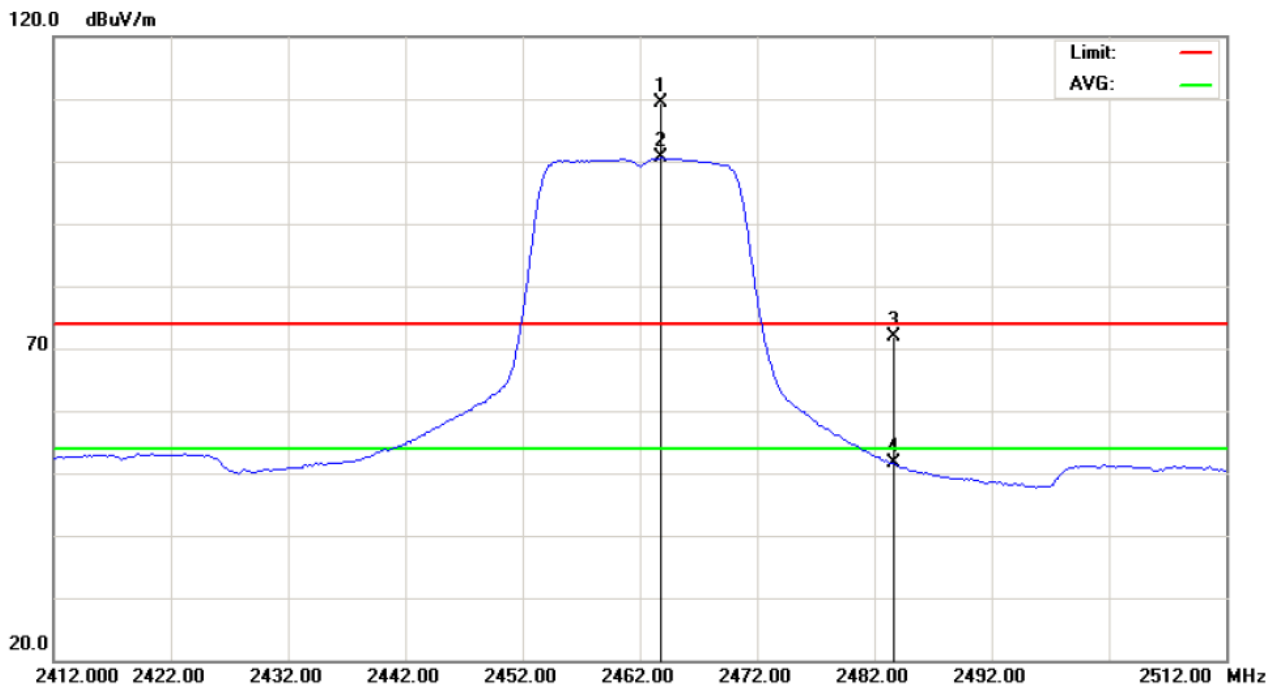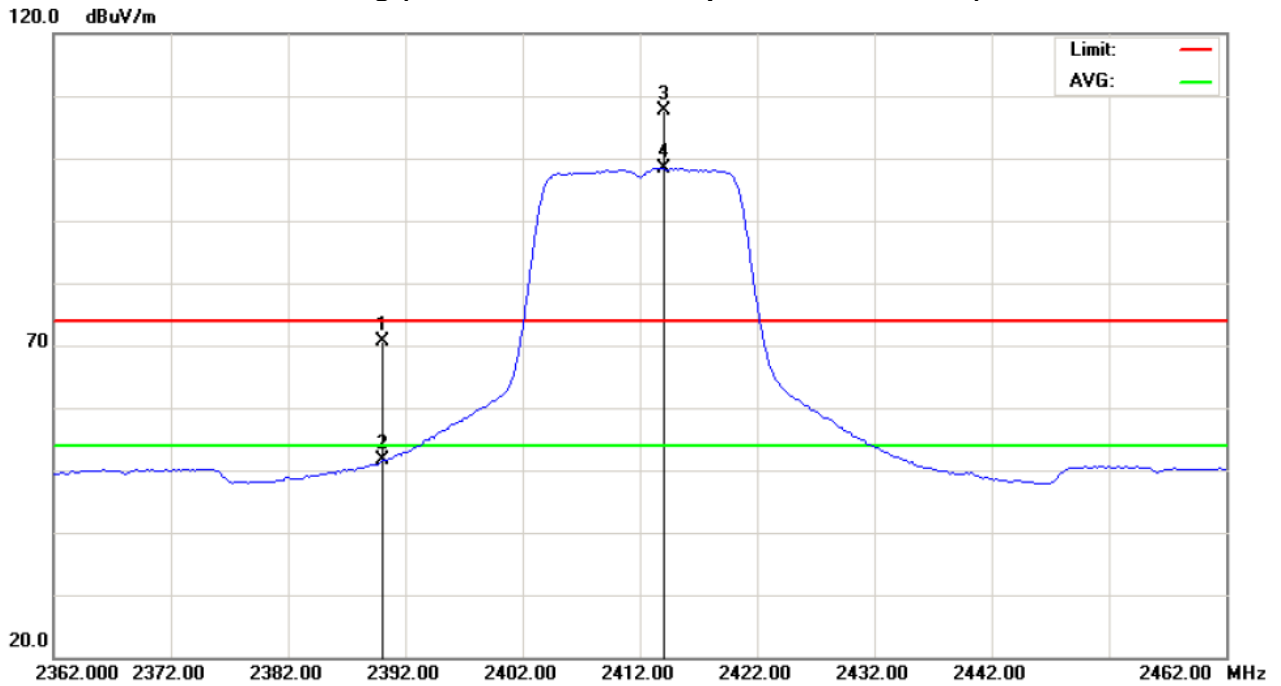



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	25 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	31.99	14.79	31.93	63.92	46.72	74.00	54.00	X
2483.50	H	33.86	14.17	32.29	66.15	46.46	74.00	54.00	X

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Horizontal)

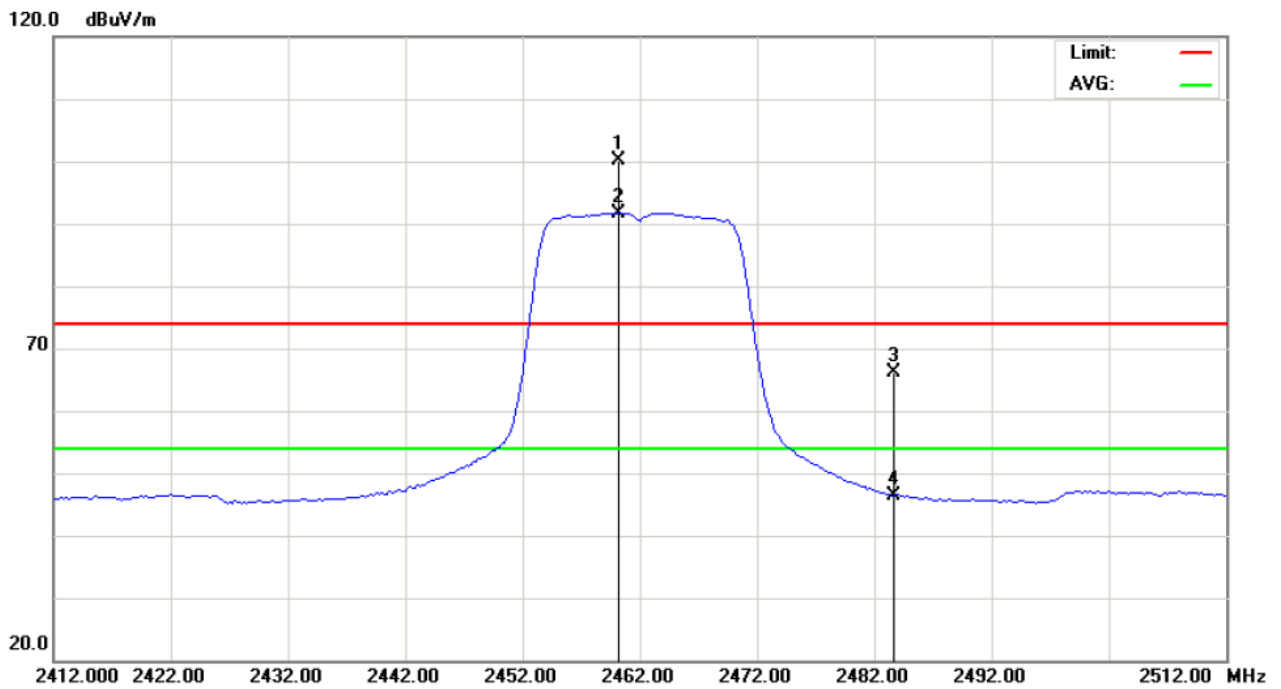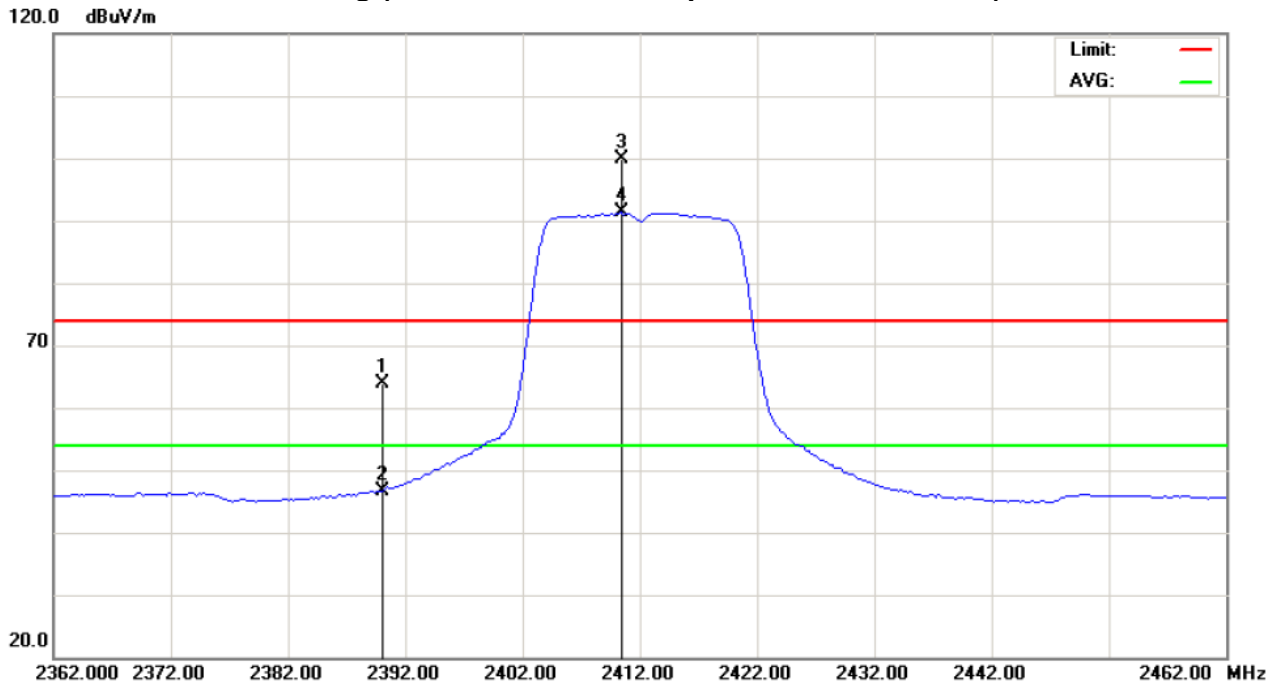



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Apr. 16, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

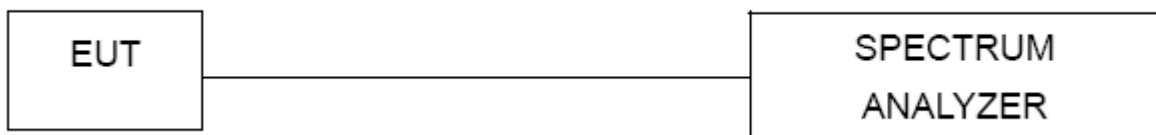

5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.




5.1.6 TEST RESULTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	12.72	15.52	>=500KHz
CH06	2437	12.16	15.56	>=500KHz
CH11	2462	12.20	15.56	>=500KHz

CH01

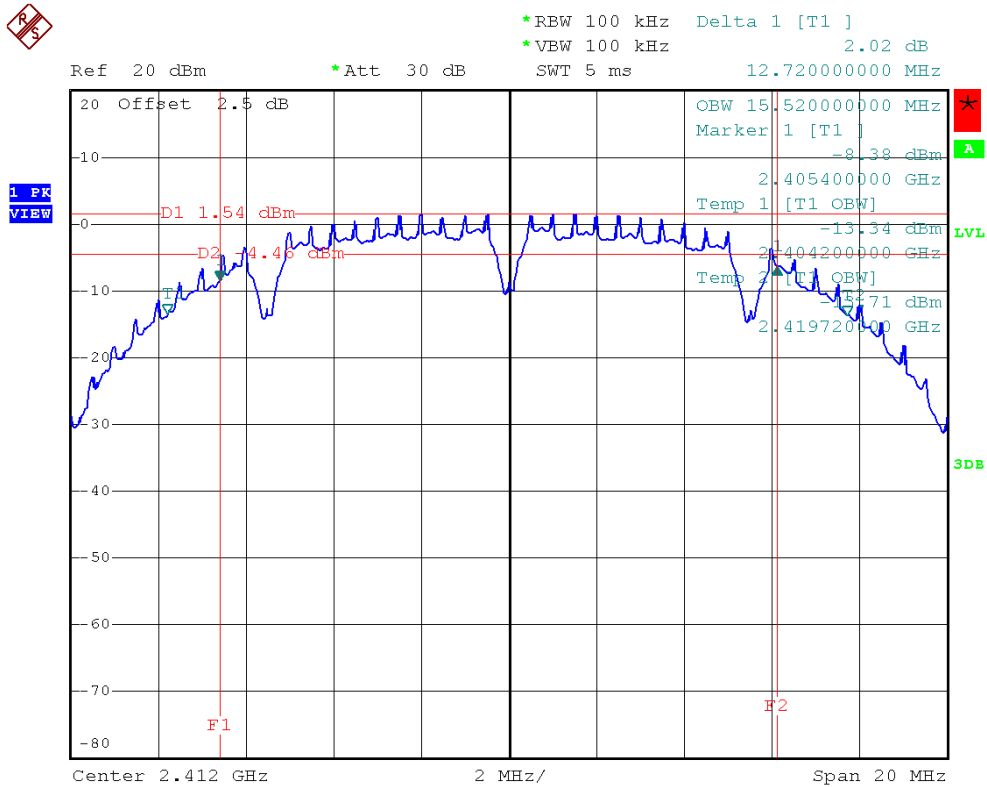




CH06



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz -0.61 dB
SWT 5 ms 12.160000000 MHz

Ref 20 dBm *Att 30 dB

1 PK VIEW

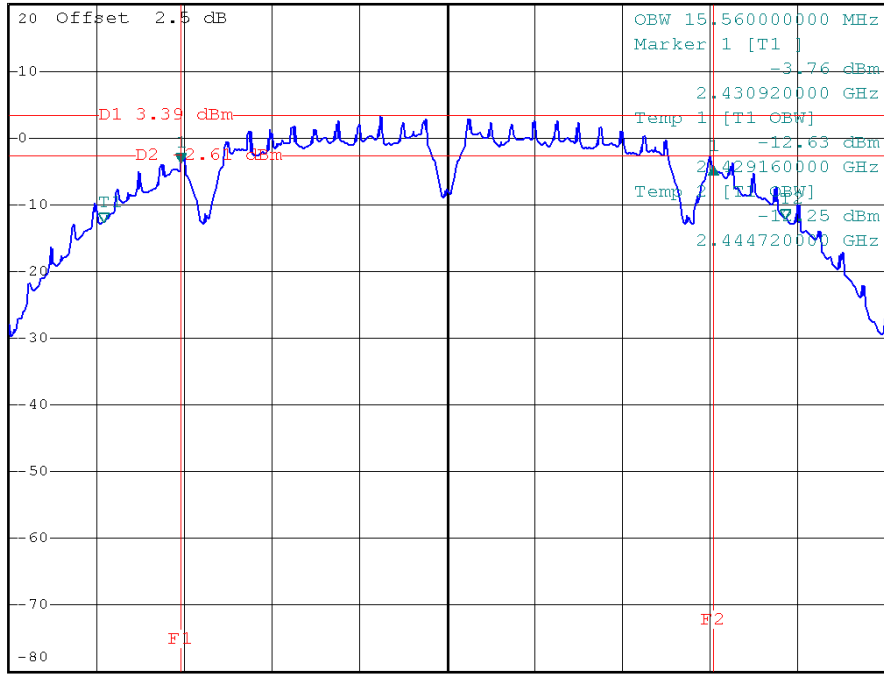

Center 2.437 GHz 2 MHz/ Span 20 MHz


CH11



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz 0.23 dB
SWT 5 ms 12.200000000 MHz

Ref 20 dBm *Att 30 dB

1 PK VIEW

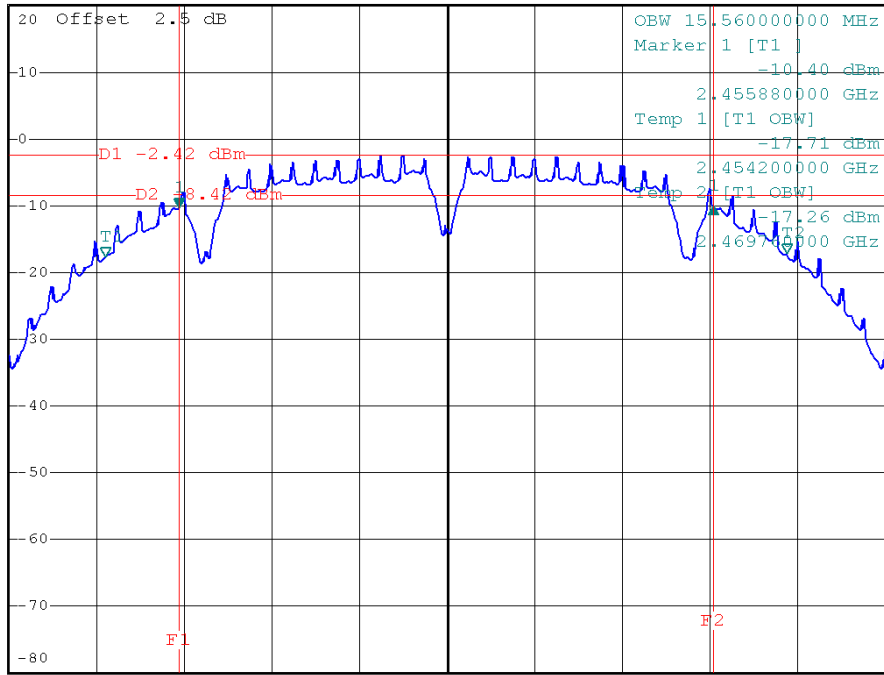

Center 2.462 GHz 2 MHz/ Span 20 MHz



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	16.56	16.52	>=500KHz
CH06	2437	16.52	16.52	>=500KHz
CH11	2462	16.48	16.52	>=500KHz

CH01






CH06



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz 0.16 dB
SWT 5 ms 16.520000000 MHz

Ref 20 dBm *Att 30 dB

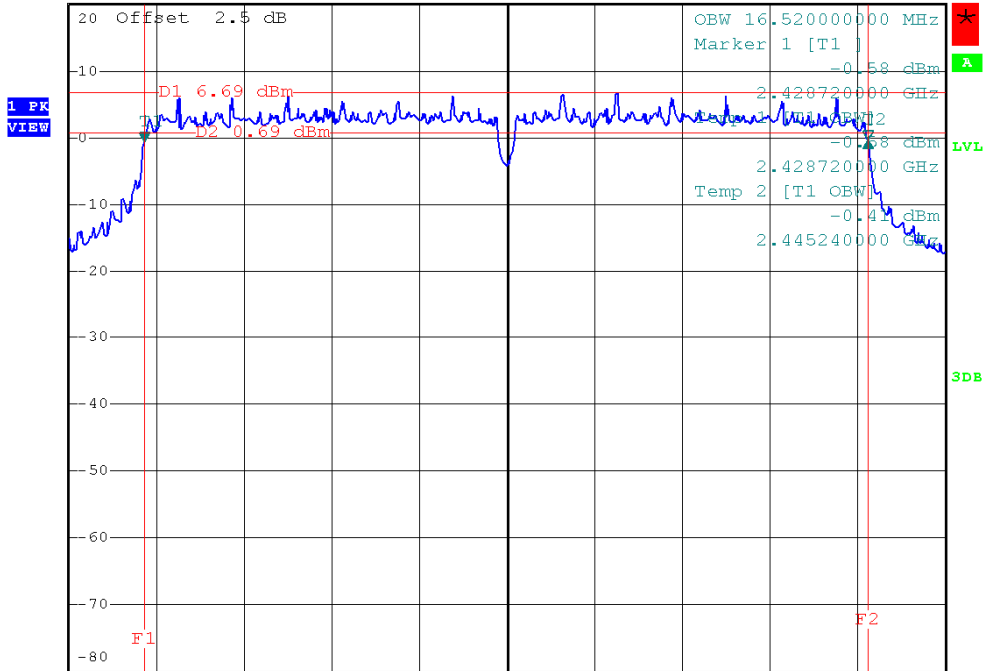


Center 2.437 GHz 2 MHz/ Span 20 MHz

CH11



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz -0.24 dB
SWT 5 ms 16.480000000 MHz

Ref 20 dBm *Att 30 dB

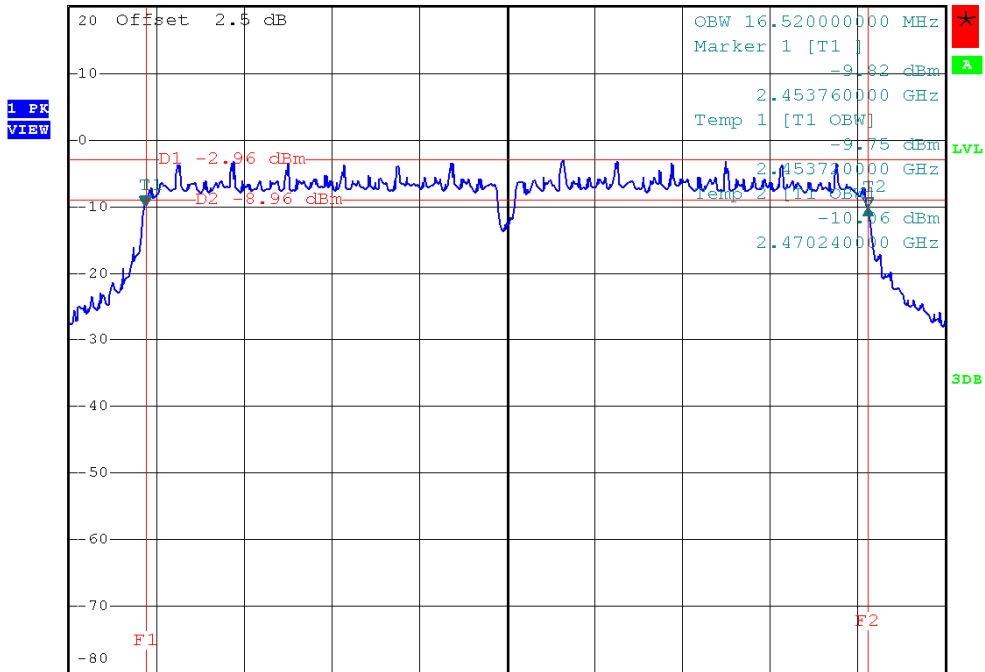

Center 2.462 GHz 2 MHz/ Span 20 MHz



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2010
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

6.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 1MHz, VBW= 1MHz, Sweep time = Auto.

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.



6.1.6 TEST RESULTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b /CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	17.90	30	1
CH06	2437	18.21	30	1
CH11	2462	15.47	30	1

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g /CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	22.40	30	1
CH06	2437	29.23	30	1
CH11	2462	22.31	30	1

Remark :

- (1) **The SISO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
And after obtain each individual transmitter chain power, then sum the output power by using the following formula:
((dBm/Chain 1)/10^Log) + ((dBm/Chain 2)/10^log) + ((dBm/ChainN)/10^log) =
Combined peak output power in mW.**
- (2) **Antenna Gain=2.0 dBi.**



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Apr. 16, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


7.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP

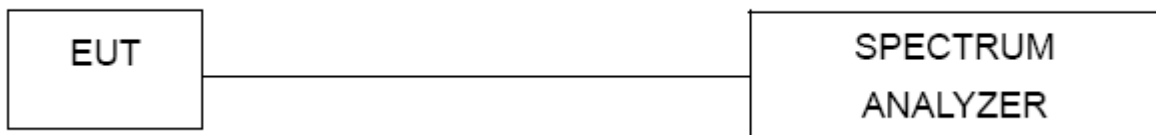

7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.



7.1.6 TEST RESULTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b CH01, CH11		

Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2389.2	-44.09	2483.5	-46.53

Result


In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



CH01



*RBW 100 kHz Marker 3 [T1]
 *VBW 100 kHz -44.09 dBm
 Ref 20 dBm *Att 30 dB SWT 10 ms 2.389200000 GHz

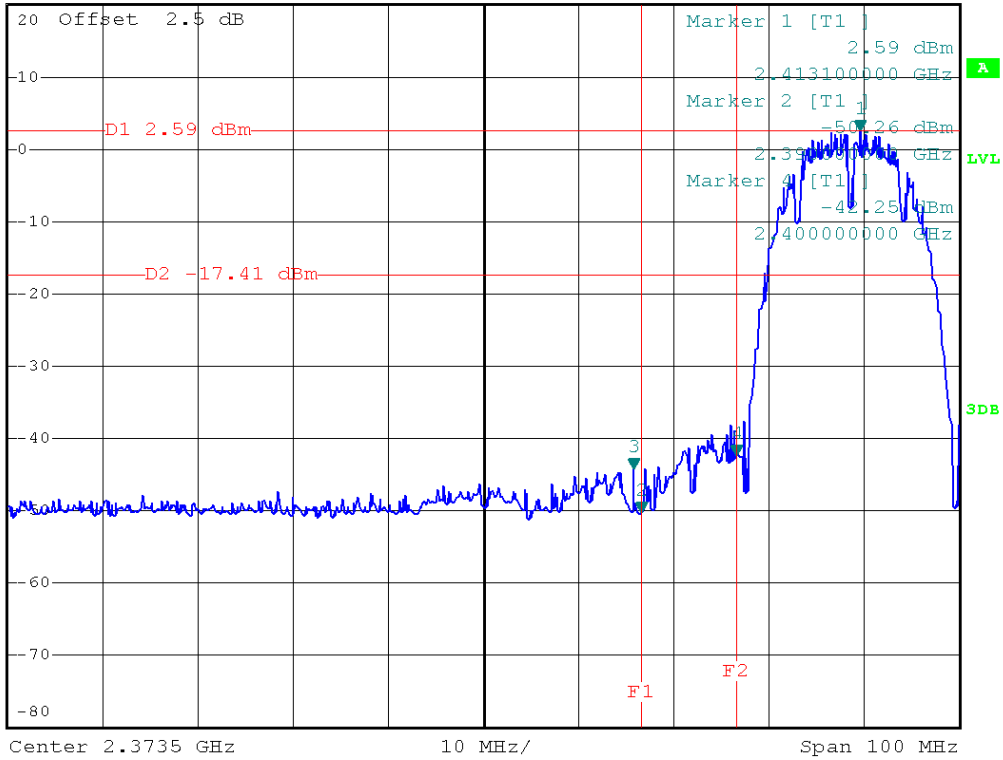


Center 2.3735 GHz 10 MHz/ Span 100 MHz

CH11



*RBW 100 kHz Marker 3 [T1]
 *VBW 100 kHz -46.53 dBm
 Ref 20 dBm *Att 30 dB SWT 10 ms 2.484300000 GHz

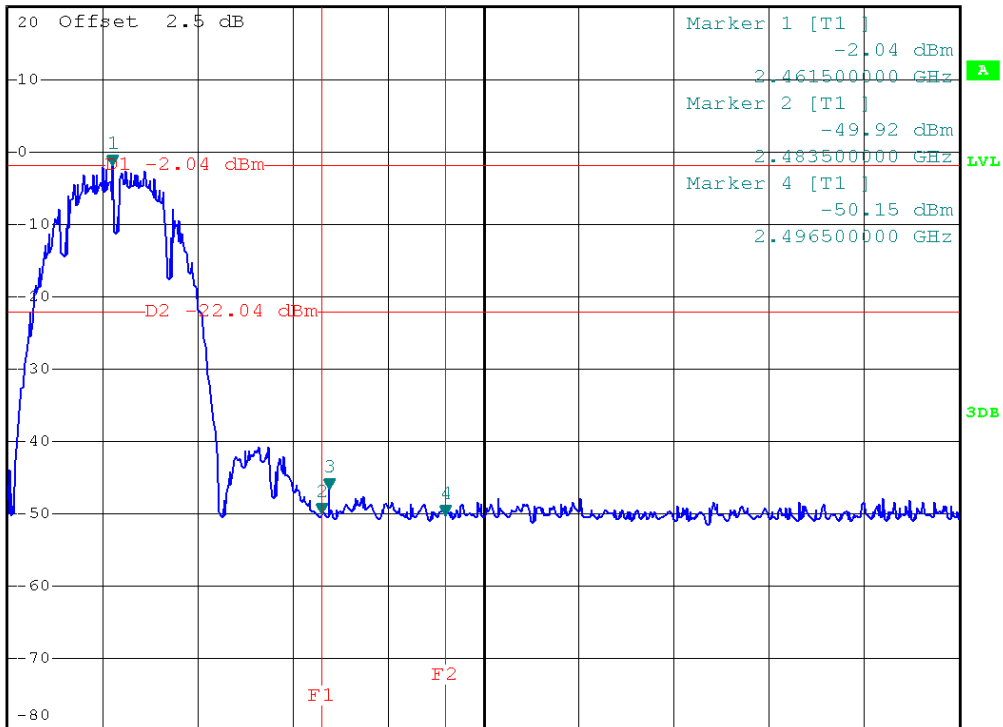

Center 2.5005 GHz 10 MHz/ Span 100 MHz



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g CH01, CH11		

Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2390.0	-45.29	2485.7	-45.17
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			




CH01



*RBW 100 kHz Marker 3 [T1]
*VBW 100 kHz -45.29 dBm
Ref 20 dBm *Att 30 dB SWT 10 ms 2.390000000 GHz

1 PK
VIEW

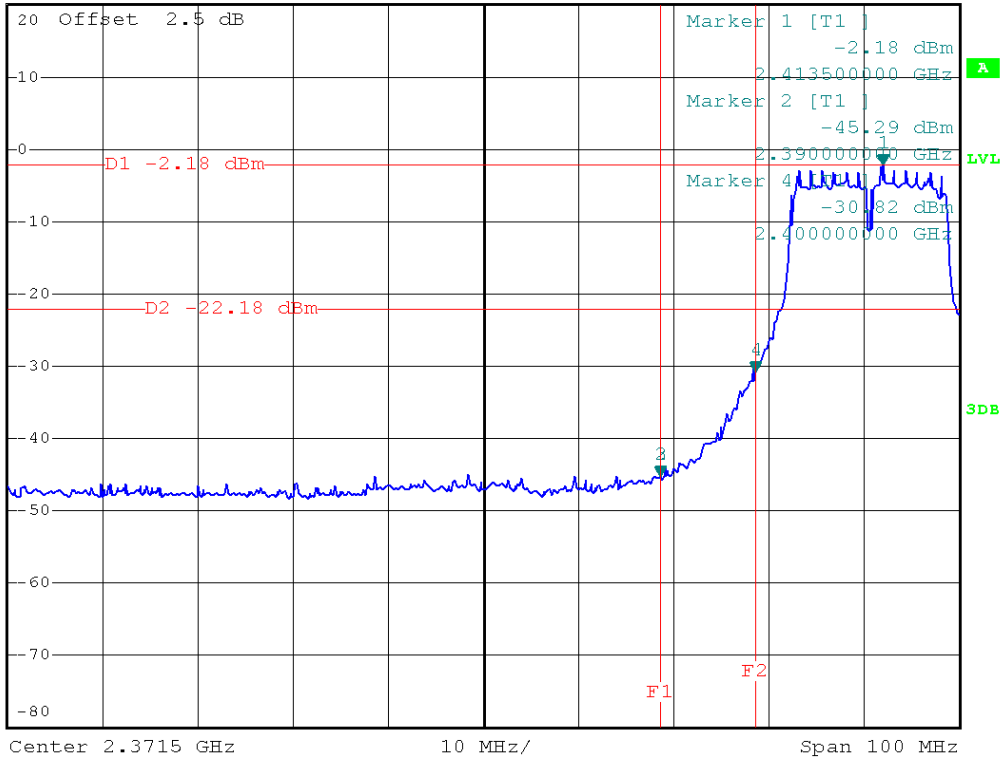


CH11



*RBW 100 kHz Marker 3 [T1]
*VBW 100 kHz -45.17 dBm
Ref 20 dBm *Att 30 dB SWT 10 ms 2.485700000 GHz

1 PK
VIEW

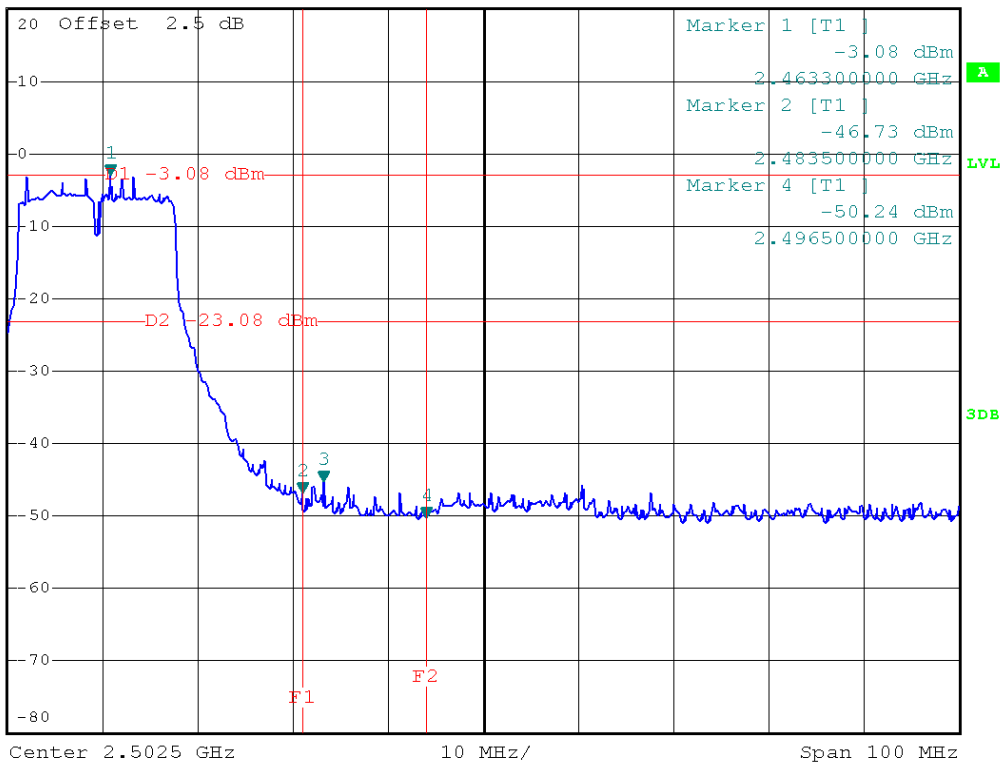



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Apr. 16, 2010

Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.




8.1.6 TEST RESULTS

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-13.13	8
CH06	2437	-12.35	8
CH11	2462	-16.04	8

CH01

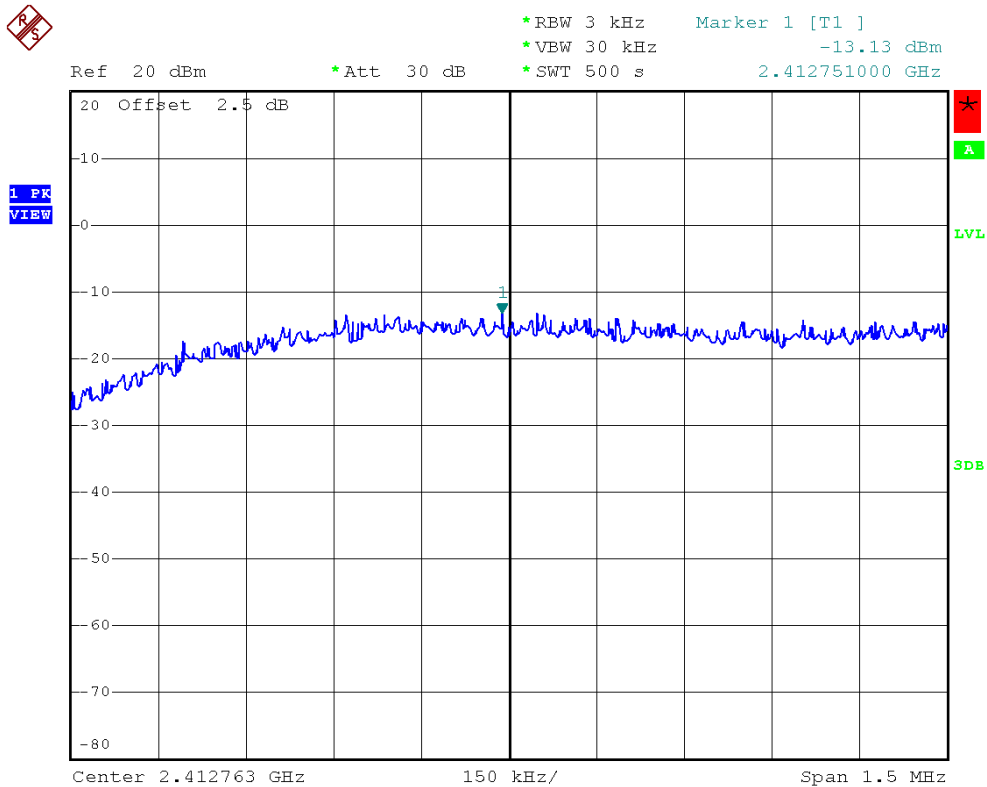




CH06



*RBW 3 kHz Marker 1 [T1]
*VBW 30 kHz -12.35 dBm
*SWT 500 s 2.437810000 GHz

Ref 20 dBm *Att 30 dB

1 PK
VIEW

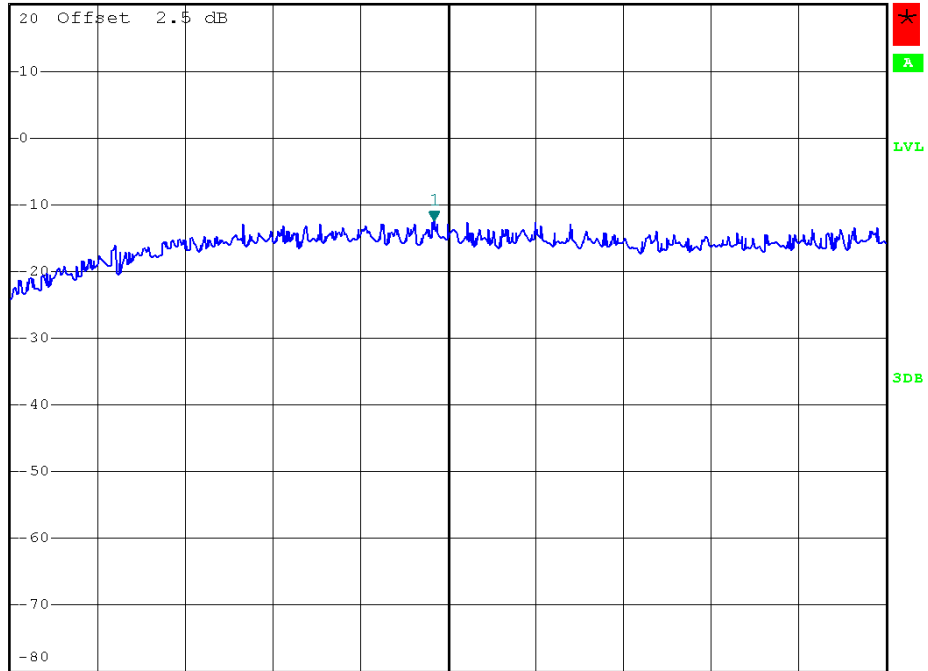

Center 2.437834 GHz 150 kHz/ Span 1.5 MHz


CH11



*RBW 3 kHz Marker 1 [T1]
*VBW 30 kHz -16.04 dBm
*SWT 500 s 2.461267000 GHz

Ref 20 dBm *Att 30 dB

1 PK
VIEW

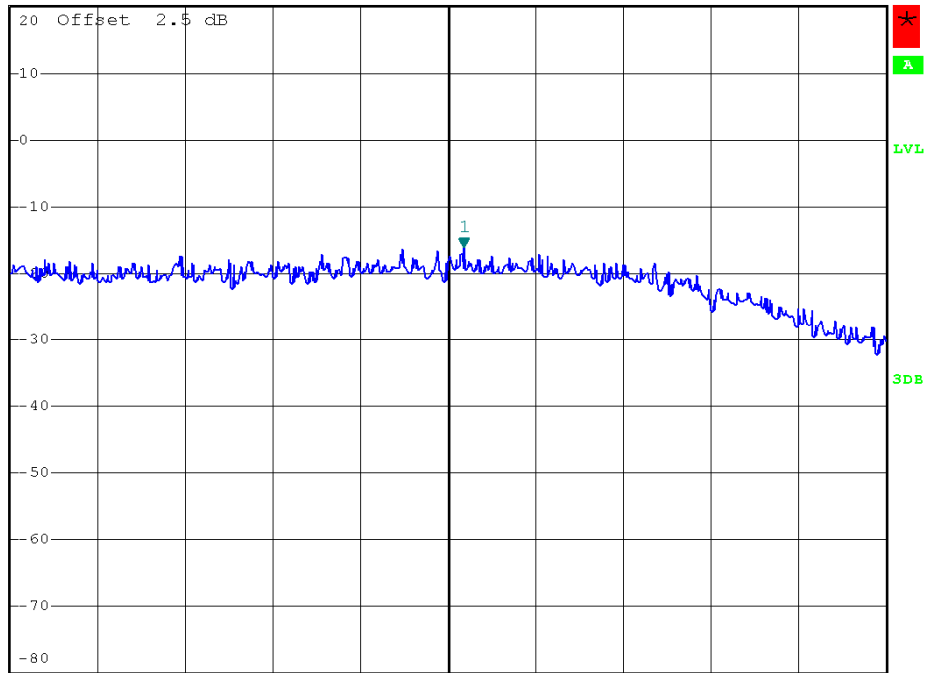


Center 2.46124 GHz 150 kHz/ Span 1.5 MHz



EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-16.29	8
CH06	2437	-8.12	8
CH11	2462	-16.36	8

CH01

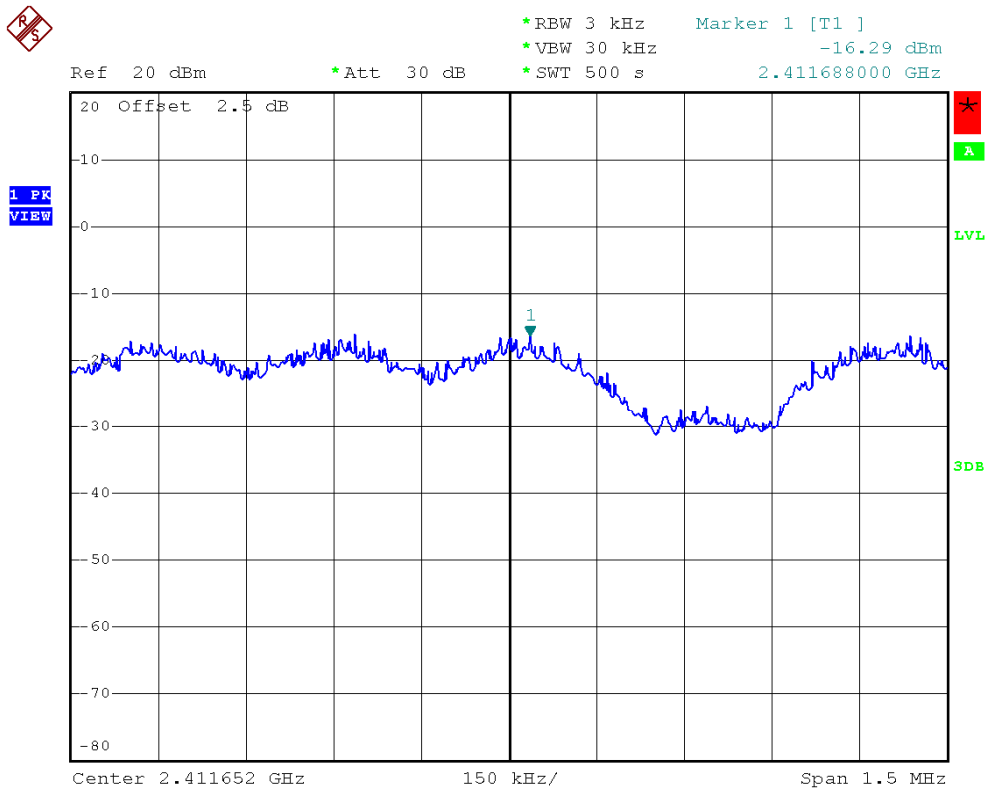




CH06



*RBW 3 kHz Marker 1 [T1]
*VBW 30 kHz -8.12 dBm
*SWT 500 s 2.438267000 GHz

Ref 20 dBm *Att 30 dB

1 PK
VIEW

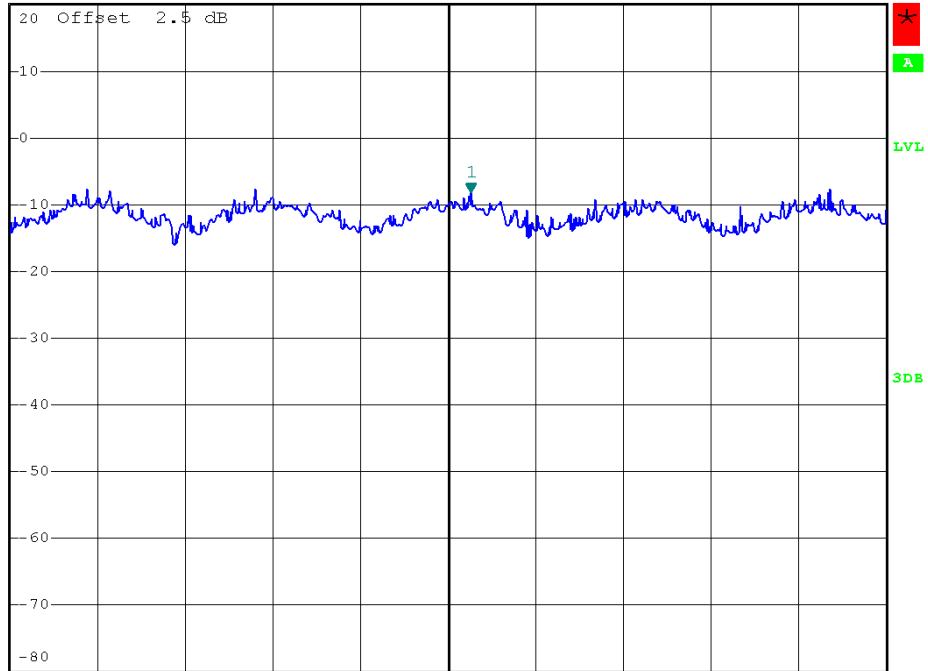


CH11



*RBW 3 kHz Marker 1 [T1]
*VBW 30 kHz -16.36 dBm
*SWT 500 s 2.462354000 GHz

Ref 20 dBm *Att 30 dB

1 PK
VIEW

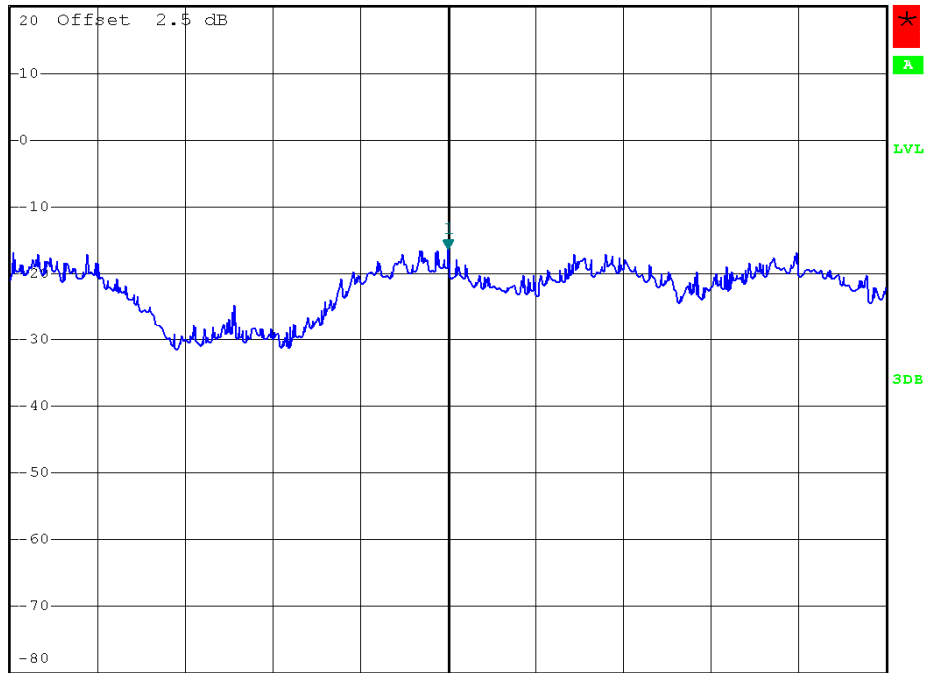



9. RF EXPOSURE TEST

9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2010
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.6 TEST RESULTS - CHIP

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	2.00	1.5849	17.9000	61.6595	0.019451	1
2437	2.00	1.5849	18.2100	66.2217	0.020891	1
2462	2.00	1.5849	15.4700	35.2371	0.011116	1

EUT :	High Power IEEE 802.11bg miniPCI Radio Module	Model Name :	DLM106
Temperature :	17 °C	Relative Humidity :	89 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	2.00	1.5849	22.4000	173.7801	0.054821	1
2437	2.00	1.5849	29.2300	837.5293	0.264211	1
2462	2.00	1.5849	22.3100	170.2159	0.053697	1

Remark :

- (1) The SISO test requirement, MPE shall measure by using the total sum power of each transmitter chain.