



LS Research, LLC



Testing Cert. # 1255.01

W66 N220 Commerce Court • Cedarburg, WI 53012 • USA

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com

ENGINEERING TEST REPORT # 309380 SC
LSR Job #: C-772

Compliance Testing of:
Schlage AD-300 Wired Door Lock with SmartCard plus keypad

Test Date(s):
December 2nd and 3rd 2009



Prepared For:



Ingersoll-Rand Company
11819 N. Pennsylvania St.
Carmel, IN 46074.

In accordance with:
Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.209
Industry Canada (IC)
RSS 210 Annex 2 and section 2.7

General Operating Requirements for Low-Power License-Exempt Transceivers

<p>Test Report Reviewed by: Teresa A. White, Quality Manager</p> <p>Signature: </p> <p>Date: December 16, 2009</p>	<p>Approved/Tested by: Khairul Aidi Zainal, Senior EMC Engineer</p> <p>Signature: </p> <p>Date: December 16, 2009</p>

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

TABLE OF CONTENTS *(page 1 of 2)*

Description	Page
EXHIBIT 1: INTRODUCTION	
1.1 Scope	4
1.2 Normative References	5
1.3 LS Research, LLC Test Facility	6
1.4 Location of Testing	6
1.5 Test Equipment Utilized	6
EXHIBIT 2: PERFORMANCE ASSESSMENT	
2.1 Client Information	7
2.2 Equipment Under Test (EUT) Information	7
2.3 Associated Antenna Description	7
2.4 EUT's Technical Specifications	8
2.5 Product Description	9
EXHIBIT 3: EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS	
3.1 Climate Test Conditions	10
3.2 Applicability & Summary of EMC Emission Test Results	10
3.3 Modifications Incorporated in the EUT for Compliance Purposes	10
3.4 Deviations & Exclusions from Test Specifications	10
EXHIBIT 4: DECLARATION OF CONFORMITY	11
EXHIBIT 5: RADIATED EMISSIONS TESTING	
5.1 Test Setup	12
5.2 Test Procedure	12
5.3 Test Equipment Utilized	13
5.4 Test Results	13
5.5 Calculation of Radiated Emissions Limits	14
5.6 Radiated Emissions Test Data Chart	15-16
5.7 Test Setup Photo(s) – Radiated Emissions Test	17
5.8 Screen Captures – Radiated Emissions Test	18-20
EXHIBIT 6: CONDUCTED EMISSIONS TEST, AC POWER LINE	
6.1 Test Setup	21
6.2 Test Procedure	21
6.3 Test Equipment Utilized	21
6.4 Test Results	21
6.5 FCC Limits of Conducted Emissions at the AC Mains Ports	22
6.6 Conducted Emissions Test Data Chart	22
6.7 Test Setup Photo(s) – Conducted Emissions Test	23
6.8 Screen Captures – Conducted Emissions Test	24

TABLE OF CONTENTS (Page 2 of 2)

Description	Page
EXHIBIT 7: OCCUPIED BANDWIDTH	
7.1 Limits	25
7.2 Method of Measurements	25
7.3 Test Data	25
7.4 Screen Captures – Occupied Bandwidth	26
EXHIBIT 8: BAND-EDGE MEASUREMENT	
8.1 Test Criterion	27
8.2 Screen Captures	27
APPENDICES	
APPENDIX A: TEST EQUIPMENT LIST	28
APPENDIX B: TEST STANDARDS – RADIO	29
APPENDIX C: UNCERTAINTY STATEMENT	30

EXHIBIT 1. INTRODUCTION

1.1 SCOPE

References:	FCC Part 15, Subpart C, Section 15.209
Title:	Telecommunication – Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Certification Authorization for Low-Power License-Exempt Transmitters.

References:	RSS 210 Annex 2
Title:	Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I equipment.
Purpose of Test:	To gain IC Certification Authorization for Low-Power License-Exempt Transmitters.

References:	RSS GEN
Title:	General requirements and Information for the Certification of Radiocommunication Equipment.
Purpose of Test:	To gain IC Certification Authorization for Low-Power License-Exempt Transmitters.

Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	<ul style="list-style-type: none">• Commercial, Industrial or Business• Residential

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 4 of 30

1.2 NORMATIVE REFERENCES

Publication	Year	Title
47 CFR, Parts 0-15 (FCC)	2008	Code of Federal Regulations - Telecommunications
RSS 210 Annex 2	2007	Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I equipment.
RSS GEN	2007	General requirements and information for the certification of Radiocommunication Equipment.
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-1-1	2006-03 A1: 2006-09 A2: 2007-07	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus.
CISPR 16-2-1	2003 A1: 2004-04 A2: 2007-07	Specification for radio disturbance and immunity measuring apparatus and methods. Part 201: Conducted disturbance measurement.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 5 of 30

1.3 LS Research, LLC TEST FACILITY

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted. A copy of the accreditation may be accessed on our web site: www.lsr.com. Accreditation status can be verified at A2LA's web site: www.a2la2.net.

1.4 LOCATION OF TESTING

All testing was performed at LS Research, LLC, W66 N220 Commerce Court, Cedarburg, Wisconsin, 53012 USA, utilizing the facilities listed below, unless otherwise noted.

List of Facilities Located at LS Research, LLC:

- Compact Chamber
- Semi-Anechoic Chamber
- Open Area Test Site (OATS)

1.5 TEST EQUIPMENT UTILIZED

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated in accordance with A2LA standards.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 6 of 30

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1 CLIENT INFORMATION

Manufacturer Name:	Ingersoll-Rand Company
Address:	11819 N. Pennsylvania St. Carmel, IN 46074
Contact Person:	Sheldon White
Contact Phone:	317.810.3166
Contact Email:	Sheldon_white@irco.com

2.2 EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information has been supplied by the applicant.

Product Name:	Schlage AD-300 with SmartCard plus keypad
Model Number:	23507288 and 23507270
Serial Number:	N/A

2.3 ASSOCIATED ANTENNA DESCRIPTION

The antenna for the 13.56 MHz SmartCard is a 2 baluns, 2turn loop antenna terminated to ground and 180° out of phase. The antenna is a PCB trace around the PCB.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 7 of 30

2.4 EUT'S TECHNICAL SPECIFICATIONS

Additional Information:

Frequency Range (in MHz)	13.56MHz
RF Power in Watts (Near-field measurement at 3 meters)	0.000845 Watts
Conducted Output Power (in dBm)	Could not be measured.
Field Strength at 3 meters	64.5 dBuV/m.
Occupied Bandwidth (99% BW)	134.7kHz
Type of Modulation	Un-modulated when scanning. AM when reading.
Emission Designator	A1D
Transmitter Spurious (worst case) at 3 meters	31.8dBuV/m at 180.3MHz
Microprocessor Model # (if applicable)	PIC24F128GB106.
EUT will be operated under FCC Rule Part(s)	CFR 47 part 15.209
Antenna Information:	
a) Antenna Type	2 (Two) 2-turn PCB loop antennas 180° out of phase.
b) Detachable/Non-Detachable	Non-detachable.
c) Antenna Gain (in dBi)	Not available.
Modular Filing	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Portable or Mobile?	Mobile

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 8 of 30


2.5 PRODUCT DESCRIPTION

The Schlage AD-300 is an open architecture product designed to interface with Schlage brand access control panels as well as all other third party panels which use the Schlage RSI RS-485 protocol. When using a third party panel that does not use the Schlage RSI RS-485 protocol, the addition of a PIB300 is required. Normal operation is on-line mode. Information contained in the user credential is passed to an ACP (Access Control Point), which controls lock functions and maintains audit trails of the credential used. The locking function ensures that the inside lever allows egress and outside lever be locked.

The AD-300 can be paired with a variety of ACPs but in this case it is paired with a SmartCard plus keypad reader. The SmartCard plus keypad reader reads ID badges using a 13.56 MHz signal.



ACP:SmartCard reader with keypad

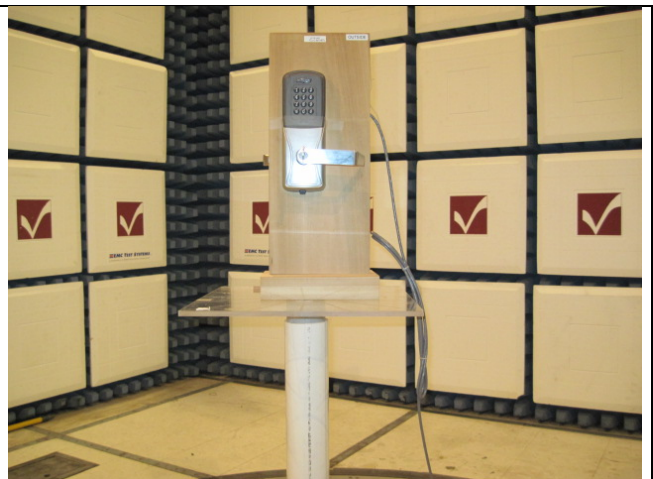

AD-300 with Multitech Reader

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 9 of 30

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 CLIMATE TEST CONDITIONS

Temperature:	70° Fahrenheit
Humidity:	36%
Pressure:	741 mmHg

3.2 APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Paragraph	Test Requirements	Compliance (yes/no)
FCC : 15.107 IC : RSS GEN 7.2.2	Power Line Conducted Emissions Measurements	Yes
IC: RSS GEN 4.6	Occupied Bandwidth	Yes
FCC : 15.109 IC : RSS 210 2.6	Un-Intentional Radiated Emissions	Yes
FCC : 15.209 (a) IC : RSS 210 A2	Maximum RF Output Power	Yes
FCC : 15.209 (c) IC : RSS 210 A2	Maximum RF Spurious Emissions	Yes
FCC : 15.109 & 15.205 IC : RSS 210 A2 and 2.6	Transmitter General Radiated Emissions	Yes
FCC: 15.209 (b)	Band edge requirements	Yes

3.3 MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None Yes (explain below)

3.4 DEVIATIONS & EXCLUSIONS FROM TEST SPECIFICATIONS

None Yes (explain below)

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 10 of 30

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to **MEET** the requirements as described within the specification of FCC Title 47, CFR Part 15.209, and Industry Canada RSS-210, Issue 7 (2007), Section 2.6 for a Low-Power License-Exempt Transmitters, as well as the specification of FCC Title 47, CFR Part 15.109, and Industry Canada RSS-210, Issue 7 (2007), Section 7 for non-intentional radiators.

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 11 of 30

EXHIBIT 5. RADIATED EMISSIONS TEST

5.1 Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4. The AD-300 with the SmartCard plus keypad badge reader, henceforth referred to as the EUT, was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber.

For the test, the EUT was set in a configuration where it continuously transmits at 13.56 MHz. This was done by a scanning a setup card (3 times for 13.56 MHz). Its operation was then validated using a card set to work at the selected mode. Initial measurements were performed at 3m separation to identify the emissions below 30MHz and all identified emissions were then re-measured at a 10m separation distance.

5.2 Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 10 kHz to 1000 MHz was scanned and investigated. In cases where emissions below 30MHz were found, measurements of those emissions were repeated on the OATS at a 10m measurement distance. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. For emissions below 30 MHz, an active loop antenna was used. This loop antenna was set at a height of 1m above the conducting ground plane and it was rotated about its vertical and horizontal axes (while utilizing the turntable to rotate the EUT) in order to measure the maximum radiated RF emissions. The maximum radiated RF emissions above 30MHz were found by raising and lowering the antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities and rotating the EUT using the turntable.

In addition, the fundamental power and frequency was monitored while the EUT supply voltage was varied $\pm 15\%$ of the nominal (102 VAC and 138 VAC).

The receiver was operated with the resolution bandwidth set at 200 Hz for measurements between 9kHz and 150kHz, 9kHz for measurements between 150kHz and 30MHz and 120kHz for measurements between 30MHz and 1000 MHz.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 12 of 30

5.3 Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at an N.I.S.T. traceable site. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an Agilent E4445A/N9039A EMI System. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with resolution bandwidths as prescribed in ANSI C63.4.

5.4 Test Results

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.209 for a Low-Power License-Exempt transmitter [Canada RSS-210, Issue 7 (2007), section 2.6]. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

The voltage variation test revealed that the EUT showed no variation in power and frequency. The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were within compliant parameters, and the system returned to the same state of operation as before the power cycle.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 13 of 30

5.5 CALCULATION OF RADIATED EMISSIONS LIMITS

Transmitter Limits

The maximum peak output power of an intentional radiator in the 9kHz-24 GHz band, as specified in Title 47 CFR 15.209 and RSS 210 section 2.7, is calculated in a formula as described below. The harmonic and spurious RF emissions, with appropriate receiver bandwidths, as specified in 15.209 (c) and section 2.7 of RSS 210, shall be below the measured power of the desired signal, and must also meet the requirements described in 15.205(c) for FCC and table 1 of RSS 210 where applicable.

The following table depicts the general radiated emission limits. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements and are comparable to that of table 3 in RSS 210 section 2.7. These limits were applied to the fundamental emission of the intentional radiator as well as all other significant spurious signals.

Frequency (MHz)	Limit $\mu\text{V/m}$	Limit (dB $\mu\text{V/m}$)	Measurement Distance (m)
0.009-0.490	2400/F (kHz)	Note 1	300
0.490-1.705	24000/F (kHz)		30
1.705-30.0	30		30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
960-24,000	500	54.0	3

Note 1: Sample calculation for the Fundamental Emission of a transmitter:

For Example:

If a transmitter operates at a fundamental frequency of 25 kHz, the emission limit may be calculated:

$$2400/F = 2400/25 = 96.0 \mu\text{V/m} \text{ if measured at 300 meters separation.}$$

$$\text{Expressed in decibels: } 20 \log_{10} (96.0) = 39.64 \text{ dB}\mu\text{V/m at 300 m separation.}$$

At 3 meters separation, the limit may be extrapolated by the addition of 40 dB/decade per 47CFR 15.31(f)(2)

$$\text{Limit for the fundamental emission} = 39.64 \text{ dB}\mu\text{V/m} + 80 \text{ dB} = 119.6 \text{ dB}/\mu\text{V/m at 3 meters}$$

Sample conversion from field strength $\mu\text{V/m}$ to dB $\mu\text{V/m}$:

$$\begin{aligned} \text{dB}\mu\text{V/m} &= 20 \log_{10} (100) \\ &= 40 \text{ dB}\mu\text{V/m (from 30-88 MHz)} \end{aligned}$$

For measurements made at 1.0 meter, a 9.5 dB correction may be invoked.

$$\begin{aligned} &960 \text{ MHz to } 10,000 \text{ MHz} \\ &500\mu\text{V/m or } 54.0 \text{ dB}/\mu\text{V/m at 3 meters} \\ &54.0 + 9.5 = 63.5 \text{ dB}/\mu\text{V/m at 1 meter} \end{aligned}$$

For measurements made at 0.3 meter, a 20 dB correction may be invoked.

$$\begin{aligned} &960 \text{ MHz to } 10,000 \text{ MHz} \\ &500\mu\text{V/m or } 54.0 \text{ dB}/\mu\text{V/m at 3 meters} \\ &54.0 + 20 = 74 \text{ dB}/\mu\text{V/m at 0.3 meters} \end{aligned}$$

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 14 of 30

5.6

RADIATED EMISSIONS DATA CHART

3 Meter Measurements of Electromagnetic Radiated Emissions
 Test Standard: 47CFR, Part 15.209. RSS 210 section 2.7
 Frequency Range Inspected: 9 kHz to 1000 MHz

Manufacturer:	Ingersoll-Rand Company				
Date(s) of Test:	December 2 nd and 3 rd 2009				
Test Engineer(s):	Khairul Aidi Zainal				
Voltage:	120 VAC				
Operation Mode:	Normal operation. Simultaneous transmit and receive				
Environmental Conditions in the Lab:	Temperature: 20 – 25° C				
	Relative Humidity: 30 – 60 %				
EUT Power:	√	Single Phase 120VAC		3 Phase ___ VAC	
		Battery		Other:	
EUT Placement:	√	80cm non-conductive table		10cm Spacers	
EUT Test Location:	√	3 Meter Semi-Anechoic FCC Listed Chamber		10m OATS	
Measurements:		Pre-Compliance		Preliminary	√ Final
Detectors Used:		Peak	√	Quasi-Peak	√ Average

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 15 of 30

The following table depicts the level of significant fundamental and spurious radiated RF emissions found for:

i. 3 meter measurement

Frequency (MHz)	Polarization	Height (meters)	Azimuth (°)	Peak (dBuV/m)	Quasi Peak (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)
13.56	Vertical	1.00	0	69.0	64.5	69.5	5.0
27.11	Vertical	1.00	169	34.4	30.6	69.5	38.9
40.67	Vertical	1.00	271	40.6	29.6	40.0	10.4
97.30	Vertical	1.00	37	30.3	28.5	43.0	14.5
106.1	Horizontal	2.05	0	27.9	26.8	43.0	16.2
180.3	Vertical	1.00	209	35.7	32.8	43.0	10.2
183.6	Vertical	1.00	0	35.2	31.2	43.0	11.8
338.9	Horizontal	1.00	271	32.3	30.1	46.0	15.9

ii. 10 meter measurement


Frequency (MHz)	Polarization	Height (meters)	Azimuth (°)	Peak (dBuV/m)	Quasi Peak (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)
13.56	Vertical	1.00	162	16.6	10.2	48.6	38.4
27.11				Note 4			

Notes:

- 1) An Average and quasi peak Detector function was used in measurements below 30 MHz, a Quasi-Peak Detector was used in measurements between 30 MHz and 1 GHz.
- 2) Measurement buried within receiver system noise floor. Data reported is that of the noise floor at the particular frequencies.
- 3) Measurements below 30MHz were performed at 3m and 10m separation distance. The limits were corrected to reflect the change in measurement distance.
- 4) Spurious emissions buried under system noise floor.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 16 of 30

5.7 Test Setup Photo(s) – Radiated Emissions Test

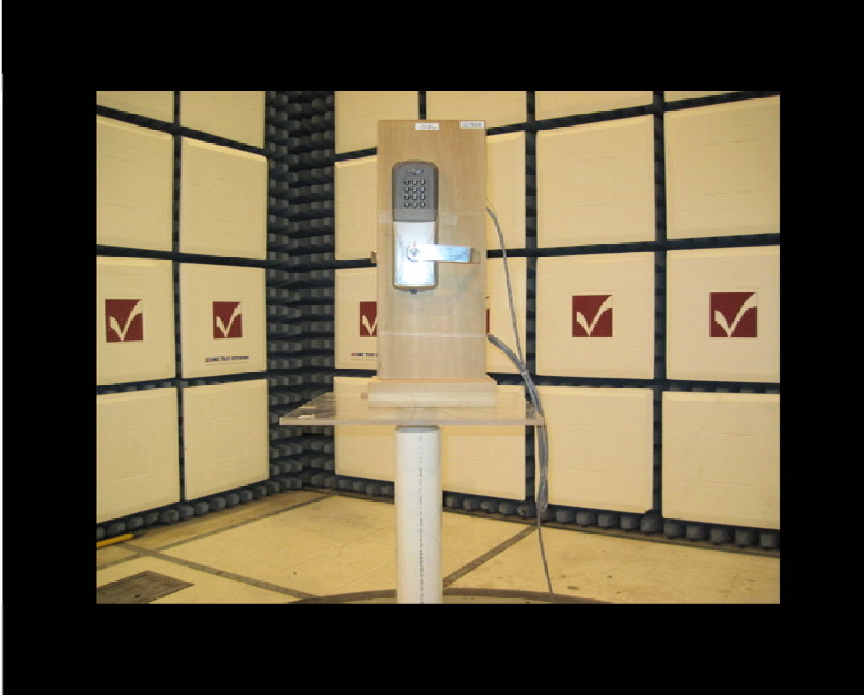

From left to right: Setup ID card for setting different transmit modes, 13.56MHz ID card and 125kHz ID card. These cards were used to set EUT in test mode and test for functionality of the PROX reader.


Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 17 of 30

5.8 Screen Captures - Radiated Emissions Testing


These screen captures represent Peak Emissions. For radiated emission measurements, a Quasi-Peak or Average detector function is utilized when measuring frequencies below 1 GHz.

The signature scans shown here are from worst-case emissions with the sense antenna in either vertical or horizontal polarity for worst case presentations.

10 kHz to 150 kHz, at 3m

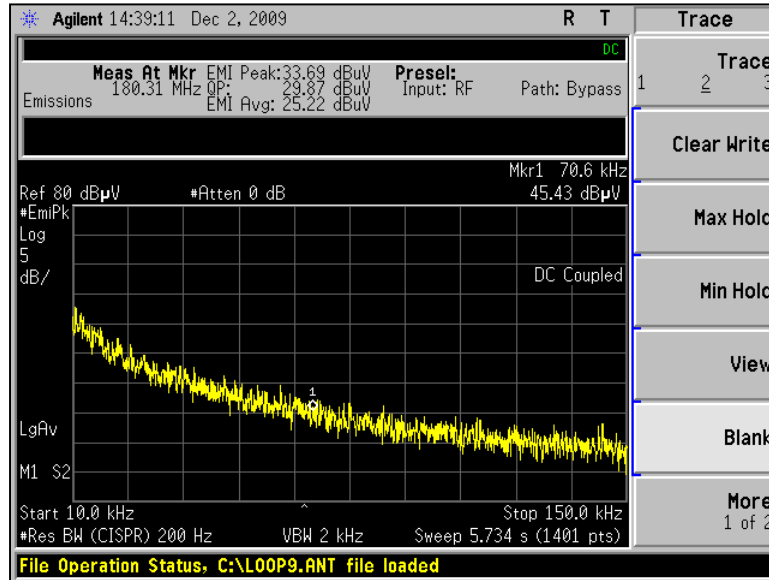


150 kHz-1MHz, at 3m

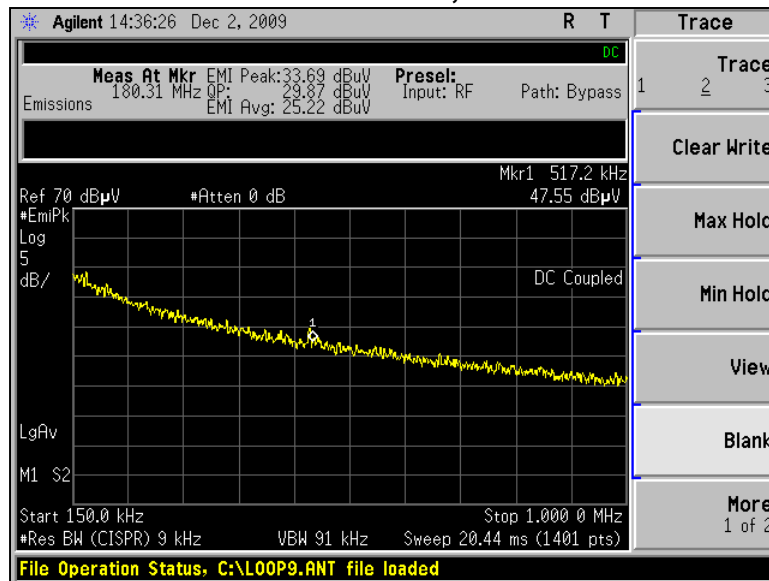


Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 18 of 30

1 MHz to 30 MHz, at 3m

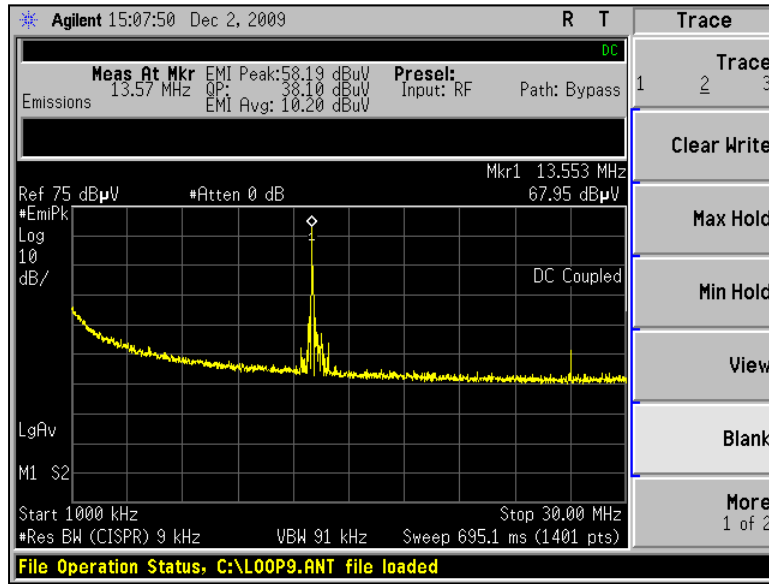


30 MHz to 300 MHz, at 3m

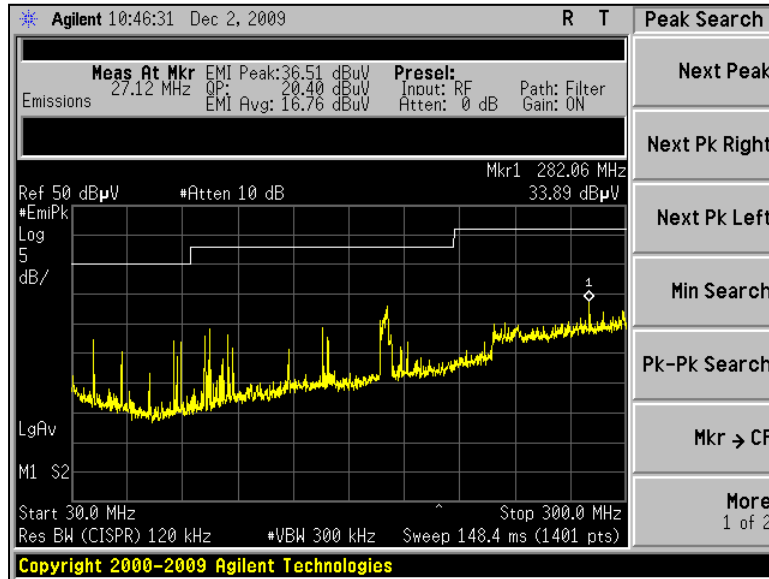

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 19 of 30

300 MHz to 1000 MHz, at 3m

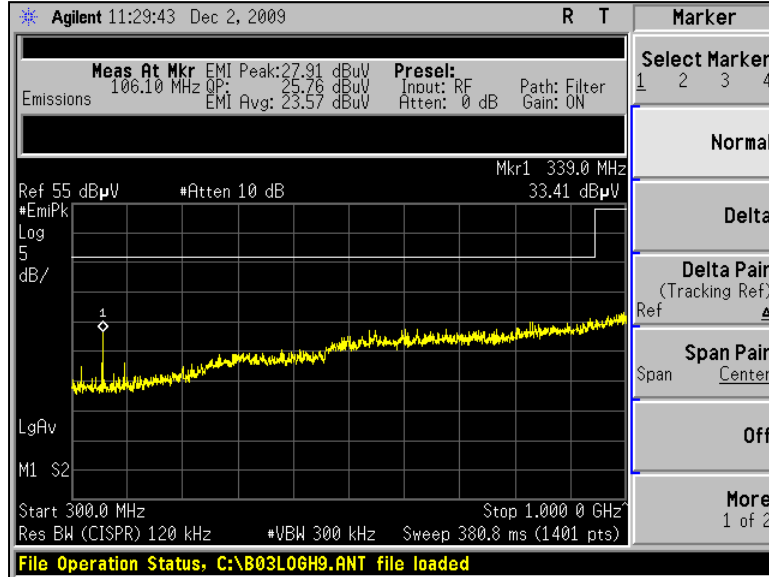

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 20 of 30

EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE

6.1 Test Setup

The test area and setup are in accordance with ANSI C63.4 and with Title 47 CFR, FCC Part 15 (Industry Canada RSS-210, Issue 7, 2007). The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT's power cable was plugged into a 50Ω (ohm), 50/250 μH Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to the Agilent E4445A/N9039A EMI System. The EMCO LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

6.2 Test Procedure

The EUT was investigated while it was transmitting at 13.56 MHz for this portion of the testing. The EUT was powered by a generic 12VDC AC to DC adaptor which was connected to the Mains network via a calibrated LISN. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1 Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30MHz. Final readings were then taken and recorded.

6.3 Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter are traceable to N.I.S.T. All cables are calibrated and checked periodically for conformance. The emissions are measured on the Agilent E4445A/N9039A EMI System, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

6.4 Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 and RSS GEN 7.2.2 Conducted Emissions for an Intentional Radiator. See the Data Charts and Graphs for more details of the test results.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 21 of 30

6.5 FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dB μ V)		Measuring Bandwidth
	Quasi-Peak	Average	
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average
0.5 – 5.0	56	46	
5.0 – 30	60	50	
* The limit decreases linearly with the logarithm of the frequency in this range.			

6.6 CONDUCTED EMISSIONS – TEST DATA CHART

Frequency Range inspected: 150 KHz to 30 MHz

Test Standard: FCC 15.207 Class B


IC RSS 210 7.2.2

Manufacturer:	Ingersoll-Rand Company				
Date(s) of Test:	December 3 rd 2009				
Test Engineer:	Khairul Aidi Zainal				
Voltage:	120 VAC				
Operation Mode:	Normal operation				
Environmental Conditions in the Lab:	Temperature: 20 – 25° C Relative Humidity: 30 – 60 %				
Test Location:	√	AC mains test bench			Chamber
EUT Placed On:	√	40cm from Vertical Ground Plane	√		10cm Spacers
	√	80cm above Ground Plane			Other:
Measurements:		Pre-Compliance		Preliminary	√ Final
Detectors Used:		Peak	√	Quasi-Peak	√ Average

Frequency (MHz)	Line	QUASI-PEAK			AVERAGE		
		Q-Peak Reading (dB μ V)	Q-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)
0.150	2	47.9	66.0	18.1	20.7	56.0	35.3
13.560	2	44.0	60.0	16.0	31.7	50.0	18.3
27.110	2	29.2	60.0	30.8	18.3	50.0	31.7
13.560	1	44.5	60.0	15.5	32.0	50.0	18.0
27.110	1	32.4	60.0	27.6	20.7	50.0	29.3

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 22 of 30

6.7 Test Setup Photo(s) – Conducted Emissions Test

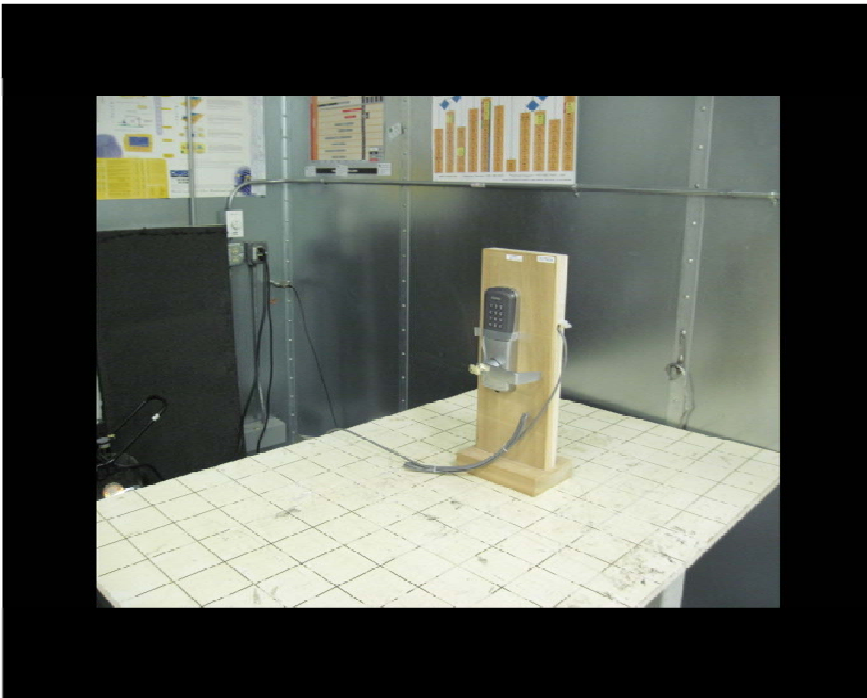


Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 23 of 30


6.8 Screen Captures – Conducted Emissions Test

These screen captures represent Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized. The emissions must meet both the Quasi-peak limit and the Average limit as described in 47 CFR 15.207 and RSS GEN 7.2.2.

Line 1

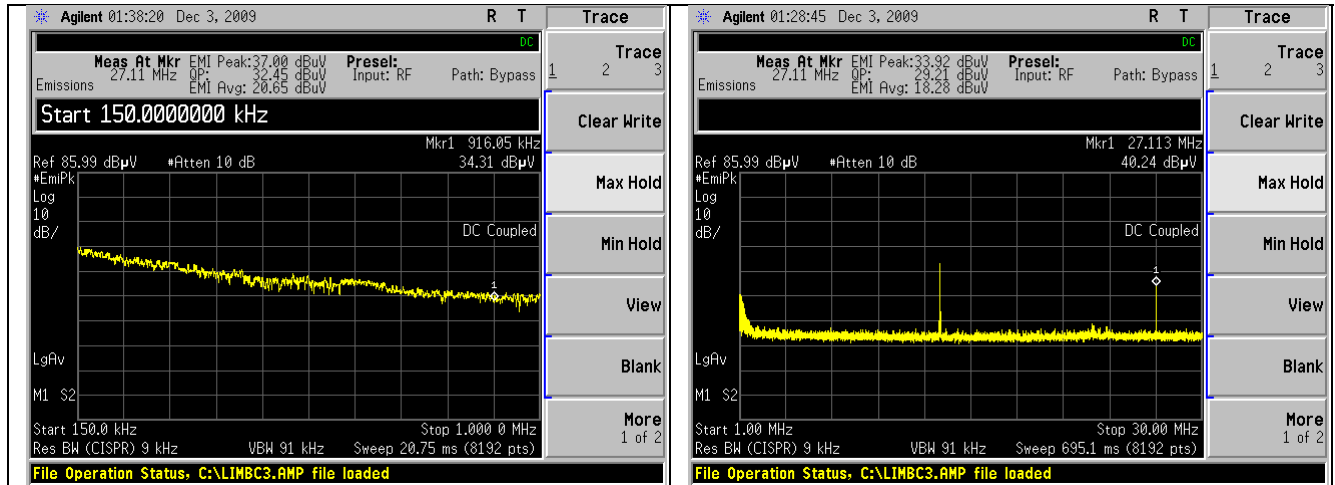

Line 2

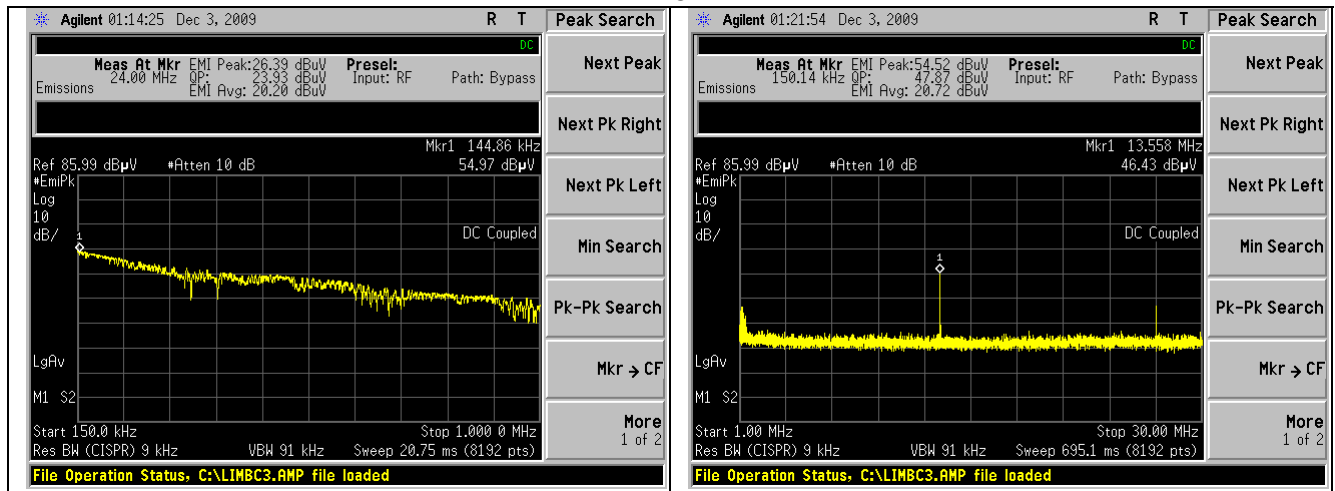

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCREd	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCREd	Page 24 of 30

EXHIBIT 7. OCCUPIED BANDWIDTH

7.1 Limits

There are no stated limits for the occupied bandwidth for devices operating under 47CFR Part 15.209. However it is required by Industry Canada per RSS GEN 4.6

7.2 Method of Measurements

ANSI C63.4, FCC and IC standard procedures were adhered to in these measurements.

The transmitter output was placed in normal operation mode. The bandwidth of the fundamental frequency was measured via radiated measurement with the Spectrum Analyzer using RBW=9kHz and VBW=91 kHz for the 13.56MHz transmitter.


7.3 Test Data

Mode	Center Frequency (MHz)	Measured -6 dBc Occ. BW (kHz)	Measured -20 dBc Occ.Bw (kHz)
AD-300 with 13.56 MHz reader	13.560	11.7	134.7


Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 25 of 30

7.4 Screen Captures - OCCUPIED BANDWIDTH

-20 dBc Occupied Bandwidth, 13.56MHz transmitter.

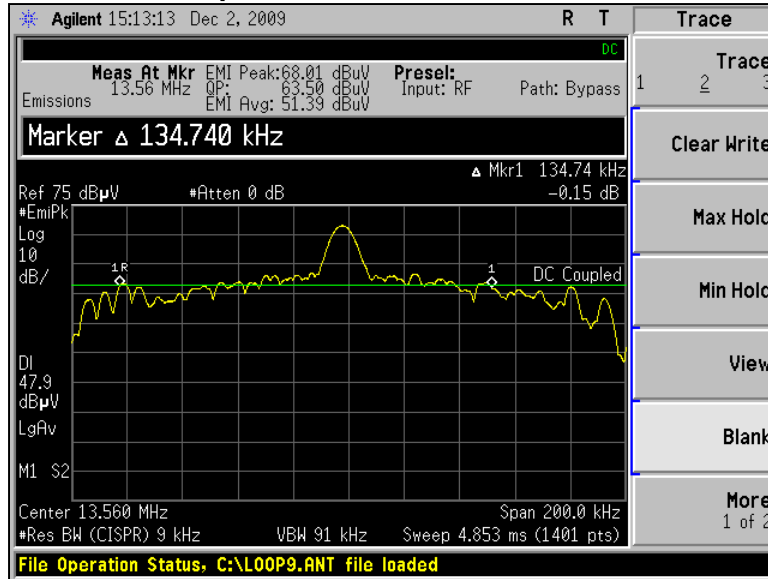

-6 dBc Occupied Bandwidth, 13.56 MHz transmitter

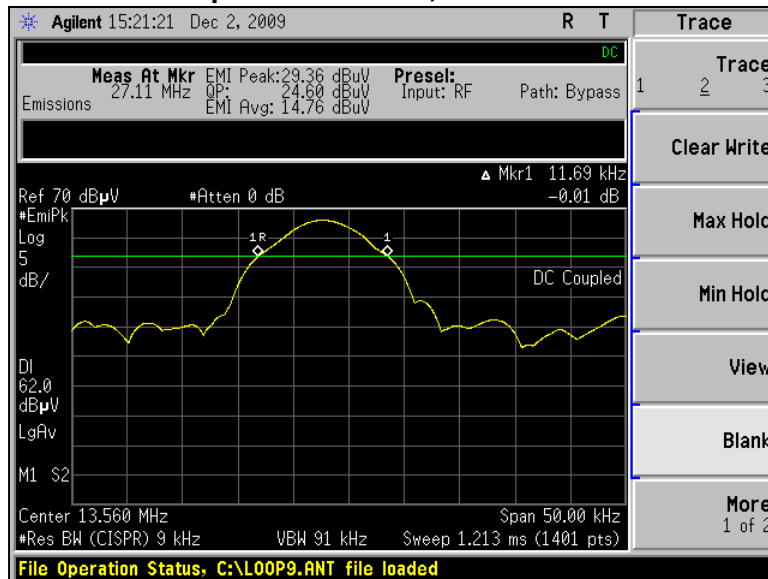


Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad Report #:309380	IC: 8053B-SMADCRED FCC ID #: XPB-SMADCRED	Template: 15.209 - v1 10-22-09 Page 26 of 30

EXHIBIT 8. BAND EDGE MEASUREMENT.

8.1 Test Criterion

FCC 15.209(b) requires a measurement of spurious emission levels to be no higher than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. The operation of this device shall also be limited to the frequency band between 1.705MHz to 30MHz for the 13.56MHz transmitter. No components of the fundamental emission shall be allowed outside of this band.


8.2 Screen captures.

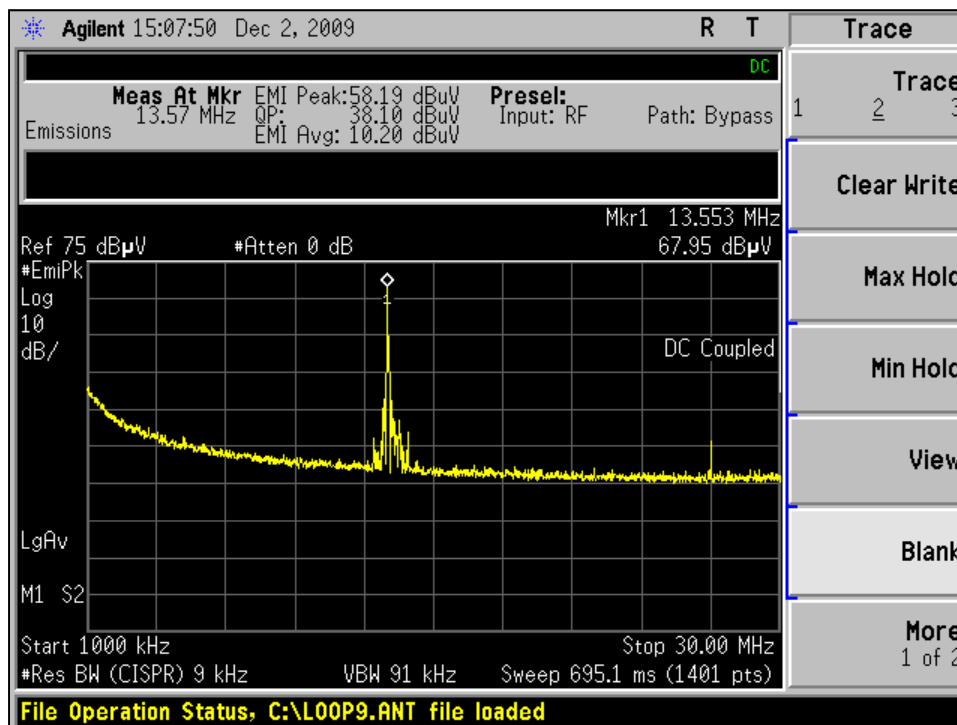


Screen capture shows that fundamental emissions were contained within the allowed band of operation.

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 27 of 30

APPENDIX A

 LS RESEARCH LLC Wireless Product Development Equipment Calibration		Date : <u>8-Dec-2009</u>		Type Test : <u>Conducted Emissions</u>		Job # : <u>C-772</u>		
		Prepared By : <u>Aidi</u>		Customer : <u>Ingersoll Rand</u>		Quote # : <u>309380</u>		
No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	aa 960008	LISN	EMCO	3816/2NM	9701-1057	12/29/2008	12/29/2009	Active Calibration
2	aa 960031	Transient Limiter	HP	11947A	3107A01708	9/15/2009	9/15/2010	Active Calibration
3	ee 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	3/17/2009	3/17/2010	Active Calibration
4	ee 960158	RF Preselector	Agilent	N9039A	MY46520110	7/2/2009	7/2/2010	Active Calibration
<hr/> Project Engineer: Aidi Quality Manager: Teresa								

 LS RESEARCH LLC Wireless Product Development Equipment Calibration		Date : <u>8-Dec-2009</u>		Type Test : <u>Radiated Emissions (209)</u>		Job # : <u>C-772</u>		
		Prepared By : <u>Aidi</u>		Customer : <u>Ingersoll Rand</u>		Quote # : <u>309380</u>		
No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	ee 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	3/17/2009	3/17/2010	Active Calibration
2	ee 960158	RF Preselector	Agilent	N9039A	MY46520110	7/2/2009	7/2/2010	Active Calibration
3	aa 960078	Log Periodic Antenna	EMCO	93146	9701-4855	10/16/2009	10/16/2010	Active Calibration
4	aa 960006	Active Loop Antenna	EMCO	6502	9205-2753	9/14/2009	9/14/2011	Active Calibration
5	aa 960150	Bicon Antenna	ETS	3110B	0003-3346	11/3/2009	11/3/2010	Active Calibration
<hr/> Project Engineer: Aidi Quality Manager: Teresa								

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCREd	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCREd	Page 28 of 30

APPENDIX C
Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	1.128 Volts/Meter
Conducted Immunity	3 Volts level	1.0 V

Prepared For: Ingersoll-Rand Company	Model #:23507288 & 23507270	LS Research, LLC
EUT: AD300 with SmartCard plus keypad	IC: 8053B-SMADCRED	Template: 15.209 - v1 10-22-09
Report #:309380	FCC ID #: XPB-SMADCRED	Page 30 of 30