

# FCC Measurement/Technical Report on

## Host-based multiradio module with Wi-Fi, Bluetooth and NFC

### EMMY-W161

### in WLAN 2.4 GHz and Bluetooth LE mode

FCC ID: EMMY-W161: XPYEMMYW161  
IC: EMMY-W161: 8595A-EMMYW161

**Test Report Reference:** MDE\_UBLOX\_1551\_FCCc\_Rev1

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**  
Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/  
Managing Directors:  
Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

Registergericht/registered:  
Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas  
Group Company  
[www.7layers.com](http://www.7layers.com)

## Table of Contents

<b>1</b>	<b>Applied Standards and Test Summary</b>	<b>4</b>
1.1	Applied Standards	4
1.2	FCC-IC Correlation Table	5
1.3	Measurement Summary / Signatures	6
1.4	Revision History	11
<b>2</b>	<b>Administrative Data</b>	<b>12</b>
2.1	Testing Laboratory	12
2.2	Project Data	12
2.3	Applicant Data	12
2.4	Manufacturer Data	12
<b>3</b>	<b>Test object Data</b>	<b>13</b>
3.1	General EUT Description	13
3.2	EUT Main components	14
3.3	WLAN Power Table	16
3.4	Ancillary Equipment	16
3.5	Auxiliary Equipment	17
3.6	EUT Setups	17
3.7	Operating Modes	18
3.8	Product labelling	18
<b>4</b>	<b>Test Results</b>	<b>19</b>
4.1	Conducted Emissions at AC Mains	19
4.2	Occupied Bandwidth (6 dB)	22
4.3	Occupied Bandwidth (99%)	27
4.4	Peak Power Output	31
4.5	Spurious RF Conducted Emissions	36
4.6	Spurious RF Conducted Emissions in Restricted Bands	41
4.7	Transmitter Spurious Radiated Emissions	52
4.8	Band Edge Compliance Conducted	58
4.9	Band Edge Compliance Conducted at Restricted Band	63
4.10	Band Edge Compliance Radiated	72
4.11	Power Density	74
4.12	Simultaneous Transmission - Spurious Radiated Emissions	79
<b>5</b>	<b>Test Equipment</b>	<b>83</b>
<b>6</b>	<b>Antenna Factors, Cable Loss and Sample Calculations</b>	<b>86</b>
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	86
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	87
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	88
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	89
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	90

6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	91
<b>7</b>	<b>Setup Drawings</b>	<b>92</b>
<b>8</b>	<b>Measurement Uncertainties</b>	<b>93</b>
<b>9</b>	<b>Photo Report</b>	<b>93</b>

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator.

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

#### Note 1:

The tests were selected and performed with reference to the FCC Public Notice "GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER §15.247, 558074 D01 DTS Meas Guidance v03r05, 2016-04-08". ANSI C63.10-2013 is applied.

#### Note 2:

Not all possible operating modes were tested. Worst case operating modes were determined at the beginning of the test period.

#### Note 3:

Bluetooth LE mode uses the same GFSK modulation like Bluetooth BDR mode, but  
- fewer channels (up to 40 instead of up to 80) in the same frequency band  
- and for this device lower output power (max. 5 dBm instead of max. 10 dBm).  
Bluetooth BDR mode is therefore worse for "Transmitter spurious radiated emissions" and "Band Edge Compliance Radiated" and cover also Bluetooth LE mode.

#### Note 4:

Bluetooth LE Mode => GFSK modulation, for test "Transmitter spurious radiated emissions" and "Band Edge Compliance Radiated" please refer to test report "MDE\_UBLOX\_1551\_FCCh", where the same EUT were tested in Bluetooth BDR mode.

**Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.**

**1.2 FCC-IC CORRELATION TABLE**

**Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC**

**DTS equipment**

<b>Measurement</b>	<b>FCC reference</b>	<b>IC reference</b>
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 1: 5.2 (1)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 1: 5.4 (4)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 1: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 1: 5.2 (2)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 15 Subpart C § 15.207

##### §15.247

Conducted Emissions at AC Mains

The measurement was performed according to ANSI C63.10

#### Final Result

OP-Mode	Setup	FCC	IC
Operating mode worst case	S161_aa01	Passed	Passed

#### 47 CFR CHAPTER I FCC PART 15 Subpart C § 15.247 (a) (2)

##### §15.247

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10

#### Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency			
Bluetooth LE, high	S161_bb01	Passed	Passed
Bluetooth LE, low	S161_bb01	Passed	Passed
Bluetooth LE, mid	S161_bb01	Passed	Passed
WLAN b, high	S161_bb01	Passed	Passed
WLAN b, low	S161_bb01	Passed	Passed
WLAN b, mid	S161_bb01	Passed	Passed
WLAN g, high	S161_bb01	Passed	Passed
WLAN g, low	S161_bb01	Passed	Passed
WLAN g, mid	S161_bb01	Passed	Passed
WLAN n 20 MHz, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, low	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid	S161_bb01	Passed	Passed
WLAN n 40 MHz, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, low	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency			
Bluetooth LE, high	S161_bb01	N/A	Tested
Bluetooth LE, low	S161_bb01	N/A	Tested
Bluetooth LE, mid	S161_bb01	N/A	Tested
WLAN b, high	S161_bb01	N/A	Tested
WLAN b, low	S161_bb01	N/A	Tested
WLAN b, mid	S161_bb01	N/A	Tested
WLAN g, high	S161_bb01	N/A	Tested
WLAN g, low	S161_bb01	N/A	Tested
WLAN g, mid	S161_bb01	N/A	Tested
WLAN n 20 MHz, high	S161_bb01	N/A	Tested
WLAN n 20 MHz, low	S161_bb01	N/A	Tested
WLAN n 20 MHz, mid	S161_bb01	N/A	Tested
WLAN n 40 MHz, high	S161_bb01	N/A	Tested
WLAN n 40 MHz, low	S161_bb01	N/A	Tested
WLAN n 40 MHz, mid	S161_bb01	N/A	Tested

Remark: No applicable limit. Measurement results for information purpose.

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (b) (3)**

Peak Power Output

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Measurement method			
Bluetooth LE, high, conducted	S161_bb01	Passed	Passed
Bluetooth LE, low, conducted	S161_bb01	Passed	Passed
Bluetooth LE, mid, conducted	S161_bb01	Passed	Passed
WLAN b, additional channel, conducted	S161_bb01	Passed	Passed
WLAN b, high, conducted	S161_bb01	Passed	Passed
WLAN b, low, conducted	S161_bb01	Passed	Passed
WLAN b, mid, conducted	S161_bb01	Passed	Passed
WLAN g, additional channel, conducted	S161_bb01	Passed	Passed
WLAN g, high, conducted	S161_bb01	Passed	Passed
WLAN g, low, conducted	S161_bb01	Passed	Passed
WLAN g, mid, conducted	S161_bb01	Passed	Passed
WLAN n 20 MHz, additional channel, conducted	S161_bb01	Passed	Passed
WLAN n 20 MHz, high, conducted	S161_bb01	Passed	Passed
WLAN n 20 MHz, low, conducted	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid, conducted	S161_bb01	Passed	Passed
WLAN n 40 MHz, additional channel, conducted	S161_bb01	Passed	Passed
WLAN n 40 MHz, high, conducted	S161_bb01	Passed	Passed
WLAN n 40 MHz, low, conducted	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid, conducted	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency			
Bluetooth LE, high	S161_bb01	Passed	Passed
Bluetooth LE, low	S161_bb01	Passed	Passed
Bluetooth LE, mid	S161_bb01	Passed	Passed
WLAN b, high	S161_bb01	Passed	Passed
WLAN b, low	S161_bb01	Passed	Passed
WLAN b, mid	S161_bb01	Passed	Passed
WLAN g, high	S161_bb01	Passed	Passed
WLAN g, low	S161_bb01	Passed	Passed
WLAN g, mid	S161_bb01	Passed	Passed
WLAN n 20 MHz, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, low	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid	S161_bb01	Passed	Passed
WLAN n 40 MHz, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, low	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Spurious RF Conducted Emissions in restricted bands

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Measurement range			
WLAN b, additional channel, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN b, high, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN b, low, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN b, mid, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN g, additional channel, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN g, high, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN g, low, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN g, mid, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 20 MHz, additional channel, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 20 MHz, high, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 20 MHz, low, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 40 MHz, additional channel, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 40 MHz, high, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 40 MHz, low, 9 kHz - 24 GHz	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid, 9 kHz - 24 GHz	S161_bb01	Passed	Passed



**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Measurement range			
WLAN b, high, 1 GHz - 26 GHz	S161_bb01	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz	S161_bb01	Passed	Passed
WLAN b, high, 9 kHz - 30 MHz	S161_bb01	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz	S161_bb01	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz	S161_bb01	Passed	Passed
WLAN b, low, 9 kHz - 30 MHz	S161_bb01	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz	S161_bb01	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz	S161_bb01	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Band Edge			
Bluetooth LE, high, high	S161_bb01	Passed	Passed
Bluetooth LE, low, low	S161_bb01	Passed	Passed
WLAN b, high, high	S161_bb01	Passed	Passed
WLAN b, low, low	S161_bb01	Passed	Passed
WLAN g, high, high	S161_bb01	Passed	Passed
WLAN g, low, low	S161_bb01	Passed	Passed
WLAN n 20 MHz, high, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, low, low	S161_bb01	Passed	Passed
WLAN n 40 MHz, high, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, low, low	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Band Edge			
WLAN b, high, high	S161_bb01	Passed	Passed
Remark: Due to 50 Ohm termination at the antenna port no radiated WLAN signal measurable. Please refer to "Band Edge Compliance Conducted at Restricted Band".			

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Conducted at Restricted Band

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Band Edge			
WLAN b, additional channel, high	S161_bb01	Passed	Passed
WLAN b, high, high	S161_bb01	Passed	Passed
WLAN b, mid, high	S161_bb01	Passed	Passed
WLAN g, additional channel, high	S161_bb01	Passed	Passed
WLAN g, high, high	S161_bb01	Passed	Passed
WLAN g, mid, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, additional channel, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, high, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, additional channel, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, high, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid, high	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (e)**

Power Density

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency			
Bluetooth LE, high	S161_bb01	Passed	Passed
Bluetooth LE, low	S161_bb01	Passed	Passed
Bluetooth LE, mid	S161_bb01	Passed	Passed
WLAN b, high	S161_bb01	Passed	Passed
WLAN b, low	S161_bb01	Passed	Passed
WLAN b, mid	S161_bb01	Passed	Passed
WLAN g, high	S161_bb01	Passed	Passed
WLAN g, low	S161_bb01	Passed	Passed
WLAN g, mid	S161_bb01	Passed	Passed
WLAN n 20 MHz, high	S161_bb01	Passed	Passed
WLAN n 20 MHz, low	S161_bb01	Passed	Passed
WLAN n 20 MHz, mid	S161_bb01	Passed	Passed
WLAN n 40 MHz, high	S161_bb01	Passed	Passed
WLAN n 40 MHz, low	S161_bb01	Passed	Passed
WLAN n 40 MHz, mid	S161_bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Simultaneous Transmission - Spurious Radiated Emissions  
The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Active Transmitters  
NFC + WLAN 2.4 GHz

**Setup**

S161\_ad01

**FCC**

Passed

**IC**

Passed



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0



(responsible for accreditation scope)  
Dipl.-Ing. Andreas Petz



(responsible for testing and report)  
Dipl.-Ing. Wolfgang Richter

1.4 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2016-06-16	--	invalid
rev_1	2016-08-05	1.1: Applicable FCC rules updated to 10-1-15 Edition, KDB 558074 D01 DTS Meas Guidance updated to v03r05, 2016-04-08 Edition, Note 3 added (Justification for Bluetooth LE-mode), Reference to FCC Public Notice DA 00-705 deleted (not applicable), 3.1: EUT description changed for clarification from "test vehicle" to "evaluation board", 3.2: Sample ad01 added, 3.7: Duty cycle information added, 4.2 to 4.4: Bandwidth and output power re-measured with lower declared output power, 4.3.1: Test description corrected 4.4.2: Reference to Frequency Hopping Systems deleted (not applicable) 4.11: Power density re-measured with lower declared output power, 4.12: Chapter Simultaneous Transmission added	valid

## 2 ADMINISTRATIVE DATA

### 2.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01  
Responsible for accreditation scope: Dipl.-Ing. Andreas Petz  
Report Template Version: 2016-06-07

### 2.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Wolfgang Richter  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2016-08-05  
Testing Period: 2016-01-28 to 2016-08-03

### 2.3 APPLICANT DATA

Company Name: u-blox AG  
Address: Zürcherstrasse 68  
8800 Thalwil  
Switzerland  
Contact Person: Mr. Giulio Comar

### 2.4 MANUFACTURER DATA

Company Name: please see applicant data  
Address:  
Contact Person:

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	WLAN 2.4 GHz, 5 GHz, BT, NFC, SRD (5.8 GHz) - Single Antenna
Product name	Host-based multiradio module with Wi-Fi, Bluetooth and NFC
Type	EMMY-W161
<b>Declared EUT data by the supplier</b>	
Voltage Type	DC
Voltage Level	normal: 3.3 V DC low: 3.0 V DC high: 3.6 V DC
Modulation Type	Bluetooth LE: GFSK WLAN: DSSS, OFDM, HT20 MCS0 – MCS7, HT40 MCS0 –MCS7 please see each test protocol
General product description	EMMY-W161 and EMMY-W163 are ultra-compact multi-radio modules providing Wi-Fi, Classic Bluetooth, Bluetooth low energy and NFC mode of operation. It is designed for both simultaneous and independent operations of: <ul style="list-style-type: none"> <li>• Wi-Fi IEEE 802.11ac and a/b/g/n</li> <li>• Dual-mode Bluetooth 4.2</li> <li>• NFC</li> </ul>
Specific product description for the EUT	EMMY-W161: Shielded module, single antenna pin for WLAN 802.11 ac/a/b/g/n and Bluetooth communication
The EUT provides the following ports:	- DC power supply - antenna port - signal ports
Data rates	Bluetooth LE, GFSK: 1 Mbit/s WLAN b: please see chapter "WLAN Power Table" WLAN g: please see chapter "WLAN Power Table" WLAN n 20 MHz: please see chapter "WLAN Power Table" WLAN n 40 MHz: please see chapter "WLAN Power Table"
Power levels	Bluetooth LE: 5 dBm WLAN: please see chapter "WLAN Power Table"

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

### 3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
DE1015031aa01	aa01	Radiated Sample "#1"
Sample Parameter	Value	
Integral Antenna	Antenna on evaluation board (target platform): Antenova, Type A10194, SMD chip antenna, 1.8 dBi Peak gain in 2.4 GHz band, 4.1 dBi Peak gain in 5 GHz band	
Serial No.	-	
HW Version	03	
SW Version	N/A	
Comment	-	

Sample Name	Sample Code	Description
DE1015031ad01	ad01	Radiated Sample "#1c"
Sample Parameter	Value	
Antenna	Antenna on evaluation board (target platform): Antenova, Type A10194, SMD chip antenna, 1.8 dBi Peak gain in 2.4 GHz band, 4.1 dBi Peak gain in 5 GHz band	
Serial No.	-	
HW Version	03	
SW Version	N/A	
Comment	-	

Sample Name	Sample Code	Description			
DE1015031bb01	bb01	Conducted Sample "#2a"			
Sample Parameter	Value				
Antenna	Antenna connector on evaluation board (target platform): The following antennas are designated for 2.4 and 5 GHz WLAN transmission on EMMY-W161, as well as Bluetooth on EMMY-W161. - Table 2 of Test Object Specification:				
				Peak gain [dBi]	
#	Manufacturer	Part number	Antenna type	2.4 GHz band	5 GHz band
W1	Antenova	A10194 [1]	SMD chip antenna 10x10x0.9 [mm]	1.8	4.1
W2	Linx	ANT-DB1-RAF-RPS [4]	Dual-band dipole antenna	2.5	<b>4.6</b>
W3	Taoglas	GW.40.2153	Dual-band dipole antenna	<b>3.74</b>	2.5
W4	Taoglas	GW.59.3153 [5]	Dual-band dipole antenna	2.37	2.93
W5	Walsin	RFDPA870900SBLB8G1	Dual-band dipole antenna	2	3
W6	Linx	ANT-2.4-CW-RCT-RP [3]	Single-band dipole antenna	2.2	N/A
W7	Delock	88395 [6]	Dual-band dipole antenna	1.5	2.1
Serial No.	-				
HW Version	03				
SW Version	N/A				
Comment	-				

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 WLAN POWER TABLE

#### Declared Power limits vs channel for FCC

Modulation group	WLAN TX Power in dBm at frequency in MHz												
	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472
DSSS 1, 2, 5.5, 11 Mbps	18	18	18	18	18	18	18	18	18	18	18	15	13
OFDM 6, 9, 12, 18 Mbps	13	16	16	16	16	16	16	16	16	15	13	10	9
OFDM 24, 36 Mbps	13	16	16	16	16	16	16	16	16	15	13	10	9
OFDM 48, 54 Mbps	13	13	13	13	13	13	13	13	13	13	13	9	9
HT20 MCS0, MCS1, MCS2	13	15	16	16	16	16	16	16	16	16	12	10	9
HT20 MCS3, MCS4	13	15	16	16	16	16	16	16	16	16	12	9	9
HT20 MCS5, MCS6, MCS7	13	13	13	13	13	13	13	13	13	13	12	9	9

Modulation group	WLAN TX Power in dBm at frequency in MHz									
	2422	2427	2432	2437	2442	2447	2452	2457	2462	
HT40 MCS0, MCS1, MCS2	11	11	13	14	14	13	10	7	6	
HT40 MCS3, MCS4	11	11	13	14	14	13	10	7	6	
HT40 MCS5, MCS6, MCS7	11	12	13	13	13	13	11	8	7	

Remark: Please see detailed EUT settings in the test protocols.

### 3.4 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
Evaluation board (target platform)	u-blox , 03, -, -	u-blox EVB-W16



### 3.5 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/ N)	Description
AC/DC power supply (115 V 60 Hz)	PeakTech, -, -, 081062045	PeakTech 6005D

### 3.6 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S161_aa01	DE1015031aa01, evaluation board, AC/DC power supply	Setup for radiated measurement
S161_ad01	DE1015031ad01, evaluation board, AC/DC power supply	Setup for radiated measurement
S161_bb01	DE1015031bb01, evaluation board, AC/DC power supply	Setup for conducted measurement

### 3.7 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

#### 3.7.1 TEST CHANNELS

<b>WLAN</b> <b>20 MHz Test Channels:</b>	<b>2.4 GHz ISM</b>		
	<b>2400 - 2483.5 MHz</b>		
	<b>low</b>	<b>mid</b>	<b>high</b>
	1	6	13
<b>Channel:</b>	2412	2437	2472
<b>Frequency [MHz]</b>			

<b>40 MHz Test Channels:</b>	<b>low</b>	<b>mid</b>	<b>high</b>
	3	6	11
	2422	2437	2462

<b>BT LE Test Channels:</b>	<b>2.4 GHz ISM</b>		
	<b>2400 - 2483.5 MHz</b>		
	<b>low</b>	<b>mid</b>	<b>high</b>
	0	19	39
<b>Channel:</b>	2402	2440	2480
<b>Frequency [MHz]</b>			

In case of testing another channel, the measurement summary state "additional channel" and the channel or centre frequency of the operating frequency is stated in the test protocol.

Duty cycle = 100 %

### 3.8 PRODUCT LABELLING

#### 3.8.1 FCC ID LABEL

Please refer to the documentation of the applicant.

#### 3.8.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 CONDUCTED EMISSIONS AT AC MAINS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 4.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

##### **Step 1: Preliminary scan**

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

##### **Step 2: Final measurement**

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### 4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).


#### 4.1.3 TEST PROTOCOL

Temperature: 24 °C  
 Air Pressure: 992 hPa  
 Humidity: 34 %

Power line	Frequency [MHz]	Measured value QP [dB $\mu$ V]	Measured value AV [dB $\mu$ V]	QP Limit [dB $\mu$ V]	AV Limit [dB $\mu$ V]	Margin QP [dB]	Margin AV [dB]
N	-	-	-	-	-	> 20	> 20
L	-	-	-	-	-	> 20	> 20

Remark: Measured at 120 V 60 Hz input of lab power supply, WLAN 2.4 GHz, CH 6, CW, set EUT target power: 18 dBm

#### 4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

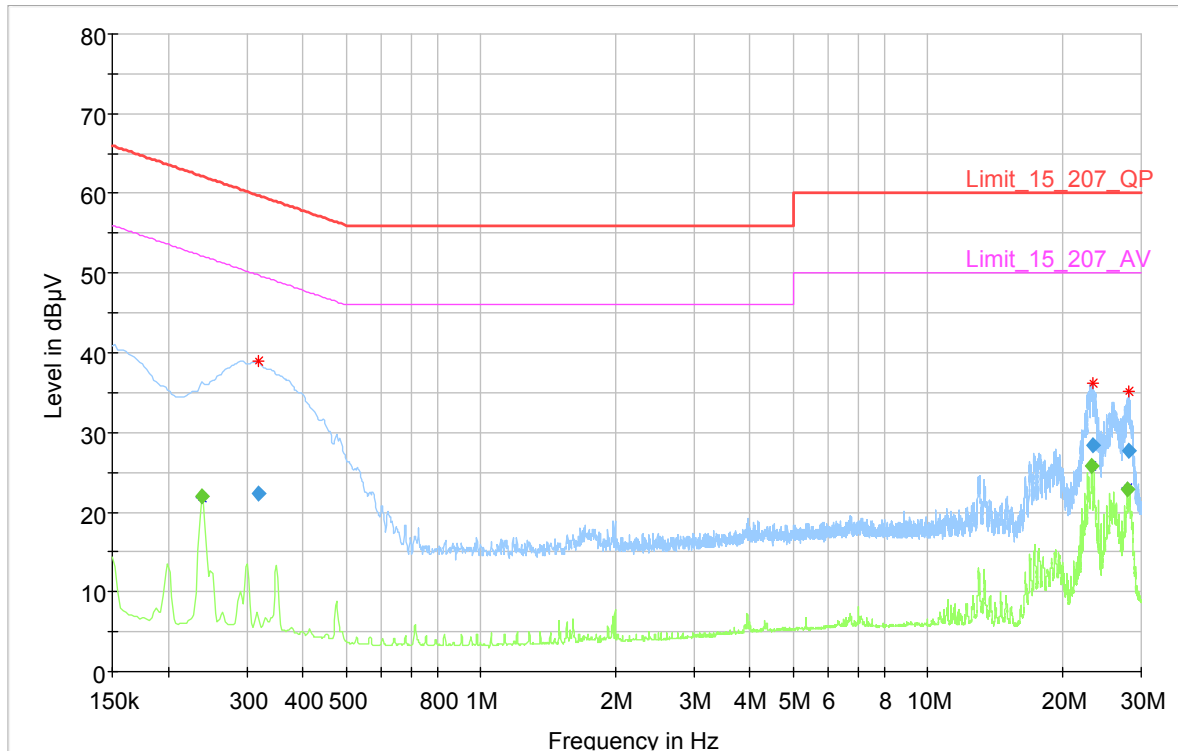

#### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.237750	---	21.86	52.17	30.31	---	---	L1	GND	10.1
0.318750	38.89	---	59.74	20.85	---	---	L1	GND	10.1
23.223750	---	25.87	50.00	24.13	---	---	N	FLO	11.1
23.322750	36.17	---	60.00	23.83	---	---	L1	GND	11.1
27.946500	---	23.01	50.00	26.99	---	---	N	FLO	11.2
28.239000	35.22	---	60.00	24.78	---	---	N	FLO	11.2

#### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.237750	---	22.01	52.17	30.16	1000.0	9.000	L1	GND	10.1
0.318750	22.32	---	59.74	37.42	1000.0	9.000	L1	GND	10.1
23.223750	---	25.72	50.00	24.28	1000.0	9.000	N	FLO	11.1
23.322750	28.44	---	60.00	31.56	1000.0	9.000	L1	GND	11.1
27.946500	---	22.78	50.00	27.22	1000.0	9.000	N	FLO	11.2
28.239000	27.64	---	60.00	32.36	1000.0	9.000	N	FLO	11.2

#### 4.1.5 TEST EQUIPMENT USED

Conducted Emissions

## 4.2 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Peak

### 4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.2.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 BT LE GFSK

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [kHz]	Limit [kHz]	Margin to Limit [kHz]
2.4 GHz ISM	0.0	2402.0	757.5	500.0	257.5
	19.0	2440.0	745.5	500.0	245.5
	39.0	2480.0	751.5	500.0	251.5

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 WLAN b-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
DSSS, 11Mbit	18.0	2412.0	9.9	0.5	9.4
DSSS, 11Mbit	18.0	2437.0	9.6	0.5	9.1
DSSS, 11Mbit	18.0	2462.0	10.3	0.5	9.8
DSSS, 11Mbit	13.0	2472.0	9.3	0.5	8.8

WLAN g-Mode; 20 MHz

Band	Set EUT target power	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
OFDM, 54 Mbps	13.0	2412.0	16.4	0.5	15.9
OFDM, 36 Mbps	16.0	2437.0	16.1	0.5	15.6
OFDM, 54 Mbps	9.0	2472.0	16.5	0.5	16.0

WLAN n-Mode; 20 MHz

Band	Set EUT target power	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
OFDM, MCS6	13.0	2412.0	17.3	0.5	16.8
OFDM, MCS3	16.0	2437.0	16.9	0.5	16.4
OFDM, MCS6	9.0	2472.0	17.6	0.5	17.1


WLAN n-Mode; 40 MHz

Band	Set EUT target power	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
OFDM, MCS6	11.0	2422.0	36.6	0.5	36.1
OFDM, MCS4	14.0	2437.0	36.4	0.5	35.9
OFDM, MCS6	7.0	2462.0	35.5	0.5	35.0


Remark: -

#### 4.2.4 MEASUREMENT PLOT (SHOWING THE LOWEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid

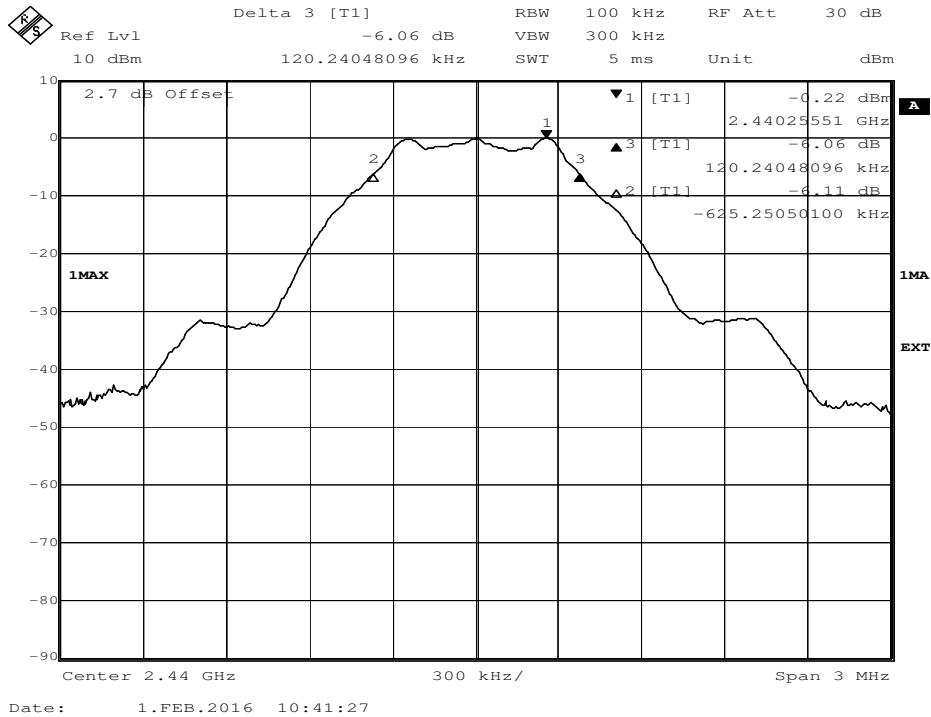


Radio Technology = WLAN b, Operating Frequency = high

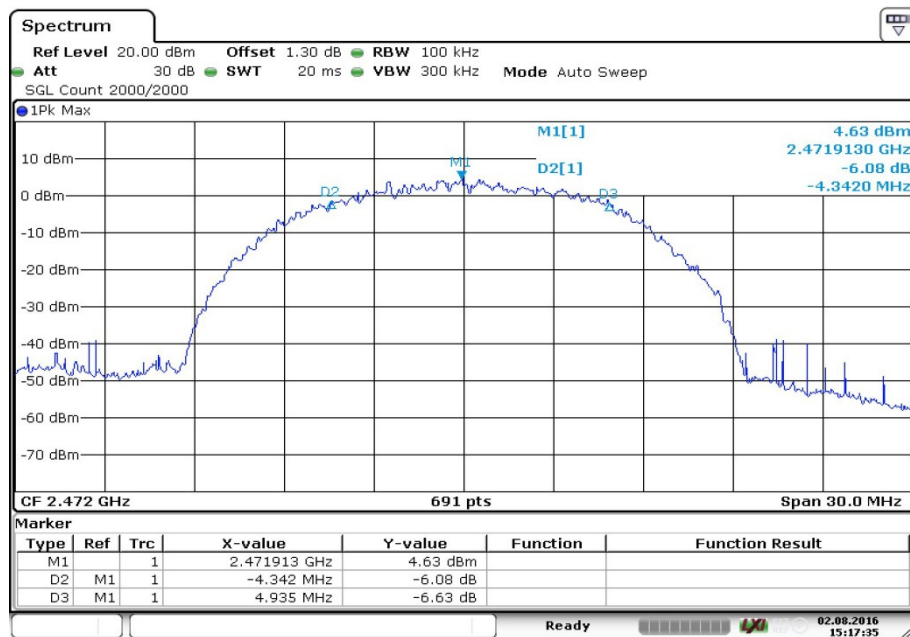

Date: 2.AUG.2016 15:17:36




Radio Technology = WLAN g, Operating Frequency = mid

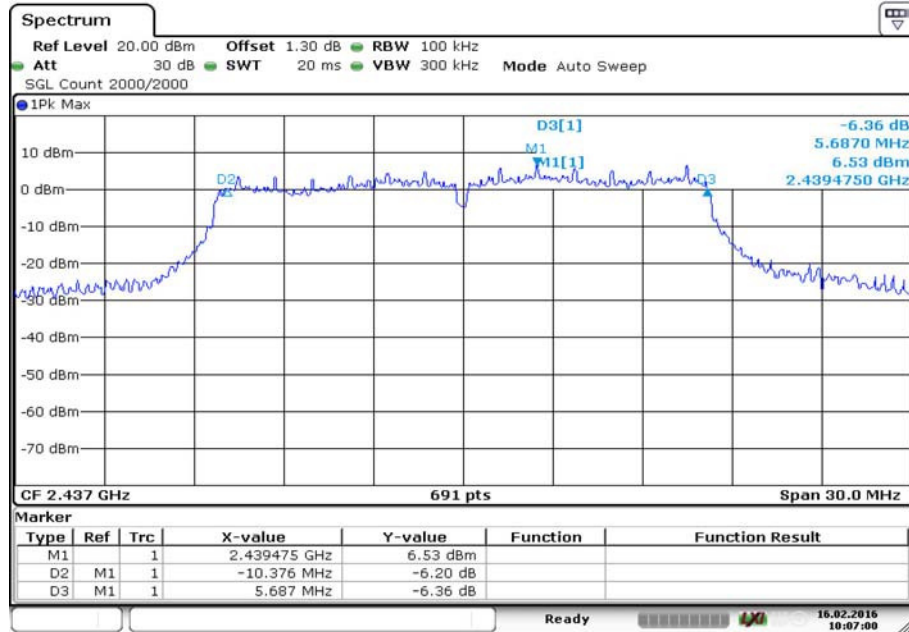


Date: 16.FEB.2016 10:07:00

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid

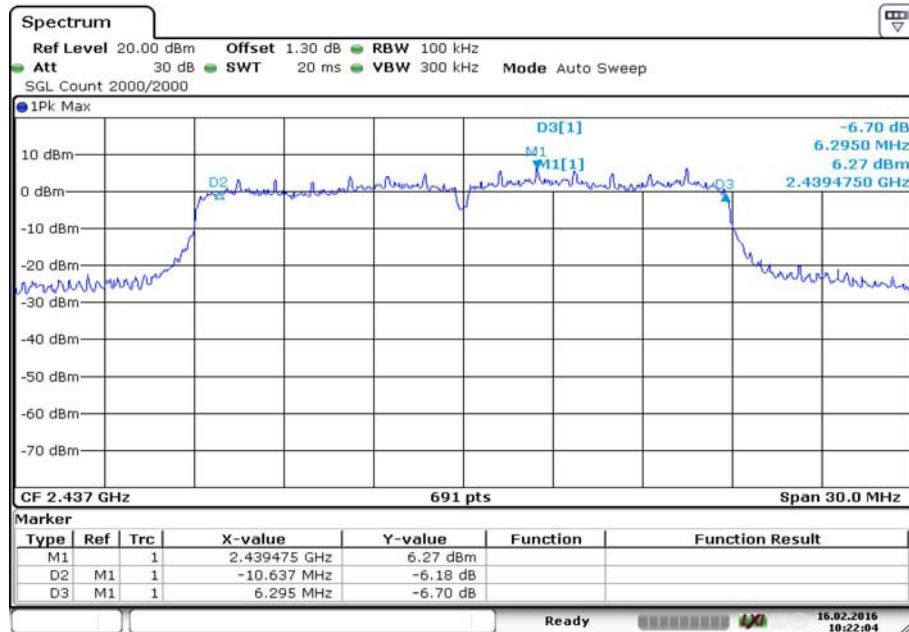

Date: 16.FEB.2016 10:22:05

Radio Technology = WLAN n 40 MHz, Operating Frequency = high

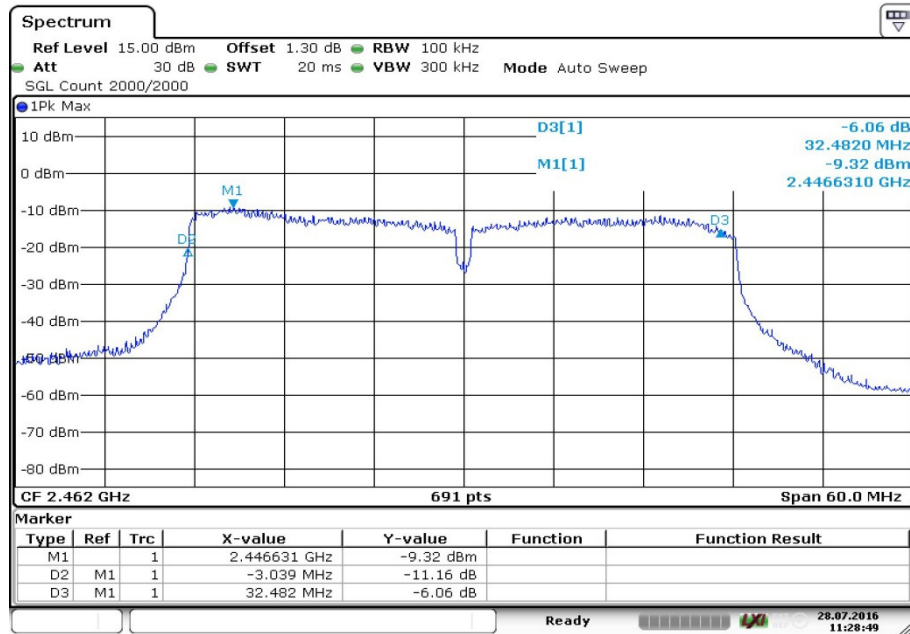

Date: 28.JUL.2016 11:28:50

#### 4.2.5 TEST EQUIPMENT USED

R&S TS8997

### 4.3 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW), 1 % to 5 % of OBW (6 dB):  
BT-LE: 30 kHz, WLAN b, g, n 20 MHz: 500 kHz, WLAN n 40 MHz: 1 MHz
- Video Bandwidth (VBW), approx. 3 x RBW:  
BT-LE: 100 kHz, WLAN b, g, n 20 MHz: 2 MHz, WLAN n 40 MHz: 3 MHz
- Span, 1.5 to 5 x OBW (6dB):  
BT-LE: 3 MHz, WLAN b, g, n 20 MHz: 50 MHz, WLAN n 40 MHz: 100 MHz
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

#### 4.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit. Measurement results for information purpose.

#### 4.3.3 TEST PROTOCOL

Ambient temperature: 23 °C  
Air Pressure: 1017 hPa  
Humidity: 41 %  
BT LE

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [kHz]
2.4 GHz ISM	0.0	2402.0	1024.6
	19.0	2440.0	<b>1024.6</b>
	39.0	2480.0	1020.3

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 WLAN b-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	99 % Bandwidth [MHz]
DSSS, 11 Mbps	18.0	2412.0	13.3
DSSS, 11 Mbps	18.0	2437.0	13.4
DSSS, 11 Mbps	13.0	2472.0	12.8

WLAN g-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	99 % Bandwidth [MHz]
OFDM, 54 Mbps	13.0	2412.0	17.0
OFDM, 36 Mbps	16.0	2437.0	17.2
OFDM, 54 Mbps	9.0	2472.0	16.7

WLAN n-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	99 % Bandwidth [MHz]
OFDM, MCS6	13.0	2412.0	17.9
OFDM, MCS3	16.0	2437.0	18.0
OFDM, MCS6	9.0	2472.0	17.7


WLAN n-Mode; 40 MHz

Mode	Set EUT target power	Frequency [MHz]	99 % Bandwidth [MHz]
OFDM, MCS6	11.0	2422.0	36.6
OFDM, MCS4	14.0	2437.0	36.0
OFDM, MCS6	7.0	2462.0	36.5

Remark: Please see next sub-clause for the measurement plot.


#### 4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid

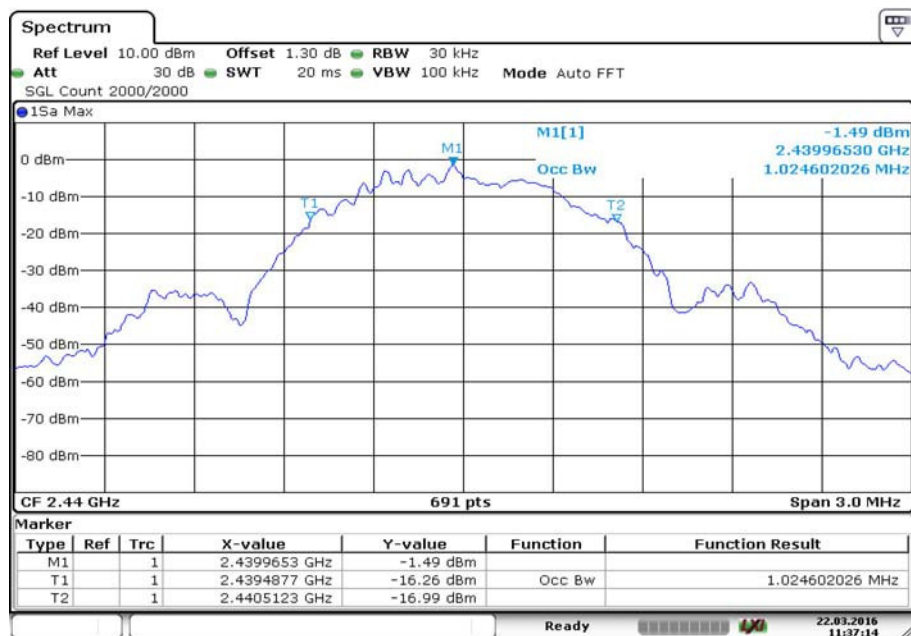


Date: 22.MAR.2016 11:37:15

Radio Technology = WLAN b, Operating Frequency = mid

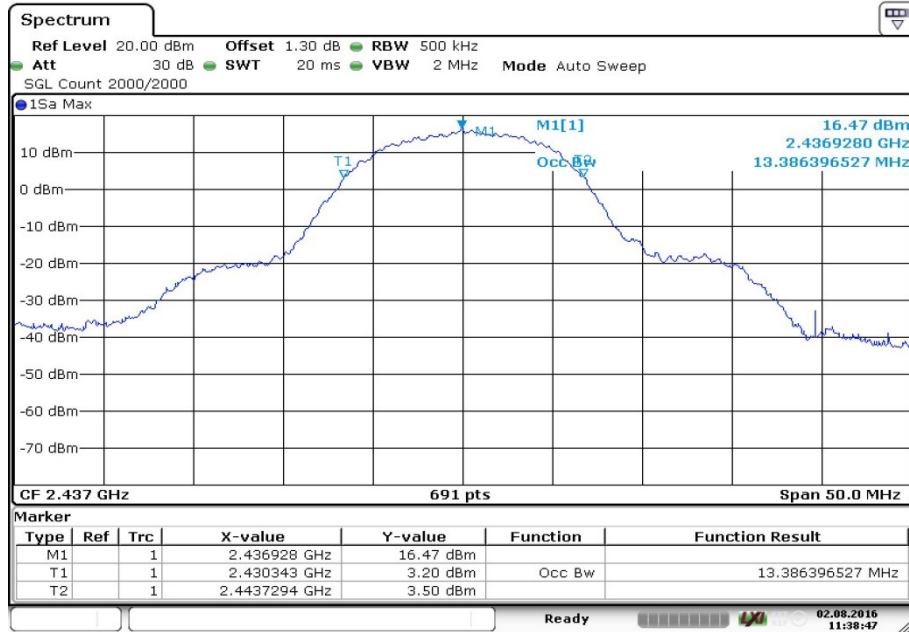


Date: 2.AUG.2016 11:38:47

Radio Technology = WLAN g, Operating Frequency = mid

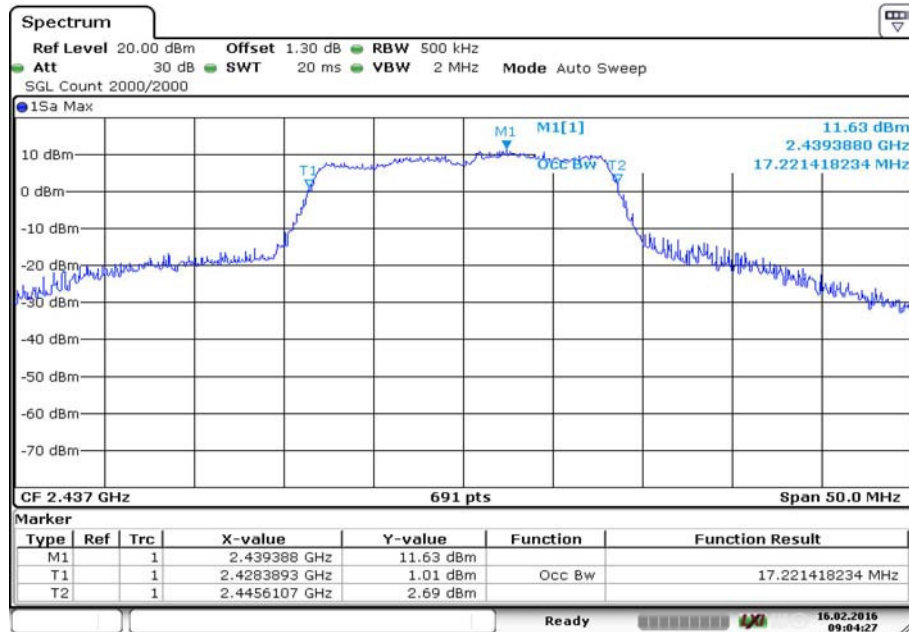


Date: 16.FEB.2016 09:04:27

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid

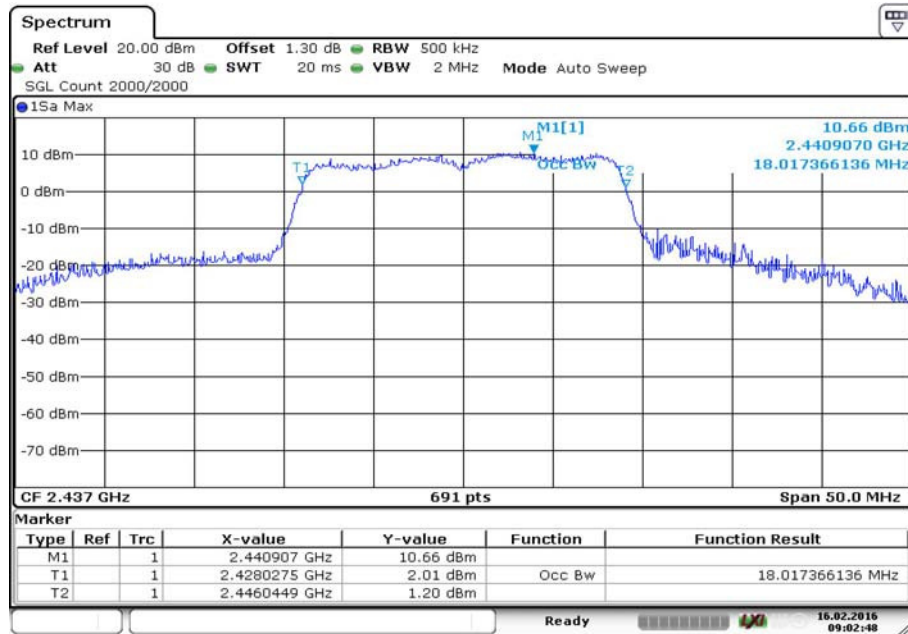

Date: 16.FEB.2016 09:02:49

Radio Technology = WLAN n 40 MHz, Operating Frequency = low

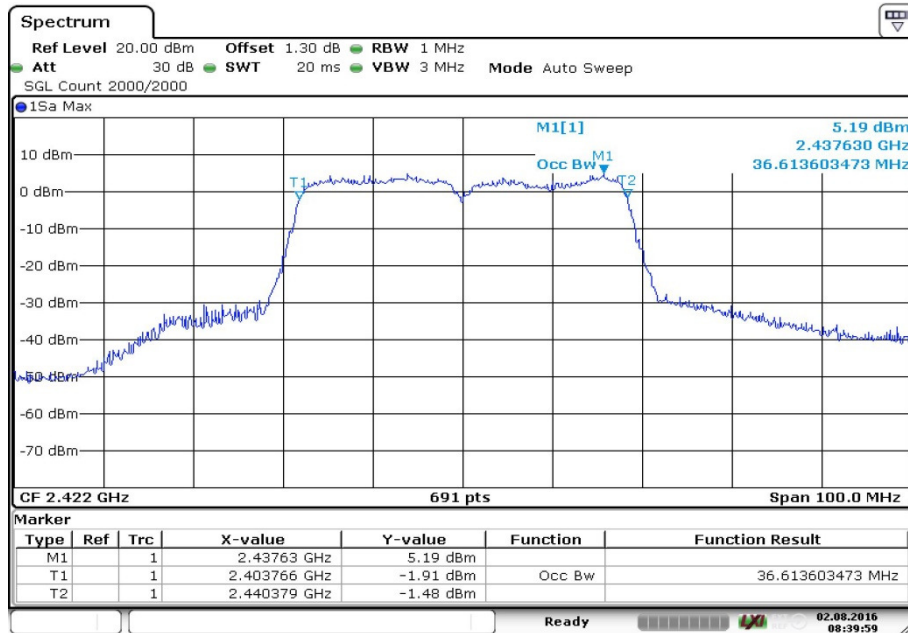

Date: 2.AUG.2016 08:39:59

#### 4.3.5TEST EQUIPMENT USED

R&S TS8997

#### 4.4 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

##### 4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 5 ms
- Detector: Peak

The channel power function of the spectrum analyser was used (Used channel bandwidth = DTS bandwidth)

##### 4.4.2 TEST REQUIREMENTS / LIMITS

###### **DTS devices:**

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

##### 4.4.3 TEST PROTOCOL

Ambient temperature: 23 °C  
Air Pressure: 1017 hPa  
Humidity: 41 %  
BT LE

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	0	2402.0	2.1	30.0	27.9
	19	2440.0	2.5	30.0	27.5
	39	2480.0	1.6	30.0	28.4

Ambient temperature: 23 °C

Air Pressure: 1017 hPa

Humidity: 41 %

WLAN b-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
DSSS, 11 Mbps	18.0	2412.0	26.6	30.0	3.4
DSSS, 11 Mbps	18.0	2437.0	26.9	30.0	3.1
DSSS, 11 Mbps	18.0	2462.0	23.4	30.0	6.6
DSSS, 11 Mbps	15.0	2467.0	20.9	30.0	9.1
DSSS, 11 Mbps	13.0	2472.0	20.1	30.0	9.9

WLAN g-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, 54 Mbps	13.0	2412.0	22.6	30.0	7.4
OFDM, 36 Mbps	16.0	2417.0	24.5	30.0	5.2
OFDM, 36 Mbps	16.0	2437.0	25.3	30.0	4.7
OFDM, 36 Mbps	10.0	2467.0	16.5	30.0	13.5
OFDM, 54 Mbps	9.0	2472.0	16.0	30.0	14.0

WLAN n-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6	13.0	2412.0	22.9	30.0	7.1
OFDM, MCS3	15.0	2417.0	24.4	30.0	5.6
OFDM, MCS3	16.0	2437.0	26.0	30.0	4.0
OFDM, MCS3	9.0	2467.0	15.8	30.0	14.2
OFDM, MCS6	9.0	2472.0	16.7	30.0	13.3


WLAN n-Mode; 40 MHz

Mode	Set EUT target power	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6	11.0	2422.0	19.2	30.0	10.8
OFDM, MCS4	11.0	2427.0	19.3	30.0	10.7
OFDM, MCS4	14.0	2437.0	22.7	30.0	7.3
OFDM, MCS4	13.0	2447.0	21.0	30.0	9.0
OFDM, MCS6	7.0	2462.0	13.9	30.0	16.1


Remark: -




4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")  
 Radio Technology = Bluetooth LE, Operating Frequency = mid, Measurement method = conducted

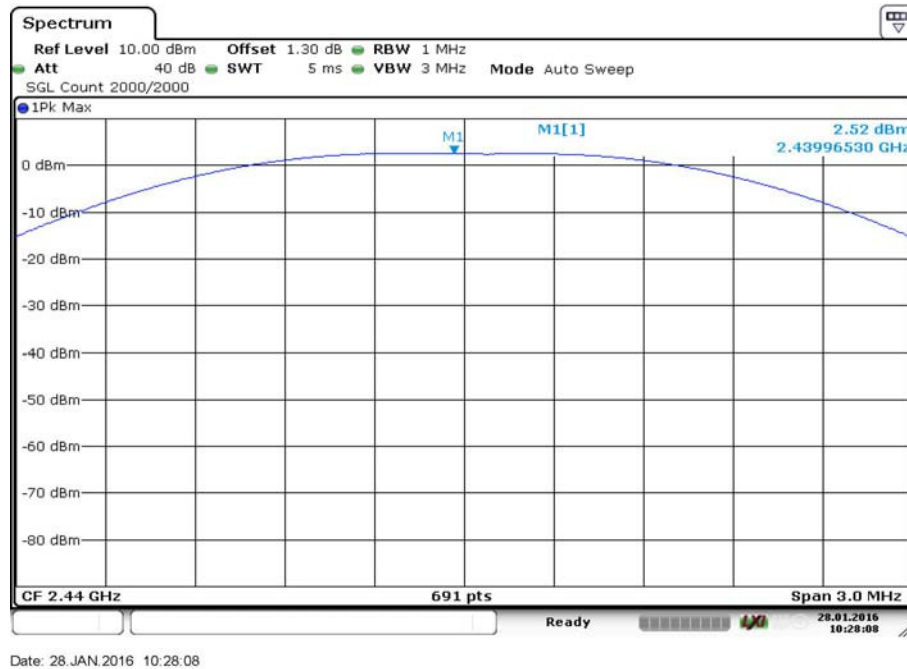

Radio Technology = WLAN b, Operating Frequency = mid, Measurement method = conducted

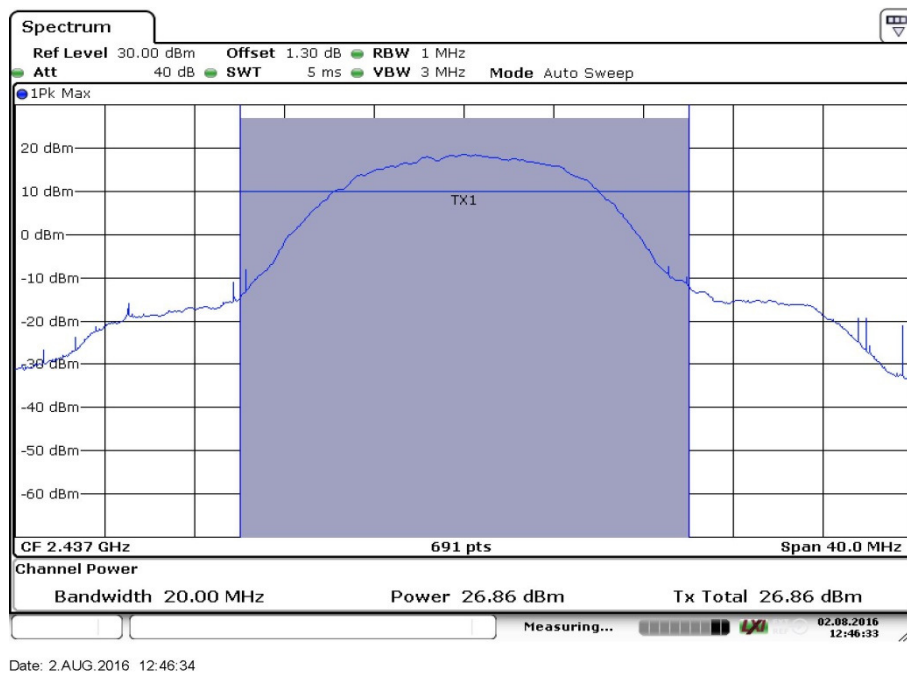


Radio Technology = WLAN g, Operating Frequency = mid, Measurement method = conducted

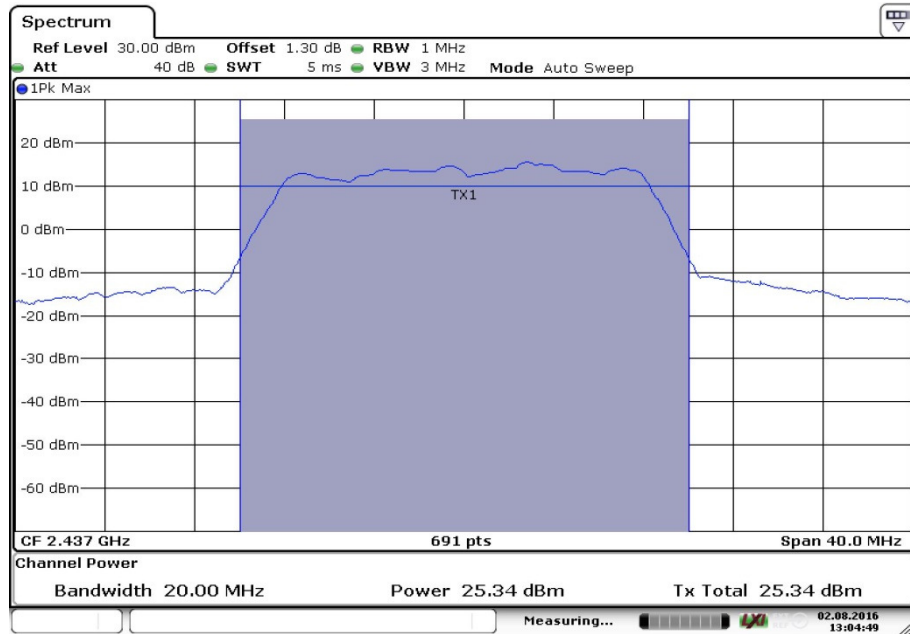


Date: 2.AUG.2016 13:04:50

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement method = conducted

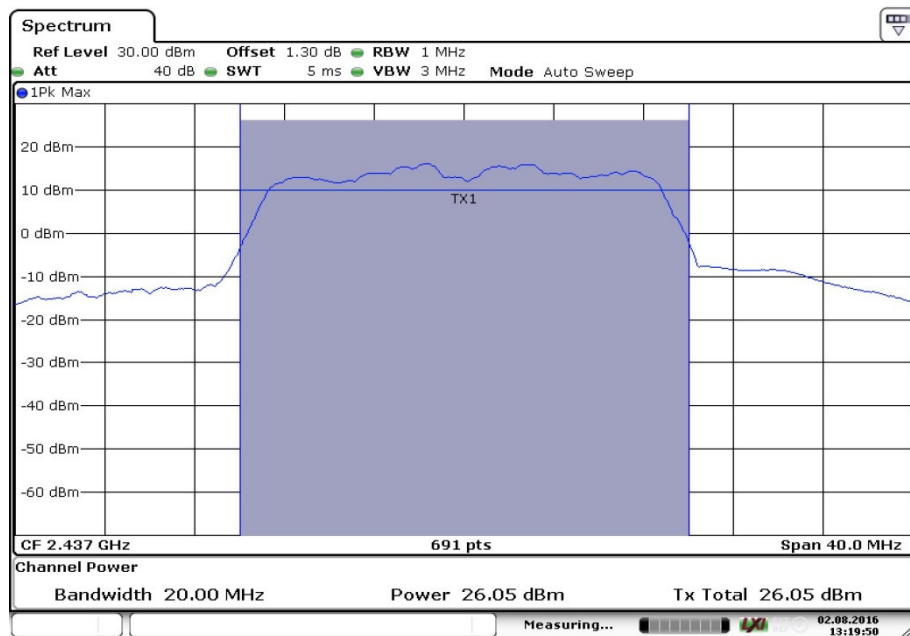

Date: 2.AUG.2016 13:19:50

Radio Technology = WLAN n 40 MHz, Operating Frequency = mid, Measurement method = conducted

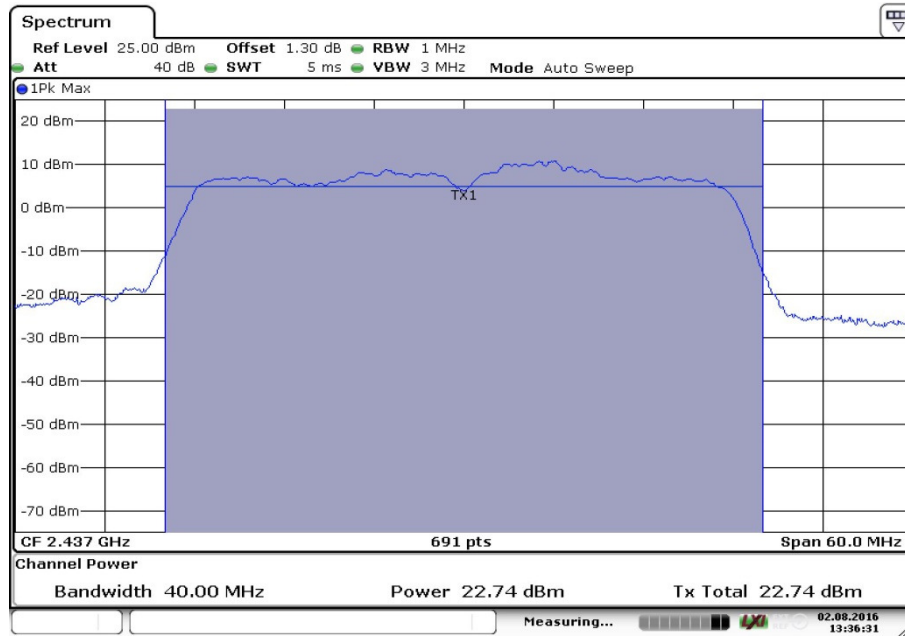

Date: 2.AUG.2016 13:36:32

#### 4.4.5 TEST EQUIPMENT USED

R&S TS8997

## 4.5 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: 2
- Sweep Time: 330 s
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc limit.

### 4.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 4.5.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 BT LE GFSK

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0.0	2402.0	-	-	PEAK	100.0	1.1	-18.9	> 20 dB
19.0	2440.0	-	-	PEAK	100.0	1.1	-18.9	> 20 dB
39.0	2480.0	-	-	PEAK	100.0	0.3	-19.7	> 20 dB

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 WLAN b-Mode; 20 MHz

Mode	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
DSSS, 1Mbit	2412.0	-	-	PEAK	100.0	9.3	-10.7	> 20
DSSS, 1Mbit	2437.0	-	-	PEAK	100.0	9.4	-10.6	> 20
DSSS, 1Mbit	2472.0	-	-	PEAK	100.0	8.7	-11.3	> 20

WLAN g-Mode; 20 MHz

Mode	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, 54 Mbps	2412.0	-	-	PEAK	100.0	5.6	-14.4	> 20
OFDM, 36 Mbps	2437.0	-	-	PEAK	100.0	6.3	-13.7	> 20
OFDM, 54 Mbps	2472.0	-	-	PEAK	100.0	4.8	-15.2	> 20

WLAN n-Mode; 20 MHz

Mode	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6	2412.0	-	-	PEAK	100.0	5.4	-14.6	> 20
OFDM, MCS3	2437.0	-	-	PEAK	100.0	6.1	-13.9	> 20
OFDM, MCS6	2472.0	-	-	PEAK	100.0	2.7	-17.3	> 20


WLAN n-Mode; 40 MHz

Mode	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6	2422.0	-	-	PEAK	100.0	2.6	-17.4	> 20
OFDM, MCS4	2437.0	-	-	PEAK	100.0	3.8	-16.2	> 20
OFDM, MCS6	2462.0	-	-	PEAK	100.0	0.3	-19.8	> 20

Remark: -


### 4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid

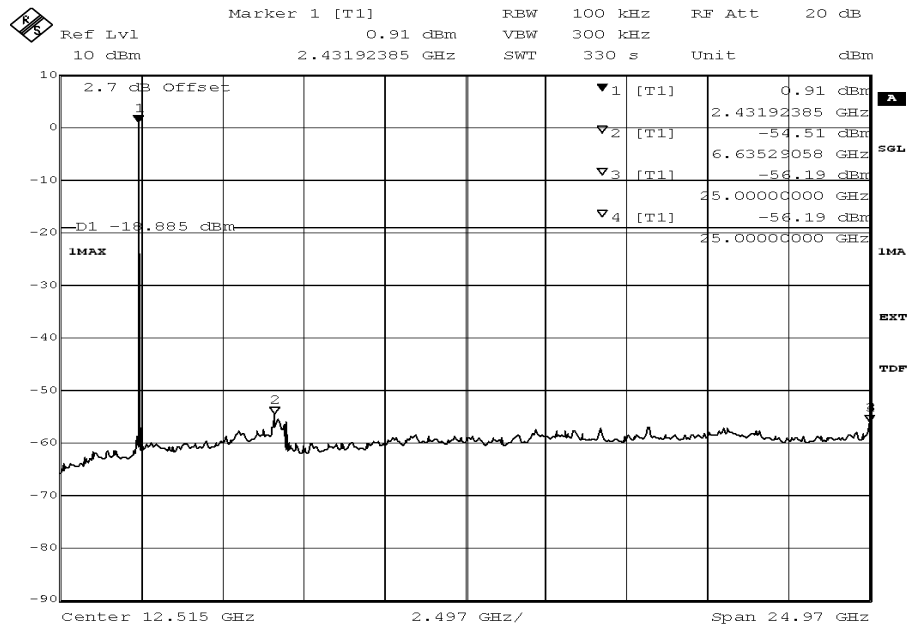


Title: spurious emissions  
 Comment A: CH M2: 2440 MHz  
 Date: 1.FEB.2016 09:59:40

Radio Technology = WLAN b, Operating Frequency = low

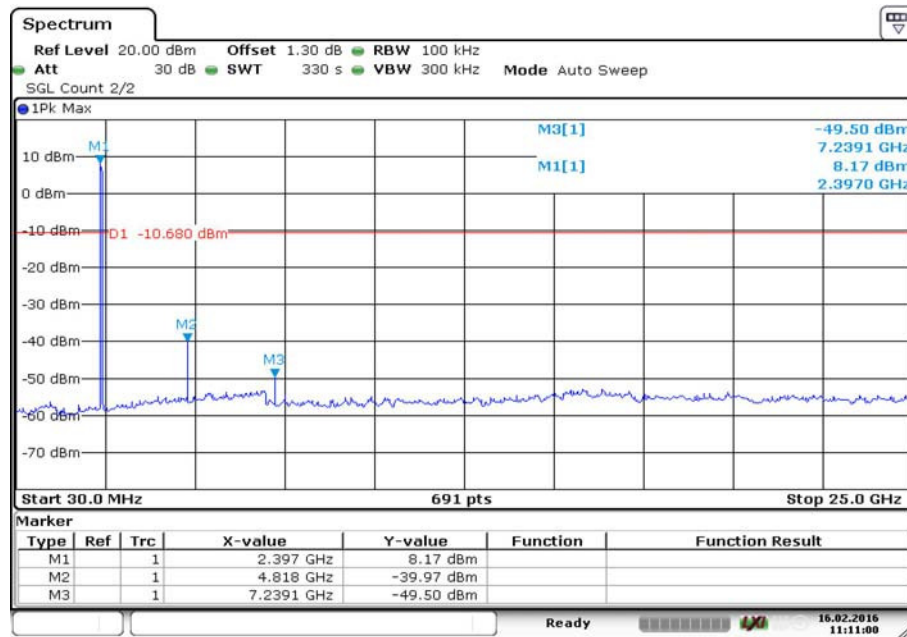


Date: 16.FEB.2016 11:11:00

Radio Technology = WLAN g, Operating Frequency = low

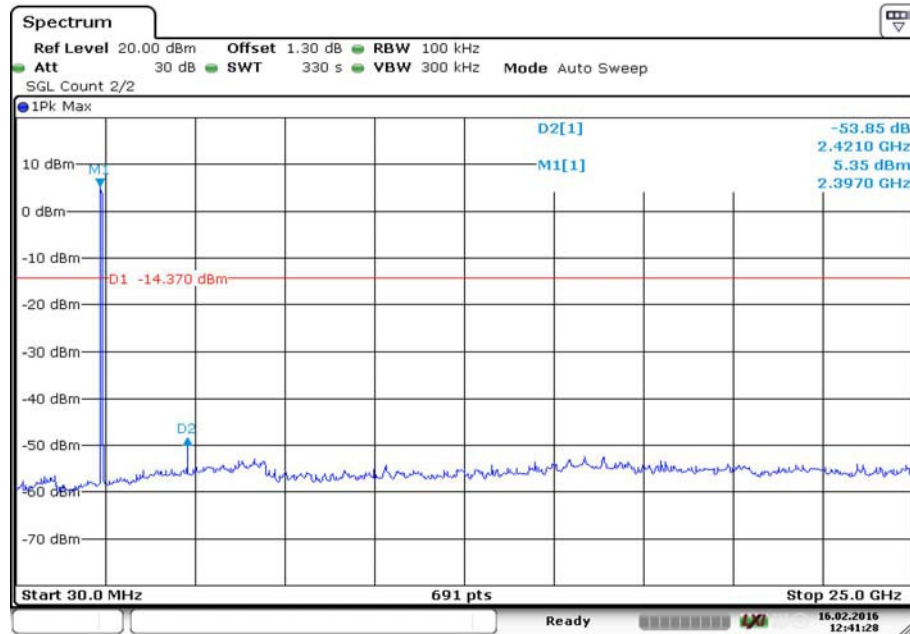


Date: 16.FEB.2016 12:41:28

Radio Technology = WLAN n 20 MHz, Operating Frequency = low

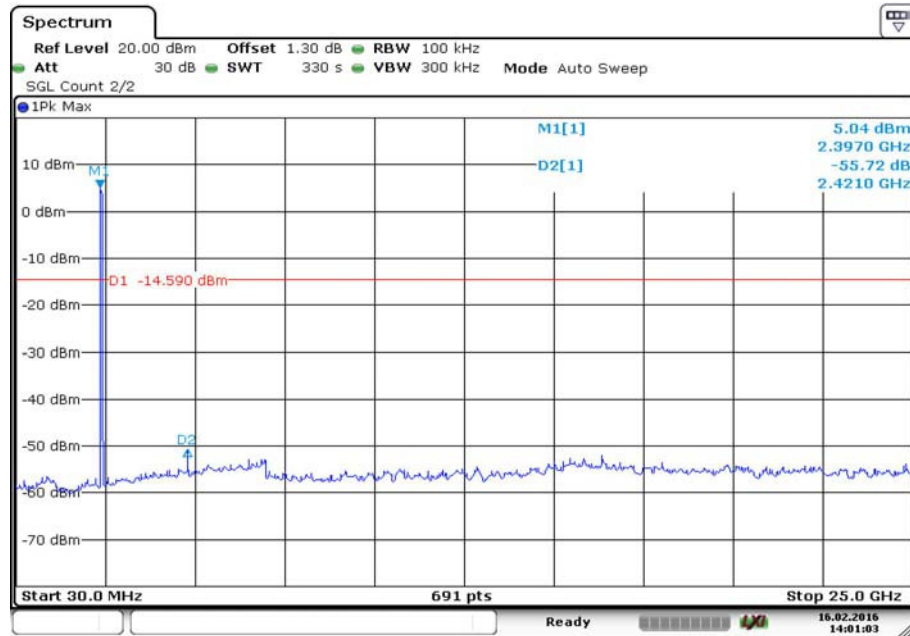

Date: 16.FEB.2016 14:01:03

Radio Technology = WLAN n 40 MHz, Operating Frequency = low

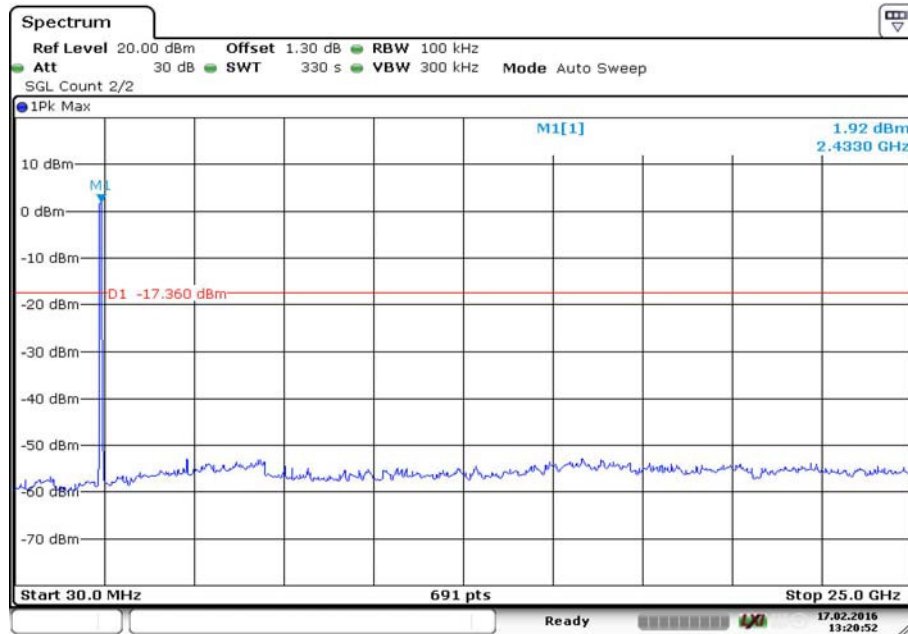

Date: 17.FEB.2016 13:20:52

#### 4.5.5 TEST EQUIPMENT USED

R&S TS8997



## 4.6 SPURIOUS RF CONDUCTED EMISSIONS IN RESTRICTED BANDS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.6.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the conducted spurious emissions measurements. The antenna port of the EUT was connected to spectrum analyzer via a short coax cable with a known cable loss  $C_L$ . The measured voltage  $U_{meas}$  at the 50 Ohm input of the analyser was used to calculate the EUT output power at the antenna port:

$$P = U_{meas} + C_L - 107$$

where

$P$  is the output power in dBm

$U_{meas}$  is the measured voltage at the 50 Ohm input of the analyzer in dB $\mu$ V

$C_L$  is the cable loss of the used cable.

The maximum transmit isotropically antenna gain  $G_i$  (in dBi) was added to the measured output power  $P$  to determine the equivalent isotropically radiated power EIRP.

$$EIRP = P + G_i$$

where

$P$  is the output power in dBm

$G_i$  is maximum transmit antenna gain in dBi.

The resultant EIRP level was converted to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20 \log d + 104.8$$

where

$E$  is the electric field strength in dB $\mu$ V/m

EIRP is the equivalent isotropically radiated power in dBm

$d$  is the specified measurement distance in m.

The appropriate maximum ground reflection factor was added to the EIRP:

6 dB for frequencies  $\leq 30$  MHz;

4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and

0 dB for frequencies  $> 1000$  MHz).

Frequency range [MHz]	measurement distance $d$ [m]	-20 log $d$ [dB]	ground reflection factor [dB]
0,009 - 0,49	300	-49,54	6
0,49 - 30	30	-29,54	6
30 - 1000	3	-9,54	4,7
>1000	3	-9,54	0

## 1. Measurement up to 30 MHz

### Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

- Detector: Peak-Maxhold/ Quasipeak (FFT-based)
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### Step 2: final measurement

EMI receiver settings:

- Detector: Peak / Average / Quasi-Peak (depending on frequency)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz (depending on frequency)
- Measuring time / Frequency step: 1 s

## 2. Measurement above 30 MHz and up to 1 GHz

### Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings:

- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms

### Step 2: final measurement

EMI receiver settings:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 120 kHz
- Measuring time: 1 s

## 3. Measurement above 1 GHz

### Step 1: pre measurement

Settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

### Step 2: final measurement

Spectrum analyzer settings:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

#### 4.6.3 TEST PROTOCOL

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
DSSS, 1Mbit / 18 dBm	2412.0	2389.893333 4823.700000	50.9 52.9	AV AV	1000	54 54	3.1 1.1
DSSS, 2Mbit / 16 dBm	2467.0	2483.500000 2483.500000 4933.983333	61.3 51.2 52.6	Peak AV AV	1000	74 54 54	12.7 2.8 1.4
DSSS, 2Mbit / 13 dBm	2472.0	2484.699500 4943.950000 4943.950000	49.3 58.5 53.0	AV Peak AV	1000	54 74 54	4.7 15.5 1.0
DSSS, 11Mbit / 18 dBm	2412.0	2389.893333 2390.000000 4823.700000	58.5 47.3 42.5	Peak AV AV	1000	74 54 54	15.5 6.7 11.5
DSSS, 11Mbit / 18 dBm	2462.0	2483.527500 2483.527500 4925.533333	56.6 44.9 45.1	Peak AV AV	1000	74 54 54	17.4 9.1 8.9
DSSS, 11Mbit / 15 dBm	2467.0	2483.500000 2483.500000 4934.633333	60.9 50.3 42.4	Peak AV AV	1000	74 54 54	13.1 3.7 11.6
DSSS, 11Mbit / 16 dBm	2472.0	2483.522200 2483.538500 4943.950000	59.9 47.7 43.8	Peak AV AV	1000	74 54 54	14.1 6.3 10.2

Remark: -

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN g-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
OFDM, 9Mbit / 13 dBm	2412.0	2390.000000 2390.000000	70.7 49.9	Peak AV	1000	74 54	3.3 4.1
OFDM, 9Mbit / 16 dBm	2417.0	2387.360000 2387.360000 2389.733333	70.3 50.3 53.8	Peak AV AV	1000	74 54 54	3.7 3.7 0.2
OFDM, 9Mbit / 16 dBm	2452.0	2483.516500 2483.500000	67.7 48.1	Peak AV	1000	74 54	6.3 5.9
OFDM, 9Mbit / 15 dBm	2457.0	2483.527500 2483.527500	69.0 47.3	Peak AV	1000	74 54	5.0 6.7
OFDM, 9Mbit / 13 dBm	2462.0	2483.500000 2483.500000	73.2 53.4	Peak AV	1000	74 54	0.8 0.6
OFDM, 9Mbit / 10 dBm	2467.0	2484.292000 2483.593500	70.2 53.0	Peak AV	1000	74 54	3.8 1.0
OFDM, 9Mbit / 9 dBm	2472.0	2483.500000 2483.500000	72.8 52.2	Peak AV	1000	74 54	1.2 1.8
OFDM, 48Mbit / 13 dBm	2462.0	2483.604500 2483.604500	71.9 52.8	Peak AV	1000	74 54	2.1 1.2
OFDM, 48Mbit / 9 dBm	2467.0	2483.665500 2483.648500	67.4 53.7	Peak AV	1000	74 54	2.6 0.3
OFDM, 48Mbit / 9 dBm	2472.0	2483.500000 2483.500000	71.8 49.4	Peak AV	1000	74 54	2.2 4.6
OFDM, 54Mbit / 13 dBm	2412.0	2390.000000 2390.000000	67.3 49.3	Peak AV	1000	74 54	6.7 4.7
OFDM, 54Mbit / 13 dBm	2462.0	2483.604500 2483.500000	71.1 52.9	Peak AV	1000	74 54	2.9 1.1
OFDM, 54Mbit / 9 dBm	2467.0	2483.511000 2483.593500	64.8 52.4	Peak AV	1000	74 54	9.2 1.6
OFDM, 54Mbit / 9 dBm	2472.0	2483.500000 2483.500000	70.7 51.3	Peak AV	1000	74 54	3.3 2.7

Remark: -

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %

WLAN n-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
HT20, MCS2 / 13 dBm	2412.0	2389.653333 2389.653333	70.9 49.2	Peak AV	1000	74 54	3.1 4.8
HT20, MCS2 / 15 dBm	2417.0	2389.653333 2389.653333	69.9 49.1	Peak AV	1000	74 54	4.1 4.9
HT20, MCS2 / 16 dBm	2422.0	2389.813333 2389.920000	68.6 50.2	Peak AV	1000	74 54	5.4 3.8
HT20, MCS2 / 16 dBm	2457.0	2483.500000 2483.500000	73.1 50.5	Peak AV	1000	74 54	0.9 3.5
HT20, MCS2 / 12 dBm	2462.0	2483.808000 2483.588000	68.2 52.5	Peak AV	1000	74 54	5.8 1.5
HT20, MCS2 / 10 dBm	2467.0	2483.610000 2483.610000	71.2 53.8	Peak AV	1000	74 54	2.8 0.2
HT20, MCS2 / 9 dBm	2472.0	2483.500000 2483.500000	70.3 53.0	Peak AV	1000	74 54	3.7 1.0
HT20, MCS4 / 15 dBm	2417.0	2388.373333 2390.000000	70.2 51.1	Peak AV	1000	74 54	3.8 2.9
HT20, MCS4 / 16 dBm	2422.0	2389.760000 2389.760000	65.4 50.0	Peak AV	1000	74 54	8.6 4.0
HT20, MCS4 / 16 dBm	2457.0	2483.544000 2483.500000	72.6 51.9	Peak AV	1000	74 54	1.4 2.1
HT20, MCS4 / 12 dBm	2462.0	2483.885000 2483.588000	71.7 53.5	Peak AV	1000	74 54	2.3 0.5
HT20, MCS4 / 9 dBm	2467.0	2483.549500 2483.549500	65.3 51.2	Peak AV	1000	74 54	8.7 2.8
HT20, MCS4 / 9 dBm	2472.0	2483.500000 2483.500000	72.1 49.0	Peak AV	1000	74 54	1.9 5.0
HT20, MCS6 / 13 dBm	2412.0	2389.813333 2389.815333	64.4 51.1	Peak AV	1000	74 54	9.6 2.9
HT20, MCS6 / 13 dBm	2457.0	2483.687000 2483.687000	65.6 45.4	Peak AV	1000	74 54	8.4 8.6
HT20, MCS6 / 12 dBm	2462.0	2483.637500 2483.511000	70.5 54.0	Peak AV	1000	74 54	3.5 0.0
HT20, MCS6 / 9 dBm	2467.0	2483.593500 2483.593500	71.3 53.9	Peak AV	1000	74 54	2.7 0.1
HT20, MCS6 / 9 dBm	2472.0	2483.544000 2483.544000	72.4 52.6	Peak AV	1000	74 54	1.6 1.4

Remark: -



Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN n-Mode; 40 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
HT40, MCS0 / 11 dBm	2422.0	2389.893333 2389.893333	73.3 50.9	Peak AV	1000	74 54	0.7 3.1
HT40, MCS0 / 11 dBm	2427.0	2389.653333 2389.653333	69.7 50.3	Peak AV	1000	74 54	4.3 3.7
HT40, MCS0 / 13 dBm	2432.0	2389.760000 2389.760000 2483.868500 2483.868500	71.1 51.3 69.5 45.7	Peak AV Peak AV	1000	74 54 74 54	2.9 2.7 4.5 8.3
HT40, MCS0 / 14 dBm	2437.0	2389.946667 2389.946667 2483.860500 2483.860500	69.2 51.8 72.6 48.6	Peak AV Peak AV	1000	74 54 74 54	4.8 2.2 1.4 5.4
HT40, MCS0 / 14 dBm	2442.0	2389.973333 2389.973333 2483.500000 2483.500000	67.5 46.9 73.1 49.2	Peak AV Peak AV	1000	74 54 74 54	6.5 7.1 0.9 4.8
HT40, MCS0 / 13 dBm	2447.0	2483.500000 2483.500000	74.0 51.7	Peak AV	1000	74 54	0.0 2.3
HT40, MCS0 / 10 dBm	2452.0	2483.500000 2483.500000	68.9 48.8	Peak AV	1000	74 54	5.1 5.2
HT40, MCS0 / 7 dBm	2457.0	2483.555000 2483.736500	61.4 49.0	Peak AV	1000	74 54	12.6 5.0
HT40, MCS0 / 6 dBm	2462.0	2483.505500 2483.505500	69.2 50.9	Peak AV	1000	74 54	4.8 3.1
HT40, MCS6 / 11 dBm	2422.0	2390.000000 2390.000000	69.3 50.4	Peak AV	1000	74 54	4.7 3.5
HT40, MCS6 / 12 dBm	2427.0	2389.626667 2389.920000	71.3 54.0	Peak AV	1000	74 54	2.7 0.0
HT40, MCS6 / 13 dBm	2432.0	2389.920000 2389.920000 2483.626500 2483.511000	70.2 52.5 72.7 48.0	Peak AV Peak AV	1000	74 54 74 54	3.8 1.5 1.3 6.0
HT40, MCS6 / 13 dBm	2447.0	2483.522000 2483.500000	71.9 53.6	Peak AV	1000	74 54	2.1 0.4
HT40, MCS6 / 11 dBm	2452.0	2483.769500 2483.769500	67.2 53.1	Peak AV	1000	74 54	6.5 0.9
HT40, MCS6 / 8 dBm	2457.0	2483.555000 2483.505500	70.9 51.7	Peak AV	1000	74 54	3.1 2.3
HT40, MCS6 / 7 dBm	2462.0	2483.610000 2483.610000	69.5 54.0	Peak AV	1000	74 54	4.5 0.0

Remark: -

#### 4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b-Mode, 2Mbit / 13 dBm, Operating Frequency = high

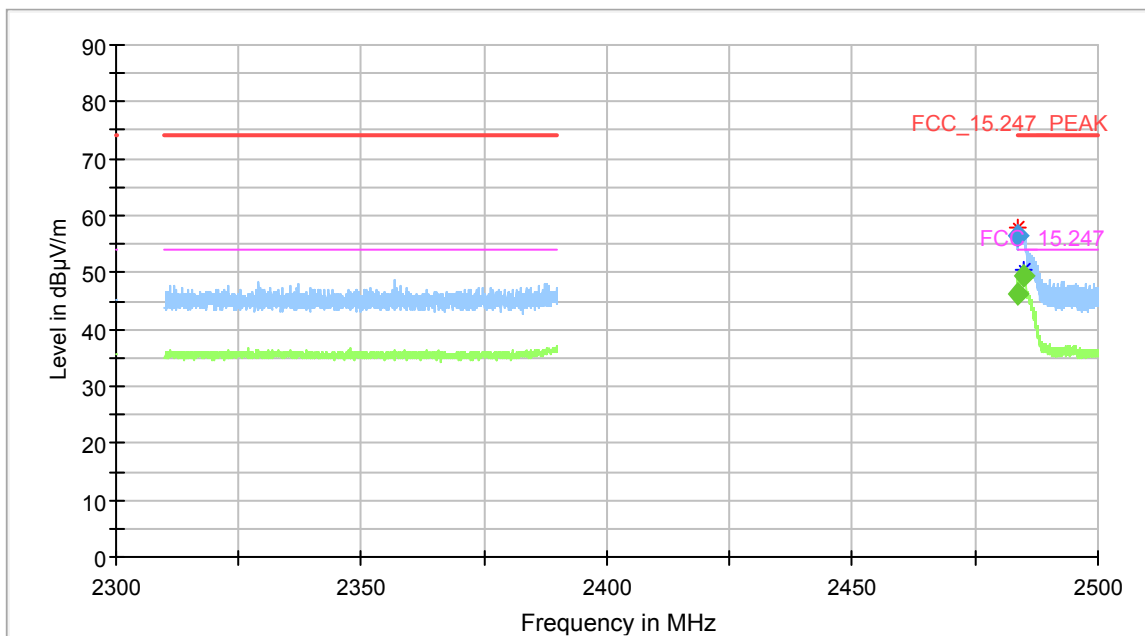
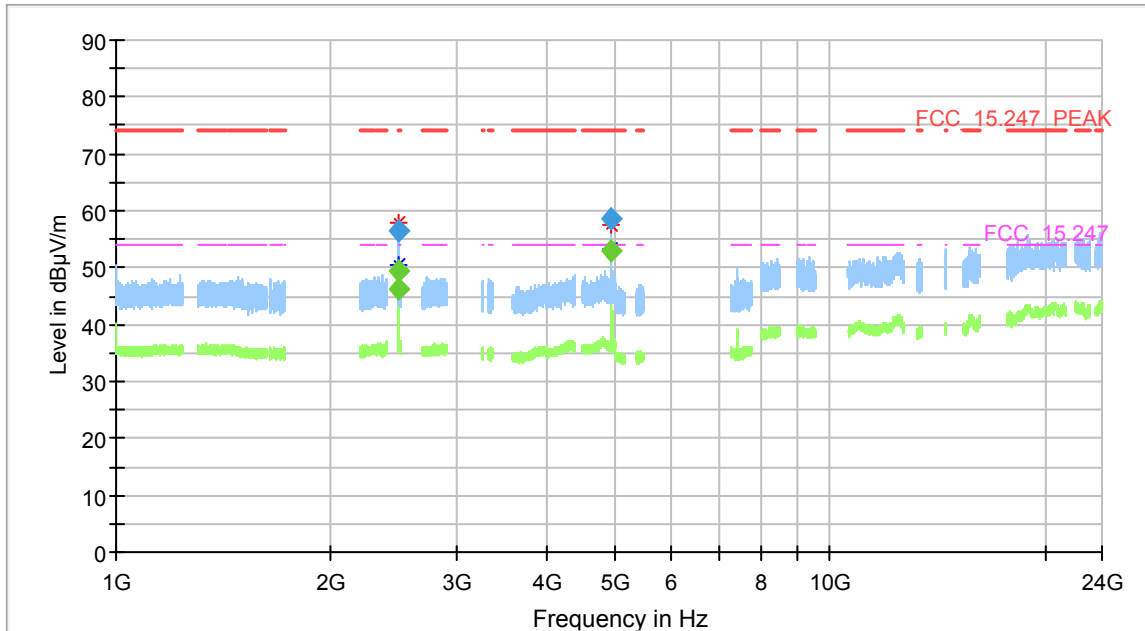


#### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.863000	56.40	---	74.00	17.60	1000.0	1000.000	-5.8
2483.863000	---	46.25	54.00	7.75	1000.0	1000.000	-5.8
2484.699000	---	49.28	54.00	4.72	1000.0	1000.000	-5.8
4943.950000	58.54	---	74.00	15.46	1000.0	1000.000	-5.8
4943.950000	---	52.99	54.00	1.01	1000.0	1000.000	-5.8





Radio Technology = WLAN g-Mode, 9Mbit / 16 dBm, Operating Frequency = 2417.0 MHz

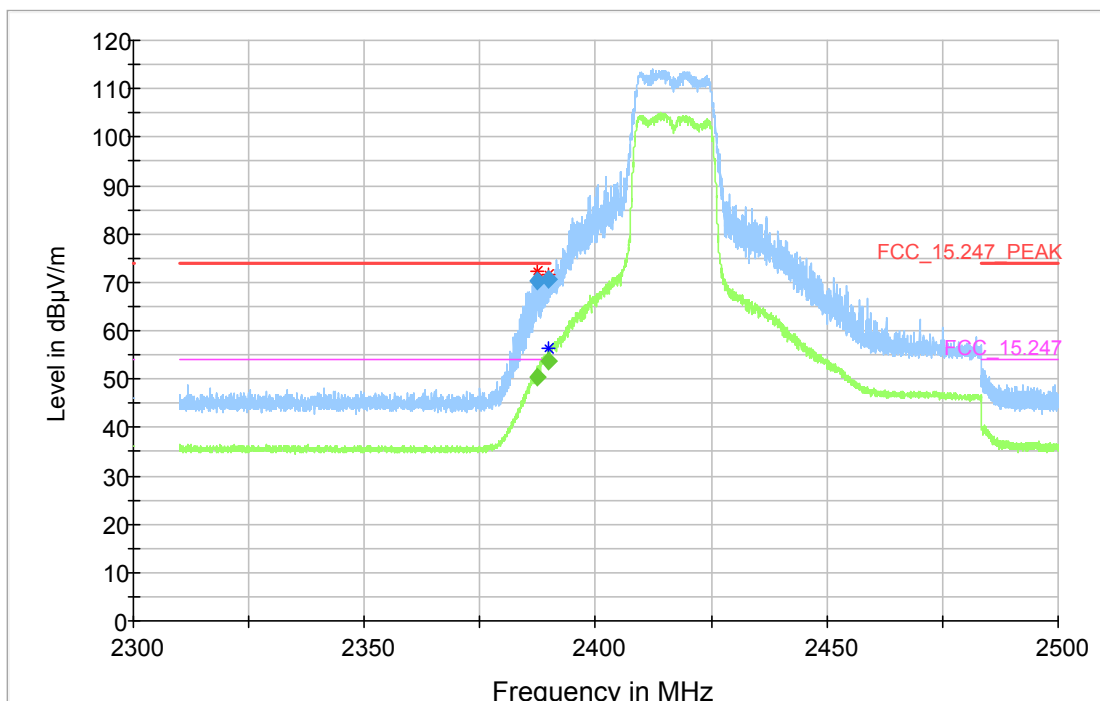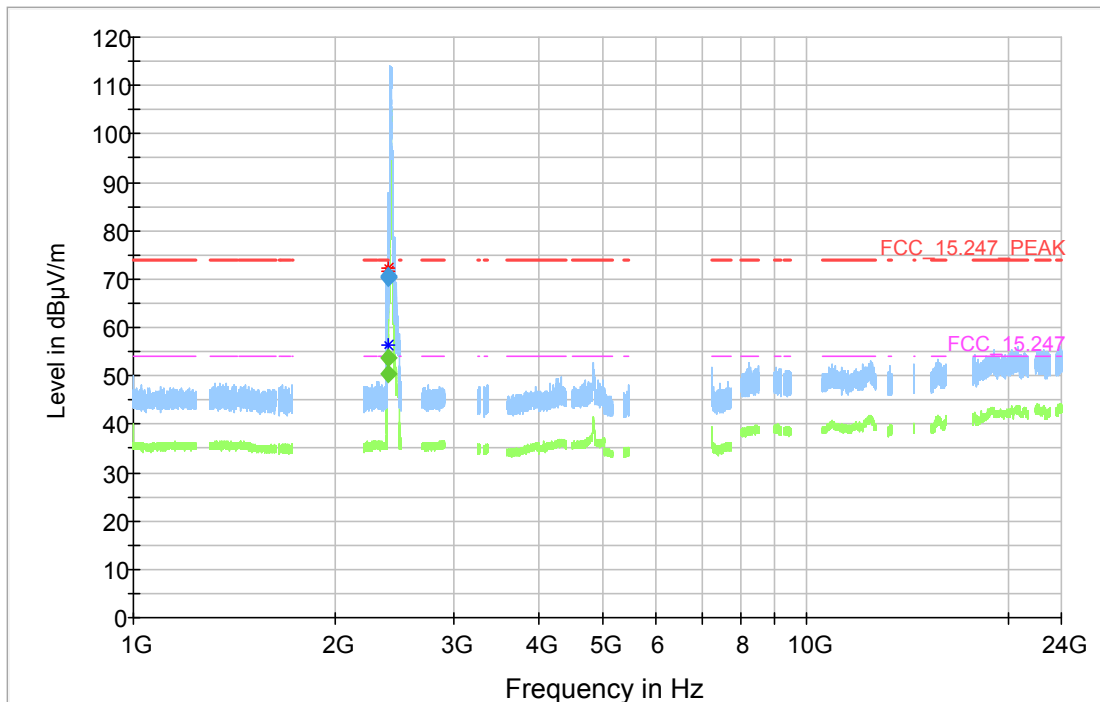

Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2387.360000	---	50.29	54.00	3.71	1000.0	1000.000	-5.8
2387.360000	70.33	---	74.00	3.67	1000.0	1000.000	-5.8
2389.733333	---	53.82	54.00	0.18	1000.0	1000.000	-5.8
2389.733333	70.61	---	74.00	3.39	1000.0	1000.000	-5.8


Radio Technology = WLAN n-Mode HT20, MCS6 / 12 dBm, Operating Frequency = 2462.0 MHz

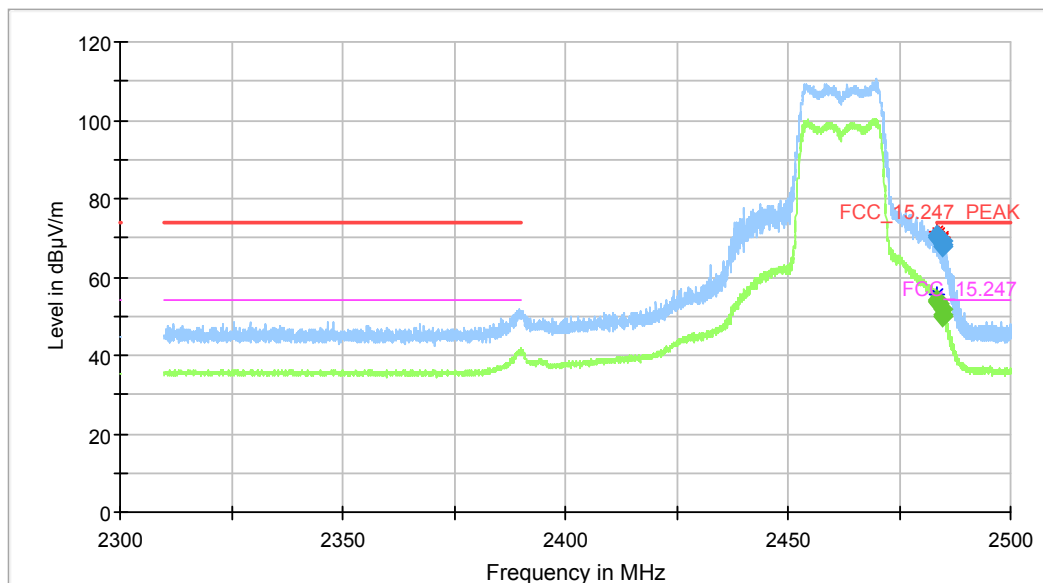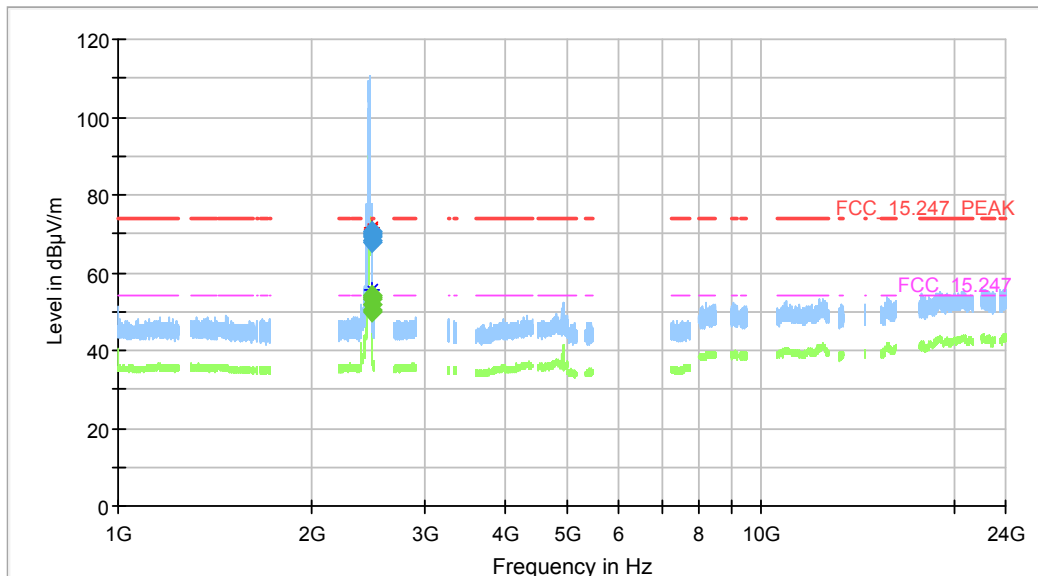

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.511000	---	53.99	54.00	0.01	1000.0	1000.000	-5.8
2483.511000	70.12	---	74.00	3.88	1000.0	1000.000	-5.8
2483.637500	---	53.74	54.00	0.26	1000.0	1000.000	-5.8
2483.637500	70.52	---	74.00	3.48	1000.0	1000.000	-5.8
2483.984000	---	53.07	54.00	0.93	1000.0	1000.000	-5.8
2483.984000	69.78	---	74.00	4.22	1000.0	1000.000	-5.8
2484.517500	---	51.54	54.00	2.46	1000.0	1000.000	-5.8
2484.517500	69.00	---	74.00	5.00	1000.0	1000.000	-5.8
2484.781500	---	50.51	54.00	3.49	1000.0	1000.000	-5.8
2484.781500	68.46	---	74.00	5.54	1000.0	1000.000	-5.8
2484.880500	---	50.11	54.00	3.89	1000.0	1000.000	-5.8
2484.880500	67.79	---	74.00	6.21	1000.0	1000.000	-5.8

Radio Technology = WLAN n-Mode HT40, MCS6 / 12 dBm, Operating Frequency = 2427.0 MHz

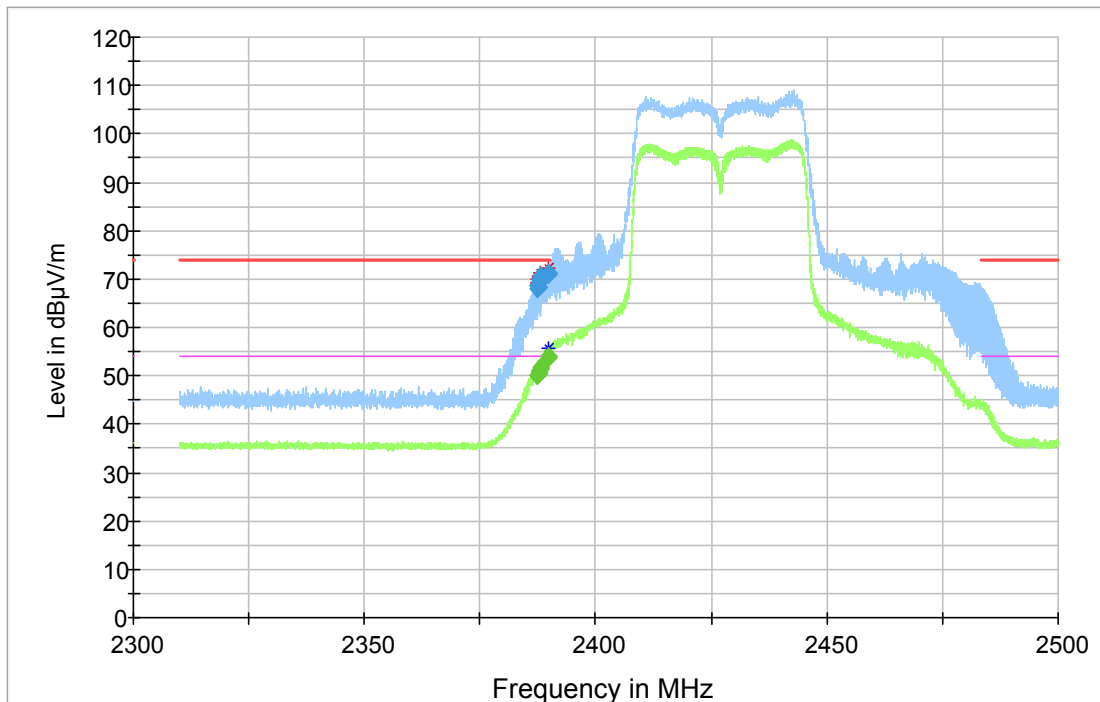

#### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2387.280000	---	49.97	54.00	4.03	1000.0	1000.000	-5.8
2387.280000	68.12	---	74.00	5.88	1000.0	1000.000	-5.8
2387.386667	---	50.06	54.00	3.94	1000.0	1000.000	-5.8
2387.386667	68.47	---	74.00	5.53	1000.0	1000.000	-5.8
2387.466667	---	50.22	54.00	3.78	1000.0	1000.000	-5.8
2387.466667	68.72	---	74.00	5.28	1000.0	1000.000	-5.8
2387.573333	---	50.55	54.00	3.45	1000.0	1000.000	-5.8
2387.573333	69.43	---	74.00	4.57	1000.0	1000.000	-5.8
2387.680000	---	50.58	54.00	3.42	1000.0	1000.000	-5.8
2387.680000	68.34	---	74.00	5.66	1000.0	1000.000	-5.8
2387.760000	---	51.18	54.00	2.82	1000.0	1000.000	-5.8
2387.760000	69.95	---	74.00	4.05	1000.0	1000.000	-5.8
2387.946667	---	51.26	54.00	2.74	1000.0	1000.000	-5.8
2387.946667	70.52	---	74.00	3.48	1000.0	1000.000	-5.8
2388.053333	---	51.71	54.00	2.29	1000.0	1000.000	-5.8
2388.053333	70.74	---	74.00	3.26	1000.0	1000.000	-5.8
2388.133333	---	51.63	54.00	2.37	1000.0	1000.000	-5.8
2388.133333	70.69	---	74.00	3.31	1000.0	1000.000	-5.8
2389.626667	---	53.81	54.00	0.19	1000.0	1000.000	-5.8
2389.626667	71.25	---	74.00	2.75	1000.0	1000.000	-5.8
2389.920000	---	54.00	54.00	0.00	1000.0	1000.000	-5.8
2389.920000	70.81	---	74.00	3.19	1000.0	1000.000	-5.8

#### 4.6.5 TEST EQUIPMENT USED

Radiated Emissions

## 4.7 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.7.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms

- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2:** Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

### **Step 3:** Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

## **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^{\circ}$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^{\circ}$ .

The elevation angle will slowly vary by  $\pm 45^{\circ}$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4.7.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

### 4.7.3 TEST PROTOCOL


Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]	Limit Type
DSSS, 11Mbit / 18 dBm	2412.0	-	noise	---	-	-	> 9	RB
DSSS, 11Mbit / 18 dBm	2442.0	-	noise	---	-	-	> 9	RB
DSSS, 11Mbit / 18 dBm	2472.0	-	noise	---	-	-	> 9	RB


Remark: Antenna port of EUT terminated with 50 Ohm.

### 4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b-Mode, 11Mbit / 18 dBm, Operating Frequency = mid

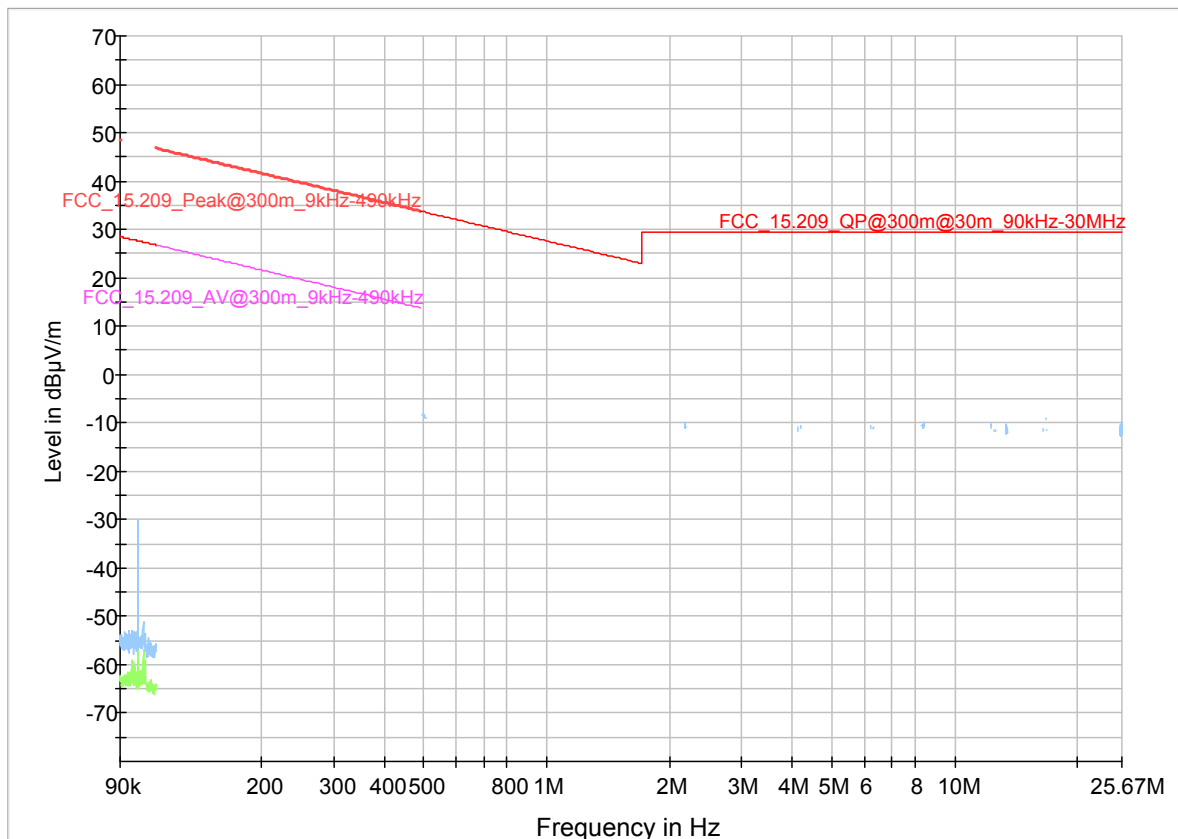


Radio Technology = WLAN b-Mode, 11Mbit / 18 dBm, Operating Frequency = mid

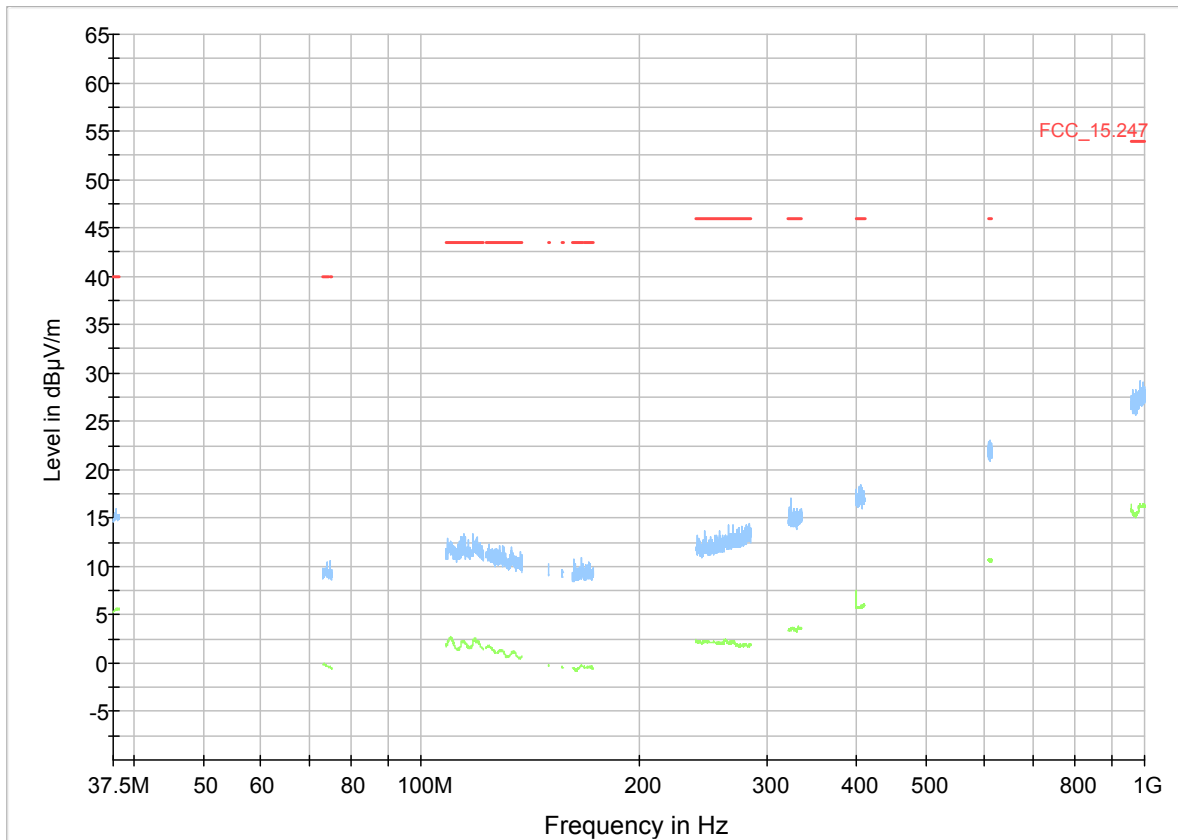



Radio Technology = WLAN b-Mode, 11Mbit / 18 dBm, Operating Frequency = mid

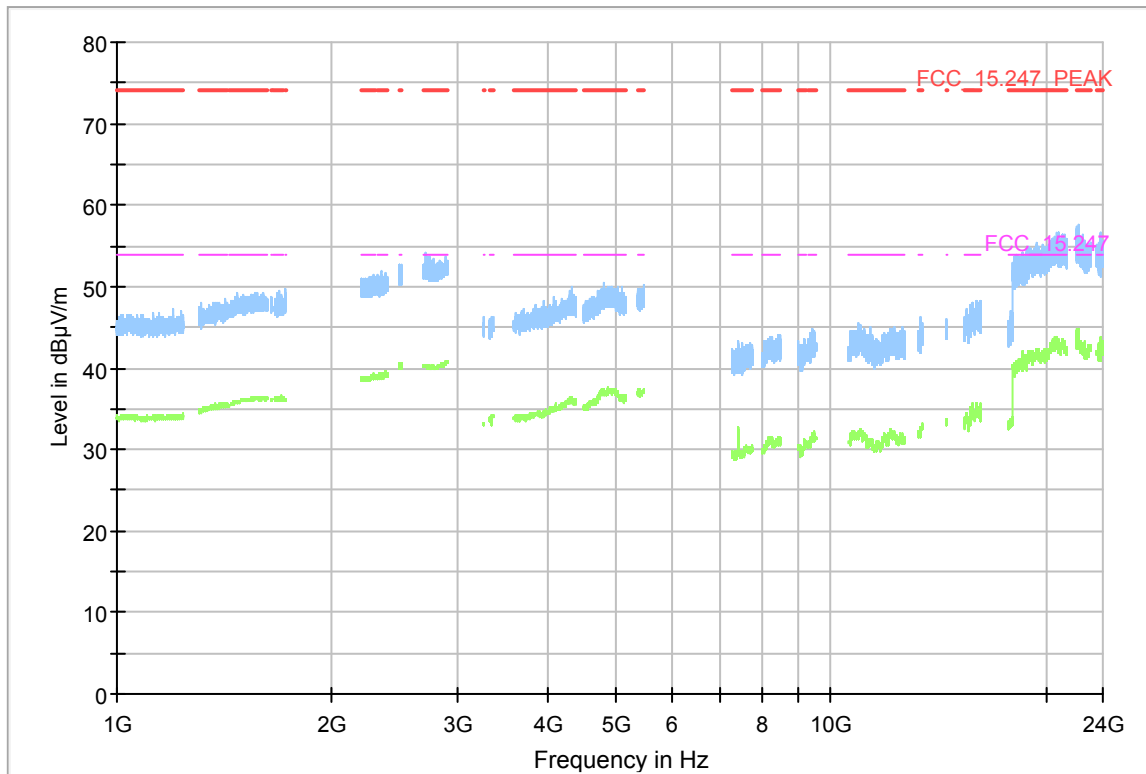

#### 4.7.5 TEST EQUIPMENT USED

Radiated Emissions

## 4.8 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.8.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions". The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency Range 30 MHz – 25 GHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: 330 s
- Sweeps: 2
- Trace: Maxhold

### 4.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

### 4.8.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 BT LE GFSK

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0.0	2402.0	2400.0	-48.5	PEAK	100.0	1.1	-18.9	29.6
39.0	2480.0	2483.5	-54.6	PEAK	100.0	0.3	-19.7	34.9

WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
DSSS, 1Mbit / 18 dBm	2412.0	2400.0	-33.3	PEAK	100.0	9.3	-10.7	22.6
DSSS, 1Mbit / 18 dBm	2472.0	2483.5	-41.6	PEAK	100.0	8.7	-11.3	30.3

WLAN g-Mode; 20 MHz

Set EUT target power	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, 54 Mbps / 13 dBm	2412.0	2400.0	-30.7	PEAK	100.0	5.6	-14.4	16.3
OFDM, 54 Mbps / 13 dBm	2472.0	2483.5	-40.6	PEAK	100.0	2.9	-17.1	23.5

WLAN n-Mode; 20 MHz

Set EUT target power	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6 / 13 dBm	2412.0	2400.0	-24.6	PEAK	100.0	5.4	-14.6	10.0
OFDM, MCS6 / 13 dBm	2472.0	2483.5	-36.7	PEAK	100.0	2.7	-17.3	19.3


WLAN n-Mode; 40 MHz

Set EUT target power	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
OFDM, MCS6 / 12 dBm	2422.0	2400.0	-27.2	PEAK	100.0	2.6	-17.4	9.8
OFDM, MCS6 / 12 dBm	2462.0	2483.5	-32.8	PEAK	100.0	0.3	-19.8	13.1


Remark: Please see next sub-clause for the measurement plot.

#### 4.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = Bluetooth LE, Operating Frequency = low, Band Edge = low

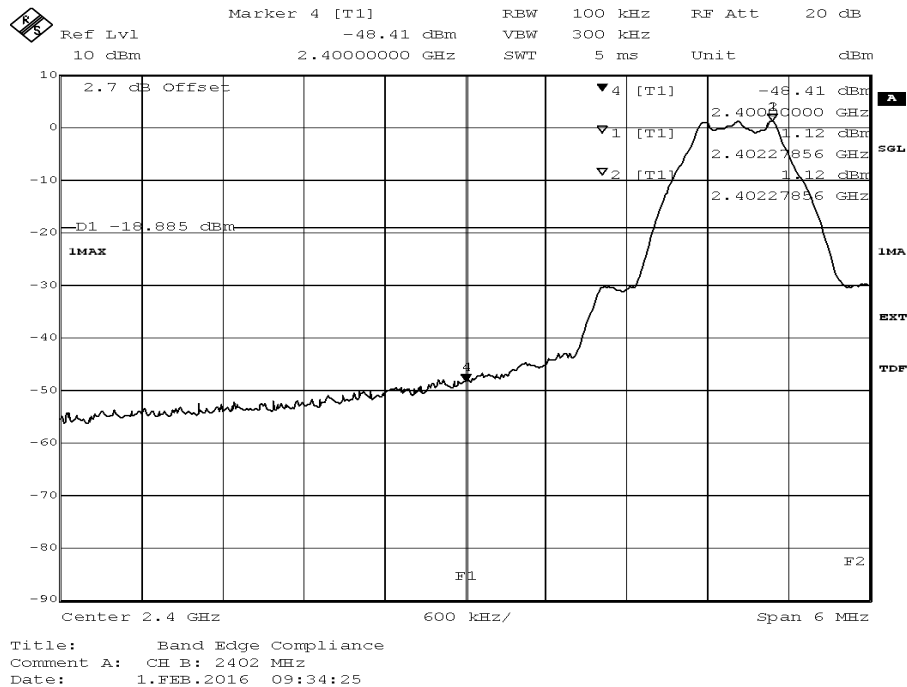

Radio Technology = WLAN b, Operating Frequency = low, Band Edge = low

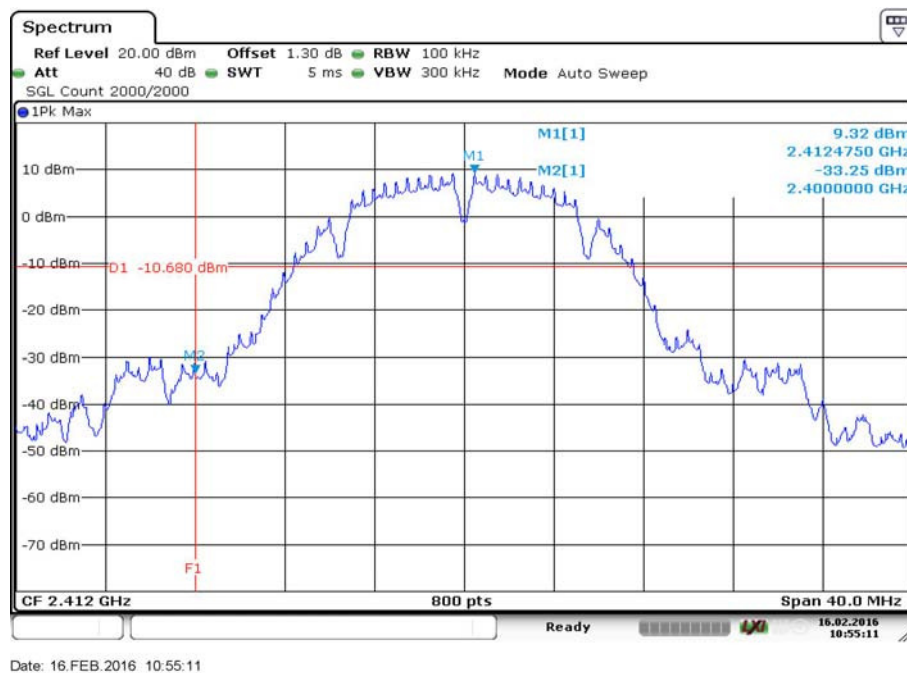


Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low

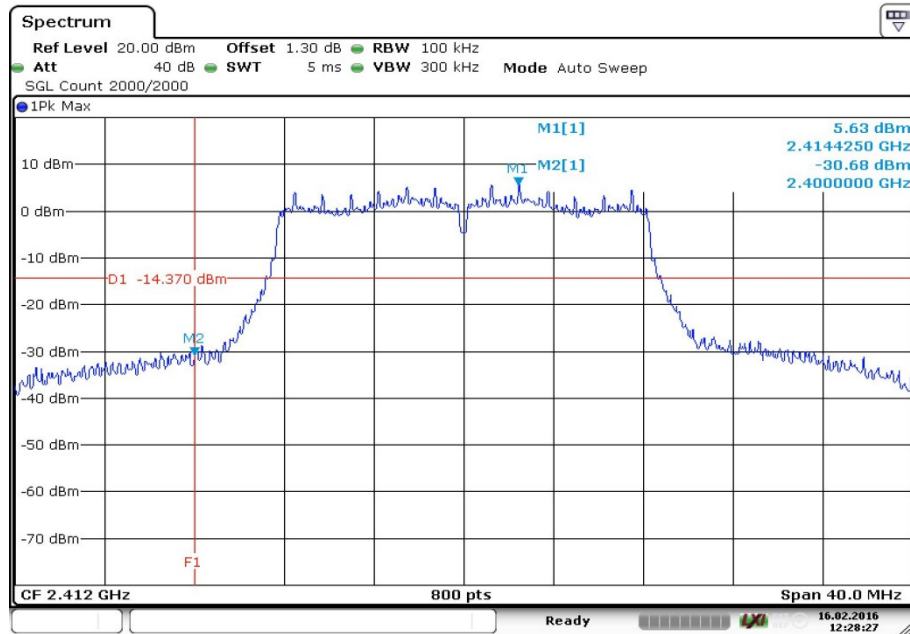


Date: 16.FEB.2016 12:28:28

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low

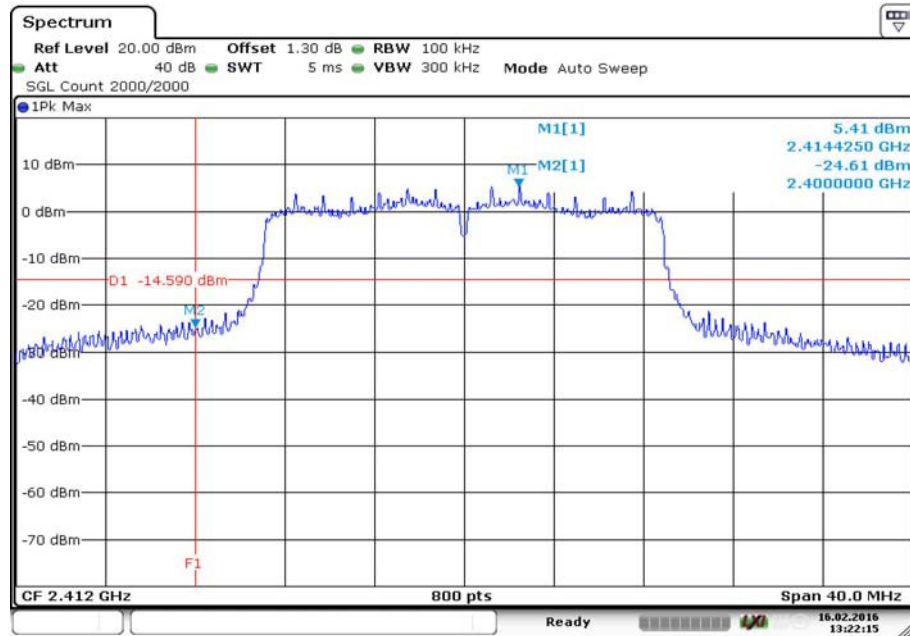

Date: 16.FEB.2016 13:22:14

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Band Edge = low

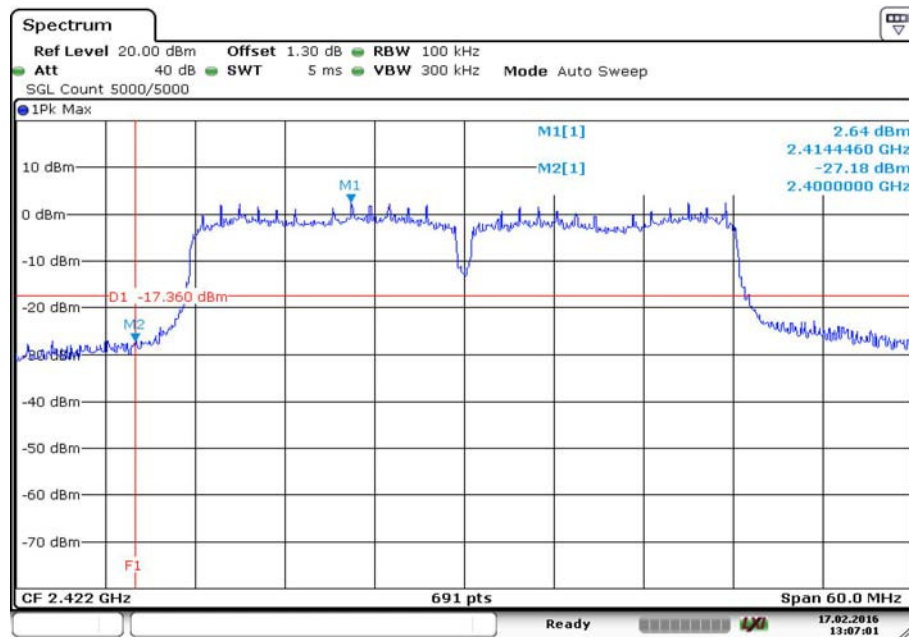

Date: 17.FEB.2016 13:07:01

#### 4.8.5 TEST EQUIPMENT USED

R&S TS8997

#### 4.9 BAND EDGE COMPLIANCE CONDUCTED AT RESTRICTED BAND

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

##### 4.9.1 TEST DESCRIPTION

Please see test description for the test case "Spurious RF Conducted Emissions in restricted bands"

##### 4.9.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

### 4.9.3 TEST PROTOCOL

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detector	RBW [kHz]	Limit [dBµV/ m]	Margin to Limit [dB]	Limit Type
DSSS, 2Mbit / 15 dBm	2467.0	2483.500000 2483.500000	61.3 51.2	Peak AV	1000	74 54	12.7 2.8	BE
DSSS, 2Mbit / 13 dBm	2472.0	2484.699500	56.4 49.3	Peak AV	1000	74 54	17.6 4.7	BE
DSSS, 11Mbit / 18 dBm	2462.0	2483.527500 2483.527500	56.6 44.9	Peak AV	1000	74 54	17.4 9.1	BE
DSSS, 11Mbit / 15 dBm	2467.0	2483.500000 2483.500000	60.9 50.3	Peak AV	1000	74 54	13.1 3.7	BE
DSSS, 11Mbit / 13 dBm	2472.0	2483.522200 2483.538500	59.9 47.7	Peak AV	1000	74 54	14.1 6.3	BE

Remark: -



Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN g-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]	Limit Type
OFDM, 9Mbit / 16 dBm	2452.0	2483.516500 2483.500000	67.7 48.1	Peak AV	1000	74 54	6.3 5.9	BE
OFDM, 9Mbit / 15 dBm	2457.0	2483.527500 2483.527500	69.0 47.3	Peak AV	1000	74 54	5.0 6.7	BE
OFDM, 9Mbit / 13 dBm	2462.0	2483.500000 2483.500000	73.2 53.4	Peak AV	1000	74 54	0.8 0.6	BE
OFDM, 9Mbit / 10 dBm	2467.0	2484.292000 2483.593500	70.2 53.0	Peak AV	1000	74 54	3.8 1.0	BE
OFDM, 9Mbit / 9 dBm	2472.0	2483.500000 2483.500000	72.8 52.2	Peak AV	1000	74 54	1.2 1.8	BE
OFDM, 48Mbit / 13 dBm	2462.0	2483.604500 2483.604500	71.9 52.8	Peak AV	1000	74 54	2.1 1.2	BE
OFDM, 48Mbit / 9 dBm	2467.0	2483.665500 2483.648500	67.4 53.7	Peak AV	1000	74 54	6.6 0.3	BE
OFDM, 48Mbit / 9 dBm	2472.0	2483.500000 2483.500000	71.8 49.4	Peak AV	1000	74 54	2.2 4.6	BE
OFDM, 54Mbit / 13 dBm	2462.0	2483.604500 2483.500000	71.1 52.9	Peak AV	1000	74 54	2.9 1.1	BE
OFDM, 54Mbit / 9 dBm	2467.0	2483.511000 2483.593500	64.8 52.4	Peak AV	1000	74 54	9.2 1.6	BE
OFDM, 54Mbit / 9 dBm	2472.0	2483.500000 2483.500000	70.7 51.3	Peak AV	1000	74 54	3.3 2.7	BE

Remark: -

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN n-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]	Limit Type
HT20, MCS2 / 16 dBm	2457.0	2483.500000 2483.500000	73.1 50.5	Peak AV	1000	74 54	0.9 3.5	BE
HT20, MCS2 / 12 dBm	2462.0	2483.808000 2483.588000	68.2 52.5	Peak AV	1000	74 54	5.8 1.5	BE
HT20, MCS2 / 10 dBm	2467.0	2483.610000 2483.610000	71.2 53.8	Peak AV	1000	74 54	2.8 0.2	BE
HT20, MCS2 / 9 dBm	2472.0	2483.500000 2483.500000	70.3 53.0	Peak AV	1000	74 54	3.7 1.0	BE
HT20, MCS4 / 16 dBm	2457.0	2483.544000 2483.500000	72.6 51.9	Peak AV	1000	74 54	1.4 2.1	BE
HT20, MCS4 / 12 dBm	2462.0	2483.885000 2483.588000	71.7 53.5	Peak AV	1000	74 54	2.3 0.5	BE
HT20, MCS4 / 9 dBm	2467.0	2483.549500 2483.549500	65.3 51.2	Peak AV	1000	74 54	8.7 2.8	BE
HT20, MCS4 / 9 dBm	2472.0	2483.500000 2483.500000	72.1 49.0	Peak AV	1000	74 54	1.9 5.0	BE
HT20, MCS6 / 13 dBm	2457.0	2483.687000 2483.687000	65.6 45.4	Peak AV	1000	74 54	8.4 8.6	BE
HT20, MCS6 / 12 dBm	2462.0	2483.637500 2483.511000	70.5 54.0	Peak AV	1000	74 54	3.5 0.0	BE
HT20, MCS6 / 9 dBm	2467.0	2483.593500 2483.593500	71.3 53.9	Peak AV	1000	74 54	2.7 0.1	BE
HT20, MCS6 / 9 dBm	2472.0	2483.544000 2483.544000	72.4 52.6	Peak AV	1000	74 54	1.6 1.4	BE

Remark: -


Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN n-Mode; 40 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]	Limit Type
HT40, MCS0 / 13 dBm	2432.0	2483.868500 2483.868500	69.5 45.7	Peak AV	1000	74 54	4.5 8.3	BE
HT40, MCS0 / 14 dBm	2437.0	2483.860500 2483.860500	72.6 48.6	Peak AV	1000	74 54	1.4 5.4	BE
HT40, MCS0 / 14 dBm	2442.0	2483.500000 2483.500000	73.1 49.2	Peak AV	1000	74 54	0.9 4.8	BE
HT40, MCS0 / 13 dBm	2447.0	2483.500000 2483.500000	74.0 51.7	Peak AV	1000	74 54	0.0 2.3	BE
HT40, MCS0 / 10 dBm	2452.0	2483.500000 2483.500000	68.9 48.8	Peak AV	1000	74 54	5.1 5.2	BE
HT40, MCS0 / 7 dBm	2457.0	2483.555000 2483.736500	61.4 49.0	Peak AV	1000	74 54	12.6 5.0	BE
HT40, MCS0 / 6 dBm	2462.0	2483.505500 2483.505500	69.2 50.9	Peak AV	1000	74 54	4.8 3.1	BE
HT40, MCS6 / 13 dBm	2432.0	2483.626500 2483.511000	72.7 48.0	Peak AV	1000	74 54	1.3 6.0	BE
HT40, MCS6 / 13 dBm	2447.0	2483.522000 2483.500000	71.9 53.6	Peak AV	1000	74 54	2.1 0.4	BE
HT40, MCS6 / 11 dBm	2452.0	2483.769500 2483.769500	67.2 53.1	Peak AV	1000	74 54	6.5 0.9	BE
HT40, MCS6 / 8 dBm	2457.0	2483.555000 2483.505500	70.9 51.7	Peak AV	1000	74 54	3.1 2.3	BE
HT40, MCS6 / 7 dBm	2462.0	2483.610000 2483.610000	69.5 54.0	Peak AV	1000	74 54	4.5 0.0	BE

Remark: -

#### 4.9.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN b-Mode, 2Mbit / 15 dBm, Operating Frequency = 2467.0 MHz

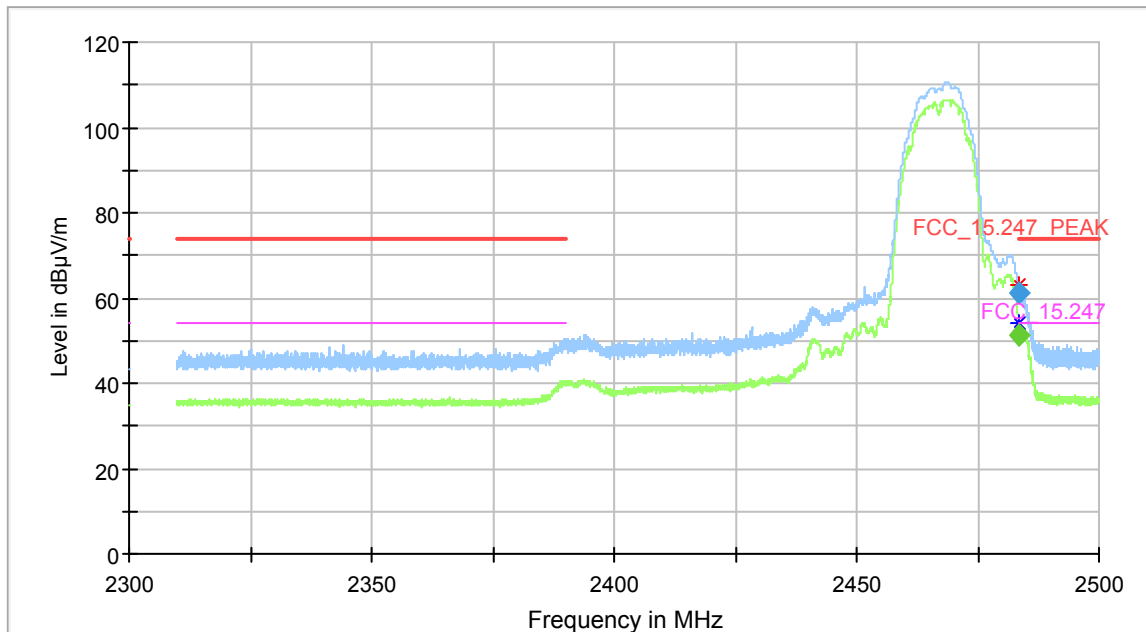

#### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.500000	61.33	---	74.00	12.67	1000.0	1000.000	-5.8
2483.500000	---	51.22	54.00	2.78	1000.0	1000.000	-5.8


Radio Technology = WLAN g-Mode, 48Mbit / 9 dBm, Operating Frequency = 2467.0 MHz

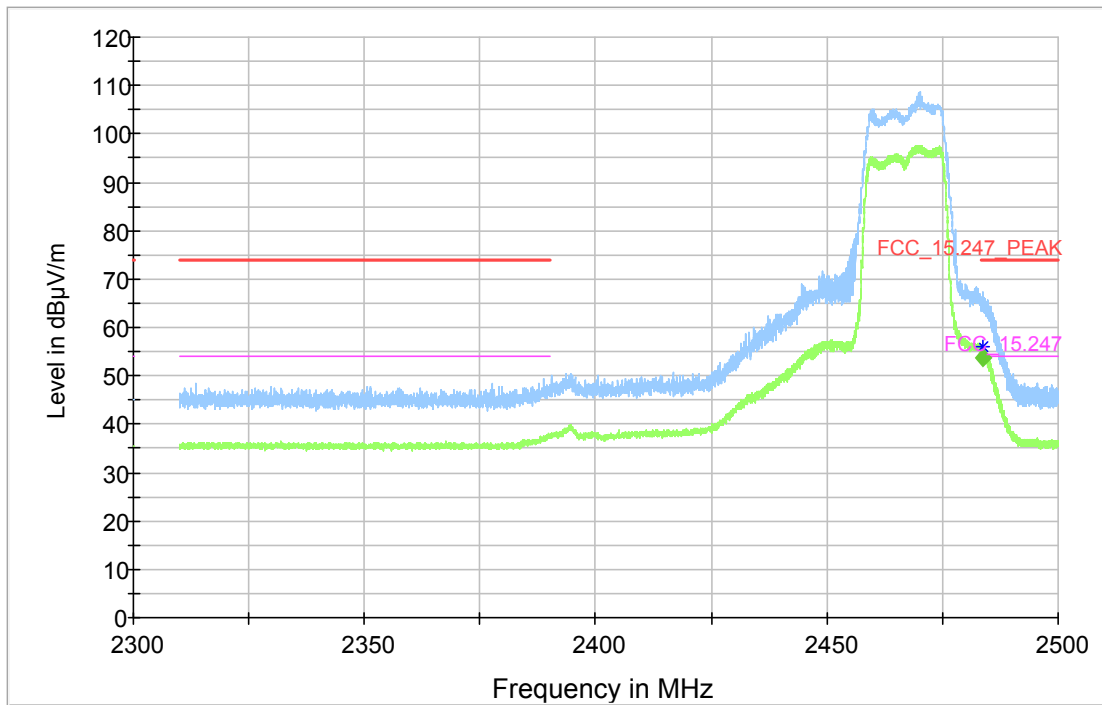

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.665500	67.41	---	74.00	6.59	1000.0	1000.000	-5.8
2483.648500	---	51.22	54.00	2.78	1000.0	1000.000	-5.8


Radio Technology = WLAN n-Mode HT20, MCS6 / 12 dBm, Operating Frequency = 2462.0 MHz

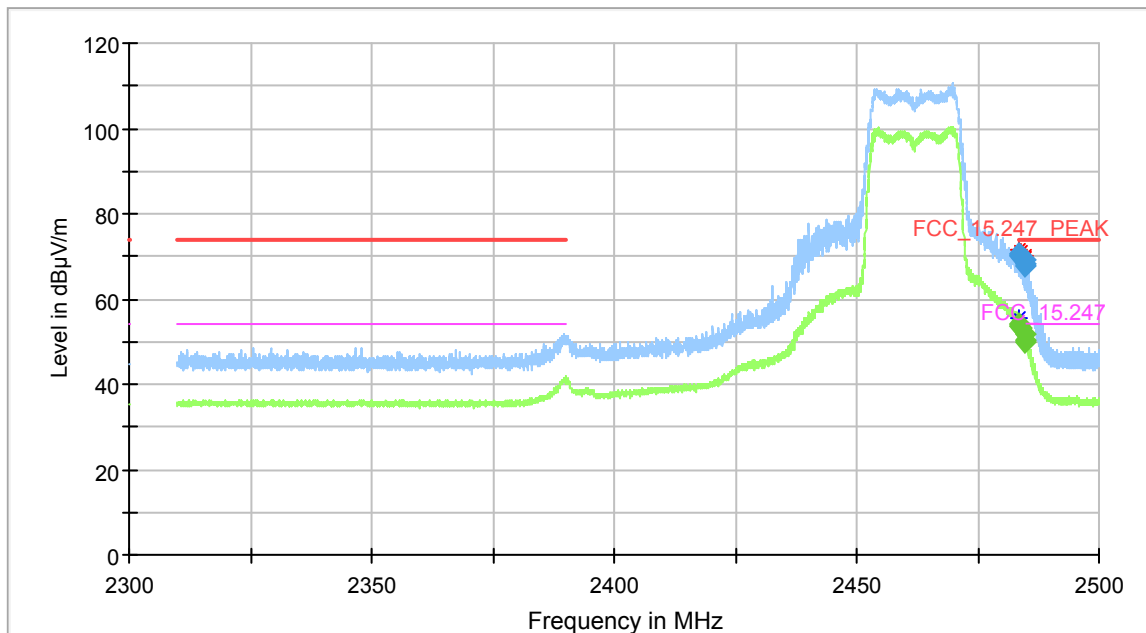

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.511000	---	53.99	54.00	0.01	1000.0	1000.000	-5.8
2483.511000	70.12	---	74.00	3.88	1000.0	1000.000	-5.8
2483.637500	---	53.74	54.00	0.26	1000.0	1000.000	-5.8
2483.637500	70.52	---	74.00	3.48	1000.0	1000.000	-5.8
2483.984000	---	53.07	54.00	0.93	1000.0	1000.000	-5.8
2483.984000	69.78	---	74.00	4.22	1000.0	1000.000	-5.8
2484.517500	---	51.54	54.00	2.46	1000.0	1000.000	-5.8
2484.517500	69.00	---	74.00	5.00	1000.0	1000.000	-5.8
2484.781500	---	50.51	54.00	3.49	1000.0	1000.000	-5.8
2484.781500	68.46	---	74.00	5.54	1000.0	1000.000	-5.8
2484.880500	---	50.11	54.00	3.89	1000.0	1000.000	-5.8
2484.880500	67.79	---	74.00	6.21	1000.0	1000.000	-5.8

Radio Technology = WLAN n-Mode HT40, MCS6 / 7 dBm, Operating Frequency = 2462.0 MHz

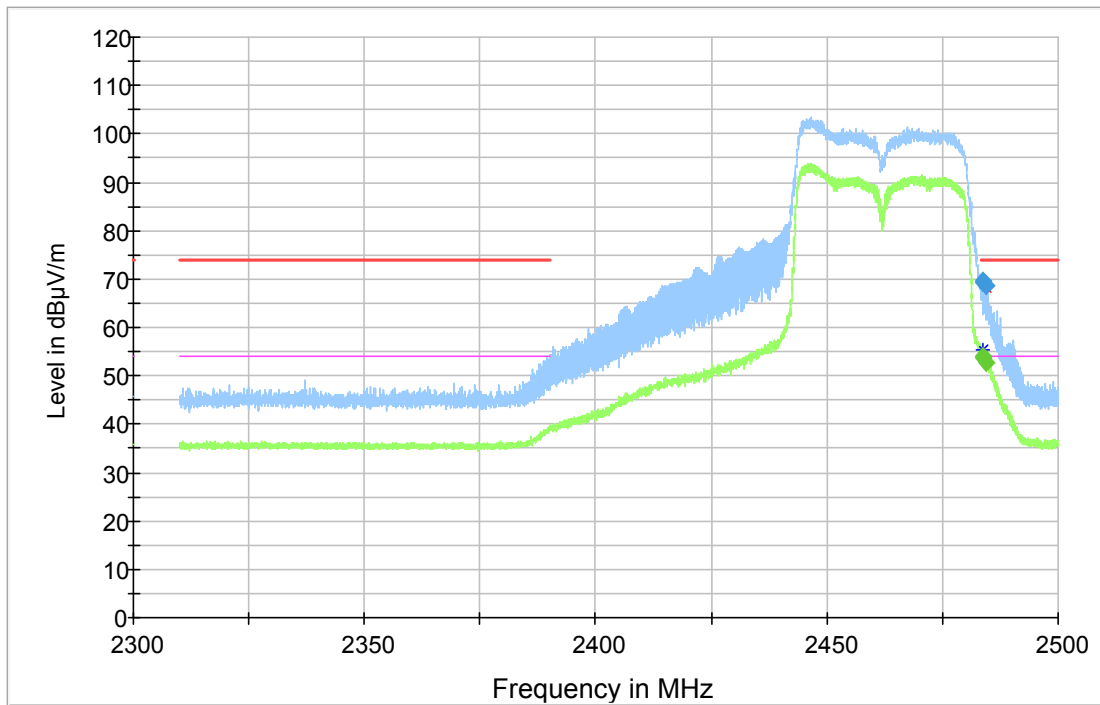

Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
2483.610000	---	53.96	54.00	0.04	1000.0	1000.000	-5.8
2483.610000	69.46	---	74.00	4.54	1000.0	1000.000	-5.8
2483.797000	---	53.65	54.00	0.35	1000.0	1000.000	-5.8
2483.797000	69.13	---	74.00	4.87	1000.0	1000.000	-5.8
2484.468000	---	52.73	54.00	1.27	1000.0	1000.000	-5.8
2484.468000	68.60	---	74.00	5.40	1000.0	1000.000	-5.8

4.9.5 TEST EQUIPMENT USED

Radiated Emissions

#### 4.10 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

##### 4.10.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

##### 4.10.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m)}$




### 4.10.3 TEST PROTOCOL

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %  
 WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detector	RBW [kHz]	Limit [dBµV/ m]	Margin to Limit [dB]	Limit Type
DSSS, 11Mbit / 18 dBm	2472.0	-	noise	---	-	-	> 13	RE

Remark: Antenna port of EUT terminated with 50 Ohm.

### 4.10.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

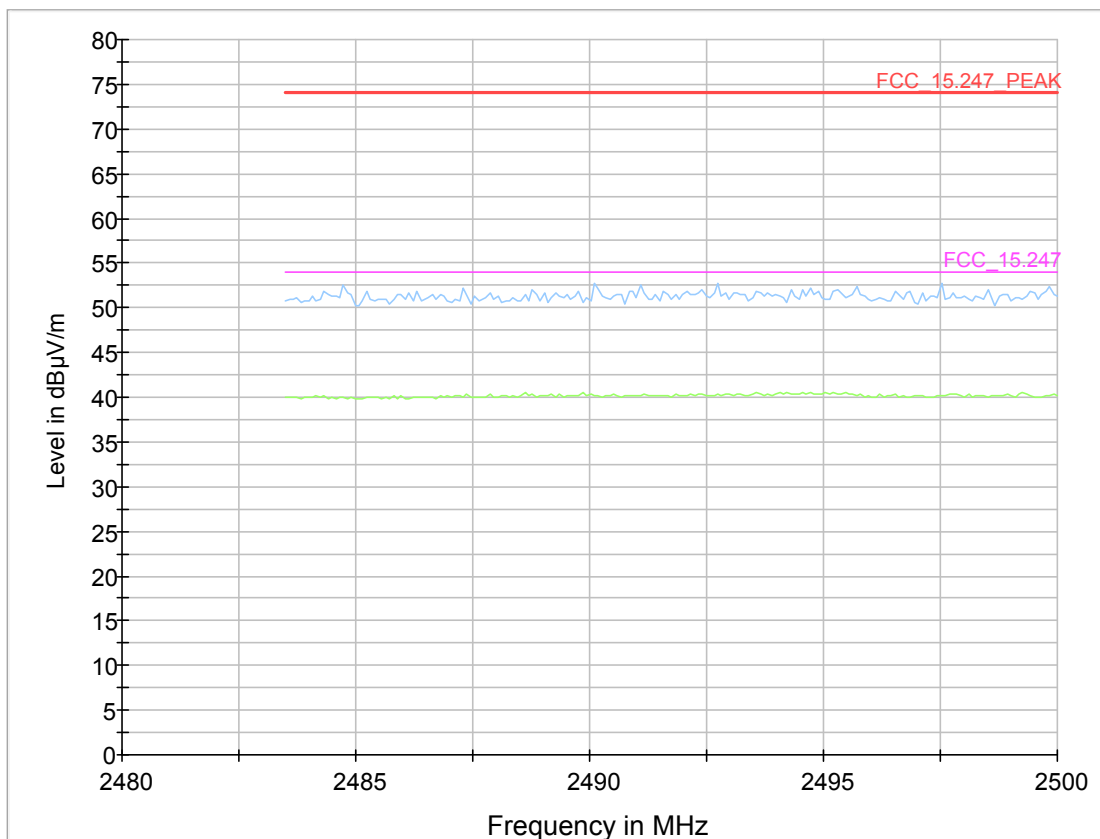

### 4.10.5 TEST EQUIPMENT USED

Radiated Emissions

#### 4.11 POWER DENSITY

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

##### 4.11.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 10 kHz
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 420 ms (BT-LE), 4.4 ms (WLAN 20 MHz), 8.8 ms (WLAN 40 MHz)
- Detector: Peak

##### 4.11.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

##### 4.11.3 TEST PROTOCOL

Ambient temperature: 23 °C  
Air Pressure: 1017 hPa  
Humidity: 41 %  
BT LE

Band	Channel No.	Frequency [MHz]	Power Density [dBm/ 3kHz]	Limit [dBm/ 3kHz]	Margin to Limit [dB]
2.4 GHz ISM	0	2402.0	-13.2	8.0	21.2
	19	2440.0	-12.7	8.0	20.7
	39	2480.0	-13.6	8.0	21.6

Ambient temperature: 23 °C  
 Air Pressure: 1017 hPa  
 Humidity: 41 %  
 WLAN b-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Power Density [dBm/ 3kHz]	Limit [dBm/ 3kHz]	Margin to Limit [dB]
DSSS, 11 Mbps	18 dBm	2412.0	-4.3	8.0	12.3
DSSS, 11 Mbps	18 dBm	2437.0	-4.8	8.0	12.8
DSSS, 11 Mbps	18 dBm	2462.0	-7.5	8.0	15.5
DSSS, 11 Mbps	15 dBm	2467.0	-10.7	8.0	18.7
DSSS, 11 Mbps	13 dBm	2472.0	-11.2	8.0	19.2

WLAN g-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Power Density [dBm/ 3kHz]	Limit [dBm/ 3kHz]	Margin to Limit [dB]
OFDM, 54 Mbps	13.0	2412.0	-11.3	8.0	19.3
OFDM, 36 Mbps	16.0	2417.0	-9.8	8.0	17.8
OFDM, 36 Mbps	16.0	2437.0	-9.2	8.0	17.2
OFDM, 36 Mbps	16.0	2462.0	-11.4	8.0	19.4
OFDM, 36 Mbps	10.0	2467.0	-18.0	8.0	26.0
OFDM, 54 Mbps	9.0	2472.0	-17.2	8.0	26.2

WLAN n-Mode; 20 MHz

Mode	Set EUT target power	Frequency [MHz]	Power Density [dBm/ 3kHz]	Limit [dBm/ 3kHz]	Margin to Limit [dB]
OFDM, MCS6	13.0	2412.0	-10.2	8.0	18.2
OFDM, MCS3	15.0	2417.0	-10.1	8.0	18.1
OFDM, MCS3	16.0	2437.0	-8.4	8.0	16.4
OFDM, MCS3	9.0	2467.0	-18.7	8.0	26.7
OFDM, MCS6	9.0	2472.0	-16.3	8.0	24.6


WLAN n-Mode; 40 MHz

Mode	Set EUT target power	Frequency [MHz]	Power Density [dBm/ 3kHz]	Limit [dBm/ 3kHz]	Margin to Limit [dB]
OFDM, MCS6	11.0	2422.0	-17.9	8.0	25.9
OFDM, MCS4	11.0	2427.0	-16.7	8.0	24.7
OFDM, MCS4	14.0	2437.0	-13.9	8.0	21.9
OFDM, MCS4	13.0	2447.0	-14.5	8.0	22.2
OFDM, MCS6	7.0	2462.0	-21.8	8.0	29.8

Remark: Please see next sub-clause for the measurement plot.


#### 4.11.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid

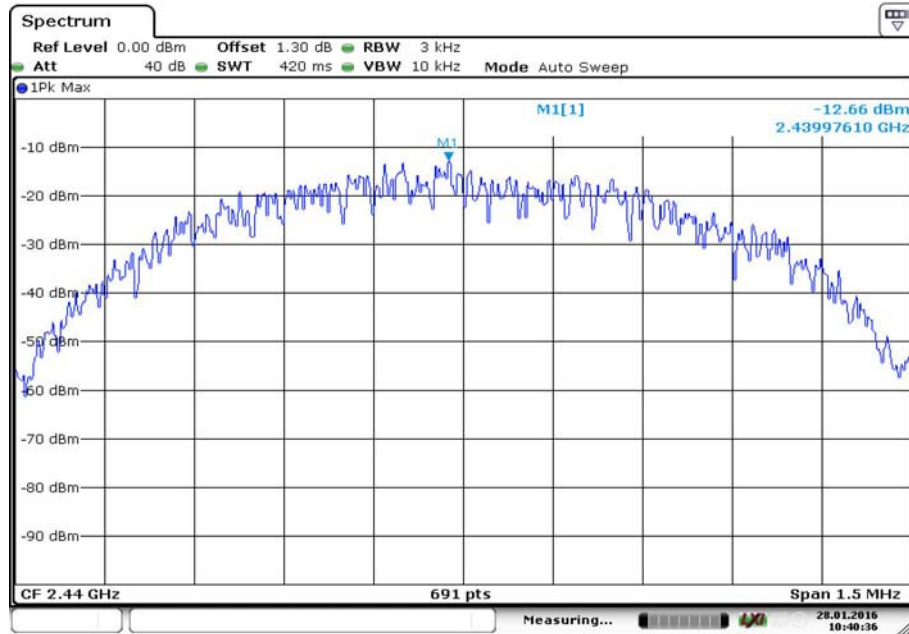


Date: 28 JAN 2016 10:40:36

Radio Technology = WLAN b, Operating Frequency = low

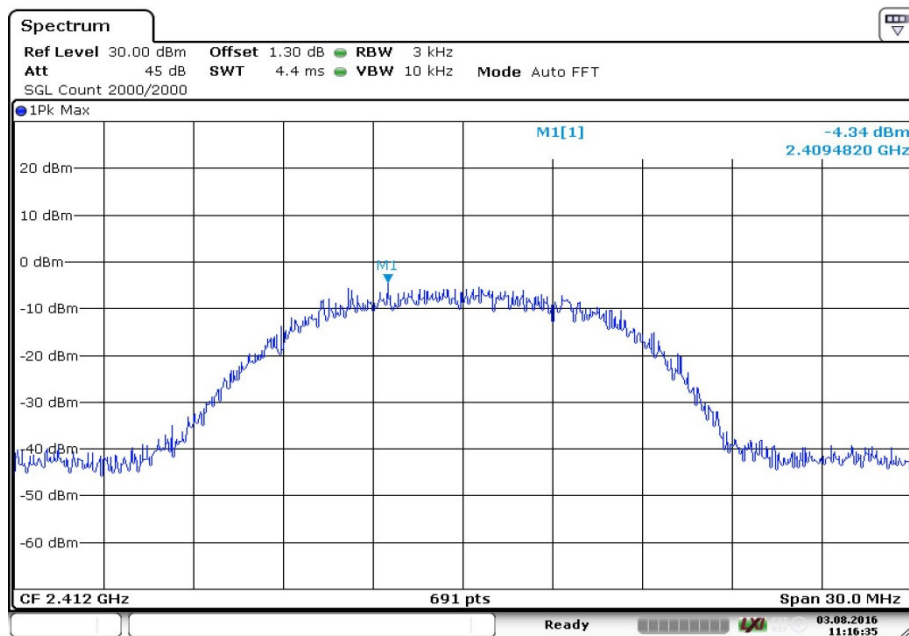


Date: 3.AUG.2016 11:16:35

Radio Technology = WLAN g, Operating Frequency = mid

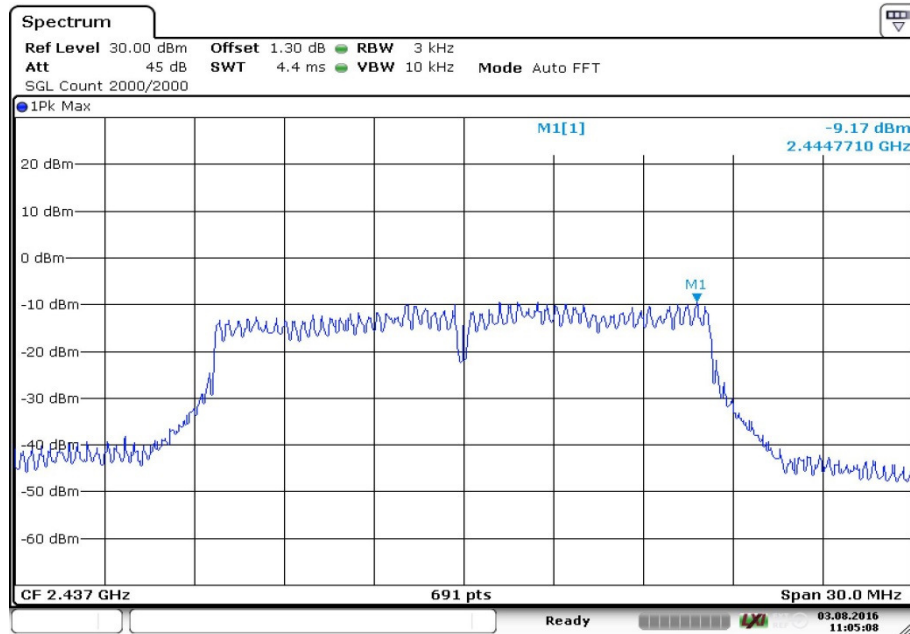


Date: 3.AUG.2016 11:05:09

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid

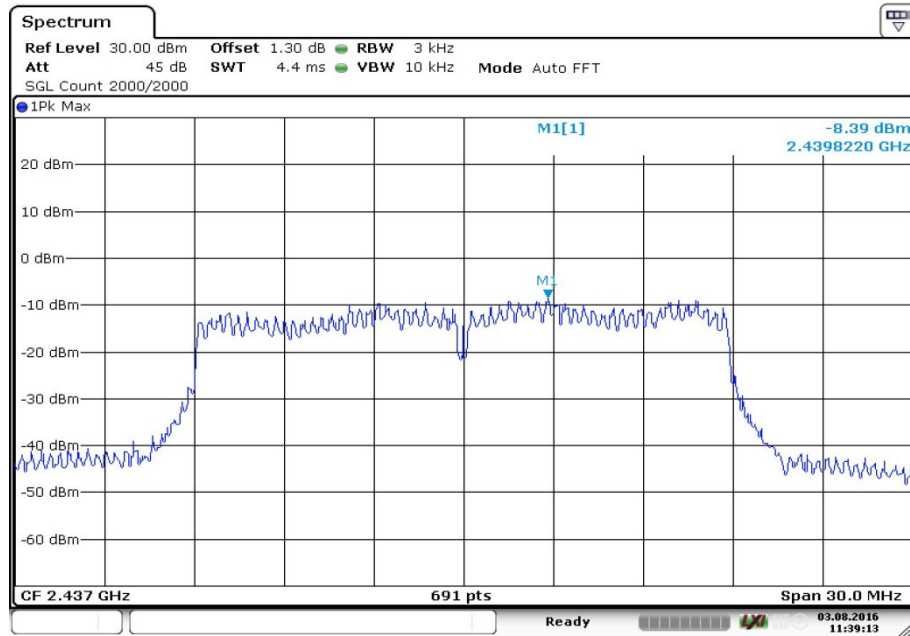

Date: 3.AUG.2016 11:39:13

Radio Technology = WLAN n 40 MHz, Operating Frequency = high

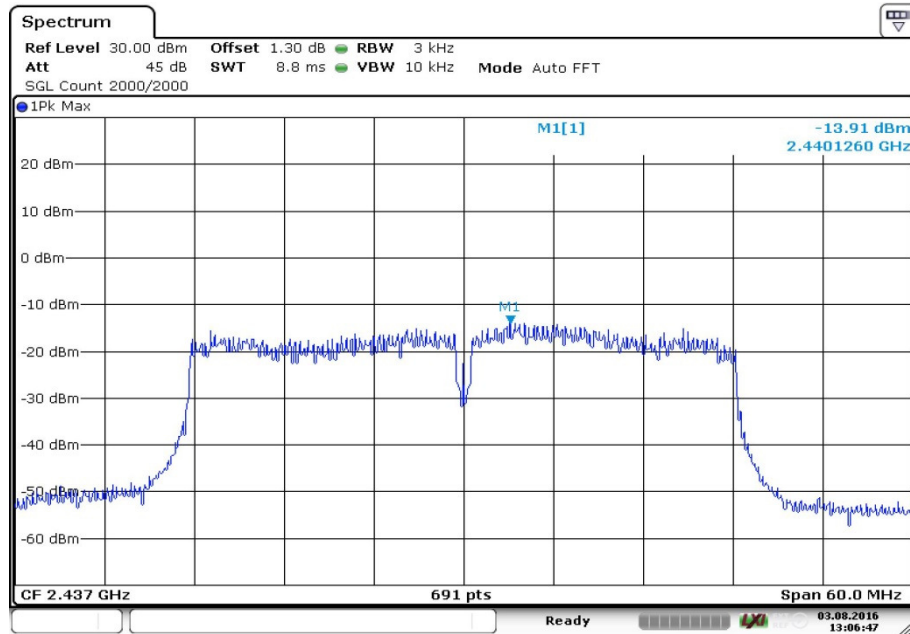

Date: 3.AUG.2016 13:06:47

#### 4.11.5 TEST EQUIPMENT USED

R&S TS8997

## 4.12 SIMULTANEOUS TRANSMISSION - SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 4.12.1 TEST DESCRIPTION

Please see test description for the test case "Transmitter Spurious Radiated Emissions"

### 4.12.2 TEST REQUIREMENTS / LIMITS

#### **WLAN 2.4 GHz:**

Please see "Test Requirements / Limits" for the test case "Transmitter Spurious Radiated Emissions"

#### **Additional for NFC:**

FCC §15.225 (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

### 4.12.3 TEST PROTOCOL

Possible simultaneous operating modes according to applicant' description	Remark
NFC + WLAN 2.4 GHz	Selected worst case operating mode: channel and mode with highest output power
NFC + BT	Not part of this report, covered from worst case mode: NFC + BT + WLAN 5 GHz
NFC + BT-LE	BT-LE covered from BT
NFC + WLAN 5 GHz	Not part of this report, covered from worst case mode: NFC + BT + WLAN 5 GHz
NFC + BT + WLAN 5 GHz	Worst case operating mode, not part of this report, no intended operating mode, only possible with special SW

Ambient temperature: 21–25 °C  
 Air Pressure: 1002–1020 hPa  
 Humidity: 38–45 %


WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
DSSS, 11Mbit / 18 dBm  NFC in continuous modulation mode	2437.0  13.56	0.009 to 30	noise	- - -	-	(13.56 MHz excluded)	> 20
DSSS, 11Mbit / 18 dBm  NFC in continuous modulation mode	2437.0  13.56	40.68	35.1	QP	120	40	4.9
DSSS, 11Mbit / 18 dBm  NFC in continuous modulation mode	2437.0  13.56	2483.50	57.3	Peak	1000	74  (13.56 MHz and 2437 MHz excluded)	16.7

Remark: Please see next sub-clause for the measurement plot.




#### 4.12.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

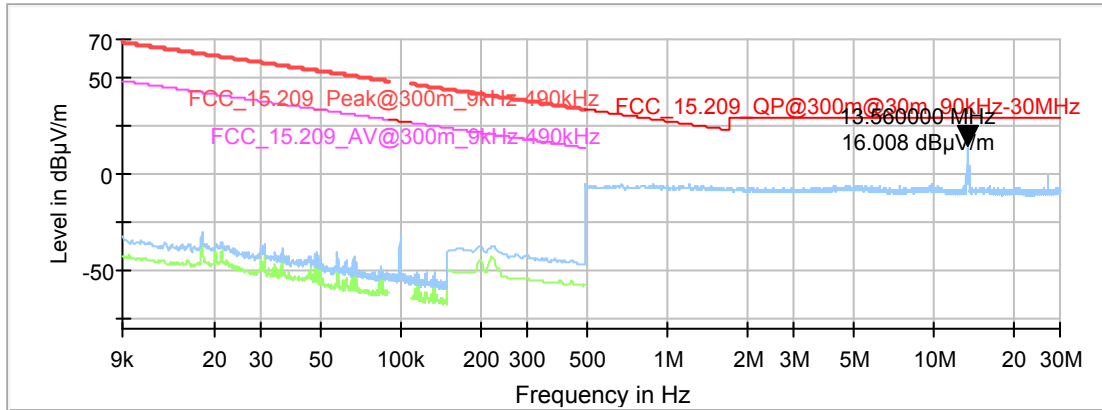


#### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
-	-	-	-	-	-	-	-	-	-

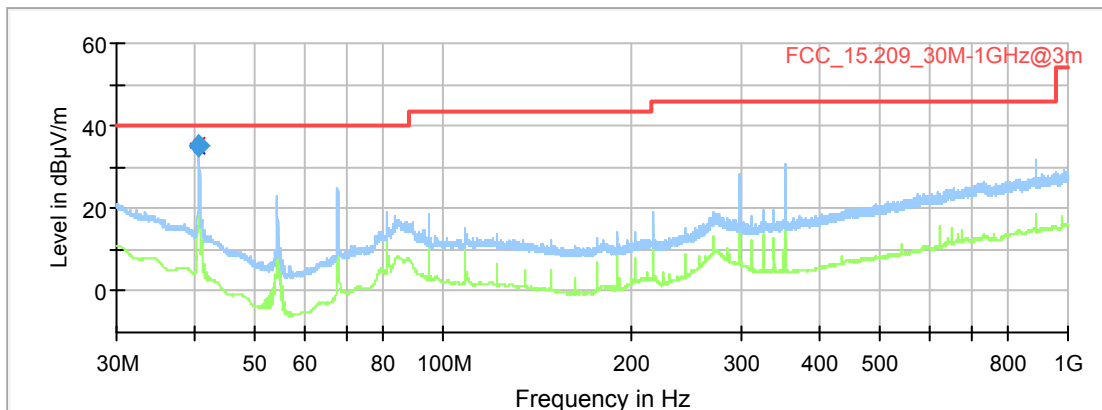

#### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
40.680000	35.14	40.00	4.86	1000.0	120.000	100.0	V	-139.0	13.3

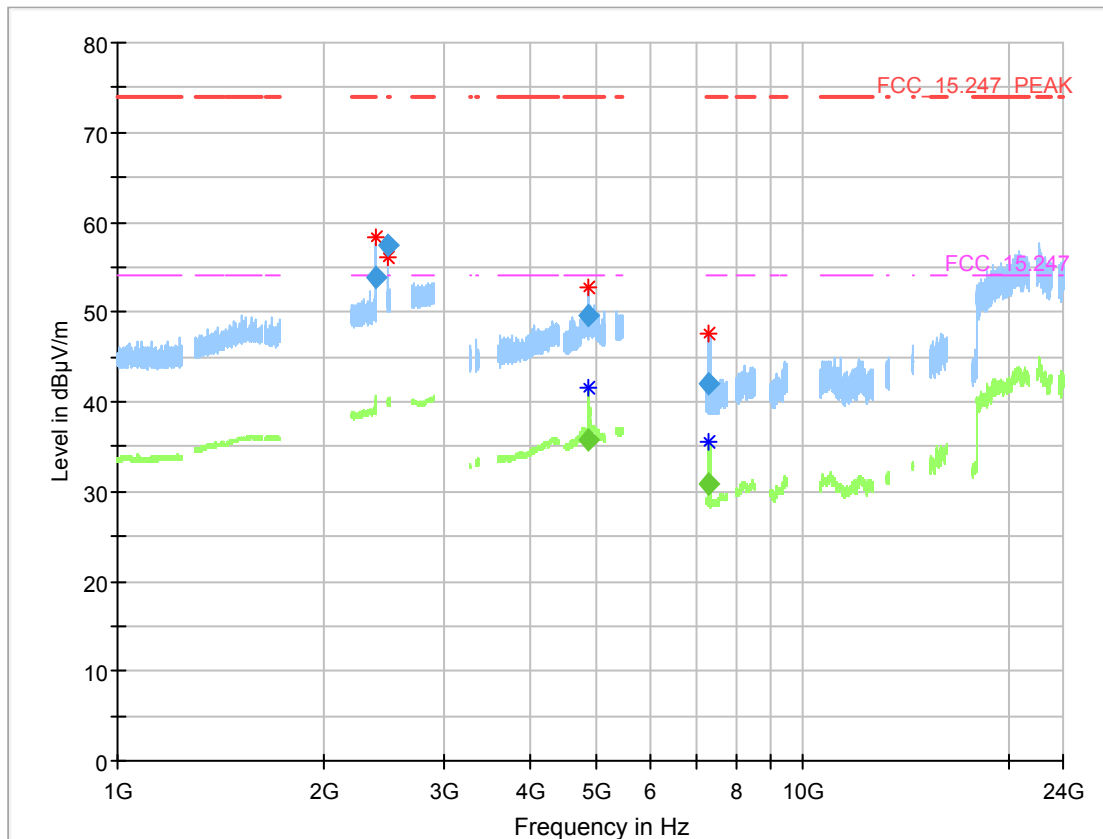

#### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2387.920000	53.94	---	74.00	20.06	1000.0	1000.000	150.0	H	-182.0	7.7
2483.500000	57.35	---	74.00	16.65	1000.0	1000.000	150.0	H	148.0	-2.0
4874.075000	---	35.77	54.00	18.23	1000.0	1000.000	150.0	H	161.0	-12.2
4877.487500	49.50	---	74.00	24.50	1000.0	1000.000	150.0	H	147.0	-2.0
7307.625000	41.93	---	74.00	32.07	1000.0	1000.000	150.0	H	148.0	10.1
7312.875000	---	30.91	54.00	23.09	1000.0	1000.000	150.0	H	161.0	-6.1

#### 4.12.5 TEST EQUIPMENT USED

Radiated Emissions

## 5 TEST EQUIPMENT

### 1 Conducted Emissions Shielded Room 02

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
	ESH 3-Z5	Two-Line V-Network	Rohde & Schwarz	828304/029	2015-03	2017-03
	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2014-11	2016-11
	EP 1200/B, NA/B1	Amplifier with integrated variable Oscillator	Spitzenberger & Spieß	B6278	2015-07	2018-07
	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2015-12	2017-12
	Opus10 THI (8152.00)	ThermoHygro Datalogger 02 (Environ)	Lufft Mess- und Regeltechnik GmbH	7489	2015-02	2017-02
	ESH 3-Z5	Two-Line V-Network	Rohde & Schwarz	829996/002	2015-03	2017-03
	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2015-02	2017-02
	CMD 55	Digital Radio Communication Tester	Rohde & Schwarz	831050/020	2014-12	2017-12
	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
	CMW 500	CMW 500	Rohde & Schwarz	107500	2015-07	2017-07

### 2 Radiated Emissions Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
	5HC3500/1800 0-1.2-KK	High Pass Filter	Trilithic	200035008		
	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2015-07	2018-07

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513		
	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2014-11	2016-11
	TT 1.5 WI	Turn Table	Maturo GmbH	-		
	Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	Frankonia	none	2014-01	2017-01
	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2015-12	2017-12
	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		
	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
	AS 620 P	Antenna mast	HD GmbH	620/37		
	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
	ASP 1.2/1.8-10kg	Antenna Mast	Maturo GmbH	-		
	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
	HL 562	Ultralog new biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2015-06	2018-06
	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2015-03	2017-03
	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
	HFH2-Z2	Loop Antenna	Rohde & Schwarz GmbH & Co. KG	829324/006	2014-11	2017-11
	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2014-11	2016-11
	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2015-02	2017-02
	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz GmbH & Co. KG	100609	2016-04	2019-04
	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
	HF 907	Double-ridged horn	Rohde & Schwarz GmbH & Co. KG	102444	2015-05	2018-05

3 R&S TS8997  
EN300328/301893 Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz GmbH & Co. KG	101158	2015-08	2016-08
	A8455-4	4 Way Power Divider (SMA)		-		
	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2016-02	2018-02
	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2015-02	2017-02
	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz GmbH & Co. KG	107695	2014-06	2017-06
	VT 4002	Climatic Chamber	Vötsch	58566002150010	2016-03	2018-03
	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2016-02	2018-02
	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz GmbH & Co. KG	259291	2013-08	2016-08
	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
	Datum, Model: MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2015-06 2016-06	2016-06 2017-07

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency MHz	Corr. dB	LISN insertion loss ESH3- Z5 dB	cable loss (incl. 10 dB atten- uator) dB
0,15	10,1	0,1	10,0
5	10,3	0,1	10,2
7	10,5	0,2	10,3
10	10,5	0,2	10,3
12	10,7	0,3	10,4
14	10,7	0,3	10,4
16	10,8	0,4	10,4
18	10,9	0,4	10,5
20	10,9	0,4	10,5
22	11,1	0,5	10,6
24	11,1	0,5	10,6
26	11,2	0,5	10,7
28	11,2	0,5	10,7
30	11,3	0,5	10,8

#### Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.



### 6.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

( $d_{Limit} = 3 \text{ m}$ )

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18,6	0,6
50	6,0	0,9
100	9,7	1,2
150	7,9	1,6
200	7,6	1,9
250	9,5	2,1
300	11,0	2,3
350	12,4	2,6
400	13,6	2,9
450	14,7	3,1
500	15,6	3,2
550	16,3	3,5
600	17,2	3,5
650	18,1	3,6
700	18,5	3,6
750	19,1	4,1
800	19,6	4,1
850	20,1	4,4
900	20,8	4,7
950	21,1	4,8
1000	21,6	4,9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/decade)	$d_{Limit}$ (meas. distance (limit))	$d_{used}$ (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0,29	0,04	0,23	0,02	0,0	3	3
0,39	0,09	0,32	0,08	0,0	3	3
0,56	0,14	0,47	0,08	0,0	3	3
0,73	0,20	0,59	0,12	0,0	3	3
0,84	0,21	0,70	0,11	0,0	3	3
0,98	0,24	0,80	0,13	0,0	3	3
1,04	0,26	0,89	0,15	0,0	3	3
1,18	0,31	0,96	0,13	0,0	3	3
1,28	0,35	1,03	0,19	0,0	3	3
1,39	0,38	1,11	0,22	0,0	3	3
1,44	0,39	1,20	0,19	0,0	3	3
1,55	0,46	1,24	0,23	0,0	3	3
1,59	0,43	1,29	0,23	0,0	3	3
1,67	0,34	1,35	0,22	0,0	3	3
1,67	0,42	1,41	0,15	0,0	3	3
1,87	0,54	1,46	0,25	0,0	3	3
1,90	0,46	1,51	0,25	0,0	3	3
1,99	0,60	1,56	0,27	0,0	3	3
2,14	0,60	1,63	0,29	0,0	3	3
2,22	0,60	1,66	0,33	0,0	3	3
2,23	0,61	1,71	0,30	0,0	3	3

( $d_{Limit} = 10 \text{ m}$ )

30	18,6	-9,9
50	6,0	-9,6
100	9,7	-9,2
150	7,9	-8,8
200	7,6	-8,6
250	9,5	-8,3
300	11,0	-8,1
350	12,4	-7,9
400	13,6	-7,6
450	14,7	-7,4
500	15,6	-7,2
550	16,3	-7,0
600	17,2	-6,9
650	18,1	-6,9
700	18,5	-6,8
750	19,1	-6,3
800	19,6	-6,3
850	20,1	-6,0
900	20,8	-5,8
950	21,1	-5,6
1000	21,6	-5,6

0,29	0,04	0,23	0,02	-10,5	10	3
0,39	0,09	0,32	0,08	-10,5	10	3
0,56	0,14	0,47	0,08	-10,5	10	3
0,73	0,20	0,59	0,12	-10,5	10	3
0,84	0,21	0,70	0,11	-10,5	10	3
0,98	0,24	0,80	0,13	-10,5	10	3
1,04	0,26	0,89	0,15	-10,5	10	3
1,18	0,31	0,96	0,13	-10,5	10	3
1,28	0,35	1,03	0,19	-10,5	10	3
1,39	0,38	1,11	0,22	-10,5	10	3
1,44	0,39	1,20	0,19	-10,5	10	3
1,55	0,46	1,24	0,23	-10,5	10	3
1,59	0,43	1,29	0,23	-10,5	10	3
1,67	0,34	1,35	0,22	-10,5	10	3
1,67	0,42	1,41	0,15	-10,5	10	3
1,87	0,54	1,46	0,25	-10,5	10	3
1,90	0,46	1,51	0,25	-10,5	10	3
1,99	0,60	1,56	0,27	-10,5	10	3
2,14	0,60	1,63	0,29	-10,5	10	3
2,22	0,60	1,66	0,33	-10,5	10	3
2,23	0,61	1,71	0,30	-10,5	10	3

#### Sample calculation

<p> <math>E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}</math>            U = Receiver reading            AF = Antenna factor            Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)            distance correction = <math>-20 * \text{LOG} (d_{Limit} / d_{used})</math>            Linear interpolation will be used for frequencies in between the values in the table.            Tables show an extract of values.         </p>
---



#### 6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24,4	-19,4
2000	28,5	-17,4
3000	31,0	-16,1
4000	33,1	-14,7
5000	34,4	-13,7
6000	34,7	-12,7
7000	35,6	-11,0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, attenuator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0,99	0,31	-21,51	0,79		
1,44	0,44	-20,63	1,38		
1,87	0,53	-19,85	1,33		
2,41	0,67	-19,13	1,31		
2,78	0,86	-18,71	1,40		
2,74	0,90	-17,83	1,47		
2,82	0,86	-16,19	1,46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31,0	-23,4
4000	33,1	-23,3
5000	34,4	-21,7
6000	34,7	-21,2
7000	35,6	-19,8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0,47	1,87	0,53	-27,58	1,33	
0,56	2,41	0,67	-28,23	1,31	
0,61	2,78	0,86	-27,35	1,40	
0,58	2,74	0,90	-26,89	1,47	
0,66	2,82	0,86	-25,58	1,46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35,6	-57,3
8000	36,3	-56,3
9000	37,1	-55,3
10000	37,5	-56,2
11000	37,5	-55,3
12000	37,6	-53,7
13000	38,2	-53,5
14000	39,9	-56,3
15000	40,9	-54,1
16000	41,3	-54,1
17000	42,8	-54,4
18000	44,2	-54,7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0,56	1,28	-62,72	2,66	0,94	1,46
0,69	0,71	-61,49	2,84	1,00	1,53
0,68	0,65	-60,80	3,06	1,09	1,60
0,70	0,54	-61,91	3,28	1,20	1,67
0,80	0,61	-61,40	3,43	1,27	1,70
0,84	0,42	-59,70	3,53	1,26	1,73
0,83	0,44	-59,81	3,75	1,32	1,83
0,91	0,53	-63,03	3,91	1,40	1,77
0,98	0,54	-61,05	4,02	1,44	1,83
1,23	0,49	-61,51	4,17	1,51	1,85
1,36	0,76	-62,36	4,34	1,53	2,00
1,70	0,53	-62,88	4,41	1,55	1,91

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$   
 U = Receiver reading  
 AF = Antenna factor  
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)  
 Linear interpolation will be used for frequencies in between the values in the table.  
 Tables show an extract of values.

## 6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency MHz	AF EMCO 3160-09 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (pre- amp) dB	cable loss 3 (inside chamber) dB	cable loss 4 (switch unit) dB	cable loss 5 (to receiver) dB
18000	40,2	-23,5	0,72	-35,85	6,20	2,81	2,65
18500	40,2	-23,2	0,69	-35,71	6,46	2,76	2,59
19000	40,2	-22,0	0,76	-35,44	6,69	3,15	2,79
19500	40,3	-21,3	0,74	-35,07	7,04	3,11	2,91
20000	40,3	-20,3	0,72	-34,49	7,30	3,07	3,05
20500	40,3	-19,9	0,78	-34,46	7,48	3,12	3,15
21000	40,3	-19,1	0,87	-34,07	7,61	3,20	3,33
21500	40,3	-19,1	0,90	-33,96	7,47	3,28	3,19
22000	40,3	-18,7	0,89	-33,57	7,34	3,35	3,28
22500	40,4	-19,0	0,87	-33,66	7,06	3,75	2,94
23000	40,4	-19,5	0,88	-33,75	6,92	3,77	2,70
23500	40,4	-19,3	0,90	-33,35	6,99	3,52	2,66
24000	40,4	-19,8	0,88	-33,99	6,88	3,88	2,58
24500	40,4	-19,5	0,91	-33,89	7,01	3,93	2,51
25000	40,4	-19,3	0,88	-33,00	6,72	3,96	2,14
25500	40,5	-20,4	0,89	-34,07	6,90	3,66	2,22
26000	40,5	-21,3	0,86	-35,11	7,02	3,69	2,28
26500	40,5	-21,1	0,90	-35,20	7,15	3,91	2,36

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d <sub>Limit</sub> (meas. distance (limit) m	d <sub>used</sub> (meas. distance (used) m
26,5	43,4	-11,2	4,4				-15,6	3	0,5
27,0	43,4	-11,2	4,4				-15,6	3	0,5
28,0	43,4	-11,1	4,5				-15,6	3	0,5
29,0	43,5	-11,0	4,6				-15,6	3	0,5
30,0	43,5	-10,9	4,7				-15,6	3	0,5
31,0	43,5	-10,8	4,7				-15,6	3	0,5
32,0	43,5	-10,7	4,8				-15,6	3	0,5
33,0	43,6	-10,7	4,9				-15,6	3	0,5
34,0	43,6	-10,6	5,0				-15,6	3	0,5
35,0	43,6	-10,5	5,1				-15,6	3	0,5
36,0	43,6	-10,4	5,1				-15,6	3	0,5
37,0	43,7	-10,3	5,2				-15,6	3	0,5
38,0	43,7	-10,2	5,3				-15,6	3	0,5
39,0	43,7	-10,2	5,4				-15,6	3	0,5
40,0	43,8	-10,1	5,5				-15,6	3	0,5

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.

## 7 SETUP DRAWINGS

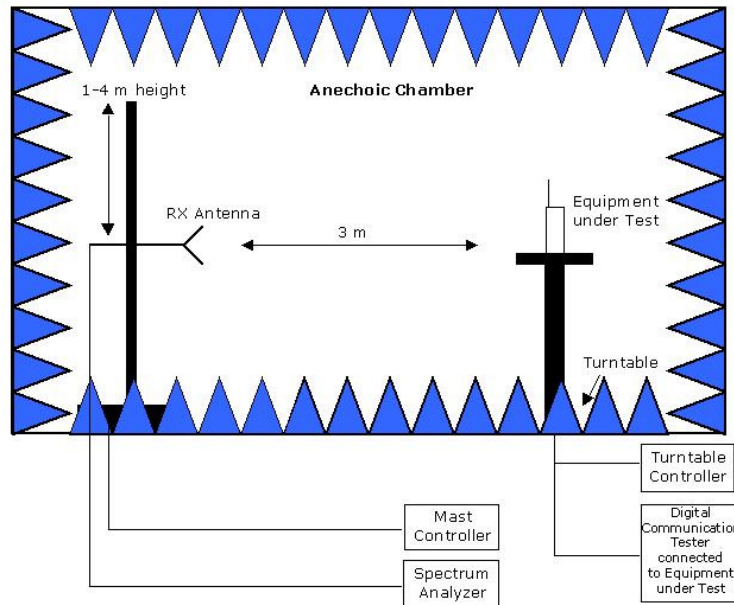

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

**Drawing 1:** Setup in the anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

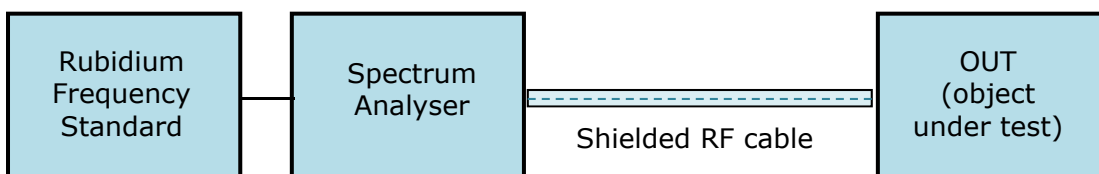

**Drawing 2:** Setup for conducted radio tests.

## 8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

## 9 PHOTO REPORT

Please see separate photo report.