

FCC Measurement/Technical Report on

Host-based multiradio module with Wi-Fi, Bluetooth and NFC

EMMY-W161

in WLAN 5 GHz mode

FCC ID: XPYEMMYW161

IC: 8595A-EMMYW161

Test Report Reference: MDE_UBLOX_1551_FCCf_Rev_1

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

1	Applied Standards and Test Summary	4
1.1	Applied Standards	4
1.2	FCC-IC Correlation Table	5
1.3	Measurement Summary / Signatures	6
1.4	Revision History	26
2	Administrative Data	27
2.1	Testing Laboratory	27
2.2	Project Data	27
2.3	Applicant Data	27
2.4	Manufacturer Data	27
3	Test object Data	28
3.1	General EUT Description	28
3.2	EUT Main components	29
3.3	WLAN Power Table	32
3.4	Ancillary Equipment	35
3.5	Auxiliary Equipment	35
3.6	EUT Setups	36
3.7	Operating Modes	36
3.8	Product labelling	37
4	Test Results	38
4.1	AC Conducted Emissions	38
4.2	26 dB Bandwidth	40
4.3	6 dB Bandwidth	43
4.4	99 % Bandwidth	46
4.5	Maximum Conducted Output Power	49
4.6	Peak Power Spectral Density	57
4.7	Undesirable Emissions; General Field Strength Limits	62
4.8	Spurious RF Conducted Emissions at Antenna Port	72
4.9	Band Edge	86
4.10	Simultaneous transmission – Spurious radiated emissions	90
5	Test Equipment	96
6	Antenna Factors, Cable Loss and Sample Calculations	100
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	100
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	101
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	102
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	103
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	104
6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	105

7	Setup Drawings	106
8	Measurement Uncertainties	107
9	Photo Report	107

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-15 Edition) and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note 1:

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v01r02, 2016-04-08".

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

Note 2:

Not all possible operating modes were tested. Worst case operating modes were determined at the beginning of the test period.

Note 3:

Unwanted emissions limits: Additional to the radiated measurements were antenna-port conducted measurements performed to cover different antennas.

Note 4:

The stricter limits were applied from the different device types: outdoor access point / indoor access point / mobile and portable client.

Note 5:

Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS) is not part of this test report.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 1: 6.2.1 (1), 6.2.2 (1), 6.2.3 (1) (99%) RSS-247 Issue 1: 6.2.4 (1) (6 dB)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-247 Issue 1: : 6.2.1 (1), 6.2.2 (1), 6.2.3 (1), 6.2.4 (1)
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-247 Issue 1: : 6.2.1 (1), 6.2.2 (1), 6.2.3 (1), 6.2.4 (1)
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	15.407 (b) § 15.209 (a)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 1: : 6.2.1 (2), 6.2.2 (2), 6.2.3 (2), 6.2.4 (2)
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 4: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 1: 6.2.2 (1), 6.2.3 (1), 6.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

Note 1:

Industry Canada RSS-247 Issue 1

6.2.3 Frequency Bands 5470-5600 MHz and 5650-5725 MHz

Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz.

This restriction is for the protection of Environment Canada's weather radars operating in this band.

1.3 MEASUREMENT SUMMARY / SIGNATURES

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.207

AC Conducted Emissions

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Operating mode

worst case

Remark: Measured at 120 V 60 Hz input of lab power supply.

Op-mode: WLAN 5 GHz, Ch. 149, 54 Mbps

+ Bluetooth Ch. 38, 1-DH1

Setup

DE1015031
aa01

FCC

Passed

IC

Passed

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.403 (i)

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-1

Remark: set EUT target power 16

WLAN a, high, U-NII-2A

Remark: set EUT target power 13

WLAN a, high, U-NII-2C

Remark: set EUT target power 13

WLAN a, high, U-NII-3

Remark: set EUT target power 14

WLAN a, low, U-NII-1

Remark: set EUT target power 13

WLAN a, low, U-NII-2A

Remark: set EUT target power 16

WLAN a, low, U-NII-2C

Remark: set EUT target power 13

WLAN a, low, U-NII-3

Remark: set EUT target power 14

WLAN a, mid, U-NII-1

Remark: set EUT target power 16

WLAN a, mid, U-NII-2A

Remark: set EUT target power 16

WLAN a, mid, U-NII-2C

Remark: set EUT target power 16

WLAN a, mid, U-NII-3

Remark: set EUT target power 16

Setup

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

DE1015031
bb01

Tested

N/A

WLAN ac 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, high, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN ac 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A

WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Tested	N/A
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 16 (MCS0)	DE1015031 bb01	Tested	N/A
WLAN ac 80 MHz, low, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Tested	N/A
WLAN ac 80 MHz, low, U-NII-3 Remark: set EUT target power 8	DE1015031 bb01	Tested	N/A
WLAN ac 80 MHz, mid, U-NII-1 Remark: set EUT target power 8	DE1015031 bb01	Tested	N/A
WLAN ac 80 MHz, mid, U-NII-2A Remark: set EUT target power 8	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, high, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, high, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Tested	N/A
WLAN n 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Tested	N/A

Remark: No applicable limit. Measurement results for information purpose and to determine the limit for conducted output power.

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

FCC §15.31, §15.407 (e)

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-3

Setup

FCC

IC

DE1015031
bb01

Passed

Passed

WLAN a, low, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN a, mid, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 20 MHz, high, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 20 MHz, low, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 20 MHz, mid, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 40 MHz, high, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 40 MHz, low, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN ac 80 MHz, low, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN n 20 MHz, high, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN n 20 MHz, low, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN n 20 MHz, mid, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN n 40 MHz, high, U-NII-3

DE1015031
bb01

Passed

Passed

WLAN n 40 MHz, low, U-NII-3

DE1015031
bb01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.31, IC RSS 247 Ch.
6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

	Setup	FCC	IC
WLAN a, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN a, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN a, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN a, high, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	N/A	Tested
WLAN a, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN a, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN a, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN a, low, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	N/A	Tested
WLAN a, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN a, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN a, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN a, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested

WLAN ac 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, high, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN ac 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 16 (MCS0)	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, low, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, low, U-NII-3 Remark: set EUT target power 8	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, mid, U-NII-1 Remark: set EUT target power 8	DE1015031 bb01	N/A	Tested
WLAN ac 80 MHz, mid, U-NII-2A Remark: set EUT target power 8	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, high, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested

WLAN n 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, high, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	N/A	Tested
WLAN n 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	N/A	Tested

Remark: No applicable limit. Measurement results for information purpose and to determine the limit for conducted output power.

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Subband			
WLAN a, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed

WLAN ac 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 16 (MCS0)	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-3 Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1 Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2A Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed

WLAN n 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.31, §15.407 (a)
(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

	Setup	FCC	IC
WLAN a, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-3 Remark: set EUT target power 14	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN a, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed

WLAN ac 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed

WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, high, U-NII-2C Remark: set EUT target power 16 (MCS0)	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-2C Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-3 Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1 Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2A Remark: set EUT target power 8	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2A Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2C Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-3 Remark: set EUT target power 13	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-1 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2A Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-3 Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2A Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2C Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-3 Remark: set EUT target power 12	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, mid, U-NII-2C Remark: set EUT target power 16	DE1015031 bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4); FCC §15.205,
§15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Measurement range, Subband			
WLAN a, high, 1GHz - 26GHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-2A Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-3 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, high, 9kHz - 30MHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-2A Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-3 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, low, 9kHz - 30MHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2A Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-3 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-2A Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-3 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2A Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2C Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-3 Remark: 6 Mbit/s	DE1015031 aa01	Passed	Passed

WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1 Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-2A Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-2C Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-3 Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1 Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-2A Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-2C Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-3 Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1 Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-2A Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-2C Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-3 Remark: MCS0	DE1015031 aa01	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-1 Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-2A Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-2C Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-3 Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-1 Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-2A Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-2C Remark: set EUT target power 12	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-3 Remark: MCS0	DE1015031 ab01	Passed	Passed
WLAN n 40 MHz, mid, 1GHz - 26GHz, U-NII-2C Remark: MCS0	DE1015031 ab01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4); FCC §15.205,
§15.209, §15.407 (b) (5),(6)**

Spurious RF Conducted Emissions at Antenna Port

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

	Setup	FCC	IC
WLAN a, additional channel, U-NII-1 Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, additional channel, U-NII-2A Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, additional channel, U-NII-2C Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, additional channel, U-NII-3 Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-1 Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-1 Remark: 54Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2C Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-2C Remark: 54Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-3 Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, low, U-NII-3 Remark: 54Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2A Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2A Remark: 54Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2C Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-2C Remark: 54Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-3 Remark: 6Mbps	DE1015031 bb01	Passed	Passed
WLAN a, high, U-NII-3 Remark: 54Mbps	DE1015031 bb01	Passed	Passed

WLAN n 20 MHz, additional channel, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, additional channel, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, additional channel, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, additional channel, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1 Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-2C Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, low, U-NII-3 Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2A Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-2C Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3 Remark: MCS7	DE1015031 bb01	Passed	Passed

WLAN n 40 MHz, additional channel, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1 Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-2C Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, low, U-NII-3 Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2A Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-2C Remark: MCS7	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN n 40 MHz, high, U-NII-3 Remark: MCS7	DE1015031 bb01	Passed	Passed

WLAN ac 20 MHz, additional channel, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, additional channel, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, additional channel, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, additional channel, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1 Remark: MCS5	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1 Remark: MCS8	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2C Remark: MCS8	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-3 Remark: MCS8	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A Remark: MCS5	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A Remark: MCS8	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3 Remark: MCS8	DE1015031 bb01	Passed	Passed

WLAN ac 40 MHz, low, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1 Remark: MCS5	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1 Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2C Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3 Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A Remark: MCS5	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3 Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, additional channel, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, additional channel, U-NII-2C Remark: MCS3	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-2C Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-2C Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-3 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, low, U-NII-3 Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1 Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1 Remark: MCS9	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2A Remark: MCS0	DE1015031 bb01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2A Remark: MCS9	DE1015031 bb01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-2A
Remark: 6 Mbit/s

Setup

FCC

IC

DE1015031
aa01

Passed

Passed

WLAN a, high, U-NII-2C
Remark: 6 Mbit/s

DE1015031
aa01

Passed

Passed

WLAN a, high, U-NII-3
Remark: 6 Mbit/s

DE1015031
aa01

Passed

Passed

WLAN a, low, U-NII-1
Remark: 6 Mbit/s

DE1015031
aa01

Passed

Passed

WLAN a, low, U-NII-2C
Remark: 6 Mbit/s

DE1015031
aa01

Passed

Passed

WLAN a, low, U-NII-3
Remark: 6 Mbit/s

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, high, U-NII-2A
Remark: MCS0

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, high, U-NII-2C
Remark: MCS0

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, high, U-NII-3
Remark: MCS0

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, low, U-NII-1
Remark: MCS0

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, low, U-NII-2C
Remark: MCS0

DE1015031
aa01

Passed

Passed

WLAN n 20 MHz, low, U-NII-3
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, high, U-NII-2A
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, high, U-NII-2C
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, high, U-NII-3
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, low, U-NII-1
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, low, U-NII-2C
Remark: MCS0

DE1015031
ab01

Passed

Passed

WLAN n 40 MHz, low, U-NII-3
Remark: MCS0

DE1015031
ab01

Passed

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart C
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4); FCC §15.205,
§15.209, §15.407 (b) (5),(6)**

Simultaneous Transmission - Spurious Radiated Emissions
The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Active Transmitters

NFC + Bluetooth BDR + WLAN 5 GHz

Setup

DE1015031
ad01

FCC

Passed

IC

Passed



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0



(responsible for accreditation scope)
Mr. Andreas Petz



(responsible for testing and report)
Mr. Wolfgang Richter

1.4 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2016-07-04	--	invalid
Rev_1	2016-08-12	1.3: Channel description for 5775 MHz corrected from "WLAN ac 80 MHz, mid, U-NII-3" to "WLAN ac 80 MHz, low, U-NII-3" (only low channel is used in this band) 3.1: EUT description changed for clarification from "test vehicle" to "evaluation board", 3.2: Sample ad01 added, 3.7.1: U-NII Subband 3, ac-mode 80 MHz nom. BW: only low channel at 5775 MHz is used in this band 4.2 to 4.6: Bandwidth, output power and peak power spectral density re-measured with lower declared output power, 4.10: Chapter Simultaneous Transmission added	valid

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01
Responsible for accreditation scope: Mr. Andreas Petz
Report Template Version: 2016-06-07

2.2 PROJECT DATA

Responsible for testing and report: Mr. Wolfgang Richter
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2016-08-12
Testing Period: 2016-01-06 to 2016-08-09

2.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Mr. Giulio Comar

2.4 MANUFACTURER DATA

Company Name: please see applicant data
Address:

Contact Person:

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	WLAN 2.4 GHz, 5 GHz, BT, NFC, SRD (5.8 GHz) - Single Antenna
Product name	Host-based multiradio module with Wi-Fi, Bluetooth and NFC
Type	EMMY-W161
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	normal: 3.3 V DC low: 3.0 V DC high: 3.6 V DC
Modulation Type for WLAN 5 GHz	OFDM, HT20 MCS0 – MCS7, HT40 MCS0 –MCS7, VHT20 MCS0 – MCS8, VHT40 MCS0 –MCS9, VHT80 MCS0 –MCS9 please see each test protocol
General product description	EMMY-W161 and EMMY-W163 are ultra-compact multi-radio modules providing Wi-Fi, Classic Bluetooth, Bluetooth low energy and NFC mode of operation. It is designed for both simultaneous and independent operations of: <ul style="list-style-type: none"> • Wi-Fi IEEE 802.11ac and a/b/g/n • Dual-mode Bluetooth 4.2 • NFC
Specific product description for the EUT	EMMY-W161: Shielded module, single antenna pin for WLAN 802.11 ac/a/b/g/n and Bluetooth communication
The EUT provides the following ports:	- DC power supply - antenna port - signal ports
Data rates	WLAN a: please see chapter "WLAN Power Table" WLAN n 20 MHz: please see chapter "WLAN Power Table" WLAN n 40 MHz: please see chapter "WLAN Power Table" WLAN ac 20: please see chapter "WLAN Power Table" WLAN ac 40: please see chapter "WLAN Power Table" WLAN ac 80: please see chapter "WLAN Power Table"
Access point use	Indoor or outdoor
Device type	Master or client, mobile and portable client
Special software used for testing	Special software used to setup EUT for testing: u-blox Labtool

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
DE1015031aa01	aa01	Radiated Sample "#1"
Sample Parameter	Value	
Integral Antenna	Antenna on evaluation board (target platform): Antenova, Type A10194, SMD chip antenna, 1.8 dBi Peak gain in 2.4 GHz band, 4.1 dBi Peak gain in 5 GHz band	
Serial No.	-	
HW Version	03	
SW Version	N/A	
Comment	-	

Sample Name	Sample Code	Description
DE1015031ad01	ad01	Radiated Sample "#1c"
Sample Parameter	Value	
Antenna	Antenna on evaluation board (target platform): Antenova, Type A10194, SMD chip antenna, 1.8 dBi Peak gain in 2.4 GHz band, 4.1 dBi Peak gain in 5 GHz band	
Serial No.	-	
HW Version	03	
SW Version	N/A	
Comment	-	

Sample Name	Sample Code	Description			
DE1015031ba01	ba01	Conducted Sample "#2"			
Sample Parameter	Value				
Antenna	Antenna connector on test vehicle (target platform): The following antennas are designated for 2.4 and 5 GHz WLAN transmission on EMMY-W161, as well as Bluetooth on EMMY-W161. - Table 2 of Test Object Specification:				
				Peak gain [dBi]	
#	Manufacturer	Part number	Antenna type	2.4 GHz band	5 GHz band
W1	Antenova	A10194 [1]	SMD chip antenna 10x10x0.9 [mm]	1.8	4.1
W2	Linx	ANT-DB1-RAF-RPS [4]	Dual-band dipole antenna	2.5	4.6
W3	Taoglas	GW.40.2153	Dual-band dipole antenna	3.74	2.5
W4	Taoglas	GW.59.3153 [5]	Dual-band dipole antenna	2.37	2.93
W5	Walsin	RFDPA870900SBLB8G1	Dual-band dipole antenna	2	3
W6	Linx	ANT-2.4-CW-RCT-RP [3]	Single-band dipole antenna	2.2	N/A
W7	Delock	88395 [6]	Dual-band dipole antenna	1.5	2.1
Serial No.	-				
HW Version	03				
SW Version	N/A				
Comment	-				

Sample Name	Sample Code	Description			
DE1015031bb01	bb01	Conducted Sample "#2a"			
Sample Parameter	Value				
Antenna	Antenna connector on evaluation board (target platform): The following antennas are designated for 2.4 and 5 GHz WLAN transmission on EMMY-W161, as well as Bluetooth on EMMY-W161. - Table 2 of Test Object Specification:				
				Peak gain [dBi]	
#	Manufacturer	Part number	Antenna type	2.4 GHz band	5 GHz band
W1	Antenova	A10194 [1]	SMD chip antenna 10x10x0.9 [mm]	1.8	4.1
W2	Linx	ANT-DB1-RAF-RPS [4]	Dual-band dipole antenna	2.5	4.6
W3	Taoglas	GW.40.2153	Dual-band dipole antenna	3.74	2.5
W4	Taoglas	GW.59.3153 [5]	Dual-band dipole antenna	2.37	2.93
W5	Walsin	RFDPA870900SBLB8G1	Dual-band dipole antenna	2	3
W6	Linx	ANT-2.4-CW-RCT-RP [3]	Single-band dipole antenna	2.2	N/A
W7	Delock	88395 [6]	Dual-band dipole antenna	1.5	2.1
Serial No.	-				
HW Version	03				
SW Version	N/A				
Comment	-				

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 WLAN POWER TABLE

Declared Power limits vs channel for FCC, U-NII-1 & 2A, 20 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz							
	5180	5200	5220	5240	5260	5280	5300	5320
OFDM 6, 9, 12, 18 Mbps	13	16	16	16	16	16	16	13
OFDM 24, 36 Mbps	13	16	16	16	16	16	16	13
OFDM 48, 54 Mbps	13	13	13	13	13	13	13	13
HT20 MCS0, MCS1, MCS2	13	16	16	16	16	16	16	13
HT20 MCS3, MCS4	13	16	16	16	16	16	16	13
HT20 MCS5, MCS6, MCS7	13	13	13	13	13	13	13	13
VHT20 MCS0, MCS1, MCS2	13	16	16	16	16	16	16	13
VHT20 MCS3, MCS4	13	16	16	16	16	16	16	13
VHT20 MCS5, MCS6, MCS7	13	13	13	13	13	13	13	13
VHT20 MCS8	13	13	13	13	13	13	13	13

Declared Power limits vs channel for FCC, U-NII-1 & 2A, 40 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz			
	5190	5230	5270	5310
HT40 MCS0, MCS1, MCS2	12	16	16	12
HT40 MCS3, MCS4	12	16	16	12
HT40 MCS5, MCS6, MCS7	12	12	12	12
VHT40 MCS0, MCS1, MCS2	12	16	16	12
VHT40 MCS3, MCS4	12	16	16	12
VHT40 MCS5, MCS6, MCS7	12	12	12	12
VHT40 MCS8, MCS9	10	10	10	10

Declared Power limits vs channel for FCC, U-NII-1 & 2A, 80 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz	
	5210	5290
VHT80 MCS0, MCS1, MCS2	8	8
VHT80 MCS3, MCS4	8	8
VHT80 MCS5, MCS6, MCS7	8	8
VHT80 MCS8, MCS9	8	8

Declared Power limits vs channel for FCC, U-NII-2C, 20 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz											
	5500	5520	5540	5560	5580	5600	5620	5640	5660	5680	5700	5720
OFDM 6, 9, 12, 18 Mbps	13	16	16	16	16	16	16	16	16	16	13	-
OFDM 24, 36 Mbps	13	16	16	16	16	16	16	16	16	16	13	-
OFDM 48, 54 Mbps	13	13	13	13	13	13	13	13	13	13	13	-
HT20 MCS0, MCS1, MCS2	13	16	16	16	16	16	16	16	16	16	13	-
HT20 MCS3, MCS4	13	16	16	16	16	16	16	16	16	16	13	-
HT20 MCS5, MCS6, MCS7	13	13	13	13	13	13	13	13	13	13	13	-
VHT20 MCS0, MCS1, MCS2	13	16	16	16	16	16	16	16	16	16	16	16
VHT20 MCS3, MCS4	13	16	16	16	16	16	16	16	16	16	16	16
VHT20 MCS5, MCS6, MCS7	13	13	13	13	13	13	13	13	13	13	13	13
VHT20 MCS8	13	13	13	13	13	13	13	13	13	13	13	13

Declared Power limits vs channel for FCC, U-NII-2C, 40 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz					
	5510	5550	5590	5630	5670	5710
HT40 MCS0, MCS1, MCS2	12	16	16	16	12	-
HT40 MCS3, MCS4	12	16	16	16	12	-
HT40 MCS5, MCS6, MCS7	12	12	12	12	12	-
VHT40 MCS0, MCS1, MCS2	12	16	16	16	16	16
VHT40 MCS3, MCS4	12	16	16	16	16	16
VHT40 MCS5, MCS6, MCS7	12	12	12	12	12	12
VHT40 MCS8, MCS9	10	10	10	10	10	10

Declared Power limits vs channel for FCC, U-NII-2C, 80 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz		
	5530	5610	5690
VHT80 MCS0, MCS1, MCS2	8	12	16
VHT80 MCS3, MCS4	8	13	13
VHT80 MCS5, MCS6, MCS7	8	10	10
VHT80 MCS8, MCS9	8	8	8

Note 1:

Industry Canada RSS-247 Issue 1

6.2.3 Frequency Bands 5470-5600 MHz and 5650-5725 MHz

Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz.

This restriction is for the protection of Environment Canada's weather radars operating in this band.

Declared Power limits vs channel for FCC, U-NII-3, 20 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz				
	5745	5765	5785	5805	5825
OFDM 6, 9, 12, 18 Mbps	14	16	16	16	14
OFDM 24, 36 Mbps	14	16	16	16	14
OFDM 48, 54 Mbps	13	13	13	13	13
HT20 MCS0, MCS1, MCS2	13	16	16	16	13
HT20 MCS3, MCS4	13	16	16	16	13
HT20 MCS5, MCS6, MCS7	13	13	13	13	13
VHT20 MCS0, MCS1, MCS2	13	16	16	16	16
VHT20 MCS3, MCS4	13	16	16	16	16
VHT20 MCS5, MCS6, MCS7	13	13	13	13	13
VHT20 MCS8	13	13	13	13	13

Declared Power limits vs channel for FCC, U-NII-3, 40 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz		
	5755	5795	
HT40 MCS0, MCS1, MCS2	12	16	
HT40 MCS3, MCS4	12	16	
HT40 MCS5, MCS6, MCS7	12	12	
VHT40 MCS0, MCS1, MCS2	12	12	
VHT40 MCS3, MCS4	12	12	
VHT40 MCS5, MCS6, MCS7	12	12	
VHT40 MCS8, MCS9	12	12	

Declared Power limits vs channel for FCC, U-NII-3, 80 MHz BW

Modulation group	WLAN TX Power in dBm at frequency in MHz	
	5775	
VHT80 MCS0, MCS1, MCS2	8	
VHT80 MCS3, MCS4	8	
VHT80 MCS5, MCS6, MCS7	8	
VHT80 MCS8, MCS9	8	

3.4 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
target platform	u-blox , 03, -, -	u-blox EVB-W16

3.5 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/ N)	Description
AC/DC power supply (115 V 60 Hz)	PeakTech, -, -, 081062045	PeakTech 6005D

3.6 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
DE1015031aa01	DE1015031aa01, target platform, AC/DC power supply	Setup for radiated measurement
DE1015031ab01	DE1015031ab01, target platform, AC/DC power supply	Setup for radiated measurement
DE1015031ad01	DE1015031ad01, target platform, AC/DC power supply	Setup for radiated measurement
DE1015031bb01	DE1015031bb01, target platform, AC/DC power supply	Setup for conducted measurement

3.7 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

3.7.1 TEST CHANNELS

a-mode, n-mode

U-NII-Subband 1 5150 - 5250 MHz			U-NII-Subband 2A 5250 - 5350 MHz			U-NII-Subband 2C 5470 - 5725 MHz			U-NII-Subband 3 5725 - 5850 MHz			Nom. BW
low	mid	high	low	mid	high	low	mid	high	low	mid	high	20 MHz
36	44	48	52	56	64	100	116	140	149	157	165	Ch.-No.
5180	5220	5240	5260	5280	5320	5500	5580	5700	5745	5785	5825	MHz
low	mid	high	low	mid	high	low	mid	high	low	mid	high	40 MHz
38	N/A	46	54	N/A	62	102	110	134	151	N/A	159	Ch.-No.
5190	N/A	5230	5270	N/A	5310	5510	5550	5670	5755	N/A	5795	MHz

ac-mode

U-NII-Subband 1 5150 - 5250 MHz			U-NII-Subband 2A 5250 - 5350 MHz			U-NII-Subband 2C 5470 - 5725 MHz			U-NII-Subband 3 5725 - 5850 MHz			Nom. BW
low	mid	high	low	mid	high	low	mid	high	low	mid	high	20 MHz
36	44	48	52	56	64	100	116	144	149	157	165	Ch.-No.
5180	5220	5240	5260	5280	5320	5500	5580	5720	5745	5785	5825	MHz
low	mid	high	low	mid	high	low	mid	high	low	mid	high	40 MHz
38	N/A	46	54	N/A	62	102	110	142	151	N/A	159	Ch.-No.
5190	N/A	5230	5270	N/A	5310	5510	5550	5710	5755	N/A	5795	MHz
low	mid	high	low	mid	high	low	mid	high	low	mid	high	80 MHz
N/A	42	N/A	N/A	58	N/A	106	122	138	155	N/A	N/A	Ch.-No.
N/A	5210	N/A	N/A	5290	N/A	5530	5610	5690	5775	N/A	N/A	MHz

In case of testing another channel, the measurement summary state "additional channel" and the channel or centre frequency of the operating frequency is stated in the test protocol.

3.7.2 TEST MODULATIONS

If not stated in the test protocols following operating modes are used:

WLAN a-Mode; 20 MHz; 6 Mbit/s; 100 % duty cycle
WLAN n-Mode; 20 MHz; 6,5 Mbit/s MCS0; 100 % duty cycle
WLAN n-Mode; 40 MHz; 13,5 Mbit/s MCS0; 100 % duty cycle
WLAN ac-Mode; 20 MHz; 6,5 Mbit/s MCS0; 100 % duty cycle
WLAN ac-Mode; 40 MHz; 13,5 Mbit/s MCS0; 100 % duty cycle
WLAN ac-Mode; 80 MHz; 433 Mbit/s MCS9; 100 % duty cycle

3.8 PRODUCT LABELLING

3.8.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.8.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

4 TEST RESULTS

4.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dBµV)	AV Limits (dBµV)
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

4.1.3 TEST PROTOCOL


Temperature: 23 °C
Air Pressure: 992 hPa
Humidity: 35 %

Power line	Frequency [MHz]	Measured value QP [dBµV]	Measured value AV [dBµV]	QP Limit [dBµV]	AV Limit [dBµV]	Margin QP [dB]	Margin AV [dB]
N	---	---	---	---	---	> 20	> 20
L	---	---	---	---	---	> 20	> 20

Remark: Remark: Measured at 120 V 60 Hz input of lab power supply.
Op-mode: WLAN 5 GHz, Ch. 149, 54 Mbps + Bluetooth Ch. 38, 1-DH1

4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Operating mode = worst case

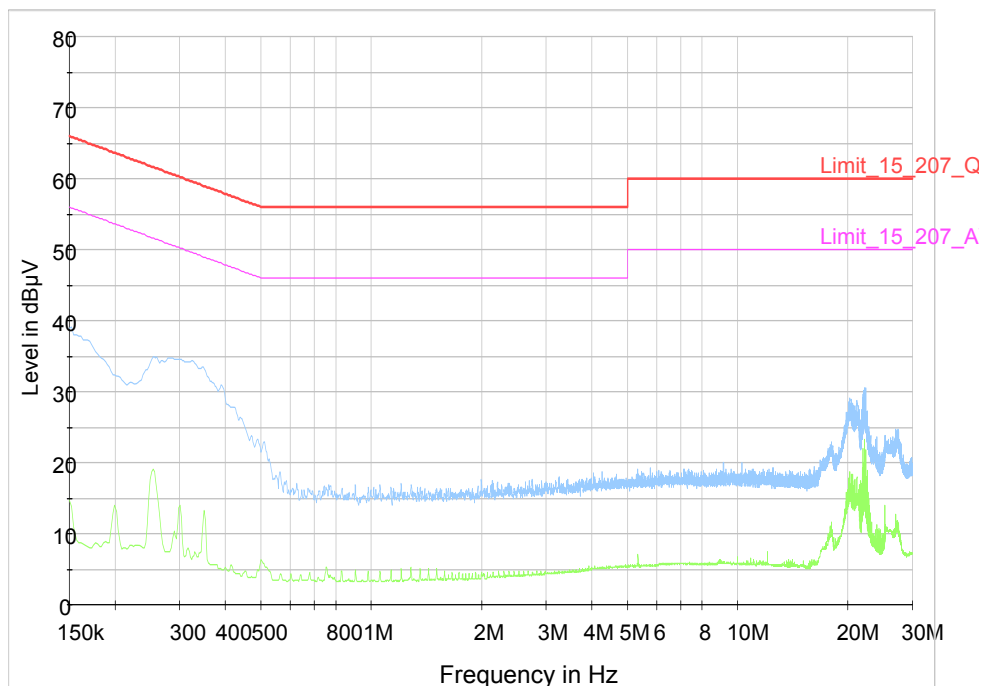

4.1.5 TEST EQUIPMENT USED

Conducted Emissions

4.2 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): > RBW z
- Span: 30 / 60 / 120 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Sample

4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

4.2.3 TEST PROTOCOL

Ambient temperature: 23 °C

Air Pressure: 1010 hPa


Humidity: 40 %

Radio Technology	Operating Frequency	Subband	26 dB Bandwidth [MHz]
WLAN a	low	U-NII-1	19,7
WLAN a	mid	U-NII-1	30,6
WLAN a	high	U-NII-1	30,5
WLAN a	low	U-NII-2A	31,9
WLAN a	mid	U-NII-2A	30,5
WLAN a	high	U-NII-2A	19,7
WLAN a	low	U-NII-2C	19,7
WLAN a	mid	U-NII-2C	19,7
WLAN a	high	U-NII-2C	19,7
WLAN a	low	U-NII-3	19,6
WLAN a	mid	U-NII-3	19,7
WLAN a	high	U-NII-3	19,6
WLAN n 20 MHz	low	U-NII-1	20,1
WLAN n 20 MHz	mid	U-NII-1	28,6
WLAN n 20 MHz	high	U-NII-1	29,0
WLAN n 20 MHz	low	U-NII-2A	28,0

WLAN n 20 MHz	mid	U-NII-2A	29,9
WLAN n 20 MHz	high	U-NII-2A	20,1
WLAN n 20 MHz	low	U-NII-2C	20,1
WLAN n 20 MHz	mid	U-NII-2C	20,4
WLAN n 20 MHz	high	U-NII-2C	20,1
WLAN n 20 MHz	low	U-NII-3	20,0
WLAN n 20 MHz	mid	U-NII-3	20,4
WLAN n 20 MHz	high	U-NII-3	20,1
WLAN n 40 MHz	low	U-NII-1	40,9
WLAN n 40 MHz	high	U-NII-1	81,0
WLAN n 40 MHz	low	U-NII-2A	72,4
WLAN n 40 MHz	high	U-NII-2A	41,1
WLAN n 40 MHz	low	U-NII-2C	41,1
WLAN n 40 MHz	mid	U-NII-2C	54,3
WLAN n 40 MHz	high	U-NII-2C	41,6
WLAN n 40 MHz	low	U-NII-3	41,3
WLAN n 40 MHz	high	U-NII-3	41,4
WLAN ac 20 MHz	low	U-NII-1	20,1
WLAN ac 20 MHz	mid	U-NII-1	28,1
WLAN ac 20 MHz	high	U-NII-1	27,9
WLAN ac 20 MHz	low	U-NII-2A	28,9
WLAN ac 20 MHz	mid	U-NII-2A	29,2
WLAN ac 20 MHz	high	U-NII-2A	20,1
WLAN ac 20 MHz	low	U-NII-2C	20,1
WLAN ac 20 MHz	mid	U-NII-2C	20,3
WLAN ac 20 MHz	high	U-NII-2C	20,4
WLAN ac 20 MHz	low	U-NII-3	20,1
WLAN ac 20 MHz	mid	U-NII-3	20,4
WLAN ac 20 MHz	high	U-NII-3	20,2
WLAN ac 40 MHz	low	U-NII-1	41,0
WLAN ac 40 MHz	high	U-NII-1	78,6
WLAN ac 40 MHz	low	U-NII-2A	76,1
WLAN ac 40 MHz	high	U-NII-2A	41,2
WLAN ac 40 MHz	low	U-NII-2C	41,4
WLAN ac 40 MHz	mid	U-NII-2C	55,7
WLAN ac 40 MHz	high	U-NII-2C	52,4
WLAN ac 40 MHz	low	U-NII-3	41,3
WLAN ac 40 MHz	high	U-NII-3	41,8
WLAN ac 80 MHz	mid	U-NII-1	82,3
WLAN ac 80 MHz	mid	U-NII-2A	83,1
WLAN ac 80 MHz	low	U-NII-2C	84,3
WLAN ac 80 MHz	high	U-NII-2C	82,9
WLAN ac 80 MHz	high (MCS0, 16 dBm)	U-NII-2C	206,0
WLAN ac 80 MHz	low	U-NII-3	83,5

Remark: Please see next sub-clause for the measurement plot.

4.2.4 MEASUREMENT PLOT (SHOWING THE LOWEST VALUE, "WORST CASE")
 Operating mode = WLAN a, low, U-NII-3

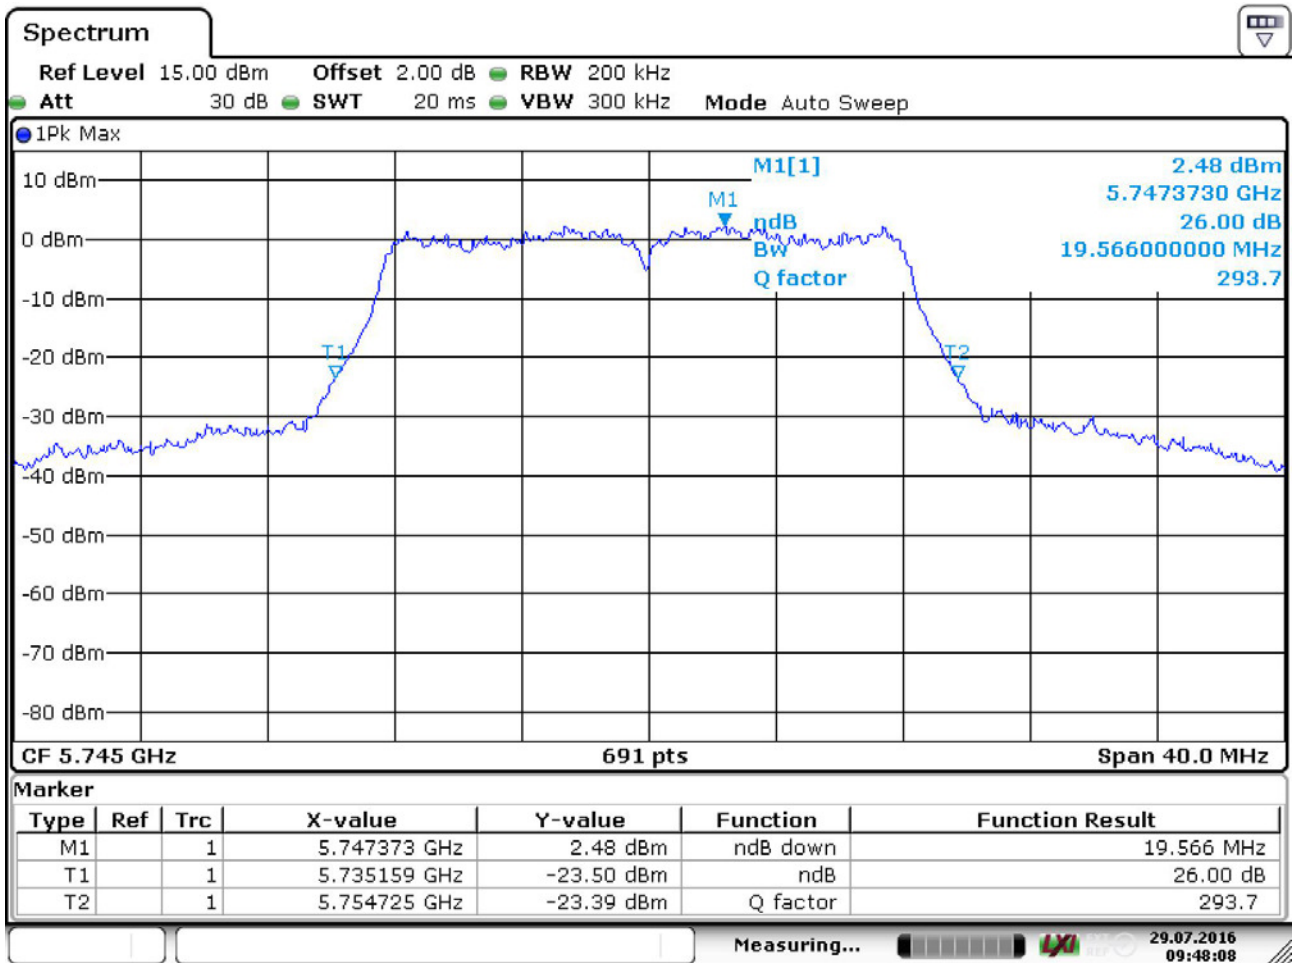

Date: 29.JUL.2016 09:48:08

4.2.5 TEST EQUIPMENT USED
 R&S TS8997

4.3 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Peak

4.3.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3.3 TEST PROTOCOL

Ambient temperature: 23 °C

Air Pressure: 1010 hPa


Humidity: 40 %

Radio Technology	Operating Frequency in U-NII-3 band	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]	Min. 6 dB Frequency [MHz]	Max. 6 dB Frequency [MHz]
WLAN a	low	16,4	0,5	15,9	-10,7	5,7
WLAN a	mid	16,4	0,5	15,9	-10,7	5,7
WLAN a	high	16,4	0,5	15,9	-10,7	5,7
WLAN n 20 MHz	low	17,5	0,5	17,0	-11,2	6,3
WLAN n 20 MHz	mid	17,6	0,5	17,1	-11,3	6,3
WLAN n 20 MHz	high	17,5	0,5	17,0	-11,2	6,3
WLAN n 40 MHz	low	35,6	0,5	35,1	-22,7	12,9
WLAN n 40 MHz	high	35,9	0,5	35,4	-22,8	13,1
WLAN ac 20 MHz	low	17,5	0,5	17,0	-11,2	6,3
WLAN ac 20 MHz	mid	17,6	0,5	17,1	-11,3	6,3
WLAN ac 20 MHz	high	17,5	0,5	17,0	-11,3	6,2
WLAN ac 40 MHz	low	35,6	0,5	35,1	-22,7	12,9
WLAN ac 40 MHz	high	36,3	0,5	35,8	-1,9	34,4
WLAN ac 80 MHz	low	76,6	0,5	76,1	-23,2	53,4

Remark: Please see next sub-clause for the measurement plot.

4.3.4 MEASUREMENT PLOT (SHOWING THE LOWEST VALUE, "WORST CASE")

Operating mode = WLAN a, mid, U-NII-3

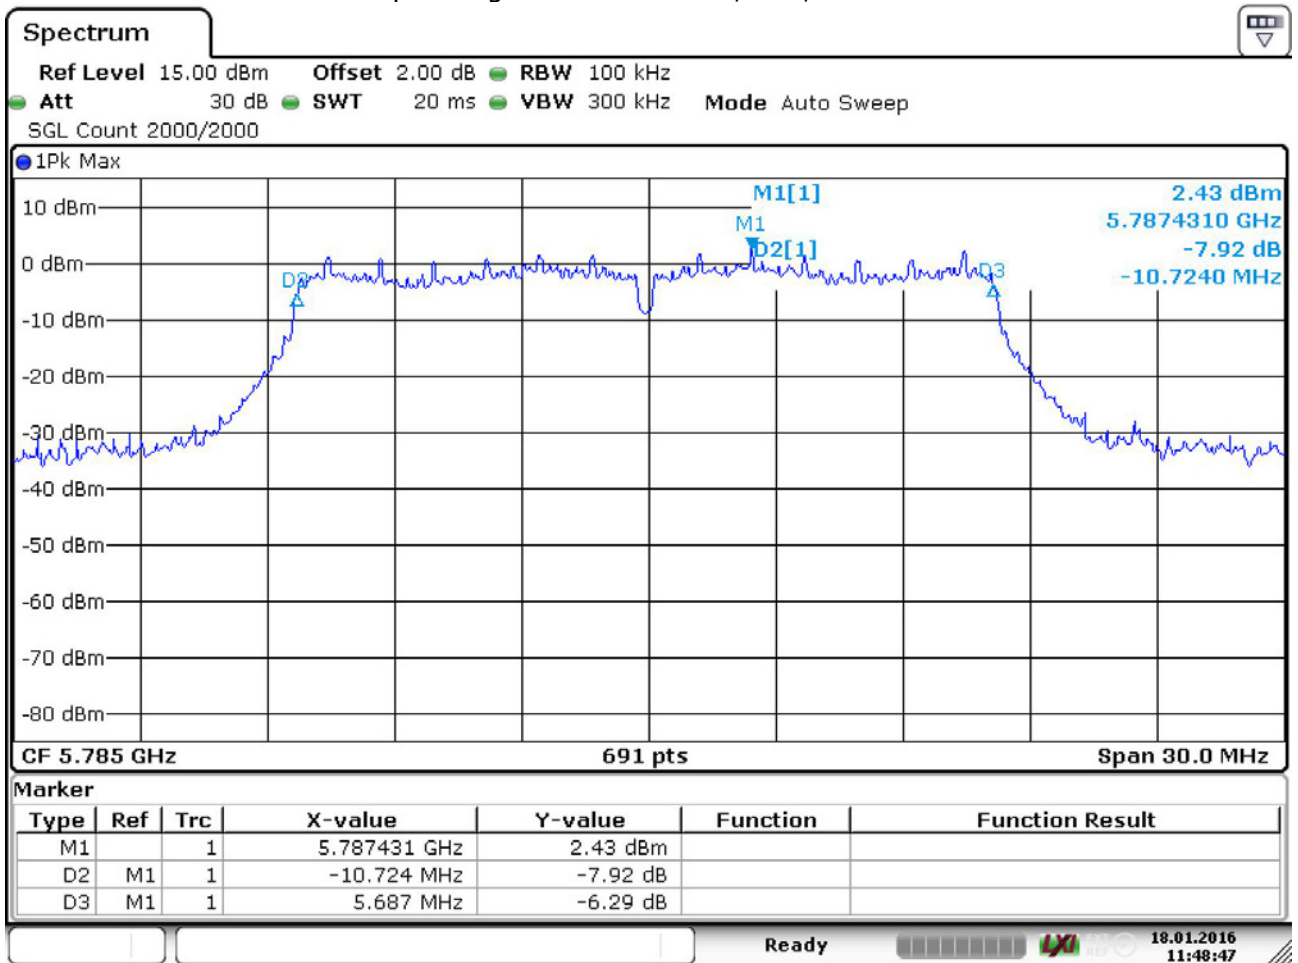

Date: 18.JAN.2016 11:48:48

4.3.5 TEST EQUIPMENT USED

R&S TS8997

4.4 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx. ≥ 1 % of the span, but not below
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 30 / 60 / 120 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

4.4.2 TEST REQUIREMENTS / LIMITS

No applicable limit. Measurement results for information purpose.

4.4.3 TEST PROTOCOL

Ambient temperature: 23 °C

Air Pressure: 1010 hPa

Humidity: 40 %


Radio Technology	Operating Frequency	Subband	99% Bandwidth [MHz]
WLAN a	low	U-NII-1	17,2
WLAN a	mid	U-NII-1	17,4
WLAN a	high	U-NII-1	17,3
WLAN a	low	U-NII-2A	17,4
WLAN a	mid	U-NII-2A	17,3
WLAN a	high	U-NII-2A	17,1
WLAN a	low	U-NII-2C	17,1
WLAN a	mid	U-NII-2C	17,1
WLAN a	high	U-NII-2C	17,1
WLAN a	low	U-NII-3	17,1
WLAN a	mid	U-NII-3	17,1
WLAN a	high	U-NII-3	17,1
WLAN n 20 MHz	low	U-NII-1	18,0
WLAN n 20 MHz	mid	U-NII-1	18,2
WLAN n 20 MHz	high	U-NII-1	18,1
WLAN n 20 MHz	low	U-NII-2A	18,2

WLAN n 20 MHz	mid	U-NII-2A	18,2
WLAN n 20 MHz	high	U-NII-2A	17,9
WLAN n 20 MHz	low	U-NII-2C	17,9
WLAN n 20 MHz	mid	U-NII-2C	18,0
WLAN n 20 MHz	high	U-NII-2C	17,9
WLAN n 20 MHz	low	U-NII-3	17,9
WLAN n 20 MHz	mid	U-NII-3	17,9
WLAN n 20 MHz	high	U-NII-3	17,9
WLAN n 40 MHz	low	U-NII-1	36,2
WLAN n 40 MHz	high	U-NII-1	36,9
WLAN n 40 MHz	low	U-NII-2A	36,8
WLAN n 40 MHz	high	U-NII-2A	36,5
WLAN n 40 MHz	low	U-NII-2C	36,3
WLAN n 40 MHz	mid	U-NII-2C	36,5
WLAN n 40 MHz	high	U-NII-2C	36,3
WLAN n 40 MHz	low	U-NII-3	36,3
WLAN n 40 MHz	high	U-NII-3	36,3
WLAN ac 20 MHz	low	U-NII-1	18,1
WLAN ac 20 MHz	mid	U-NII-1	18,2
WLAN ac 20 MHz	high	U-NII-1	18,3
WLAN ac 20 MHz	low	U-NII-2A	18,2
WLAN ac 20 MHz	mid	U-NII-2A	18,3
WLAN ac 20 MHz	high	U-NII-2A	17,9
WLAN ac 20 MHz	low	U-NII-2C	17,9
WLAN ac 20 MHz	mid	U-NII-2C	17,9
WLAN ac 20 MHz	high	U-NII-2C	18,0
WLAN ac 20 MHz	low	U-NII-3	17,9
WLAN ac 20 MHz	mid	U-NII-3	17,9
WLAN ac 20 MHz	high	U-NII-3	17,9
WLAN ac 40 MHz	low	U-NII-1	36,3
WLAN ac 40 MHz	high	U-NII-1	36,9
WLAN ac 40 MHz	low	U-NII-2A	36,9
WLAN ac 40 MHz	high	U-NII-2A	36,3
WLAN ac 40 MHz	low	U-NII-2C	36,3
WLAN ac 40 MHz	mid	U-NII-2C	36,5
WLAN ac 40 MHz	high	U-NII-2C	36,5
WLAN ac 40 MHz	low	U-NII-3	36,2
WLAN ac 40 MHz	high	U-NII-3	36,5
WLAN ac 80 MHz	mid	U-NII-1	76,6
WLAN ac 80 MHz	mid	U-NII-2A	76,9
WLAN ac 80 MHz	low	U-NII-2C	76,7
WLAN ac 80 MHz	high	U-NII-2C	79,0
WLAN ac 80 MHz	high (MCS0, 16 dBm)	U-NII-2C	101,4
WLAN ac 80 MHz	low	U-NII-3	76,4

Remark: Please see next sub-clause for the measurement plot.

4.4.4 MEASUREMENT PLOT (SHOWING THE LOWEST VALUE, "WORST CASE")

Operating mode = WLAN a, low, U-NII-2C

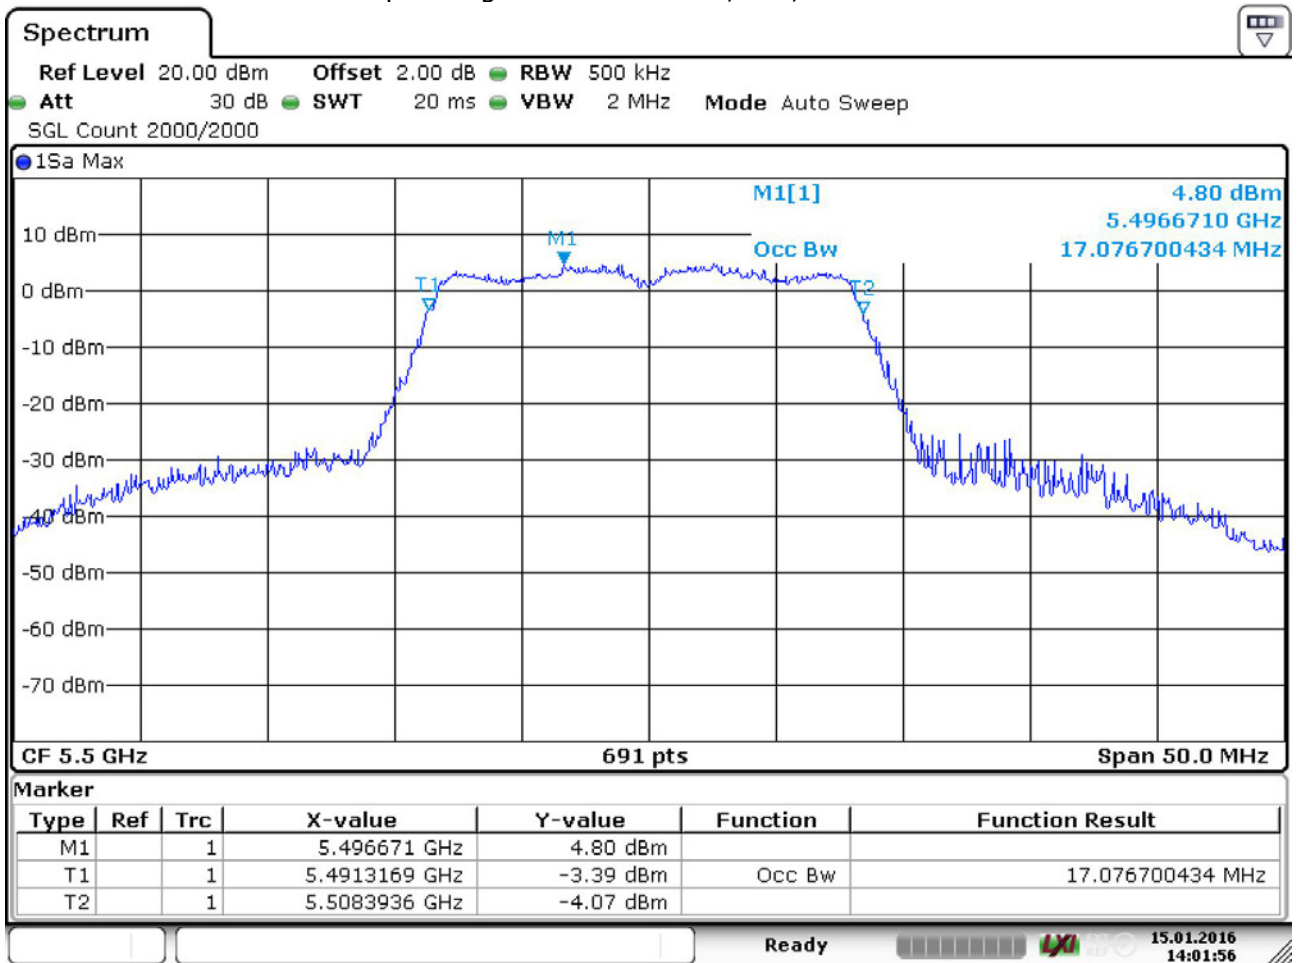

Date: 15.JAN.2016 14:01:56

4.4.5 TEST EQUIPMENT USED

R&S TS8997

4.5 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 1000
- Sweep time: 20 ms
- Detector: RMS
- Trigger: free run (100 % duty cycle)

The channel power function of the spectrum analyser was used (Used channel bandwidth = nominal bandwidth)

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

4.5.2 TEST REQUIREMENTS / LIMITS

A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or $17 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or $10 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or $17 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or $23 + 10 \log_{10} B \text{ [dBm]}$, whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

4.5.3 TEST PROTOCOL

Ambient temperature: 23 °C

Air Pressure: 1010 hPa

Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36,0	5180,0	14,4	19,0	24,0	9,6	N/A	N/A	22,4	3,3	1)
	44,0	5220,0	16,2	20,8	24,0	7,8	N/A	N/A	22,4	1,6	1)
	48,0	5240,0	16,3	20,9	24,0	7,7	N/A	N/A	22,4	1,5	1)
2A	52,0	5260,0	17,0	21,6	24,0	7,0	23,4	6,4	29,4	7,8	1)
	56,0	5280,0	16,3	20,9	24,0	7,7	23,4	7,1	29,4	8,5	1)
	64,0	5320,0	13,9	18,5	24,0	10,1	23,3	9,5	29,3	10,9	1)
2C	100,0	5500,0	12,9	17,5	24,0	11,0	23,3	10,4	29,3	11,8	
	116,0	5580,0	14,5	19,1	24,0	9,4	23,3	8,8	29,3	10,2	
	140,0	5700,0	10,5	15,1	24,0	13,5	23,3	12,8	29,3	14,2	
3	149,0	5745,0	11,7	16,3	30,0	18,3	29,4	17,7	36,0	19,7	
	157,0	5785,0	12,5	17,1	30,0	17,5	29,3	16,8	36,0	18,9	
	165,0	5825,0	11,6	16,2	30,0	16,9	29,3	17,7	36,0	19,8	

WLAN n-Mode; 20 MHz; 6,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36,0	5180,0	14,6	19,2	24,0	9,4	N/A	N/A	22,6	3,4	1)
	44,0	5220,0	16,4	21,0	24,0	7,6	N/A	N/A	22,6	1,6	1)
	48,0	5240,0	16,2	20,8	24,0	7,8	N/A	N/A	22,6	1,8	1)
2A	52,0	5260,0	16,8	21,4	24,0	7,2	23,6	6,8	29,6	8,2	1)
	56,0	5280,0	16,3	20,9	24,0	7,7	23,6	7,3	29,6	8,7	1)
	64,0	5320,0	14,0	18,6	24,0	10,0	23,5	9,5	29,5	10,9	1)
2C	100,0	5500,0	12,7	17,3	24,0	11,3	23,5	10,9	29,5	12,3	
	116,0	5580,0	14,6	19,2	24,0	9,4	23,6	9,0	29,6	10,4	
	140,0	5700,0	10,4	15,0	24,0	13,6	23,6	13,2	29,6	14,6	
3	149,0	5745,0	10,9	15,5	30,0	19,1	29,6	18,7	36,0	20,5	
	157,0	5785,0	12,6	17,2	30,0	17,4	29,5	17,0	36,0	18,8	
	165,0	5825,0	10,7	15,3	30,0	19,3	29,5	18,8	36,0	20,7	

WLAN n-Mode; 40 MHz; 13,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38,0	5190,0	13,9	18,5	24,0	10,1	N/A	N/A	23,0	4,5	1)
	46,0	5230,0	16,4	21,0	24,0	7,6	N/A	N/A	23,0	2,0	1)
2A	54,0	5270,0	16,1	20,7	24,0	7,9	24,0	7,9	30,0	9,3	1)
	62,0	5310,0	12,6	17,2	24,0	11,4	24,0	11,4	30,0	12,8	1)
2C	102,0	5510,0	11,5	16,1	24,0	12,5	24,0	12,5	30,0	13,9	
	110,0	5550,0	14,4	19,0	24,0	9,6	24,0	9,6	30,0	11,0	
	138,0	5670,0	9,5	14,1	24,0	14,5	24,0	14,5	30,0	15,9	
3	151,0	5755,0	9,3	13,8	30,0	20,7	30,0	20,7	36,0	22,2	
	159,0	5795,0	12,4	17,0	30,0	17,6	30,0	17,6	36,0	19,0	

Remark: 1) = no additional limit applies related to the elevation.

Ambient temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 40 %

WLAN ac-Mode; 20 MHz; 6,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36,0	5180,0	14,5	19,1	24,0	9,5	N/A	N/A	22,6	3,5	1)
	44,0	5220,0	16,4	21,0	24,0	7,6	N/A	N/A	22,6	1,6	1)
	48,0	5240,0	16,2	20,8	24,0	7,8	N/A	N/A	22,6	1,9	1)
2A	52,0	5260,0	16,7	21,3	24,0	7,3	23,6	6,9	29,6	8,3	1)
	56,0	5280,0	16,3	20,9	24,0	7,7	23,6	7,3	29,6	8,7	1)
	64,0	5320,0	13,9	18,5	24,0	10,1	23,6	9,7	29,5	11,0	1)
2C	100,0	5500,0	12,7	17,3	24,0	11,3	23,5	10,8	29,5	12,2	
	116,0	5580,0	14,4	19,0	24,0	9,6	23,5	9,1	29,5	10,5	
	140,0	5700,0	13,4	18,0	24,0	10,6	23,5	10,1	29,6	11,6	
3	149,0	5745,0	10,8	15,4	30,0	19,2	29,6	18,7	36,0	20,6	
	157,0	5785,0	12,6	17,2	30,0	17,4	29,5	16,9	36,0	18,8	
	165,0	5825,0	13,2	17,8	30,0	16,8	29,5	16,4	36,0	18,2	

WLAN ac-Mode; 40 MHz; 13,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38,0	5190,0	13,4	18,0	24,0	10,6	N/A	N/A	23,0	5,0	1)
	46,0	5230,0	16,4	21,0	24,0	7,6	N/A	N/A	23,0	2,0	1)
2A	54,0	5270,0	16,0	20,6	24,0	8,0	24,0	8,0	30,0	9,4	1)
	62,0	5310,0	12,6	17,2	24,0	11,4	24,0	11,4	30,0	12,8	1)
2C	102,0	5510,0	11,2	15,8	24,0	12,8	24,0	12,8	30,0	14,2	
	110,0	5550,0	14,5	19,1	24,0	9,5	24,0	9,5	30,0	10,9	
	138,0	5670,0	13,4	18,0	24,0	10,6	24,0	10,6	30,0	12,0	
3	151,0	5755,0	9,1	13,7	30,0	20,9	30,0	20,9	36,0	22,3	
	159,0	5795,0	9,2	13,8	30,0	20,8	30,0	20,8	36,0	22,2	

WLAN ac-Mode; 80 MHz; 433 Mbit/s MCS9

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	1)
1	42,0	5210,0	9,8	14,4	24,0	14,2	N/A	N/A	23,0	8,6	1)
2A	58,0	5290,0	9,1	13,7	24,0	14,9	24,0	14,9	30,0	16,3	1)
2C	106,0	5530,0	6,6	11,2	24,0	17,4	24,0	17,4	30,0	18,8	
	122,0	5610,0	6,6	11,2	24,0	17,4	24,0	17,4	30,0	18,8	
	138,0	5690,0	6,8	11,4	24,0	17,2	24,0	17,2	30,0	18,6	
3	155,0	5775,0	6,9	11,5	30,0	23,1	30,0	23,1	36,0	24,5	


WLAN ac-Mode; 80 MHz; 433 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	1)
2C	138,0	5690,0	13,2	17,8	24,0	10,8	24,0	10,8	30,0	12,2	

Remark: 1) = no additional limit applies related to the elevation.


4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Operating mode = WLAN a, high, U-NII-1

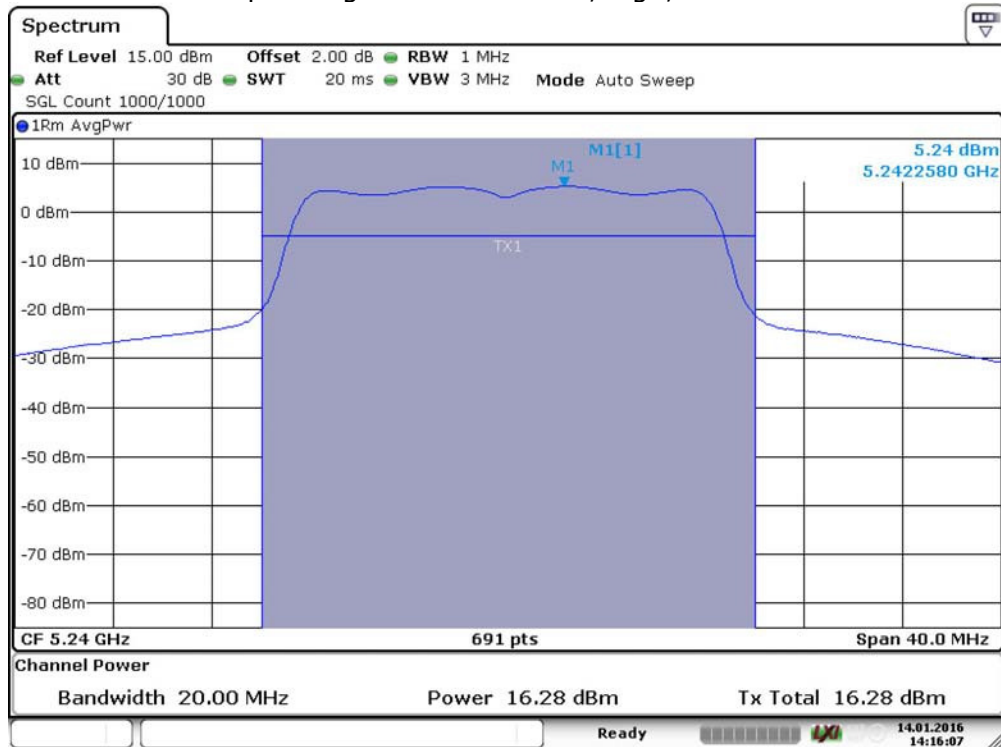


Date: 14.JAN.2016 14:16:08

Operating mode = WLAN n 20 MHz, mid, U-NII-1

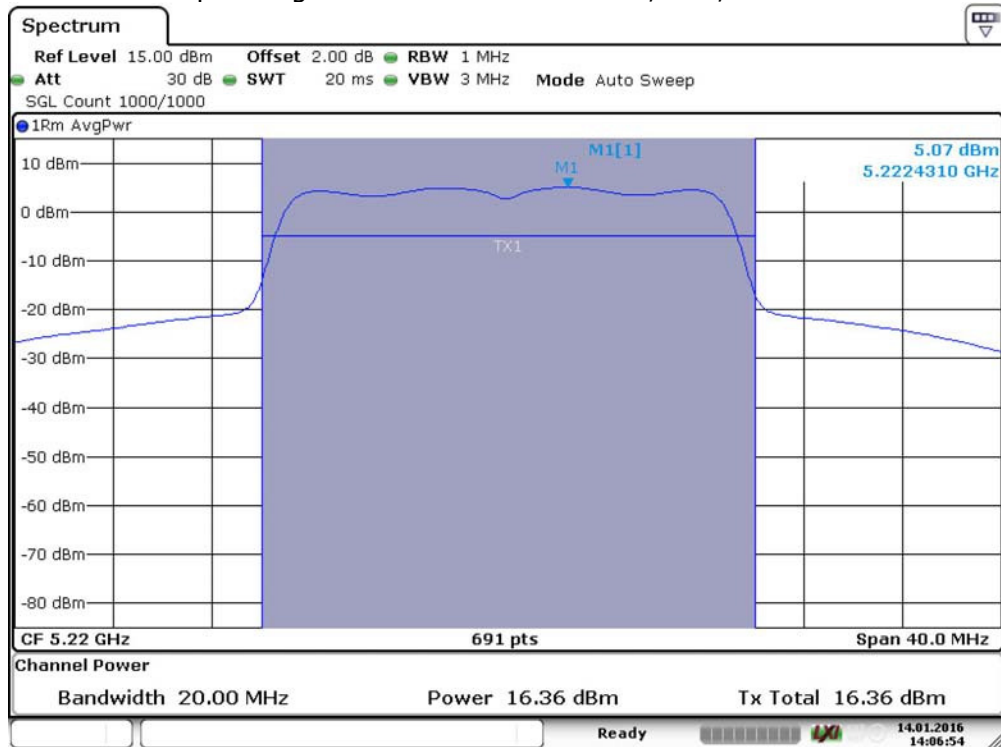


Date: 14.JAN.2016 14:06:54

Operating mode = WLAN n 40 MHz, high, U-NII-1

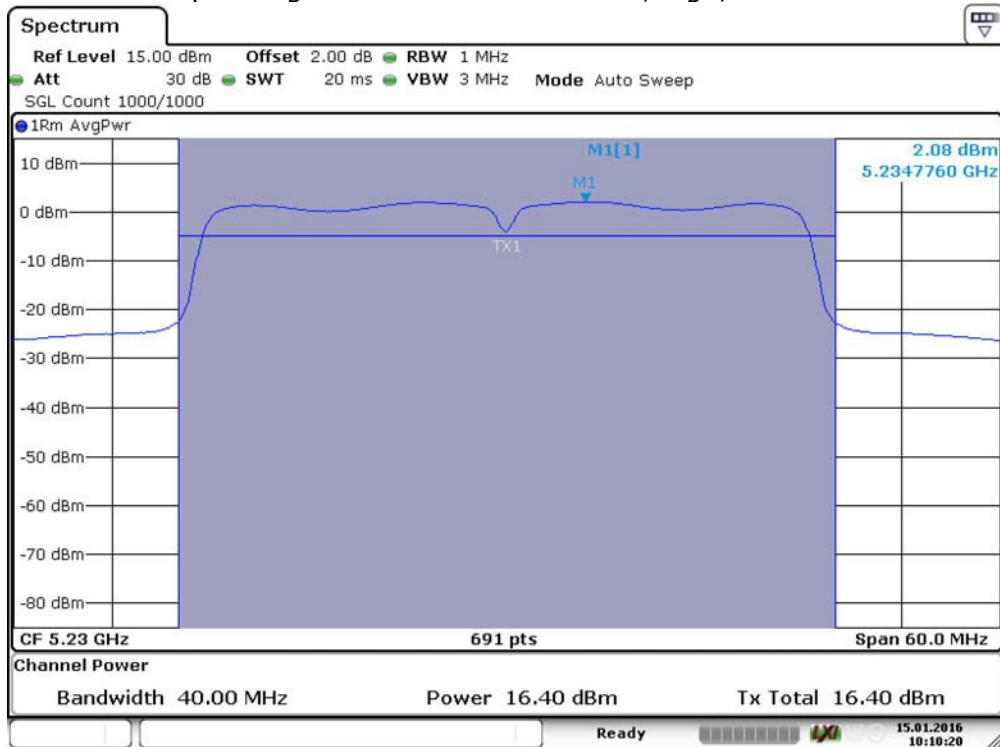


Date: 15.JAN.2016 10:10:20

Operating mode = WLAN ac 20 MHz, mid, U-NII-1

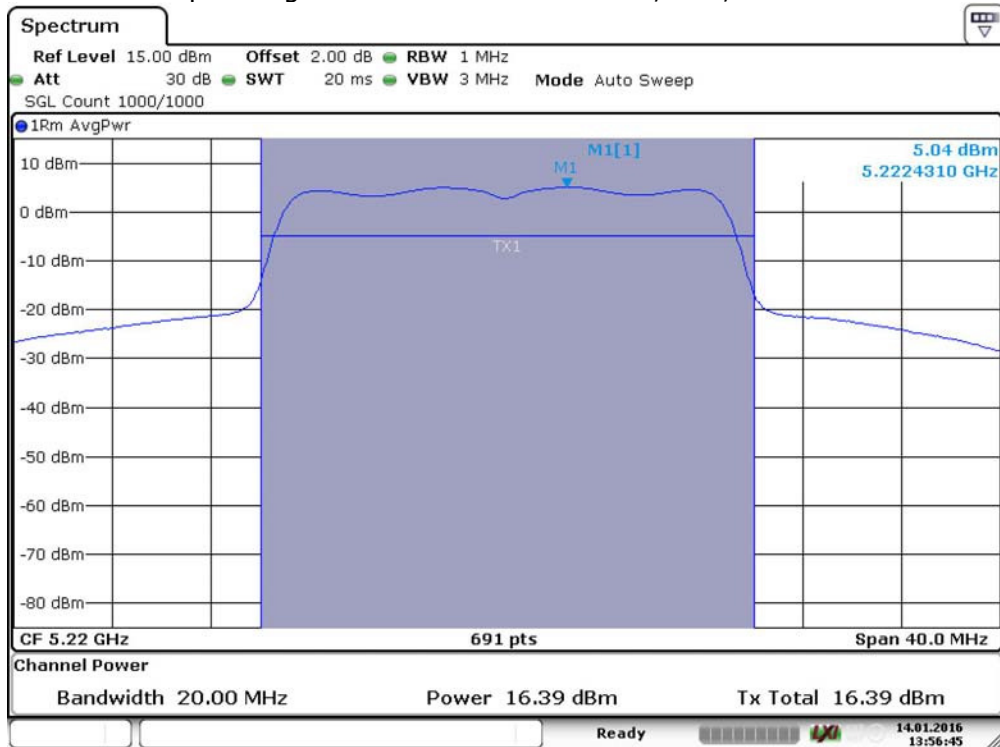


Date: 14.JAN.2016 13:56:45

Operating mode = WLAN ac 40 MHz, high, U-NII-1

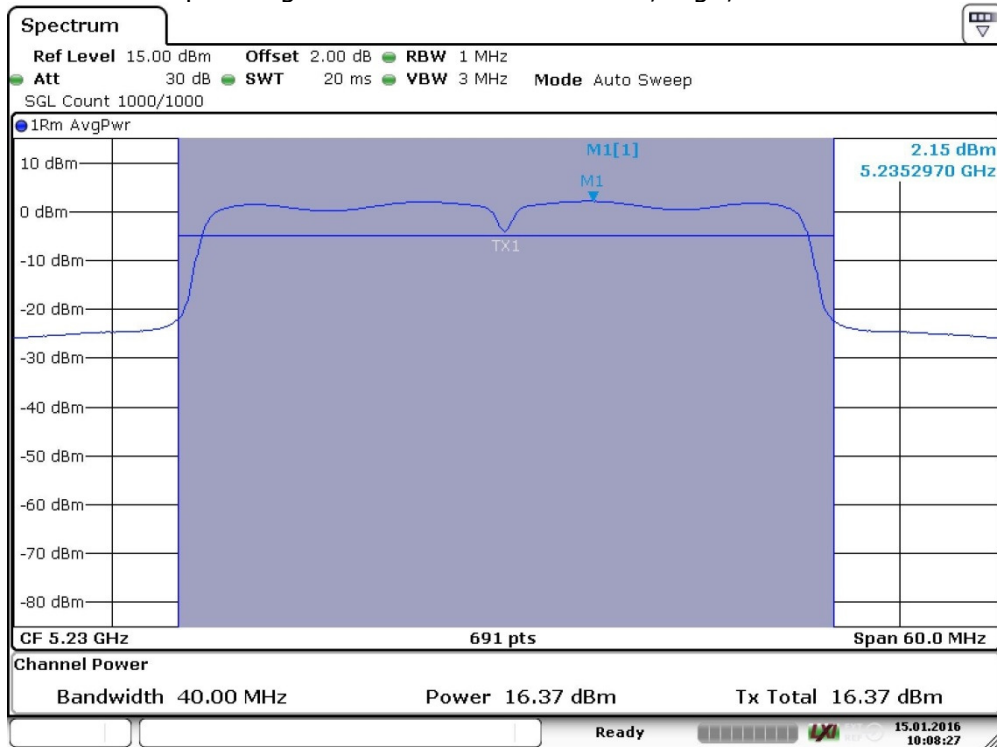


Date: 15.JAN.2016 10:08:27

Operating mode = WLAN ac 80 MHz, mid, U-NII-1

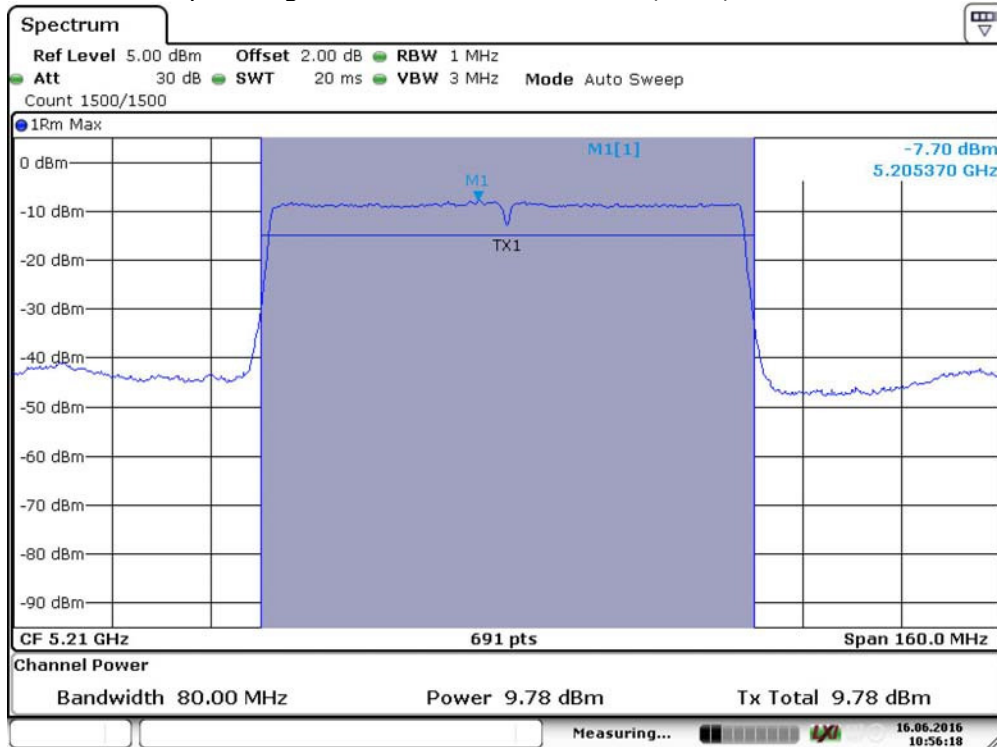

Date: 16.JUN.2016 10:56:18

Operating mode = WLAN ac 80 MHz, high, U-NII-2C, MCS0

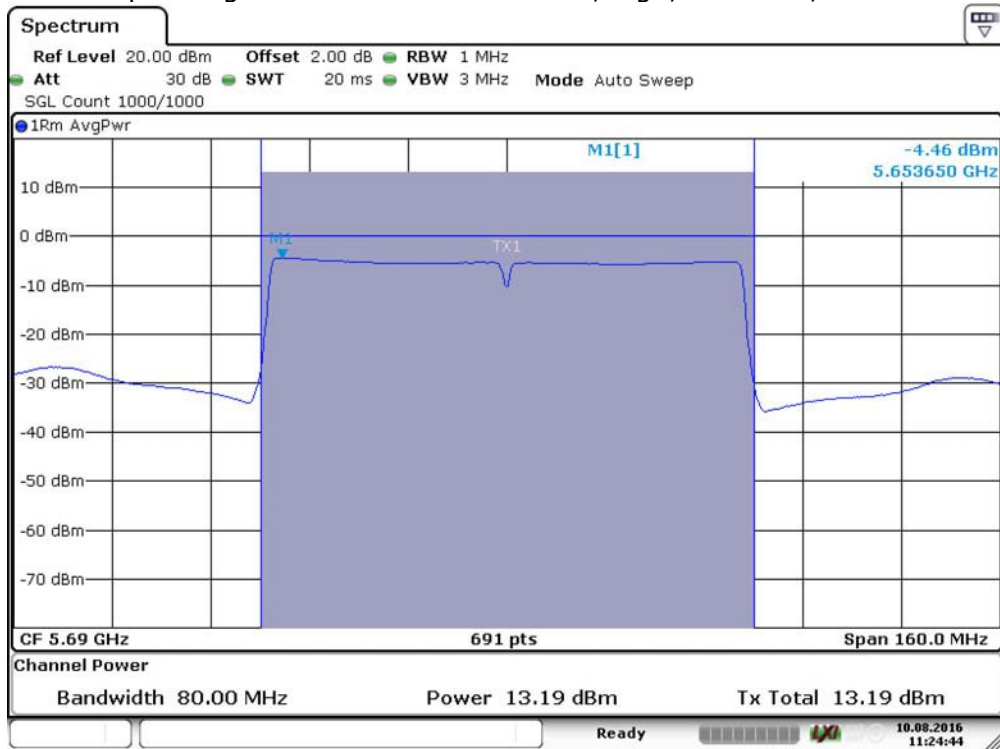

Date: 10.AUG.2016 11:24:44

4.5.5 TEST EQUIPMENT USED

R&S TS8997

4.6 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.6.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 1000
- Sweptime: 20 ms
- Detector: RMS
- Trigger: free run (100 % duty cycle)

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

4.6.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz. This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:
Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:
Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:
Limit: 30 dBm/500 kHz.

4.6.3 TEST PROTOCOL

Ambient temperature: 32 °C

Air Pressure: 1010 hPa

Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII - Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm / MHz]	Margin [dB]	IC EIRP MPSD
1,0	36,0	5180,0	3,4	17,0	13,7	10,0	2,1	8,0
	44,0	5220,0	5,1	17,0	11,9	10,0	0,3	9,7
	48,0	5240,0	5,2	17,0	11,8	10,0	0,2	9,8
2A	52,0	5260,0	5,9	11,0	5,1	11,0	5,1	unit:
	56,0	5280,0	5,2	11,0	5,8	11,0	5,8	dBm/
	64,0	5320,0	2,8	11,0	8,2	11,0	8,2	MHz
2C	100,0	5500,0	1,8	11,0	9,2	11,0	9,2	
	116,0	5580,0	3,4	11,0	7,6	11,0	7,6	
	140,0	5700,0	-0,6	11,0	11,6	11,0	11,6	
3,0	149,0	5745,0	0,6	30,0	29,4	17,0	16,4	
	157,0	5785,0	1,5	30,0	28,5	17,0	15,5	
	165,0	5825,0	-0,1	30,0	30,1	17,0	17,1	

WLAN n-Mode; 20 MHz; 6,5 Mbit/s MCS0

U-NII - Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	FCC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1,0	36,0	5180,0	3,2	17,0	13,8	10,0	2,2	7,8
	44,0	5220,0	5,1	17,0	11,9	10,0	0,3	9,7
	48,0	5240,0	4,8	17,0	12,2	10,0	0,6	9,4
2A	52,0	5260,0	5,5	11,0	5,5	11,0	5,5	unit:
	56,0	5280,0	4,9	11,0	6,1	11,0	6,1	dBm/
	64,0	5320,0	2,6	11,0	8,4	11,0	8,4	MHz
2C	100,0	5500,0	1,3	11,0	9,7	11,0	9,7	
	116,0	5580,0	3,2	11,0	7,8	11,0	7,8	
	140,0	5700,0	-1,0	11,0	12,0	11,0	12,0	
3,0	149,0	5745,0	-0,5	30,0	30,5	17,0	17,5	
	157,0	5785,0	1,3	30,0	28,7	17,0	15,7	
	165,0	5825,0	-0,6	30,0	30,6	17,0	17,6	

Remarks:

The stricter FC-limit (11 dBm/MHz) in U-NII-1 band for mobile and portable client devices is also passed.
Please see next sub-clause for the measurement plot.

WLAN n-Mode; 40 MHz; 13,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	FCC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1,0	38,0	5190,0	-0,5	17,0	17,5	10,0	5,9	4,1
	46,0	5230,0	2,1	17,0	14,9	10,0	3,3	6,7
2A	54,0	5270,0	1,8	11,0	9,2	11,0	9,2	unit:
	62,0	5310,0	-1,8	11,0	12,8	11,0	12,8	dBm/
2C	102,0	5510,0	-2,9	11,0	13,9	11,0	13,9	MHz
	110,0	5550,0	0,1	11,0	10,9	11,0	10,9	
	138,0	5670,0	-4,8	11,0	15,8	11,0	15,8	
3,0	151,0	5755,0	-5,0	30,0	35,0	17,0	22,0	
	159,0	5795,0	-1,8	30,0	31,8	17,0	18,8	

WLAN ac-Mode; 20 MHz; 6,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	FCC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1,0	36,0	5180,0	3,2	17,0	13,9	10,0	2,3	7,8
	44,0	5220,0	5,0	17,0	12,0	10,0	0,4	9,6
	48,0	5240,0	4,8	17,0	12,2	10,0	0,6	9,4
2A	52,0	5260,0	5,4	11,0	5,7	11,0	5,7	unit:
	56,0	5280,0	4,9	11,0	6,1	11,0	6,1	dBm/
	64,0	5320,0	2,6	11,0	8,4	11,0	8,4	MHz
2C	100,0	5500,0	1,3	11,0	9,7	11,0	9,7	
	116,0	5580,0	3,1	11,0	7,9	11,0	7,9	
	140,0	5700,0	2,0	11,0	9,0	11,0	9,0	
3,0	149,0	5745,0	-0,5	30,0	30,5	17,0	17,5	
	157,0	5785,0	1,3	30,0	28,7	17,0	15,7	
	165,0	5825,0	1,8	30,0	28,2	17,0	15,2	

WLAN ac-Mode; 40 MHz; 13,5Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPSD
1,0	38,0	5190,0	-1,0	17,0	18,0	10,0	6,4	3,7
	46,0	5230,0	2,2	17,0	14,9	10,0	3,3	6,8
2A	54,0	5270,0	1,7	11,0	9,3	11,0	9,3	unit:
	62,0	5310,0	-1,8	11,0	12,8	11,0	12,8	dBm/
2C	102,0	5510,0	-3,2	11,0	14,2	11,0	14,2	MHz
	110,0	5550,0	0,2	11,0	10,8	11,0	10,8	
	138,0	5670,0	-0,9	11,0	11,9	11,0	11,9	
3,0	151,0	5755,0	-5,2	30,0	35,2	17,0	22,2	
	159,0	5795,0	-5,0	30,0	35,0	17,0	22,0	

WLAN ac-Mode; 80 MHz; 433 Mbit/s MCS9

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPSD
1,0	42,0	5210,0	-7,7	17,0	24,7	10,0	13,1	-3,1
2A	58,0	5290,0	-8,2	11,0	19,2	11,0	19,2	unit:
2C	106,0	5530,0	-11,0	11,0	22,0	11,0	22,0	dBm/
	138,0	5690,0	-10,4	11,0	21,4	11,0	21,4	MHz
3,0	155,0	5775,0	-10,9	30,0	40,9	17,0	27,9	


WLAN ac-Mode; 80 MHz; 433 Mbit/s MCS0

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPSD
2C	138,0	5690,0	-4,5	11,0	15,5	11,0	15,5	

Remarks:


The stricter FC-limit (11 dBm/MHz) in U-NII-1 band for mobile and portable client devices is also passed. Please see next sub-clause for the measurement plot.

4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")
 Operating mode = WLAN a, high, U-NII-1

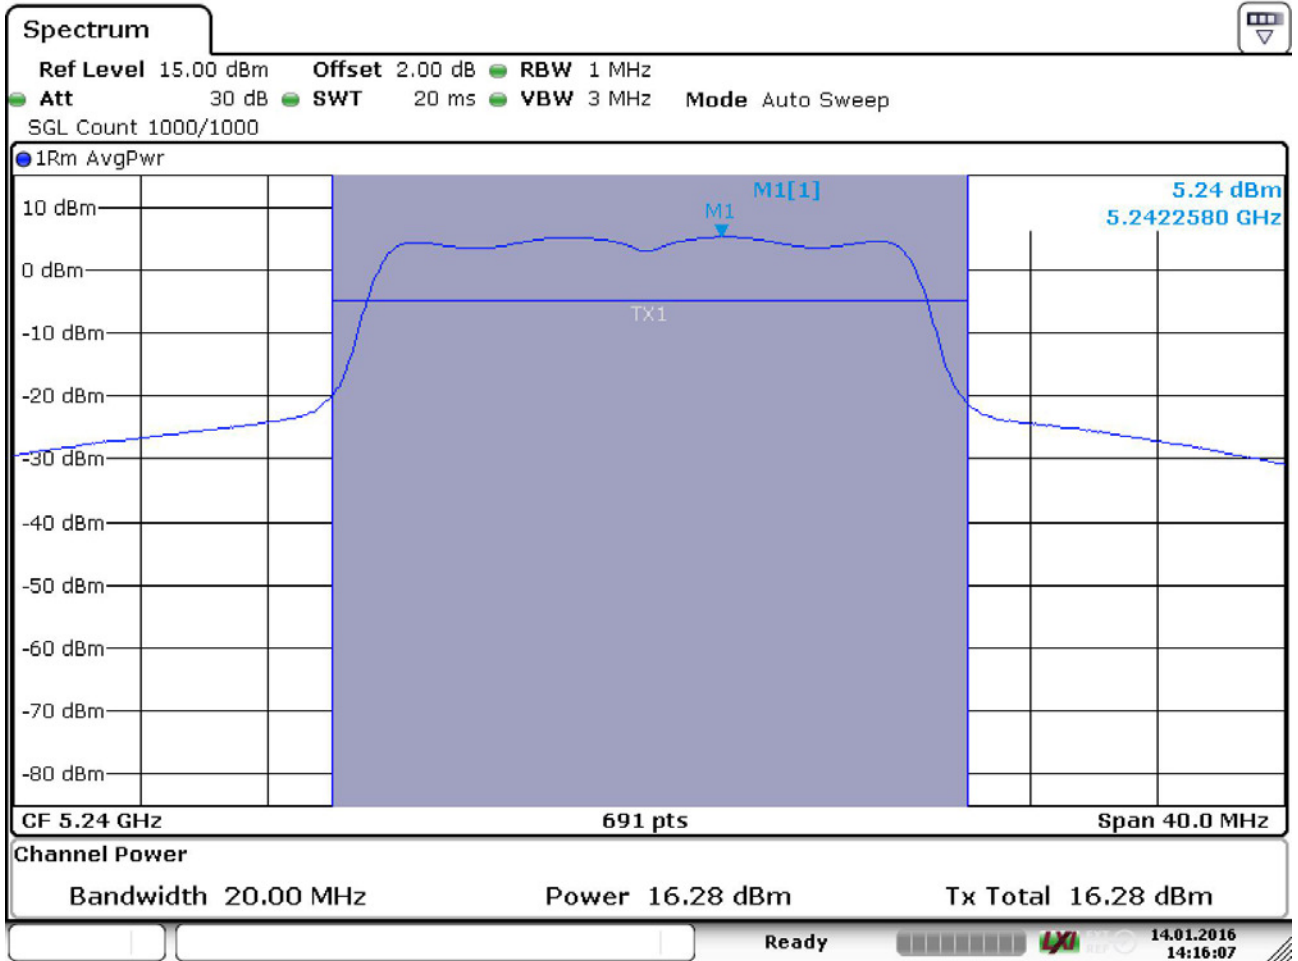

Date: 14.JAN.2016 14:16:08

Operating mode = WLAN a, low, U-NII-2A

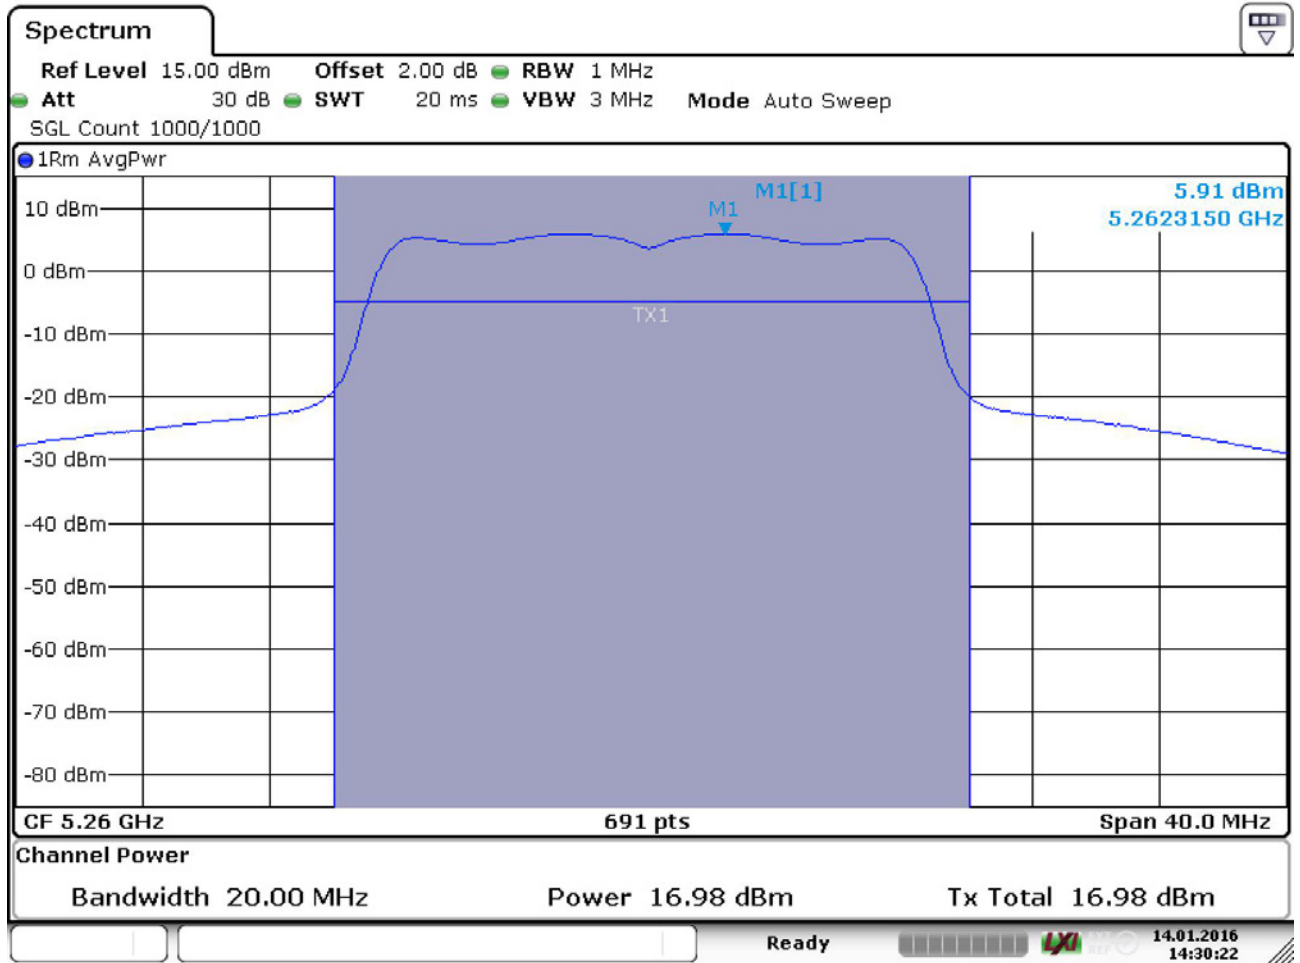

Date: 14.JAN.2016 14:30:22

4.6.5 TEST EQUIPMENT USED

R&S TS8997

4.7 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.7.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated this contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Above 26 GHz the measurement distance is reduced to 1 m.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average

- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / Average

- Measured frequencies: in step 1 determined frequencies

- IF – Bandwidth: 1 MHz

- Measuring time: 1 s

4.7.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250-5350 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.

Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725-5825 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5715-5835 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715-5725 and 5825-5835 MHz.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] - 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB - Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 *)

UE - "Undesirable Emission Limit" according FCC §15.407

BE-RB - Band Edge Limit basing on "Restricted Band Limits"

BE-UE - Band Edge Limit basing on "Undesirable Emission Limit"

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

4.7.3 TEST PROTOCOL

Ambient temperature: 24–29 °C
 Air Pressure: 1000–1009 hPa
 Humidity: 33–49 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type
36,0	5180,0	9 kHz - 30 MHz	--	PEAK	10,0	--	> 20	RB
140,0	5700,0	9 kHz - 30 MHz	--	PEAK	10,0	--	> 20	RB
44,0	5220,0	30,0	<23,0	PEAK	120,0	40,0	>17,0	RB
56,0	5280,0	30,0	<23,0	PEAK	120,0	40,0	>17,0	RB
116,0	5580,0	30,0	<23,0	PEAK	120,0	40,0	> 17,0	RB
157,0	5785,0	30,0	23,0	PEAK	120,0	40,0	17,0	RB
36,0	5180,0	5148,9	65,2	PEAK	1000,0	74,0	8,8	RB
36,0	5180,0	5148,9	52,6	AV	1000,0	54,0	1,4	RB
36,0	5180,0	5148,9	45,5	AV	1000,0	54,0	8,5	RB
44,0	5220,0	20879,6	44,9	AV	1000,0	54,0	9,1	RB
48,0	5240,0	15724,6	60,8	PEAK	1000,0	74,0	13,2	RB
48,0	5240,0	15724,6	49,3	AV	1000,0	54,0	4,7	RB
48,0	5240,0	20959,7	50,8	AV	1000,0	54,0	3,2	RB
52,0	5260,0	15783,1	48,5	AV	1000,0	54,0	5,5	RB
52,0	5260,0	15783,1	60,5	PEAK	1000,0	74,0	13,5	RB
52,0	5260,0	21039,8	49,9	AV	1000,0	54,0	4,2	RB
56,0	5280,0	15840,9	60,7	PEAK	1000,0	74,0	13,3	RB
56,0	5280,0	15842,6	49,8	AV	1000,0	54,0	4,2	RB
56,0	5280,0	21119,7	49,7	AV	1000,0	54,0	4,3	RB
64,0	5320,0	5350,2	49,0	AV	1000,0	54,0	5,0	RB
64,0	5320,0	5350,2	63,2	PEAK	1000,0	74,0	10,8	RB
100,0	5500,0	5469,0	62,9	PEAK	1000,0	68,2	5,3	UE
100,0	5500,0	5459,8	46,1	AV	1000,0	54,0	7,9	RB
116,0	5580,0	7000,0	57,5	AV	1000,0	68,2	10,7	UE
140,0	5700,0	5725,4	61,6	PEAK	1000,0	68,2	6,6	UE
149,0	5745,0	5714,0	66,7	PEAK	1000,0	68,2	1,6	UE
149,0	5745,0	5724,7	73,2	PEAK	1000,0	78,2	5,0	BE
157,0	5785,0	7000,0	57,5	AV	1000,0	68,2	10,7	UE
165,0	5825,0	5854,5	69,8	PEAK	1000,0	78,2	8,4	BE
165,0	5825,0	5859,9	65,7	PEAK	1000,0	78,2	12,5	BE
44,0	5220,0	26 GHz - 40 GHz	< 48	PEAK	1000,0	68,2	> 20	UE
56,0	5280,0	27 GHz - 40 GHz	< 48	PEAK	1000,0	68,2	> 20	UE
116,0	5580,0	28 GHz - 40 GHz	< 48	PEAK	1000,0	68,2	> 20	UE
157,0	5785,0	29 GHz - 40 GHz	< 48	PEAK	1000,0	68,2	> 20	UE

Remark: Please see next sub-clause for the measurement plot.

WLAN n-Mode; 20 MHz; 6,5 Mbit/s MCS0


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type
36,0	5180,0	5149,2	68,3	PEAK	1000,0	74,0	5,7	RB
36,0	5180,0	5149,8	50,2	AV	1000,0	54,0	3,8	RB
36,0	5180,0	15535,9	55,1	PEAK	1000,0	74,0	18,9	RB
36,0	5180,0	15535,9	44,1	AV	1000,0	54,0	9,9	RB
44,0	5220,0	15665,9	58,6	PEAK	1000,0	74,0	15,4	RB
44,0	5220,0	15662,2	46,6	AV	1000,0	54,0	7,4	RB
48,0	5240,0	7000,0	57,5	AV	1000,0	68,2	10,7	UE
52,0	5260,0	15784,8	60,6	PEAK	1000,0	74,0	13,4	RB
52,0	5260,0	15784,2	48,6	AV	1000,0	54,0	5,4	RB
56,0	5280,0	15842,2	49,3	AV	1000,0	54,0	4,7	RB
56,0	5280,0	15851,6	60,4	PEAK	1000,0	74,0	13,6	RB
64,0	5320,0	5351,7	62,6	PEAK	1000,0	74,0	11,4	RB
64,0	5320,0	15960,3	39,4	AV	1000,0	54,0	14,6	RB
100,0	5500,0	5469,8	63,4	PEAK	1000,0	68,2	4,8	UE
100,0	5500,0	10999,8	40,6	AV	1000,0	54,0	13,4	RB
116,0	5580,0	11159,7	38,1	AV	1000,0	54,0	15,9	RB
140,0	5700,0	5725,1	67,0	PEAK	1000,0	68,2	1,2	UE
149,0	5745,0	5598,8	57,8	PEAK	1000,0	68,2	10,4	UE
157,0	5785,0	7000,0	57,5	PEAK	1000,0	68,2	10,7	UE
165,0	5825,0	5860,0	72,3	PEAK	1000,0	78,2	6,0	BE
165,0	5825,0	5850,0	72,1	PEAK	1000,0	78,2	6,1	BE

WLAN n-Mode; 40 MHz; 13,5 Mbit/s MCS0


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type
38,0	5190,0	5148,9	45,6	AV	1000,0	54,0	8,4	RB
38,0	5190,0	5149,0	56,9	PEAK	1000,0	74,0	17,1	RB
38,0	5190,0	20759,8	43,5	AV	1000,0	54,0	10,5	RB
46,0	5230,0	5148,4	62,0	PEAK	1000,0	74,0	12,0	RB
54,0	5270,0	20919,9	47,9	AV	1000,0	54,0	6,1	RB
62,0	5310,0	5350,0	47,7	AV	1000,0	54,0	6,3	RB
102,0	5510,0	7000,0	57,5	PEAK	1000,0	68,2	10,7	UE
110,0	5550,0	25288,5	56,6	PEAK	1000,0	68,2	11,6	UE
134,0	5670,0	7000,0	57,5	PEAK	1000,0	68,2	10,7	UE
151,0	5755,0	5724,9	65,9	PEAK	1000,0	78,2	12,3	BE
159,0	5795,0	4930,5	56,9	PEAK	1000,0	74,0	17,1	RB

Remark: Please see next sub-clause for the measurement plot.


4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")
Operating mode = WLAN a, low, U-NII-1

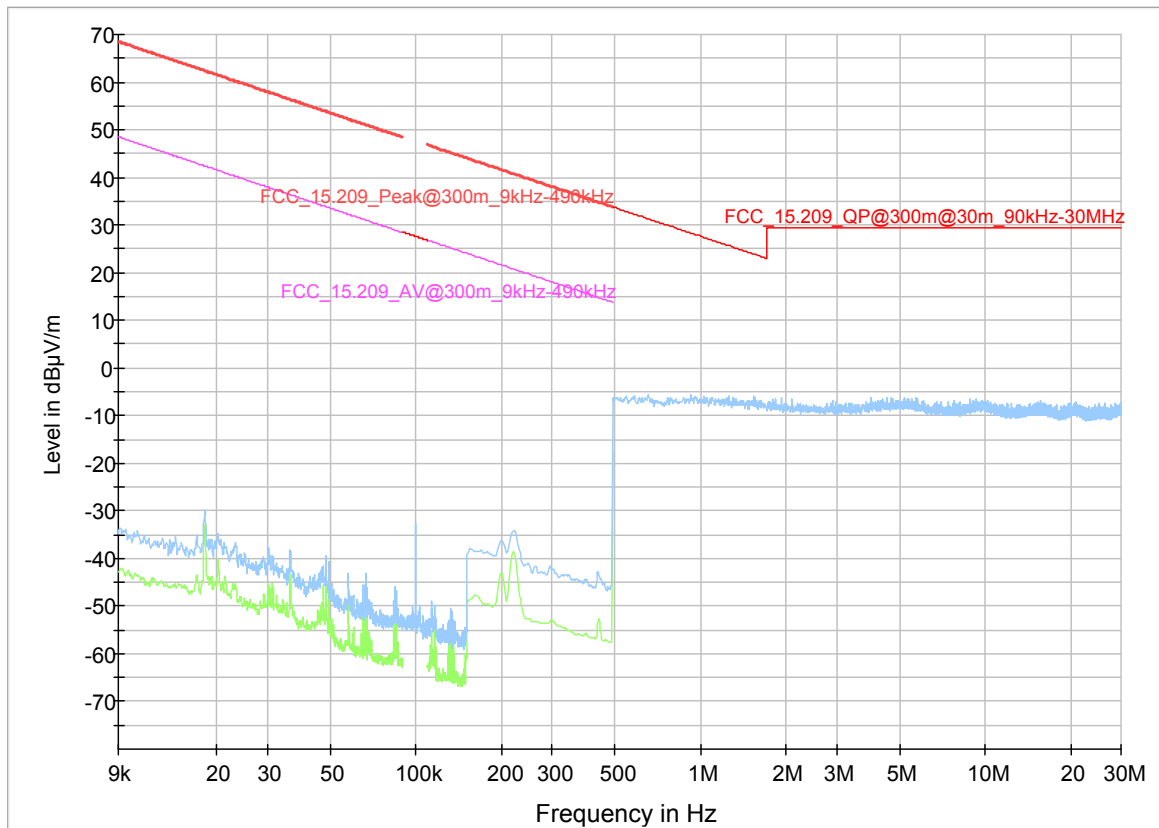


Operating mode = WLAN a, mid, U-NII-2C

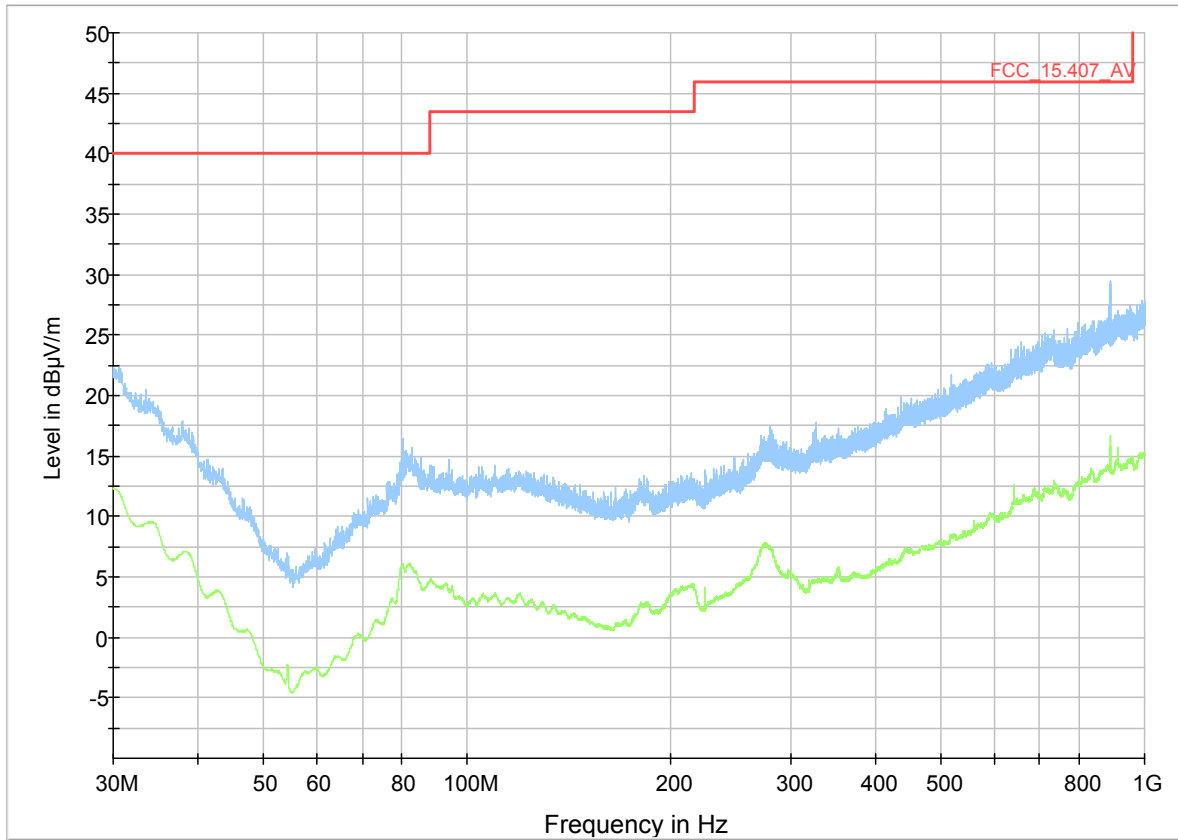


Operating mode = WLAN a, low, U-NII-1

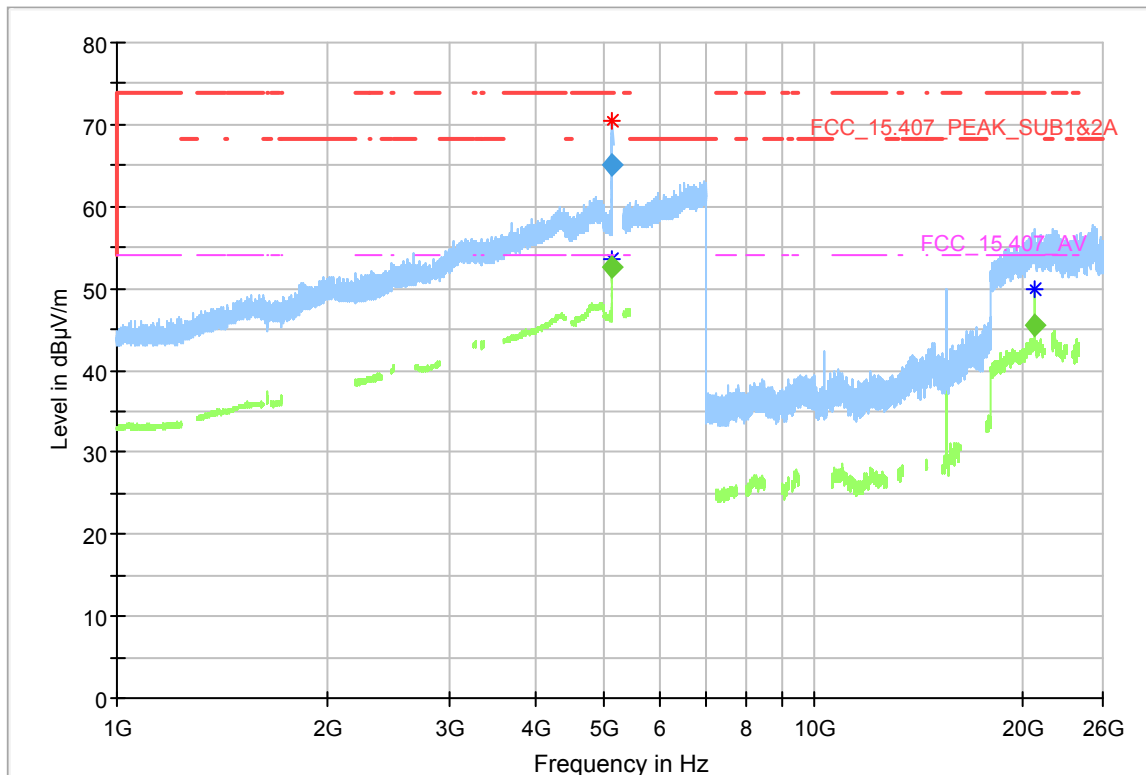


Operating mode = WLAN a, mid, U-NII-2C

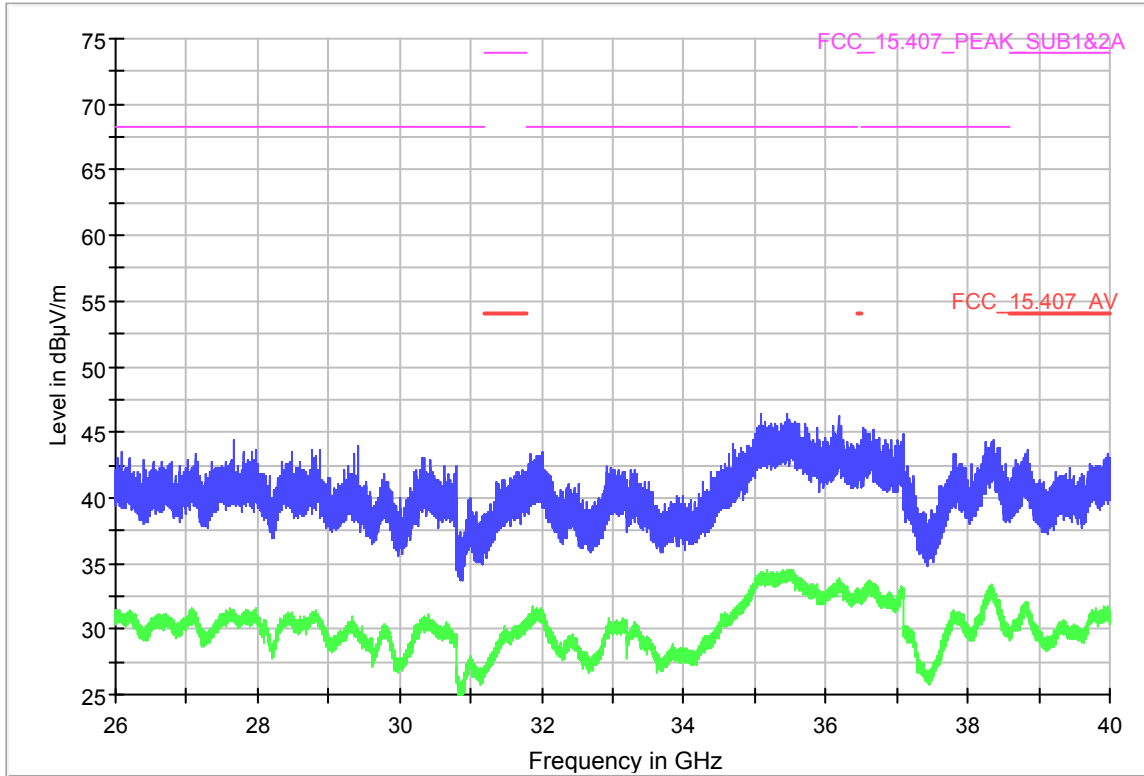

Operating mode = WLAN n 20, high, U-NII-2C

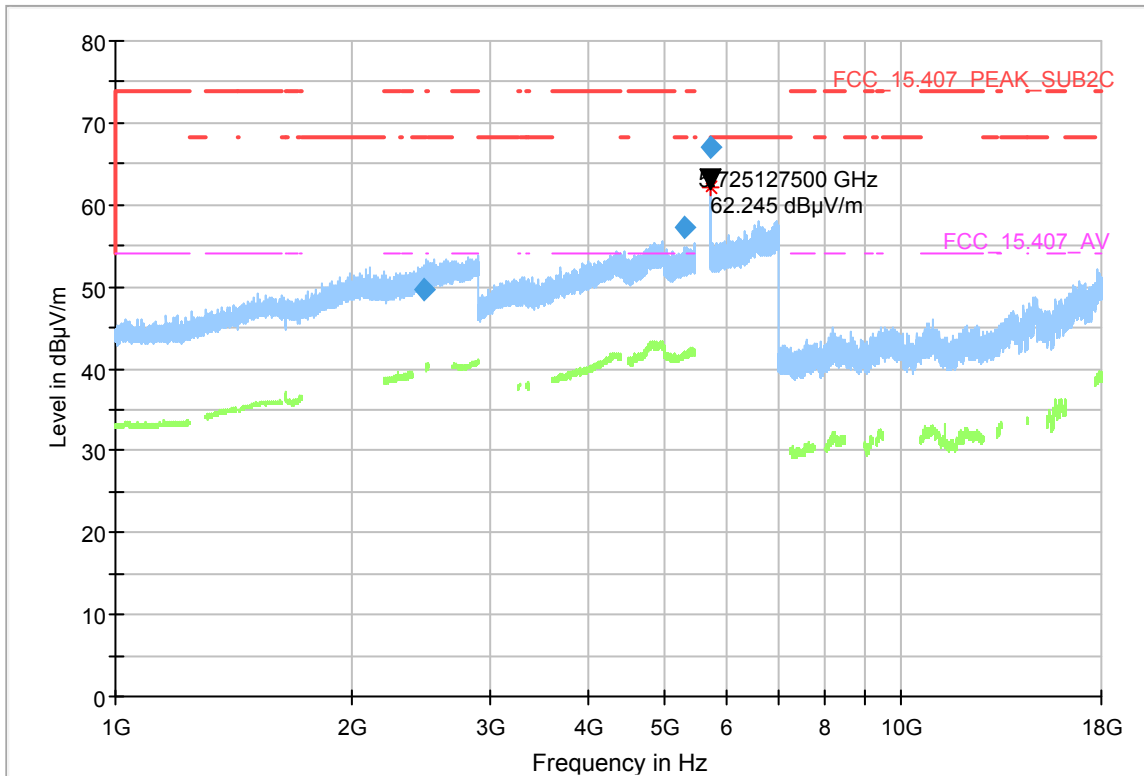

Operating mode = WLAN n 40, low, U-NII-2A

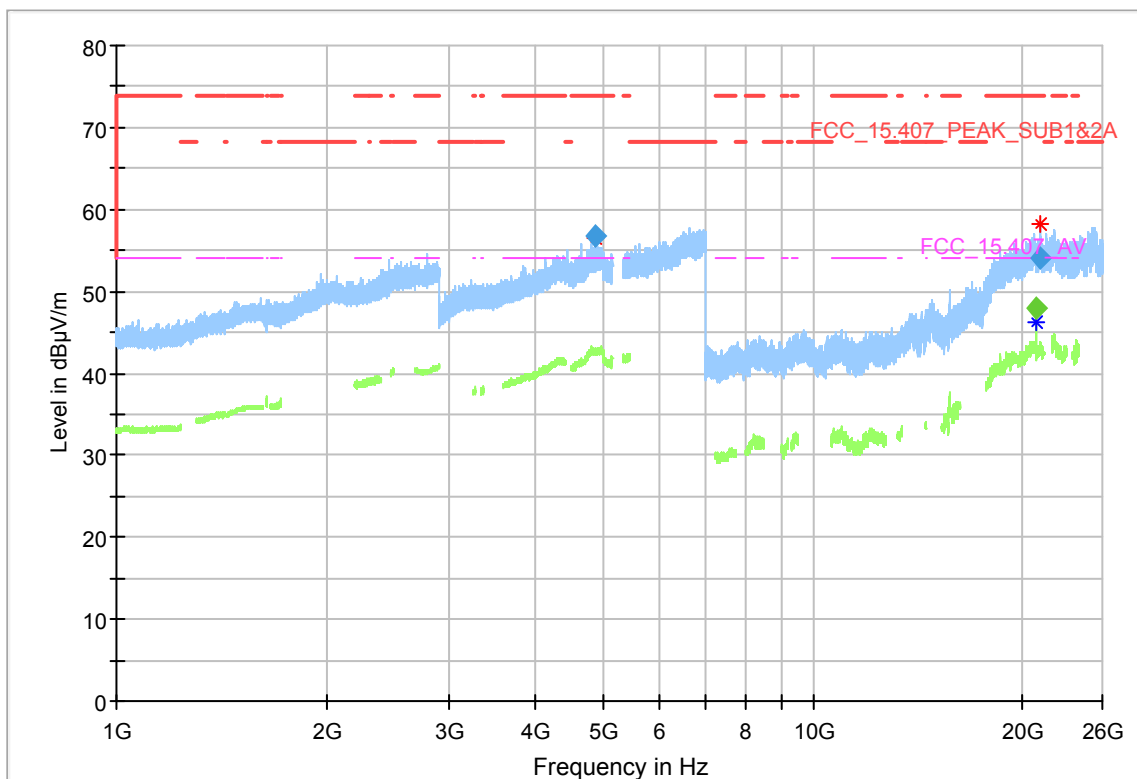

4.7.5 TEST EQUIPMENT USED

Radiated Emissions

4.8 SPURIOUS RF CONDUCTED EMISSIONS AT ANTENNA PORT

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the conducted spurious emissions measurements. The antenna port of the EUT was connected to spectrum analyzer via a short coax cable with a known cable loss C_L . The measured voltage U_{meas} at the 50 Ohm input of the analyser was used to calculate the EUT output power at the antenna port:

$$P = U_{meas} + C_L - 107$$

where

P is the output power in dBm

U_{meas} is the measured voltage at the 50 Ohm input of the analyzer in dB μ V

C_L is the cable loss of the used cable.

The maximum transmit isotropically antenna gain G_i (in dBi) was added to the measured output power P to determine the equivalent isotropically radiated power EIRP.

$$EIRP = P + G_i$$

where

P is the output power in dBm

G_i is maximum transmit antenna gain in dBi.

The resultant EIRP level was converted to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20 \log d + 104.8$$

where

E is the electric field strength in dB μ V/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m.

The appropriate maximum ground reflection factor was added to the EIRP:

6 dB for frequencies ≤ 30 MHz;

4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and

0 dB for frequencies > 1000 MHz).

Frequency range [MHz]	measurement distance d [m]	-20 log d [dB]	ground reflection factor [dB]
0,009 - 0,49	300	-49,54	6
0,49 - 30	30	-29,54	6
30 - 1000	3	-9,54	4,7
>1000	3	-9,54	0

1. Measurement up to 30 MHz

Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

- Detector: Peak-Maxhold/ Quasipeak (FFT-based)
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

EMI receiver settings:

- Detector: Peak / Average / Quasi-Peak (depending on frequency)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz (depending on frequency)
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: pre measurement

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings:

- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms

Step 2: final measurement

EMI receiver settings:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

Step 1: pre measurement

Settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 2: final measurement

Spectrum analyzer settings:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 1 MHz
- Measuring time: 1 s

4.8.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150–5250 MHz, indoor operation only:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250–5350 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470–5600 MHz and 5650–5725 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725–5825 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5835 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5825–5835 MHz.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 *)

UE – "Undesirable Emission Limit" according FCC §15.407

BE-RB – Band Edge Limit basing on "Restricted Band Limits"

BE-UE – Band Edge Limit basing on "Undesirable Emission Limit"

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

4.8.3 TEST PROTOCOL

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-1 & 2A

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detector	RBW [kHz]	Limit [dBµV/ m]	Margin [dB]	Limit Type
OFDM, 6Mbps / 13 dBm	5180,0	5149,887500	51,4	AV	1000,0	54	2,6	RB
OFDM, 6Mbps / 16 dBm	5200,0	5145,987500	68,4	PEAK	1000,0	74	5,6	RB
OFDM, 6Mbps / 16 dBm	5300,0	5350,0	<54,0	PEAK	1000,0	74	>15	RB
OFDM, 6Mbps / 13 dBm	5320,0	5350,110000	68,4	PEAK	1000,0	74	5,6	RB
OFDM, 54Mbps / 13 dBm	5180,0	5150,0	50,0	AV	1000,0	54	4,0	RB
OFDM, 54Mbps / 13 dBm	5320,0	5350,0	48,4	AV	1000,0	54	5,6	RB

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-1 & 2A

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detec- tor	RBW [kHz]	Limit [dBµV/ m]	Margin [dB]	Limit Type
HT20, MCS0 / 13 dBm	5180,0	5150,0	50,0	AV	1000,0	54	4,0	RB
HT20, MCS0 / 16 dBm	5200,0	5145,125000	66,2	PEAK	1000,0	74	7,8	RB
HT20, MCS0 / 16 dBm	5300,0	5352,530000	67,8	PEAK	1000,0	74	6,2	RB
HT20, MCS0 / 13 dBm	5320,0	5350,0	48,4	AV	1000,0	54	5,6	RB
HT20, MCS7 / 13 dBm	5180,0	5150,0	50,0	AV	1000,0	54	4,0	RB
HT20, MCS7 / 13 dBm	5320,0	5350,0	48,4	AV	1000,0	54	5,6	RB
HT40, MCS0 / 12 dBm	5190,0	5149,700000	73,8	AV	1000,0	54	0,2	RB
HT40, MCS0 / 16 dBm	5230,0	5149,587500	70,2	PEAK	1000,0	74	3,8	RB
HT40, MCS0 / 16 dBm	5270,0	5350,0	67,7	PEAK	1000,0	74	6,3	RB
HT40, MCS0 / 12 dBm	5310,0	5350,220000	53,7	AV	1000,0	54	0,3	RB
HT40, MCS7 / 12 dBm	5190,0	5149,400000	50,6	AV	1000,0	54	3,4	RB
HT40, MCS7 / 12 dBm	5310,0	5350,000000	53,0	AV	1000,0	54	1,0	RB
VHT20, MCS0 / 13 dBm	5180,0	5149,887500	47,6	AV	1000,0	54	6,4	RB
VHT20, MCS0 / 16 dBm	5200,0	5150,0	70,0	PEAK	1000,0	74	4,0	RB
VHT20, MCS0 / 16 dBm	5300,0	5351,870000	66,6	PEAK	1000,0	74	7,4	RB
VHT20, MCS0 / 13 dBm	5320,0	5350,000000	68,6	AV	1000,0	54	5,4	RB
VHT20, MCS5 / 13 dBm	5180,0	5149.962500	47,4	AV	1000,0	54	6,6	RB
VHT20, MCS5 / 13 dBm	5320,0	5350,0	70,0	PEAK	1000,0	74	4,0	RB
VHT20, MCS8 / 13 dBm	5180,0	5149,887500	47,5	AV	1000,0	54	6,5	RB
VHT20, MCS8 / 13 dBm	5320,0	5350,0	48,4	AV	1000,0	54	5,6	RB

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-1 & 2A

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detec- tor	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type
VHT40, MCS0 / 12 dBm	5190,0	5149,250000	73,7	PEAK	1000,0	74	0,3	RB
VHT40, MCS0 / 16 dBm	5230,0	5145,500000	72,3	PEAK	1000,0	74	1,7	RB
VHT40, MCS0 / 16 dBm	5270,0	5355,500000	70,3	PEAK	1000,0	74	3,7	RB
VHT40, MCS0 / 12 dBm	5310,0	5350,440000	72,0	PEAK	1000,0	74	2,0	RB
VHT40, MCS5 / 12 dBm	5190,0	5149,775000	52,8	AV	1000,0	54	1,2	RB
VHT40, MCS5 / 12 dBm	5310,0	5350,990000	52,0	AV	1000,0	54	2,0	RB
VHT40, MCS9 / 10 dBm	5190,0	5148,875000	49,3	AV	1000,0	54	4,7	RB
VHT40, MCS9 / 10 dBm	5310,0	5350,660000	49,1	AV	1000,0	54	4,9	RB
VHT80, MCS0 / 8 dBm	5210,0	5136,387500	54,0	AV	1000,0	54	0,0	RB
VHT80, MCS0 / 8 dBm	5290,0	5362,980000	51,7	AV	1000,0	54	2,3	RB
VHT80, MCS9 / 8 dBm	5210,0	5136,387500	53,2	AV	1000,0	54	0,8	RB
VHT80, MCS9 / 8 dBm	5529,0	5363,530000	49,4	PEAK	1000,0	74	4,6	RB

Remark: Please see next sub-clause for the measurement plot.

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-2C

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detec- tor	RBW [kHz]	Limit [dBµV/ m]	Margin [dB]	Limit Type
OFDM, 6Mbps / 13 dBm	5500,0	5470,0	62,0	PEAK	1000,0	68,2	6,2	UE
OFDM, 6Mbps / 16 dBm	5520,0	5464,192000	59,8	PEAK	1000,0	68,2	8,4	UE
OFDM, 6Mbps / 16 dBm	5680,0	5725,350000	64,3	PEAK	1000,0	68,2	3,9	UE
OFDM, 6Mbps / 13 dBm	5700,0	5725,0	60,0	PEAK	1000,0	68,2	8,2	UE
OFDM, 54Mbps / 13 dBm	5500,0	5470,0	62,0	PEAK	1000,0	68,2	6,2	UE
OFDM, 54Mbps / 13 dBm	5700,0	5725,0	60,0	PEAK	1000,0	68,2	8,2	UE
HT20, MCS0 / 13 dBm	5500,0	5469,987000	63,7	PEAK	1000,0	68,2	4,5	UE
HT20, MCS0 / 16 dBm	5520,0	5469,849000	60,5	PEAK	1000,0	68,2	7,7	UE
HT20, MCS0 / 16 dBm	5680,0	5726,750000	67,6	PEAK	1000,0	68,2	0,6	UE
HT20, MCS0 / 13 dBm	5700,0	5725,262500	63,6	PEAK	1000,0	68,2	4,6	UE
HT20, MCS7 / 13 dBm	5500,0	5469,770000	59,6	PEAK	1000,0	68,2	8,6	UE
HT20, MCS7 / 13 dBm	5700,0	5725,000000	65,6	PEAK	1000,0	68,2	2,6	UE
HT40, MCS0 / 12 dBm	5510,0	5468,569000	67,1	PEAK	1000,0	68,2	1,1	UE
HT40, MCS0 / 16 dBm	550,0	5464,690000	61,8	PEAK	1000,0	68,2	6,4	UE
HT40, MCS0 / 16 dBm	5630,0	5725,0	62,0	PEAK	1000,0	68,2	6,2	UE
HT40, MCS0 / 12 dBm	5670,0	5725,0	60,0	PEAK	1000,0	68,2	8,2	UE
HT40, MCS7 / 12 dBm	5510,0	5468,581000	63,3	PEAK	1000,0	68,2	4,9	UE
HT40, MCS7 / 12 dBm	5670,0	5725,0	55,0	PEAK	1000,0	68,2	13,2	UE

Remark: Please see next sub-clause for the measurement plot.

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-2C

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detec- tor	RBW [kHz]	Limit [dBµV/ m]	Margin [dB]	Limit Type
VHT20, MCS0 / 13 dBm	5500,0	5468,223000	62,4	PEAK	1000,0	68,2	5,8	UE
VHT20, MCS0 / 16 dBm	5520,0	5470,0	60,0	PEAK	1000,0	68,2	8,2	UE
VHT20, MCS8 / 13 dBm	5500,0	5468,590000	63,0	PEAK	1000,0	68,2	5,2	UE
VHT40, MCS0 / 12 dBm	5510,0	5469,853000	67,7	PEAK	1000,0	68,2	0,5	UE
VHT40, MCS0 / 16 dBm	5550,0	5463,997000	64,3	PEAK	1000,0	68,2	3,9	UE
VHT40, MCS9 / 12 dBm	5510,0	5465,698000	64,6	PEAK	1000,0	68,2	3,6	UE
VHT80, MCS0 / 8 dBm	5530,0	5461,864000	63,5	PEAK	1000,0	68,2	4,7	UE
VHT80, MCS0 / 12 dBm	5610,0	5470,0	61,0	PEAK	1000,0	68,2	7,2	UE
VHT80, MCS3 / 13 dBm	5610,0	5462,090000	64,4	PEAK	1000,0	68,2	3,8	UE
VHT80, MCS9 / 8 dBm	5530,0	5460,963000	61,8	PEAK	1000,0	68,2	6,4	UE

Remark: Please see next sub-clause for the measurement plot.

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

Band U-NII-3

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detec- tor	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type
OFDM, 6Mbps / 14 dBm	5745,0	5724,262500	72,7	PEAK	1000,0	78,2	5,5	BE
OFDM, 6Mbps / 16 dBm	5765,0	5725,0	65,0	PEAK	1000,0	78,2	13,2	BE
OFDM, 6Mbps / 16 dBm	5805,0	5850,0	62,0	PEAK	1000,0	78,2	16,2	BE
OFDM, 6Mbps / 14 dBm	5825,0	5861,700000	60,9	PEAK	1000,0	68,2	7,3	UE
OFDM, 54Mbps / 13 dBm	5745,0	5725,0	70,0	PEAK	1000,0	78,2	8,2	BE
OFDM, 54Mbps / 13 dBm	5825,0	5850,0	61,0	PEAK	1000,0	78,2	17,2	BE
HT20, MCS0 / 13 dBm	5745,0	5724,850000	71,4	PEAK	1000,0	78,2	6,8	BE
HT20, MCS0 / 16 dBm	5765,0	5725,0	66,0	PEAK	1000,0	78,2	12,2	BE
HT20, MCS0 / 16 dBm	5805,0	5850,0	62,0	PEAK	1000,0	78,2	16,2	BE
HT20, MCS0 / 13 dBm	5825,0	5860,0	60,0	PEAK	1000,0	68,2	8,2	UE
HT20, MCS7 / 13 dBm	5745,0	5724,837500	70,6	PEAK	1000,0	78,2	7,6	BE
HT20, MCS7 / 13 dBm	5825,0	5850,0	70,0	PEAK	1000,0	78,2	8,2	BE
HT40, MCS0 / 12 dBm	5755,0	5713,675000	67,0	PEAK	1000,0	68,2	1,2	UE
HT40, MCS0 / 16 dBm	5795,0	5860,200000	67,7	PEAK	1000,0	68,2	0,5	UE
HT40, MCS7 / 12 dBm	5755,0	5712,350000	65,1	PEAK	1000,0	68,2	3,1	UE
HT40, MCS7 / 12 dBm	5795,0	5860,0	55,0	PEAK	1000,0	68,2	13,2	UE

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa


Humidity: 33–49 %

Band U-NII-3


Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/ m]	Detec- tor	RBW [kHz]	Limit [dBµV/ m]	Margin [dB]	Limit Type
VHT20, MCS0 / 13 dBm	5745,0	5724,950000	72,5	PEAK	1000,0	78,2	5,7	BE
VHT20, MCS0 / 16 dBm	5760,0	5715,0	60,0	PEAK	1000,0	68,2	8,2	UE
VHT20, MCS0 / 16 dBm	5805,0	5860,0	60,0	PEAK	1000,0	68,2	8,2	UE
VHT20, MCS0 / 16 dBm	5825,0	5860,125000	68,0	PEAK	1000,0	68,2	0,2	UE
VHT20, MCS8 / 13 dBm	5745,0	5724,950000	72,6	PEAK	1000,0	78,2	5,6	BE
VHT20, MCS8 / 13 dBm	5825,0	5850,0	65,0	PEAK	1000,0	78,2	13,2	BE
VHT40, MCS0 / 12 dBm	5755,0	5702,337500	62,3	PEAK	1000,0	68,2	5,9	UE
VHT40, MCS0 / 12 dBm	5795,0	5860,0	57,0	PEAK	1000,0	68,2	11,2	UE
VHT40, MCS9 / 12 dBm	5755,0	5710,312500	64,0	PEAK	1000,0	68,2	4,2	UE
VHT40, MCS9 / 12 dBm	5795,0	5860,0	57,0	PEAK	1000,0	68,2	11,2	UE
VHT80, MCS0 / 8 dBm	5775,0	5695,775000	63,8	PEAK	1000,0	68,2	4,4	UE
VHT80, MCS9 / 8 dBm	5775,0	5697,525000	61,9	PEAK	1000,0	68,2	6,3	UE

Remark: Please see next sub-clause for the measurement plot.


4.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")
Operating mode = WLAN n 40 MHz (HT40, MCS0, 12 dBm), low, U-NII-1 & 2A

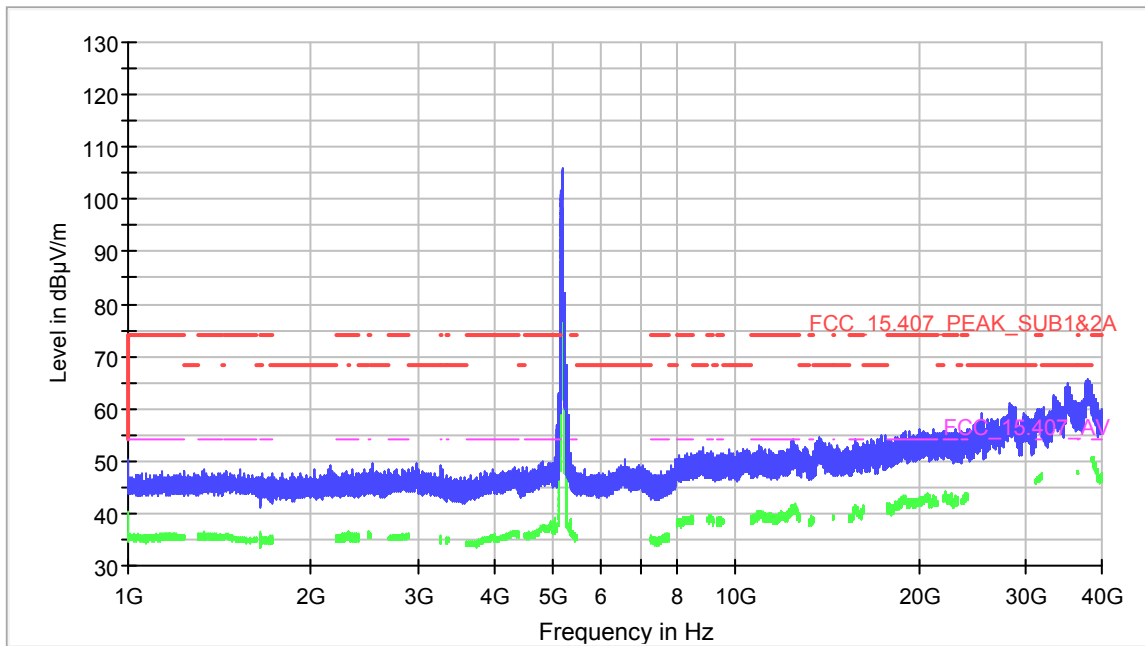


Plot zoomed

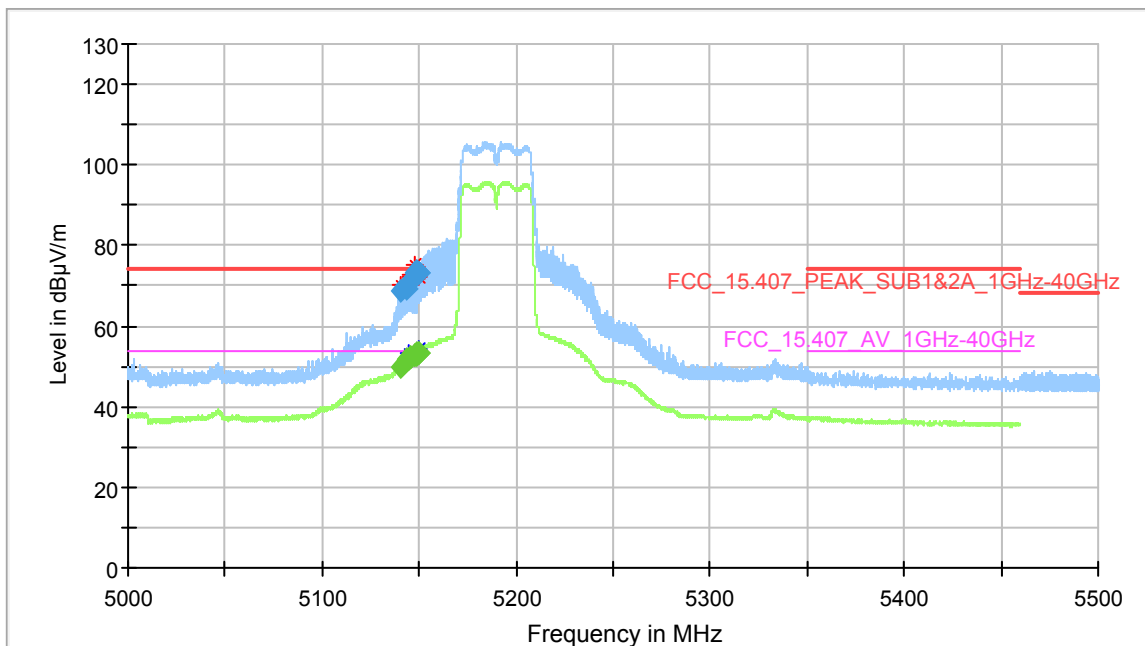


Operating mode = WLAN ac 40 MHz (VHT40, MCS0, 12 dBm), low, U-NII-1 & 2A

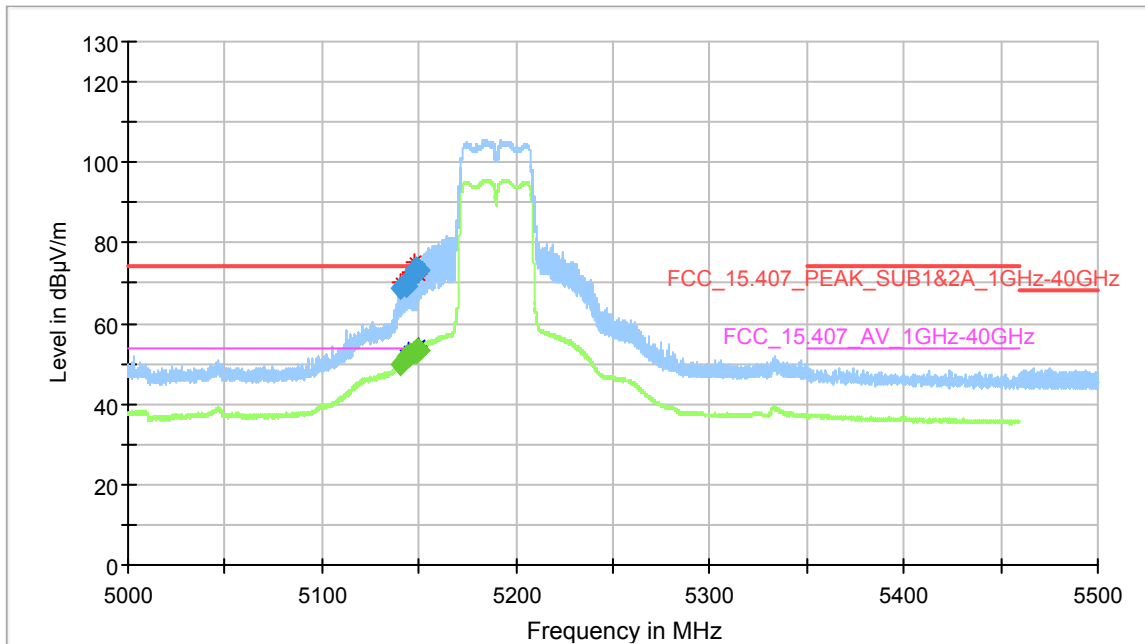


Operating mode = WLAN ac 80 MHz (VHT80, MCS0, 8 dBm), low, U-NII-1 & 2A

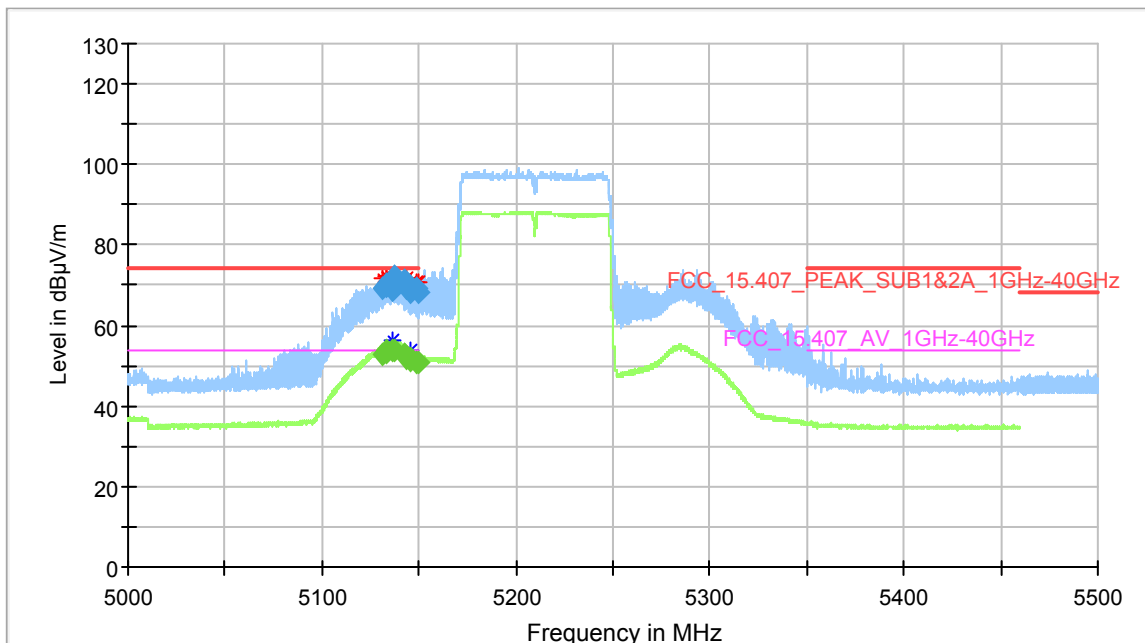


Operating mode = WLAN n 20 MHz (HT20, MCS0, 16 dBm, 5680 MHz),
additional channel, U-NII-2C

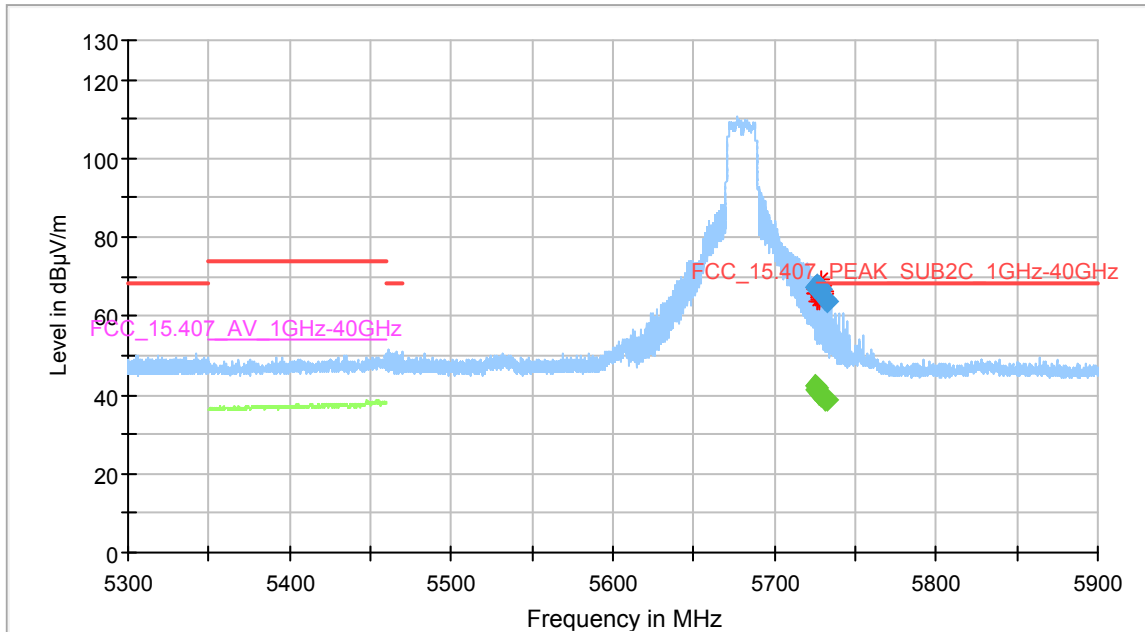


Operating mode = WLAN ac 40 MHz (VHT40, MCS0, 12 dBm), low, U-NII-2C

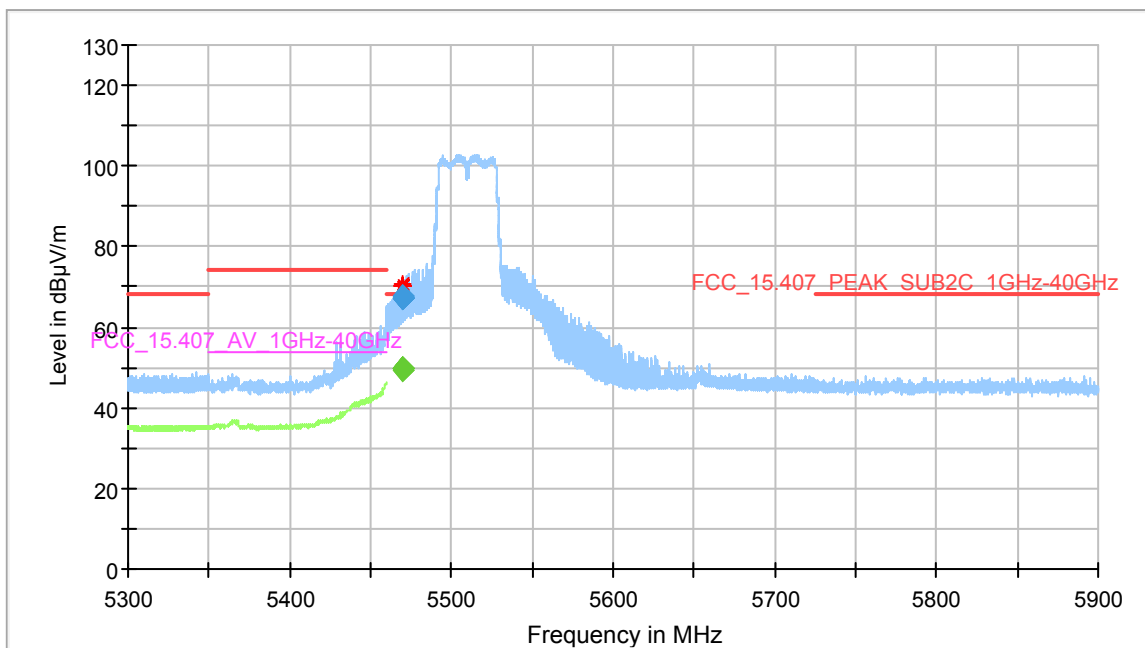

Operating mode = WLAN n 40 MHz (HT40, MCS0, 16 dBm), high, U-NII-3

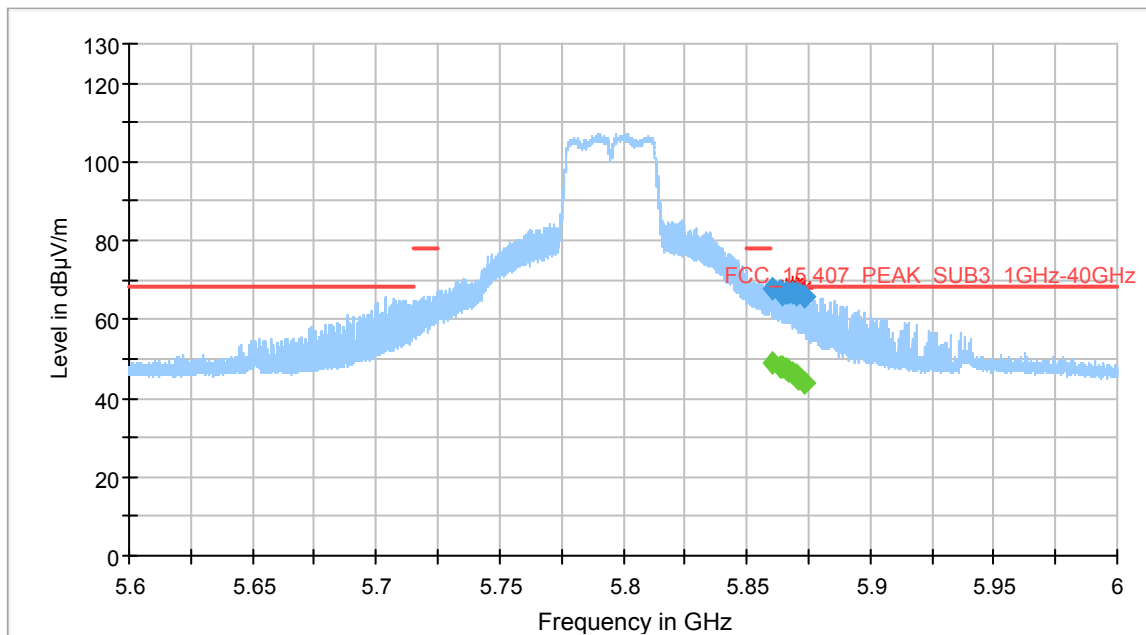

Operating mode = WLAN ac 20 MHz (VHT20, MCS0, 16 dBm), high, U-NII-3

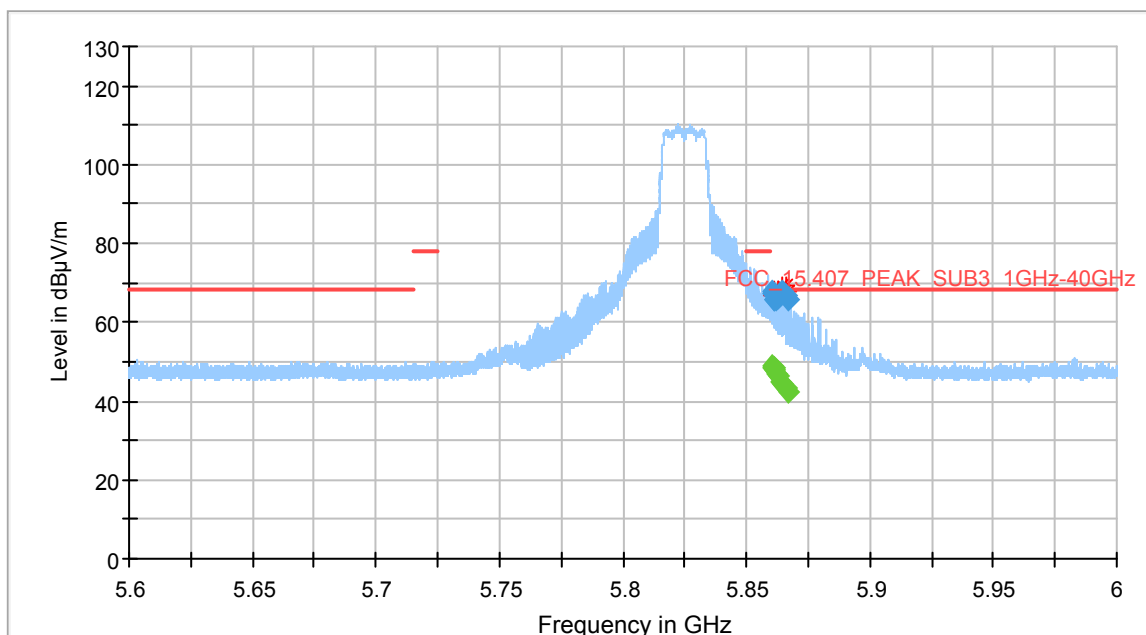

4.8.5 TEST EQUIPMENT USED

Radiated Emissions

4.9 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.9.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

4.9.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)
FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m)}$

4.9.3 TEST PROTOCOL

Ambient temperature: 24–29 °C

Air Pressure: 1000–1009 hPa

Humidity: 33–49 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type	FCC / IC?
1,0	36,0	5180,0	5150,0	65,2	PEAK	1000,0	74,0	8,8	BE-RB	FCC&IC
	36,0	5180,0	5150,0	52,6	AV	1000,0	54,0	1,4	BE-RB	FCC&IC
2A	64,0	5320,0	5350,0	63,2	PEAK	1000,0	74,0	10,8	BE-RB	FCC&IC
	64,0	5320,0	5350,0	49,0	AV	1000,0	54,0	5,0	BE-RB	FCC&IC
2C	100,0	5500,0	5460,0	54,0	PEAK	1000,0	74,0	20,0	BE-RB	FCC&IC
	100,0	5500,0	5460,0	42,7	AV	1000,0	54,0	11,3	BE-RB	FCC&IC
	100,0	5500,0	5470,0	62,9	PEAK	1000,0	68,2	5,3	BE-UE	FCC&IC
	140,0	5700,0	5725,0	61,6	PEAK	1000,0	68,2	6,6	BE-UE	FCC&IC
3,0	149,0	5745,0	5725,0	73,2	PEAK	1000,0	78,2	5,0	BE-UE	FCC&IC
	165,0	5825,0	5850,0	67,2	PEAK	1000,0	78,2	11,0	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; 6,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type	FCC / IC?
1,0	36,0	5180,0	5150,0	62,7	PEAK	1000,0	74,0	11,3	BE-RB	FCC&IC
	36,0	5180,0	5150,0	49,6	AV	1000,0	54,0	4,4	BE-RB	FCC&IC
2A	64,0	5320,0	5350,0	62,6	PEAK	1000,0	74,0	11,4	BE-RB	FCC&IC
	64,0	5320,0	5350,0	39,4	AV	1000,0	54,0	14,6	BE-RB	FCC&IC
2C	100,0	5500,0	5460,0	54,0	PEAK	1000,0	74,0	20,0	BE-RB	FCC&IC
	100,0	5500,0	5460,0	42,9	AV	1000,0	54,0	11,2	BE-RB	FCC&IC
	100,0	5500,0	5470,0	63,4	PEAK	1000,0	68,2	4,8	BE-UE	FCC&IC
	140,0	5700,0	5725,0	67,0	PEAK	1000,0	68,2	1,2	BE-UE	FCC&IC
3,0	149,0	5745,0	5725,0	61,4	PEAK	1000,0	78,2	16,9	BE-UE	FCC&IC
	165,0	5825,0	5850,0	72,3	PEAK	1000,0	78,2	6,0	BE-UE	FCC&IC


WLAN n-Mode; 40 MHz;13,5 Mbit/s MCS0

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin [dB]	Limit Type	FCC / IC?
1,0	38,0	5190,0	5150,0	61,1	PEAK	1000,0	74,0	12,9	BE-RB	FCC&IC
	38,0	5190,0	5150,0	49,0	AV	1000,0	54,0	5,0	BE-RB	FCC&IC
2A	62,0	5310,0	5350,0	64,9	PEAK	1000,0	74,0	9,1	BE-RB	FCC&IC
	62,0	5310,0	5350,0	47,7	AV	1000,0	54,0	6,3	BE-RB	FCC&IC
2C	102,0	5510,0	5460,0	53,8	PEAK	1000,0	74,0	20,2	BE-RB	FCC&IC
	102,0	5510,0	5460,0	42,9	AV	1000,0	54,0	11,1	BE-RB	FCC&IC
	102,0	5510,0	5470,0	56,0	PEAK	1000,0	68,2	12,2	BE-UE	FCC&IC
	138,0	5690,0	5725,0	54,2	PEAK	1000,0	68,2	14,0	BE-UE	FCC&IC
3,0	151,0	5755,0	5725,0	65,9	PEAK	1000,0	78,2	12,3	BE-UE	FCC&IC
	159,0	5795,0	5850,0	57,9	PEAK	1000,0	78,2	20,3	BE-UE	FCC&IC


Remark: Please see next sub-clause for the measurement plot.

4.9.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Operating mode = WLAN a, low, U-NII-1

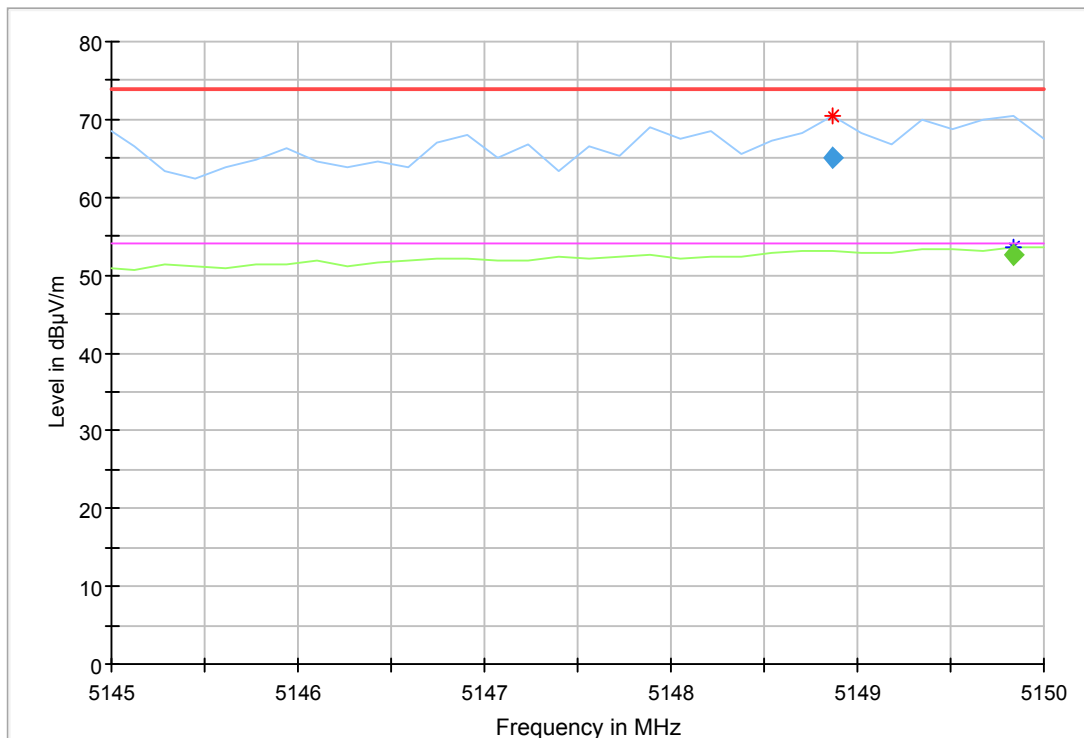

Operating mode = WLAN n 20, high, U-NII-2C

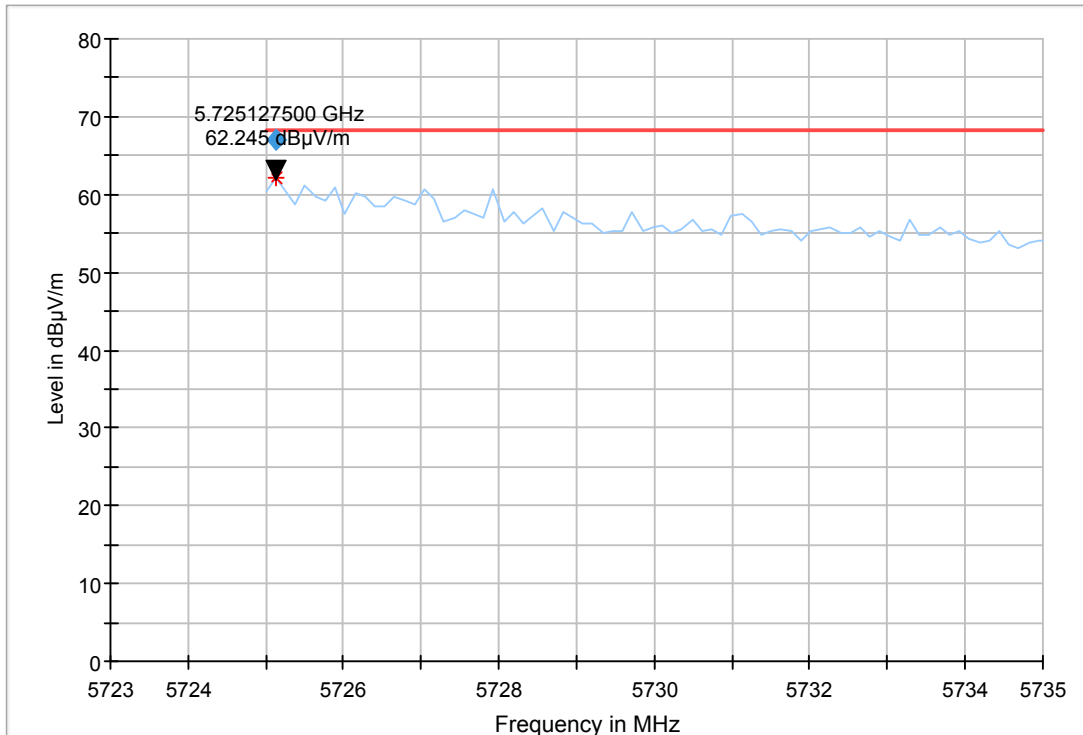

Operating mode = WLAN n 40, low, U-NII-1

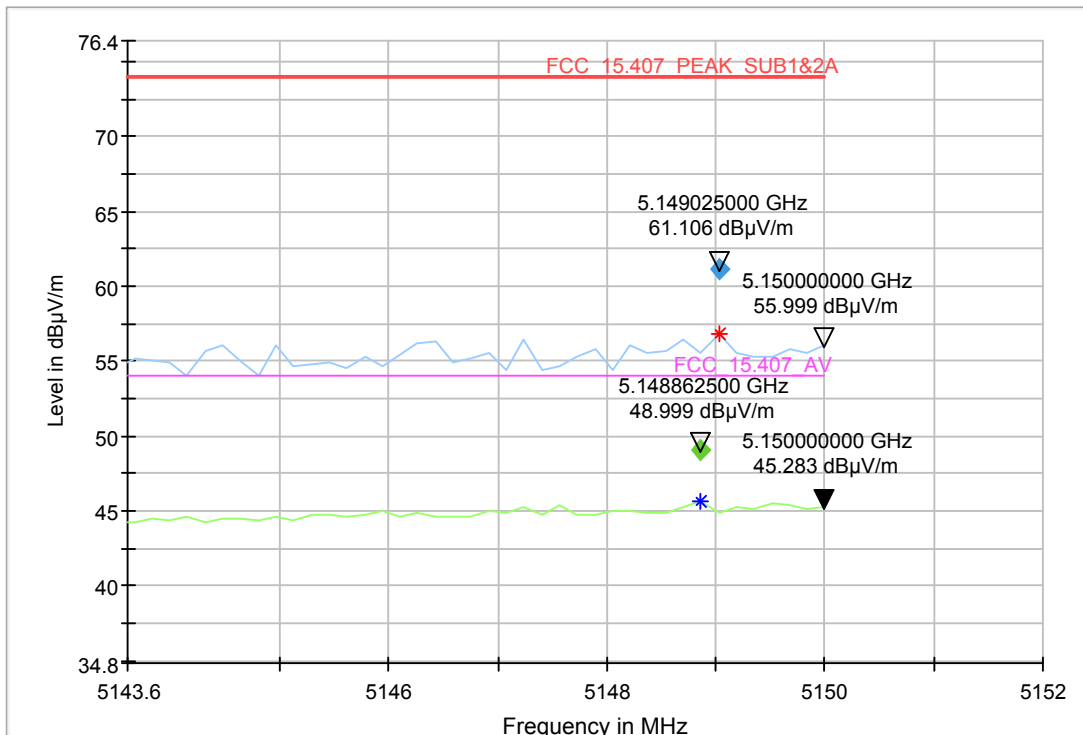

4.9.5 TEST EQUIPMENT USED

Radiated Emissions

4.10 SIMULTANEOUS TRANSMISSION – SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.10.1 TEST DESCRIPTION

Please see test description for the test case “UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS”

4.10.2 TEST REQUIREMENTS / LIMITS

WLAN 5 GHz

Please see “Test Requirements / Limits” for the test case “UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS”

Additional for NFC:

FCC §15.225 (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Additional for Bluetooth

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

4.10.3 TEST PROTOCOL

Possible simultaneous operating modes according to applicant's description	Remark
NFC + WLAN 2.4 GHz	Not part of this report
NFC + BT	covered from worst case mode: NFC + BT + WLAN 5 GHz
NFC + BT-LE	BT-LE covered from BT
NFC + WLAN 5 GHz	covered from worst case mode: NFC + BT + WLAN 5 GHz
NFC + BT + WLAN 5 GHz	Worst case operating mode, no intended operating mode, only possible with special SW, Selected worst case operating modes: channels and modes with highest output power


Ambient temperature: 21–25 °C
 Air Pressure: 1002–1020 hPa
 Humidity: 38–45 %
 WLAN b-Mode; 20 MHz

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
BT BDR (DH1, Ch.0) / max. power WLAN 5 GHz (a-Mode; 20 MHz; 6 Mbit/s) / 16 dBm NFC in continuous modulation mode	2402,0 5240,0 13,56	0,009 to 30	noise	Peak, AV	-	(13,56 MHz excluded)	> 20
BT BDR (DH1, Ch.0) / max. power WLAN 5 GHz (a-Mode; 20 MHz; 6 Mbit/s) / 16 dBm NFC in continuous modulation mode	2402,0 5240,0 13,56	40,68 352,56	35,1 35,6	QP	120	40 46	4,9 10,4
BT BDR (DH1, Ch.0) / max. power WLAN 5 GHz (a-Mode; 20 MHz; 6 Mbit/s) / 16 dBm NFC in continuous modulation mode	2402,0 5240,0 13,56	2835,32 15719,75	44,7 45,1 (100 % duty cycle, no duty cycle correction applicable)	AV	1000	54 54 (CF at 2402 MHz and 5240 MHz excluded)	9,3 8,9

Mode / Set EUT target power	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/ m]	Detector	RBW [kHz]	Limit [dBμV/ m]	Margin to Limit [dB]
BT BDR (DH1, Ch.0) / max. power	2402,0	26000 to 40000	noise	Peak, AV	-	74 54	> 20
WLAN 5 GHz (a-Mode; 20 MHz; 6 Mbit/s) / 16 dBm	5240,0						
NFC in continuous modulation mode	13,56						


Remark: Please see next sub-clause for the measurement plot.

4.10.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

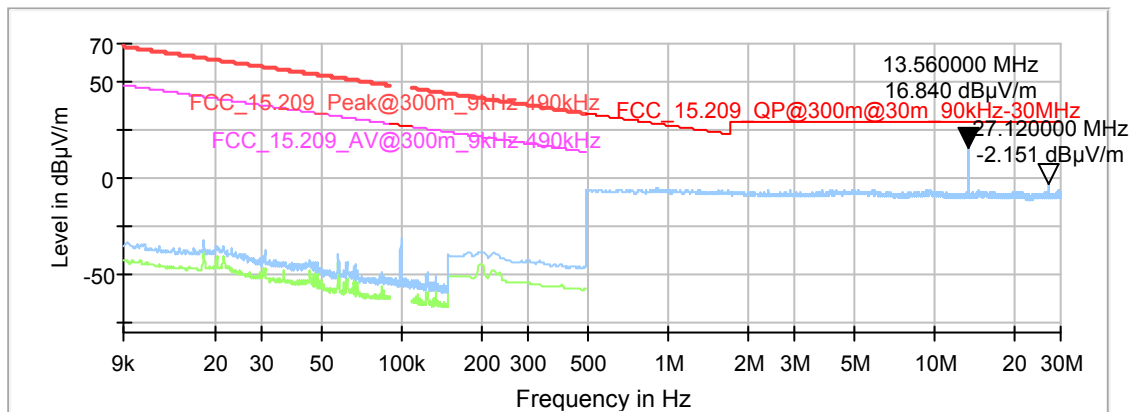


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
-	-	-	-	-	-	-	-	-	-

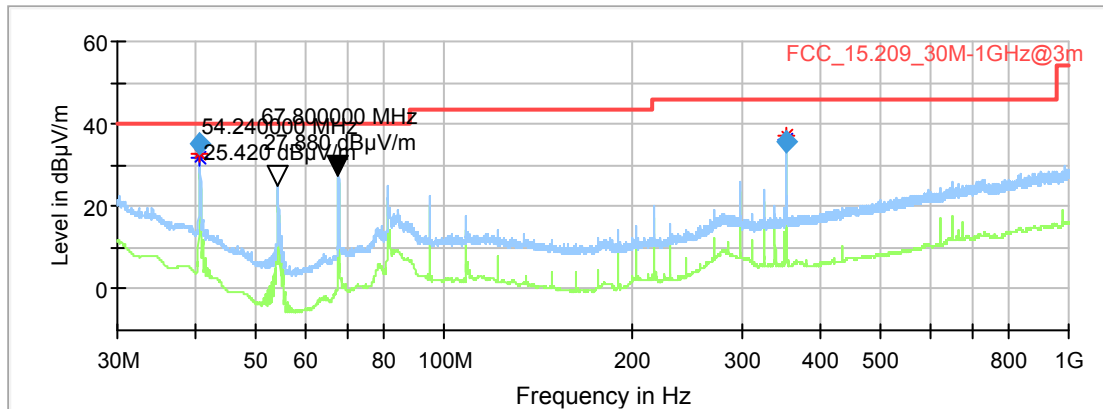

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
40,680000	35,08	40,00	4,92	1000,0	120,000	100,0	V	-132,0	13,3
54,240000	25,42	40,00	14,58	1000,0	120,000	102,0	V	-130,0	10,1
67,800000	27,88	40,00	12,12	1000,0	120,000	100,0	V	-132,0	12,3
81,360000	23,54	40,00	16,46	1000,0	120,000	100,0	V	-130,0	13,2
352,560000	35,59	46,00	10,41	1000,0	120,000	102,0	H	-180,0	15,1

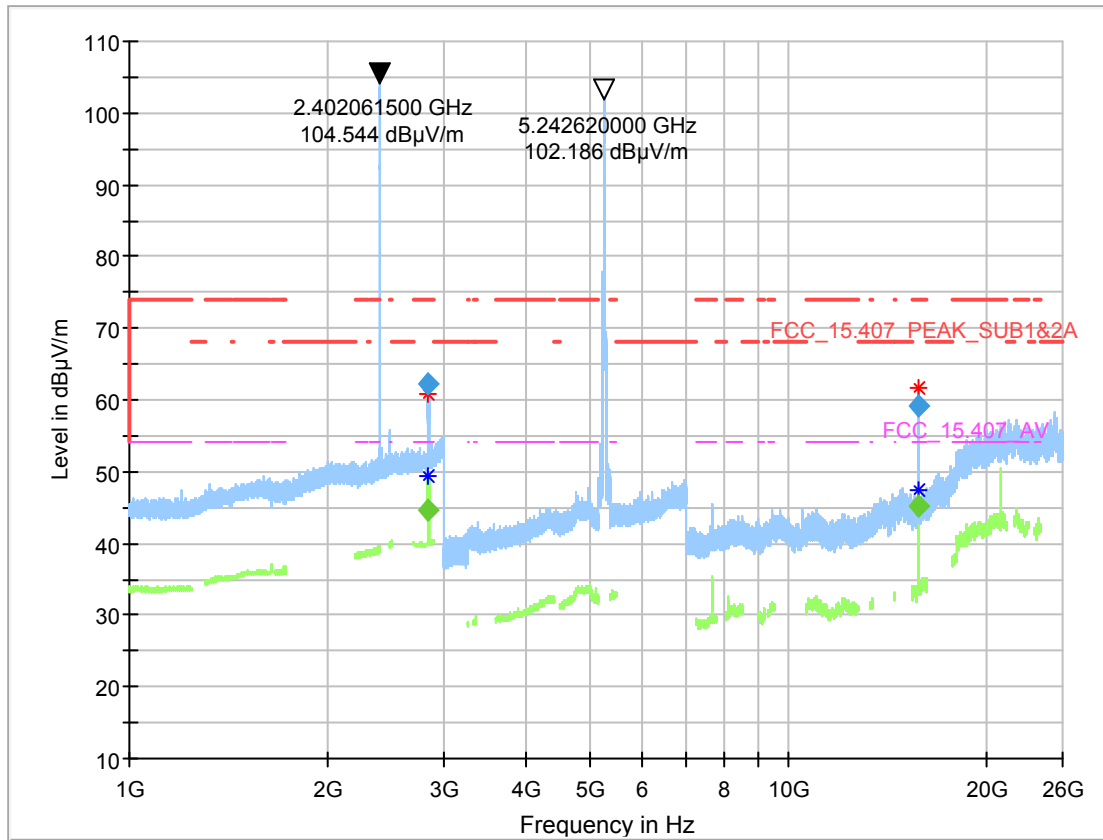


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2834,900000	60,74	---	74,00	13,26	---	---	150,0	V	92,0	74,9
2835,320000	---	49,26	54,00	4,74	---	---	150,0	V	92,0	87,9
15716,633333	61,58	---	74,00	12,42	---	---	150,0	V	-11,0	90,8
15719,750000	---	47,55	54,00	6,45	---	---	150,0	V	-6,0	96,6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2834,900000	62,18	---	74,00	11,82	1000,0	1000,000	150,0	V	92,0	75,0
2835,320000	---	44,65	54,00	9,35	1000,0	1000,000	150,0	V	92,0	88,0
15716,633333	59,04	---	74,00	14,96	1000,0	1000,000	150,0	V	-11,0	90,7
15719,750000	---	45,13	54,00	8,87	1000,0	1000,000	150,0	V	-6,0	96,7

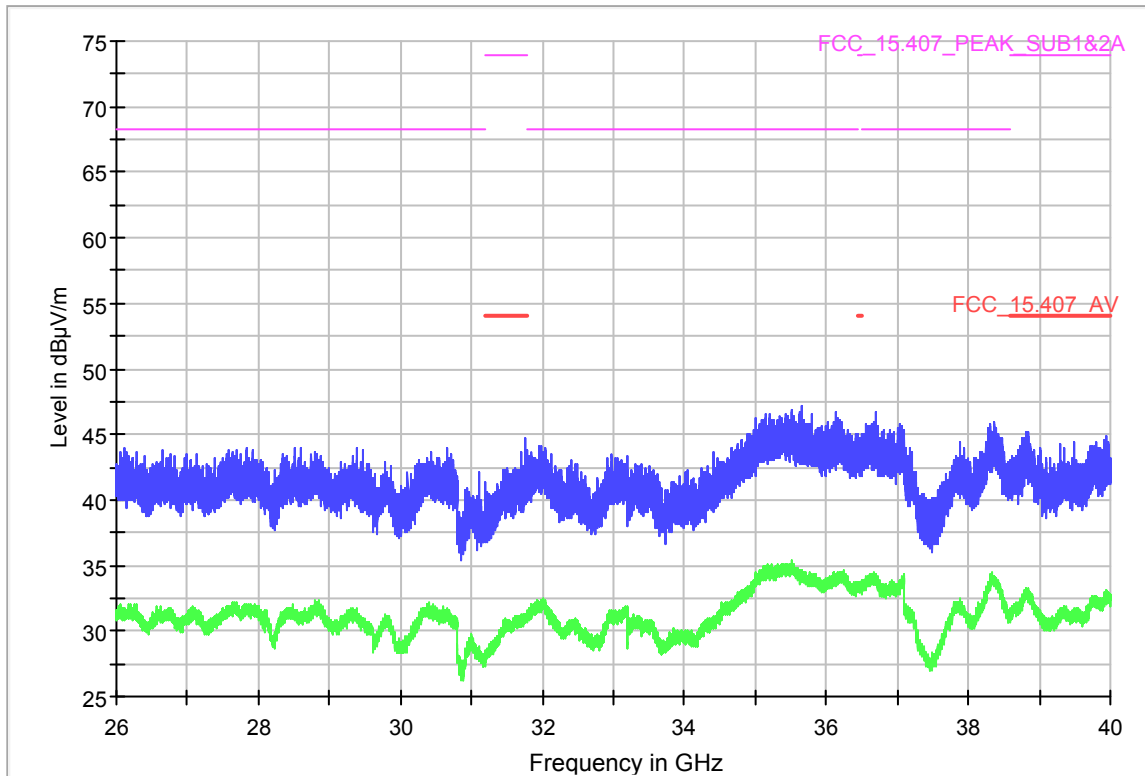

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
-	-	-	-	-	-	-	-	-	-	-

4.10.5 TEST EQUIPMENT USED

Radiated Emissions

5 TEST EQUIPMENT

1 Conducted Emissions Shielded Room 02

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	ESH 3-Z5	Two-Line V-Network	Rohde & Schwarz	828304/029	2015-03	2017-03
1.2	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2014-11	2016-11
1.3	ISN T800	Impedance Stabilization Network	Teseq	36159		
1.4	EP 1200/B, NA/B1	Amplifier with integrated variable Oscillator	Spitzenberger & Spieß	B6278	2015-07	2018-07
1.5	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2015-12	2017-12
1.6	Opus10 THI (8152.00)	ThermoHygro Datalogger 02 (Environ)	Lufft Mess- und Regeltechnik GmbH	7489	2015-02	2017-02
1.7	ESH 3-Z5	Two-Line V-Network	Rohde & Schwarz	829996/002	2015-03	2017-03
1.8	CMU 200	Universal Radio Communication Tester	Rohde & Schwarz GmbH & Co. KG	102366	2016-06	2019-05
1.9	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2015-02	2017-02
1.10	CMD 55	Digital Radio Communication Tester	Rohde & Schwarz	831050/020	2014-12	2017-12
1.11	ESH 3-Z6	One-Line V-Network	Rohde & Schwarz	100489	2014-06	2017-11
1.12	ESH 3-Z6	One-Line V-Network	Rohde & Schwarz	100570	2013-11	2016-11
1.13	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
1.14	CMW 500	CMW 500	Rohde & Schwarz	107500	2015-07	2017-07

2 Radiated Emissions
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
2.2	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
2.3	5HC3500/1800 0-1.2-KK	High Pass Filter	Trilithic	200035008		
2.4	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB		
2.5	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/1192 0513		
2.6	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2014-11	2016-11
2.7	TT 1.5 WI	Turn Table	Maturo GmbH	-		
2.8	Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	Frankonia	none	2014-01	2017-01
2.9	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2016-02	2018-02
2.10	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2015-12	2017-12
2.11	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/37907 09		
2.12	5HC2700/1275 0-1.5-KK	High Pass Filter	Trilithic	9942012		
2.13	AS 620 P	Antenna mast	HD GmbH	620/37		
2.14	4HC1600/1275 0-1.5-KK	High Pass Filter	Trilithic	9942011		
2.15	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
2.16	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
2.17	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
2.18	HL 562	Ultralog new biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2015-06	2018-06

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.19	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2015-03	2017-03
2.20	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
2.21	HFH2-Z2	Loop Antenna	Rohde & Schwarz GmbH & Co. KG	829324/006	2014-11	2017-11
2.22	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2014-11	2016-11
2.23	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2015-02	2017-02
2.24	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
2.25	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
2.26	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz GmbH & Co. KG	100609	2016-04	2019-04
2.27	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
2.28	HF 907	Double-ridged horn	Rohde & Schwarz GmbH & Co. KG	102444	2015-05	2018-05

3 R&S TS8997
EN300328/301893 Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz GmbH & Co. KG	101158	2015-08	2016-08
3.2	A8455-4	4 Way Power Divider (SMA)		-		
3.3	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2016-02	2018-02
3.4	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2015-02	2017-02
3.5	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz GmbH & Co. KG	107695	2014-06	2017-06
3.6	VT 4002	Climatic Chamber	Vötsch	58566002150010	2016-03	2018-03
3.7	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2016-02	2018-02

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.8	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz GmbH & Co. KG	259291	2013-08	2016-08
3.9	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
3.10	Datum, Model: MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2015-06	2016-06

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency MHz	Corr. dB	LISN insertion loss ESH3- Z5 dB	cable loss (incl. 10 dB atten- uator) dB
0,15	10,1	0,1	10,0
5	10,3	0,1	10,2
7	10,5	0,2	10,3
10	10,5	0,2	10,3
12	10,7	0,3	10,4
14	10,7	0,3	10,4
16	10,8	0,4	10,4
18	10,9	0,4	10,5
20	10,9	0,4	10,5
22	11,1	0,5	10,6
24	11,1	0,5	10,6
26	11,2	0,5	10,7
28	11,2	0,5	10,7
30	11,3	0,5	10,8

Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
0,009	20,50	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,01	20,45	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,015	20,37	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,02	20,36	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,025	20,38	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,03	20,32	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,05	20,35	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,08	20,30	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,1	20,20	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,2	20,17	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,3	20,14	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,49	20,12	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,490001	20,12	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,5	20,11	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,8	20,10	-39,6	0,1	0,1	0,1	0,1	-40	30	3
1	20,09	-39,6	0,1	0,1	0,1	0,1	-40	30	3
2	20,08	-39,6	0,1	0,1	0,1	0,1	-40	30	3
3	20,06	-39,6	0,1	0,1	0,1	0,1	-40	30	3
4	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
5	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
6	20,02	-39,5	0,2	0,1	0,1	0,1	-40	30	3
8	19,95	-39,5	0,2	0,1	0,1	0,1	-40	30	3
10	19,83	-39,4	0,2	0,1	0,2	0,1	-40	30	3
12	19,71	-39,4	0,2	0,1	0,2	0,1	-40	30	3
14	19,54	-39,4	0,2	0,1	0,2	0,1	-40	30	3
16	19,53	-39,3	0,3	0,1	0,2	0,1	-40	30	3
18	19,50	-39,3	0,3	0,1	0,2	0,1	-40	30	3
20	19,57	-39,3	0,3	0,1	0,2	0,1	-40	30	3
22	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
24	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
26	19,54	-39,3	0,3	0,1	0,2	0,1	-40	30	3
28	19,46	-39,2	0,3	0,1	0,3	0,1	-40	30	3
30	19,73	-39,1	0,4	0,1	0,3	0,1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

6.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{Limit} = 3\text{ m}$)

Frequency MHz	AF R&S HL562 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d_{Limit} (meas. distance (limit)) m	d_{used} (meas. distance (used)) m
30	18,6	0,6	0,29	0,04	0,23	0,02	0,0	3	3
50	6,0	0,9	0,39	0,09	0,32	0,08	0,0	3	3
100	9,7	1,2	0,56	0,14	0,47	0,08	0,0	3	3
150	7,9	1,6	0,73	0,20	0,59	0,12	0,0	3	3
200	7,6	1,9	0,84	0,21	0,70	0,11	0,0	3	3
250	9,5	2,1	0,98	0,24	0,80	0,13	0,0	3	3
300	11,0	2,3	1,04	0,26	0,89	0,15	0,0	3	3
350	12,4	2,6	1,18	0,31	0,96	0,13	0,0	3	3
400	13,6	2,9	1,28	0,35	1,03	0,19	0,0	3	3
450	14,7	3,1	1,39	0,38	1,11	0,22	0,0	3	3
500	15,6	3,2	1,44	0,39	1,20	0,19	0,0	3	3
550	16,3	3,5	1,55	0,46	1,24	0,23	0,0	3	3
600	17,2	3,5	1,59	0,43	1,29	0,23	0,0	3	3
650	18,1	3,6	1,67	0,34	1,35	0,22	0,0	3	3
700	18,5	3,6	1,67	0,42	1,41	0,15	0,0	3	3
750	19,1	4,1	1,87	0,54	1,46	0,25	0,0	3	3
800	19,6	4,1	1,90	0,46	1,51	0,25	0,0	3	3
850	20,1	4,4	1,99	0,60	1,56	0,27	0,0	3	3
900	20,8	4,7	2,14	0,60	1,63	0,29	0,0	3	3
950	21,1	4,8	2,22	0,60	1,66	0,33	0,0	3	3
1000	21,6	4,9	2,23	0,61	1,71	0,30	0,0	3	3

($d_{Limit} = 10\text{ m}$)

30	18,6	-9,9	0,29	0,04	0,23	0,02	-10,5	10	3
50	6,0	-9,6	0,39	0,09	0,32	0,08	-10,5	10	3
100	9,7	-9,2	0,56	0,14	0,47	0,08	-10,5	10	3
150	7,9	-8,8	0,73	0,20	0,59	0,12	-10,5	10	3
200	7,6	-8,6	0,84	0,21	0,70	0,11	-10,5	10	3
250	9,5	-8,3	0,98	0,24	0,80	0,13	-10,5	10	3
300	11,0	-8,1	1,04	0,26	0,89	0,15	-10,5	10	3
350	12,4	-7,9	1,18	0,31	0,96	0,13	-10,5	10	3
400	13,6	-7,6	1,28	0,35	1,03	0,19	-10,5	10	3
450	14,7	-7,4	1,39	0,38	1,11	0,22	-10,5	10	3
500	15,6	-7,2	1,44	0,39	1,20	0,19	-10,5	10	3
550	16,3	-7,0	1,55	0,46	1,24	0,23	-10,5	10	3
600	17,2	-6,9	1,59	0,43	1,29	0,23	-10,5	10	3
650	18,1	-6,9	1,67	0,34	1,35	0,22	-10,5	10	3
700	18,5	-6,8	1,67	0,42	1,41	0,15	-10,5	10	3
750	19,1	-6,3	1,87	0,54	1,46	0,25	-10,5	10	3
800	19,6	-6,3	1,90	0,46	1,51	0,25	-10,5	10	3
850	20,1	-6,0	1,99	0,60	1,56	0,27	-10,5	10	3
900	20,8	-5,8	2,14	0,60	1,63	0,29	-10,5	10	3
950	21,1	-5,6	2,22	0,60	1,66	0,33	-10,5	10	3
1000	21,6	-5,6	2,23	0,61	1,71	0,30	-10,5	10	3

Sample calculation

$E\text{ (dB } \mu\text{V/m)} = U\text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG}(d_{Limit}/d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24,4	-19,4
2000	28,5	-17,4
3000	31,0	-16,1
4000	33,1	-14,7
5000	34,4	-13,7
6000	34,7	-12,7
7000	35,6	-11,0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, attenuator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0,99	0,31	-21,51	0,79		
1,44	0,44	-20,63	1,38		
1,87	0,53	-19,85	1,33		
2,41	0,67	-19,13	1,31		
2,78	0,86	-18,71	1,40		
2,74	0,90	-17,83	1,47		
2,82	0,86	-16,19	1,46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31,0	-23,4
4000	33,1	-23,3
5000	34,4	-21,7
6000	34,7	-21,2
7000	35,6	-19,8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0,47	1,87	0,53	-27,58	1,33	
0,56	2,41	0,67	-28,23	1,31	
0,61	2,78	0,86	-27,35	1,40	
0,58	2,74	0,90	-26,89	1,47	
0,66	2,82	0,86	-25,58	1,46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35,6	-57,3
8000	36,3	-56,3
9000	37,1	-55,3
10000	37,5	-56,2
11000	37,5	-55,3
12000	37,6	-53,7
13000	38,2	-53,5
14000	39,9	-56,3
15000	40,9	-54,1
16000	41,3	-54,1
17000	42,8	-54,4
18000	44,2	-54,7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0,56	1,28	-62,72	2,66	0,94	1,46
0,69	0,71	-61,49	2,84	1,00	1,53
0,68	0,65	-60,80	3,06	1,09	1,60
0,70	0,54	-61,91	3,28	1,20	1,67
0,80	0,61	-61,40	3,43	1,27	1,70
0,84	0,42	-59,70	3,53	1,26	1,73
0,83	0,44	-59,81	3,75	1,32	1,83
0,91	0,53	-63,03	3,91	1,40	1,77
0,98	0,54	-61,05	4,02	1,44	1,83
1,23	0,49	-61,51	4,17	1,51	1,85
1,36	0,76	-62,36	4,34	1,53	2,00
1,70	0,53	-62,88	4,41	1,55	1,91

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40,2	-23,5	0,72	-35,85	6,20	2,81	2,65
18500	40,2	-23,2	0,69	-35,71	6,46	2,76	2,59
19000	40,2	-22,0	0,76	-35,44	6,69	3,15	2,79
19500	40,3	-21,3	0,74	-35,07	7,04	3,11	2,91
20000	40,3	-20,3	0,72	-34,49	7,30	3,07	3,05
20500	40,3	-19,9	0,78	-34,46	7,48	3,12	3,15
21000	40,3	-19,1	0,87	-34,07	7,61	3,20	3,33
21500	40,3	-19,1	0,90	-33,96	7,47	3,28	3,19
22000	40,3	-18,7	0,89	-33,57	7,34	3,35	3,28
22500	40,4	-19,0	0,87	-33,66	7,06	3,75	2,94
23000	40,4	-19,5	0,88	-33,75	6,92	3,77	2,70
23500	40,4	-19,3	0,90	-33,35	6,99	3,52	2,66
24000	40,4	-19,8	0,88	-33,99	6,88	3,88	2,58
24500	40,4	-19,5	0,91	-33,89	7,01	3,93	2,51
25000	40,4	-19,3	0,88	-33,00	6,72	3,96	2,14
25500	40,5	-20,4	0,89	-34,07	6,90	3,66	2,22
26000	40,5	-21,3	0,86	-35,11	7,02	3,69	2,28
26500	40,5	-21,1	0,90	-35,20	7,15	3,91	2,36

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
26,5	43,4	-11,2	4,4				-15,6	3	0,5
27,0	43,4	-11,2	4,4				-15,6	3	0,5
28,0	43,4	-11,1	4,5				-15,6	3	0,5
29,0	43,5	-11,0	4,6				-15,6	3	0,5
30,0	43,5	-10,9	4,7				-15,6	3	0,5
31,0	43,5	-10,8	4,7				-15,6	3	0,5
32,0	43,5	-10,7	4,8				-15,6	3	0,5
33,0	43,6	-10,7	4,9				-15,6	3	0,5
34,0	43,6	-10,6	5,0				-15,6	3	0,5
35,0	43,6	-10,5	5,1				-15,6	3	0,5
36,0	43,6	-10,4	5,1				-15,6	3	0,5
37,0	43,7	-10,3	5,2				-15,6	3	0,5
38,0	43,7	-10,2	5,3				-15,6	3	0,5
39,0	43,7	-10,2	5,4				-15,6	3	0,5
40,0	43,8	-10,1	5,5				-15,6	3	0,5

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

$$\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$$

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.

7 SETUP DRAWINGS

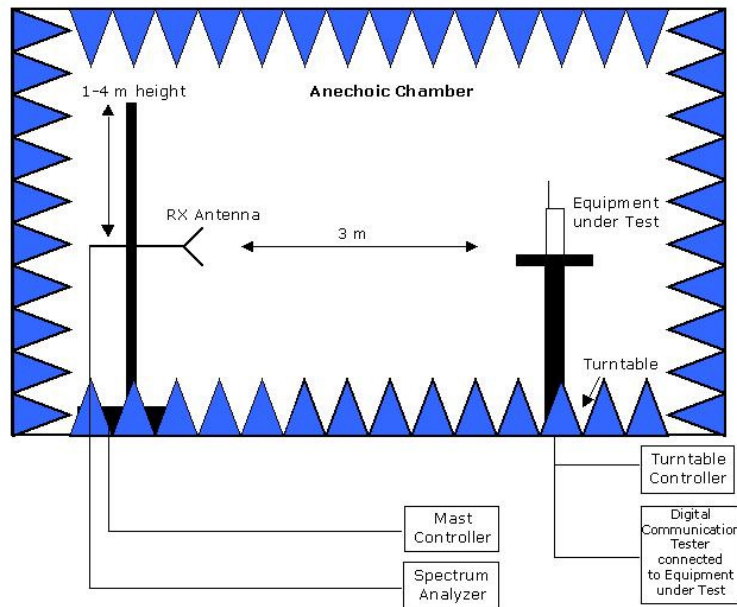

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

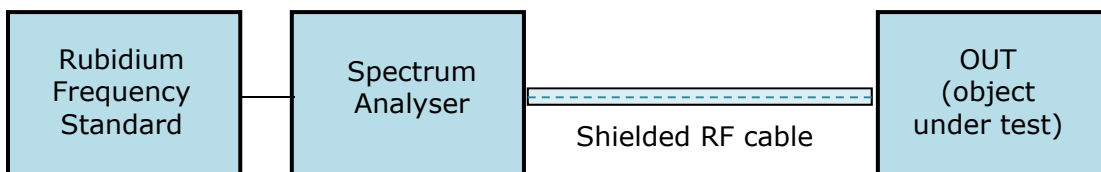

Drawing 2: Setup for conducted radio tests.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

9 PHOTO REPORT

Please see separate photo report.