

FCC Measurement/Technical Report on WLAN and Bluetooth module

JODY-W354

FCC ID: XPYJODYW374

IC: 8595A-JODYW374

Test Report Reference: MDE_UBLOX_2220_FCC_02

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Stefan Kischka
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary	5
2	Revision History / Signatures	13
3	Administrative Data	14
3.1	Testing Laboratory	14
3.2	Project Data	14
3.3	Applicant Data	14
3.4	Manufacturer Data	15
4	Test object Data	16
4.1	General EUT Description	16
4.2	EUT Main components	17
4.3	Ancillary Equipment	17
4.4	Auxiliary Equipment	18
4.5	EUT Setups	18
4.6	Operating Modes / Test Channels	19
4.7	Product labelling	19
5	Test Results	20
5.1	AC Conducted Emissions	20
5.2	Maximum Conducted Output Power	23
5.3	Undesirable Emissions; General Field Strength Limits	33
5.4	Band Edge	65
6	Test Equipment	95
7	Antenna Factors, Cable Loss and Sample Calculations	99
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	99
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	100
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	101
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	102
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	103
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	104
8	Measurement Uncertainties	105
9	Photo Report	106

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-21 Edition) and 15 (10-1-21 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note:

The tests were selected and performed with reference to the FCC Public Notice “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures New Rules v02r01, 2017-12-14”.

ANSI C63.10-2013 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5: 8.8
Occupied bandwidth	§ 15.403 (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB)
Maximum conducted output power	§ 15.407 (a) (1) to (8), (11)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Maximum power spectral density	§ 15.407 (a) (1) to (8), (12)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	§ 15.407 (b) § 15.209 (a)	RSS-Gen Issue 5: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 5: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3
Antenna requirement	§ 15.203 / 15.204 § 15.407 (a) (9)	RSS-Gen Issue 5: 8.3
Receiver spurious emissions	-	-

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.207

AC Conducted Emissions

The measurement was performed according to ANSI C63.10 6.2

Final Result

OP-Mode	Setup	Date	FCC	IC
Operating mode worst case	S03_374_AB01	2022-09-16	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10 12.3.3.2

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Subband				
WLAN a, high, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, high, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, high, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, high, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, low, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, low, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, low, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, low, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, high, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, high, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, low, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, low, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10 12.3.3.2

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN ac 40 MHz, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz, high, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, high, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, high, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, high, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, low, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, low, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, low, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, low, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, mid, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, mid, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 20 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-19	Passed	Passed
WLAN ax 20 MHz, mid, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ax 40 MHz, high, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, low, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 80 MHz, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 80 MHz, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 80 MHz, mid, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 80 MHz, mid, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 80 MHz, mid, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, high, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, high, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, high, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, low, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart E §15.407

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10 12.3.3.2

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN n 20 MHz, low, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, low, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 20 MHz, mid, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, high, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, high, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, high, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, low, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, low, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, low, U-NII-3	S01_354_AB01	2022-08-15	Passed	Passed
WLAN n 40 MHz, mid, U-NII-2C	S01_354_AB01	2022-08-15	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 40 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ac 80 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 80 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-2A	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-3	S01_354_AB01	2022-08-17	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10 12.3.3.2

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN ax 20 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 20 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 20 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, mid, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 20 MHz MIMO, mid, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 20 MHz MIMO, mid, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN ax 40 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 40 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 80 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 80 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 80 MHz MIMO, mid, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 80 MHz MIMO, mid, U-NII-2A	S01_354_AB01	2022-08-17	Passed	Passed
WLAN ax 80 MHz MIMO, mid, U-NII-3	S01_354_AB01	2022-08-17	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1	S01_354_AB01	2022-08-17	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10 12.3.3.2

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN n 40 MHz MIMO, high, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-2A	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-3	S01_354_AB01	2022-08-16	Passed	Passed
WLAN n 40 MHz MIMO, mid, U-NII-2C	S01_354_AB01	2022-08-16	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

**FCC §15.407 (b), (1),(2),(3),(4); FCC
§15.205, §15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

Final Result

6.4, 6.5, 6.6.5

OP-Mode Radio Technology, Operating Frequency, Measurement range, Subband	Setup	Date	FCC	IC
WLAN a, high, 1GHz - 26GHz, U-NII-1	S02_354_AB01	2022-08-05	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-2A	S02_354_AB01	2022-08-06	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-2C	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, high, 1GHz - 26GHz, U-NII-3	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, high, 9kHz - 30MHz, U-NII-2C	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, high, 9kHz - 30MHz, U-NII-2C	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-1	S02_354_AB01	2022-07-27	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-2A	S02_354_AB01	2022-08-09	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-2C	S02_354_AB01	2022-08-05	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-3	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, low, 9kHz - 30MHz, U-NII-1	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1	S02_354_AB01	2022-08-02	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1 Remark: Measurement Method Conducted, Measured Range: 1 - 18 GHz	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2A Remark: Measurement Method Conducted, Measured Range: 1 - 18 GHz	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2A	S02_354_AB01	2022-08-07	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2C Remark: Measurement Method Conducted, Measured Range: 1 - 18 GHz	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-2C	S02_354_AB01	2022-08-07	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-3 Remark: Measurement Method Conducted, Measured Range: 1 - 18 GHz	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-3	S02_354_AB01	2022-08-16	Passed	Passed
WLAN a, low, 26GHz - 40GHz, U-NII-1	S02_354_AB01	2022-08-15	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

**FCC §15.407 (b), (1),(2),(3),(4); FCC
§15.205, §15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10
6.4, 6.5, 6.6.5

Final Result

OP-Mode Radio Technology, Operating Frequency, Measurement range, Subband	Setup	Date	FCC	IC
WLAN a, mid, 26GHz - 40GHz, U-NII-2A	S01_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-2C	S02_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-3	S02_354_AB01	2022-08-15	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2A	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2C	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-16	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-3	S02_354_AB01	2022-07-28	Passed	Passed
WLAN a, mid, 9kHz - 30MHz, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-16	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

FCC §15.407 (b), (1),(2),(3),(4)

Band Edge

The measurement was performed according to ANSI C63.10 6.6.5

Final Result

OP-Mode Radio Technology, Operating Frequency, Subband	Setup	Date	FCC	IC
WLAN a, high, U-NII-2A	S02_354_AB01	2022-08-05	Passed	Passed
WLAN a, high, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, low, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, mid, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, high, U-NII-2C	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, high, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, high, U-NII-3	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, high, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, mid, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, low, U-NII-1	S02_354_AB01	2022-07-27	Passed	Passed



**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

FCC §15.407 (b), (1),(2),(3),(4)

Band Edge

The measurement was performed according to ANSI C63.10 6.6.5

Final Result

OP-Mode

Radio Technology, Operating Frequency,
Subband

Setup

Date

FCC

IC

OP-Mode	Setup	Date	FCC	IC
WLAN a, low, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, mid, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, high, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, low, U-NII-2C	S02_354_AB01	2022-08-05	Passed	Passed
WLAN a, low, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, mid, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN a, low, U-NII-3	S02_354_AB01	2022-08-08	Passed	Passed
WLAN a, low, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-15	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-15	Passed	Passed
WLAN ax 40 MHz MIMO, low, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-15	Passed	Passed
WLAN ax 80 MHz, mid, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-15	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-2C Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-3 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1 Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-2A Remark: Measurement Method Conducted	S01_354_AA01	2022-08-12	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart E §15.407**

FCC §15.407 (b), (1),(2),(3),(4)

Band Edge

The measurement was performed according to ANSI C63.10 6.6.5

Final Result

OP-Mode

Radio Technology, Operating Frequency,
Subband

Setup

Date

FCC

IC

WLAN n 20 MHz MIMO, mid, U-NII-2C

S01_354_AA01

2022-08-12

Passed

Passed

Remark: Measurement Method Conducted

WLAN n 20 MHz MIMO, mid, U-NII-3

S01_354_AA01

2022-08-12

Passed

Passed

Remark: Measurement Method Conducted

N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY / SIGNATURES


Report version control			
Version	Release date	Change Description	Version validity
initial	2022-11-22	--	valid
--	--	--	--

COMMENT: According to the applicant the WLAN part of the JODY-W377 is identical to the WLAN part of the JODY-W354. Due to this not all tests have been performed for JODY-W354.

Report Reference JODY-W377: MDE_UBLOX_2030_FCC_02



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall

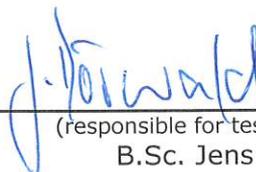

(responsible for testing and report)
B.Sc. Jens Dörwald



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall

Report Template Version: 2021-09-09

3.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2022-11-22
Testing Period: 2022-07-27 to 2022-09-19

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Filip Kruzela

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

Address:

Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Host-based module with WLAN and Bluetooth technology.
Product name	JODY-W3
Type	JODY-W354-00A
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	1.8 V + 3.3 V
Tested Modulation Type	OFDM
Specific product description	<p>The EUT is a Bluetooth and WLAN module.</p> <p>In the 5 GHz band it supports SISO and MIMO Mode for WLAN.</p> <p>Supported WLAN modes are a, n, ac and ax with 20 MHz (mode a, n, ac, ax), 40 MHz (mode n, ac, ax) and 80 MHz (mode ac, ax) BW. Ax Mode supports MU-OFDMA.</p> <p>The U-NII bands 1, 2A, 2C and 3 are supported. For this report the EUT is a slave without radar detection in the relevant DFS bands.</p>
Ports of the device	<p>Enclosure</p> <p>Data</p> <p>DC Power</p> <p>Antenna</p> <p>The EUT is a module with solder pads for surface mounting, so no cables were connected to the EUT itself.</p>
Antenna	<p>External / 2 dBi (No antennas were provided for the tests, radiated measurements were performed with 50 Ohm terminations)</p> <p>Remark by laboratory:</p> <p>Naming of antenna ports for the report:</p> 
Tested Datarates	<p>WLAN a: 6 Mbit</p> <p>WLAN n: MCS 0 (SISO), MCS 8 (MIMO)</p> <p>WLAN ac, ax: MCS 0</p>
Special software used for testing	Labtool 2.0.0.85-17.80.200.p204 on computer board provided by applicant

Used output power		5 GHz																							
		Mode	Ch.	36	40	44	48	52	56	60	64	100	104	108	112	116	132	136	140	144	149	153	157	161	165
A		16	17	17	17	18	18	18	16	15	18	18	18	18	18	18	18	15	18	18	18	18	18	18	18
N20 SISO		14	17	17	17	17	17	17	14	15	17	17	17	17	17	17	17	17	15	17	17	17	17	17	17
N20 MIMO		14	15	15	15	17	17	17	14	14	17	17	17	17	17	17	17	17	14	17	17	17	17	17	17
N40 SISO		13		16		16		13		12		16	N/A		15		16		16		16		16	N/A	
N40 MIMO		12		15		16		12		11		16	N/A		15		16		16		16		16	N/A	
Ac20 SISO		14	17	17	17	17	17	14	15	17	17	17	17	17	17	17	17	15	17	17	17	17	17	17	
Ac20 MIMO		14	15	15	15	17	17	14	14	17	17	17	17	17	17	17	17	14	17	17	17	17	17	17	
Ac40 SISO		13		16		16		13		12		16	N/A		15		16		16		16		16	N/A	
Ac40 MIMO		12		15		16		12		11		16	N/A		15		16		16		16		16	N/A	
Ac80 SISO			12			12				12							16				16		16	N/A	
Ac80 MIMO			11			11				11							16				16		16	N/A	
Ax20 SISO		14	15	15	15	15	15	14	14	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	
Ax20 MIMO		14	14	14	14	15	15	14	14	15	15	15	15	15	15	15	15	14	15	15	15	15	15	15	
Ax40 SISO		13		15		15		13		12		15	N/A		15		15		15		15		15	N/A	
Ax40 MIMO		12		14		15		12		11		15	N/A		15		15		15		15		15	N/A	
Ax80 SISO			12			12				12			N/A				15				15		15	N/A	
Ax80 MIMO			11			11				11			N/A				15				15		15	N/A	

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT 354 aa01	DE1015166	JODY-W354 Sample
Sample Parameter	Value	
Serial No.	AH36009C38105580500	
HW Version	05	
SW Version	FW: 2.0.0.86-17.80.200.p207	
Comment	-	

Sample Name	Sample Code	Description
EUT 354 ab01	DE1015166	JODY-W354 Sample
Sample Parameter	Value	
Serial No.	AH36009C38102B40500	
HW Version	05	
SW Version	FW: 2.0.0.86-17.80.200.p207	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX2	UBLOX, JODY-Carrier Board, REV C, - , 10000001898798019001	Supply and Port connector board
AUX4	UBLOX, JODY-Carrier Board, REV C, - , 10000001898798014001	Supply and Port connector board
AUX21	Toradex, Ixora, V 1.2, apalis-tk1-mainline_2022-01-12, Kernel: 4.14.90, -	Board Computer for setting modes
ACDC1	Agilent, E3631A, -, -, MY40018563	120 V 60 Hz AC laboratory power supply

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_354_AB01	EUT 354 ab01, AUX4, AUX21	Conducted Setup
S02_354_AB01	EUT 354 ab01, AUX4,	Radiated Setup
S03_354_AB01	EUT 354 ab01, AUX4, ACDC1	AC Conducted Setup
S01_354_AA01	EUT 354 aa01, AUX2, AUX21	Conducted Setup

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

U-NII-Subband 1 5150 - 5250 MHz			U-NII-Subband 2A 5250 - 5350 MHz			U-NII-Subband 2C 5470 - 5725 MHz			U-NII-Subband 3 5725 - 5850 MHz			Nom. BW
low	mid	high	low	mid	high	low	mid	high	low	mid	high	20 MHz
36	40	48	52	60	64	100	116	140 / 144 ¹⁾	149	157	165	Ch.-No.
5180	5200	5240	5260	5300	5320	5500	5580	5700 / 5720	5745	5785	5825	MHz

low	mid	high	low	mid	high	low	mid	high	low	mid	high	40 MHz
38	-	46	54	-	62	102	110	134 / 142 ¹⁾	151	-	159	Ch.-No.
5190	-	5230	5270	-	5310	5510	5550	5670 / 5710	5755	-	5795	MHz

low	mid	high	low	mid	high	low	mid	high	low	mid	high	80 MHz
-	42	-	-	58	-	106	-	138 ¹⁾	155	-	-	Ch.-No.
-	5210	-	-	5290	-	5530	-	5690	5775	-	-	MHz

1) Channels 144, 142 and 138 are straddle channels. Relevant high channels for upper Band Edge of band 2C are CH.140, CH. 134 and Ch 122.

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS


5.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10 6.2

5.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

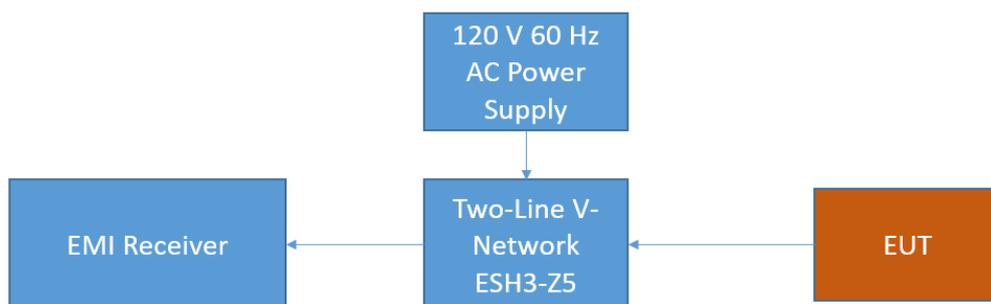

FCC Conducted Emissions on AC

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak & (CISPR) Average

- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dB μ V)	AV Limits (dB μ V)
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.1.3 TEST PROTOCOL


Temperature: 25 °C
 Air Pressure: 1001 hPa
 Humidity: 45 %

Variant	Power line	PE	Frequency [MHz]	Measured value QP [dB μ V]	Measured value AV [dB μ V]	Limit [dB μ V]	Margin [dB]
374	N	GND	12.01	43.1	-	60.0	16.9
374	N	GND	12.01	-	39.3	50.0	10.7
374	N	FLO	24.01	49.0	-	60.0	11.0
374	N	FLO	24.01	-	44.0	50.0	6.0

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT

Test Description:	Conducted Emissions
Test Standard:	FCC §15.207, ANSI C63.10
EUT / Setup Code:	DE1015166ab01
Operating Conditions:	WLAN 5 A-Mode CH40 6Mbps
Legend:	Trace: blue = QP, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final QP, green = final CISPR AV
Tested Port / used LISN:	AC mains => 1st LISN ESH3-Z5
Termination of other ports:	N/A

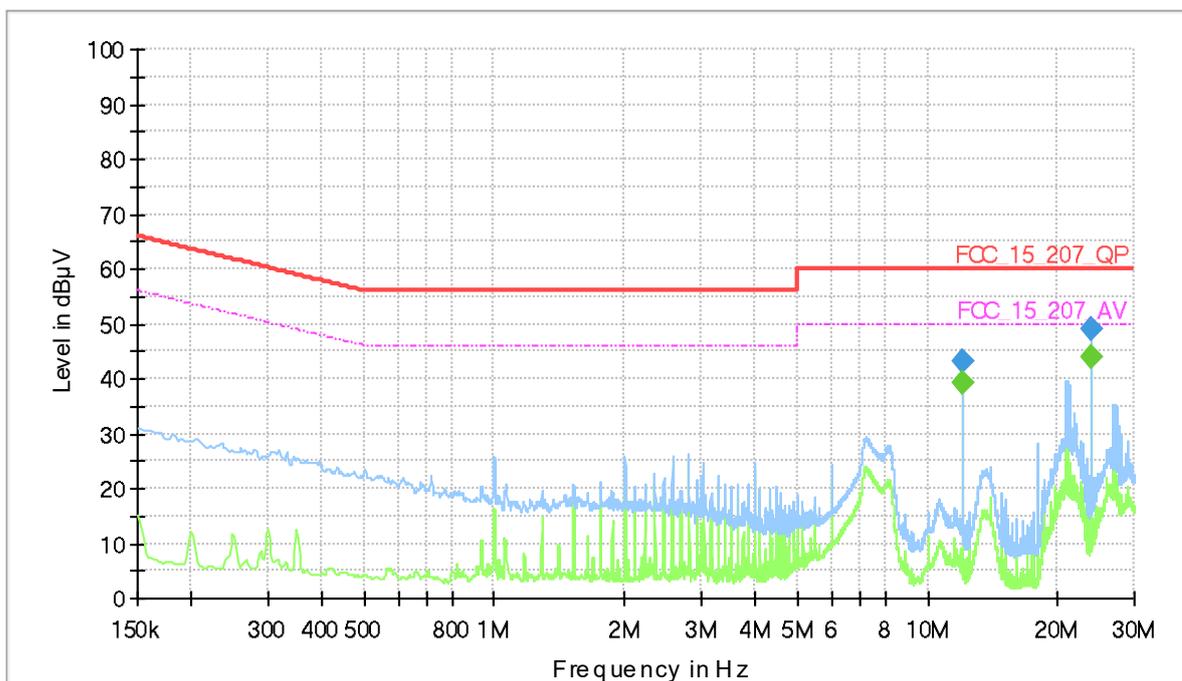

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	PE	Corr. (dB)
12.005250	---	39.28	50.00	10.72	1000.0	9.000	N	GND	10.7
12.005250	43.08	---	60.00	16.92	1000.0	9.000	N	GND	10.7
24.009000	---	43.98	50.00	6.02	1000.0	9.000	N	GND	11.2
24.009000	48.99	---	60.00	11.01	1000.0	9.000	N	GND	11.2

5.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

5.2 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power


For U-NII bands 1, 2A, 2C, 3:

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


The OSP-B157W is a gated RF average power meter with a signal bandwidth > 300 MHz.

Note:

The measurement was performed according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **PM-G**.

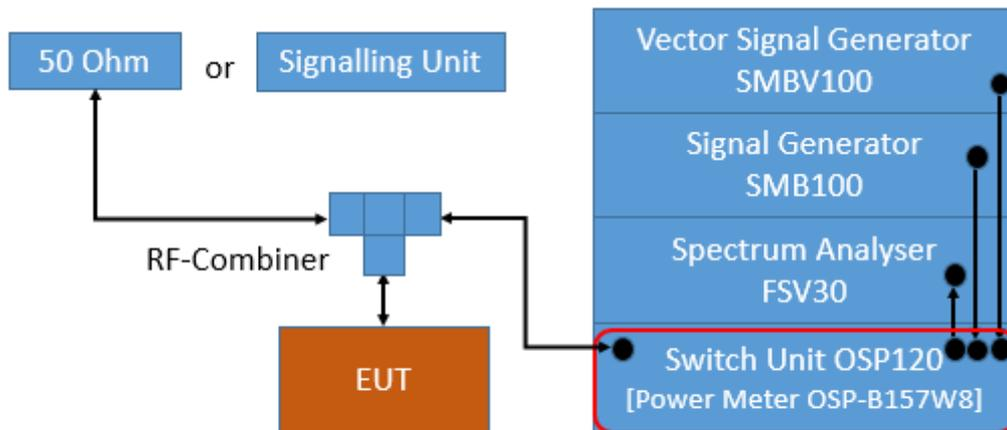

TS8997; Maximum Conducted Output Power

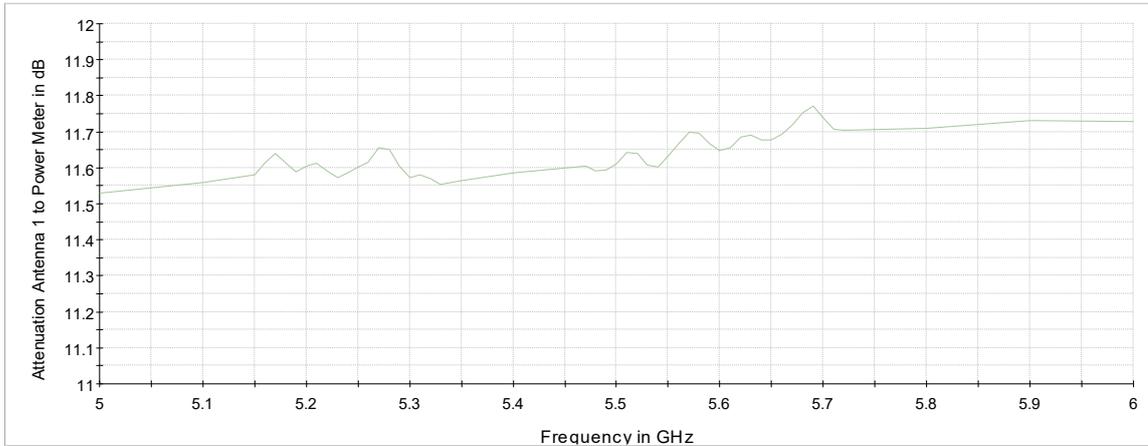

Attenuation of measurement path

For U-NII bands 5,6,7,8:

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyzer settings:


- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: at least 100
- Sweeptime: Auto
- Detector: RMS
- Trigger: free run (DC >98 %) or gated mode (DC < 98 %)

See worst case result plots for details

Note:

The measurement was performed according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

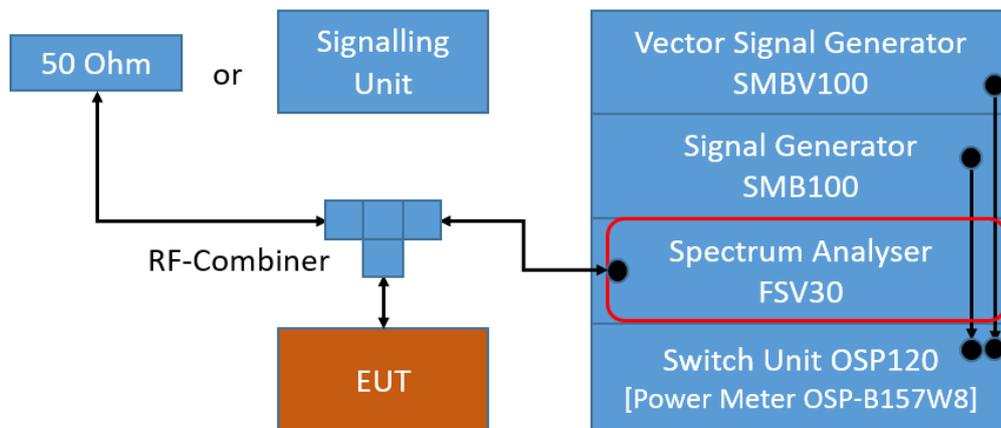

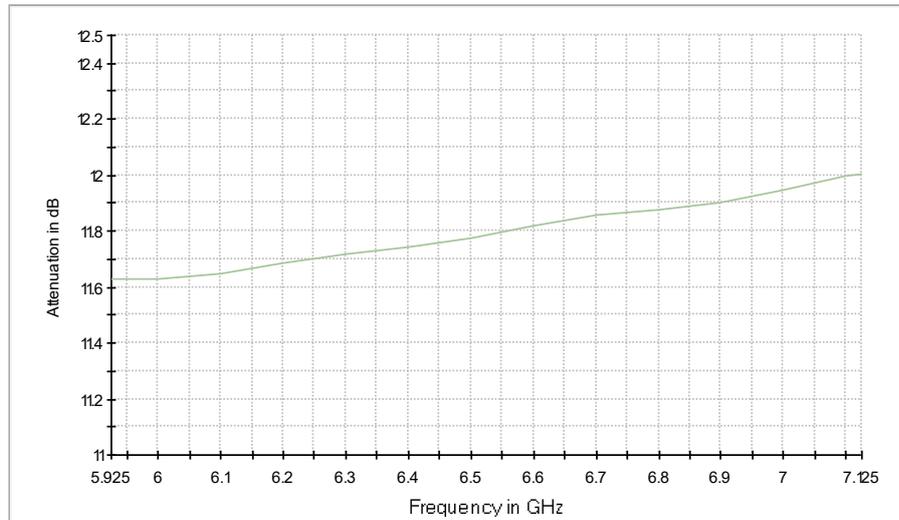

Attenuation of measurement path

5.2.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1) (i): Outdoor access point:

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iii): Fixed point-to-point access points:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 23 dBi.

§15.407 (a) (1) (iv): Client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 250 mW (24 dBm) or $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$ whatever is the lesser.

FCC Part 15, Subpart E, §15.407 (a) (3):

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi. The antenna gain limitation is not applicable for fixed point-to-point devices.

FCC Part 15, Subpart E, §15.407 (a) (4):

For a standard power access point and fixed client devices in the 5.925 – 6.425 GHz and 6.525 – 6.875 GHz bands:

Limit: 4 W (36 dBm) e.i.r.p.

For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

FCC Part 15, Subpart E, §15.407 (a) (5):

For an indoor access point in the 5.925 – 7.125 GHz bands:

Limit: 1 W (30 dBm)e.i.r.p.

FCC Part 15, Subpart E, §15.407 (a) (6):

For a subordinate device operating under an indoor access point in the 5.925 – 7.125 GHz bands:

Limit: 1 W (30 dBm)e.i.r.p.

FCC Part 15, Subpart E, §15.407 (a) (7):

For a client device, except for fixed client devices, operating under standard power access point in the 5.925-6.425 GHz and 6.525-6.875 GHz bands:

Limit: 1 W (30 dBm)e.i.r.p.

The client device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

FCC Part 15, Subpart E, §15.407 (a) (8):

For client devices operating under the control of an indoor access point in the 5.925 – 7.125 GHz bands:

Limit: 250 mW (24 dBm)e.i.r.p.

FCC Part 15, Subpart E, §15.407 (a) (11):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

All frequency bands: B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.1.1, Band 5150-5250 MHz, indoor operation only, except for OEM devices installed by vehicle manufacturers:

Limits:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW. (e.i.r.p.)

Other devices: 200 mW (23 dBm) or $10 + 10 \log_{10}B$ [dBm], whichever power is less.

RSS-247, 6.2.2.1, Band 5250-5350 MHz:

Limits:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other devices than installed in vehicles:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below:

- i. -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$
- ii. $-13 - 0.716 (\theta - 8)$ dBW/MHz for $8^\circ \leq \theta < 40^\circ$
- iii. $-35.9 - 1.22 (\theta - 40)$ dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$
- iv. -42 dBW/MHz for $\theta > 45^\circ$

RSS-247, 6.2.3.1, Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

Note: Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247, 6.2.4.1, Band 5725-5850 MHz:

Limits:

Maximum conducted Power: 1 W (30 dBm)

e.i.r.p.: 4 W (36 dBm)

5.2.3 TEST PROTOCOL

Ambient temperature: 23 - 26 °C
 Air Pressure: 980 - 1020 hPa
 Humidity: 30 - 40%

WLAN a-Mode; 20 MHz; 6 Mbit/s

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	16.7	18.7	30.0	13.3	N/A	-	22.2	3.5	1)
354		5200	18.2	20.2	30.0	11.8	N/A	-	22.2	2.0	1)
354		5240	18.1	20.1	30.0	11.9	N/A	-	22.2	2.1	1)
354	2A	5260	16.7	18.7	24.0	7.3	23.5	6.8	29.5	10.8	1)
354		5300	16.9	18.9	24.0	7.1	23.2	6.3	29.2	10.3	1)
354		5320	15.0	17.0	24.0	9.0	23.2	8.2	29.2	12.2	1)
354	2C	5500	13.1	15.1	24.0	10.9	23.2	10.1	29.2	14.1	
354		5580	17.0	19.0	24.0	7.0	23.2	6.2	29.2	10.2	
354		5700	14.9	16.9	23.9	9.0	23.2	8.3	29.2	12.3	
354	3	5745	16.8	18.8	30.0	13.2	30.0	13.2	36.0	17.2	
354		5785	17.0	19.0	30.0	13.0	30.0	13.0	36.0	17.0	
354		5825	16.3	18.3	30.0	13.7	30.0	13.7	36.0	17.7	

WLAN n-Mode; 20 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	13.1	15.1	30.0	16.9	N/A	-	22.5	7.4	1)
354		5200	16.1	18.1	30.0	13.9	N/A	-	22.5	4.4	1)
354		5240	16.5	18.5	30.0	13.5	N/A	-	22.5	4.0	1)
354	2A	5260	15.7	17.7	24.0	8.3	23.5	7.8	29.5	11.8	1)
354		5300	15.6	17.6	24.0	8.4	23.5	7.9	29.5	11.9	1)
354		5320	12.6	14.6	24.0	11.4	23.5	10.9	29.5	14.9	1)
354	2C	5500	13.1	15.1	24.0	10.9	23.5	10.4	29.5	14.4	
354		5580	15.9	17.9	24.0	8.1	23.5	7.6	29.5	11.6	
354		5700	14.5	16.5	24.0	9.5	23.5	9.0	29.5	13.0	
354	3	5745	16.6	18.6	30.0	13.4	30.0	13.4	36.0	17.4	
354		5785	16.2	18.2	30.0	13.8	30.0	13.8	36.0	17.8	
354		5825	15.4	17.4	30.0	14.6	30.0	14.6	36.0	18.6	

WLAN n-Mode; 40 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	12.2	14.2	30.0	17.8	N/A	-	23.0	8.8	1)
354		5230	15.5	17.5	30.0	14.5	N/A	-	23.0	5.5	1)
354	2A	5270	14.9	16.9	24.0	9.1	24.0	9.1	30.0	13.1	1)
354		5310	12.2	14.2	24.0	11.8	24.0	11.8	30.0	15.8	1)
354	2C	5510	10.5	12.5	24.0	13.5	24.0	13.5	30.0	17.5	
354		5550	14.7	16.7	24.0	9.3	24.0	9.3	30.0	13.3	
354		5670	15.0	17.0	24.0	9.0	24.0	9.0	30.0	13.0	
354	3	5755	14.9	16.9	30.0	15.1	30.0	15.1	36.0	19.1	
354		5795	14.9	16.9	30.0	15.1	30.0	15.1	36.0	19.1	

WLAN ac-Mode; 20 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	13.1	15.1	30.0	16.9	N/A	-	22.5	7.4	1)
354		5200	16.5	18.5	30.0	13.5	N/A	-	22.5	4.0	1)
354		5240	16.4	18.4	30.0	13.6	N/A	-	22.5	4.1	1)
354	2A	5260	16.1	18.1	24.0	7.9	23.5	7.4	29.5	11.4	1)
354		5300	16.0	18.0	24.0	8.0	23.5	7.5	29.5	11.5	1)
354		5320	13.0	15.0	24.0	11.0	23.5	10.5	29.5	14.5	1)
354	2C	5500	13.1	15.1	24.0	10.9	23.5	10.4	29.5	14.4	
354		5580	15.9	17.9	24.0	8.1	23.5	7.6	29.5	11.6	
354		5700	14.8	16.8	24.0	9.2	23.5	8.7	29.5	12.7	
354	3	5745	16.0	18.0	30.0	14.0	30.0	14.0	36.0	18.0	
354		5785	15.5	17.5	30.0	14.5	30.0	14.5	36.0	18.5	
354		5825	15.4	17.4	30.0	14.6	30.0	14.6	36.0	18.6	

WLAN ac-Mode; 40 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	13.7	15.7	30.0	16.3	N/A	-	23.0	7.3	1)
354		5230	17.0	19.0	30.0	13.0	N/A	-	23.0	4.0	1)
354	2A	5270	16.6	18.6	24.0	7.4	24.0	7.4	30.0	11.4	1)
354		5310	13.7	15.7	24.0	10.3	24.0	10.3	30.0	14.3	1)
354	2C	5510	12.2	14.2	24.0	11.8	24.0	11.8	30.0	15.8	
354		5550	15.9	17.9	24.0	8.1	24.0	8.1	30.0	12.1	
354		5670	15.3	17.3	24.0	8.7	24.0	8.7	30.0	12.7	
354	3	5755	15.7	17.7	30.0	14.3	30.0	14.3	36.0	18.3	
354		5795	13.7	15.7	30.0	16.3	N/A		23.0	7.3	

WLAN ac-Mode; 80 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5210	13.2	15.2	30.0	16.8	N/A	-	23.0	7.8	1)
354	2A	5290	12.9	14.9	24.0	11.1	24.0	11.1	30.0	15.1	1)
354	2C	5530	12.8	14.8	24.0	11.2	24.0	11.2	30.0	15.2	
354		5690	16.3	18.3	24.0	7.7	24.0	7.7	30.0	11.7	
354	3	5775	15.7	17.7	30.0	14.3	30.0	14.3	36.0	18.3	

WLAN ax-Mode; 20 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	13.1	15.1	30.0	16.9	N/A	-	22.8	7.7	1)
354		5200	14.8	16.8	30.0	15.2	N/A	-	22.7	5.9	1)
354		5240	14.8	16.8	30.0	15.2	N/A	-	22.8	6.0	1)
354	2A	5260	14.4	16.4	24.0	9.6	23.7	9.3	29.7	13.3	1)
354		5300	14.5	16.5	24.0	9.5	23.7	9.2	29.7	13.2	1)
354		5320	13.3	15.3	24.0	10.7	23.8	10.5	29.8	14.5	1)
354	2C	5500	12.2	14.2	24.0	11.8	23.7	11.5	29.7	15.5	
354		5580	15.5	17.5	24.0	8.5	23.7	8.2	29.7	12.2	
354		5700	14.7	16.7	24.0	9.3	23.7	9.0	29.7	13.0	
354	3	5745	14.9	16.9	30.0	15.1	30.0	15.1	36.0	19.1	
354		5785	14.5	16.5	30.0	15.5	30.0	15.5	36.0	19.5	
354		5825	13.7	15.7	30.0	16.3	30.0	16.3	36.0	20.3	

WLAN ax-Mode; 40 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	14.1	16.1	30.0	15.9	N/A	-	23.0	6.9	1)
354		5230	15.9	17.9	30.0	14.1	N/A	-	23.0	5.1	1)
354	2A	5270	16.0	18.0	24.0	8.0	24.0	8.0	30.0	12.0	1)
354		5310	13.6	15.6	24.0	10.4	24.0	10.4	30.0	14.4	1)
354	2C	5510	12.7	14.7	24.0	11.3	24.0	11.3	30.0	15.3	
354		5550	15.6	17.6	24.0	8.4	24.0	8.4	30.0	12.4	
354		5670	15.2	17.2	24.0	8.8	24.0	8.8	30.0	12.8	
354	3	5755	14.6	16.6	30.0	15.4	30.0	15.4	36.0	19.4	
354		5795	14.2	16.2	30.0	15.8	30.0	15.8	36.0	19.8	

WLAN ax-Mode; 80 MHz; MCS0; SISO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5210	13.5	15.5	30.0	16.5	N/A		23.0	7.5	1)
354	2A	5290	13.2	15.2	24.0	10.8	24.0	10.8	30.0	14.8	1)
354	2C	5530	12.8	14.8	24.0	11.2	24.0	11.2	30.0	15.2	
354		5690	15.7	17.7	24.0	8.3	24.0	8.3	30.0	12.3	
354	3	5775	14.5	16.5	30.0	15.5	30.0	15.5	36.0	19.5	

WLAN n-Mode; 20 MHz; MCS8; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	17.3	19.3	30.0	12.7	N/A	-	22.5	3.2	1)
354		5200	18.7	20.7	30.0	11.3	N/A	-	22.5	1.8	1)
354		5240	18.8	20.8	30.0	11.2	N/A	-	22.5	1.7	1)
354	2A	5260	20.7	22.7	24.0	3.3	23.5	2.8	29.5	6.8	1)
354		5300	20.4	22.4	24.0	3.6	23.5	3.1	29.5	7.1	1)
354		5320	17.7	19.7	24.0	6.3	23.5	5.8	29.5	9.8	1)
354	2C	5500	17.1	19.1	24.0	6.9	23.5	6.4	29.5	10.4	
354		5580	20.0	22.0	24.0	4.0	23.5	3.5	29.5	7.5	
354		5700	17.0	19.0	24.0	7.0	23.5	6.5	29.5	10.5	
354	3	5745	19.6	21.6	30.0	10.4	30.0	10.4	36.0	14.4	
354		5785	19.2	21.2	30.0	10.8	30.0	10.8	36.0	14.8	
354		5825	18.3	20.3	30.0	11.7	30.0	11.7	36.0	15.7	

WLAN n-Mode; 40 MHz; MCS8; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	15.8	17.8	30.0	14.2	N/A		23.0	5.2	1)
354		5230	19.1	21.1	30.0	10.9	N/A		23.0	1.9	1)
354	2A	5270	19.7	21.7	24.0	4.3	24.0	8.2	30.0	8.3	1)
354		5310	15.9	17.9	24.0	8.1	24.0	4.3	30.0	12.1	1)
354	2C	5510	14.5	16.5	24.0	9.5	24.0	8.1	30.0	13.5	
354		5550	18.3	20.3	24.0	5.7	24.0	9.5	30.0	9.7	
354		5670	18.2	20.2	24.0	5.8	24.0	5.7	30.0	9.8	
354	3	5755	18.3	20.3	30.0	11.7	30.0	11.8	36.0	15.7	
354		5795	17.8	19.8	30.0	12.2	30.0	11.7	36.0	16.2	

WLAN ac-Mode; 20 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	17.7	19.7	30.0	12.3	N/A		22.5	2.8	1)
354		5200	19.1	21.1	30.0	10.9	N/A		22.5	1.4	1)
354		5240	18.8	20.8	30.0	11.2	N/A		22.5	1.7	1)
354	2A	5260	20.7	22.7	24.0	3.3	23.5	2.8	29.5	6.8	1)
354		5300	20.8	22.8	24.0	3.2	23.5	2.7	29.5	6.7	1)
354		5320	17.3	19.3	24.0	6.7	23.5	6.2	29.5	10.2	1)
354	2C	5500	17.1	19.1	24.0	6.9	23.5	6.4	29.5	10.4	
354		5580	20.4	22.4	24.0	3.6	23.5	3.1	29.5	7.1	
354		5700	17.0	19.0	24.0	7.0	23.5	6.5	29.5	10.5	
354	3	5745	19.1	21.1	30.0	10.9	30.0	10.9	36.0	14.9	
354		5785	18.8	20.8	30.0	11.2	30.0	11.2	36.0	15.2	
354		5825	18.9	20.9	30.0	11.1	30.0	11.1	36.0	15.1	

WLAN ac-Mode; 40 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	16.0	18.0	30.0	14.0	N/A	-	23.0	5.0	1)
354		5230	19.1	21.1	30.0	10.9	N/A	-	23.0	1.9	1)
354	2A	5270	19.6	21.6	24.0	4.4	24.0	8.0	30.0	8.4	1)
354		5310	15.9	17.9	24.0	8.1	24.0	4.4	30.0	12.1	1)
354	2C	5510	14.2	16.2	24.0	9.8	24.0	8.1	30.0	13.8	
354		5550	19.3	21.3	24.0	4.7	24.0	9.8	30.0	8.7	
354		5670	17.7	19.7	24.0	6.3	24.0	4.7	30.0	10.3	
354	3	5755	18.6	20.6	30.0	11.4	30.0	12.3	36.0	15.4	
354		5795	18.2	20.2	30.0	11.8	30.0	11.4	36.0	15.8	

WLAN ac-Mode; 80 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5210	15.5	17.5	30.0	14.5	N/A	-	23.0	5.5	1)
354	2A	5290	15.1	17.1	24.0	8.9	24.0	8.9	30.0	12.9	1)
354	2C	5530	14.9	16.9	24.0	9.1	24.0	9.1	30.0	13.1	
354		5690	18.0	20.0	24.0	6.0	24.0	6.0	30.0	10.0	
354	3	5775	17.5	19.5	30.0	12.5	30.0	12.5	36.0	16.5	

WLAN ax-Mode; 20 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5180	18.0	20.0	30.0	12.0	N/A	-	22.8	2.8	1)
354		5200	18.0	20.0	30.0	12.0	N/A	-	22.7	2.7	1)
354		5240	18.5	20.5	30.0	11.5	N/A	-	22.8	2.3	1)
354	2A	5260	18.8	20.8	24.0	5.2	23.7	4.9	29.7	8.9	1)
354		5300	19.0	21.0	24.0	5.0	23.7	4.7	29.7	8.7	1)
354		5320	18.0	20.0	24.0	6.0	23.7	5.7	29.8	9.8	1)
354	2C	5500	16.9	18.9	24.0	7.1	23.7	6.8	29.7	10.8	
354		5580	18.4	20.4	24.0	5.6	23.7	5.3	29.7	9.3	
354		5700	17.0	19.0	24.0	7.0	23.7	6.7	29.7	10.7	
354	3	5745	18.1	20.1	30.0	11.9	30.0	11.9	36.0	15.9	
354		5785	17.1	19.1	30.0	12.9	30.0	12.9	36.0	16.9	
354		5825	16.7	18.7	30.0	13.3	30.0	13.3	36.0	17.3	

WLAN ax-Mode; 40 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5190	16.3	18.3	30.0	13.7	N/A	-	23.0	4.7	1)
354		5230	18.4	20.4	30.0	11.6	N/A	-	23.0	2.6	1)
354	2A	5270	19.6	21.6	24.0	4.4	24.0	7.7	30.0	8.4	1)
354		5310	16.3	18.3	24.0	7.7	24.0	4.4	30.0	11.7	1)
354	2C	5510	14.5	16.5	24.0	9.5	24.0	7.7	30.0	13.5	
354		5550	18.4	20.4	24.0	5.6	24.0	9.5	30.0	9.6	
354		5670	18.4	20.4	24.0	5.6	24.0	5.6	30.0	9.6	
354	3	5755	17.6	19.6	30.0	12.4	30.0	11.6	36.0	16.4	
354		5795	17.4	19.4	30.0	12.6	30.0	12.4	36.0	16.6	

WLAN ax-Mode; 80 MHz; MCS0; MIMO

Variant	U-NII-Subband	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
354	1	5210	15.4	17.4	30.0	14.6	N/A		23.0	5.6	1)
354	2A	5290	15.0	17.0	24.0	9.0	24.0	9.0	30.0	13.0	1)
354	2C	5530	14.8	16.8	24.0	9.2	24.0	9.2	30.0	13.2	
354		5690	19.1	21.1	24.0	4.9	24.0	4.9	30.0	8.9	
354	3	5775	18.4	20.4	30.0	11.6	30.0	11.6	36.0	15.6	

Remark: 1) = no additional limit applies related to the elevation.
Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Power Meter Measurement, no plots provided.

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.3.1 TEST DESCRIPTION

Radiated Measurement with 50 Ohm termination at antenna ports

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

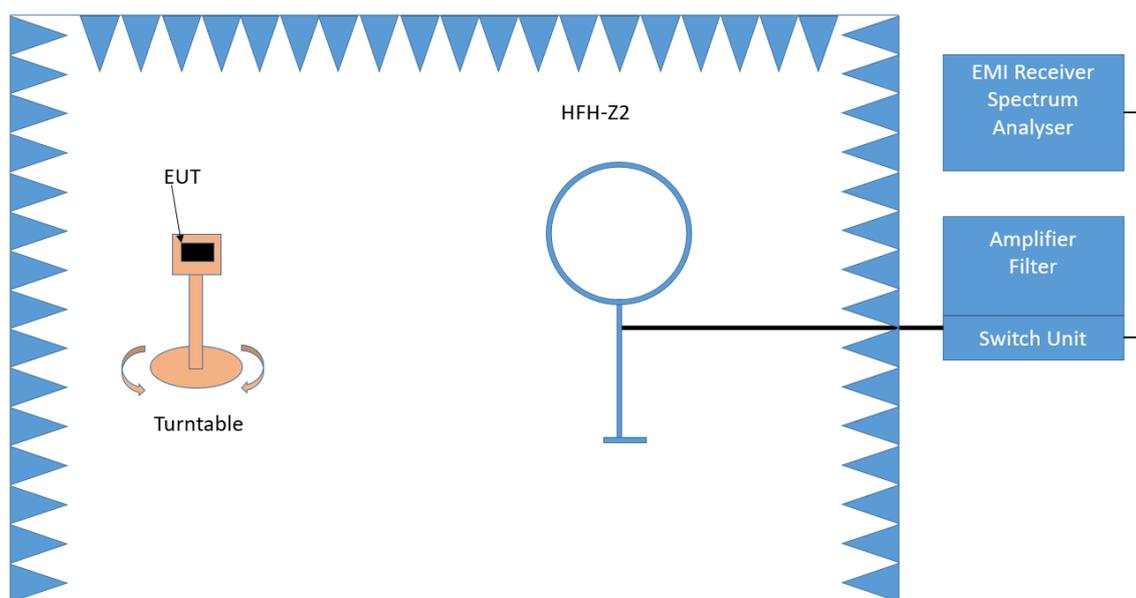

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

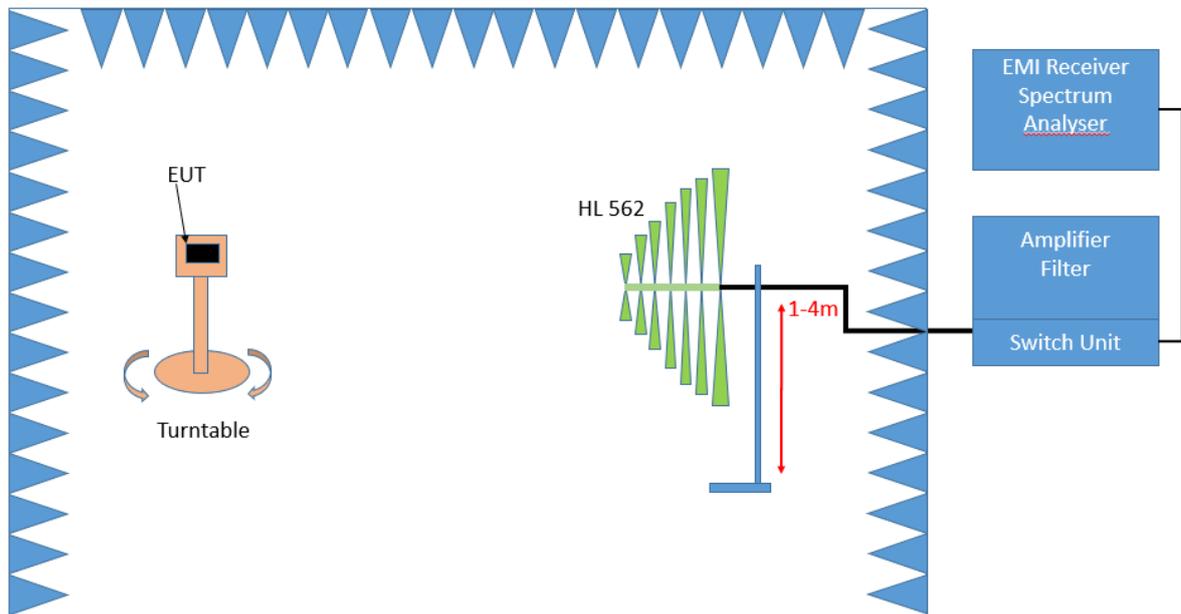

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°

- Turntable step size: 90°
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360°. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360 °
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement 1 GHz up to 26.5 GHz

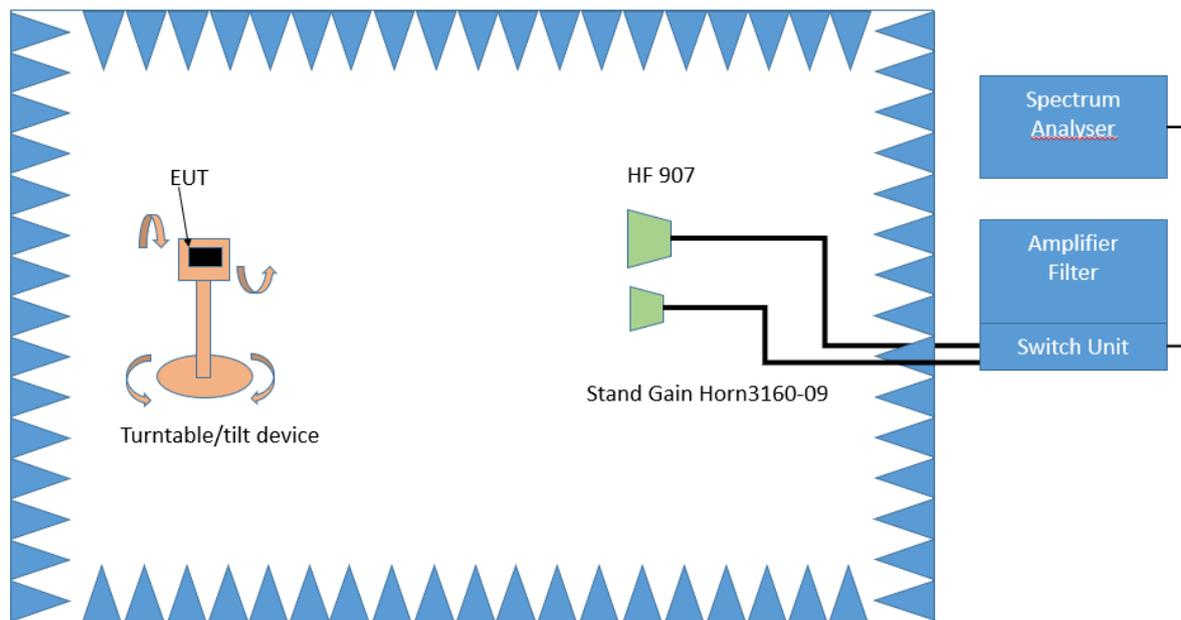

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:


Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

4. Measurement above 26.5 GHz up to 40 GHz

The following modifications, compared to the frequency range 1 GHz – 26.5 GHz, apply to the measurement procedure for the frequency range above 26.5 GHz:

- Measurement distance: 1m

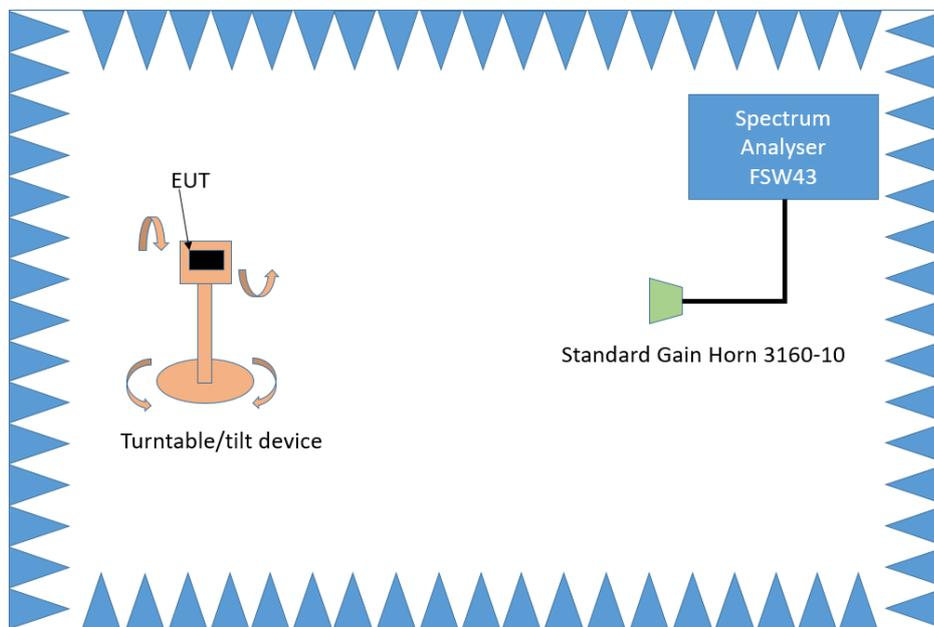



Test Setup; Spurious Emission Radiated (FAC), 26.5 – 40 GHz

Conducted Measurements at antenna ports

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

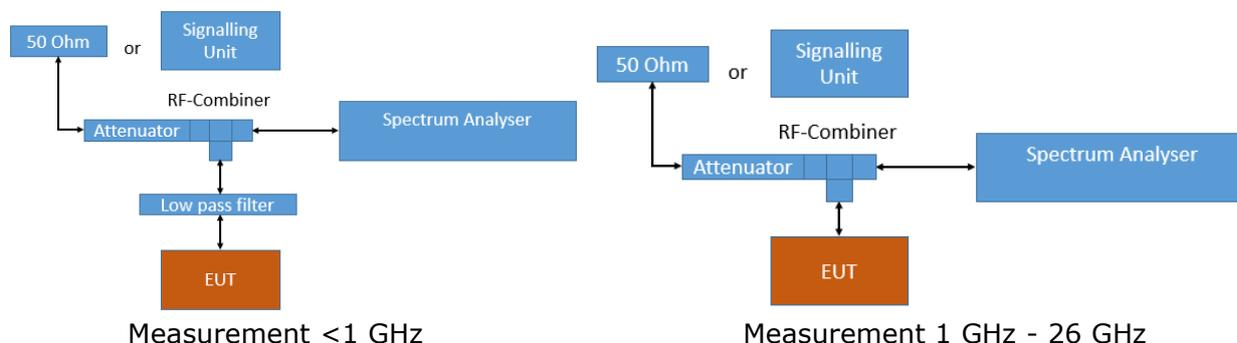

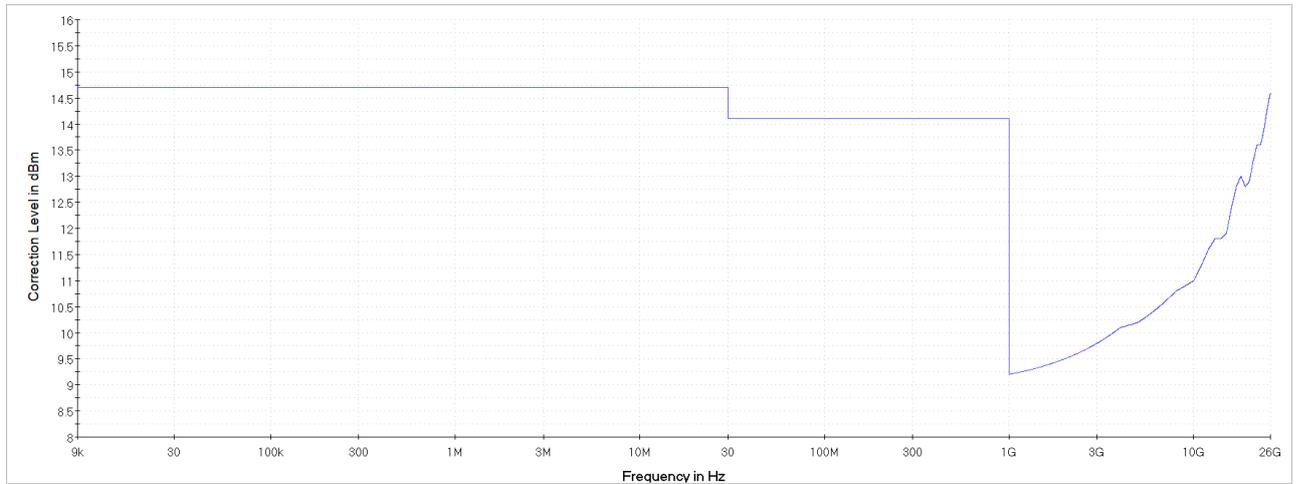

Measurement 26 GHz - 40 GHz

Analyser settings:

- Frequency range: 0.009 – 30 MHz
- Resolution Bandwidth (RBW): 10 kHz
- Video Bandwidth (VBW): 30 kHz
- Trace: Maxhold
- Sweeps: till stable
- Sweep Time: coupled
- Detector: Peak

- Frequency range: 30 – 1000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: till stable
- Sweep Time: coupled
- Detector: Peak

- Frequency range: 1000 – 26000 MHz
- Resolution Bandwidth (RBW): 1000 kHz
- Video Bandwidth (VBW): 3000 kHz
- Trace: Maxhold, Average Power
- Sweeps: 500
- Sweep Time: coupled
- Detector: Peak, RMS

- Frequency range: 26000 – 40000 MHz
- Resolution Bandwidth (RBW): 1000 kHz
- Video Bandwidth (VBW): 3000 kHz
- Trace: Maxhold, Average Power
- Sweeps: 1000
- Sweep Time: coupled
- Detector: Peak, RMS

For the conducted emissions in restricted bands the Value is measured in dBm and then converted to dB μ V/m as given in KDB 789033:

1. Measure the conducted output power in dBm.
2. Add the maximum antenna gain in dBi. (Included in measurement result by offset)
3. Add the appropriate ground reflection factor (included in measurement result by transducer factor)
 - 6 dB for frequencies \leq 30 MHz;
 - 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and
 - 0 dB for frequencies $>$ 1000 MHz).
4. Convert the resultant EIRP level to an equivalent electric field strength level using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$
 Where E is the electric field strength in dB μ V/m,
 EIRP is the equivalent isotropically radiated power in dBm
 D is the specified measurement distance in m

Value [dB μ V/m] = Measured value [dBm] (including gain and ground reflection factor) – 20 log D + 104.8

5.3.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)
 For transmitters operating in the 5150–5250 MHz band:
 Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)
 For transmitters operating in the 5250–5350 MHz band:
 Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)
 For transmitters operating in the 5470–5725 MHz band:
 Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)
 For transmitters operating in the 5725–5850 MHz band:
 Limit: –27 dBm/MHz at 75 MHz or more above or below the band edge
 increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge
 increasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edge
 increasing linearly to 27 dBm/MHz at the band edge.

FCC Part 15 Subpart E, §15.407 (b) (5)
 For transmitters operating within the 5.925-7.125 GHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5.925-7.125 GHz.

FCC Part 15 Subpart E, §15.407 (b) (6)

For transmitters operating within the 5.925-7.125 GHz bands:

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: -27 dBm/MHz EIRP outside of the band 5150-5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250-5350 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5250-5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.

However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725-5850 MHz:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables):

RB – Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 *)

UE – "Undesirable Emission Limit" according FCC §15.407

BE-RB – Band Edge Limit basing on "Restricted Band Limits"

BE-UE – Band Edge Limit basing on "Undesirable Emission Limit"

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

5.3.3 TEST PROTOCOL


Ambient temperature: 24–30 °C
 Air Pressure: 990–1026 hPa
 Humidity: 30–40 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Variant / Test Method	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
354 / Radiated	5180	20720.0	58.4	PEAK	1000.0	74.0	15.6	RB
354 / Radiated	5180	20720.0	53.1	AV	1000.0	54.0	0.9	RB
354 / Radiated	5200	10400.4	57.3	PEAK	1000.0	68.2	10.9	UE
354 / Radiated	5200	10400.4	43.3	AV	1000.0	43.3	12.2	UE
354 / Radiated	5200	15597.5	54.5	PEAK	1000.0	74.0	19.5	RB
354 / Radiated	5200	15597.5	41.8	AV	1000.0	54.0	12.2	RB
354 / Radiated	5200	20799.9	59.4	PEAK	1000.0	74.0	14.6	RB
354 / Radiated	5200	20799.9	53.3	AV	1000.0	54.0	0.7	RB
354 / Conducted	5200	-	---	---	---	---	---	---
354 / Radiated	5240	20959.9	59.5	PEAK	1000.0	74.0	14.5	RB
354 / Radiated	5240	20959.9	53.9	AV	1000.0	54.0	0.1	RB
354 / Radiated	5260	10526.4	56.6	PEAK	1000.0	68.2	11.6	UE
354 / Radiated	5260	21039.9	59.5	PEAK	1000.0	74.0	14.5	RB
354 / Radiated	5260	21039.9	53.0	AV	1000.0	54.0	1.0	RB
354 / Radiated	5300	10600.4	60.1	PEAK	1000.0	74.0	13.9	RB
354 / Radiated	5300	10600.4	46.8	AV	1000.0	54.0	7.2	RB
354 / Radiated	5300	21200.1	59.1	PEAK	1000.0	74.0	14.9	RB
354 / Radiated	5300	21200.1	50.8	AV	1000.0	54.0	3.2	RB
354 / Conducted	5300	-	---	---	---	---	---	---
354 / Radiated	5320	10638.9	57.1	PEAK	1000.0	74.0	16.9	RB
354 / Radiated	5320	10638.9	44.4	AV	1000.0	54.0	9.6	RB
354 / Radiated	5320	21280.0	57.9	PEAK	1000.0	74.0	16.1	RB
354 / Radiated	5320	21280.0	51.7	AV	1000.0	54.0	2.3	RB
354 / Radiated	5500	22000.0	57.9	PEAK	1000.0	68.2	10.3	UE
354 / Radiated	5580	-	---	---	---	---	---	---
354 / Conducted	5580	-	---	---	---	---	---	---
354 / Radiated	5700	11399.8	55.6	PEAK	1000.0	74.0	18.4	RB
354 / Radiated	5700	11399.8	52.2	AV	1000.0	54.0	1.8	RB
354 / Radiated	5700	11399.9	55.8	PEAK	1000.0	74.0	18.2	RB
354 / Radiated	5700	11399.9	52.6	AV	1000.0	54.0	1.4	RB
354 / Radiated	5700	22800.0	56.6	PEAK	1000.0	74.0	17.4	RB
354 / Radiated	5700	22800.0	51.1	AV	1000.0	54.0	2.9	RB
354 / Conducted	5700	-	---	---	---	---	---	---
354 / Radiated	5745	11490.4	53.0	PEAK	1000.0	74.0	21.0	RB
354 / Radiated	5745	11490.4	39.6	AV	1000.0	54.0	14.4	RB
354 / Radiated	5745	22980.0	57.3	PEAK	1000.0	74.0	2.5	RB
354 / Radiated	5745	22980.0	51.5	AV	1000.0	54.0	16.7	RB
354 / Radiated	5785	11569.7	54.3	PEAK	1000.0	74.0	19.7	RB
354 / Radiated	5785	11569.7	41.0	AV	1000.0	54.0	13.0	RB
354 / Conducted	5785	-	---	---	---	---	---	---
354 / Radiated	5825	11649.7	59.0	PEAK	1000.0	74.0	15.0	RB
354 / Radiated	5825	11649.7	45.7	AV	1000.0	54.0	8.3	RB


Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = low, Measurement range = 9kHz - 30MHz, Subband = U-NII-1 (S02_354_AB01)

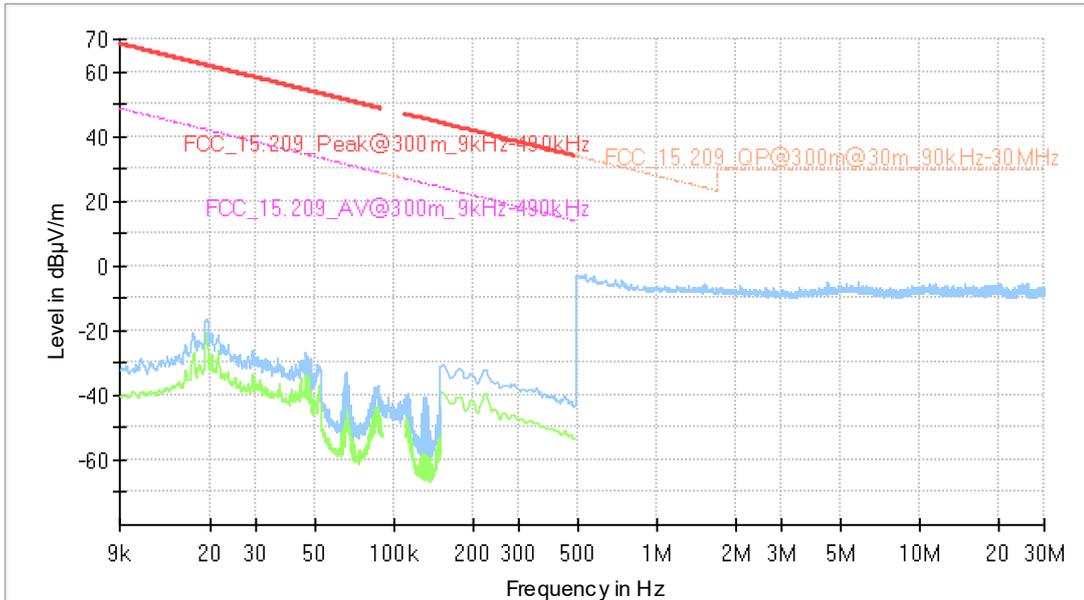


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 9kHz - 30MHz, Subband = U-NII-1 (S01_354_AA01)
Antenna A

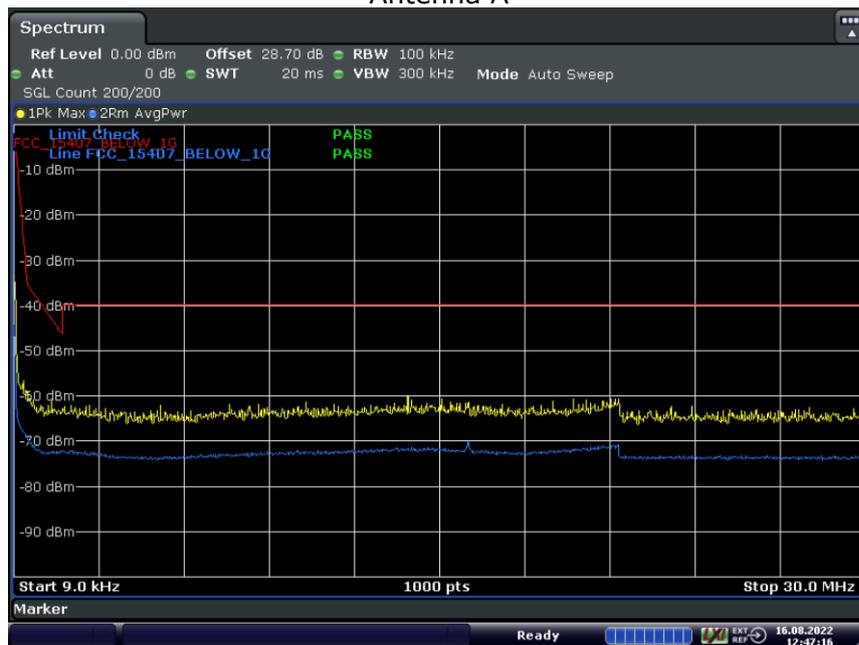


Date: 16.AUG.2022 12:47:17

Antenna B

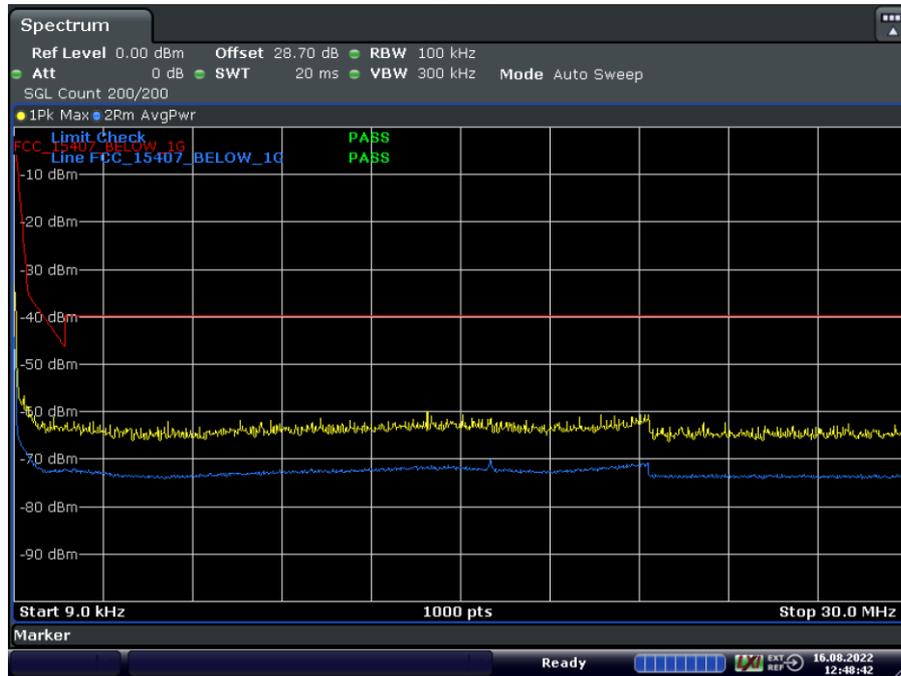


Date: 16 AUG.2022 12:48:42

Radio Technology = WLAN a, Operating Frequency = high, Measurement range = 9kHz - 30MHz, Subband = U-NII-2C (S02_354_AB01)

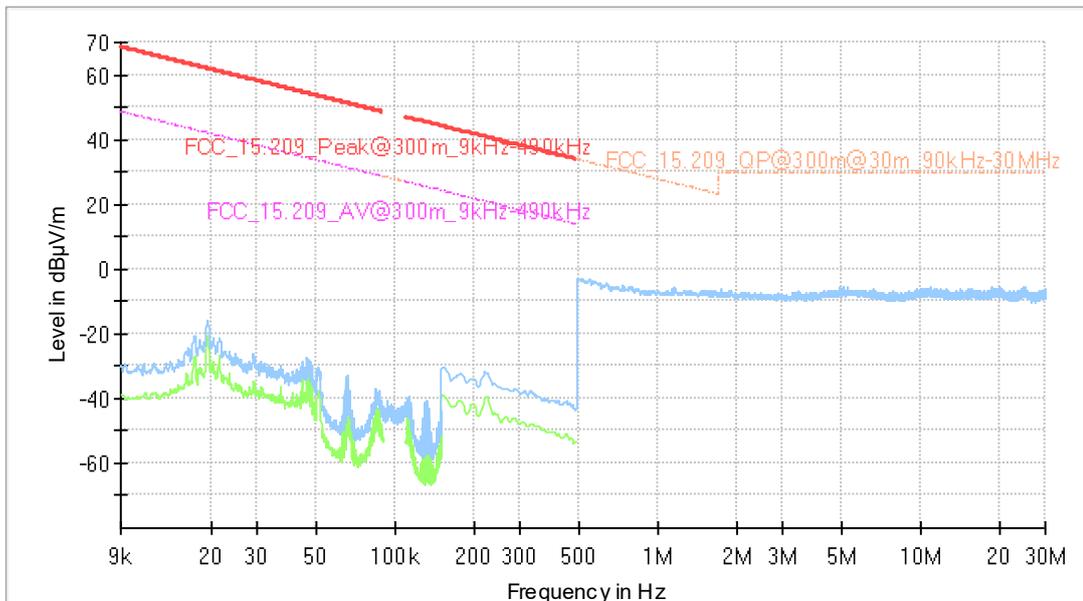


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 9kHz - 30MHz, Subband = U-NII-3 (S01_354_AA01)
Antenna A

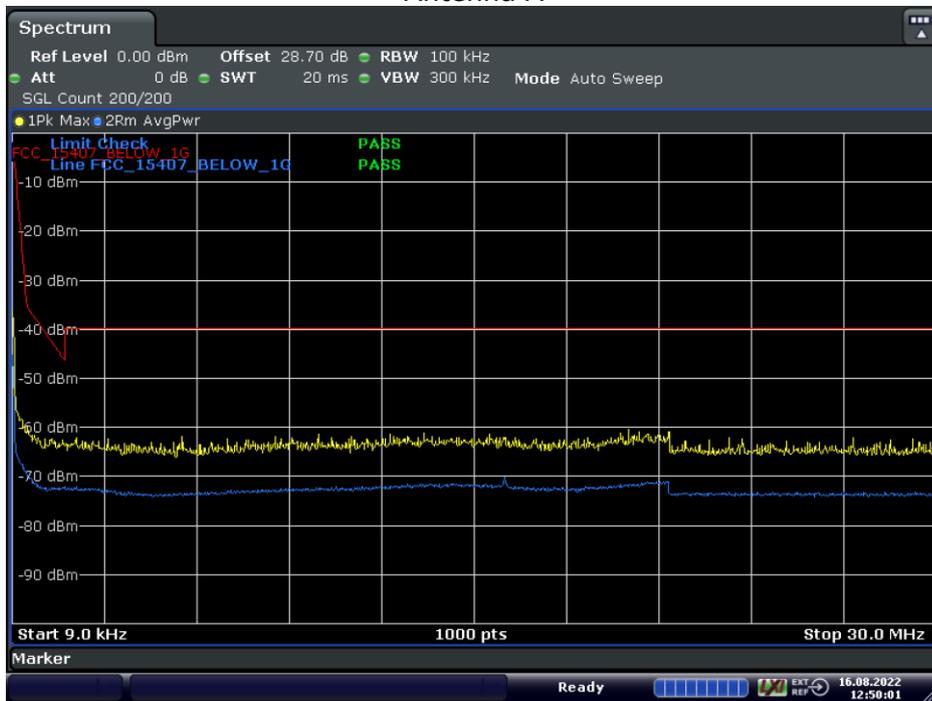


Date: 16.AUG.2022 12:50:01

Antenna B

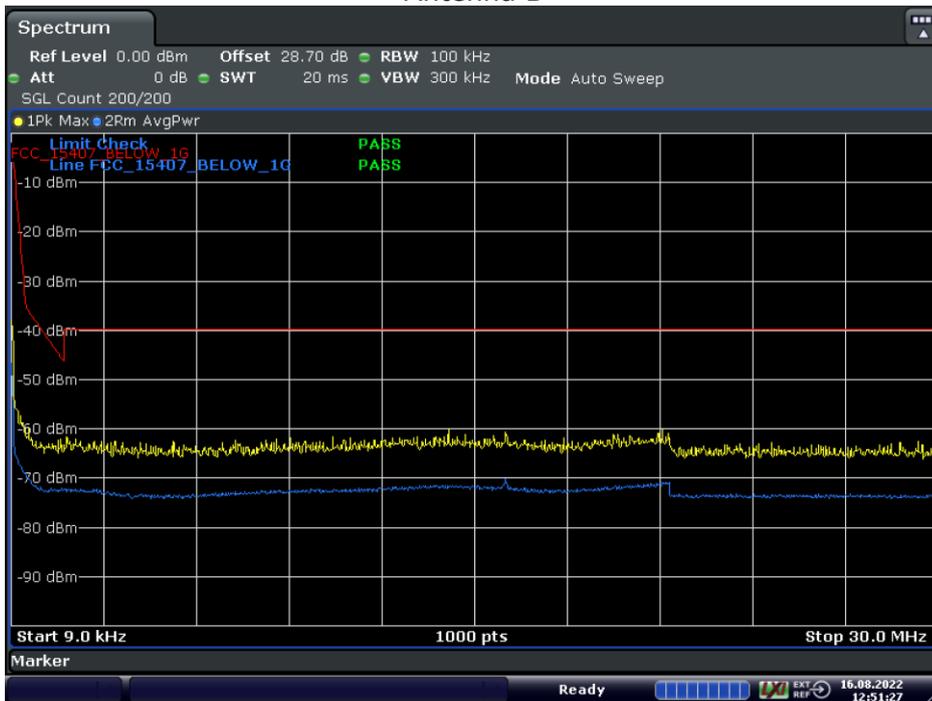


Date: 16.AUG.2022 12:51:28

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-1 (S02_354_AB01)

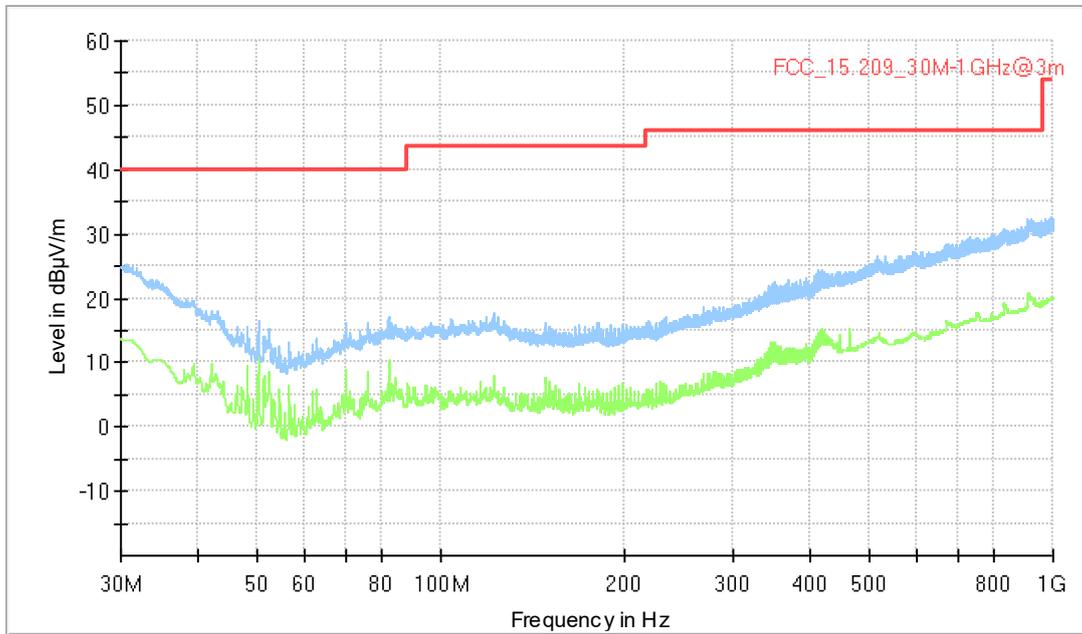


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-1 (S01_354_AA01) Antenna A

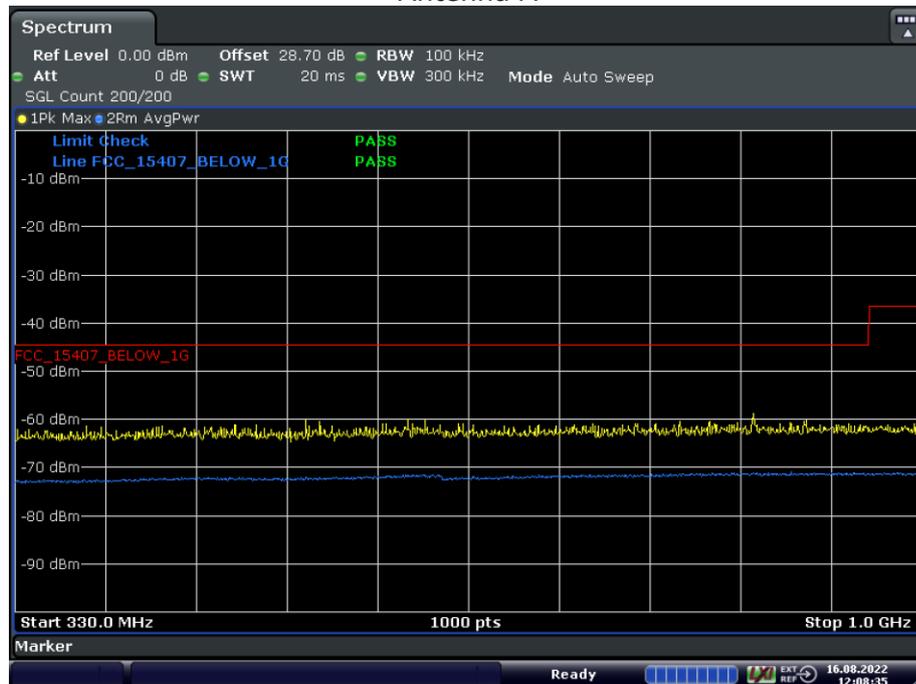


Date: 16.AUG.2022 12:08:36

Antenna B

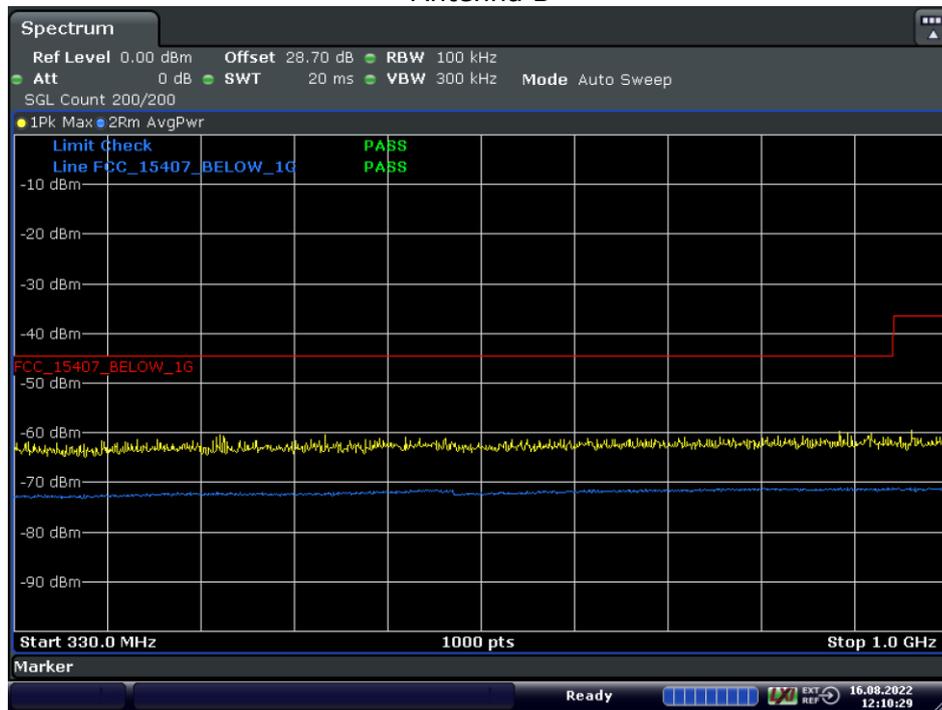


Date: 16.AUG.2022 12:10:29

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz – 1GHz, Subband = U-NII-2A (S02_354_AB01)

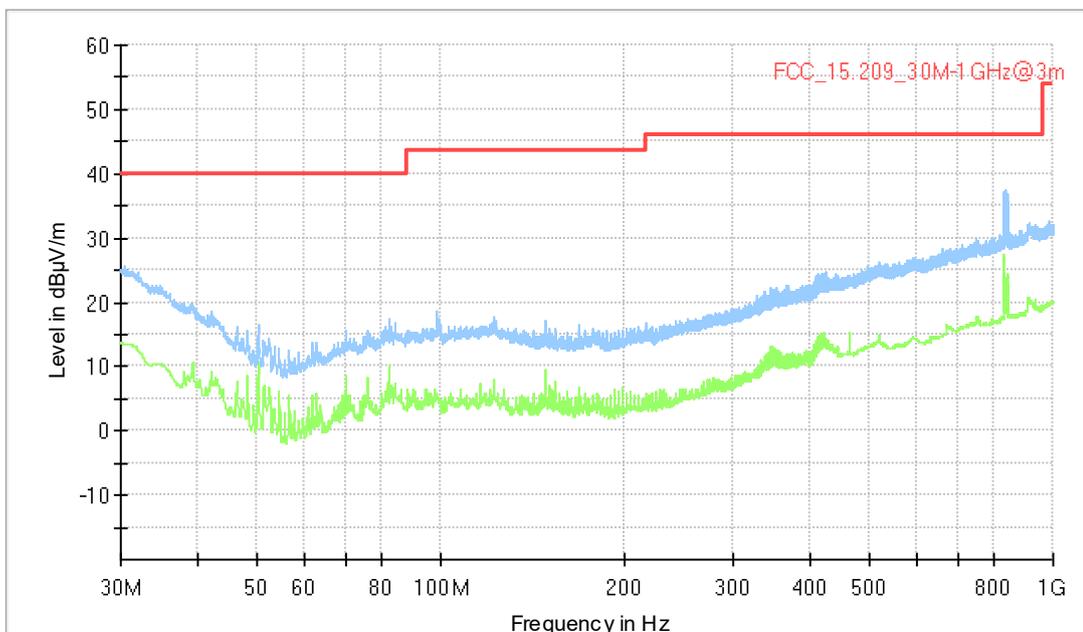


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-2A (S01_354_AA01)
Antenna A

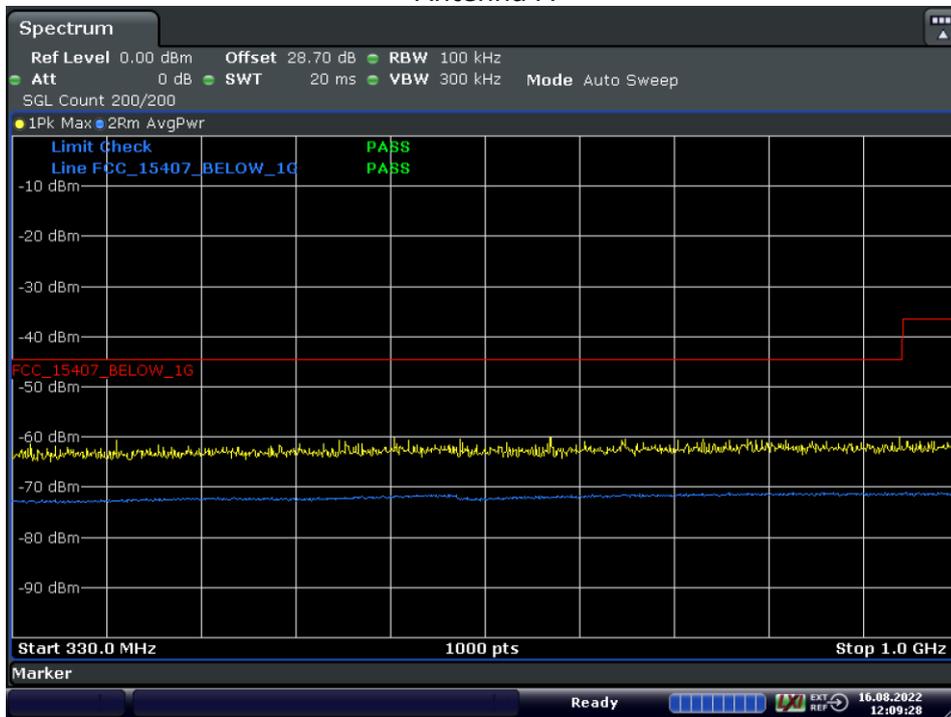


Date: 16.AUG.2022 12:09:28

Antenna B

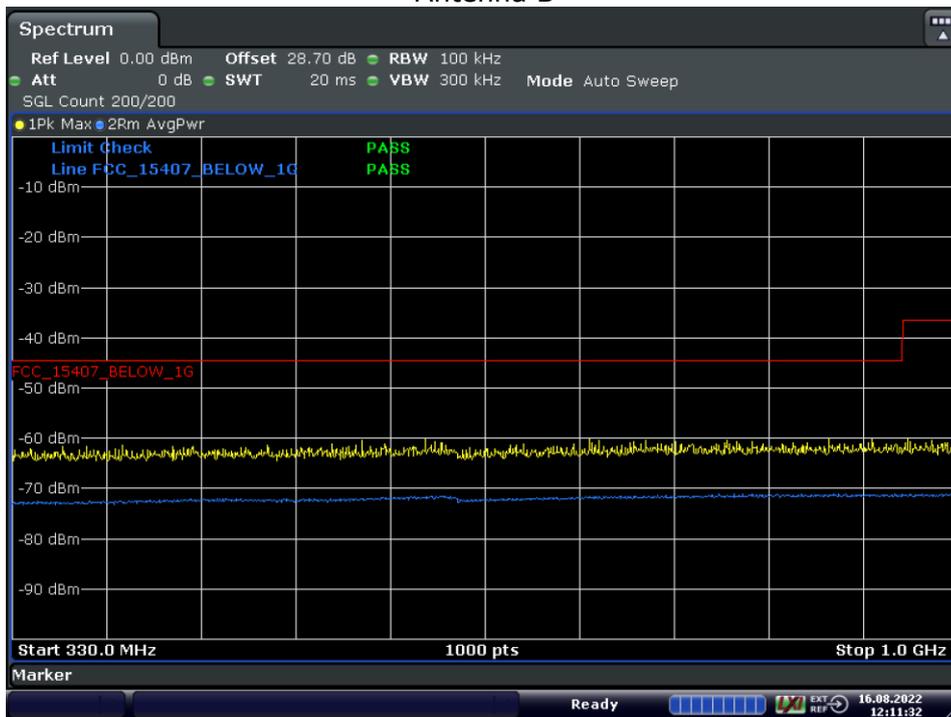


Date: 16.AUG.2022 12:11:32

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-2C (S02_354_AB01)

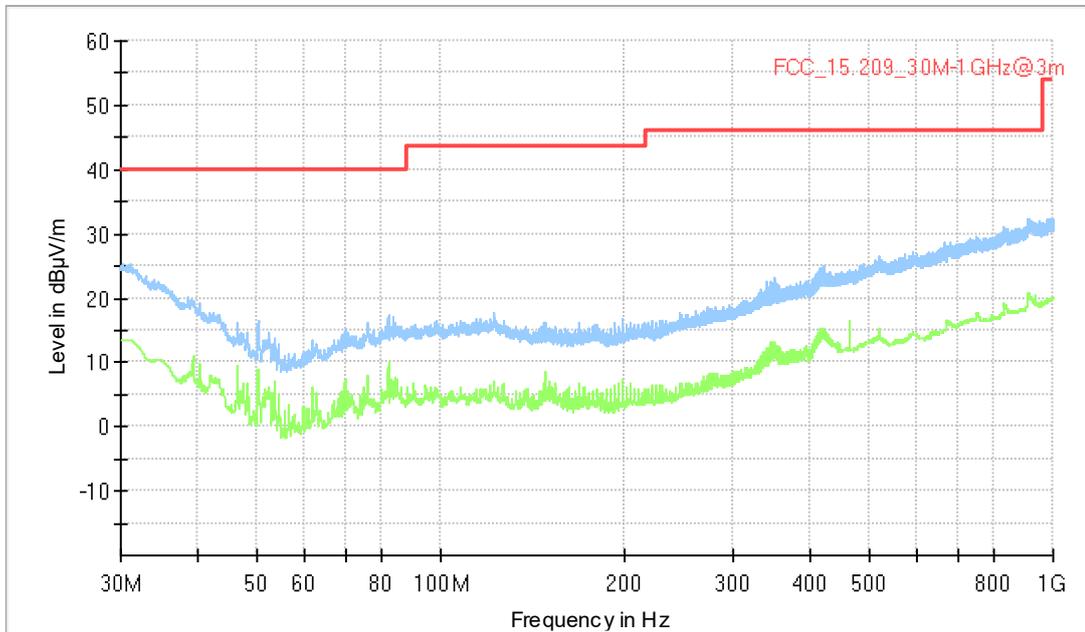


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-2C (S01_354_AA01)
Antenna A

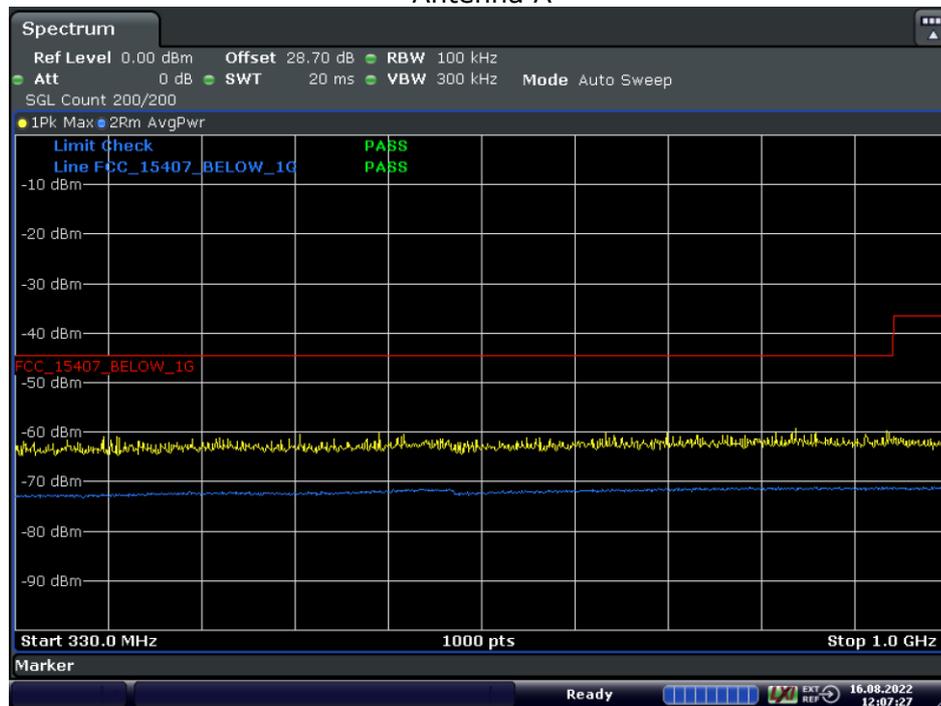


Date: 16.AUG.2022 12:07:27

Antenna B

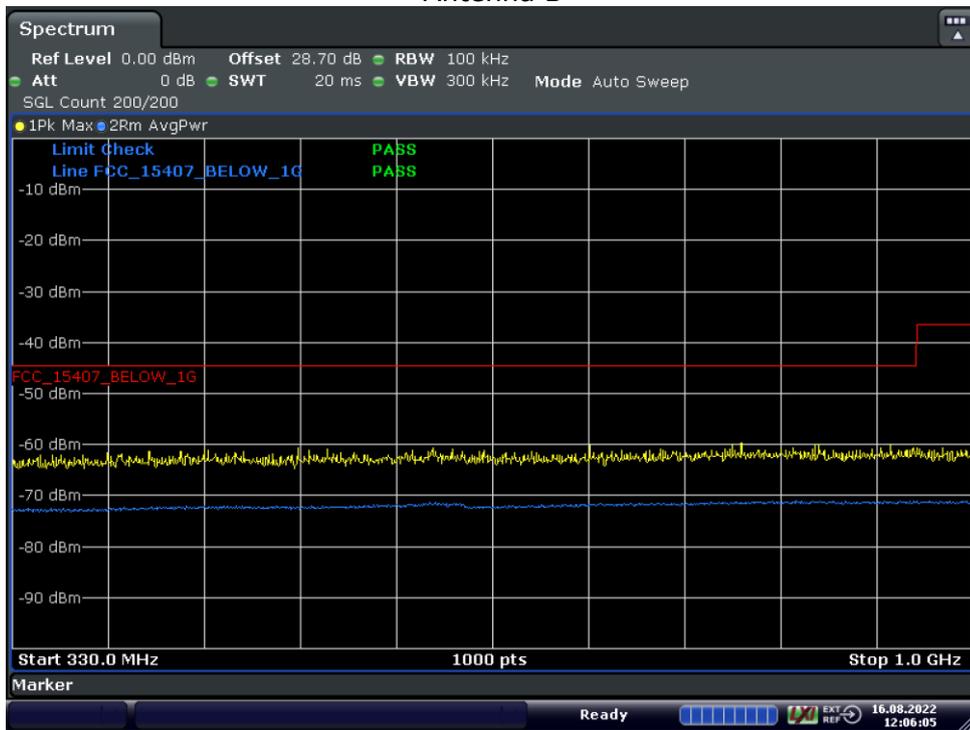


Date: 16.AUG.2022 12:06:05

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz – 1GHz, Subband = U-NII-3 (S02_354_AB01)

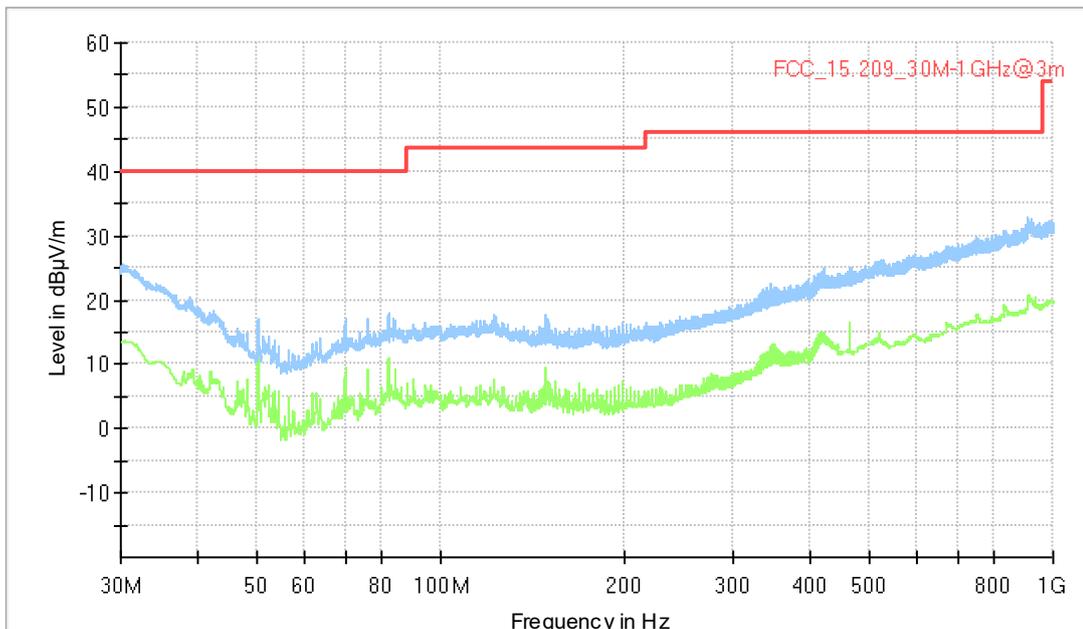


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-3 (S01_354_AA01)
Antenna A

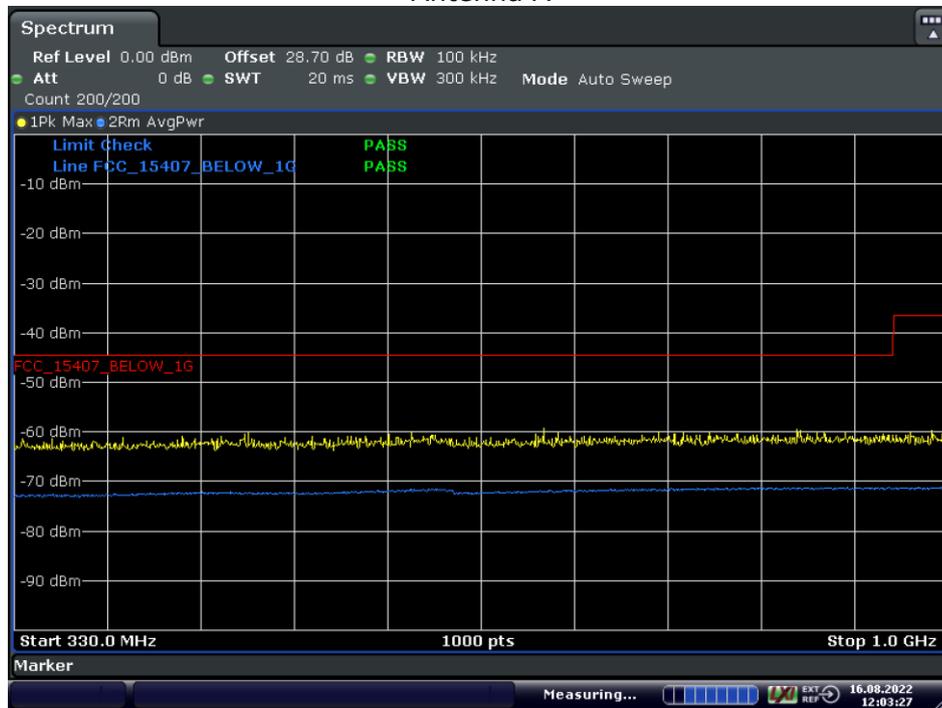


Date: 16.AUG.2022 12:03:27

Antenna B

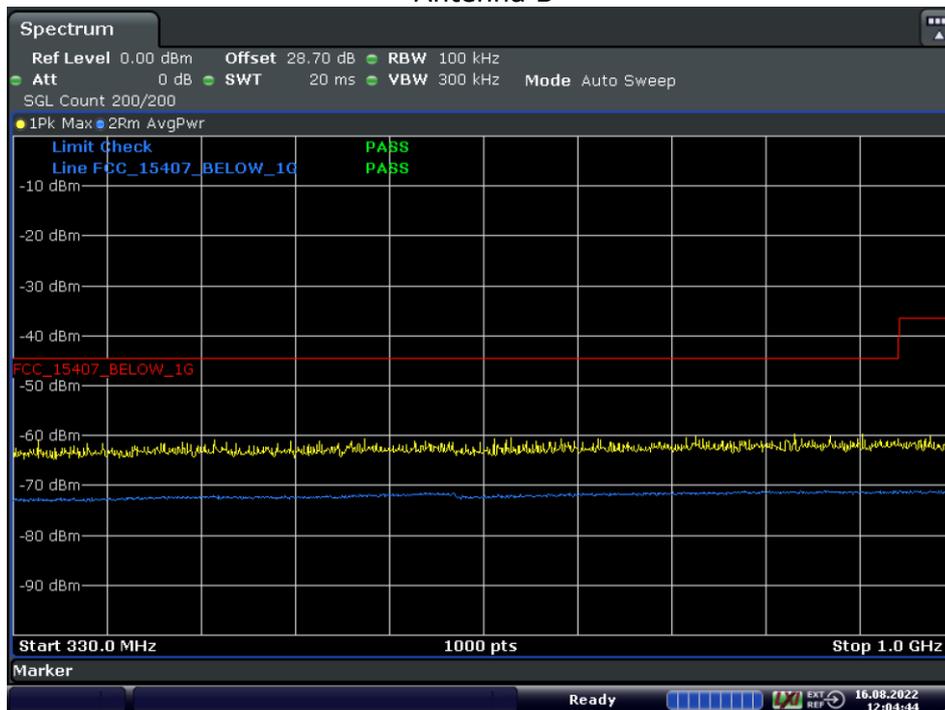


Date: 16.AUG.2022 12:04:45

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S02_354_AB01)

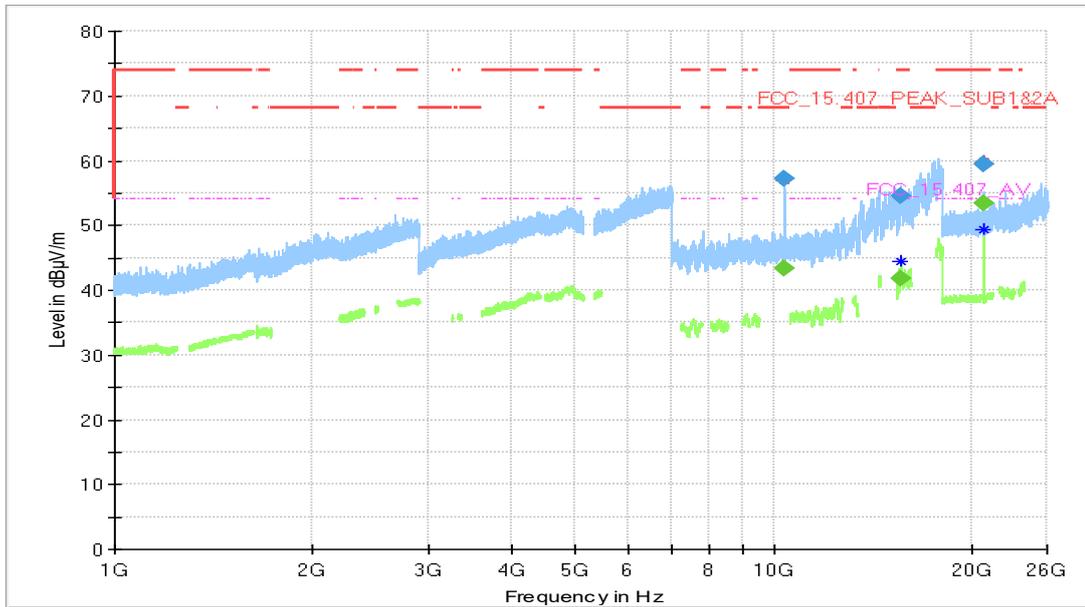


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
10400.350	---	43.3	---	---	1000.0	1000.000	150.0	H	-45.0	82.0	-11.8
10400.350	57.3	---	68.20	10.95	1000.0	1000.000	150.0	H	-45.0	82.0	-11.8
15597.492	---	41.8	54.00	12.21	1000.0	1000.000	150.0	H	-4.0	4.0	-1.0
15597.492	54.5	---	74.00	19.53	1000.0	1000.000	150.0	H	-4.0	4.0	-1.0
20799.900	---	53.3	54.00	0.69	1000.0	1000.000	150.0	H	-34.0	99.0	18.3
20799.900	59.4	---	74.00	14.56	1000.0	1000.000	150.0	H	-34.0	99.0	18.3

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 1GHz - 18GHz, Subband = U-NII-1 (S01_354_AA01) Antenna A

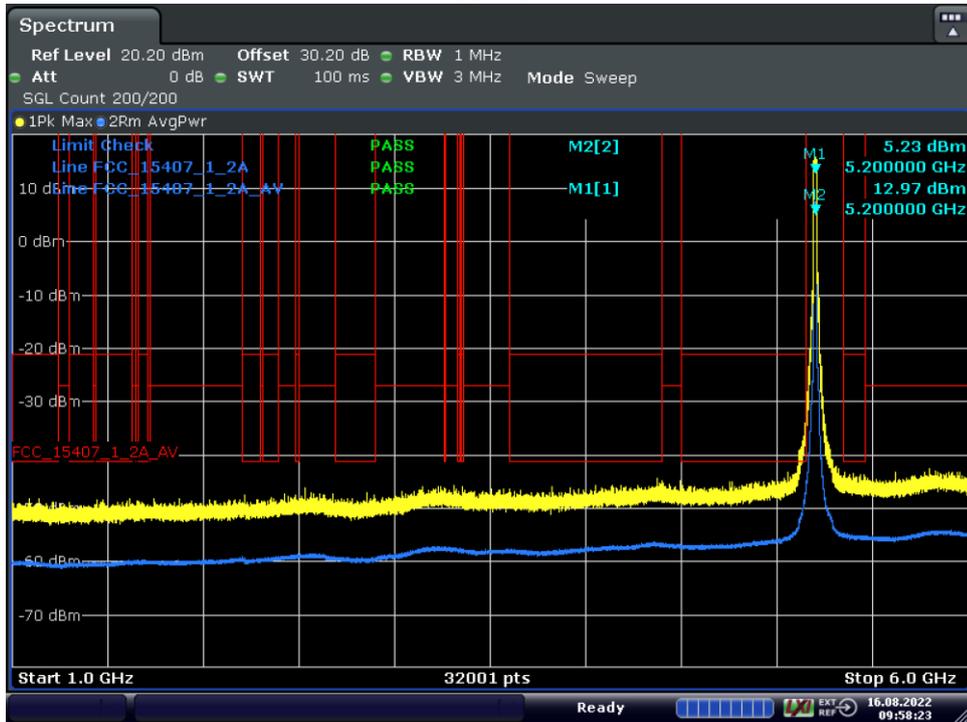


Date: 16.AUG.2022 09:58:23

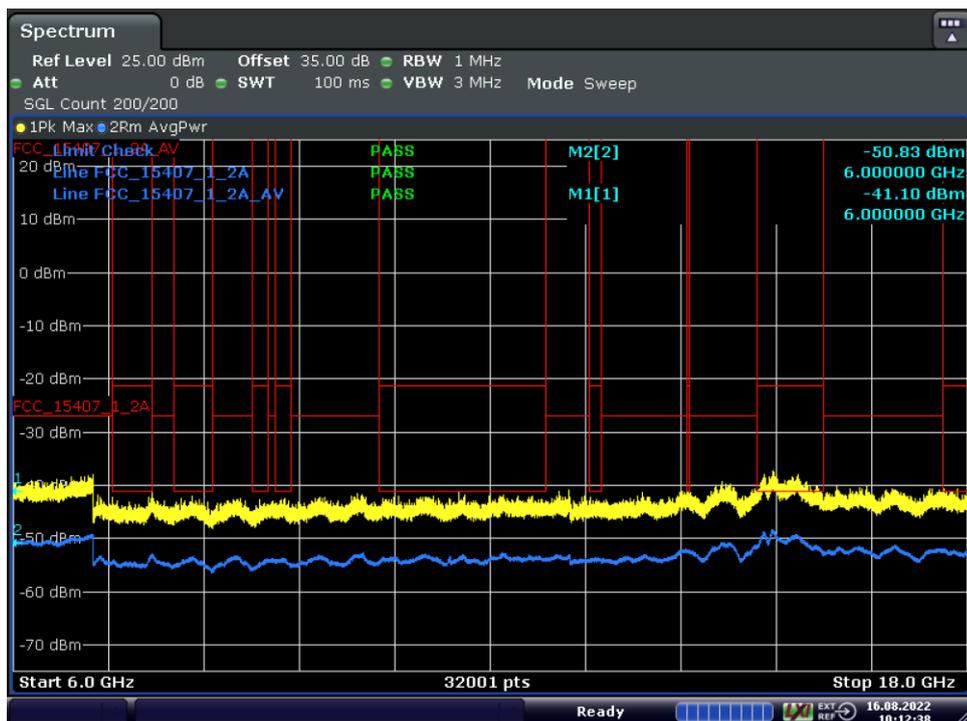


Date: 16.AUG.2022 10:12:38

Antenna B

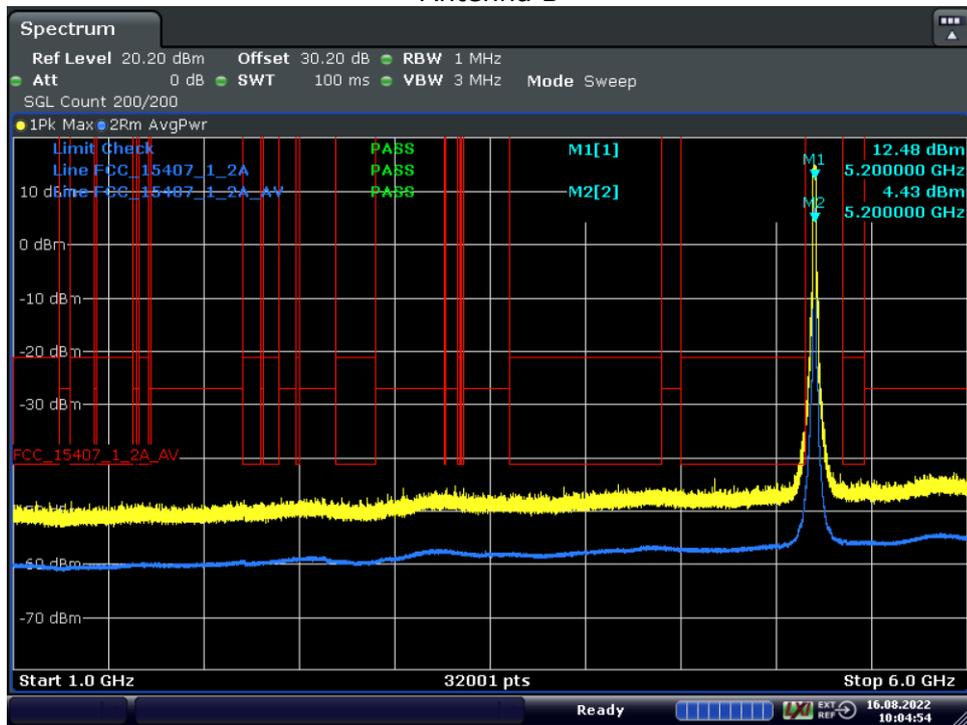


Date: 16.AUG.2022 10:04:54

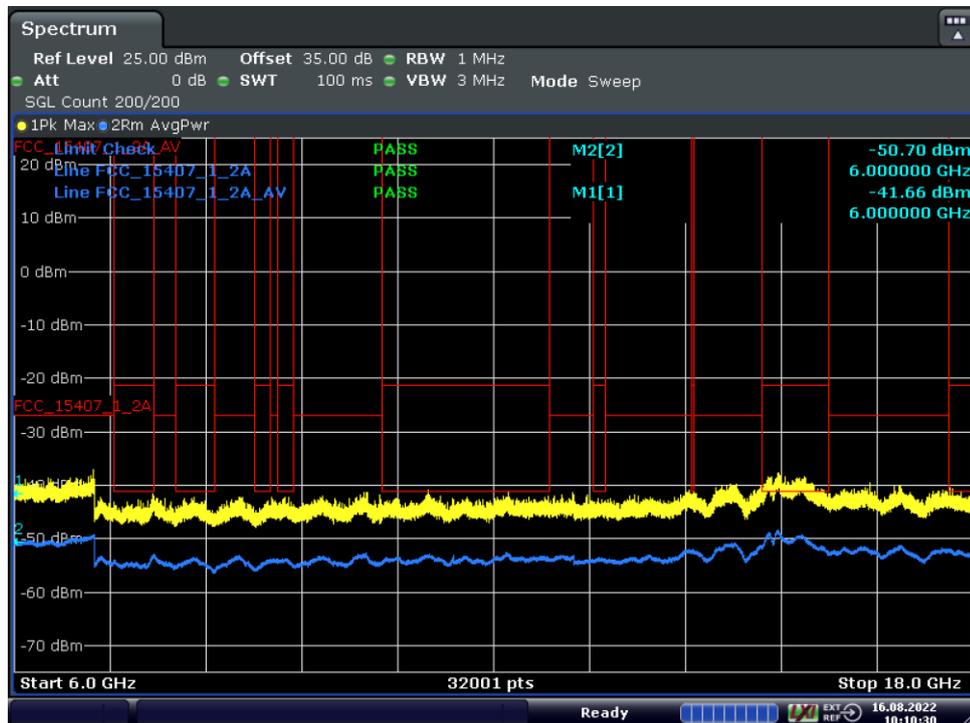


Date: 16.AUG.2022 10:10:30

Radio Technology = WLAN a, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-2A (S02_354_AB01)

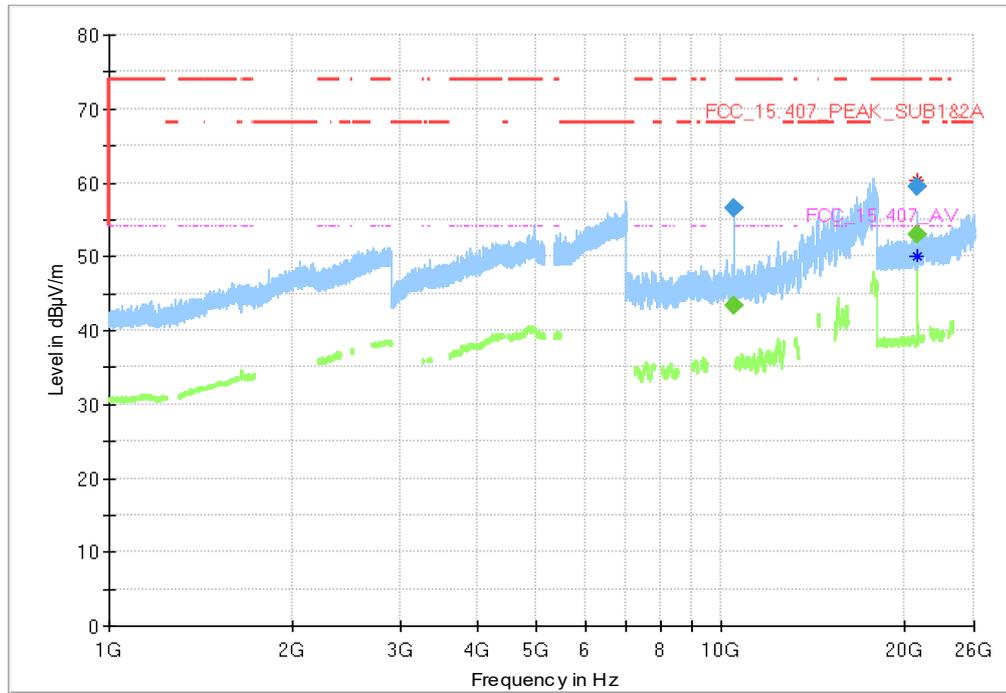


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
10526.438	---	43.3	---	---	1000.0	1000.000	150.0	H	11.0	86.0	-11.1
10526.438	56.6	---	68.20	11.63	1000.0	1000.000	150.0	H	11.0	86.0	-11.1
21039.940	---	53.0	54.00	0.97	1000.0	1000.000	150.0	H	34.0	105.0	18.4
21039.940	59.5	---	74.00	14.45	1000.0	1000.000	150.0	H	34.0	105.0	18.4

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 1GHz - 18GHz, Subband = U-NII-2A (S01_354_AA01) Antenna A

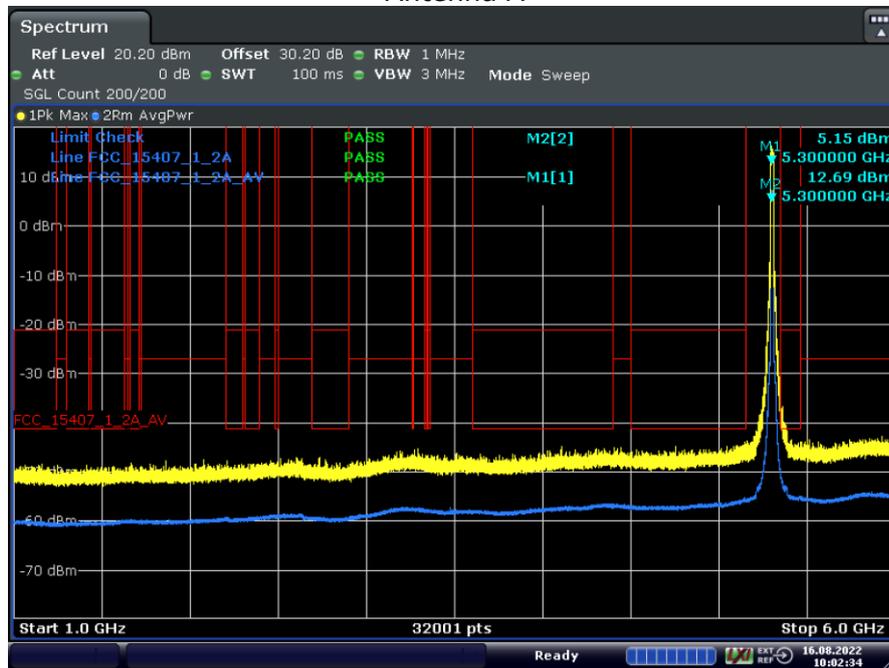


Date: 16.AUG.2022 10:02:34

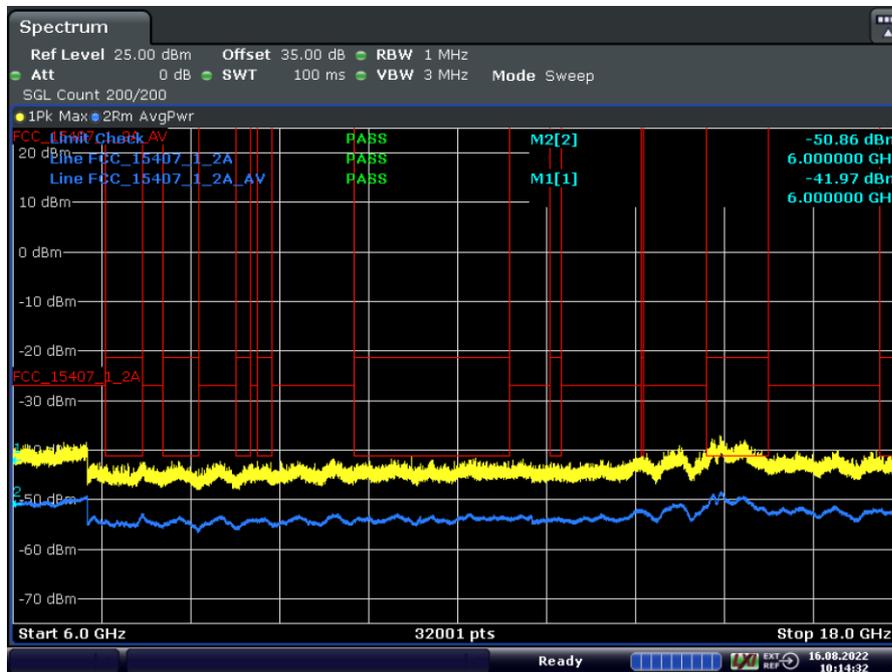


Date: 16.AUG.2022 10:14:32

Antenna B

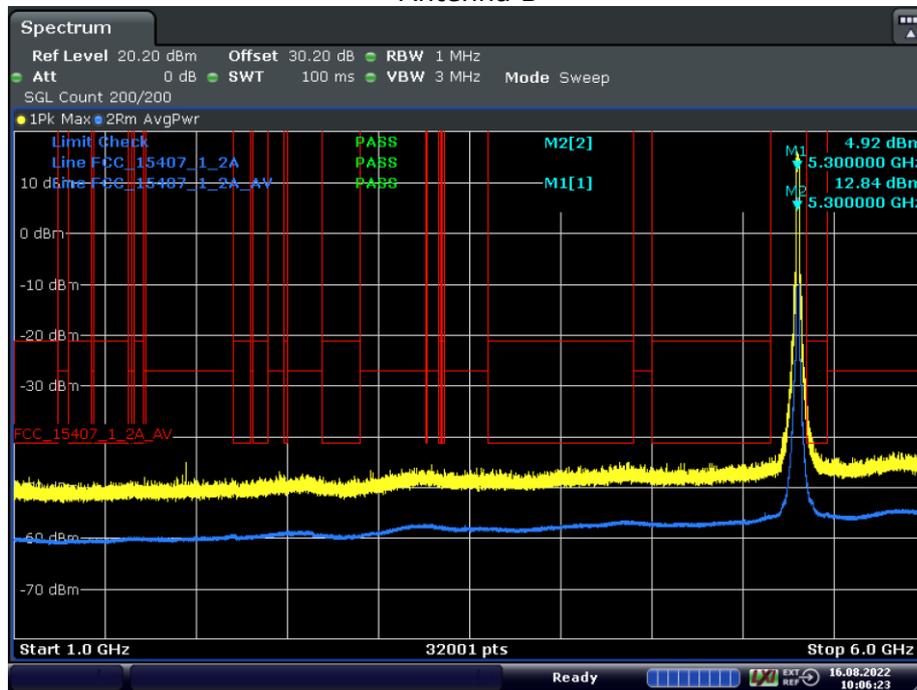


Date: 16.AUG.2022 10:06:23

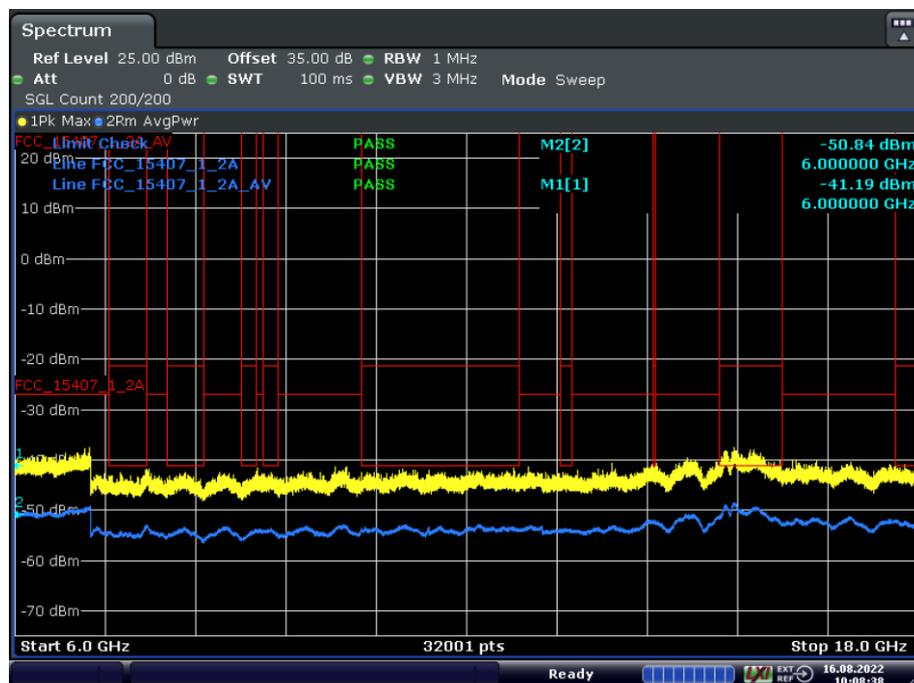


Date: 16.AUG.2022 10:08:38

Radio Technology = WLAN a, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-2C (S02_354_AB01)

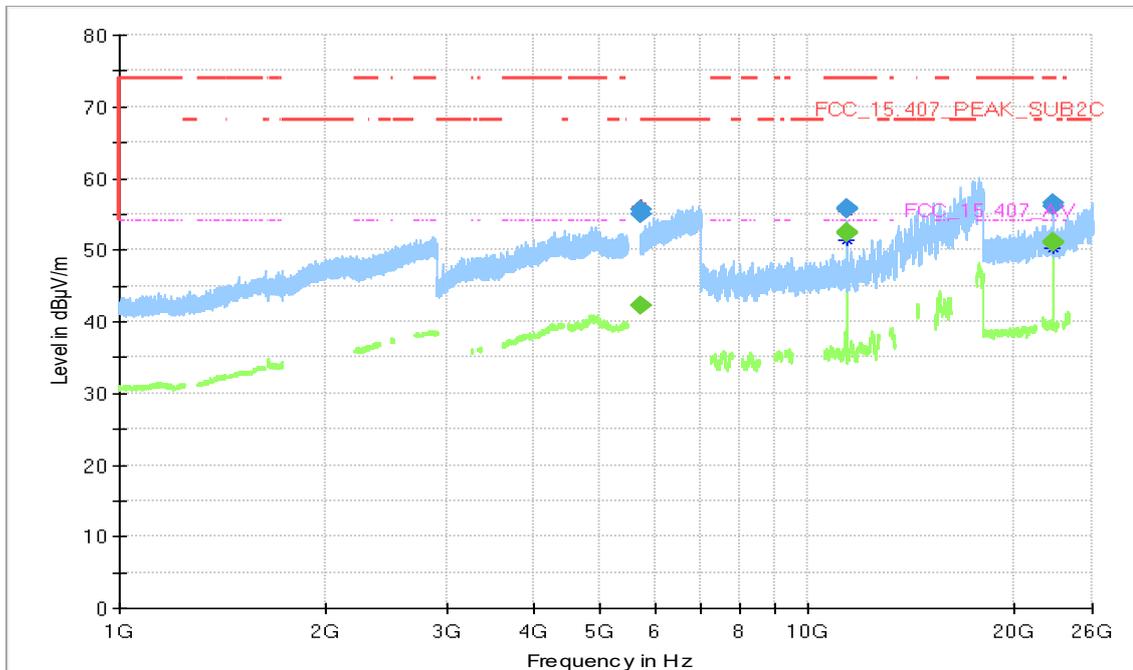


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5725.000	---	42.3	---	---	1000.0	1000.000	150.0	V	-91.0	2.0	14.2
5725.000	55.6	---	68.20	12.62	1000.0	1000.000	150.0	V	-91.0	2.0	14.2
5725.765	---	42.3	---	---	1000.0	1000.000	150.0	H	134.0	-4.0	14.2
5725.765	55.0	---	68.20	13.21	1000.0	1000.000	150.0	H	134.0	-4.0	14.2
11399.785	---	52.2	54.00	1.78	1000.0	1000.000	150.0	H	-36.0	85.0	-9.2
11399.785	55.6	---	74.00	18.37	1000.0	1000.000	150.0	H	-36.0	85.0	-9.2
11399.890	---	52.6	54.00	1.38	1000.0	1000.000	150.0	H	-34.0	83.0	-9.2
11399.890	55.8	---	74.00	18.17	1000.0	1000.000	150.0	H	-34.0	83.0	-9.2
22799.876	---	51.1	54.00	2.91	1000.0	1000.000	150.0	H	-40.0	93.0	19.5
22799.876	56.6	---	74.00	17.41	1000.0	1000.000	150.0	H	-40.0	93.0	19.5
22800.098	---	50.9	54.00	3.08	1000.0	1000.000	150.0	H	-41.0	91.0	19.5
22800.098	56.2	---	74.00	17.84	1000.0	1000.000	150.0	H	-41.0	91.0	19.5

Radio Technology = WLAN a, Operating Frequency = high, Measurement range = 1GHz - 18GHz, Subband = U-NII-2C (S01_354_AA01)
Antenna A

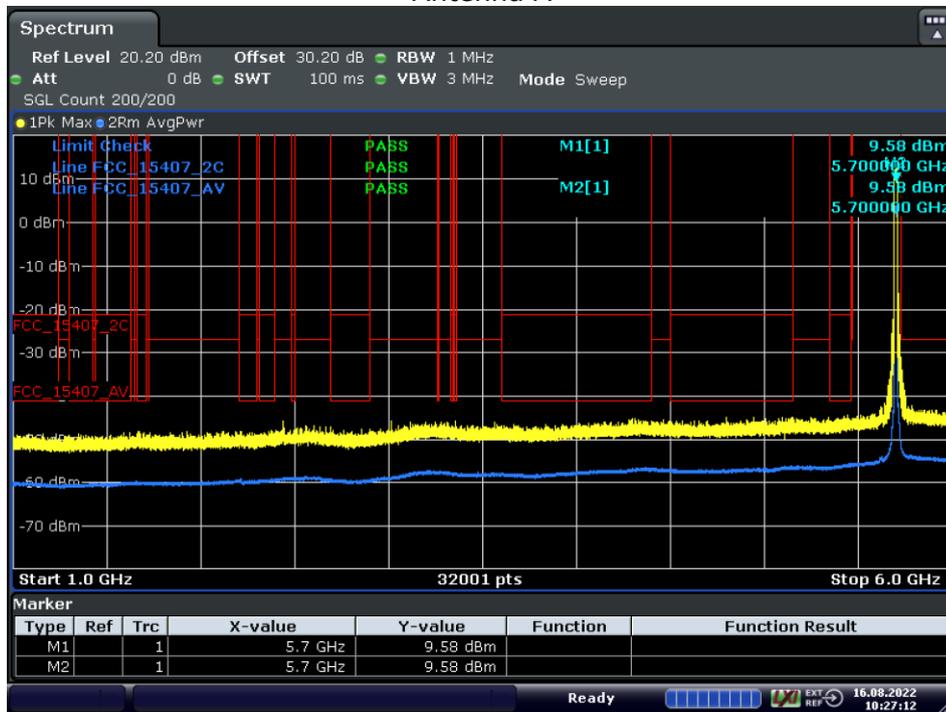


Date: 16.AUG.2022 10:27:12

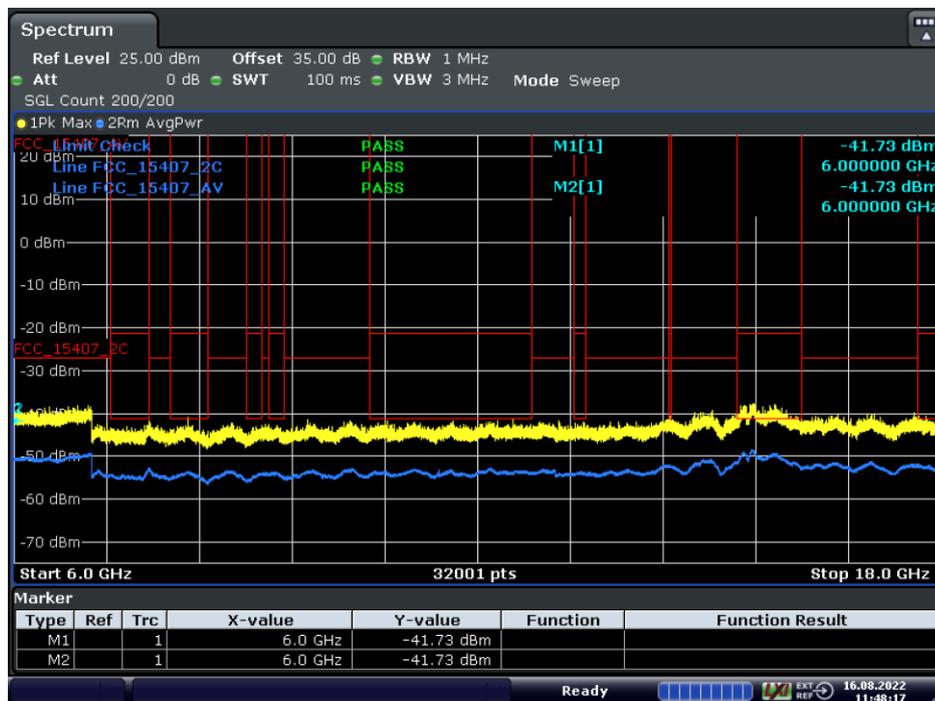


Date: 16.AUG.2022 11:48:18

Antenna B

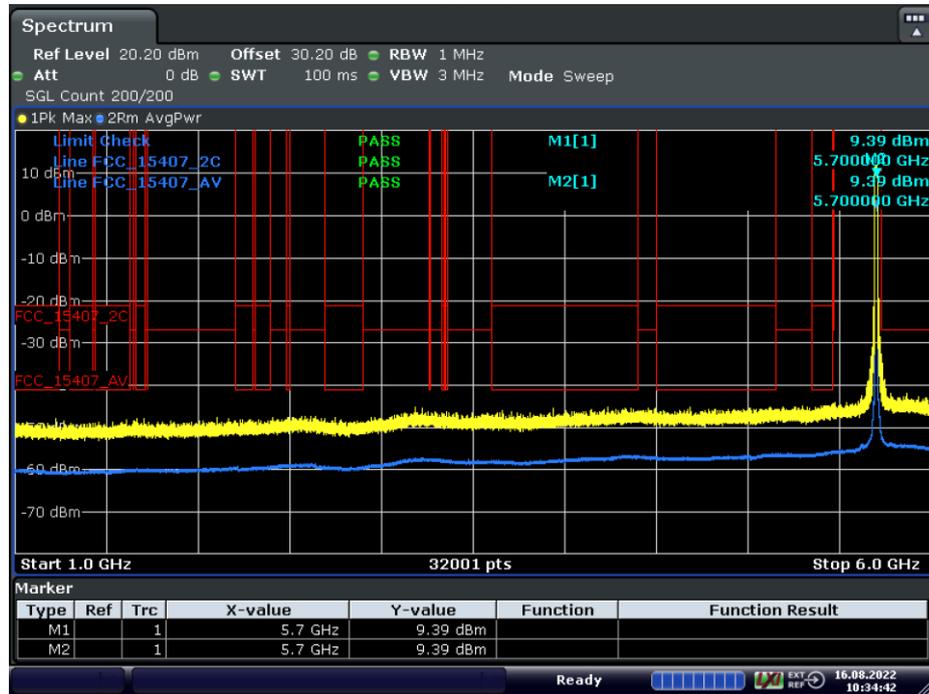


Date: 16.AUG.2022 10:34:43

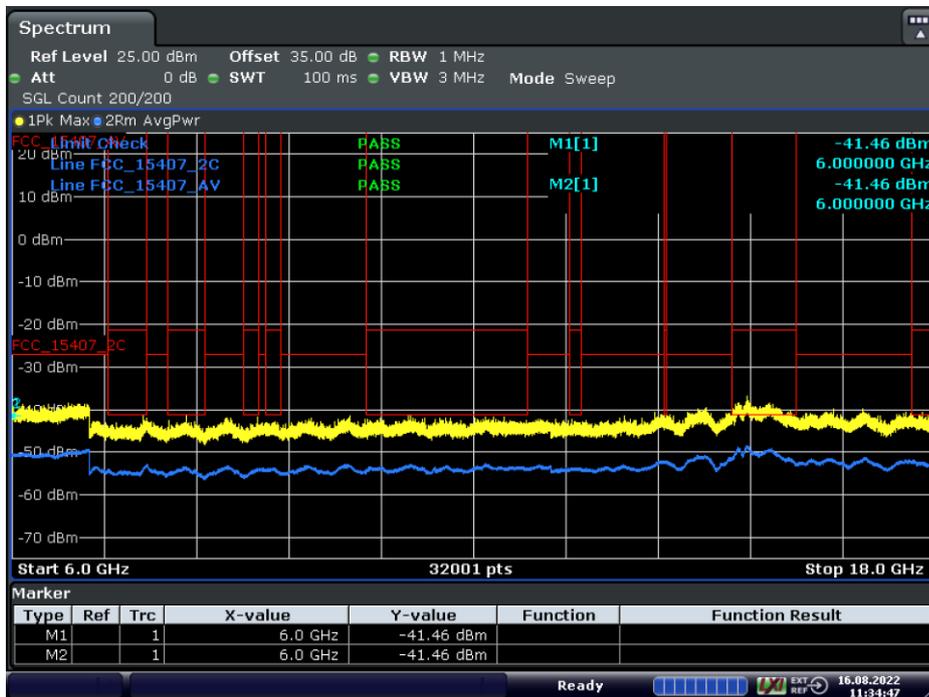


Date: 16.AUG.2022 11:34:48

Radio Technology = WLAN a, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-3 (S02_354_AB01)

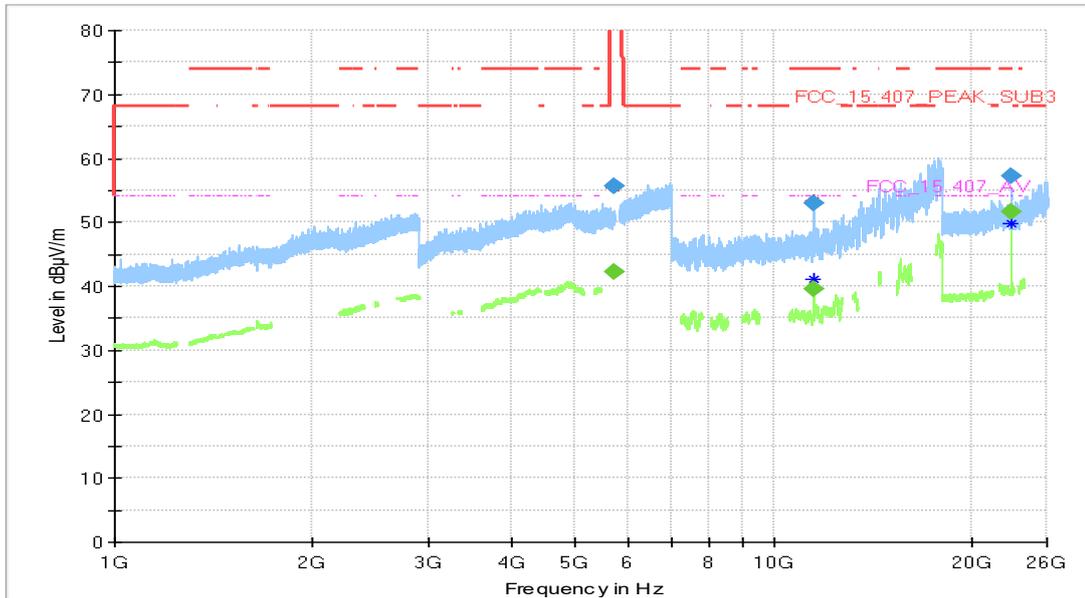


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5723.300	---	42.3	---	---	1000.0	1000.000	150.0	V	-45.0	15.0	14.2
5723.300	55.7	---	118.32	62.63	1000.0	1000.000	150.0	V	-45.0	15.0	14.2
11490.400	---	39.6	54.00	14.37	1000.0	1000.000	150.0	H	-46.0	88.0	-8.9
11490.400	53.0	---	74.00	21.04	1000.0	1000.000	150.0	H	-46.0	88.0	-8.9
22980.029	---	51.5	54.00	2.49	1000.0	1000.000	150.0	H	-54.0	88.0	19.7
22980.029	57.3	---	74.00	16.70	1000.0	1000.000	150.0	H	-54.0	88.0	19.7

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 1GHz - 18GHz, Subband = U-NII-3 (S01_354_AA01)
Antenna A

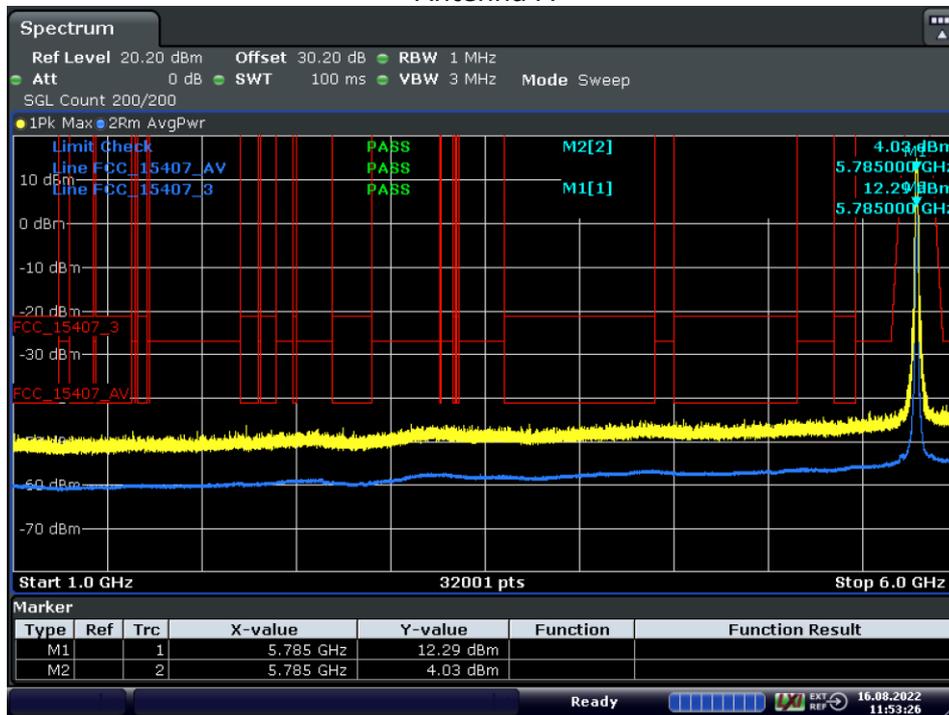


Date: 16.AUG.2022 11:53:26

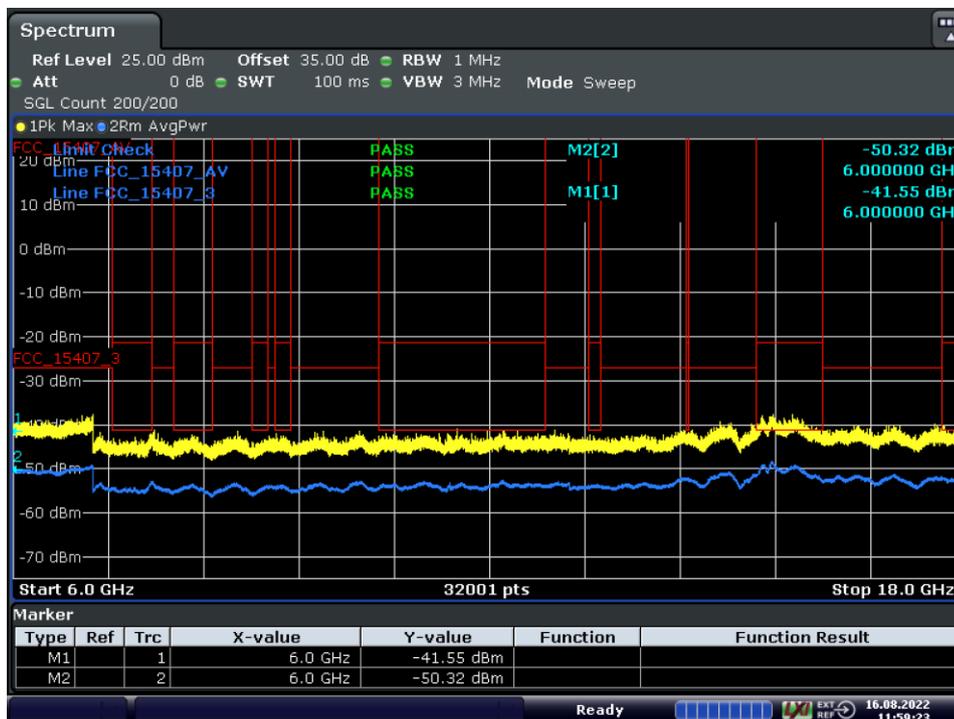


Date: 16.AUG.2022 11:59:23

Antenna B

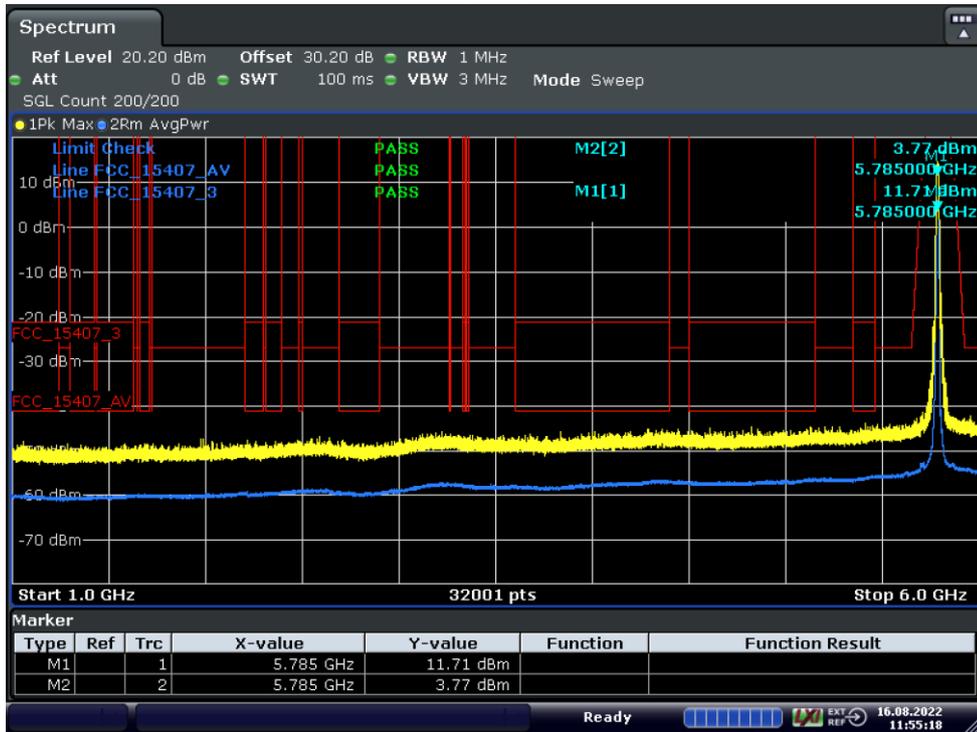


Date: 16.AUG.2022 11:55:18

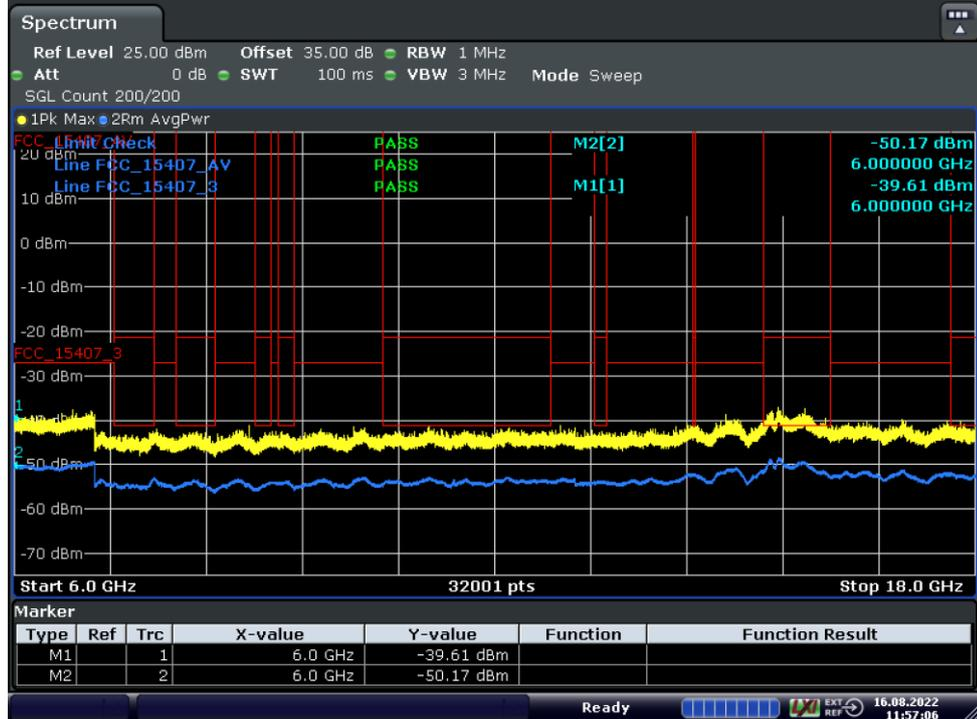


Date: 16.AUG.2022 11:57:06

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 26GHz - 40GHz, Subband = U-NII-1 (S02_354_AB01)

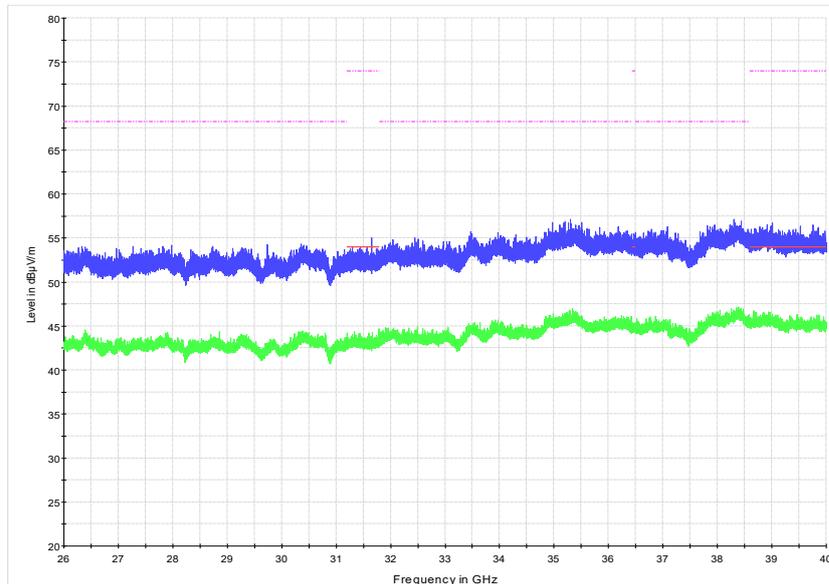

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 26GHz - 40GHz, Subband = U-NII-3 (S02_354_AB01)

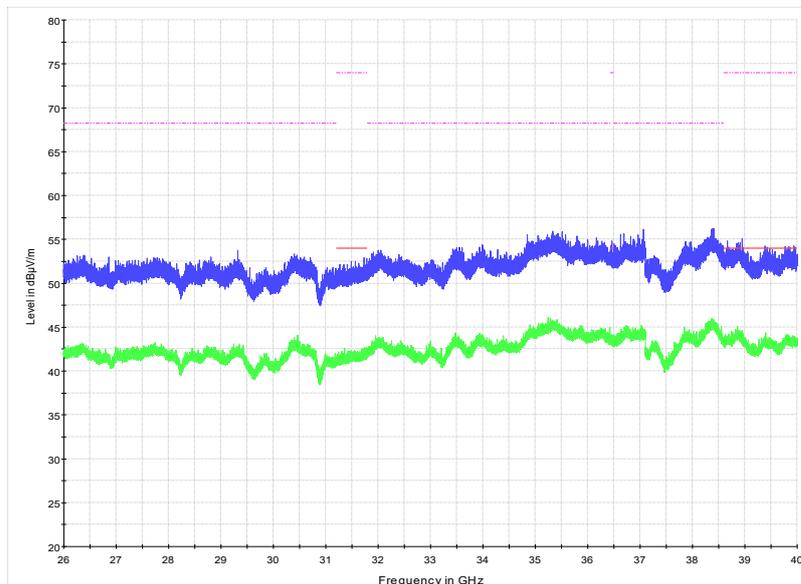

5.3.5 TEST EQUIPMENT USED

- Radiated Emissions SAC H-Field
- Radiated Emissions FAR 5 GHz FCC
- Radiated Emissions SAC up to 1 GHz
- R&S TS8997
- Radio Lab

5.4 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.4.1 TEST DESCRIPTION

Radiated Measurement with 50 Ohm termination at antenna ports


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

3. Measurement above 1 GHz

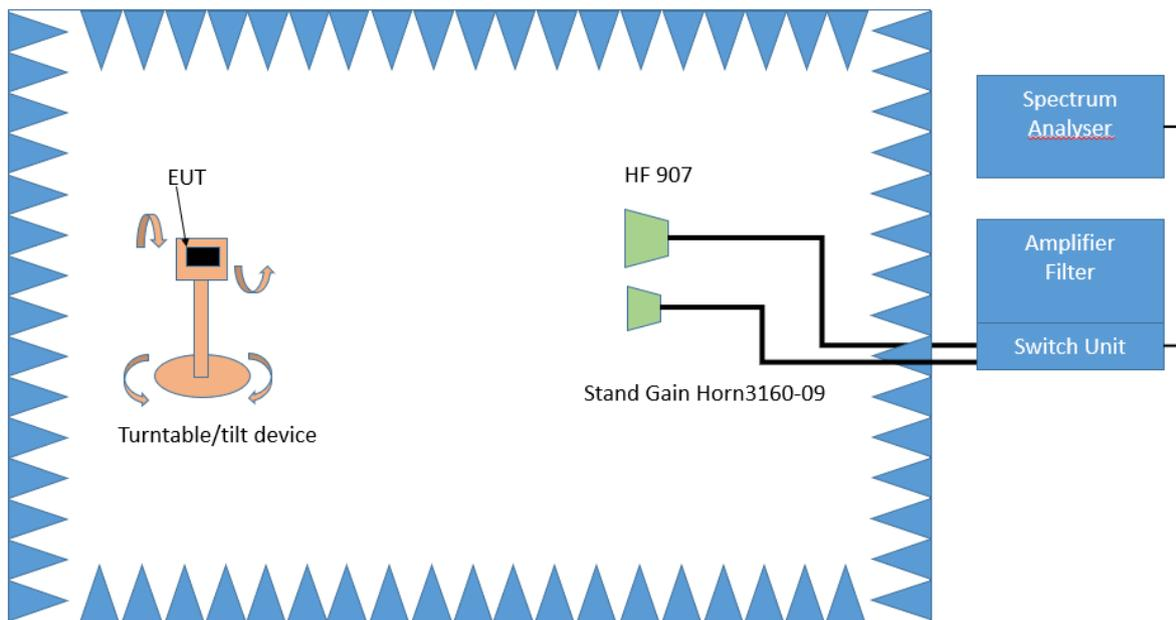

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.
 The elevation angle will slowly vary by $\pm 45^\circ$
 Spectrum analyser settings:
 - Detector: Peak



Step 3:

Spectrum analyser settings for step 3:
 - Detector: Peak / CISPR Average
 - Measured frequencies: in step 1 determined frequencies
 - RBW = 1 MHz
 - VBW = 3 MHz
 - Measuring time: 1 s

Conducted Measurements at antenna ports

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

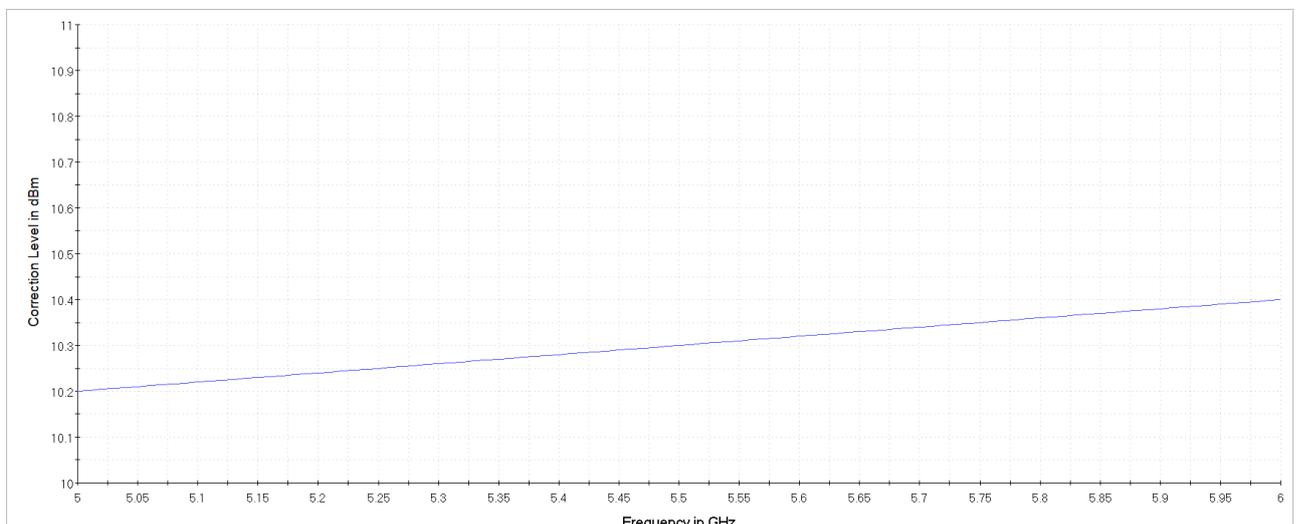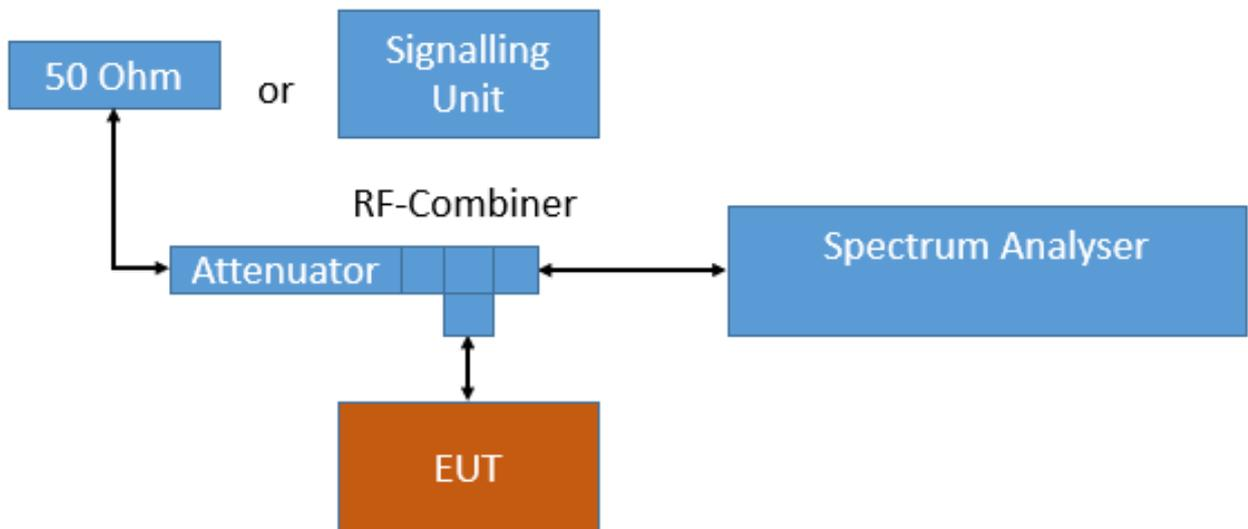

Analyser settings:

- Frequency range: 5100 – 5400 MHz (U-NII band 1/2A)
5430 – 5530 MHz (U-NII band 2C low BE)
5655 – 5755 MHz (U-NII band 2C high BE)
5611 – 5811 MHz (U-NII band 3 low BE)
5765 – 5965 MHz (U-NII band 3 high BE)
- Resolution Bandwidth (RBW): 1000 kHz
- Video Bandwidth (VBW): 3000 kHz
- Trace: Maxhold, Average Power
- Sweeps: 10000
- Sweep Time: coupled
- Detector: Peak, RMS

For the conducted emissions in restricted bands the Value is measured in dBm and then converted to dB μ V/m as given in KDB 558074:

1. Measure the conducted output power in dBm.
2. Add the maximum antenna gain in dBi. (Included in measurement result by offset)
3. Add the appropriate ground reflection factor (0 for measured range)
6 dB for frequencies \leq 30 MHz;
4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and
0 dB for frequencies $>$ 1000 MHz).
4. Convert the resultant EIRP level to an equivalent electric field strength level using the following relationship:
$$E = \text{EIRP} - 20 \log D + 104.8$$
Where E is the electric field strength in dB μ V/m,
EIRP is the equivalent isotropically radiated power in dBm
D is the specified measurement distance in m

Value [dB μ V/m] = Measured value [dBm] (including gain and ground reflection factor) – 20 log D + 104.8

5.4.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz at 75 MHz or more above or below the band edge
increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge
increasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edge
increasing linearly to 27 dBm/MHz at the band edge.

FCC Part 15 Subpart E, §15.407 (b) (5)

For transmitters operating within the 5.925-7.125 GHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5.925-7.125 GHz.

FCC Part 15 Subpart E, §15.407 (b) (6)

For transmitters operating within the 5.925-7.125 GHz bands:

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250-5350 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p.at 5850 MHz instead of 5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725-5850 MHz:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

C) FCC & IC

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits (dB $\mu\text{V}/\text{m}$)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits (dB $\mu\text{V}/\text{m}$)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.4.3 TEST PROTOCOL

Ambient temperature: 24–30 °C
 Air Pressure: 990–1026 hPa
 Humidity: 30–40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
354	Radiated	5180	5150	55.6	PEAK	1000	74	18.4	BE-RB
354	Radiated	5180	5150	42.0	AV	1000	54	12.0	BE-RB
354 Ant. A	Conducted	5180	5150	64.7	PEAK	1000	74	9.3	BE-RB
354 Ant. A	Conducted	5180	5150	46.3	AV	1000	54	7.7	BE-RB
354 Ant. B	Conducted	5180	5150	63.8	PEAK	1000	74	10.2	BE-RB
354 Ant. B	Conducted	5180	5150	48.8	AV	1000	54	5.2	BE-RB
354 Ant. A	Conducted	5200	5150	60.2	PEAK	1000	74	13.8	BE-RB
354 Ant. A	Conducted	5200	5150	45.5	AV	1000	54	8.5	BE-RB
354 Ant. B	Conducted	5200	5150	60.3	PEAK	1000	74	13.7	BE-RB
354 Ant. B	Conducted	5200	5150	46.7	AV	1000	54	7.3	BE-RB
354 Ant. A	Conducted	5300	5350	49.9	PEAK	1000	74	24.1	BE-RB
354 Ant. A	Conducted	5300	5350	38.5	AV	1000	54	15.5	BE-RB
354 Ant. B	Conducted	5300	5350	49.3	PEAK	1000	74	24.7	BE-RB
354 Ant. B	Conducted	5300	5350	38.4	AV	1000	54	15.6	BE-RB
354 Ant. A	Conducted	5320	5350	63.8	PEAK	1000	74	10.2	BE-RB
354 Ant. A	Conducted	5320	5350	45.8	AV	1000	54	8.2	BE-RB
354 Ant. B	Conducted	5320	5350	65.1	PEAK	1000	74	8.9	BE-RB
354 Ant. B	Conducted	5320	5350	48.3	AV	1000	54	5.7	BE-RB
354	Radiated	5320	5350	54.7	PEAK	1000	74	19.3	BE-RB
354	Radiated	5320	5350	41.9	AV	1000	54	12.1	BE-RB
354 Ant. A	Conducted	5500	5460	56.1	PEAK	1000	74	17.9	BE-RB
354 Ant. A	Conducted	5500	5460	40.7	AV	1000	54	13.3	BE-RB
354 Ant. B	Conducted	5500	5460	58.7	PEAK	1000	74	15.3	BE-RB
354 Ant. B	Conducted	5500	5460	41.4	AV	1000	54	12.6	BE-RB
354 Ant. A	Conducted	5500	5470	58.9	PEAK	1000	68.2	9.3	BE-UE
354 Ant. B	Conducted	5500	5470	62.6	PEAK	1000	68.2	5.6	BE-UE
354	Radiated	5500	5460	55.5	PEAK	1000	74	18.5	BE-RB
354	Radiated	5500	5460	42.3	AV	1000	54	11.7	BE-RB
354	Radiated	5500	5470	55.5	PEAK	1000	68.2	12.7	BE-UE
354 Ant. A	Conducted	5520	5460	60.4	PEAK	1000	74	13.6	BE-RB
354 Ant. A	Conducted	5520	5460	41.7	AV	1000	54	12.3	BE-RB
354 Ant. B	Conducted	5520	5460	61.1	PEAK	1000	74	12.9	BE-RB
354 Ant. B	Conducted	5520	5460	44.8	AV	1000	54	9.2	BE-RB
354 Ant. A	Conducted	5520	5470	60.5	PEAK	1000	68.2	7.7	BE-UE
354 Ant. B	Conducted	5680	5725	61.5	PEAK	1000	68.2	6.7	BE-UE
354	Radiated	5700	5725	55.6	PEAK	1000	68.2	12.6	BE-UE
354 Ant. A	Conducted	5700	5725	63.3	PEAK	1000	68.2	4.9	BE-UE
354 Ant. B	Conducted	5700	5725	63.5	PEAK	1000	68.2	4.7	BE-UE
354 Ant. A	Conducted	5745	5650	49.9	PEAK	1000	65.2	15.3	BE-UE
354 Ant. B	Conducted	5745	5650	50.7	PEAK	1000	65.2	14.5	BE-UE
354 Ant. A	Conducted	5745	5725	74.4	PEAK	1000	122.2	47.8	BE-UE
354 Ant. B	Conducted	5745	5725	75.4	PEAK	1000	122.2	46.8	BE-UE
354	Radiated	5745	5725	55.7	PEAK	1000	122.2	66.5	BE-UE
354 Ant. A	Conducted	5825	5850	70.6	PEAK	1000	122.2	51.6	BE-UE
354 Ant. B	Conducted	5825	5850	75.9	PEAK	1000	122.2	46.3	BE-UE
354	Radiated	5825	5850	56.3	PEAK	1000	122.2	65.9	BE-UE
354 Ant. A	Conducted	5825	5925	51.3	PEAK	1000	65.2	13.9	BE-UE
354 Ant. B	Conducted	5825	5925	50.7	PEAK	1000	65.2	14.5	BE-UE

WLAN n-Mode; 20 MHz; MCS8; MIMO
 Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5180	5150	59.0	PEAK	1000	74	15.0	BE-RB
354 Ant. A	Conducted	5180	5150	42.0	AV	1000	54	12.0	BE-RB
354 Ant. B	Conducted	5180	5150	60.5	PEAK	1000	74	13.5	BE-RB
354 Ant. B	Conducted	5180	5150	43.6	AV	1000	54	10.4	BE-RB
354 Ant. A	Conducted	5200	5150	56.7	PEAK	1000	74	17.3	BE-RB
354 Ant. A	Conducted	5200	5150	42.6	AV	1000	54	11.4	BE-RB
354 Ant. B	Conducted	5200	5150	57.5	PEAK	1000	74	16.5	BE-RB
354 Ant. B	Conducted	5200	5150	44.2	AV	1000	54	9.8	BE-RB
354 Ant. A	Conducted	5300	5350	55.9	PEAK	1000	74	18.1	BE-RB
354 Ant. A	Conducted	5300	5350	42.3	AV	1000	54	11.7	BE-RB
354 Ant. B	Conducted	5300	5350	58.7	PEAK	1000	74	15.3	BE-RB
354 Ant. B	Conducted	5300	5150	43.1	AV	1000	54	10.9	BE-RB
354 Ant. A	Conducted	5320	5350	62.1	PEAK	1000	74	11.9	BE-RB
354 Ant. A	Conducted	5320	5350	42.2	AV	1000	54	11.8	BE-RB
354 Ant. B	Conducted	5320	5350	62.9	PEAK	1000	74	11.1	BE-RB
354 Ant. B	Conducted	5320	5350	42.7	AV	1000	54	11.3	BE-RB
354 Ant. A	Conducted	5500	5460	55.2	PEAK	1000	74	18.8	BE-RB
354 Ant. A	Conducted	5500	5460	40.6	AV	1000	54	13.4	BE-RB
354 Ant. B	Conducted	5500	5460	58.1	PEAK	1000	74	15.9	BE-RB
354 Ant. B	Conducted	5500	5460	40.6	AV	1000	54	13.4	BE-RB
354 Ant. A	Conducted	5500	5470	57.0	PEAK	1000	68.2	11.2	BE-UE
354 Ant. B	Conducted	5500	5470	60.7	PEAK	1000	68.2	7.5	BE-UE
354 Ant. A	Conducted	5520	5460	53.5	PEAK	1000	74	20.5	BE-RB
354 Ant. A	Conducted	5520	5460	40.5	AV	1000	54	13.5	BE-RB
354 Ant. B	Conducted	5520	5460	57.8	PEAK	1000	74	16.2	BE-RB
354 Ant. B	Conducted	5520	5460	41.7	AV	1000	54	12.3	BE-RB
354 Ant. A	Conducted	5520	5470	58.7	PEAK	1000	68.2	9.5	BE-UE
354 Ant. B	Conducted	5520	5725	60.6	PEAK	1000	68.2	7.6	BE-UE
354 Ant. A	Conducted	5680	5725	56.4	PEAK	1000	74	17.6	BE-RB
354 Ant. A	Conducted	5680	5725	41.4	AV	1000	54	12.6	BE-RB
354 Ant. B	Conducted	5680	5725	59.5	PEAK	1000	74	14.5	BE-RB
354 Ant. B	Conducted	5680	5725	41.6	AV	1000	54	12.4	BE-RB
354 Ant. A	Conducted	5700	5725	61.9	PEAK	1000	74	12.1	BE-RB
354 Ant. A	Conducted	5700	5725	42.6	AV	1000	54	11.4	BE-RB
354 Ant. B	Conducted	5700	5725	63.8	PEAK	1000	74	10.2	BE-RB
354 Ant. B	Conducted	5700	5725	43.9	AV	1000	54	10.1	BE-RB
354 Ant. A	Conducted	5745	5650	50.7	PEAK	1000	65.2	14.5	BE-UE
354 Ant. B	Conducted	5745	5650	50.1	PEAK	1000	65.2	15.1	BE-UE
354 Ant. A	Conducted	5745	5725	73.3	PEAK	1000	122.2	48.9	BE-UE
354 Ant. B	Conducted	5745	5725	72.6	PEAK	1000	122.2	49.6	BE-UE
354 Ant. A	Conducted	5825	5850	50.4	PEAK	1000	65.2	14.8	BE-UE
354 Ant. B	Conducted	5825	5850	50.7	PEAK	1000	65.2	14.5	BE-UE
354 Ant. A	Conducted	5825	5925	67.1	PEAK	1000	122.2	55.1	BE-UE
354 Ant. B	Conducted	5825	5925	77.2	PEAK	1000	122.2	45.0	BE-UE

WLAN ac-Mode; 80 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5775	5650	59.2	PEAK	1000	65.2	6.0	BE-UE
354 Ant. B	Conducted	5775	5650	59.7	PEAK	1000	65.2	5.5	BE-UE
354 Ant. A	Conducted	5775	5725	69.1	PEAK	1000	122.2	53.1	BE-UE
354 Ant. B	Conducted	5775	5725	69.5	PEAK	1000	122.2	52.7	BE-UE
354 Ant. A	Conducted	5775	5850	66.1	PEAK	1000	122.2	56.1	BE-UE
354 Ant. B	Conducted	5775	5850	66.9	PEAK	1000	122.2	55.3	BE-UE
354 Ant. A	Conducted	5775	5925	54.2	PEAK	1000	65.2	11.0	BE-UE
354 Ant. B	Conducted	5775	5925	54.4	PEAK	1000	65.2	10.8	BE-UE

WLAN ac-Mode; 80 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5775	5650	60.1	PEAK	1000	65.2	5.1	BE-UE
354 Ant. B	Conducted	5775	5650	57.8	PEAK	1000	65.2	7.4	BE-UE
354 Ant. A	Conducted	5775	5725	69.5	PEAK	1000	122.2	52.7	BE-UE
354 Ant. B	Conducted	5775	5725	71.1	PEAK	1000	122.2	51.1	BE-UE
354 Ant. A	Conducted	5775	5850	66.8	PEAK	1000	122.2	55.4	BE-UE
354 Ant. B	Conducted	5775	5850	67.1	PEAK	1000	122.2	55.1	BE-UE
354 Ant. A	Conducted	5775	5925	58.0	PEAK	1000	65.2	7.2	BE-UE
354 Ant. B	Conducted	5775	5925	56.9	PEAK	1000	65.2	8.3	BE-UE

WLAN ax-Mode; 40 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5745	5650	50.6	PEAK	1000	65.2	14.6	BE-UE
354 Ant. B	Conducted	5745	5650	61.0	PEAK	1000	65.2	4.2	BE-UE
354 Ant. A	Conducted	5745	5725	71.7	PEAK	1000	122.2	50.5	BE-UE
354 Ant. B	Conducted	5745	5725	85.5	PEAK	1000	122.2	36.7	BE-UE
354 Ant. A	Conducted	5745	5850	51.8	PEAK	1000	65.2	13.4	BE-UE
354 Ant. B	Conducted	5745	5850	63.4	PEAK	1000	65.2	1.8	BE-UE
354 Ant. A	Conducted	5745	5925	50.1	PEAK	1000	122.2	72.1	BE-UE
354 Ant. B	Conducted	5745	5925	51.5	PEAK	1000	122.2	70.7	BE-UE

WLAN ax-Mode; 80 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5775	5650	55.9	PEAK	1000	65.2	9.3	BE-UE
354 Ant. B	Conducted	5775	5650	57.0	PEAK	1000	65.2	8.2	BE-UE
354 Ant. A	Conducted	5775	5725	67.6	PEAK	1000	122.2	54.6	BE-UE
354 Ant. B	Conducted	5775	5725	66.1	PEAK	1000	122.2	56.1	BE-UE
354 Ant. A	Conducted	5775	5850	64.1	PEAK	1000	122.2	58.1	BE-UE
354 Ant. B	Conducted	5775	5850	65.5	PEAK	1000	122.2	56.7	BE-UE
354 Ant. A	Conducted	5775	5925	52.5	PEAK	1000	65.2	12.7	BE-UE
354 Ant. B	Conducted	5775	5925	55.6	PEAK	1000	65.2	9.6	BE-UE


WLAN ax-Mode; 80 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB

Variant	Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
354 Ant. A	Conducted	5775	5650	57.6	PEAK	1000	65.2	7.6	BE-UE
354 Ant. B	Conducted	5775	5650	60.0	PEAK	1000	65.2	5.2	BE-UE
354 Ant. A	Conducted	5775	5725	68.5	PEAK	1000	122.2	53.7	BE-UE
354 Ant. B	Conducted	5775	5725	67.3	PEAK	1000	122.2	54.9	BE-UE
354 Ant. A	Conducted	5775	5850	64.4	PEAK	1000	122.2	57.8	BE-UE
354 Ant. B	Conducted	5775	5850	64.9	PEAK	1000	122.2	57.3	BE-UE
354 Ant. A	Conducted	5775	5925	53.8	PEAK	1000	65.2	11.4	BE-UE
354 Ant. B	Conducted	5775	5925	53.1	PEAK	1000	65.2	12.1	BE-UE

Remark: Please see next sub-clause for the measurement plot.


5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-1 (S02_354_AB01)

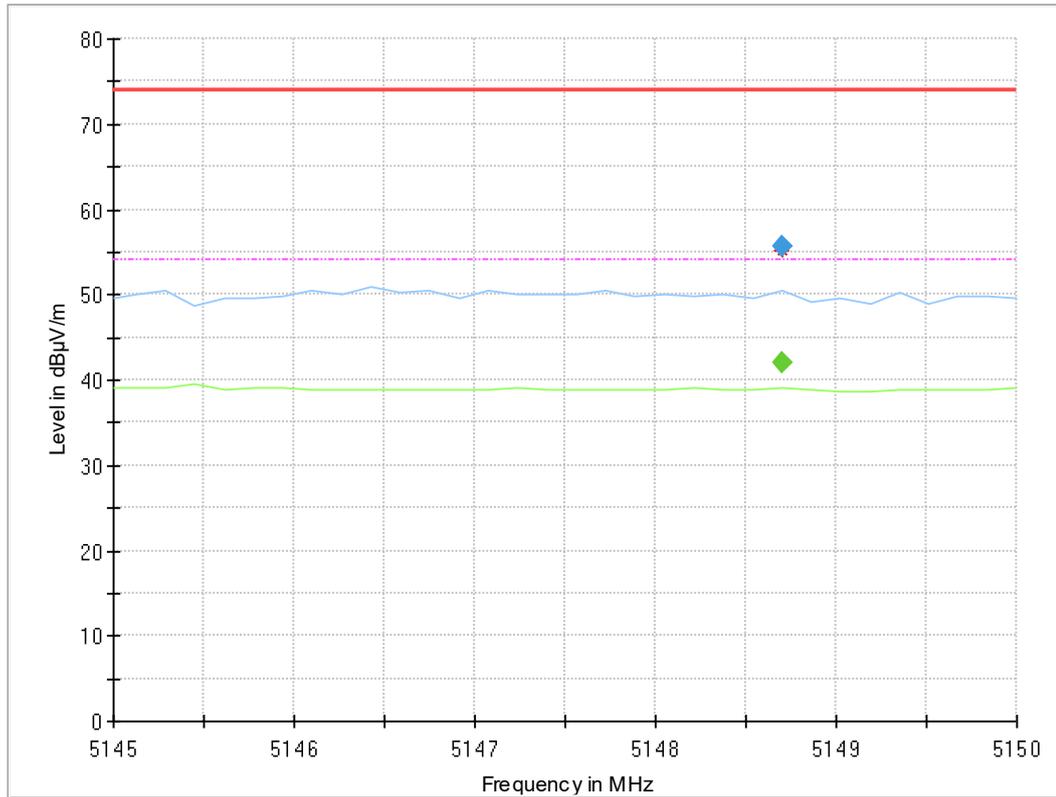


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5148.700	55.6	---	74.00	18.38	1000.0	1000.000	150.0	H	101.0	0.0	13.5
5148.700	---	42.0	54.00	11.95	1000.0	1000.000	150.0	H	101.0	0.0	13.5

Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-1
 (S01_354_AA01)
 Antenna A

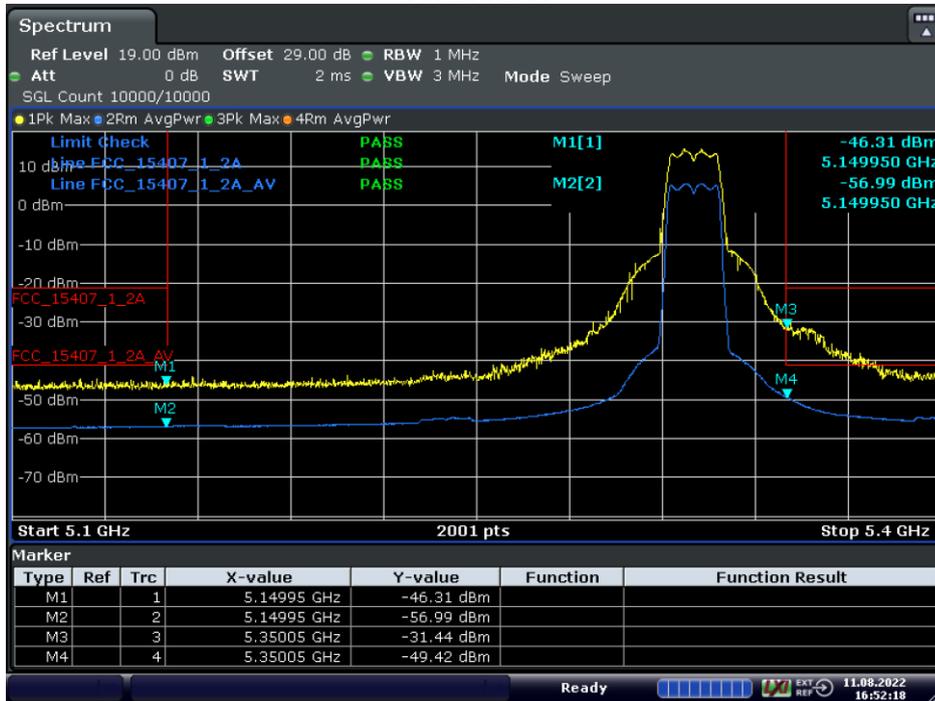


Date: 11.AUG.2022 16:52:19

Antenna B

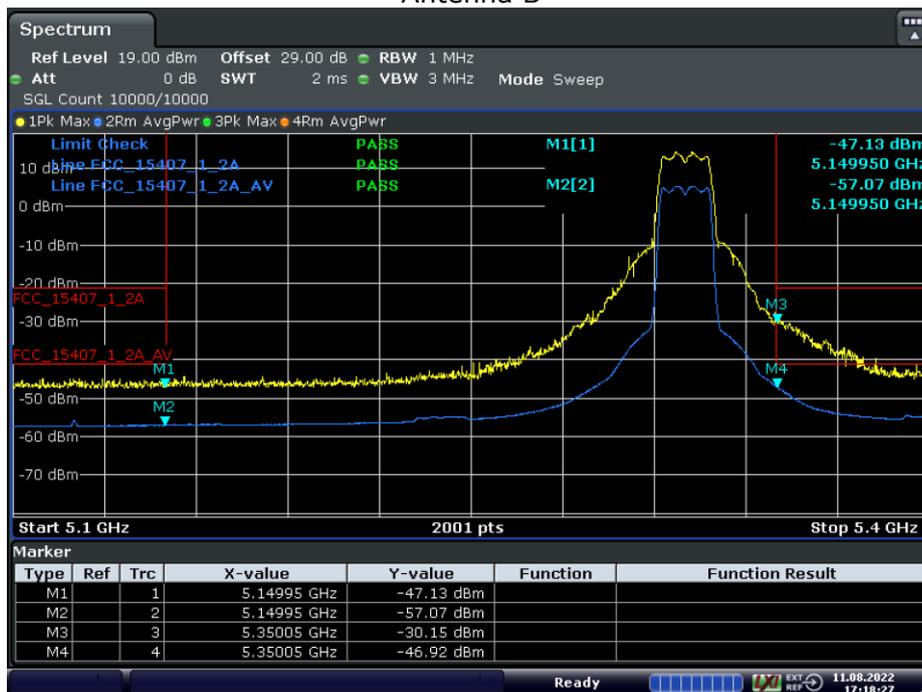


Date: 11.AUG.2022 17:18:28

Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-1 (S02_354_AB01)

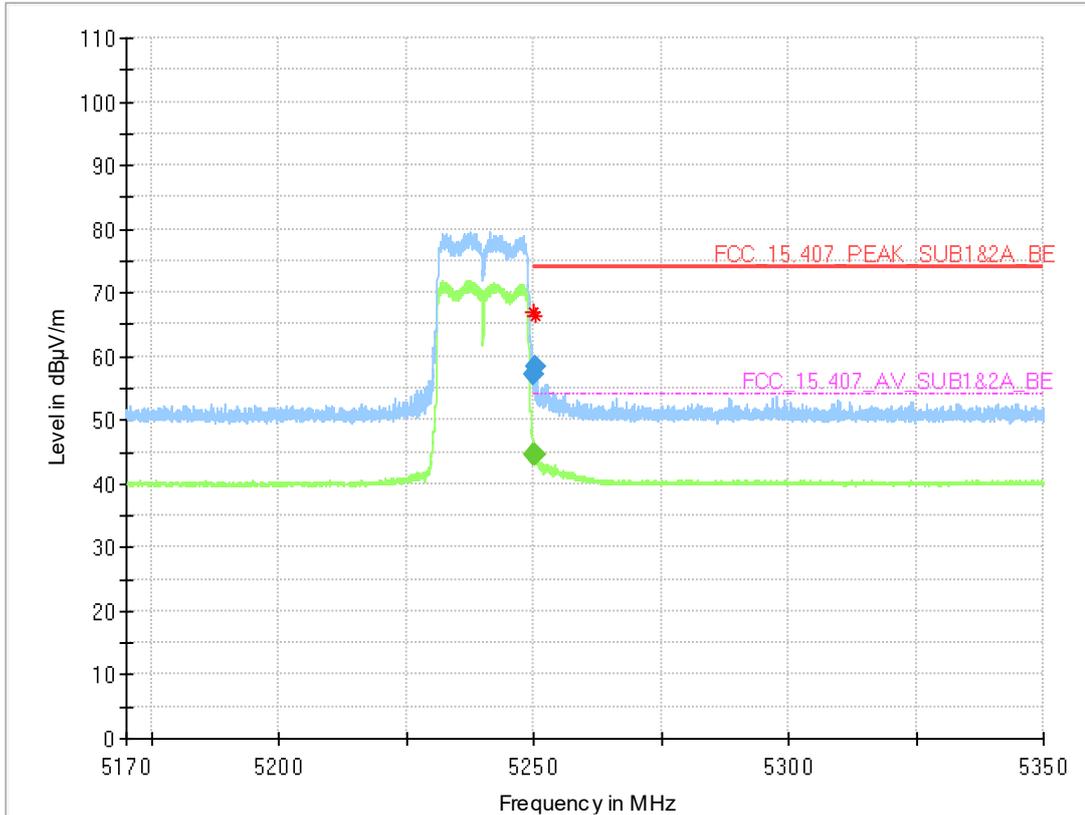

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5250.010	---	44.5	54.00	9.46	1000.0	200.000	150.0	H	136.0	92.0	13.6
5250.010	57.2	---	74.00	16.78	1000.0	200.000	150.0	H	136.0	92.0	13.6
5250.160	---	44.4	54.00	9.56	1000.0	200.000	150.0	H	139.0	88.0	13.6
5250.160	58.3	---	74.00	15.74	1000.0	200.000	150.0	H	139.0	88.0	13.6

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-2C
(S02_354_AB01)

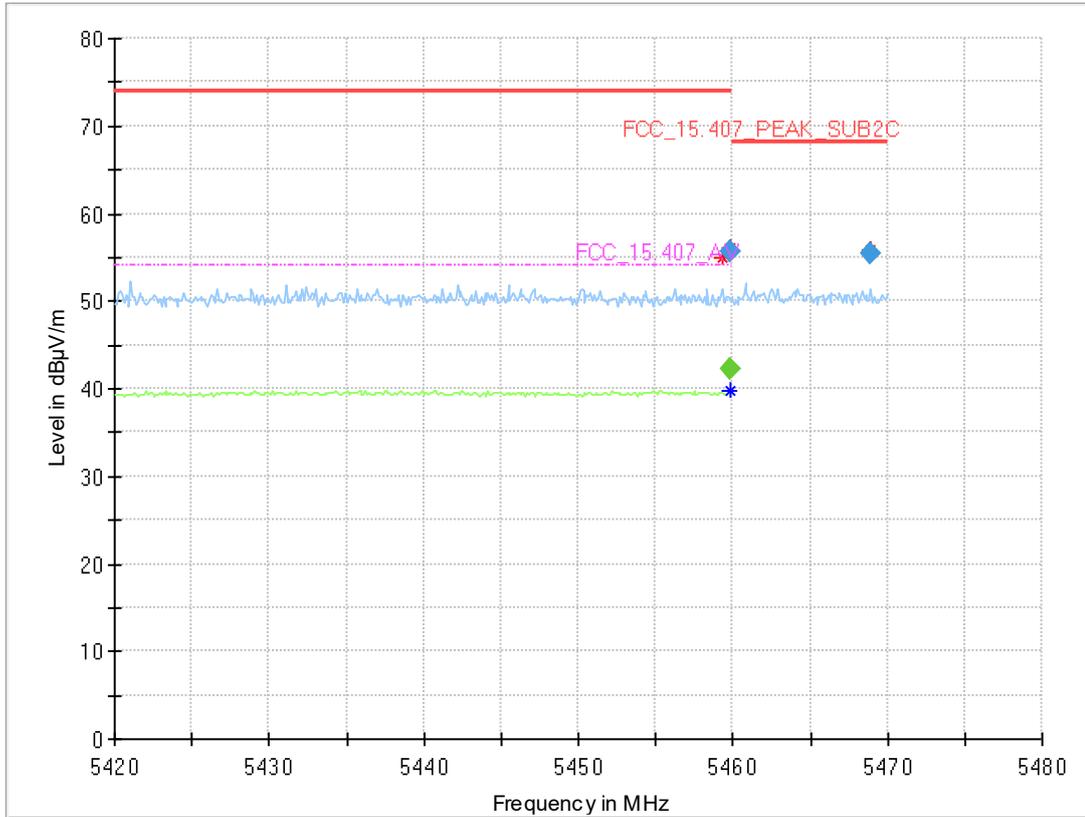

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5459.780	55.5	---	74.00	18.47	1000.0	1000.000	150.0	V	3.0	91.0	14.5
5459.780	---	42.3	54.00	11.72	1000.0	1000.000	150.0	V	3.0	91.0	14.5
5468.900	55.5	---	68.20	12.70	1000.0	1000.000	150.0	V	-40.0	15.0	14.5